

TEST REPORT

Reference No. : WTF18S06115660W
FCC ID..... : YL6-143ISRE100
Applicant..... : Alarm.com Incorporated
Address : 8281 Greensboro Drive, Suite 100, Tysons, Virginia 22102, United States
Manufacturer : Alarm.com Incorporated
Address : 8281 Greensboro Drive, Suite 100, Tysons, Virginia 22102, United States
Product..... : IMAGE SENSOR RANGE EXTENDER
Model(s)..... : ADC-ISRE-100
Standards..... : FCC CFR47 Part 15 C Section 15.247:2018
Date of Receipt sample.. : 2018-06-22
Date of Test..... : 2018-06-23 to 2018-09-06
Date of Issue : 2018-09-30
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Test Site/Test Location:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

Robin Zhou

Robin Zhou / Test Engineer




Philip Zhong

Philip Zhong / Manager

1 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED Canada (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

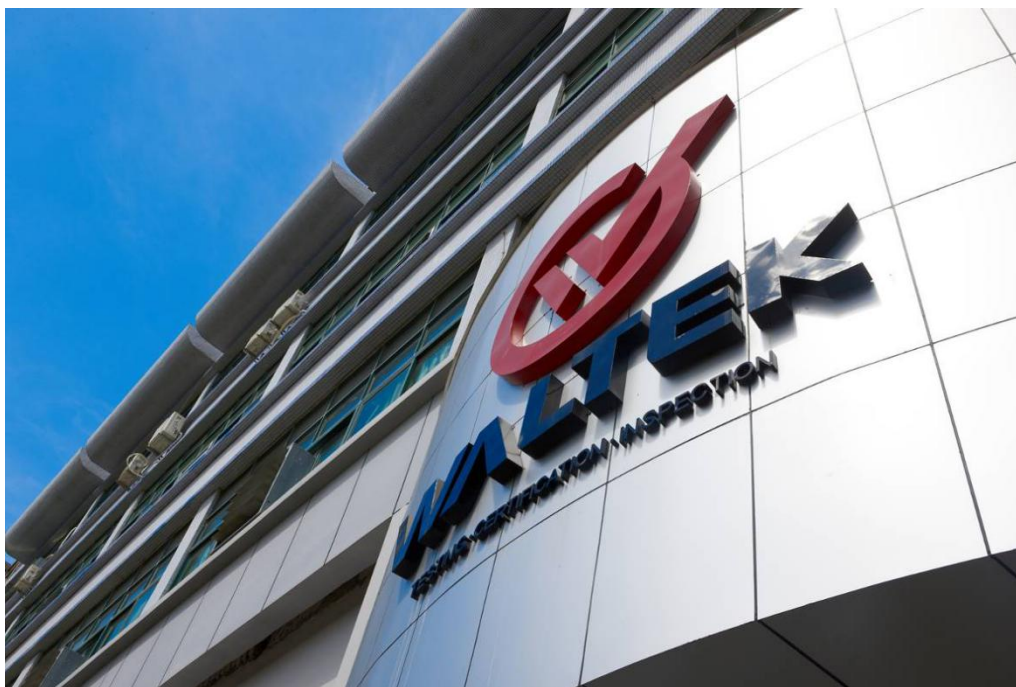

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

1.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ SDoC(VOC/DOC)	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
COVER PAGE	1
1 LABORATORIES INTRODUCTION	2
1.1 TEST FACILITY	3
2 CONTENTS	4
3 REPORT REVISION HISTORY	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.	7
4.2 DETAILS OF E.U.T.	7
4.3 CHANNEL LIST	7
4.4 TEST MODE	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENT'S LIST	8
5.2 MEASUREMENT UNCERTAINTY	9
5.3 SUBCONTRACTED.....	9
6 TEST SUMMARY	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP	11
7.3 MEASUREMENT DESCRIPTION	11
7.4 CONDUCTED EMISSION TEST RESULT	12
8 RADIATED SPURIOUS EMISSIONS	16
8.1 EUT OPERATION.....	16
8.2 TEST SETUP	17
8.3 SPECTRUM ANALYZER SETUP	18
8.4 TEST PROCEDURE	19
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
8.6 SUMMARY OF TEST RESULTS	20
9 BAND EDGE MEASUREMENT	23
9.1 TEST PROCEDURE.....	23
9.2 TEST SETUP	24
9.3 TEST RESULT	24
10 BANDWIDTH MEASUREMENT	26
10.1 TEST PROCEDURE:.....	26
10.2 TEST SETUP	26
10.3 TEST RESULT:	26
11 MAXIMUM CONDUCTED PEAK OUTPUT POWER	28
11.1 TEST PROCEDURE:.....	28
11.2 TEST SETUP	28
11.3 TEST RESULT:	29
12 POWER SPECTRAL DENSITY	31
12.1 TEST PROCEDURE:.....	31
12.2 TEST SETUP	31
12.3 TEST RESULT:	32
13 ANTENNA REQUIREMENT	34
14 FCC ID: YL6-143ISRE100 RF EXPOSURE REPORT	35

14.1	REQUIREMENTS.....	35
14.2	THE PROCEDURES / LIMIT.....	35
14.3	MPE CALCULATION METHOD.....	36
14.4	RESULT: COMPLIANCE.....	36
15	PHOTOGRAPHS–MODEL ADC-ISRE-100 TEST SETUP PHOTOS.....	37
15.1	RADIATED SPURIOUS EMISSIONS.....	37
15.2	CONDUCTED EMISSION.....	38
16	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	39
16.1	MODEL ADC-ISRE-100 EXTERNAL PHOTOS.....	39
16.2	MODEL ADC-ISRE-100 INTERNAL PHOTOS.....	42

3 Report Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF18S06115660W	2018-06-22	2018-06-23 to 2018-09-06	2018-09-30	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product: IMAGE SENSOR RANGE EXTENDER
 Model(s) ADC-ISRE-100

4.2 Details of E.U.T.

Operation Frequency: 912MHz~924MHz
 Antenna installation: Bolt Antenna
 Antenna Gain: 0.68 dBi
 Type of modulation: BPSK
 Ratings: AC Power: 100-240VAC, 0.05A, 50/60Hz
 Battery Power: 3.7V, Lithium Ion Rechargeable, 700mAh

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	912	2	914	3	916	4	918
5	920	6	922	7	924	8	N/A

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests.

Test mode	Low Channel	Middle Channel	High Channel
Transmitting	912MHz	918MHz	924MHz

5 Equipment Used during Test

5.1 Equipment's List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2018-04-29	2019-04-28
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2018-04-29	2019-04-28
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-29	2019-04-28
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018-04-29	2019-04-28
5	Spectrum Analyzer	R&S	FSP40	100501	2017-10-20	2018-10-19
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA917065 1	2017-10-25	2018-10-24
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2017-10-25	2018-10-24
8	Cable	Top	18-40GHz	-	2017-10-25	2018-10-24
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-29	2019-04-28
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-29	2019-04-28
3	Active Loop Antenna	Com-power	AL-130R	10160007	2018-04-17	2019-04-16
4	Amplifier	ANRITSU	MH648A	M43381	2018-04-29	2019-04-28
5	Cable	HUBER+SUHNER	CBL2	525178	2018-04-29	2019-04-28

6	Coaxial Cable (below 1GHz)	Top	TYPE16 (13M)	-	2017-09-12	2018-09-11
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSL6	100959	2017-09-12	2018-09-11
2	Coaxial Cable	Top	10Hz-30GHz	-	2017-09-12	2018-09-11
3	Antenna Connector*	Realacc	45RSm	-	2017-09-12	2018-09-11
4	DC Block	Gwave	GDCB-3G-N- SMA	140307001	2017-09-12	2018-09-11
***: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

5.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	Pass
Conducted Emissions	15.207(a)	Pass
Bandwidth	15.247(a)(2)	Pass
Maximum conducted peak output power	15.247(b)(3),(4)	Pass
Power Spectral Density	15.247(e)	Pass
Band Edge	15.247(d)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa
Test Voltage:	AC 120V/60Hz, AC 240V/60Hz

EUT Operation :

The test was performed in Transmitting mode, the worst data (low channel) were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

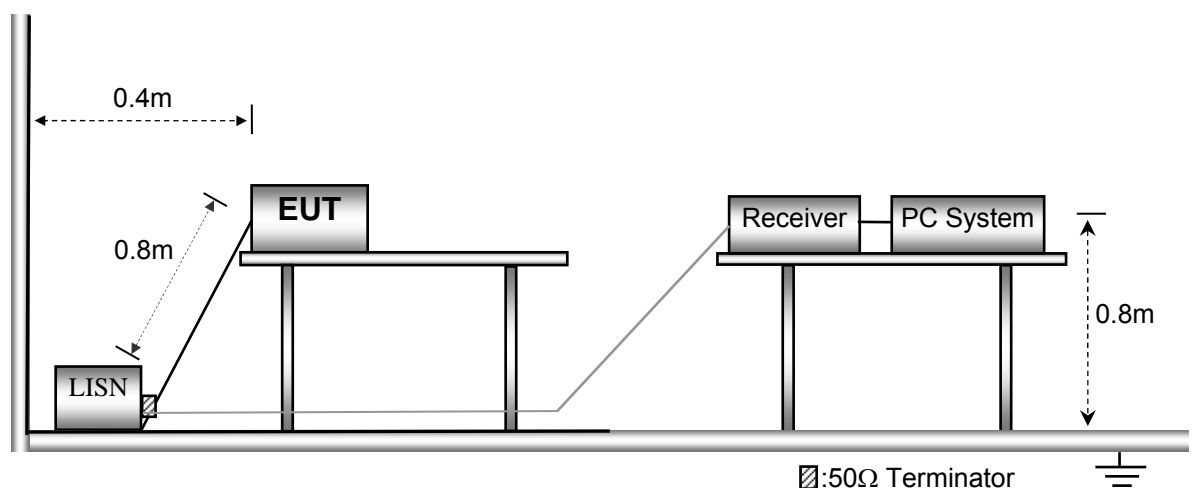


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line: (AC 120V/60Hz)

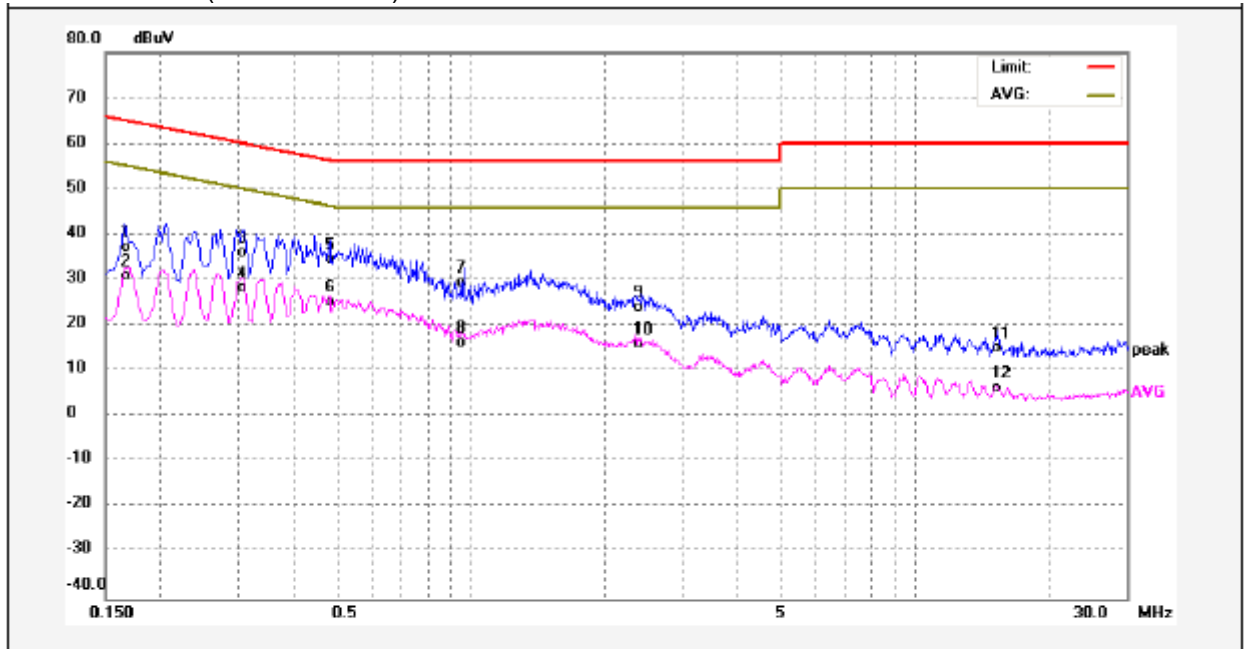


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	27.33	9.90	37.23	65.15	-27.92	QP	
2	0.1660	20.95	9.90	30.85	55.15	-24.30	AVG	
3	0.3059	26.11	9.99	36.10	60.08	-23.98	QP	
4	0.3059	18.11	9.99	28.10	50.08	-21.98	AVG	
5	0.4820	24.44	10.07	34.51	56.30	-21.79	QP	
6	0.4820	15.21	10.07	25.28	46.30	-21.02	AVG	
7	0.9660	19.42	10.08	29.50	56.00	-26.50	QP	
8	0.9660	6.12	10.08	16.20	46.00	-29.80	AVG	
9	2.4219	13.97	10.23	24.20	56.00	-31.80	QP	
10	2.4219	5.72	10.23	15.95	46.00	-30.05	AVG	
11	15.3099	4.81	10.39	15.20	60.00	-44.80	QP	
12	15.3099	-4.18	10.39	6.21	50.00	-43.79	AVG	

Neutral line: (AC 120V/60Hz)

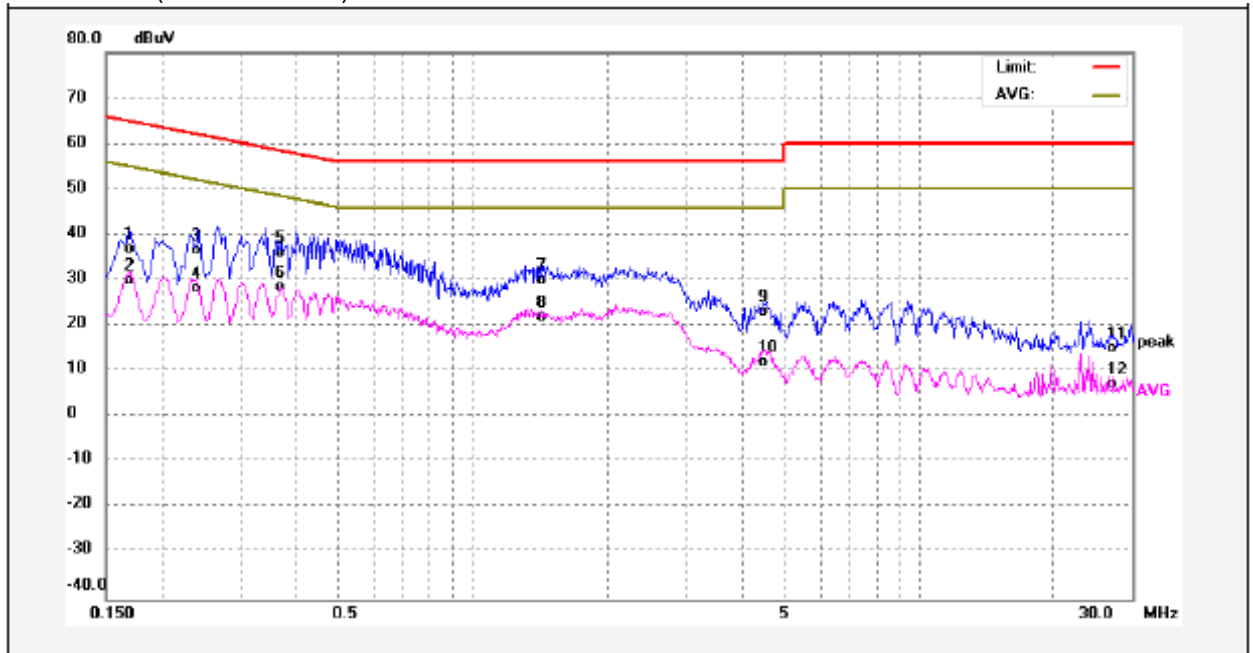


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	27.24	9.86	37.10	64.96	-27.86	QP	
2	0.1700	20.34	9.86	30.20	54.96	-24.76	AVG	
3	0.2420	26.81	9.99	36.80	62.02	-25.22	QP	
4	0.2420	18.23	9.99	28.22	52.02	-23.80	AVG	
5	0.3700	26.07	10.05	36.12	58.50	-22.38	QP	
6	0.3700	18.59	10.05	28.64	48.50	-19.86	AVG	
7	1.4380	20.00	10.20	30.20	56.00	-25.80	QP	
8	1.4380	11.69	10.20	21.89	46.00	-24.11	AVG	
9	4.5699	12.84	10.26	23.10	56.00	-32.90	QP	
10	4.5699	1.84	10.26	12.10	46.00	-33.90	AVG	
11	27.0259	4.60	10.60	15.20	60.00	-44.80	QP	
12	27.0259	-3.40	10.60	7.20	50.00	-42.80	AVG	

Live line: (AC 240V/60Hz)

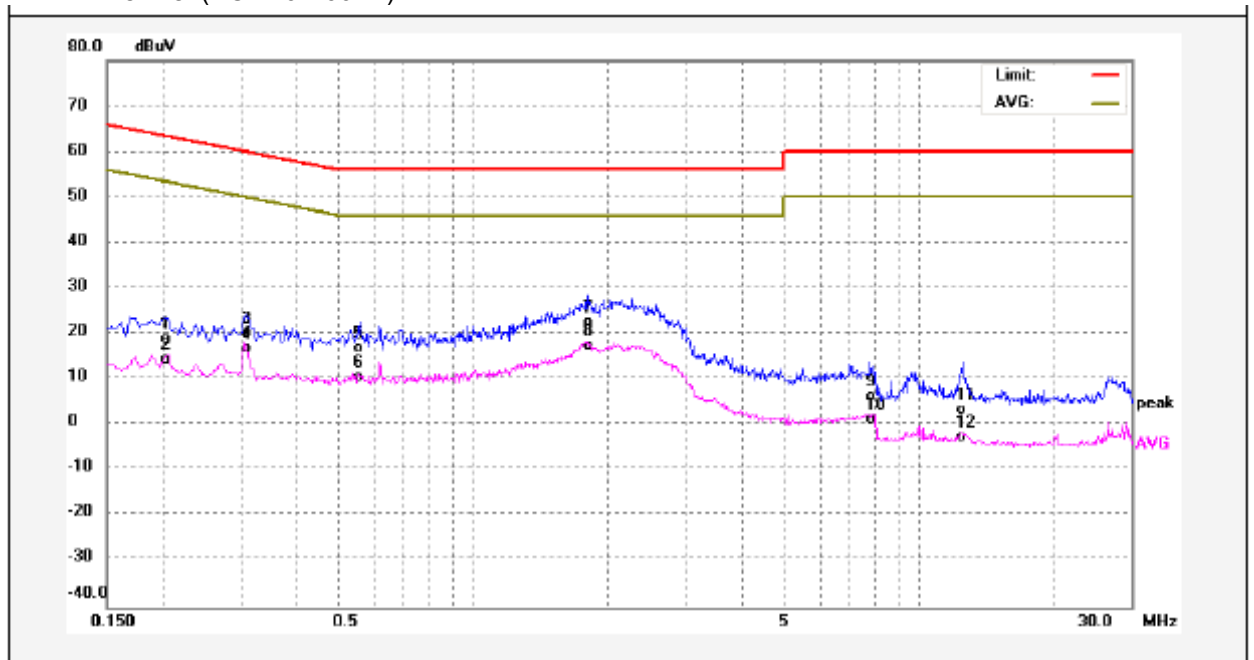

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2020	8.70	10.33	19.03	63.52	-44.49	QP	
2	0.2020	4.00	10.33	14.33	53.52	-39.19	AVG	
3	0.3100	9.75	10.41	20.16	59.97	-39.81	QP	
4	0.3100	6.45	10.41	16.86	49.97	-33.11	AVG	
5	0.5580	6.30	10.46	16.76	56.00	-39.24	QP	
6	0.5580	0.07	10.46	10.53	46.00	-35.47	AVG	
7	1.7980	11.99	10.53	22.52	56.00	-33.48	QP	
8	1.7980	6.79	10.53	17.32	46.00	-28.68	AVG	
9	7.7820	-4.74	11.07	6.33	60.00	-53.67	QP	
10	7.7820	-9.80	11.07	1.27	50.00	-48.73	AVG	
11	12.5780	-7.73	11.05	3.32	60.00	-56.68	QP	
12	12.5780	-13.78	11.05	-2.73	50.00	-52.73	AVG	

Neutral line: (AC 240V/60Hz)

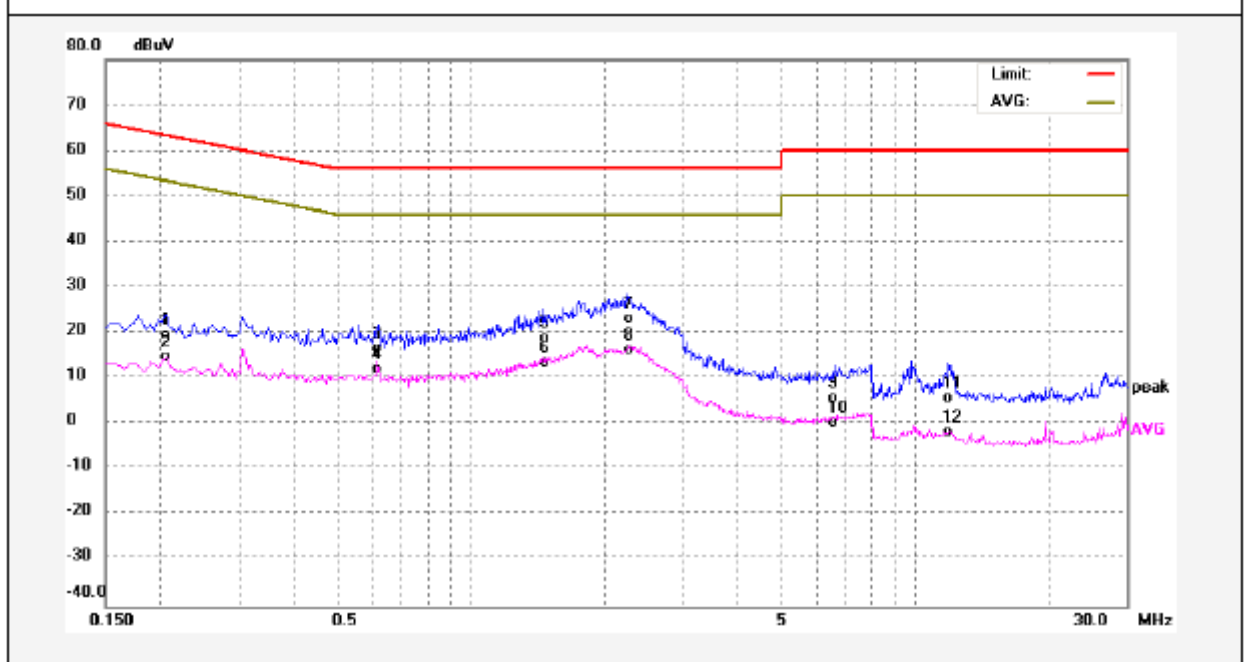

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2060	9.23	10.33	19.56	63.36	-43.80	QP	
2	0.2060	4.37	10.33	14.70	53.36	-38.66	AVG	
3	0.6180	6.08	10.48	16.56	56.00	-39.44	QP	
4	0.6180	1.68	10.48	12.16	46.00	-33.84	AVG	
5	1.4620	8.52	10.47	18.99	56.00	-37.01	QP	
6	1.4620	3.14	10.47	13.61	46.00	-32.39	AVG	
7	2.2380	12.62	10.61	23.23	56.00	-32.77	QP	
8	2.2380	5.70	10.61	16.31	46.00	-29.69	AVG	
9	6.6060	-5.22	10.97	5.75	60.00	-54.25	QP	
10	6.6060	-10.59	10.97	0.38	50.00	-49.62	AVG	
11	11.8940	-5.23	11.10	5.87	60.00	-54.13	QP	
12	11.8940	-12.95	11.10	-1.85	50.00	-51.85	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa

Test Voltage: AC 120V/60Hz, AC 240V/60Hz


EUT Operation :

The test was performed in Transmitting mode. the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

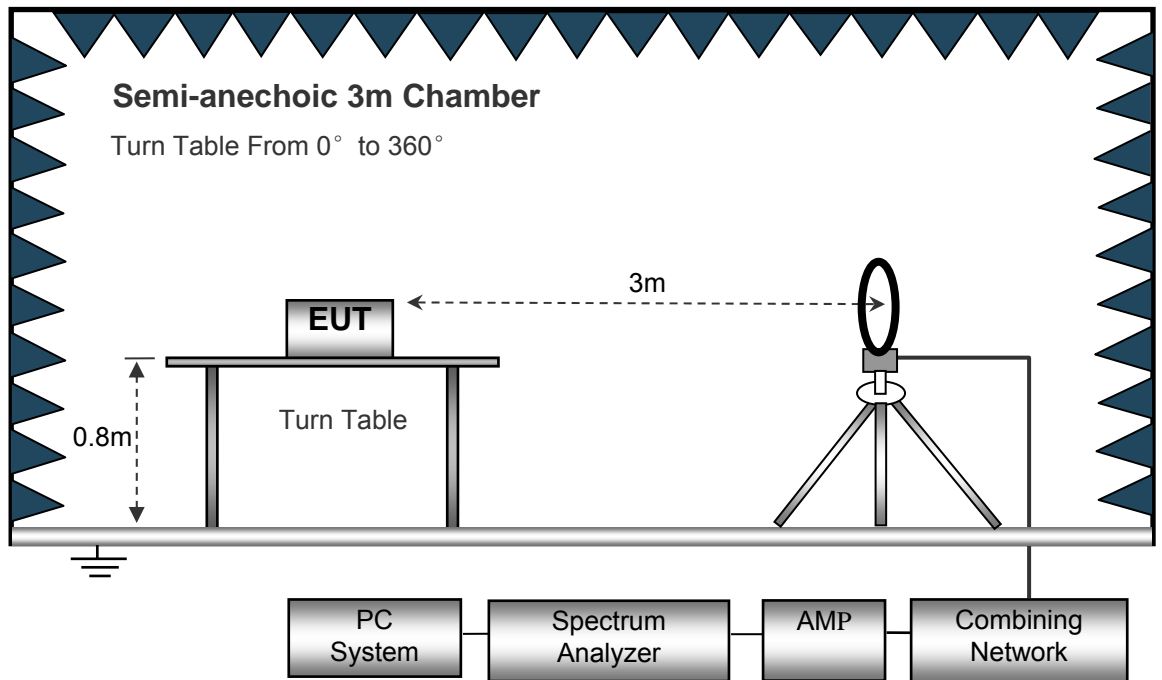

The test setup for emission measurement from 30 MHz to 1 GHz.

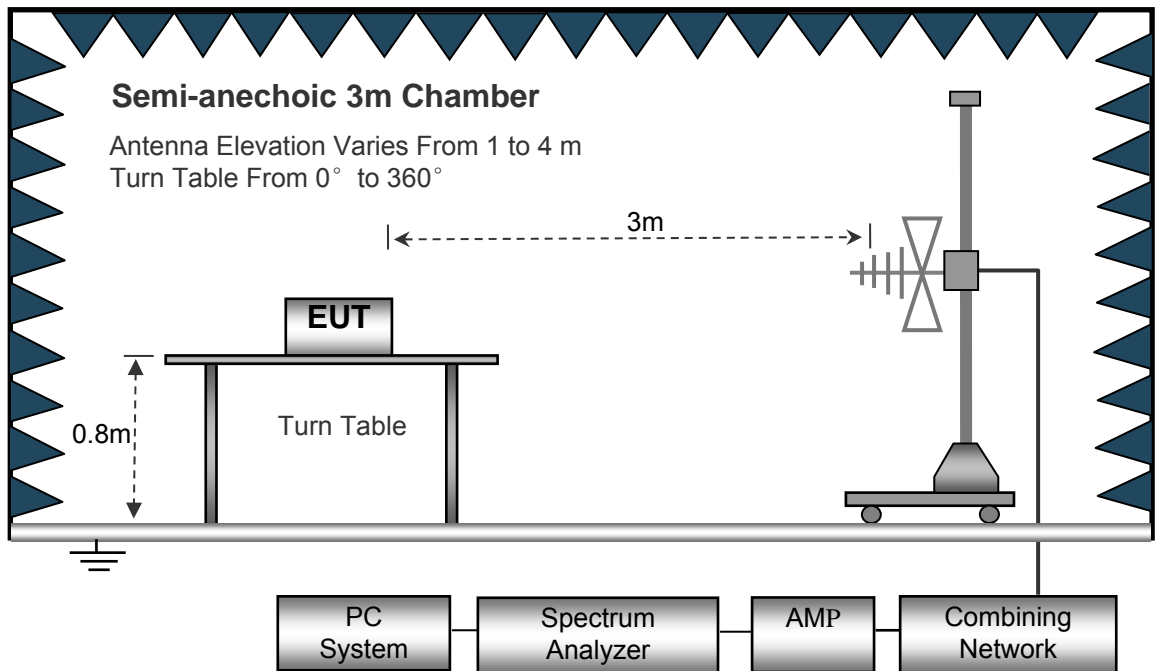

The test setup for emission measurement above 1 GHz.

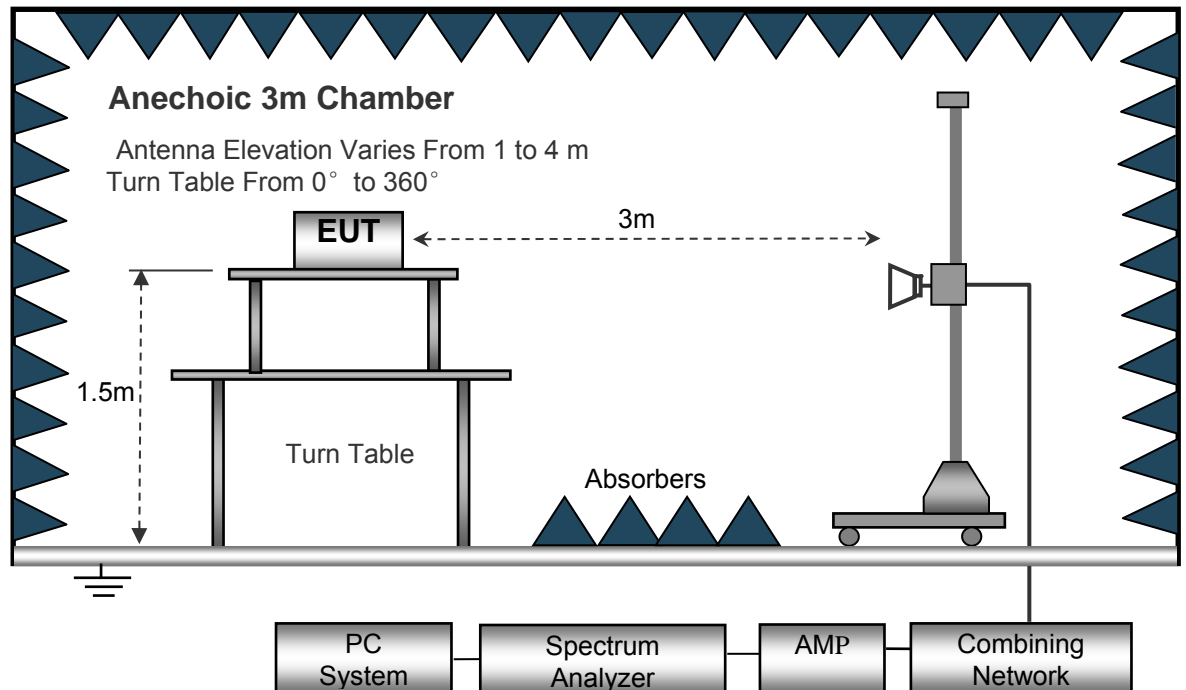

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

(Note: The test were performed in AC 120V/60Hz and AC 240V/60Hz, only the worst test data where performed in AC 120V/60Hz were shown in the report)

Test Frequency : 9 kHz to 30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30 MHz ~ 10 GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Low Channel 912MHz									
238.31	39.31	QP	220	2.0	H	-16.42	22.89	46.00	-23.10
238.31	38.22	QP	244	1.5	V	-16.42	21.80	46.00	-24.20
609.25	38.64	QP	39	1.2	H	-15.41	23.23	46.00	-22.77
609.25	38.59	QP	8	1.4	V	-15.41	23.18	46.00	-22.82
978.34	51.54	QP	251	1.0	H	-16.62	34.92	54.00	-19.08
978.34	50.37	QP	101	1.7	V	-16.62	33.75	54.00	-20.25
1824.00	81.40	PK	323	1.9	H	-15.24	66.16	74.00	-7.84
1824.00	65.87	Ave	323	1.9	H	-15.24	50.63	54.00	-3.37
2736.00	80.52	PK	312	1.5	H	-14.24	66.28	74.00	-7.72
2736.00	64.68	Ave	312	1.5	H	-14.24	50.44	54.00	-3.56
3648.00	64.06	PK	320	1.1	H	-9.45	54.61	74.00	-19.39
3648.00	48.77	Ave	320	1.1	H	-9.45	39.32	54.00	-14.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
Middle Channel 918MHz									
238.31	38.50	QP	224	1.0	H	-16.42	22.08	46.00	-23.92
238.31	39.85	QP	81	1.8	V	-16.42	23.43	46.00	-22.57
609.25	37.11	PK	284	1.5	H	-15.41	21.70	4600	-24.30
609.25	38.53	Ave	110	1.1	V	-15.41	23.12	46.00	-22.88
978.34	50.99	PK	25	1.8	H	-16.62	34.37	54.00	-19.63
978.34	50.89	Ave	97	1.5	V	-16.62	34.27	54.00	-19.73
1836.00	81.69	PK	140	1.8	H	-15.20	66.49	74.00	-7.51
1836.00	65.50	Ave	140	1.8	H	-15.20	50.30	54.00	-3.70
2754.00	80.29	PK	282	1.5	H	-14.14	66.15	74.00	-7.85
2754.00	64.86	Ave	282	1.5	H	-14.14	50.72	54.00	-3.28
3672.00	67.22	PK	64	1.1	H	-9.25	57.97	74.00	-16.03
3672.00	51.61	Ave	64	1.1	H	-9.25	42.36	54.00	-11.64

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
High Channel 924MHz									
238.31	38.57	QP	259	1.6	H	-16.42	22.15	46.00	-23.85
238.31	38.48	QP	47	2.0	V	-16.42	22.06	46.00	-23.94
609.25	38.41	QP	251	1.4	H	-15.41	23.00	46.00	-23.00
609.25	38.71	QP	258	1.7	V	-15.41	23.30	46.00	-22.70
978.34	51.43	QP	316	1.1	H	-16.62	34.81	54.00	-19.19
978.34	51.77	QP	129	1.6	V	-16.62	35.15	54.00	-18.85
1848.00	80.66	PK	83	1.4	H	-15.16	65.50	74.00	-8.50
1848.00	64.10	Ave	83	1.4	H	-15.16	49.50	54.00	-4.50
2772.00	79.64	PK	223	1.1	H	-14.06	65.58	74.00	-8.42
2772.00	63.96	Ave	223	1.1	H	-14.06	49.90	54.00	-4.10
3696.00	63.13	PK	35	1.2	H	-9.10	54.03	74.00	-19.97
3696.00	47.28	Ave	35	1.2	H	-9.10	38.18	54.00	-15.82


9 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 15.247 Meas Guidance v05 August 24, 2018
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Setup

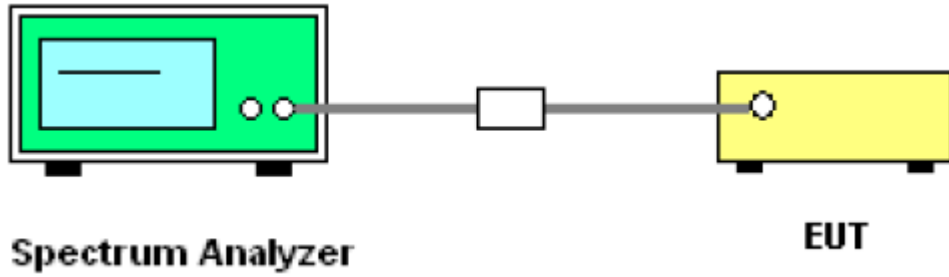


9.3 Test Result

Test result plots shown as follows:

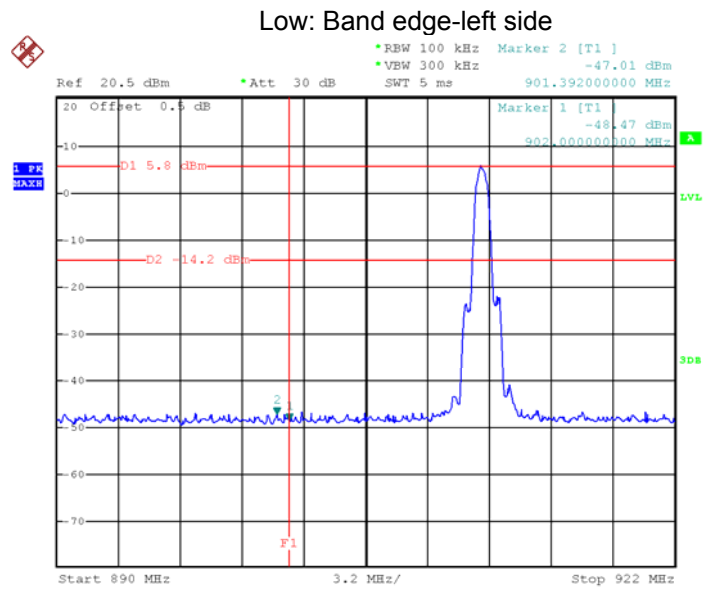

High: Band edge-right side

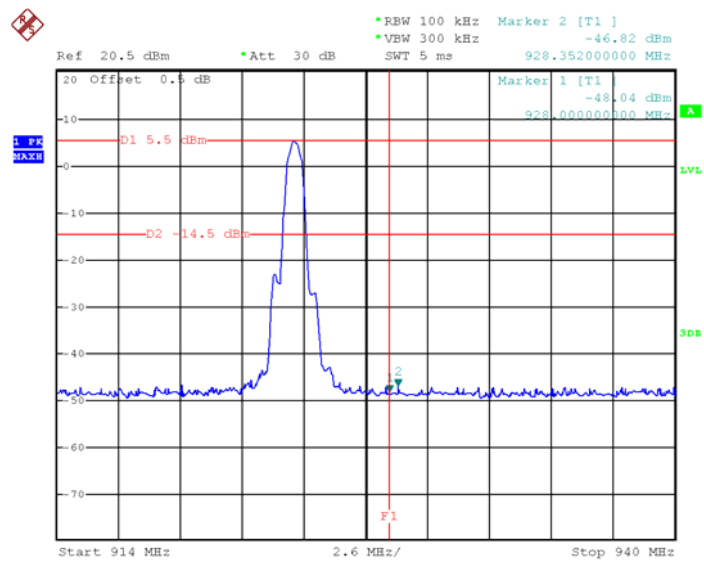

10 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247


Test Method:

558074 D01 15.247 Meas Guidance v05 August 24, 2018

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


10.2 Test Setup


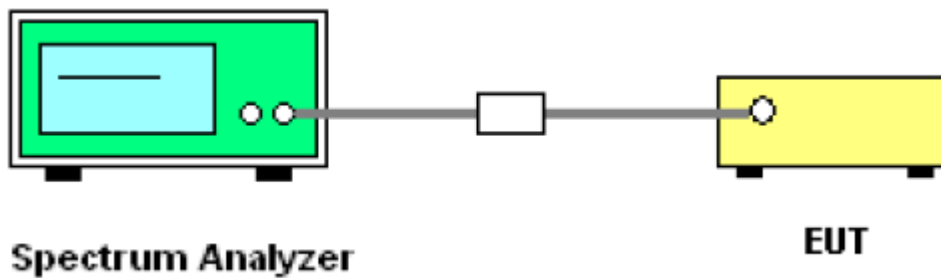


10.3 Test Result:

6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
Low	Middle	High	Low	Middle	High
0.690	0.690	0.690	0.870	0.870	0.864

Test result plot as follows:

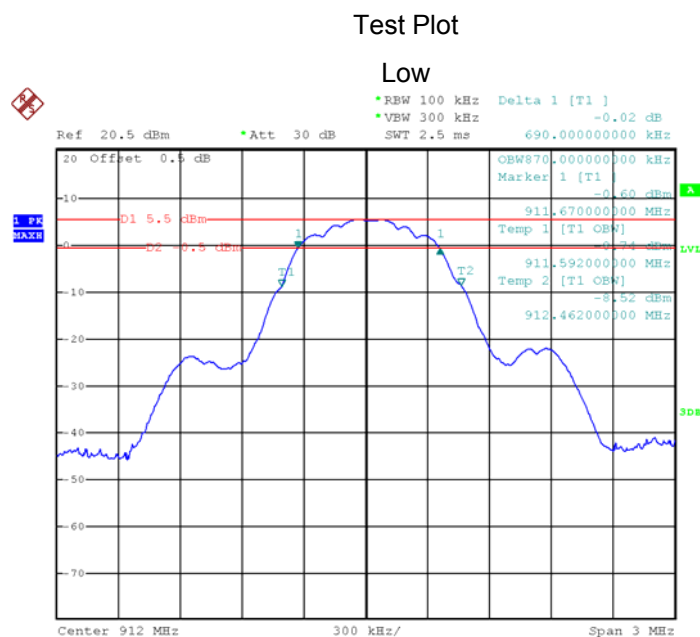

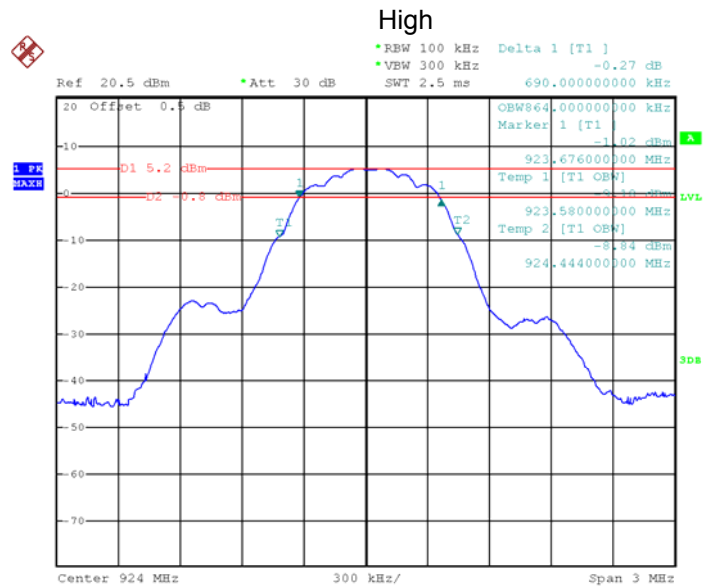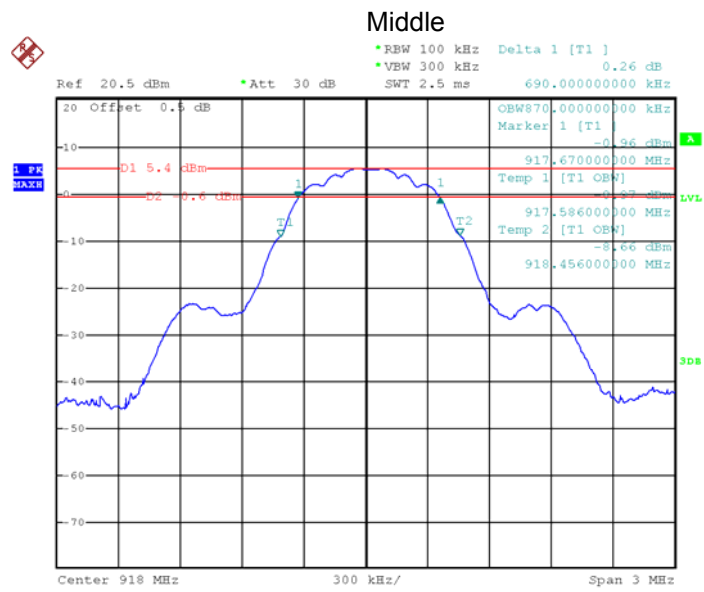

11 Maximum conducted peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:


558074 D01 15.247 Meas Guidance v05 August 24, 2018

11.1 Test Procedure:

558074 D01 15.247 Meas Guidance v05 August 24, 2018

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Setup


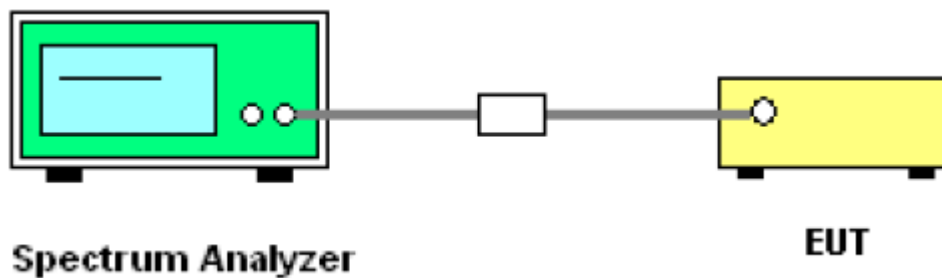



11.3 Test Result:

Maximum conducted Peak Output Power (dBm)		
Low	Middle	High
9.93	9.78	9.68
Limit: 1W/30dBm		

Test result plot as follows:

Test Plot

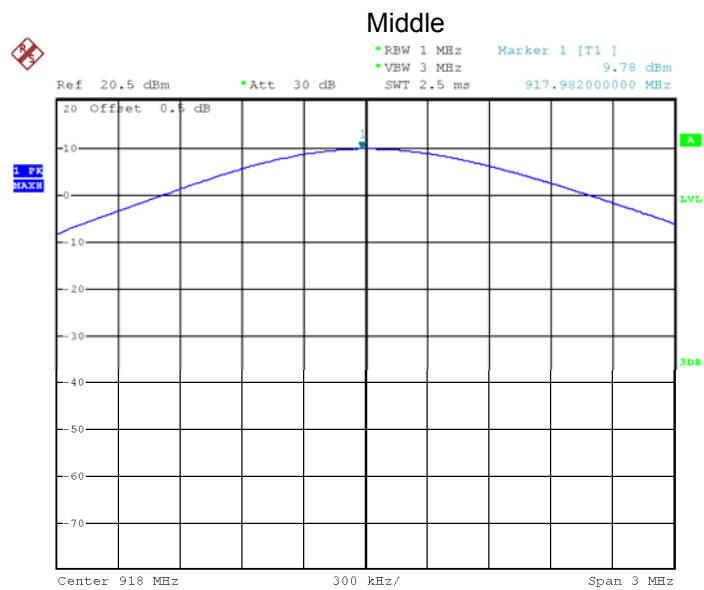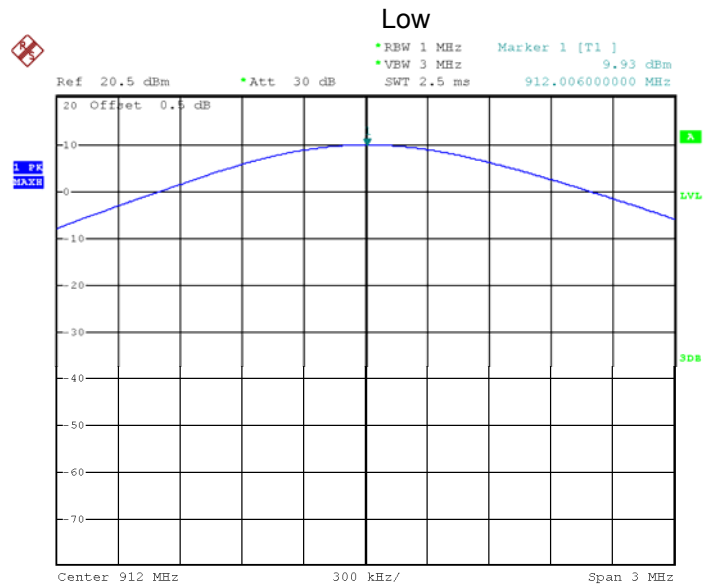

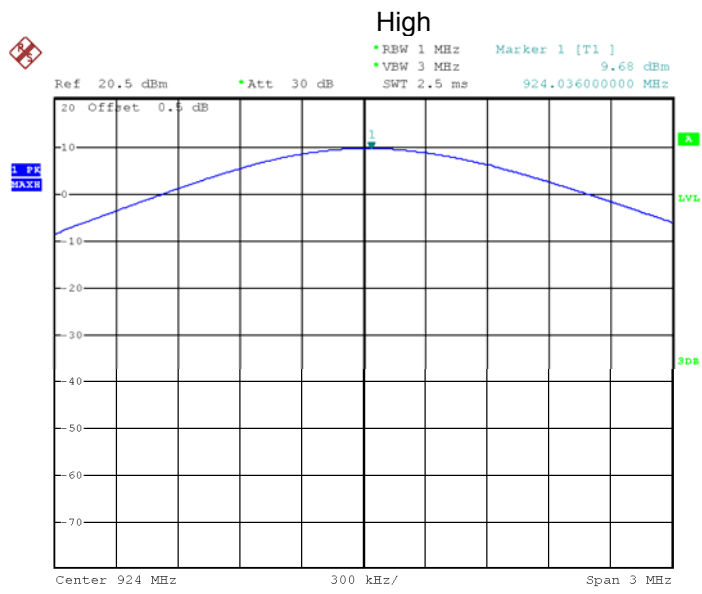

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247


Test Method: 558074 D01 15.247 Meas Guidance v05 August 24, 2018

12.1 Test Procedure:

558074 D01 15.247 Meas Guidance v05 August 24, 2018

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



12.2 Test Setup

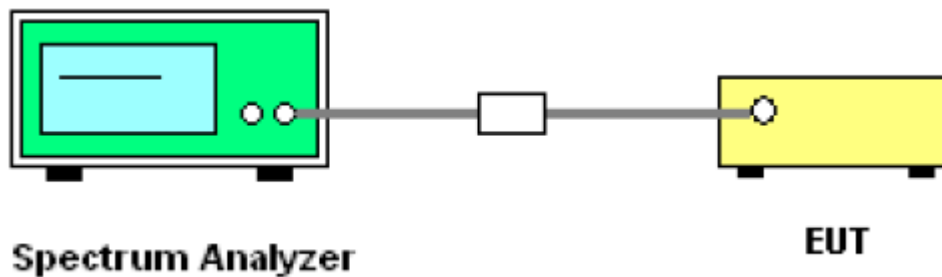


12.3 Test Result:

Power Spectral (dBm per 3kHz)		
Low	Middle	High
-2.18	-2.38	-2.46
Limit: 8dBm per 3kHz		

Test Plot

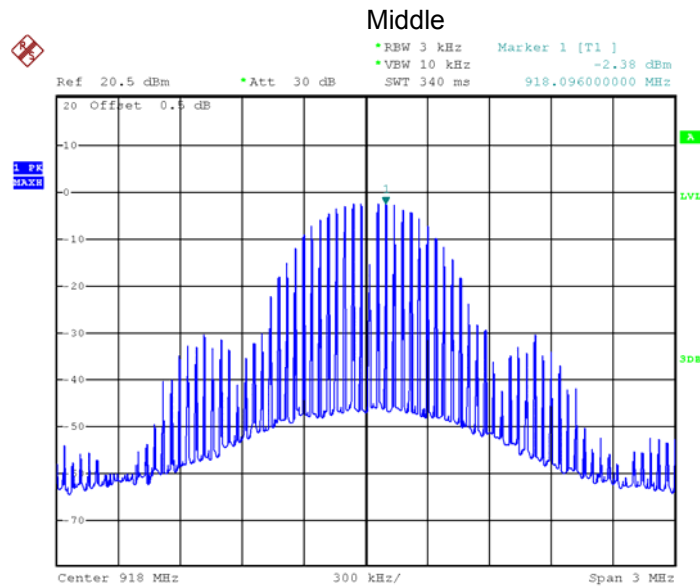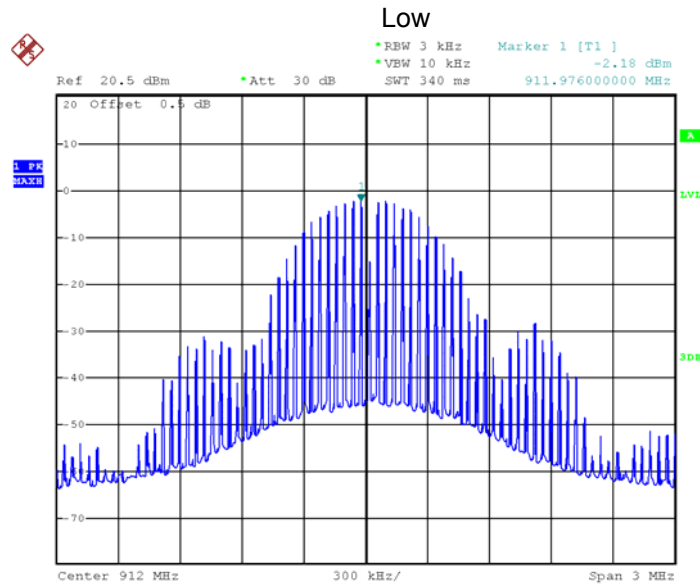

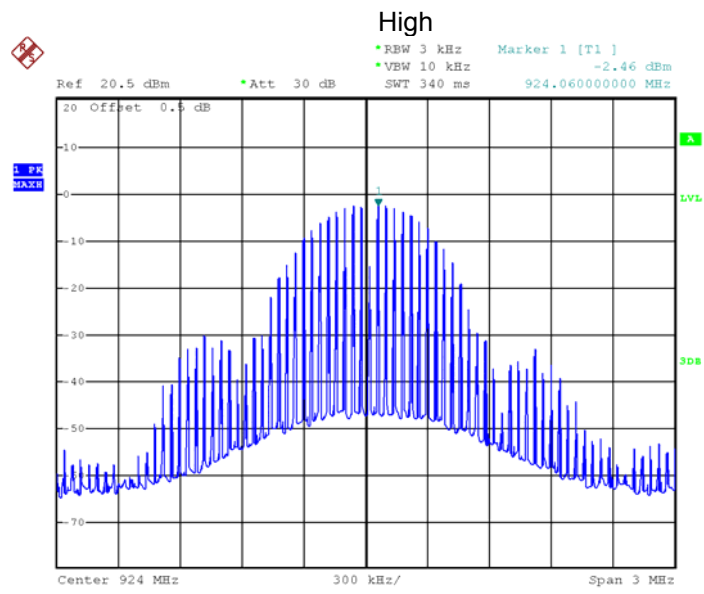


13 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one Bolt Antenna, the gain is 0.68dBi. meets the requirements of FCC 15.203.

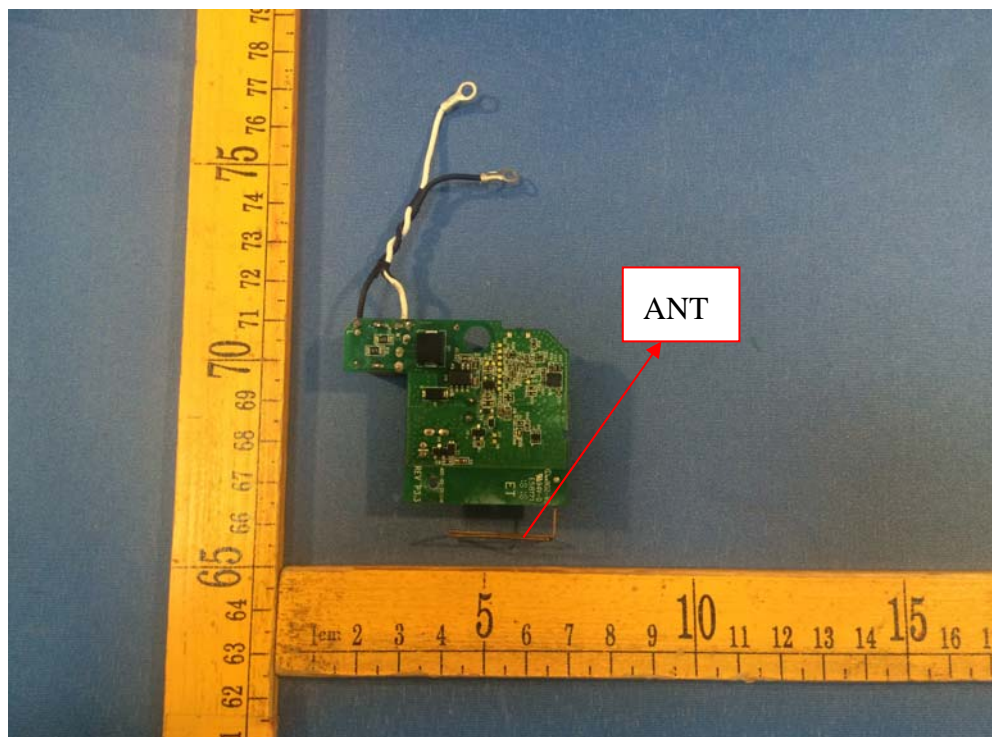

14 FCC ID: YL6-143ISRE100 RF Exposure Report

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091 & KDB 447498 D01 General RF Exposure Guidance v06

14.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

14.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz; *Plane-wave equivalent power density

14.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. conducted Output Power (dBm)	Max. conducted Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)	Result
0.68	1.17	9.93	9.84	0.00229	1	Compliance


14.4 Result: Compliance

No SAR measurement is required.

15 Photographs–Model ADC-ISRE-100 Test Setup Photos

15.1 Radiated Spurious Emissions

Test frequency from 9 kHz to 30 MHz

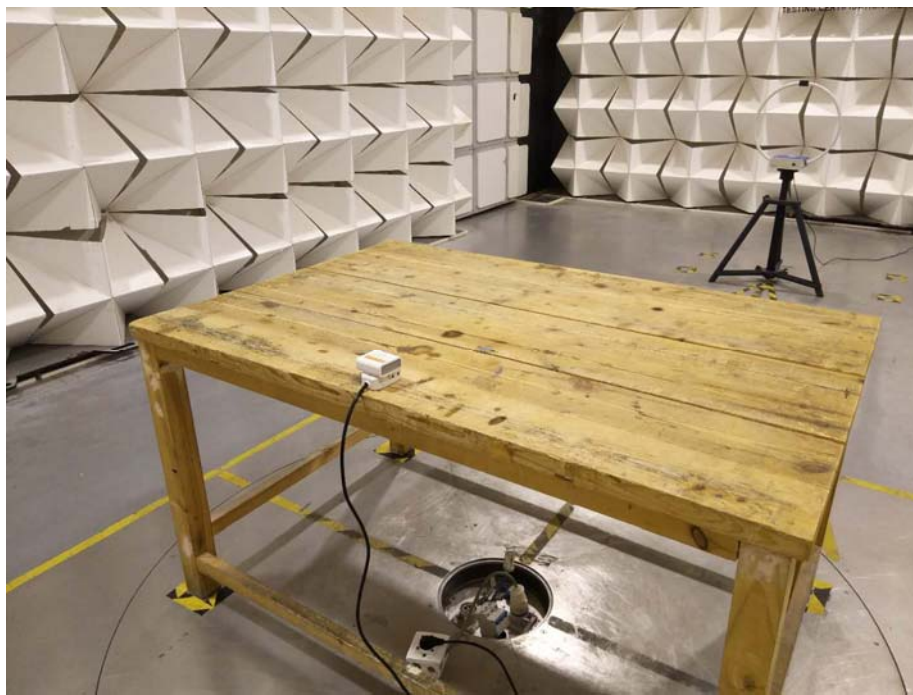

Test frequency from 30 MHz to 1 GHz



Test frequency 1 GHz to 10 GHz





15.2 Conducted Emission



16 Photographs - Constructional Details



16.1 Model ADC-ISRE-100 External Photos


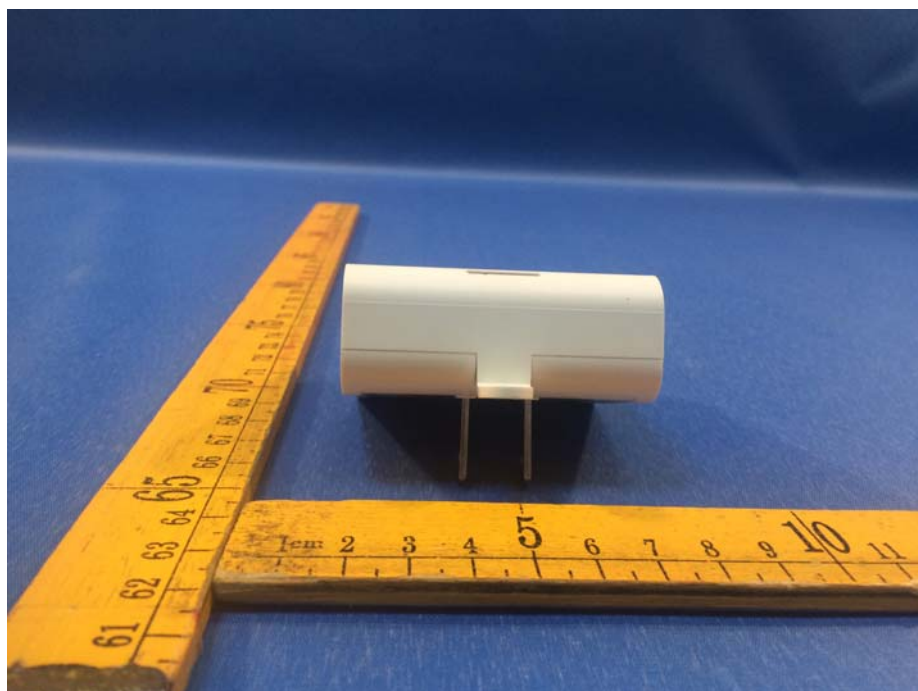



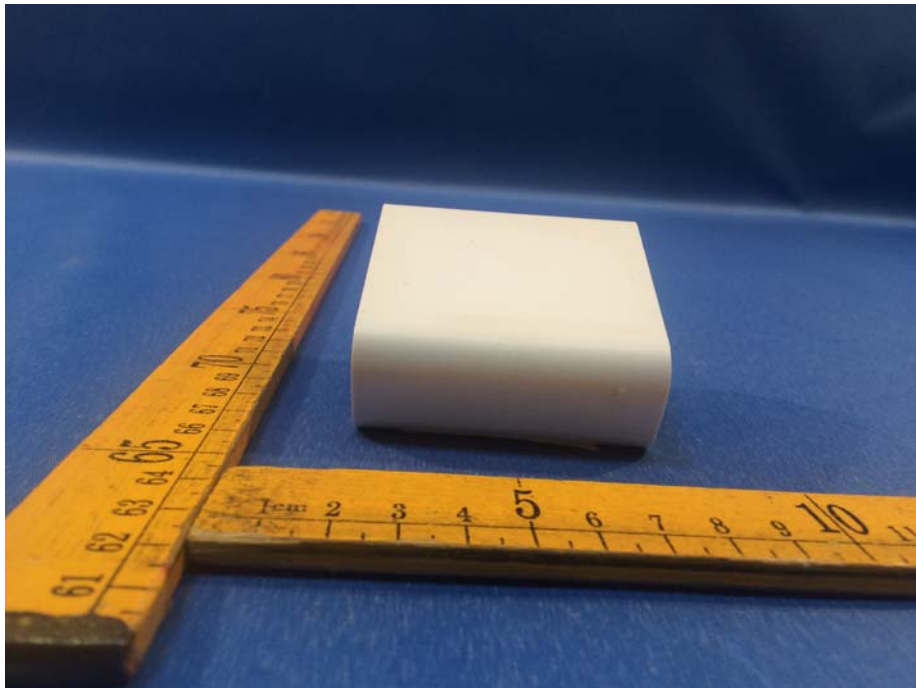






16.2 Model ADC-ISRE-100 Internal Photos

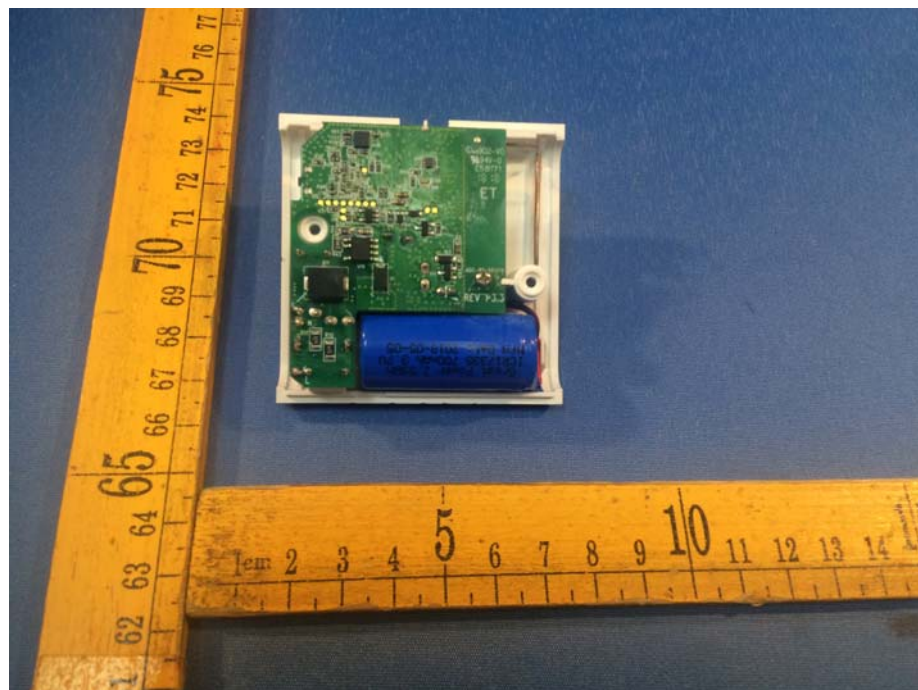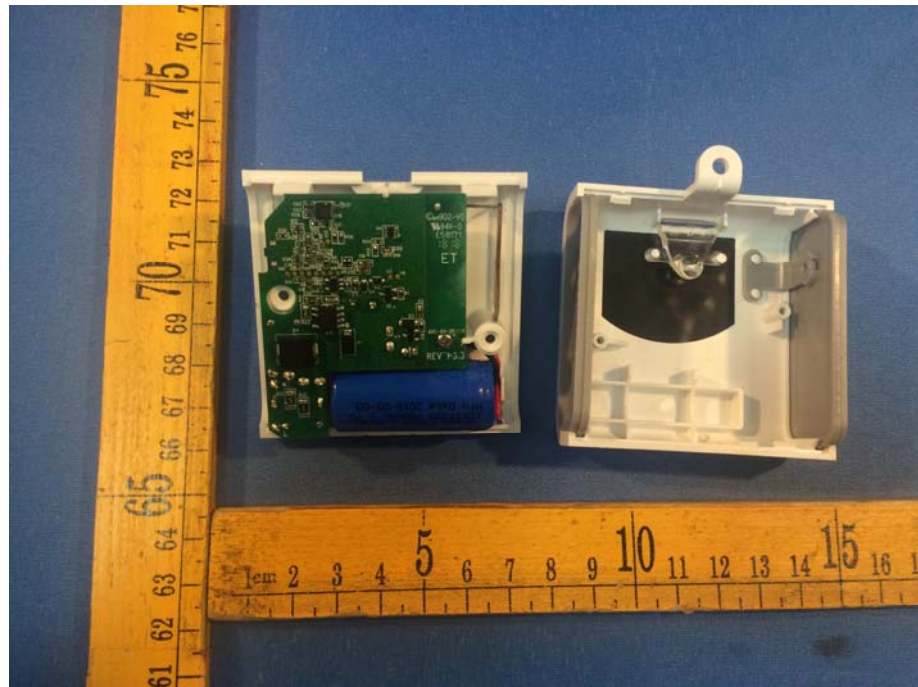

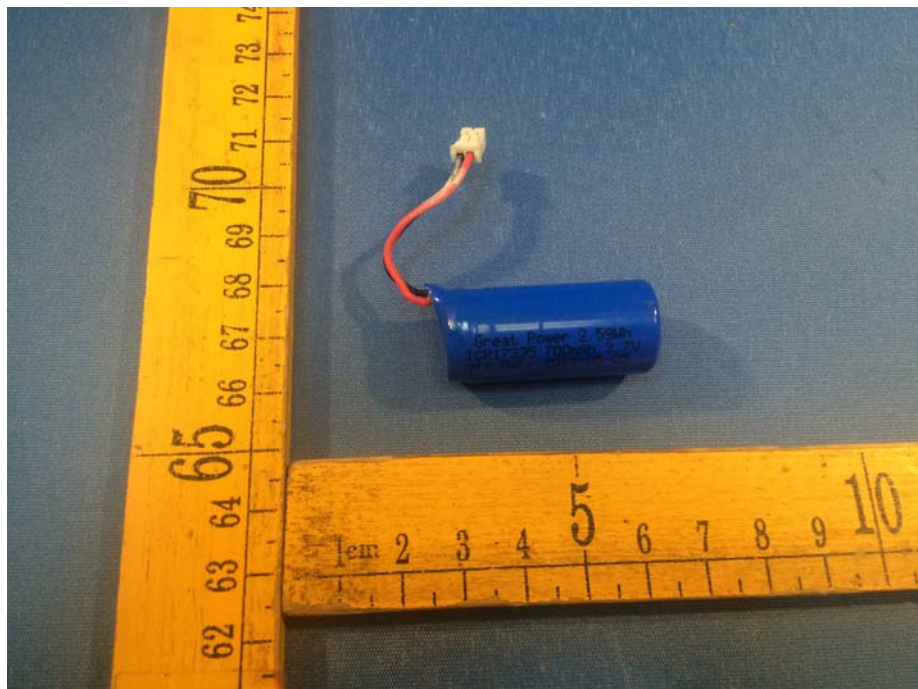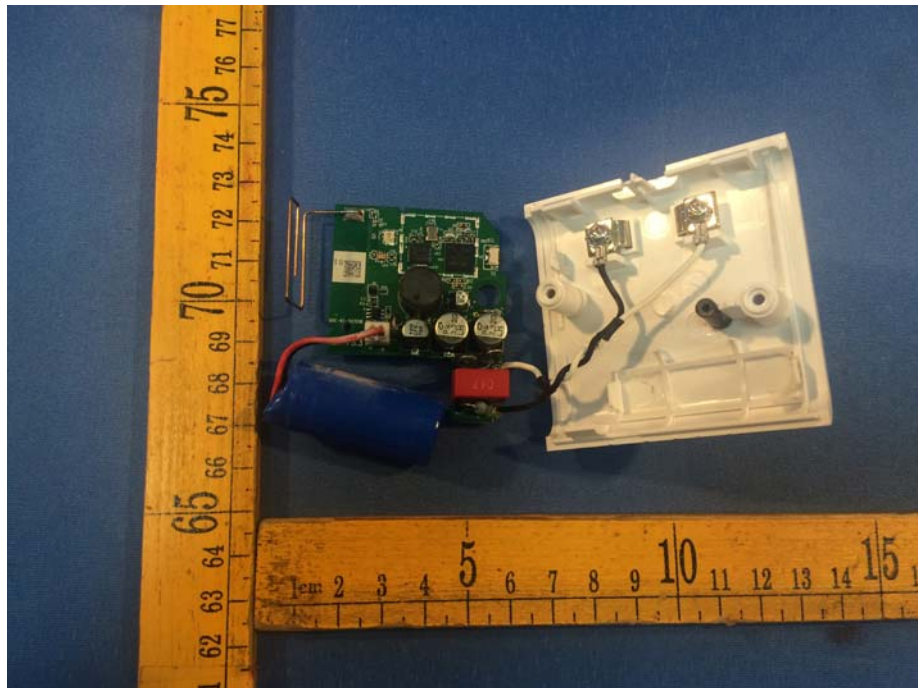

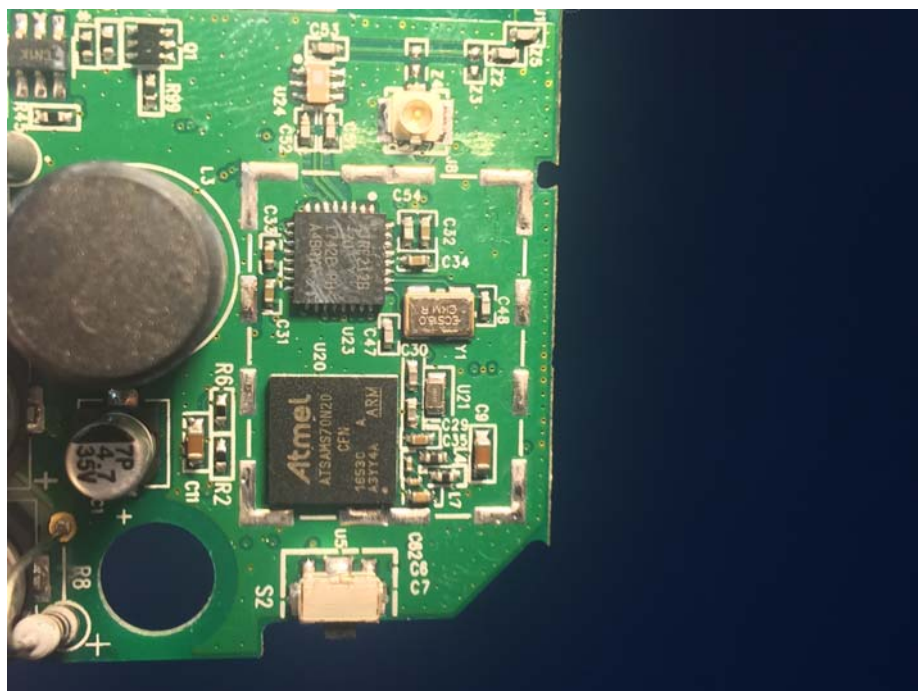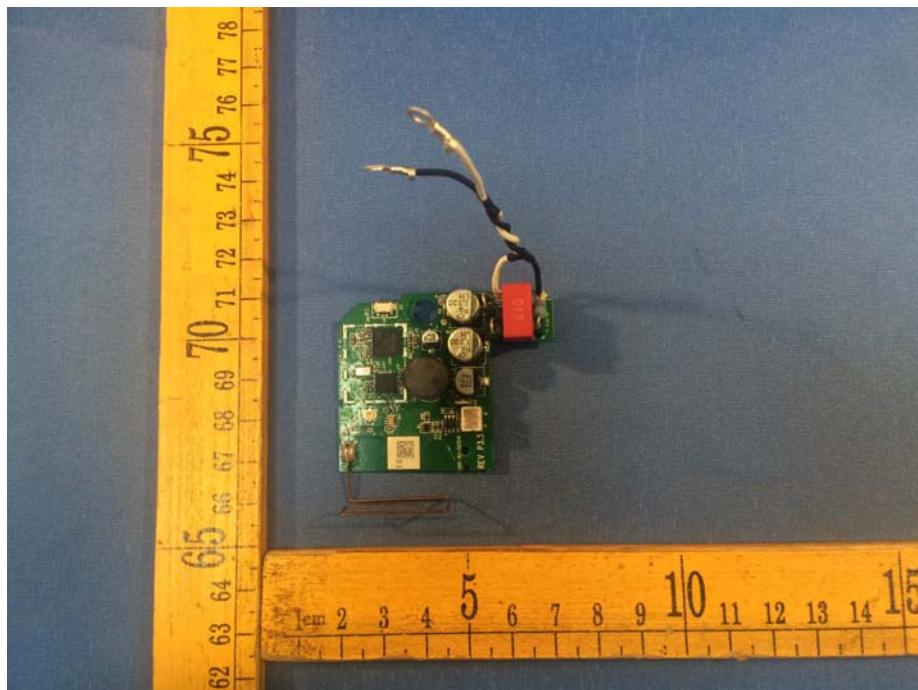

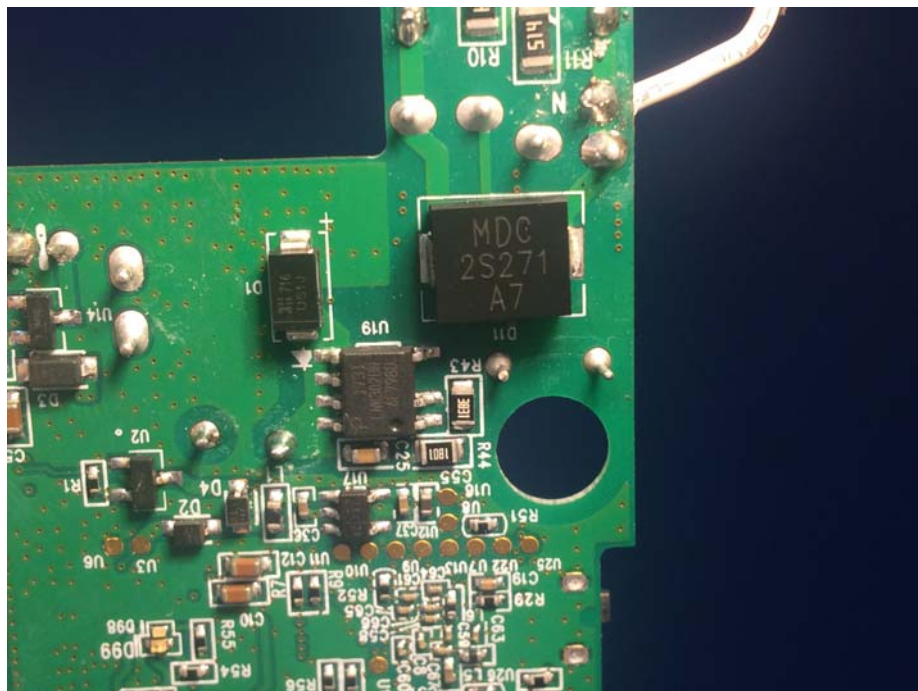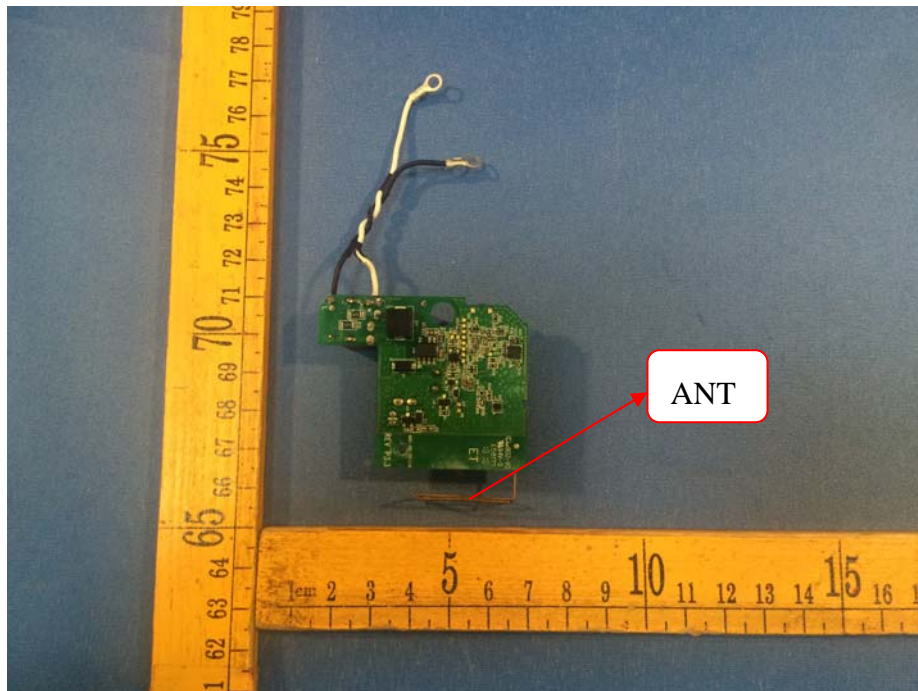

====End of Report====