

## TEST REPORT

### FCC Rules Part 15.247

**Report Reference No..... : MTEB23090025-R1**

**FCC ID..... : YMX-ATS2853**

Compiled by

( position+printed name+signature): File administrators Alisa Luo



Supervised by

( position+printed name+signature): Test Engineer Sunny Deng



Approved by

( position+printed name+signature): Manager Yvette Zhou



Date of issue..... : **Sep.04,2023**

**Representative Laboratory Name Shenzhen Most Technology Service Co., Ltd.**

Address ..... : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

**Applicant's name..... : XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.**

Address ..... : (5/F)NO.168, QIANPU ROAD,SIMING DISTRICT, XIAMEN,Fujian CHINA

**Test specification/ Standard..... : FCC Rules Part 15.247**

TRF Originator..... : Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description ..... : Bluetooth Module**

Trade Mark ..... : N/A

Model/Type reference..... : ATS2853

Listed Models ..... : N/A

Modulation Type ..... : GFSK,  $\pi/4$ DQPSK,8-DPSK

Operation Frequency..... : From 2402MHz to 2480MHz

Hardware Version..... V0.2

Software Version ..... V2.14

Rating ..... DC 3.8V

Result..... PASS

# TEST REPORT

Equipment under Test : Bluetooth Module

Model /Type : ATS2853

Listed Models : N/A

Remark : N/A

Applicant : **XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.**

Address : (5/F)NO.168, QIANPU ROAD,SIMING DISTRICT,XIAMEN, Fujian CHINA

Manufacturer : **Xiamen Healthcare Electronic Co.,Ltd.**

Address : 65-66#, 62-63# BUILDING, SIMING ZONE, TONGAN INDUSTRIAL DISTRICT, XIAMEN CITY, FUJIAN PROVINCE, P.R.CHINA

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>REVISION HISTORY .....</u></b>	<b><u>4</u></b>
<b><u>2</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>5</u></b>
<b><u>3</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>6</u></b>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.7	Test Item (Equipment Under Test) Description*	7
3.8	Auxiliary Equipment (AE) Description	7
3.9	Antenna Information*	7
3.10	Related Submittal(s) / Grant (s)	8
3.11	Modifications	8
3.12	EUT configuration	8
<b><u>4</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>9</u></b>
4.1	Address of the test laboratory	9
4.2	Environmental conditions	9
4.3	Summary of measurement results	10
4.4	Statement of the measurement uncertainty	10
4.5	Equipments Used during the Test	11
<b><u>5</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>12</u></b>
5.1	AC Power Conducted Emission	12
5.2	Radiated Emission	13
5.3	Band Edge Compliance of RF Emission	20
5.4	Maximum Peak Output Power	33
5.5	20dB Bandwidth	34
5.6	Frequency Separation	35
5.7	Number of hopping frequency	36
5.8	Time of Occupancy (Dwell Time)	37
5.9	Spurious RF Conducted Emission	38
5.10	Pseudorandom Frequency Hopping Sequence	39
5.11	Antenna Requirement	40
<b><u>6</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>41</u></b>
<b><u>7</u></b>	<b><u>PHOTOS OF THE EUT .....</u></b>	<b><u>42</u></b>
	APPENDIX I. Conducted Peak Output Power	43
	APPENDIX II. 99% Bandwidth	44
	APPENDIX III. 20dB Bandwidth	46
	APPENDIX IV. Carrier Frequencies Separation	48
	APPENDIX V. Conducted Out Of Band Emission	50
	APPENDIX VI. Duty Cycle	54
	APPENDIX VII. Dwell Time	59
	APPENDIX VIII. Number Of Hopping Channel	63

## 1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023.09.04	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2023.08.28
Testing commenced on	:	2023.08.29
Testing concluded on	:	2023.09.04

#### 3.2 Product Description

Product Name:	Bluetooth Module
Model/Type reference:	ATS2853
Power Supply:	DC 3.8V
Testing sample ID:	MTYP02624
<b>Bluetooth :</b>	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	-0.58dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

1. DC 3.8V

#### 3.4 Short description of the Equipment under Test (EUT)

This is a Bluetooth Module For more details, refer to the user's manual of the EUT.


### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

**Operation Frequency:**

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

### 3.6 Block Diagram of Test Setup



### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1				
AE 2	-			

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	-0.58dBi
Antenna 2					

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- Supplied by the lab

<input checked="" type="radio"/>	ADAPTER	M/N:	/
<input type="radio"/>		Manufacturer:	/



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.205	Band edge compliance radiated	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK □/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2023/03/17	1 Year

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

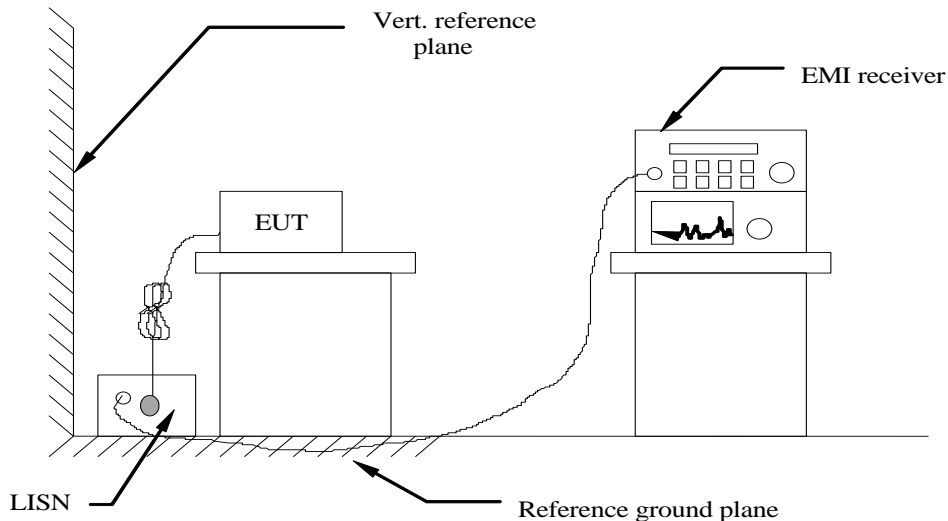

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

N/A


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

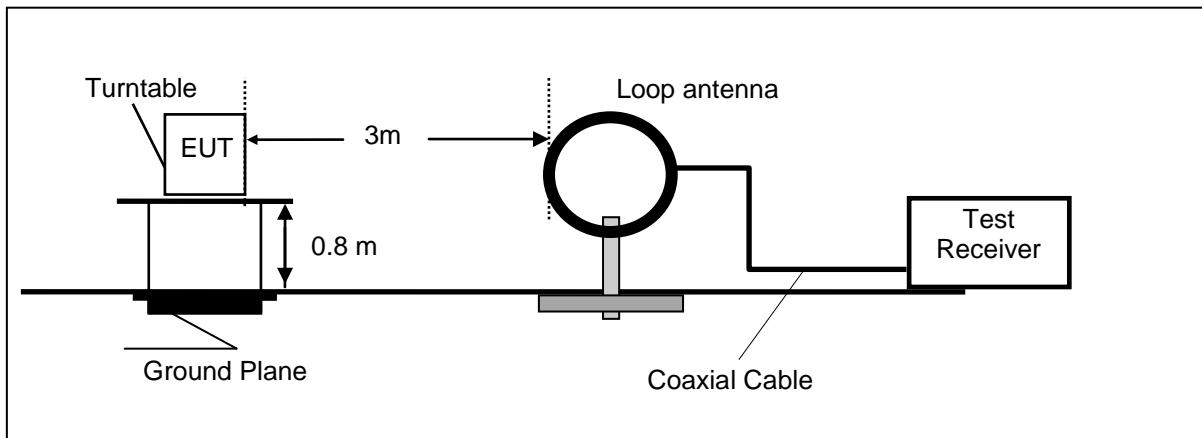

Frequency range 30MHz – 1000MHz

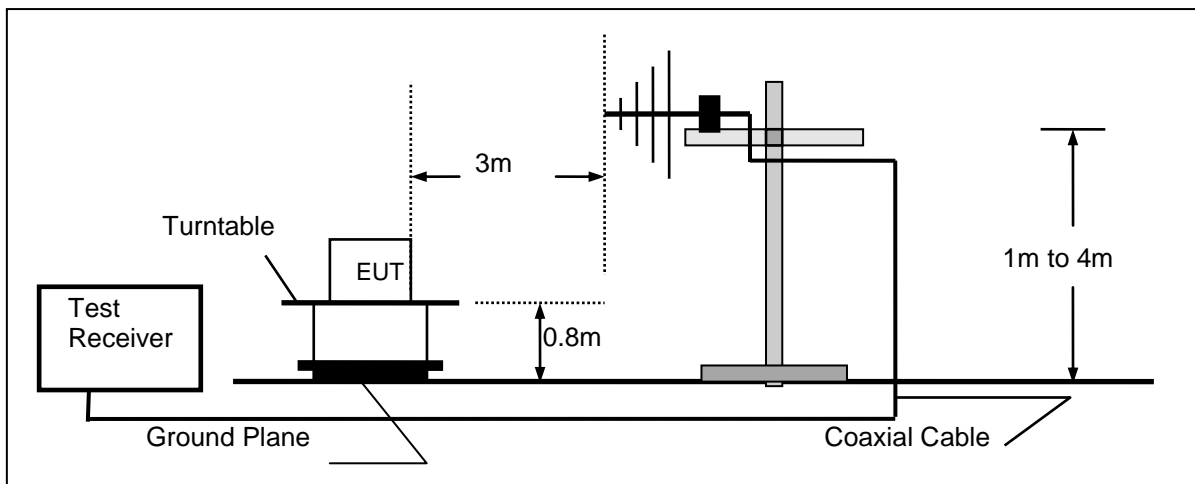

Frequency range above 1GHz-25GHz

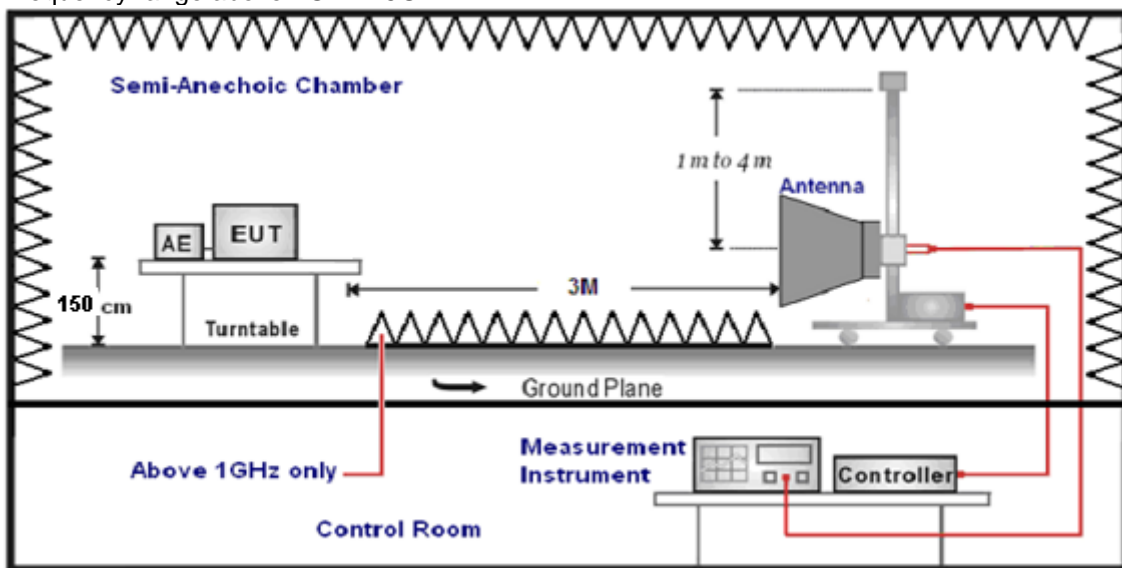

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

$$Transd=AF +CL-AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


### **TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK, 8-DPSK mode from 9 KHz to 25GHz and recorded worst case at  $\pi/4$  DQPSK 2DH5 mode.
3. For below 1GHz testing recorded worst at 8DPSK 3DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

For 30MHz-1GHz

Horizontal

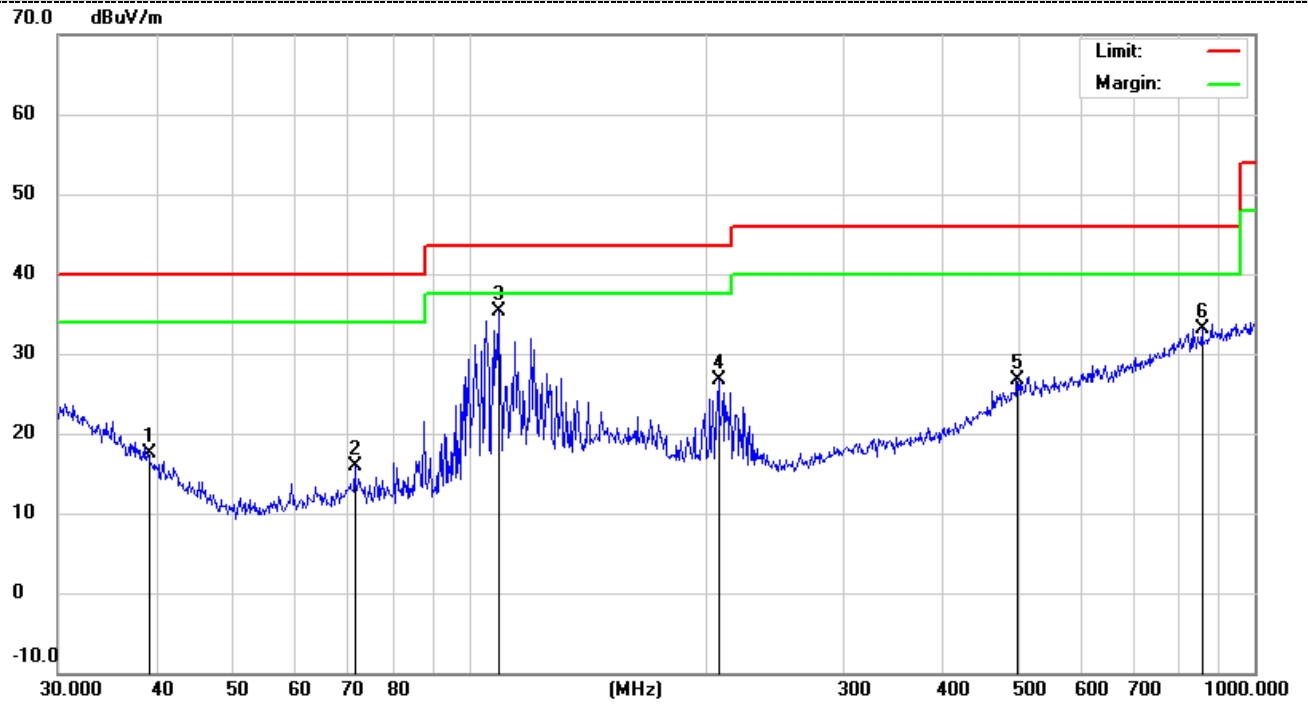


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		39.0245	2.94	14.52	17.46	40.00	-22.54	QP	200	34
2		71.5806	6.39	9.43	15.82	40.00	-24.18	QP	200	105
3	*	109.0286	20.75	14.59	35.34	43.50	-8.16	QP	200	188
4		207.8501	11.70	14.98	26.68	43.50	-16.82	QP	200	206
5		497.6765	4.04	22.58	26.62	46.00	-19.38	QP	200	274
6		857.0247	4.66	28.53	33.19	46.00	-12.81	QP	200	331

\*:Maximum data    x:Over limit    !:over margin



Vertical

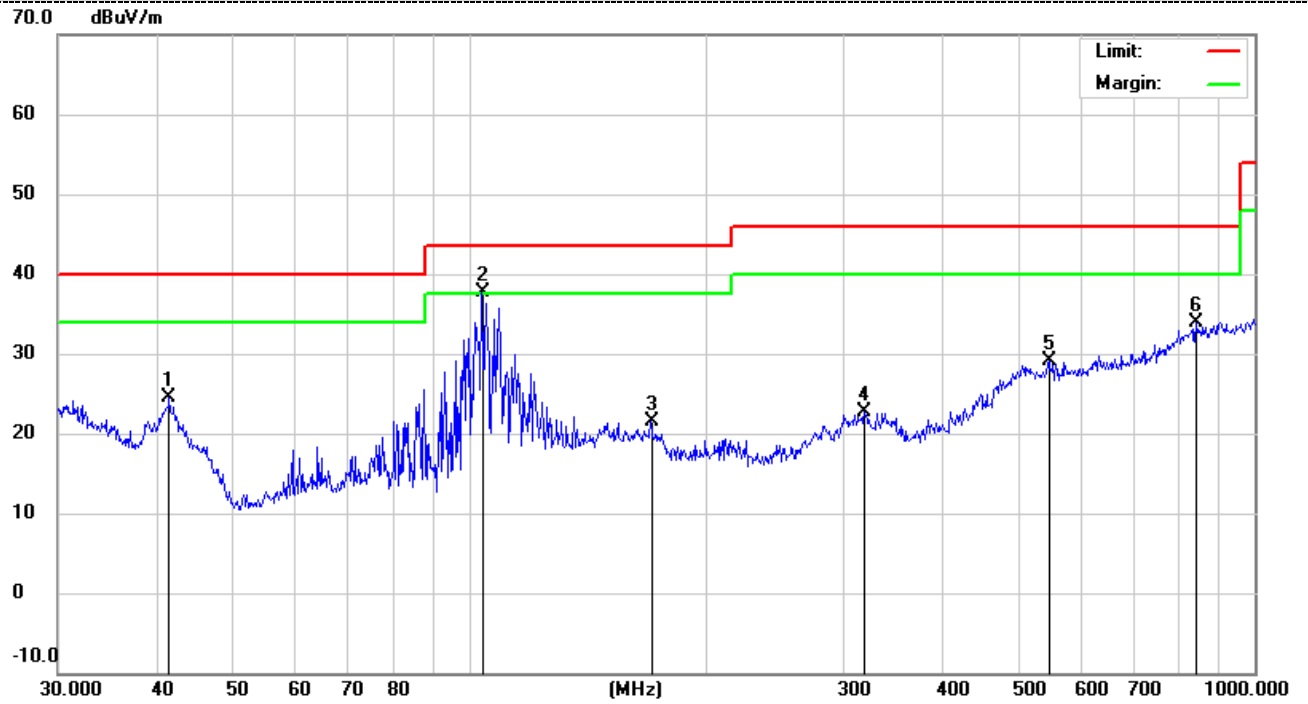

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		41.5670	11.72	12.77	24.49	40.00	-15.51	QP	100	23	
2	*	103.8055	23.75	14.02	37.77	43.50	-5.73	QP	100	70	
3		170.1948	4.62	16.96	21.58	43.50	-21.92	QP	100	105	
4		318.8170	6.80	15.86	22.66	46.00	-23.34	QP	100	189	
5		547.0977	5.97	23.22	29.19	46.00	-16.81	QP	100	235	
6		842.1296	5.53	28.36	33.89	46.00	-12.11	QP	100	286	

\*:Maximum data    x:Over limit    !:over margin

**For 1GHz to 25GHz**

Note: GFSK, π/4 DQPSK and 8DPSK all have been tested, only worse case 8DPSK is reported.

**8DPSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	57.66	PK	74	16.34	55.76	31.42	6.98	36.5	1.9
4804	46.13	AV	54	7.87	44.23	31.42	6.98	36.5	1.9
7206	54.11	PK	74	19.89	43.51	37.03	8.87	35.3	10.6
7206	40.96	AV	54	13.04	30.36	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	54.68	PK	74	19.32	52.78	31.42	6.98	36.5	1.9
4804	46.58	AV	54	7.42	44.68	31.42	6.98	36.5	1.9
7206	51.89	PK	74	22.11	41.29	37.03	8.87	35.3	10.6
7206	41.21	AV	54	12.79	30.61	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	57.01	PK	74	16.99	54.95	30.98	7.58	36.5	2.06
4882	44.03	AV	54	9.97	41.97	30.98	7.58	36.5	2.06
7323	52.1	PK	74	21.9	41.18	37.66	8.56	35.3	10.92
7323	43.38	AV	54	10.62	32.46	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	53.31	PK	74	20.69	51.25	30.98	7.58	36.5	2.06
4882	44.75	AV	54	9.25	42.69	30.98	7.58	36.5	2.06
7323	54.58	PK	74	19.42	43.66	37.66	8.56	35.3	10.92
7323	42.73	AV	54	11.27	31.81	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	54.15	PK	74	19.85	51.08	31.47	7.8	36.2	3.07
4960	44.97	AV	54	9.03	41.9	31.47	7.8	36.2	3.07
7440	54.37	PK	74	19.63	42.63	38.32	8.72	35.3	11.74
7440	44.62	AV	54	9.38	32.88	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	57.15	PK	74	16.85	54.08	31.47	7.8	36.2	3.07
4960	43.33	AV	54	10.67	40.26	31.47	7.8	36.2	3.07
7440	51.99	PK	74	22.01	40.25	38.32	8.72	35.3	11.74
7440	42.79	AV	54	11.21	31.05	38.32	8.72	35.3	11.74

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

### 5.3 Band Edge Compliance of RF Emission

#### TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### TEST CONFIGURATION

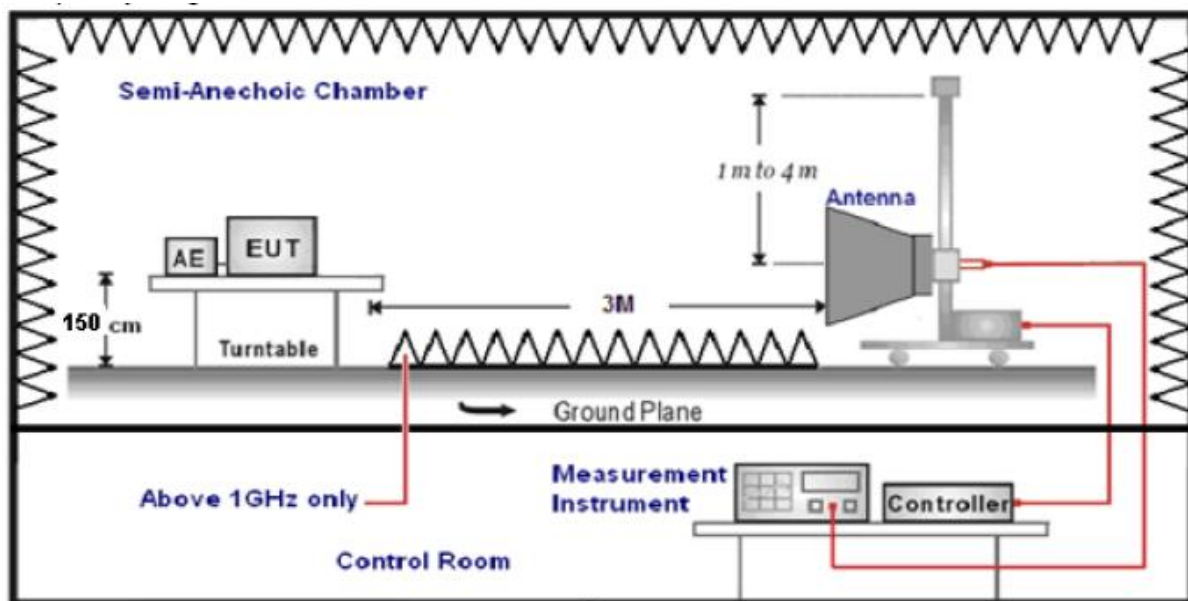

#### TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

#### LIMIT


Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Note: GFSK,  $\pi/4$  DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**Results of Band Edges Test (Radiated)**


**Polarity:HORIZONTAL(GFSK-2480MHz)**

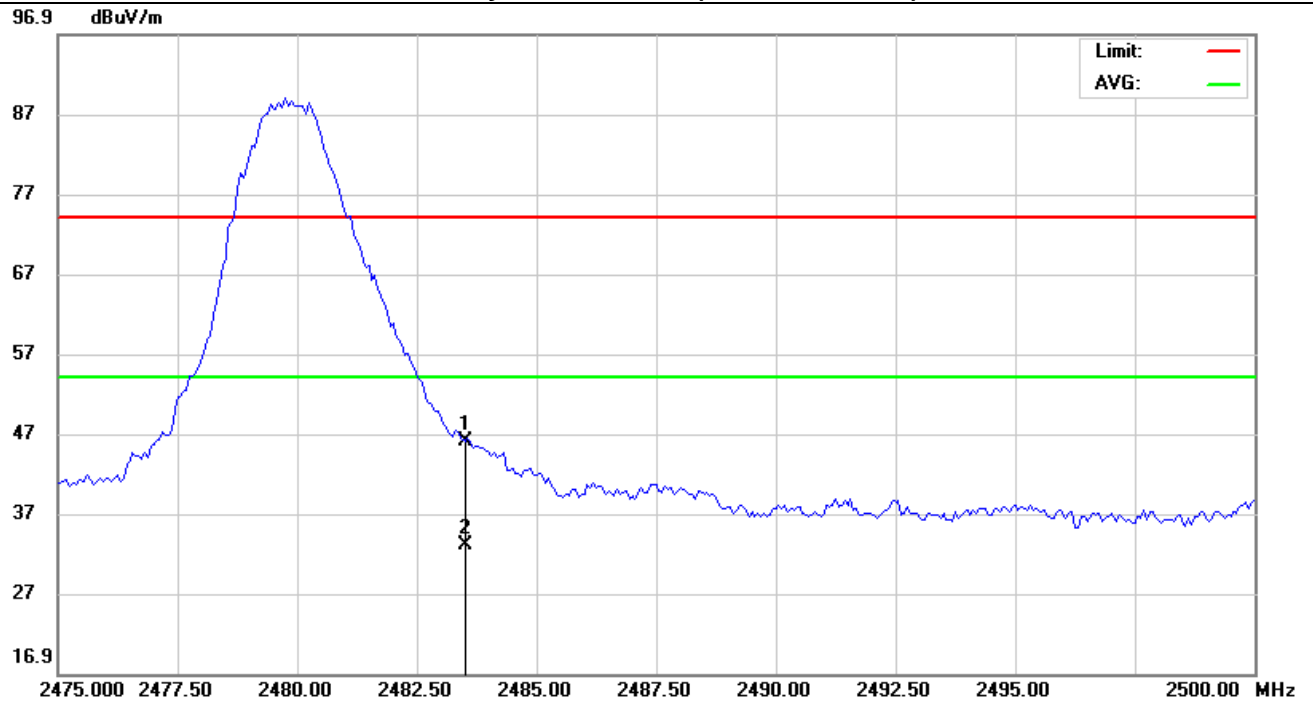

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	54.38	-8.29	46.09	74.00	-27.91	peak			
2	*	2483.500	41.36	-8.29	33.07	54.00	-20.93	AVG			

\*:Maximum data    x:Over limit    !:over margin


Polarity:VERTICAL(GFSK-2480MHz)

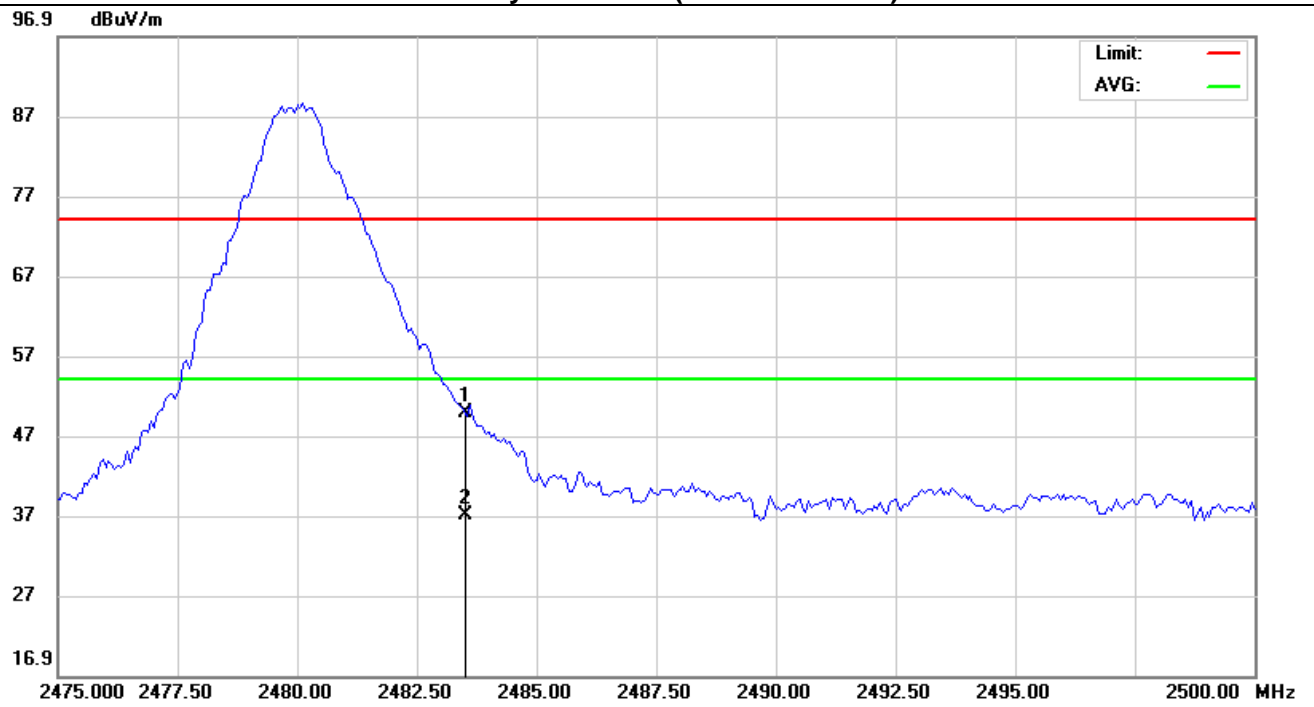

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	58.14	-8.29	49.85	74.00	-24.15	peak			
2	*	2483.500	45.36	-8.29	37.07	54.00	-16.93	AVG			

\*:Maximum data    x:Over limit    !:over margin


Polarity:HORIZONTAL(GFSK-2402MHz)

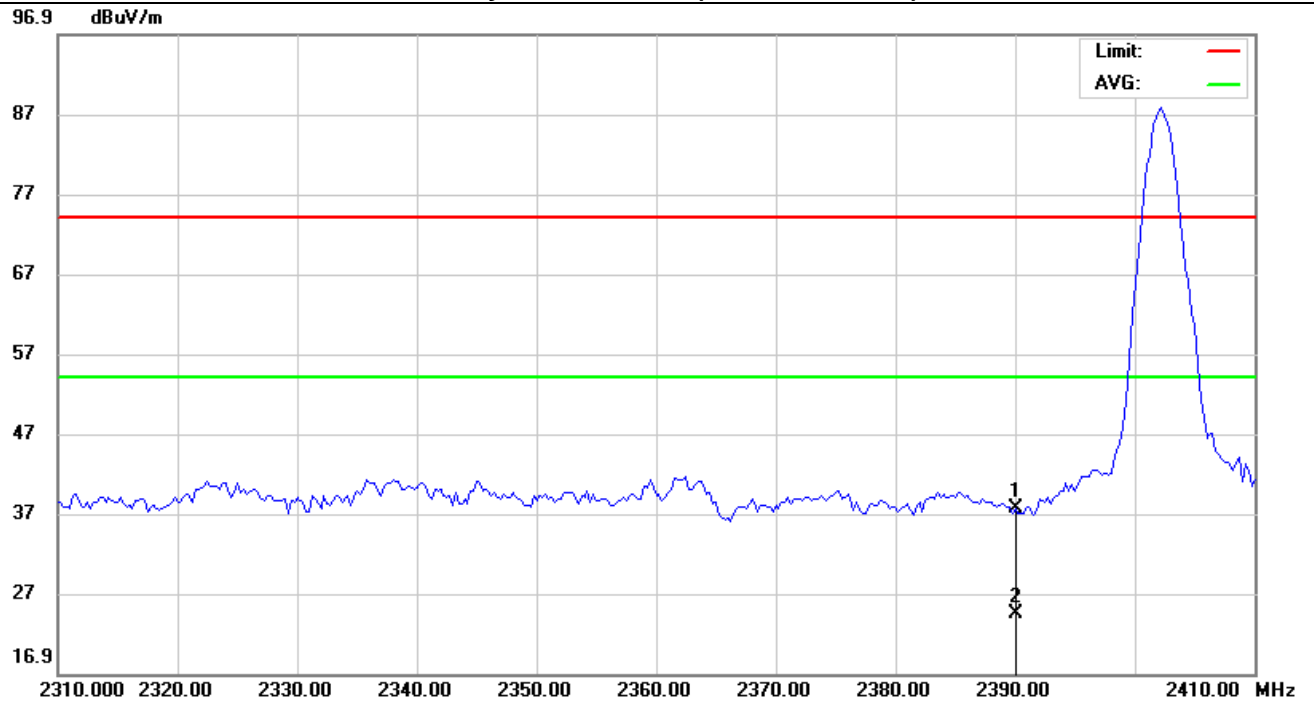

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2390.000	46.10	-8.43	37.67	74.00	-36.33	peak			
2	*	2390.000	32.89	-8.43	24.46	54.00	-29.54	AVG			

\*:Maximum data    x:Over limit    !:over margin

Polarity:VERTICAL(GFSK-2402MHz)

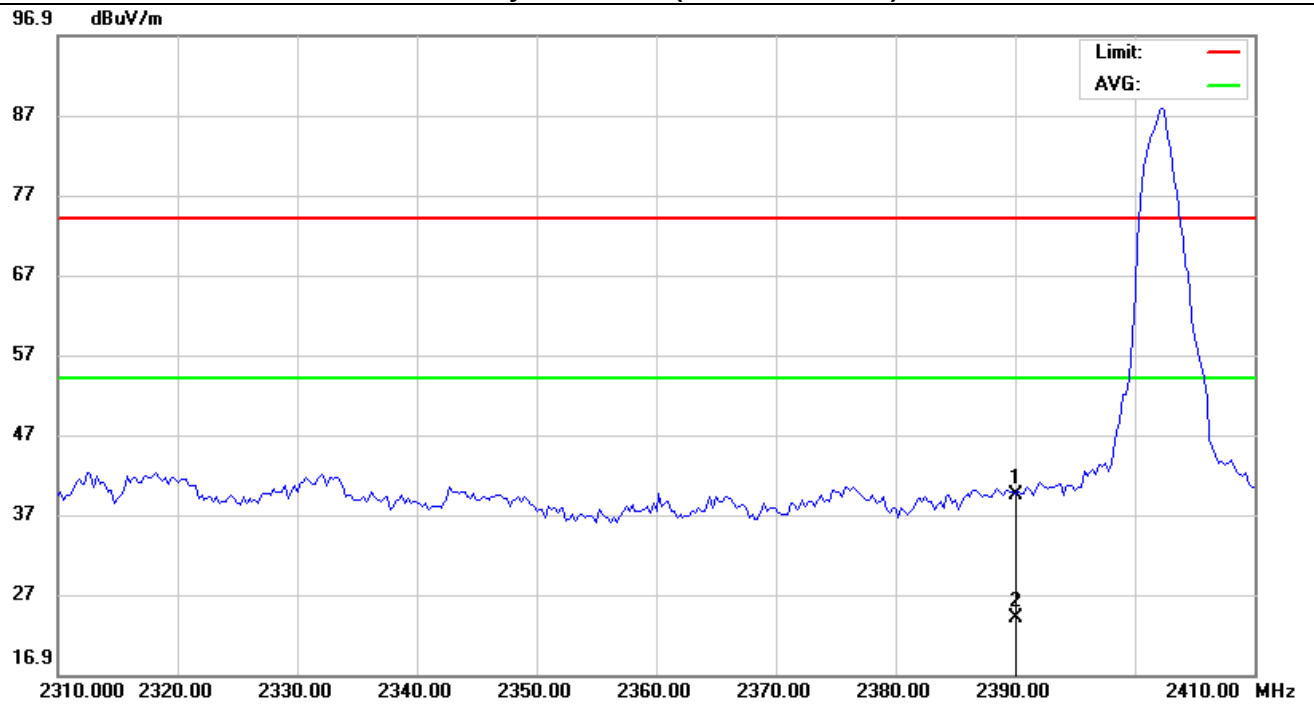


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	47.74	-8.43	39.31	74.00	-34.69	peak		
2	*	2390.000	32.52	-8.43	24.09	54.00	-29.91	AVG		

\*:Maximum data    x:Over limit    !:over margin




Polarity:HORIZONTAL( $\pi/4$  DQPSK -2480MHz)

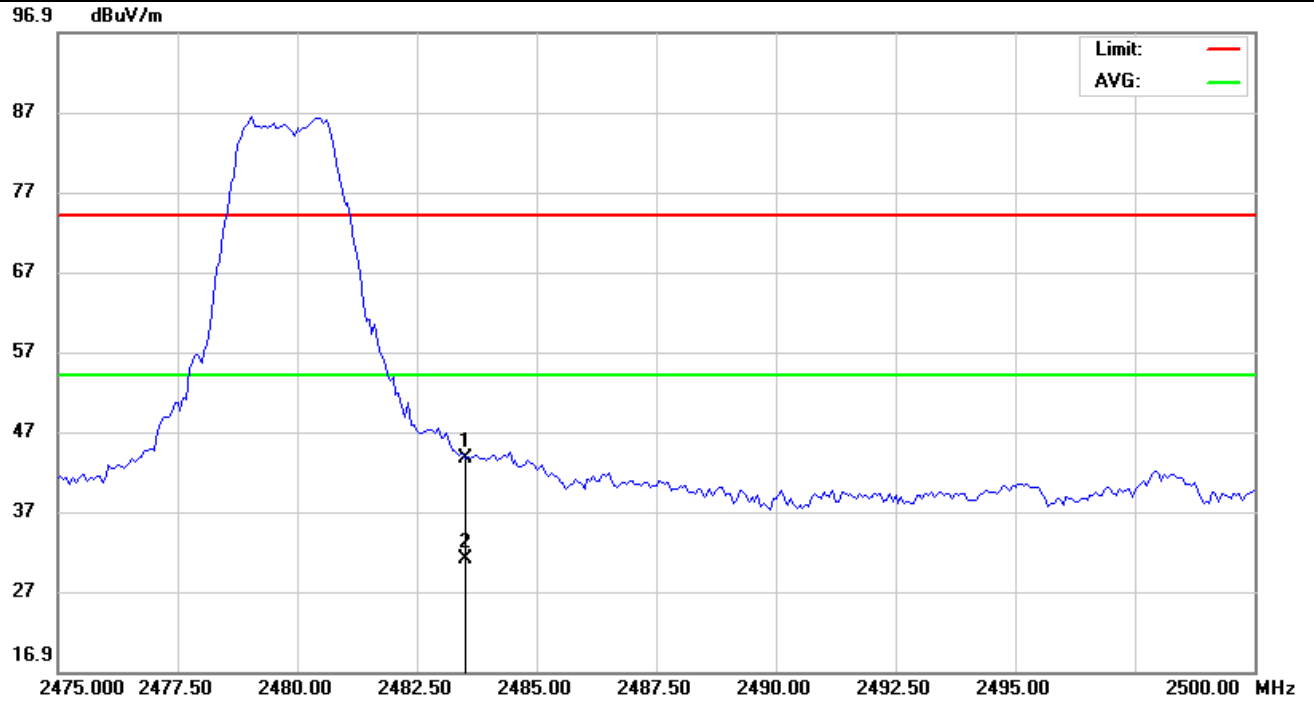

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	51.88	-8.29	43.59	74.00	-30.41			peak
2	*	2483.500	39.25	-8.29	30.96	54.00	-23.04			AVG

\*:Maximum data    x:Over limit    !:over margin


Polarity:VERTICAL( $\pi/4$  DQPSK 2480MHz)

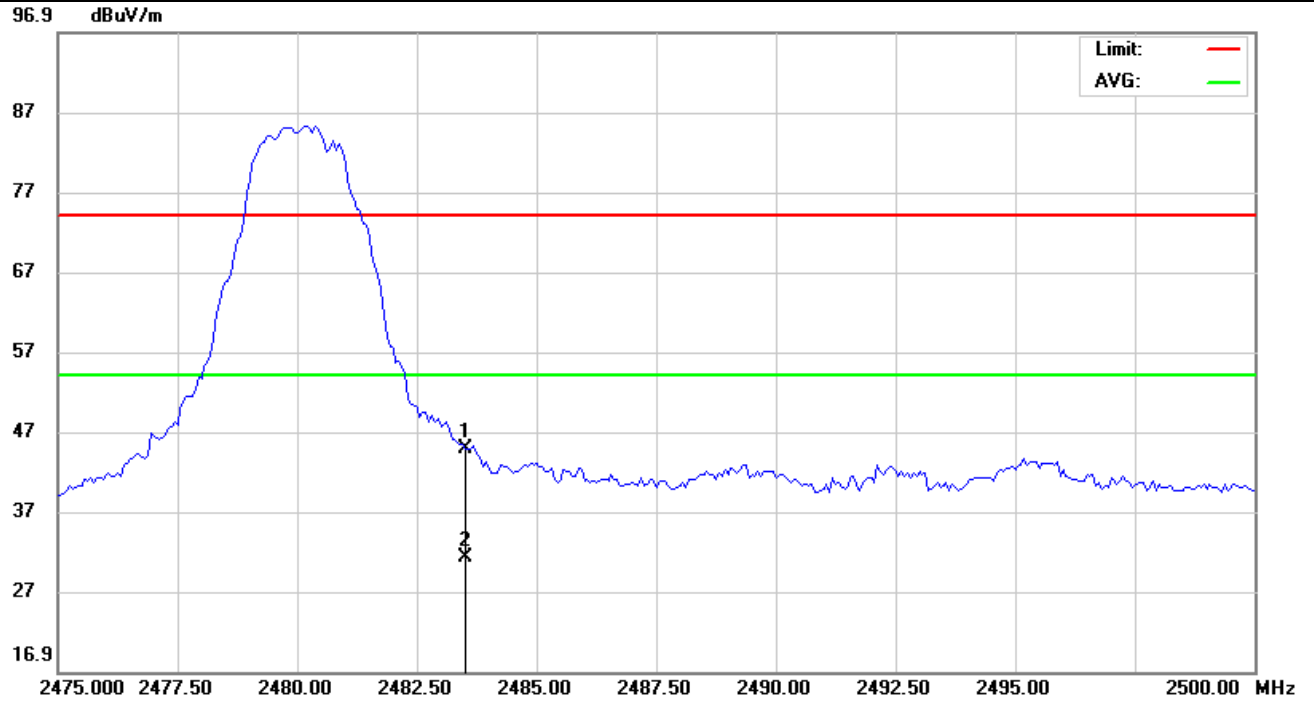

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	53.14	-8.29	44.85	74.00	-29.15	peak			
2	*	2483.500	39.52	-8.29	31.23	54.00	-22.77	AVG			

\*:Maximum data    x:Over limit    !:over margin


Polarity:HORIZONTAL( $\pi/4$  DQPSK -2402MHz)

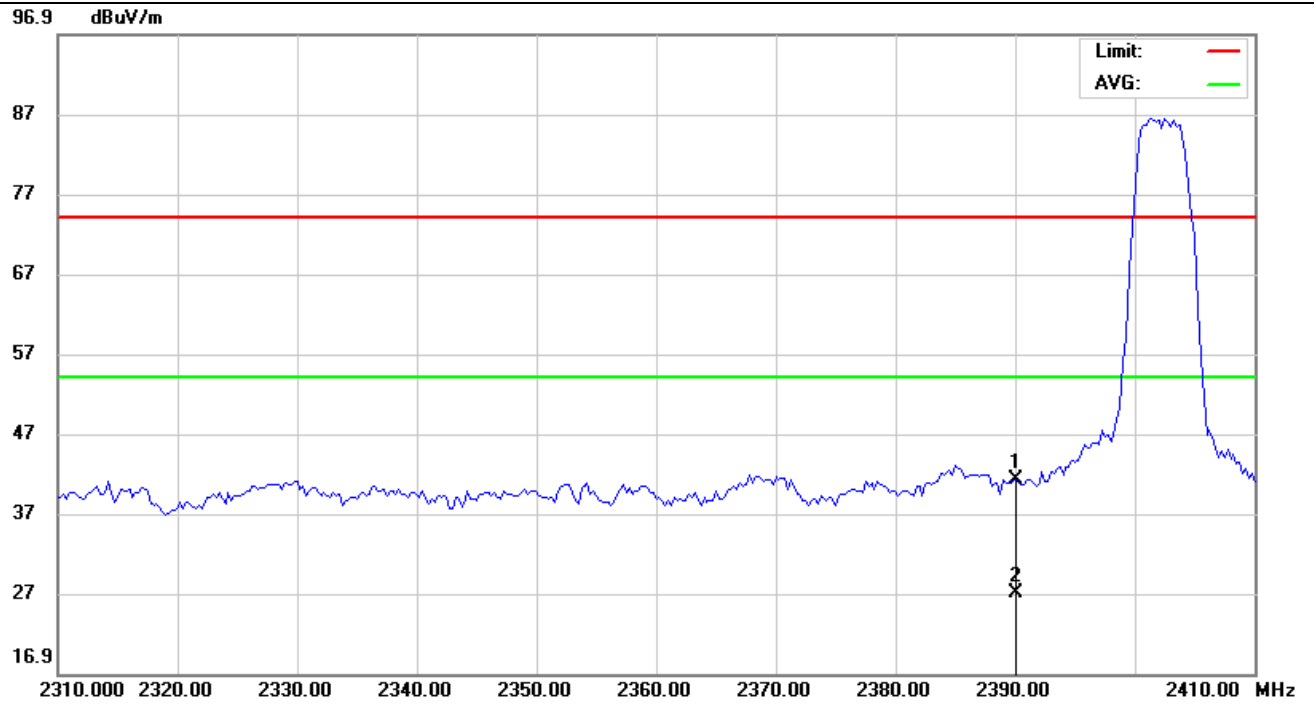

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2390.000	49.60	-8.43	41.17	74.00	-32.83	peak			
2	*	2390.000	35.47	-8.43	27.04	54.00	-26.96	AVG			

\*:Maximum data    x:Over limit    !:over margin


Polarity:VERTICAL( $\pi/4$  DQPSK -2402MHz)

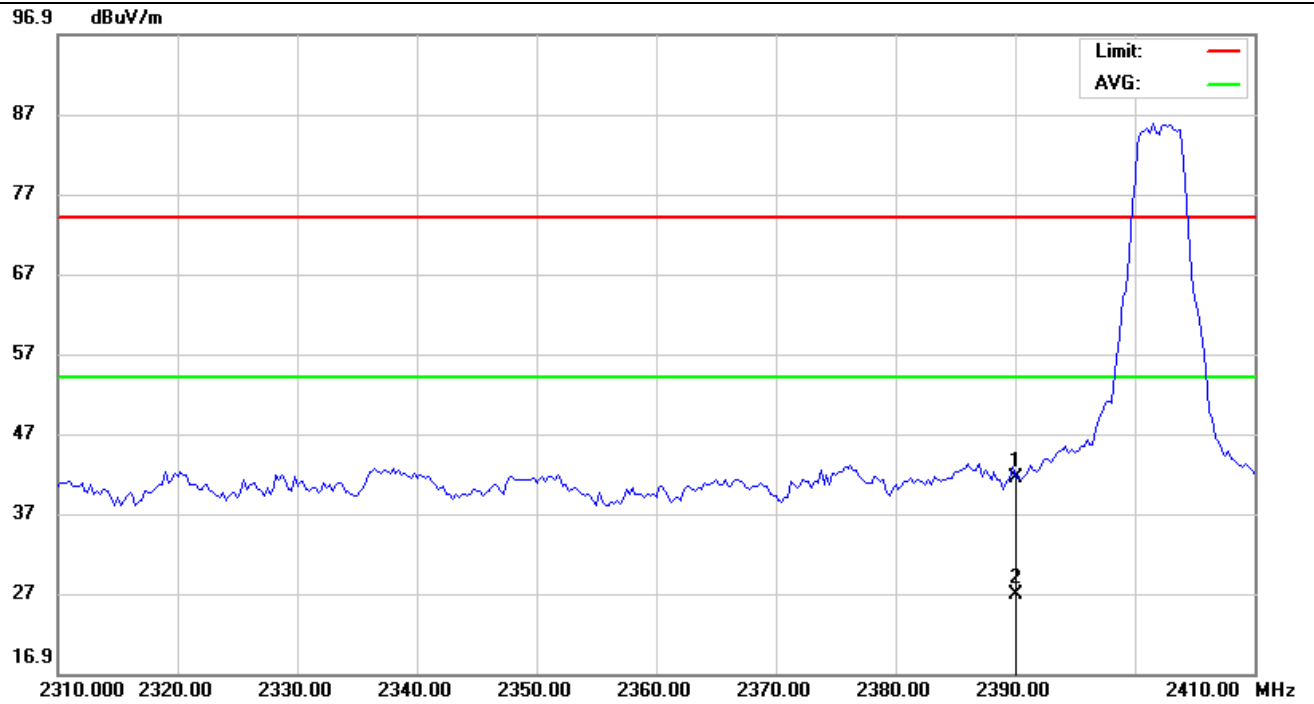

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	49.74	-8.43	41.31	74.00	-32.69			peak
2	*	2390.000	35.26	-8.43	26.83	54.00	-27.17			AVG

\*:Maximum data    x:Over limit    !:over margin


Polarity:HORIZONTAL(8DPSK -2480MHz)

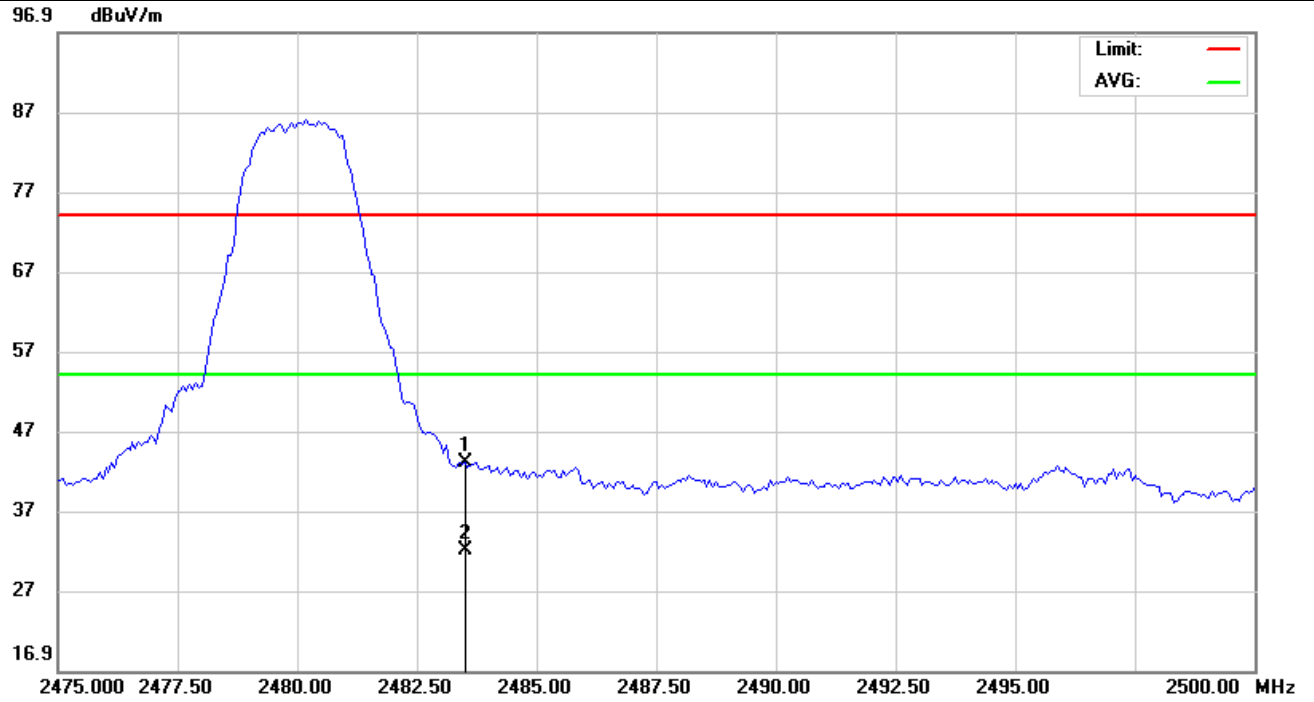

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	51.38	-8.29	43.09	74.00	-30.91	peak			
2	*	2483.500	40.21	-8.29	31.92	54.00	-22.08	AVG			

\*:Maximum data    x:Over limit    !:over margin


Polarity:VERTICAL(8DPSK 2480MHz)

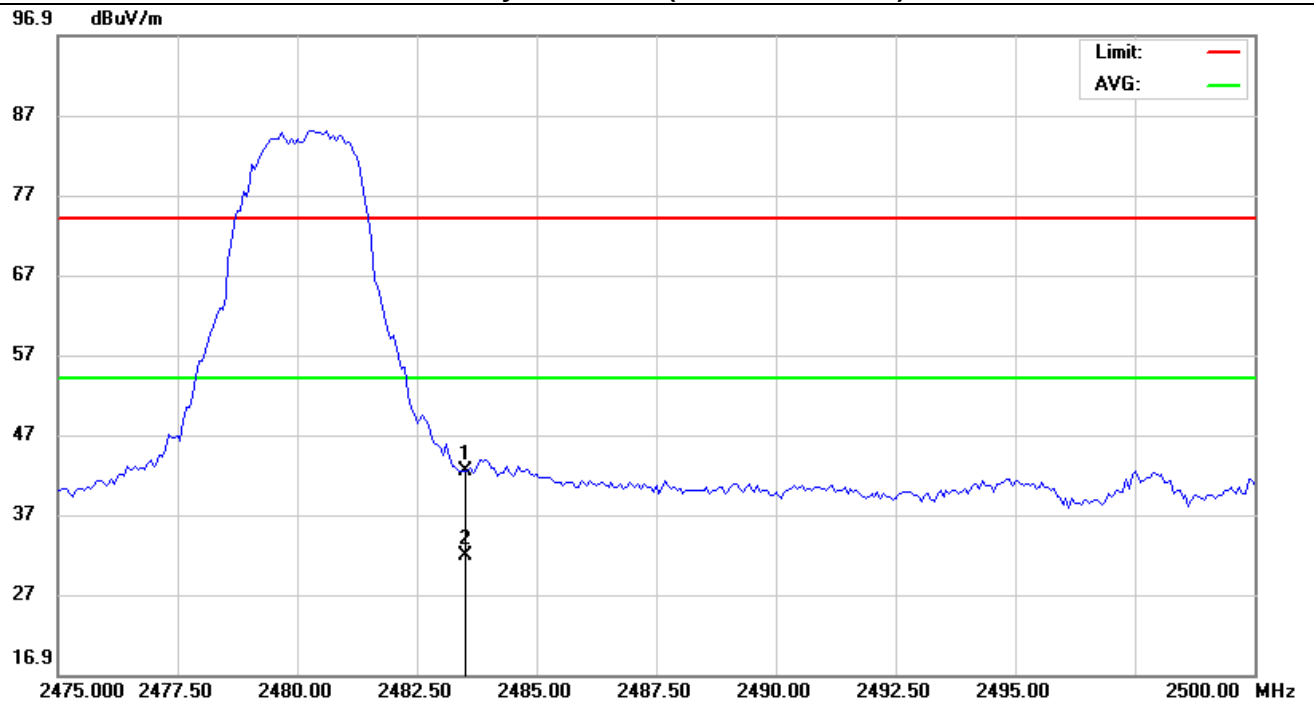

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	50.64	-8.29	42.35	74.00	-31.65			peak
2	*	2483.500	40.03	-8.29	31.74	54.00	-22.26			AVG

\*:Maximum data    x:Over limit    !:over margin


Polarity:HORIZONTAL(8DPSK -2402MHz)

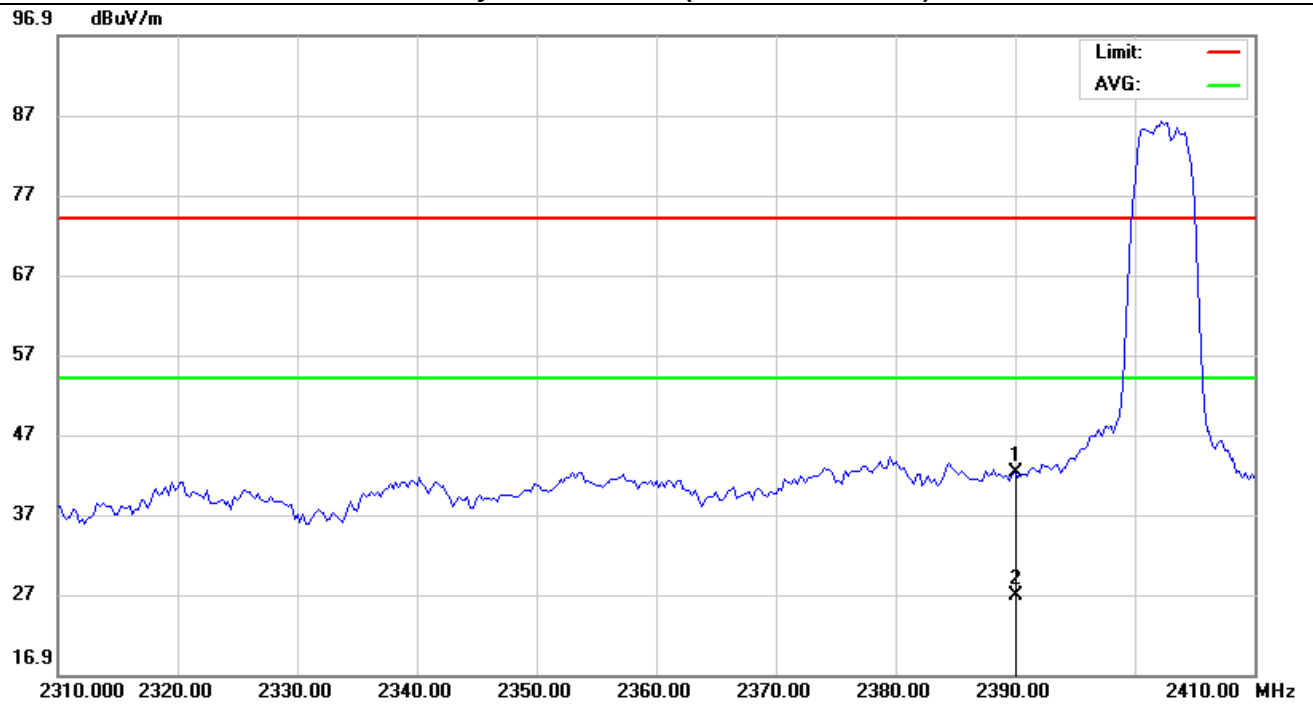

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	50.60	-8.43	42.17	74.00	-31.83			peak
2	*	2390.000	35.14	-8.43	26.71	54.00	-27.29			AVG

\*:Maximum data x:Over limit !:over margin

Polarity:VERTICAL(8DPSK -2402MHz)

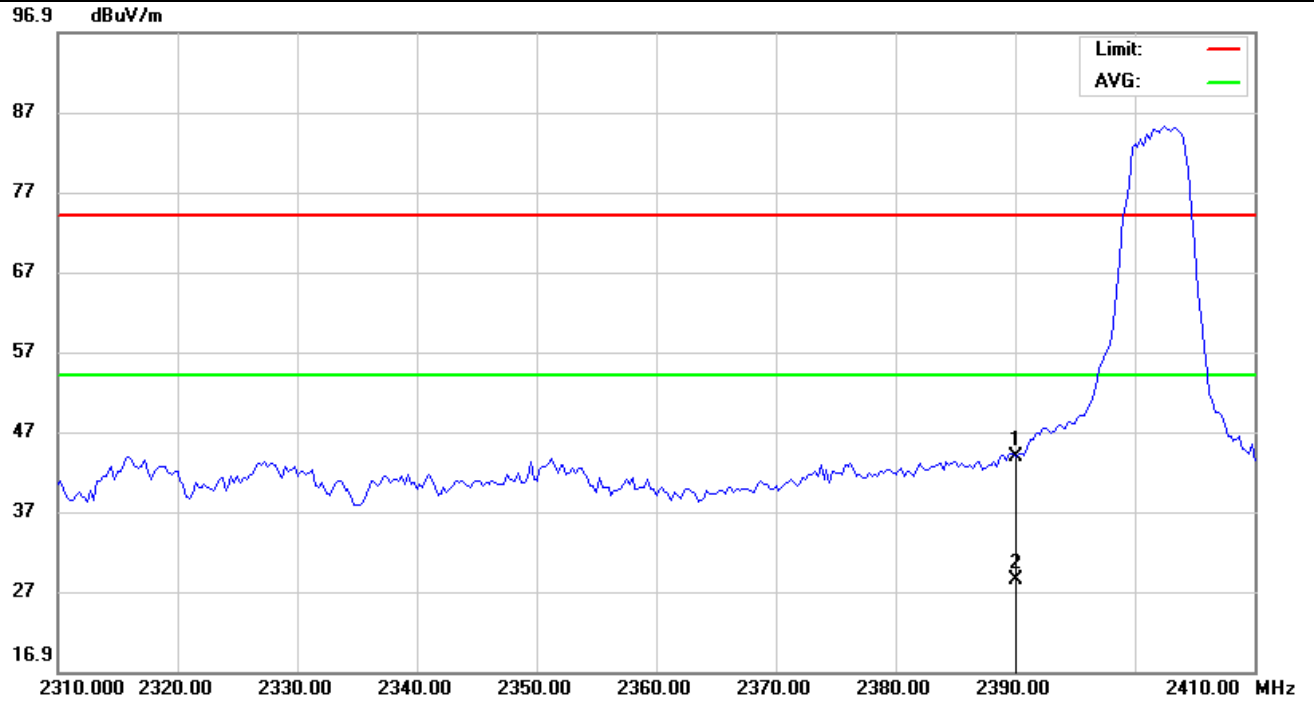

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	52.24	-8.43	43.81	74.00	-30.19			peak
2	*	2390.000	36.90	-8.43	28.47	54.00	-25.53			AVG

\*:Maximum data    x:Over limit    !:over margin



## 5.4 Maximum Peak Output Power


### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

### Test Configuration



### Test Results

See Appendix I

## 5.5 20dB Bandwidth

### Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

See Appendix III

## 5.6 Frequency Separation


### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $\frac{2}{3} \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION



### TEST RESULTS

See Appendix IV

## 5.7 Number of hopping frequency


### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

### Test Configuration



### Test Results

See Appendix VIII

## 5.8 Time of Occupancy (Dwell Time)


### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration




### Test Results

See Appendix VII

## 5.9 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### Test Results

See Appendix V

### 5.10 Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


**For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

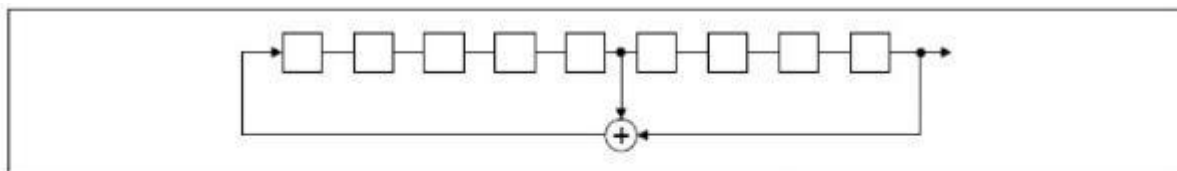

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

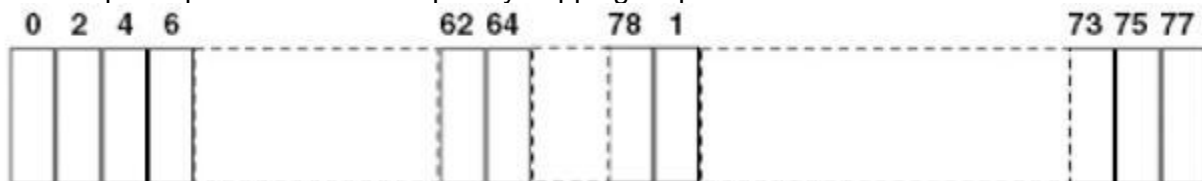

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 5.11 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is -0.58dBi , and the antenna is a PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details. Results: Compliance.



## 6 Test Setup Photos of the EUT

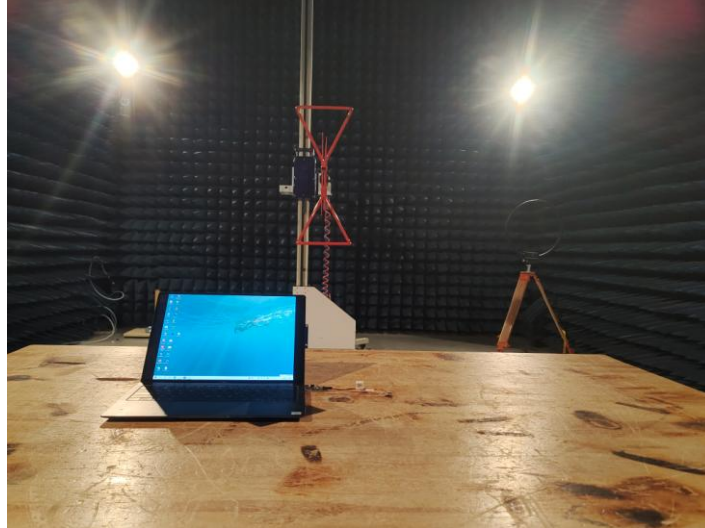

## **7 Photos of the EUT**

See photo report

## APPENDIX I. Conducted Peak Output Power

## Test Result

Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
GFSK	DH5	0	2.930	1.963	None	30	PASS
		39	0.658	1.164	None		PASS
		78	-3.214	0.477	None		PASS
$\pi/4$ DQPSK	2-DH5	0	1.373	1.372	None	20.97	PASS
		39	-0.941	0.805	None		PASS
		78	-3.870	0.410	None		PASS
8DPSK	3-DH5	0	1.332	1.359	None		PASS
		39	-0.717	0.848	None		PASS
		78	-3.858	0.411	None		PASS


# APPENDIX II.99% Bandwidth

## Test Result


Modulation	Channel	99% BW (MHz)
GFSK	0	0.82013
	39	0.80761
	78	0.84210
$\pi$ /4DQPSK	0	1.0436
	39	0.98381
	78	1.0392
8DPSK	0	1.0105
	39	1.0105
	78	1.0606

## Test Graphs




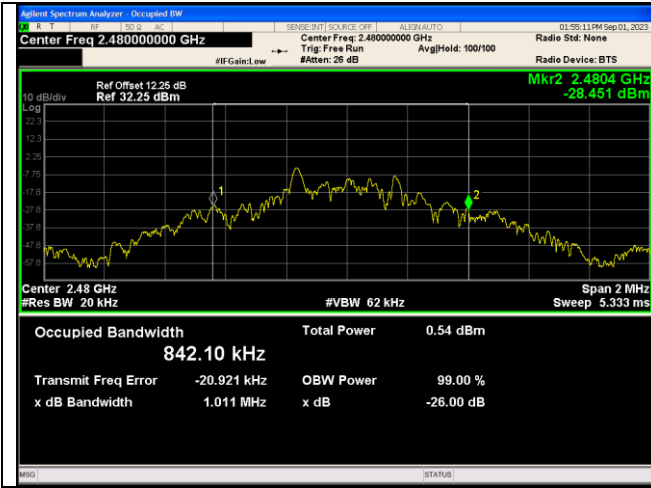


GFSK\_DH5\_Channel 78

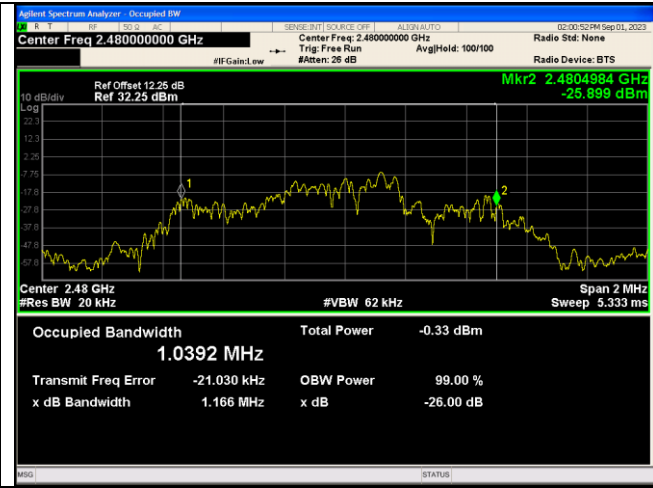


$\pi/4$ DQPSK\_2-DH5\_Channel 78

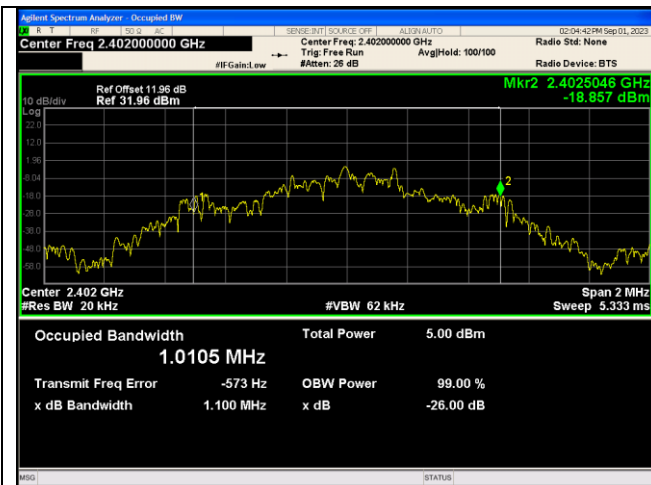

8DPSK\_3-DH5\_Channel 0

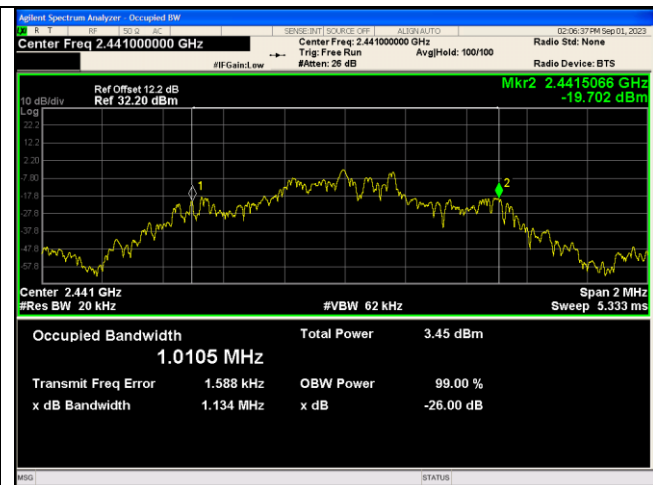

8DPSK\_3-DH5\_Channel 39

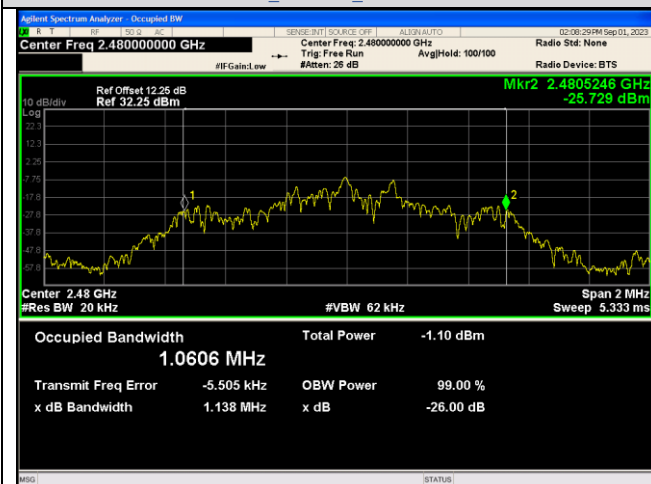

8DPSK\_3-DH5\_Channel 78


Void

# APPENDIX III.20dB Bandwidth

## Test Result


Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.7267
	39	2441 MHz	0.7261
	78	2480 MHz	0.7074
$\pi/4$ DQPSK	0	2402 MHz	1.105
	39	2441 MHz	1.110
	78	2480 MHz	1.098
8DPSK	0	2402 MHz	1.127
	39	2441 MHz	1.125
	78	2480 MHz	1.123

## Test Graphs

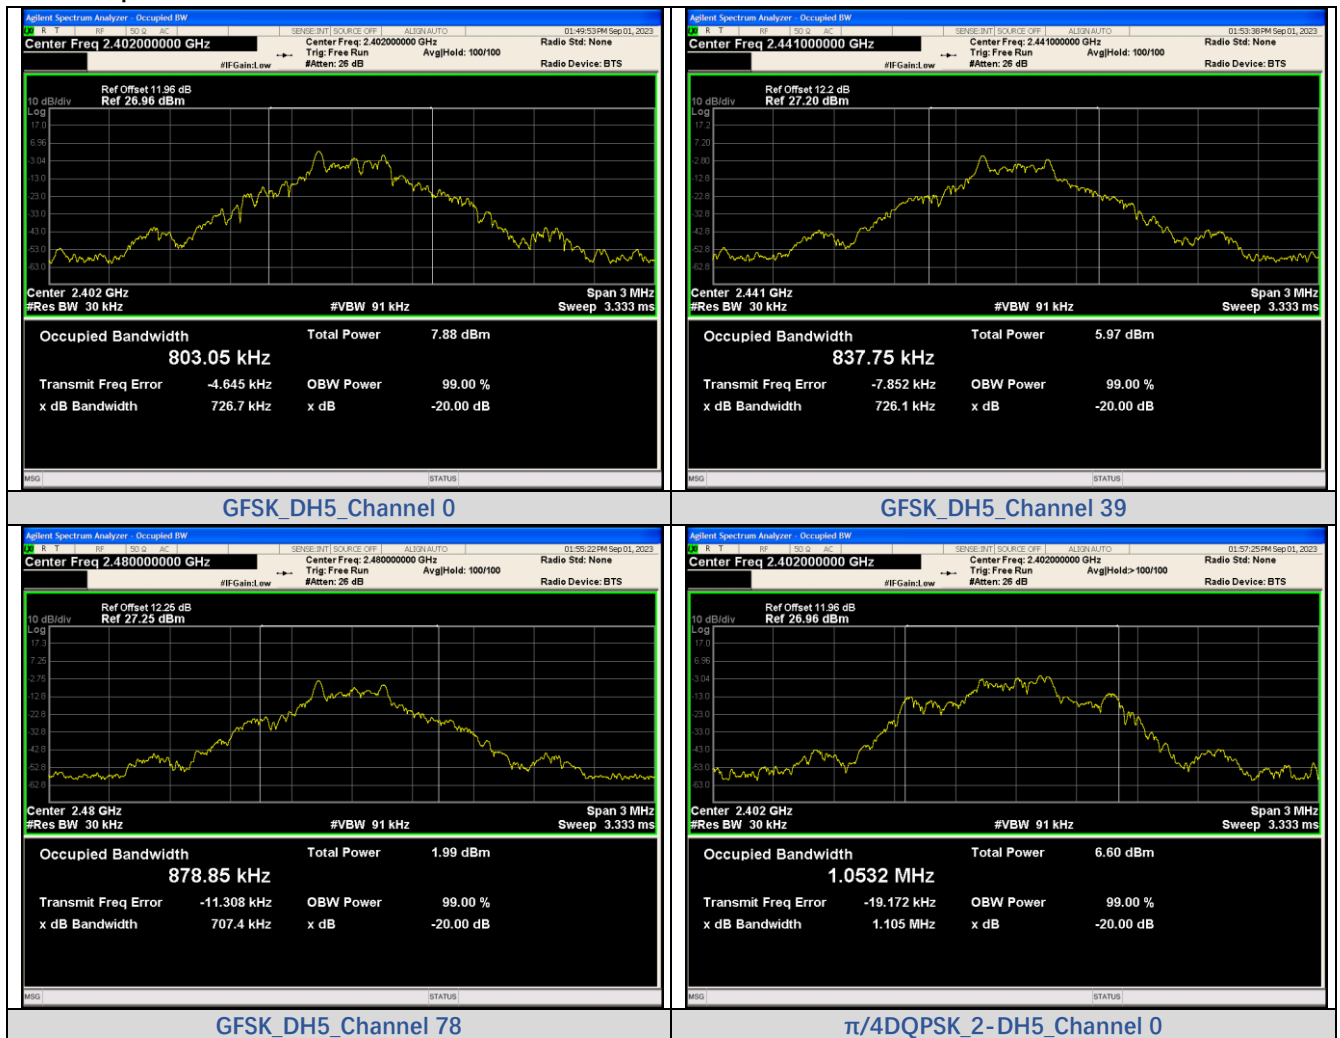





$\pi/4$ DQPSK\_2-DH5\_Channel 39

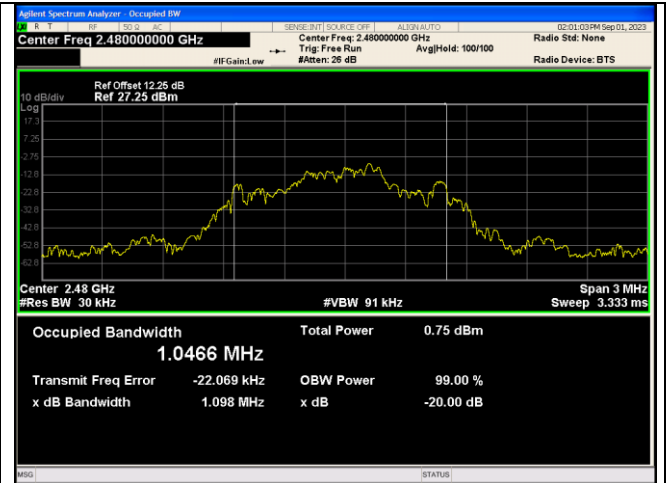


$\pi/4$ DQPSK\_2-DH5\_Channel 78

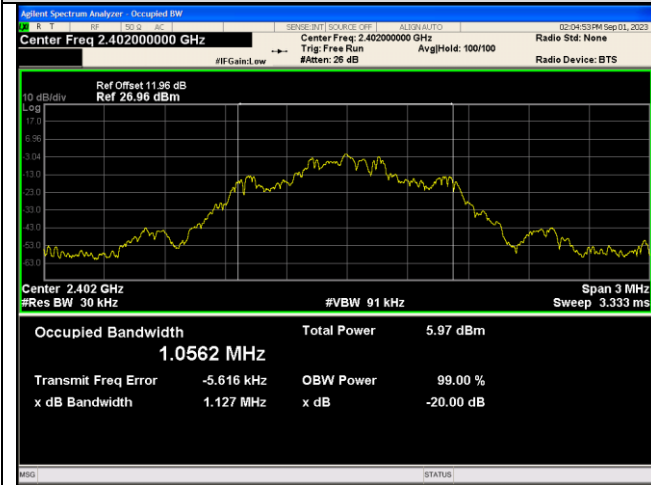


8DPSK\_3-DH5\_Channel 0

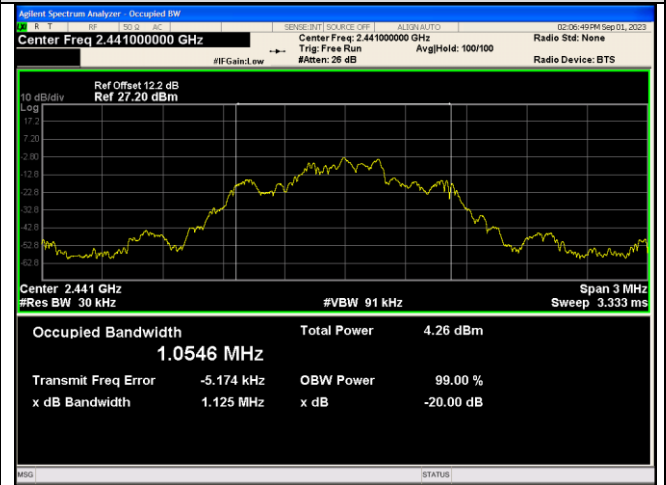

8DPSK\_3-DH5\_Channel 39

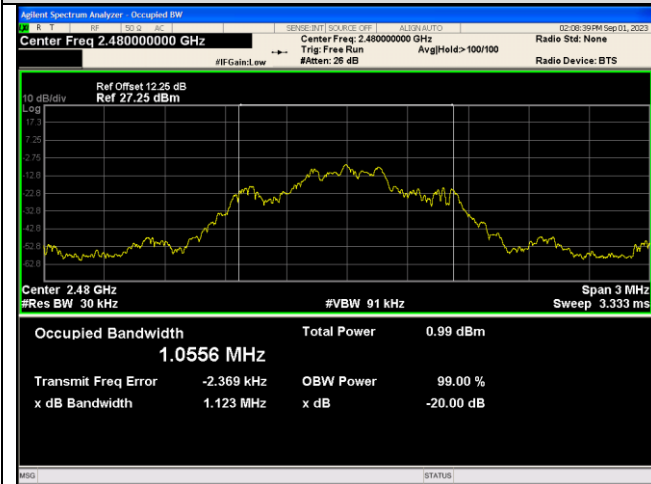

8DPSK\_3-DH5\_Channel 78




# APPENDIX IV. Carrier Frequencies Separation

## Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2439.835	2440.8353	1.0003	0.484	PASS
GFSK	DH5	2439.8347	2440.835	1.0003	0.484	PASS
GFSK	DH5	2439.835	2440.8356	1.0006	0.472	PASS
$\pi/4$ DQPSK	2-DH5	2440.0024	2441.0183	1.0159	0.737	PASS
$\pi/4$ DQPSK	2-DH5	2440.1542	2441.009	0.8548	0.74	PASS
$\pi/4$ DQPSK	2-DH5	2440.0207	2440.9913	0.9706	0.732	PASS
8DPSK	3-DH5	2440.1611	2441.1542	0.9931	0.751	PASS
8DPSK	3-DH5	2439.8464	2440.832	0.9856	0.75	PASS
8DPSK	3-DH5	2440.0135	2441.1521	1.1386	0.749	PASS

## Test Graphs

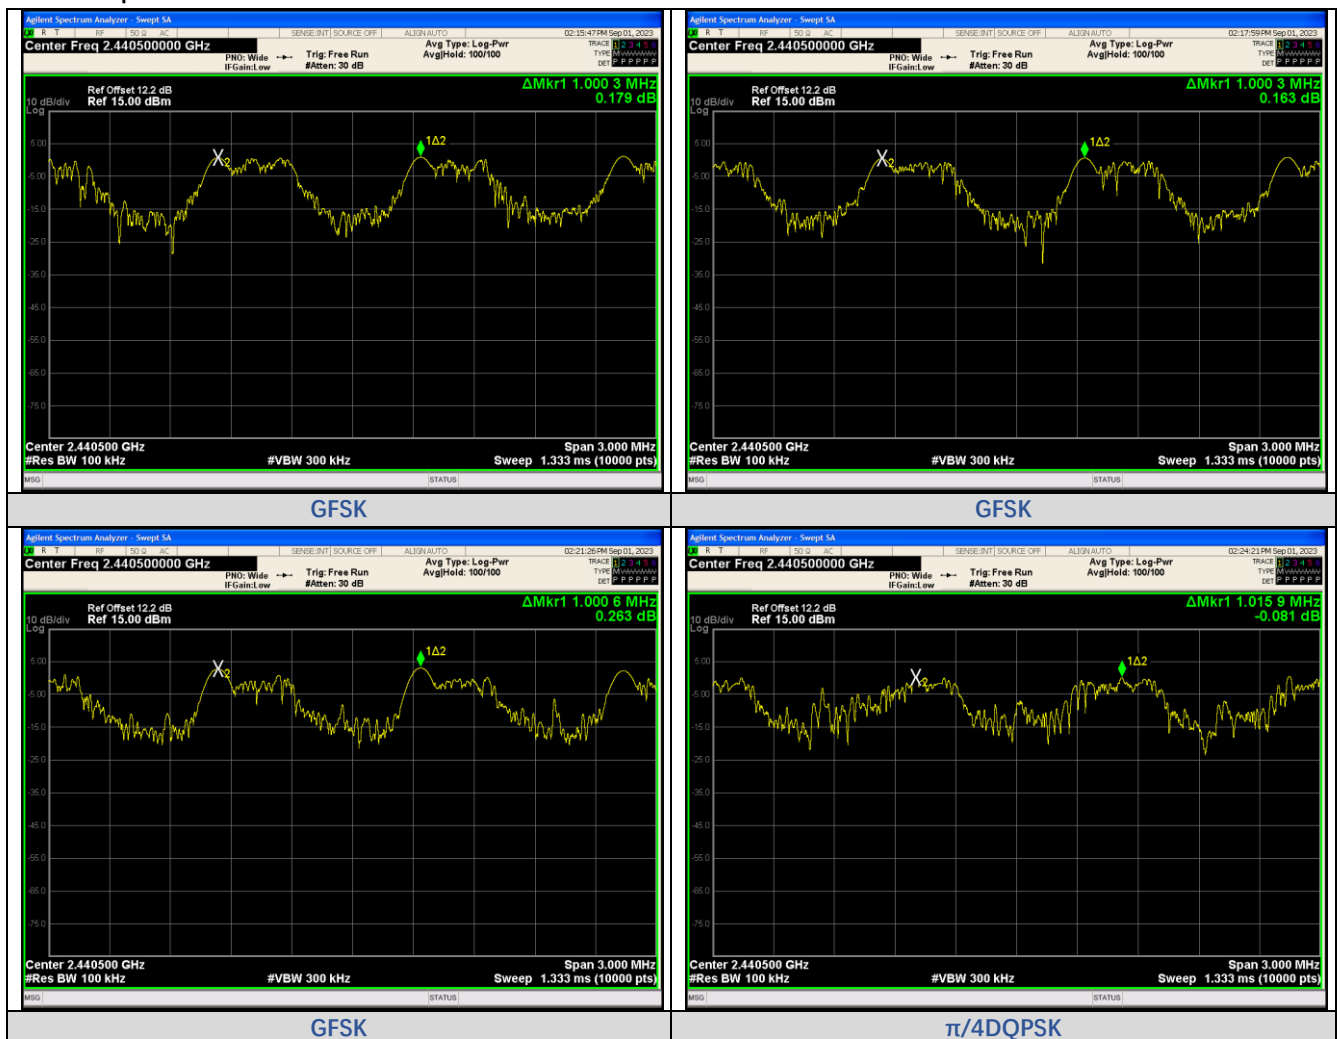






π/4DQPSK



π/4DQPSK




8DPSK

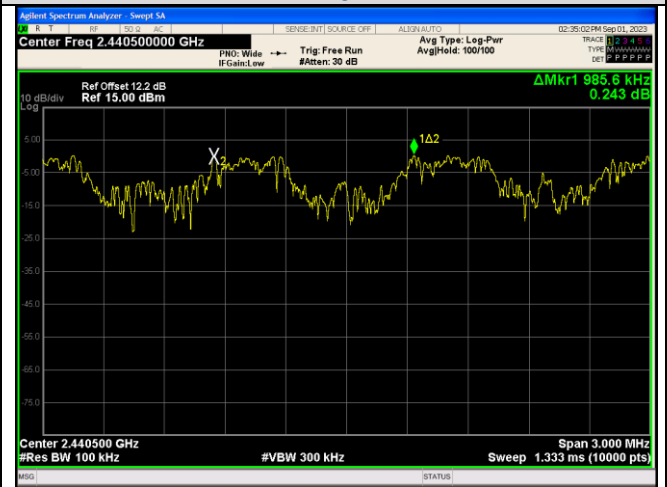

8DPSK



8DPSK



### APPENDIX V. Conducted Out Of Band Emission

Test Result  
Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
GFSK	DH5	0	2400.00	-51.396	-17.53	-33.866	PASS	
			2397.91	-50.081	-17.53	-32.551	PASS	
			4803.80	-53.499	-17.53	-35.969	PASS	
			7205.90	-62.283	-17.53	-44.753	PASS	
			9607.50	-63.898	-17.53	-46.368	PASS	
			24889.5	-45.627	-17.53	-28.097	PASS	
		39	4881.79	-53.654	-19.7	-33.954	PASS	
			7322.05	-62.098	-19.7	-42.398	PASS	
			9764.17	-62.110	-19.7	-42.410	PASS	
			24940.7	-45.451	-19.7	-25.751	PASS	
		78	2483.50	-51.801	-23.77	-28.031	PASS	
			4959.83	-56.347	-23.77	-32.577	PASS	
			7440.66	-62.386	-23.77	-38.616	PASS	
			9919.62	-61.645	-23.77	-37.875	PASS	
				24955.7	-45.054	-23.77	-21.284	PASS
		$\pi/4$ DQPSK	2-DH5	0	2400.00	-52.616	-18.69	-33.926
2397.49	-49.729				-18.69	-31.039	PASS	
4804.40	-55.984				-18.69	-37.294	PASS	
7205.90	-64.129				-18.69	-45.439	PASS	
9608.10	-63.569				-18.69	-44.879	PASS	
24940.7	-45.301				-18.69	-26.611	PASS	
39	4882.42			-56.010	-20.41	-35.600	PASS	
	7323.92			-62.806	-20.41	-42.396	PASS	
	9763.55			-62.976	-20.41	-42.566	PASS	
	24904.5			-45.604	-20.41	-25.194	PASS	
78	2483.50			-51.902	-24.14	-27.762	PASS	
	4960.45			-56.635	-24.14	-32.495	PASS	
	7439.41			-62.247	-24.14	-38.107	PASS	
	9920.24			-63.734	-24.14	-39.594	PASS	
				24965.7	-45.263	-24.14	-21.123	PASS
8DPSK	3-DH5			0	2400.00	-53.280	-18.68	-34.600
		2397.17	-50.557		-18.68	-31.877	PASS	
		4803.80	-57.362		-18.68	-38.682	PASS	
		7205.30	-63.353		-18.68	-44.673	PASS	
		9607.50	-64.779		-18.68	-46.099	PASS	
		24916.3	-45.947		-18.68	-27.267	PASS	
		39	4881.79	-56.798	-20.89	-35.908	PASS	
			7323.30	-62.230	-20.89	-41.340	PASS	
			9764.80	-63.220	-20.89	-42.330	PASS	
			24985.6	-45.696	-20.89	-24.806	PASS	
		78	2483.50	-51.847	-24.15	-27.697	PASS	
			4959.83	-57.727	-24.15	-33.577	PASS	
			7440.66	-63.528	-24.15	-39.378	PASS	
			9920.24	-64.019	-24.15	-39.869	PASS	
				24944.4	-46.076	-24.15	-21.926	PASS