



## FCC PART 22/24 TEST REPORT

### FCC Part 22 /Part 24

**Report Reference No.**..... : **TRE1312003101 R/C: 34886**

**FCC ID**..... : **YPVITALCOMSKYHD**

Compiled by

( position+printed name+signature)..: File administrators Jerome Luo

*Jerome Luo*

Supervised by

( position+printed name+signature)..: Test Engineer Yuchao Wang

*yuchao.wang*

Approved by

( position+printed name+signature)..: Manager Wenliang Li

*Wenliang Li*

Date of issue.....: Dec 18, 2013

**Testing Laboratory Name** .....: **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

**Applicant's name**.....: **ITALCOM GROUP**

Address.....: 1728 Coral Way, Coral Gables, Miami, Florida, United States

**Test specification** .....

Standard .....: **FCC Part 22: PUBLIC MOBILE SERVICES**

**FCC Part 24: PERSONAL COMMUNICATIONS SERVICES**

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: mobile phone

Trade Mark .....: NYX

**Manufacturer**.....: **ITALCOM GROUP**

Model/Type reference.....: SKY HD

Listed Models .....: /

Ratings.....: DC 3.70V

Modulation .....: GMSK for GSM/GPRS/EGPRS

GPRS Class .....: 12

GPRS operation mode .....: Class B

Hardware version .....: 8061-MB-V0.3

Software version .....: SKY\_AMXNYX\_V001R

Android version .....: 4.2.1

Frequency Band .....: GSM850/PCS1900

Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>TRE1312003101</b>	Dec 18, 2013
		Date of issue

Equipment under Test : mobile phone

Model /Type : SKY HD

Listed Models : /

**Applicant** : **ITALCOM GROUP**

Address : 1728 Coral Way,Coral Gables,Miami,Florida,United States

**Manufacturer** : **ITALCOM GROUP**

Address : 1728 Coral Way,Coral Gables,Miami,Florida,United States

<b>Test Result</b>	<b>PASS</b>
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS</u></b>	<b>4</b>
<b>2.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	5
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	Internal Identification of EUT used during the test	6
2.6.	Internal Identification of AE used during the test	6
2.7.	Normal Accessory setting	6
2.8.	EUT configuration	6
2.9.	Related Submittal(s) / Grant (s)	6
2.10.	Modifications	6
2.11.	Note	7
<b>3.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>8</b>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	9
3.4.	Statement of the measurement uncertainty	9
3.5.	Test Description	9
3.6.	Equipments Used during the Test	10
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
4.1.	Conducted Emissions Test	11
4.2.	OUTPUT POWER	16
4.3.	Radiated Spurious Emssion	21
4.4.	OCCUPIED BANDWIDTH	25
4.5.	EMISSION BANDWIDTH	36
4.6.	BAND EDGE COMPLIANCE	47
4.7.	Spurious Emssion on Antenna Port	55
4.8.	Frequency Stability Test	78
<b>5.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b>80</b>
<b>6.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b>82</b>

## 1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-12 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-12 Edition\)](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[KDB971168 D01:201](#): Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems

[ANSI C63.4:2009](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Dec 05, 2013
Testing commenced on	:	Dec 06, 2013
Testing concluded on	:	Dec 18, 2013

### 2.2. Product Description

The **ITALCOM GROUP's** Model: SKY HD or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	mobile phone
Model Number	SKY HD
FCC ID	YPVITALCOMSKYHD
Modulation Type	QPSK for WCDMA,GMSK for GSM/GPRS/EGPRS
Antenna Type	Internal
Hardware version	8061-MB-V0.3
Software version	SKY_AMXNYX_V001R
Android version	4.2.1
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
WCDMA Operation Frequency Band	FDD Band II, FDD Band V
HSDPA Release Version	Release 8
HSUPA Release Version	Release 6
WCDMA Release Version	R99
Extreme temp. Tolerance	-30°C to +60°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM/GPRS Operation Frequency Band	GSM850/PCS1900
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
EGPRS Multislot Class	12

### 2.3. Equipment under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V

#### Test frequency list

Modulation Type	Test Channel	Channel Number	Test Frequency
GPRS850/GSM850	Low	128	824.20 MHz
	Middle	188	836.60 MHz
	High	251	848.80 MHz
GPRS1900/GSM850	Low	512	1850.20 MHz
	Middle	661	1880.00 MHz
	High	810	1909.80 MHz

## 2.4. Short description of the Equipment under Test (EUT)

The Equipment Under Test (EUT) is a model of mobile phone with

WCDMA/HSUPA/HSDPA/GPRS/GSM,WLAN and Bluetooth function and integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## 2.5. Internal Identification of EUT used during the test

SN or IMEI	HW Version	SW Version
403729161378583	8061-MB-V0.3	SKY_AMXNYX_V001R

## 2.6. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger and USB cable

AE1

Model:NYX3000A98X69  
 Manufacturer: ITALCOM GROUP  
 Capacitance: 3000mAh  
 Nominal Voltage:3.70V

AE2:

Model: SKY HD  
 Manufacturer: ITALCOM GROUP  
 Input: 100-240V~50/60Hz 0.15A  
 Output: OUTPUT: 5.0V DC 1.0A  
 Power Cable Length: 90cm  
 Shielded       Unshielded

\*AE ID: is used to identify the test sample in the lab internally.

## 2.7. Normal Accessory setting

Fully charged battery was used during the test.

## 2.8. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

## 2.9. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **YPVITALCOMSKYHD** filing to comply with FCC Part 22 and Part 24 Rules.

## 2.10. Modifications

No modifications were implemented to meet testing criteria.

## 2.11. Note

1. The EUT is a mobile phone WCDMA/HSUPA/HSDPA/GPRS/GSM,WLAN and Bluetooth function,The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS/EGPRS	FCC Part 22/FCC Part 24	TRE1312003101
WCDMA/HSUPA/HSDPA	FCC Part 22/FCC Part 24	TRE1312003102
WLAN	FCC Part 15 C 15.247	TRE1312003103
Bluetooth v2.1+EDR	FCC Part 15 C 15.247	TRE1312003104
Bluetooth 4.0	FCC Part 15 C 15.247	TRE1312003105
USB Port	FCC Part 15 B	TRE1312003106
SAR	FCC Part 2 §2.1093	TRE1312003107

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen Huatongwei International Inspection Co., Ltd  
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China  
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar 01, 2012. Valid time is until Feb 28, 2015.

##### **A2LA-Lab Cert. No. 2243.01**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2015.

##### **FCC-Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date June 01, 2015.

##### **IC-Registration No.: 5377**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on Jan 25, 2011. Valid time is until Jan 24, 2014

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2009. Valid time is until December 19, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2009. Valid time is until December 19, 2013.

##### **DNV**

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug 24, 2016.



### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

### 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

### 3.5. Test Description

Test Items	Clause in FCC rules	Verdict
Conducted Emission	15.107/15.207	PASS
Output Power	22.913(a)/24.232(c)	PASS
Radiated Spurious Emission	2.1051/22.917/24.238	PASS
Frequency Stability	2.1055/24.235	PASS
Occupied Bandwidth	2.1049(h)(i)	PASS
Emission Bandwidth	22.917(b)/24.238(b)	PASS
Band Edge Compliance	22.917(b)/24.238(b)	PASS
Conducted Spurious Emission	2.1057/22.917/24.238	PASS

Remark:

1. The measurement uncertainty is not included in the test result.

### 3.6. Equipments Used during the Test

<b>AC Power Conducted Emission</b>					
No.	Equipment	Manufacturer	Model No.	Serial No.	Cal.Due
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2014/10/25
2	EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	2014/10/25
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2014/10/25
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
5	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/10/25

<b>Output Power(Conducted) &amp; Occupied Bandwidth &amp; Emission Bandwidth &amp; Band Edge Compliance &amp; Conducted Spurious Emission</b>					
No.	Equipment	Manufacturer	Model No.	Serial No.	Cal.Due
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/10/25
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2014/10/25
3	Splitter	Mini-Circuit	ZAPD-4	400059	2014/10/25

<b>Frequency Stability</b>					
No.	Equipment	Manufacturer	Model No.	Serial No.	Cal.Due
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/10/25
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2014/10/25
3	Climate Chamber	ESPEC	EL-10KA	05107008	2014/10/25
4	Splitter	Mini-Circuit	ZAPD-4	400059	2014/10/25

<b>Output Power (Radiated) &amp; Radiated Spurious Emission</b>					
No.	Equipment	Manufacturer	Model No.	Serial No.	Cal.Due
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2014/10/25
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2014/10/25
3	HORN ANTENNA	ShwarzBeck	9120D	1012	2014/10/25
4	HORN ANTENNA	ShwarzBeck	9120D	1011	2014/10/25
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2014/10/25
6	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2014/10/25
7	TURNTABLE	MATURO	TT2.0	----	N/A
8	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
9	EMI Test Software	Audix	E3	N/A	N/A
10	EMI Test Receiver	Rohde&Schwarz	ESIB 26	100009	2014/10/25
11	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
12	High pass filter	Compliance Direction systems	BSU-6	34202	2014/10/25
13	Splitter	Mini-Circuit	ZAPD-4	400059	2014/10/25
14	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2014/10/25
15	Horn Antenna	SCHWARZBECK	BBHA9170	25842	2014/10/25
16	Preamplifier	ShwarzBeck	BBV 9718	BBV 9718	2014/10/25
17	Broadband Preamplifier	ShwarzBeck	BBV743	9743-0079	2014/10/25
18	Signal Generator	Rohde&Schwarz	SMF100A	101932	2014/10/25
19	Amplifier	Compliance Direction systems	PAP1-4060	120	2014/10/25
20	TURNTABLE	ETS	2088	2149	N/A
21	ANTENNA MAST	ETS	2075	2346	N/A
22	HORN ANTENNA	Rohde&Schwarz	HF906	100068	2014/10/25
23	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2014/10/25

The calibration interval was one year.


## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST APPLICABLE

The EUT was tested according to ANSI C63.4 - 2009. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2009. Cables and peripherals were moved to find the maximum emission levels for each frequency.

#### TEST CONFIGURATION

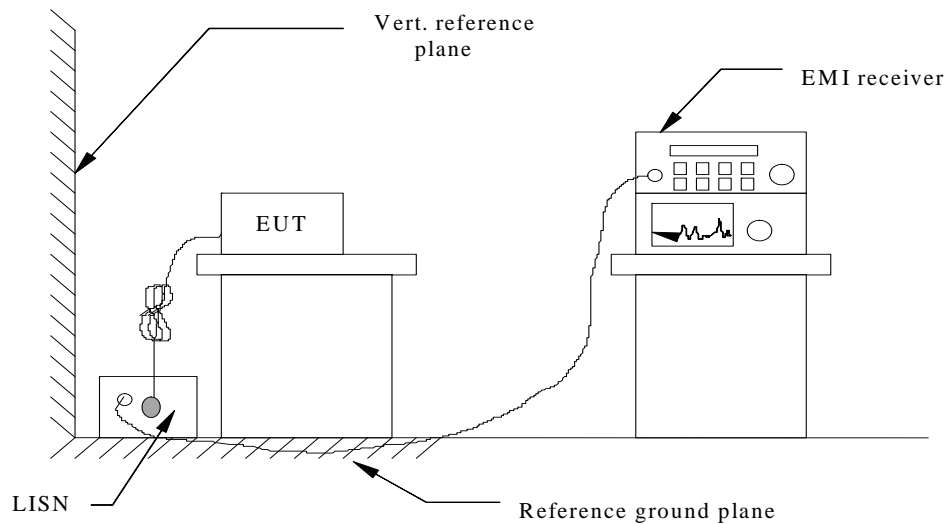

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

**TEST RESULTS**

**GSM850 -AE2**

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

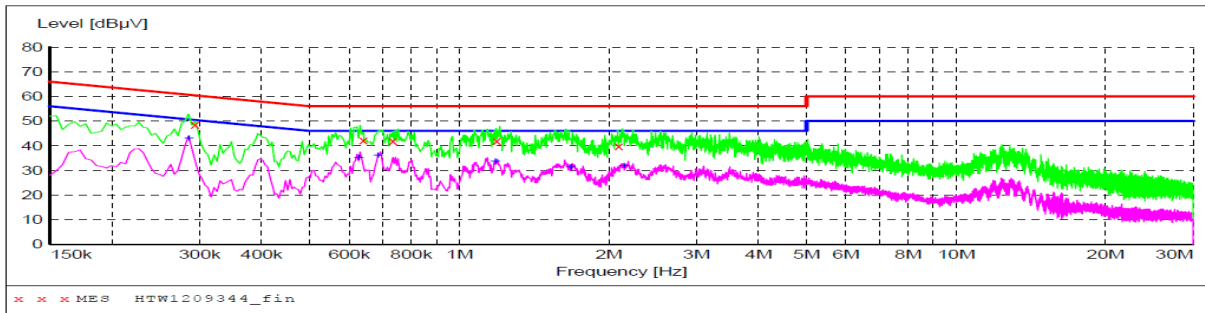

**MEASUREMENT RESULT: "HTW1209344\_fin"**

12/9/2013 6:26PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.294000	48.50	10.6	60	11.9	QP	L1	GND
0.640500	42.20	10.3	56	13.8	QP	L1	GND
0.735000	42.10	10.2	56	13.9	QP	L1	GND
1.189500	42.00	10.3	56	14.0	QP	L1	GND
2.094000	39.80	10.3	56	16.2	QP	L1	GND

**MEASUREMENT RESULT: "HTW1209344\_fin2"**

12/9/2013 6:26PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	42.90	10.6	51	7.8	AV	L1	GND
0.627000	35.10	10.3	46	10.9	AV	L1	GND
0.685500	36.00	10.3	46	10.0	AV	L1	GND
1.180500	33.60	10.3	46	12.4	AV	L1	GND
1.675500	31.10	10.3	46	14.9	AV	L1	GND
2.143500	31.60	10.3	46	14.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

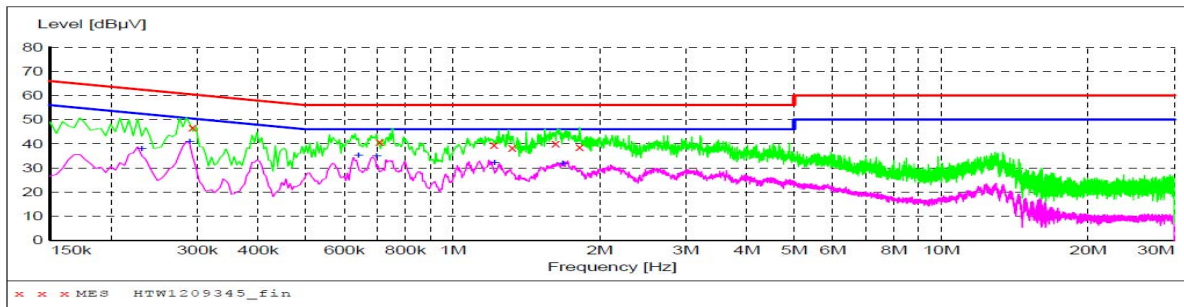

**MEASUREMENT RESULT: "HTW1209345\_fin"**

12/9/2013 6:31PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.294000	46.80	10.6	60	13.6	QP	N	GND
0.708000	40.70	10.3	56	15.3	QP	N	GND
1.216500	39.50	10.3	56	16.5	QP	N	GND
1.324500	38.40	10.3	56	17.6	QP	N	GND
1.626000	40.20	10.3	56	15.8	QP	N	GND
1.819500	38.50	10.3	56	17.5	QP	N	GND


**MEASUREMENT RESULT: "HTW1209345\_fin2"**

12/9/2013 6:31PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.231000	37.80	10.5	52	14.6	AV	N	GND
0.289500	40.70	10.6	51	9.8	AV	N	GND
0.640500	35.00	10.3	46	11.0	AV	N	GND
0.699000	34.70	10.3	46	11.3	AV	N	GND
1.216500	31.90	10.3	46	14.1	AV	N	GND
1.680000	31.70	10.3	46	14.3	AV	N	GND

PCS1900-AE2

SCAN TABLE: "Voltage (9K-30M) FIN"  
 Short Description: 150K-30M Voltage

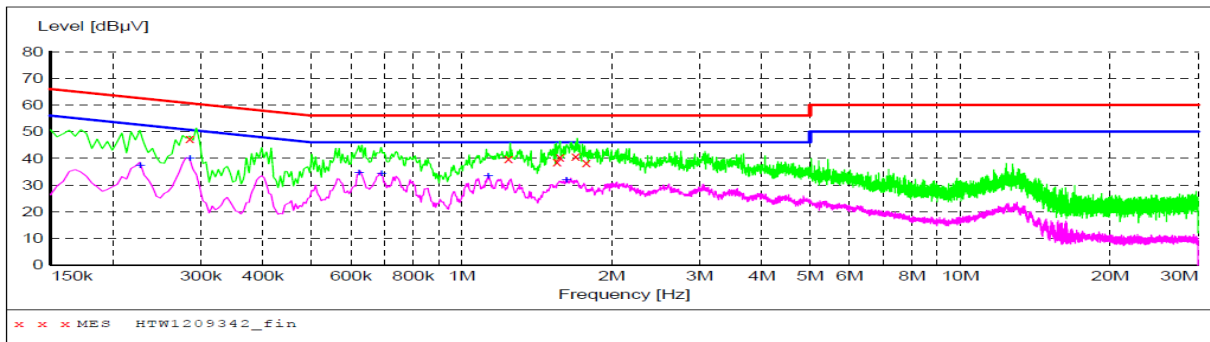

MEASUREMENT RESULT: "HTW1209342\_fin"

12/9/2013 6:19PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	47.50	10.6	61	13.2	QP	N	GND
1.243500	39.90	10.3	56	16.1	QP	N	GND
1.554000	38.80	10.3	56	17.2	QP	N	GND
1.576500	40.50	10.3	56	15.5	QP	N	GND
1.693500	40.70	10.3	56	15.3	QP	N	GND
1.779000	38.30	10.3	56	17.7	QP	N	GND

MEASUREMENT RESULT: "HTW1209342\_fin2"

12/9/2013 6:19PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.226500	37.20	10.5	53	15.4	AV	N	GND
0.285000	39.90	10.6	51	10.8	AV	N	GND
0.622500	34.50	10.3	46	11.5	AV	N	GND
0.690000	34.10	10.3	46	11.9	AV	N	GND
1.131000	33.10	10.3	46	12.9	AV	N	GND
1.621500	31.70	10.3	46	14.3	AV	N	GND

SCAN TABLE: "Voltage (9K-30M) FIN"  
 Short Description: 150K-30M Voltage

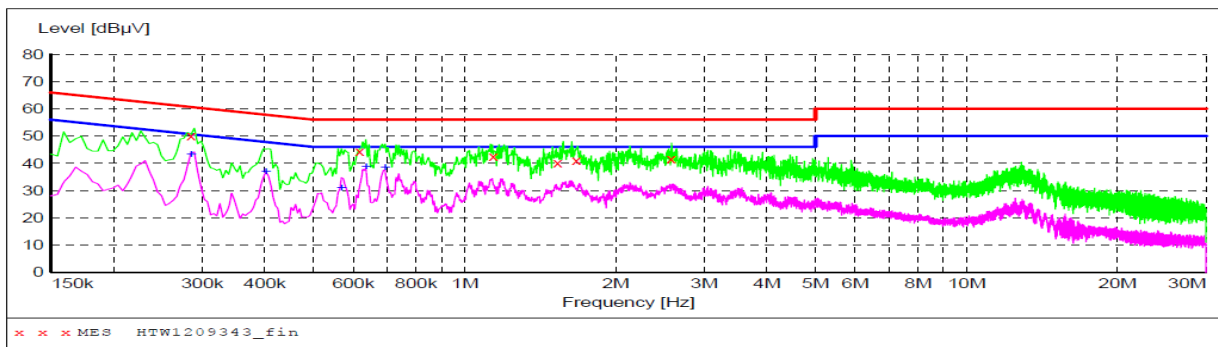

MEASUREMENT RESULT: "HTW1209343\_fin"

12/9/2013 6:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	50.00	10.6	61	10.7	QP	L1	GND
0.618000	44.40	10.3	56	11.6	QP	L1	GND
1.140000	42.50	10.3	56	13.5	QP	L1	GND
1.531500	40.20	10.3	56	15.8	QP	L1	GND
1.671000	41.00	10.3	56	15.0	QP	L1	GND
2.580000	41.60	10.3	56	14.4	QP	L1	GND


MEASUREMENT RESULT: "HTW1209343\_fin2"

12/9/2013 6:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	43.20	10.6	51	7.5	AV	L1	GND
0.402000	36.90	10.5	48	10.9	AV	L1	GND
0.568500	30.90	10.3	46	15.1	AV	L1	GND
0.636000	38.80	10.3	46	7.2	AV	L1	GND
0.694500	38.30	10.3	46	7.7	AV	L1	GND

MP3-AE2

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

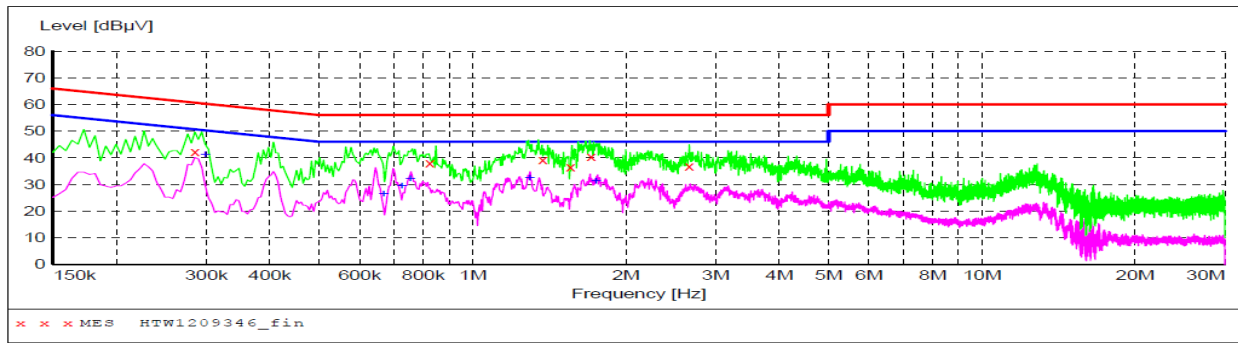

MEASUREMENT RESULT: "HTW1209346\_fin"

12/9/2013 6:35PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	42.40	10.6	61	18.3	QP	N	GND
0.825000	38.00	10.2	56	18.0	QP	N	GND
1.374000	39.30	10.3	56	16.7	QP	N	GND
1.558500	36.50	10.3	56	19.5	QP	N	GND
1.711500	40.50	10.3	56	15.5	QP	N	GND
2.665500	36.80	10.3	56	19.2	QP	N	GND

MEASUREMENT RESULT: "HTW1209346\_fin2"

12/9/2013 6:35PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.298500	41.10	10.7	50	9.2	AV	N	GND
0.667500	26.20	10.3	46	19.8	AV	N	GND
0.726000	29.40	10.2	46	16.6	AV	N	GND
0.753000	32.10	10.2	46	13.9	AV	N	GND
1.293000	32.30	10.3	46	13.7	AV	N	GND
1.743000	31.00	10.3	46	15.0	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"  
 Short Description: 150K-30M Voltage

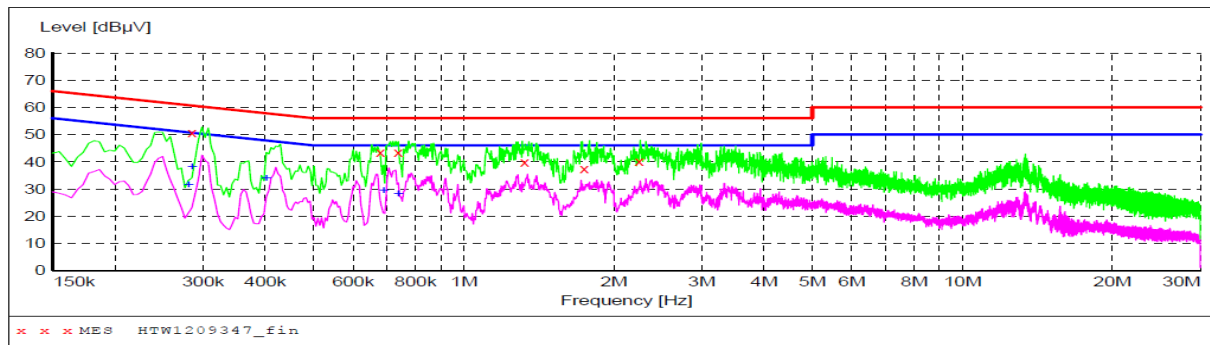

MEASUREMENT RESULT: "HTW1209347\_fin"

12/9/2013 6:38PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.285000	50.80	10.6	61	9.9	QP	L1	GND
0.681000	43.40	10.3	56	12.6	QP	L1	GND
0.739500	43.50	10.2	56	12.5	QP	L1	GND
1.324500	39.70	10.3	56	16.3	QP	L1	GND
1.743000	37.40	10.3	56	18.6	QP	L1	GND
2.247000	40.20	10.3	56	15.8	QP	L1	GND


MEASUREMENT RESULT: "HTW1209347\_fin2"

12/9/2013 6:38PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.280500	31.40	10.6	51	19.4	AV	L1	GND
0.285000	38.10	10.6	51	12.6	AV	L1	GND
0.402000	33.90	10.5	48	13.9	AV	L1	GND
0.690000	29.20	10.3	46	16.8	AV	L1	GND
0.739500	28.00	10.2	46	18.0	AV	L1	GND

**CAMERA-AE2**

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

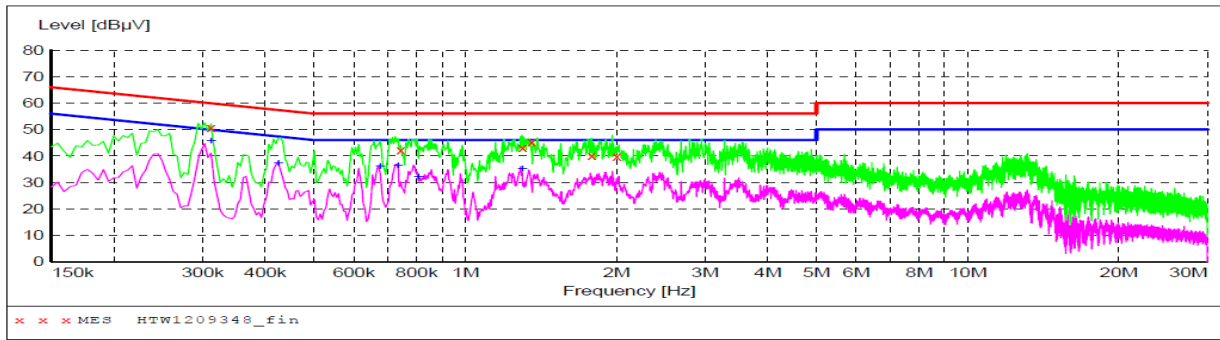

**MEASUREMENT RESULT: "HTW1209348\_fin"**

12/9/2013 6:41PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.312000	50.80	10.6	60	9.1	QP	L1	GND
0.744000	42.20	10.2	56	13.8	QP	L1	GND
1.302000	43.10	10.3	56	12.9	QP	L1	GND
1.356000	45.10	10.3	56	10.9	QP	L1	GND
1.788000	40.20	10.3	56	15.8	QP	L1	GND
2.004000	39.90	10.3	56	16.1	QP	L1	GND

**MEASUREMENT RESULT: "HTW1209348\_fin2"**

12/9/2013 6:41PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.312000	45.50	10.6	50	4.4	AV	L1	GND
0.424500	37.10	10.4	47	10.3	AV	L1	GND
0.676500	36.00	10.3	46	10.0	AV	L1	GND
0.735000	36.10	10.2	46	9.9	AV	L1	GND
0.807000	31.90	10.2	46	14.1	AV	L1	GND
1.297500	35.00	10.3	46	11.0	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

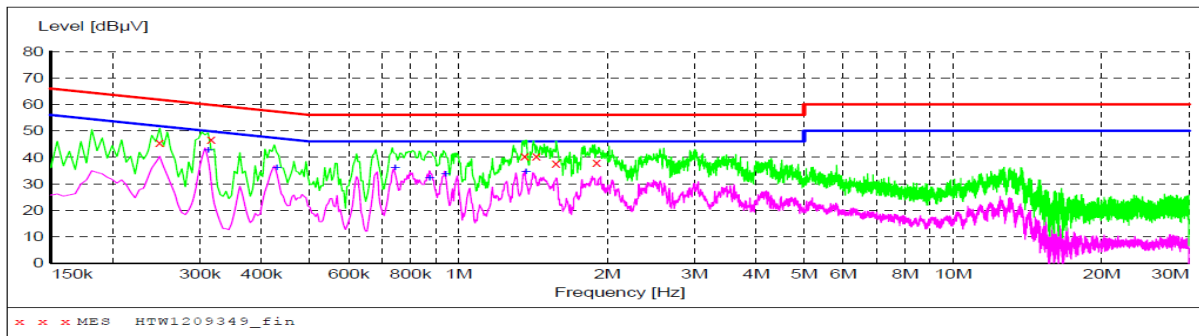

**MEASUREMENT RESULT: "HTW1209349\_fin"**

12/9/2013 6:44PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.249000	45.60	10.5	62	16.2	QP	N	GND
0.316500	46.70	10.6	60	13.1	QP	N	GND
1.360500	40.60	10.3	56	15.4	QP	N	GND
1.437000	40.40	10.3	56	15.6	QP	N	GND
1.576500	37.80	10.3	56	18.2	QP	N	GND
1.905000	38.00	10.3	56	18.0	QP	N	GND

**MEASUREMENT RESULT: "HTW1209349\_fin2"**

12/9/2013 6:44PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.312000	42.60	10.6	50	7.3	AV	N	GND
0.429000	35.90	10.4	47	11.4	AV	N	GND
0.744000	36.00	10.2	46	10.0	AV	N	GND
0.874500	32.10	10.2	46	13.9	AV	N	GND
0.942000	33.60	10.2	46	12.4	AV	N	GND
1.369500	34.50	10.3	46	11.5	AV	N	GND


## 4.2. OUTPUT POWER

### TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### 4.2.1. Conducted Output Power

### TEST CONFIGURATION

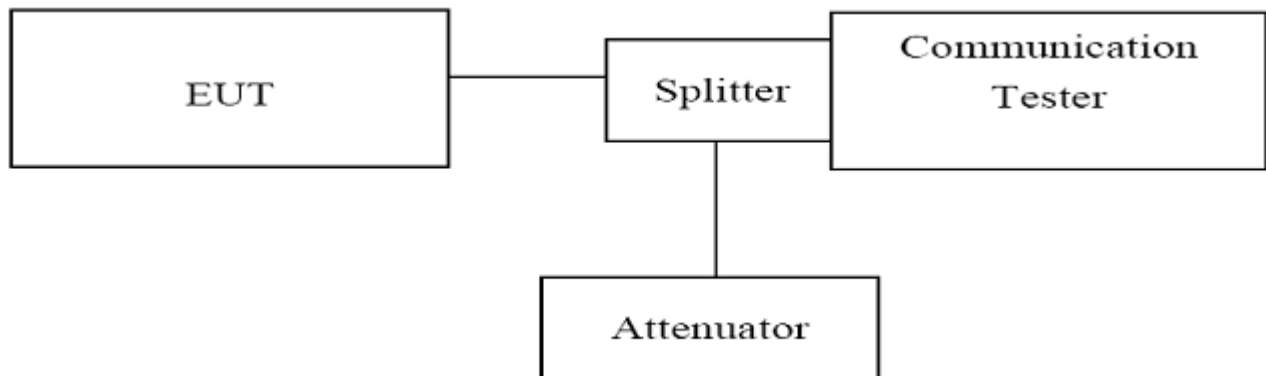

### TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation.
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (low, middle and high of operational frequency range).

### TEST CONDITION

RBW	VBW	Sweep Time	Span
1MHz	3MHz	300ms	10MHz

GSM850				
Function	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	5	33dBm(2W)	4	/
GPRS	3	33dBm(2W)	12	B
EGPRS	3	33dBm(2W)	12	B

PCS1900				
Function	Power step	Nominal Peak output power (dBm)	Power & Multislot class	Operation class
GSM	0	30dBm(1W)	1	/
GPRS	3	30dBm(1W)	12	B
EGPRS	3	30dBm(1W)	12	B

### TEST RESULTS

GSM850(GMSK)		
Frequency (MHz)	Power Step	Output Power (dBm)
824.20	5	32.15
836.60	5	32.00
848.80	5	32.02



GPRS850(GMSK,1Slot)		
Frequency (MHz)	Power Step	Output Power (dBm)
824.20	3	32.16
836.60	3	32.01
848.80	3	32.04

EGPRS850(GMSK,1Slot)		
Frequency (MHz)	Power Step	Output Power (dBm)
824.20	3	32.10
836.60	3	31.95
848.80	3	31.95

PCS1900(GMSK)		
Frequency (MHz)	Power Step	Output Power (dBm)
1850.20	0	29.71
1880.00	0	30.21
1909.80	0	30.61

GPRS1900(GMSK,1Slot)		
Frequency (MHz)	Power Step	Output Power (dBm)
1850.20	3	29.72
1880.00	3	30.25
1909.80	3	30.65

EGPRS1900(GMSK,1Slot)		
Frequency (MHz)	Power Step	Output Power (dBm)
1850.20	3	29.65
1880.00	3	30.19
1909.80	3	30.55


## 4.2.2. Radiated Output Power


### TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

### TEST CONFIGURATION

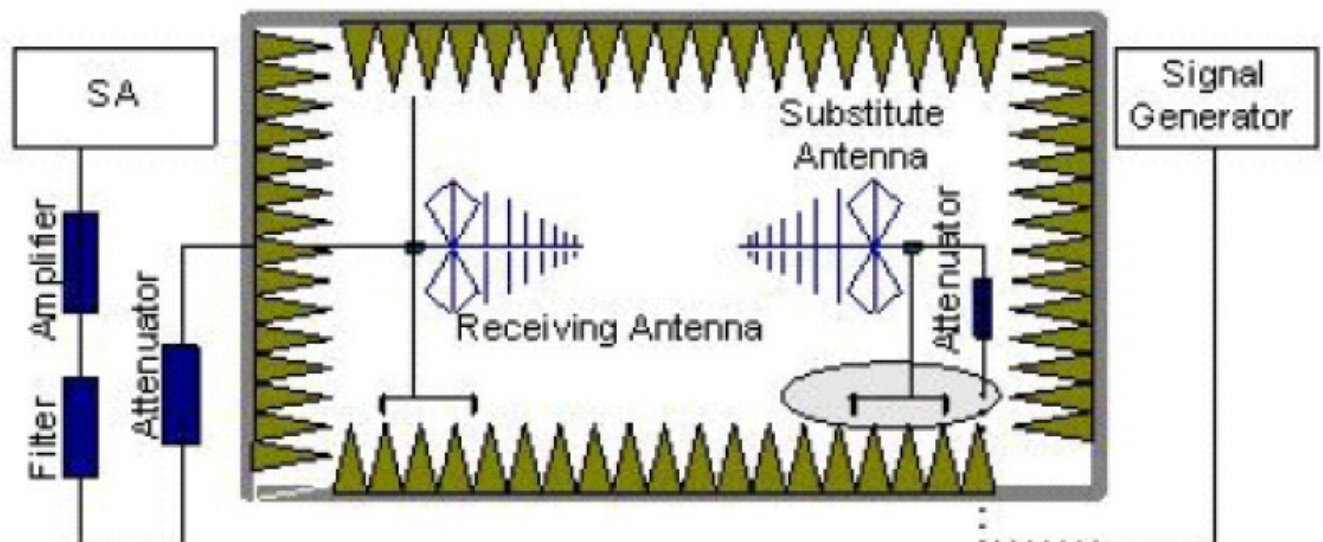

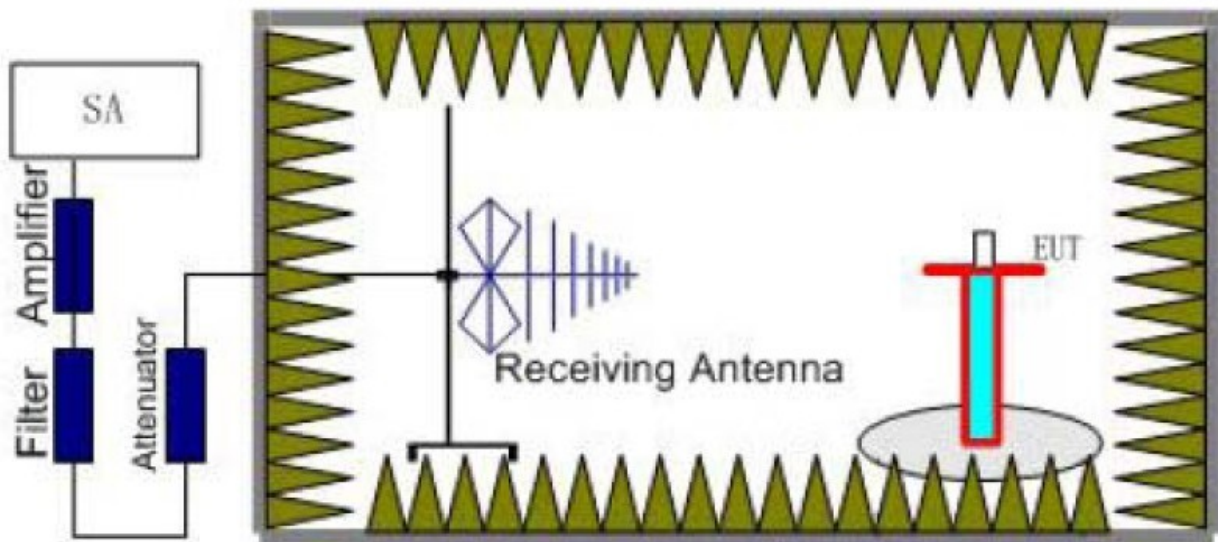

**TEST PROCEDURE**

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P<sub>r</sub>).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P<sub>r</sub>). The power of signal source (P<sub>Mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P<sub>cl</sub>), the Substitution Antenna Gain (G<sub>a</sub>) and the Amplifier Gain (P<sub>Ag</sub>) should be recorded after test.  
The measurement results are obtained as described below:  
Power(EIRP)=P<sub>Mea</sub>- P<sub>Ag</sub> - P<sub>cl</sub> - G<sub>a</sub>  
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:  
Power(EIRP)=P<sub>Mea</sub>- P<sub>cl</sub> - G<sub>a</sub>
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

**TEST LIMIT**

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

GSM850(GPRS850,EDGE850)		
Function	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	3	≤38.45dBm (7W)

PCS1900(GPRS1900,EDGE1900)		
Function	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	3	≤33dBm (2W)

**TEST RESULTS**

GSM850						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	ERP (dBm)	Polarization
824.20	24.15	1.56	8.45	2.15	28.89	H
836.60	23.84	1.50	8.45	2.15	28.64	H
848.80	24.18	1.67	8.39	2.15	28.75	H
824.20	24.14	1.56	8.45	2.15	28.88	V
836.60	23.81	1.50	8.45	2.15	28.61	V
848.80	24.20	1.67	8.39	2.15	28.77	V

GPRS850						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	ERP (dBm)	Polarization
824.20	24.16	1.56	8.45	2.15	28.90	H
836.60	23.85	1.50	8.45	2.15	28.65	H
848.80	24.20	1.67	8.39	2.15	28.77	H
824.20	24.15	1.56	8.45	2.15	28.89	V
836.60	23.82	1.50	8.45	2.15	28.62	V
848.80	24.22	1.67	8.39	2.15	28.79	V

EGPRS850						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	ERP (dBm)	Polarization
824.20	24.10	1.56	8.45	2.15	28.84	H
836.60	23.79	1.50	8.45	2.15	28.59	H
848.80	24.11	1.67	8.39	2.15	28.68	H
824.20	24.09	1.56	8.45	2.15	28.83	V
836.60	23.76	1.50	8.45	2.15	28.56	V
848.80	24.13	1.67	8.39	2.15	28.70	V

PCS1900						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	EIRP (dBm)	Polarization
1850.20	23.78	3.52	8.35	2.15	28.61	H
1880.00	24.45	3.61	8.29	2.15	29.13	H
1909.80	25.77	3.67	8.37	2.15	30.47	H
1850.20	24.75	3.52	8.35	2.15	29.58	V
1880.00	24.56	3.61	8.29	2.15	29.24	V
1909.80	24.87	3.67	8.37	2.15	29.57	V

GPRS1900						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	EIRP (dBm)	Polarization
1850.20	23.79	3.52	8.35	2.15	28.62	H
1880.00	24.49	3.61	8.29	2.15	29.17	H
1909.80	25.81	3.67	8.37	2.15	30.51	H
1850.20	24.76	3.52	8.35	2.15	29.59	V
1880.00	24.6	3.61	8.29	2.15	29.28	V
1909.80	24.91	3.67	8.37	2.15	29.61	V


EGPRS1900						
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	EIRP (dBm)	Polarization
1850.20	23.72	3.52	8.35	2.15	28.55	H
1880.00	24.43	3.61	8.29	2.15	29.11	H
1909.80	25.71	3.67	8.37	2.15	30.41	H
1850.20	24.69	3.52	8.35	2.15	29.52	V
1880.00	24.54	3.61	8.29	2.15	29.22	V
1909.80	24.81	3.67	8.37	2.15	29.51	V

### 4.3. Radiated Spurious Emission

#### TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

#### TEST CONFIGURATION

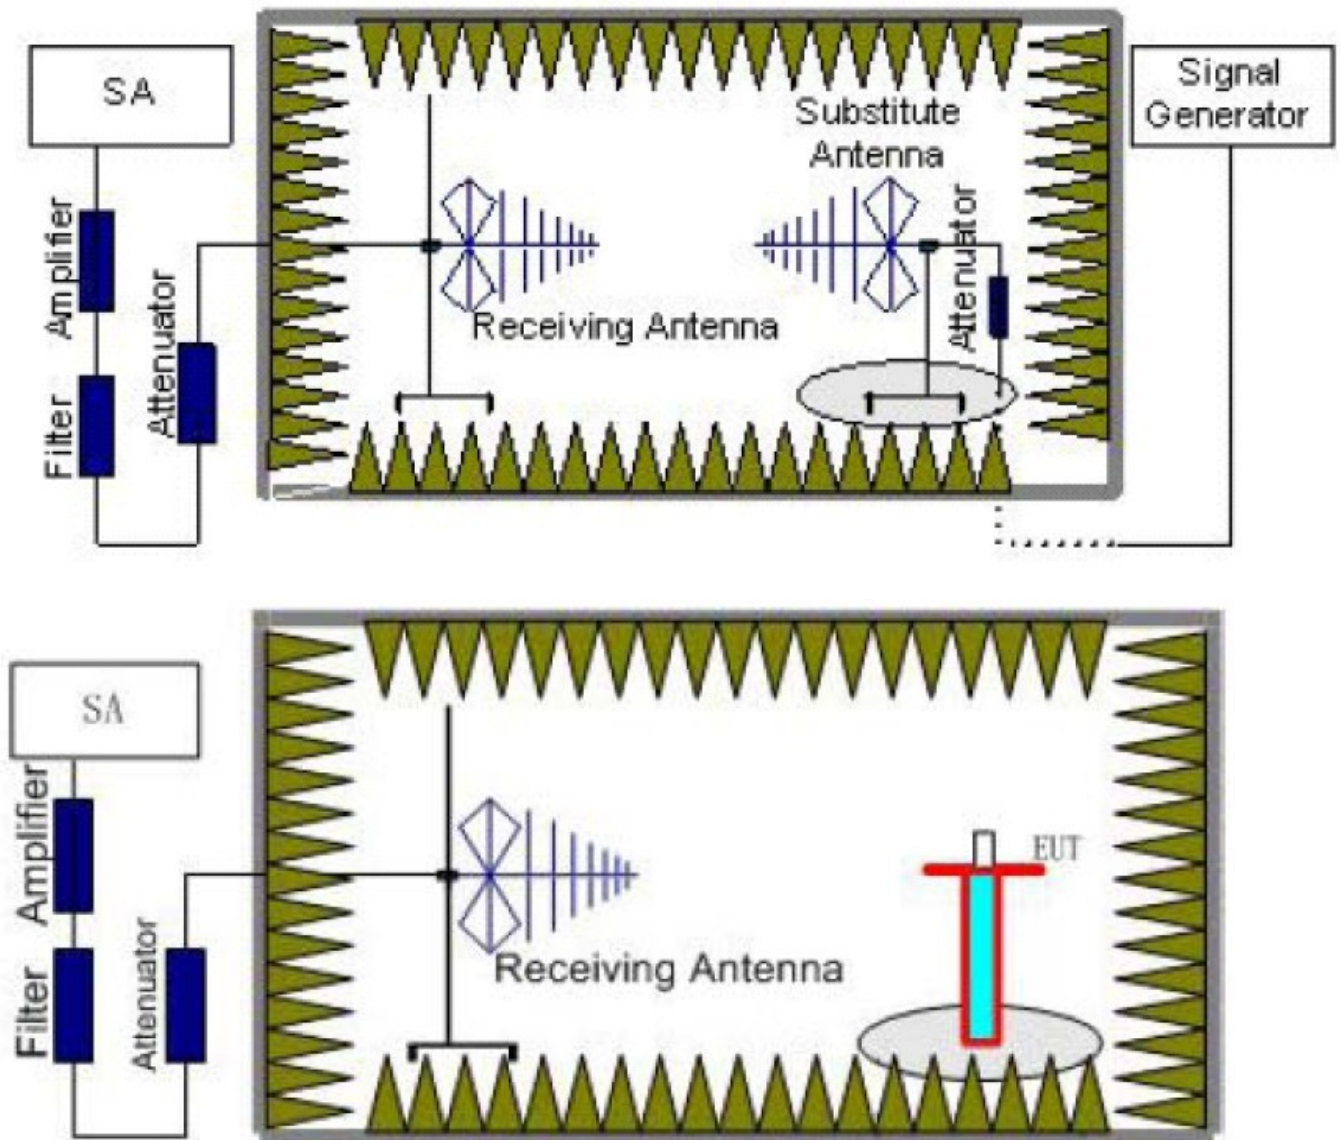

#### TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test. The measurement results are obtained as described below:  
Power(EIRP)= $P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	

## TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
GSM 850MHz	Low	30MHz-10GHz	PASS
	Middle	30MHz-10GHz	PASS
	High	30MHz-10GHz	PASS
GSM 1900MHz	Low	30MHz-20GHz	PASS
	Middle	30MHz-20GHz	PASS
	High	30MHz-20GHz	PASS

GSM850							
Channel Number: 128				Test Frequency: 824.20 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
2472.89	-20.78	4.32	6.77	2.15	-20.48	-13.00	H
3295.25	-23.90	4.55	12.25	2.15	-18.35	-13.00	H
4942.15	-25.08	4.70	12.92	2.15	-19.01	-13.00	H
2472.89	-19.34	4.32	6.77	2.15	-19.04	-13.00	V
3295.60	-22.18	4.55	12.25	2.15	-16.63	-13.00	V
4113.97	-22.41	4.59	12.76	2.15	-16.39	-13.00	V

GSM850							
Channel Number: 190				Test Frequency: 836.60 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3341.30	-27.54	4.55	12.25	2.15	-21.99	-13.00	H
4143.71	-26.61	4.59	12.76	2.15	-20.59	-13.00	H
5014.47	-25.69	4.78	12.88	2.15	-19.74	-13.00	H
3342.71	-25.75	4.55	12.25	2.15	-20.20	-13.00	V
4142.11	-23.28	4.59	12.76	2.15	-17.26	-13.00	V
5014.38	-22.97	4.78	12.88	2.15	-17.02	-13.00	V

GSM850							
Channel Number: 251				Test Frequency: 848.80 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
2546.20	-24.98	4.29	6.83	2.15	-24.59	-13.00	H
3390.19	-28.32	4.58	12.59	2.15	-22.46	-13.00	H
4233.20	-23.63	4.59	12.76	2.15	-17.61	-13.00	H
2547.37	-22.35	4.29	6.83	2.15	-21.96	-13.00	V
3390.19	-26.22	4.58	12.59	2.15	-20.36	-13.00	V
4231.57	-22.17	4.59	12.76	2.15	-16.15	-13.00	V

PCS1900							
Channel Number: 512				Test Frequency: 1850.20 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3702.05	-28.20	4.55	12.34	2.15	-22.56	-13.00	H
5551.75	-25.70	5.05	13.53	2.15	-19.37	-13.00	H
7403.26	-25.40	4.64	11.60	2.15	-20.59	-13.00	H
3701.68	-26.95	4.55	12.34	2.15	-21.31	-13.00	V
5551.75	-23.93	5.05	13.53	2.15	-17.60	-13.00	V
7404.26	-23.63	4.64	11.60	2.15	-18.82	-13.00	V

PCS1900							
Channel Number: 661				Test Frequency: 1880.00 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3765.26	-29.45	4.55	12.40	2.15	-23.75	-13.00	H
5642.76	-28.75	4.96	13.60	2.15	-22.26	-13.00	H
7525.54	-26.14	4.71	11.89	2.15	-21.11	-13.00	H
3765.26	-27.22	4.55	12.40	2.15	-21.52	-13.00	V
5642.76	-26.09	4.96	13.60	2.15	-19.60	-13.00	V
7525.54	-23.76	4.71	11.89	2.15	-18.73	-13.00	V

PCS1900							
Channel Number: 810				Test Frequency: 1909.80 MHz			
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3821.82	-28.94	4.51	12.43	2.15	-23.24	-13.00	H
5733.24	-28.68	4.90	13.61	2.15	-22.19	-13.00	H
7639.34	-24.89	4.78	12.00	2.15	-19.86	-13.00	H
3820.82	-26.62	4.51	12.43	2.15	-20.92	-13.00	V
5733.24	-25.98	4.90	13.61	2.15	-19.49	-13.00	V
7633.34	-22.49	4.78	12.00	2.15	-17.46	-13.00	V

Note: 1. In general, the worse case attenuation requirement shown above was applied.

3. \*\*\* means that the emission level is too low to be measured or at least 20 dB down than the limit.




#### 4.4. OCCUPIED BANDWIDTH

##### TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured 99% BW.

##### TEST CONFIGURATION

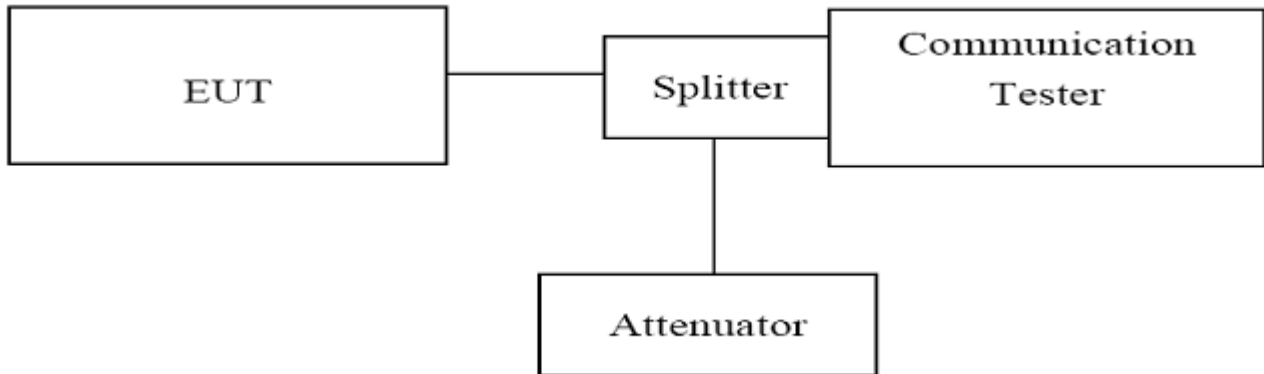

##### TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz,VBW=50KHz,Span=500KHz,SWT=20ms;
4. Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (low, middle and high of operational frequency range).

##### TEST RESULTS


GSM850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
128	824.20	245.19	Plot 4.4.1 A	PASS
190	836.60	248.40	Plot 4.4.1 B	PASS
251	848.80	242.79	Plot 4.4.1 C	PASS

GPRS850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
128	824.20	242.79	Plot 4.4.2 A	PASS
190	836.60	247.60	Plot 4.4.2 B	PASS
251	848.80	245.19	Plot 4.4.2 C	PASS

EGPRS850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
128	824.20	244.39	Plot 4.4.3 A	PASS
190	836.60	244.39	Plot 4.4.3 B	PASS
251	848.80	242.79	Plot 4.4.3 C	PASS



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1 ] 26.27 dBm 824.217628205 MHz

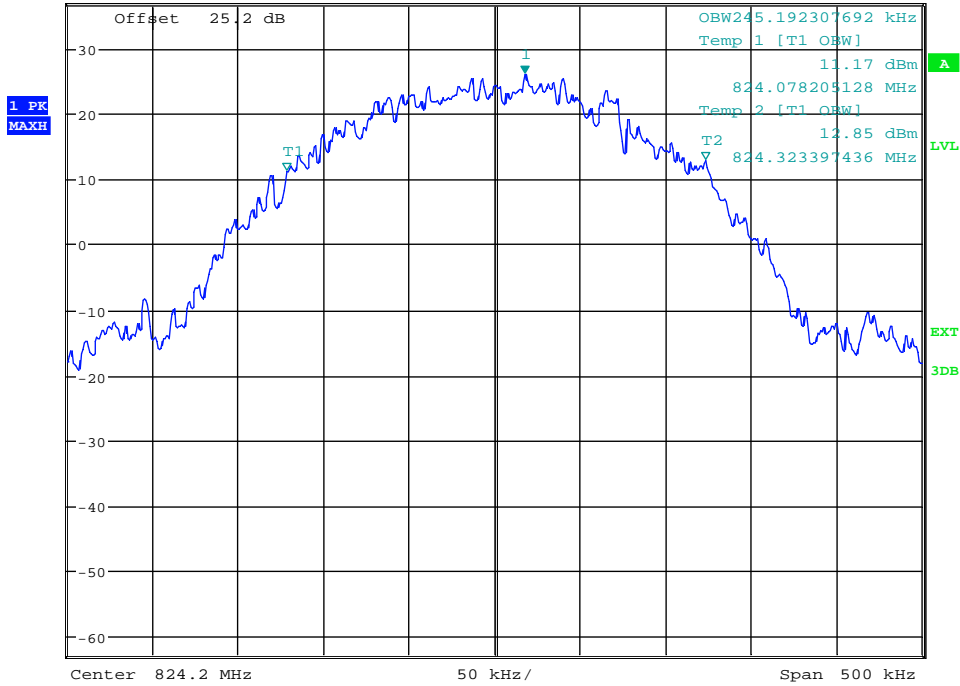


Date: 10.DEC.2013 13:29:46

(Plot 4.4.1 A: Channel 128: 824.20MHz @ GSM850)




Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1 ] 26.51 dBm 836.668108974 MHz

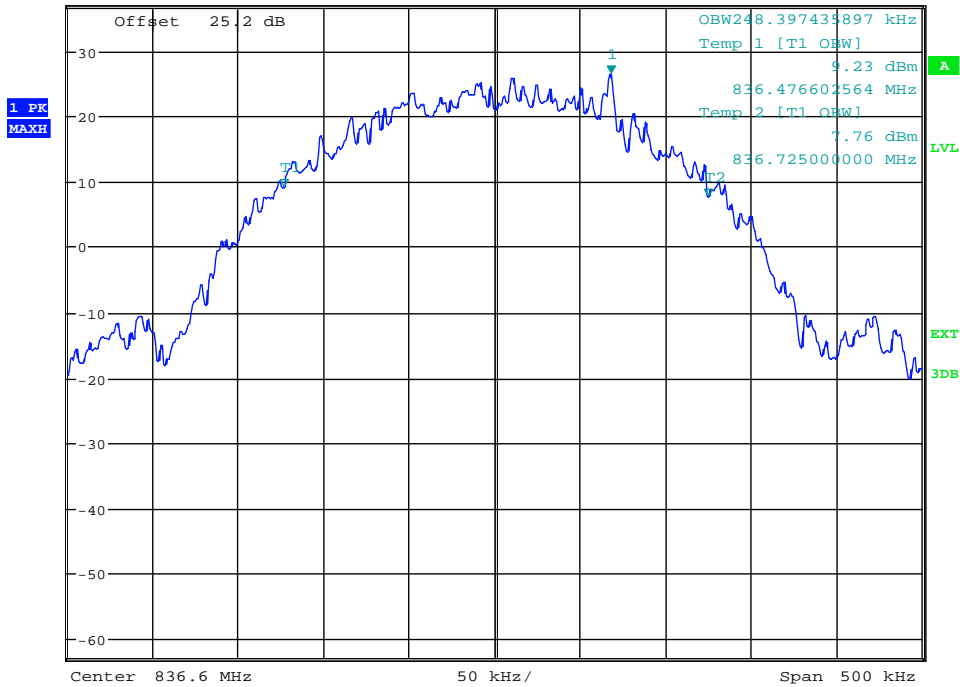


Date: 10.DEC.2013 13:29:22

(Plot 4.4.1 B: Channel 190: 836.60MHz @ GSM850)

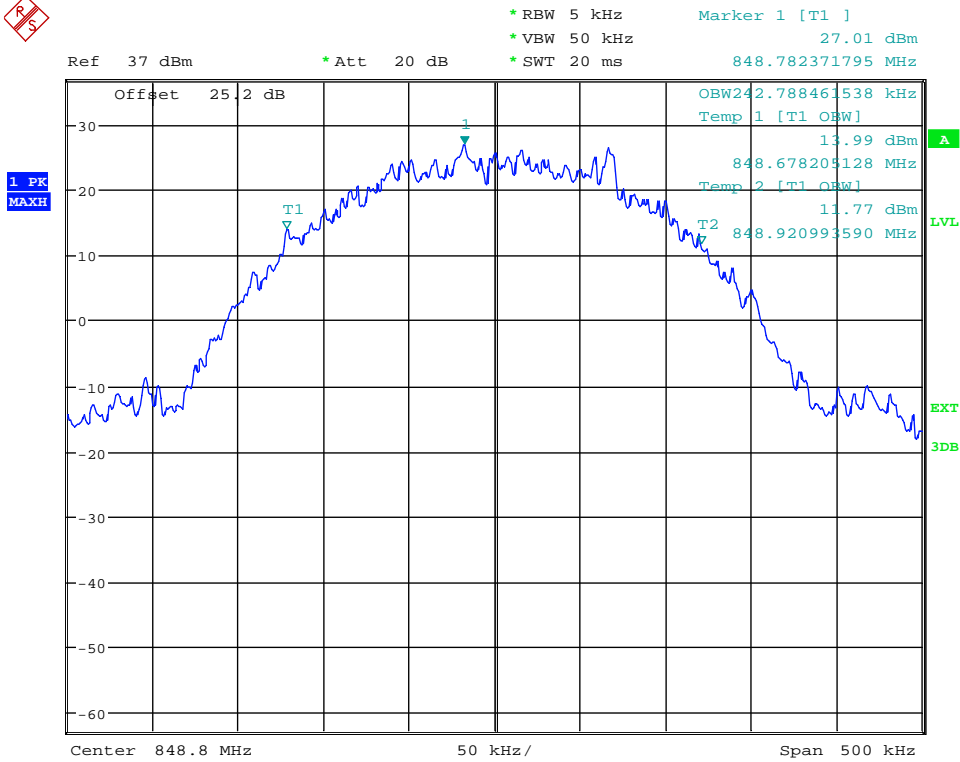


Date: 10.DEC.2013 13:28:27

(Plot 4.4.1 C: Channel 251: 848.80MHz @ GSM850)

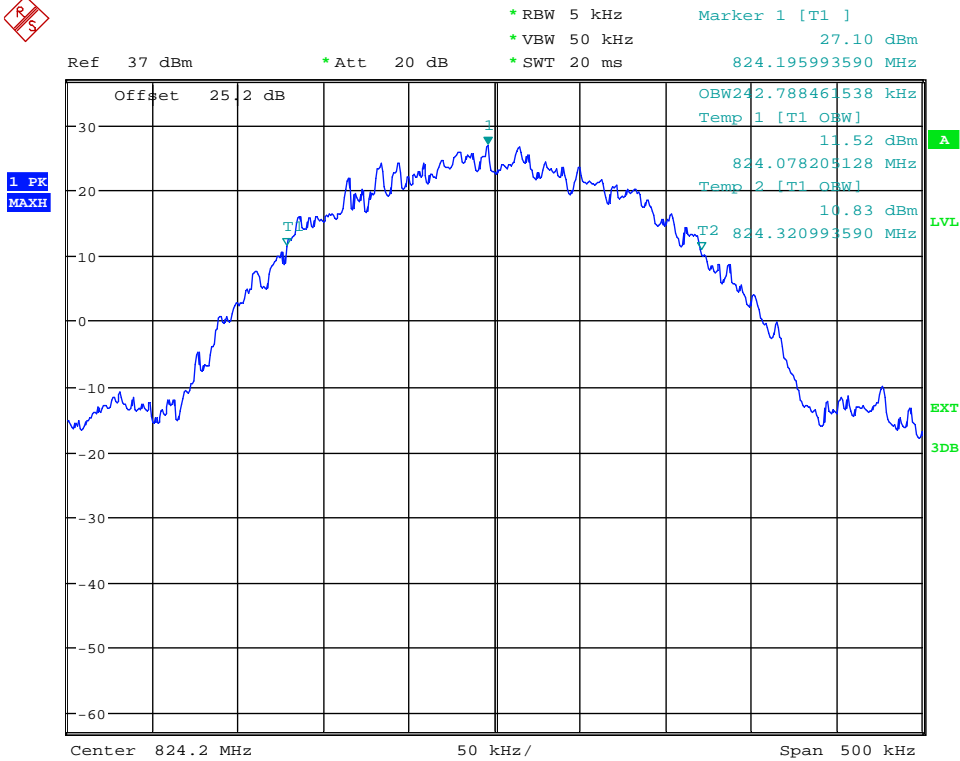


Date: 10.DEC.2013 13:47:55

(Plot 4.4.2 A: Channel 128: 824.20MHz @ GPRS850)

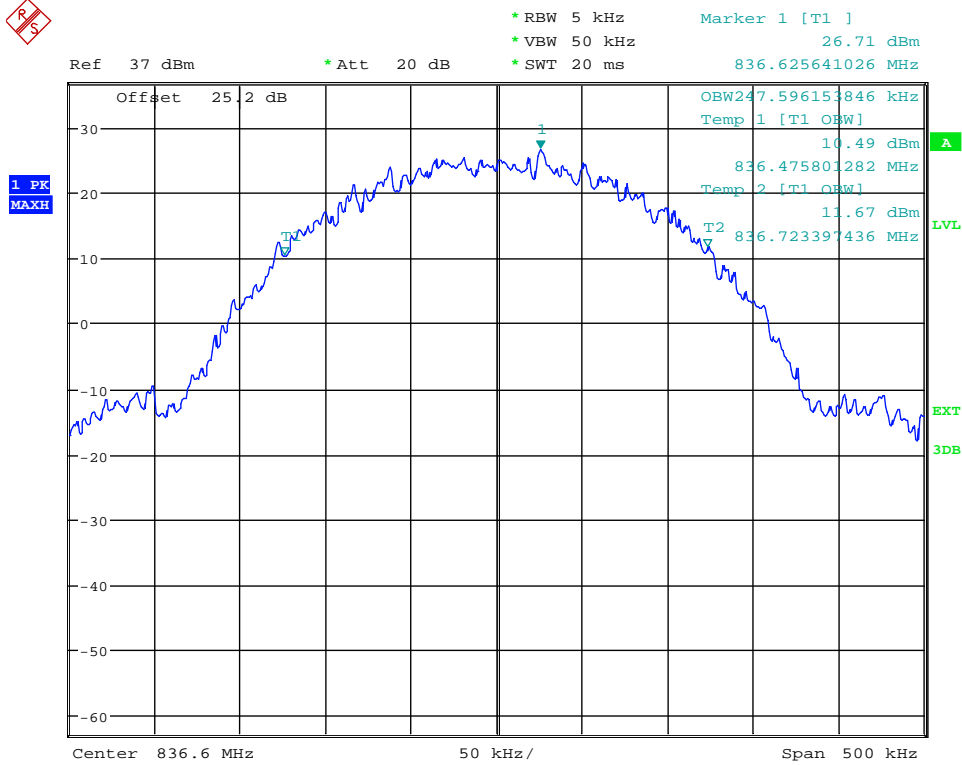


Date: 10.DEC.2013 13:48:35

(Plot 4.4.2 B: Channel 190: 836.60MHz @ GPRS850)

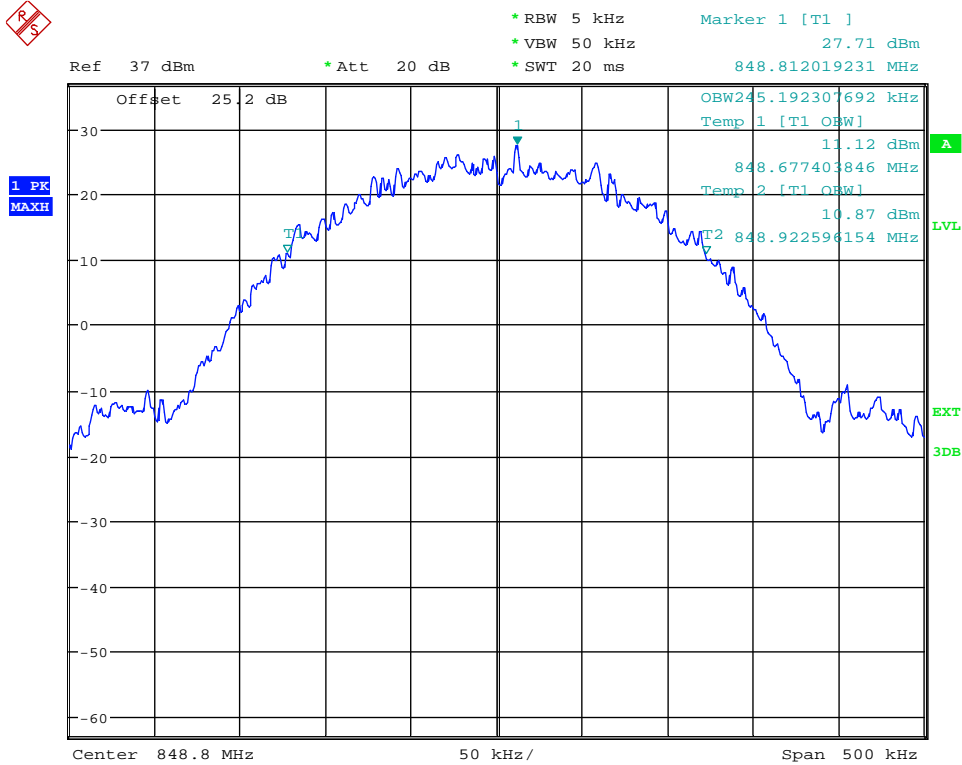


Date: 10.DEC.2013 13:46:48

(Plot 4.4.2 C: Channel 251: 848.80MHz @ GPRS850)

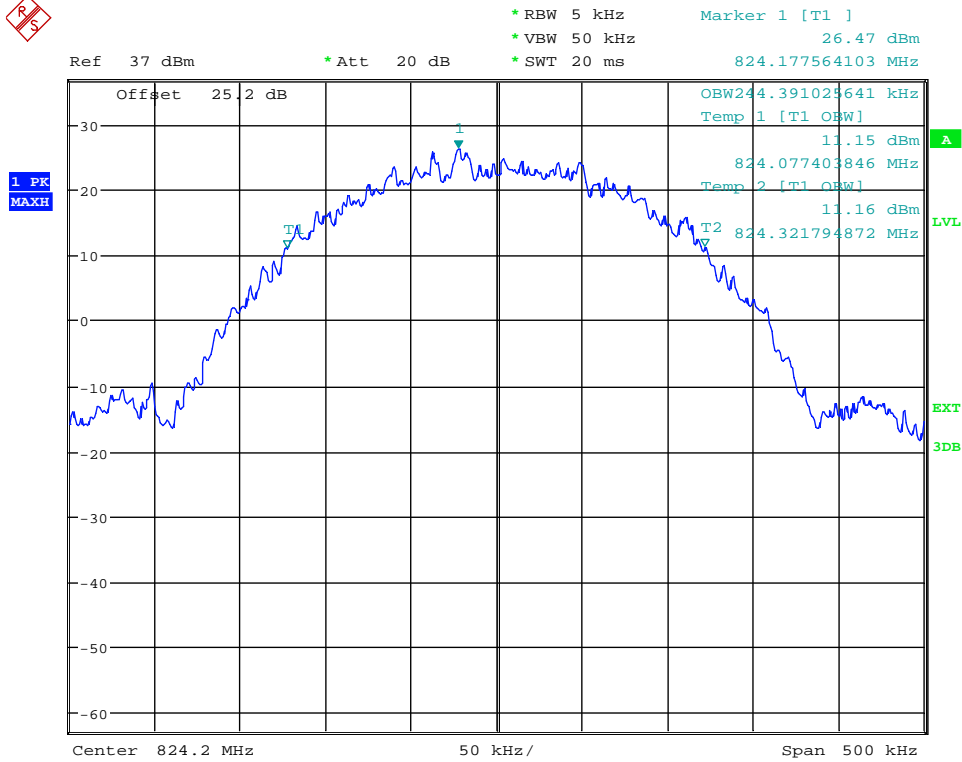


Date: 10.DEC.2013 14:00:48

(Plot 4.4.3 A: Channel 128: 824.20MHz @ EGPRS850)

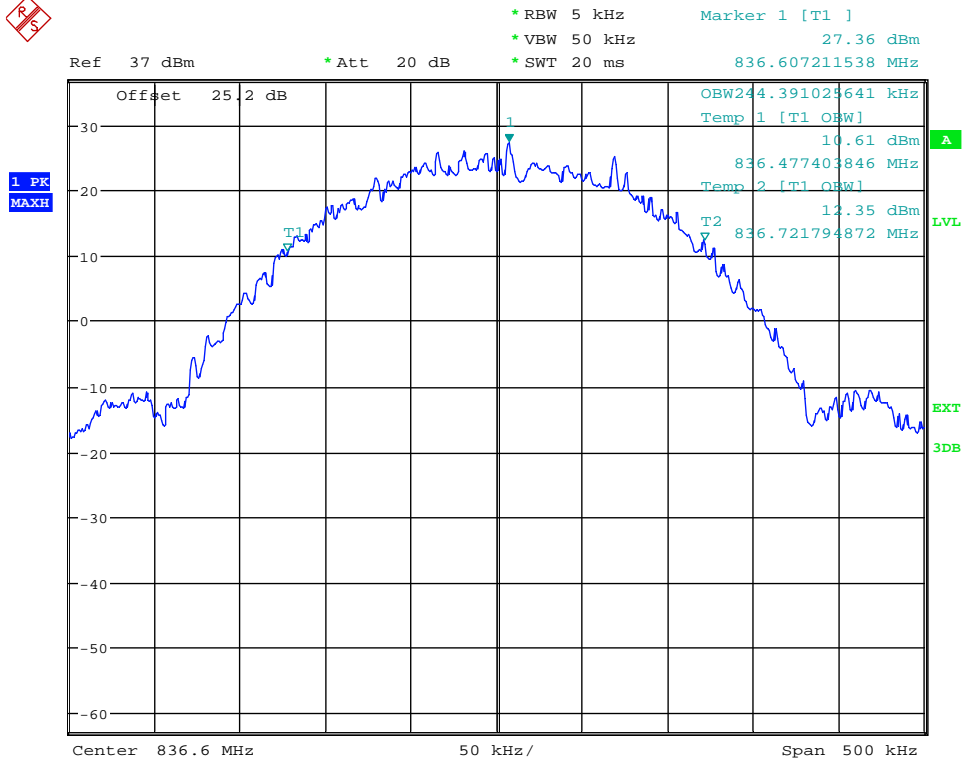

Date: 10.DEC.2013 14:00:10

(Plot 4.4.3 B: Channel 190: 836.60MHz @ EGPRS850)

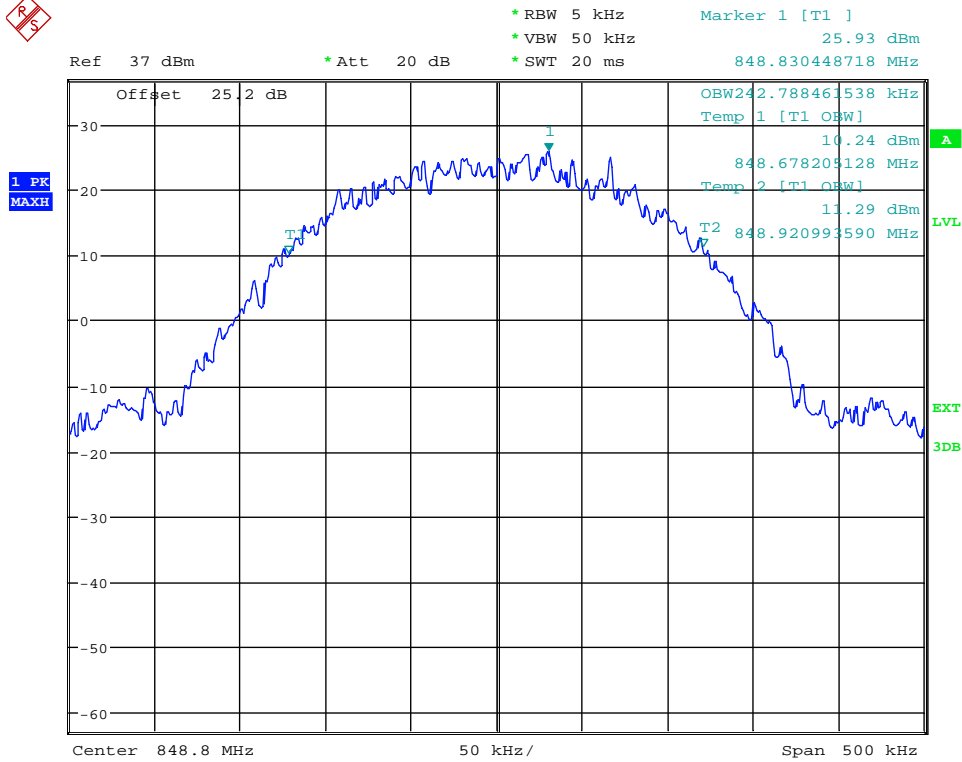


Date: 10.DEC.2013 14:00:30

(Plot 4.4.3 C: Channel 251: 848.80MHz @ EGPRS850)

GSM1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	242.79	Plot 4.4.4 A	PASS
661	1880.00	244.39	Plot 4.4.4 B	PASS
810	1909.80	247.60	Plot 4.4.4 C	PASS


GPRS1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	245.19	Plot 4.4.5 A	PASS
661	1880.00	245.99	Plot 4.4.5 B	PASS
810	1909.80	244.39	Plot 4.4.5 C	PASS

EGPRS1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	245.19	Plot 4.4.6 A	PASS
661	1880.00	246.79	Plot 4.4.6 B	PASS
810	1909.80	247.60	Plot 4.4.6 C	PASS

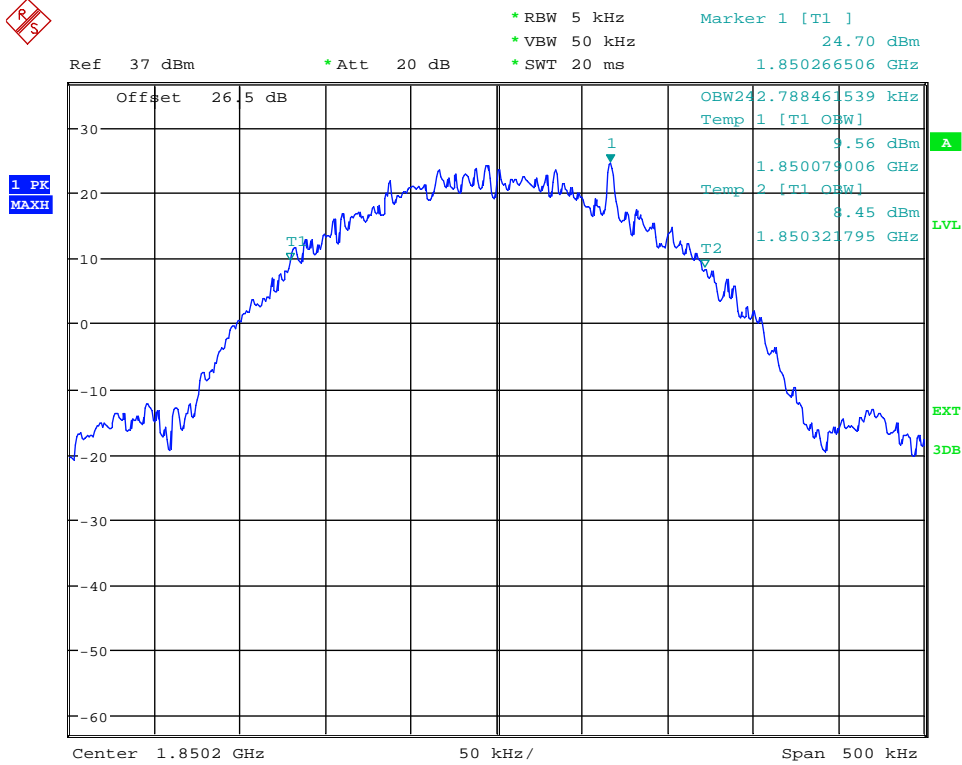

Date: 10.DEC.2013 14:08:51

(Plot 4.4.4 A: Channel 512:1850.20MHz @ PCS1900)

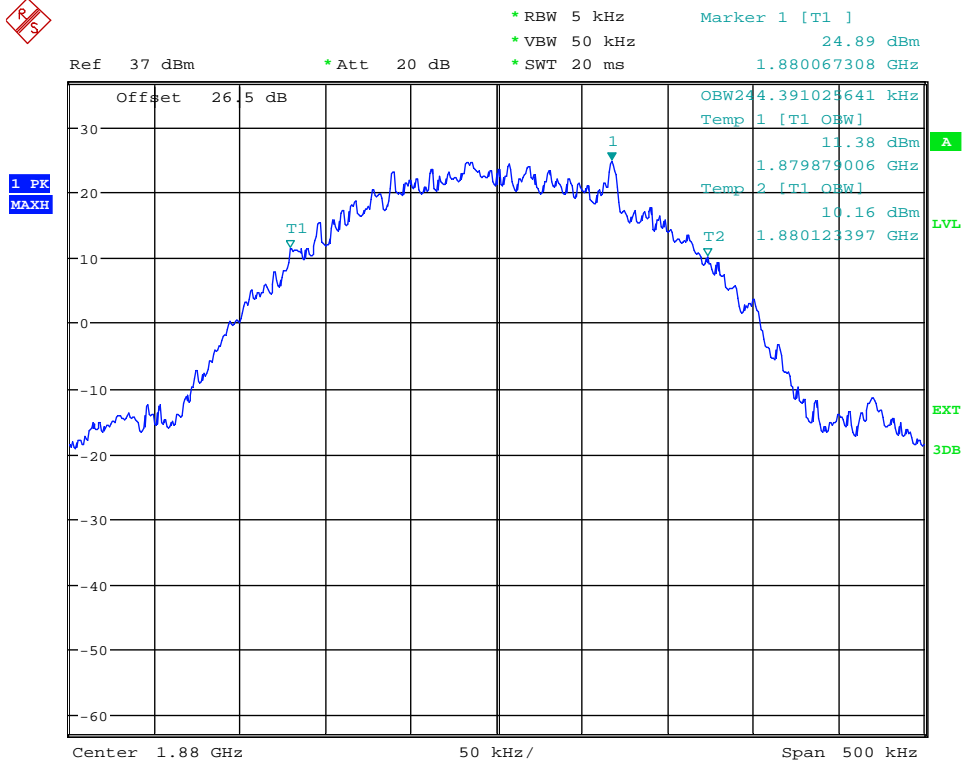


Date: 10.DEC.2013 14:08:29

(Plot 4.4.4 B: Channel 661:1880.00MHz @ PCS1900)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1 ] 25.07 dBm 1.909838462 GHz

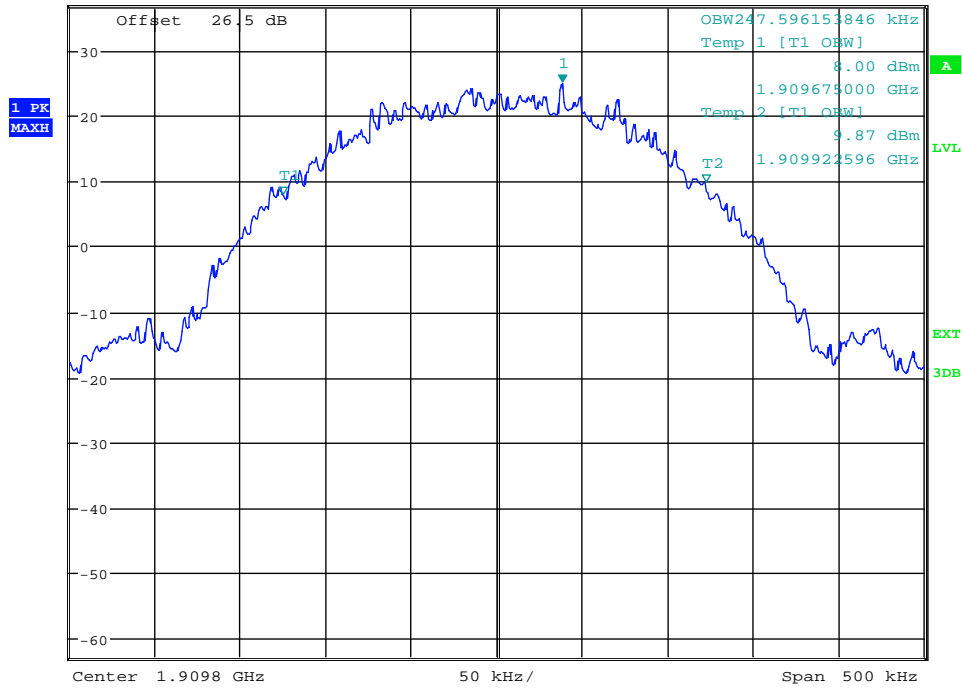


Date: 10.DEC.2013 14:07:57

(Plot 4.4.4 C: Channel 810:1909.80MHz @ PCS1900)




Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1 ] 23.45 dBm 1.850201603 GHz

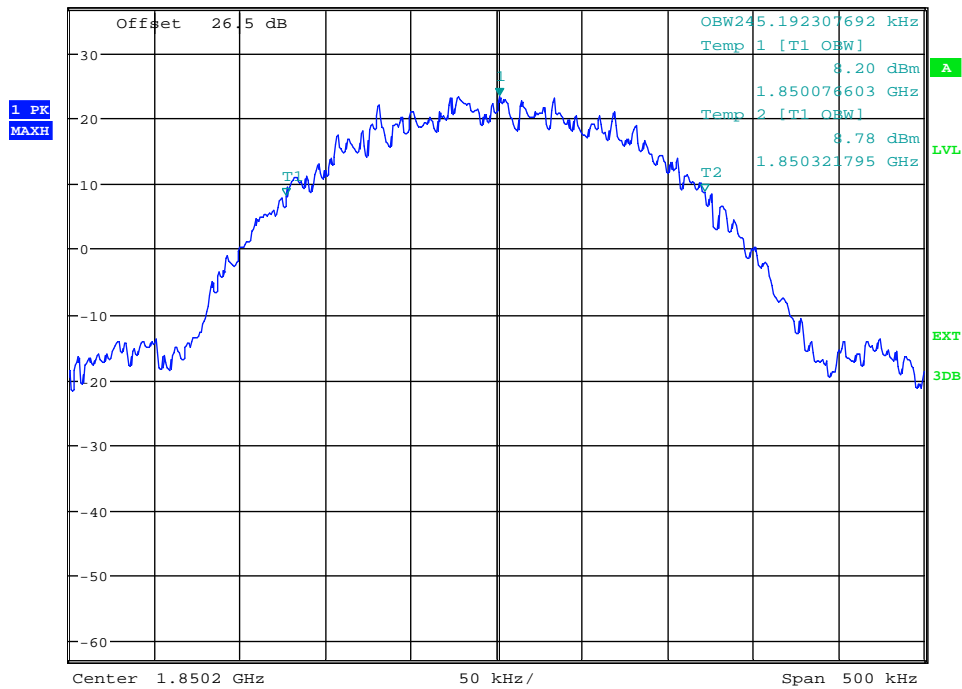

Date: 10.DEC.2013 14:29:29


(Plot 4.4.5 A: Channel 512:1820.20MHz @ GPRS1900)



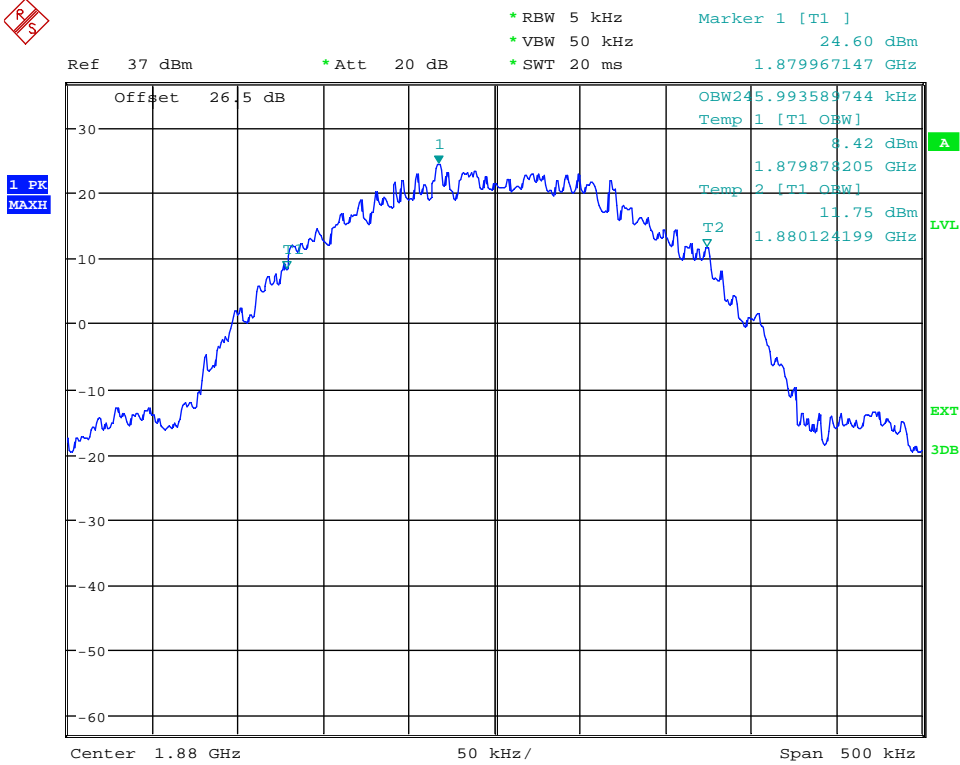


Date: 10.DEC.2013 14:29:07

(Plot 4.4.5 B: Channel 661:1880.00MHz @ GPRS1900)

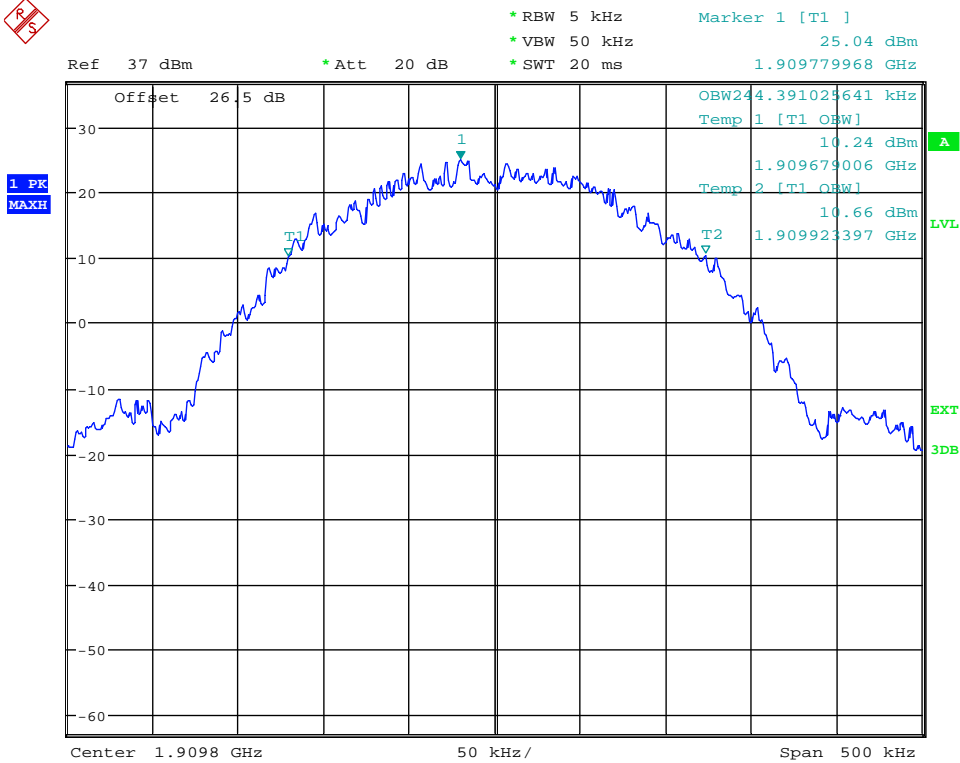


Date: 10.DEC.2013 14:28:47

(Plot 4.4.5 C: Channel 810:1909.80MHz @ GPRS1900)

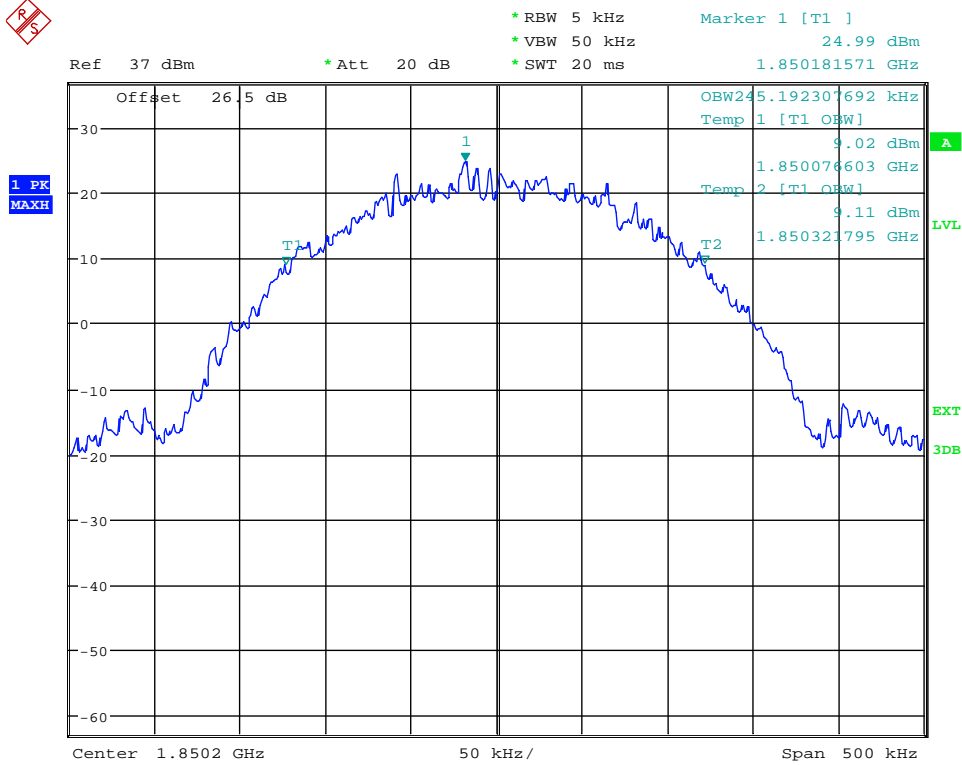

Date: 10.DEC.2013 14:38:02

(Plot 4.4.6 A: Channel 512:1820.20MHz @ EGPRS1900)

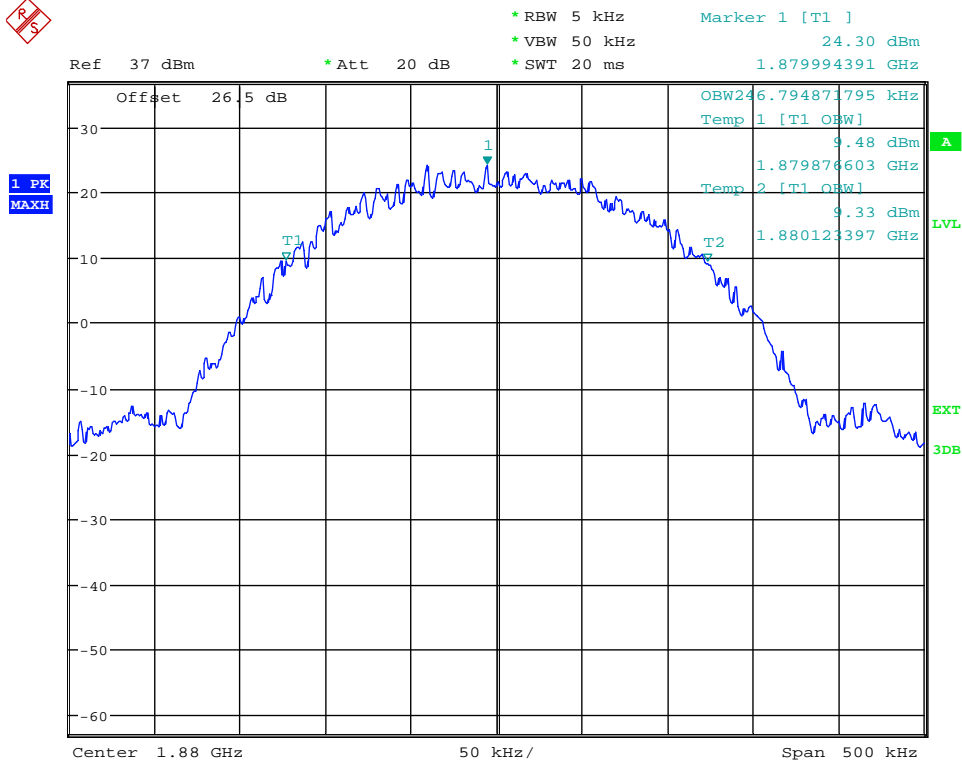


Date: 10.DEC.2013 14:38:29

(Plot 4.4.6 B: Channel 661:1880.00MHz @ EGPRS1900)



\*RBW 5 kHz      Marker 1 [T1 ]  
\*VBW 50 kHz      23.88 dBm  
\*SWT 20 ms      1.909777564 GHz

Ref 37 dBm      \*Att 20 dB

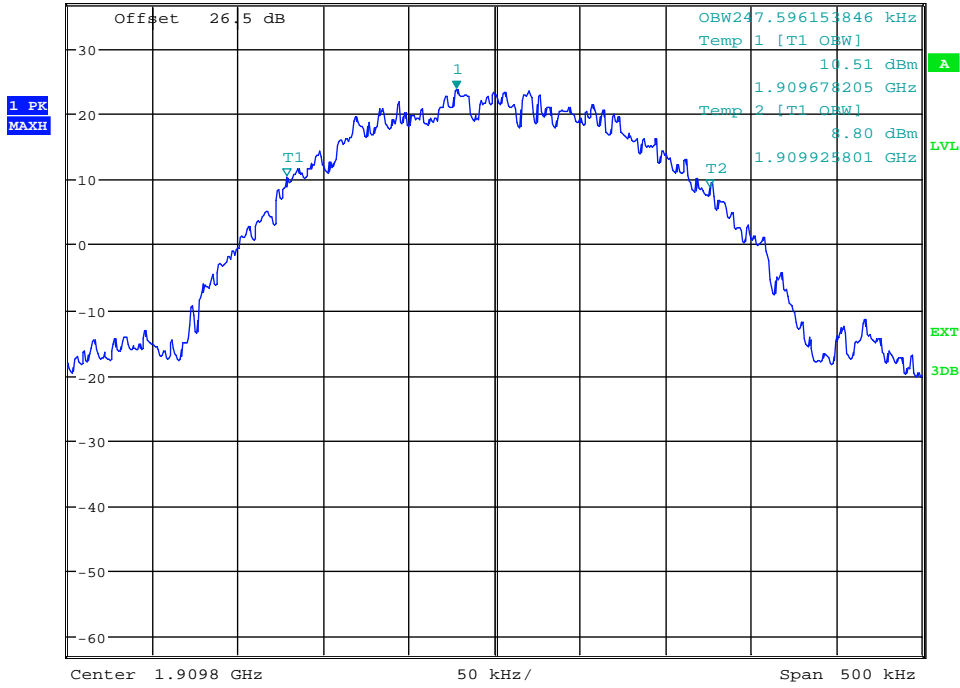

Date: 10.DEC.2013 14:39:00


(Plot 4.4.6 C: Channel 810:1909.80MHz @ EGPRS1900)

## 4.5. EMISSION BANDWIDTH

### TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. The table below lists the measured -26dBc BW.

### TEST CONFIGURATION

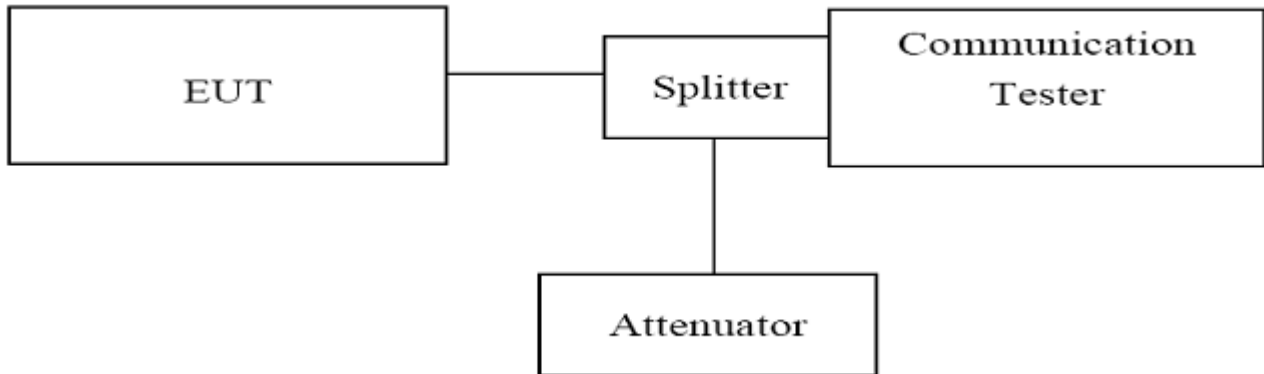

### TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz,VBW=50KHz,Span=500KHz,SWT=20ms;
4. Set SPA Max hold. Mark peak, Set -26dBc Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (bottom, middle and top of operational frequency range).

### TEST RESULTS


GSM850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
128	824.20	313.30	Plot 4.5.1 A	PASS
190	836.60	310.10	Plot 4.5.1 B	PASS
251	848.80	313.30	Plot 4.5.1 C	PASS

GPRS850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
128	824.20	305.29	Plot 4.5.2 A	PASS
190	836.60	307.70	Plot 4.5.2 B	PASS
251	848.80	316.50	Plot 4.5.2 C	PASS

EGPRS850				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
128	824.20	311.70	Plot 4.5.3 A	PASS
190	836.60	314.10	Plot 4.5.3 B	PASS
251	848.80	314.90	Plot 4.5.3 C	PASS



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1] 26.62 dBm 824.267307692 MHz

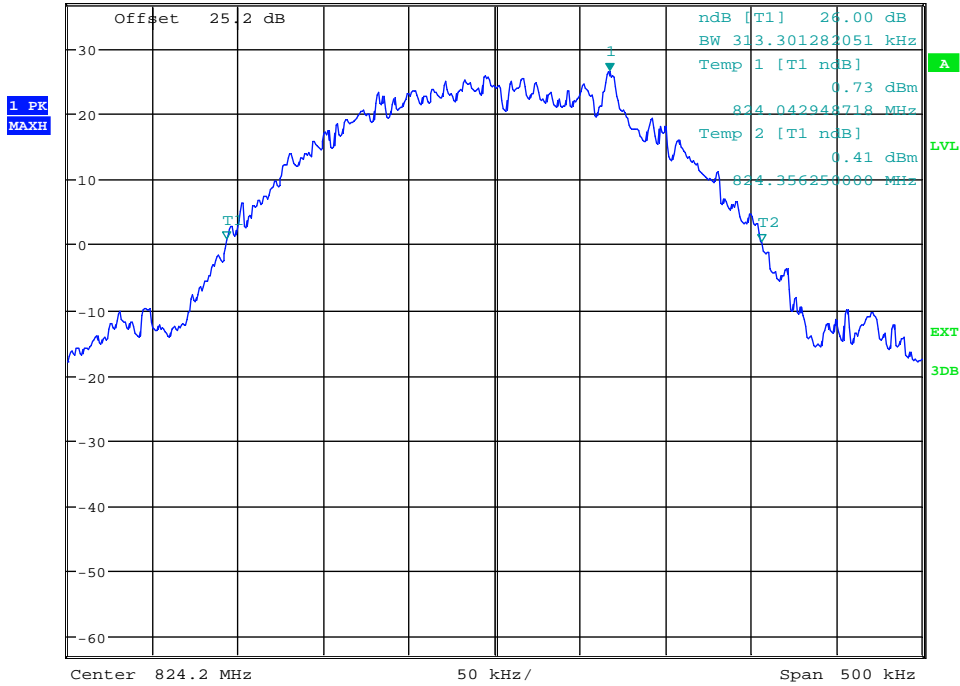


Date: 10.DEC.2013 13:30:19

(Plot 4.5.1 A: Channel 128: 824.20MHz @ GSM850)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1] 27.54 dBm 836.625641026 MHz

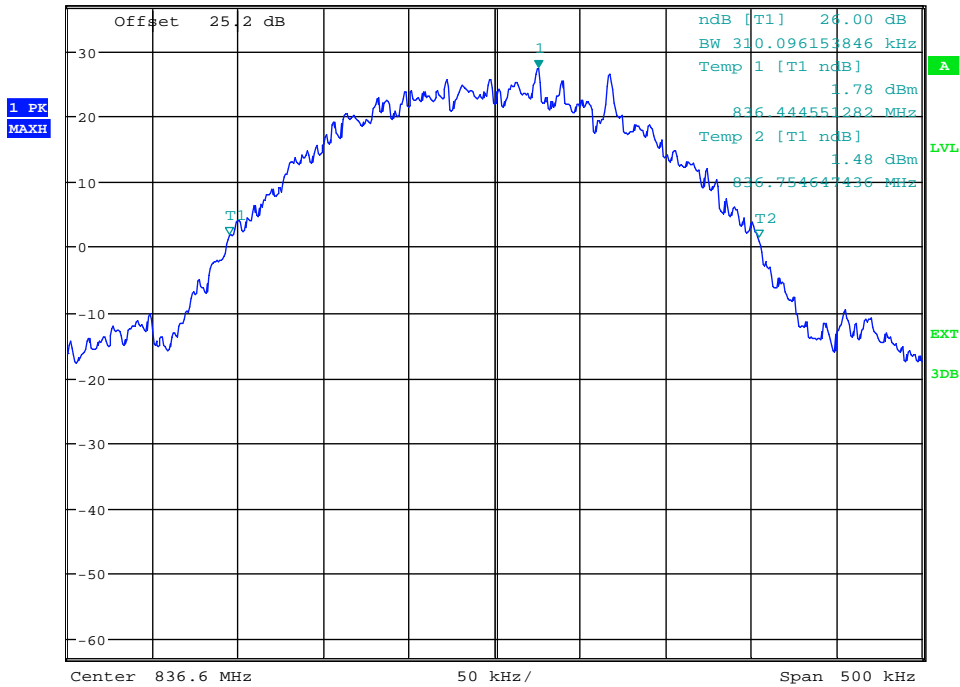


Date: 10.DEC.2013 13:30:52

(Plot 4.5.1 B: Channel 190: 836.60MHz @ GSM850)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1] 26.17 dBm 848.803205128 MHz

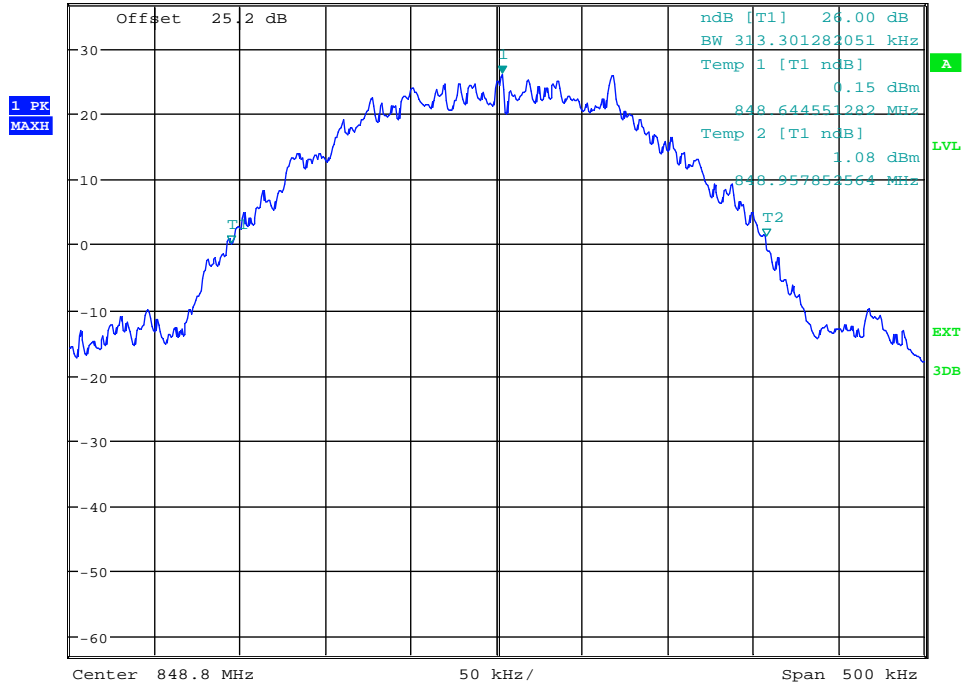


Date: 10.DEC.2013 13:31:15

(Plot 4.5.1 C: Channel 251: 848.80MHz @ GSM850)




Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 20 ms Marker 1 [T1] 28.23 dBm 824.190384615 MHz

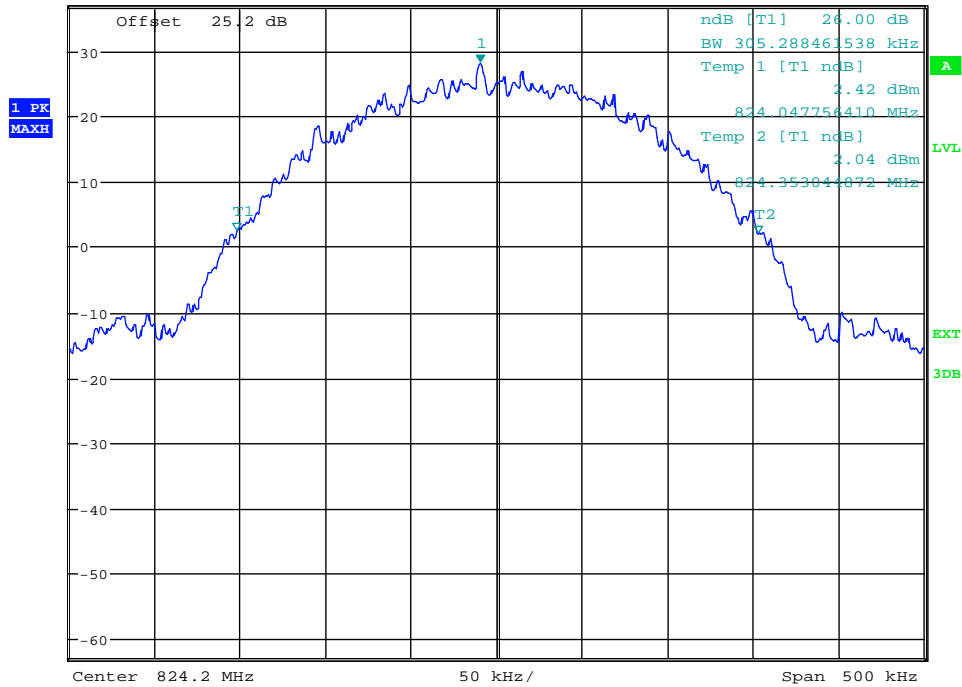


Date: 10.DEC.2013 13:50:18

(Plot 4.5.2 A: Channel 128: 824.20MHz @ GPRS850)

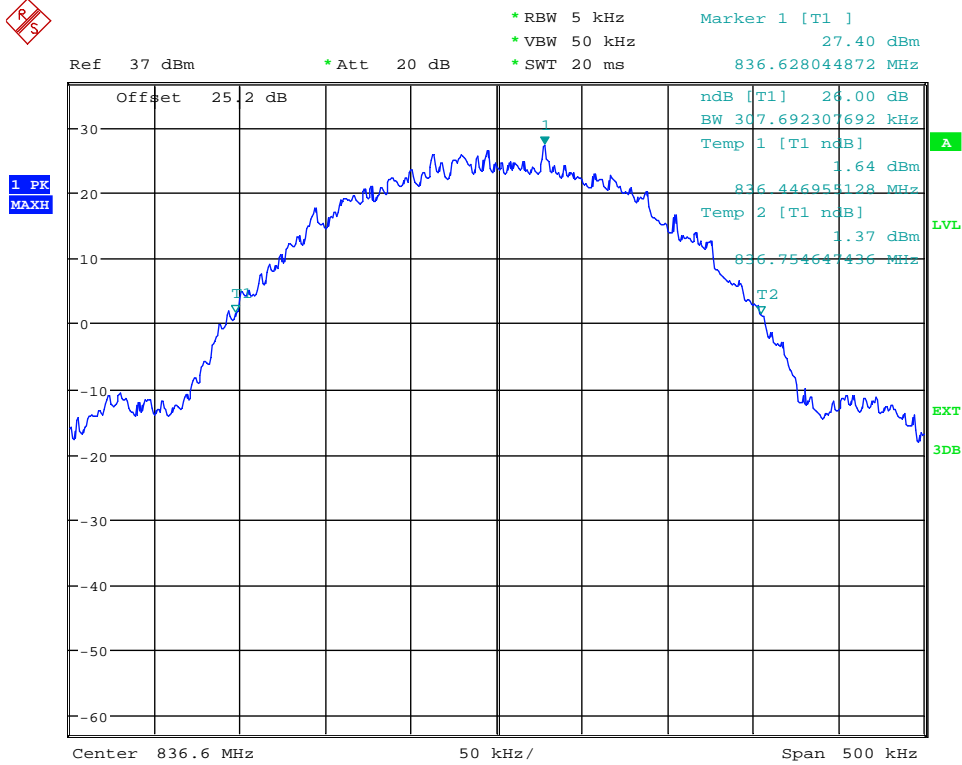


Date: 10.DEC.2013 13:49:08

(Plot 4.5.2 B: Channel 190: 836.60MHz @ GPRS850)

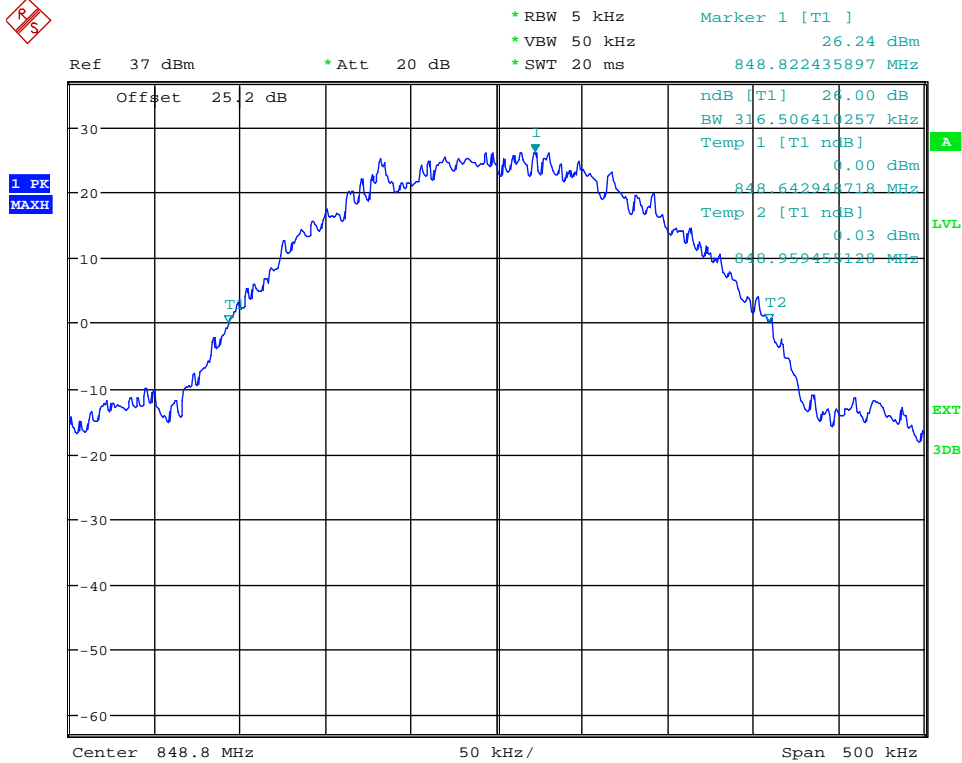


Date: 10.DEC.2013 13:49:43

(Plot 4.5.2 C: Channel 251: 848.80MHz @ GPRS850)

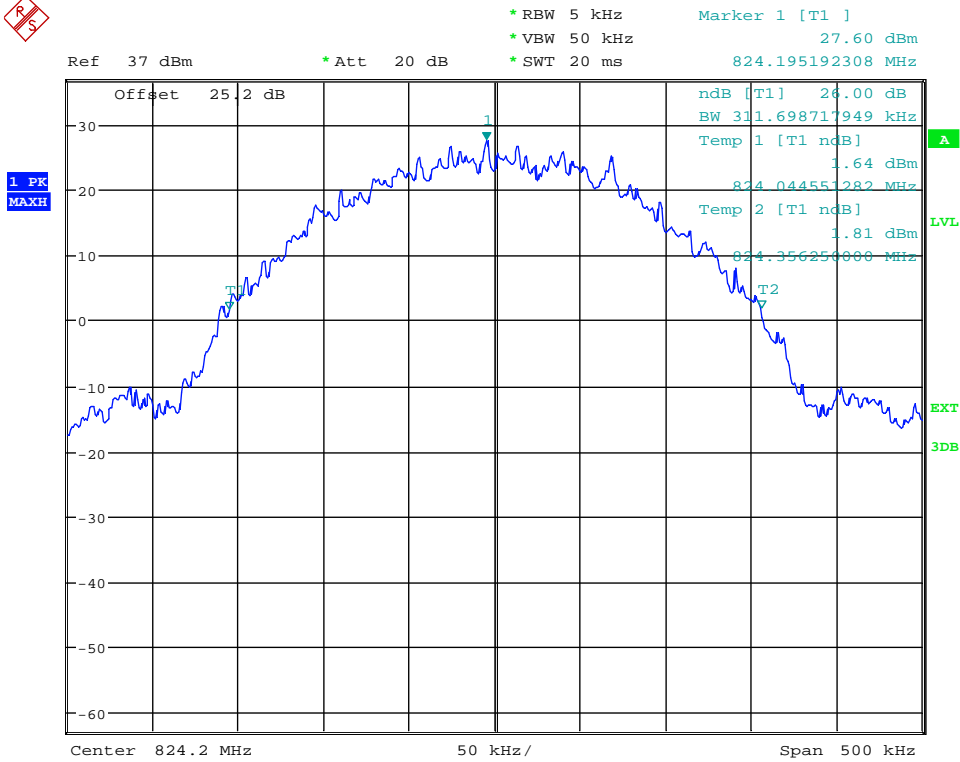

Date: 10.DEC.2013 14:01:26


(Plot 4.5.3 A: Channel 128: 824.20MHz @ EGPRS850)

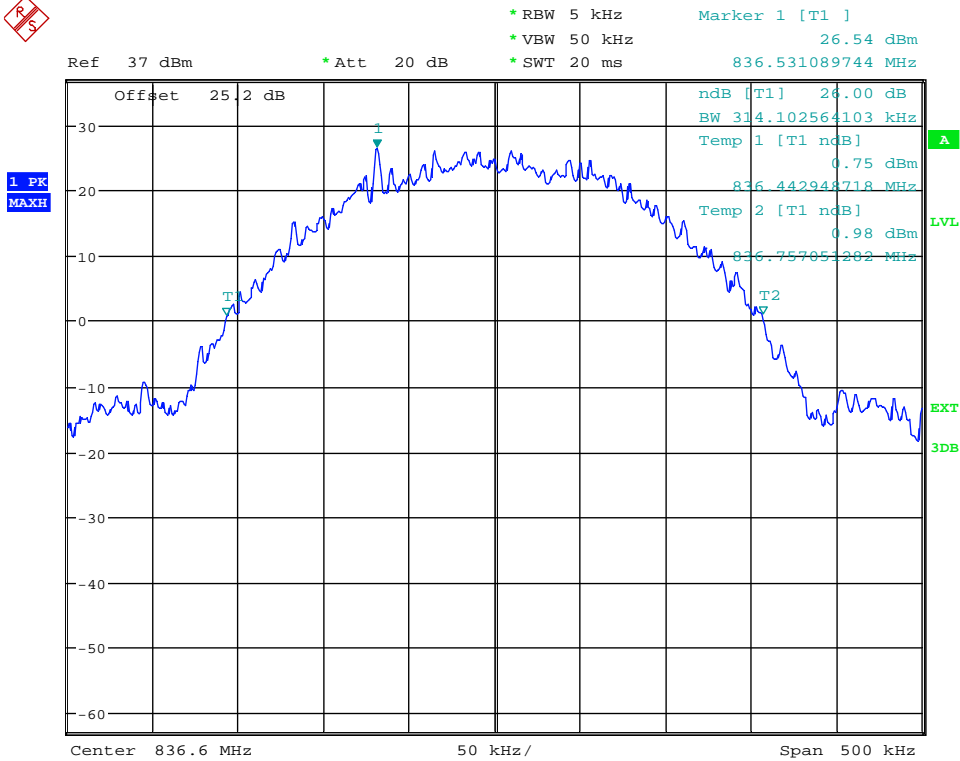

Date: 10.DEC.2013 14:01:53

(Plot 4.5.3 B: Channel 190: 836.60MHz @ EGPRS850)



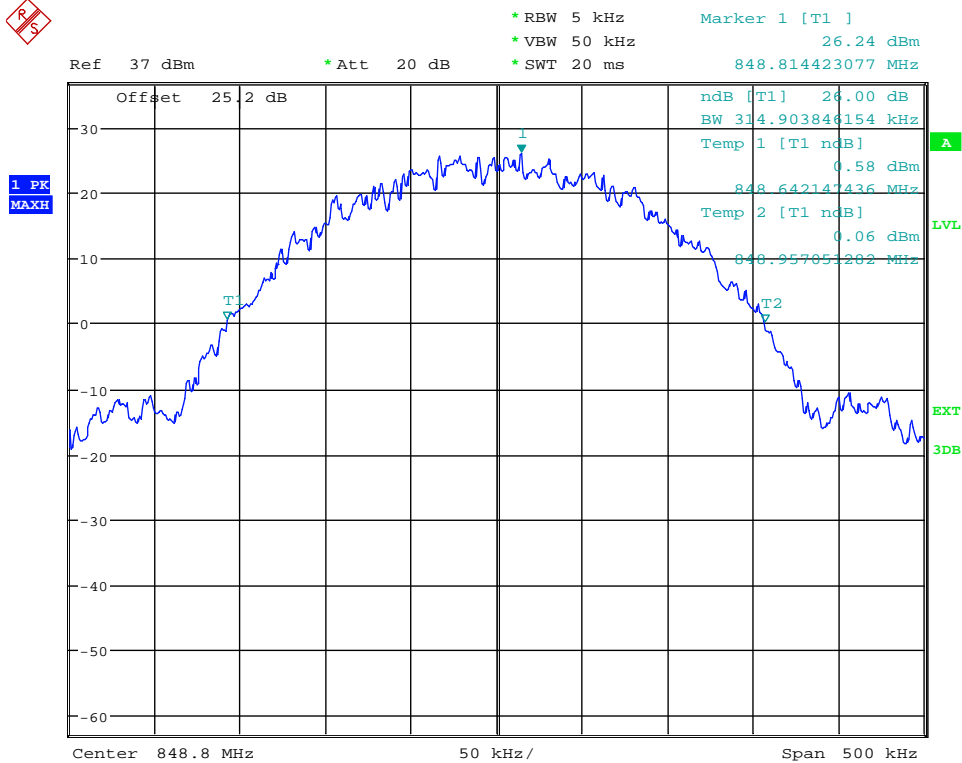

Date: 10.DEC.2013 14:02:13

(Plot 4.5.3 C: Channel 251: 848.80MHz @ EGPRS850)


GSM1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	314.10	Plot 4.5.4 A	PASS
661	1880.00	317.30	Plot 4.5.4 B	PASS
810	1909.80	310.90	Plot 4.5.4 C	PASS

GPRS1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	317.31	Plot 4.5.5 A	PASS
661	1880.00	315.71	Plot 4.5.5 B	PASS
810	1909.80	315.71	Plot 4.5.5 C	PASS

EGPRS1900				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) ( kHz)	Refer to Plot	Verdict
512	1850.20	318.11	Plot 4.5.6 A	PASS
661	1880.00	312.50	Plot 4.5.6 B	PASS
810	1909.80	313.30	Plot 4.5.6 C	PASS



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      23.78 dBm  
\* VBW 50 kHz      1.850201603 GHz  
\* SWT 20 ms

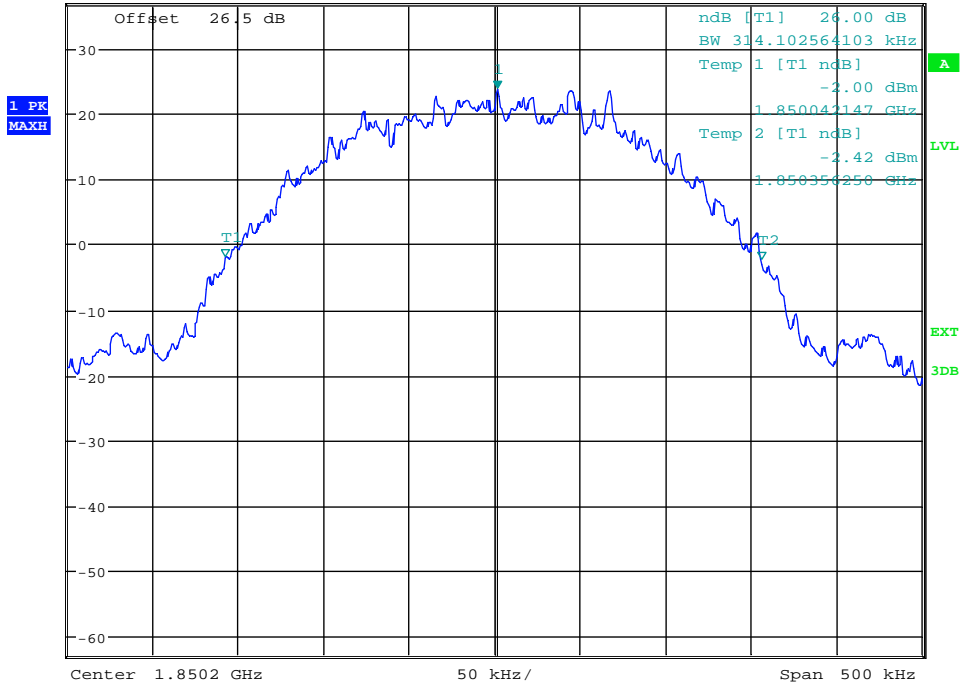


Date: 10.DEC.2013 14:09:03

(Plot 4.5.4 A: Channel 512:1850.20MHz @ PCS1900)



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      24.02 dBm  
\* VBW 50 kHz      1.880036058 GHz  
\* SWT 20 ms

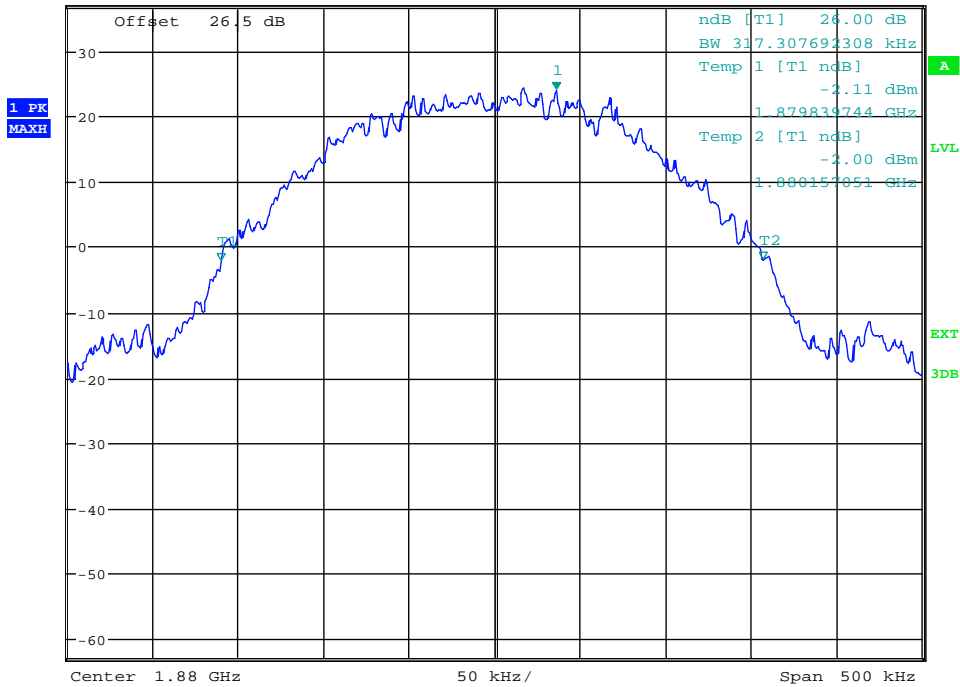


Date: 10.DEC.2013 14:09:28

(Plot 4.5.4 B: Channel 661:1880.00MHz @ PCS1900)



Ref 37 dBm \*Att 20 dB \*RBW 5 kHz \*VBW 50 kHz \*SWT 20 ms Marker 1 [T1] 25.57 dBm 1.909795192 GHz

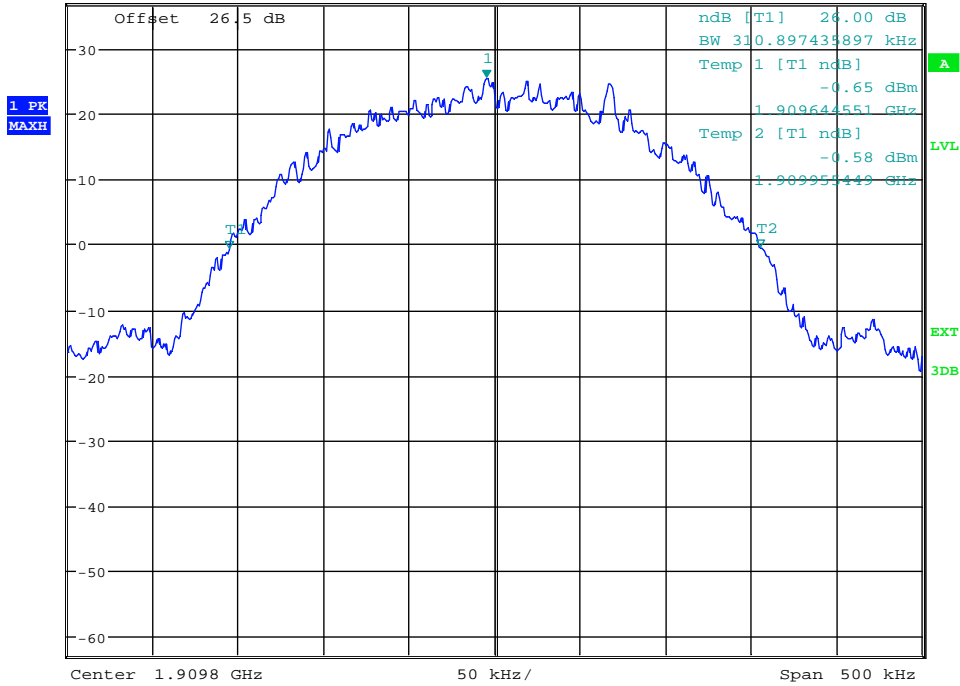


Date: 10.DEC.2013 14:10:13

(Plot 4.5.4 C: Channel 810:1909.80MHz @ PCS1900)



Ref 37 dBm \*Att 20 dB \*RBW 5 kHz \*VBW 50 kHz \*SWT 20 ms Marker 1 [T1] 23.66 dBm 1.850182372 GHz

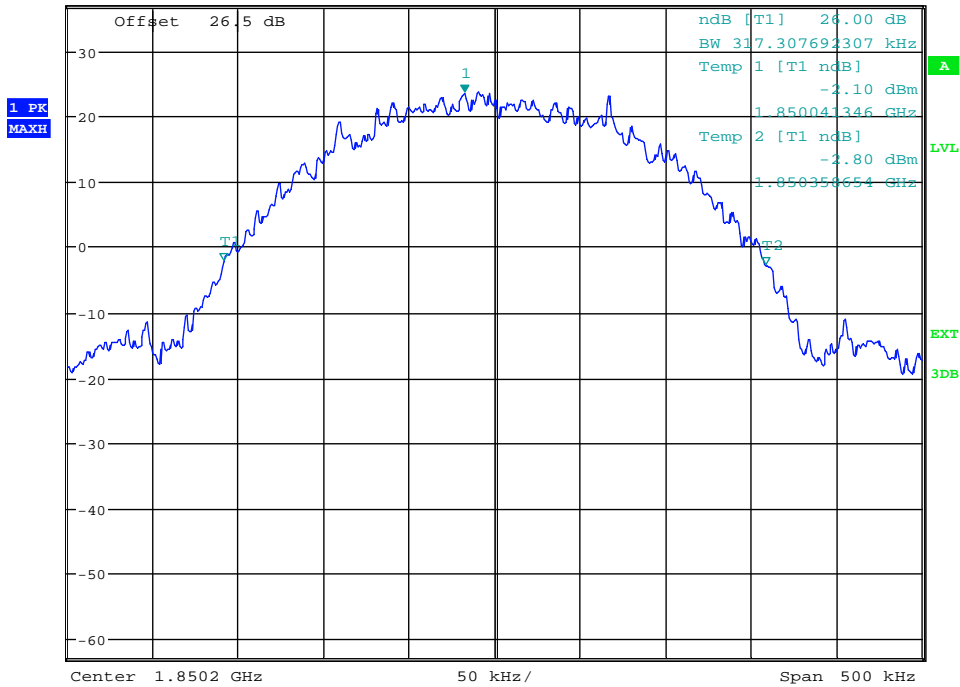


Date: 10.DEC.2013 14:29:47

(Plot 4.5.5 A: Channel 512:1850.20MHz @ GPRS1900)



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      23.86 dBm  
\* VBW 50 kHz      \* SWT 20 ms      1.879981571 GHz

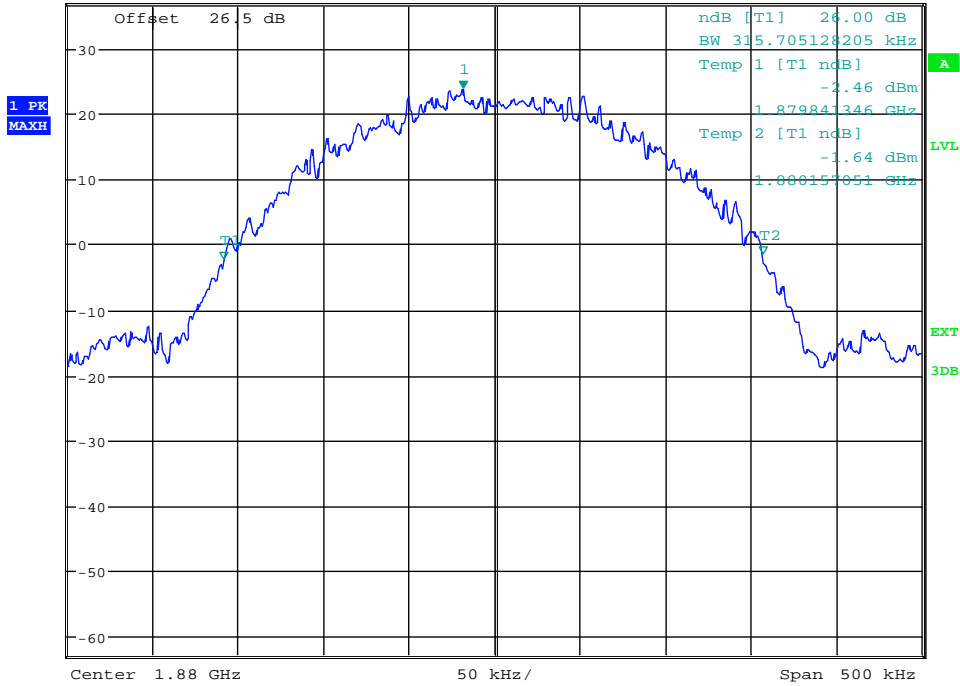


Date: 10.DEC.2013 14:30:08

(Plot 4.5.5 B: Channel 661:1880.00MHz @ GPRS1900)



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      23.89 dBm  
\* VBW 50 kHz      \* SWT 20 ms      1.909787179 GHz

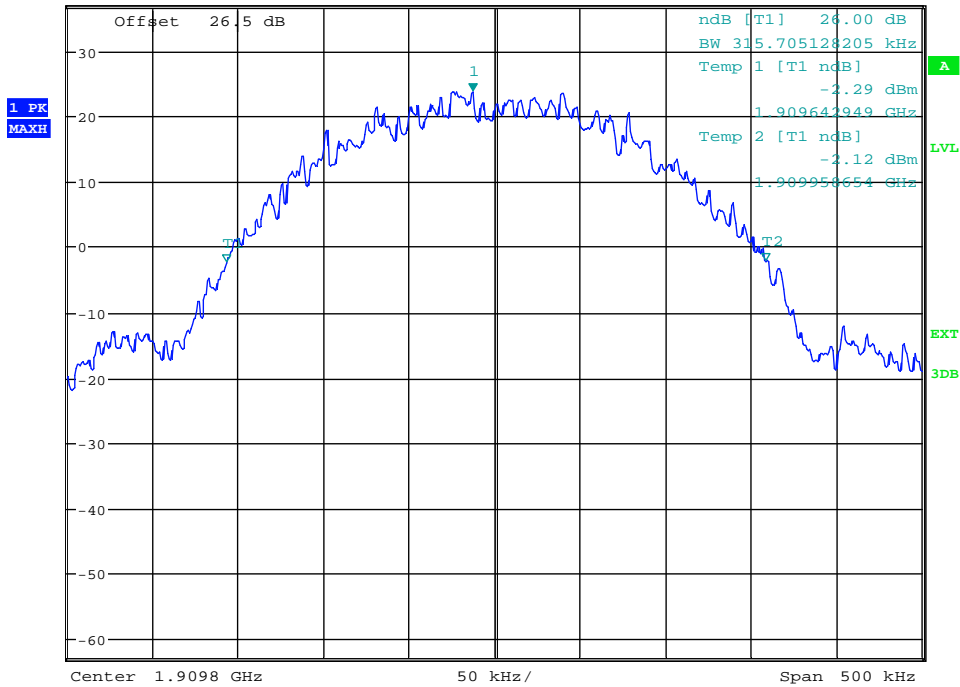


Date: 10.DEC.2013 14:30:22

(Plot 4.5.5 C: Channel 810:1909.80MHz @ GPRS1900)



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      23.52 dBm  
\* VBW 50 kHz      1.850202404 GHz  
\* SWT 20 ms

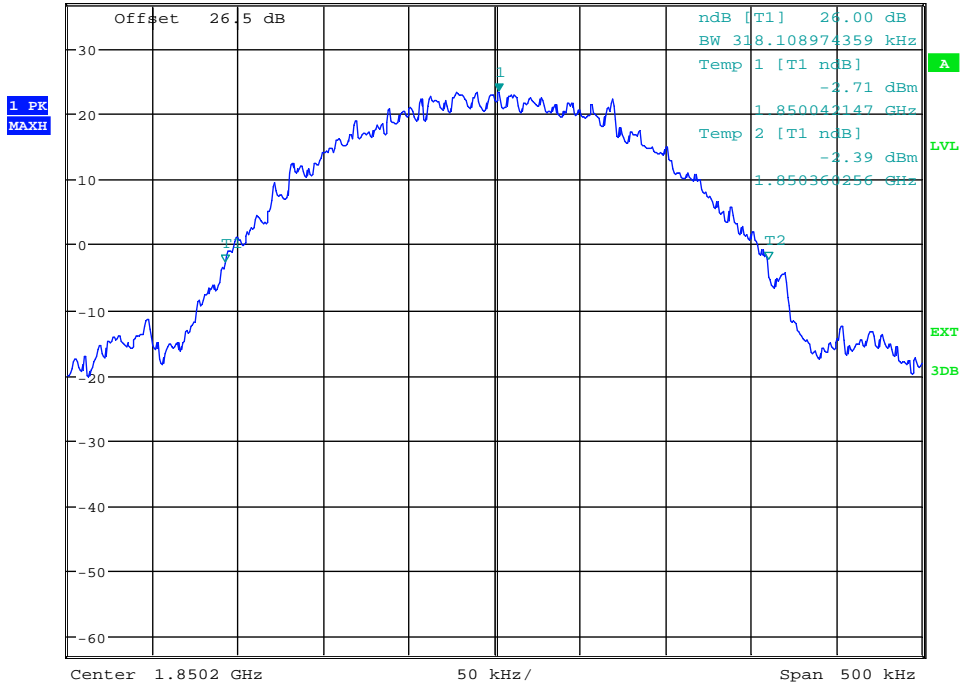


Date: 10.DEC.2013 14:39:57

(Plot 4.5.6 A: Channel 512:1850.20MHz @ EGPRS1900)



Ref 37 dBm      \* Att 20 dB      \* RBW 5 kHz      Marker 1 [T1]      24.23 dBm  
\* VBW 50 kHz      1.880016026 GHz  
\* SWT 20 ms

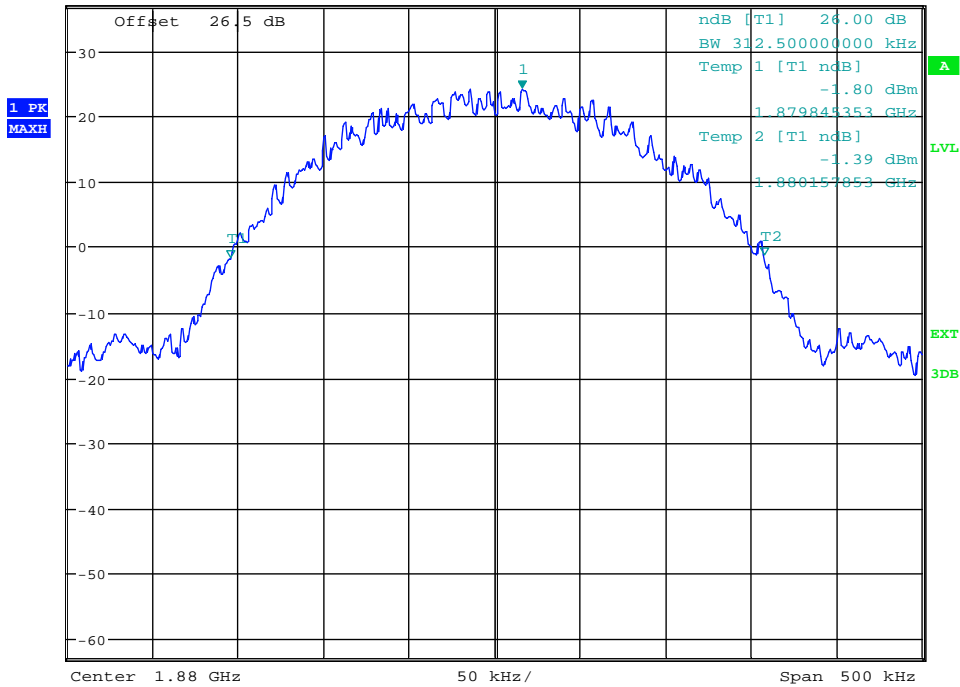


Date: 10.DEC.2013 14:39:32

(Plot 4.5.6 B: Channel 661:1880.00MHz @ EGPRS1900)



\*RBW 5 kHz      Marker 1 [T1 ]  
\*VBW 50 kHz      25.19 dBm  
\*SWT 20 ms      1.909794391 GHz

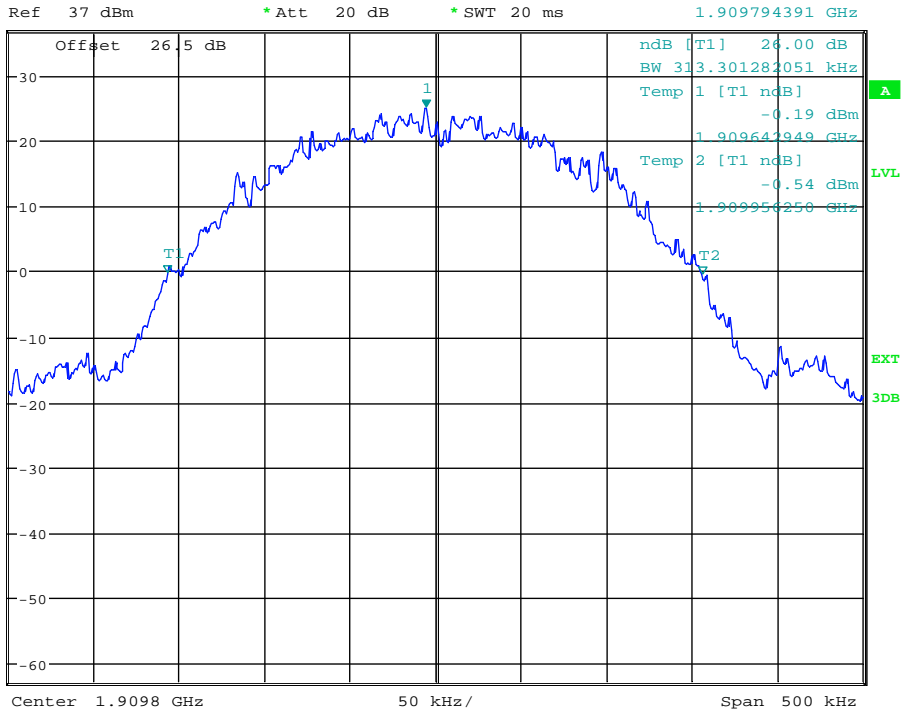

Date: 10.DEC.2013 14:39:13


(Plot 4.5.6 C: Channel 810:1909.80MHz @ EGPRS1900)

## 4.6. BAND EDGE COMPLIANCE

### TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

### TEST CONFIGURATION

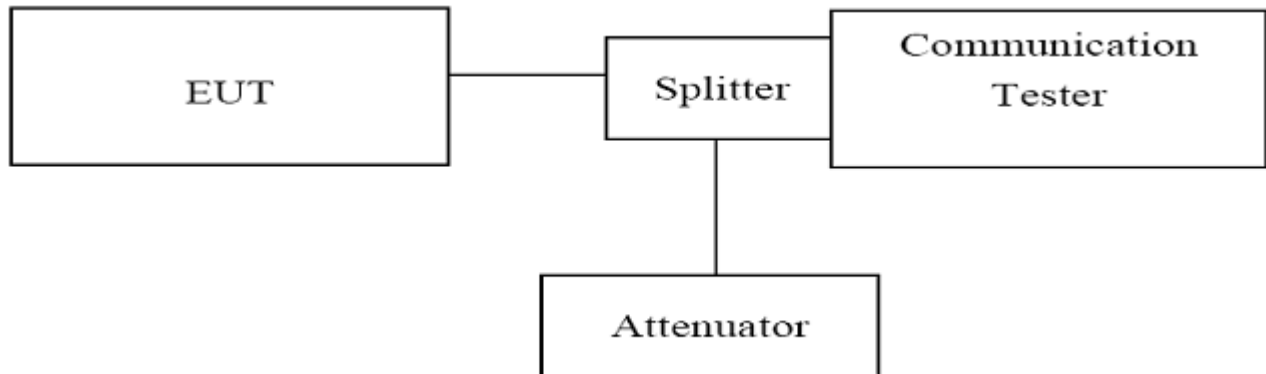

### TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz,VBW=50KHz,Span=1MHz,SWT=300ms;
4. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (low, middle and high of operational frequency range).

### TEST RESULTS


GSM850						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
128	824.20	823.98	-13.89	-13.00	Plot 4.6.1 A	PASS
251	848.80	849.00	-13.33	-13.00	Plot 4.6.1 B	PASS

GPRS850						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
128	824.20	824.00	-13.23	-13.00	Plot 4.6.2 A	PASS
251	848.80	849.00	-13.13	-13.00	Plot 4.6.2 B	PASS

EGPRS850						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
128	824.20	824.00	-13.76	-13.00	Plot 4.6.3 A	PASS
251	848.80	849.00	-13.57	-13.00	Plot 4.6.3 B	PASS



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.89 dBm 823.983974359 MHz

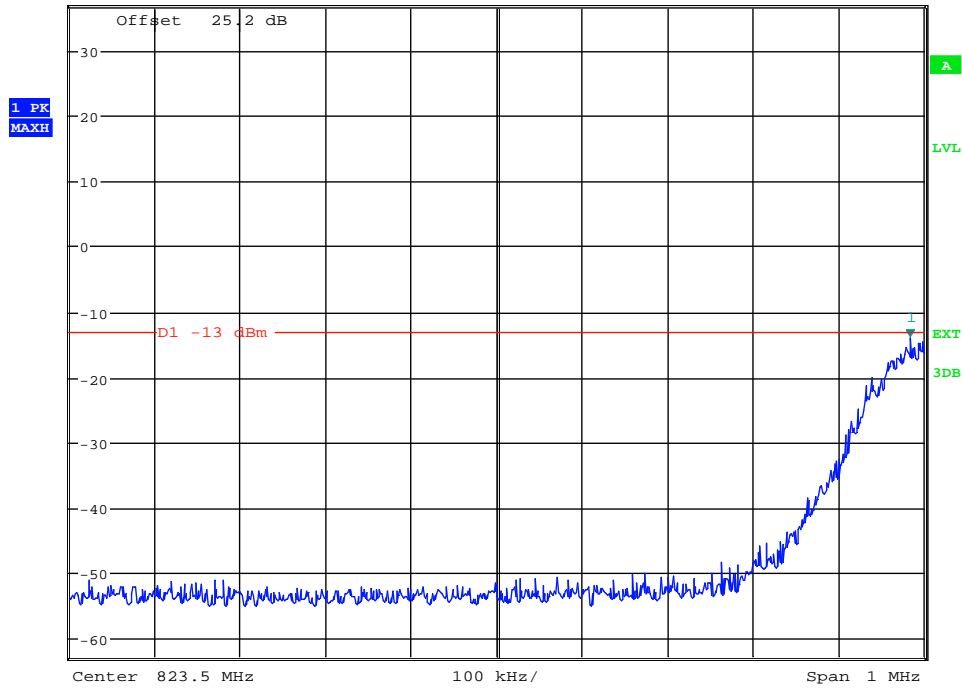


Date: 10.DEC.2013 13:34:51

(Plot 4.6.1 A: Channel 128: 824.20MHz @ GSM850)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.33 dBm 849.001602564 MHz

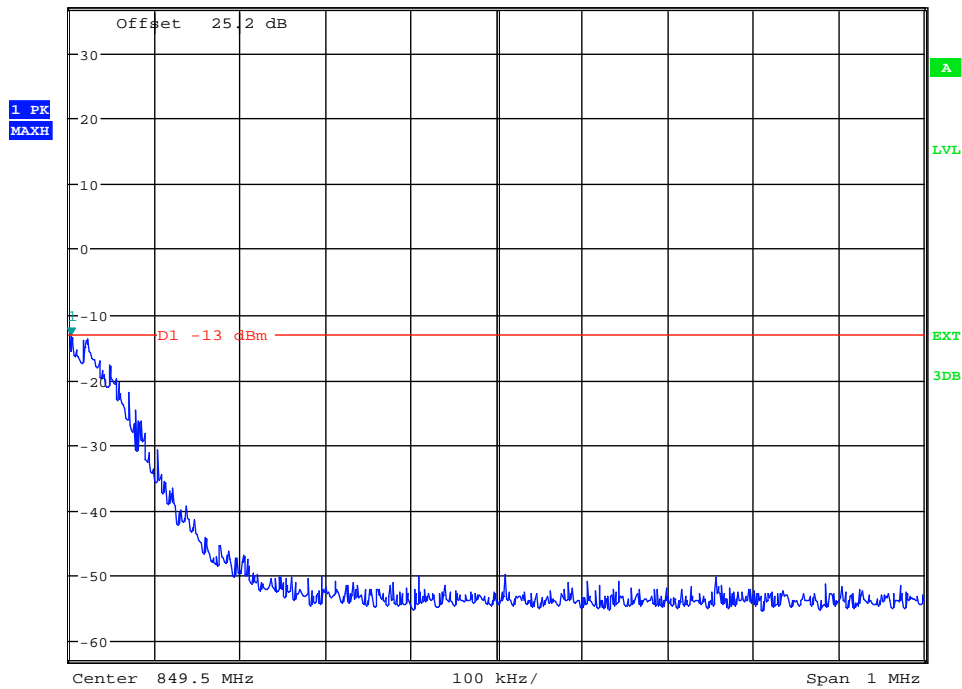


Date: 10.DEC.2013 13:33:11

(Plot 4.6.1 B: Channel 251: 848.80MHz @ GSM850)





Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.23 dBm 823.998397436 MHz

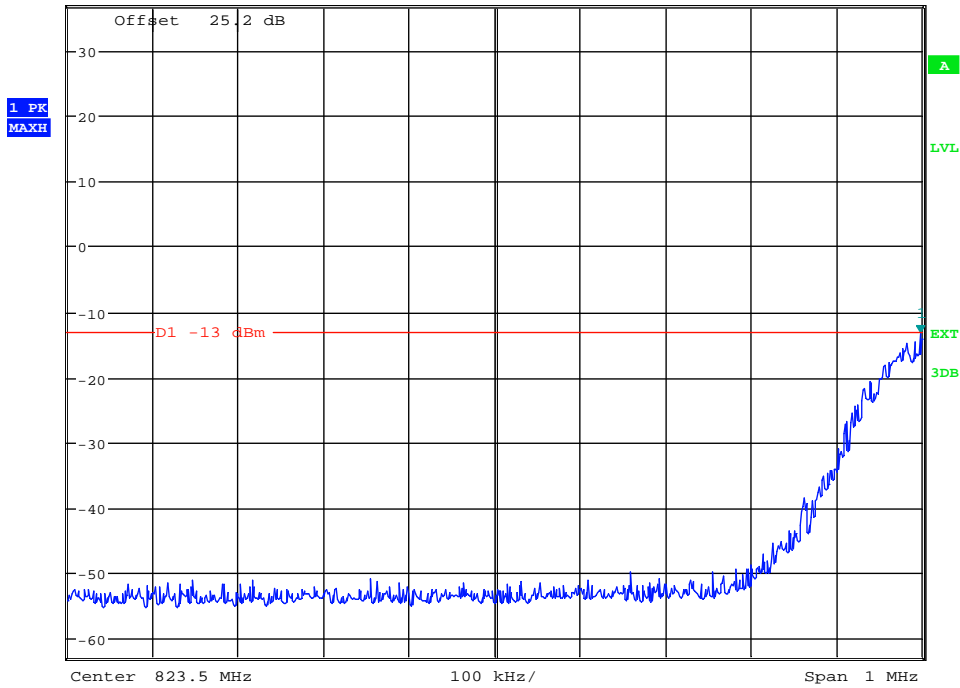


Date: 10.DEC.2013 13:52:48

(Plot 4.6.2 A: Channel 128: 824.20MHz @ GPRS850)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.13 dBm 849.003205128 MHz

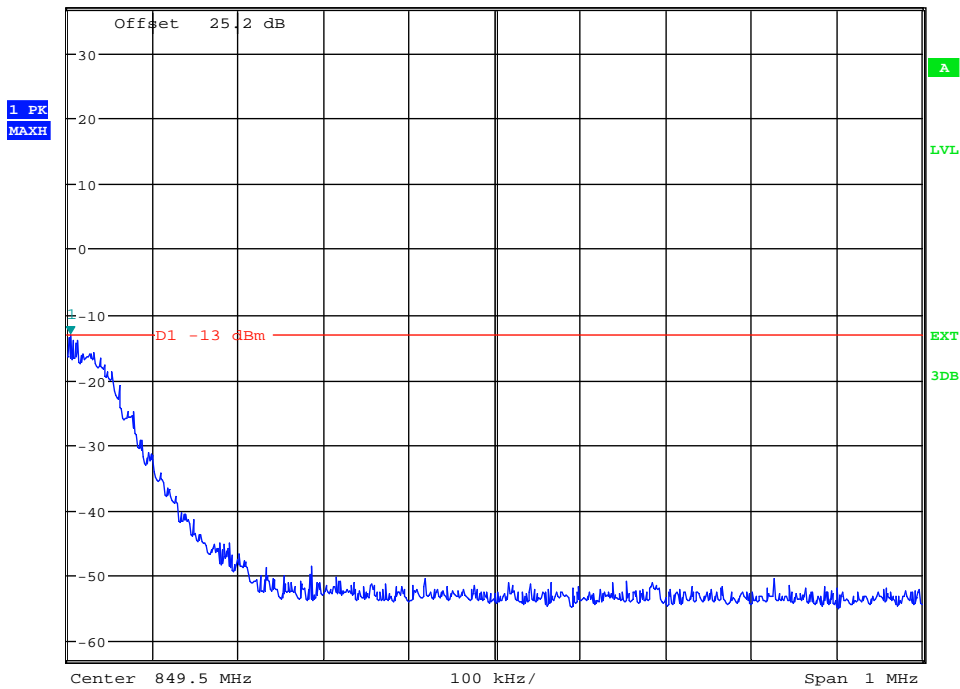


Date: 10.DEC.2013 13:53:29

(Plot 4.6.2 B: Channel 251: 848.80MHz @ GPRS850)



\*RBW 5 kHz  
\*VBW 50 kHz  
\*SWT 300 ms

Marker 1 [T1 ]  
-13.76 dBm  
823.996794872 MHz

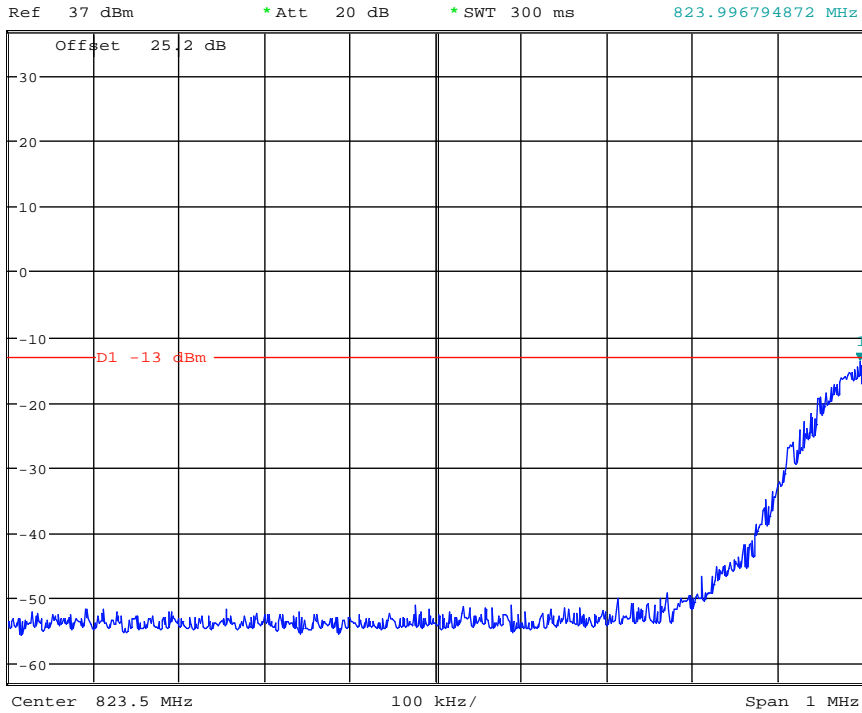


Date: 10.DEC.2013 13:57:35

(Plot 4.6.3 A: Channel 128: 824.20MHz @ EGPRS850)



\*RBW 5 kHz  
\*VBW 50 kHz  
\*SWT 300 ms

Marker 1 [T1 ]  
-13.57 dBm  
849.003205128 MHz

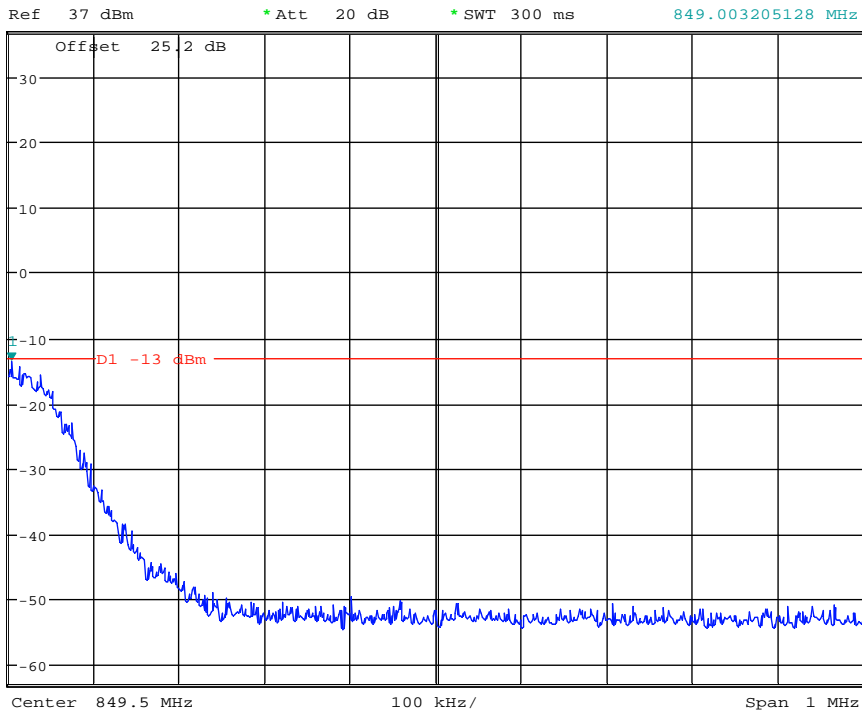


Date: 10.DEC.2013 13:57:09

(Plot 4.6.3 B: Channel 251: 848.80MHz @ EGPRS850)

PCS1900						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
512	1850.20	1850.00	-14.06	-13.00	Plot 4.6.4 A	PASS
810	1909.80	1910.00	-13.53	-13.00	Plot 4.6.4 B	PASS

GPRS1900						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
512	1850.20	1850.00	-13.93	-13.00	Plot 4.6.5 A	PASS
810	1909.80	1910.00	-14.35	-13.00	Plot 4.6.5 B	PASS

EGPRS1900						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
512	1850.20	1850.00	-13.56	-13.00	Plot 4.6.6 A	PASS
810	1909.80	1910.00	-13.14	-13.00	Plot 4.6.6 B	PASS

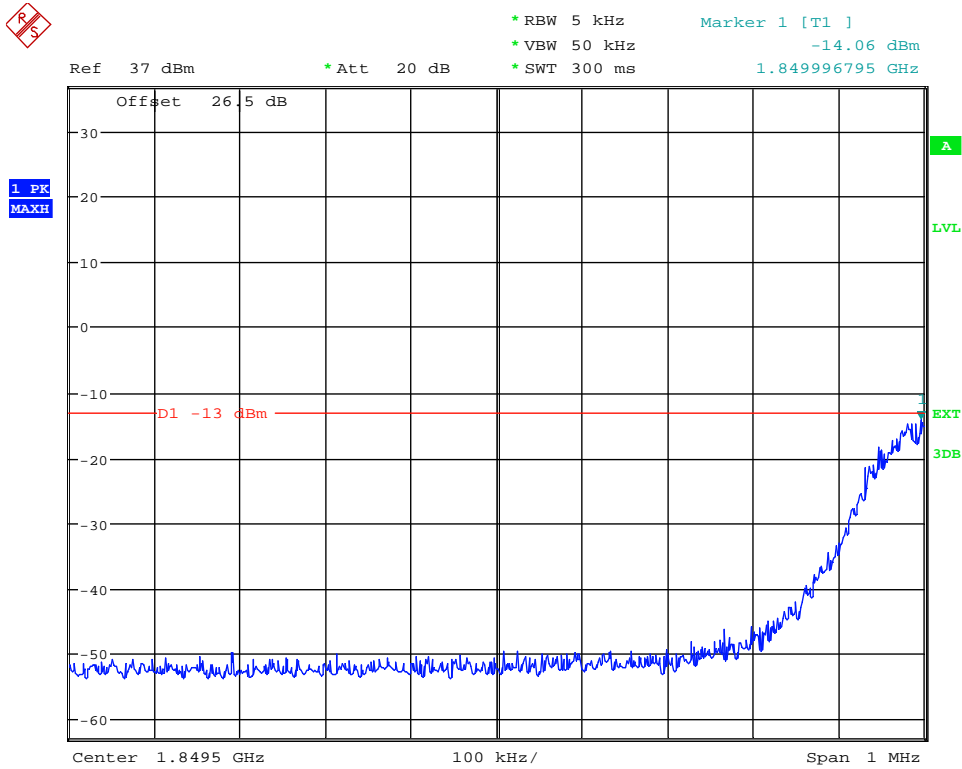


Date: 10.DEC.2013 14:13:27

(Plot 4.6.4 A: Channel 512: 1850.20MHz @ PCS1900)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.53 dBm 1.910001603 GHz

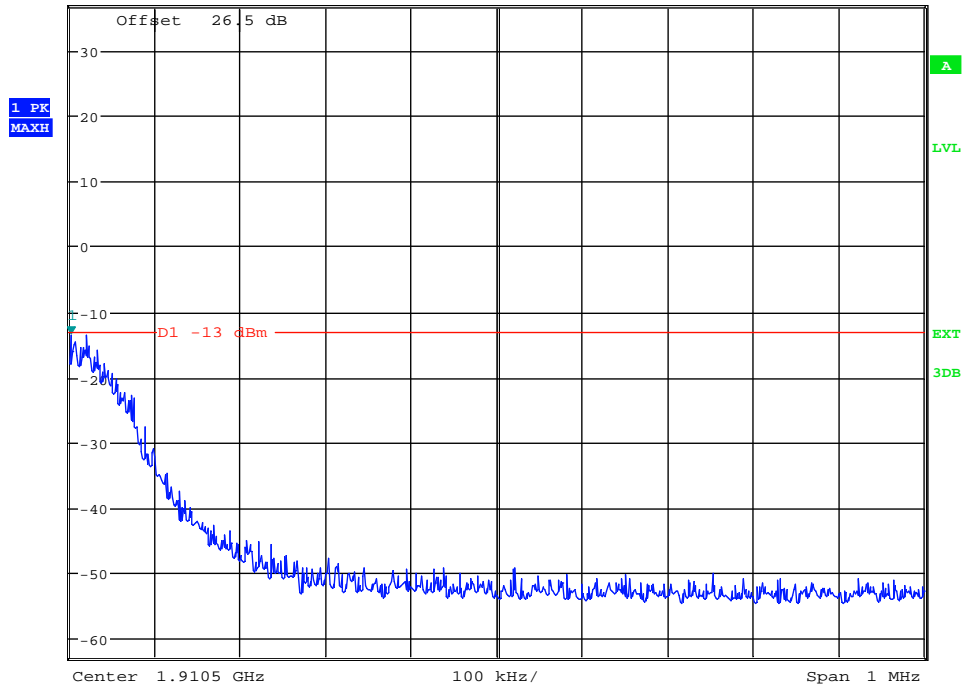


Date: 10.DEC.2013 14:11:44

(Plot 4.6.4 B: Channel 810: 1909.80MHz @ PCS1900)



Ref 37 dBm \* Att 20 dB \* RBW 5 kHz \* VBW 50 kHz \* SWT 300 ms Marker 1 [T1 ] -13.93 dBm 1.849996795 GHz

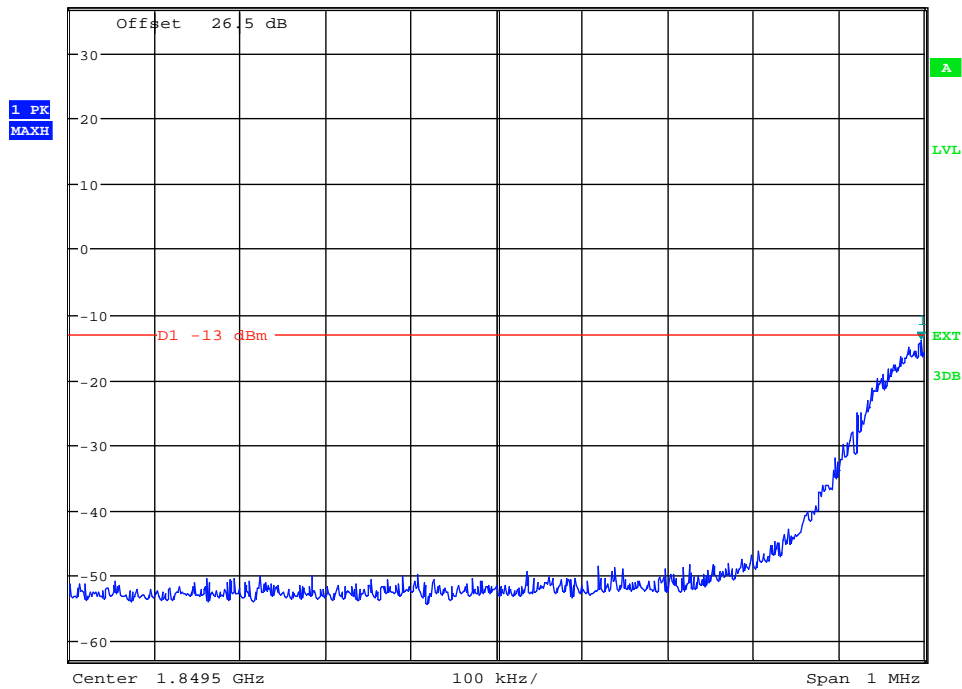


Date: 10.DEC.2013 14:33:49

(Plot 4.6.5 A: Channel 512: 1850.20MHz @ GPRS1900)



\*RBW 5 kHz      Marker 1 [T1 ]  
\*VBW 50 kHz      -14.35 dBm  
\*SWT 300 ms      1.910006410 GHz

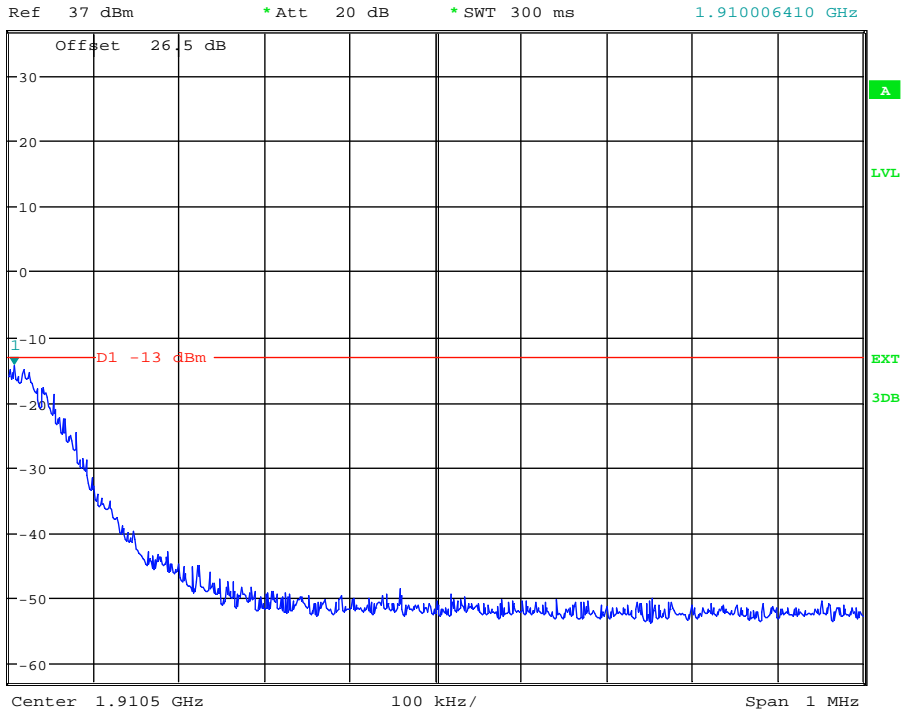


Date: 10.DEC.2013 14:32:25

(Plot 4.6.4 B: Channel 810: 1909.80MHz @ GPRS1900)



\*RBW 5 kHz      Marker 1 [T1 ]  
\*VBW 50 kHz      -13.56 dBm  
\*SWT 300 ms      1.849998397 GHz

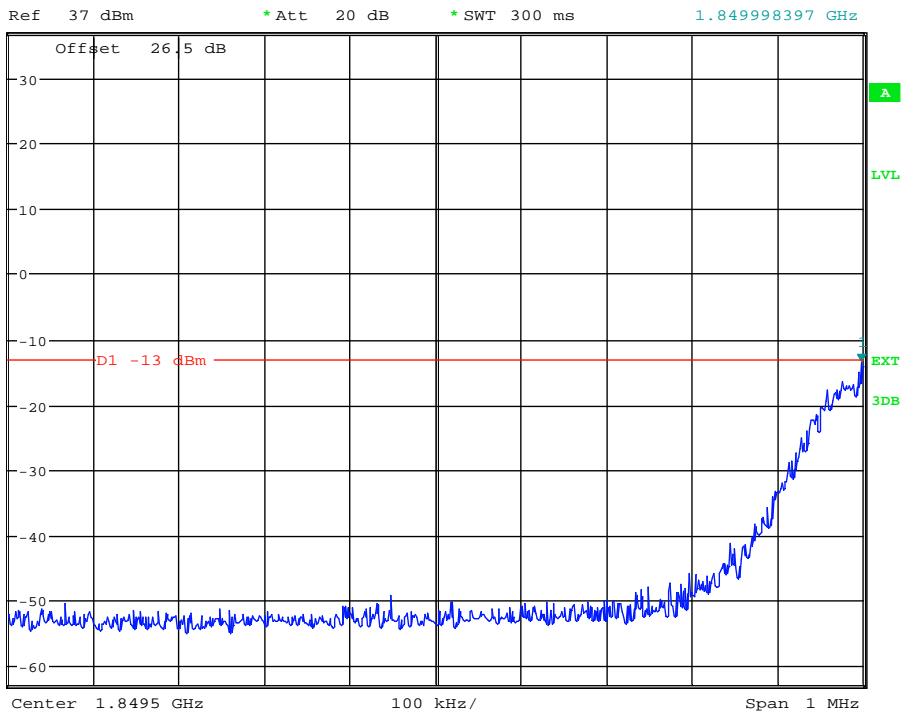


Date: 10.DEC.2013 14:35:15

(Plot 4.6.6 A: Channel 512: 1850.20MHz @ EGPRS1900)



\*RBW 5 kHz      Marker 1 [T1 ]  
\*VBW 50 kHz      -13.14 dBm  
\*SWT 300 ms      1.910004808 GHz

Ref 37 dBm      \*Att 20 dB

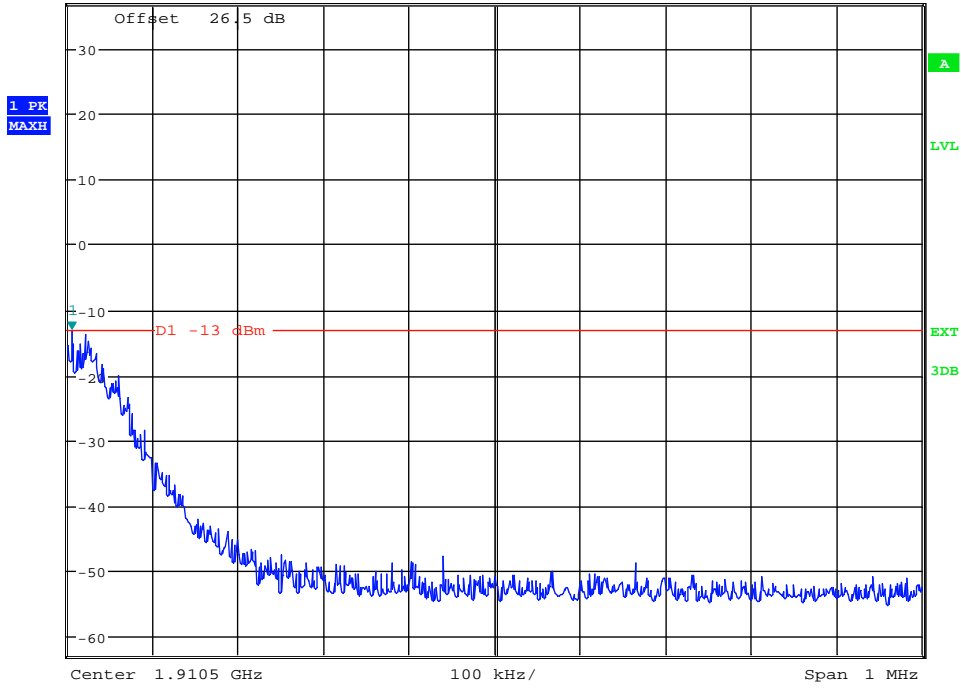

Date: 10.DEC.2013 14:35:38

(Plot 4.6.6 B: Channel 810: 1909.80MHz @ EGPRS1900)


## 4.7. Spurious Emission on Antenna Port

### TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;  
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### TEST CONFIGURATION

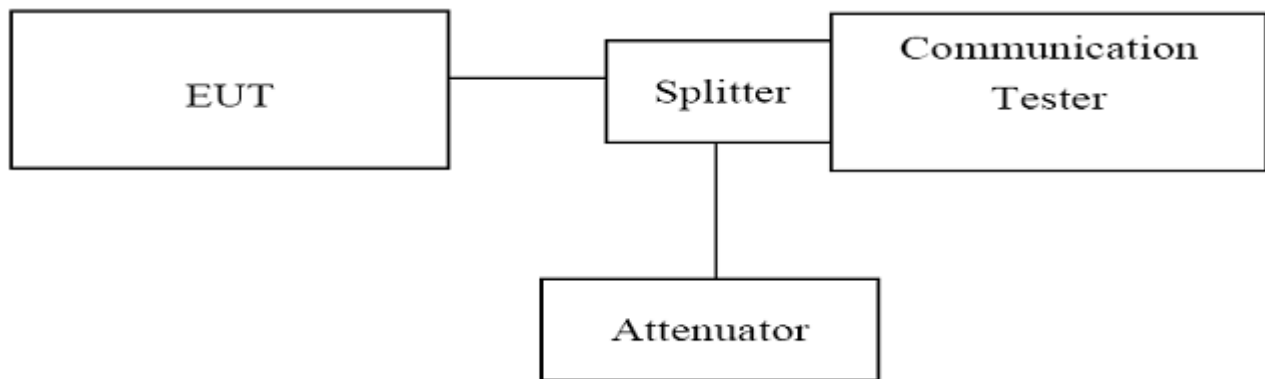

### TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1909.80 MHz for PCS1900 band; 824.20 MHz, 836.60 MHz and 848.80 MHz for GSM850 band. (low, middle and high of operational frequency range).

### TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### TEST RESULTS

GSM850						
Channel Number: 128		Test Frequency: 824.20 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.1 A1	PASS
1000	2500	2329.33	-32.23	-13.00	Plot 4.7.1 A2	PASS
2500	7500	3108.97	-31.29	-13.00	Plot 4.7.1 A3	PASS
7500	10000	7640.22	-32.80	-13.00	Plot 4.7.1 A4	PASS

GSM850						
Channel Number: 190		Test Frequency: 836.60 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.2 A1	PASS
1000	2500	12459.13	-32.37	-13.00	Plot 4.7.2 A2	PASS
2500	7500	2660.26	-31.76	-13.00	Plot 4.7.2 A3	PASS
7500	10000	8373.40	-33.02	-13.00	Plot 4.7.2 A4	PASS

GSM850						
Channel Number: 251		Test Frequency: 848.80 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.3 A1	PASS
1000	2500	2348.56	-32.25	-13.00	Plot 4.7.3 A2	PASS
2500	7500	3525.64	-31.88	-13.00	Plot 4.7.3 A3	PASS
7500	10000	7463.14	-32.95	-13.00	Plot 4.7.3 A4	PASS

GSM850						
Test Mode: Idle						
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	589.62	-34.32	-13.00	Plot 4.7.4 A1	PASS
1000	2500	2451.92	-32.41	-13.00	Plot 4.7.4 A2	PASS
2500	7500	3533.65	-32.24	-13.00	Plot 4.7.4 A3	PASS
7500	10000	9471.15	-32.82	-13.00	Plot 4.7.4 A4	PASS


Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. \*\*\* means that the emission level is too low to be measured or at least 20 dB down than the limit.





\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      32.39 dBm  
SWT 2.5 ms      825.897435897 MHz

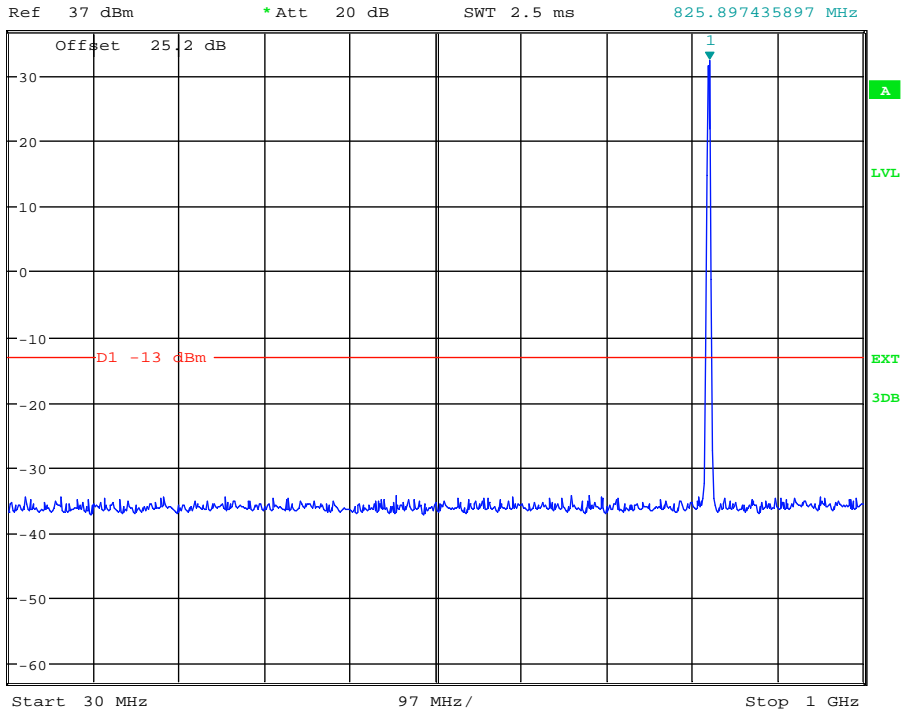


Date: 10.DEC.2013 13:36:02

(Plot 4.7.1 A1: Channel 128: 824.20MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.23 dBm  
SWT 5 ms      2.329326923 GHz

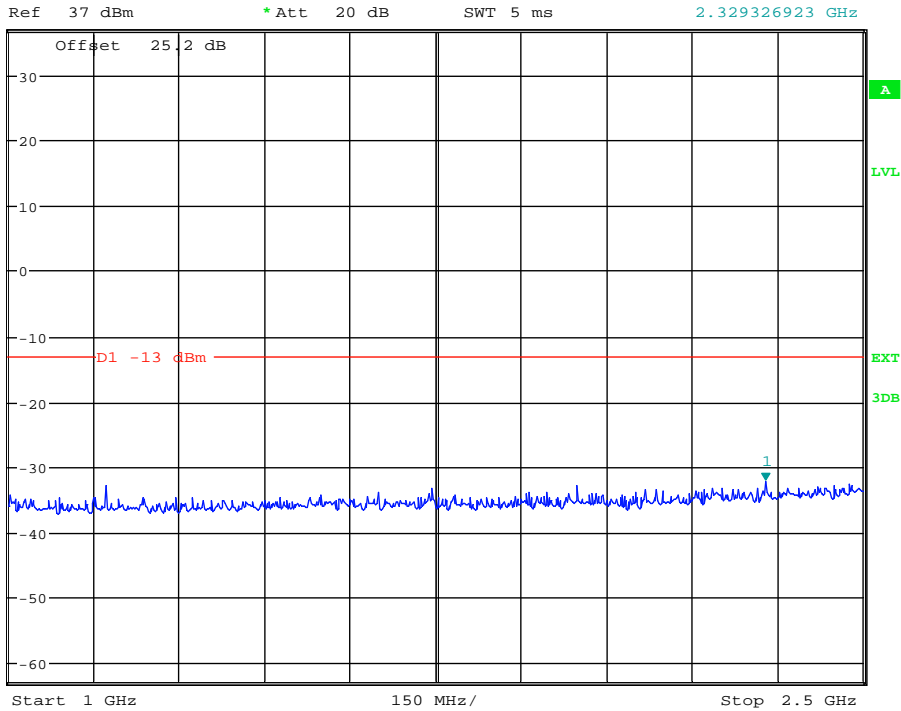


Date: 10.DEC.2013 13:36:19

(Plot 4.7.1 A2: Channel 128: 824.20MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.29 dBm  
SWT 30 ms      3.108974359 GHz

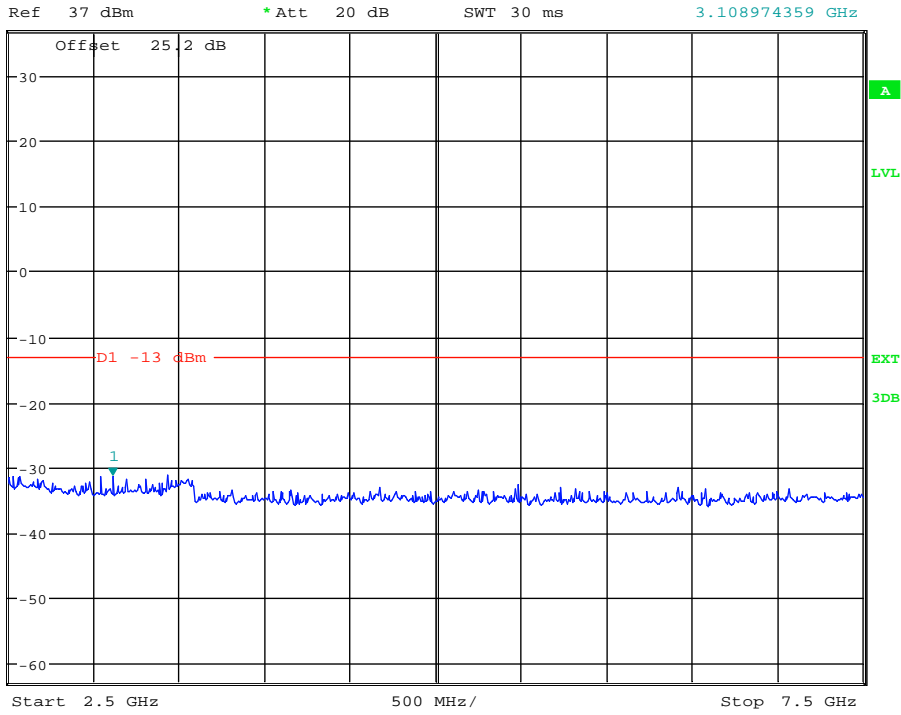


Date: 10.DEC.2013 13:36:50

(Plot 4.7.1 A3: Channel 128: 824.20MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.80 dBm  
SWT 20 ms      7.640224359 GHz

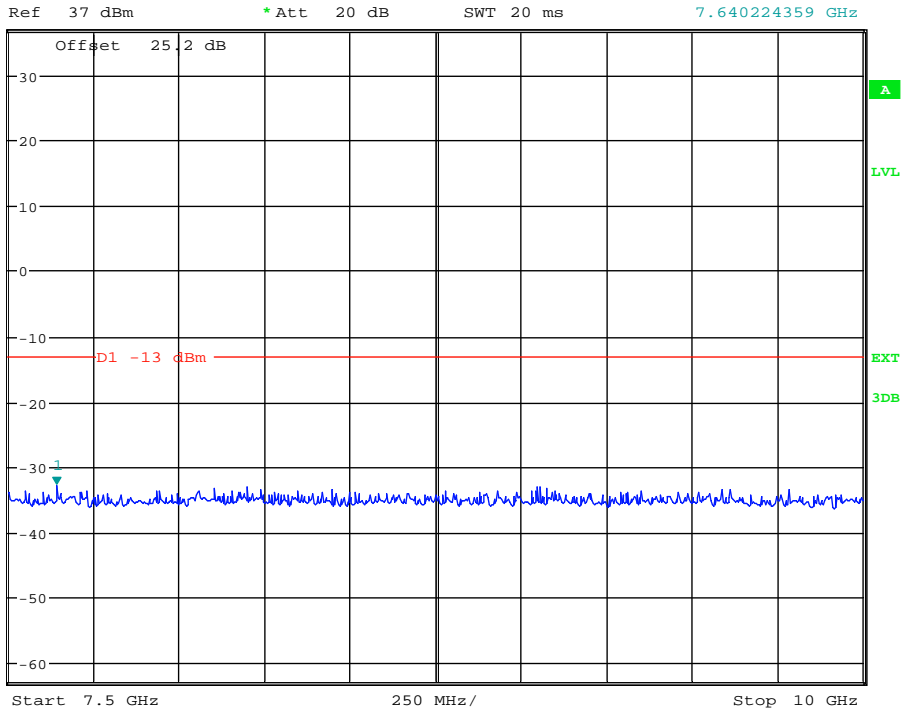


Date: 10.DEC.2013 13:37:07

(Plot 4.7.1 A4: Channel 128: 824.20MHz @ Traffic @ GSM850)



Ref 37 dBm \* Att 20 dB \* RBW 1 MHz Marker 1 [T1 ]  
\* VBW 3 MHz 32.29 dBm  
SWT 2.5 ms 836.778846154 MHz

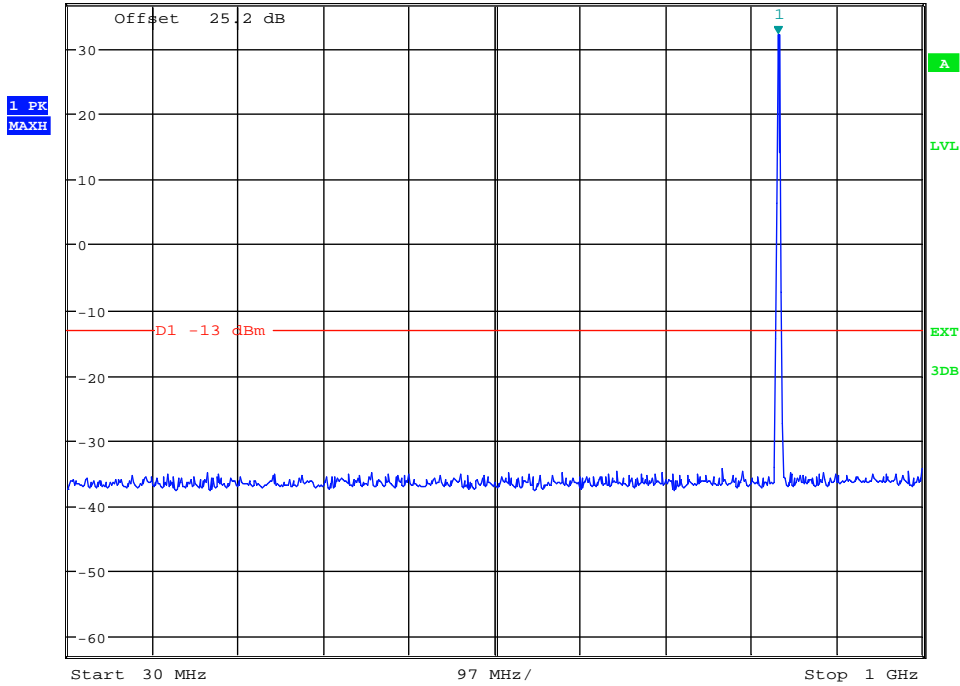


Date: 10.DEC.2013 13:37:28

(Plot 4.7.2 A1: Channel 190: 836.60MHz @ Traffic @ GSM850)



Ref 37 dBm \* Att 20 dB \* RBW 1 MHz Marker 1 [T1 ]  
\* VBW 3 MHz -32.37 dBm  
SWT 5 ms 2.459134615 GHz

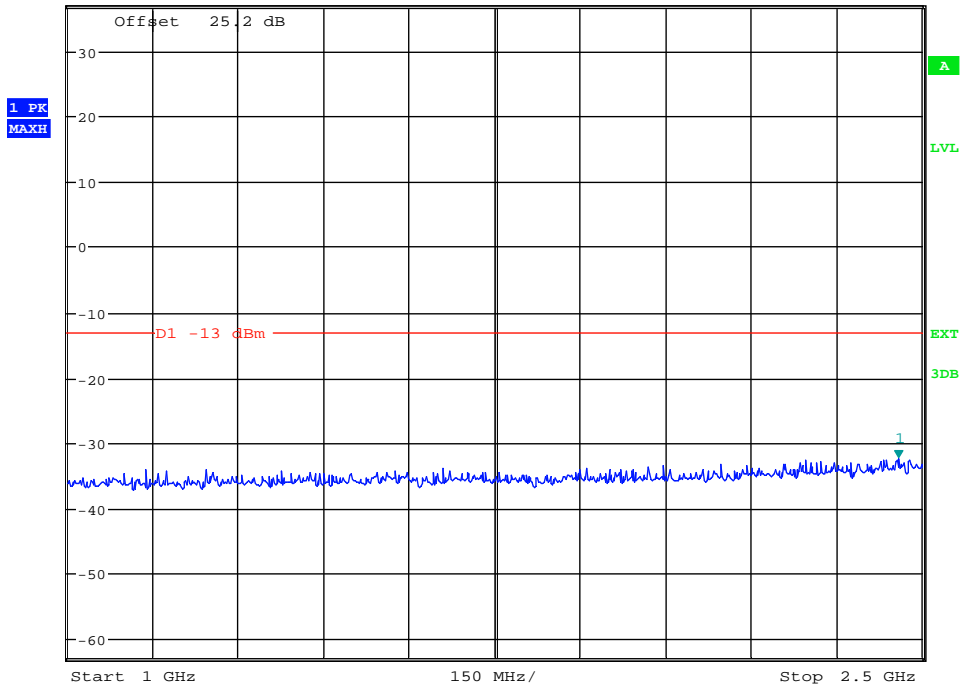


Date: 10.DEC.2013 13:37:44

(Plot 4.7.2 A2: Channel 190: 836.60MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.76 dBm  
SWT 30 ms      2.660256410 GHz

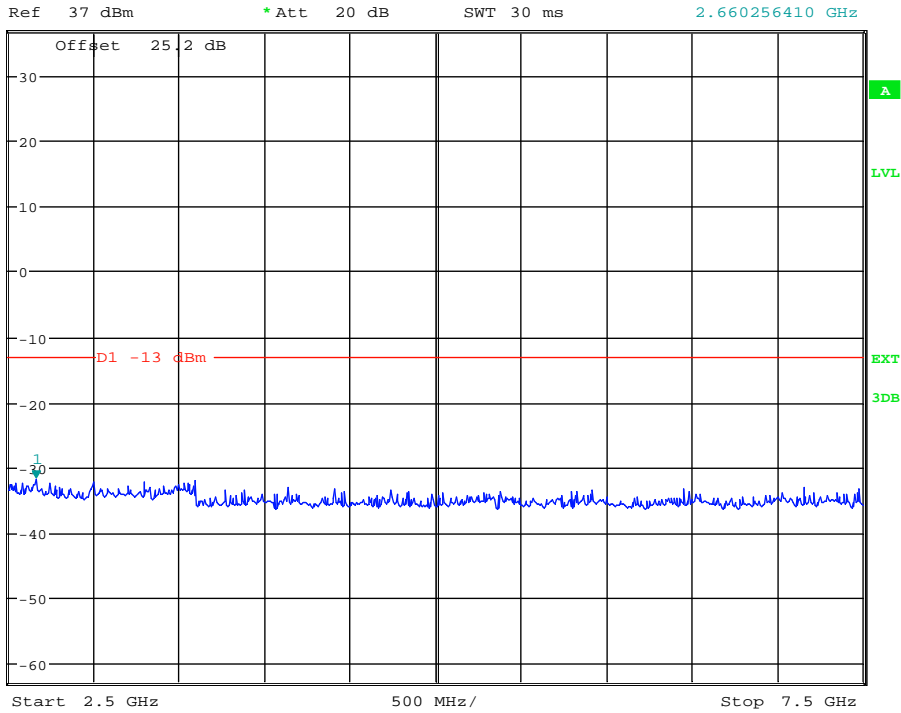


Date: 10.DEC.2013 13:37:57

(Plot 4.7.2 A3: Channel 190: 836.60MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -33.02 dBm  
SWT 20 ms      8.373397436 GHz

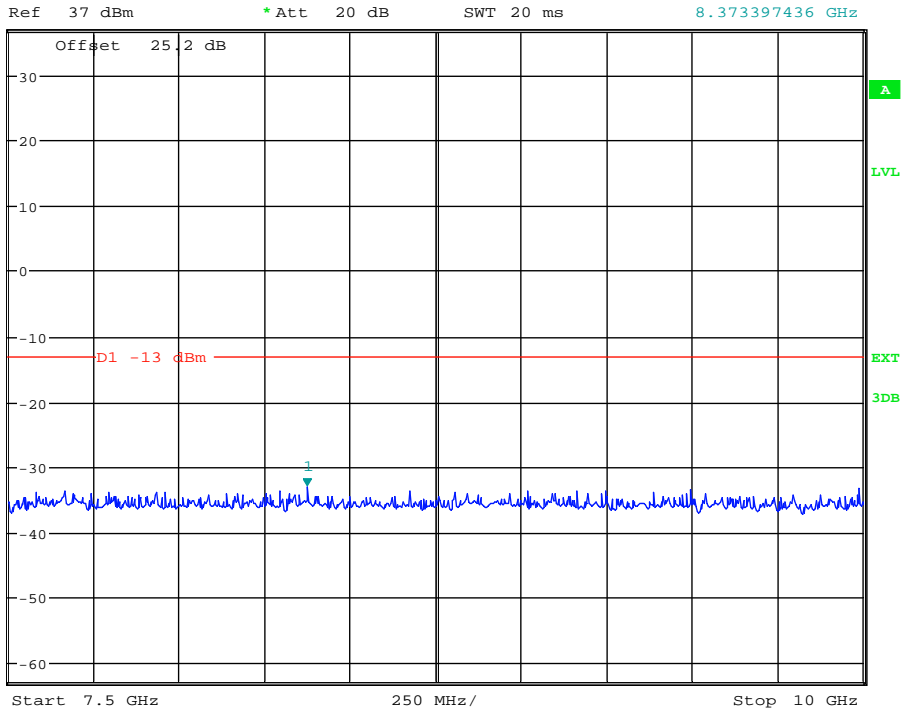


Date: 10.DEC.2013 13:38:08

(Plot 4.7.2 A4: Channel 190: 836.60MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      32.21 dBm  
SWT 2.5 ms      850.769230769 MHz

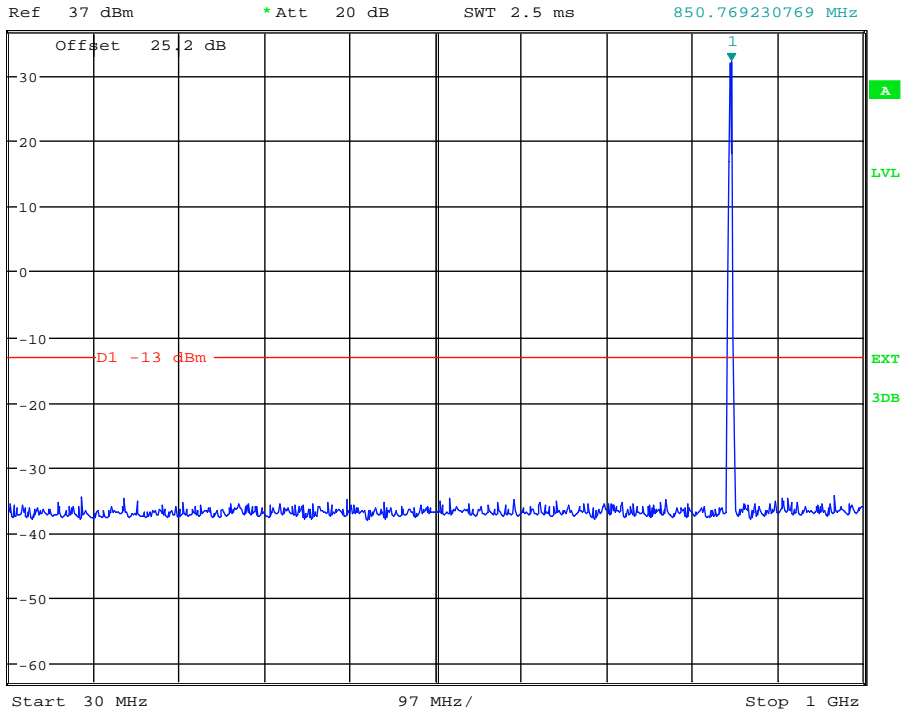


Date: 10.DEC.2013 13:38:45

(Plot 4.7.3 A1: Channel 251: 848.80MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.25 dBm  
SWT 5 ms      2.348557692 GHz

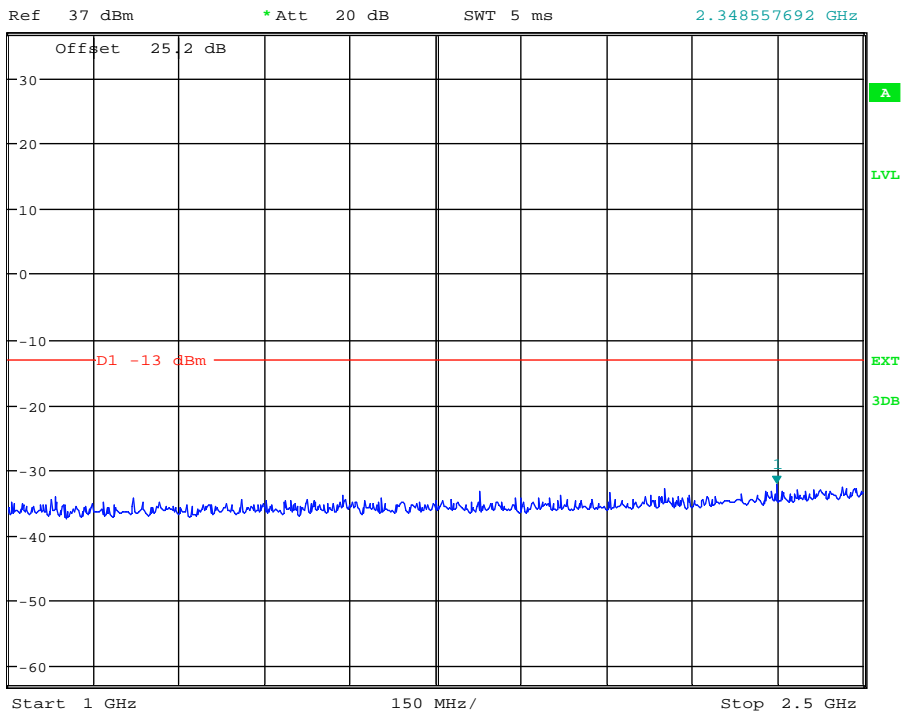


Date: 10.DEC.2013 13:38:59

(Plot 4.7.3 A2: Channel 251: 848.80MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.88 dBm  
SWT 30 ms      3.525641026 GHz

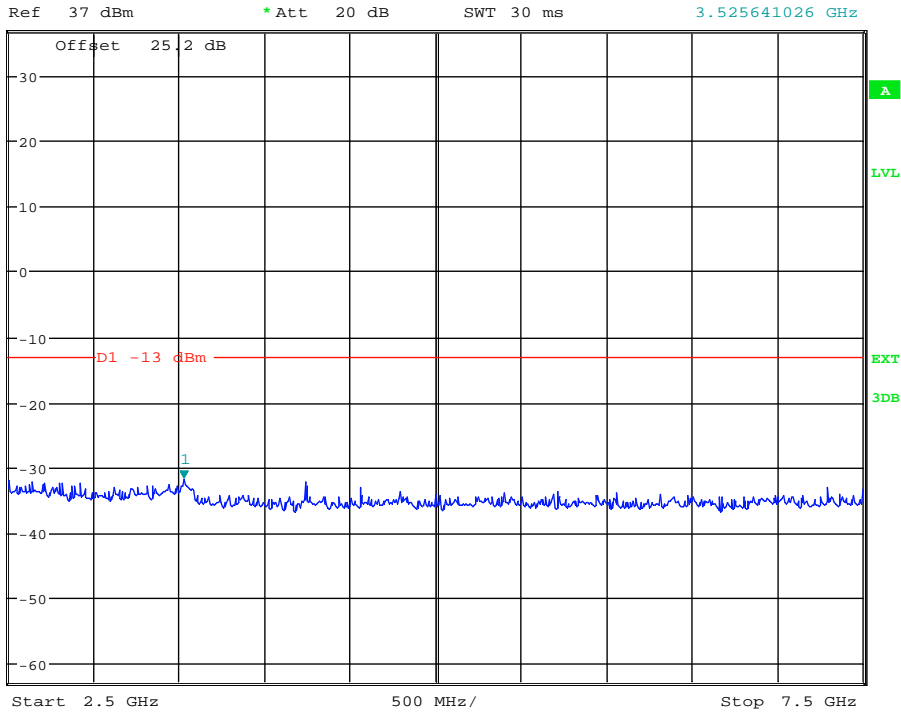


Date: 10.DEC.2013 13:39:10

(Plot 4.7.3 A3: Channel 251: 848.80MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.95 dBm  
SWT 20 ms      9.463141026 GHz

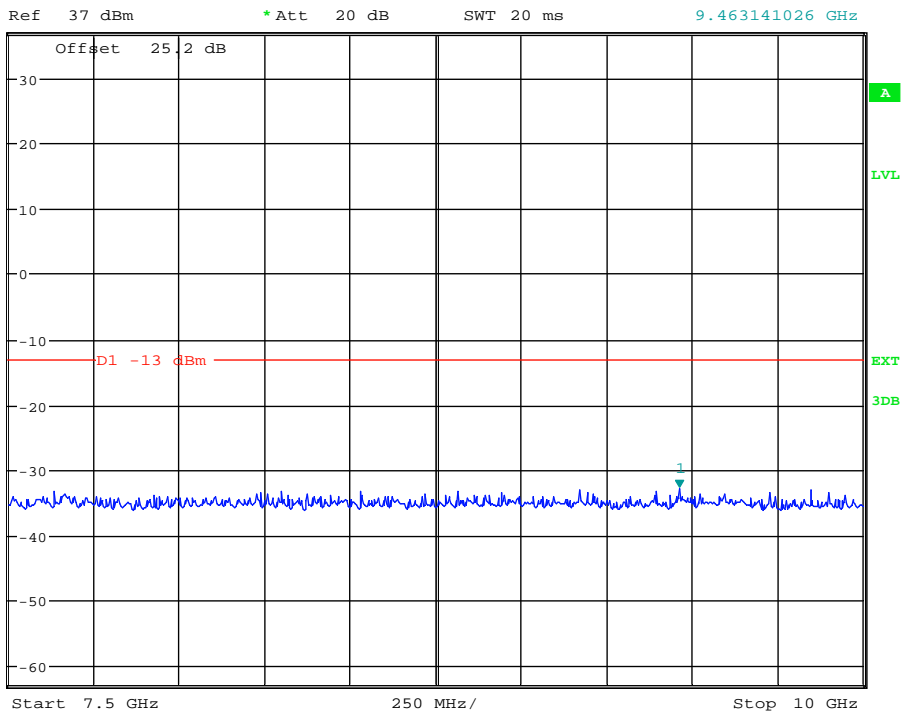


Date: 10.DEC.2013 13:39:26

(Plot 4.7.3 A4: Channel 251: 848.80MHz @ Traffic @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -34.32 dBm  
SWT 2.5 ms      589.615384615 MHz

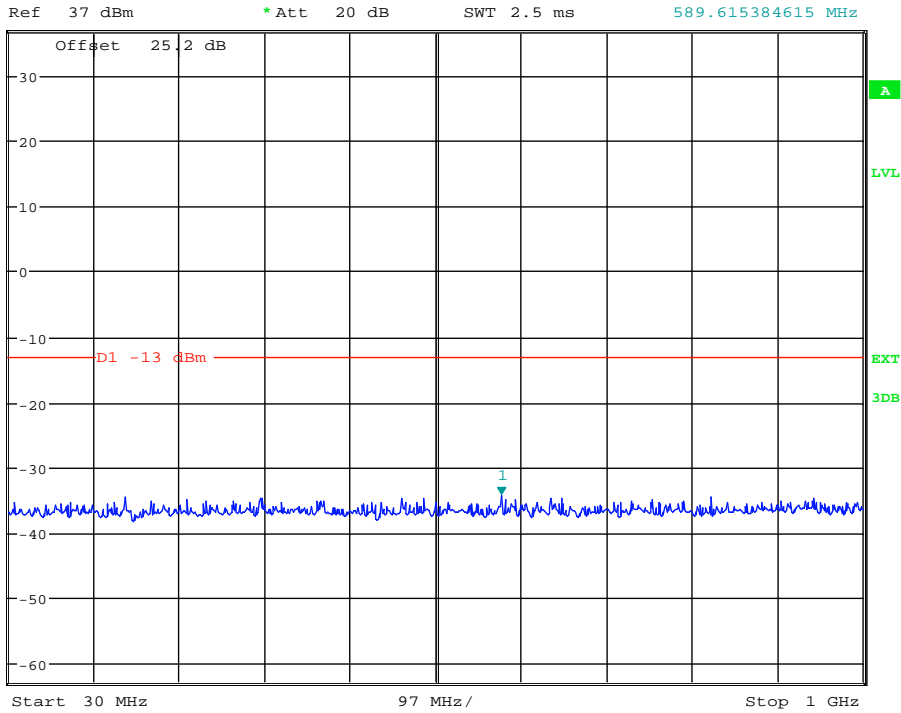


Date: 10.DEC.2013 13:39:48

(Plot 4.7.4 A1: Idle @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.41 dBm  
SWT 5 ms      2.451923077 GHz

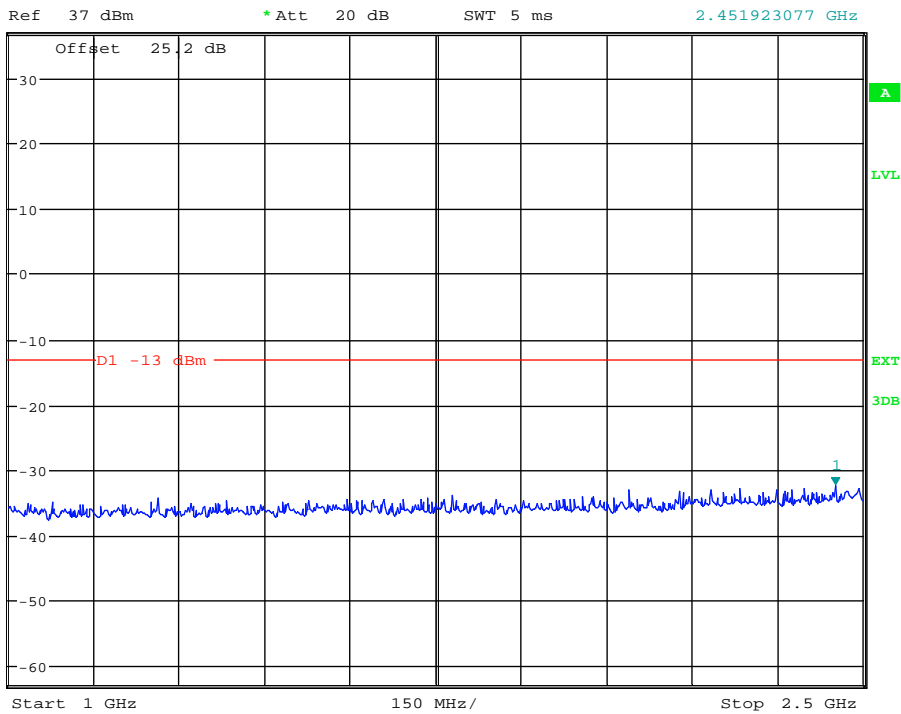


Date: 10.DEC.2013 13:40:00

(Plot 4.7.4 A2: Idle @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.24 dBm  
SWT 30 ms      3.533653846 GHz

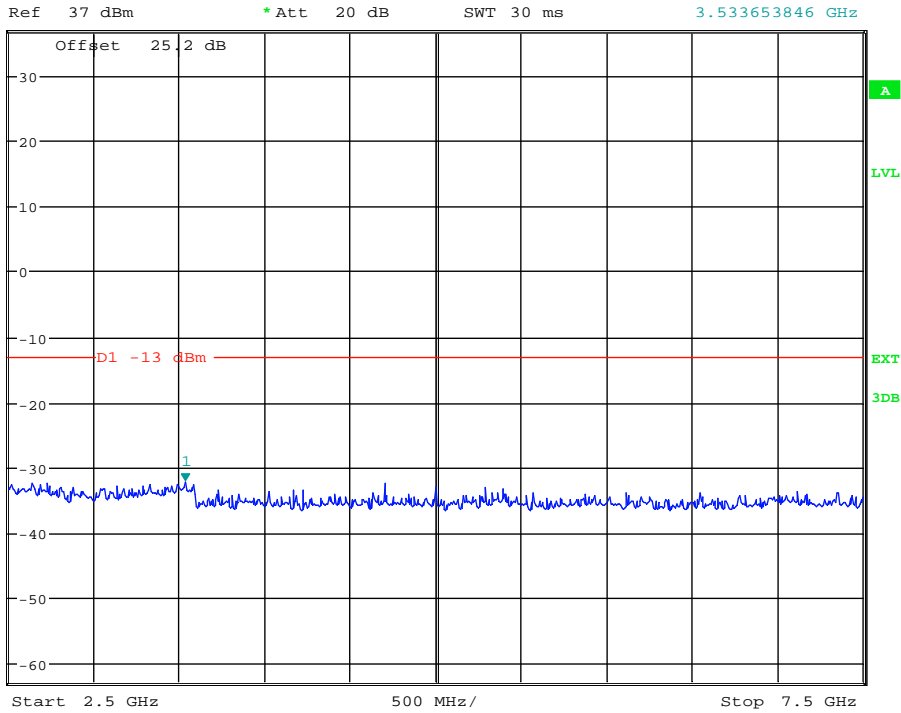


Date: 10.DEC.2013 13:40:11

(Plot 4.7.4 A3: Idle @ GSM850)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.82 dBm  
SWT 20 ms      9.471153846 GHz

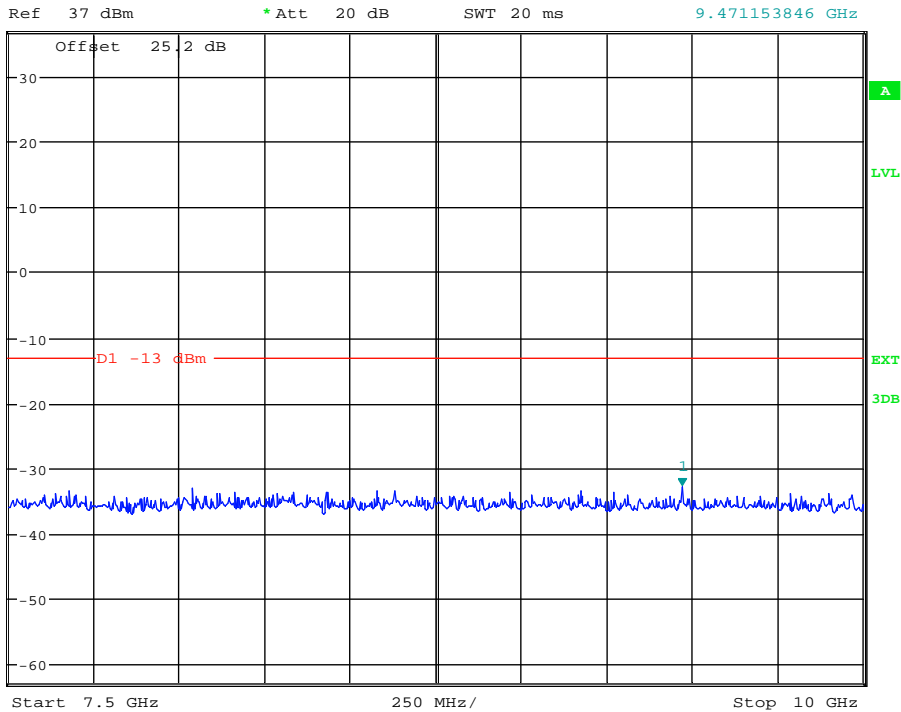

Date: 10.DEC.2013 13:40:20

(Plot 4.7.4 A4: Idle @ GSM850)



PCS1900						
Channel Number: 512		Test Frequency: 1850.20 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	759.05	-32.76	-13.00	Plot 4.7.5 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.5 A2	PASS
2500	7500	3573.72	-30.60	-13.00	Plot 4.7.5 A3	PASS
7500	10000	7540.06	-31.61	-13.00	Plot 4.7.5 A4	PASS
10000	15000	10128.20	-31.76	-13.00	Plot 4.7.5 A5	PASS
15000	20000	17187.50	-31.07	-13.00	Plot 4.7.5 A6	PASS

PCS1900						
Channel Number: 661		Test Frequency: 1880.00 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	920.72	-33.26	-13.00	Plot 4.7.6 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.6 A2	PASS
2500	7500	3573.72	-30.37	-13.00	Plot 4.7.6 A3	PASS
7500	10000	8185.10	-31.43	-13.00	Plot 4.7.6 A4	PASS
10000	15000	13541.67	-31.43	-13.00	Plot 4.7.6 A5	PASS
15000	20000	17123.40	-30.69	-13.00	Plot 4.7.6 A6	PASS

PCS1900						
Channel Number: 810		Test Frequency: 1909.80 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	112.39	-32.61	-13.00	Plot 4.7.7 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.7 A2	PASS
2500	7500	3589.74	-30.32	-13.00	Plot 4.7.7 A3	PASS
7500	10000	8373.88	-31.41	-13.00	Plot 4.7.7 A4	PASS
10000	15000	11065.71	-30.05	-13.00	Plot 4.7.7 A5	PASS
15000	20000	17491.99	-30.98	-13.00	Plot 4.7.7 A6	PASS


PCS1900						
Test Mode: Idle						
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	288.04	-33.36	-13.00	Plot 4.7.8 A1	PASS
1000	2500	2454.33	-30.97	-13.00	Plot 4.7.8 A2	PASS
2500	7500	3565.71	-30.80	-13.00	Plot 4.7.8 A3	PASS
7500	10000	8409.46	-31.46	-13.00	Plot 4.7.8 A4	PASS
10000	15000	10472.76	-31.31	-13.00	Plot 4.7.8 A5	PASS
15000	20000	17235.58	-30.83	-13.00	Plot 4.7.8 A6	PASS

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. \*\*\* means that the emission level is too low to be measured or at least 20 dB down than the limit.



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.76 dBm  
SWT 2.5 ms      759.054487179 MHz

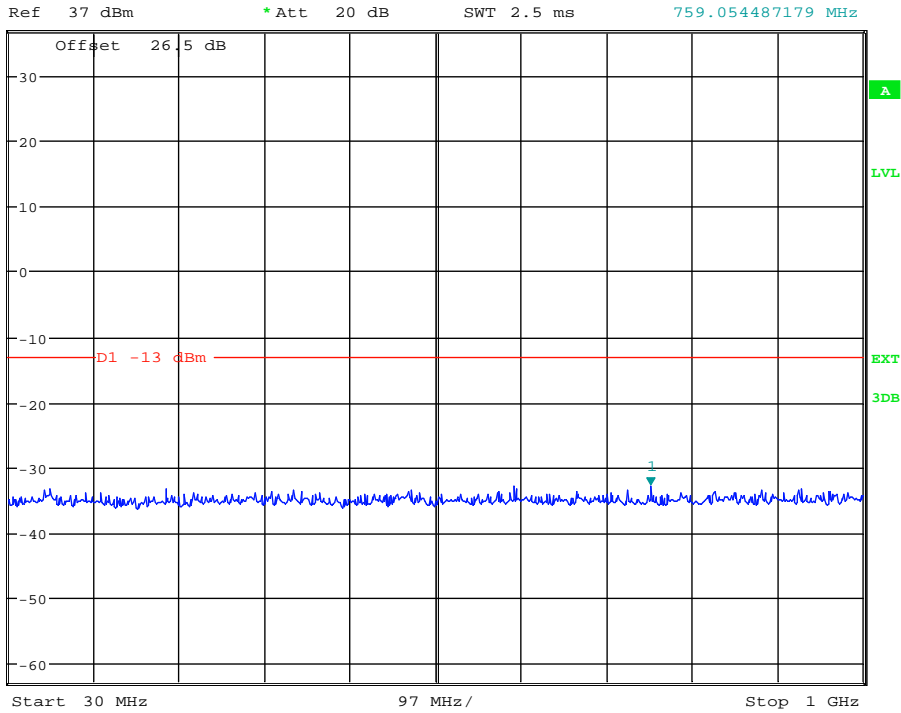


Date: 10.DEC.2013 14:14:01

(Plot 4.7.5 A1: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      29.86 dBm  
SWT 5 ms      1.850961538 GHz

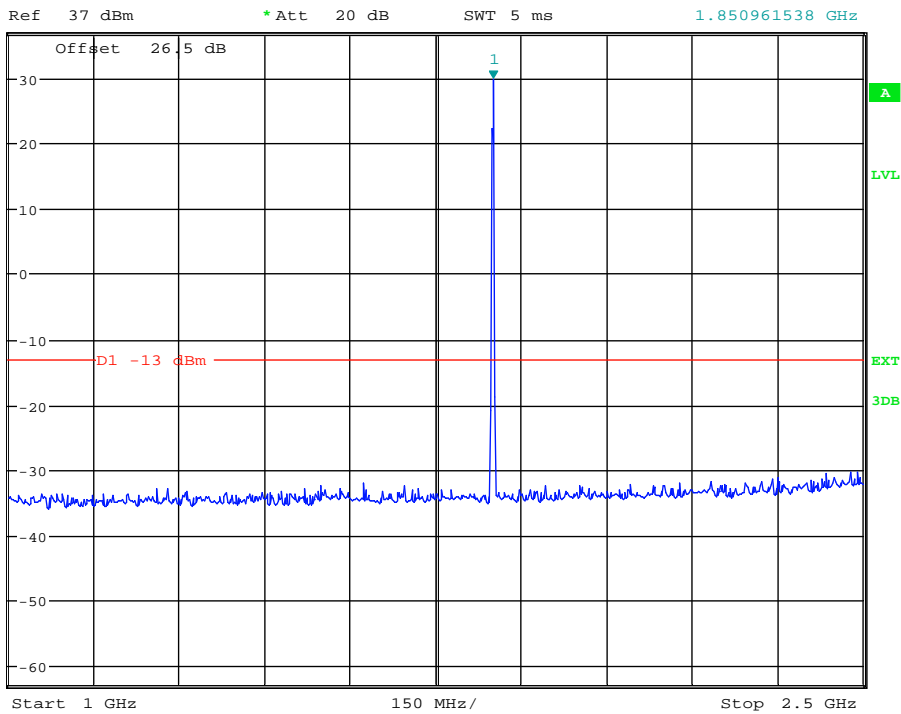


Date: 10.DEC.2013 14:14:22

(Plot 4.7.5 A2: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.60 dBm  
SWT 30 ms      3.573717949 GHz

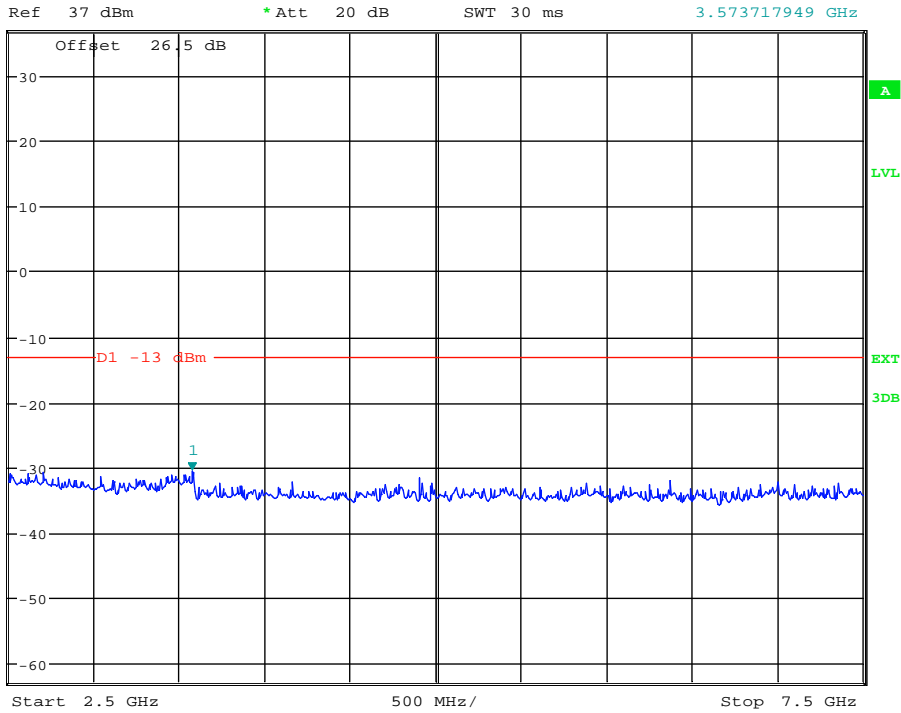


Date: 10.DEC.2013 14:14:40

(Plot 4.7.5 A3: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.61 dBm  
SWT 20 ms      7.540064103 GHz

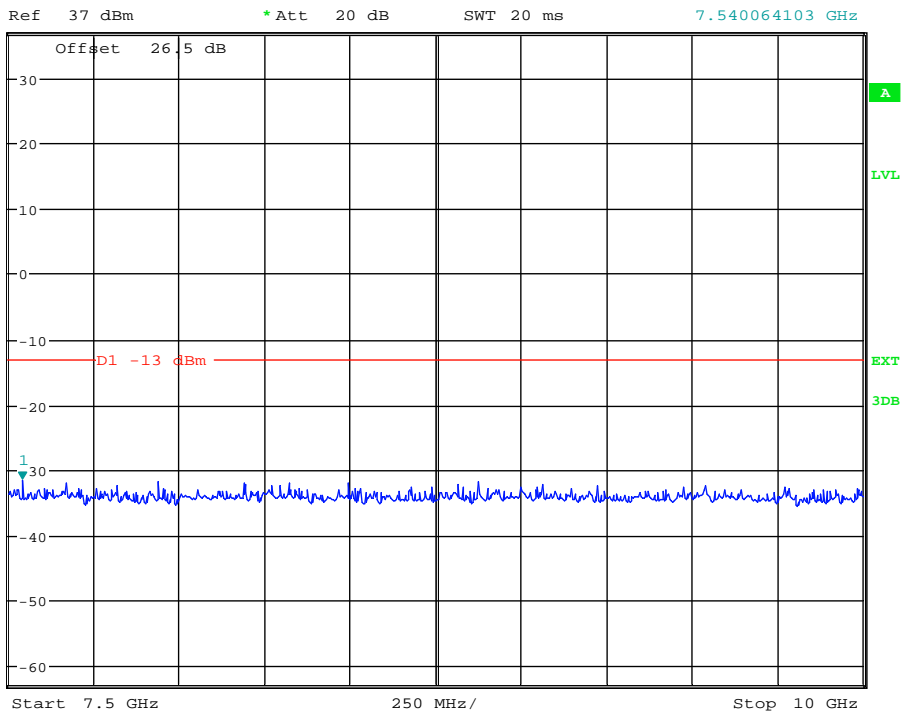


Date: 10.DEC.2013 14:14:53

(Plot 4.7.5 A4: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.76 dBm  
SWT 30 ms      10.128205128 GHz

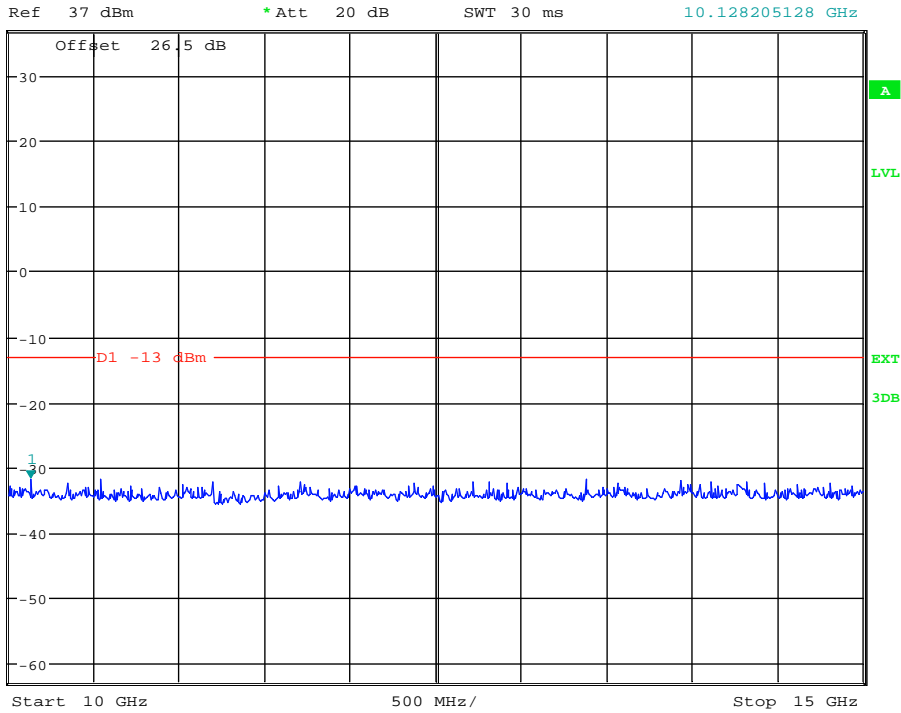


Date: 10.DEC.2013 14:15:07

(Plot 4.7.5 A5: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.07 dBm  
SWT 30 ms      17.187500000 GHz

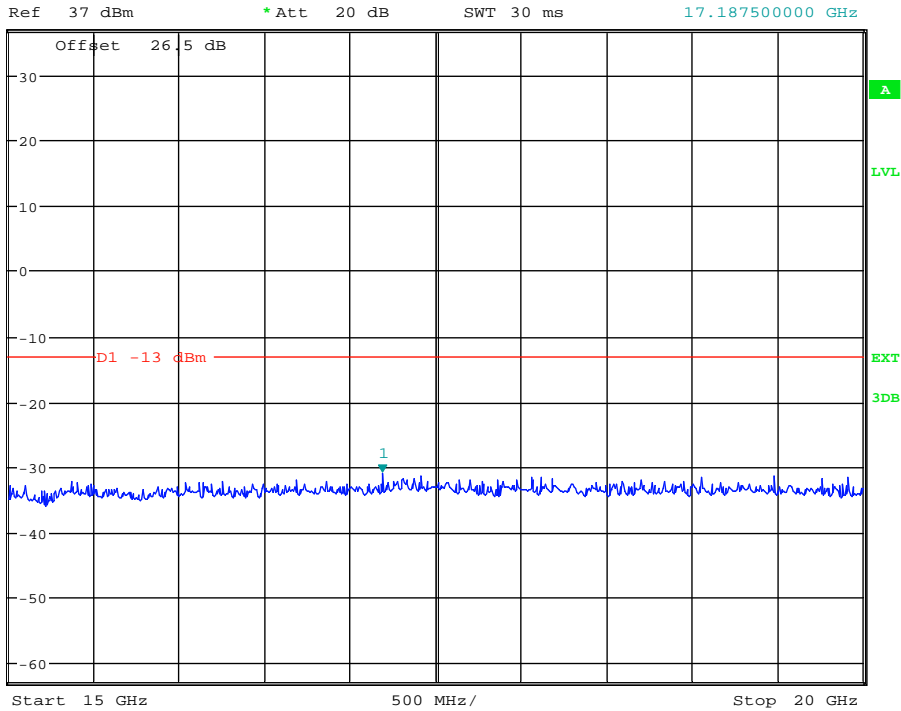


Date: 10.DEC.2013 14:15:18

(Plot 4.7.5 A6: Channel 512: 1850.20MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -33.26 dBm  
SWT 2.5 ms      920.721153846 MHz

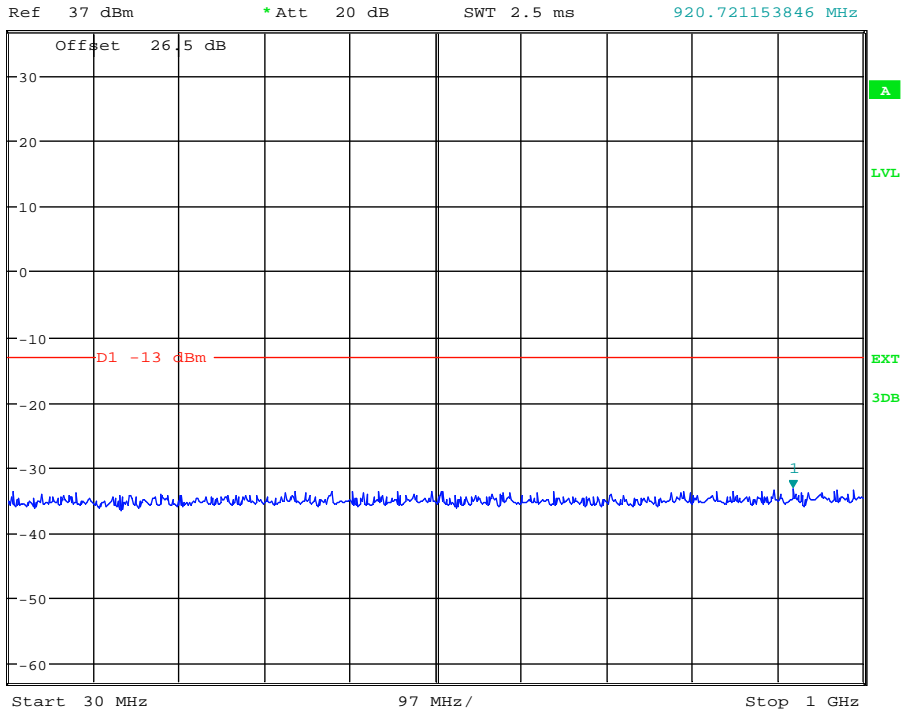


Date: 10.DEC.2013 14:16:26

(Plot 4.7.6 A1: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      30.36 dBm  
SWT 5 ms      1.882211538 GHz

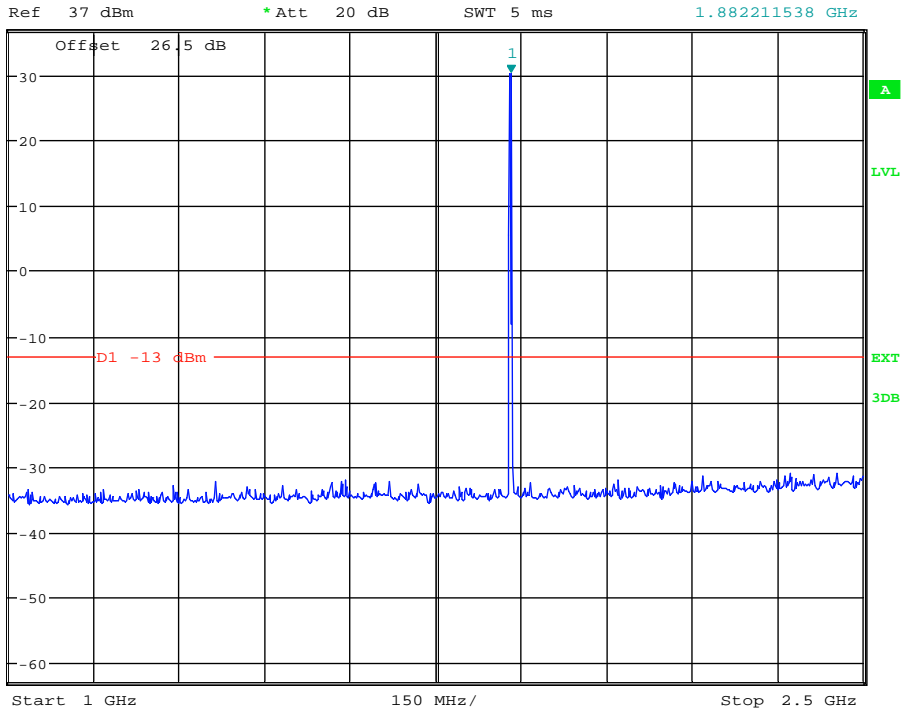


Date: 10.DEC.2013 14:16:55

(Plot 4.7.6 A2: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.37 dBm  
SWT 30 ms      3.573717949 GHz

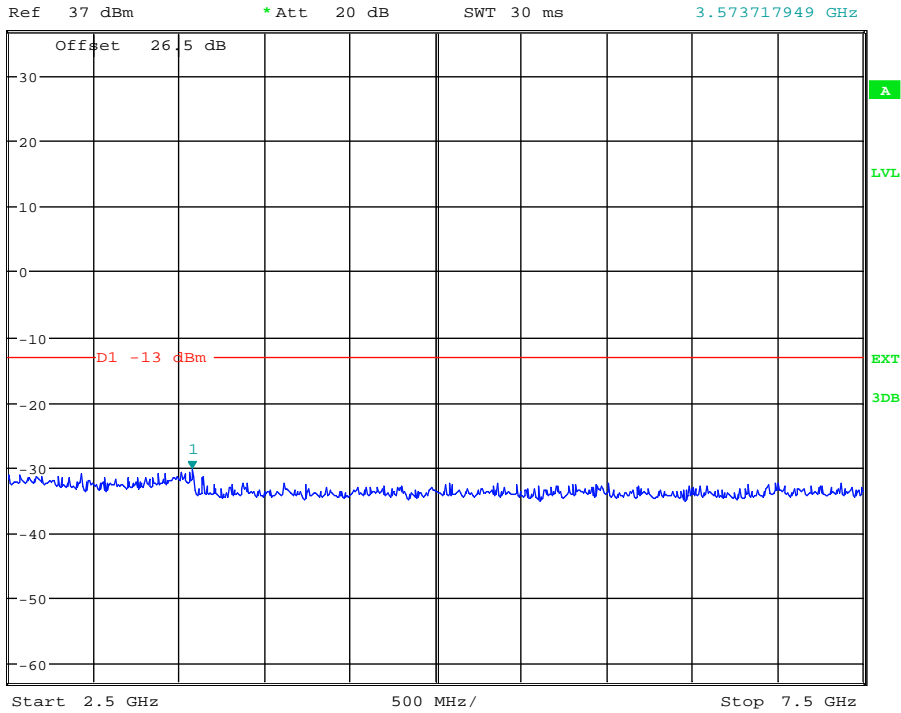


Date: 10.DEC.2013 14:17:17

(Plot 4.7.6 A3: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.43 dBm  
SWT 20 ms      8.185096154 GHz

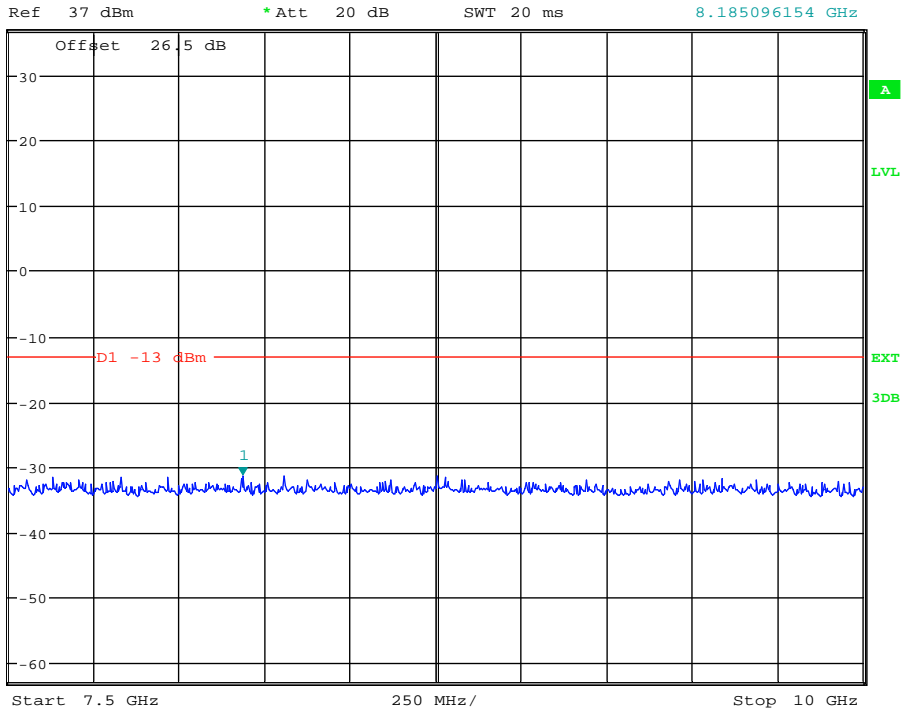


Date: 10.DEC.2013 14:17:49

(Plot 4.7.6 A4: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.43 dBm  
SWT 30 ms      13.541666667 GHz

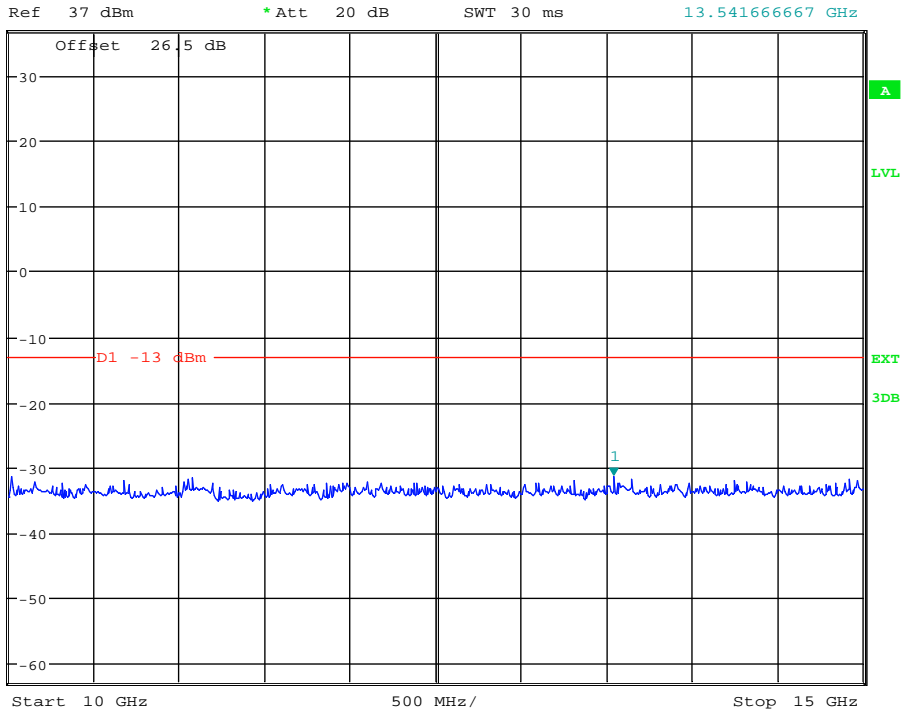


Date: 10.DEC.2013 14:18:10

(Plot 4.7.6 A5: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.69 dBm  
SWT 30 ms      17.123397436 GHz

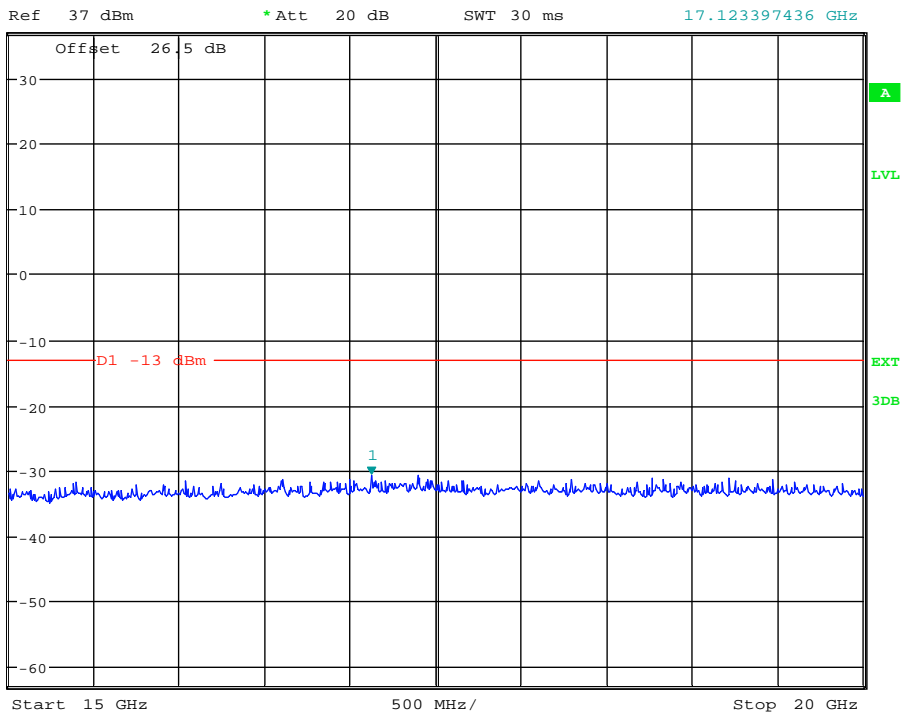


Date: 10.DEC.2013 14:18:27

(Plot 4.7.6 A6: Channel 661: 1880.00MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -32.61 dBm  
SWT 2.5 ms      112.387820513 MHz

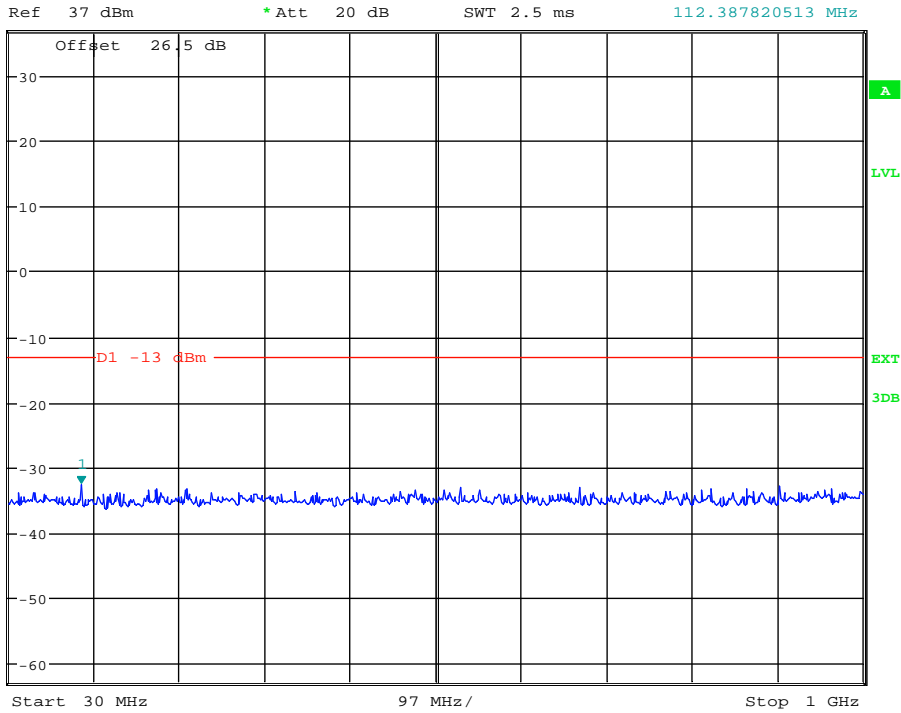


Date: 10.DEC.2013 14:18:52

(Plot 4.7.7 A1: Channel 810: 1909.80MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      30.74 dBm  
SWT 5 ms      1.911057692 GHz

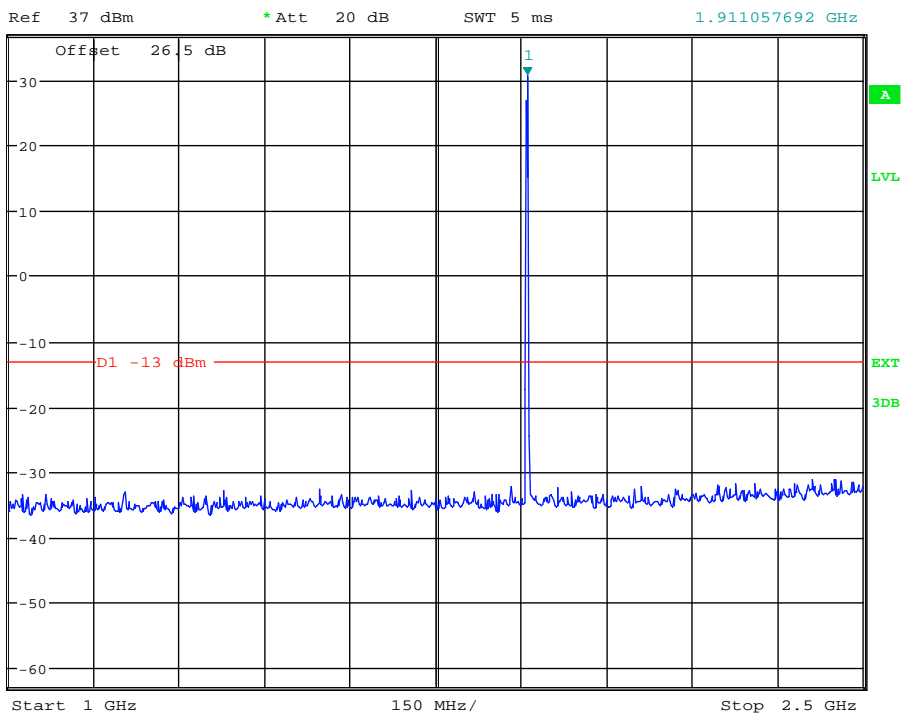


Date: 10.DEC.2013 14:19:01

(Plot 4.7.7 A2: Channel 810: 1909.80MHz @ Traffic @ PCS1900)





\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.32 dBm  
SWT 30 ms      3.589743590 GHz

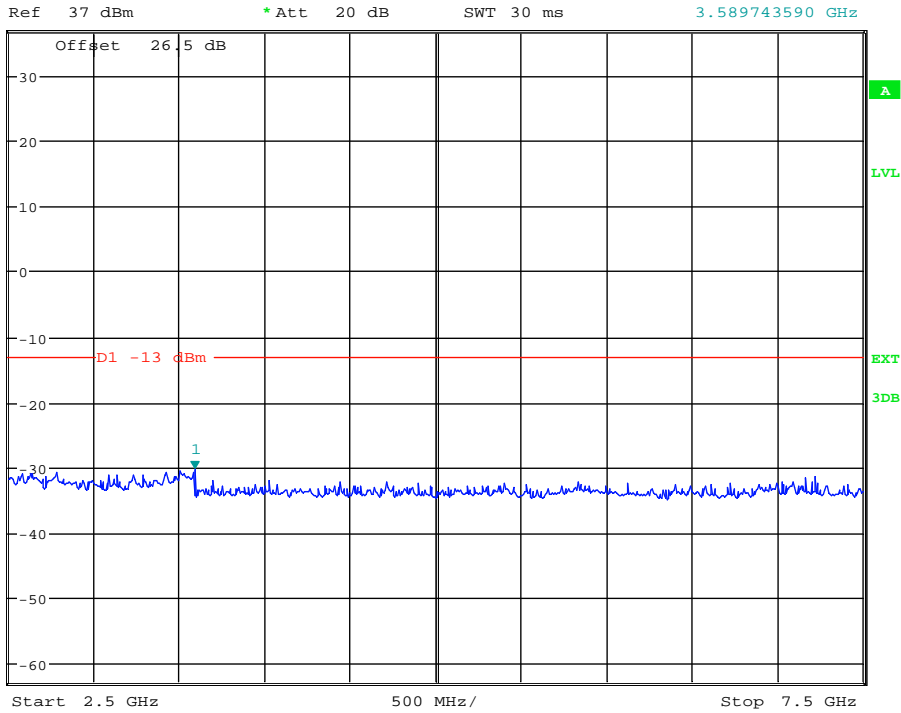


Date: 10.DEC.2013 14:19:25

(Plot 4.7.7 A3: Channel 810: 1909.80MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.41 dBm  
SWT 20 ms      8.673878205 GHz

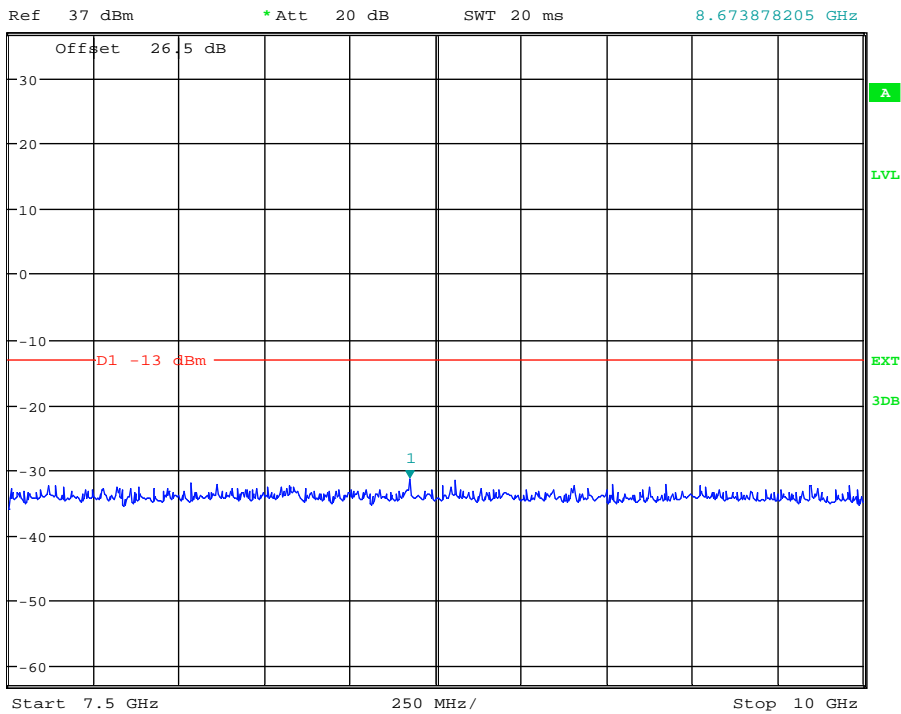


Date: 10.DEC.2013 14:19:36

(Plot 4.7.7 A4: Channel 810: 1909.80MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.05 dBm  
SWT 30 ms      11.065705128 GHz

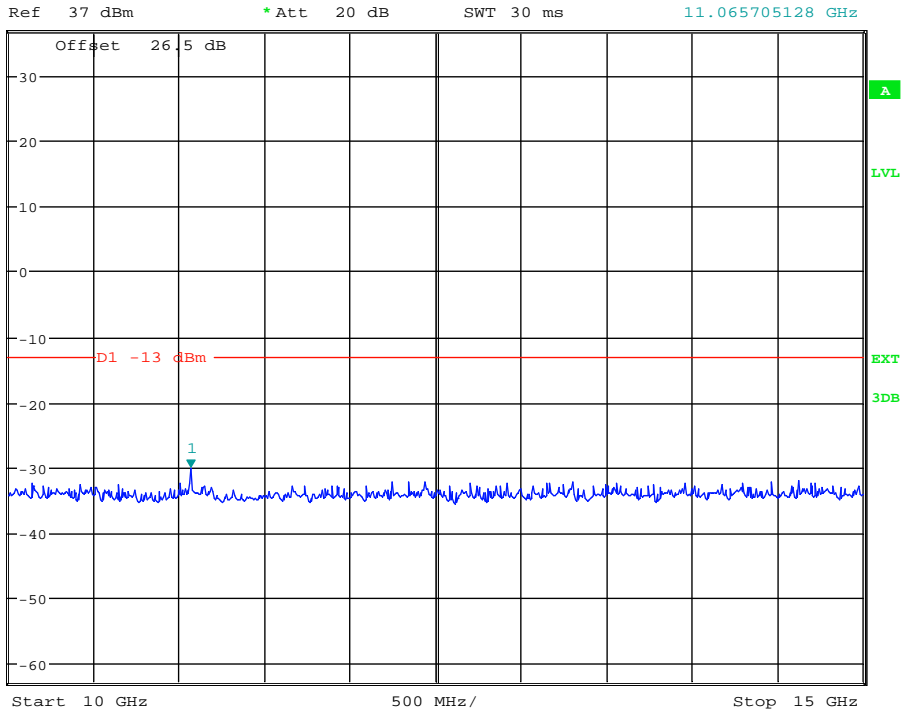


Date: 10.DEC.2013 14:19:49

(Plot 4.7.7 A5: Channel 810: 1909.80MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.98 dBm  
SWT 30 ms      17.491987179 GHz

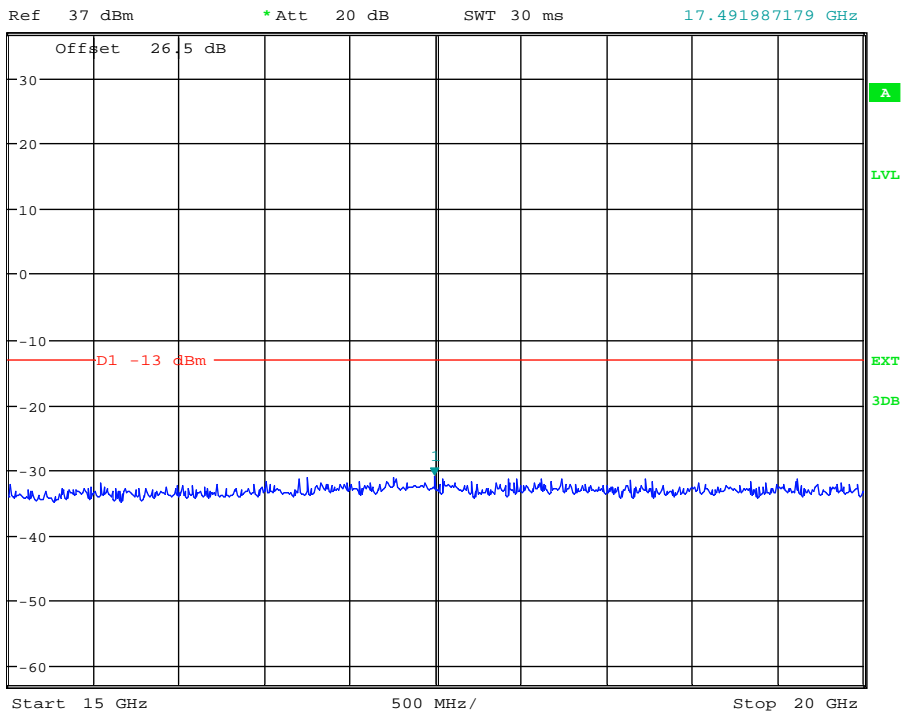


Date: 10.DEC.2013 14:20:03

(Plot 4.7.7 A6: Channel 810: 1909.80MHz @ Traffic @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -33.36 dBm  
SWT 2.5 ms      288.044871795 MHz

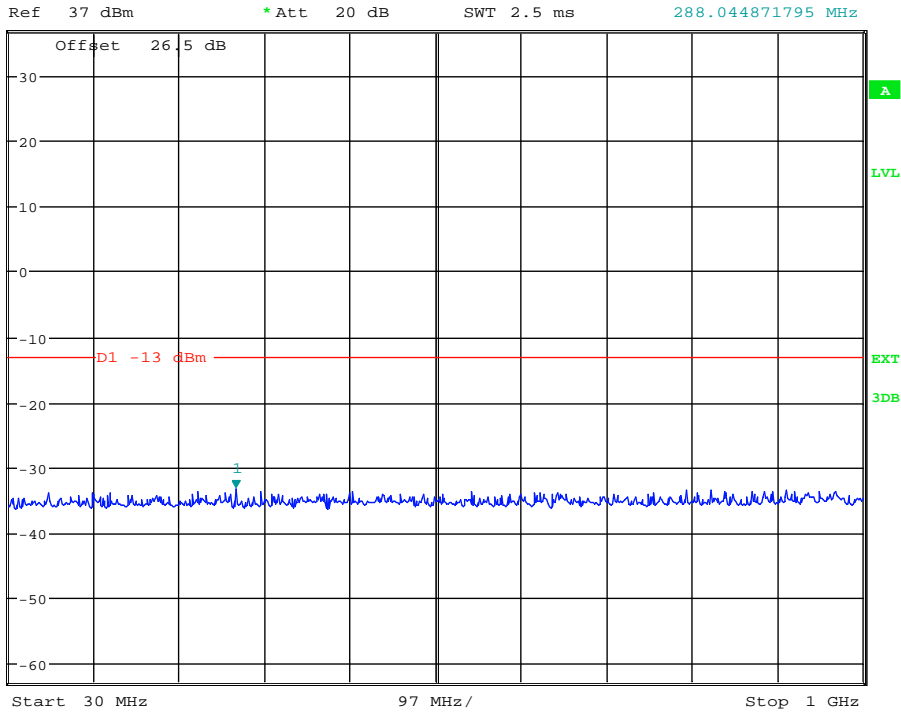


Date: 10.DEC.2013 14:20:27

(Plot 4.7.8 A1: Idle @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.97 dBm  
SWT 5 ms      2.454326923 GHz

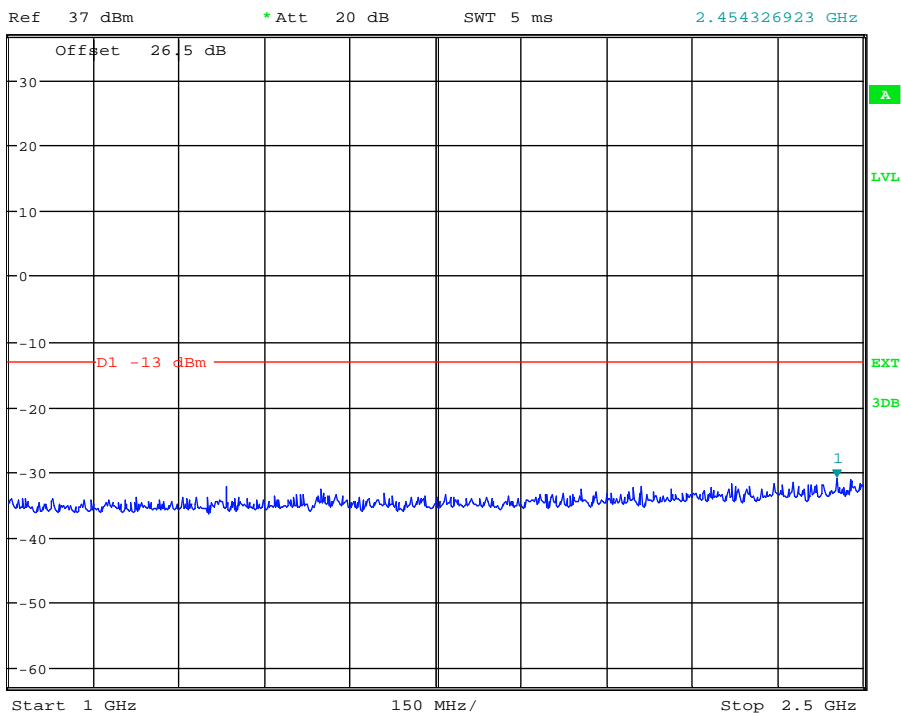


Date: 10.DEC.2013 14:20:37

(Plot 4.7.8 A2: Idle @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.80 dBm  
SWT 30 ms      3.565705128 GHz

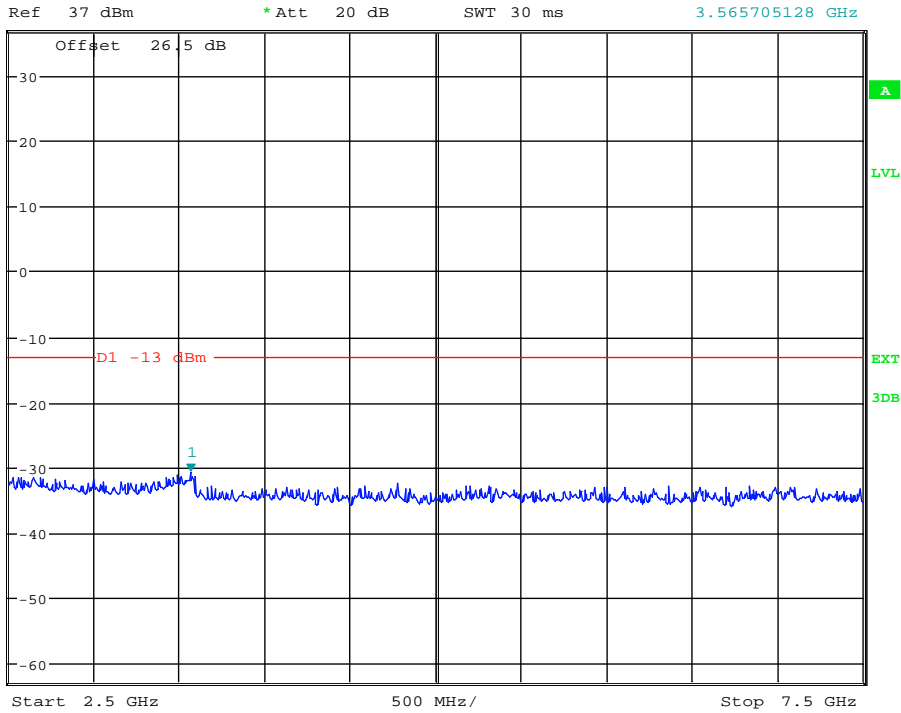


Date: 10.DEC.2013 14:20:48

(Plot 4.7.8 A3: Idle @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.46 dBm  
SWT 20 ms      8.409455128 GHz

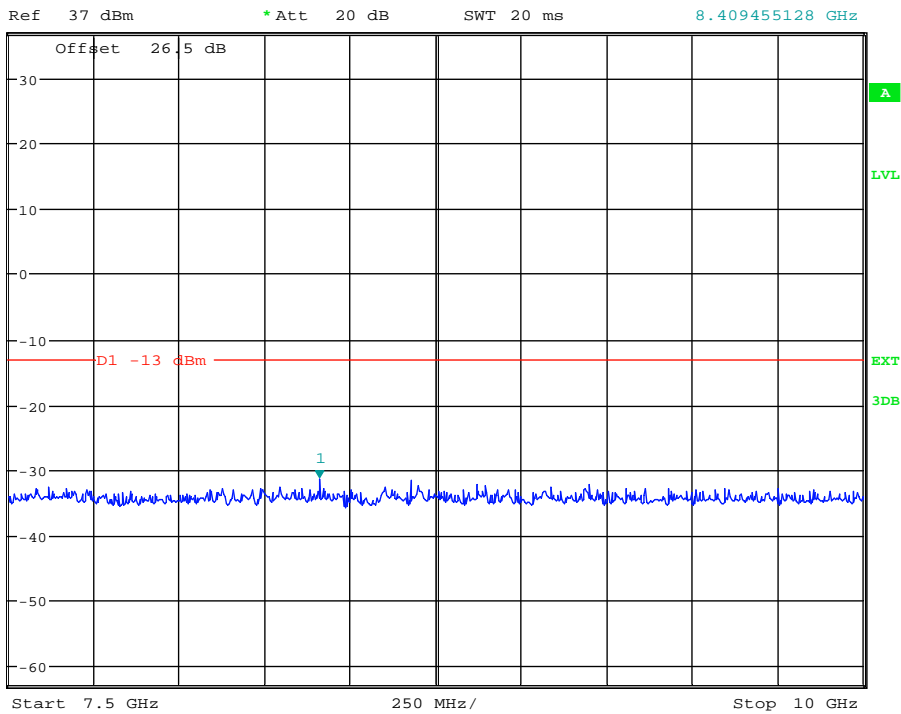


Date: 10.DEC.2013 14:20:58

(Plot 4.7.8 A4: Idle @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -31.31 dBm  
SWT 30 ms      10.472756410 GHz

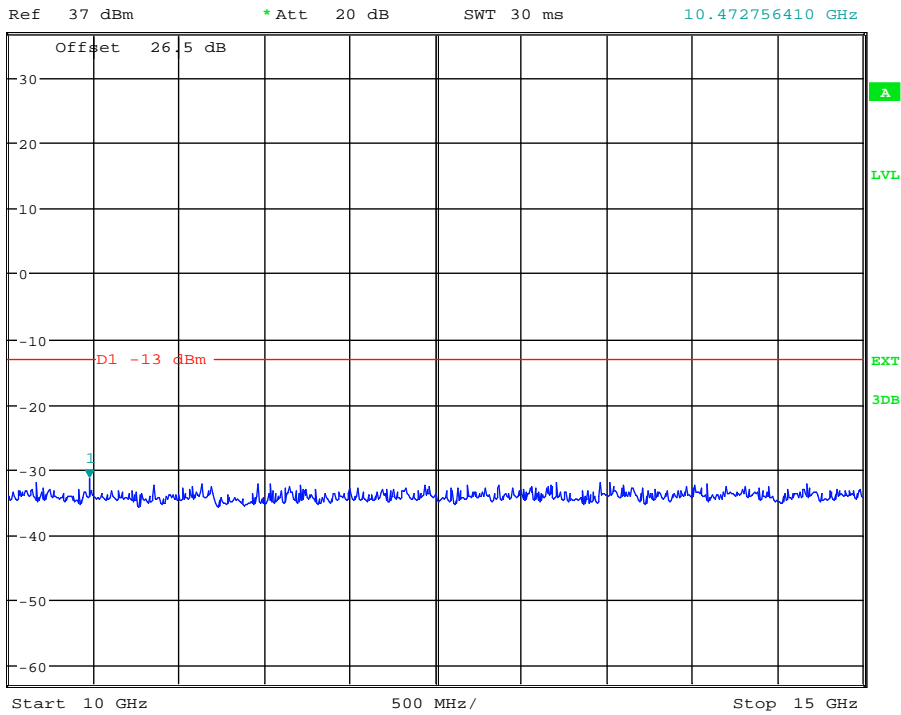


Date: 10.DEC.2013 14:21:11

(Plot 4.7.8 A5: Idle @ PCS1900)



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -30.83 dBm  
SWT 30 ms      17.235576923 GHz

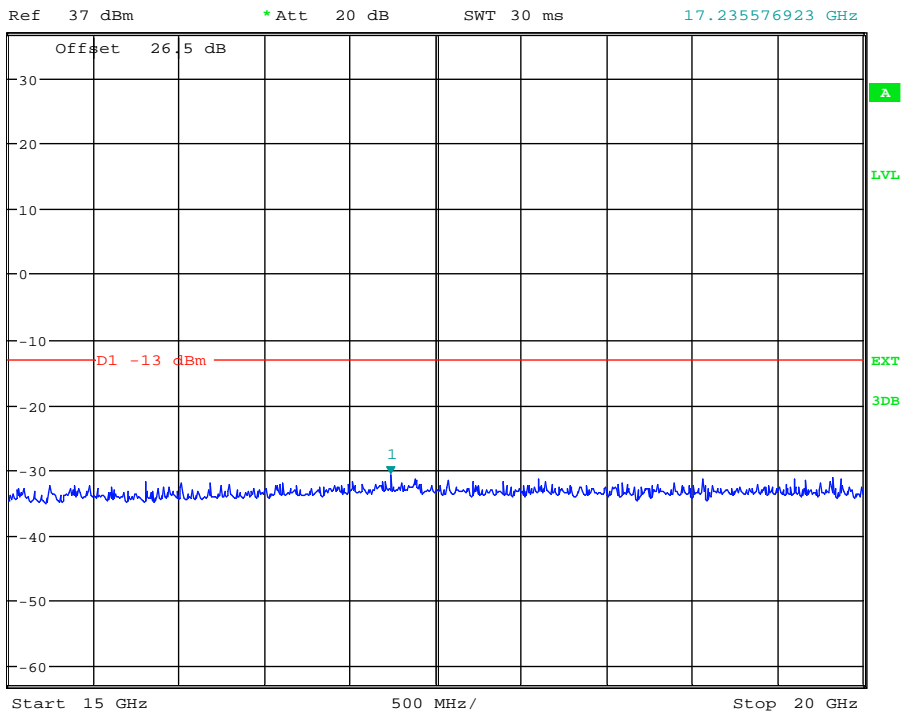

Date: 10.DEC.2013 14:21:22

(Plot 4.7.8 A6: Idle @ PCS1900)

## 4.8. Frequency Stability Test

### TEST APPLICABLE


1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (d) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.45V.

### TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature;
2. Subject the EUT to overnight soak at -30°C;
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
6. Subject the EUT to overnight soak at +50°C;
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

### TEST CONFIGURATION

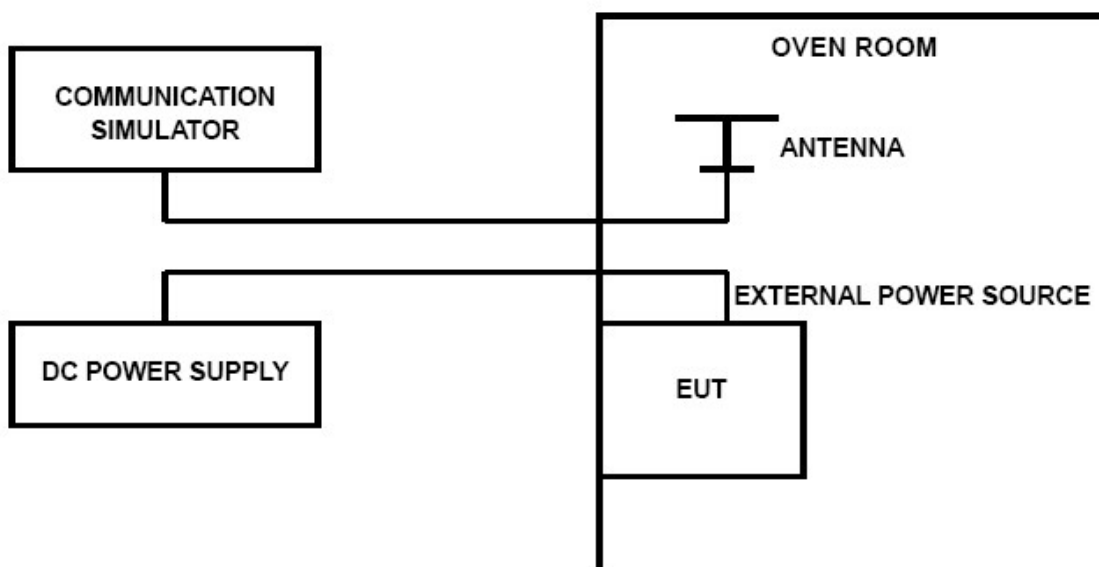

### TEST LIMITS

#### ***For Hand carried battery powered equipment***

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.70DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

***For equipment powered by primary supply voltage***


According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**TEST RESULTS**


GSM850					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	25	30	0.036	0.10	PASS
3.70	25	-29	0.035	0.10	PASS
4.20	25	-16	0.019	0.10	PASS
3.70	-30	-22	0.026	0.10	PASS
3.70	-20	-29	0.035	0.10	PASS
3.70	-10	-20	0.024	0.10	PASS
3.70	0	19	0.023	0.10	PASS
3.70	10	-29	0.035	0.10	PASS
3.70	20	-29	0.035	0.10	PASS
3.70	30	-24	0.029	0.10	PASS
3.70	40	-22	0.024	0.10	PASS
3.70	50	-16	0.019	0.10	PASS

PCS1900					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	-50	0.027	0.10	PASS
3.70	20	-49	0.026	0.10	PASS
4.20	20	-40	0.021	0.10	PASS
3.70	-30	-38	0.020	0.10	PASS
3.70	-20	-42	0.022	0.10	PASS
3.70	-10	-47	0.025	0.10	PASS
3.70	0	-36	0.019	0.10	PASS
3.70	10	-37	0.020	0.10	PASS
3.70	20	-45	0.024	0.10	PASS
3.70	30	-40	0.021	0.10	PASS
3.70	40	-37	0.020	0.10	PASS
3.70	50	-37	0.020	0.10	PASS

## 5. Test Setup Photos of the EUT

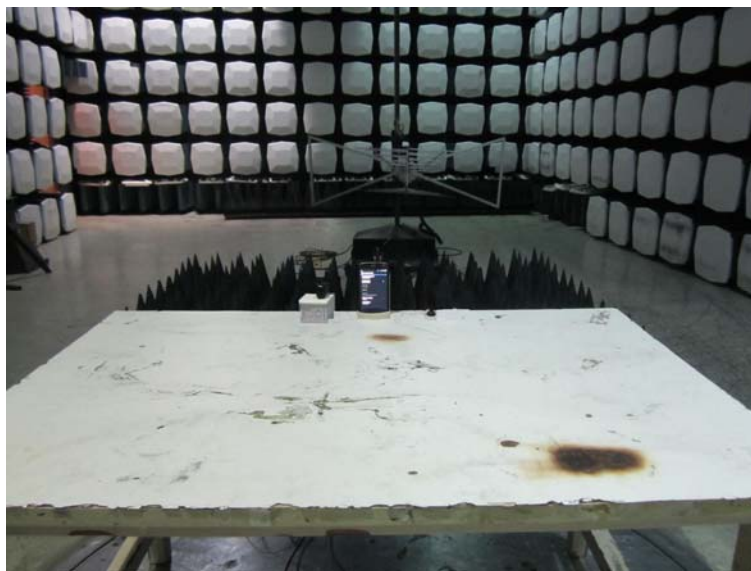



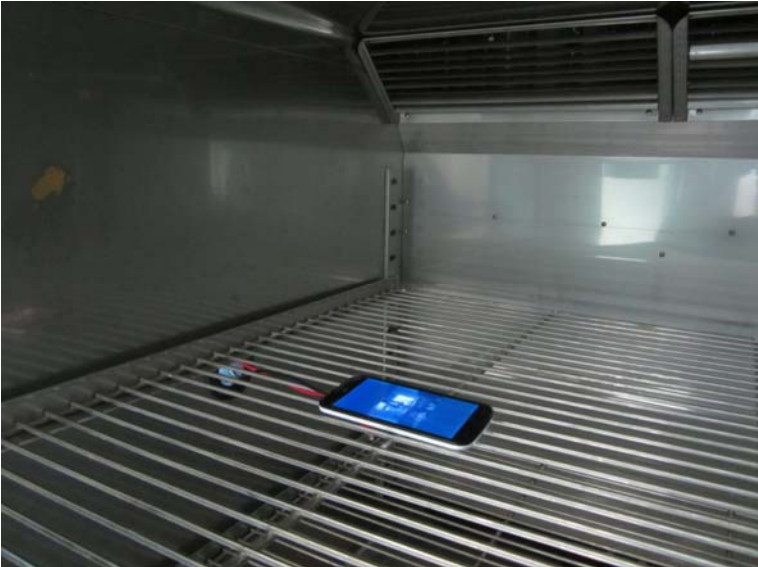

## 6. External and Internal Photos of the EUT


### External photos of the EUT










Internal photos of the EUT


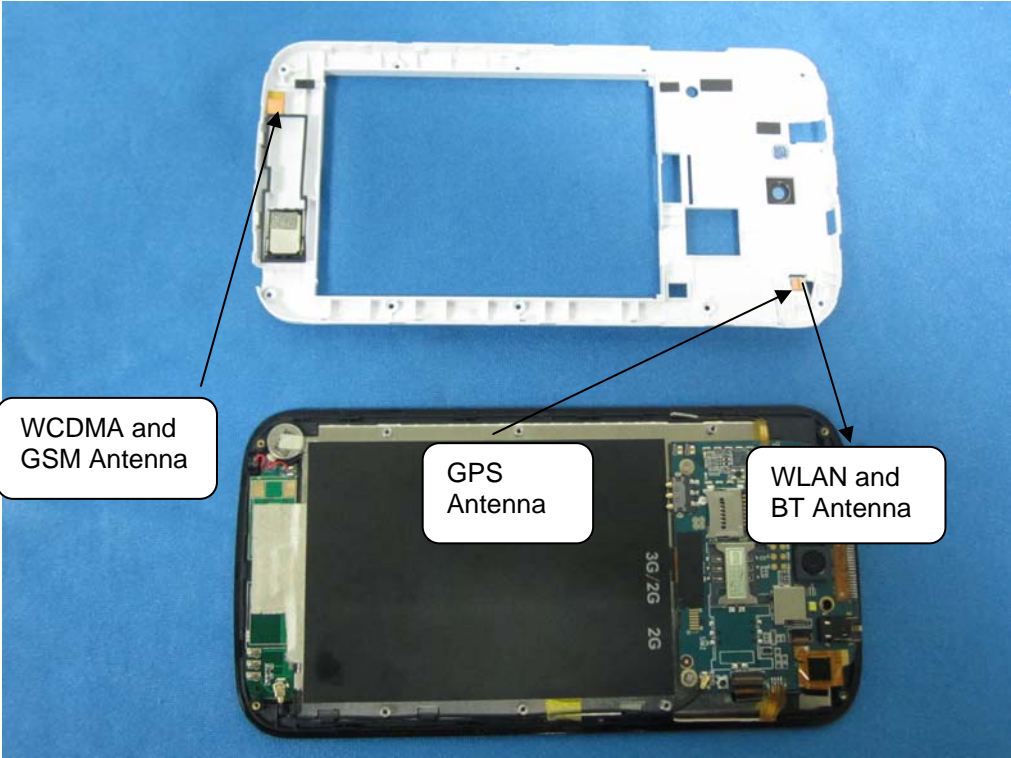




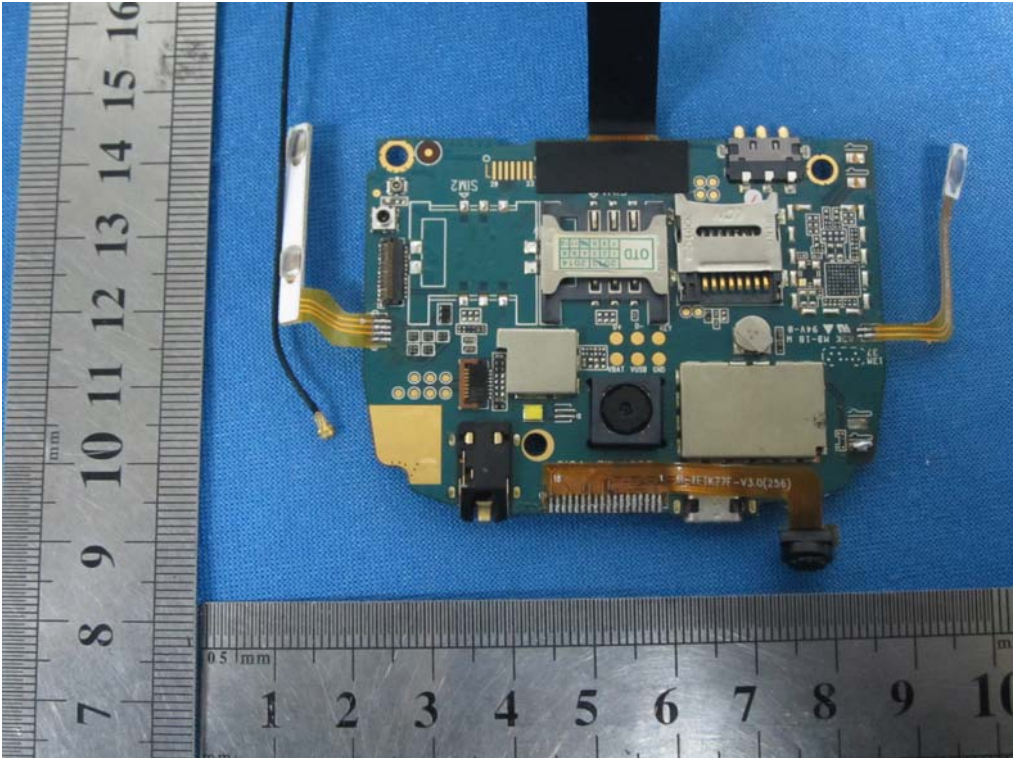

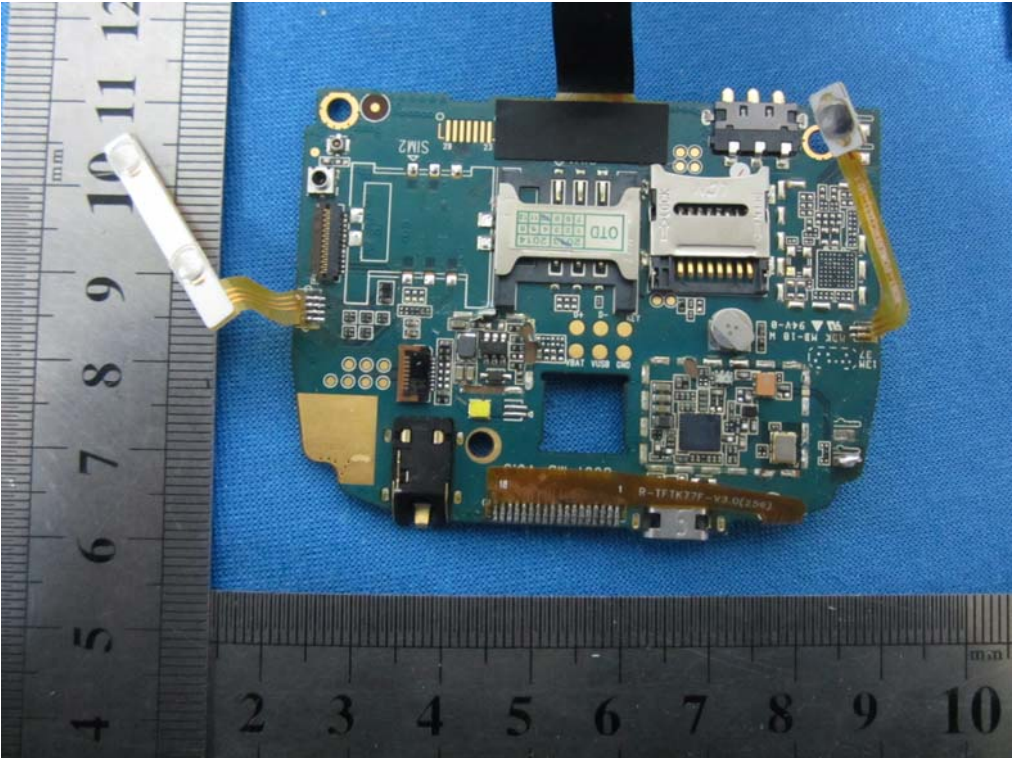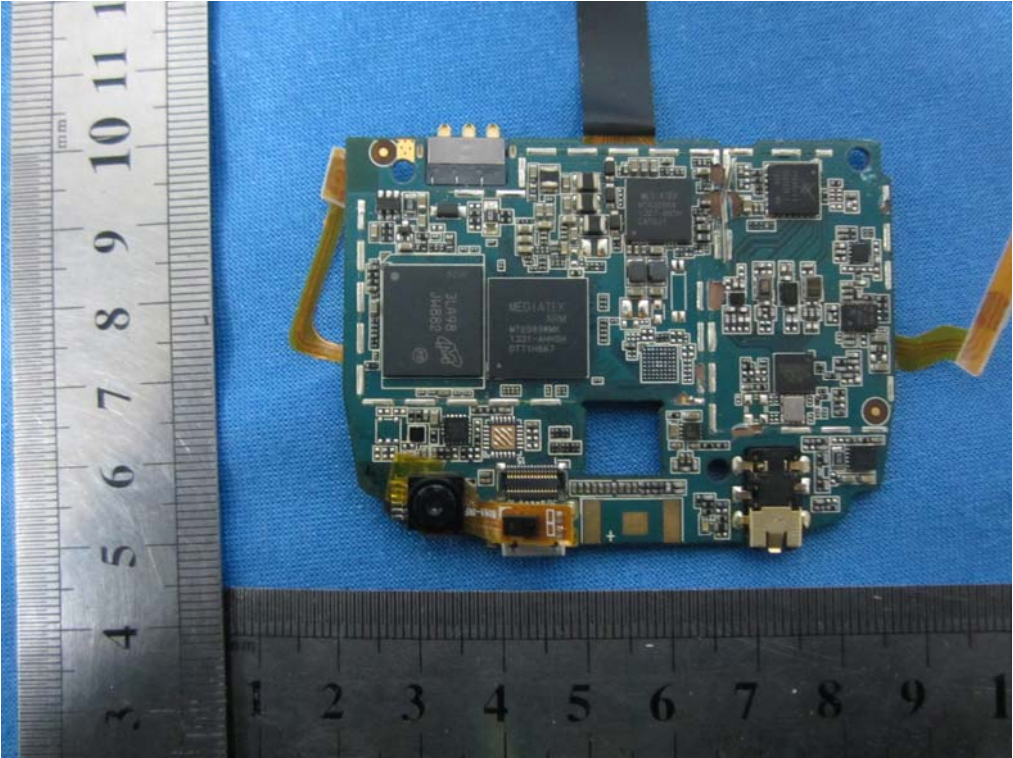



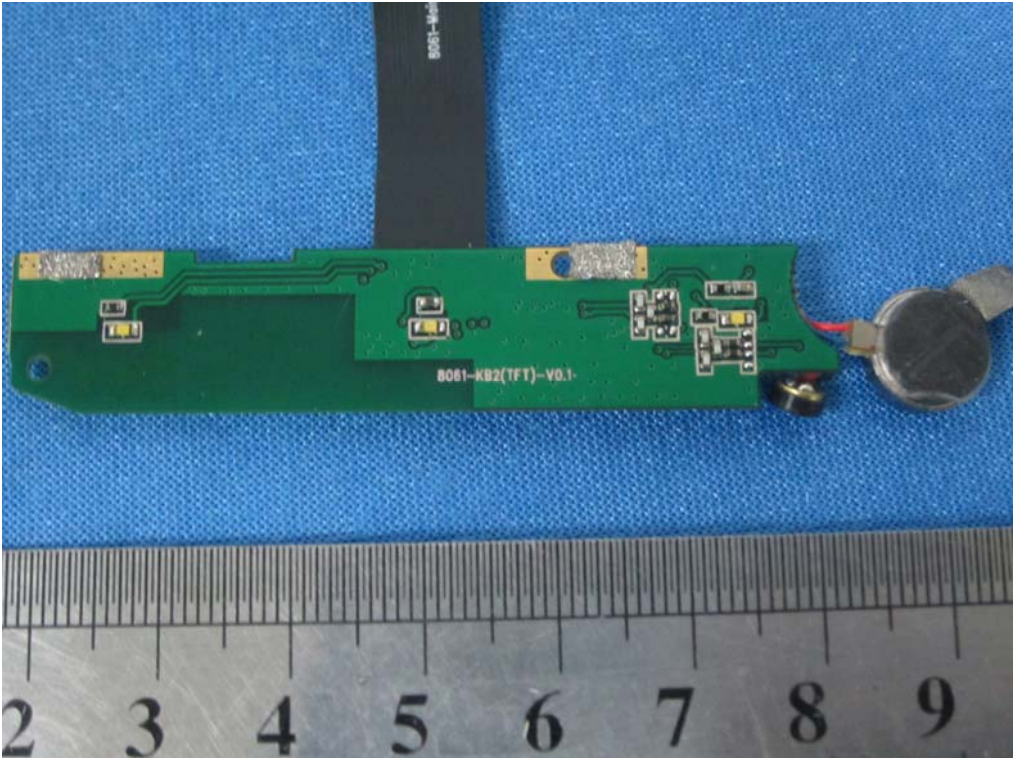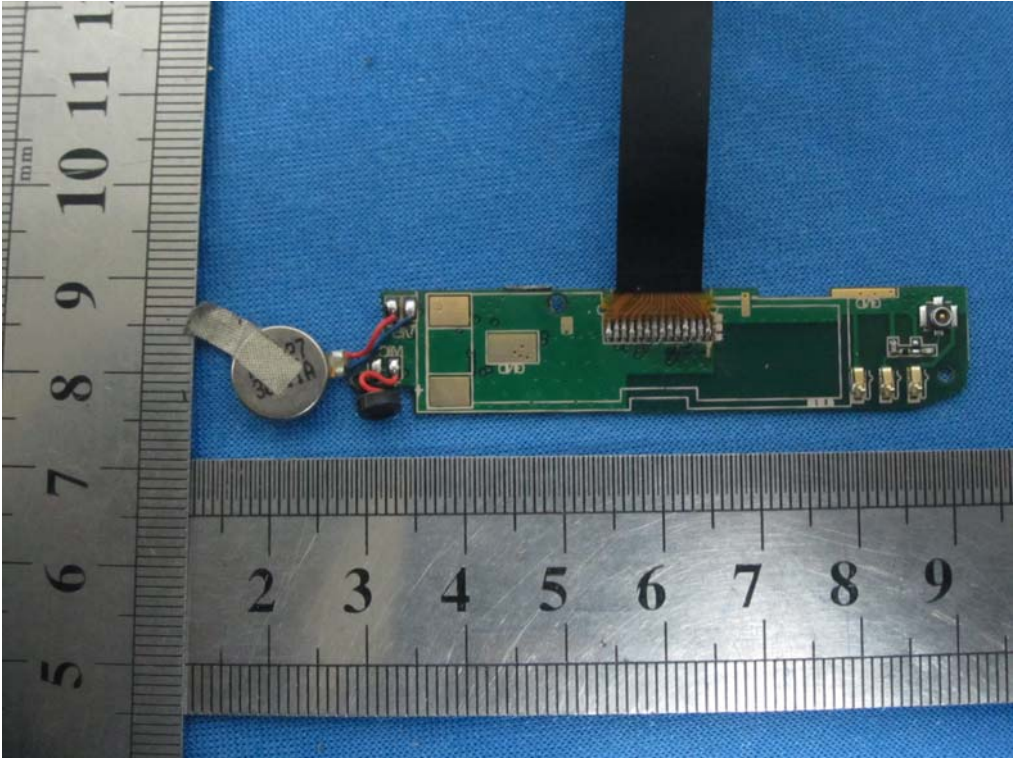

.....End of Report.....