



Product Service

FCC - TEST REPORT

Report Number : **68.920.13.014.01** Date of Issue: July 17, 2013

Model : **80-VBOLDB(00406), 80-VBOLDS(00407)**

Product Type : Bluetooth Headphone

Applicant : Velodyne Acoustics, Inc.

Address : 345 Digital Drive Morgan Hill, California 95037 United States

Production Facility : Charter Media (Dongguan) Co., Ltd.

Address : Dabandi Industrial Zone, Daning District, Humen Town,
Dongguan City, Guangdong Province 523930, P. R. China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including
Appendices : 44

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. Jiangsu TÜV Product Service Ltd. – Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Jiangsu TÜV Product Service Ltd. – Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power.....	13
9.3	20 dB bandwidth and 99% Occupied Bandwidth.....	15
9.4	Carrier Frequency Separation.....	22
9.5	Number of hopping frequencies	24
9.6	Dwell Time	26
9.7	Spurious RF conducted emissions.....	30
9.8	Band edge testing	36
9.9	Spurious radiated emissions for transmitter	41
10	Test Equipment List.....	43
11	System Measurement Uncertainty	44

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: Jiangsu TÜV Product Service Ltd. – Shenzhen Branch
6th Floor, H Hall,
Culture Creative Park,
No. 4001, Fuqiang Road,
Futian District 518048,
Shenzhen,P.R.C.

Telephone: 86 755 8828 6998
Fax: 86 755 828 5299

Test Site 2

Company name: Audix Technology (shenzhen) Co.,Ltd
Block Shenzhen, Science & Industry Park,
Nantou, Shenzhen,
Guangdong,
China

Telephone: 86 755 2663 9496
Fax: 86 755 2663 2877

3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product:	Bluetooth Headphone
Model no.:	80-VBOLDB(00406)
FCC ID:	YRD-VB1
Brand Name:	Velodyne
Options and accessories:	NIL
Rating:	3.7VDC (Supplied by Li-ion rechargeable battery) 5VDC (Charged by PC USB Port)
RF Transmission Frequency:	2402-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Duty Cycle:	42.14%
Antenna Type:	Ceramic antenna
Antenna Gain:	0dBi
Description of the EUT:	The Equipment Under Test (EUT) is a wireless headset with Bluetooth function operating at 2.4GHz

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2012 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure released by FCC on March 30, 2000 and C63.10 (2009).

5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Site	Test Result
§15.207	Conducted emission AC power port	10	Site 2	Pass
§15.247(b)(1)	Conducted peak output power	13	Site 2	Pass
§15.247(a)(2)	6dB bandwidth	---	---	N/A
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	15	Site 2	Pass
§15.247(a)(1)	Carrier frequency separation	22	Site 2	Pass
§15.247(a)(1)(iii)	Number of hopping frequencies	24	Site 2	Pass
§15.247(a)(1)(iii)	Dwell Time	26	Site 2	Pass
§15.247(e)	Power spectral density*	---	---	N/A
§15.247(d)	Spurious RF conducted emissions	30	Site 2	Pass
§15.247(d)	Band edge	36	Site 2	Pass
§15.247(d) & §15.209	Spurious radiated emissions for transmitter and receiver	41	Site 2	Pass
§15.203	Antenna requirement	See note 2		Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a permanently ceramic antenna, which gain is 0dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: YRD-VB1, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

The difference between two models only lies in the outlook colour, so all the testing was only applied on 80-VBOLDB(00406), 80-VBOLDS(00407) is deemed to fulfil relevant requirement without further estimation.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 1, 2013

Testing Start Date: June 4, 2013

Testing End Date: June 9, 2013

- Jiangsu TÜV Product Service Ltd. – Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



Cookies Bu
Senior EMC Project
Engineer




Felix Li
EMC Project Engineer




Leo Li
EMC Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

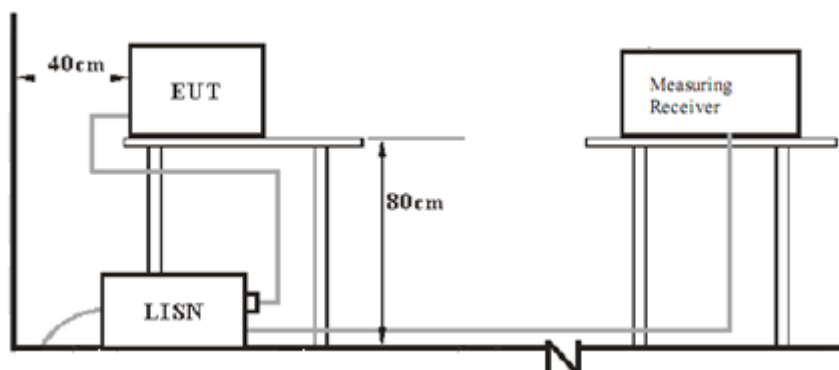

7.2 Radiated test setups

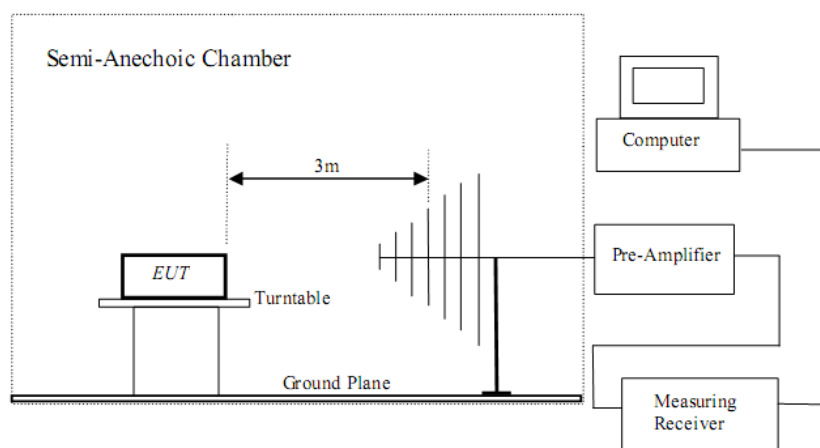

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

Name	Model	Manufacturer	S/N	Cal Date	Cal Interval (month)
Host	Studio 540	DELL	J14XK2X	---	---
LCD Monitor	1907FPt	DELL	CN-009759-71618-6AP-ACPP	---	---
USB Mouse	M0C5UO	DELL	512022645	---	---
USB Keyboard:	SK-8120	DELL	CN-ODJ365-71616-2BE-0BZ3-A00	USB Keyboard:	SK-8120

Test software: Blue test 3.0, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit


According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Bluetooth Headphone
M/N : 80-VBOLDB(00406)
Operating Condition : Charging & Tx
Test specification : Live
Comment : AC 120V/60Hz

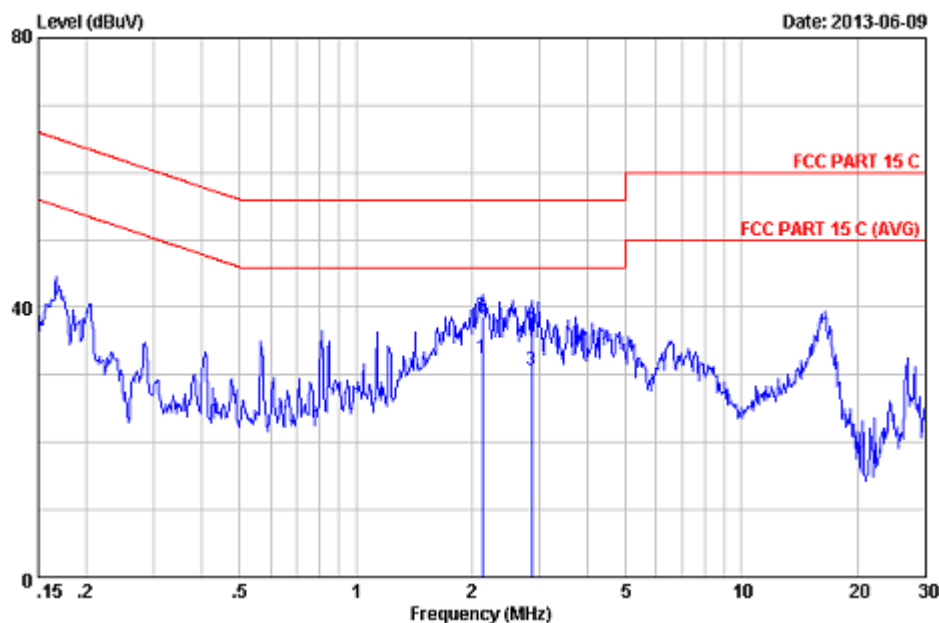


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	2.130	0.00	0.04	32.50	32.54	56.00	23.46	Average
2	2.130	0.00	0.04	38.70	38.74	46.00	7.26	QP
3	2.854	0.00	0.05	30.60	30.65	56.00	25.35	Average
4	2.854	0.00	0.05	37.90	37.95	46.00	8.05	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Conducted Emission

Product Type : Bluetooth Headphone
M/N : 80-VBOLDB(00406)
Operating Condition : Charging & Tx
Test specification : Neutral
Comment : AC 120V/60Hz

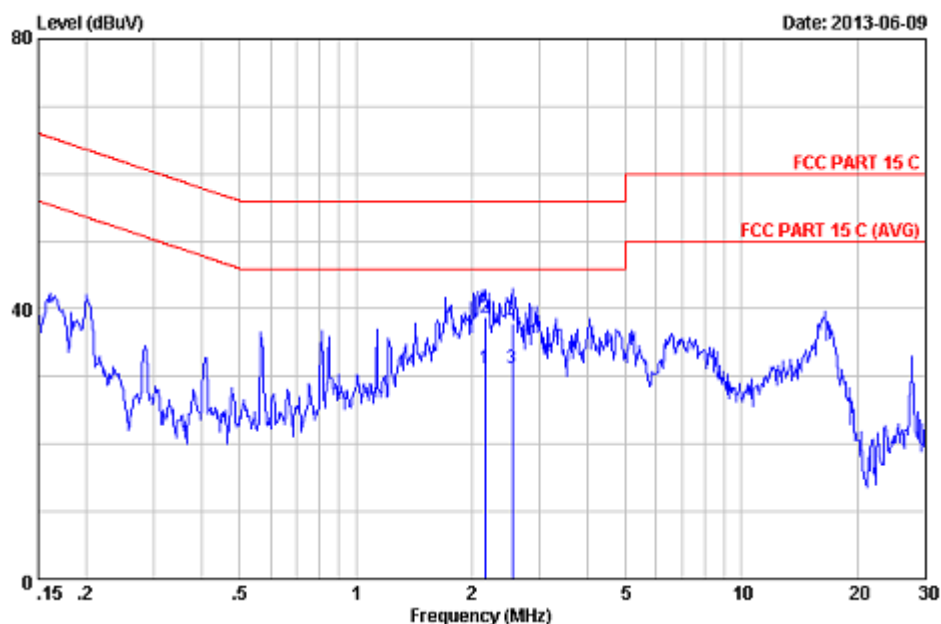

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	2.166	0.00	0.04	31.20	31.24	46.00	14.76	Average
2	2.166	0.00	0.04	38.70	38.74	56.00	17.26	QP
3	2.540	0.00	0.05	31.10	31.15	46.00	14.85	Average
4	2.540	0.00	0.05	37.90	37.95	56.00	18.05	QP

Remarks: 1. Emission Level = LISN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Conducted peak output power**Bluetooth Mode GFSK modulation Test Result**

Frequency	Conducted Peak Output Power	Result
MHz	dBm	
Low channel 2402MHz	4.17	Pass
Middle channel 2441MHz	3.09	Pass
High channel 2480MHz	2.19	Pass

Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result

Frequency	Conducted Peak Output Power	Result
MHz	dBm	
Low channel 2402MHz	3.08	Pass
Middle channel 2441MHz	1.71	Pass
High channel 2480MHz	0.66	Pass

Bluetooth Mode 8DPSK modulation Test Result

Frequency	Conducted Peak Output Power	Result
MHz	dBm	
Low channel 2402MHz	3.47	Pass
Middle channel 2441MHz	2.15	Pass
High channel 2480MHz	1.11	Pass

9.3 20 dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit



Limit [kHz]

N/A


20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode GFSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	856.530	824.824	--	Pass
2441	851.426	807.784	--	Pass
2480	833.964	807.961	--	Pass

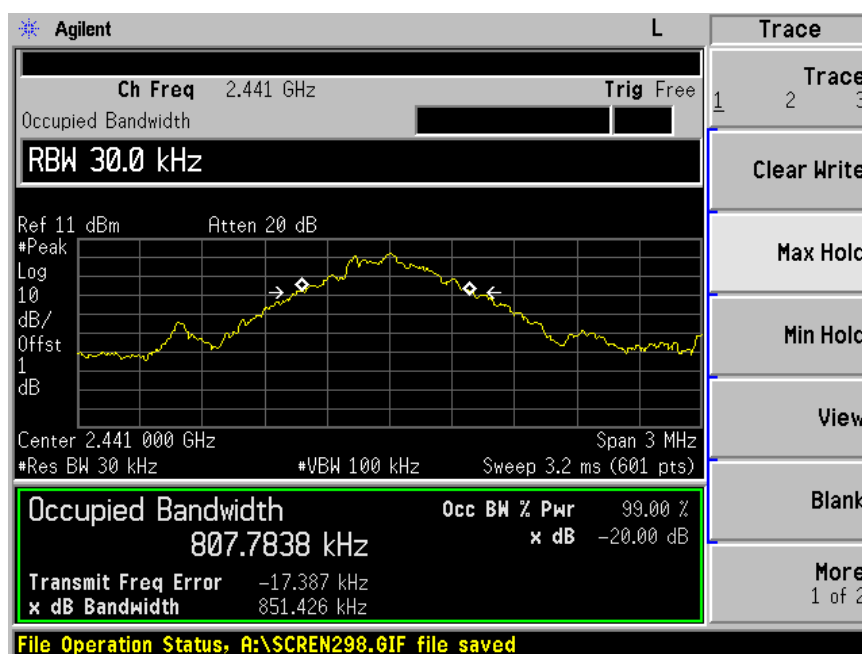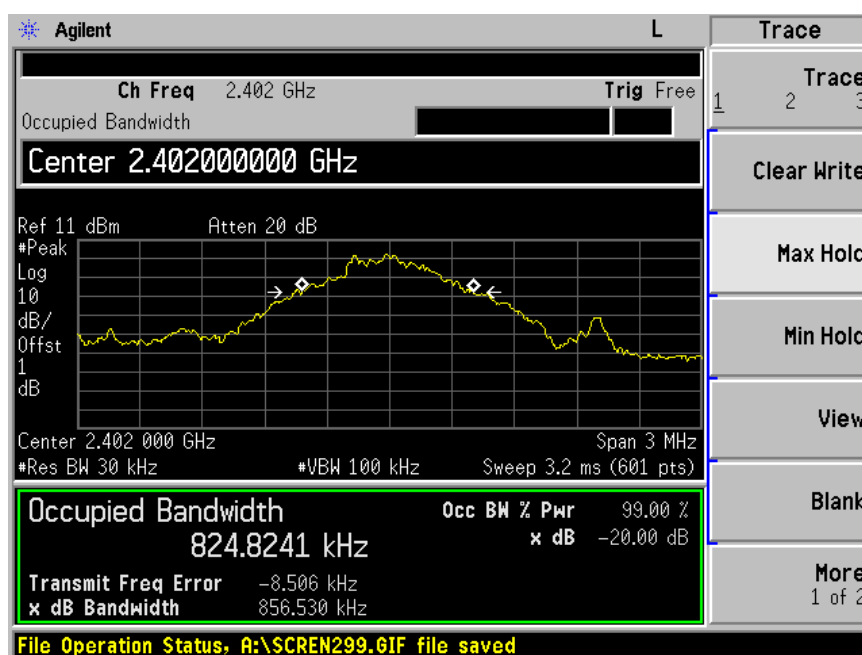



20 dB bandwidth and 99% Occupied Bandwidth

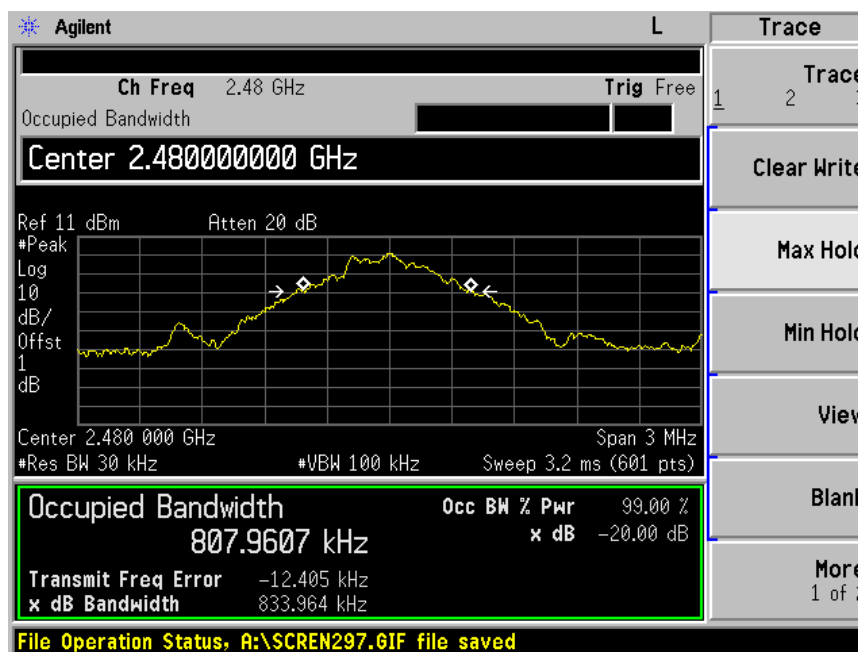


20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1.230	1.159	--	Pass
2441	1.206	1.156	--	Pass
2480	1.223	1.163	--	Pass

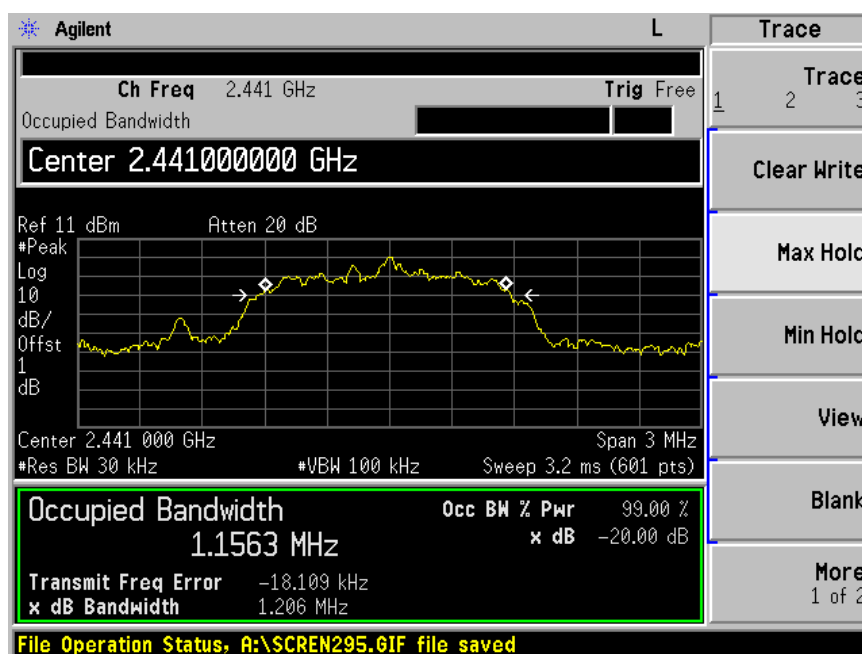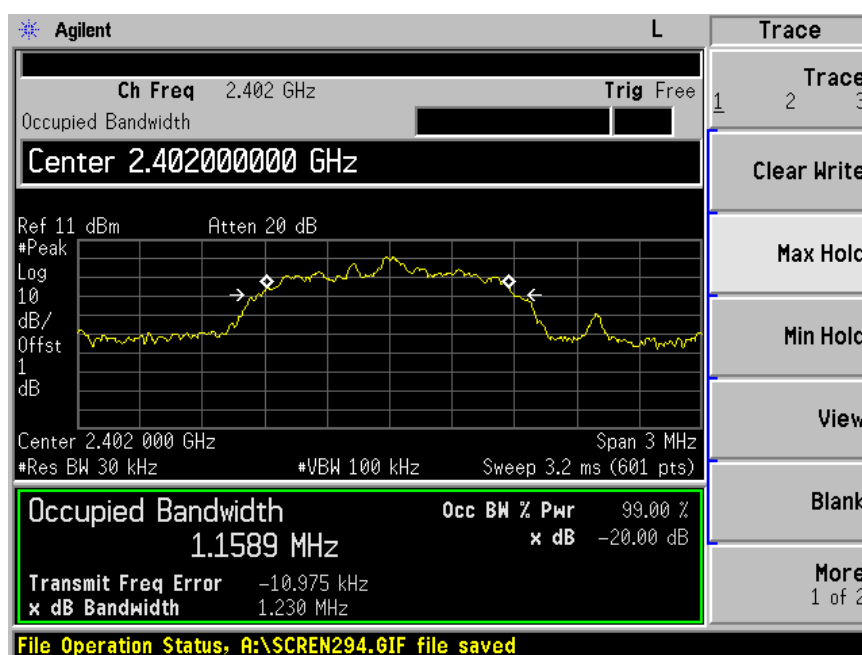



20 dB bandwidth and 99% Occupied Bandwidth

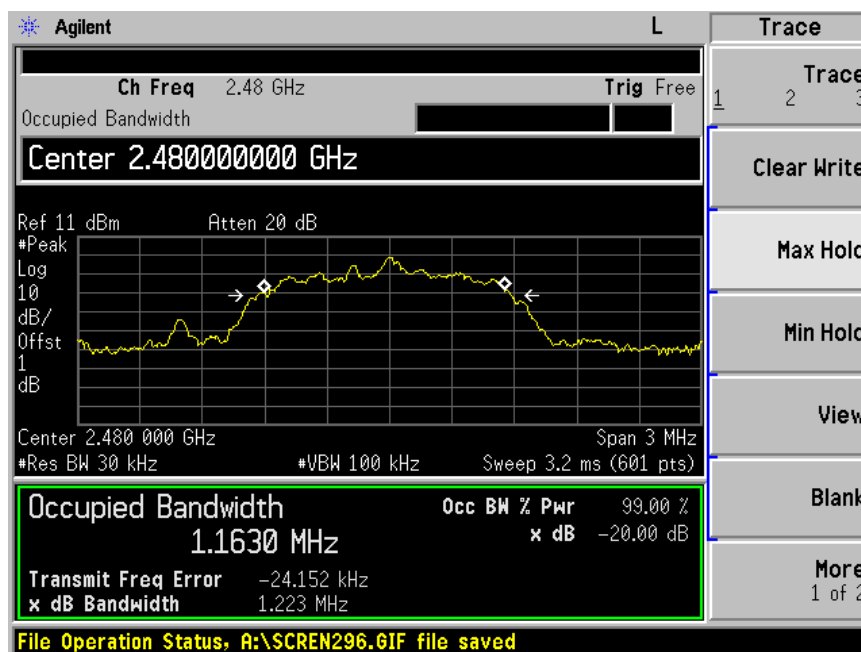


20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode 8DPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1.219	1.155	--	Pass
2441	1.202	1.140	--	Pass
2480	1.209	1.134	--	Pass

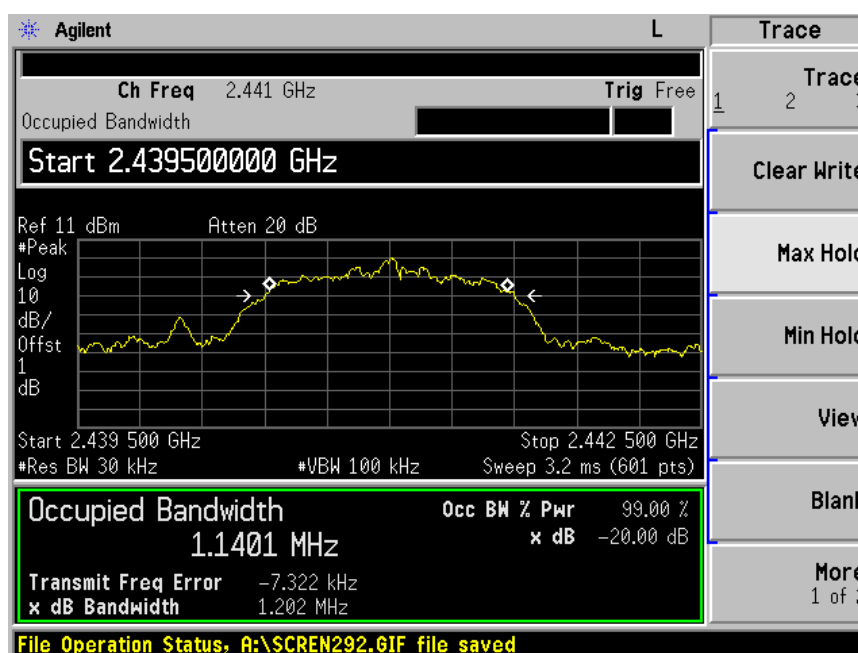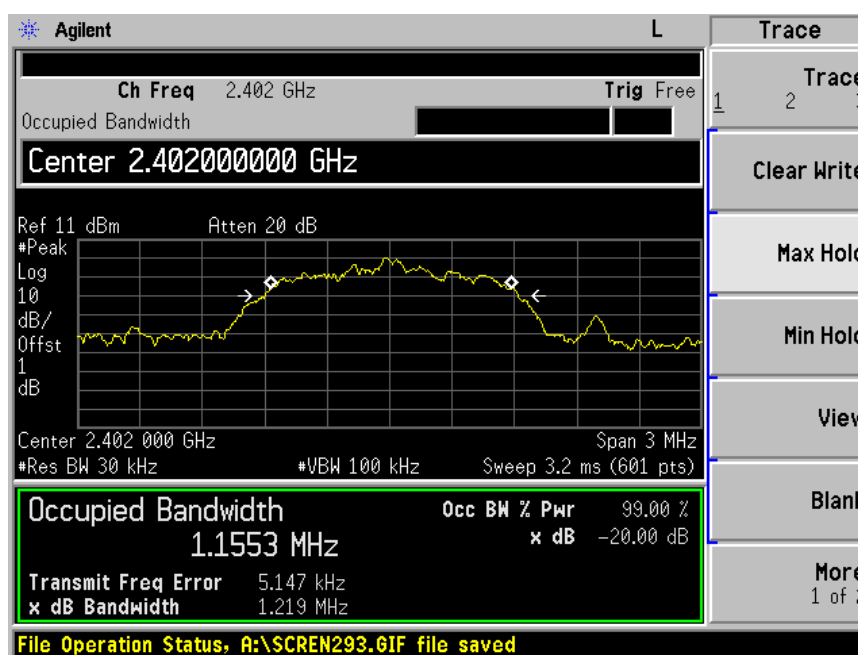

20 dB bandwidth and 99% Occupied Bandwidth

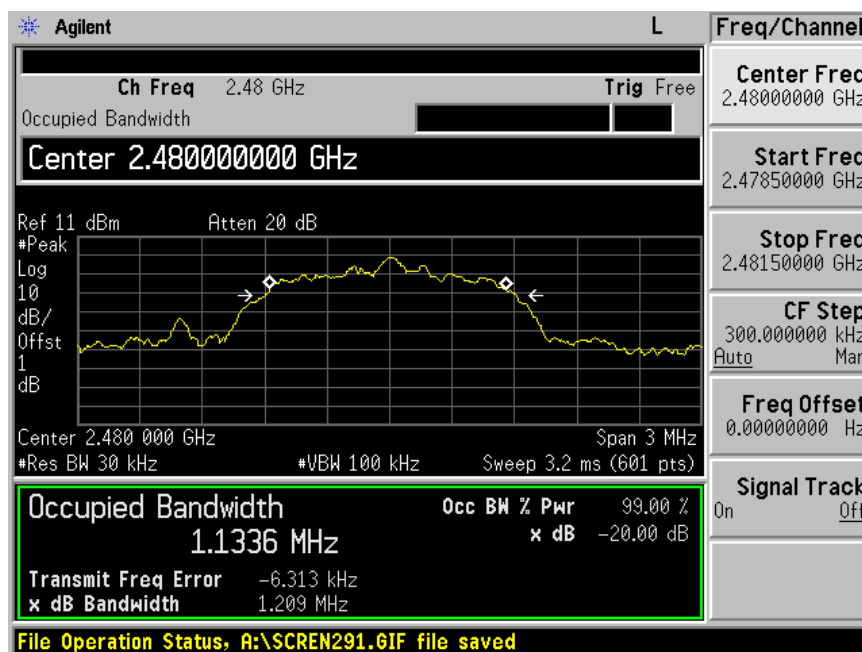

9.4 Carrier Frequency Separation

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

Limit

Limit kHz
$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater

GFSK Modulation Limit


Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	571.02
2441	567.62
2480	556.10

Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.

GFSK Modulation test result

Frequency MHz	Carrier Frequency Separation kHz	Result
2402	1000	Pass
2441	1000	Pass
2480	1000	Pass

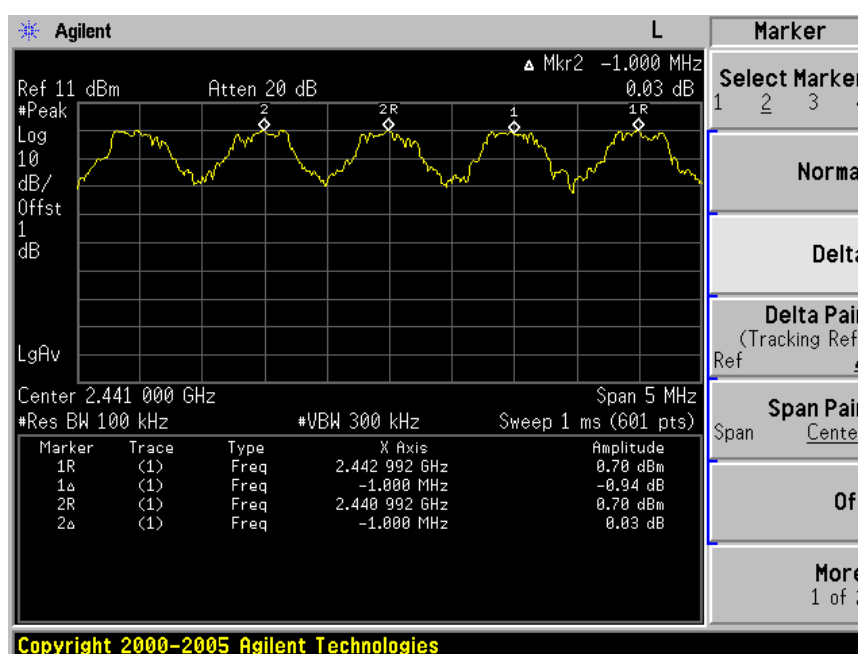

9.5 Number of hopping frequencies

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

Limit


Limit
number

 ≥ 15

Number of hopping frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

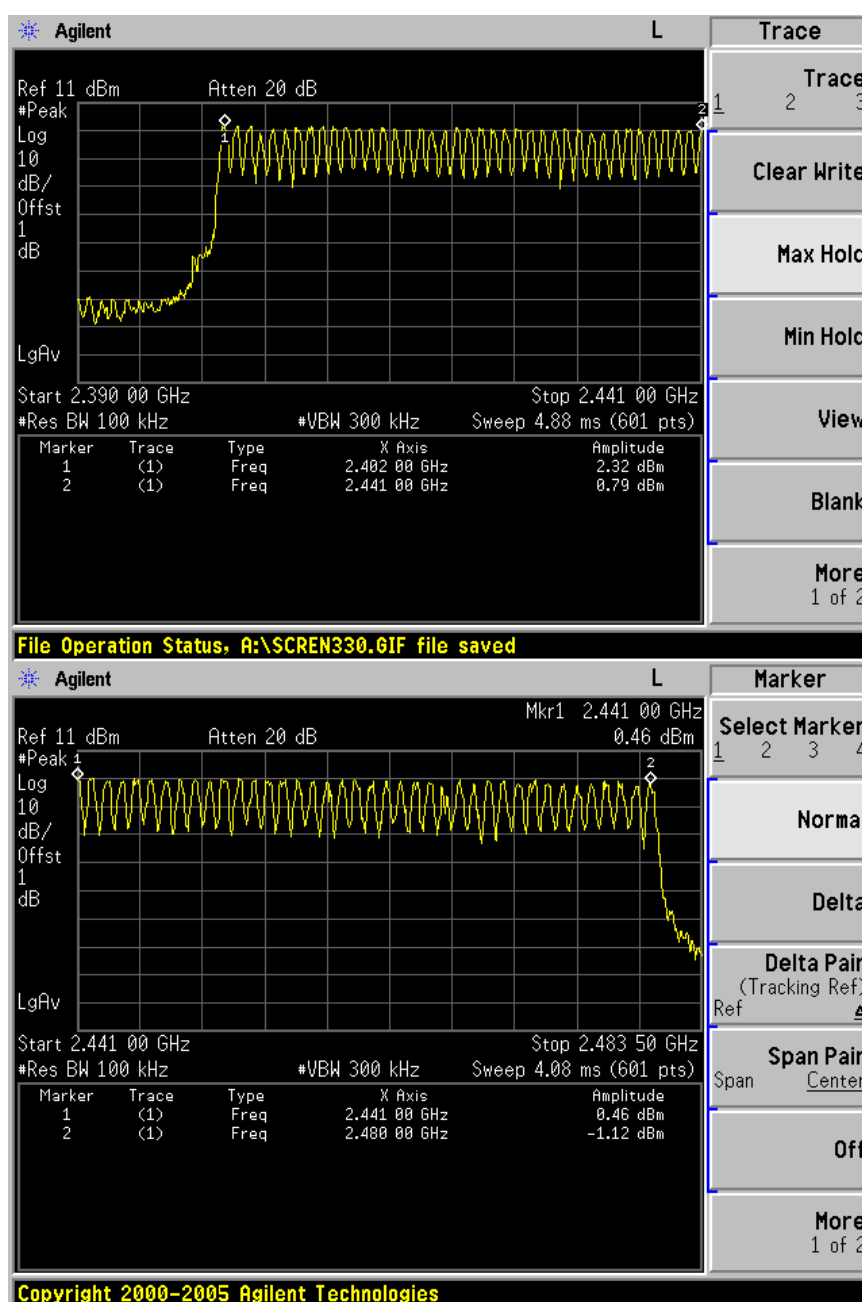

9.6 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

Limit

According to §15.247(a)(1)(iii), the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time


The maximum dwell time shall be 0,4 s.

According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.

Test Result


Modulation	Packet Type	Reading (μs)	Test Result (ms)	Limit (ms)	Result
GFSK	DH5	3058	328.55	< 400	Pass
$\pi/4$ -DQPSK	2DH5	3050	327.69	< 400	Pass
8-DPSK	3DH5	3058	327.69	< 400	Pass

GFSK Modulation

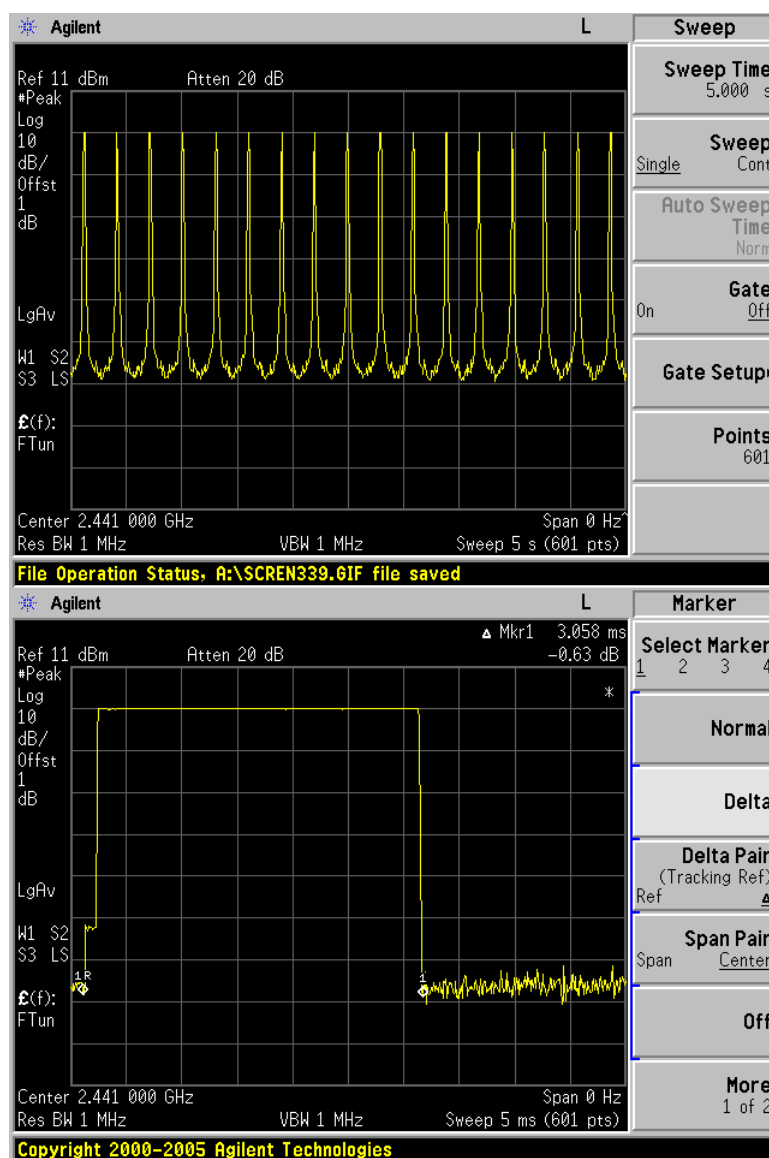


DH5

$\pi/4$ -DQPSK Modulation

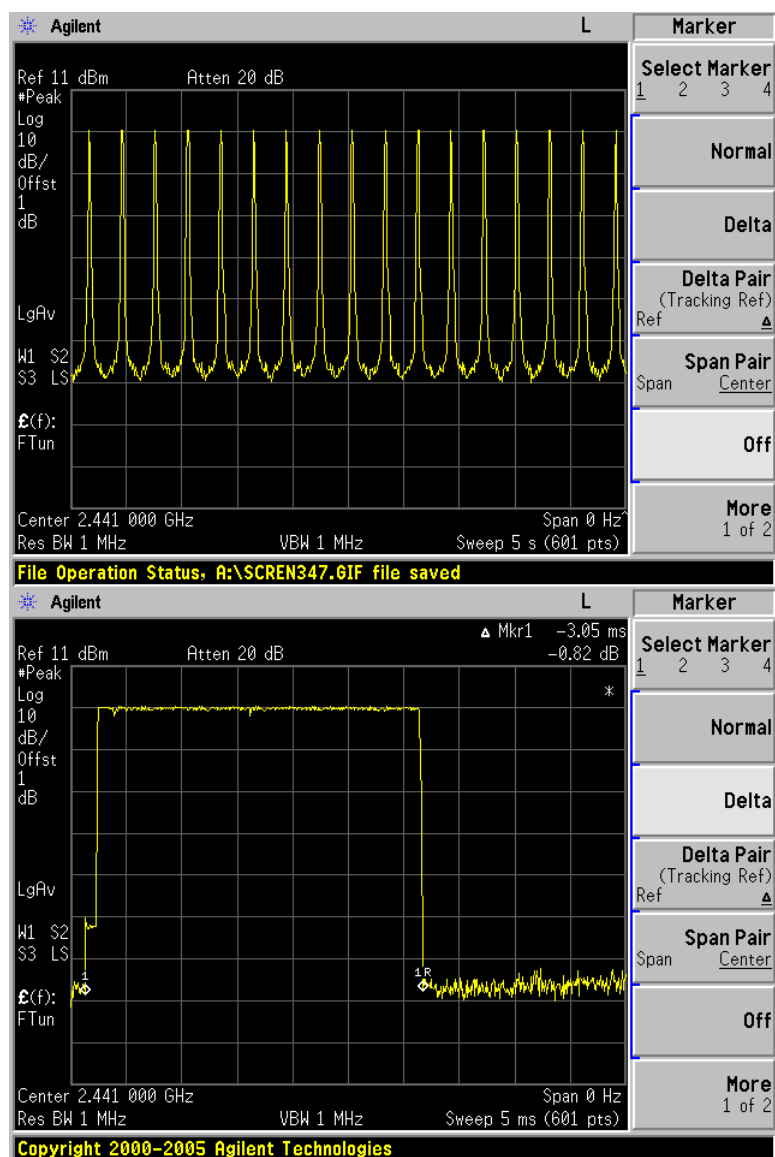

DH5

8-DPSK Modulation

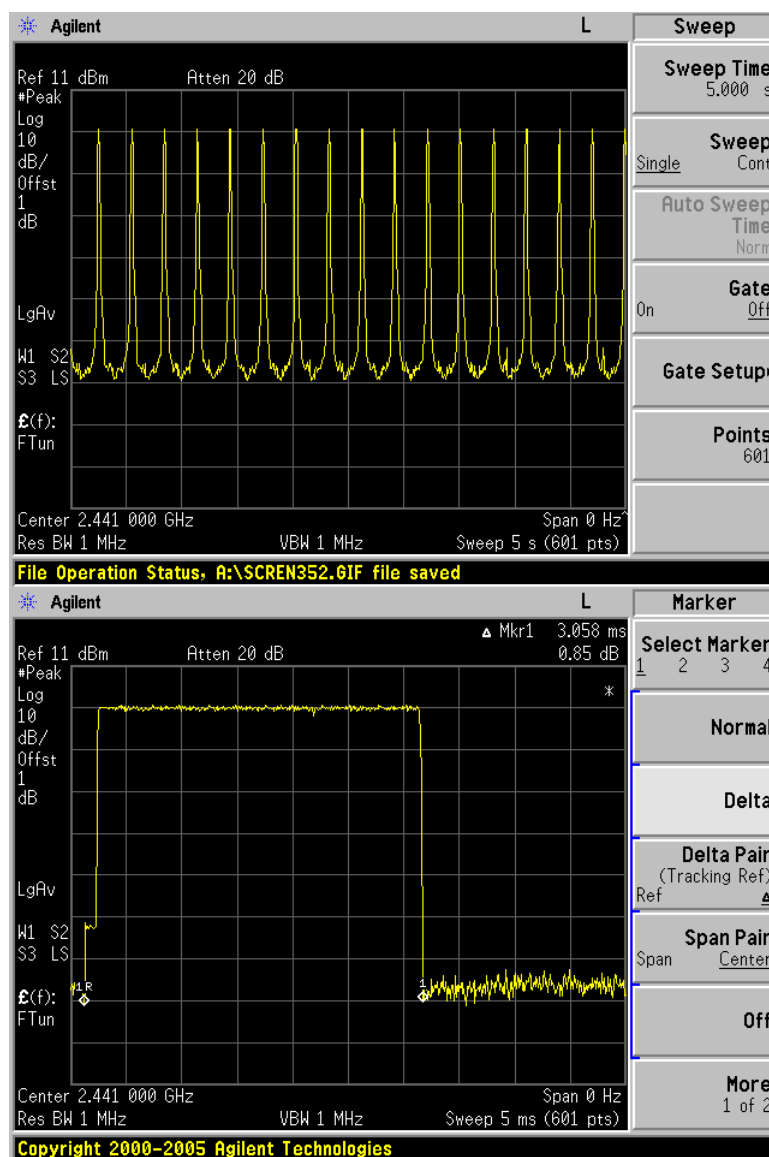

DH5

Note:

A period time=79x0.4(s)=31.6(s)

DH5	time slot= 17(times)/5(s) *3058 (μs) *31.6(s)= 328.55 (ms)
2DH5	time slot= 17(times)/5(s) *3050 (μs) *31.6(s)=327.69 (ms)
3DH5	time slot= 17(times)/5(s) *3050 (μs) *31.6(s)=327.69 (ms)

9.7 Spurious RF conducted emissions

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.



Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Spurious RF conducted emissions

Only the worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.


2402MHz

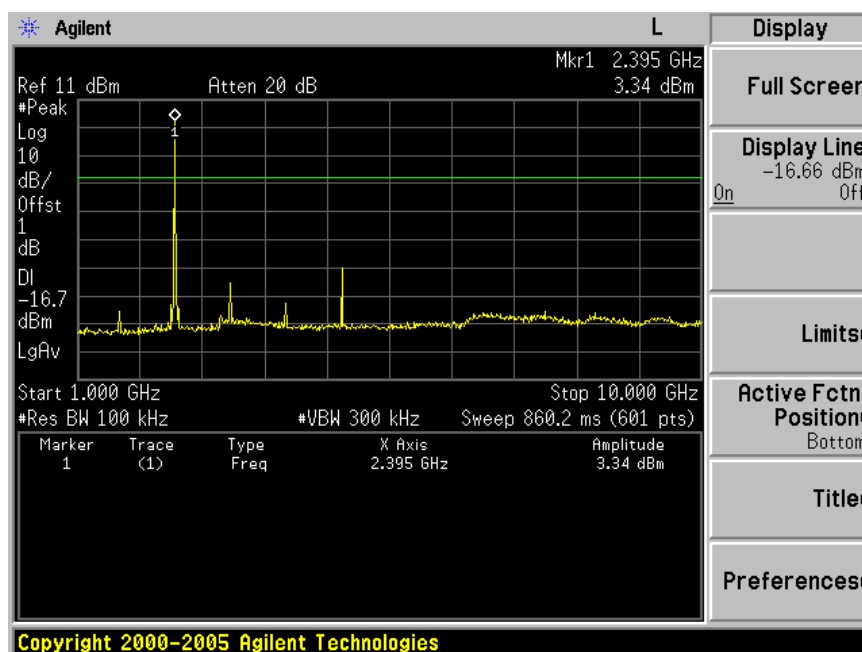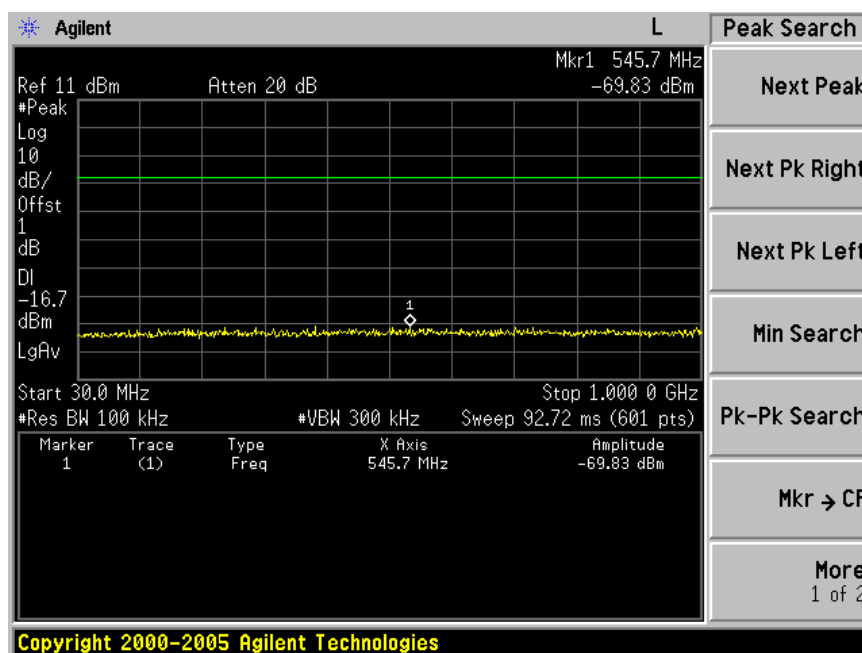



Spurious RF conducted emissions

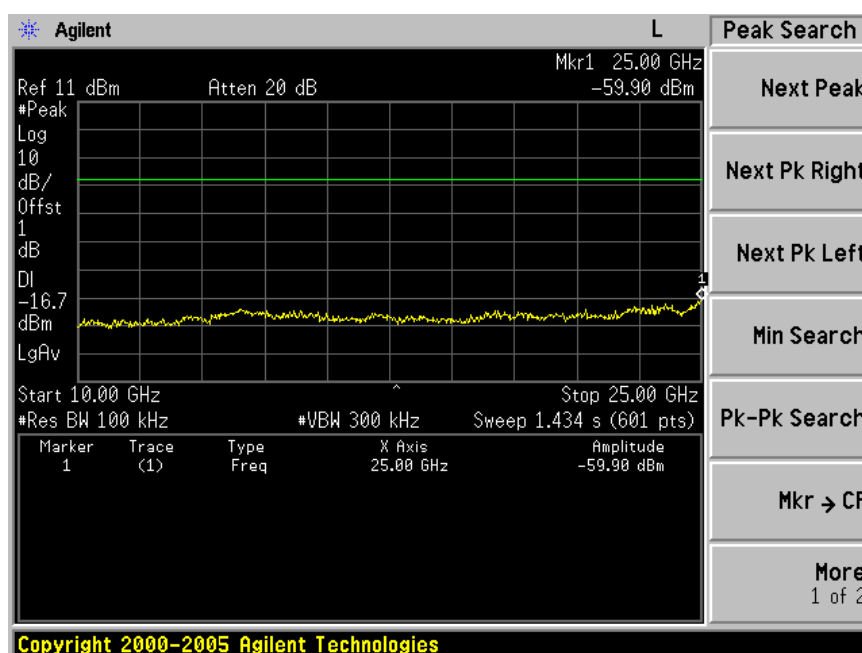

2441MHz


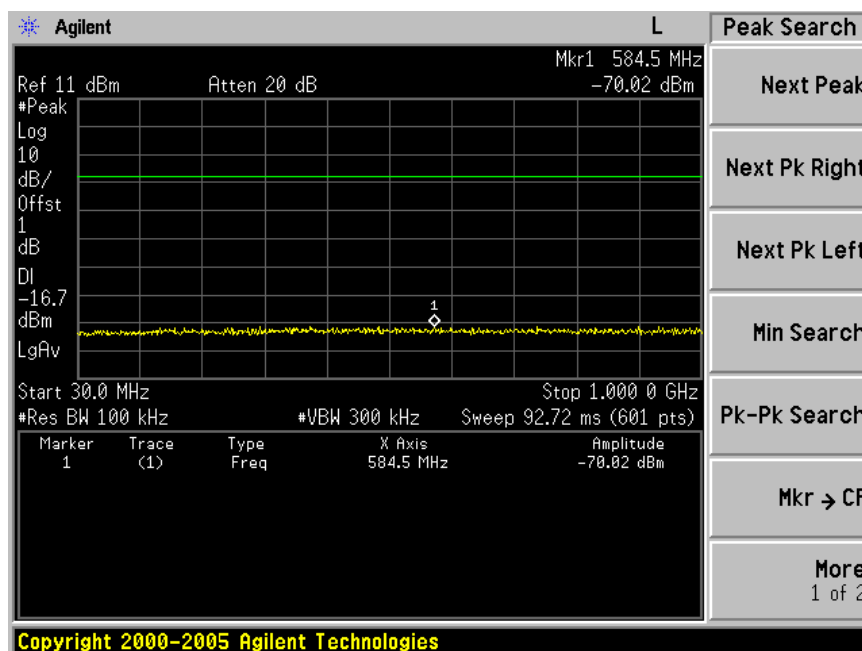


Spurious RF conducted emissions

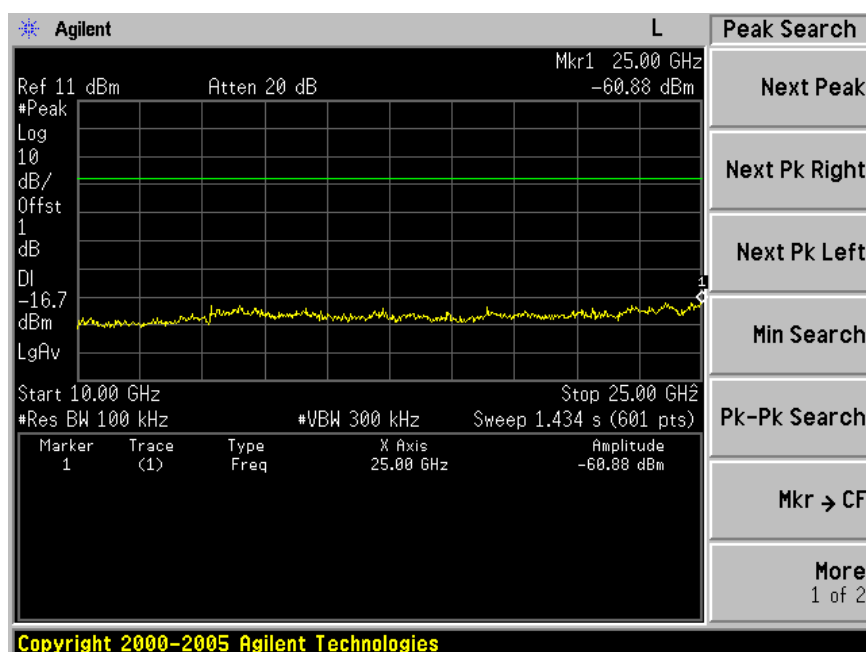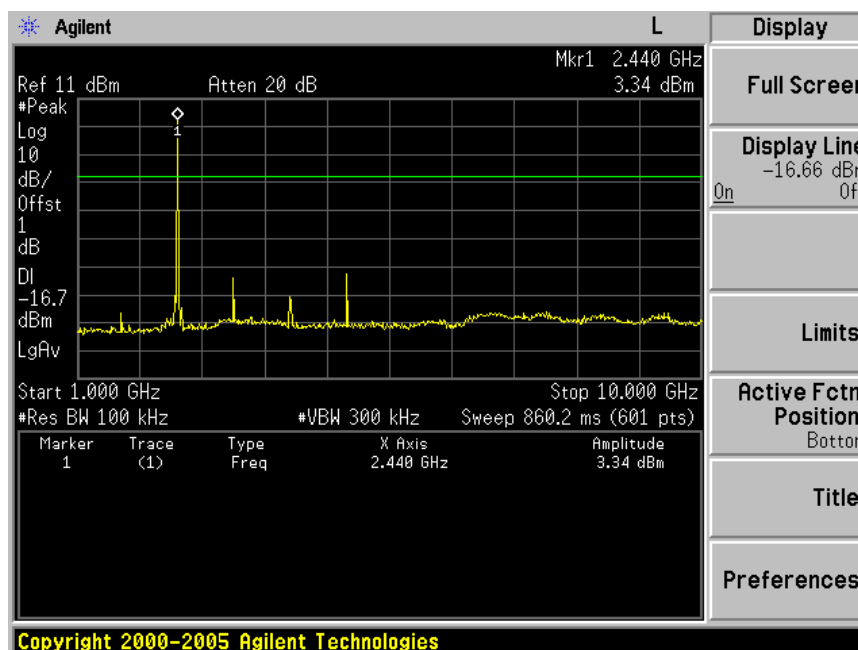


Spurious RF conducted emissions

2480MHz

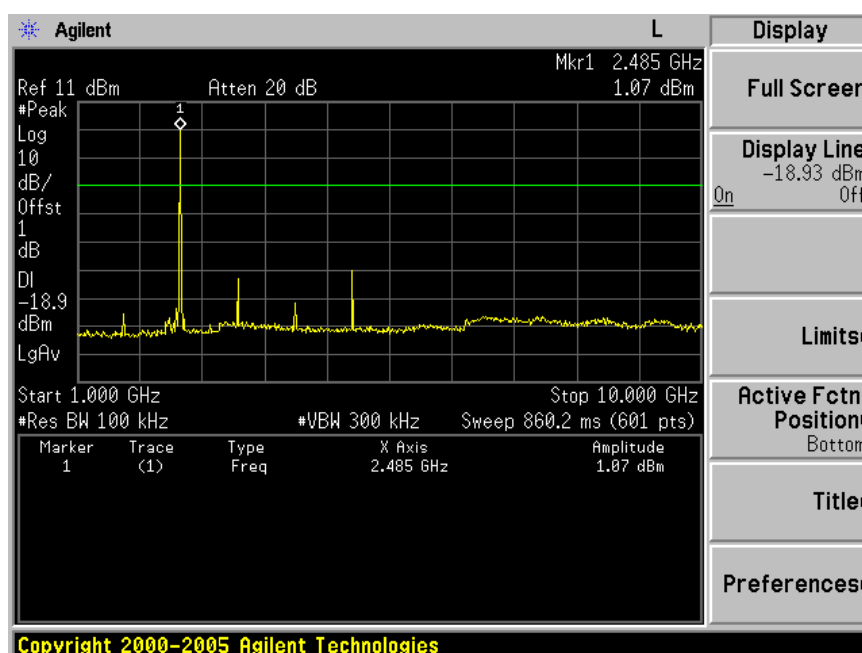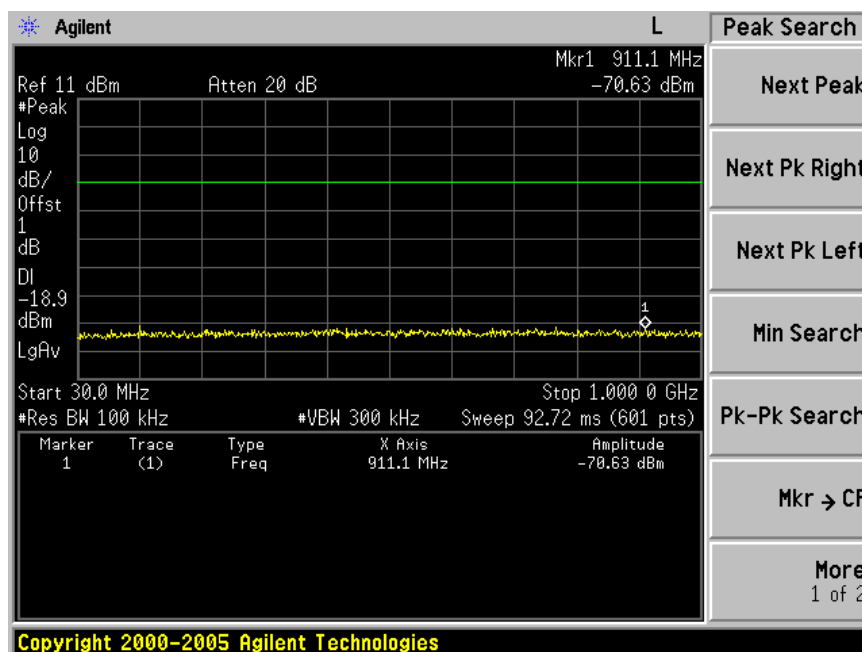

Spurious RF conducted emissions

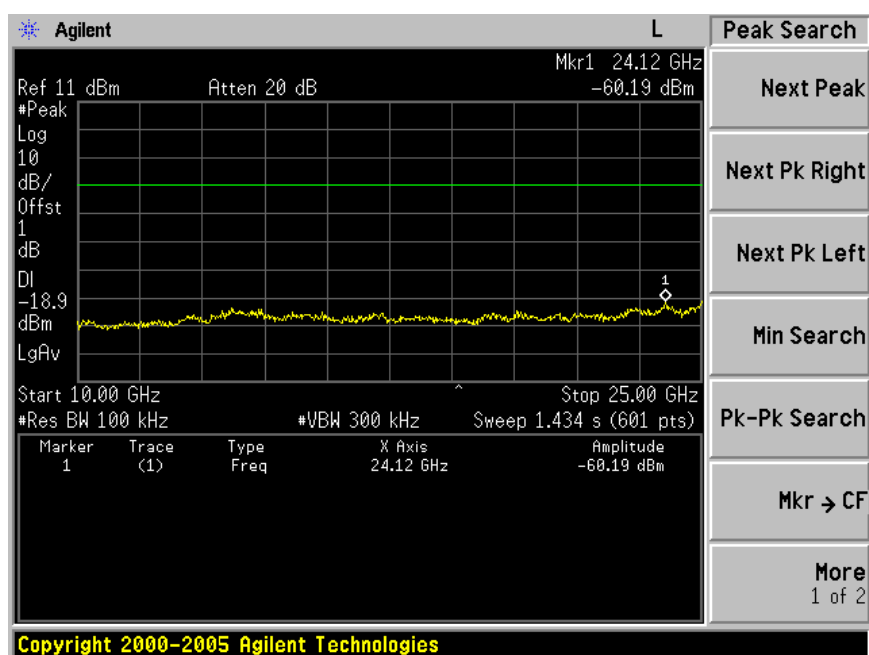

9.8 Band edge testing

Test Method



- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.

Limit:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).



Band edge testing

GFSK Modulation Test Result:
Hopping on mode:

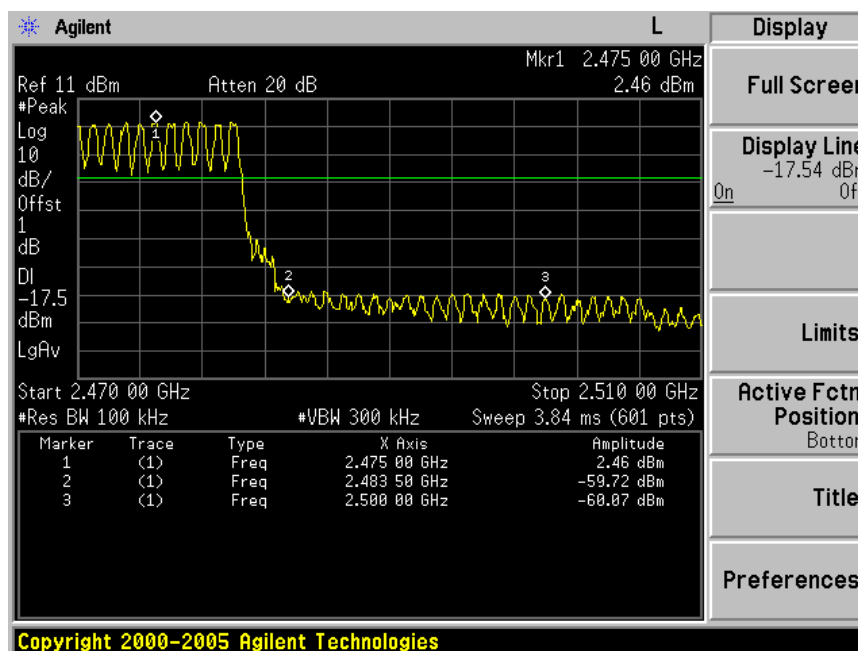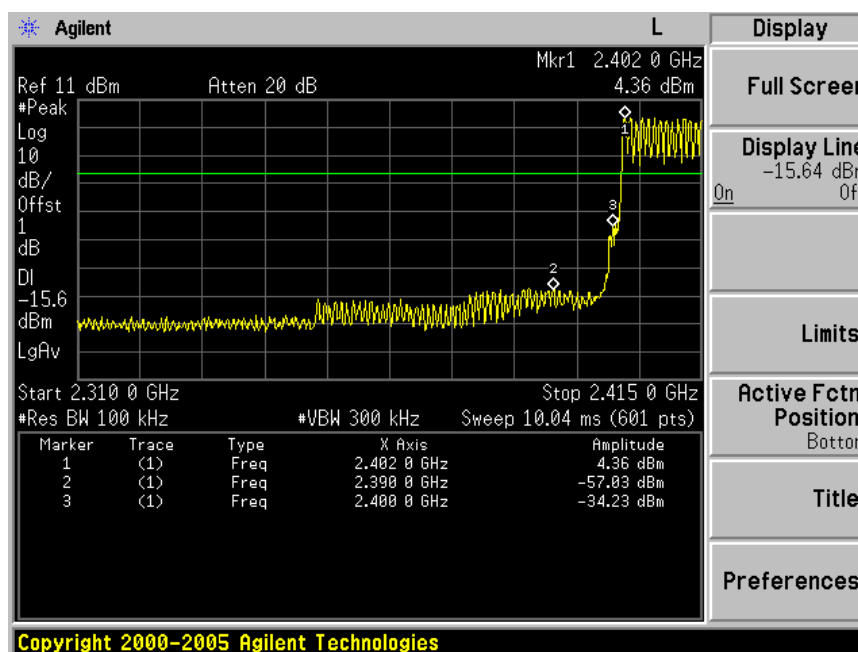

Band edge testing



Hopping off mode:

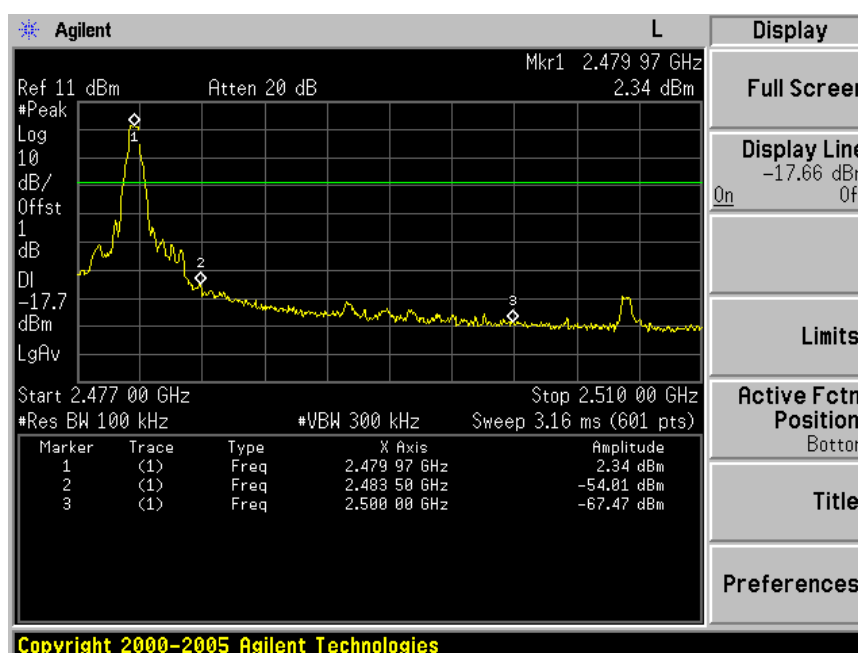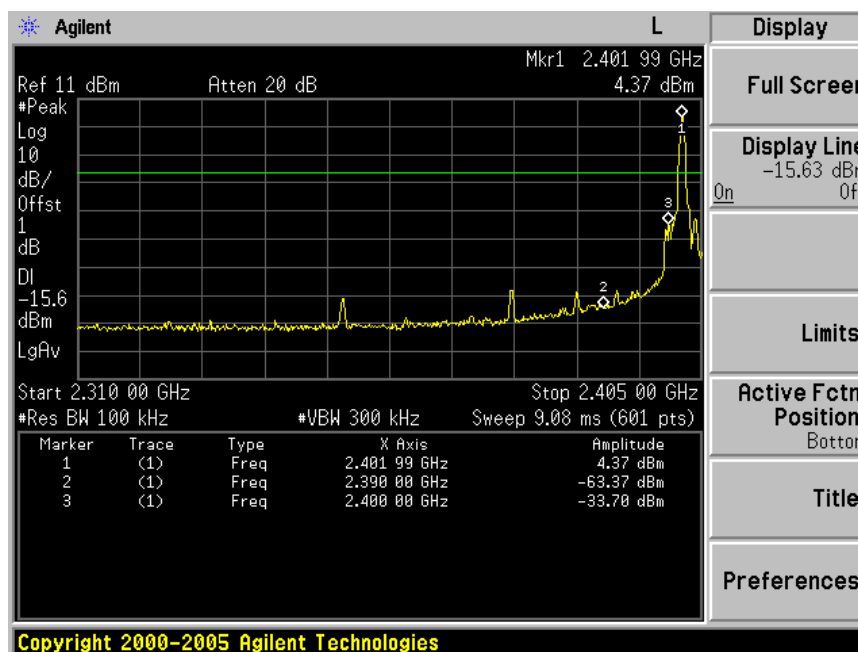

Band edge testing



8DPSK Modulation Test Result:

Hopping on mode:

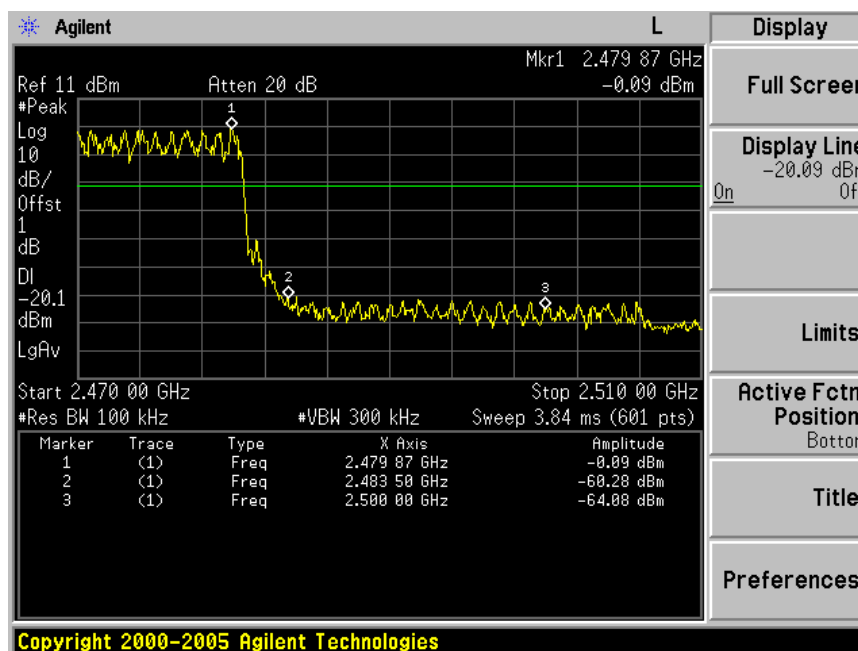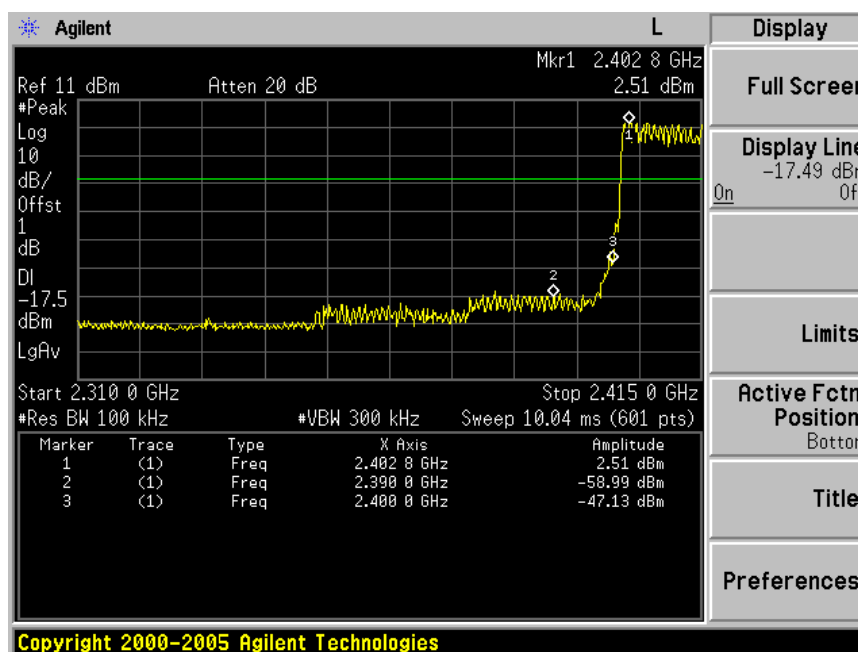

Band edge testing

Hopping off mode:

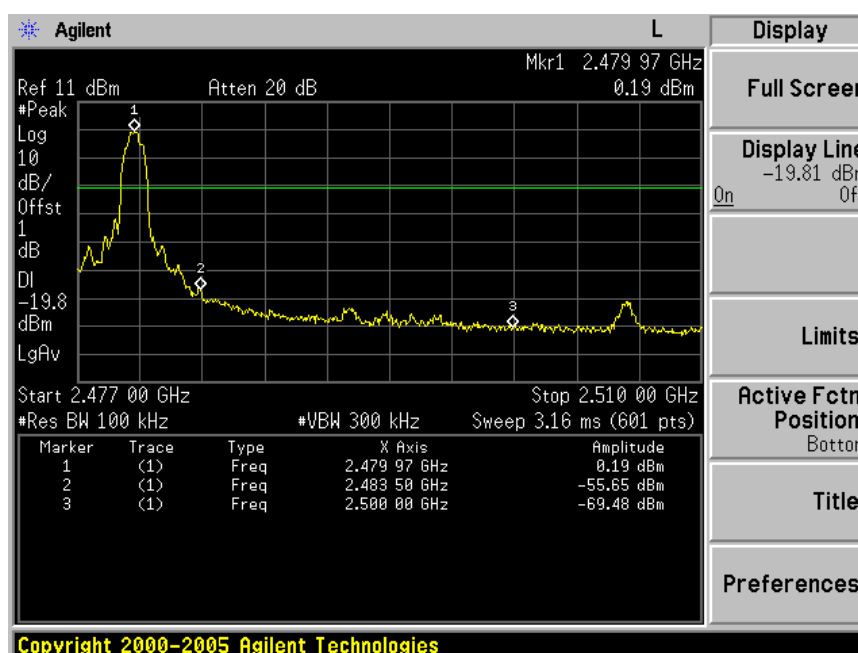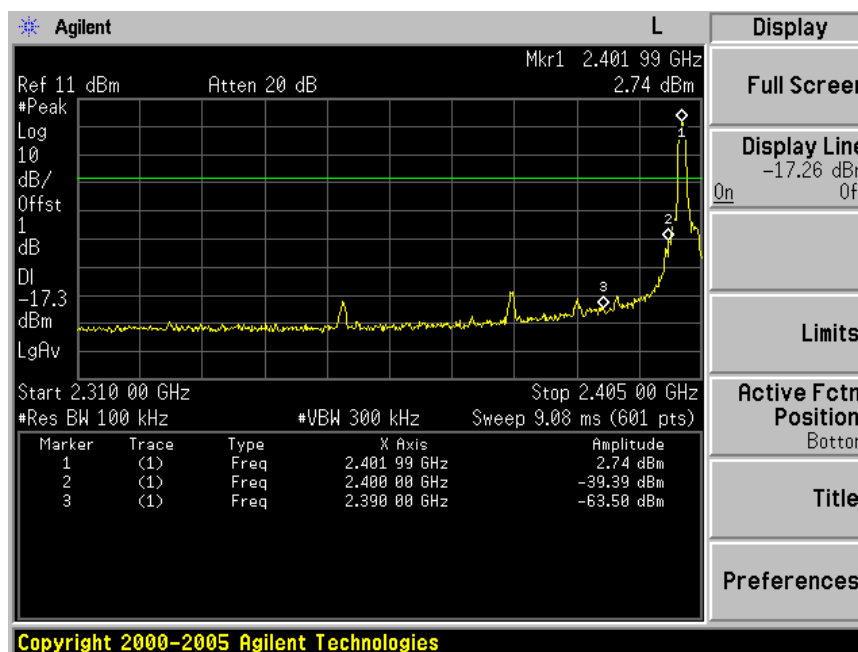

9.9 Spurious radiated emissions for transmitter

Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{duty cycle}/100\text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Limit

According to part 15.247(d), the radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBuV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter and receiver

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

Bluetooth Mode GFSK Modulation 2402MHz Test Result

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Amp. Factor dB	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
197.42	9.77	1.78	-	23.10	34.65	Vertical	43.5	QP	Pass
196.68	9.73	1.78	-	29.10	40.61	Horizontal	43.5	QP	Pass
*1595.00	25.72	4.76	34.6	48.57	44.45	Vertical	74.0	PK	Pass
*1595.00	24.93	4.63	36.15	52.17	45.58	Horizontal	74.0	PK	Pass
*4804.000	32.47	8.56	35.72	45.94	51.25	Vertical	74.0	PK	Pass
*4804.000	32.47	8.56	35.72	44.5	49.81	Horizontal	74.0	PK	Pass
-	-	-	-	-	-	-	-	-	-

Bluetooth Mode GFSK Modulation 2441MHz Test Result

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Amp. Factor dB	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
1629.00	24.87	4.68	36.11	57.02	50.46	Vertical	74.0	PK	Pass
1629.00	24.87	4.68	36.11	50.99	44.43	Horizontal	74.0	PK	Pass
*4882.000	32.64	8.64	35.7	44.84	50.42	Vertical	74.0	PK	Pass
*4882.000	32.64	8.64	35.7	43.05	48.63	Horizontal	74.0	PK	Pass
-	-	-	-	-	-	-	-	-	-

Bluetooth Mode GFSK Modulation 2480MHz Test Result

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Amp. Factor dB	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
*1646.00	24.84	4.7	36.09	57.67	51.12	Vertical	74.0	PK	Pass
*1646.00	24.84	4.7	36.09	50.71	44.16	Horizontal	74.0	PK	Pass
*4960.000	32.81	8.72	35.7	49.01	54.84	Vertical	74.0	PK	Pass
*4960.000	32.81	8.72	35.7	41.51	47.34	Vertical	54.0	AV	Pass
*4960.000	32.81	8.72	35.7	44.6	50.43	Horizontal	74.0	PK	Pass
-	-	-	-	-	-	-	-	-	-

Remark:

- (1) QP Emission Level= Antenna Factor +Cable Loss + Reading
PK Emission Level= Antenna Factor +Cable Loss - Amp. factor + Reading
AV Emission Level= PK Emission Level+20log(dutycycle)
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (3) “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

10 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE	
CE	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Nov.04, 13	<input checked="" type="checkbox"/>
	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Nov.04, 13	<input checked="" type="checkbox"/>
	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.07, 14	<input type="checkbox"/>
	RF Cable	3D-2W	Fujikura	LISN Cable 1#	May.07, 14	<input checked="" type="checkbox"/>
	Coaxial Switch	MP59B	Anritsu	M55367	May.07, 14	<input checked="" type="checkbox"/>
	Passive Probe	ESH2-Z3	Rohde & Schwarz	299.7810.52	May.07, 14	<input type="checkbox"/>
	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100341	May.07, 14	<input type="checkbox"/>
C	Spectrum	Agilent	E4446A	US44300459	May.07, 14	<input checked="" type="checkbox"/>
RE < 1 GHz	Test Receiver <1GHz	Rohde & Schwarz	ESVS10	834468/011	May.07, 14	<input checked="" type="checkbox"/>
	Amplifier < 1 GHz	HP	8447D	2648A04738	May.07, 14	<input checked="" type="checkbox"/>
	HF Cable	Hubersuhne	Sucoflex104	Room 2	May.07, 14	<input checked="" type="checkbox"/>
	Bilog Antenna	Schaffner	CBL6111C	2598	Oct.25, 13	<input checked="" type="checkbox"/>
RE > 1 GHz	Spectrum > 1GHz	Agilent	E4446A	US44300459	May.07, 14	<input checked="" type="checkbox"/>
	Horn Antenna	EMCO	3115	9607-4877	Jun. 23, 14	<input checked="" type="checkbox"/>
	Amp > 1 Ghz	HP	8449B	3008A08495	May.07, 14	<input checked="" type="checkbox"/>
	HF Cable	Hubersuhne	Sucoflex104	Room1	May.07, 14	<input checked="" type="checkbox"/>

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- 20dB bandwidth and 99% Occupied Bandwidth
- Carrier frequency separation
- Number of hopping frequencies
- Dwell Time
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items	Extended Uncertainty
Radiated spurious emission	4.32dB (30MHz-1GHz)
	2.27dB (1GHz -25GHz)
Conducted spurious emission	2.10dB(30MHz-25GHz)
Bandwidth test	$1*10^{-9}$
Conducted emission	2.4dB