



# RF TEST REPORT




Report No.: FCC\_IC\_RF\_SL16021701-LHS-001 Touch  
Supersede Report No.: None

Applicant	Pass & Seymour, Inc. d/b/a Legrand		
Product Name	ADORNE TAP RF IN-WALL SCENE CONTROLLER		
Model No.	204450		
Test Standard	47CFR15.247 RSS-247 Issue 1.0, May 2015		
Test Method	ANCI C63.4:2014 RSS-Gen Issue 4.0, Nov 2014 FCC Public Notice DA 00-705, 558074 D01 DTS Meas Guidance v03r04		
FCC ID	YV8-204450		
IC ID	9922A-204450		
Date of test	03/01/2016 to 03/18/2016		
Issue Date	03/21/2016		
Test Result	<u>Pass</u>	Fail	
Equipment complied with the specification			[ x ]
Equipment did not comply with the specification			[ ]
 <b>Teody Manansala</b> Test Engineer		 <b>Chen Ge</b> Engineer Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

**Issued By:**  
**SIEMIC Laboratories**  
**775 Montague Expressway, Milpitas, 95035 CA**



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description .....6

6.2 Radio Description .....6

6.3 EUT test modes/configuration Description.....6

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....7**

7.1 Supporting Equipment .....7

7.2 Cabling Description .....7

7.3 Test Software Description .....7

**8 TEST SUMMARY .....8**

**9 MEASUREMENT UNCERTAINTY .....9**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....10**

10.1 Antenna Requirement.....10

10.2 Conducted Emissions.....11

10.3 20dB Bandwidth & 99% Bandwidth .....14

10.4 Number of Hopping Channel .....17

10.5 Peak Output Power .....18

10.6 Channel Separation .....21

10.7 Time of Occupancy .....22

10.8 Peak Spectral Density .....25

10.9 Band Edge .....28

10.10 Radiated Emissions below 1GHz.....30

10.11 Radiated Spurious Emissions above 1GHz.....37

**ANNEX A. TEST INSTRUMENT .....42**

**ANNEX B. SIEMIC ACCREDITATION .....43**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL16021701-LHS-001 Touch	None	Original	03/21/2016

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of the following product

Company: Pass & Seymour, Inc. d/b/a Legrand  
Product: ADORNE TAP RF IN-WALL SCENE CONTROLLER  
Model: 204450

against the current Stipulated Standards. The ADTHRIWHC 204450-02 RF module (FCC ID: YV8-204450, IC ID: 9922A-204450)) has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	Pass & Seymour, Inc. d/b/a Legrand
Applicant Address	301 Fulling Mill Road, Suite G, Middletown, PA 17057
Manufacturer Name	Pass & Seymour, Inc. d/b/a Legrand
Manufacturer Address	301 Fulling Mill Road, Suite G, Middletown, PA 17057

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	ADORNE TAP RF IN-WALL SCENE CONTROLLER
Model No.	204450
Host Model No.	ADTHRIWHCM1, ADTPRIWHCM1
Trade Name	Legrand
Serial No.	N/A
Input Power	120VAC, 60Hz
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Product Hardware version	E2
Product Software version	1.0
Radio Hardware version	1.0
Radio Software version	1.0
Date of EUT received	03/01/2016
Equipment Class/ Category	DSSS
Port/Connectors	N/A
Remark	N/A

### 6.2 Radio Description

#### Spec for Radio -

Radio Type	UHF RFID
Operating Frequency	904.861-924.873 MHz
Modulation	FSK Synchronous Manchester Encoded(Hybrid Spread Spectrum)
Number of Channels	3
Antenna Type	Embedded antenna
Antenna Gain	2.56 dBi
Antenna Connector Type	Attached to PCBA

### 6.3 EUT test modes/configuration Description

#### Test mode

Test Mode		Note
Test_mode_1	Transmitting continuously	-
Test_mode_2		-
Test_mode_3		-
Test_mode_4		-
Remark:		

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
-	-	-	-	-	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
AC Power	EUT Host	AC Power	AC Mains	Mains Outlet	1	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
-	-	-

## 8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.4 – 2014 FCC Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS 247	IC	-	
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.4 – 2014	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247(5.5)	IC	RSS-Gen Issue 4.0, Nov 2014	

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Channel Separation	FCC	15.247 (a)(1)	FCC	FCC Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.3.1)	IC	-	
Occupied Bandwidth	FCC	15.247 (a)(1)	FCC	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS Gen Issue4(4.6)	IC	-	
20 dB Bandwidth	FCC	15.247 (a)(2)	FCC	FCC Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.1.3)	IC	-	
Number of Hopping Channels	FCC	15.247 (a)(1)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.3)	IC	-	
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	FCC Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.5)	IC	-	
Time of Occupancy	FCC	15.247 (a)(1)	FCC	FCC Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.3.1)	IC	-	
Output Power	FCC	15.247(b)	FCC	FCC Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247 (5.4.1)	IC	-	
Receiver Spurious Emissions	FCC	15.247(d)	FCC	FCC Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen Issue4(7.1)	IC	-	
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.4)	IC	-	
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v03r04	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS210(5.2.2)	IC	-	
Hybrid System Requirement	FCC	15.247(f)	FCC	FCC Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.3)	IC	-	
Hopping Capability	FCC	15.247(g)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1)	IC	-	
Hopping Coordination Requirement	FCC	15.247(h)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247(5.1)	IC	-	
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen Issue4(3.2)	IC	-	

- |        |  |
|--------|--|
| Remark | <ol style="list-style-type: none"> <li>All measurement uncertainties do not take into consideration for all presented test results.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> <li>The EUT is a hybrid system that employ a combination of both frequency hopping and digital modulation techniques</li> </ol> |
|--------|--|



## 9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions Voltage	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

## 10 Measurements, Examination and Derived Results


### 10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device.            b) Antenna must use a unique type of connector to attach to the device.            c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.</p>	<input checked="" type="checkbox"/>
Remark	The antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

## 10.2 Conducted Emissions

### Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

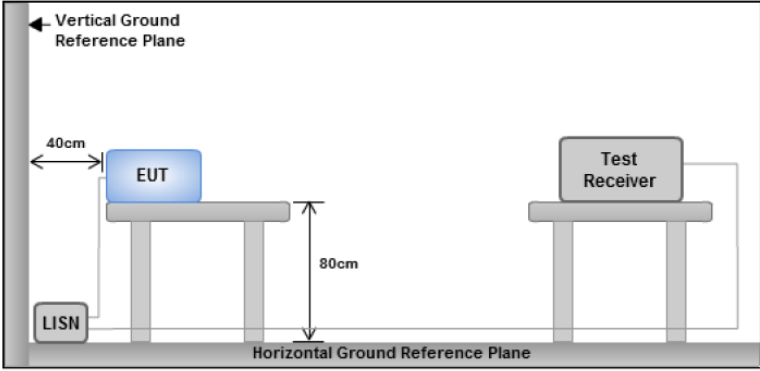Spec	Item	Requirement	Applicable
47CFR§15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup		 <p style="text-align: center;">Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>	
Procedure		<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>	
Remark		EUT tested at 120VAC 60Hz	
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A

Test was done by Teody Manansala at Conducted Emission test site.

### Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21.5	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	37		
	Atmospheric(mbar):	1028		
Mains Power:	120Vac, 60Hz			
Tested by:	Teody Manansala			
Test Date:	03/17/2016			
Remarks	Line			

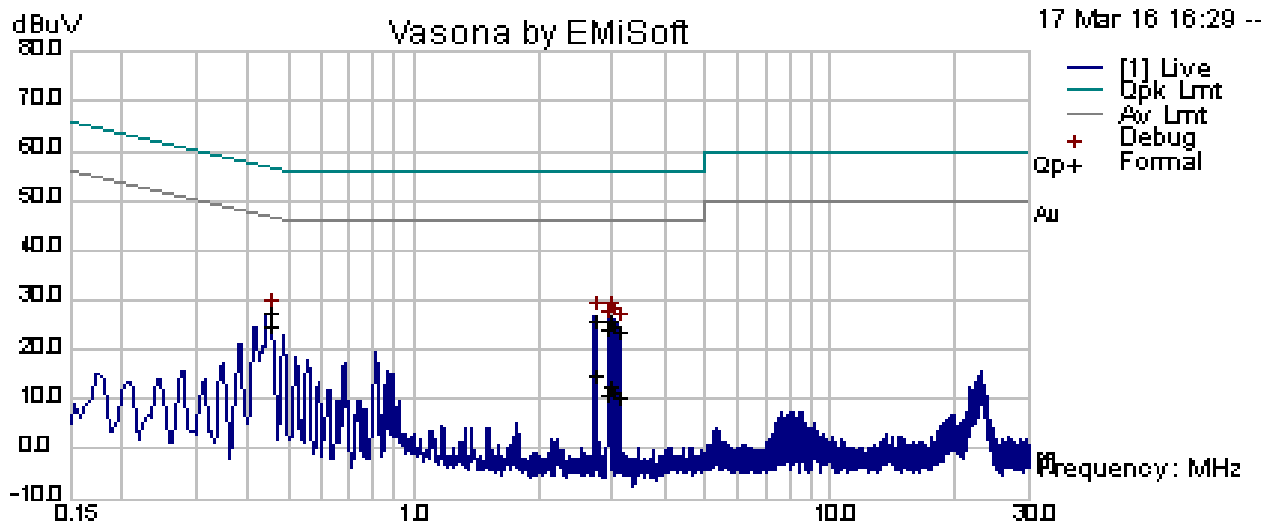


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
2.73	15.29	10.03	0.55	25.87	Quasi Peak	Line	56.00	-30.13	Pass
2.96	15.45	10.03	0.55	26.03	Quasi Peak	Line	56.00	-29.97	Pass
0.45	16.70	10.01	0.71	27.42	Quasi Peak	Line	56.86	-29.44	Pass
3.03	14.27	10.03	0.55	24.85	Quasi Peak	Line	56.00	-31.15	Pass
2.93	13.90	10.03	0.55	24.48	Quasi Peak	Line	56.00	-31.52	Pass
3.10	13.24	10.03	0.55	23.82	Quasi Peak	Line	56.00	-32.18	Pass
2.73	4.42	10.03	0.55	15.00	Average	Line	46.00	-31.00	Pass
2.96	1.88	10.03	0.55	12.46	Average	Line	46.00	-33.54	Pass
0.45	13.88	10.01	0.71	24.60	Average	Line	46.86	-22.26	Pass
3.03	0.90	10.03	0.55	11.48	Average	Line	46.00	-34.52	Pass
2.93	0.30	10.03	0.55	10.88	Average	Line	46.00	-35.12	Pass
3.10	-0.25	10.03	0.55	10.33	Average	Line	46.00	-35.67	Pass

### Conducted Emission Test Results

Test specification:	Conducted Emissions				
Environmental Conditions:	Temp(°C):	21.5	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
	Humidity (%):	37			
	Atmospheric(mbar):	1028			
Mains Power:	120Vac, 60Hz				
Tested by:	Teody Manansala				
Test Date:	01/30/2015				
Remarks	Neutral				

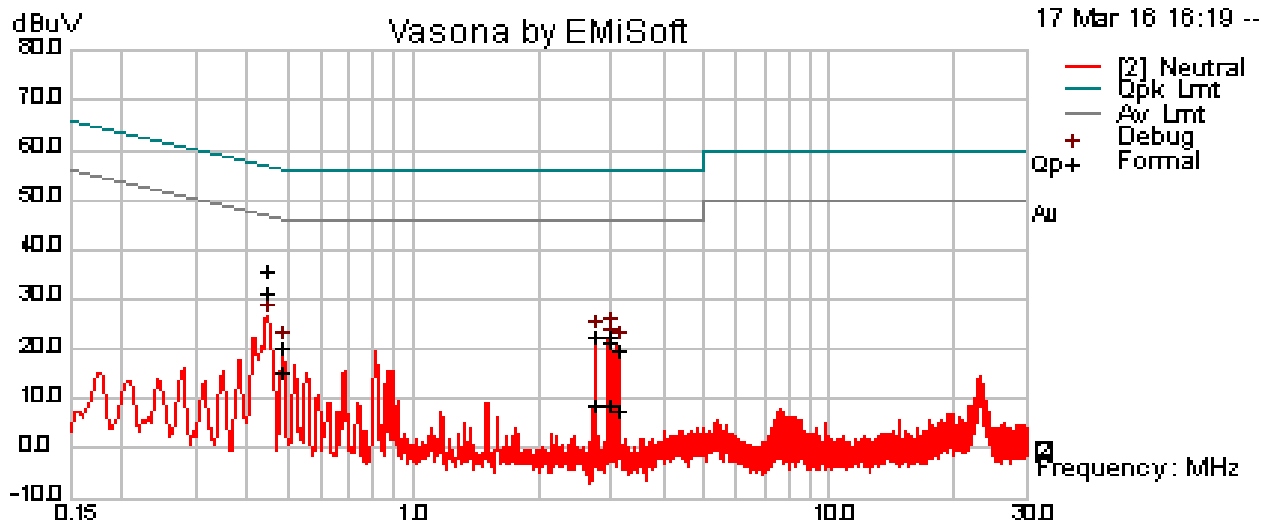


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.44	24.89	10.01	0.72	35.62	Quasi Peak	Neutral	57.00	-21.38	Pass
2.97	11.81	10.03	0.55	22.38	Quasi Peak	Neutral	56.00	-33.62	Pass
2.74	11.76	10.03	0.55	22.34	Quasi Peak	Neutral	56.00	-33.66	Pass
2.96	11.11	10.03	0.55	21.68	Quasi Peak	Neutral	56.00	-34.32	Pass
3.11	9.31	10.03	0.55	19.89	Quasi Peak	Neutral	56.00	-36.11	Pass
0.49	9.41	10.01	0.69	20.11	Quasi Peak	Neutral	56.24	-36.14	Pass
0.44	20.50	10.01	0.72	31.23	Average	Neutral	47.00	-15.77	Pass
2.97	-1.79	10.03	0.55	8.79	Average	Neutral	46.00	-37.21	Pass
2.74	-1.73	10.03	0.55	8.84	Average	Neutral	46.00	-37.16	Pass
2.96	-2.02	10.03	0.55	8.56	Average	Neutral	46.00	-37.44	Pass
3.11	-2.94	10.03	0.55	7.64	Average	Neutral	46.00	-38.36	Pass
0.49	4.89	10.01	0.69	15.59	Average	Neutral	46.24	-30.65	Pass

### 10.3 20dB Bandwidth & 99% Bandwidth

**Requirement(s):**

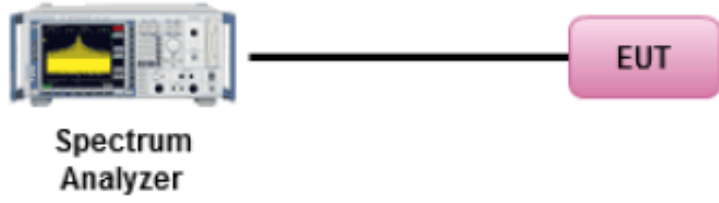Spec	Requirement	Applicable
47 CFR §15.247 (a) RSS-247 (5.1.3)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
RSS Gen Issue 4.0 (4.6.1)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;"><b>Spectrum Analyzer</b>      <b>EUT</b></p>	
Procedure	<p><u>20dB Emission bandwidth measurement procedure</u></p> <ol style="list-style-type: none"> <li>1. Set RBW <math>\geq</math> 1% of 20dB Bandwidth</li> <li>2. Set the video bandwidth (VBW) <math>\geq</math> RBW.</li> <li>3. Detector = Peak.</li> <li>4. Trace mode = max hold.</li> <li>5. Sweep = auto couple.</li> <li>6. Allow the trace to stabilize.</li> <li>7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ol> <p><u>99% Occupied bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Allow the trace to stabilize.</li> <li>- Use the spectrum analyser built-in measurement function to determine the 99% OBW.             <ul style="list-style-type: none"> <li>o Set RBW = close to 1% of the selected span as is</li> <li>o Set VBW = 3 x RBW</li> <li>o Detector = Peak</li> <li>o Trace mode = max hold</li> <li>o Sweep = auto couple</li> </ul> </li> <li>- Capture the plot.</li> <li>- Repeat above steps for different test channel and other modulation type.</li> </ul>	
Test Date	03/14/2016	Environmental condition Temperature 24°C Relative Humidity 46.3% Atmospheric Pressure 1019mbar
Remark	-	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

**Test Data**    Yes       N/A  
**Test Plot**    Yes       N/A

**Test was done by Teody Manansala at RF test site.**


**20dB Bandwidth Test Result**

Type	Freq (MHz)	Test mode	CH	20dB Bandwidth (MHz)
20dB OBW	904.86	Con-TX	Low	0.06869
20dB OBW	918.86	Con-TX	Mid	0.06866
20dB OBW	924.87	Con-TX	High	0.06863


**99% Bandwidth Test Result**

Type	Freq (MHz)	Test mode	CH	99% Bandwidth (MHz)
99% OBW	904.861	Con-TX	Low	0.066970
99% OBW	918.869	Con-TX	Mid	0.066967
99% OBW	924.873	Con-TX	High	0.066848


**20 dB & 99% Test Plots**

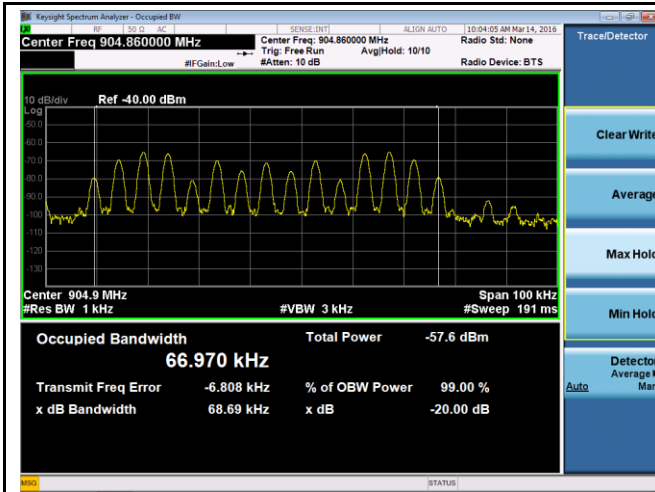

**20dB BW Low CH**

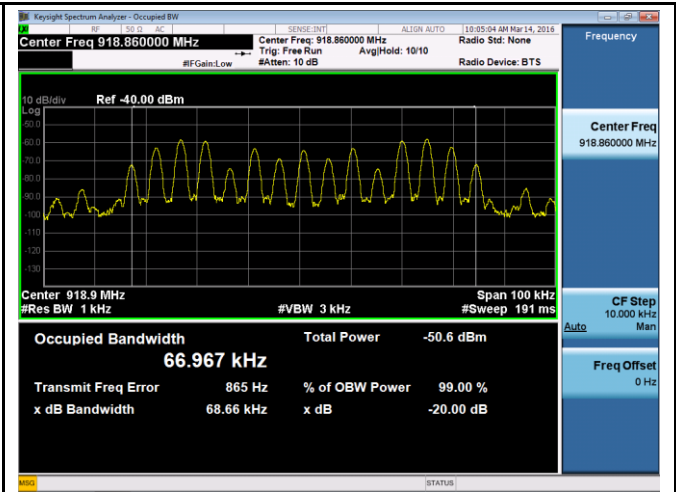

**20dB BW Mid CH**

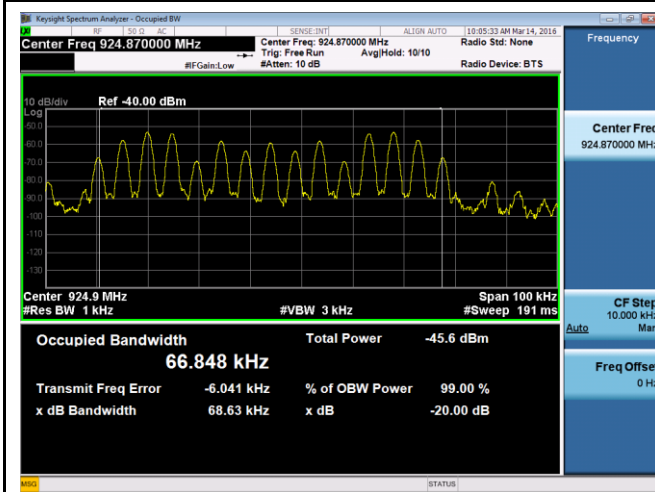


**20dB BW High CH**





### 10.4 Number of Hopping Channel

**Requirement(s):**

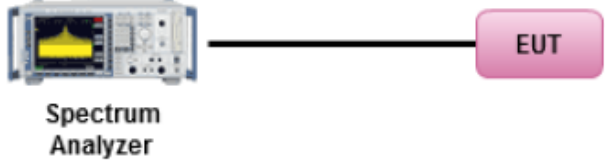Spec	Requirement	Applicable									
47 CFR §15.247 RSS-247 (5.3)	For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz	<input type="checkbox"/>									
Test Setup	 <p>The diagram shows a Spectrum Analyzer on the left connected by a cable to a pink box labeled 'EUT' on the right.</p>										
Procedure	<u>Number of hopping frequencies procedure</u> <ol style="list-style-type: none"> <li>1. The EUT must have its hopping function enabled</li> <li>2. Span = the frequency band of operation.</li> <li>3. Resolution (or IF) Bandwidth (RBW) &gt;= 1% of the span.</li> <li>4. Video (or Average) Bandwidth (VBW) &gt;= RBW.</li> <li>5. Detector = peak.</li> <li>6. Sweep time = auto couple.</li> <li>7. Trace mode = max hold.</li> <li>8. Allow trace to fully stabilize.</li> <li>9. Save the plot</li> </ol>										
Test Date	N/A	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>N/A</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>N/A</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>N/A</td> </tr> </table>	Environmental condition	Temperature	N/A		Relative Humidity	N/A		Atmospheric Pressure	N/A
Environmental condition	Temperature	N/A									
	Relative Humidity	N/A									
	Atmospheric Pressure	N/A									
Remark	The EUT is hybrid system, this item is not applicable to EUT.										
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail										

**Test Data**     Yes       N/A

**Test Plot**     Yes       N/A

## 10.5 Peak Output Power

### Requirement(s):

Spec	Requirement	Applicable
47 CFR §15.247 (b) RSS-247 (5.4.1)	For all other frequency hopping systems in the 902-928 MHz band: 1 Watt. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm.	<input checked="" type="checkbox"/>
Test Setup		
Procedure	<p><u>Maximum output power measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.</li> <li>- RBW &gt; 1% of the 20 dB bandwidth of the emission being measured;</li> <li>- VBW &gt;= RBW.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.</li> </ul>	
Test Date	03/16/2016	Environmental condition Temperature 22.1°C Relative Humidity 45.5% Atmospheric Pressure 1019mbar
Remark	EIRP = Measured Field Strength – 95.23 ( @ 3m distance) Measured Power = EIRP – Ant Gain	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data     Yes       N/A



Test Plot     Yes       N/A

Test was done by Teody Manansala at 10 meter Chamber.


**Output Power Test Result**

Type	Freq (MHz)	Test mode	CH	Measured field strength@3m (dBuV/m)	Antenna Gain (dBi)	Converted Conducted Power (dBm)	Limit (dBm)	Result
Output power	904.861	Cont-TX	Low	85.71	2.56	-12.08	30	Pass
Output power	918.869	Cont-TX	Mid	89.39	2.56	-8.40	30	Pass
Output power	924.873	Cont-TX	High	87.80	2.56	-9.90	30	Pass


**Test Plots**

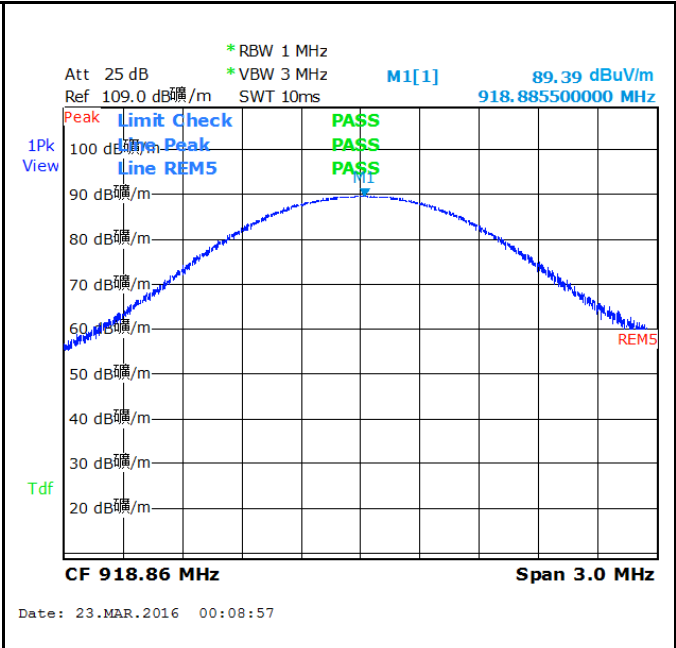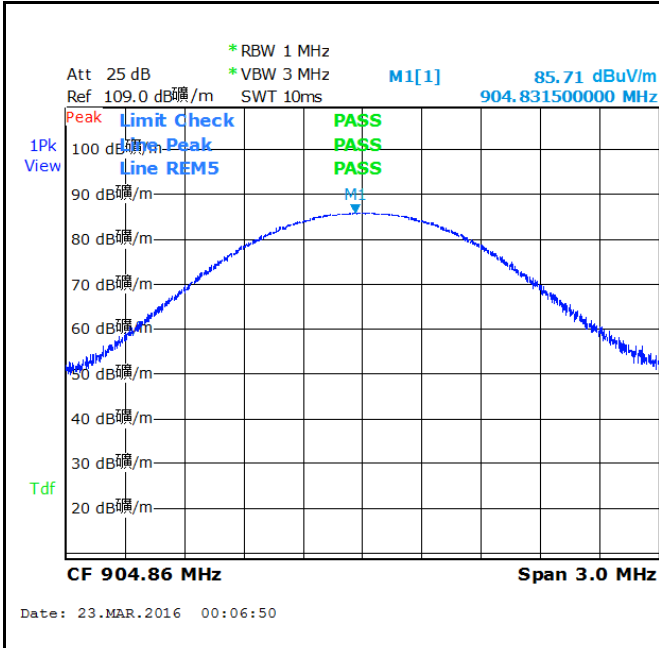

**Output power - Low CH**

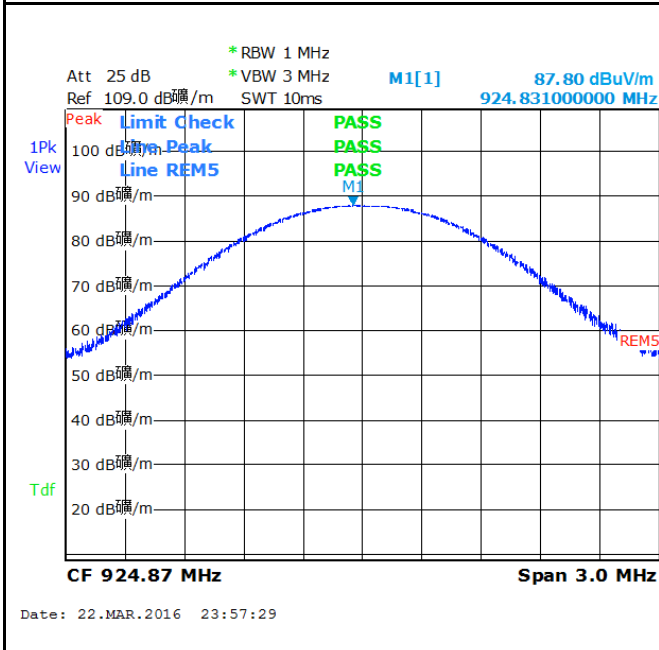

**Output power - Mid CH**




**Output power - High CH**



## 10.6 Channel Separation

### Requirement(s):

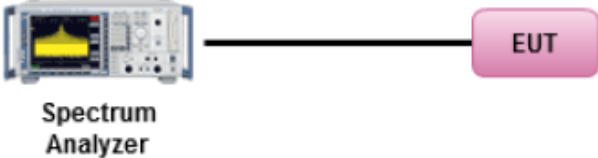
Spec	Requirement	Applicable									
47 CFR §15.247 (a)(1) RSS-247 (5.3.1)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>									
Test Setup	 <p style="text-align: center;"><b>Spectrum Analyzer</b></p>										
Procedure	<u>Channel Separation procedure</u> <ol style="list-style-type: none"> <li>1. The EUT must have its hopping function enabled.</li> <li>2. Span = wide enough to capture the peaks of two adjacent channels</li> <li>3. Resolution (or IF) Bandwidth (RBW) &gt;= 1% of the span</li> <li>4. Video (or Average) Bandwidth (VBW) &gt;= RBW.</li> <li>5. Detector = Peak.</li> <li>6. Trace mode = max hold.</li> <li>7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.</li> </ol>										
Test Date	N/A	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>45%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	23°C		Relative Humidity	45%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	23°C									
	Relative Humidity	45%									
	Atmospheric Pressure	1019mbar									
Remark	EUT belongs to hybrid system. There is not hop channel separation restriction on hybrid system. The results here are for reference.										
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail <input checked="" type="checkbox"/> N/A										

**Test Data**     Yes             N/A

**Test Plot**     Yes             N/A

## 10.7 Time of Occupancy

### Requirement(s):

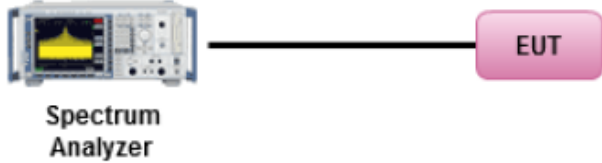Spec	Requirement	Applicable									
47 CFR §15.247 RSS-247 (5.3.1)	<p>For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 2 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.</p> <p>The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.</p>	<input checked="" type="checkbox"/>									
Test Setup	 <p>Spectrum Analyzer</p>										
Procedure	<p>Channel Separation procedure</p> <ol style="list-style-type: none"> <li>1. The EUT must have its hopping function enabled.</li> <li>2. Span = zero span</li> <li>3. centered on a hopping channel</li> <li>4. RBW = 1 MHz; VBW &gt;= RBW</li> <li>5. Sweep = as necessary to capture the entire dwell time per hopping channel.</li> <li>6. Detector = Peak.</li> <li>7. Trace mode = max hold.</li> <li>8. If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.</li> </ol>										
Test Date	03/16/2016	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>45%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	23°C		Relative Humidity	45%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	23°C									
	Relative Humidity	45%									
	Atmospheric Pressure	1019mbar									
Remark	<p>EUT belongs to hybrid system. We used 2s as the repetition observation time, which is equal to the number of hopping frequencies employed multiplied by 0.4.</p> <p>Dwell Time equals to the number of repetition times in each channel in 2 seconds multiply by the time of occupancy in each hopping frequency.</p>										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data     Yes       N/A


Test Plot     Yes       N/A

Test was done by Teody Manansala at RF test site.


### Dwell Time Test Result

Index	Mode	Frequency (MHz)	Type	Measurement	Calculated Dwell Time(Sec)	Limit (Sec)
1	TX	904.861	Single Pulse time (Sec)	0.01508	0.1116	0.4
2	TX	904.861	Cycle time(Sec)	0.2703		
3	TX	918.869	Single Pulse time (Sec)	0.01508	0.1182	0.4
4	TX	918.869	Cycle time(Sec)	0.2552		
5	TX	924.873	Single Pulse time (Sec)	0.01508	0.1116	0.4
6	TX	924.873	Cycle time(Sec)	0.2703		


**Test Plots**

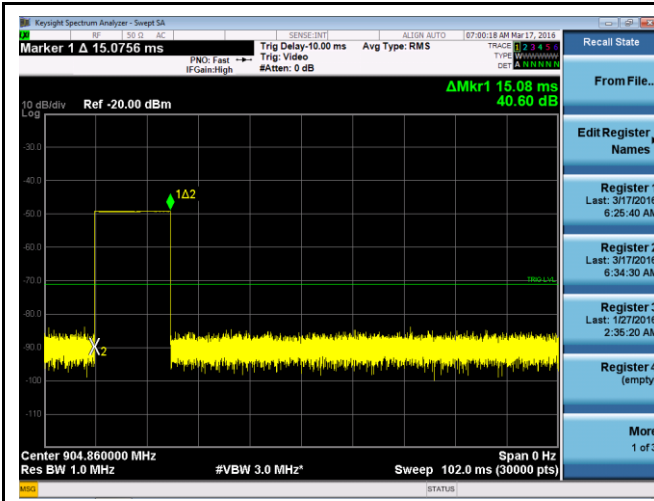


**Low Channel Single Pulse Time**

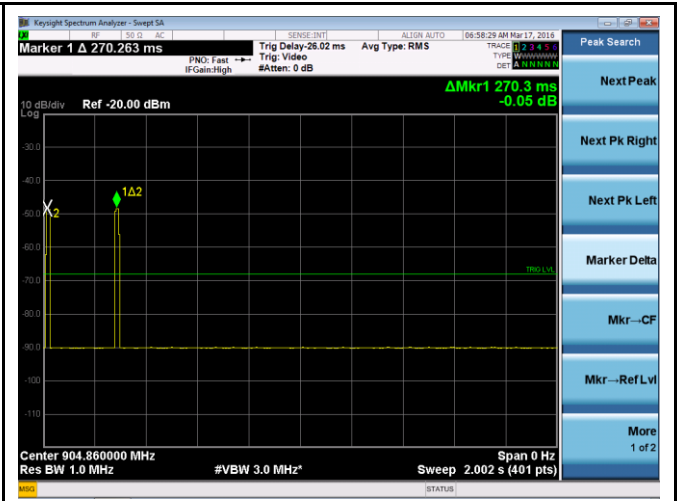


**Low Channel Cycle Time**

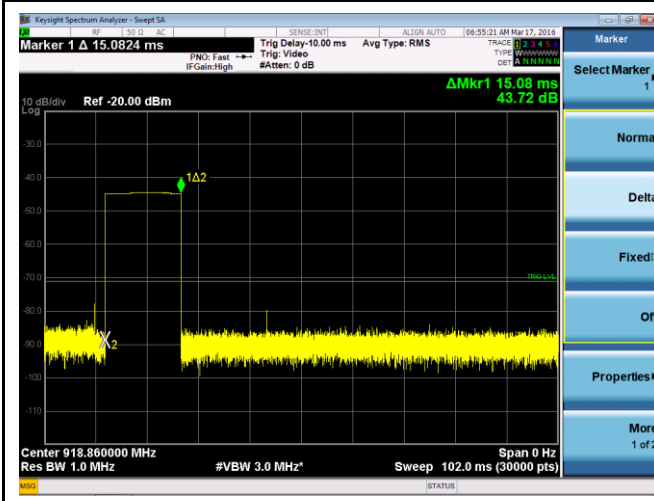


**Mid Channel Single Pulse Time**

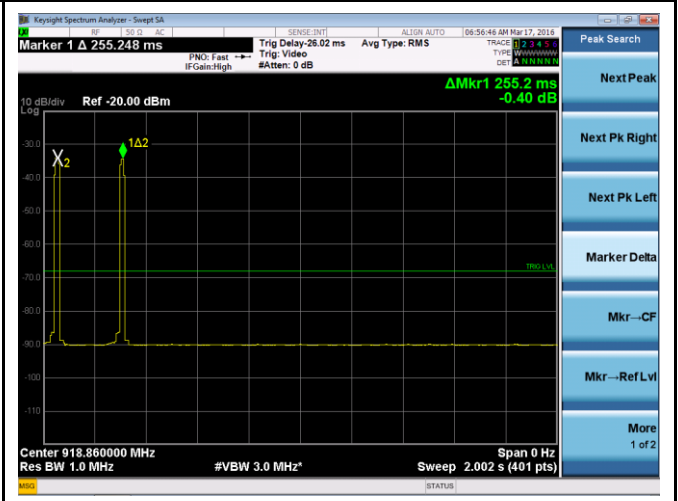

**Mid Channel Cycle Time**

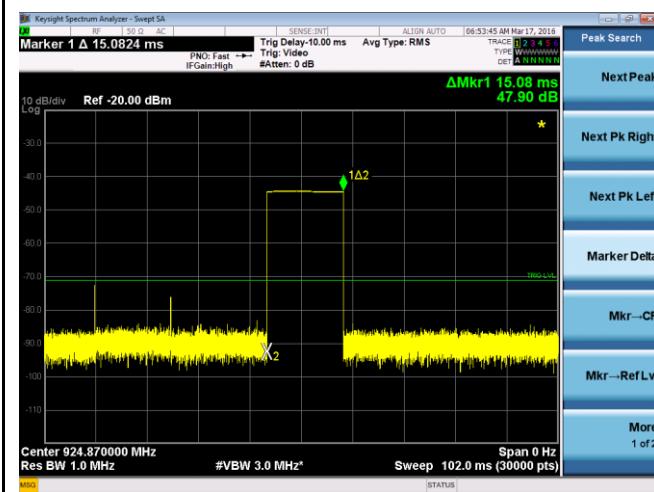

**High Channel Single Pulse Time**

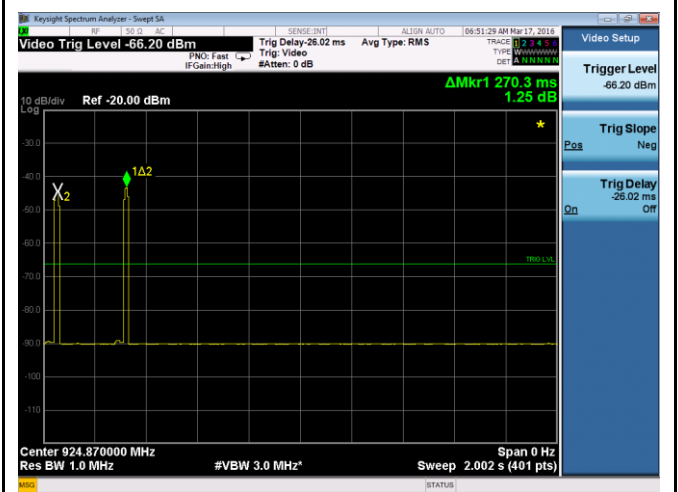

**High Channel Cycle Time**



## 10.8 Peak Spectral Density

### Requirement(s):

Spec	Requirement	Applicable									
47 CFR §15.247 RSS-247 (5.2.2)	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission	<input checked="" type="checkbox"/>									
Test Setup											
Procedure	<p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set analyzer center frequency to DTS channel center frequency.</li> <li>- Set the span to 1.5 times the DTS bandwidth.</li> <li>- Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul>										
Test Date	03/16/2016	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>45%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table>	Environmental condition	Temperature	23°C		Relative Humidity	45%		Atmospheric Pressure	1019mbar
Environmental condition	Temperature	23°C									
	Relative Humidity	45%									
	Atmospheric Pressure	1019mbar									
Remark	<p>EIRP density = Measured Field Strength – 95.23 ( @ 3m distance)            Measured PSD = EIRP density – Ant Gain</p>										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data     Yes (See below)       N/A



Test Plot     Yes (See below)       N/A

Test was done by Teody Manansala at 10 meter Chamber.

**PSD Test Data**


Type	Freq (MHz)	Test mode	CH	Measured field strength@3m (dBuV/m)	Antenna Gain (dBi)	Converted PSD (dBm/3KHz)	Limit (dBm)	Result
Maximum PSD	904.861	Cont-TX	Low	82.91	2.56	-14.88	8	Pass
Maximum PSD	918.869	Cont-TX	Mid	86.59	2.56	-11.20	8	Pass
Maximum PSD	924.873	Cont-TX	High	85.00	2.56	-12.79	8	Pass

**Test Plots**

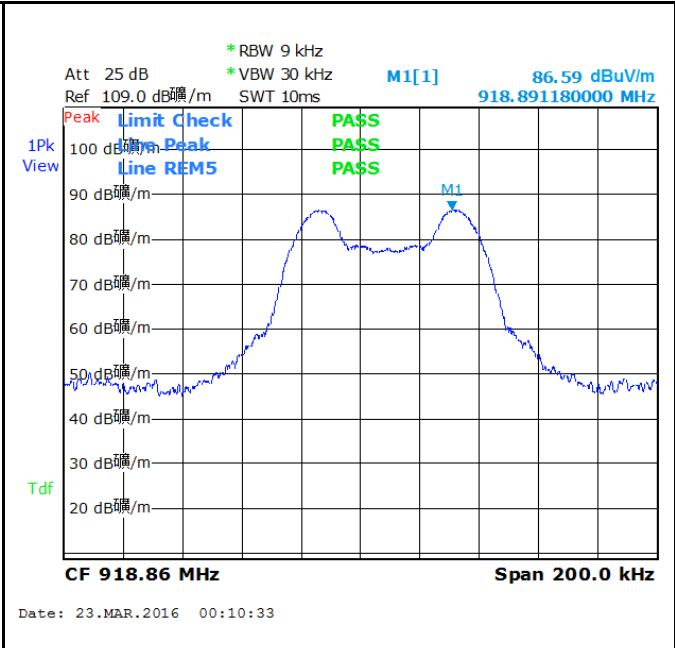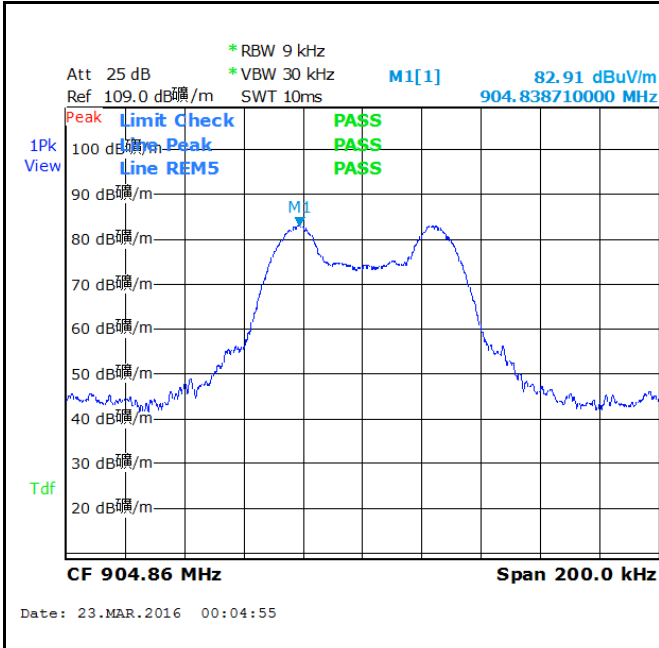

**Output power - Low CH**

**Output power - Mid CH**

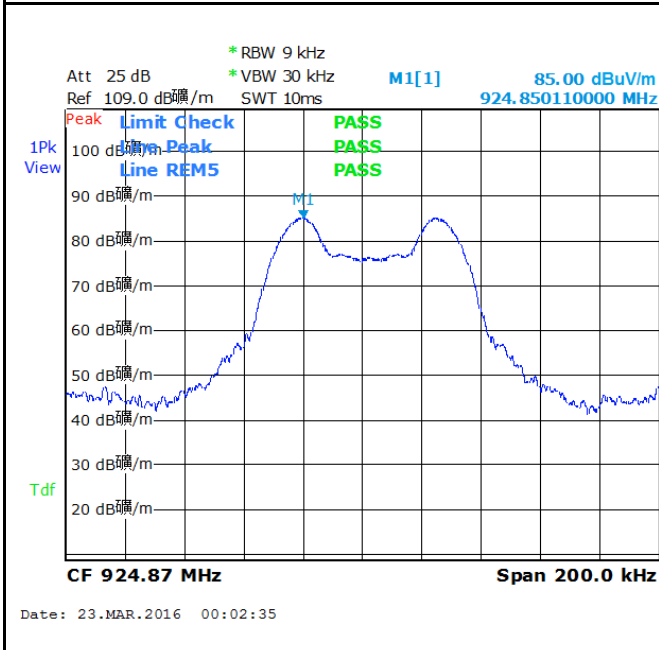

**Output power - High CH**

## 10.9 Band Edge

### Requirement(s):


Spec	Item	Requirement	Applicable
§ 15.247(d), RSS-247 Issue 1.0, May 2015	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required  <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r04</p> <p><u>Band Edge measurement procedure</u></p> <ol style="list-style-type: none"> <li>1. Set the EUT to maximum power setting and enable the EUT transmit continuously.</li> <li>2. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>3. Change modulation and channel bandwidth then repeat step 1 to 2.</li> <li>4. Measured and record the results in the test report.</li> </ol>		
Test Date	03/17/2016	Environmental condition	Temperature 23°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	None		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes     N/A


Test Plot     Yes     N/A

Test was done by Teody Manansala at 10 meter Chamber.

**Test Plots**

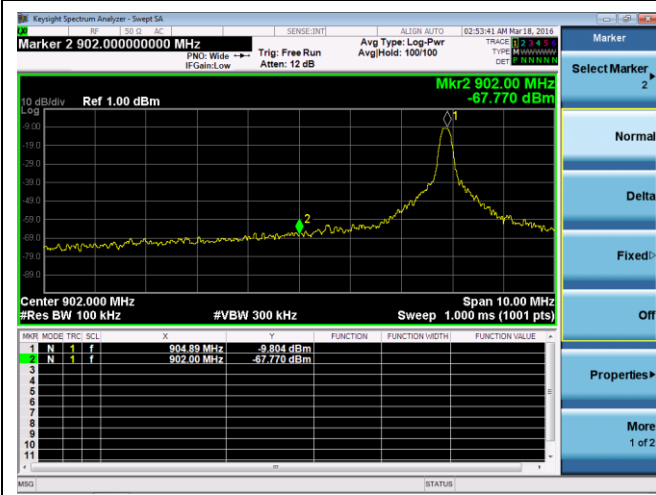

**Band Edge-Low CH**

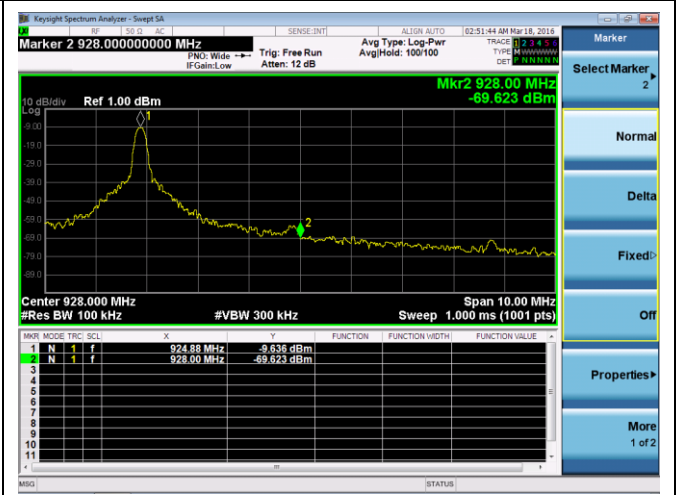

**Band Edge-High CH**

### 10.10 Radiated Emissions below 1GHz

**Requirement(s):**

Spec	Item	Requirement	Applicable															
47CFR§15.247(d), RSS247(5.5)	a)	<p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> <th>Measurement Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88 – 216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216 960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	Measurement Distance (m)	30 – 88	100	3	88 – 216	150	3	216 960	200	3	Above 960	500	3	<input type="checkbox"/>
	Frequency range (MHz)	Field Strength (uV/m)	Measurement Distance (m)															
30 – 88	100	3																
88 – 216	150	3																
216 960	200	3																
Above 960	500	3																
Test Setup																		
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>																	
Remark	Different EUT orientations were evaluated. Only the worst case is presented in this report.																	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																	


**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A

**Test was done by Teody Manansala at 10 meter Chamber.**

**Host ADTHRIWHCM1:  
 Radiated Emission Test Results (Below 1GHz)**


Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	20		
	Humidity (%)	38		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Tx at 904.86MHz			

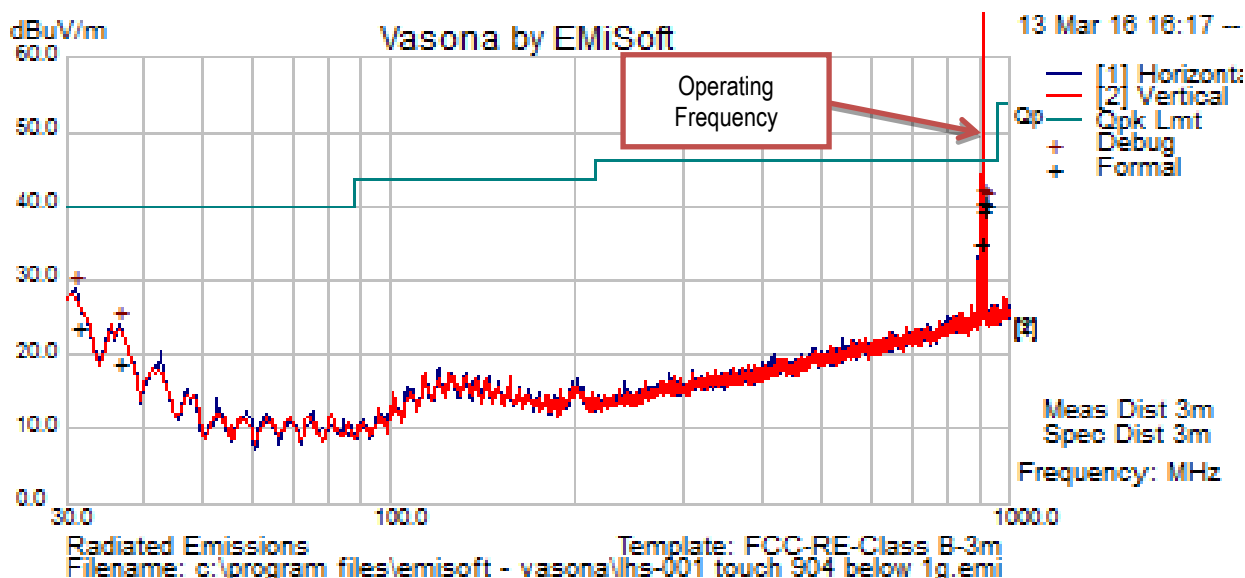

**30MHz – 1000MHz at 3 meters**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
901.87	51.56	4.78	-16.01	40.32	Quasi Max	H	101.00	304.00	46.02	-5.70	Pass
917.83	51.23	4.86	-16.04	40.06	Quasi Max	V	101.00	136.00	46.02	-5.96	Pass
907.85	50.80	4.81	-16.10	39.50	Quasi Max	H	103.00	146.00	46.02	-6.52	Pass
31.17	39.44	0.83	-16.70	23.57	Quasi Max	H	369.00	223.00	40.00	-16.43	Pass
891.86	46.41	4.71	-16.36	34.76	Quasi Max	H	100.00	148.00	46.02	-11.26	Pass
36.62	39.00	0.89	-21.26	18.63	Quasi Max	H	108.00	185.00	40.00	-21.37	Pass

Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	21		
	Humidity (%)	40		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Tx at 918.86MHz			

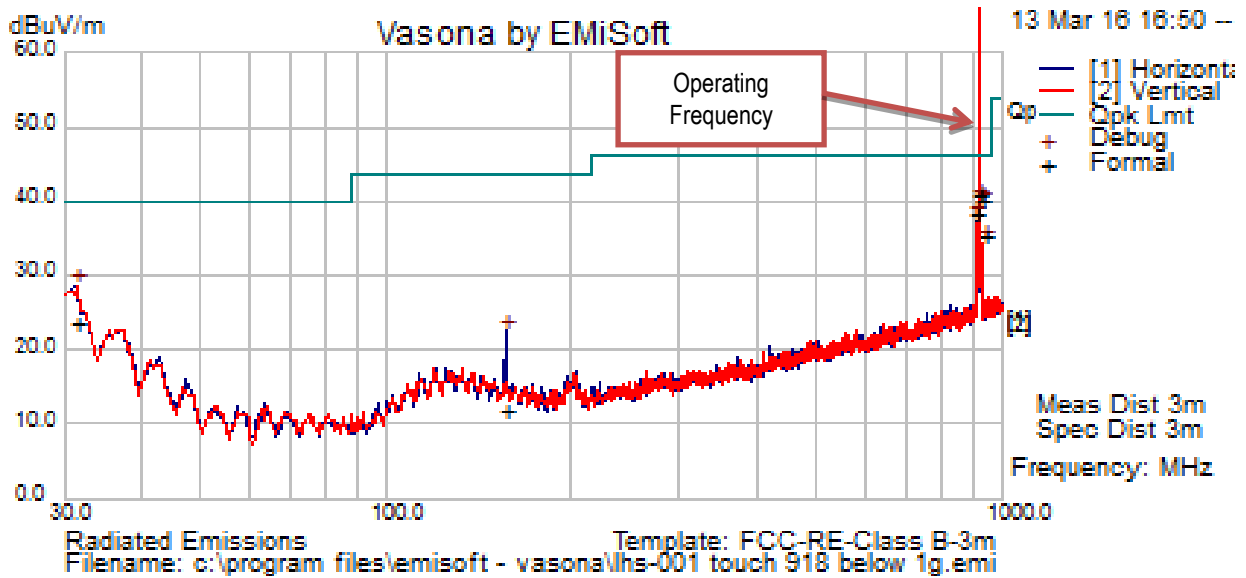


**30MHz – 1000MHz at 3 meters**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
915.88	52.00	4.86	-16.06	40.80	Quasi Max	H	100.00	152.00	46.02	-5.22	Pass
921.81	51.42	4.83	-15.98	40.26	Quasi Max	V	105.00	356.00	46.02	-5.76	Pass
905.89	49.45	4.81	-16.08	38.19	Quasi Max	H	100.00	149.00	46.02	-7.83	Pass
31.26	39.45	0.83	-16.78	23.50	Quasi Max	V	135.00	224.00	40.00	-16.50	Pass
931.89	46.50	4.78	-15.82	35.46	Quasi Max	V	102.00	129.00	46.02	-10.56	Pass
156.17	36.89	1.87	-27.09	11.67	Quasi Max	H	237.00	148.00	43.52	-31.85	Pass



Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	20		
	Humidity (%)	38		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Tx at 924.87MHz			

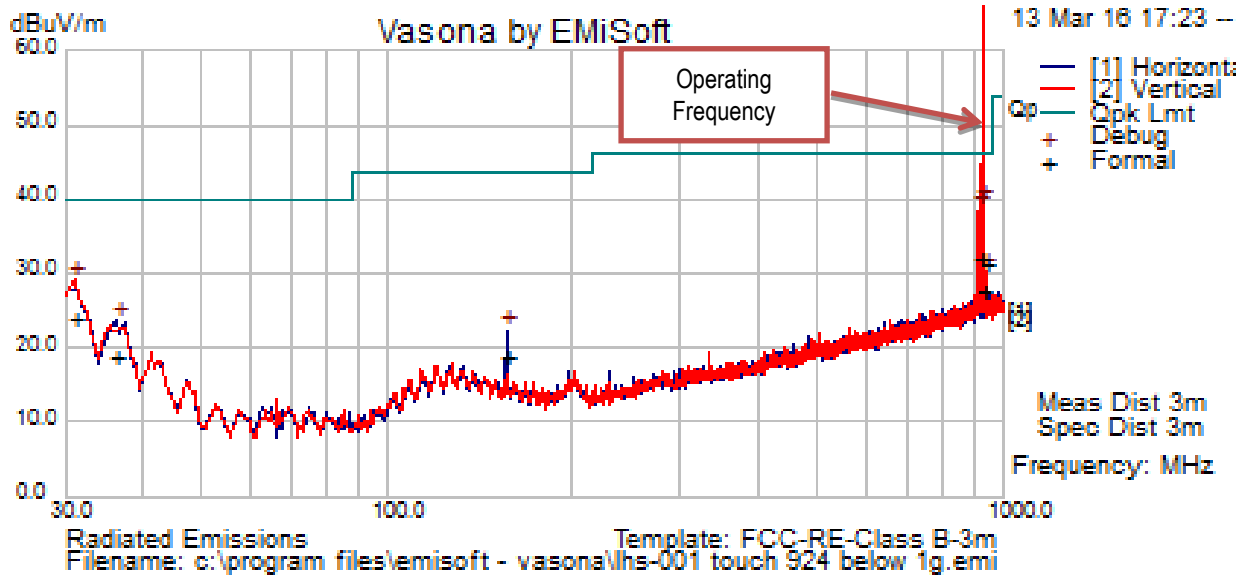


**30MHz – 1000MHz at 3 meters**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
928.16	38.60	4.79	-15.87	27.52	Quasi Max	V	109.00	62.00	46.02	-18.50	Pass
911.97	43.36	4.85	-16.11	32.09	Quasi Max	V	105.00	128.00	46.02	-13.93	Pass
30.85	39.44	0.83	-16.41	23.86	Quasi Max	V	144.00	243.00	40.00	-16.14	Pass
937.85	42.19	4.85	-15.78	31.26	Quasi Max	V	108.00	133.00	46.02	-14.76	Pass
36.19	38.73	0.87	-20.93	18.67	Quasi Max	H	113.00	301.00	40.00	-21.33	Pass
156.22	44.02	1.87	-27.09	18.80	Quasi Max	H	216.00	132.00	43.52	-24.72	Pass

**Host ADTPRIWHCM1:  
 Radiated Emission Test Results (Below 1GHz)**


Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	20		
	Humidity (%)	38		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Tx at 904.86MHz			

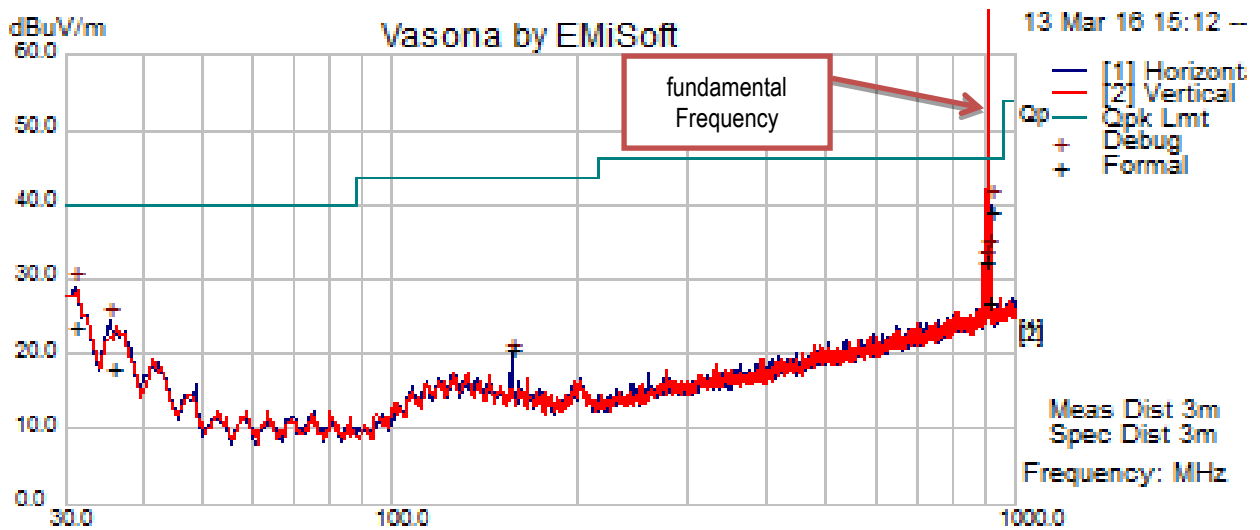

**30MHz – 1000MHz at 3 meters**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
917.89	50.26	4.86	-16.04	39.08	Quasi Max	H	103.00	156.00	46.02	-6.94	Pass
31.02	39.41	0.83	-16.56	23.68	Quasi Max	H	371.00	57.00	40.00	-16.32	Pass
906.67	38.11	4.81	-16.09	26.84	Quasi Max	V	149.00	14.00	46.02	-19.18	Pass
891.88	43.96	4.71	-16.36	32.32	Quasi Max	H	103.00	154.00	46.02	-13.70	Pass
35.57	37.69	0.86	-20.44	18.11	Quasi Max	H	219.00	63.00	40.00	-21.89	Pass
156.22	45.86	1.87	-27.09	20.63	Quasi Max	H	139.00	91.00	43.52	-22.89	Pass


Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	21		
	Humidity (%)	40		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Transmit at 918.86MHz			

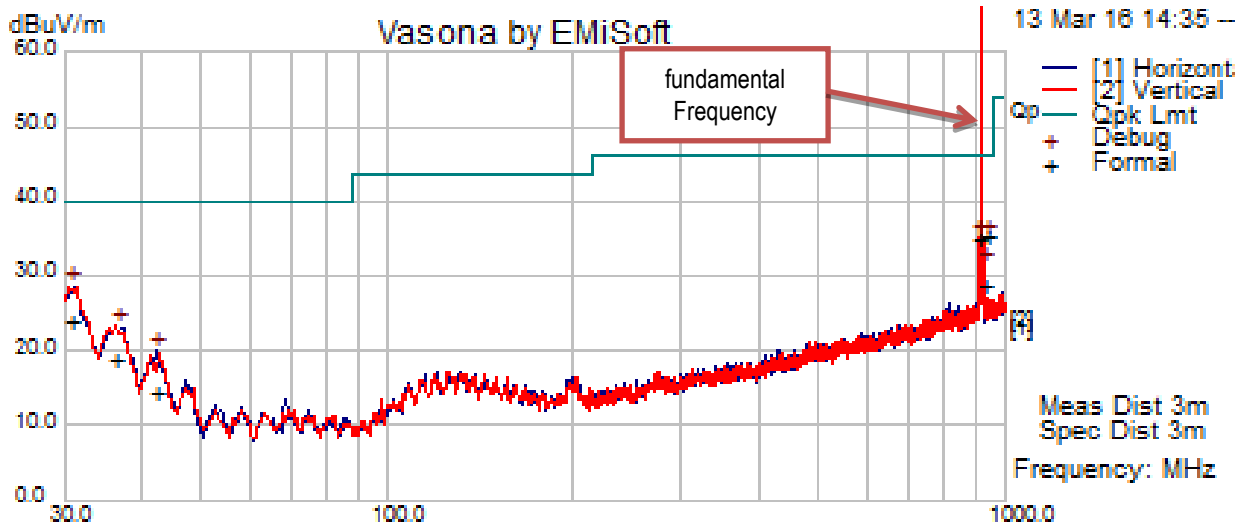

30MHz – 1000MHz at 3 meters

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
931.89	46.49	4.78	-15.82	35.45	Quasi Max	H	100.00	158.00	46.02	-10.57	Pass
905.88	46.15	4.81	-16.08	34.89	Quasi Max	V	102.00	20.00	46.02	-11.13	Pass
30.53	39.31	0.83	-16.11	24.02	Quasi Max	V	134.00	121.00	40.00	-15.98	Pass
923.04	39.98	4.82	-15.96	28.83	Quasi Max	H	104.00	167.00	46.02	-17.19	Pass
36.25	38.75	0.88	-20.97	18.65	Quasi Max	V	150.00	87.00	40.00	-21.35	Pass
41.93	38.52	0.96	-25.11	14.36	Quasi Max	H	302.00	155.00	40.00	-25.64	Pass

Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	20		
	Humidity (%)	38		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	Continuous Transmit at 924.87MHz			

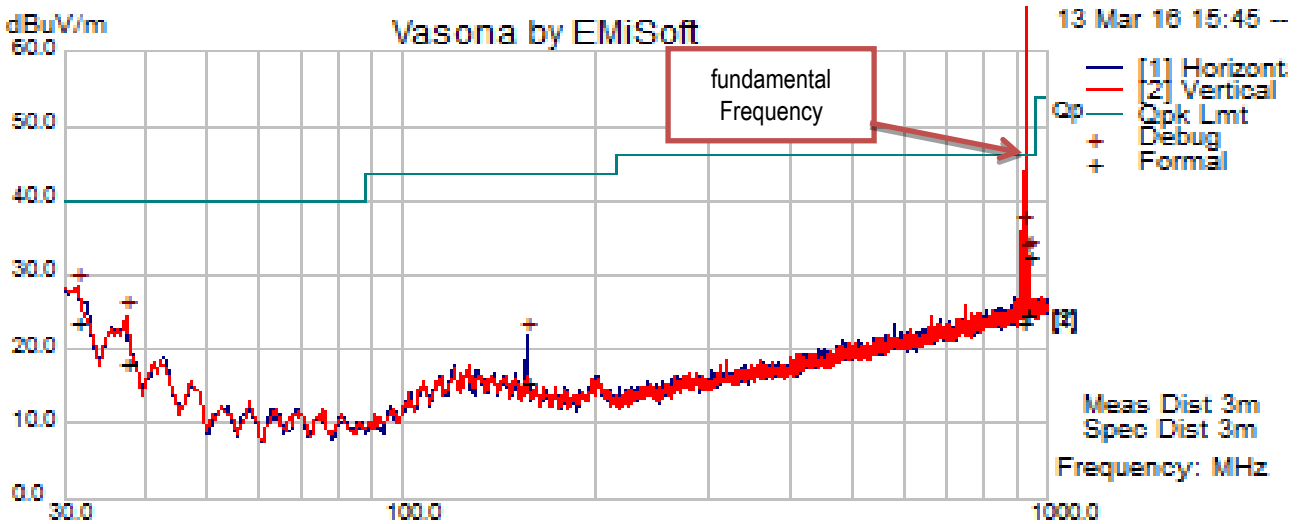

30MHz – 1000MHz at 3 meters

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
912.09	34.92	4.85	-16.11	23.65	Quasi Max	H	323.00	7.00	46.02	-22.37	Pass
31.31	39.44	0.83	-16.83	23.44	Quasi Max	V	219.00	269.00	40.00	-16.56	Pass
937.84	43.12	4.85	-15.78	32.19	Quasi Max	V	103.00	20.00	46.02	-13.83	Pass
929.23	35.85	4.82	-15.85	24.81	Quasi Max	H	116.00	136.00	46.02	-21.21	Pass
37.27	38.97	0.91	-21.76	18.13	Quasi Max	V	389.00	52.00	40.00	-21.87	Pass
156.20	40.65	1.87	-27.09	15.43	Quasi Max	H	269.00	53.00	43.52	-28.09	Pass

### 10.11 Radiated Spurious Emissions above 1GHz

**Requirement(s):**

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247 (5.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required  <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 2.8	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. An average measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Remark	The EUT was tested up to 10GHz inside of four different hosts at Low, Mid and High channels		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**     Yes (See below)     N/A

**Test Plot**     Yes (See below)     N/A

**Test was done by Teody Manansala at 3 meter Chamber.**

**Host ADTHRIWHCM1:  
Radiated Emission Test Results (Above 1GHz)**

Test specification	Above 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	22		
	Humidity (%)	40		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/18/2016			
Remarks:	The EUT was tested inside the 3M chamber at Low, Mid and High channels			

**Continuous Tx at 904.86MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4230.14	37.34	9.07	11.23	57.65	Peak Max	H	151.00	141.00	74.00	-16.35	Pass
17554.86	35.62	16.69	10.45	62.77	Peak Max	H	170.00	55.00	74.00	-11.23	Pass
6122.09	35.94	10.63	10.77	57.35	Peak Max	V	205.00	185.00	74.00	-16.65	Pass
2030.35	40.93	4.31	11.38	56.62	Peak Max	V	148.00	110.00	74.00	-17.38	Pass
1001.30	43.65	3.35	9.68	56.68	Peak Max	H	222.00	174.00	74.00	-17.32	Pass
11455.92	35.26	12.28	8.02	55.56	Peak Max	V	188.00	22.00	74.00	-18.44	Pass
4230.14	25.67	9.07	11.23	45.98	Average Max	H	151.00	141.00	54.00	-8.03	Pass
17554.86	23.41	16.69	10.45	50.56	Average Max	H	170.00	55.00	54.00	-3.45	Pass
6122.09	24.92	10.63	10.77	46.32	Average Max	V	205.00	185.00	54.00	-7.68	Pass
2030.35	28.74	4.31	11.38	44.43	Average Max	V	148.00	110.00	54.00	-9.57	Pass
1001.30	31.94	3.35	9.68	44.97	Average Max	H	222.00	174.00	54.00	-9.03	Pass
11455.92	23.82	12.28	8.02	44.13	Average Max	V	188.00	22.00	54.00	-9.88	Pass

**Continuous Tx at 918.86MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17565.36	35.37	16.68	10.47	62.52	Peak Max	H	148.00	263.00	74.00	-11.49	Pass
4027.50	37.08	8.57	12.11	57.76	Peak Max	H	203.00	115.00	74.00	-16.24	Pass
6098.00	36.05	10.60	10.83	57.48	Peak Max	V	218.00	229.00	74.00	-16.52	Pass
1000.35	43.82	3.35	9.68	56.85	Peak Max	V	234.00	93.00	74.00	-17.15	Pass
1986.26	40.62	4.27	11.37	56.27	Peak Max	V	223.00	238.00	74.00	-17.73	Pass
10044.64	36.13	10.82	8.80	55.75	Peak Max	V	197.00	311.00	74.00	-18.25	Pass
17565.36	23.47	16.68	10.47	50.62	Average Max	H	148.00	263.00	54.00	-3.38	Pass
4027.50	25.26	8.57	12.11	45.94	Average Max	H	203.00	115.00	54.00	-8.06	Pass
6098.00	24.61	10.60	10.83	46.04	Average Max	V	218.00	229.00	54.00	-7.96	Pass
1000.35	31.87	3.35	9.68	44.90	Average Max	V	234.00	93.00	54.00	-9.10	Pass
1986.26	28.46	4.27	11.37	44.10	Average Max	V	223.00	238.00	54.00	-9.90	Pass
10044.64	24.25	10.82	8.80	43.88	Average Max	V	197.00	311.00	54.00	-10.12	Pass

**Continuous Tx at 924.87MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17320.37	35.20	16.77	9.86	61.82	Peak Max	V	184.00	167.00	74.00	-12.18	Pass
4048.59	36.35	8.62	12.01	56.99	Peak Max	H	246.00	334.00	74.00	-17.02	Pass
6152.71	37.24	10.67	10.70	58.61	Peak Max	H	188.00	162.00	74.00	-15.39	Pass
1000.85	43.62	3.35	9.68	56.65	Peak Max	H	173.00	288.00	74.00	-17.35	Pass
2074.73	40.62	4.35	11.24	56.21	Peak Max	V	166.00	51.00	74.00	-17.79	Pass
10906.29	36.17	12.67	8.30	57.14	Peak Max	H	238.00	76.00	74.00	-16.86	Pass
17320.37	23.27	16.77	9.86	49.90	Average Max	V	184.00	167.00	54.00	-4.10	Pass
4048.59	25.30	8.62	12.01	45.93	Average Max	H	246.00	334.00	54.00	-8.07	Pass
6152.71	24.74	10.67	10.70	46.11	Average Max	H	188.00	162.00	54.00	-7.89	Pass
1000.85	31.97	3.35	9.68	45.00	Average Max	H	173.00	288.00	54.00	-9.00	Pass
2074.73	28.66	4.35	11.24	44.25	Average Max	V	166.00	51.00	54.00	-9.75	Pass
10906.29	23.14	12.67	8.30	44.11	Average Max	H	238.00	76.00	54.00	-9.89	Pass

### Host ADTHRIWHCM1:

### Radiated Emission Test Results (Above 1GHz)

Test specification	Above 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	22		
	Humidity (%)	40		
	Atmospheric (mbar):	1019		
Mains Power:	120VAC,60Hz			
Tested by:	Teody Manansala			
Test Date:	03/13/2016			
Remarks:	The EUT was tested inside the 3M chamber at Low, Mid and High channels			

### Continuous Tx at 904.86MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17531.28	34.12	16.74	10.43	61.29	Peak Max	V	218.00	93.00	74.00	-12.71	Pass
4103.06	37.02	8.76	11.77	57.56	Peak Max	V	185.00	69.00	74.00	-16.44	Pass
6069.77	36.35	10.57	10.90	57.81	Peak Max	V	150.00	201.00	74.00	-16.19	Pass
1000.00	33.75	3.35	9.68	46.78	Peak Max	H	178.00	40.00	74.00	-27.22	Pass
2000.08	39.95	4.28	11.48	55.71	Peak Max	H	215.00	305.00	74.00	-18.29	Pass
9976.66	37.33	10.77	8.74	56.84	Peak Max	V	165.00	183.00	74.00	-17.16	Pass
17531.28	22.72	16.74	10.43	49.88	Average Max	V	218.00	93.00	54.00	-4.12	Pass
4103.06	25.44	8.76	11.77	45.98	Average Max	V	185.00	69.00	54.00	-8.02	Pass
6069.77	24.65	10.57	10.90	46.11	Average Max	V	150.00	201.00	54.00	-7.89	Pass
1000.00	31.78	3.35	9.68	44.81	Average Max	H	178.00	40.00	54.00	-9.19	Pass
2000.08	28.27	4.28	11.48	44.03	Average Max	H	215.00	305.00	54.00	-9.97	Pass
9976.66	24.19	10.77	8.74	43.70	Average Max	V	165.00	183.00	54.00	-10.30	Pass

### Continuous Tx at 918.86MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4080.05	37.16	8.70	11.87	57.74	Peak Max	H	213.00	333.00	74.00	-16.26	Pass
6110.15	36.55	10.62	10.80	57.97	Peak Max	V	231.00	147.00	74.00	-16.03	Pass
17456.94	34.57	16.78	10.27	61.63	Peak Max	H	157.00	260.00	74.00	-12.37	Pass
1978.79	39.50	4.27	11.31	55.08	Peak Max	H	245.00	227.00	74.00	-18.92	Pass
1072.69	42.10	3.46	9.56	55.12	Peak Max	V	245.00	250.00	74.00	-18.88	Pass
4080.05	25.62	8.70	11.87	46.20	Average Max	H	213.00	333.00	54.00	-7.80	Pass
6110.15	24.28	10.62	10.80	45.70	Average Max	V	231.00	147.00	54.00	-8.30	Pass
17456.94	22.99	16.78	10.27	50.05	Average Max	H	157.00	260.00	54.00	-3.95	Pass
1978.79	28.24	4.27	11.31	43.82	Average Max	H	245.00	227.00	54.00	-10.18	Pass
1072.69	30.83	3.46	9.56	43.85	Average Max	V	245.00	250.00	54.00	-10.15	Pass



**Continuous Tx at 924.87MHz**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4228.42	37.83	9.07	11.24	58.14	Peak Max	H	162.00	156.00	74.00	-15.86	Pass
17533.73	34.05	16.73	10.43	61.22	Peak Max	V	230.00	150.00	74.00	-12.78	Pass
6144.19	36.71	10.66	10.72	58.09	Peak Max	H	250.00	118.00	74.00	-15.91	Pass
1019.89	43.34	3.38	9.65	56.37	Peak Max	V	250.00	14.00	74.00	-17.63	Pass
2029.69	40.42	4.31	11.38	56.11	Peak Max	V	250.00	265.00	74.00	-17.89	Pass
10721.65	35.25	12.08	8.40	55.73	Peak Max	H	250.00	117.00	74.00	-18.27	Pass
4228.42	25.72	9.07	11.24	46.03	Average Max	H	162.00	156.00	54.00	-7.97	Pass
17533.73	22.71	16.73	10.43	49.88	Average Max	V	230.00	150.00	54.00	-4.12	Pass
6144.19	24.65	10.66	10.72	46.03	Average Max	H	250.00	118.00	54.00	-7.97	Pass
1019.89	31.37	3.38	9.65	44.40	Average Max	V	250.00	14.00	54.00	-9.60	Pass
2029.69	28.48	4.31	11.38	44.17	Average Max	V	250.00	265.00	54.00	-9.83	Pass
10721.65	24.06	12.08	8.40	44.54	Average Max	H	250.00	117.00	54.00	-9.46	Pass

















## Annex A. TEST INSTRUMENT








Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>						
R & S Receiver	ESL6	100178	05/27/2015	1 Year	05/27/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	03/04/2016	1 Year	03/04/2017	<input checked="" type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	11140711	02/19/2016	1 Year	02/19/2017	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/12/2015	1 Year	05/12/2016	<input type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/25/2015	1 Year	08/25/2016	<input checked="" type="checkbox"/>
Tuned Dipole Antenna 30 - 1000 MHz (4pcs set)	AD-100	40133	10/02/2015	1 Year	10/02/2016	<input type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	<input checked="" type="checkbox"/>
Agilent Signal Generator	MXG N5182A	MY47071065	04/06/2015	1 Year	04/06/2016	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input type="checkbox"/>
Test Equity Environment Chamber	1007H	61201	07/31/2015	1 Year	07/31/2016	<input type="checkbox"/>
USB RF Power Sensor	7002-006	10SL0190	09/03/2015	1 Year	09/03/2016	<input type="checkbox"/>

## Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0
Conducted Emission	EMISoft	EMISoft Vasona	V5.0

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2