

ISO/IEC 17025  
 ACCREDITED LAB  
 CERTIFICATE NUMBER  
 51/LE 147  
 ISED CABid: ES1909

Test report No:  
 NIE: 69578RAN.001

## Test report IEEE Std 1528™-2013

(*) Identification of item tested	mPERS
(*) Trademark	Essence Security International (E.S.I) LTD
(*) Model and /or type reference tested	ES900MPRS
(*) Other identification of the product	Mobile personal emergency device based on LTE cellular communications, with built-in fall detection HW version : 1.2 SW Version : 01.01 FCC ID: YXG-ES900MPRS IC: 11061A-ES900MPRS
(*) Features	LTE, BLE, WiFi, bands B2, B4, B5, B12, B13
Manufacturer	Essence Security International (E.S.I) LTD 12 Abba Eban Avenue Herzliya, Israel 4672530 Tal Cohen Technical Director of Regulatory, Certification and Reliability +972(73)2447-705 talco@essence-grp.com
Test method requested, standard	<ol style="list-style-type: none"> <li>1. IEEE Std 1528™-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</li> <li>2. FCC 47 CFR Part 2.1093. Radiofrequency radiation exposure evaluation: portable devices.</li> <li>3. ISED RSS-102 Issue 5 (2015-03) – Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).</li> </ol>
Summary	<p>Considering the results of the performed test, the item under test is IN COMPLIANCE with FCC 47CFR Part 2.1093 and IC RSS-102 Issue 5 exposure limits.</p> <p>The maximum 1-g SAR found during this test into the body exposure condition has been 0.594 W/kg, for LTE Band 2.</p>

Approved by (name / position & signature)	Miguel Lacave Antennas Lab Manager
Date of issue	2021-09-16
Report template No	FDT08_23 (* "Data provided by the client")

# Index

Competences and guarantees .....	4
General conditions .....	4
Uncertainty.....	4
Data provided by the client.....	4
Usage of samples .....	5
Test sample description .....	5
Identification of the client.....	6
Testing period and place.....	6
Document history .....	6
Environmental conditions .....	6
Remarks and comments .....	6
Testing verdicts.....	8
Appendix A: Test configuration .....	9
Appendix B: Test results .....	18
Appendix C: Measurement Reports .....	41
Appendix D: System Validation Reports.....	47
Appendix E: Calibration data.....	52
Appendix F: Photographs.....	104

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the following documents:

1. DEKRA Testing and Certification S.A.U. internal document PODT000.
2. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested", "Other identification of the product", "Features" and "Test sample description").
2. Maximum output power and testing distance.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: Essence Group

Sample M/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
69037/008	Mobile personal emergency device	ES900MPRS	04	2021-07-21

1. Sample M/01 has undergone the test(s) specified in subclause "Test method requested": Conducted average output power and SAR evaluation for LTE Cat M mode.

## Test sample description

Description of product..... :	Mobile personal emergency device based on LTE cellular communications, with built-in fall detection		
Software version..... :	01.01		
Hardware version..... :	1.2		
Mounting position..... :	<input type="checkbox"/>	<i>Table top equipment</i>	
	<input type="checkbox"/>	<i>Wall/Ceiling mounted equipment</i>	
	<input type="checkbox"/>	<i>Floor standing equipment</i>	
	<input type="checkbox"/>	<i>Hand-held equipment</i>	
	<input checked="" type="checkbox"/>	<i>Other: Body-worn device</i>	
Accessories (not part of the test item)..... :	Description	Type	Manufacturer
	Charging adapter	---	
	USB cable	---	

## Identification of the client

Essence Security International (E.S.I) LTD  
12 Abba Eban Avenue Herzliya, Israel 4672530  
Tal Cohen  
Technical Director of Regulatory, Certification and Reliability  
+972(73)2447-705  
talco@essence-grp.com

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-08-04
Date (finish)	2021-08-24

## Document history

Report number	Date	Description
69578RAN.001	2021-09-16	First release

## Environmental conditions

Date	Max. Temp. °C	Min. Temp. °C	Max. Hum. %	Min. Hum. %	Limit
From 2021-08-04 to 2021-08-24	24.95	21.12	66.41	44.80	18-25 °C, 30-70%

## Remarks and comments

- 1: Zoom scan is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06, paragraph "4.4.2. Area scan based 1-g estimation"
- 2: Only the plots of the highest reported SAR for each test position and mode/band are included in appendix C.
- 3: The tests have been performed by the technical personnel: Francisco J. Sánchez.
- 4: The instrumentation utilized to perform the tests covered in this test report is listed in the following table:

Equipment	NC
Dosimetric E-field probe SPEAG EX3DV4	6125
Data acquisition device SPEAG DAE4	3430
Electro-optical converter SPEAG EOC3	3438
Robot Stäubli RX60BL, Robot controller Stäubli CS7MB	3420
Measurement server SPEAG DASY5 SE UMS 011 BS	3847
Oval flat phantom SPEAG ELI 4	3525
SAR measurement software SPEAG DASY52 V52.10.4.1527	3423
SAR postprocessing software SPEAG SEMCAD X	3423
750 MHz dipole validation kit SPEAG D750V3	3919
900 MHz dipole validation kit SPEAG D900V2	3426
1800 MHz dipole validation kit SPEAG D1800V2	3427
Body Tissue Equivalent Liquids for 750 MHz band	3921
Body Tissue Equivalent Liquids for 835 MHz band	3632
Body Tissue Equivalent Liquids for 900 MHz band	3632
Body Tissue Equivalent Liquids for 1700 MHz band	6029
Body Tissue Equivalent Liquids for 1900 MHz band	3634
Universal Radio Communication Tester R&S CMW 500	6667
Vector network analyzer Agilent FieldFox N9923A	4482
Dielectric probe kit SPEAG DAK-3.5	4171
Power meter Agilent E4419B	4393
RF Generator R&S SMU200	3346
DC Power supply Agilent U8002A	4835
Dual directional coupler HP 778D	1084
Dual directional coupler NARDA 4227-16	3630
Power amplifier MITEQ AMF-4D-00400600-50-30P	3485
6 dB attenuator Weinschel 75 A-6-11	2400
SPEAG Mounting Device for Hand-held devices	3424
Power sensor DC 50 MHz to 18 GHz R&S model NRP-Z81	4164
Digital thermometer LKM Electronics model DTM300-Spezial	4170
Temperature and humidity probe HUMIDIPROBE Pico Technology	3453

## 5: References

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IC RSS-102 Issue 5 (2015-03) – Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) and the following FCC Published RF exposure KDB procedures:

- FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015).
- FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).
- FCC OET KDB 865664 D02 RF Exposure Reporting v01r02 (October 2015).
- FCC OET KDB 941225 D05 SAR for LTE Devices v02r05 (October 2015).

The tests documented in this report were performed also in accordance with IEC/IEEE 62209-1528:2020 standard.

## Testing verdicts

---

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

FCC 47CFR Part 2.1093 & ISED RSS-102 Issue 5	VERDICT			
	N/A	P	F	NM
LTE 2		P		
LTE 4		P		
LTE 5		P		
LTE 12		P		
LTE 13		P		



## Appendix A: Test configuration

## INDEX

1.	GENERAL INTRODUCTION.....	11
1.1.	Application Standard .....	11
1.2.	General requirements .....	11
1.3.	Measurement system requirements .....	11
1.4.	Phantom requirements.....	11
1.5.	Measurement Liquids requirements. ....	11
2.	MEASUREMENT SYSTEM .....	12
2.1.	Measurement System .....	12
2.2.	Test Positions of device relative to body .....	15
2.3.	Test to be performed .....	15
2.4.	Description of interpolation/extrapolation scheme .....	15
2.5.	Determination of the largest peak spatial-average SAR .....	15
2.6.	System Validation .....	15
3.	UNCERTAINTY .....	16
4.	SAR LIMIT .....	17
5.	DEVICE UNDER TEST.....	17
5.1.	Dimensions .....	17
5.2.	Wireless Technology.....	17
5.3.	Antenna Location .....	17

## 1. GENERAL INTRODUCTION

### 1.1. Application Standard

The Federal Communications Commission (FCC) sets the limits for General Population/Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the body of the user under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

Industry of Canada (ISED) sets the limits for General Population/Uncontrolled environment when the exposure occurs at a distance of 0.2 m or less into the RSS-102 Issue 5, paragraph 4 "Exposure Limits", Table 3.

### 1.2. General requirements

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/- 2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

### 1.3. Measurement system requirements

The measurement system used for SAR tests fulfills the procedural and technical requirements described at the reference standards used.

### 1.4. Phantom requirements

The phantom model for body measurements is an elliptical open-top container with a flat bottom, with the following shape and dimensions:

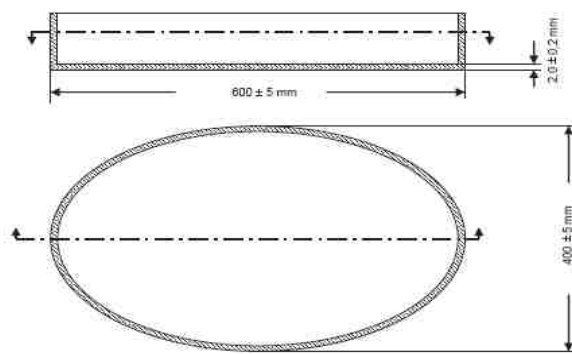


Figure 1: Proportions and shape of Phantom shell

### 1.5. Measurement Liquids requirements.

The liquids used to simulate the human tissues, must fulfill the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 865664 D01 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 3, of this document.

To minimize the effect of reflections on peak spatial-average SAR values, from the upper surface of the tissue-equivalent liquid, the depth of the liquid should be at least 15 cm.

## 2. MEASUREMENT SYSTEM

### 2.1. Measurement System

The DASY5 system for performing compliance tests consists of the following items:

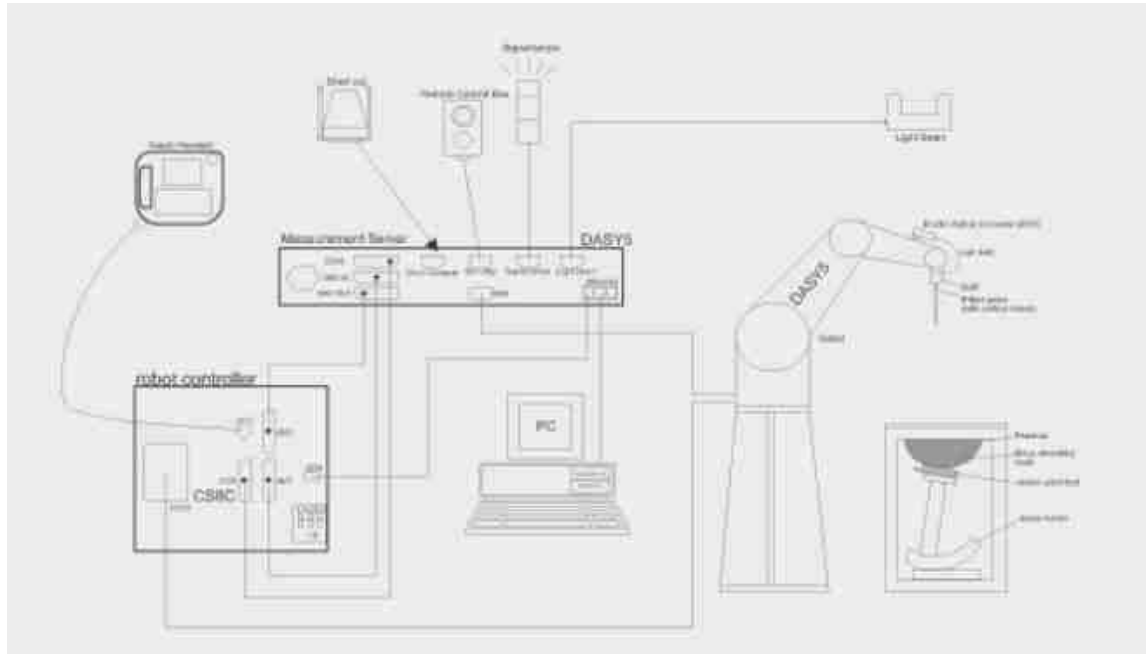


Figure 2: SAR Measurement system

A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).

An isotropic field probe optimized and calibrated for the targeted measurement.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.


The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.


The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.


A computer running the DASY5 software.


Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.


The phantom, the device holder and other accessories according to the targeted measurement.

	<b>Model</b>	<b>EX3DV4</b>
	<b>Construction</b>	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).
	<b>Frequency</b>	10 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
	<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
	<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
	<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm

	<b>Model</b>	<b>DAE4</b>
	<b>Construction</b>	Signal amplifier, multiplexer, A/D converter, and control logic. Serial optical link communication with DASY4/5 embedded system (fully remote controlled). Two-step probe touch detector for mechanical surface detection and emergency robot stop.
	<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
	<b>Input Offset Voltage</b>	< 5 $\mu$ V (with auto zero)
	<b>Input Resistance</b>	200 MOhm
	<b>Input Bias Current</b>	< 50 fA

	<b>Model</b>	<b>ELI</b>
	<b>Construction</b>	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
	<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)
	<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
	<b>Shell Thickness</b>	2 $\pm$ 0.2 mm (bottom plate)
	<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm
	<b>Filling Volume</b>	Approx. 30 liters
	<b>Wooden Support</b>	SPEAG standard phantom table

	<b>Model</b>	<b>Mounting Device for Hand-Held Transmitters</b>
	<b>Construction</b>	In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).
	<b>Material</b>	Polyoxymethylene (POM)

	<b>Model</b>	<b>System Validations Kits 450 MHz – 6 GHz</b>		
	<b>Construction</b>	Symmetrical dipole with 1/4 balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.		
	<b>Frequency</b>	450 MHz to 5800 MHz		
	<b>Return Loss</b>	20 dB at specified validation position		
	<b>Dimensions (length and overall height in mm)</b>	<b>Product</b>	<b>Dipole length</b>	<b>Overall height</b>
	D450V3	290.0	330.0	
	D750V3	179.0	330.0	
	D900V2	148.5	340.0	
	D1800V2	72.5	300.0	
	D2000V2	65.0	300.0	
	D2450V2	52.0	290.0	
	D2600V2	49.2	290.0	
	D5GHzV2	20.6	300.0	

## 2.2. Test Positions of device relative to body

The device under test consists of a mobile personal emergency device which could be used close to the body of the user.

All device faces and edges have been tested facing the flat phantom at 0 mm test.

## 2.3. Test to be performed

Test shall be performed for each test position previously described, using the channel producing the highest rated output power. Additionally the other applicable test frequency channels must be measure for the test configuration providing the highest SAR for each applicable transmitting band.

## 2.4. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantoms surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr and 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with approx. 15 mm spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning within a 1 mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5 mm steps in both directions. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

## 2.5. Determination of the largest peak spatial-average SAR

To determine the maximum value of the peak spatial-average SAR of a DUT, all device positions, configurations and operational modes should be tested for each frequency band.

The averaging volume shall be chosen as 1gr. of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the DUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

## 2.6. System Validation

Prior to the SAR measurements, system verification is done to verify the system accuracy. A complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 10% of this channel.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

### 3. UNCERTAINTY

According to FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015), as the highest measured 1-g SAR has been < 1.5 W/kg, SAR measurement uncertainty analysis described in IEEE Std 1528-2013 and IEC is not required in the actual SAR report, but it has been included for ISO 17025 accreditation.

#### Uncertainty for 300 MHz – 3 GHz

ERROR SOURCES	Uncertainty value (± %)	Probability distribution	Divisor	(c <sub>i</sub> ) 1g	(c <sub>i</sub> ) 10g	Standard uncertainty (1g) (± %)	Standard uncertainty (10g) (± %)
<b>Measurement Equipment</b>							
Probe Calibration	6.650	6.650	N	1	1	1	6.650
Axial Isotropy	3.500	3.500	R	√3	0.7	0.7	1.415
Hemisfericall Isotropy	2.320	2.320	R	√3	0.7	0.7	0.938
Boundary effect	1.000	1.000	R	√3	1	1	0.577
Linearity	4.700	4.700	R	√3	1	1	2.714
System Detection limits	0.250	0.250	R	√3	1	1	0.144
Probe modulation response	4.800	4.800	N	1	1	1	4.800
Readout electronics	0.300	0.300	N	1	1	1	0.300
Response time	1.010	1.010	R	√3	1	1	0.583
Integration time	2.600	2.600	R	√3	1	1	1.501
RF Ambient noise	3.000	3.000	R	√3	1	1	1.732
RF Ambient reflections	3.000	3.000	R	√3	1	1	1.732
Probe positioner mech. restrictions	0.400	0.400	R	√3	1	1	0.231
Probe positioning with respect to phantom shell	2.900	2.900	R	√3	1	1	1.674
Max. SAR Eval.	2.000	2.000	R	√3	1	1	1.155
<b>Test Sample Related</b>							
Device holder uncertainty	2.900	N	1	1	1	2.900	2.900
Test sample positioning	3.600	N	1	1	1	3.600	3.600
Drift of output power	5.000	R	√3	1	1	2.887	2.887
<b>Phantom and Setup</b>							
Phantom uncertainty (shape and thickness tolerances)	6.100	R	√3	1	1	3.522	3.522
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.900	R	√3	1	0.84	1.097	0.921
Liquid conductivity (meas.)	2.454	N	1	0.78	0.71	1.914	1.742
Liquid permittivity (meas.)	2.454	N	1	0.26	0.26	0.638	0.638
Liquid conductivity – temperature uncertainty	5.220	R	√3	0.78	0.71	2.351	2.140
Liquid permittivity – temperature uncertainty	0.840	R	√3	0.23	0.26	0.112	0.126
<b>Combined standard uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					<b>12.00</b>	<b>11.92</b>
<b>Expanded uncertainty (confidence interval of 95%)</b>	$ue = 2.00 u_c$					<b>24.00</b>	<b>23.84</b>

Table 1: Uncertainty Assessment for 300 MHz - 3 GHz.



## 4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR 1 gr.) with the shape of a cube and averaged over a mass of 10 gr (Extremity SAR 10 gr). These levels could not exceed the values indicated in the application Standard:

Standard	Exposure	SAR	SAR Limit (W/kg)
FCC 47 CFR Part 2.1093, Paragraph (d)(2) RSS-102 Issue 5 (2015-03), Paragraph 4	General population/Uncontrolled	SAR 1-g.	1.6
FCC 47 CFR Part 2.1093, Paragraph (d)(2) RSS-102 Issue 5 (2015-03), Paragraph 4	General population/Uncontrolled Extremity	SAR 10-g.	4.0

Table 2: SAR limit

## 5. DEVICE UNDER TEST

### 5.1. Dimensions

Dimensions	Millimetres
Length x Width x Height	66.0 x 45.0 x 20.0
Overall Diagonal:	70.0


Table 3: Dimensions

### 5.2. Wireless Technology

Wireless Technology	SAR Testing	Frequency Bands	Modes
LTE	Required	2/4/5/12/13	- QPSK and 16-QAM (Rel. 9)
Wi-Fi	Not Required*	2.4 GHz	- RX Only
Bluetooth	Not Required*	2.4 GHz	- RX Only

Table 4: Supported modes

### 5.3. Antenna Location

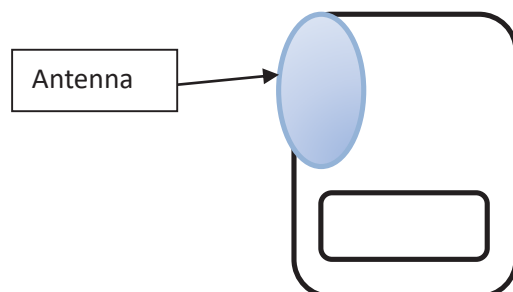

Front Face view

Figure 3: Antenna diagram location sketch

## Appendix B: Test results

## INDEX

1. TEST CONDITIONS .....	20
1.1. Power supply (V):.....	20
1.2. Temperature (°C): .....	20
1.3. Test signal, Output Power and Frequencies.....	20
1.4. DUT and test-site configurations .....	20
2. CONDUCTED AVERAGE POWER MEASUREMENTS .....	21
2.1. LTE Bands.....	21
3. TISSUE PARAMETERS MEASUREMENTS.....	32
4. SYSTEM CHECK MEASUREMENTS.....	34
4.1. Validation results for Body TSL .....	34
5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) .....	35
5.1. Summary maximum results for 1-g Body SAR measurements. ....	35
5.2. Results for LTE Band 2 (1 RB, 20 MHz, QPSK).....	36
5.3. Results for LTE Band 2 (50% RB, 20 MHz, QPSK).....	36
5.4. Results for LTE Band 2 (100% RB, 20 MHz, QPSK).....	36
5.5. Results for LTE Band 4 (1 RB, 20 MHz, QPSK).....	37
5.6. Results for LTE Band 4 (50% RB, 20 MHz, QPSK).....	37
5.7. Results for LTE Band 4 (100% RB, 20 MHz, QPSK).....	37
5.8. Results for LTE Band 5 (1 RB, 10 MHz, QPSK).....	38
5.9. Results for LTE Band 5 (50% RB, 10 MHz, QPSK).....	38
5.10. Results for LTE Band 5 (100% RB, 10 MHz, QPSK).....	38
5.11. Results for LTE Band 12 (1 RB, 10 MHz, QPSK).....	39
5.12. Results for LTE Band 12 (50% RB, 10 MHz, QPSK).....	39
5.13. Results for LTE Band 12 (100% RB, 10 MHz, QPSK).....	39
5.14. Results for LTE Band 13 (1 RB, 10 MHz, QPSK).....	40
5.15. Results for LTE Band 13 (50% RB, 10 MHz, QPSK).....	40
5.16. Results for LTE Band 13 (100% RB, 10 MHz, QPSK).....	40

## 1. TEST CONDITIONS

### 1.1. Power supply (V):

$V_n = 3.8$  Li-polymer rechargeable battery

Type of power supply = DC Voltage from rechargeable Li-Ion 3.8 V battery.

### 1.2. Temperature (°C):

$T_n = +20.00$  to  $+25.00$

The subscript n indicates normal test conditions.

### 1.3. Test signal, Output Power and Frequencies

For the LTE Cat M operational mode, the samples were put into operation by using a R&S CMW 500 as base station simulator.

The actual SAR sample has an accessible antenna connector for conducted measurements, so the conducted average output power and radiated measurements was performance using the same sample (M/01) provided by the manufacturer. See 'usage of samples' paragraph of this report.

The maximum conducted time-averaged power of the device for each mode was measured with a power sensor R&S NRP-Z81.

A fully charged battery was used for every test sequence. In all operating bands and test positions, the measurements were performed on the channel producing the highest rated output power. In each band, for those positions where the maximum averaged SAR was found, measurements were performed on the remaining required channels.

The target power alignments for RF components declared by the manufacturer for each supported technology are:

Output Power (dBm)	Band/Mode				
	LTE B2	LTE B4	LTE B5	LTE B12	LTE B13
Nominal	20	20	20	20	20
Maximum	22	22	22	22	22

### 1.4. DUT and test-site configurations

For body-worn exposure tests, the DUT was placed in each position, against the flat phantom surface.

The separation distance between DUT and flat phantom surface was 0 mm for body exposure testing.

## 2. CONDUCTED AVERAGE POWER MEASUREMENTS

### 2.1. LTE Bands.

#### - LTE B2

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1860.0 MHz	1880.0 MHz	1900.0 MHz
LTE B2	20 MHz	QPSK	1RB Low	0	20.28	20.46	20.25
			1RB Mid	0	20.28	20.47	20.24
			1RB High	0	20.62	20.79	20.72
			50% Low	0	20.27	20.37	20.18
			50% Mid	0	20.30	20.39	20.15
			50% High	0	20.36	20.35	20.35
			100%	0	20.36	20.40	20.27
		16-QAM	1RB Low	0	20.31	20.30	20.19
			1RB Mid	0	20.28	20.33	20.21
			1RB High	0	20.57	20.36	20.50
			50% Low	0	20.35	20.39	20.22
			50% Mid	0	20.26	20.40	20.20
			50% High	0	20.35	20.45	20.21
			100%	0	20.28	20.38	20.25
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1857.5 MHz	1880.0 MHz	1902.5 MHz
LTE B2	15 MHz	QPSK	1RB Low	0	20.44	20.37	20.27
			1RB Mid	0	20.40	20.33	20.31
			1RB High	0	20.70	20.72	20.65
			50% Low	0	20.23	20.37	20.28
			50% Mid	0	20.19	20.39	20.30
			50% High	0	20.26	20.46	20.27
			100%	0	20.30	20.47	20.32
		16-QAM	1RB Low	0	20.23	20.39	20.18
			1RB Mid	0	20.14	20.30	20.16
			1RB High	0	20.52	20.69	20.62
			50% Low	0	20.21	20.40	20.27
			50% Mid	0	20.17	20.35	20.28
			50% High	0	20.23	20.37	20.26
			100%	0	20.15	20.35	20.18

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1855.0 MHz	1880.0MHz	1905.0 MHz
LTE B2	10 MHz	QPSK	1RB Low	0	20.30	20.44	20.18
			1RB Mid	0	20.26	20.45	20.19
			1RB High	0	20.58	20.78	20.59
			50% Low	0	20.22	20.44	20.16
			50% Mid	0	20.23	20.45	20.19
			50% High	0	20.38	20.44	20.24
			100%	0	19.75	19.95	19.86
		16-QAM	1RB Low	0	20.20	20.35	20.09
			1RB Mid	0	20.10	20.39	20.05
			1RB High	0	20.57	20.78	20.54
			50% Low	0	20.28	20.43	20.28
			50% Mid	0	20.15	20.44	20.25
			50% High	0	20.19	20.50	20.22
			100%	0	19.89	20.10	19.80
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1852.5 MHz	1880.0 MHz	1907.5 MHz
LTE B2	5 MHz	QPSK	1RB Low	0	20.20	20.45	20.21
			1RB Mid	0	20.18	20.46	20.25
			1RB High	0	20.13	20.34	20.18
			50% Low	0	20.17	20.44	20.28
			50% Mid	0	20.15	20.45	20.25
			50% High	0	20.30	20.41	20.22
			100%	0	19.80	19.99	19.95
		16-QAM	1RB Low	0	20.19	20.45	20.30
			1RB Mid	0	20.20	20.36	20.15
			1RB High	0	20.16	20.26	20.11
			50% Low	0	20.22	20.53	20.17
			50% Mid	0	20.19	20.49	20.20
			50% High	0	20.18	20.62	20.06
			100%	0	19.62	19.58	19.48

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1851.5 MHz	1880.0 MHz	1908.5 MHz
LTE B2	3 MHz	QPSK	1RB Low	0	20.08	20.42	20.26
			1RB Mid	0	20.19	20.48	20.16
			1RB High	0	20.59	20.68	20.65
			50% Low	0	19.70	19.92	19.60
			50% Mid	0	19.77	19.99	19.66
			50% High	0	19.75	19.85	19.70
			100%	0	19.49	19.57	19.30
		16-QAM	1RB Low	0	19.70	19.95	19.63
			1RB Mid	0	19.57	19.90	19.70
			1RB High	0	20.07	20.36	19.94
			50% Low	0	19.45	19.62	19.40
			50% Mid	0	19.42	19.60	19.40
			50% High	0	19.33	19.64	19.38
			100%	0	19.26	19.60	19.51
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1850.7 MHz	1880.0 MHz	1909.3 MHz
LTE B2	1.4 MHz	QPSK	1RB Low	0	19.53	19.89	19.71
			1RB Mid	0	19.65	19.95	19.80
			1RB High	0	19.50	19.80	19.60
			50% Low	0	19.06	19.33	19.28
			50% Mid	0	19.10	19.28	19.17
			50% High	0	19.20	19.25	19.15
			100%	0	18.79	18.90	18.90
		16-QAM	1RB Low	0	19.15	19.44	19.22
			1RB Mid	0	19.08	19.44	19.19
			1RB High	0	19.06	19.33	19.15
			50% Low	0	18.74	19.02	18.75
			50% Mid	0	18.75	19.03	18.83
			50% High	0	18.79	18.94	18.88
			100%	0	18.77	18.91	18.94

**- LTE B4**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1720.0 MHz	1732.5 MHz	1745.0 MHz
LTE B4	20 MHz	QPSK	1RB Low	0	20.33	20.55	20.63
			1RB Mid	0	20.49	20.56	20.65
			1RB High	0	20.80	20.90	21.05
			50% Low	0	20.44	20.56	20.64
			50% Mid	0	20.46	20.55	20.57
			50% High	0	20.45	20.50	20.62
			100%	0	20.44	20.36	20.60
		16-QAM	1RB Low	0	20.30	20.33	20.41
			1RB Mid	0	20.27	20.34	20.42
			1RB High	0	20.70	20.80	20.90
			50% Low	0	20.38	20.48	20.63
			50% Mid	0	20.38	20.49	20.52
			50% High	0	20.35	20.46	20.56
			100%	0	20.30	20.54	20.59
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE B4	15 MHz	QPSK	1RB Low	0	20.35	20.54	20.63
			1RB Mid	0	20.35	20.44	20.65
			1RB High	0	20.75	20.86	21.06
			50% Low	0	20.32	20.42	20.57
			50% Mid	0	20.28	20.43	20.50
			50% High	0	20.36	20.40	20.54
			100%	0	20.33	20.45	20.59
		16-QAM	1RB Low	0	20.31	20.49	20.66
			1RB Mid	0	20.31	20.54	20.48
			1RB High	0	20.70	20.90	21.05
			50% Low	0	20.28	20.43	20.67
			50% Mid	0	20.32	20.40	20.70
			50% High	0	20.27	20.46	20.58
			100%	0	20.29	20.47	20.63



Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1715.0 MHz	1732.5MHz	1750.0 MHz
LTE B4	10 MHz	QPSK	1RB Low	0	20.30	20.51	20.60
			1RB Mid	0	20.33	20.52	20.61
			1RB High	0	20.67	20.84	21.01
			50% Low	0	20.32	20.49	20.61
			50% Mid	0	20.20	20.52	20.66
			50% High	0	20.31	20.51	20.48
			100%	0	19.90	20.02	20.18
		16-QAM	1RB Low	0	20.34	20.37	20.46
			1RB Mid	0	20.32	20.35	20.36
			1RB High	0	20.66	20.74	20.82
			50% Low	0	20.35	20.46	20.55
			50% Mid	0	20.42	20.45	20.58
			50% High	0	20.39	20.40	20.57
			100%	0	19.88	20.06	20.15
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1712.5 MHz	1732.5MHz	1752.5 MHz
LTE B4	5 MHz	QPSK	1RB Low	0	20.37	20.50	20.61
			1RB Mid	0	20.30	20.52	20.62
			1RB High	0	20.22	20.40	20.57
			50% Low	0	20.26	20.48	20.59
			50% Mid	0	20.24	20.50	20.59
			50% High	0	20.22	20.56	20.66
			100%	0	19.72	20.15	20.20
		16-QAM	1RB Low	0	19.99	20.47	20.60
			1RB Mid	0	20.00	20.53	20.58
			1RB High	0	20.03	20.50	20.63
			50% Low	0	20.31	20.61	20.74
			50% Mid	0	20.34	20.61	20.75
			50% High	0	20.30	20.61	20.78
			100%	0	19.46	19.72	19.91

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					1711.5 MHz	1732.5MHz	1753.5 MHz
LTE B4	3 MHz	QPSK	1RB Low	0	20.25	20.49	20.68
			1RB Mid	0	20.30	20.60	20.66
			1RB High	0	20.55	20.88	20.96
			50% Low	0	19.87	20.11	20.27
			50% Mid	0	19.89	20.10	20.26
			50% High	0	19.82	20.01	20.14
			100%	0	19.44	19.66	19.69
		16-QAM	1RB Low	0	19.73	20.01	20.15
			1RB Mid	0	19.68	20.05	20.32
			1RB High	0	20.25	20.41	20.56
			50% Low	0	19.51	19.83	19.89
			50% Mid	0	19.49	19.75	19.94
			50% High	0	19.47	19.79	19.96
			100%	0	19.53	19.80	19.84
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					1710.7 MHz	1732.5MHz	1754.3 MHz
LTE B4	1.4 MHz	QPSK	1RB Low	0	19.75	19.94	20.17
			1RB Mid	0	19.81	20.04	20.28
			1RB High	0	19.72	20.00	20.09
			50% Low	0	19.38	19.57	19.67
			50% Mid	0	19.30	19.61	19.59
			50% High	0	19.24	19.60	19.66
			100%	0	18.75	19.17	19.16
		16-QAM	1RB Low	0	19.35	19.31	19.49
			1RB Mid	0	19.04	19.40	19.56
			1RB High	0	18.93	19.50	19.66
			50% Low	0	18.89	19.17	19.19
			50% Mid	0	18.88	19.21	19.28
			50% High	0	18.84	18.98	19.27
			100%	0	18.77	19.09	19.25

- **LTE B5**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					829.0 MHz	836.5 MHz	844.0 MHz
LTE B5	10 MHz	QPSK	1RB Low	0	19.81	19.91	19.99
			1RB Mid	0	19.87	19.88	19.97
			1RB High	0	20.26	20.29	20.45
			50% Low	0	19.86	19.88	20.07
			50% Mid	0	19.85	19.90	19.96
			50% High	0	19.87	19.87	20.02
			100%	0	19.42	19.55	19.71
		16-QAM	1RB Low	0	19.84	20.04	19.93
			1RB Mid	0	19.85	20.07	19.93
			1RB High	0	20.18	20.42	20.44
			50% Low	0	19.85	20.01	20.07
			50% Mid	0	19.85	20.12	20.09
			50% High	0	19.91	20.09	20.08
			100%	0	19.41	19.66	19.65
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					826.5 MHz	836.5 MHz	846.5 MHz
LTE B5	5 MHz	QPSK	1RB Low	0	19.90	19.91	20.08
			1RB Mid	0	19.96	19.97	20.09
			1RB High	0	19.84	19.84	20.01
			50% Low	0	19.96	19.98	20.07
			50% Mid	0	19.99	19.96	20.12
			50% High	0	19.97	19.89	20.15
			100%	0	19.53	19.44	19.69
		16-QAM	1RB Low	0	19.85	19.78	20.06
			1RB Mid	0	19.93	19.88	20.08
			1RB High	0	19.82	19.79	19.95
			50% Low	0	20.01	19.93	20.07
			50% Mid	0	19.99	19.89	20.06
			50% High	0	19.95	19.90	20.05
			100%	0	19.11	19.09	19.18

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					825.5 MHz	836.5 MHz	847.4 MHz
LTE B5	3 MHz	QPSK	1RB Low	0	19.98	19.86	20.12
			1RB Mid	0	20.00	19.85	20.13
			1RB High	0	20.25	20.26	20.45
			50% Low	0	19.48	19.52	19.67
			50% Mid	0	19.56	19.51	19.72
			50% High	0	19.42	19.55	19.71
			100%	0	19.08	19.06	19.27
		16-QAM	1RB Low	0	19.46	19.47	19.60
			1RB Mid	0	19.33	19.51	19.49
			1RB High	0	19.80	19.78	19.96
			50% Low	0	19.22	19.15	19.43
			50% Mid	0	19.19	19.25	19.33
			50% High	0	19.15	19.14	19.35
			100%	0	19.18	19.07	19.20
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					824.7 MHz	836.5 MHz	848.2 MHz
LTE B5	1.4 MHz	QPSK	1RB Low	0	19.35	19.31	19.49
			1RB Mid	0	19.37	19.38	19.47
			1RB High	0	19.32	19.29	19.44
			50% Low	0	18.86	18.89	19.05
			50% Mid	0	18.86	18.92	19.10
			50% High	0	18.95	18.88	19.00
			100%	0	18.50	18.44	18.58
		16-QAM	1RB Low	0	18.86	18.84	18.90
			1RB Mid	0	18.75	18.92	18.78
			1RB High	0	18.72	18.80	18.95
			50% Low	0	18.58	18.57	18.70
			50% Mid	0	18.54	18.58	18.67
			50% High	0	18.53	18.53	18.66
			100%	0	18.60	18.47	18.63

**- LTE B12**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
LTE B12	10 MHz	QPSK	1RB Low	0	-	707.5 MHz	-
			1RB Mid	0	-	19.55	-
			1RB High	0	-	19.62	-
			50% Low	0	-	19.75	-
			50% Mid	0	-	19.34	-
			50% High	0	-	19.34	-
			100%	0	-	19.21	-
		16-QAM	1RB Low	0	-	19.33	-
			1RB Mid	0	-	18.55	-
			1RB High	0	-	19.19	-
			50% Low	0	-	19.24	-
			50% Mid	0	-	19.60	-
			50% High	0	-	19.32	-
			100%	0	-	19.31	-
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					701.5 MHz	707.5 MHz	713.5 MHz
LTE B12	5 MHz	QPSK	1RB Low	0	19.22	19.35	19.36
			1RB Mid	0	19.30	19.35	19.37
			1RB High	0	19.21	19.23	19.27
			50% Low	0	19.33	19.37	19.40
			50% Mid	0	19.28	19.28	19.29
			50% High	0	19.30	19.33	19.35
			100%	0	18.84	18.80	19.12
		16-QAM	1RB Low	0	19.24	19.22	19.33
			1RB Mid	0	19.25	19.37	19.31
			1RB High	0	19.31	19.26	19.20
			50% Low	0	19.37	19.42	19.39
			50% Mid	0	19.38	19.44	19.48
			50% High	0	19.42	19.43	19.51
			100%	0	18.51	18.48	18.62

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
					700.5 MHz	707.5 MHz	714.5 MHz
LTE B12	3 MHz	QPSK	1RB Low	0	19.21	19.38	19.41
			1RB Mid	0	19.32	19.40	19.42
			1RB High	0	19.60	19.61	19.76
			50% Low	0	18.77	18.82	18.94
			50% Mid	0	18.80	18.85	18.88
			50% High	0	18.88	19.00	19.07
			100%	0	18.49	18.43	18.65
		16-QAM	1RB Low	0	18.90	18.93	18.85
			1RB Mid	0	18.80	19.04	18.84
			1RB High	0	19.09	19.00	19.34
			50% Low	0	18.48	18.45	18.69
			50% Mid	0	18.43	18.55	18.71
			50% High	0	18.54	18.51	18.72
			100%	0	18.39	18.78	18.65
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
					699.7 MHz	707.5 MHz	715.3 MHz
LTE B12	1.4 MHz	QPSK	1RB Low	0	18.76	18.90	18.90
			1RB Mid	0	18.75	18.80	18.95
			1RB High	0	18.66	18.75	18.82
			50% Low	0	18.18	18.37	18.33
			50% Mid	0	18.26	18.34	18.40
			50% High	0	18.29	18.35	18.47
			100%	0	17.77	18.05	18.23
		16-QAM	1RB Low	0	18.14	18.29	18.32
			1RB Mid	0	18.20	18.35	18.17
			1RB High	0	18.26	18.43	18.29
			50% Low	0	17.88	17.95	17.95
			50% Mid	0	17.93	17.94	18.07
			50% High	0	17.94	17.93	18.05
			100%	0	18.14	17.88	18.06

- **LTE B13**

Band	BW	Modulation	Mode	MPR	Average Output Power (dBm)		
					Low CH	Mid CH	High CH
LTE B13	10 MHz	QPSK	1RB Low	0	-	782.0 MHz	-
			1RB Mid	0	-	20.02	-
			1RB High	0	-	20.28	-
			50% Low	0	-	20.07	-
			50% Mid	0	-	20.01	-
			50% High	0	-	20.01	-
			100%	0	-	19.55	-
		16-QAM	1RB Low	0	-	20.01	-
			1RB Mid	0	-	20.06	-
			1RB High	0	-	20.30	-
			50% Low	0	-	20.08	-
			50% Mid	0	-	20.07	-
			50% High	0	-	20.05	-
			100%	0	-	19.56	-
Band	BW	Modulation	Mode	MPR	Low CH	Mid CH	High CH
LTE B13	5 MHz	QPSK	1RB Low	0	779.5 MHz	782.0 MHz	784.5 MHz
			1RB Mid	0	-	20.08	-
			1RB High	0	-	20.09	-
			50% Low	0	-	20.02	-
			50% Mid	0	-	20.07	-
			50% High	0	-	20.06	-
			100%	0	-	20.08	-
		16-QAM	1RB Low	0	-	20.12	-
			1RB Mid	0	-	20.15	-
			1RB High	0	-	20.05	-
			50% Low	0	-	20.20	-
			50% Mid	0	-	20.18	-
			50% High	0	-	20.12	-
			100%	0	-	19.15	-

Note: According to KDB941225 D05 SAR for LTE Devices, for LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

### 3. TISSUE PARAMETERS MEASUREMENTS

Frequency (MHz)	Target Body Tissue		Measured Body Tissue		Deviation %		Measured Date
	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	Permittivity $\epsilon$	Conductivity $\sigma$ [S/m]	
750	55.5	0.96	57.71	0.97	3.93	0.69	2021-08-09
835	55.2	0.97	57.15	0.96	3.53	-0.96	2021-08-11
900	55.0	1.05	56.65	1.03	3.01	-2.04	2021-08-11
1750	53.4	1.49	53.21	1.43	-0.41	-4.02	2021-08-23
1800	53.3	1.52	53.27	1.49	-0.05	-1.87	2021-08-23
1800	53.3	1.52	53.47	1.47	0.32	-3.23	2021-08-23
1900	53.3	1.52	53.33	1.55	0.05	1.72	2021-08-23

Note: The dielectric properties have been measured by the contact probe method at 22° C.



## **- Composition / Information on ingredients**

### **Head and Muscle Tissue Simulation Liquids HSL750V2/MSL750V2**

H <sub>2</sub> O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose Medium	Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%

### **Head and Muscle Tissue Simulation Liquids HSL900/MSL900**

H <sub>2</sub> O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose Medium	Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%

### **Head and Muscle Tissue Simulation Liquids HBBL1350-1850V3/M HBBL1350-1850V3**

H <sub>2</sub> O	50 – 73 %
Non-ionic detergents	27 – 50 % polyoxyethylenesorbitan monolaurate
NaCl	0 – 2 %
Preservative	0.05 – 0.1% Preventol-D7
Safety relevant ingredients:	
CAS-No. 55965-84-9	< 0.1 % aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone
CAS-No. 9005-64-5	<50 % polyoxyethylenesorbitan monolaurate

### **Head and Muscle Tissue Simulation Liquids HSL1800/MSL1800**

H <sub>2</sub> O	Water, 52 – 75%
C8H18O3	Diethylene glycol monobutyl ether (DGBE), 25 – 48% (CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8)
NaCl	Sodium Chloride, <1.0%

## 4. SYSTEM CHECK MEASUREMENTS

### 4.1. Validation results for Body TSL

Date	Frequency (MHz)	SAR over	Fast SAR (W/kg)	SAR (W/kg)	1 W Target SAR (W/kg)	1 W Norm. SAR (W/kg)	Drift (%)
2021-08-09	750	1 gr.	2.22	2.16	8.67	8.63	-0.46
		10 gr.	1.50	1.44	5.72	5.75	0.58
2021-08-11	900	1 gr.	2.77	2.74	11.1	10.90	-1.83
		10 gr.	1.83	1.79	7.16	7.12	-0.57
2021-08-23	1800	1 gr.	9.96	9.82	39.3	39.10	-0.51
		10 gr.	5.15	5.13	20.7	20.43	-1.33
2021-08-23	1800	1 gr.	9.32	9.31	39.3	37.50	-4.58
		10 gr.	4.75	4.75	20.7	19.05	-7.97

## 5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

### 5.1. Summary maximum results for 1-g Body SAR measurements.

Mode	Side / Position	Channel (Frequency)	Reported SAR 1-g (W/kg)	Limit SAR 1-g (W/kg)
LTE Band 2	Front face / 0 mm	CH 19100 (1900 MHz)	0.594	1.6
LTE Band 4	Front face / 0 mm	CH 20175 (1732.5 MHz)	0.502	1.6
LTE Band 5	Back face / 0 mm	CH 20450 (829 MHz)	0.078	1.6
LTE Band 12	Back face / 0 mm	CH 23095 (707.5 MHz)	0.157	1.6
LTE Band 13	Back face / 0 mm	CH 23230 (782 MHz)	0.117	1.6

## 5.2. Results for LTE Band 2 (1 RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 18900 (1880 MHz)	0.253	0.290	3.992	1.866	0.541	
Back face	0	CH 18900 (1880 MHz)	0.165	NM <sup>1</sup>	0.693	1.866	0.308	
Left edge	0	CH 18900 (1880 MHz)	0.198	NM <sup>1</sup>	3.395	1.866	0.370	
Right edge	0	CH 18900 (1880 MHz)	0.039	NM <sup>1</sup>	0.000	1.866	0.073	
Top edge	0	CH 18900 (1880 MHz)	0.050	NM <sup>1</sup>	0.809	1.866	0.094	
Bottom edge	0	CH 18900 (1880 MHz)	0.018	NM <sup>1</sup>	0.000	1.866	0.034	
Front face	0	CH 18700 (1860 MHz)	0.260	0.281	2.920	1.941	0.545	
Front face	0	CH 19100 (1900 MHz)	0.275	0.313	-0.459	1.897	0.594	1

1: See remarks and comments.

## 5.3. Results for LTE Band 2 (50% RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 18900 (1880 MHz)	0.257	0.272	3.633	2.046	0.557	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

## 5.4. Results for LTE Band 2 (100% RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 18900 (1880 MHz)	0.258	0.271	2.683	2.042	0.553	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

### 5.5. Results for LTE Band 4 (1 RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 20300 (1745 MHz)	0.247	0.264	1.274	1.758	0.464	
Back face	0	CH 20300 (1745 MHz)	0.165	NM <sup>1</sup>	2.565	1.758	0.290	
Left edge	0	CH 20300 (1745 MHz)	0.047	NM <sup>1</sup>	-0.345	1.758	0.082	
Right edge	0	CH 20300 (1745 MHz)	0.227	NM <sup>1</sup>	-3.728	1.758	0.399	
Top edge	0	CH 20300 (1745 MHz)	0.037	NM <sup>1</sup>	-0.459	1.758	0.065	
Bottom edge	0	CH 20300 (1745 MHz)	0.014	NM <sup>1</sup>	3.992	1.758	0.024	
Front face	0	CH 20050 (1720 MHz)	0.256	0.263	-0.345	1.862	0.490	
Front face	0	CH 20175 (1732.5 MHz)	0.269	0.276	1.042	1.820	0.502	2

1: See remarks and comments.

### 5.6. Results for LTE Band 4 (50% RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 20300 (1745 MHz)	0.240	0.250	-1.712	1.932	0.483	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

### 5.7. Results for LTE Band 4 (100% RB, 20 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 20300 (1745 MHz)	0.246	0.250	0.577	1.950	0.487	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

## 5.8. Results for LTE Band 5 (1 RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 20600 (844 MHz)	0.030	NM <sup>1</sup>	0.462	2.018	0.061	
Back face	0	CH 20600 (844 MHz)	0.034	0.032	3.395	2.018	0.064	
Left edge	0	CH 20600 (844 MHz)	0.033	NM <sup>1</sup>	1.625	2.018	0.067	
Right edge	0	CH 20600 (844 MHz)	0.003	NM <sup>1</sup>	-2.501	2.018	0.005	
Top edge	0	CH 20600 (844 MHz)	0.006	NM <sup>1</sup>	2.329	2.018	0.012	
Bottom edge	0	CH 20600 (844 MHz)	0.008	NM <sup>1</sup>	4.232	2.018	0.016	
Back face	0	CH 20450 (829 MHz)	0.047	0.037	3.872	2.109	0.078	3
Back face	0	CH 20525 (836.5 MHz)	0.042	0.033	-0.230	2.094	0.068	

1: See remarks and comments.

## 5.9. Results for LTE Band 5 (50% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 20600 (844 MHz)	0.042	0.031	2.094	2.203	0.069	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

## 5.10. Results for LTE Band 5 (100% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 20525 (836.5 MHz)	0.038	0.029	3.872	2.483	0.073	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

### 5.11. Results for LTE Band 12 (1 RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 23095 (707.5 MHz)	0.066	NM <sup>1</sup>	0.809	2.371	0.156	
Back face	0	CH 23095 (707.5 MHz)	0.069	0.054	0.346	2.371	0.128	
Left edge	0	CH 23095 (707.5 MHz)	0.062	NM <sup>1</sup>	1.158	2.371	0.147	
Right edge	0	CH 23095 (707.5 MHz)	0.006	NM <sup>1</sup>	-1.486	2.371	0.013	
Top edge	0	CH 23095 (707.5 MHz)	0.011	NM <sup>1</sup>	-1.031	2.371	0.026	
Bottom edge	0	CH 23095 (707.5 MHz)	0.016	NM <sup>1</sup>	4.112	2.371	0.038	

1: See remarks and comments.

### 5.12. Results for LTE Band 12 (50% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 23095 (707.5 MHz)	0.069	0.053	1.508	2.606	0.139	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

### 5.13. Results for LTE Band 12 (100% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 23095 (707.5 MHz)	0.063	0.050	-0.688	3.126	0.157	4

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

#### 5.14. Results for LTE Band 13 (1 RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Front face	0	CH 23230 (782 MHz)	0.048	NM <sup>1</sup>	1.508	2.099	0.101	
Back face	0	CH 23230 (782 MHz)	0.067	0.052	0.693	2.099	0.109	
Left edge	0	CH 23230 (782 MHz)	0.048	NM <sup>1</sup>	1.859	2.099	0.101	
Right edge	0	CH 23230 (782 MHz)	0.005	NM <sup>1</sup>	1.742	2.099	0.010	
Top edge	0	CH 23230 (782 MHz)	0.010	NM <sup>1</sup>	0.231	2.099	0.020	
Bottom edge	0	CH 23230 (782 MHz)	0.012	NM <sup>1</sup>	4.472	2.099	0.024	

1: See remarks and comments.

#### 5.15. Results for LTE Band 13 (50% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 23230 (782 MHz)	0.063	0.052	1.859	2.203	0.114	

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.

#### 5.16. Results for LTE Band 13 (100% RB, 10 MHz, QPSK)

Position	Dist (mm)	Channel (Frequency)	Estimated SAR 1-g (W/kg)	SAR 1-g (W/kg)	Power Drift (%)	Scale factor	Reported SAR 1-g (W/kg)	Plot No.
Back face	0	CH 23230 (782 MHz)	0.058	0.047	-1.938	2.483	0.117	5

Testing of additional LTE configurations is not required due to the SAR test procedures mentioned in FCC OET KDB 941225 D05 – SAR for LTE Devices v02r05.



## Appendix C: Measurement Reports

**Plot N° 1**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 23/08/2021**

**DUT: ESSENCE; Type: Generic device; Serial: IMEI:866349041109343**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1899.9 MHz;  
 Duty Cycle: 1:3.73852

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.55$  S/m;  $\epsilon_r = 53.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(8.06, 8.06, 8.06) @ 1899.9 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom/LTE 2, 1 RB High, High CH, Front Face/Area Scan (71x71x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.384 W/kg

**Flat Phantom/LTE 2, 1 RB High, High CH, Front Face/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.61 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.687 W/kg

**SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.151 W/kg** (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 0.482 W/kg

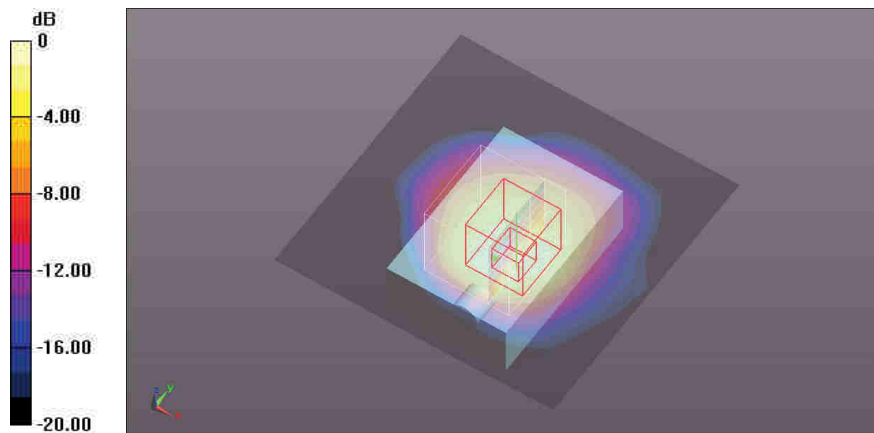

0 dB = 0.482 W/kg = -3.17 dBW/kg

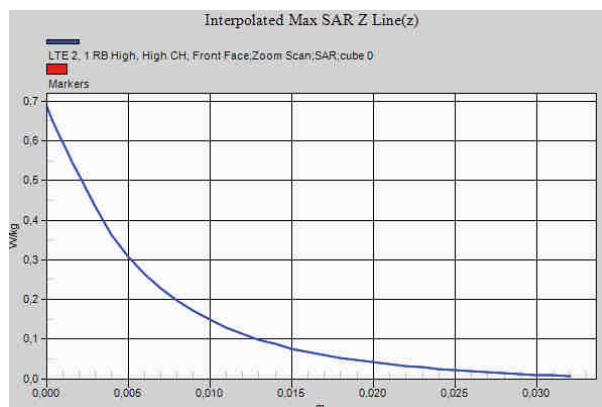

**Plot N° 2**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 23/08/2021**

**DUT: ESSENCE; Type: Generic device; Serial: IMEI:866349041109343**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:3.73852

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 53.263$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(8.06, 8.06, 8.06) @ 1732.5 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom/LTE 4, 1 RB High, Mid CH, Front Face/Area Scan (71x71x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.395 W/kg

**Flat Phantom/LTE 4, 1 RB High, Mid CH, Front Face/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.21 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.532 W/kg


**SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.147 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm


Ratio of SAR at M2 to SAR at M1 = 54.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.368 W/kg

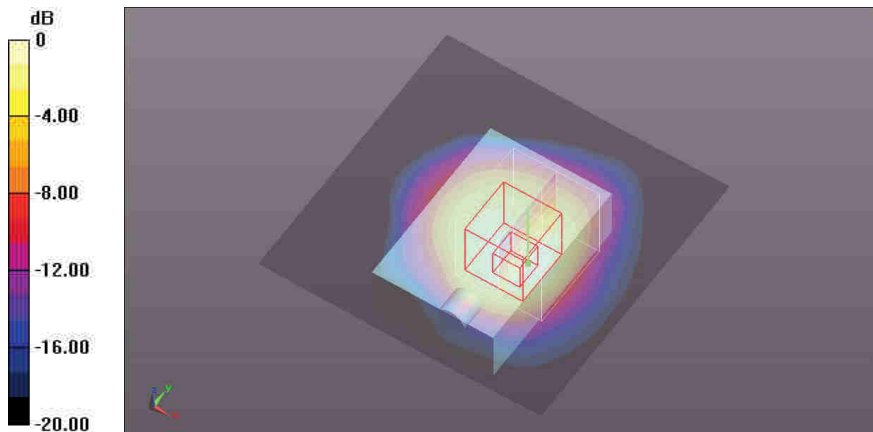

0 dB = 0.368 W/kg = -4.34 dBW/kg

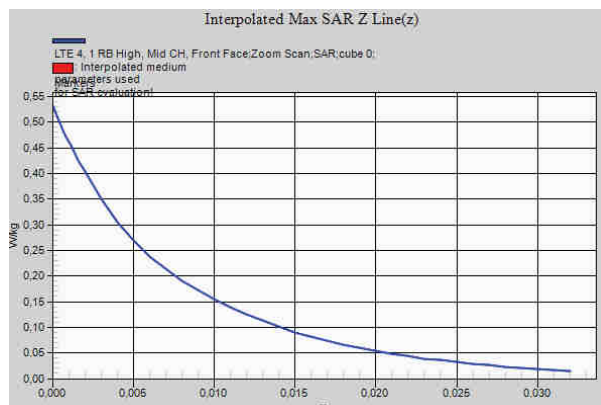

### Plot N° 3

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 12/08/2021**

**DUT: ESSENCE; Type: Generic device; Serial: IMEI:866349041109343**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 829 MHz; Duty Cycle: 1:3.73594

Medium parameters used (interpolated):  $f = 829$  MHz;  $\sigma = 0.95$  S/m;  $\epsilon_r = 57.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(9.52, 9.52, 9.52) @ 829 MHz; Calibrated: 28/08/2020

- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn669; Calibrated: 19/08/2020

- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### Flat Phantom/LTE 5, 1 RB High, Low CH, Back Face/Area Scan (71x71x1):

Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0650 W/kg

#### Flat Phantom/LTE 5, 1 RB High, Low CH, Back Face/Zoom Scan (6x7x7)/Cube 0:

Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.507 V/m; Power Drift = 0.33 dB

Peak SAR (extrapolated) = 0.0820 W/kg


**SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.021 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid


Ratio of SAR at M2 to SAR at M1 = 43.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0617 W/kg

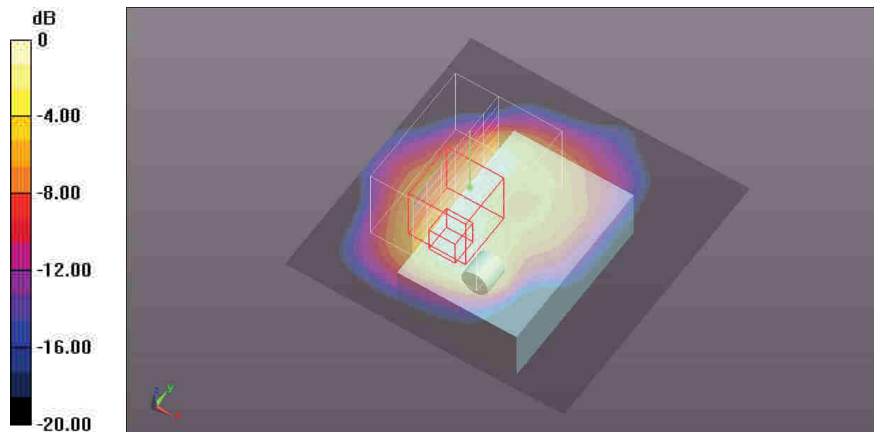

0 dB = 0.0617 W/kg = -12.10 dBW/kg

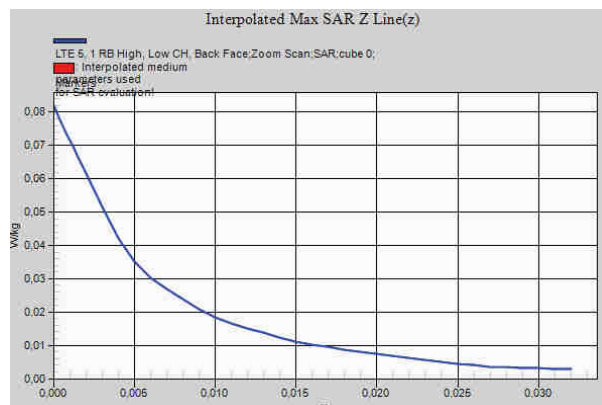

**Plot N° 4**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 09/08/2021**

**DUT: ESSENCE; Type: Generic device; Serial: IMEI:866349041109343**

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:3.80102

Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 58.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(10, 10, 10) @ 707.5 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom/LTE 12, 100% RB, Mid CH, Back Face/Area Scan (71x71x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0853 W/kg

**Flat Phantom/LTE 12, 100% RB, Mid CH, Back Face/Zoom Scan (6x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.903 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.103 W/kg


**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.028 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid


Ratio of SAR at M2 to SAR at M1 = 45%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0757 W/kg

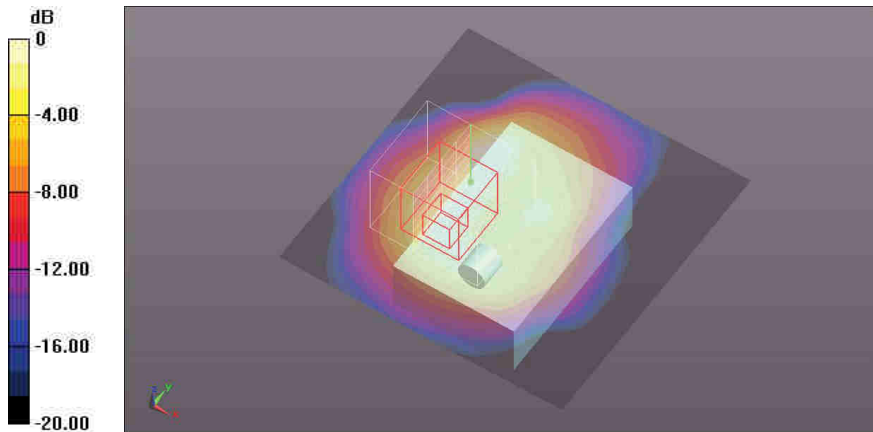

0 dB = 0.0757 W/kg = -11.21 dBW/kg

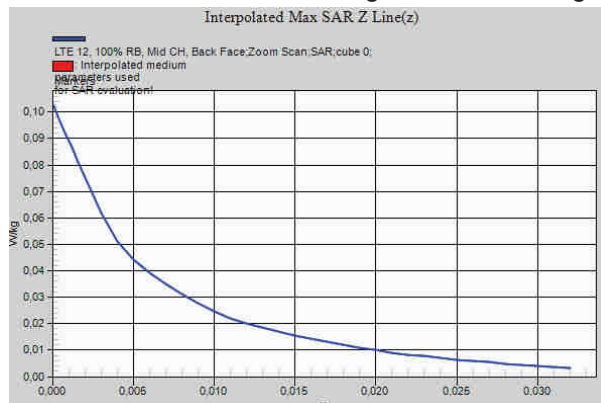

**Plot N° 5**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 10/08/2021**

**DUT: ESSENCE; Type: Generic device; Serial: IMEI:866349041109343**

Communication System: UID 10108 - CAG, LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:3.80102

Medium parameters used (interpolated):  $f = 782$  MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 57.55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(10, 10, 10) @ 782 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Flat Phantom/LTE 13, 100% RB, Mid CH, Back Face/Area Scan (71x71x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0810 W/kg

**Flat Phantom/LTE 13, 100% RB, Mid CH, Back Face/Zoom Scan (5x6x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0960 W/kg


**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.027 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid


Ratio of SAR at M2 to SAR at M1 = 42%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0719 W/kg

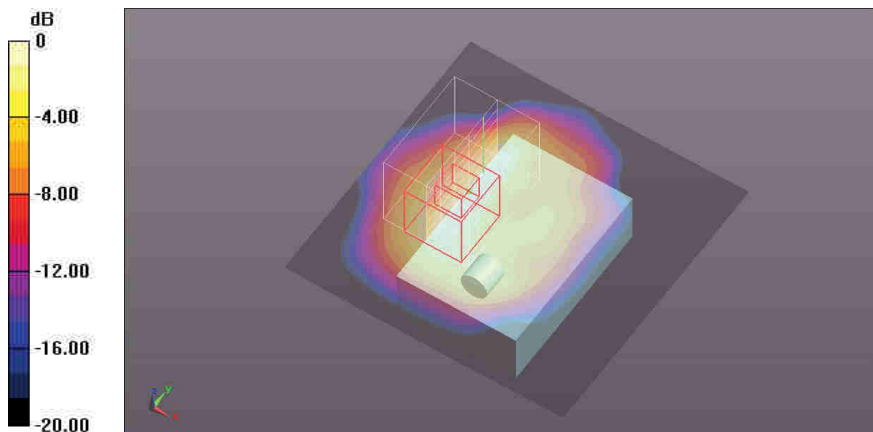

0 dB = 0.0719 W/kg = -11.43 dBW/kg

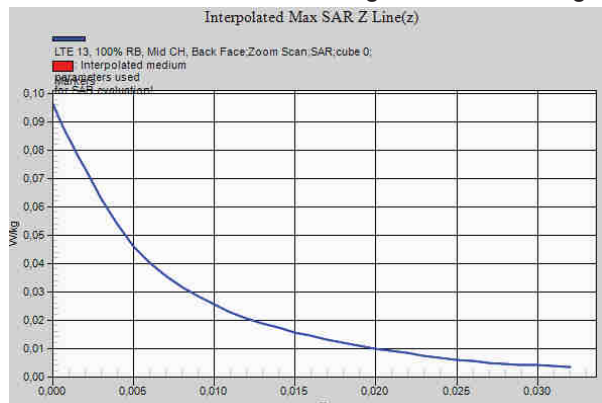

## Appendix D: System Validation Reports



## Validation results in 750 MHz Band for Body TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 09/08/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1036

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.97$  S/m;  $\epsilon_r = 57.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(10, 10, 10) @ 750 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 750MHz Body, 2021-08-09/d=15mm, Pin=250 mW/Area Scan (61x91x1):**

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.72 W/kg

**Configuration 750MHz Body, 2021-08-09/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.18 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.44 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 21.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 2.71 W/kg

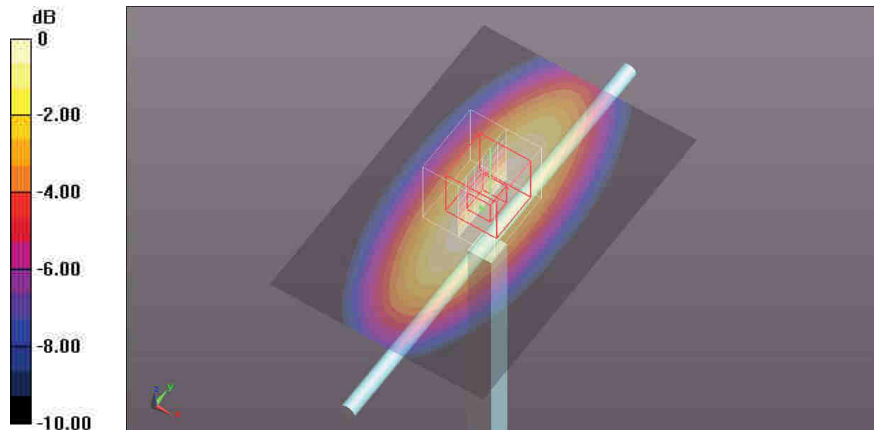

0 dB = 2.71 W/kg = 4.33 dBW/kg





**Validation results in 900 MHz Band for Body TSL**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 11/08/2021**

**DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d007**

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.03 \text{ S/m}$ ;  $\epsilon_r = 56.65$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(9.52, 9.52, 9.52) @ 900 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 900 MHz Body, 2021-08-11/d=15mm, Pin=250 mW/Area Scan (61x91x1):**

Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 3.36 W/kg

**Configuration 900 MHz Body, 2021-08-11/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 58.64 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 4.01 W/kg

**SAR(1 g) = 2.74 W/kg; SAR(10 g) = 1.79 W/kg** (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 67.5%

Maximum value of SAR (measured) = 3.40 W/kg

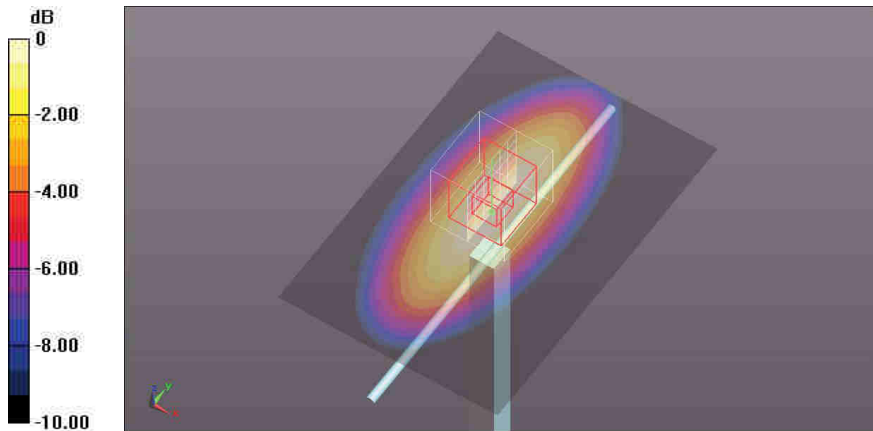

0 dB = 3.40 W/kg = 5.31 dBW/kg

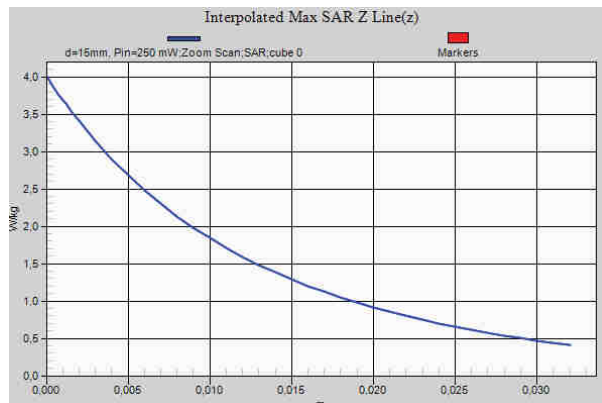

**Validation results in 1800 MHz Band for Body TSL**

**Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 23/08/2021**

**DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099**

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.49$  S/m;  $\epsilon_r = 53.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(8.06, 8.06, 8.06) @ 1800 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 1800MHz (1700), Body, 2021-08-23/d=10mm, Pin=250 mW/Area Scan (91x91x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 13.6 W/kg

**Configuration 1800MHz (1700), Body, 2021-08-23/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 96.80 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 18.0 W/kg

**SAR(1 g) = 9.82 W/kg; SAR(10 g) = 5.13 W/kg** (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 14.1 W/kg

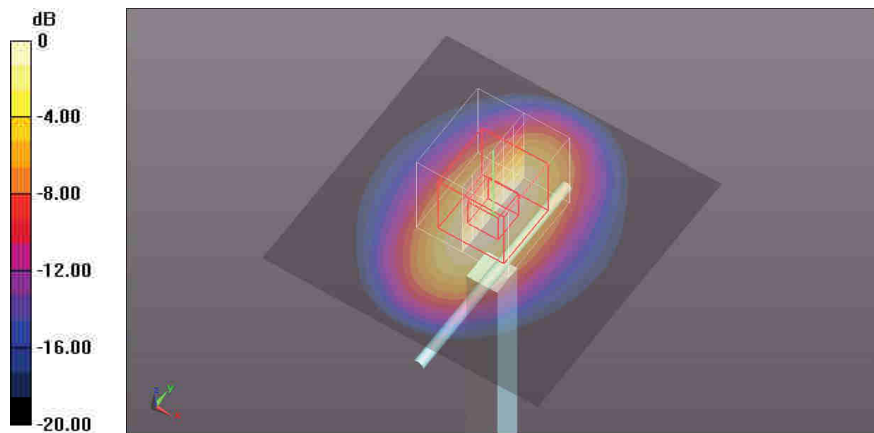

0 dB = 14.1 W/kg = 11.49 dBW/kg

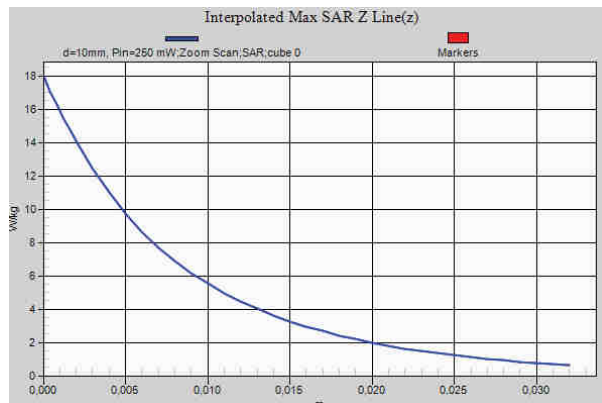

## Validation results in 1800 MHz Band for Body TSL

Test Laboratory: DEKRA Testing and Certification, S.A.U; Date: 23/08/2021

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 53.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7461; ConvF(8.06, 8.06, 8.06) @ 1800 MHz; Calibrated: 28/08/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 19/08/2020
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Configuration 1800MHz (1900), Body, 2021-08-23/d=10mm, Pin=250 mW/Area Scan (91x91x1):**

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.7 W/kg

**Configuration 1800MHz (1900), Body, 2021-08-23/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.09 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.31 W/kg; SAR(10 g) = 4.73 W/kg** (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 13.3 W/kg

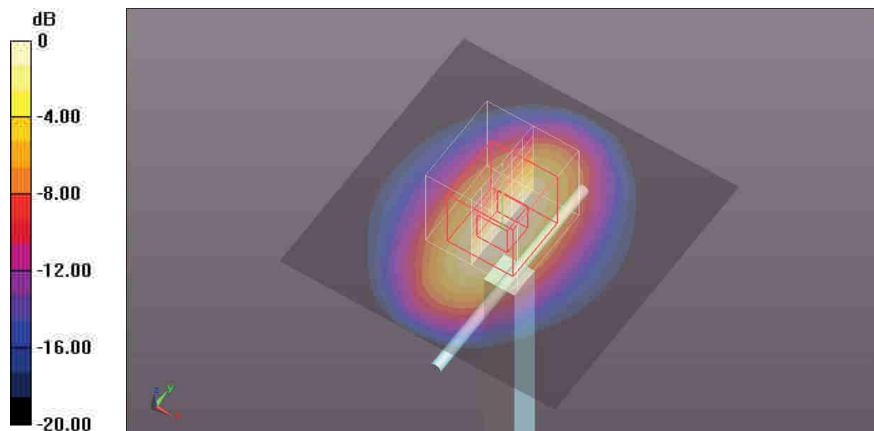

0 dB = 13.3 W/kg = 11.24 dBW/kg



## Appendix E: Calibration data

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 C Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: DEKRA Spain

Certificate No.: DAE4-669\_Aug20

CALIBRATION CERTIFICATE																							
Object	DAE4 - SD 000 D04 BM - SN: 669																						
Calibration procedure(s)	DA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)																						
Calibration date	August 19, 2020																						
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).                      The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity = 70%.</p> <p>Calibration Equipment used (M&amp;PE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Kathley Multimeter Type 2001</td> <td>DN: 0810278</td> <td>05-Sep-19 (No.25849)</td> <td>Rep-20</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> <tr> <td>Auto DAE Calibration Unit</td> <td>SE UWS 043 AA 1001</td> <td>09-Jan-20 (in house check)</td> <td>In house check: Jan-21</td> </tr> <tr> <td>Calibrator Box V2.1</td> <td>SE UMS 006 AA 1002</td> <td>09-Jan-20 (in house check)</td> <td>In house check: Jan-21</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Kathley Multimeter Type 2001	DN: 0810278	05-Sep-19 (No.25849)	Rep-20	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE UWS 043 AA 1001	09-Jan-20 (in house check)	In house check: Jan-21	Calibrator Box V2.1	SE UMS 006 AA 1002	09-Jan-20 (in house check)	In house check: Jan-21
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																				
Kathley Multimeter Type 2001	DN: 0810278	05-Sep-19 (No.25849)	Rep-20																				
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																				
Auto DAE Calibration Unit	SE UWS 043 AA 1001	09-Jan-20 (in house check)	In house check: Jan-21																				
Calibrator Box V2.1	SE UMS 006 AA 1002	09-Jan-20 (in house check)	In house check: Jan-21																				
Calibrated by:	Name Ackian Gehring	Function Laboratory Technician	Signature 																				
Approved by:	Name Sebastian Köhn	Function Deputy Manager	Signature 																				
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: August 18, 2020																				

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 45, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS).  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage.
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.



### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV, full range = -100...+300 mV  
 Low Range: 1LSB = 61nV, full range = -1...+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.352 ± 0.02% (k=2)	403.907 ± 0.02% (k=2)	404.229 ± 0.02% (k=2)
Low Range	3.95616 ± 1.50% (k=2)	3.97451 ± 1.50% (k=2)	3.97389 ± 1.50% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	103.5° ± 1°
---	-------------

**Appendix (Additional assessments outside the scope of SCS0108)**

**1. DC Voltage Linearity**

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	199991.55	-1.11	-0.00
Channel X + Input	20006.68	5.01	0.03
Channel X - Input	-19997.78	3.58	-0.02
Channel Y + Input	199992.71	-0.16	-0.00
Channel Y + Input	20006.49	4.80	0.02
Channel Y - Input	-19998.83	2.88	-0.01
Channel Z + Input	199992.27	-0.07	-0.00
Channel Z + Input	20005.50	1.92	0.02
Channel Z - Input	-19998.03	3.48	-0.02

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2001.20	0.18	0.01
Channel X + Input	201.73	0.38	0.18
Channel X - Input	-198.17	0.32	-0.16
Channel Y + Input	2000.99	0.18	0.01
Channel Y + Input	200.65	-0.71	-0.35
Channel Y - Input	-198.74	-0.22	0.11
Channel Z + Input	2001.21	0.45	0.02
Channel Z + Input	200.06	-1.14	-0.57
Channel Z - Input	-198.24	-0.52	0.26

**2. Common mode sensitivity**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	1.77	0.19
	-200	0.27	-1.22
Channel Y	200	11.03	10.95
	-200	-12.29	-12.65
Channel Z	200	-9.10	-9.20
	-200	7.59	7.20

**3. Channel separation**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	>	-1.66	-3.23
Channel Y	200	9.16	<	-1.22
Channel Z	200	3.53	7.31	>



#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	18075	15552
Channel Y	15708	15438
Channel Z	15994	14993

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec  
 Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	0.26	-1.18	1.94	0.50
Channel Y	-0.12	-2.07	1.54	0.51
Channel Z	0.09	-0.89	0.82	0.35

#### 6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kΩ)	Measuring (MΩ)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+8	+14
Supply (- Vcc)	-0.01	-8	-6

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8504 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 S Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: SCS 0108

Client **Dekra Spain**

Certificate No. **EX3-7461\_Aug20/2**

**CALIBRATION CERTIFICATE (Replacement of No: EX3-7461\_Aug20)**

Object: **EX3DV4 - SN 7461**

Calibration procedure(s): **QA CAL-01 v9, QA CAL-12 v9, QA CAL-14 v6, QA CAL-23 v5, QA CAL-25 v7**  
 Calibration procedure for dosimetric E-field probes

Calibration date: **August 28, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 0.1°C and humidity < 70%).

Calibration Equipment used (M&PE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104776	01-Apr-20 (No. 217-03100/03101)	Apr-21
Power sensor NRP-Z91	SN: 103244	01-Apr-20 (No. 217-03100)	Apr-21
Power sensor NRP-Z91	SN: 103245	01-Apr-20 (No. 217-03101)	Apr-21
Reference 20 dB Attenuator	SN: CC2552 (25a)	31-Mar-20 (No. 217-03106)	Apr-21
GAZ4	SN: 660	27-Dec-19 (No. 13A54-000, Dec19)	Dec-20
Reference Probe ES30V2	SN: 3013	31-Dec-19 (No. ES3-3013, Dec19)	Dec-20
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E44116B	SN: 6841293874	08-Apr-18 (in house check Jun-20)	In house check Jun-22
Power sensor E4412A	SN: MV41488887	08-Apr-18 (in house check Jun-20)	In house check Jun-22
Power sensor E4412A	SN: 000110210	08-Apr-18 (in house check Jun-20)	In house check Jun-22
RF generator HP 8648C	SN: UG3642U01700	04-Aug-09 (in house check Jun-20)	In house check Jun-22
Network Analyzer E8368A	SN: US41080477	31-Mar-14 (in house check Oct-19)	In house check Oct-20

Calibrated by: **Name: Jaron Kastrin, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Kato Pokovic, Function: Technical Manager, Signature: [Signature]**

Issued: September 20, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 C Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

TSL	tissue simulating liquid
$NORM_{x,y,z}$	sensitivity in free space
$ConvF$	sensitivity in TSL / $NORM_{x,y,z}$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependant linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in GASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 300$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide),  $NORM_{x,y,z}$  are only intermediate values, i.e., the uncertainties of  $NORM_{x,y,z}$  does not affect the  $E^2$ -field uncertainty inside TSL (see below  $ConvF$ ).
- $NORM(f)_{x,y,z} = NORM_{x,y,z} \cdot \text{frequency\_response}$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of  $ConvF$ .
- $DCP_{x,y,z}$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $A_{x,y,z}$ ;  $B_{x,y,z}$ ;  $C_{x,y,z}$ ;  $D_{x,y,z}$ ;  $WR_{x,y,z}$ ;  $A, B, C, D$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.  $WR$  is the maximum calibration range expressed in RMS voltage across the diode.
- $ConvF$  and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORM_{x,y,z} \cdot ConvF$ , whereby the uncertainty corresponds to that given for  $ConvF$ . A frequency dependent  $ConvF$  is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the  $NORM_{x,y,z}$  (no uncertainty required).



EX3DV4 – SN:7461

August 28, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7461

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu\text{V}/(\text{V/m})^2)^{\text{A}}$	0.45	0.41	0.45	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	101.3	95.8	100.2	

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max dev.	Max Unc <sup>C</sup> (k=2)
0	CW	X	0.00	0.00	1.00	0.00	150.0	$\pm 3.5\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		143.3		
		Z	0.00	0.00	1.00		150.3		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	12.38	84.70	18.59	10.00	80.0	$\pm 4.0\%$	$\pm 9.6\%$
		Y	20.00	89.14	19.05		80.0		
		Z	20.00	91.48	20.62		80.0		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	20.00	90.65	19.17	8.99	80.0	$\pm 2.8\%$	$\pm 8.8\%$
		Y	20.00	95.12	18.55		80.0		
		Z	20.00	94.24	20.79		80.0		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	20.00	93.65	19.96	3.98	95.0	$\pm 1.4\%$	$\pm 8.8\%$
		Y	20.00	94.39	19.49		95.0		
		Z	20.00	100.28	22.31		95.0		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	20.00	97.51	19.97	2.22	120.0	$\pm 1.0\%$	$\pm 8.6\%$
		Y	20.00	101.91	21.97		120.0		
		Z	20.00	107.68	24.54		120.0		
10357-AAA	QPSK Waveform, 1 MHz	X	1.74	65.80	14.86	1.00	150.0	$\pm 1.7\%$	$\pm 8.8\%$
		Y	1.89	65.62	14.86		150.0		
		Z	1.81	64.63	14.28		150.0		
10360-AAA	QPSK Waveform, 10 MHz	X	2.26	67.68	15.52	0.00	150.0	$\pm 1.1\%$	$\pm 8.6\%$
		Y	2.21	67.41	15.50		150.0		
		Z	2.10	66.48	14.95		150.0		
10395-AAA	64-QAM Waveform, 100 kHz	X	2.81	68.85	17.79	3.01	150.0	$\pm 0.9\%$	$\pm 8.6\%$
		Y	3.02	71.38	19.31		150.0		
		Z	2.86	68.95	18.45		150.0		
10399-AAA	64-QAM Waveform, 40 MHz	X	3.43	68.39	15.39	0.00	150.0	$\pm 0.7\%$	$\pm 9.6\%$
		Y	3.52	68.89	15.67		150.0		
		Z	3.48	65.56	15.44		150.0		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	4.94	65.21	15.27	0.00	150.0	$\pm 1.7\%$	$\pm 9.6\%$
		Y	4.88	65.55	15.47		150.0		
		Z	4.87	65.45	15.39		150.0		

Note: For details on UID parameters see Appendix.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E-field uncertainty inside 15L (see Pages 5 and 6).

<sup>B</sup> Numerical visualization parameter; uncertainty not required.

<sup>C</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:7461

August 28, 2020

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7461

### Sensor Model Parameters

	C1 IF	C2 IF	$\alpha$ V <sup>-1</sup>	T1 ms.V <sup>-2</sup>	T2 ms.V <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
X	52.4	385.48	34.74	8.72	0.00	4.98	2.00	0.05	1.00
Y	47.7	354.55	35.22	5.66	0.25	4.98	2.00	0.04	1.01
Z	43.4	317.77	34.95	8.05	0.00	4.97	2.00	0.00	1.00

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-79.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7461

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>E</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>G</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>H</sup>	Depth (mm)	Unc (k=2)
450	43.5	0.87	10.92	10.92	10.92	0.13	1.30	± 13.3 %
750	41.9	0.89	9.84	9.84	9.84	0.50	0.80	± 12.0 %
900	41.5	0.97	9.43	9.43	9.43	0.35	0.98	± 12.0 %
1640	40.2	1.31	8.70	8.70	8.70	0.32	0.85	± 12.0 %
1810	40.0	1.40	8.25	8.25	8.25	0.32	0.86	± 12.0 %
2000	40.0	1.40	8.09	8.09	8.09	0.32	0.86	± 12.0 %
2300	39.5	1.67	7.79	7.79	7.79	0.35	0.90	± 12.0 %
2450	39.2	1.80	7.47	7.47	7.47	0.36	0.90	± 12.0 %
2600	39.0	1.96	7.27	7.27	7.27	0.39	0.90	± 12.0 %
3300	38.2	2.71	7.16	7.16	7.16	0.35	1.25	± 13.1 %
3500	37.9	2.91	7.10	7.10	7.10	0.30	1.25	± 13.1 %
3700	37.7	3.12	7.00	7.00	7.00	0.30	1.25	± 13.1 %
3800	37.5	3.32	6.45	6.45	6.45	0.30	1.50	± 13.1 %
4200	37.1	3.63	6.10	6.10	6.10	0.25	1.50	± 13.1 %
4600	36.7	4.04	6.09	6.09	6.09	0.40	1.80	± 13.1 %
4950	36.3	4.40	5.92	5.92	5.92	0.40	1.80	± 13.1 %
5250	35.9	4.71	5.71	5.71	5.71	0.40	1.80	± 13.1 %
5600	35.5	5.07	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5800	35.3	5.27	5.15	5.15	5.15	0.40	1.80	± 13.1 %

<sup>E</sup> Frequency validity above 300 MHz or ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 8 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. DEKRA warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7461

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>1)</sup>	Relative Permittivity <sup>2)</sup>	Conductivity (S/m) <sup>3)</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>4)</sup>	Depth <sup>5)</sup> (mm)	Unc (k=2)
450	56.7	0.94	11.07	11.07	11.07	0.08	1.30	± 13.3 %
750	55.5	0.96	10.00	10.00	10.00	0.48	0.80	± 12.0 %
900	55.0	1.05	9.52	9.52	9.52	0.31	0.99	± 12.0 %
1840	53.7	1.42	8.55	8.55	8.55	0.35	0.85	± 12.0 %
1810	53.3	1.52	8.06	8.06	8.06	0.39	0.86	± 12.0 %
2000	53.3	1.52	7.91	7.91	7.91	0.46	0.85	± 12.0 %
2300	52.9	1.81	7.79	7.79	7.79	0.43	0.80	± 12.0 %
2450	52.7	1.95	7.62	7.52	7.62	0.34	0.82	± 12.0 %
2600	52.5	2.16	7.48	7.48	7.48	0.33	0.82	± 12.0 %
5250	48.9	5.35	4.80	4.80	4.80	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.14	4.14	4.14	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.26	4.26	4.26	0.50	1.90	± 13.1 %

<sup>1)</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF<sup>2)</sup> uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 30, 35, 40, 50 and 70 MHz for ConvF<sup>2)</sup> assessments at 30, 60, 100, 150, 180 and 220 MHz respectively. Validity of ConvF<sup>2)</sup> assessed at 8 MHz is 4-8 MHz, and ConvF<sup>2)</sup> assessed at 13 MHz is 8-10 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>2)</sup> At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF<sup>2)</sup> uncertainty for indicated target tissue parameters.

<sup>3)</sup> Alpha/Depth are determined during calibration. SPEAG warns that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-5 GHz at any distance larger than half the probe tip diameter from the boundary.

EX30V4-5N7481

August 26, 2020

### Frequency Response of E-Field (TEM-Cell: ifi110 EXC, Waveguide: R22)

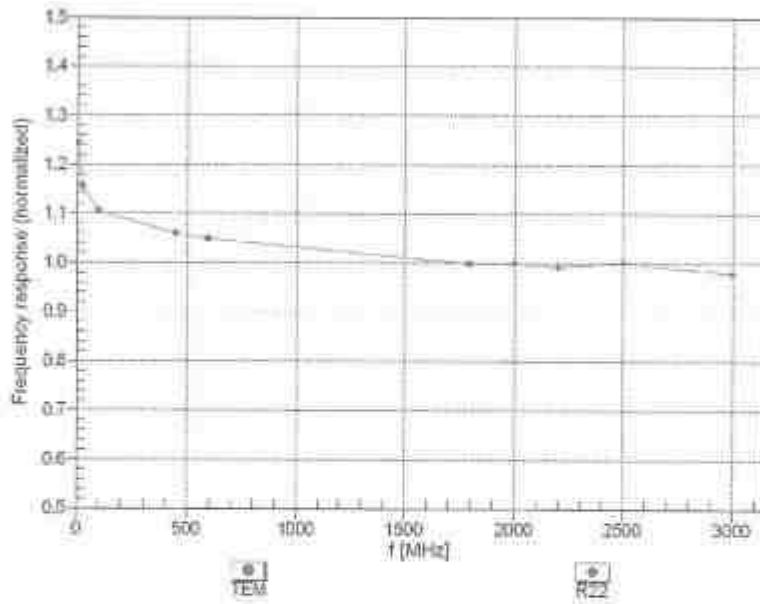

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )





EX3DV4-SN:7481

August 28, 2020

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

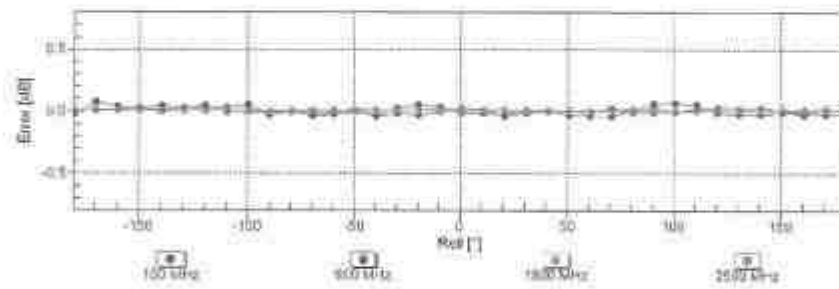
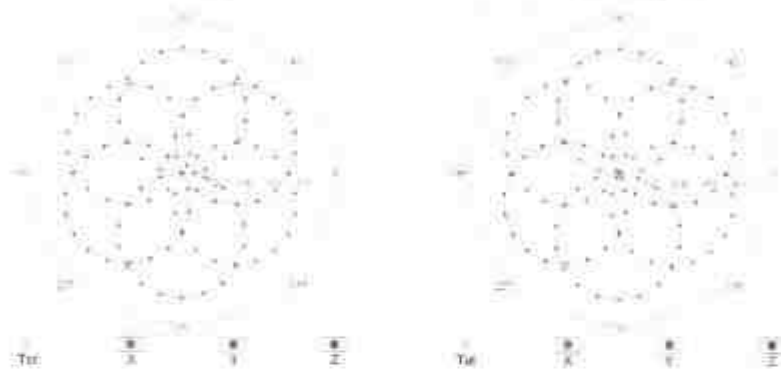


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

EX3DV4- SN:7461

August 20, 2020

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>test</sub>= 1900 MHz)

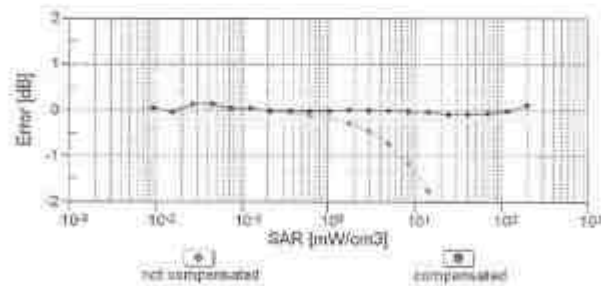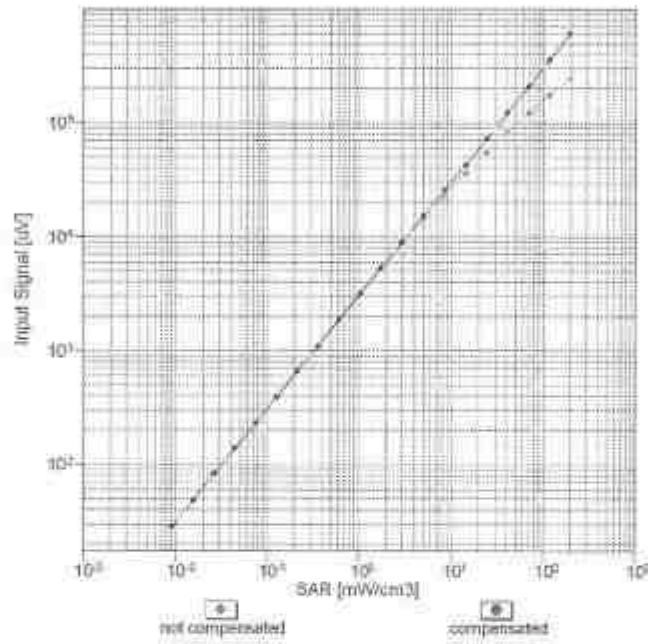


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



EX3DV4-BN-7461

August 28, 2020

### Conversion Factor Assessment

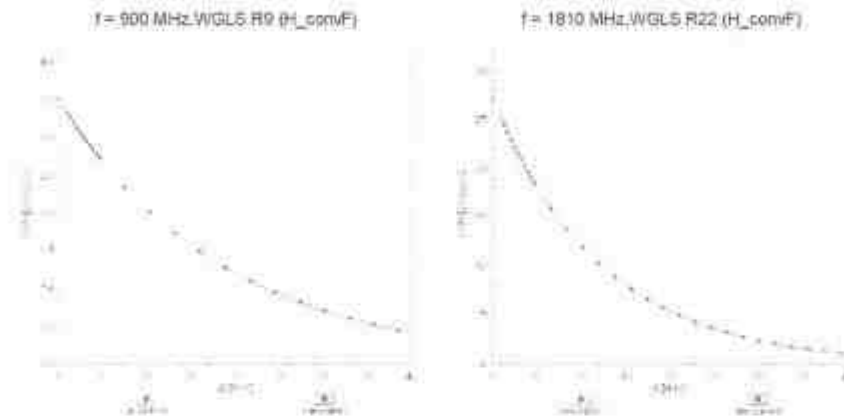

### Deviation from Isotropy in Liquid Error ( $\phi$ , $\theta$ ), $f = 900 \text{ MHz}$

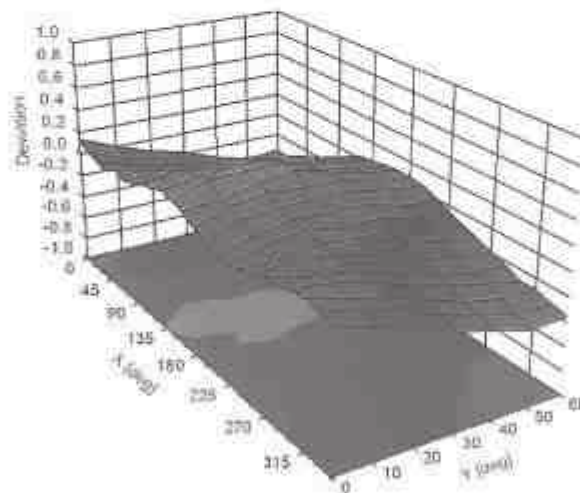

EX3DV4-SN7461

August 28, 2020

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>o</sup> (ke%)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 0.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 0.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 0.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 5 Mbps)	WLAN	9.46	± 0.6 %
10021	DAC	GSM-FDD (TDMA, GMSK, TN 0)	GSM	9.39	± 0.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 0.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 0.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 0.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 0.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 0.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 0.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 0.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	0.30	± 0.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.67	± 0.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 0.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI4-QPSK, DH1)	Bluetooth	7.74	± 0.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI4-QPSK, DH3)	Bluetooth	4.53	± 0.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI4-QPSK, DH5)	Bluetooth	3.83	± 0.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-PSK, DH1)	Bluetooth	8.01	± 0.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-PSK, DH3)	Bluetooth	4.77	± 0.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-PSK, DH5)	Bluetooth	4.10	± 0.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 0.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI4-QPSK, Halfrate)	AMPS	7.78	± 0.6 %
10044	CAA	IS-95E/A/TIA-553 FDD (FDMA, FS)	AMPS	0.00	± 0.6 %
10048	CAA	DECT (TDD, TDMA/FDM, QPSK, Full Slot, 24)	DECT	13.80	± 0.6 %
10049	CAA	DECT (TDD, TDMA/FDM, QPSK, Double Slot, 12)	DECT	10.79	± 0.6 %
10056	CAA	UMTS-FDD (TD-SCDMA, 1.38 Mbps)	TD-SCDMA	11.01	± 0.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 0.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 0.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 0.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 0.6 %
10063	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.88	± 0.6 %
10063	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 0.6 %
10064	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 0.6 %
10065	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 0.6 %
10066	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 0.6 %
10067	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 0.6 %
10068	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 0.6 %
10069	CAC	IEEE 802.11ah WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 0.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 0.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 0.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 0.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 0.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 0.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 0.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 0.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 0.6 %
10083	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI4-QPSK, Fullrate)	AMPS	4.77	± 0.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 0.6 %
10097	CAB	UMTS-FDD (HSDPA)	WCDMA	3.96	± 0.6 %
10098	CAB	UMTS-FDD (HSUPA, Subrate 2)	WCDMA	3.98	± 0.6 %
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 0.6 %
10100	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	6.67	± 0.6 %
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 0.6 %
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.80	± 0.6 %
10103	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 0.6 %
10104	CAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 0.6 %
10105	CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 0.6 %
10106	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.96	± 0.6 %



EX3DV4-SN 7481

August 26, 2020

10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±0.6%
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	6.70	±0.6%
10111	CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±0.6%
10112	CAS	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.56	±0.6%
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.82	±0.6%
10114	CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±0.6%
10115	CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±0.6%
10116	CAC	IEEE 802.11n (HT Greenfield, 130 Mbps, 64-QAM)	WLAN	8.15	±0.6%
10117	CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±0.6%
10118	CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.50	±0.6%
10119	CAC	IEEE 802.11n (HT Mixed, 130 Mbps, 64-QAM)	WLAN	8.13	±0.6%
10140	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±0.6%
10141	CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±0.6%
10142	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	6.73	±0.6%
10143	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±0.6%
10144	CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±0.6%
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	6.70	±0.6%
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±0.6%
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±0.6%
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±0.6%
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±0.6%
10151	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±0.6%
10152	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±0.6%
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±0.6%
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	6.75	±0.6%
10155	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±0.6%
10156	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	6.70	±0.6%
10157	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.40	±0.6%
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±0.6%
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±0.6%
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±0.6%
10161	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±0.6%
10162	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.56	±0.6%
10163	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	6.40	±0.6%
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±0.6%
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.70	±0.6%
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	6.73	±0.6%
10170	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±0.6%
10171	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±0.6%
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±0.6%
10173	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±0.6%
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±0.6%
10175	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	6.72	±0.6%
10176	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±0.6%
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	6.73	±0.6%
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±0.6%
10179	CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±0.6%
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±0.6%
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±0.6%
10182	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.82	±0.6%
10183	AAO	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±0.6%
10184	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	6.73	±0.6%
10185	CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±0.6%
10186	AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±0.6%
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	6.73	±0.6%
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±0.6%
10189	AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±0.6%
10190	CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±0.6%
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±0.6%
10196	CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±0.6%
10198	CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±0.6%
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±0.6%
10199	CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±0.6%
10213	CAC	IEEE 802.11n (HT Mixed, 7.3 Mbps, BPSK)	WLAN	8.03	±0.6%

Certificate No: EX3-7481\_Asp202

Page 12 of 22

EX3DV4-SN-7481

August 28, 2020

10220	CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 0.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 0.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, QPSK)	WLAN	8.05	± 0.6 %
10223	CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 0.6 %
10224	CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 0.6 %
10225	CAB	UMTS-FDD (HSPA+)	WCDMA	5.07	± 0.6 %
10226	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 0.6 %
10227	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 0.6 %
10228	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 0.6 %
10229	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 0.6 %
10230	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.26	± 0.6 %
10231	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 0.6 %
10232	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 0.6 %
10233	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 0.6 %
10234	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 0.6 %
10235	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.46	± 0.6 %
10236	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 0.6 %
10237	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 0.6 %
10238	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 0.6 %
10239	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 0.6 %
10240	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 0.6 %
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 0.6 %
10242	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 0.6 %
10243	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 0.6 %
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.08	± 0.6 %
10245	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.08	± 0.6 %
10246	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 0.6 %
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 0.6 %
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 0.6 %
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 0.6 %
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 0.6 %
10251	CAU	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 0.6 %
10252	CAU	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 0.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 0.6 %
10254	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 0.6 %
10255	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 0.6 %
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.86	± 0.6 %
10257	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 0.6 %
10258	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 0.6 %
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.96	± 0.6 %
10260	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 0.6 %
10261	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 0.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 0.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.18	± 0.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 0.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.82	± 0.6 %
10266	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 0.6 %
10267	CAU	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 0.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.08	± 0.6 %
10269	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 0.6 %
10270	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 0.6 %
10274	CAB	UMTS-FDD (HSPA, Subnet 5, 3GPP R10)	WCDMA	4.87	± 0.6 %
10275	CAB	UMTS-FDD (HSPA, Subnet 5, 3GPP R10.4)	WCDMA	3.98	± 0.6 %
10277	CAA	PHS (QPSK)	PHS	11.61	± 0.6 %
10278	CAA	PHS (QPSK, BW 884MHz, Roll-off 0.3)	PHS	12.16	± 0.6 %
10279	CAA	PHS (QPSK, BW 884MHz, Roll-off 0.38)	PHS	12.16	± 0.6 %
10290	AAB	CDMA2000, RC1, S0E5, Full Rate	CDMA2000	3.91	± 0.6 %
10291	AAB	CDMA2000, RC3, S0E5, Full Rate	CDMA2000	3.40	± 0.6 %
10292	AAB	CDMA2000, RC3, S0E2, Full Rate	CDMA2000	3.38	± 0.6 %
10293	AAB	CDMA2000, RC3, S0E3, Full Rate	CDMA2000	3.50	± 0.6 %
10295	AAB	CDMA2000, RC1, S0E3, 1/8th Rate 25 k	CDMA2000	12.48	± 0.6 %
10297	AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 0.6 %
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 0.6 %
10299	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.55	± 0.6 %



EXSDV4-EN:7481

August 26, 2020

10300	AA0	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 0.6 %
10301	AAA	IEEE 802.16e WIMAX (29.16, 5ms, 10MHz, QPSK, PUSC)	WIMAX	12.03	± 0.6 %
10302	AAA	IEEE 802.16e WIMAX (29.16, 5ms, 10MHz, QPSK, PUSC, JCTHRL)	WIMAX	12.57	± 0.6 %
10303	AAA	IEEE 802.16e WIMAX (31.15, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	12.52	± 0.6 %
10304	AAA	IEEE 802.16e WIMAX (29.16, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	11.99	± 0.6 %
10305	AAA	IEEE 802.16e WIMAX (31.15, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	15.24	± 0.6 %
10306	AAA	IEEE 802.16e WIMAX (29.16, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	14.57	± 0.6 %
10307	AAA	IEEE 802.16e WIMAX (29.16, 10ms, 10MHz, QPSK, PUSC)	WIMAX	14.49	± 0.6 %
10308	AAA	IEEE 802.16e WIMAX (29.16, 10ms, 10MHz, 16QAM, PUSC)	WIMAX	14.46	± 0.6 %
10309	AAA	IEEE 802.16e WIMAX (29.16, 10ms, 10MHz, 16QAM, AMC 2x3)	WIMAX	14.58	± 0.6 %
10310	AAA	IEEE 802.16e WIMAX (29.16, 10ms, 10MHz, QPSK, AMC 2x3)	WIMAX	14.57	± 0.6 %
10311	AA0	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 0.6 %
10313	AAA	IDEN 1:3	IDEN	10.51	± 0.6 %
10314	AAA	IDEN 1:6	IDEN	13.48	± 0.6 %
10316	AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 0.6 %
10318	AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	6.36	± 0.6 %
10317	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	6.36	± 0.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 0.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 0.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.96	± 0.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 0.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 0.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 0.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 0.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 0.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 0.6 %
10400	AA0	IEEE 802.11ac WiFi (20MHz, 64-QAM, 96pc dc)	WLAN	6.37	± 0.6 %
10401	AA0	IEEE 802.11ac WiFi (40MHz, 64-QAM, 96pc dc)	WLAN	6.60	± 0.6 %
10403	AA0	IEEE 802.11ac WiFi (80MHz, 64-QAM, 96pc dc)	WLAN	6.53	± 0.6 %
10403	AA0	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 0.6 %
10404	AA0	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 0.6 %
10406	AA0	CDMA2000, RC3, S0.32, SCHO, Full Rate	CDMA2000	6.22	± 0.6 %
10410	AA0	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.62	± 0.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	6.54	± 0.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.68	± 0.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	6.23	± 0.6 %
10417	AA0	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	6.23	± 0.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 96pc, Long)	WLAN	6.14	± 0.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 96pc, Short)	WLAN	6.19	± 0.6 %
10422	AA0	IEEE 802.11n (HT Greenfield, 7.2 Mbps, 96pc)	WLAN	6.32	± 0.6 %
10423	AA0	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	6.47	± 0.6 %
10424	AA0	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	6.40	± 0.6 %
10425	AA0	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	6.41	± 0.6 %
10426	AA0	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	6.45	± 0.6 %
10427	AA0	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	6.41	± 0.6 %
10430	AA0	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	6.26	± 0.6 %
10431	AA0	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	6.38	± 0.6 %
10432	AA0	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	6.34	± 0.6 %
10433	AA0	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	6.34	± 0.6 %
10434	AAA	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	6.60	± 0.6 %
10435	AA0	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL, Sub)	LTE-TDD	7.62	± 0.6 %
10447	AA0	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 0.6 %
10448	AA0	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 0.6 %
10449	AA0	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 0.6 %
10450	AA0	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 0.6 %
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.56	± 0.6 %
10453	AA0	Validation (Square, 10ms, 1ms)	Test	10.00	± 0.6 %
10466	AA0	IEEE 802.11ac WiFi (100MHz, 64-QAM, 96pc dc)	WLAN	6.63	± 0.6 %
10457	AAA	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 0.6 %
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 0.6 %
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	6.25	± 0.6 %
10460	AAA	UMTS-FDD (WCDMA, AMR)	WCDMA	2.30	± 0.6 %
10461	AA0	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.62	± 0.6 %
10462	AA0	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %

EX30V4-SN7461

August 28, 2020

10463	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 0.6 %
10464	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.62	± 0.6 %
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.02	± 0.6 %
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 0.6 %
10467	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %
10469	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.66	± 0.6 %
10470	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.62	± 0.6 %
10471	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %
10472	AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 0.6 %
10473	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.62	± 0.6 %
10474	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %
10475	AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 0.6 %
10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %
10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 0.6 %
10479	AAE	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %
10480	AAE	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 0.6 %
10481	AAE	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %
10482	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 0.6 %
10483	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub)	LTE-TDD	8.39	± 0.6 %
10484	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 0.6 %
10485	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 0.6 %
10486	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 0.6 %
10487	AAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 0.6 %
10488	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	± 0.6 %
10489	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 0.6 %
10491	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %
10492	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 0.6 %
10493	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 0.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 0.6 %
10496	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 0.6 %
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 0.6 %
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 0.6 %
10499	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 0.6 %
10500	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 0.6 %
10501	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 0.6 %
10502	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 0.6 %
10503	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 0.6 %
10504	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %
10505	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 0.6 %
10506	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %
10507	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 0.6 %
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.65	± 0.6 %
10509	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.69	± 0.6 %
10510	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %
10511	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 0.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 0.6 %
10514	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	± 0.6 %
10516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 0.6 %
10517	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 0.6 %
10518	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 0.6 %
10519	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 0.6 %
10520	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	± 0.6 %
10521	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	± 0.6 %
10522	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 30 Mbps, 99pc dc)	WLAN	8.45	± 0.6 %
10523	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.25	± 0.6 %
10524	AAE	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	± 0.6 %
10525	AAE	IEEE 802.11ac WiFi (20MHz, MCS9, 99pc dc)	WLAN	8.36	± 0.6 %
10526	AAE	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.42	± 0.6 %
10527	AAE	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	± 0.6 %

Certificate No: EX3-7461\_Aug2020

Page 15 of 22



EX3DV4-SN7401

August 28, 2020

10528	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.36	± 0.6 %
10529	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 0.6 %
10531	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.43	± 0.6 %
10532	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 0.6 %
10533	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc)	WLAN	8.36	± 0.6 %
10534	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.45	± 0.6 %
10535	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 0.6 %
10536	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 0.6 %
10537	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 0.6 %
10538	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 0.6 %
10540	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 0.6 %
10541	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 0.6 %
10542	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 0.6 %
10543	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 0.6 %
10544	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8.47	± 0.6 %
10545	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 0.6 %
10546	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 0.6 %
10547	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc)	WLAN	8.49	± 0.6 %
10548	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 0.6 %
10550	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.36	± 0.6 %
10551	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 0.6 %
10552	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 0.6 %
10553	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 0.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc)	WLAN	8.48	± 0.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc)	WLAN	8.47	± 0.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 0.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 0.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 0.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	± 0.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 0.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 0.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc)	WLAN	8.77	± 0.6 %
10564	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 0.6 %
10565	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	± 0.6 %
10566	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.11	± 0.6 %
10567	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	± 0.6 %
10568	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	± 0.6 %
10569	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	± 0.6 %
10570	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.20	± 0.6 %
10571	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.09	± 0.6 %
10572	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.09	± 0.6 %
10573	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.98	± 0.6 %
10574	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.98	± 0.6 %
10575	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc dc)	WLAN	8.59	± 0.6 %
10576	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.60	± 0.6 %
10577	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.70	± 0.6 %
10578	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.48	± 0.6 %
10579	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.38	± 0.6 %
10580	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.76	± 0.6 %
10581	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.35	± 0.6 %
10582	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.67	± 0.6 %
10583	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.59	± 0.6 %
10584	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.60	± 0.6 %
10585	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.70	± 0.6 %
10586	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.48	± 0.6 %
10587	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	8.36	± 0.6 %
10588	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.78	± 0.6 %
10589	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.35	± 0.6 %
10590	AAB	IEEE 802.11ah WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.67	± 0.6 %
10591	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS9, 99pc dc)	WLAN	8.63	± 0.6 %
10592	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 99pc dc)	WLAN	8.79	± 0.6 %
10593	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 99pc dc)	WLAN	8.94	± 0.6 %
10594	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 99pc dc)	WLAN	8.74	± 0.6 %
10595	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 99pc dc)	WLAN	8.74	± 0.6 %

EX3DV4- 0N7401

August 28, 2020

10598	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc)	WLAN	0.71	± 0.6 %
10597	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS8, 90pc dc)	WLAN	0.72	± 0.6 %
10596	AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc)	WLAN	0.50	± 0.6 %
10595	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc)	WLAN	0.79	± 0.6 %
10600	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	0.88	± 0.6 %
10601	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc)	WLAN	0.87	± 0.6 %
10602	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc)	WLAN	0.94	± 0.6 %
10603	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc)	WLAN	0.93	± 0.6 %
10604	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc dc)	WLAN	0.78	± 0.6 %
10605	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc)	WLAN	0.97	± 0.6 %
10606	AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc dc)	WLAN	0.82	± 0.6 %
10607	AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc dc)	WLAN	0.54	± 0.6 %
10608	AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	0.77	± 0.6 %
10609	AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc dc)	WLAN	0.57	± 0.6 %
10610	AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc dc)	WLAN	0.78	± 0.6 %
10611	AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc dc)	WLAN	0.70	± 0.6 %
10612	AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc dc)	WLAN	0.77	± 0.6 %
10613	AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc)	WLAN	0.94	± 0.6 %
10614	AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc dc)	WLAN	0.59	± 0.6 %
10615	AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc dc)	WLAN	0.82	± 0.6 %
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc)	WLAN	0.82	± 0.6 %
10617	AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc dc)	WLAN	0.81	± 0.6 %
10618	AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc dc)	WLAN	0.98	± 0.6 %
10619	AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc dc)	WLAN	0.66	± 0.6 %
10620	AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc dc)	WLAN	0.87	± 0.6 %
10621	AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc)	WLAN	0.77	± 0.6 %
10622	AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc dc)	WLAN	0.88	± 0.6 %
10623	AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	0.82	± 0.6 %
10624	AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc dc)	WLAN	0.96	± 0.6 %
10625	AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc dc)	WLAN	0.96	± 0.6 %
10626	AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc dc)	WLAN	0.83	± 0.6 %
10627	AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc dc)	WLAN	0.88	± 0.6 %
10628	AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc)	WLAN	0.71	± 0.6 %
10629	AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc dc)	WLAN	0.85	± 0.6 %
10630	AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc)	WLAN	0.72	± 0.6 %
10631	AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc dc)	WLAN	0.81	± 0.6 %
10632	AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc dc)	WLAN	0.74	± 0.6 %
10633	AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	0.63	± 0.6 %
10634	AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc dc)	WLAN	0.80	± 0.6 %
10635	AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc)	WLAN	0.81	± 0.6 %
10636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc)	WLAN	0.83	± 0.6 %
10637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc)	WLAN	0.79	± 0.6 %
10638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc dc)	WLAN	0.66	± 0.6 %
10639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc dc)	WLAN	0.85	± 0.6 %
10640	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc dc)	WLAN	0.98	± 0.6 %
10641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc)	WLAN	0.96	± 0.6 %
10642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc)	WLAN	0.96	± 0.6 %
10643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc)	WLAN	0.89	± 0.6 %
10644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc)	WLAN	0.99	± 0.6 %
10645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc dc)	WLAN	0.11	± 0.6 %
10646	AAG	LTE-TDD (SC-FDMA, 1 RB, 0 MHz, QPSK, UL Sub=2.7)	LTE-TDD	11.98	± 0.6 %
10647	AAF	LTE-TDD (SC-FDMA, 1 RB, 0 MHz, QPSK, UL sub=2.7)	LTE-TDD	11.98	± 0.6 %
10648	AAA	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 0.6 %
10652	AAE	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	0.91	± 0.6 %
10653	AAE	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 0.6 %
10654	AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	0.90	± 0.6 %
10655	AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 0.6 %
10656	AAA	Pulse Waveform (200Hz, 10%)	Test	10.00	± 0.6 %
10659	AAA	Pulse Waveform (200Hz, 30%)	Test	0.99	± 0.6 %
10660	AAA	Pulse Waveform (200Hz, 40%)	Test	3.98	± 0.6 %
10661	AAA	Pulse Waveform (200Hz, 60%)	Test	2.22	± 0.6 %
10662	AAA	Pulse Waveform (200Hz, 80%)	Test	0.97	± 0.6 %
10670	AAA	Bluetooth Low Energy	Bluetooth	2.15	± 0.6 %
10671	AAA	IEEE 802.11ax (20MHz, MCS0, 90pc dc)	WLAN	0.99	± 0.6 %



EX3DV4-SN7481

August 28, 2020

10672	AAA	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	8.57	± 0.6 %
10673	AAA	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 0.6 %
10674	AAA	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 0.6 %
10675	AAA	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 0.6 %
10676	AAA	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.77	± 0.6 %
10677	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.73	± 0.6 %
10678	AAA	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.78	± 0.6 %
10679	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 0.6 %
10680	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.80	± 0.6 %
10681	AAA	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 0.6 %
10682	AAA	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 0.6 %
10683	AAA	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.42	± 0.6 %
10684	AAA	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	8.26	± 0.6 %
10685	AAA	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.23	± 0.6 %
10686	AAA	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.28	± 0.6 %
10687	AAA	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.45	± 0.6 %
10688	AAA	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.29	± 0.6 %
10689	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.55	± 0.6 %
10690	AAA	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.29	± 0.6 %
10691	AAA	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.25	± 0.6 %
10692	AAA	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.29	± 0.6 %
10693	AAA	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.25	± 0.6 %
10694	AAA	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.57	± 0.6 %
10695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.78	± 0.6 %
10696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.91	± 0.6 %
10697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.61	± 0.6 %
10698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.69	± 0.6 %
10699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.82	± 0.6 %
10700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.73	± 0.6 %
10701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.86	± 0.6 %
10702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.70	± 0.6 %
10703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.82	± 0.6 %
10704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.56	± 0.6 %
10705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 0.6 %
10706	AAA	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.68	± 0.6 %
10707	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.32	± 0.6 %
10708	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.55	± 0.6 %
10709	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.33	± 0.6 %
10710	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.29	± 0.6 %
10711	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.39	± 0.6 %
10712	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.67	± 0.6 %
10713	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.33	± 0.6 %
10714	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.76	± 0.6 %
10715	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.48	± 0.6 %
10716	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.30	± 0.6 %
10717	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.46	± 0.6 %
10718	AAA	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.24	± 0.6 %
10719	AAA	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	9.81	± 0.6 %
10720	AAA	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 0.6 %
10721	AAA	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 0.6 %
10722	AAA	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.58	± 0.6 %
10723	AAA	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.70	± 0.6 %
10724	AAA	IEEE 802.11ax (80MHz, MCS5, 90pc dc)	WLAN	8.90	± 0.6 %
10725	AAA	IEEE 802.11ax (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 0.6 %
10726	AAA	IEEE 802.11ax (80MHz, MCS7, 90pc dc)	WLAN	8.72	± 0.6 %
10727	AAA	IEEE 802.11ax (80MHz, MCS8, 90pc dc)	WLAN	8.66	± 0.6 %
10728	AAA	IEEE 802.11ax (80MHz, MCS9, 90pc dc)	WLAN	8.68	± 0.6 %
10729	AAA	IEEE 802.11ax (80MHz, MCS10, 90pc dc)	WLAN	8.64	± 0.6 %
10730	AAA	IEEE 802.11ax (80MHz, MCS11, 90pc dc)	WLAN	8.67	± 0.6 %
10731	AAA	IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.42	± 0.6 %
10732	AAA	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.46	± 0.6 %
10733	AAA	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.40	± 0.6 %
10734	AAA	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.25	± 0.6 %
10735	AAA	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.33	± 0.6 %

EX3DV4-SN:7461

August 26, 2020

10736	AAA	IEEE 802.11ax (80MHz, MCS5, 99pc dc)	WLAN	8.27	±0.6%
10737	AAA	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.36	±0.6%
10738	AAA	IEEE 802.11ax (80MHz, MCS7, 99pc dc)	WLAN	8.42	±0.6%
10739	AAA	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.29	±0.6%
10740	AAA	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8.48	±0.6%
10741	AAA	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	±0.6%
10742	AAA	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.43	±0.6%
10743	AAA	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.94	±0.6%
10744	AAA	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.19	±0.6%
10745	AAA	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.93	±0.6%
10746	AAA	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.11	±0.6%
10747	AAA	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.04	±0.6%
10748	AAA	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.93	±0.6%
10749	AAA	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.90	±0.6%
10750	AAA	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.79	±0.6%
10751	AAA	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.22	±0.6%
10752	AAA	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.81	±0.6%
10753	AAA	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	9.00	±0.6%
10754	AAA	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.94	±0.6%
10755	AAA	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.94	±0.6%
10756	AAA	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.77	±0.6%
10757	AAA	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.77	±0.6%
10758	AAA	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.69	±0.6%
10759	AAA	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.58	±0.6%
10760	AAA	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.49	±0.6%
10761	AAA	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.58	±0.6%
10762	AAA	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.49	±0.6%
10763	AAA	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.53	±0.6%
10764	AAA	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.54	±0.6%
10765	AAA	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	8.54	±0.6%
10766	AAA	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.51	±0.6%
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±0.6%
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±0.6%
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±0.6%
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±0.6%
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±0.6%
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±0.6%
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±0.6%
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±0.6%
10775	AAB	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±0.6%
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±0.6%
10777	AAB	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±0.6%
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±0.6%
10779	AAB	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±0.6%
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.58	±0.6%
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±0.6%
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±0.6%
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±0.6%
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.20	±0.6%
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±0.6%
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±0.6%
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±0.6%
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±0.6%
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±0.6%
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±0.6%
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±0.6%
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.90	±0.6%
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±0.6%
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±0.6%
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±0.6%
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±0.6%
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±0.6%
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±0.6%
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±0.6%



EX3DV4-SN7461

August 28, 2020

10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 0.6 %
10802	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	± 0.6 %
10803	AAC	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 0.6 %
10805	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10806	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	± 0.6 %
10809	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10810	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10812	AAC	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	± 0.6 %
10817	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 0.6 %
10818	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10819	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	± 0.6 %
10820	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	± 0.6 %
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10822	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.38	± 0.6 %
10824	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	± 0.6 %
10826	AAC	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10827	AAC	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	± 0.6 %
10828	AAC	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	± 0.6 %
10829	AAC	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	± 0.6 %
10830	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	± 0.6 %
10831	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 0.6 %
10832	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	± 0.6 %
10833	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 0.6 %
10834	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 0.6 %
10836	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 0.6 %
10836	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	± 0.6 %
10837	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	± 0.6 %
10839	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 0.6 %
10840	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	± 0.6 %
10841	AAC	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	± 0.6 %
10843	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.45	± 0.6 %
10844	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10846	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10848	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10855	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.38	± 0.6 %
10856	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 0.6 %
10857	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 0.6 %
10858	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 0.6 %
10858	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 0.6 %
10860	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10861	AAC	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	± 0.6 %
10863	AAC	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10864	AAC	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 0.6 %
10865	AAC	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 0.6 %
10868	AAC	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	6.68	± 0.6 %
10868	AAC	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	± 0.6 %
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 0.6 %
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.68	± 0.6 %
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	5.75	± 0.6 %
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	6.52	± 0.6 %
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	5.61	± 0.6 %
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.05	± 0.6 %
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 0.6 %
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	± 0.6 %
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	7.95	± 0.6 %
10879	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 0.6 %
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 0.6 %
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	± 0.6 %
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 0.6 %
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 0.6 %
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	5.57	± 0.6 %
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 18QAM, 120 kHz)	5G NR FR2 TDD	6.53	± 0.6 %
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 0.6 %

EX3DV4-SN7461

August 28, 2020

10886	AA0	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.65	± 0.6 %
10887	AA0	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.76	± 0.6 %
10888	AA0	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 0.6 %
10889	AA0	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	± 0.6 %
10890	AA0	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	± 0.6 %
10891	AA0	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 0.6 %
10892	AA0	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 0.6 %
10897	AAA	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.06	± 0.6 %
10898	AAA	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 0.6 %
10899	AAA	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 0.6 %
10900	AAA	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10901	AAA	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10902	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10903	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10904	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10905	AAA	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10907	AAA	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 0.6 %
10907	AAA	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	± 0.6 %
10908	AAA	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 0.6 %
10909	AAA	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 0.6 %
10910	AAA	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 0.6 %
10911	AAA	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 0.6 %
10912	AAA	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10913	AAA	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10914	AAA	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 0.6 %
10915	AAA	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 0.6 %
10916	AAA	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 0.6 %
10917	AAA	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 0.6 %
10918	AAA	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 0.6 %
10919	AAA	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 0.6 %
10920	AAA	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	± 0.6 %
10921	AAA	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10922	AAA	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	± 0.6 %
10921	AAA	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10924	AAA	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10925	AAA	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	± 0.6 %
10928	AAA	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	± 0.6 %
10927	AAA	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	± 0.6 %
10928	AAA	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 0.6 %
10928	AAA	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 0.6 %
10930	AAA	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 0.6 %
10931	AAA	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.61	± 0.6 %
10932	AAA	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.61	± 0.6 %
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.61	± 0.6 %
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 0.6 %
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	± 0.6 %
10936	AAA	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.60	± 0.6 %
10937	AAA	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	± 0.6 %
10938	AAA	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.80	± 0.6 %
10939	AAA	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	± 0.6 %
10940	AAA	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	± 0.6 %
10941	AAA	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 0.6 %
10942	AAA	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 0.6 %
10943	AAA	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.99	± 0.6 %
10944	AAA	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	± 0.6 %
10945	AAA	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	± 0.6 %
10946	AAA	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	± 0.6 %
10947	AAA	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 0.6 %
10948	AAA	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 0.6 %
10949	AAA	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	± 0.6 %
10950	AAA	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	± 0.6 %
10951	AAA	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	± 0.6 %
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.25	± 0.6 %
10953	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.15	± 0.6 %



EX03V4-5N745T

August 28, 2020

10954	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	± 9.0 %
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	± 9.5 %
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	± 9.6 %
10957	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	± 9.6 %
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.81	± 9.0 %
10959	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	± 9.6 %
10960	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	± 9.6 %
10961	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	± 9.6 %
10962	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	± 9.0 %
10963	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	± 9.0 %
10964	AAA	5G NR DL (CP-OFDM, TM 3.1, 6 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	± 9.6 %
10965	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	± 9.6 %
10966	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.8 %
10967	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	± 9.0 %
10968	AAA	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	± 9.6 %

\* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 C Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **Dekra Spain**

Certificate No: **D750V3-1036\_Oct19**

CALIBRATION CERTIFICATE			
Object	D750V3 - SN:1036		
Calibration procedure(s)	QA CAL-05 v11 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz		
Calibration date:	October 22, 2019		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).                      The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p>			
<b>Primary Standards</b>	<b>ID #</b>	<b>Cal Date (Certificate No.)</b>	<b>Scheduled Calibration</b>
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02893/02893)	Apr-20
Power sensor NRP-Z91	SN: 103344	03-Apr-19 (No. 217-02893)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20K)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06027	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX30VM	SN: 7349	29-May-19 (No. EXC-7349_May19)	May-20
DAEA	SN: 001	26-Apr-19 (No. DAE4-001_Apr19)	Apr-20
<b>Secondary Standards</b>	<b>ID #</b>	<b>Check Date (in house)</b>	<b>Scheduled Check</b>
Power meter E4410B	SN: GB38512473	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP-3481A	SN: GB37292763	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: WY41093217	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator P&S SMT-05	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: USA1090477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19
Calibrated by:	Name Jeton Kastrat	Function Laboratory Technician	Signature 
Approved by:	Name Kaja Pokonc	Technical Manager	
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: October 23, 2019



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zürich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (IAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0106

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.0	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.7 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.64 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.65 W/kg ± 16.5 % (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.5 ± 6 %	0.95 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.67 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.72 W/kg ± 16.5 % (k=2)

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	56.0 Ω + 1.8 jΩ
Return Loss	-24.6 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	50.6 Ω + 1.9 jΩ
Return Loss	-34.0 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.036 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAFT data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 22.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1036

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 42.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07) @ 750 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $\Delta x=5$ mm,  $\Delta y=5$ mm,  $\Delta z=5$ mm

Reference Value = 60.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 18.4 mm


Ratio of SAR at M2 to SAR at M1 = 66.9%

Maximum value of SAR (measured) = 2.85 W/kg





### Impedance Measurement Plot for Head TSL

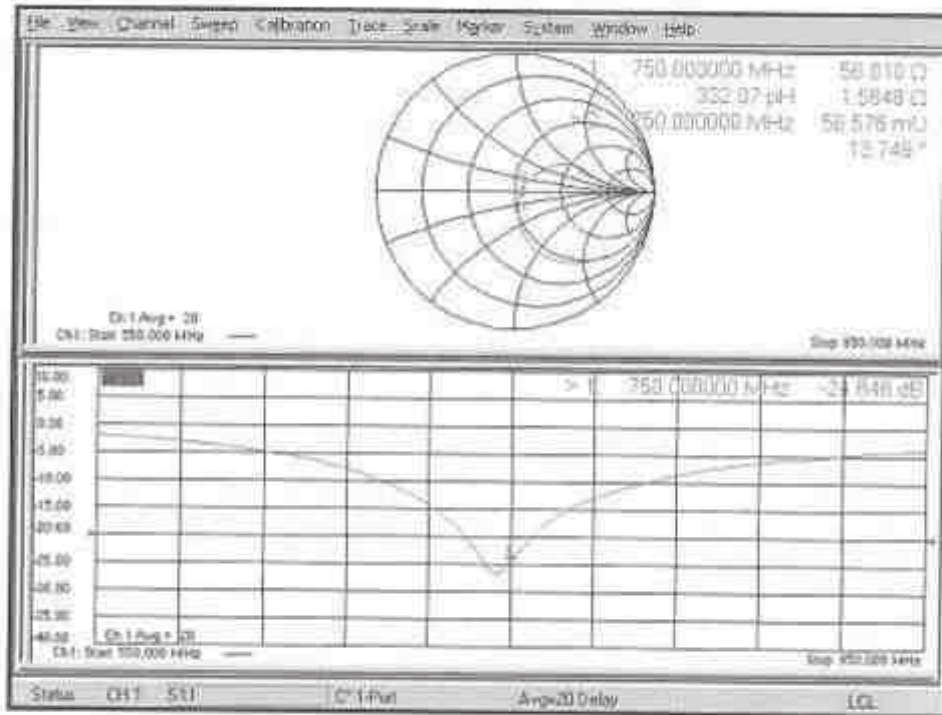

## DASY5 Validation Report for Body TSL

Date: 22.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1036

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.95$  S/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.4, 10.4, 10.4) @ 750 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.19 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.42 W/kg


Smallest distance from peaks to all points 3 dB below = 18 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 2.88 W/kg



Impedance Measurement Plot for Body TSL

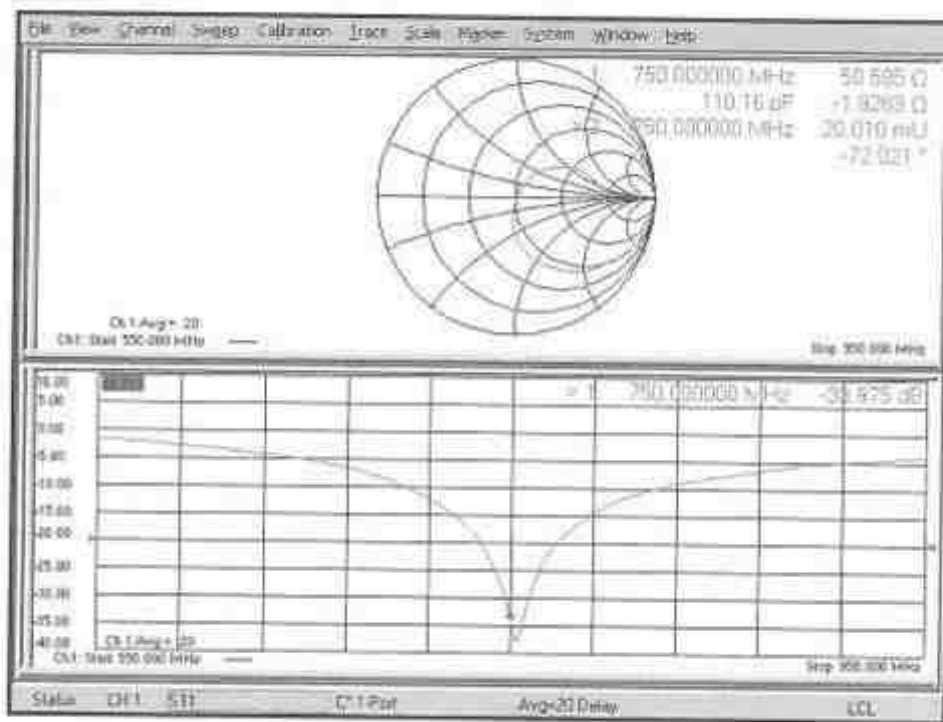

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 S Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: Dekra Spain

Certificate No.: D900V2-1d007\_Oct19

CALIBRATION CERTIFICATE			
Object	D900V2 - SN:1d007		
Calibration procedure(s)	QA CAL-05.v11 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz		
Calibration date	October 22, 2019		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&PE critical for calibration)			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02880/02889)	Apr-20
Power sensor NRP-Z21	SN: 103244	03-Apr-19 (No. 217-02880)	Apr-20
Power sensor NRP-Z21	SN: 103245	03-Apr-19 (No. 217-02883)	Apr-20
Reference 20-dB Attenuator	SN: 5058 (20K)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02893)	Apr-20
Reference Probe EX30V4	SN: 7340	29-May-19 (No. EX3-7340_May19)	May-20
DAE4	SN: 601	30-Apr-19 (No. DAE4-601_Apr19)	Apr-22
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4410B	SN: 0329512475	30-Oct-14 (in house check Feb-18)	In house check: Oct-20
Power sensor HP 8481A	SN: L237292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41003217	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator RMS SM7-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8366A	SN: L1541060477	31-Mar-14 (in house check Oct-18)	In house check: Oct-18
Calibrated by:	Name: Jeton Kestrel	Function: Laboratory Technician	Signature:
Approved by:	Name: Katja Pokovic	Function: Technical Manager	Signature:
			Issued: October 23, 2019
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No.: D900V2-1d007\_Oct19

Page 1 of 8



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration; as far as not given on page 1.

DASY Version	DASY5	V52.10.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$900 \text{ MHz} \pm 1 \text{ MHz}$	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	$22.0 \text{ }^\circ\text{C}$	41.5	0.97 mho/m
Measured Head TSL parameters	$(22.0 \pm 0.2) \text{ }^\circ\text{C}$	$42.3 \pm 6 \%$	$0.94 \text{ mho/m} \pm 6 \%$
Head TSL temperature change during test	$< 0.5 \text{ }^\circ\text{C}$	---	---

### SAR result with Head TSL

SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.74 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	$11.3 \text{ W/kg} \pm 17.0 \%$ (k=2)

SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.77 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	$7.23 \text{ W/kg} \pm 16.5 \%$ (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	$22.0 \text{ }^\circ\text{C}$	55.0	1.05 mho/m
Measured Body TSL parameters	$(22.0 \pm 0.2) \text{ }^\circ\text{C}$	$55.1 \pm 6 \%$	$1.01 \text{ mho/m} \pm 6 \%$
Body TSL temperature change during test	$< 0.5 \text{ }^\circ\text{C}$	---	---

### SAR result with Body TSL

SAR averaged over $1 \text{ cm}^3$ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.69 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	$11.1 \text{ W/kg} \pm 17.0 \%$ (k=2)

SAR averaged over $10 \text{ cm}^3$ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	$7.16 \text{ W/kg} \pm 16.5 \%$ (k=2)

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	49.8 $\Omega$ - 2.0 $\mu\Omega$
Return Loss	-33.7 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	48.3 $\Omega$ - 3.5 $\mu\Omega$
Return Loss	-25.6 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.408 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 22.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:1d007

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.51, 9.51, 9.51) @ 900 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=15$ mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 66.31 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 4.17 W/kg

SAR(1 g) = 2.74 W/kg; SAR(10 g) = 1.77 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm


Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 3.70 W/kg

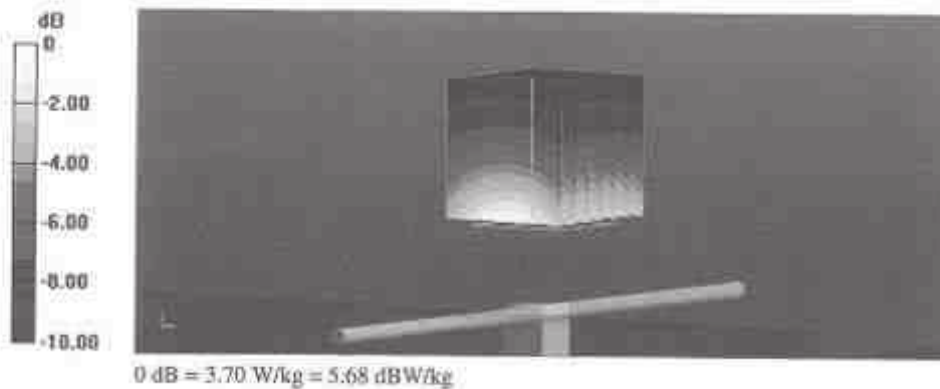



Impedance Measurement Plot for Head TSL

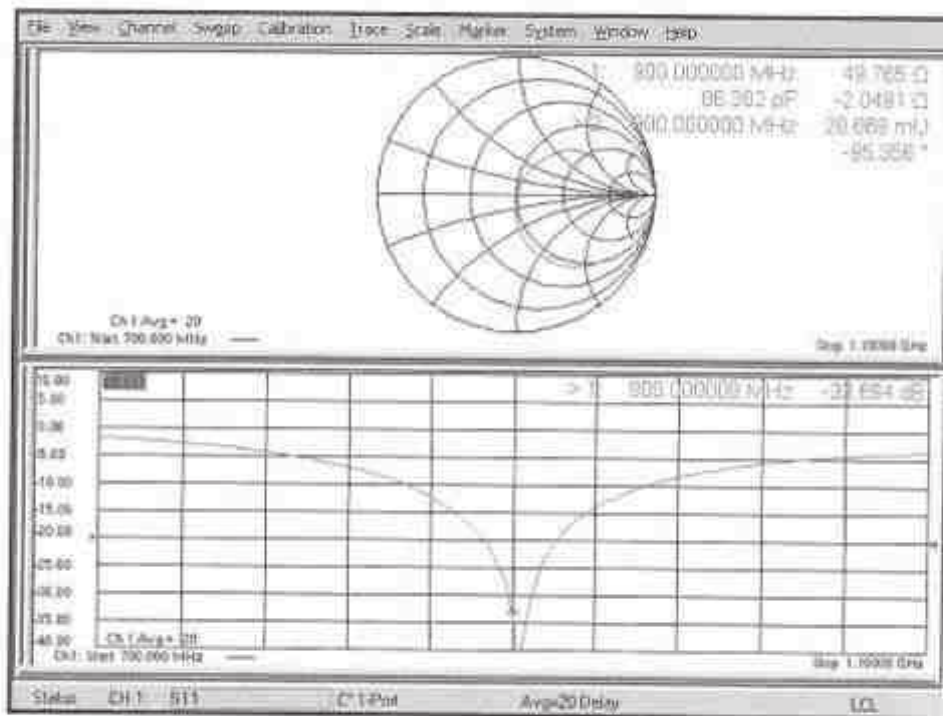

## DASY5 Validation Report for Body TSL

Date: 22.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:1d007

Communication System: UID 0 - CW; Frequency: 900 MHz  
Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.01$  S/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(9.95, 9.95, 9.95) @ 900 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 68.67 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 4.01 W/kg  
SAR(1 g) = 2.69 W/kg; SAR(10 g) = 1.75 W/kg  
Smallest distance from peaks to all points 3 dB below = 15 mm  
Ratio of SAR at M2 to SAR at M1 = 67.2%  
Maximum value of SAR (measured) = 3.60 W/kg



### Impedance Measurement Plot for Body TSL

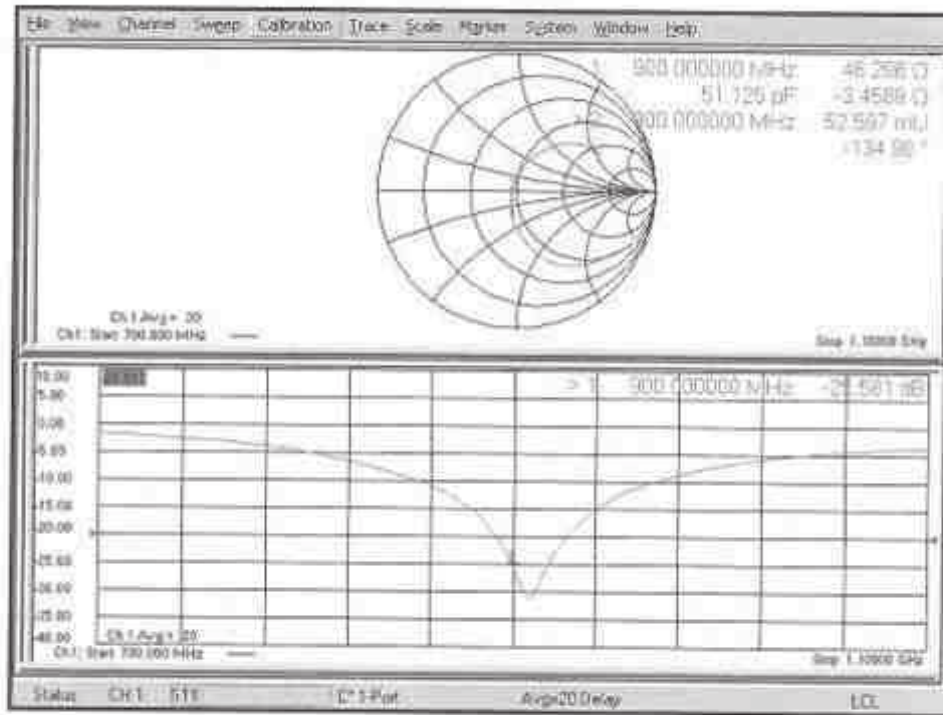

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
 C Service suisse d'étalonnage  
 S Servizio svizzero di taratura  
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **Dekra Spain**

Certificate No: **D1800V2-2d099\_Oct19**

CALIBRATION CERTIFICATE			
Object	D1800V2 - SN:2d099		
Calibration procedure(s)	QA CAL-05.v11 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz		
Calibration date:	October 23, 2019		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility, environment temperature $22 \pm 3^\circ\text{C}$ and humidity $< 70\%$ .			
Calibration Equipment used (MATE critical for calibration)			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	05-Apr-19 (No. 217-02893/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103040	03-Apr-19 (No. 217-02892)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combinator	SN: 0047.2 / 06007	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX30V4	SN: 7349	29-May-19 (No. EX3-7349_May19)	May-20
DAE4	SN: 601	30-Apr-19 (No. DAE4-601_Apr19)	Apr-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: G530512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8491A	SN: U537292785	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8491A	SN: MY41082317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator HSS SMT-08	SN: 100872	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: U941080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-18
Calibrated by:	Name Jeton Kartraj	Function Laboratory Technician	Signature 
Approved by:	Name Katja Fokovic	Function Technical Manager	Signature 
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: October 23, 2019

Certificate No: D1800V2-2d099\_Oct19

Page 1 of 8



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.3
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$1800 \text{ MHz} \pm 1 \text{ MHz}$	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	$(22.0 \pm 0.2) \text{ °C}$	$40.7 \pm 6 \%$	$1.38 \text{ mho/m} \pm 6 \%$
Head TSL temperature change during test	$< 0.5 \text{ °C}$	---	---

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	$38.8 \text{ W/kg} \pm 17.0 \%$ (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.00 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	$20.2 \text{ W/kg} \pm 16.5 \%$ (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	$(22.0 \pm 0.2) \text{ °C}$	$53.6 \pm 6 \%$	$1.50 \text{ mho/m} \pm 6 \%$
Body TSL temperature change during test	$< 0.5 \text{ °C}$	---	---

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.73 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	$39.3 \text{ W/kg} \pm 17.0 \%$ (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	$20.7 \text{ W/kg} \pm 16.5 \%$ (k=2)

#### Appendix (Additional assessments outside the scope of SCS 0108)

##### Antenna Parameters with Head TSL

Impedance, transformed to feed point	$48.8 \Omega - 4.8 j\Omega$
Return Loss	+27.1 dB

##### Antenna Parameters with Body TSL

Impedance, transformed to feed point	$44.5 \Omega - 4.7 j\Omega$
Return Loss	+22.3 dB

##### General Antenna Parameters and Design

Electrical Delay (one direction)	1.207 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

##### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 21.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:2d099


Communication System: UID 0 - CW; Frequency: 1800 MHz  
Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.64, 8.64, 8.64) @ 1800 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 108.5 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 17.8 W/kg  
SAR(1 g) = 9.58 W/kg; SAR(10 g) = 5 W/kg  
Smallest distance from peaks to all points 3 dB below = 10 mm  
Ratio of SAR at M2 to SAR at M1 = 54.2%  
Maximum value of SAR (measured) = 14.9 W/kg

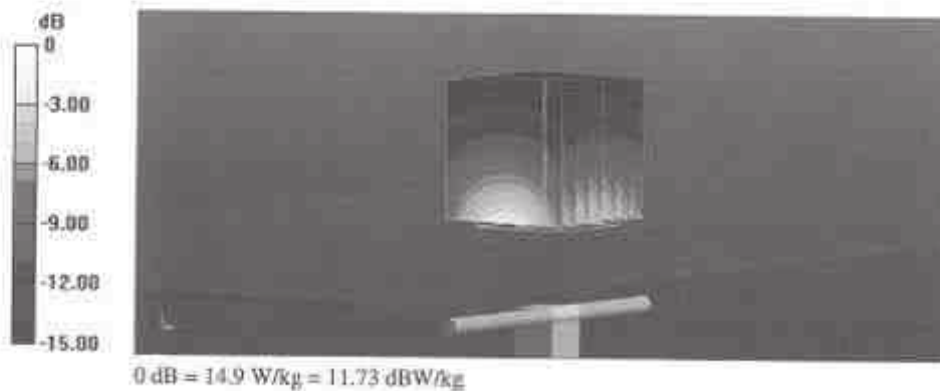



Impedance Measurement Plot for Head TSL

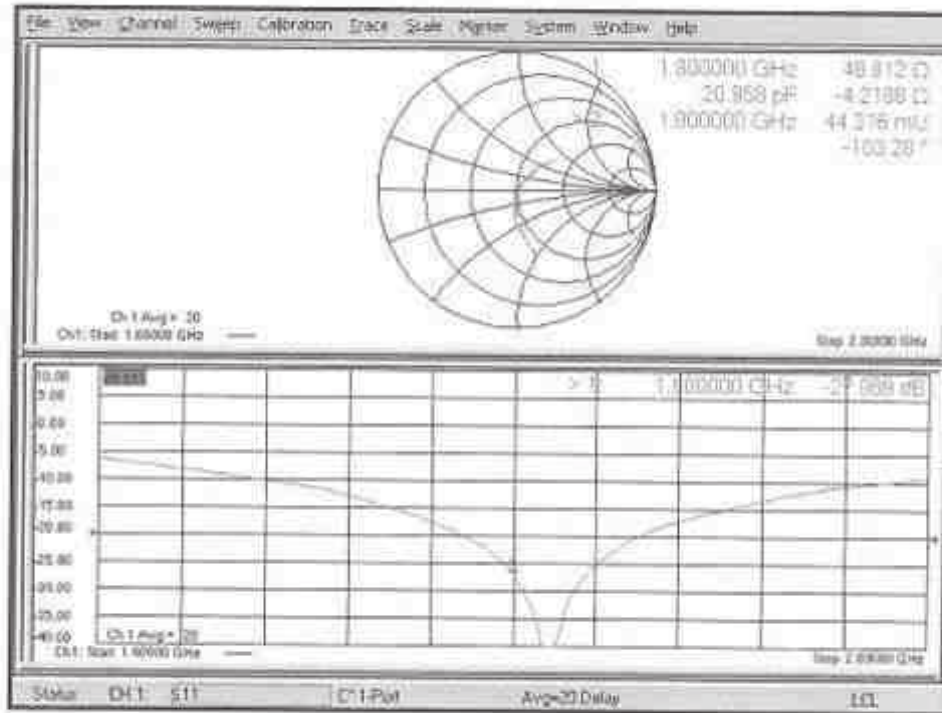

## DASY5 Validation Report for Body TSL

Date: 22.10.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN:2d099


Communication System: UID-0 - CW; Frequency: 1800 MHz  
Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.5$  S/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF{8.44, 8.44, 8.44} @ 1800 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $d_x=5$ mm,  $d_y=5$ mm,  $d_z=5$ mm  
Reference Value = 105.0 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 17.3 W/kg  
SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.13 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.8 mm  
Ratio of SAR at M2 to SAR at M1 = 57.3%  
Maximum value of SAR (measured) = 14.7 W/kg

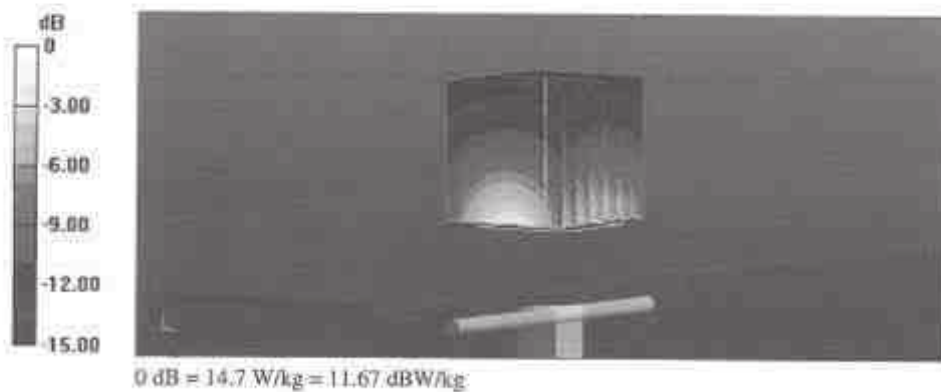

Impedance Measurement Plot for Body TSL

