



EMC TEST REPORT

Report No.: SET2013-07099

Product Name: IP Phone

FCC ID: YZZGXP2160

Model No. : GXP2160

Applicant: Grandstream Networks, INC

Address: 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park,
Shenzhen, China

Received Date: 2013-11-05

Tested Date: 2013-11-05—2013-11-13

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **25** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : IP Phone

Model No. : GXP2160

Applicant : Grandstream Networks, INC

Applicant Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park,
Shenzhen, China


Manufacturer :
Grandstream Networks, INC

Manufacturer Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park,
Shenzhen, China

Test Standards : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : 
_____ 2013.11.14
Xiaolong Zhang, Test Engineer

Reviewed by : 
_____ 2013.11.14
Shuangwen Zhang, Senior Engineer

Approved by : 
_____ 2013.11.14
Wu Li'an, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Mode7**
- 2.2 Test Setup and Equipments List8**
- 2.2.1 Conducted Emission8
- 2.2.2 Radiated Emission8
- 3. 47 CFR PART 15B REQUIREMENTS12**
- 3.1 Conducted Emission12**
- 3.1.1 Requirement12
- 3.1.2 Test Description12
- 3.1.3 Test Result12
- 3.2 Radiated Emission15**
- 3.2.1 Requirement15
- 3.2.2 Test Description15
- 3.2.3 Test Result16
- 4. PHOTOGRAPHS OF THE EUT23**
- 5. PHOTOGRAPHS OF THE TEST SET-UP24**

| Change History | | |
|----------------|-------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | NOV 13,2013 | First edition |
| | | |
| | | |



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type : GXP2160
Serial No. : (n.a, marked #1 by test site)
FCC ID : YZZGXP2160
Hardware Version..... : /
Software Version : /
Ancillary Equipment 1 : AC Adapter (Charger for Battery)
Brand Name: MASSPOWER
Model Name: WEF1200100A1BA, WEF1200100E1BA,
WEF1200100I1BA
Serial No.: (n.a. marked #1 by test site)
Rated Input: 100-240V, 60/50Hz,0.3A
Ancillary Equipment 2.....: Rated Output: 12V=1.0A
PC
Brand Name:ThinkPad
Model Name:E420
Serial No.:1141AH6

Note 1: The EUT is a IP Phone, it supports Bluetooth2.1+EDR.

Note 2: The EUT is equipped with a PC port which can be connected to the ancillary equipments supplied by the manufacturer e.g. the network Cable.

Note 3: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

| No. | Identity | Document Title |
|-----|----------------------------------|-------------------------|
| 1 | 47 CFR Part 15 Subpart B 2012 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Result |
|-----|---------|--------------------|--------|
| 1 | 15.107 | Conducted Emission | PASS |
| 2 | 15.109 | Radiated Emission | PASS |

NOTE: The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2009 and CISPR 22:2008. The test results are as following:



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1659

CCIC-SET Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC-SET Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|--------------|
| Temperature (°C): | 15°C - 35°C |
| Relative Humidity (%): | 30% -60% |
| Atmospheric Pressure (kPa): | 86KPa-106KPa |

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

| | |
|------------------------------------|-------------------|
| Uncertainty of Conducted Emission: | Uc = 3.6 dB (k=2) |
| Uncertainty of Radiated Emission: | Uc = 4.5 dB (k=2) |



2. TEST CONDITIONS SETTING

2.1 Test Mode

- (1) The first test mode

The EUT configuration of the emission tests is EUT + PC+ charge.

In this test mode, the EUT is connected with a PC via a network cable supplied by applicant and powered by charge. During the measurement, the data is transmitting between the PC and the EUT.

- (2) The second test mode

The EUT configuration of the emission tests is EUT + PC+POE.


In this test mode, the EUT is connected with a PC via a network cable supplied by applicant and powered by POE. During the measurement, the data is transmitting between the PC and the EUT.

NOTE: All test modes are performed, only the worst cases are recorded in this report.

2.2 Test Setup and Equipments List

2.2.1 Conducted Emission

A. Test Setup:

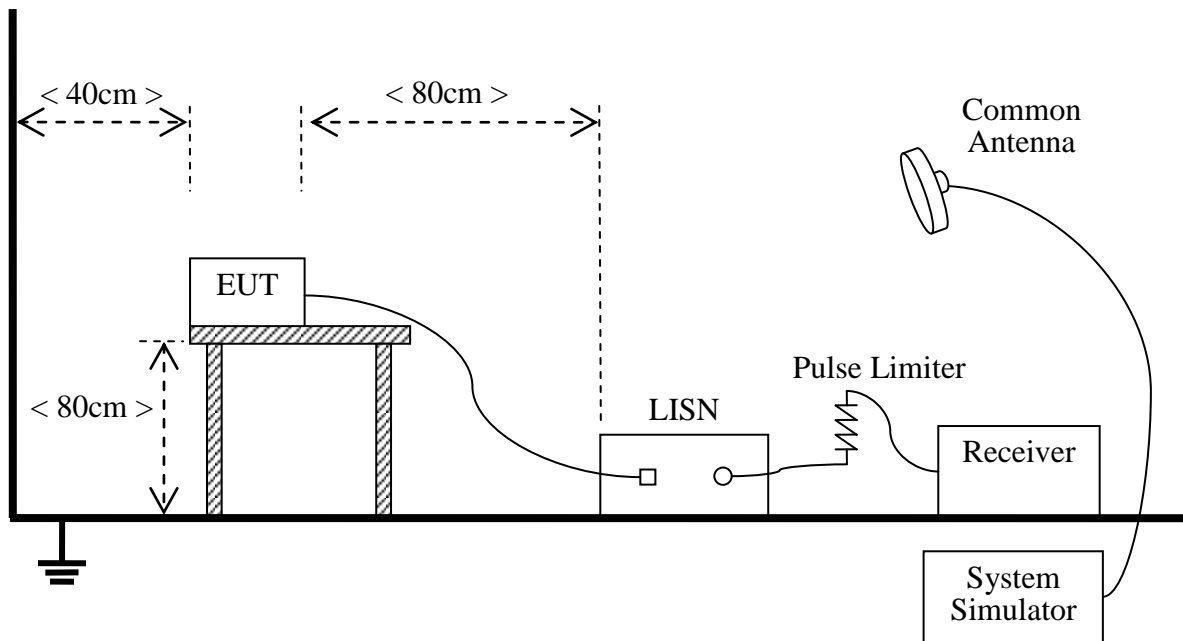

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

B. Equipments List:


| Description | Manufacturer | Model | Serial No. | Calibration Due. Date |
|-------------------|--------------|----------|------------|-----------------------|
| Test Receiver | Schwarzbeck | FCKL1528 | A0304230 | 2014.06.10 |
| LISN | Schwarzbeck | NSLK8127 | A0304233 | 2014.06.10 |
| Personal Computer | ThinkPad | T430i | A130401289 | (n.a.) |
| Keyboard | lenovo | KU-0989 | (n.a.) | (n.a.) |
| Mouse | logitech | (n.a.) | (n.a.) | (n.a.) |

Remark : PC ,Keyboard,Mouse listed as above have FCC DOC approval


2.2.2 Radiated Emission

A. Test Setup:


1) For radiated emissions from 9kHz to 30MHz

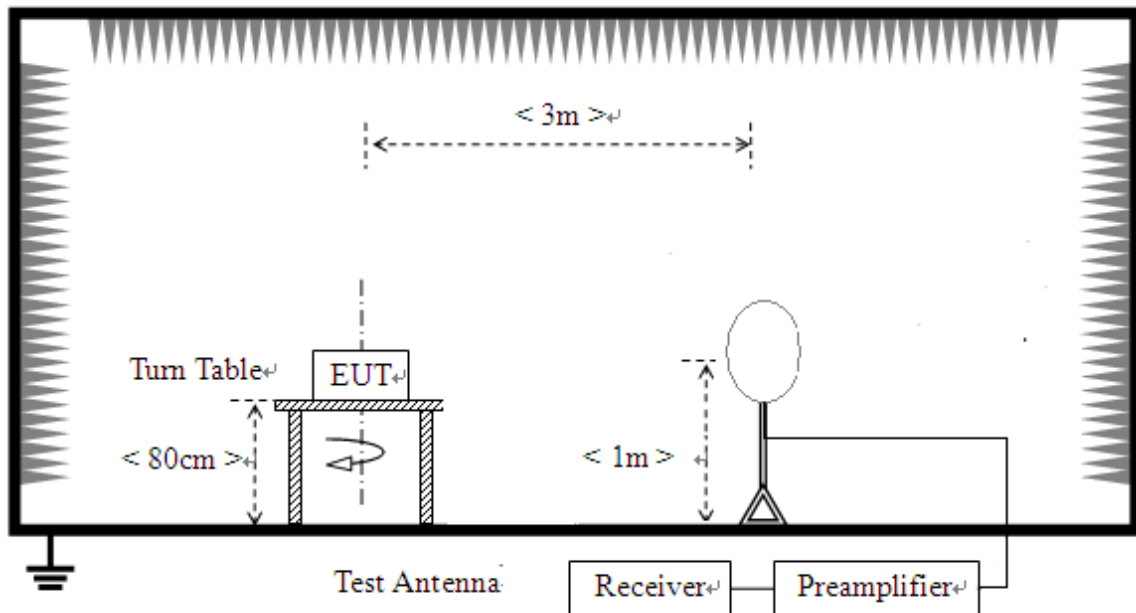

2) For radiated emissions from 30MHz to 1GHz

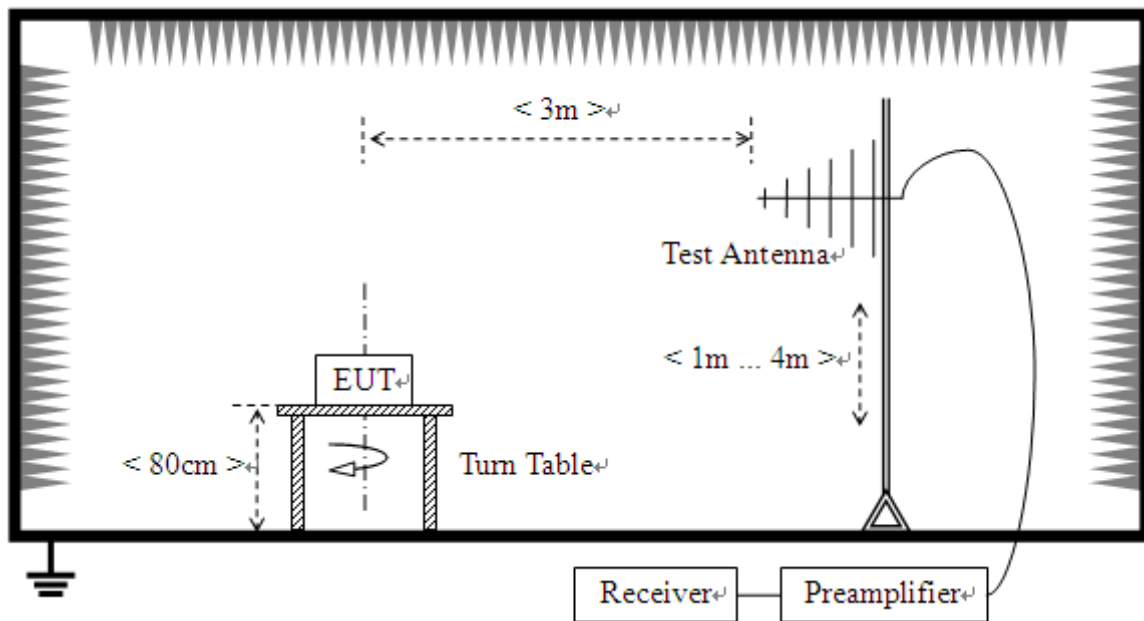

3) For radiated emissions above 1GHz

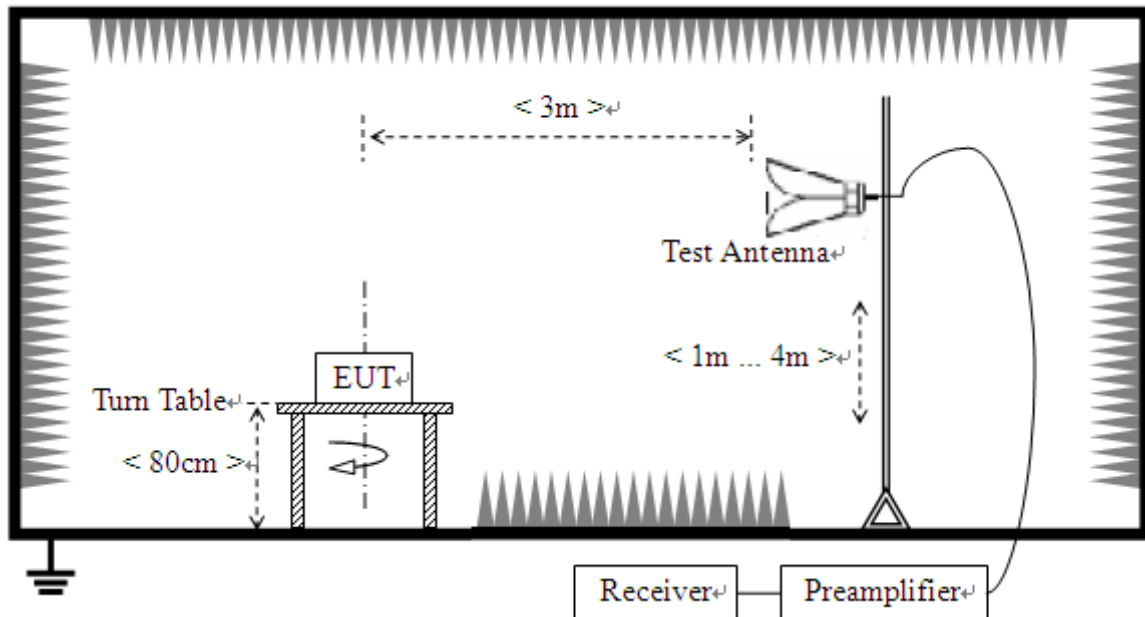

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna.

The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

- 2) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:



| Description | Manufacturer | Model | Serial No. | Calibration Due. Date |
|-----------------------|-----------------------------|-------------------------------|------------|-----------------------|
| Test Receiver | ROHDE&SCHWARZ | ESIB7 | A0501375 | 2014.06.10 |
| Test Receiver | ROHDE&SCHWARZ | ESIB26 | A0304218 | 2014.06.10 |
| Semi-Anechoic Chamber | Albatross Projects GmbH | 9m*6m*6m | A0412372 | 2014.01.04 |
| Test Antenna - Bi-Log | HP | CBL6111A | A9704202 | 2014.06.10 |
| Test Antenna - Horn | ROHDE&SCHWARZ | HF906 | A0304225 | 2014.06.10 |
| Anechoic Chamber | Albatross | SAC-5MAC 12.8x6.8x6.4 m | A0304210 | 2014.03.09 |
| Amplifier 1G~18GHz | ROHDE&SCHWARZ | MITEQ AFS42-0010 1800 | 25-S-42 | 2014.06.10 |
| Amplifier 20M~3GHz | Compliance Direction System | PAP-0203H | 22018 | 2014.06.10 |
| Personal Computer | ThinkPad | T430i | A130401289 | (n.a.) |
| Keyboard | Lenovo | KU-0989 | (n.a.) | (n.a.) |
| Mouse | Logitech | M-UV96 | (n.a.) | (n.a.) |

Remark :PC ,Keyboard,Mouse listed as above have FCC DOC approval



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|-----------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50- 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description


See section 2.2.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

3.1.3.1 Test Mode


A. Test Plot and Suspicious Points:

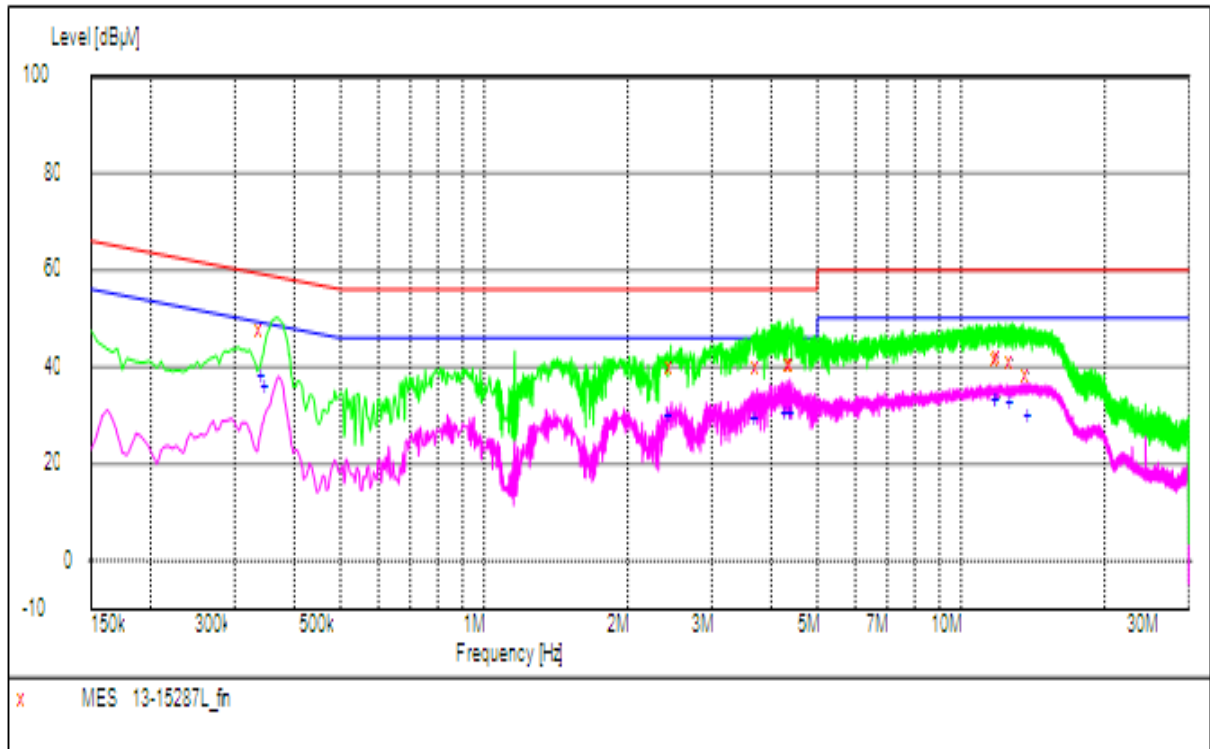

| Conducted Disturbance at Mains Terminals | | | | | | | |
|--|---------------|--------------------------|-------------|-----------------|---------------|--------------------------|-------------|
| L Test Data | | | | | | | |
| QP | | | | AV | | | |
| Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) |
| 0.3240 | 59.20 | 47.80 | 11.40 | 0.3460 | 49.10 | 38.00 | 11.10 |
| 4.4400 | 56 | 40.30 | 15.70 | 4.4440 | 46 | 30.80 | 15.20 |
| 12.0240 | 60 | 41.90 | 18.10 | 11.9960 | 50 | 33.20 | 16.80 |
| | | | | | | | |
| L Test Curve | | | | | | | |

(Plot A: L Phase)

B. Test Plot and Suspicious Points:

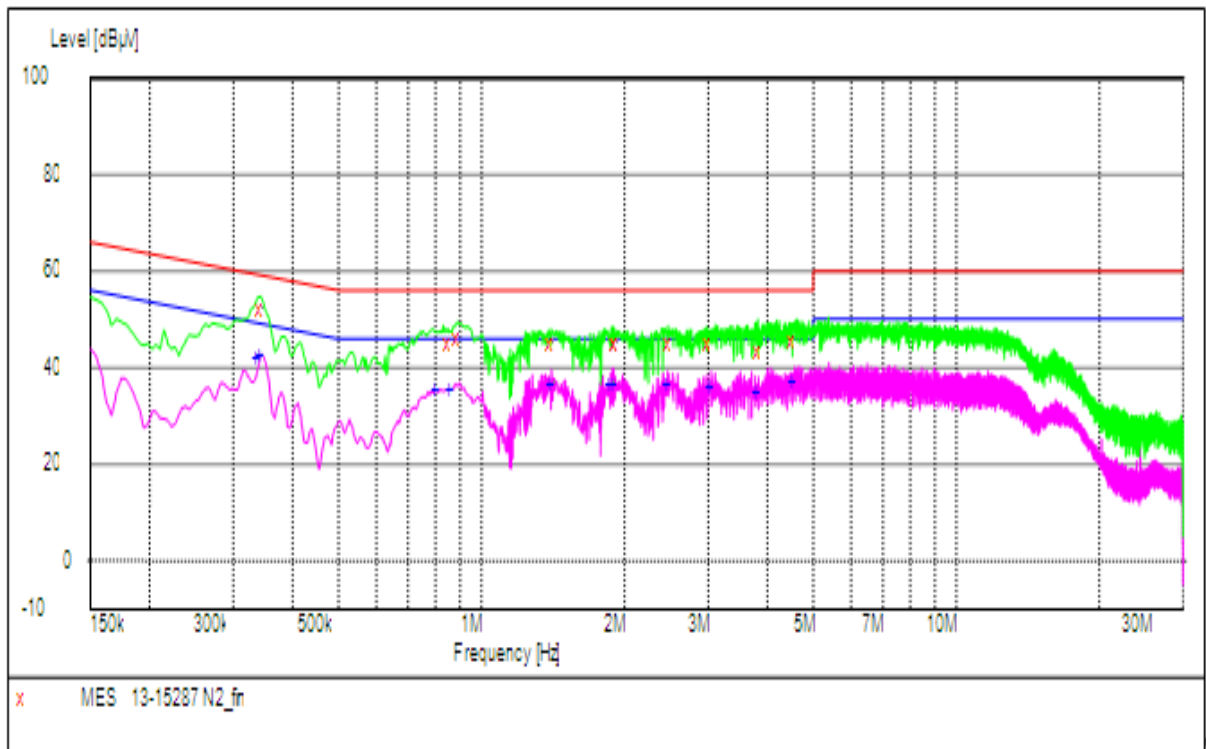

| Conducted Disturbance at Mains Terminals | | | | | | | |
|--|---------------|--------------------------|-------------|-----------------|---------------|--------------------------|-------------|
| N Test Data | | | | | | | |
| QP | | | | AV | | | |
| Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) |
| 0.3460 | 59.10 | 52.10 | 7.00 | 0.3460 | 49.10 | 42.60 | 6.50 |
| 0.8960 | 56 | 45.80 | 10.20 | 1.8880 | 46 | 36.60 | 9.40 |
| 4.5360 | 56 | 45.60 | 10.40 | 4.5640 | 46 | 37.10 | 8.90 |
| | | | | | | | |
| N Test Curve | | | | | | | |

(Plot B: N Phase)

Test Result: PASS



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency range (MHz) | Field Strength | | Field Strength Limitation at 3m Measurement Dist | |
|-----------------------|----------------------|------|--|----------------------------------|
| | $\mu\text{V/m}$ | Dist | ($\mu\text{V/m}$) | (dBuV/m) |
| 0.009 - 0.490 | $2400/F(\text{KHz})$ | 300m | $10000 * 2400/F(\text{KHz})$ | $20\log 2400/F(\text{KHz}) + 80$ |
| 0.490 - 1.705 | $2400/F(\text{KHz})$ | 30m | $100 * 2400/F(\text{KHz})$ | $20\log 2400/F(\text{KHz}) + 40$ |
| 1.705 - 30.00 | 30 | 30m | $100 * 30$ | $20\log 30 + 40$ |
| 30.0 - 88.0 | 100 | 3m | 100 | $20\log 100$ |
| 88.0 - 216.0 | 150 | 3m | 150 | $20\log 150$ |
| 216.0 - 960.0 | 200 | 3m | 200 | $20\log 200$ |
| Above 960.0 | 500 | 3m | 500 | $20\log 500$ |

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level($\mu\text{V/m}$).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

3.2.2 Test Description

See section 2.2.2 of this report.

3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

A. Test Plots and Suspicious Points:


NOTE: The emissions are too small to be measured and are at least 6 dB below the limit, So all the data of marked are pass.

(1)The first test mode

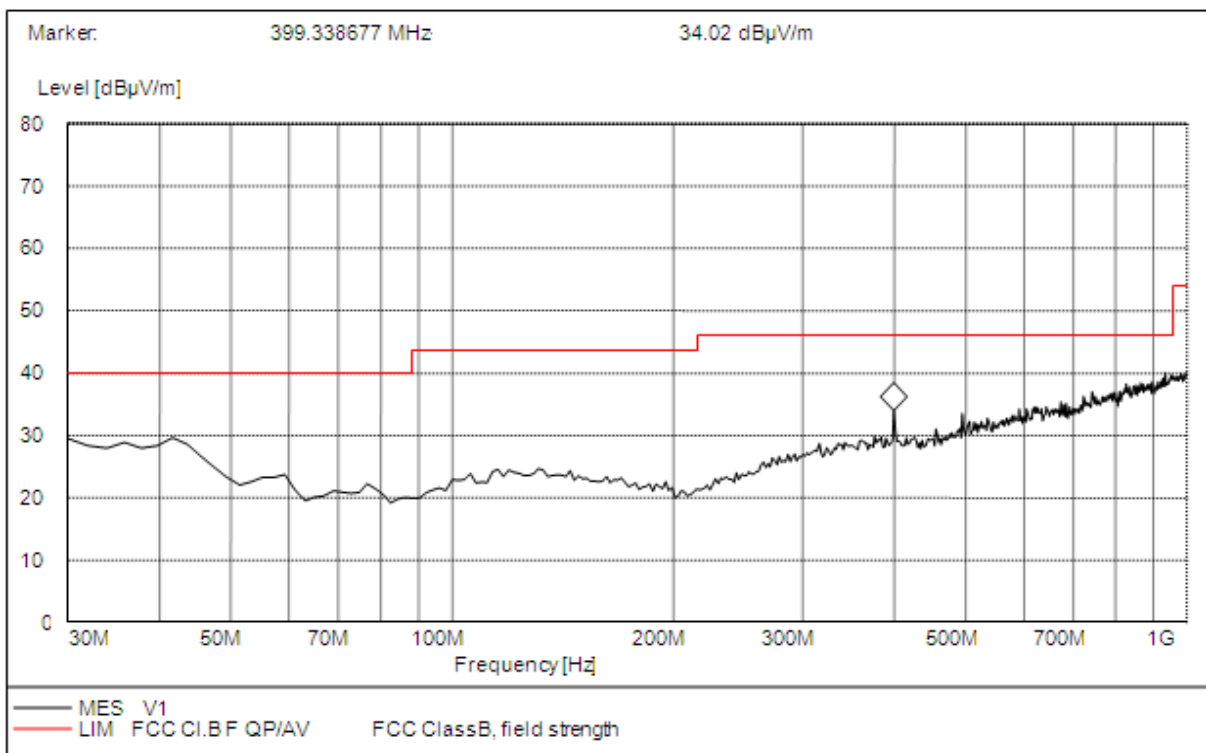

(Plot A: Test Antenna Vertical 30M - 1G)

| Frequency (MHz) | QuasiPeak (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|--------------------------|-----------------|---------------------|----------------------|-------------|----------|---------|
| 41.663200 | 29.61 | 120.000 | 100.0 | 40.00 | 10.39 | Vertical | Pass |
| 119.418000 | 24.64 | 120.000 | 100.0 | 43.50 | 18.86 | Vertical | Pass |
| 399.338600 | 34.02 | 120.000 | 100.0 | 46.00 | 11.98 | Vertical | Pass |

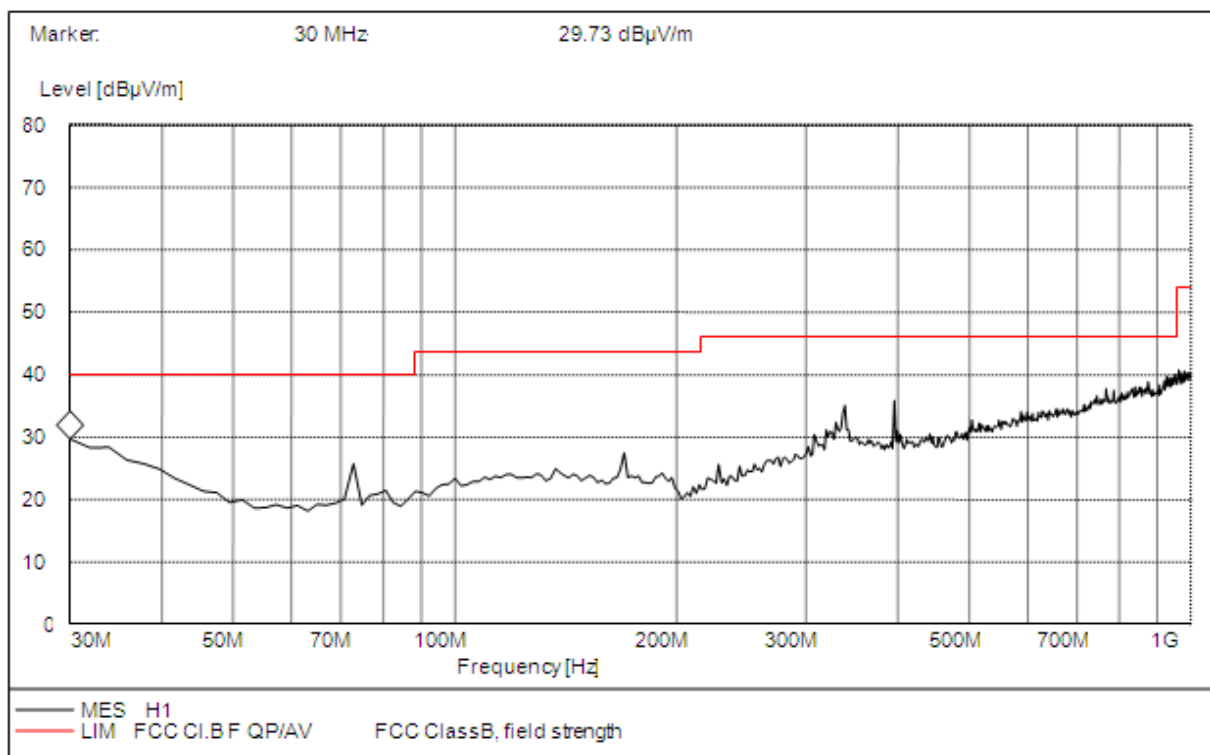


(Plot B: Test Antenna Horizontal 30M - 1G)

| Frequency (MHz) | QuasiPeak (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|--------------------------|-----------------|---------------------|----------------------|-------------|------------|---------|
| 30.000000 | 29.73 | 120.000 | 100.0 | 40.00 | 10.27 | Horizontal | Pass |
| 169.959900 | 27.46 | 120.000 | 100.0 | 43.50 | 16.04 | Horizontal | Pass |
| 395.450000 | 35.90 | 120.000 | 100.0 | 46.00 | 10.10 | Horizontal | Pass |
| | | | | | | | |




(2)The second test mode

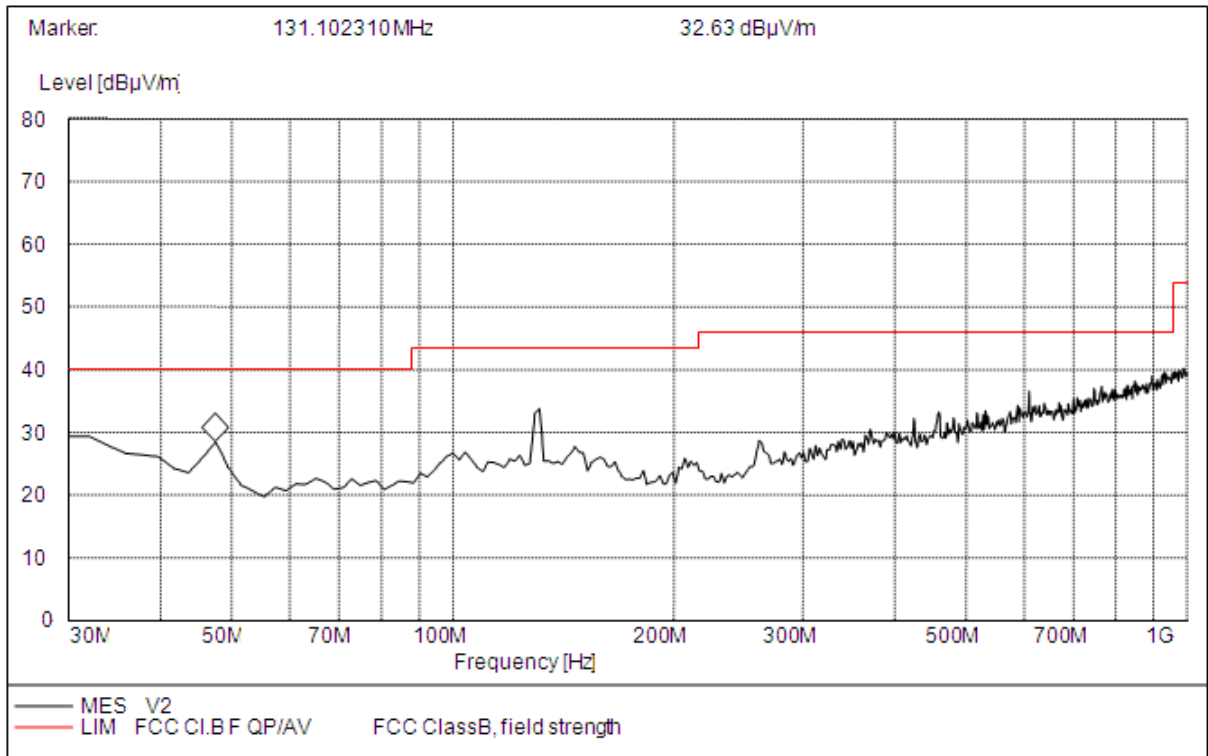


(Plot C: Test Antenna Vertical 30M - 1G)

| Frequency (MHz) | QuasiPeak (dBµ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dBµ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|---------------------|-----------------|---------------------|-----------------|-------------|----------|---------|
| 30.109423 | 29.12 | 120.000 | 100.0 | 40.00 | 10.88 | Vertical | Pass |
| 131.102310 | 33.98 | 120.000 | 100.0 | 43.50 | 9.52 | Vertical | Pass |
| 611.041245 | 36.79 | 120.000 | 100.0 | 46.00 | 9.21 | Vertical | Pass |

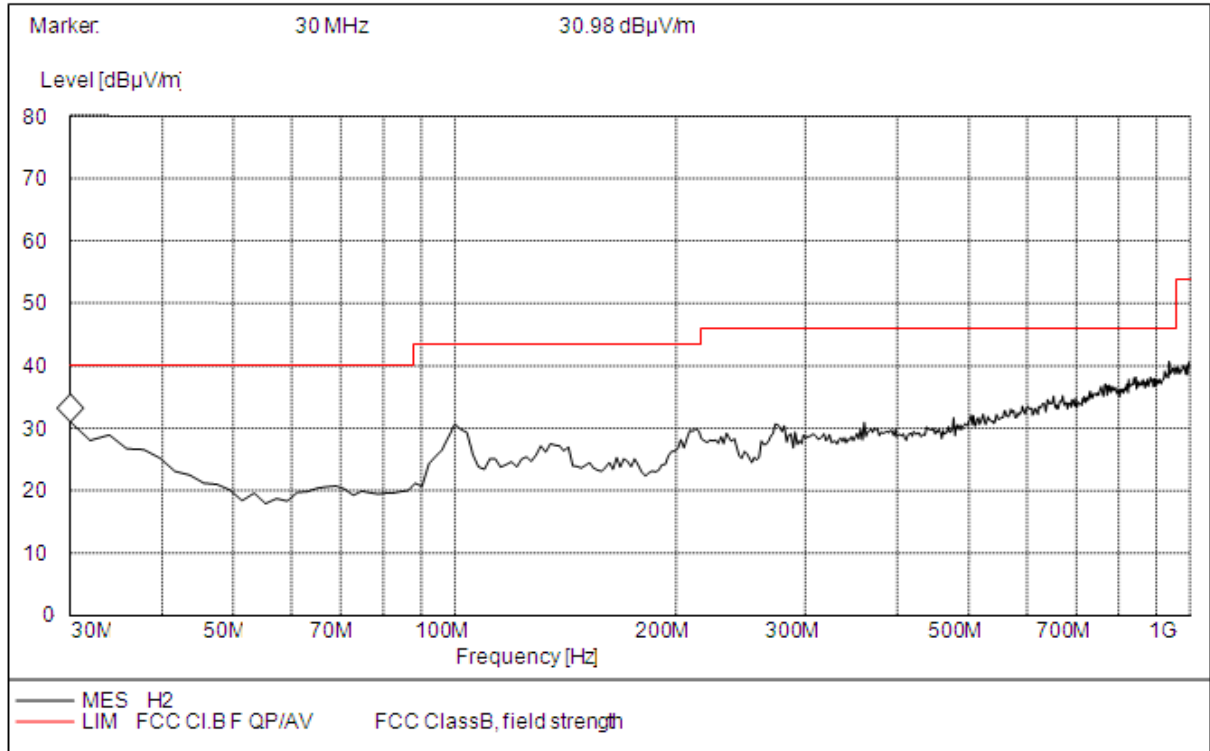

(Plot D: Test Antenna Horizontal 30M - 1G)

| Frequency (MHz) | QuasiPeak (dBµV/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dBµV/m) | Margin (dB) | Antenna | Verdict |
|-----------------|--------------------|-----------------|---------------------|----------------|-------------|------------|---------|
| 30.000000 | 30.98 | 120.000 | 100.0 | 40.00 | 9.02 | Horizontal | Pass |
| 99.979900 | 30.66 | 120.000 | 100.0 | 43.50 | 12.84 | Horizontal | Pass |
| 671.482000 | 35.23 | 120.000 | 100.0 | 46.00 | 10.77 | Horizontal | Pass |
| | | | | | | | |

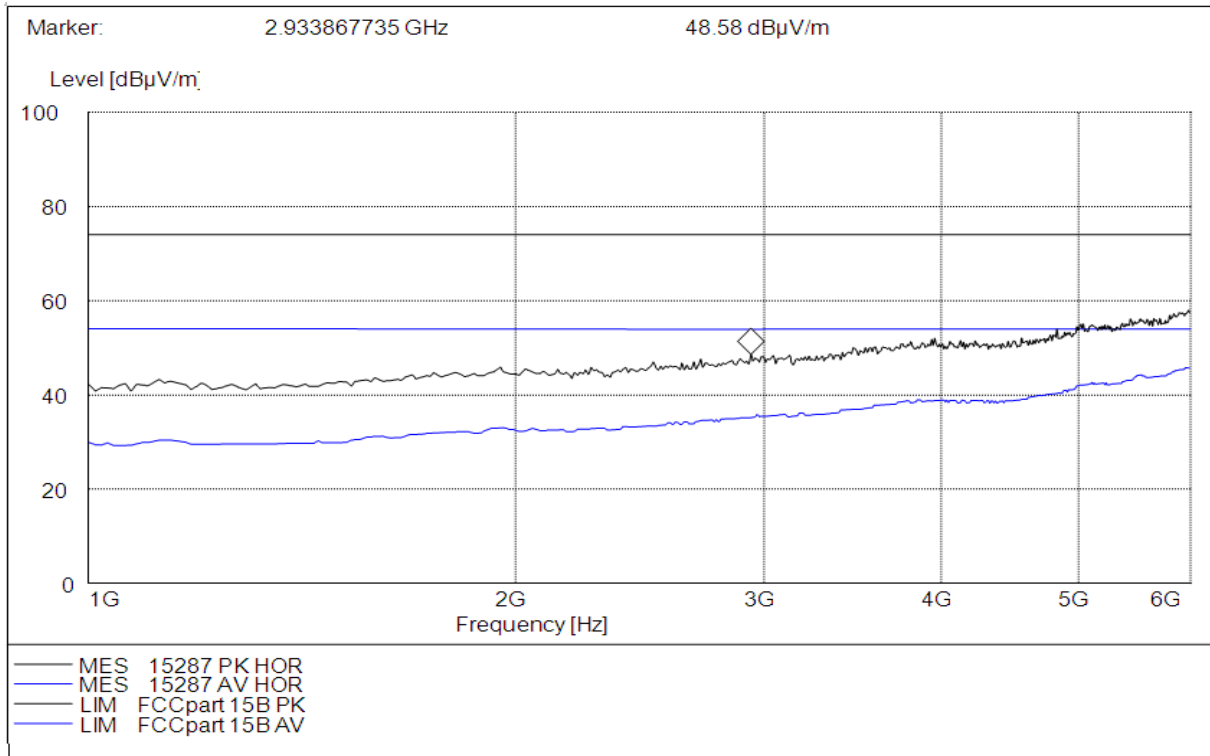


(Plot E: Test Antenna Horizontal 1G – 6G)

| Frequency (MHz) | AV (dBµV/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dBµV/m) | Margin (dB) | Antenna | Verdict |
|-----------------|-------------|-----------------|---------------------|----------------|-------------|------------|---------|
| 1100.20000 | 31.30 | 1000.000 | 100.0 | 54.00 | 22.70 | Horizontal | Pass |
| 1821.64000 | 32.07 | 1000.000 | 150.0 | 54.00 | 21.93 | Horizontal | Pass |
| 2252.50000 | 33.13 | 1000.000 | 150.0 | 54.00 | 20.87 | Horizontal | Pass |
| 2933.86770 | 35.43 | 1000.000 | 100.0 | 54.00 | 18.57 | Horizontal | Pass |
| 3785.57100 | 38.99 | 1000.000 | 150.0 | 54.00 | 15.01 | Horizontal | Pass |
| 5579.07800 | 43.46 | 1000.000 | 100.0 | 54.00 | 10.54 | Horizontal | Pass |
| | | | | | | | |



| Frequency (MHz) | PK (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|-------------------|-----------------|---------------------|----------------------|-------------|------------|---------|
| 1100.20000 | 41.70 | 1000.000 | 100.0 | 74.00 | 32.30 | Horizontal | Pass |
| 1821.64000 | 42.98 | 1000.000 | 150.0 | 74.00 | 31.02 | Horizontal | Pass |
| 2252.50000 | 43.23 | 1000.000 | 150.0 | 74.00 | 30.77 | Horizontal | Pass |
| 2933.86770 | 48.58 | 1000.000 | 100.0 | 74.00 | 25.42 | Horizontal | Pass |
| 3785.57100 | 50.88 | 1000.000 | 150.0 | 74.00 | 23.12 | Horizontal | Pass |
| 5579.07800 | 55.23 | 1000.000 | 100.0 | 74.00 | 18.77 | Horizontal | Pass |
| | | | | | | | |

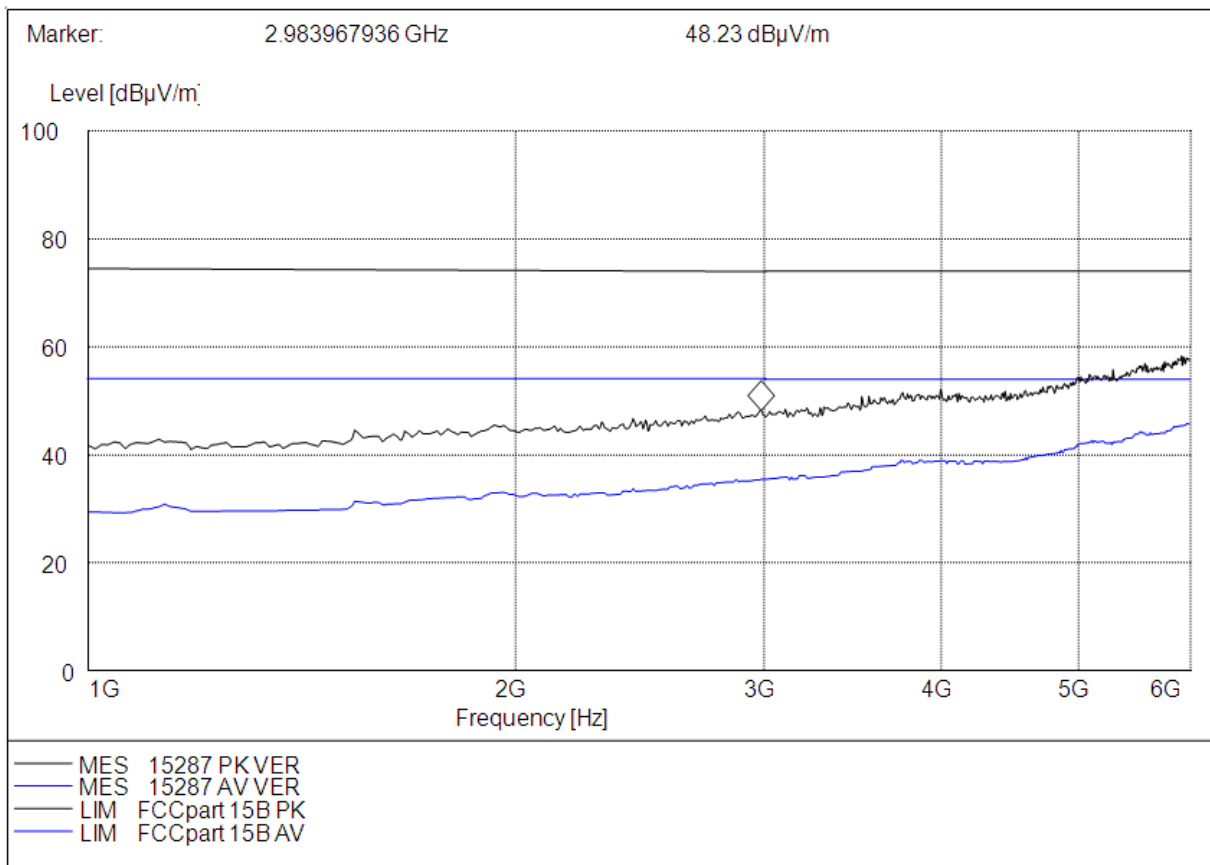

(Plot F: Test Antenna Vertical 1G – 6G)



| Frequency (MHz) | AV (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|-------------------|-----------------|---------------------|----------------------|-------------|------------|---------|
| 1130.26000 | 31.81 | 1000.000 | 100.0 | 54.00 | 22.19 | Horizontal | Pass |
| 1821.64000 | 32.03 | 1000.000 | 150.0 | 54.00 | 21.97 | Horizontal | Pass |
| 2242.84000 | 33.21 | 1000.000 | 150.0 | 54.00 | 20.79 | Horizontal | Pass |
| 2983.96790 | 34.98 | 1000.000 | 100.0 | 54.00 | 19.02 | Horizontal | Pass |
| 3785.57100 | 39.12 | 1000.000 | 150.0 | 54.00 | 14.88 | Horizontal | Pass |
| 5529.05800 | 43.36 | 1000.000 | 100.0 | 54.00 | 10.64 | Horizontal | Pass |
| | | | | | | | |

| Frequency (MHz) | PK (dB μ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB μ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|-------------------|-----------------|---------------------|----------------------|-------------|------------|---------|
| 1130.26000 | 41.85 | 1000.000 | 100.0 | 74.00 | 32.15 | Horizontal | Pass |
| 1821.64000 | 43.37 | 1000.000 | 150.0 | 74.00 | 30.63 | Horizontal | Pass |
| 2242.84000 | 46.21 | 1000.000 | 150.0 | 74.00 | 27.79 | Horizontal | Pass |
| 2983.96790 | 48.23 | 1000.000 | 100.0 | 74.00 | 25.77 | Horizontal | Pass |
| 3785.57100 | 49.56 | 1000.000 | 150.0 | 74.00 | 24.44 | Horizontal | Pass |
| 5529.05800 | 55.76 | 1000.000 | 100.0 | 74.00 | 19.24 | Horizontal | Pass |
| | | | | | | | |

Test Result: PASS


4. PHOTOGRAPHS OF THE EUT




5. PHOTOGRAPHS OF THE TEST SET-UP




Conducted Emission

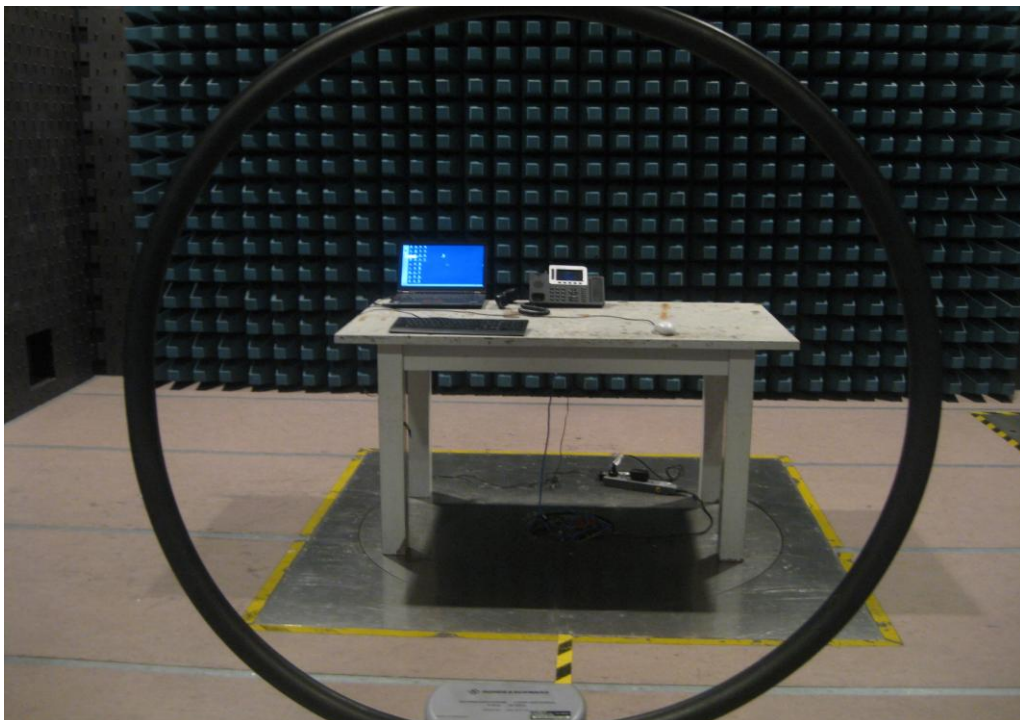

Radiated Emission of 9k-30M

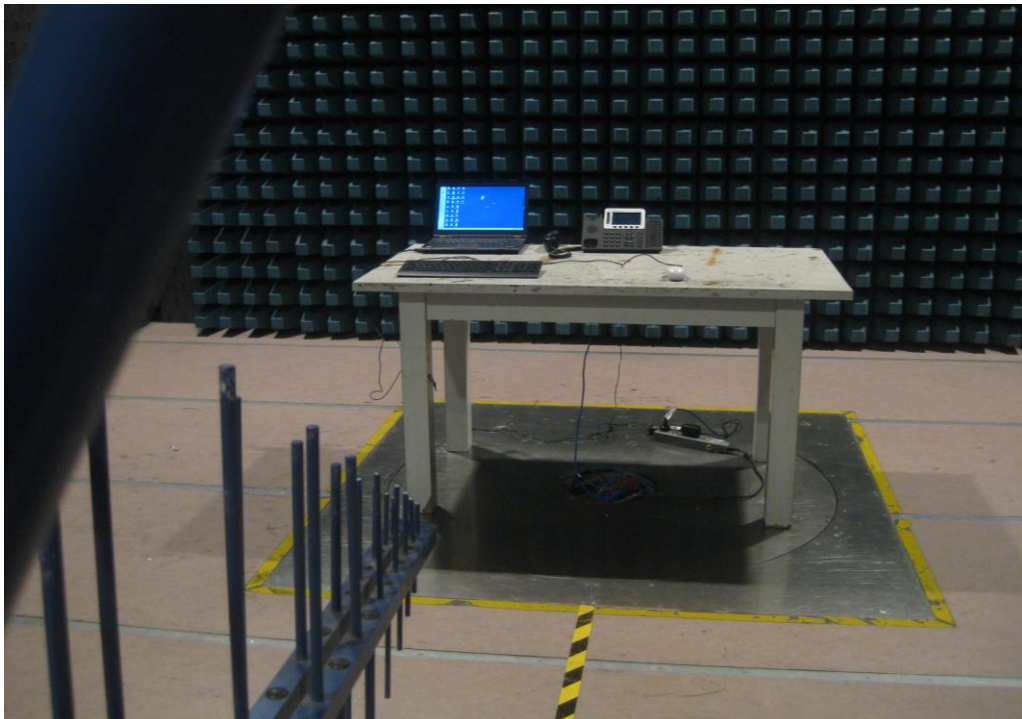

Radiated Emission of 30M-1G

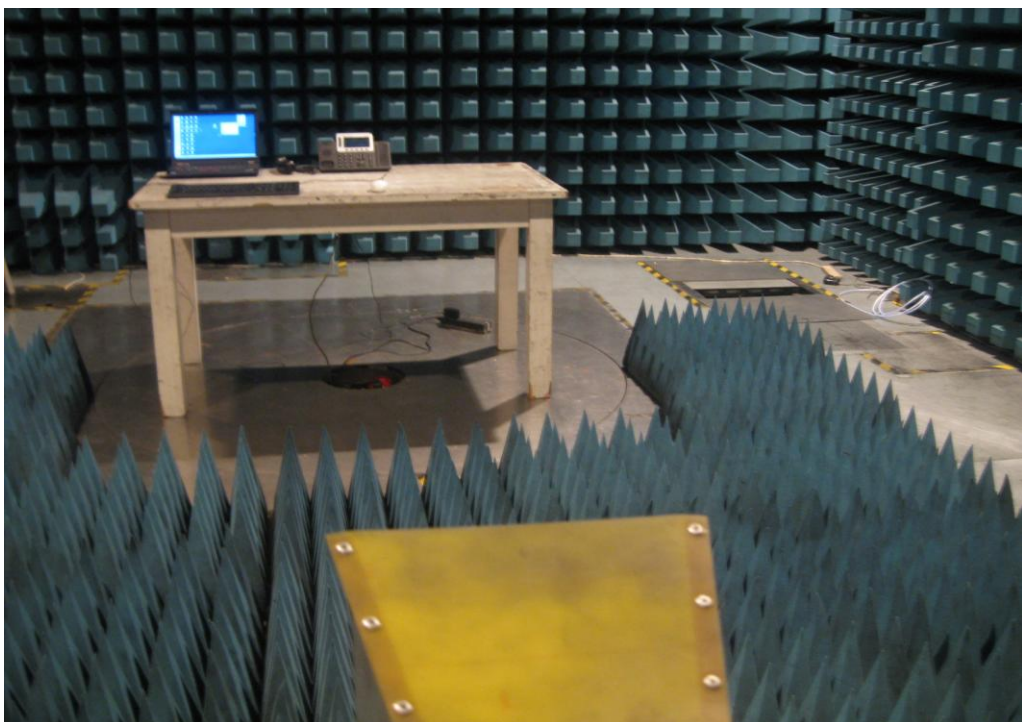

Radiated Emission of 1-18G

**** END OF REPORT ****