

FCC TEST REPORT

Client Name : Seed Technology Co., Ltd.
Address : 9F, G3 Building, TCL International E City,
Zhongshanyuan Road, Nanshan District, Shenzhen,
China 518055
Product Name : WM1302 LoRaWAN Gateway Module(SPI) - US915
Date : Jun. 01, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Configuration.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	13
4.1. Test Standard and Limit.....	13
4.2. Test Setup.....	13
4.3. Test Procedure.....	14
4.4. Test Data.....	15
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	21
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	23
APPENDIX III -- INTERNAL PHOTOGRAPH.....	27

TEST REPORT

Applicant : Seeed Technology Co., Ltd.
Manufacturer : Seeed Technology Co., Ltd.
Product Name : WM1302 LoRaWAN Gateway Module(SPI) - US915
Model No. : WM1302-SPI-US915-C
Trade Mark : Seeed Studio
Rating(s) : Input: DC 3.3V/420mA

Test Standard(s) : FCC Part15 Subpart, Section 15.247

Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt

May 13, 2021

Date of Test

May 13~May 26, 2021

Prepared By



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Seed Technology Co., Ltd.
Address	:	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, China 518055
Manufacturer	:	Seed Technology Co., Ltd.
Address	:	9F, G3 Building, TCL International E City, Zhongshanyuan Road, Nanshan District, Shenzhen, China 518055
Factory	:	Shenzhen Xinxian Technology Co; Limited
Address	:	F5, Building B17, Hengfeng Industrial City, No. 739 Zhoushi Rd, Baoan District, Shenzhen, Guangdong, P.R.C.

1.2. Description of Device (EUT)

Product Name	:	WM1302 LoRaWAN Gateway Module(SPI) - US915	
Model No.	:	WM1302-SPI-US915-C	
Trade Mark	:	Seed Studio	
Test Power Supply	:	DC 3.3V by Debug board	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	902~928MHz
		Number of Channel:	8 Channels
		Modulation Type:	LoRa Chirp Spread Spectrum
		Antenna Type:	Cylindrical antenna
		Antenna Gain(Peak):	1.2 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: SAW12-050-2100UB Input: 100-240V~ 50/60Hz, 0.3A Output: DC 5V, 2100mA
---------	---	--

1.4. Description of Test Configuration



The system was configured for testing in testing mode, which was provided by manufacturer.

For LoRa mode, Detailed Frequency as below:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	923.3	5	925.7
2	923.9	6	926.3
3	924.5	7	926.9
4	925.1	8	927.5

Note: EUT was tested with Channel 1 and 8.

1.5. Description Of Test Setup

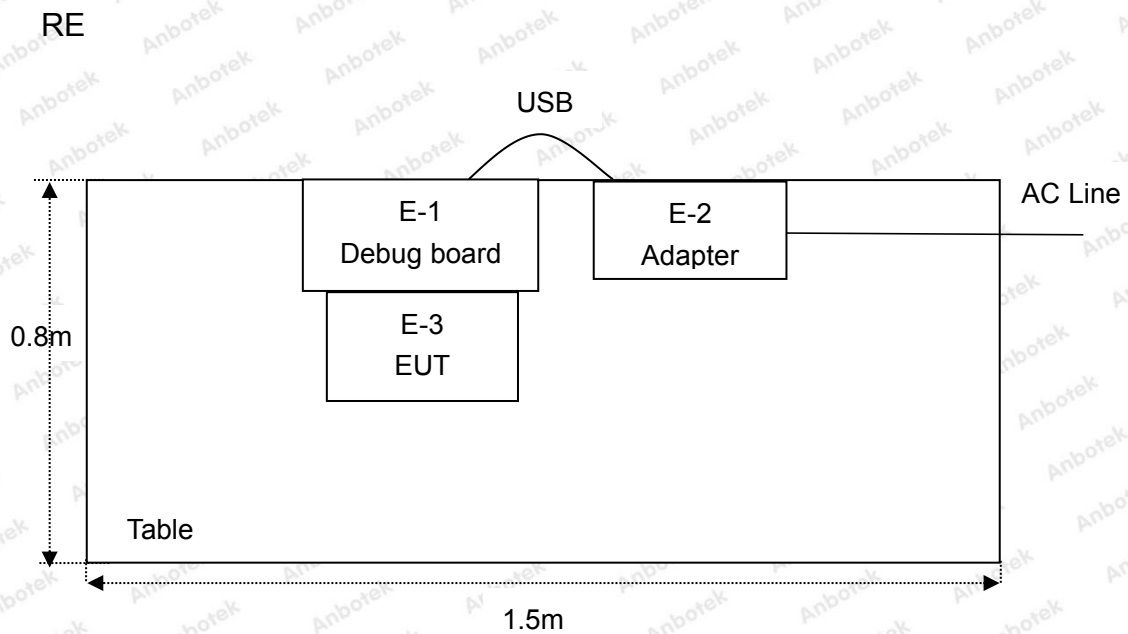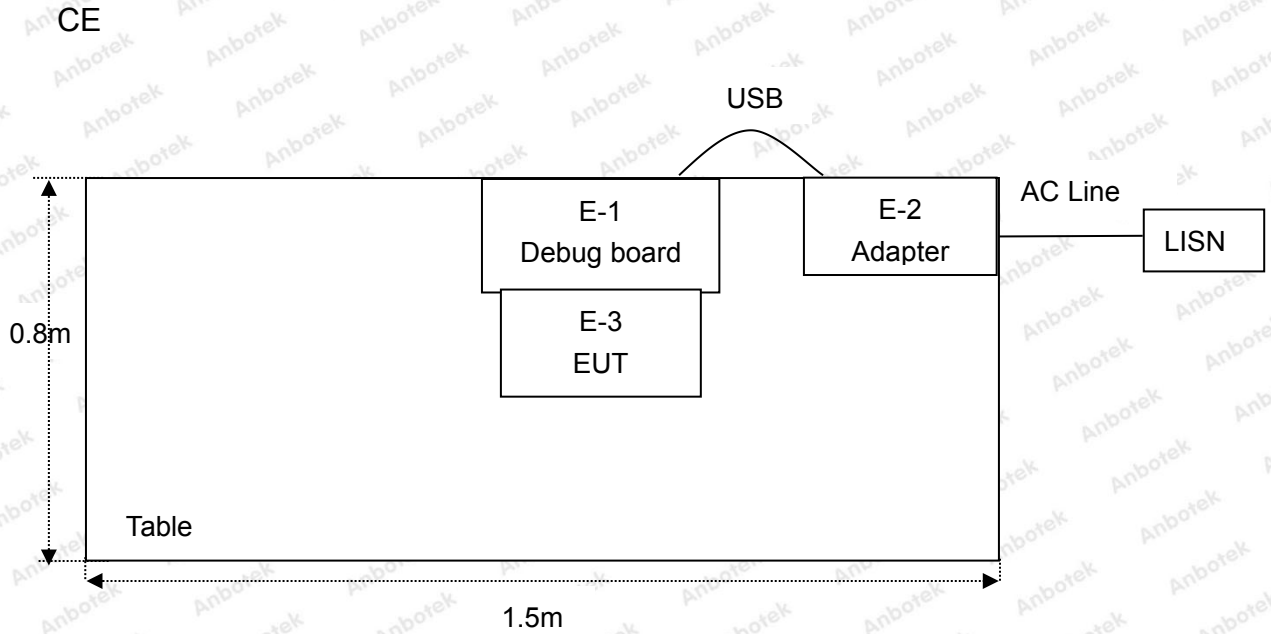

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

Note: This is a Class II application of the device, the difference between the original device and current one described as following:

- (1) Change the Manufacturer of Crystal oscillator located at the X1 position of the PCB board.
- (2) Changing the Model No. to "WM1302-SPI-US915-C"

Based on the change made to the device, the spurious emission test items were performed, other data were referred to the original report 18220WC10052801.


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

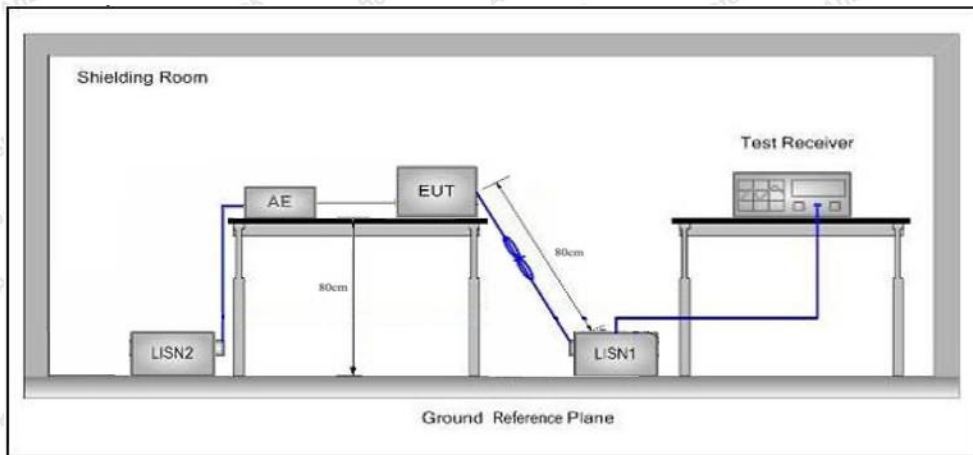

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

During the test, pre-scan all the modes, and found CH08 (TX) which is the worst case, only the worst case is recorded in the report.

Please to see the following pages.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH08
 Test Specification: AC 120V, 60Hz
 Comment: Live Line
 Tem.: 23.8°C Hum.: 48%

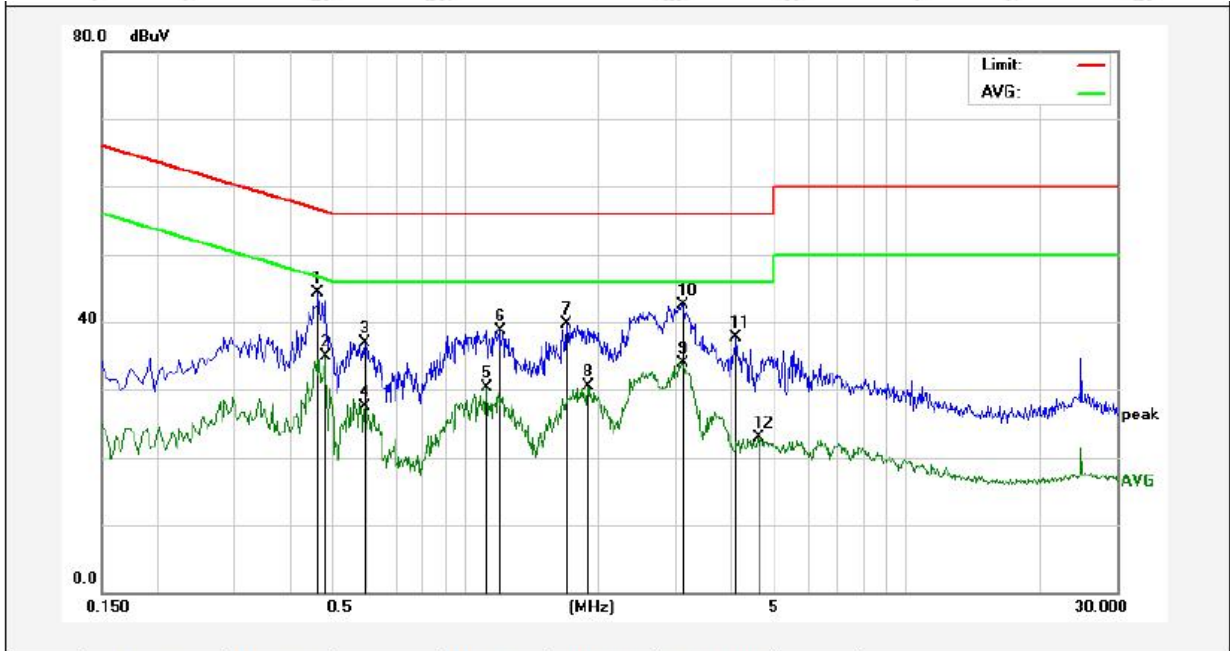

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4660	24.29	19.96	44.25	56.58	-12.33	QP	
2	0.4820	14.97	19.97	34.94	46.30	-11.36	AVG	
3	0.5940	16.96	20.01	36.97	56.00	-19.03	QP	
4	0.5940	7.57	20.01	27.58	46.00	-18.42	AVG	
5	1.1220	10.17	20.12	30.29	46.00	-15.71	AVG	
6	1.1980	18.67	20.12	38.79	56.00	-17.21	QP	
7	1.7020	19.57	20.13	39.70	56.00	-16.30	QP	
8	1.8980	10.34	20.14	30.48	46.00	-15.52	AVG	
9	3.1060	13.72	20.16	33.88	46.00	-12.12	AVG	
10	3.1140	22.31	20.16	42.47	56.00	-13.53	QP	
11	4.1180	17.53	20.18	37.71	56.00	-18.29	QP	
12	4.5980	2.74	20.20	22.94	46.00	-23.06	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH08
 Test Specification: AC 120V, 60Hz
 Comment: Neutral Line
 Tem.: 23.8°C Hum.: 48%

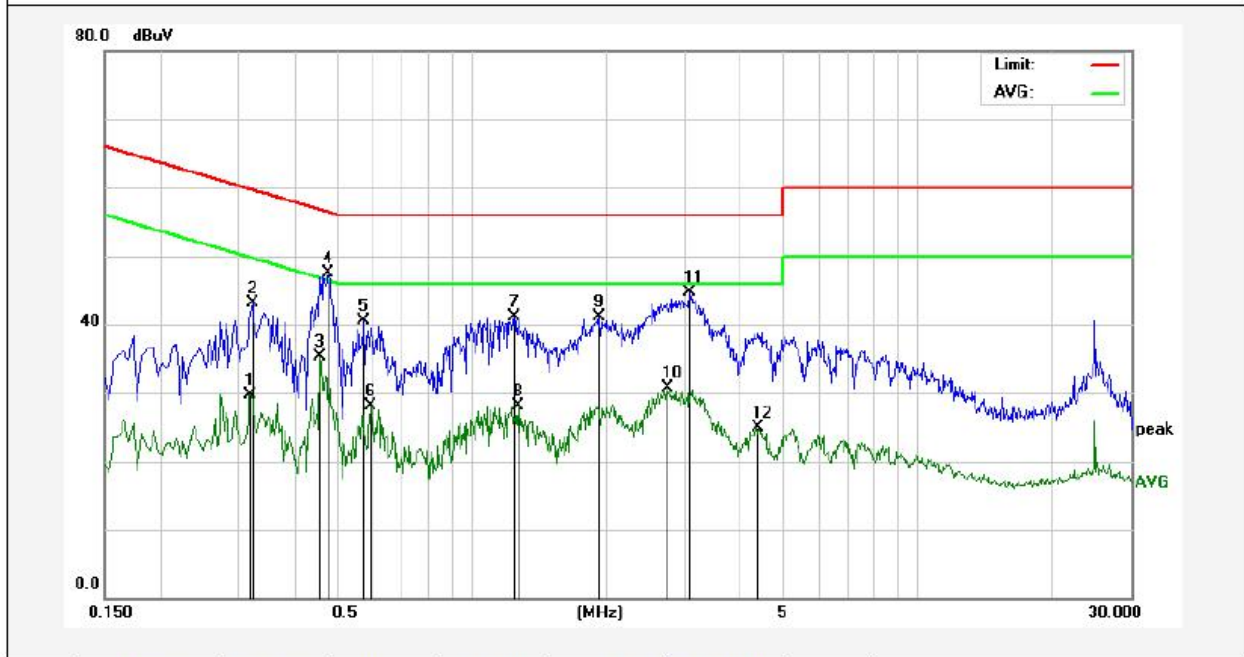

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3180	9.89	19.90	29.79	49.76	-19.97	AVG	
2	0.3220	23.11	19.90	43.01	59.65	-16.64	QP	
3	0.4580	15.30	19.96	35.26	46.73	-11.47	AVG	
4	0.4780	27.52	19.97	47.49	56.37	-8.88	QP	
5	0.5740	20.47	20.00	40.47	56.00	-15.53	QP	
6	0.5940	8.05	20.01	28.06	46.00	-17.94	AVG	
7	1.2460	20.90	20.12	41.02	56.00	-14.98	QP	
8	1.2700	8.06	20.13	28.19	46.00	-17.81	AVG	
9	1.9380	20.87	20.14	41.01	56.00	-14.99	QP	
10	2.7500	10.64	20.15	30.79	46.00	-15.21	AVG	
11	3.0860	24.51	20.16	44.67	56.00	-11.33	QP	
12	4.3459	4.76	20.19	24.95	46.00	-21.05	AVG	

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

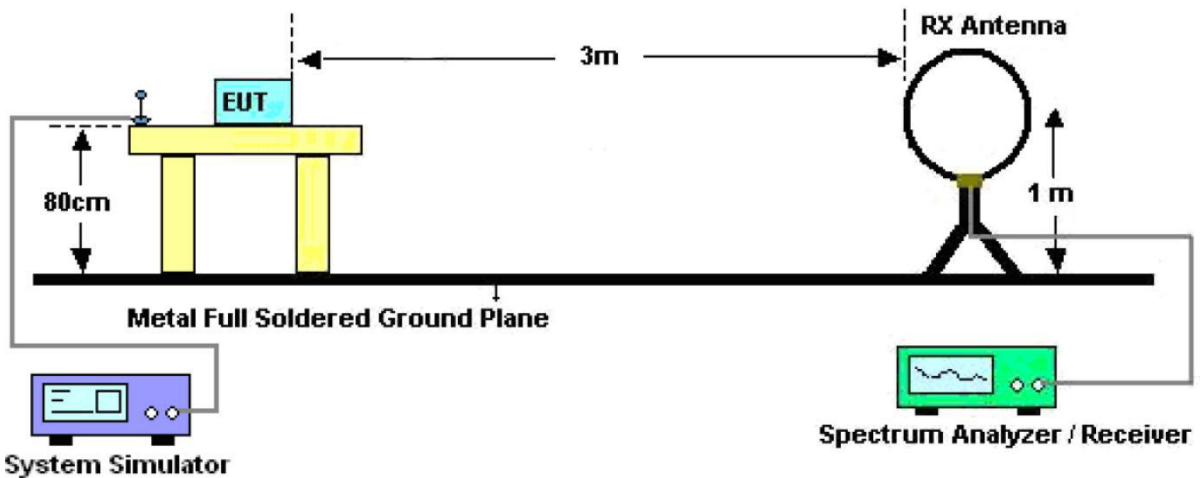


Figure 1. Below 30MHz

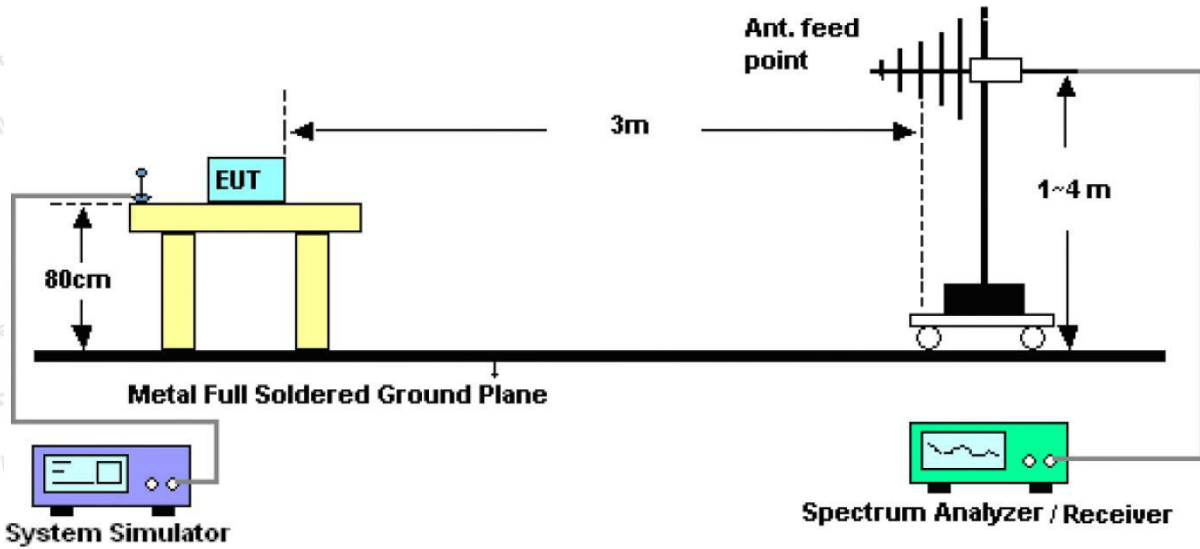


Figure 2. 30MHz to 1GHz

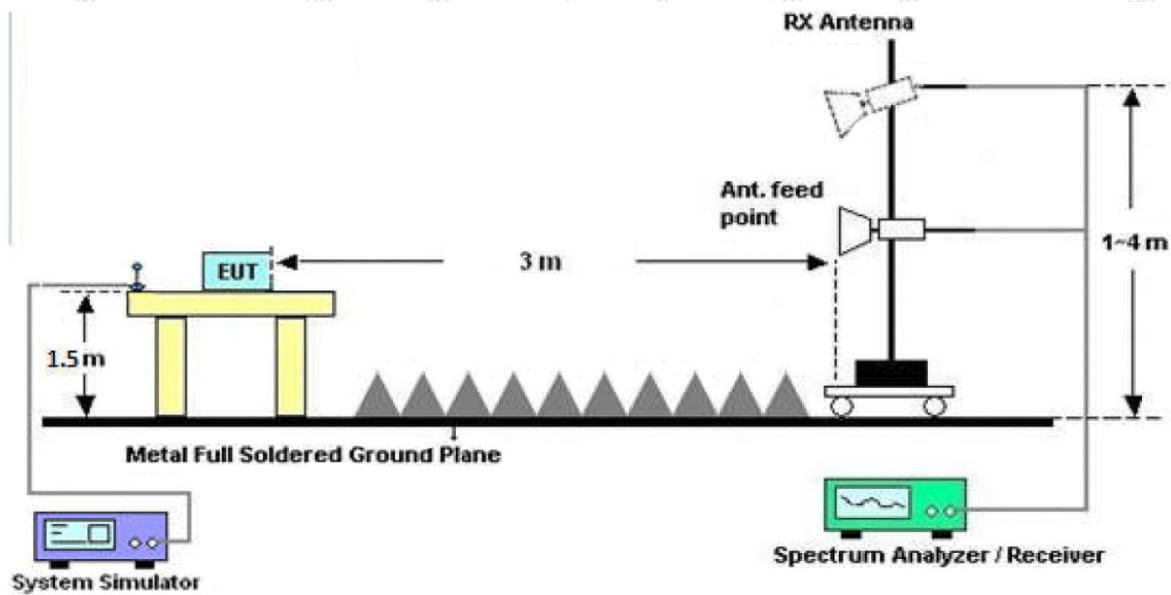


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Hotline
400-003-0500
www.anbotek.com

Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan all the modes, and found the CH08 (TX) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Test Mode: CH08
 Power Source: AC 120V, 60Hz
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 22°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.3813	40.04	-15.53	24.51	40.00	-15.49	peak			
2	49.0144	35.14	-14.70	20.44	40.00	-19.56	peak			
3	146.3735	37.05	-19.97	17.08	43.50	-26.42	peak			
4	224.5192	37.30	-16.25	21.05	46.00	-24.95	peak			
5	550.9479	37.22	-8.00	29.22	46.00	-16.78	peak			
6	651.9416	37.91	-6.79	31.12	46.00	-14.88	peak			

Test Results (30~1000MHz)

Test Mode: CH08
 Power Source: AC 120V, 60Hz
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 22°C/50%RH

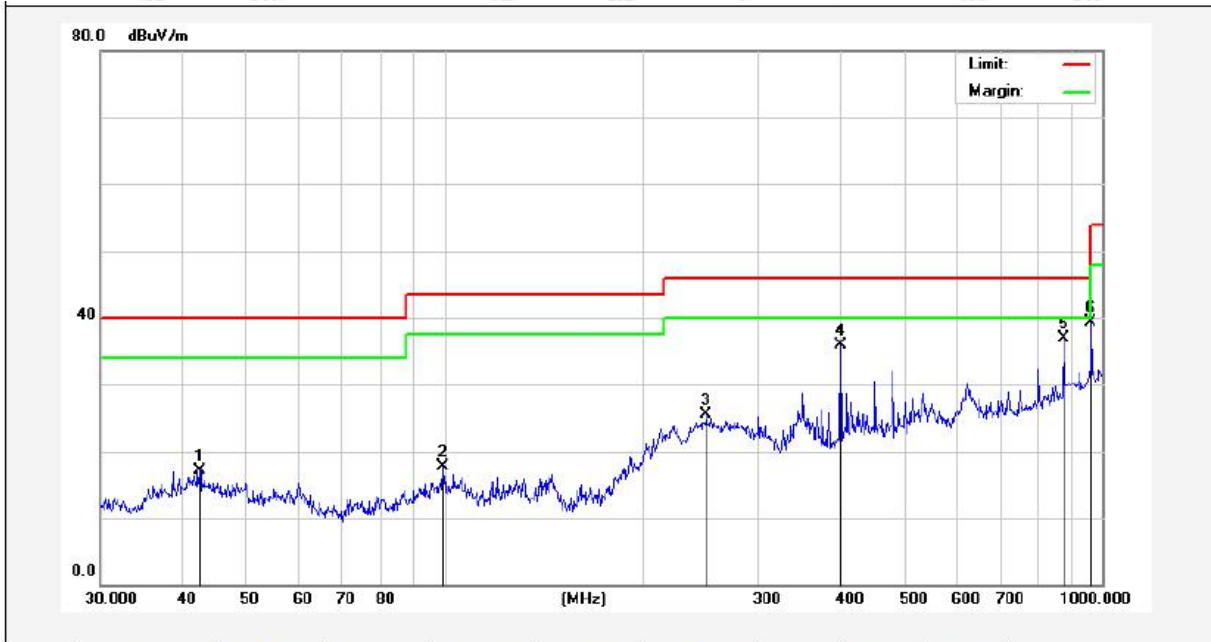

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.4508	31.82	-14.66	17.16	40.00	-22.84	peak			
2	99.5281	37.04	-19.42	17.62	43.50	-25.88	peak			
3	250.3012	44.24	-18.81	25.43	46.00	-20.57	peak			
4	400.4319	48.89	-12.98	35.91	46.00	-10.09	peak			
5	875.2470	39.34	-2.43	36.91	46.00	-9.09	peak			
6	962.1623	39.95	-0.56	39.39	54.00	-14.61	peak			

Note: The EUT received input Voltage DC 3.3V from Debug board, and the Debug board received AC 120V/60Hz from Adapter.

Test Results (1GHz-25GHz)

Test Mode: CH01					Test channel: Lowest				
Frequency (MHz)	Antenna Pol.	Reading (dBUV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Det. Mode
1846.6000	H	42.44	7.39	28.73	26.31	52.25	74	-21.75	PK
1846.6000	H	35.27	7.39	28.73	26.31	45.08	54	-8.92	AV
2769.9000	H	41.82	8.10	29.71	27.01	52.62	74	-21.38	PK
2769.9000	H	34.57	8.10	29.71	27.01	45.37	54	-8.63	AV
3693.2000	H	--	--	--	--	--	--	--	PK
3693.2000	H	--	--	--	--	--	--	--	AV
1846.6000	V	43.36	7.39	28.73	26.31	53.17	74	-20.83	PK
1846.6000	V	35.52	7.39	28.73	26.31	45.33	54	-8.67	AV
2769.9000	V	42.29	8.10	29.71	27.01	53.09	74	-20.91	PK
2769.9000	V	34.43	8.10	29.71	27.01	45.23	54	-8.77	AV
3693.2000	V	--	--	--	--	--	--	--	PK
3693.2000	V	--	--	--	--	--	--	--	AV

Test Mode: CH08					Test channel: High				
Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Det. Mode
1855.0000	H	47.07	7.43	28.69	26.31	56.88	74	-17.12	PK
1855.0000	H	36.74	7.43	28.69	26.31	46.55	54	-7.45	AV
2782.5000	H	45.63	8.15	29.84	27.01	56.61	74	-17.39	PK
2782.5000	H	34.95	8.15	29.84	27.01	45.93	54	-8.07	AV
3710.0000	H	--	--	--	--	--	--	--	PK
3710.0000	H	--	--	--	--	--	--	--	AV
1855.0000	V	47.87	7.43	28.69	26.31	57.68	74	-16.32	PK
1855.0000	V	35.96	7.43	28.69	26.31	45.77	54	-8.23	AV
2782.5000	V	46.28	8.15	29.84	27.01	57.26	74	-16.74	PK
2782.5000	V	35.09	8.15	29.84	27.01	46.07	54	-7.93	AV
3710.0000	V	--	--	--	--	--	--	--	PK
3710.0000	V	--	--	--	--	--	--	--	AV

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Det.
902.0000	44.33	22.45	4.48	31.33	39.93	46.00	-6.07	H	QP
928.0000	39.47	22.59	4.54	31.35	35.25	46.00	-10.75	H	QP
902.0000	43.34	22.45	4.48	31.33	38.94	46.00	-7.06	V	QP
928.0000	40.02	22.59	4.54	31.35	35.80	46.00	-10.20	V	QP

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement






Photo of Radiation Emission Test


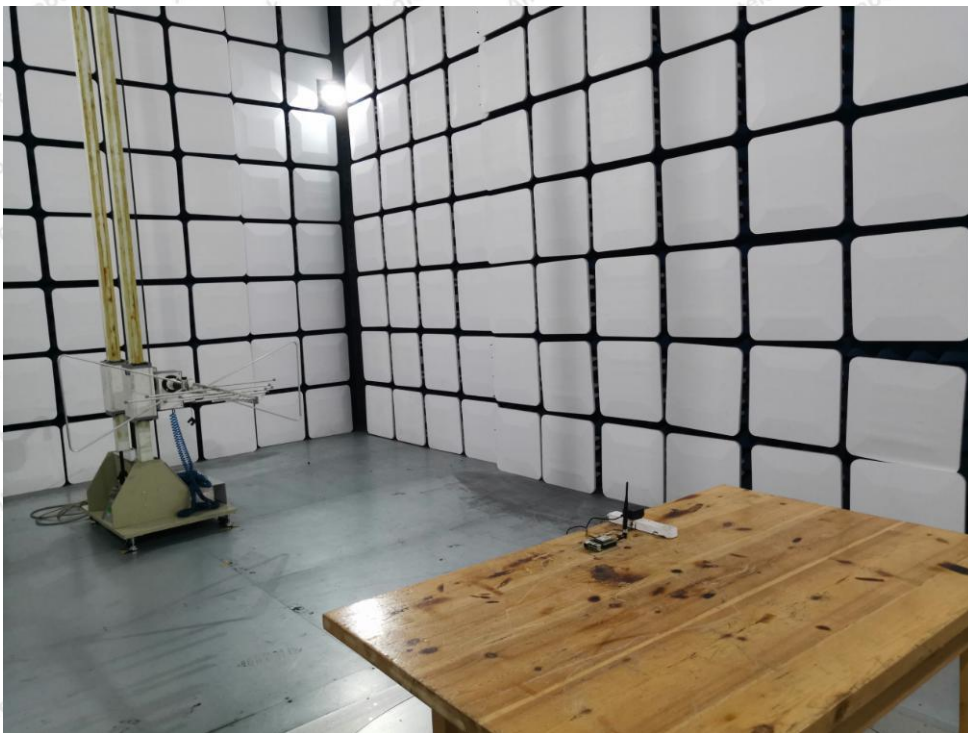


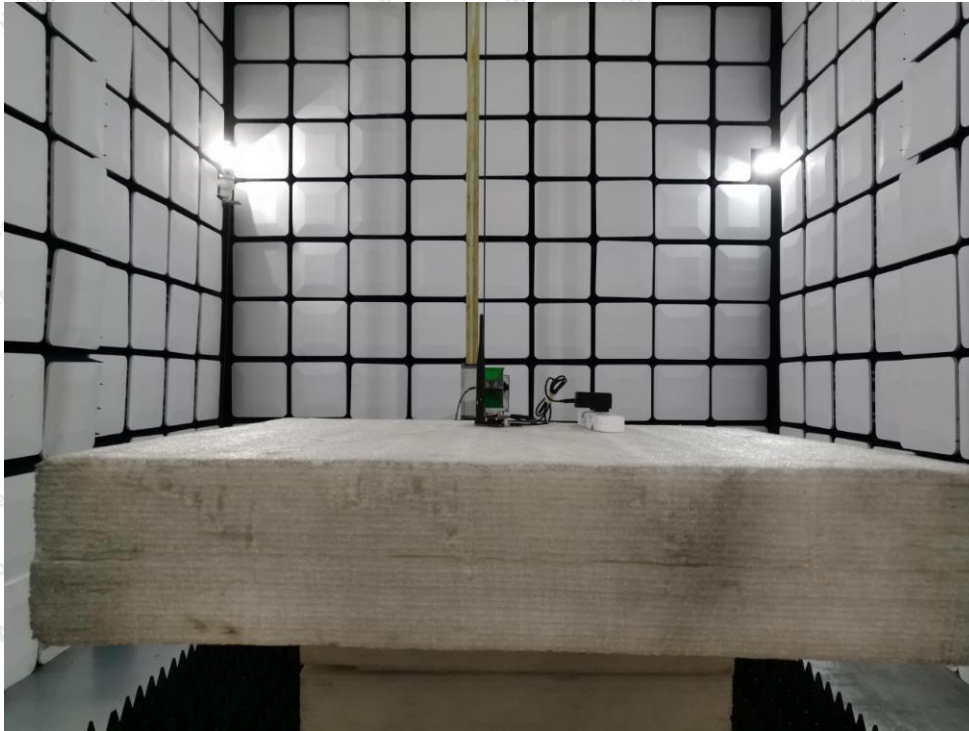

APPENDIX II -- EXTERNAL PHOTOGRAPH


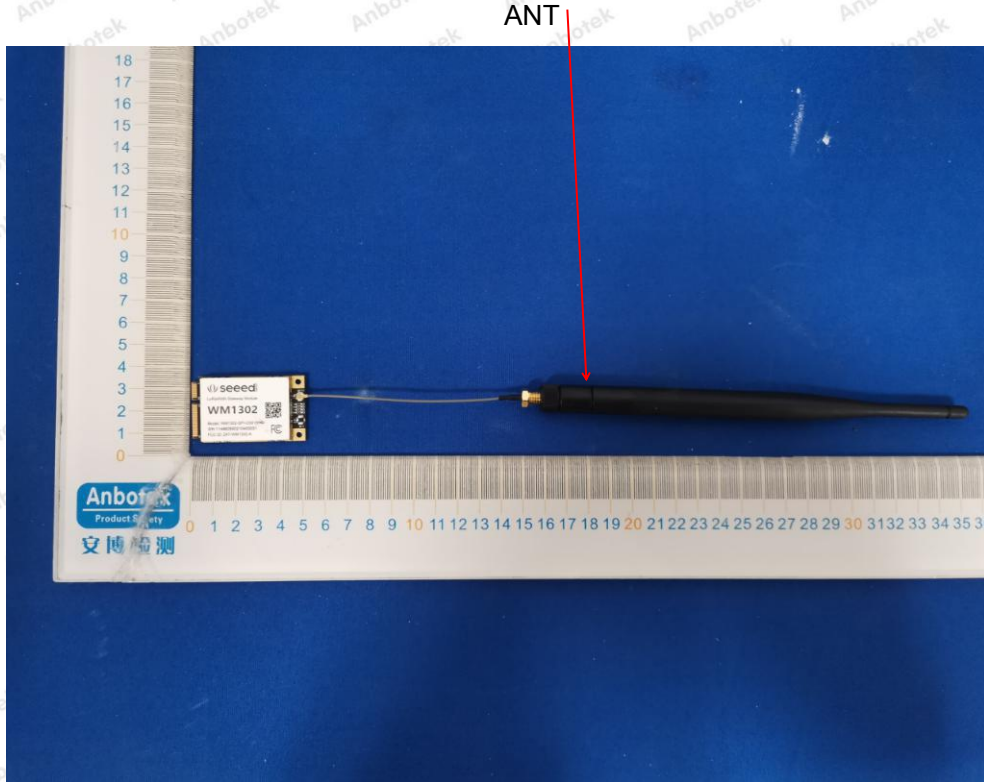


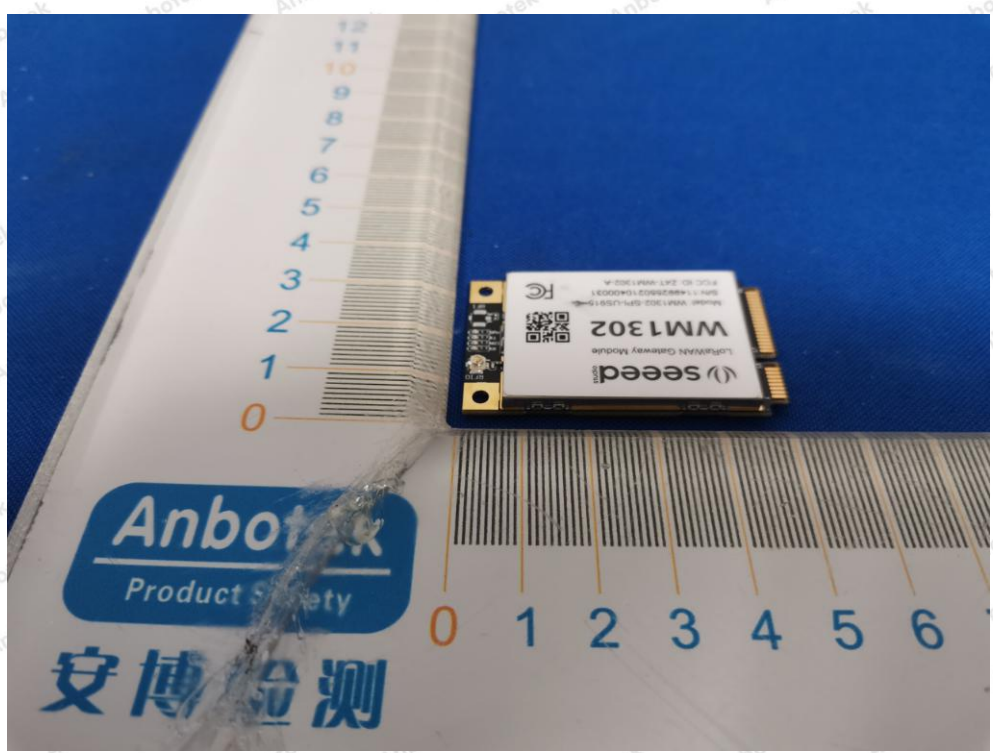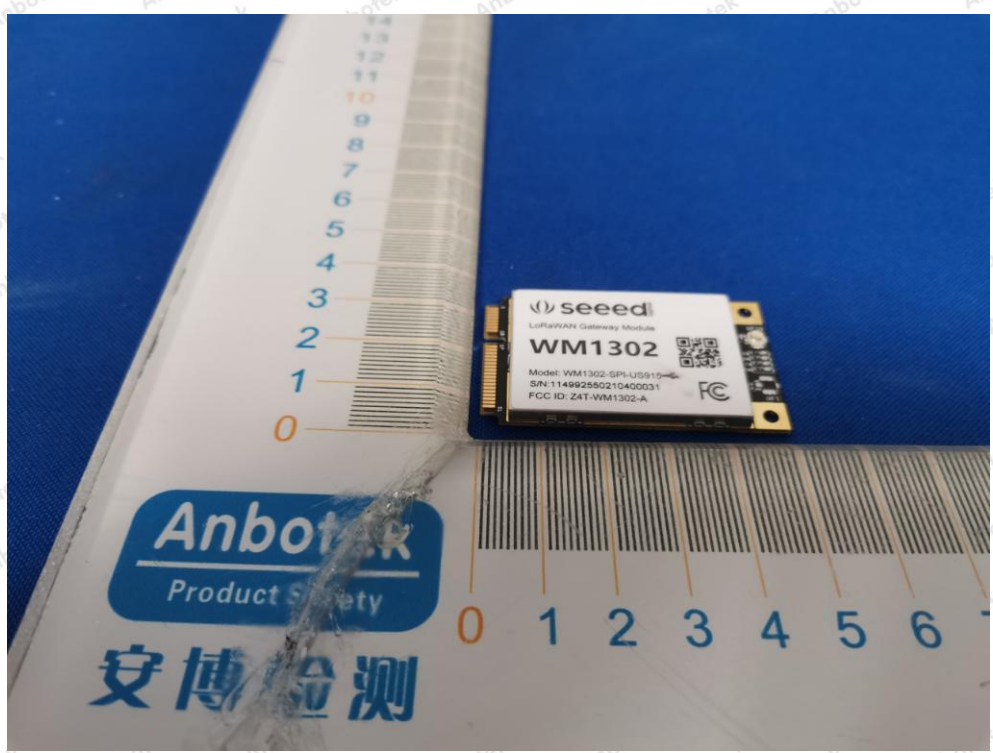

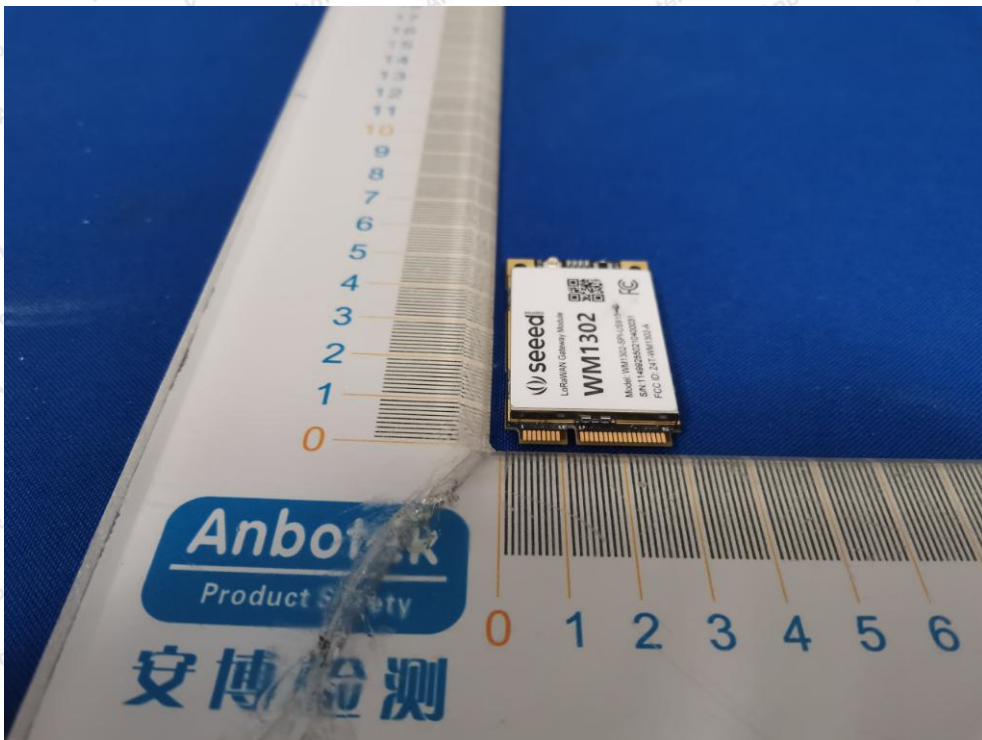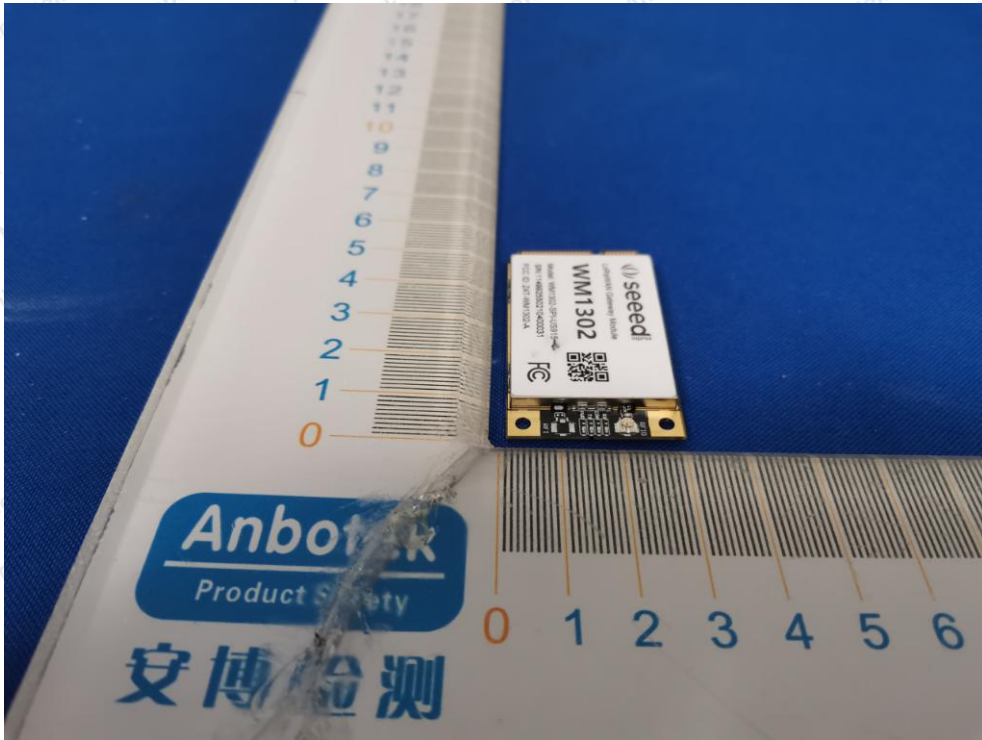



APPENDIX III -- INTERNAL PHOTOGRAPH

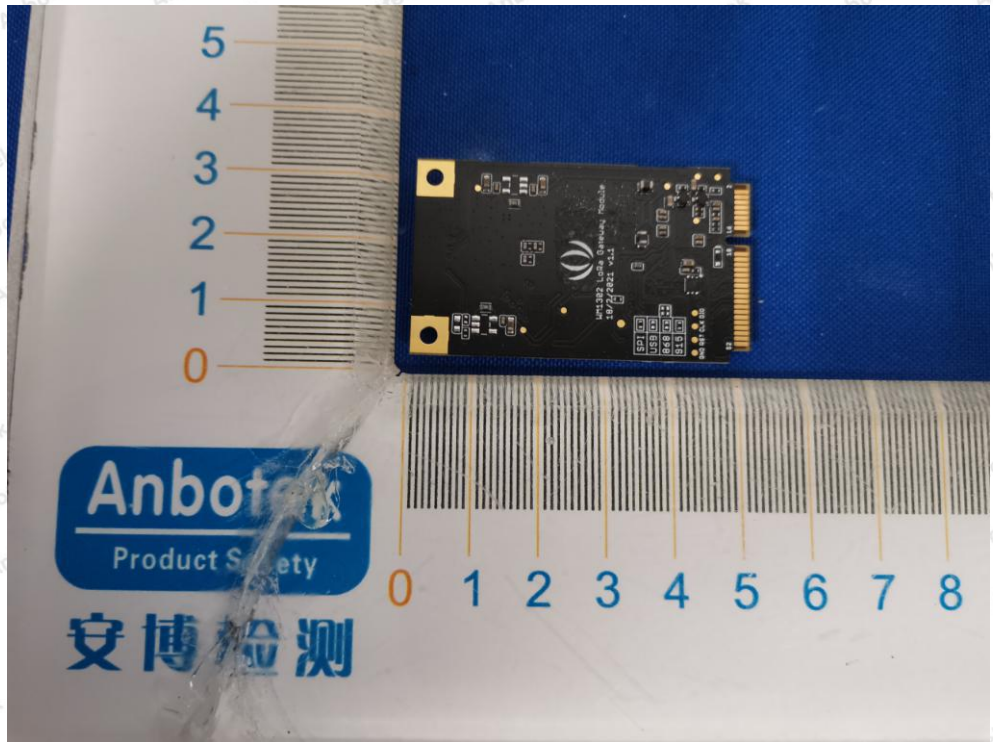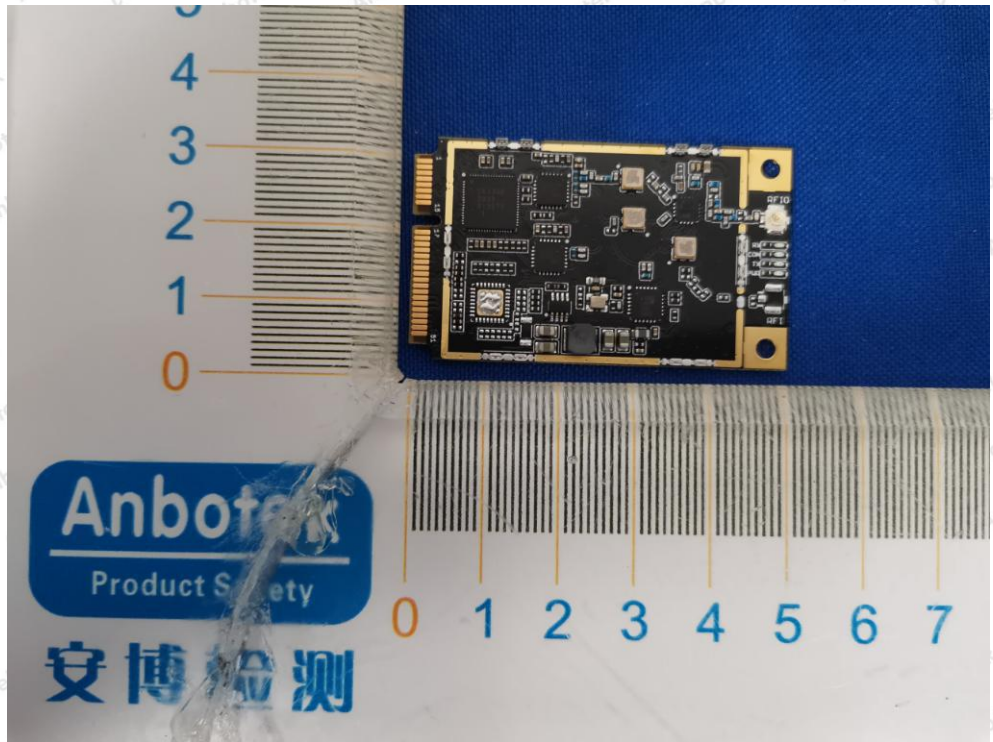

----- End of Report -----