

FCC Test Report

Report No.: AGC13779230602FE03

FCC ID : Z63-O3AIRKEY

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Low-profile Mechanical keyboard

BRAND NAME : AUSDOM

MODEL NAME

Airkey84, Airkey104, Airkey87, Airkey98, Airkey108,

Airkey68

APPLICANT: SHENZHEN AONI ELECTRONIC CO., LTD.

DATE OF ISSUE : Aug. 25, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global compliance (Shenzhen) Co., Ltd



Page 2 of 44

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 25, 2023	Valid	Initial Release



Page 3 of 44

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10 10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	12 13
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)8.3. LIMITS AND MEASUREMENT RESULTS	15
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	19 19
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	26
10.1. MEASUREMENT PROCEDURE	26 26
11. RADIATED EMISSION	28
11.1. MEASUREMENT PROCEDURE	29 30
12. LINE CONDUCTED EMISSION TEST	40
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	40 40

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 4 of 44

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	4′
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	4′
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	42
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	44
APPENDIX B: PHOTOGRAPHS OF EUT	44



Page 5 of 44

1. VERIFICATION OF COMPLIANCE

Applicant	SHENZHEN AONI ELECTRONIC CO., LTD.	
Address	No. 5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an District, ShenZhen, China	
Manufacturer	Shenzhen Ausdom CO LTD	
Address	ROOM 701, NO. 5 FACTORY BUILDING, HONGHUIINDUSTRIAL PARK, NO. 2, LIUXIAN 3rd ROAD, DISTRICT 68, XINGDONG COMMUNITY, XIN'AN STREET, BAOAN DISTRICT, SHENZHEN	
Factory	Shenzhen Ausdom CO LTD	
Address	ROOM 701, NO. 5 FACTORY BUILDING, HONGHUIINDUSTRIAL PARK, NO. 2, LIUXIAN 3rd ROAD, DISTRICT 68, XINGDONG COMMUNITY, XIN'AN STREET, BAOAN DISTRICT, SHENZHEN	
Product Designation	Low-profile Mechanical keyboard	
Brand Name	AUSDOM	
Test Model	Airkey84	
Series Model	Airkey104, Airkey87, Airkey98, Airkey108, Airkey68	
Difference Description	All the same except for the model name.	
Date of receipt of test item	Jun. 29, 2023	
Date of Test	Jun. 29, 2023 to Aug. 25, 2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	
	·	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Aug. 25, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 25, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 25, 2023



Page 6 of 44

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Low-profile Mechanical keyboard". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

<u> </u>	
Operation Frequency	2.403 GHz to 2.480GHz
RF Output Power	-3.841dBm (Max)
Modulation	GFSK
Number of channels	16 Channel
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	-1dBi
Hardware Version	REV:1.1
Software Version	V1.06
Power Supply	DC 5V by adapter or DC 3.7V by battery

2.2. TABLE OF CARRIER FREQUENCYS

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2403	9	2441
2	2407	10	2445
3	2414	11	2453
4	2419	12	2459
5	2422	13	2463
6	2426	14	2466
7	2436	15	2473
8	2439	16	2480



Page 7 of 44

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID**: **Z63-O3AIRKEY** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.


2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

2.8 DUTY CYCLE

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW=8MHz, VBW=50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Frequency	Duty Cycle
GFSK	2402MHz	77.13%

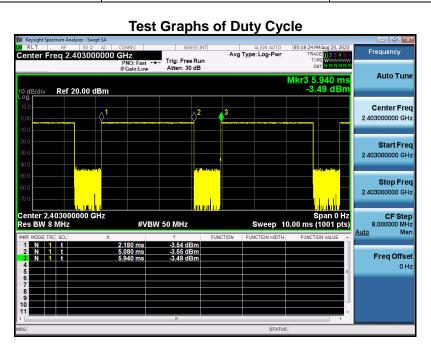



Page 8 of 44

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$	
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %	



Page 9 of 44

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2403MHz_GFSK
2	Middle channel TX_2441MHz_GFSK
3	High channel TX_2480MHz_GFSK

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The fixed frequency mode is to press the key to trigger the frequency point without external software




Page 10 of 44

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Low-profile Mechanical keyboard	Airkey84	Z63-O3AIRKEY	EUT
2	Control Box	N/A	USB-TTL	AE
3	Adapter	TY0500100E1MN	N/A	AE
4	Charger line	G258	N/A	AE
5	Control board	EPS-35-3.3	DC 3.3V	AE
6	Hongmi PC	RMA2201-AG	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 44

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

1201 24011 111211 01 0011200122 21111001011 1201							
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due		
TEST RECEIVER	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023		
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024		
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A		

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	100034	Aug. 03, 2022	Aug. 02, 2023
Wideband Antenna	SCHWARZBECK	VULB9168	D69250	May 11, 2022	May 10, 2025
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifer	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Test software	FARA	V.RA-03A	N/A	N/A	N/A



Page 12 of 44

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

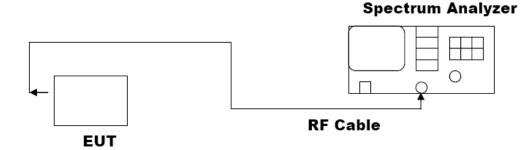




Page 13 of 44


7.3. LIMITS AND MEASUREMENT RESULT

	10.1						
	Test Data of Conducted Output Power						
Test Mode Test Channel (MHz) Peak Power Limits (dBm) Pass or Fail							
	2403	-4.149	≤30	Pass			
GFSK	2441	-4.631	≤30	Pass			
	2480	-3.841	≤30	Pass			

Test Graphs of Conducted Output Power V R RF 50 Ω AC Center Freq 2.403000000 GHz
PNO: Fast → IFGain:Low Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run **Auto Tune** Mkr1 2.402 322 GHz -4.149 dBm Ref 20.00 dBm 10 dB/div Center Freq 2.403000000 GHz warra INTA WAN Start Freq 2.400500000 GHz Stop Freq 2.405500000 GHz CF Step 500.000 kHz <u>Auto</u> Man Freq Offset Scale Type Center 2.403000 GHz #Res BW 1.5 MHz Span 5.000 MHz Sweep 1.066 ms (1000 pts) Lin **#VBW 5.0 MHz** Test_Graph_ANT1_2403_Peak Power





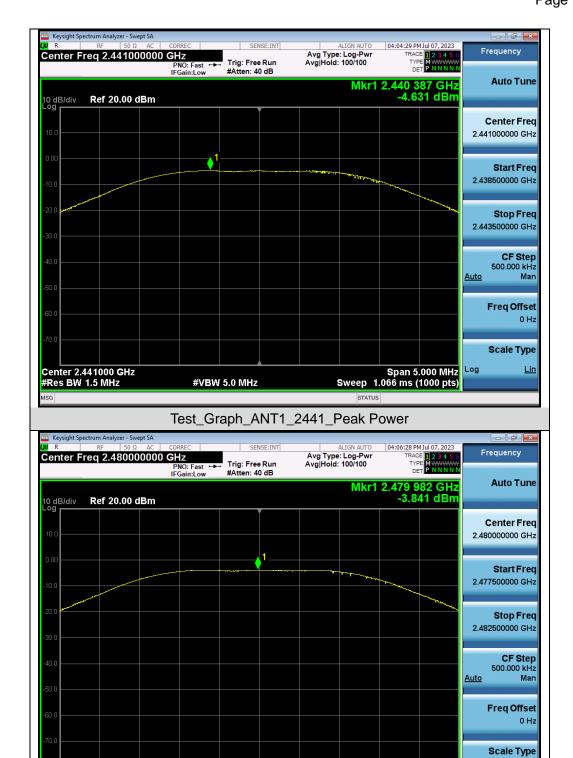

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_ANT1_2480_Peak Power

#VBW 5.0 MHz

Span 5.000 MHz Sweep 1.066 ms (1000 pts) <u>Lin</u>

Center 2.480000 GHz #Res BW 1.5 MHz



Page 15 of 44

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	-6dB Limits (MHz)	Pass or Fail		
	2403	2.011	1.320	≥0.5	Pass		
GFSK	2441	2.074	1.323	≥0.5	Pass		
	2480	1.960	1.320	≥0.5	Pass		







Test Graphs of Occupied Bandwidth |03:36:42 PM Jul 04, 2023 Radio Std: None Frequency Center Freq: 2.403000000 GHz Trig: Free Run Avg|Hol #Atten: 30 dB Center Freq 2.403000000 GHz Avg|Hold:>10/10 Radio Device: BTS Ref 30.00 dBm Center Freq 2.403000000 GHz Center 2.403 GHz #Res BW 30 kHz Span 5 MHz Sweep 6.867 ms CF Step 500.000 kHz #VBW 100 kHz Auto Man Occupied Bandwidth **Total Power** 0.31 dBm 2.0108 MHz Frea Offset -14.999 kHz **OBW Power** 99.00 % **Transmit Freq Error** x dB Bandwidth 2.230 MHz x dB -26.00 dB Test Graph ANT1 2403 OBW 03:43:15 PM Jul 04, 2023 Radio Std: None Center Freq: 2.441000000 GHz Trig: Free Run Avg|Hol #Atten: 30 dB Frequency Center Freq 2.441000000 GHz Avg|Hold: 10/10 Radio Device: BTS #IFGain:Low Ref 30.00 dBm Center Freq 2.441000000 GHz Center 2.441 GHz #Res BW 30 kHz Span 5 MHz Sweep 6.867 ms **CF Step #VBW 100 kHz** 500.000 kHz Man **Total Power** -1.98 dBm Occupied Bandwidth 2.0743 MHz Freq Offset 0 Hz Transmit Freq Error -23.527 kHz **OBW Power** 99.00 % x dB Bandwidth 2.349 MHz -26.00 dB x dB


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_ANT1_2441_OBW





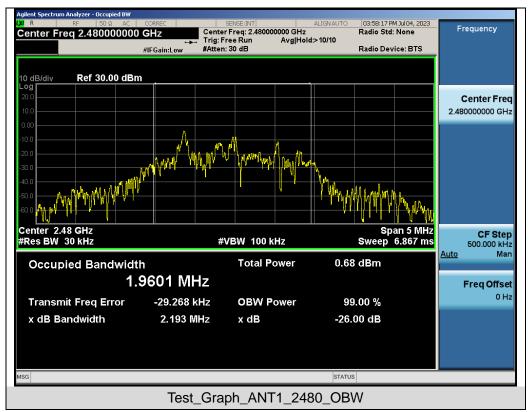

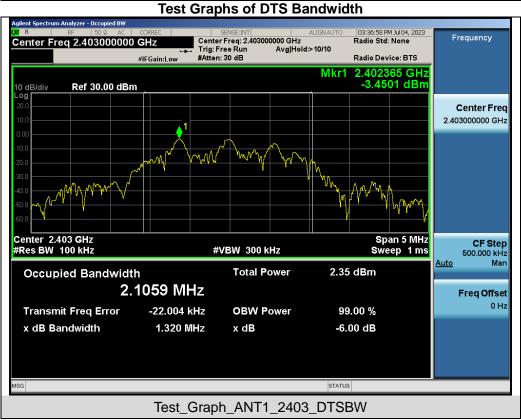









Page 19 of 44

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT


OFF. ENTITE AND INCADENCE INCOME.					
LIMITS AND MEASUREMENT RESULT					
Applicable Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			







Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands Frequency Avg Type: Log-Pwr Avg|Hold:>10/10 Trig: Free Run #Atten: 30 dB




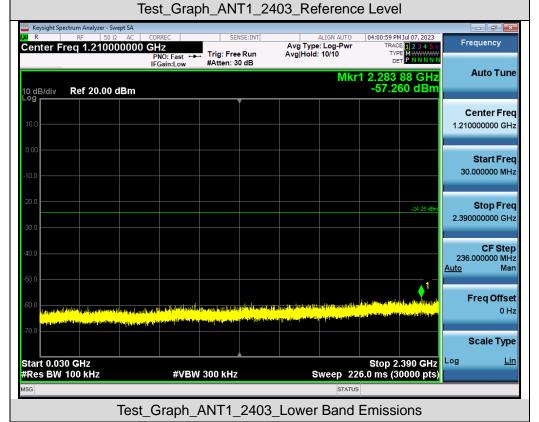





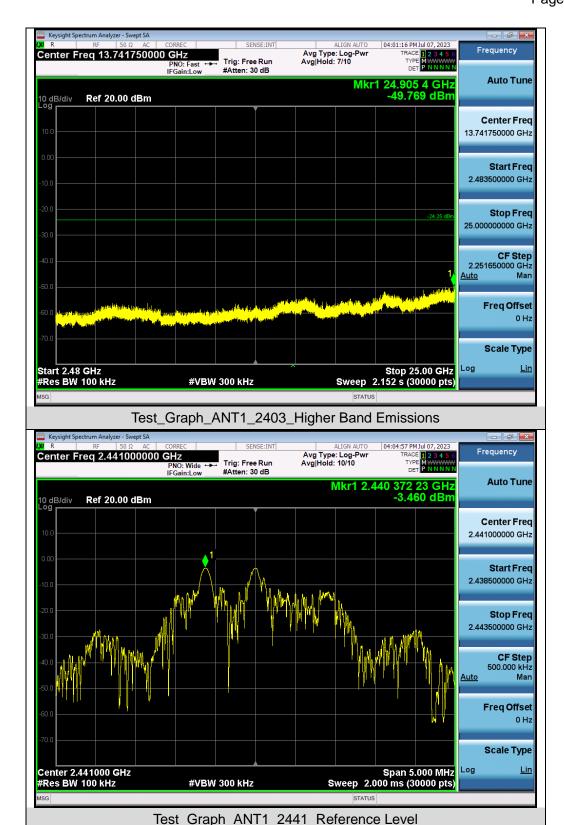




Freq Offset 0 Hz

Scale Type

<u>Lin</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



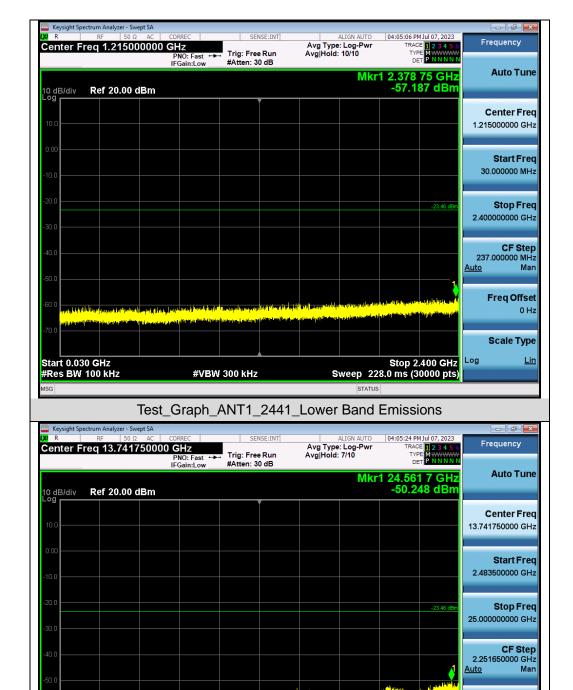


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$

Test_Graph_ANT1_2441_Higher Band Emissions

#VBW 300 kHz

Start 2.48 GHz

#Res BW 100 kHz



Freq Offset 0 Hz

Scale Type

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph ANT1 2480 Lower Band Emissions


#VBW 300 kHz

Start 0.030 GHz #Res BW 100 kHz





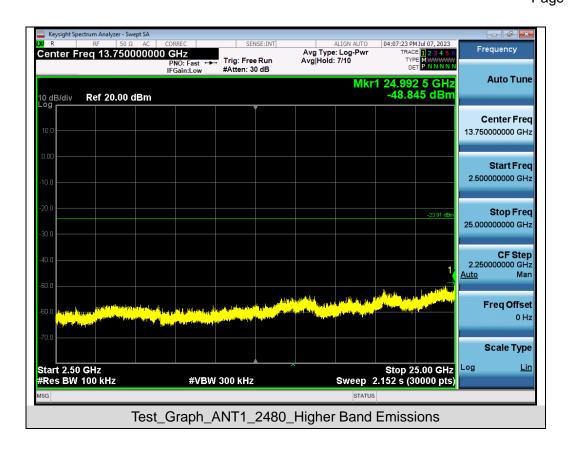





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Frequency Avg Type: Log-Pwi Avg|Hold:>100/100 Center Freq 2.399000000 GHz Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.400 000 0 GHz -38.522 dBm Ref 20.00 dBm Center Frea 2.399000000 GHz Start Freq 2.390000000 GHz compresenting and brighting and beautiful freely and have been Stop Freq 2.408000000 GHz Start 2.390000 GHz #Res BW 100 kHz Stop 2.408000 GHz Sweep 2.000 ms (30000 pts) **CF Step** 1.800000 MHz **#VBW 300 kHz** FUNCTION FUNCTION WIDTH Freq Offset Scale Type Log Test Graph_ANT1_2403_Lower Band Edge Emissions Avg Type: Log-Pwi Avg|Hold: 100/100 #Atten: 30 dB **Auto Tune** Mkr2 2.483 500 0 GHz -49.062 dBm Ref 20.00 dBm Center Frea 2.487500000 GHz 2.475000000 GHz Stop Freq 2.500000000 GHz Stop 2.50000 GHz 4.000 ms (30000 pts) Start 2.47500 GHz #Res BW 100 kHz **#VBW** 300 kHz 2.500000 MHz **Freq Offset** 0 Hz Scale Type

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_ANT1_2480_Higher Band Edge Emissions



Page 26 of 44

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT


Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2403	-21.269	≤8	Pass	
GFSK	2441	-21.112	≤8	Pass	
	2480	-20.920	≪8	Pass	

Test Graphs of Conducted Output Power Spectral Density







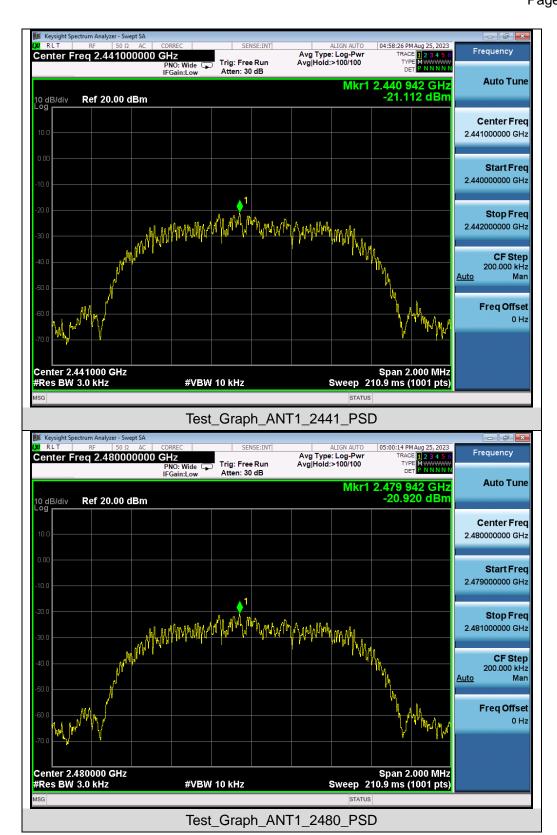




Page 28 of 44

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

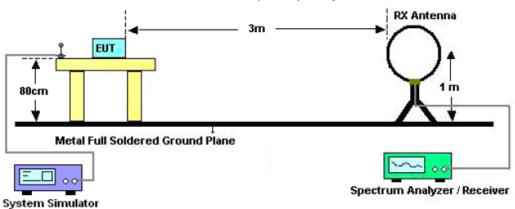

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

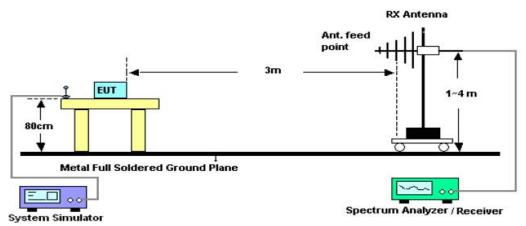

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

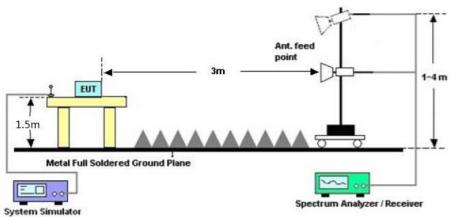



Page 30 of 44

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 31 of 44

Radiated emission from 30MHz to 1000MHz

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

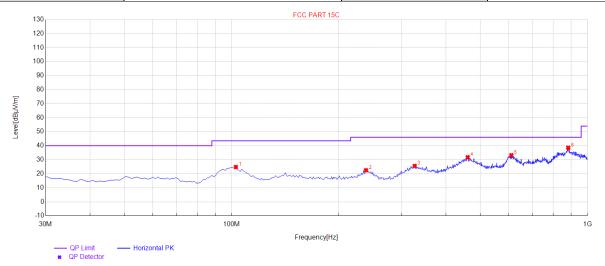


PK Da	PK Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	102.75	24.80	20.12	43.50	18.70	100	280	Horizontal
2	238.55	22.51	17.30	46.00	23.49	100	10	Horizontal
3	326.82	25.59	21.16	46.00	20.41	100	230	Horizontal
4	460.68	31.76	27.58	46.00	14.24	100	290	Horizontal
5	611.03	33.21	28.31	46.00	12.79	100	280	Horizontal
6	882.63	38.53	33.07	46.00	7.47	100	240	Horizontal

RESULT: PASS



Page 32 of 44

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

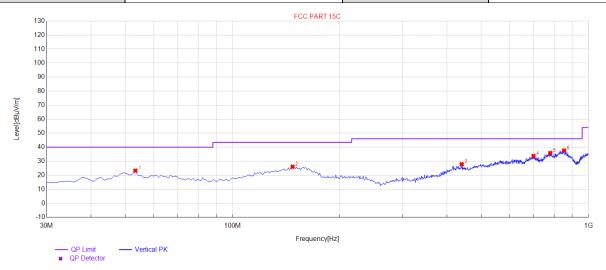

PK Da	ta List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	53.28	23.26	13.84	40.00	16.74	100	20	Vertical
2	147.37	26.05	20.62	43.50	17.45	100	280	Vertical
3	440.31	27.83	21.98	46.00	18.17	100	60	Vertical
4	700.27	33.68	29.04	46.00	12.32	100	40	Vertical
5	780.78	35.80	30.91	46.00	10.20	100	10	Vertical
6	853.53	37.61	32.18	46.00	8.39	100	90	Vertical

RESULT: PASS

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.



Page 33 of 44

Radiated emission above 1GHz

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4806.000	43.41	0.08	43.49	74	-30.51	peak
4806.000	35.34	0.08	35.42	54	-18.58	AVG
7209.000	38.67	2.21	40.88	74	-33.12	peak
7209.000	31.26	2.21	33.47	54	-20.53	AVG

Remark

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Low-profile Mechanical keyboard dongle	Model Name	Airkey84 dongle
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4806.000	44.39	0.08	44.47	74	-29.53	peak
4806.000	34.88	0.08	34.96	54	-19.04	AVG
7209.000	38.27	2.21	40.48	74	-33.52	peak
7209.000	30.64	2.21	32.85	54	-21.15	AVG
						+
emark:	<u>l</u>		l			

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 34 of 44

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

3μV) (dB 65 0.14	44.7	, , ,	m) (dB) -29.21	Value Type
		9 74	-29.21	neak
74 0.17				peak
0.14	4 35.8	8 54	-18.12	AVG
2.36	6 42.0	8 74	-31.92	peak
.53 2.36	33.8	9 54	-20.11	AVG

EUT	Low-profile Mechanical keyboard dongle	Model Name	Airkey84 dongle
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.13	0.14	45.27	74	-28.73	peak
4882.000	38.09	0.14	38.23	54	-15.77	AVG
7323.000	40.45	2.36	42.81	74	-31.19	peak
7323.000	32.46	2.36	34.82	54	-19.18	AVG
Remark:						
-actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



Page 35 of 44

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.6	0.22	44.82	74	-29.18	peak
4960.000	35.46	0.22	35.68	54	-18.32	AVG
7440.000	38.75	2.64	41.39	74	-32.61	peak
7440.000	29.56	2.64	32.2	54	-21.8	AVG
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.91	0.22	43.13	74	-30.87	peak
4960.000	34.22	0.22	34.44	54	-19.56	AVG
7440.000	38.64	2.64	41.28	74	-32.72	peak
7440.000	29.79	2.64	32.43	54	-21.57	AVG
Remark:					I	
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			


RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands

EUT	Low-profile Mechanical keyboard	Model Name	Airkey84
Temperature	22.9° C	Relative Humidity	57.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

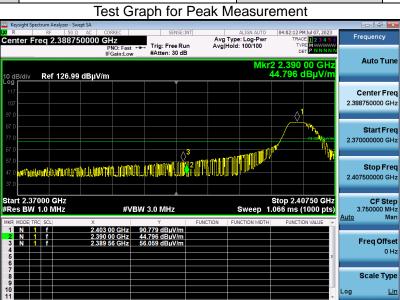

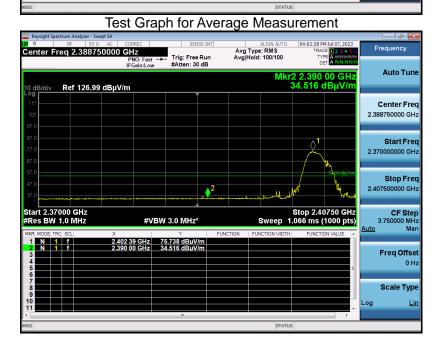



RESULT: PASS






Low-profile Mechanical **EUT Model Name** Airkey84 keyboard 22.9° C **Temperature Relative Humidity** 57.3% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 1 **Antenna**

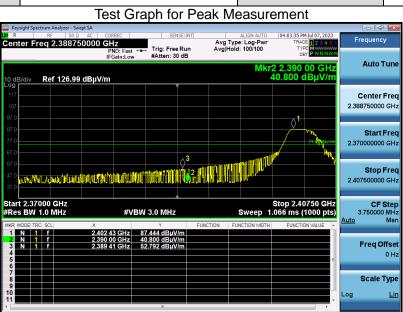

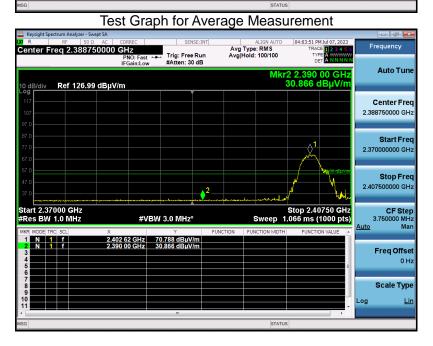


RESULT: PASS






Low-profile Mechanical **EUT Model Name** Airkey84 keyboard 22.9° C **Temperature Relative Humidity** 57.3% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 3 Horizontal **Antenna**

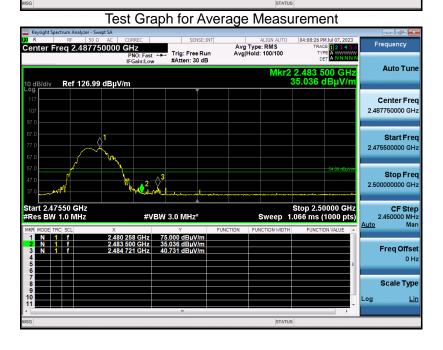


RESULT: PASS





Low-profile Mechanical **EUT Model Name** Airkey84 keyboard 22.9° C **Temperature Relative Humidity** 57.3% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 3 Vertical **Antenna**

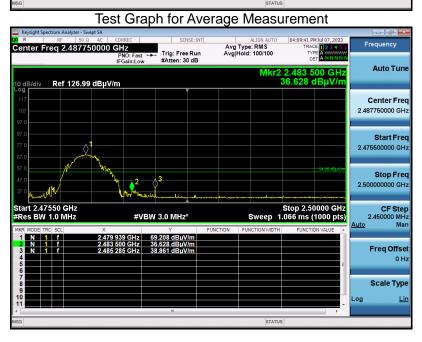

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 40 of 44

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Framuonov	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

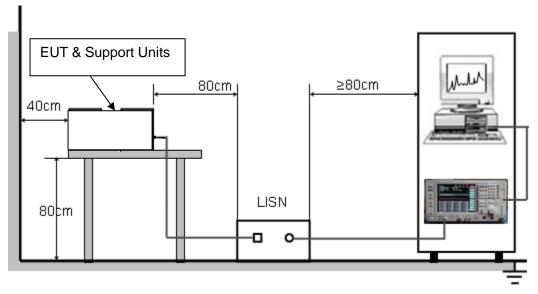



Page 41 of 44

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L1

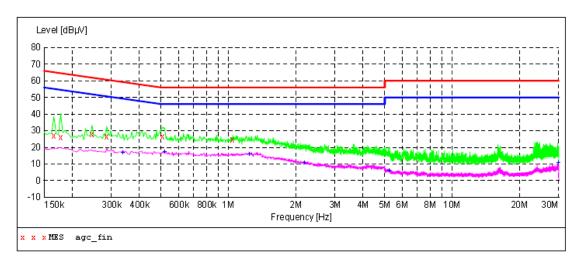

MEASUREMENT RESULT: "agc_fin"

2023/7/3 13.14						
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dBuV	dB	dBuV	dB		
0.166000	26.80	6.1	65	38.4	OP	L1
	20.00	6.1	60	JO.4	QP	ΤТ
0.178000	26.00	6.1	65	38.6	QP	L1
0.246000	28.00	6.1	62	33.9	QP	L1
0.286000	26.60	6.1	61	34.0	QP	L1
0.510000	26.40	6.1	56	29.6	QP	L1
1.046000	24.80	6.2	56	31.2	QP	L1

MEASUREMENT RESULT: "agc_fin2"


2023/7/3 15:14

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.338000	16.90	6.1	49	32.4	AV	L1
0.518000	17.10	6.1	46	28.9	AV	L1
1.238000	16.00	6.2	46	30.0	AV	L1
2.194000	10.70	6.2	46	35.3	AV	L1
5.238000	6.20	6.4	50	43.8	AV	L1
29.870000	10.70	9.1	50	39.3	AV	L1

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

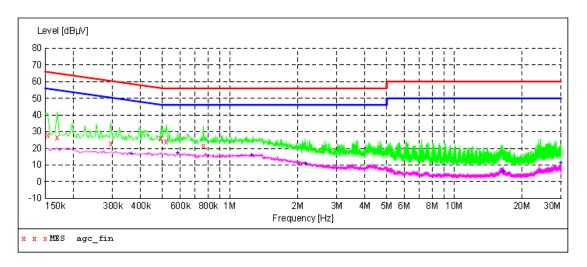

MEASUREMENT RESULT: "agc_fin"

2023/7/3 Freque		Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154	1000	27.80	6.1	66	38.0	QP	N
0.170	0000	26.40	6.1	65	38.6	QP	N
0.294	1000	22.80	6.1	60	37.6	QP	N
0.494	1000	26.00	6.1	56	30.1	QP	N
0.522	2000	24.00	6.1	56	32.0	QP	N
0.762	2000	21.40	6.2	56	34.6	QP	N

MEASUREMENT RESULT: "agc fin2"

Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
16.80	6.1	49	31.9	AV	N
17.00	6.2	46	29.0	AV	N
16.00	6.2	46	30.0	AV	N
10.80	6.2	46	35.2	AV	N
6.20	7.0	50	43.8	AV	N
11.20	9.1	50	38.8	AV	N
	dBμV 16.80 17.00 16.00 10.80 6.20	dBμV dB 16.80 6.1 17.00 6.2 16.00 6.2 10.80 6.2 6.20 7.0	dBμV dB dBμV 16.80 6.1 49 17.00 6.2 46 16.00 6.2 46 10.80 6.2 46 6.20 7.0 50	dBμV dB dBμV dB 16.80 6.1 49 31.9 17.00 6.2 46 29.0 16.00 6.2 46 30.0 10.80 6.2 46 35.2 6.20 7.0 50 43.8	dBμV dB dBμV dB 16.80 6.1 49 31.9 AV 17.00 6.2 46 29.0 AV 16.00 6.2 46 30.0 AV 10.80 6.2 46 35.2 AV 6.20 7.0 50 43.8 AV

RESULT: PASS

Note: All the test modes had been tested, the Mode 3 was the worst case. Only the data of the worst case would be record in this test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 44 of 44

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13779230602AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13779230602AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.