

Test report

264561-3TRFWL

Date of issue: September 25, 2014

Applicant:

Texas Instruments Inc.

Product:

CC3100 Booster-pack

Model:

CC3100MODR11MAMOB

FCC ID:

Z64-CC3100MODR1

IC Registration number:

451I-CC3100MODR1

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart C, §15.247**
Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz
- ◆ **RSS-210, Issue 8, December 2010, Annex 8**
Frequency Hopping and Digital Modulation Systems Operating in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz Bands

Test location

| | |
|---------------|--|
| Company name: | Nemko Canada Inc. |
| Address: | 303 River Road |
| City: | Ottawa |
| Province: | Ontario |
| Postal code: | K1V 1H2 |
| Country: | Canada |
| Telephone: | +1 613 737 9680 |
| Facsimile: | +1 613 737 9691 |
| Toll free: | +1 800 563 6336 |
| Website: | www.nemko.com |
| Site number: | FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber) |

| | |
|--------------|---|
| Tested by: | Kevin Rose, Wireless/EMC Specialist |
| Reviewed by: | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Date: | September 25, 2014 |
| Signature: | |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

| | |
|---|-----------|
| Table of contents | 3 |
| Section 1. Report summary | 4 |
| 1.1 Applicant and manufacturer | 4 |
| 1.2 Test specifications | 4 |
| 1.3 Test methods..... | 4 |
| 1.4 Statement of compliance | 4 |
| 1.5 Exclusions..... | 4 |
| 1.6 Test report revision history | 4 |
| Section 2. Summary of test results | 5 |
| 2.1 FCC Part 15 Subpart C, general requirements test results..... | 5 |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results..... | 5 |
| 2.3 IC RSS-GEN, Issue 3, test results | 5 |
| 2.4 IC RSS-210, Issue 8, test results | 6 |
| Section 3. Equipment under test (EUT) details | 7 |
| 3.1 Sample information..... | 7 |
| 3.2 EUT information | 7 |
| 3.3 Technical information | 7 |
| 3.4 Product description and theory of operation | 7 |
| 3.5 EUT exercise details..... | 7 |
| 3.6 EUT setup diagram | 8 |
| Section 4. Engineering considerations | 9 |
| 4.1 Modifications incorporated in the EUT..... | 9 |
| 4.2 Technical judgment..... | 9 |
| 4.3 Deviations from laboratory tests procedures..... | 9 |
| Section 5. Test conditions | 10 |
| 5.1 Atmospheric conditions | 10 |
| 5.2 Power supply range..... | 10 |
| Section 6. Measurement uncertainty | 11 |
| 6.1 Uncertainty of measurement | 11 |
| Section 7. Test equipment | 12 |
| 7.1 Test equipment list..... | 12 |
| Section 8. Testing data | 13 |
| 8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits | 13 |
| 8.2 FCC 15.247(a)(2) and RSS-210 A8.2(a) Minimum 6 dB bandwidth for systems using digital modulation techniques | 17 |
| 8.3 RSS-Gen 4.6.1 Occupied bandwidth | 19 |
| 8.4 FCC 15.247(b) and RSS-210 A8.4 (4) Transmitter output power and e.i.r.p. requirements | 21 |
| 8.5 FCC 15.247(d) and RSS-210 A8.5 Spurious (out-of-band) emissions..... | 23 |
| 8.6 FCC 15.247(e) and RSS-210 A8.2(b) Power spectral density for digitally modulated devices..... | 31 |
| Section 9. Block diagrams of test set-ups | 33 |
| 9.1 Radiated emissions set-up..... | 33 |
| 9.2 Conducted emissions set-up | 33 |

Section 1. Report summary

1.1 Applicant and manufacturer

| | |
|-----------------|------------------------|
| Company name | Texas Instruments Inc. |
| Address | 12500 TI Boulevard |
| City | Dallas |
| Province/State | Texas |
| Postal/Zip code | 75243 |
| Country | USA |

1.2 Test specifications

| | |
|--|---|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz |
| RSS-210, Issue 8 Annex 8 | Frequency Hopping and Digital Modulation Systems Operating in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz Bands |

1.3 Test methods

| | |
|--|--|
| Guidance for compliance measurements on DTS operating under 15.247 | 558074 D01 Meas Guidance v03r02 (June 6, 2014) |
| ANSI C64.3 v 2003 | American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF | Original report issued |

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

| Part | Test description | Verdict |
|------------|---------------------------|-------------------|
| §15.207(a) | Conducted limits | Pass |
| §15.31(e) | Variation of power source | Pass ¹ |
| §15.203 | Antenna requirement | Pass ² |

Notes: ¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

² The Antennas are located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part | Test description | Verdict |
|--------------------|--|----------------|
| §15.247(a)(1)(i) | Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| §15.247(a)(1)(ii) | Frequency hopping systems operating in the 5725–5850 MHz band | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| §15.247(a)(2) | Minimum 6 dB bandwidth for systems using digital modulation techniques | Pass |
| §15.247(b)(1) | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band | Not applicable |
| §15.247(b)(2) | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| §15.247(b)(3) | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass |
| §15.247(c)(1) | Fixed point-to-point operation with directional antenna gains greater than 6 dBi | Not applicable |
| §15.247(c)(2) | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| §15.247(d) | Spurious emissions | Pass |
| §15.247(e) | Power spectral density for digitally modulated devices | Pass |
| §15.247(f) | Time of occupancy for hybrid systems | Not applicable |

2.3 IC RSS-GEN, Issue 3, test results

| Part | Test description | Verdict |
|-------|--|-----------------------------|
| 4.6.1 | Occupied bandwidth | Pass |
| 6.1 | Receiver spurious emissions limits (radiated) | Not applicable |
| 6.2 | Receiver spurious emissions limits (antenna conducted) | Not applicable ¹ |
| 7.2.4 | AC power lines conducted emission limits | Pass |

Notes: ¹ According to Notice 2012-DRS0126 (from January 2012) section 2.2 of RSS-Gen, Issue 3 has been revised. The EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.4 IC RSS-210, Issue 8, test results

| Part | Test description | Verdict |
|----------|--|----------------|
| A8.1 | Frequency hopping systems | |
| A8.1 (a) | Bandwidth of a frequency hopping channel | Not applicable |
| A8.1 (b) | Minimum channel spacing for frequency hopping systems | Not applicable |
| A8.1 (c) | Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| A8.1 (d) | Frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| A8.1 (e) | Frequency hopping systems operating in the 5725–5850 MHz band | Not applicable |
| A8.2 | Digital modulation systems | |
| A8.2 (a) | Minimum 6 dB bandwidth | Pass |
| A8.2 (b) | Maximum power spectral density | Pass |
| A8.3 | Hybrid systems | |
| A8.3 (1) | Digital modulation turned off | Not applicable |
| A8.3 (2) | Frequency hopping turned off | Not applicable |
| A8.4 | Transmitter output power and e.i.r.p. requirements | |
| A8.4 (1) | For frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| A8.4 (2) | For frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| A8.4 (3) | For frequency hopping systems operating in the 5725–5850 MHz | Not applicable |
| A8.4 (4) | For systems employing digital modulation techniques | Pass |
| A8.4 (5) | For point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band | Not applicable |
| A8.4 (6) | For transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| A8.5 | Out-of-band emissions | Pass |

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

| | |
|------------------------|---------------|
| Receipt date | July 21, 2014 |
| Nemko sample ID number | 5 |

3.2 EUT information

| | |
|---------------|---------------------|
| Product name | CC3100 Booster-pack |
| Model | CC3100MODR11MAMOB |
| Serial number | N/A |

3.3 Technical information

| | |
|---------------------------|---|
| Operating band | 2400–2483.5 MHz |
| Operating frequency | 2412–2462 MHz |
| Modulation type | 802.11b/g/n |
| Occupied bandwidth (99 %) | 14.03 MHz (802.11b), 16.34 MHz (802.11g), 17.59 MHz (802.11n) |
| Emission designator | W7D |
| Power requirements | 120 V _{AC} , 60 Hz via Laptop power adapter connected with USB cord to EUT |
| Antenna information | Taiyo Yuden 2.4 GHz Multilayer RadiEdge Antenna, MN: AH 316M245001, Peak Gain: 1.9 dBi The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator. |

3.4 Product description and theory of operation

The EUT is designed to be used as a standalone development platform for application development using the CC3200 device. It can be also used in conjunction with compatible booster-packs to enhance the peripherals available in the system. The board features on-board emulation using FTDI device and has an array of sensors for an out of the box experience. This board can be directly connected to the PC using software development platforms including CCS and IAR.

3.5 EUT exercise details

There were 2 samples provided for testing: one with the permanent antenna and the second one is with the 50 Ω antenna cable for conducted measurements. EUT was controlled from laptop using Radio Tool 0.5 CLI application.

3.6 EUT setup diagram

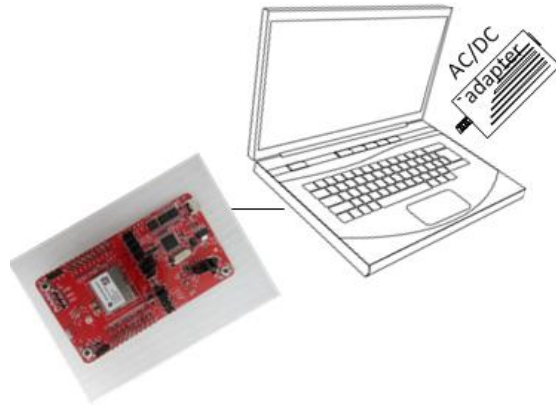


Figure 3.6-1: Setup diagram

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

As per manufacture request the CC3200MODR1M2AMOB model was considered as a representative sample and all the tests were performed on it. CC3100MODR1MAMOB is a depopulated version of the CC3200MODR1M2AMOB and therefor was deemed compliant.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|---------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of $K=2$ with 95% certainty.

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|-----------------------------|----------------|--------------|-----------|-----------|-------------|
| 3 m EMI test chamber | TDK | SAC-3 | FA002047 | 1 year | Mar. 18/15 |
| Flush mount turntable | Sunol | FM2022 | FA002082 | — | NCR |
| Controller | Sunol | SC104V | FA002060 | — | NCR |
| Antenna mast | Sunol | TLT2 | FA002061 | — | NCR |
| Horn antenna (1–18 GHz) | EMCO | 3115 | FA000825 | 1 year | Mar. 10/15 |
| Pre-amplifier (1–18 GHz) | JCA | JCA118-503 | FA002091 | 1 year | June 23/15 |
| Bilog antenna (20–3000 MHz) | Sunol | JB3 | FA002108 | 1 year | Mar. 12/15 |
| 50 Ω coax cable | C.C.A. | None | FA002555 | 1 year | June 23/15 |
| 50 Ω coax cable | Huber + Suhner | NONE | FA002074 | 1 year | June 23/15 |
| Horn antenna 18–40 GHz | EMCO | 3116 | FA001847 | 2 year | Sept. 06/14 |
| 18–26 GHz pre-amplifier | Narda | BBS-1826N612 | FA001550 | — | VOU |

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.207(a) and RSS-Gen 7.2.4 AC power line conducted emissions limits

8.1.1 Definitions and limits

FCC:
 Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

IC:
 The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

The conducted emissions shall be measured with a 50 Ω /50 μ H line impedance stabilization network (LISN).

Table 8.1-1: Conducted emissions limit

| Frequency of emission, MHz | Conducted limit, dB μ V | |
|-------------------------------|-----------------------------|-----------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

Note: * - Decreases with the logarithm of the frequency.

8.1.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 24, 2014 | Temperature | 23 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 36 % |

8.1.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

| | |
|----------------------|------------------|
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Detector mode | Peak and Average |
| Trace mode | Max Hold |
| Measurement time | 1000 ms |

Receiver settings for final measurements:

| | |
|----------------------|------------------------|
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Detector mode | Quasi-Peak and Average |
| Trace mode | Max Hold |
| Measurement time | 1000 ms |

8.1.4 Test data

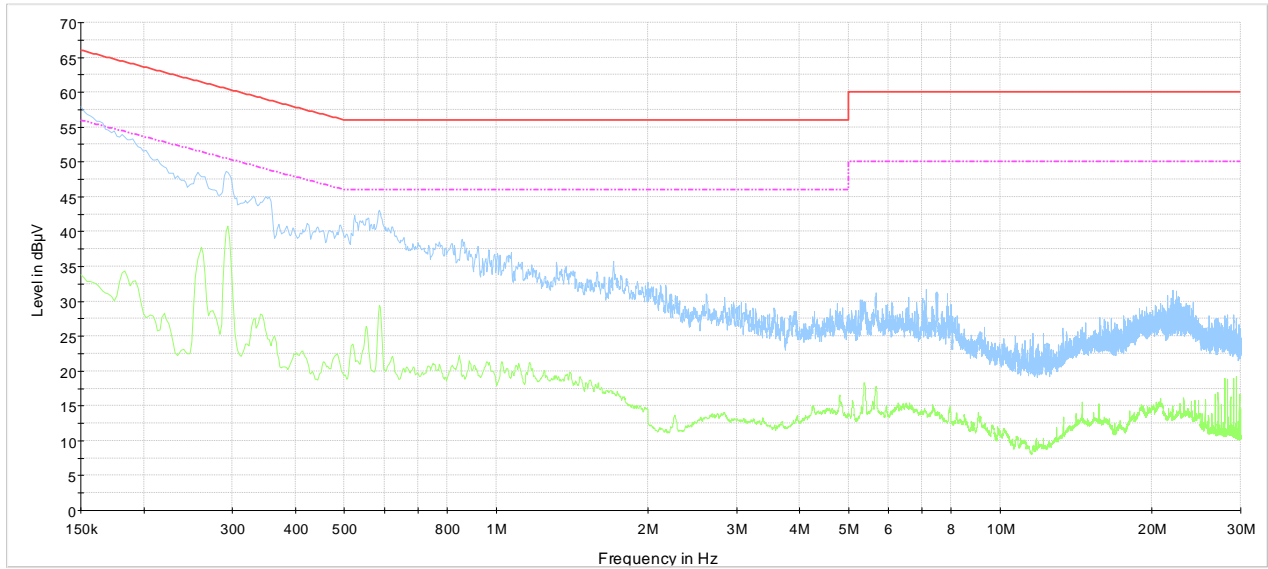


NEX -264561 CE Emissions 120 Vac 60 Hz Phase

- CISPR 22 Mains QP Class B
- - - CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG

Plot 8.1-1: Conducted emissions on phase line

8.1.4 Test data, continued

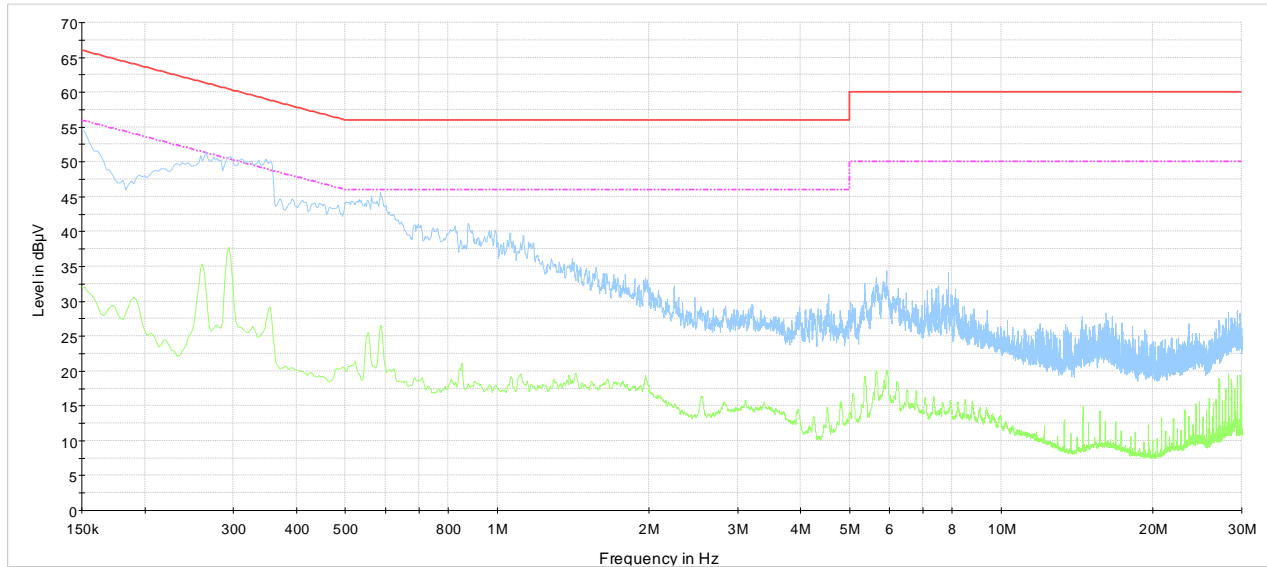

NEX-264561 CE Emissions 120 Vac 60 Hz Neutral

- CISPR 22 Mains QP Class B
- - - CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG

Plot 8.1-2: Conducted emissions on neutral line

8.2 FCC 15.247(a)(2) and RSS-210 A8.2(a) Minimum 6 dB bandwidth for systems using digital modulation techniques

8.2.1 Definitions and limits

FCC and IC:

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 28, 2014 | Temperature | 21 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 38 % |

8.2.3 Observations, settings and special notes

Spectrum analyser settings:

| | |
|----------------------|---|
| Resolution bandwidth | 1–5 % of DTS BW (no wider than 100 kHz) |
| Video bandwidth | ≥3 × RBW |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.2.4 Test data

Table 8.2-1: 6 dB bandwidth results

| Modulation | Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|------------|----------------|---------------------|--------------------|-------------|
| 802.11b | 2412 | 10.04 | 0.5 | 9.54 |
| | 2437 | 9.99 | 0.5 | 9.49 |
| | 2462 | 10.04 | 0.5 | 9.54 |
| 802.11g | 2412 | 15.19 | 0.5 | 14.69 |
| | 2437 | 15.09 | 0.5 | 14.59 |
| | 2462 | 15.19 | 0.5 | 14.69 |
| 802.11n | 2412 | 15.19 | 0.5 | 14.69 |
| | 2437 | 15.19 | 0.5 | 14.69 |
| | 2462 | 15.08 | 0.5 | 14.58 |

Section 8

Testing data

Test name


FCC 15.247(a)(2) and RSS-210 A8.2(a) Minimum 6 dB bandwidth for systems using digital modulation techniques

Specification

FCC 15 Subpart C and RSS-210, Issue 8




8.2.4 Test data, continued

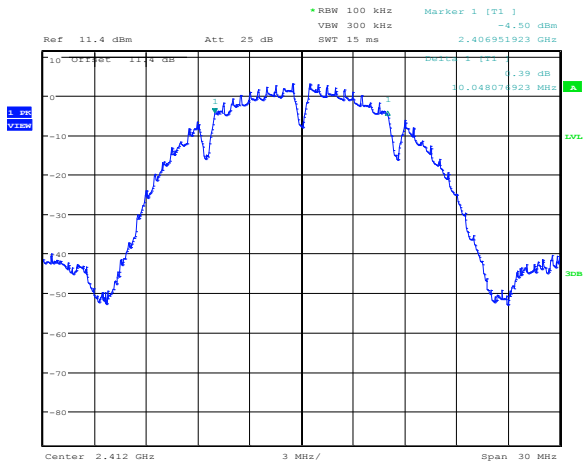


Date: 28.JUL.2014 13:46:36

Figure 8.2-1: 6 dB bandwidth on 802.11b, sample plot

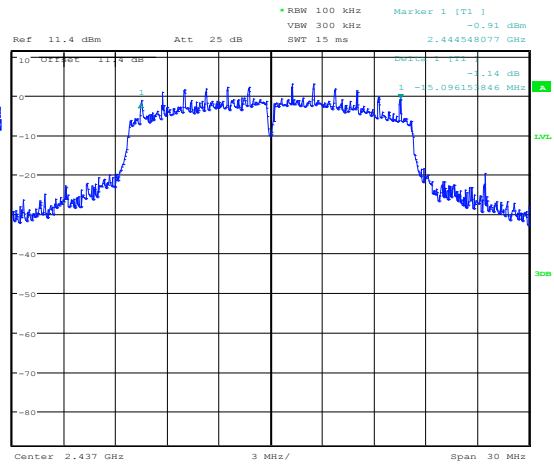

Date: 28.JUL.2014 13:51:19

Figure 8.2-2: 6 dB bandwidth on 802.11g, sample plot

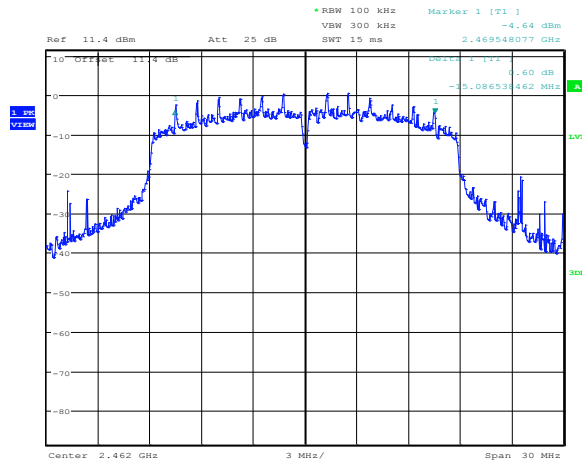

Date: 28.JUL.2014 14:02:06

Figure 8.2-3: 6 dB bandwidth on 802.11n, sample plot

8.3 RSS-Gen 4.6.1 Occupied bandwidth

8.3.1 Definitions and limits

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 percent emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

8.3.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 28, 2014 | Temperature | 21 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 38 % |

8.3.3 Observations, settings and special notes

Spectrum analyser settings:


| | |
|----------------------|----------|
| Resolution bandwidth | 100 kHz |
| Video bandwidth | ≥3 × RBW |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.3.4 Test data

Table 8.3-1: 99 % bandwidth results


| Modulation | Frequency, MHz | 99 % occupied bandwidth, MHz |
|------------|----------------|------------------------------|
| 802.11b | 2412 | 14.03 |
| | 2437 | 13.99 |
| | 2462 | 13.99 |
| 802.11g | 2412 | 16.29 |
| | 2437 | 16.34 |
| | 2462 | 16.29 |
| 802.11n | 2412 | 17.50 |
| | 2437 | 17.59 |
| | 2462 | 17.50 |

8.3.4 Test data, continued

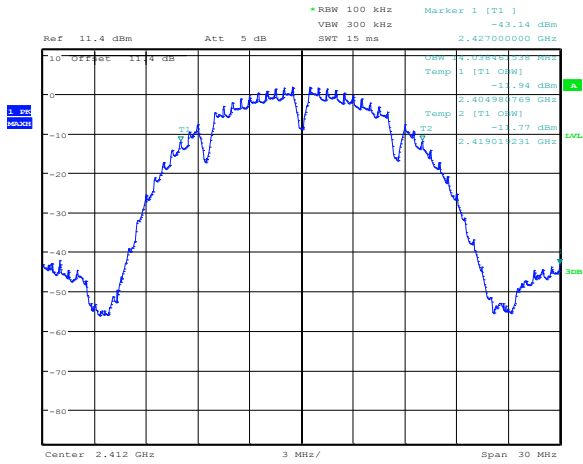


Date: 28.JUL.2014 14:15:45

Figure 8.3-1: 99 % bandwidth on 802.11b, sample plot

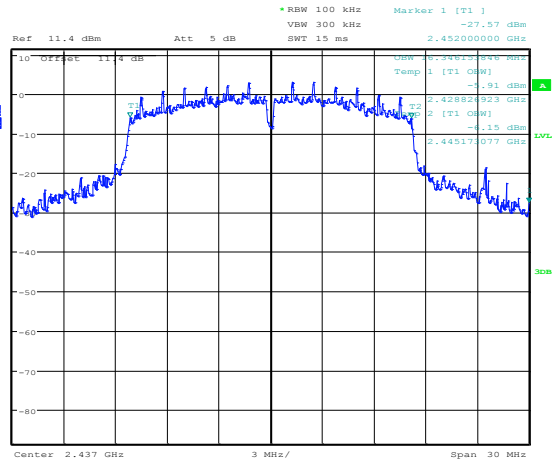

Date: 28.JUL.2014 14:13:43

Figure 8.3-2: 99 % bandwidth on 802.11g, sample plot

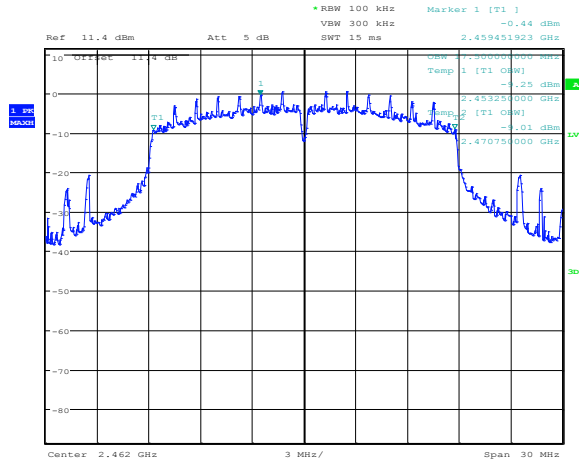

Date: 28.JUL.2014 14:11:50

Figure 8.3-3: 99 % bandwidth on 802.11n, sample plot

8.4 FCC 15.247(b) and RSS-210 A8.4 (4) Transmitter output power and e.i.r.p. requirements

8.4.1 Definitions and limits

FCC:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) and (b)(3)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

- (c) Operation with directional antenna gains greater than 6 dBi.
- (2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
 - (i) Different information must be transmitted to each receiver.
 - (ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
 - (A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

IC:

A8.4 (4) Transmitter Output Power and e.i.r.p. Requirements for systems employing digital modulation techniques operating in the bands 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands

For systems employing digital modulation techniques operating in the bands 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen).

8.4.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 28, 2014 | Temperature | 21 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 38 % |

8.4.3 Observations, settings and special notes

The test was performed according to DTS guidelines section 9.2.2.2 Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each sweep). Spectrum analyser settings:

| | |
|----------------------|---------------------------------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | ≥3 × RBW |
| Frequency span | 50 MHz |
| Detector mode | RMS |
| Trace mode | Power averaging over 100 sweeps |
| Power integration | Power over 20 MHz |

8.4.4 Test data

Table 8.4-1: Output power measurements results

| Modulation | Frequency, MHz | Conducted output power, dBm | | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|------------|----------------|-----------------------------|-------|------------|-------------------|-----------|-----------------|-----------------|
| | | Measured | Limit | | | | | |
| 802.11b | 2412 | 12.18 | 30 | 17.82 | 1.9 | 14.08 | 36 | 21.92 |
| | 2437 | 14.14 | 30 | 15.86 | 1.9 | 16.04 | 36 | 19.96 |
| | 2462 | 12.24 | 30 | 17.76 | 1.9 | 14.14 | 36 | 21.86 |
| 802.11g | 2412 | 12.75 | 30 | 17.25 | 1.9 | 14.65 | 36 | 21.35 |
| | 2437 | 14.64 | 30 | 15.36 | 1.9 | 16.54 | 36 | 19.46 |
| | 2462 | 12.98 | 30 | 17.02 | 1.9 | 14.88 | 36 | 21.12 |
| 802.11n | 2412 | 11.43 | 30 | 18.57 | 1.9 | 13.33 | 36 | 22.67 |
| | 2437 | 14.20 | 30 | 15.80 | 1.9 | 16.10 | 36 | 19.9 |
| | 2462 | 11.58 | 30 | 18.42 | 1.9 | 13.48 | 36 | 22.52 |

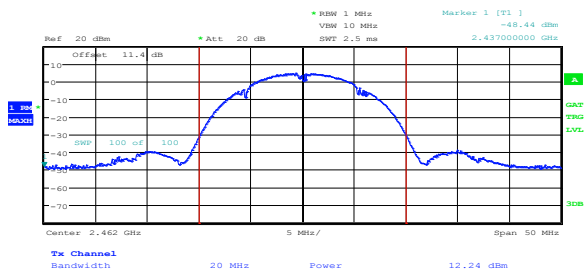


Figure 8.4-1: Output power on 802.11b, sample plot

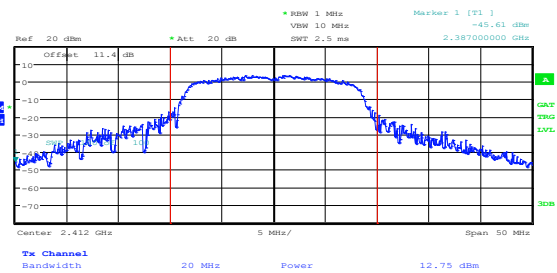


Figure 8.4-2: Output power on 802.11g, sample plot



Figure 8.4-3: Output power on 802.11n, sample plot

8.5 FCC 15.247(d) and RSS-210 A8.5 Spurious (out-of-band) emissions

8.5.1 Definitions and limits

FCC:
 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

IC:
 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

Table 8.5-1: FCC §15.209 and RSS-Gen – Radiated emission limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|----------------|-----------------------------|---------------------------------|-------------------------|
| | µV/m | dBµV/m | |
| 0.009–0.490 | 2400/F | $67.6 - 20 \times \log_{10}(F)$ | 300 |
| 0.490–1.705 | 24000/F | $87.6 - 20 \times \log_{10}(F)$ | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.5-2: IC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-----------------|---------------------|---------------|-------------|
| 0.090–0.110 | 12.51975–12.52025 | 399.9–410 | 5.35–5.46 |
| 2.1735–2.1905 | 12.57675–12.57725 | 608–614 | 7.25–7.75 |
| 3.020–3.026 | 13.36–13.41 | 960–1427 | 8.025–8.5 |
| 4.125–4.128 | 16.42–16.423 | 1435–1626.5 | 9.0–9.2 |
| 4.17725–4.17775 | 16.69475–16.69525 | 1645.5–1646.5 | 9.3–9.5 |
| 4.20725–4.20775 | 16.80425–16.80475 | 1660–1710 | 10.6–12.7 |
| 5.677–5.683 | 25.5–25.67 | 1718.8–1722.2 | 13.25–13.4 |
| 6.215–6.218 | 37.5–38.25 | 2200–2300 | 14.47–14.5 |
| 6.26775–6.26825 | 73–74.6 | 2310–2390 | 15.35–16.2 |
| 6.31175–6.31225 | 74.8–75.2 | 2655–2900 | 17.7–21.4 |
| 8.291–8.294 | 108–138 | 3260–3267 | 22.01–23.12 |
| 8.362–8.366 | 156.52475–156.52525 | 3332–3339 | 23.6–24.0 |
| 8.37625–8.38675 | 156.7–156.9 | 3345.8–3358 | 31.2–31.8 |
| 8.41425–8.41475 | 240–285 | 3500–4400 | 36.43–36.5 |
| 12.29–12.293 | 322–335.4 | 4500–5150 | Above 38.6 |

Note: Certain frequency bands listed in Table 8.5-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

8.5.1 Definitions and limits, continued

Table 8.5-3: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.5.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 28, 2014 | Temperature | 21 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 38 % |

8.5.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10th harmonic.
 Cabinet radiation measurements were performed at a distance of 3 m; No emissions higher than 10 dB below the limit were detected.
 Since fundamental power was tested using average method, the spurious emissions outside restricted bands limit is -30 dBc/100 kHz

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

| | |
|----------------------|----------|
| Resolution bandwidth | 100 kHz |
| Video bandwidth | 300 kHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

| | |
|----------------------|----------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

| | |
|----------------------|----------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 10 Hz |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.5.3 Observations, settings and special notes, continued

Spectrum analyser settings for conducted spurious emissions measurements outside restricted bands:

| | |
|----------------------|----------|
| Resolution bandwidth | 100 kHz |
| Video bandwidth | 300 kHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Spectrum analyser settings for conducted spurious emissions measurements within restricted bands below 1 GHz:

| | |
|----------------------|----------|
| Resolution bandwidth | 100 kHz |
| Video bandwidth | 300 kHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Note: as per 12.2.3 Quasi-Peak measurement procedure of the 558074 D01 DTS Meas Guidance v03r02: As an alternative to CISPR quasi-peak measurement, compliance was demonstrated to the applicable emission limits using a peak detector.


Spectrum analyser settings for conducted spurious emissions peak measurements within restricted bands above 1 GHz:

| | |
|----------------------|----------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Spectrum analyser settings for conducted spurious emissions average measurements within restricted bands above 1 GHz:


| | |
|----------------------|-------------------------------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | 3 MHz |
| Detector mode | RMS |
| Trace mode | Power average over 100 sweeps |

8.5.4 Test data

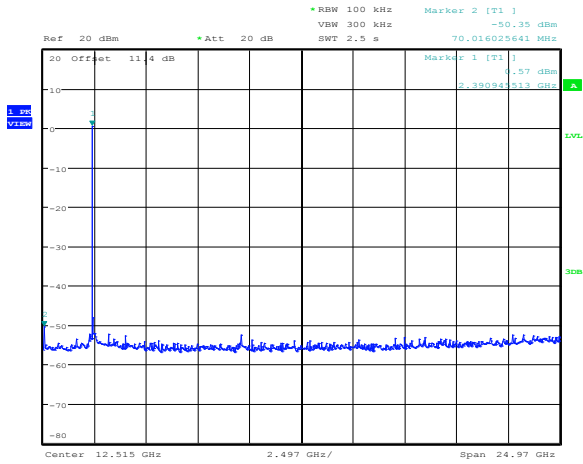


Date: 28.JUL.2014 15:03:19

Figure 8.5-1: Conducted spurious 802.11b, low channel

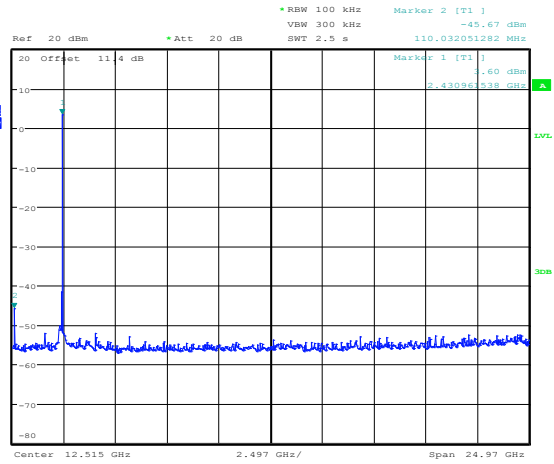


Date: 28.JUL.2014 15:04:06

Figure 8.5-2: Conducted spurious 802.11b, mid channel

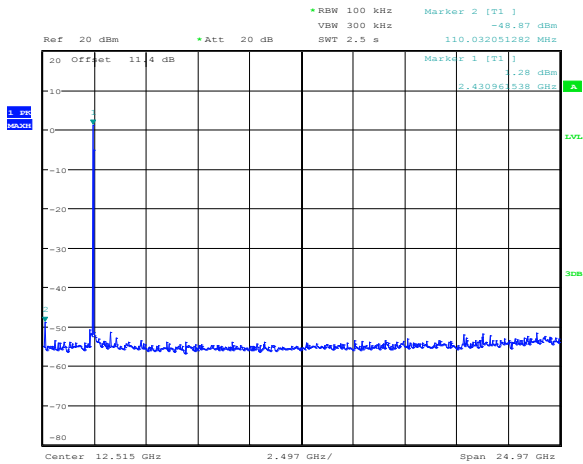

Date: 28.JUL.2014 15:04:39


Figure 8.5-3: Conducted spurious 802.11b, high channel

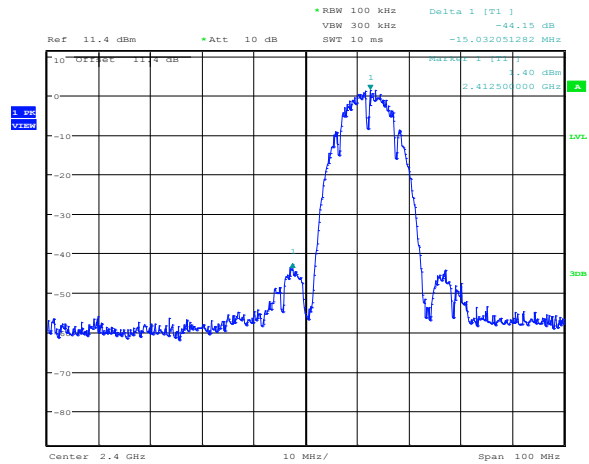

Date: 28.JUL.2014 14:53:49


Figure 8.5-4: Conducted spurious 802.11b, Lower band edge

8.5.5 Test data, continued

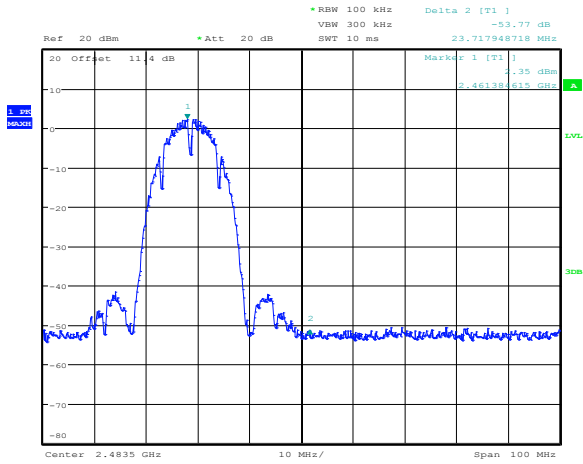


Date: 28.JUL.2014 15:11:44

Figure 8.5-5: Conducted spurious 802.11b, upper band edge

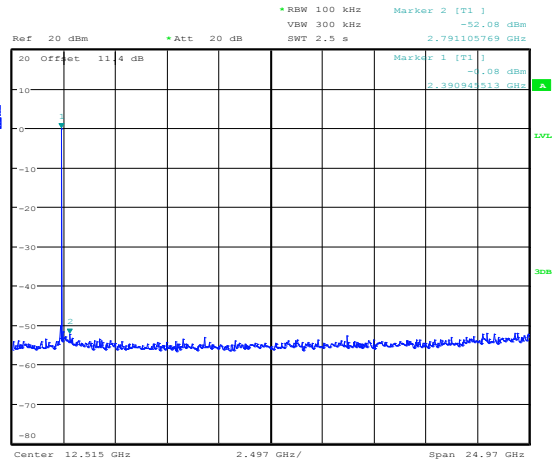


Date: 28.JUL.2014 15:07:09

Figure 8.5-6: Conducted spurious 802.11g, low channel

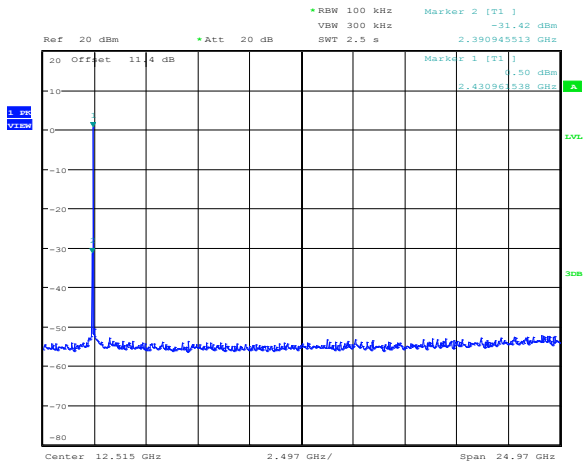

Date: 28.JUL.2014 15:06:36


Figure 8.5-7: Conducted spurious 802.11g, mid channel

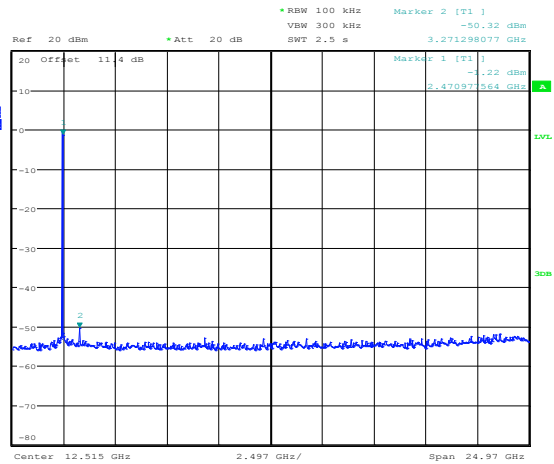

Date: 28.JUL.2014 15:09:35


Figure 8.5-8: Conducted spurious 802.11g, high channel

8.5.6 Test data, continued

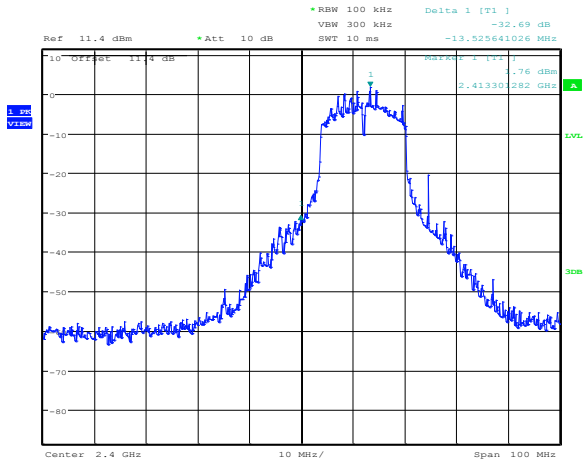


Date: 28.JUL.2014 14:53:16

Figure 8.5-9: Conducted spurious 802.11g, lower band edge

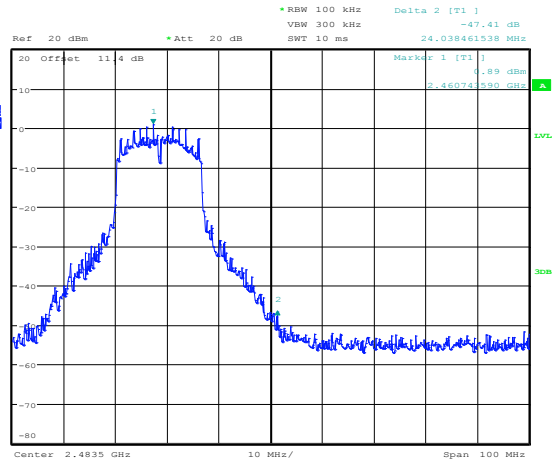


Date: 28.JUL.2014 15:11:07

Figure 8.5-10: Conducted spurious 802.11g, upper band edge

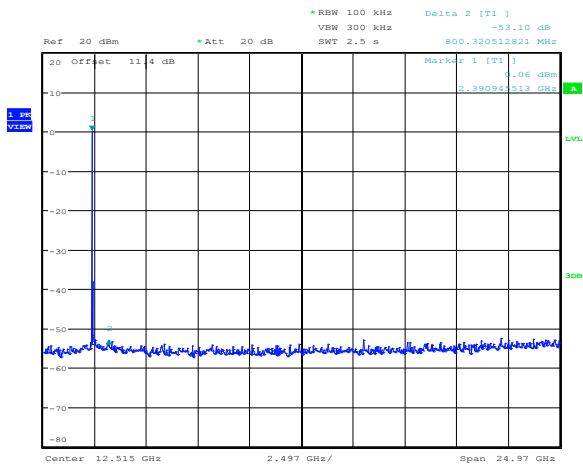

Date: 28.JUL.2014 15:08:06


Figure 8.5-11: Conducted spurious 802.11n, low channel

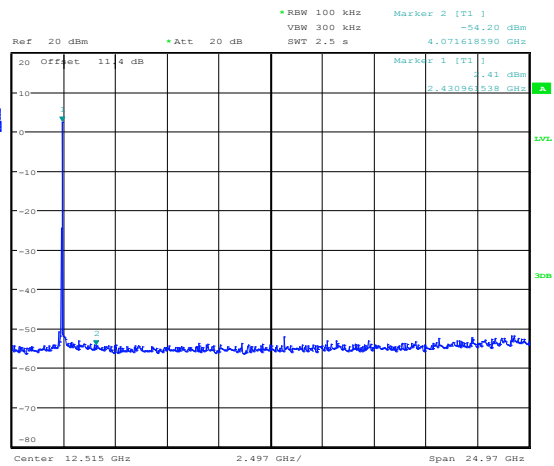

Date: 28.JUL.2014 15:08:47


Figure 8.5-12: Conducted spurious 802.11n, mid channel

8.5.4 Test data, continued

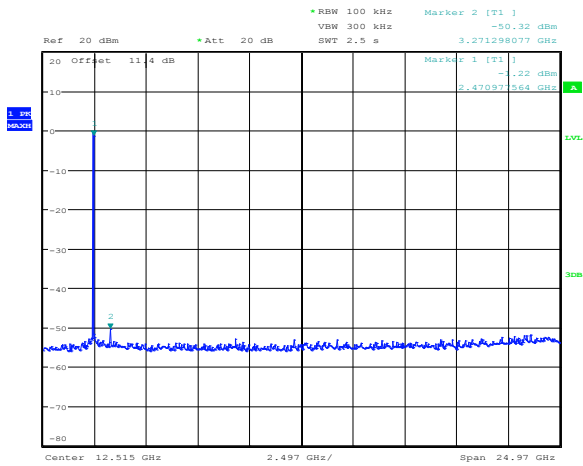


Date: 28.JUL.2014 15:09:35

Figure 8.5-13: Conducted spurious 802.11n, high channel

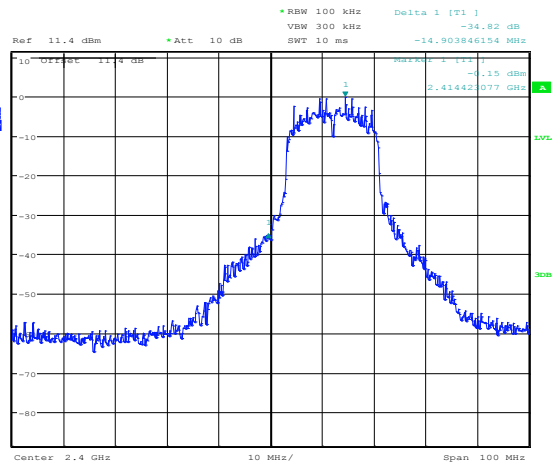

Date: 28.JUL.2014 14:50:42

Figure 8.5-14: Conducted spurious 802.11n, lower band edge

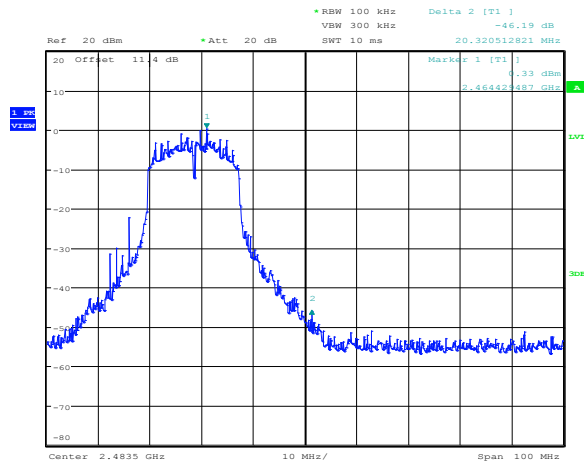

Date: 28.JUL.2014 15:10:36

Figure 8.5-15: Conducted spurious 802.11g, upper band edge

8.5.4 Test data, continued

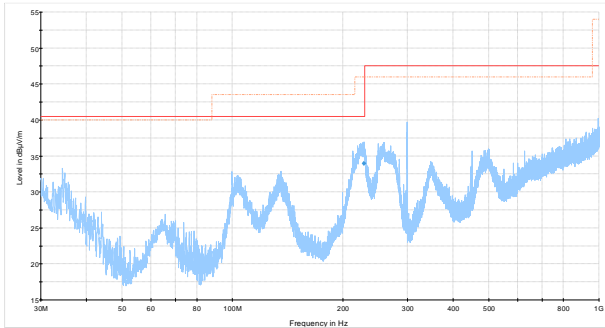


Figure 8.5-16: Radiated Spurious 30-1000 MHz

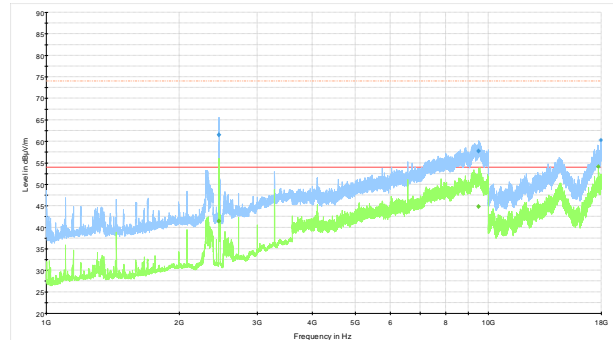


Figure 8.5-17: Radiated Spurious 1-18 GHz

Table 8.5-4: Radiated band edge emissions within restricted bands

| Modulation | Channel | Frequency, MHz | Peak level, dBµV/m | | Margin, dB | Average level, dBµV/m | | Margin, dB |
|------------|---------|----------------|--------------------|-------|------------|-----------------------|-------|------------|
| | | | Measured | Limit | | Measured | Limit | |
| 802.11b | Low | 2390 | 52.55 | 74 | 21.45 | 52.55 | 54 | 1.45 |
| | High | 2483.5 | 51.89 | 74 | 22.11 | 51.89 | 54 | 2.11 |
| 802.11g | Low | 2390 | 63.20 | 74 | 10.80 | 52.82 | 54 | 1.18 |
| | High | 2483.5 | 62.81 | 74 | 11.19 | 53.25 | 54 | 0.75 |
| 802.11n | Low | 2390 | 67.33 | 74 | 6.67 | 53.62 | 54 | 0.38 |
| | High | 2483.5 | 64.51 | 74 | 9.49 | 53.72 | 54 | 0.28 |

8.6 FCC 15.247(e) and RSS-210 A8.2(b) Power spectral density for digitally modulated devices

8.6.1 Definitions and limits

FCC:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

IC:

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration. This power spectral density shall be determined in accordance with the provisions of Section A8.4(4); (i.e. the power spectral density shall be determined using the same method for determining the conducted output power).

8.6.2 Test summary

| | | | |
|---------------|---------------|-------------------|-----------|
| Test date | July 28, 2014 | Temperature | 21 °C |
| Test engineer | Kevin Rose | Air pressure | 1003 mbar |
| Verdict | Pass | Relative humidity | 38 % |

8.6.3 Observations, settings and special notes

The test was performed using method described in section 10.2 Method PKPSD (EUT transmitting at full power throughout each sweep) of 558074 D01 DTS Meas Guidance v03r02. Spectrum analyser settings:
 Peak Detector was used as worst case.


| | |
|----------------------|--|
| Resolution bandwidth | Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. |
| Video bandwidth | Set the VBW $\geq 3 \times \text{RBW}$. |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max hold. |
| Sweeps | Allow trace to fully stabilize. |

8.6.4 Test data

Table 8.6-1: PSD measurements results


| Modulation | Frequency, MHz | PSD, dBm/100 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|------------|----------------|------------------|----------------------|------------|
| 802.11b | 2412 | 1.66 | 8 | 6.34 |
| | 2437 | 4.08 | 8 | 3.92 |
| | 2462 | 2.17 | 8 | 5.83 |
| 802.11g | 2412 | 1.12 | 8 | 6.88 |
| | 2437 | 3.16 | 8 | 4.84 |
| | 2462 | 1.29 | 8 | 6.71 |
| 802.11n | 2412 | 0.42 | 8 | 7.58 |
| | 2437 | 3.01 | 8 | 4.99 |
| | 2462 | 0.50 | 8 | 7.50 |

8.6.4 Test data, continued

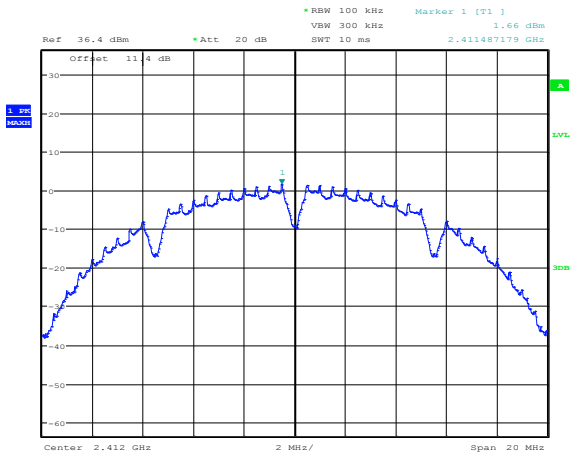


Date: 28.JUL.2014 16:27:24

Figure 8.6-1: PSD sample plot on 802.11b

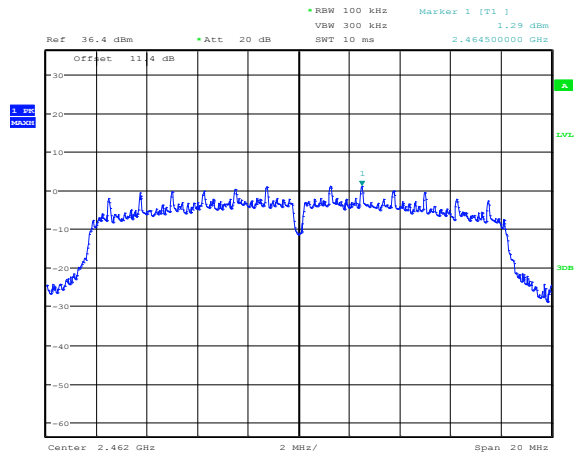

Date: 28.JUL.2014 16:30:35

Figure 8.6-2: PSD sample plot on 802.11g

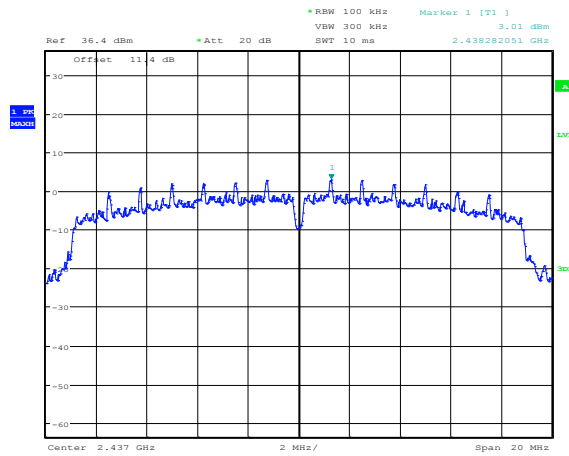


Date: 28.JUL.2014 16:28:55

Figure 8.6-3: PSD sample plot on 802.11n

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

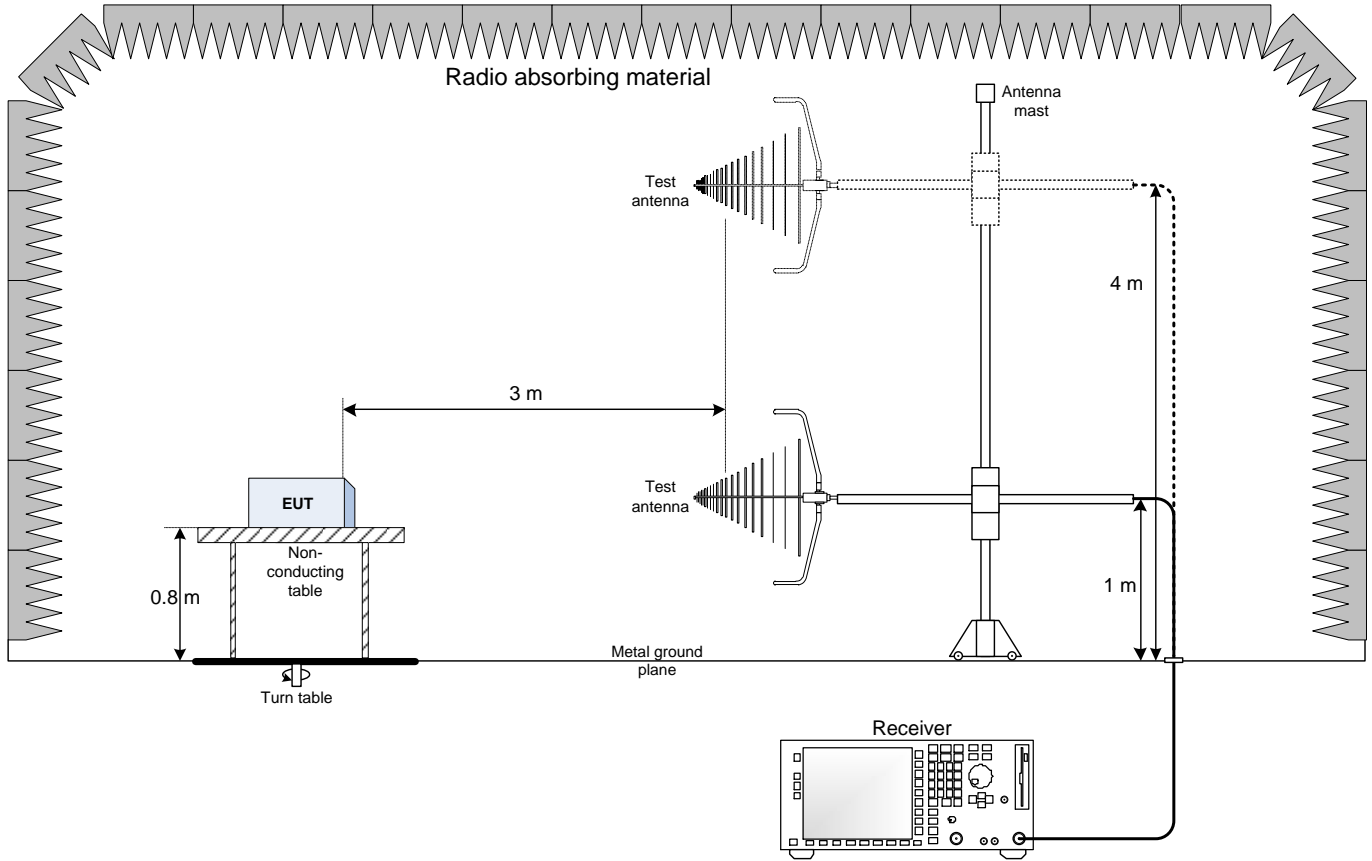

9.2 Conducted emissions set-up

