



# Nemko Korea Co., Ltd.

155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 449-852 KOREA, REPUBLIC OF

TEL:+82 31 330-1700

FAX:+82 31 322 2332

#### FCC and IC EVALUATION REPORT FOR CERTIFICATION

Applicant:

BRAVEN LC Dates of Issue : September 25, 2017

6001 Oak Canyon,Irvine, CA, 92168, USA Test Report No.: NK-17-R-209

Attn. : Sally Namie Test Site : Nemko Korea Co., Ltd.

FCC ID

**Brand Name** 

**Contact Person** 

Z7RBVALE 10013A-BVALE

**BRAVEN** 

BRAVEN LC 6001 Oak Canyon,Irvine, CA, 92168, USA Sally Namie Telephone No. : +949-556-3568

Applied Standard: FCC 47 CFR Part 15.247 and IC RSS-247 Issue 2

Classification: Digital Transmission System (DTS)

EUT Type: WiFi SPEAKER

Sep 25, 2017

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By: Yonghwan Kim

Engineer

Reviewed By: Deokha Ryu

Sep 21. 2019

**Technical Manager** 

**BRAVEN LC** 

FCC ID: Z7RBVALE / IC: 10013A-BVALE

Page 1 of 74



# **TABLE OF CONTENTS**

1.	Scope	4
2.	Introduction (Site Description)	5
	2.1 Test facility	5
	2.2 Accreditation and listing	6
3.	Test Conditions & EUT Information	7
	3.1 Operation During Test	7
	3.1.1 Table of test power setting	7
	3.1.2 Table of test channels	7
	3.1.3 Table of test modes	8
	3.1.4 Antenna information	8
	3.1.5 Additional Information Related to Testing	8
	3.2 Support Equipment	9
	3.3 Setup Drawing	9
	3.4 EUT Information	10
4.	Summary of Test Results	11
5.	Recommendation / Conclusion	12
6.	Antenna Requirements	12
7.	Description of Test	13
	7.1 Conducted Emissions	13
	7.2 Radiated Emissions	14
	7.3 6 dB Bandwidth	15
	7.4 Maximum Conducted Output Power (average)	16
	7.5 Maximum Power Spectral Density (average)	17
	7.6 Conducted Spurious Emissions	18
	7.7 Duty Cycle	19
8.	Test Data	20

**BRAVEN LC** 



### Test Report No.: NK-17-R-209

#### FCC and IC Certification

10.	Accuracy of Measurement	73
9.	Test Equipment	72
	8.8 Radiated Band Edge	68
	8.7 Radiated Spurious Emissions	62
	8.6 Conducted Spurious Emissions	48
	8.5 Maximum Power Spectral Density (average)	40
	8.4 Maximum Conducted Output Power (average) and E.I.R.P	32
	8.3 6 dB Modulated Bandwidth	24
	8.2 Radiated Emissions	22
	8.1 Conducted Emissions	20

**BRAVEN LC** NKQF-27-18 (Rev. 00) FCC ID: Z7RBVALE / IC: 10013A-BVALE



### 1. SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 and IC RSS-247 Issue2.

Responsible Party: BRAVEN LC

6001 Oak Canyon, Irvine, CA, 92168, USA

Contact Person: Sally Namie

Manufacturer: BRAVEN LC

6001 Oak Canyon, Irvine, CA, 92168, USA

FCC ID: Z7RBVALE

IC: 10013A-BVALE
 Model: BRAVEN VALE
 HVIN: BRAVEN VALE

Brand Name: BRAVEN

EUT Type: WiFi SPEAKER

Classification: Digital Transmission System (DTS)

Applied Standard: FCC 47 CFR Part 15.247 and IC RSS-247 Issue 2

Test Procedure(s): ANSI C63.10-2013 and FCC guidance of Guidance 558074

FCC ID: Z7RBVALE / IC: 10013A-BVALE

D01 DTS Meas Guidance v04

● Dates of Test: September 8, 2017 ~ September 13, 2017

Place of Tests: Nemko Korea Co., Ltd.



### 2. INTRODUCTION

### 2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating from **BRAVEN LC FCC ID**: **Z7RBVALE** and **IC**: **10013A-BVALE**.

These measurement tests were conducted at Nemko Korea Co., Ltd. EMC Laboratory .

The site address 155 & 159, Osan-Ro, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 KOREA, REPULIC OF.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 km (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 km (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014 according to §2.948.

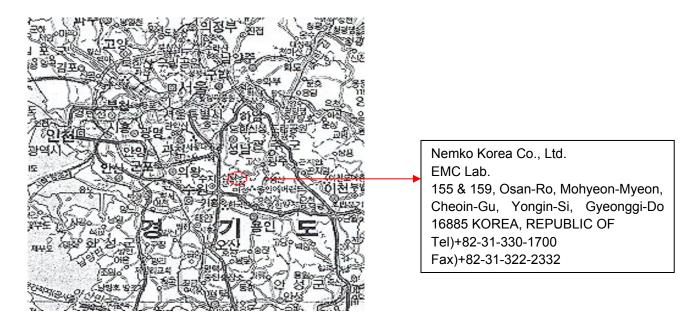


Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

FCC ID: Z7RBVALE / IC: 10013A-BVALE

BRAVEN LC Page 5 of 74



## 2.2 Accreditation and listing

	Accreditation type	Accreditation number
CAB Accreditation for DOC		Designation No. KR0026
KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)		Registration No. 155
Industry Canada	Canada IC Registered site	Site No. 2040E
VEI	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
IECEE SCHEME	EMC CBTL	-
	KCC(RRL)Designated Lab.	Registration No. KR0026

**BRAVEN LC** NKQF-27-18 (Rev. 00) FCC ID: Z7RBVALE / IC: 10013A-BVALE



### 3. TEST CONDITIONS & EUT INFORMATION

### 3.1 Operation During Test

The EUT is the SISO transceiver which is module supporting the 802.11b/g/n mode (802.11b/g/n(20,40MHz): 1TX/1RX).

The Laptop was used to control the EUT to transmit the wanted TX channel continuously (dutycycle 100%) by the testing program (QA Tool) supported by manufacturer. The Laptop was removed after controlling the EUT to transmit the wanted signal.

The operating voltage of EUT was 12 Vdc supplied from AC/DC adapter.

The EUT was tested at the lowest, middle and the highest channels with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

#### 3.1.1 Table of test power setting

Frequency	Mode	Power setting Level
	802.11b	15.5
2412 MHz ~ 2462 MHz	802.11g	11.5
24 12 IVII 12 ** 2402 IVII 12	802.11n (20 MHz)	11.5
	802.11n (40 MHz)	9

#### 3.1.2 Table of test channels

Frequency band	Mode	Test Channel (CH)	Frequency (MHz)
	802.11b,g,n (20 MHz) 802.11n (40 MHz)	1	2412
		6	2437
2.4.011-		11	2462
2.4 GHz		3	2422
		6	2437
		9	2452

BRAVEN LC



#### 3.1.3 Table of test modes

Test Items	Mode	*Data rate (Mbps)	Test Channel (CH)
Conducted Emissions	802.11b	1	11
Radiated Emissions	802.11b	1	1
	802.11b	1	1/6/11
6 dB Bandwidth	802.11g	6	1/6/11
O UD BAHUWIULII	802.11n (20 MHz)	MCS0	1/6/11
	802.11n (40 MHz)	MCS0	3/6/9
	802.11b	1	1/6/11
Maximum conducted	802.11g	6	1/6/11
Output Power	802.11n (20 MHz)	MCS0	1/6/11
	802.11n (40 MHz)	MCS0	3/6/9
	802.11b	1	1/6/11
Power Spectral Density	802.11g	6	1/6/11
Power Spectral Density	802.11n (20 MHz)	MCS0	1/6/11
	802.11n (40 MHz)	MCS0	3/6/9
	802.11b	1	1/6/11
Conducted Spurious Emission, Radiated Spurious Emission,	802.11g	6	1/6/11
Band edge Emission	802.11n (20 MHz)	MCS0	1/6/11
	802.11n (40 MHz)	MCS0	3/6/9

<sup>\*</sup>The worst data rate was determined by the conducted output power that generates the highest emission performing pre-scan testing in all data rates of each mode.

### 3.1.4 Antenna information:

Frequency band	Mode	Data rate	Antenna TX mode	Support CDD	Support MIMO
	802.11b,g	All	■ 1TX, □ 2TX	☐ Yes, ■ No	☐ Yes, ■ No
2.4 GHz	802.11n (20 MHz)	MCS 0~7	■ 1TX, □ 2TX	☐ Yes, ■ No	☐ Yes, ■ No
	802.11n (40 MHz)	MCS 0~7	■ 1TX, □ 2TX	☐ Yes, ■ No	☐ Yes, ■ No

### 3.1.5. Additional Information Related to Testing


The cable and attenuator loss from 30MHz to 26GHz was reflected in spectrum analyzer with correction factor for all conducted testing.



### 3.2 Support Equipment

EUT	BRAVEN LC Model : BRAVEN VALE	S/N: N/A
Laptop Computer	HP Model : G62-355TU 1.5 m shielded pin connector cable	FCC DOC S/N: CNF0452FN3
AC/DC Adapter	HP Model: PPP009D 1.5 m unshielded power cable	FCC DOC S/N: WBGSV0ACXZH162

### 3.3 Setup Drawing

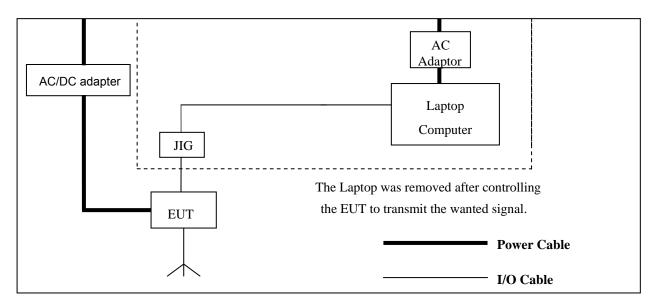

BRAVEN LC FCC ID : Z7RBVALE / IC : 10013A-BVALE

Page 9 of 74



### 3.4 EUT Information

The EUT is the **BRAVEN LC WiFi SPEAKER FCC ID: Z7RBVALE, IC: 10013A-BVALE.** 


Specifications:	
Category	WiFi SPEAKER
Model Name	BRAVEN VALE
Brand Name	BRAVEN
Frequency of Operation	802.11b,g,n (20 MHz): 2412 MHz ~ 2462 MHz 802.11n (40 MHz) : 2422 MHz ~ 2452 MHz
Maximum Conducted Output Power	802.11b : 18.53 dBm 802.11g : 12.98 dBm 802.11n (20 MHz) : 12.86 dBm 802.11n (40 MHz) : 11.70 dBm
Channels	802.11b,g,n (20 MHz): 11 CH 802.11n (40 MHz): 7 CH
Antenna Gain (peak)	2.6 dBi
Antenna Setup	802.11b/g/n (20, 40MHz) : 1TX / 1RX
Modulations	DSSS(BPSK,QPSK,CCK) for 802.11b OFDM(BPSK,QPSK,16QAM,64QAM) for 802.11g/n
Temperature Range	-10 ℃ ~ +50 ℃
Voltage	12 Vdc
Dimensions (L x W x H)	About 108.2 mm x 108.2 mm X 160.0 mm
Weight	About 485 g
HVIN (Hardware version number)	BRAVEN VALE
FVIN (Firmware Version Identification Number)	BRAVEN VALE
Remarks	-



# 4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

The Let ride been tested decording	FCC	IC		_
Name of Test	Paragraph No.	Paragraph No.	Result	Remark
Conducted Emission	15.207	RSS-GEN Issue 4 8.8	Complies	
Radiated Emission	15.209	RSS-GEN Issue 4 8.9	Complies	
6 dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 5.2	Complies	
Maximum Conducted Output Power	15.247(b)(3)	RSS-247 Issue 2 5.4	Complies	
Power Spectral Density	15.247(e)	RSS-247 Issue 2 5.2	Complies	
Conducted Spurious Emission	15.247(d)	RSS-247 Issue 2 5.5	Complies	
Radiated Spurious Emission	15.247(d)	RSS-247 Issue 2 5.5	Complies	
Maximum Permissible Exposure	1.1307(b)	RSS-102 Issue 5	Complies	





5. RECOMMENDATION/CONCLUSION

The data collected shows that the **BRAVEN LC WiFi SPEAKER FCC ID: Z7RBVALE**, **IC: 10013A-BVALE** is in compliance with Part 15.247 of the FCC Rule and RSS-247 Issue 2 of the IC Specification.

### 6. ANTENNA REQUIREMENTS

#### §15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the BRAVEN LC WiFi SPEAKER FCC ID: Z7RBVALE, IC: 10013A-BVALE is permanently attached and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

**BRAVEN LC** 

FCC ID: Z7RBVALE / IC: 10013A-BVALE

Page 12 of 74






### 7. DESCRIPTION OF TESTS

### **7.1 Conducted Emissions**

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6. A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH3-Z5) and (ESH2-Z5) of the 50 ohm/50 µH Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN (ESH3-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH2-Z5). Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ". If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs, All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentinefashion) to a 1 meter length. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time. The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

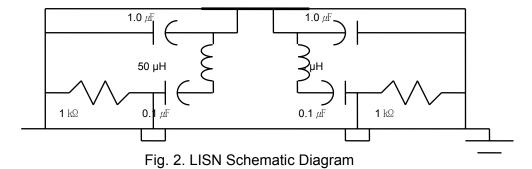

**BRAVEN LC** 

FCC ID: Z7RBVALE / IC: 10013A-BVALE

Page 13 of 74



### 7.2 Radiated Emissions

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013.

The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna(Rohde&Schwarz, HFH2-Z2) and 30 to 1000 MHz using Trilog broadband test antenna(Schwarzbeck, VULB 9163). Above 1 GHz, Horn antenna (Schwarzbeck BBHA 9120D: up to 18 GHz, Q-par Angus QSH20S20: 18 to 26.5 GHz, Q-par Angus QSH22S20: 26.5 to 40 GHz) was used.

For emissions testing at below 1GHz, The test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, The test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.

At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in KDB "558074 D01 DTS Meas Guidance v04" in section 12.2.4 and 12.2.5.3. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 1kHz, Detector = Peak, Trace mode = max hold. Allow max hold to run for at least 50 times (1/duty cycle) traces.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3


Radiated Emissions Limits per 47 CFR 15.209(a) and RSS-GEN Issue 4 8.9

**BRAVEN LC** 



### 7.3 6 dB Bandwidth

### Test Setup



#### **Test Procedure**

EUTs 6 dB bandwidth is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

RBW = 100 kHz

 $VBW \geq 3 \times RBW$ 

Detector = Peak

Trace mode = max hold

Sweep = auto

The bandwidth measurement function on the spectrum analyzer is used to measure the 6 dB bandwidth.

**BRAVEN LC** 



7.4 Maximum Conducted Output Power (average)

### **Test Setup**



### **Test Procedure**

EUTs Maximum Conducted Output Power (average) is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

Measure the duty cycle, x, of the transmitter output signal

Span to at least 1.5 times the OBW.

RBW = 1 - 5 % of the OBW, not to exceed 1MHz

VBW ≥  $3 \times RBW$ .

Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ 


Sweep time = auto

Detector = RMS

Trace average at least 100 traces in power averaging mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges

**BRAVEN LC** 





### 7.5 Maximum Power Spectral Density (average)

#### **Test Setup**



#### **Test Procedure**

EUTs Power Spectral Density is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

Center frequency = DTS channel center frequency

Span = at least 1.5 times the DTS bandwidth

 $RBW: 3 kHz \leq RBW \leq 100 kHz$ 

 $VBW \ge 3 \times RBW$ 

Detector = power averaging (RMS)

Ensure that the number of measurement points = sweep ≥ 2 x span / RBW

Sweep time = auto couple

Employ trace averaging (RMS) = minimum of 100 traces

Use the peak marker function to determine the maximum amplitude level


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

BRAVEN LC



### 7.6 Conducted Spurious Emissions

#### **Test Setup**



#### **Test Procedure**

EUTs Conducted spurious emissions are measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

#### 1) Reference Level

Center frequency = DTS channel center frequency

Span  $\geq$  1.5 times the DTS bandwidth

RBW = 100 kHz

 $VBW \geq 3 \times RBW$ 

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow trace to fully stabilize.

The peak search function on the spectrum analyzer is used to determine the maximum PSD level.

#### 2) Unwanted Emissions

Set the center frequency and span to encompass frequency range to be measured.

RBW = 100 kHz

 $VBW \ge 3 \times RBW$ 

Detector = peak

Sweep time = auto couple

Trace mode = max hold


Allow trace to fully stabilize

Use the peak marker function to determine the maximum amplitude level



### 7.7 Duty Cycle

#### **Test Setup**



### **Test Procedure**

EUTs duty cycle are measured at middle channel with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level. The spectrum analyzer setting is as follows.

Center frequency = Center frequency of the transmission

Span = zero

RBW = 3 MHz

VBW = 3 MHz

Detector = peak

Sweep time = at least 3 ms

Sweep mode = Single

The marker function on the spectrum analyzer is used to determine the duty cycle

The results of the duty cycle measurement according to the above test procedure

	Data rate	On time (ms)	On + Off time (ms)	Duty Cycle (%)	Duty Factor (dB)
b mode	1Mbps	ı	-	100	-
g mode	6Mbps	-	-	100	-
n(20MHz)mode	MCS0	-	-	100	-
n(40MHz)mode	MCS0	-	-	100	-

FCC ID : Z7RBVALE / IC : 10013A-BVALE

**BRAVEN LC** 



### 8. TEST DATA

### **8.1 Conducted Emissions**

#### FCC §15.207, RSS-Gen Issue 4 8.8

Frequency	Level	(dBμV)	*) Factor **) Line		Limit (dBμV)		Margin (dB)	
(MHz)	Q-Peak	Average	(dB)	) Line	Q-Peak	Average	Q-Peak	Average
0.15	53.5	42.3	10.50	L	65.8	55.8	12.3	13.5
0.18	44.5	16.6	10.50	N	64.6	54.6	20.1	38.0
0.23	42.8	35.0	10.40	N	62.3	52.3	19.5	17.3
0.55	35.8	35.1	10.60	L	56.0	46.0	20.2	10.9
1.89	24.3	22.1	10.60	N	56.0	46.0	31.7	23.9
12.05	24.5	15.7	11.00	N	60.0	50.0	35.5	34.3

**Line Conducted Emissions Tabulated Data** 


#### Notes:

- 1. Measurements using CISPR quasi-peak mode & average mode.
- 2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
- 3. \*) Factor = LISN + Cable Loss
- 4. \*\*) LINE : L = Line , N = Neutral
- 5. Highest channel (2462MHz) in b mode is the worst case.
- 6. The limit is on FCC §15.207(a) and IC RSS-GEN issue4 8.8.

BRAVEN LC Page 20 of 74



### Conducted Emission at the Mains port (Line + Neutral)\_b mode 2462MHz

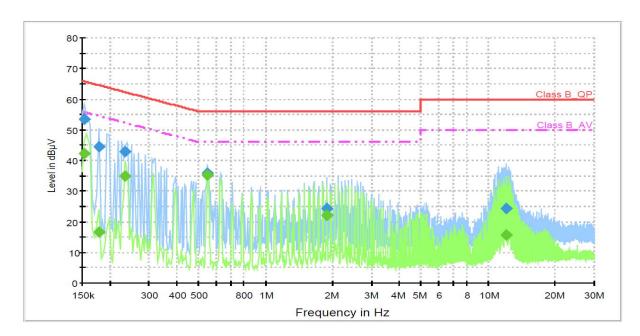



### TEST DATA

### **8.2 Radiated Emissions**

#### FCC §15.209, IC RSS-Gen Issue 4 8.9

#### Result

Frequency	Reading	Pol*	Antenna Heights	Turntable	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV/m)	(H/V)	(cm)	Angles (°)	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
43.80	55.52	V	107	270	-22.7	32.8	40.0	7.2
68.48	52.83	V	109	112	-26.7	26.1	40.0	13.9
166.55	62.24	V	108	-7	-27.4	34.8	43.5	8.7
250.01	61.50	Н	109	256	-22.9	38.6	46.0	7.4
265.80	52.02	V	130	15	-22.5	29.5	46.0	16.5
599.98	49.14	V	108	77	-13.7	35.4	46.0	10.6


**Radiated Measurements at 3meters** 

#### Notes:

- 1. All modes were measured and the worst-case emission was reported.
- 2. The radiated limits are shown on Figure 3. Above 1 GHz the limit is 500 μV/m.
- 3. \*Pol. H = Horizontal, V = Vertical
- 4. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- 5. Measurements using CISPR quasi-peak mode below 1 GHz.
- 6. The radiated emissions testing were made by rotating the receive antenna with horizontal, Vertical polarization. The worst date was recorded.
- 7. Lowest channel (2412MHz) in b mode is the worst case.
- 8. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- 9. The limit is on the FCC §15.209 and RSS-Gen Issue4 8.9



### Radiated emission below 1GHz\_ b mode 2412 MHz

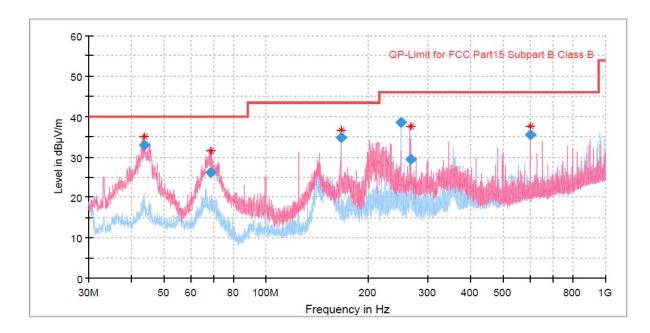



# 8.3 6 dB Modulated Bandwidth

### FCC §15.247(a)(2), IC RSS-247 Issue 2 5.2

### Test Mode: Set to Lowest channel, Middle channel and Highest channel

#### 802.11b mode

Channel	Frequency (MHz)	Result (MHz)	Limit (MHz)
Low	2412	9.09	0.5
Middle	2437	10.06	0.5
High	2462	9.60	0.5


#### 802.11q mode

Channel	Frequency (MHz)	Result (MHz)	Limit (MHz)
Low	2412	16.31	0.5
Middle	2437	16.36	0.5
High	2462	16.33	0.5

802.11n (20 MHz) mode

Channel	Frequency (MHz)	Result (MHz)	Limit (MHz)
Low	2412	17.41	0.5
Middle	2437	17.59	0.5
High	2462	17.35	0.5

**BRAVEN LC** 





# TEST DATA


802.11n (40 MHz) mode

<u> </u>							
Channel	Frequency (MHz)	Result (MHz)	Limit (MHz)				
Low	2422	35.82	0.5				
Middle	2437	36.30	0.5				
High	2452	36.04	0.5				




#### 802.11b mode




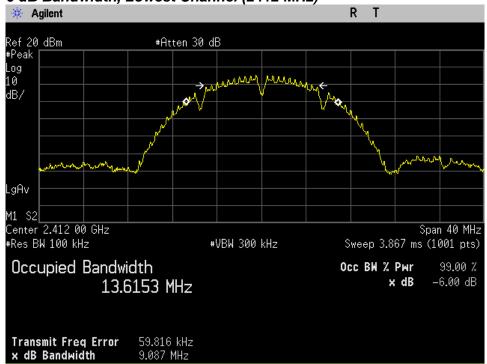

#### 6 dB Bandwidth, Middle Channel (2437 MHz)

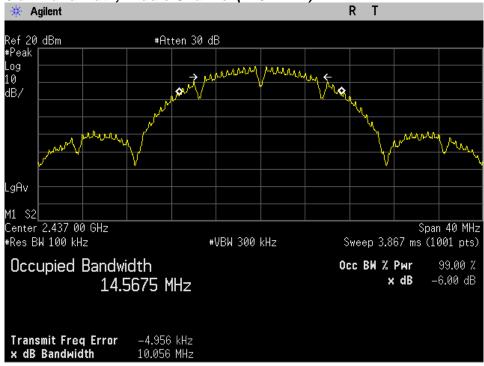




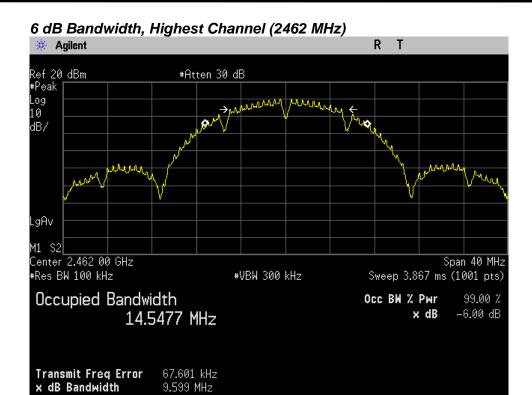


#### 802.11g mode



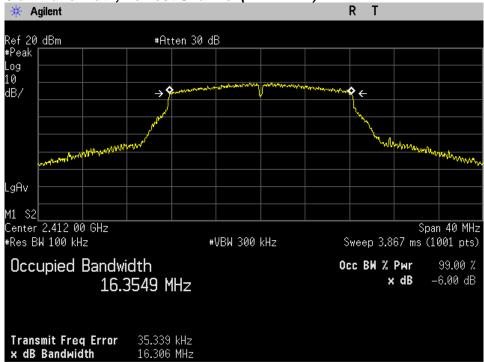






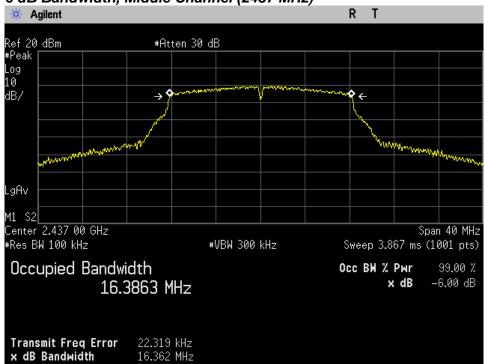


#### 6 dB Bandwidth, Highest Channel (2462 MHz)

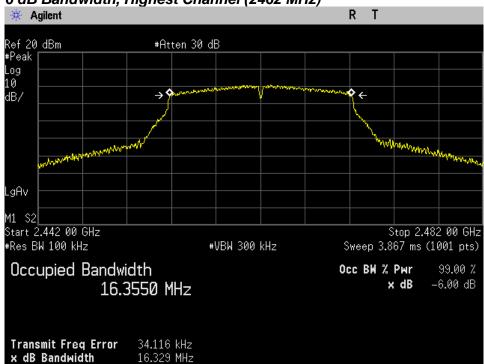




### 802.11n (20 MHz) mode




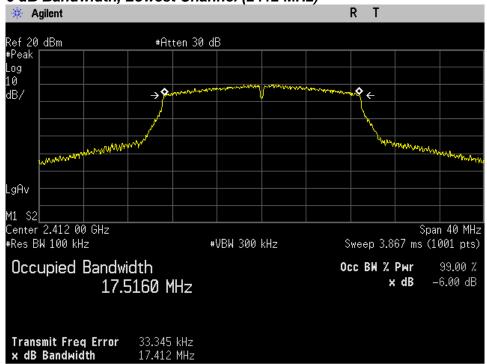

#### 6 dB Bandwidth, Middle Channel (2437 MHz)

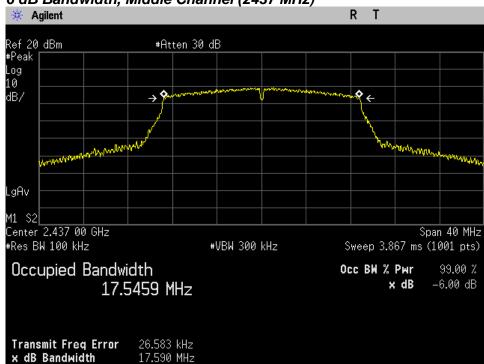




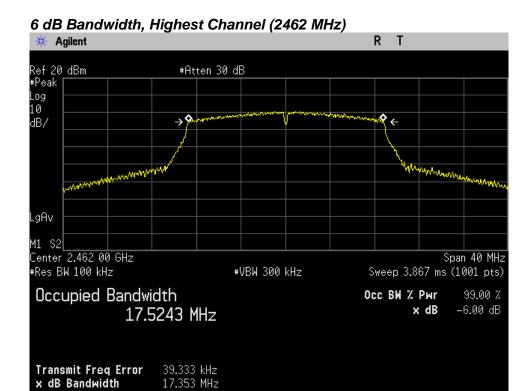

#### 802.11n (40 MHz) mode




39.333 kHz 17.353 MHz

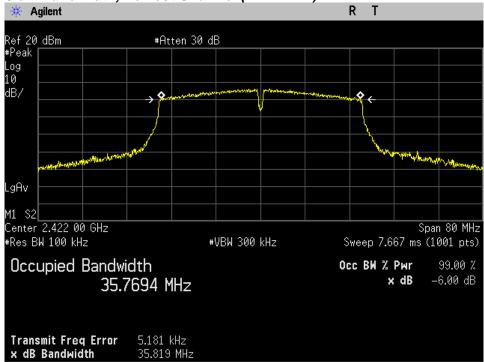






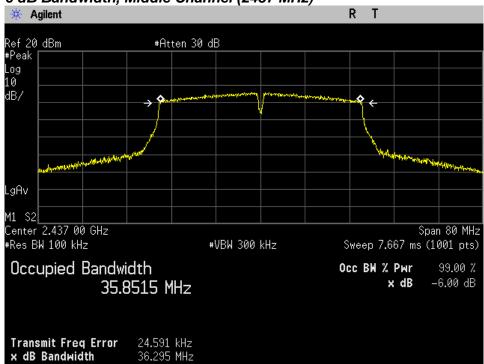

#### 6 dB Bandwidth, Highest Channel (2452 MHz)

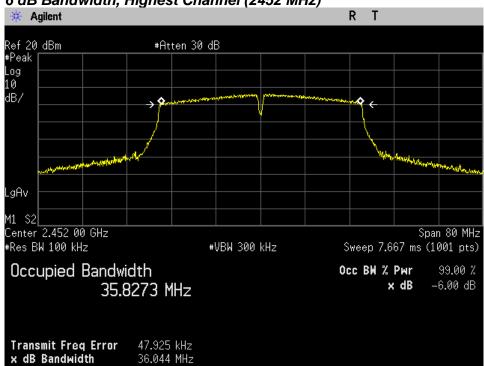



### 8.4 Maximum Conducted Output Power (average) and E.I.R.P

### FCC §15.247(b)(3), IC RSS-247 Issue 2 5.4

Test Mode: Set to Lowest channel, Middle channel and Highest channel

802.11b mode

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)
Lowest	2412	17.45	30.00	20.05	36.00
Middle	2437	17.50	30.00	20.10	36.00
Highest	2462	18.53	30.00	21.13	36.00

802.11g mode

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)
Lowest	2412	11.93	30.00	14.53	36.00
Middle	2437	12.00	30.00	14.60	36.00
Highest	2462	12.98	30.00	15.58	36.00



### TEST DATA

802.11n (20MHz) mode

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)
Lowest	2412	12.04	30.00	14.64	36.00
Middle	2437	11.83	30.00	14.43	36.00
Highest	2462	12.86	30.00	15.46	36.00

802.11n (40MHz) mode

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)
Lowest	2422	11.70	30.00	14.30	36.00
Middle	2437	11.57	30.00	14.17	36.00
Highest	2452	11.67	30.00	14.27	36.00

#### Note:

1. E.I.R.P was calculated by following equation according to KDB412172 D01 Determining ERP and EIRP v01r01.

$$E.I.R.P = P_T + G_T - Lc$$

 $P_T$  = transmitter outputpower (dBm)

 $G_T$  = Gain of the transmitting antenna in dBi, Peak antenna gain is **2.6 dBi**.

 $L_C$  = Signal attenuation in the connecting cable between the transmitter and antenna in dB. This factor of an integral antenna is negligible.

2. The following equation was used for spectrum offset:


Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)




### PLOT OF TEST DATA

#### 802.11b mode

### Maximum Conducted Output Power, Lowest Channel (2412 MHz)

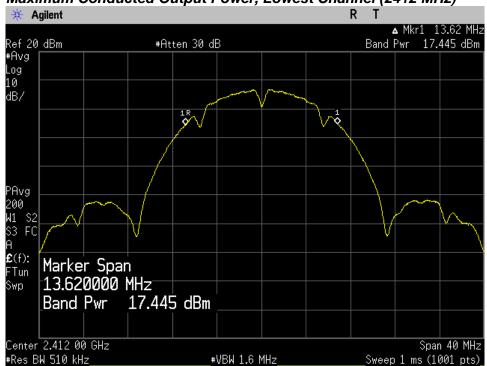


#### Maximum Conducted Output Power, Middle Channel (2437 MHz)

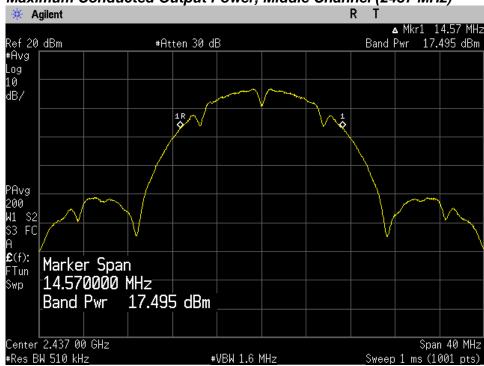




### PLOT OF TEST DATA

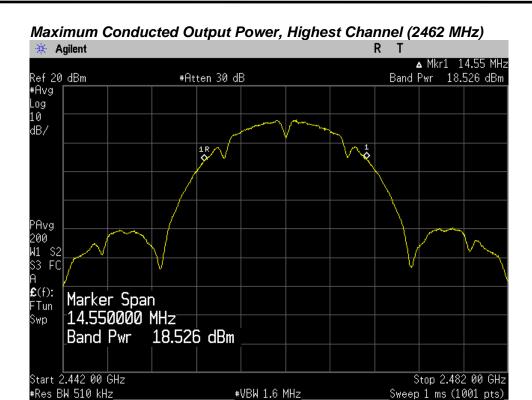

#### 802.11g mode

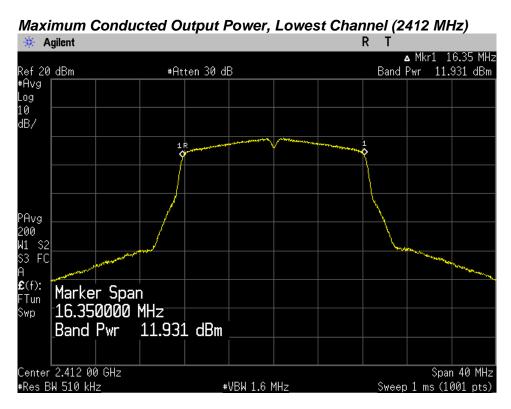


**BRAVEN LC** 



# PLOT OF TEST DATA



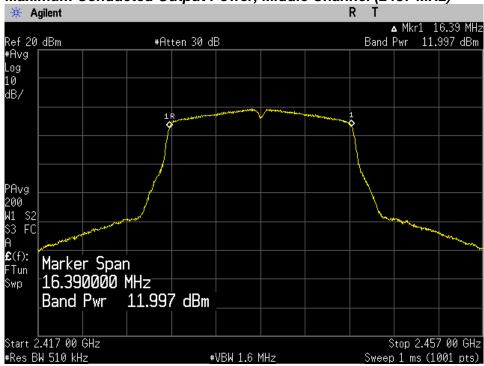


### Maximum Conducted Output Power, Highest Channel (2462 MHz)






### 802.11n (20 MHz) mode


### Maximum Conducted Output Power, Lowest Channel (2412 MHz)

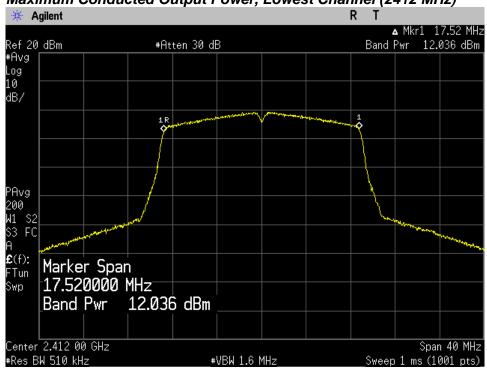


### Maximum Conducted Output Power, Middle Channel (2437 MHz)

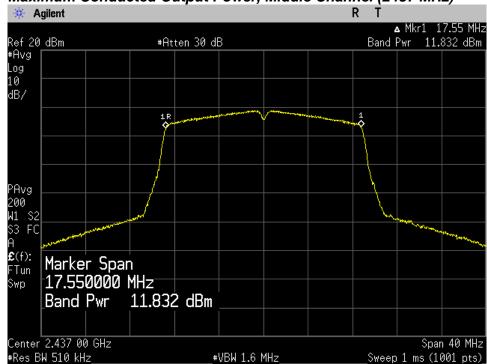



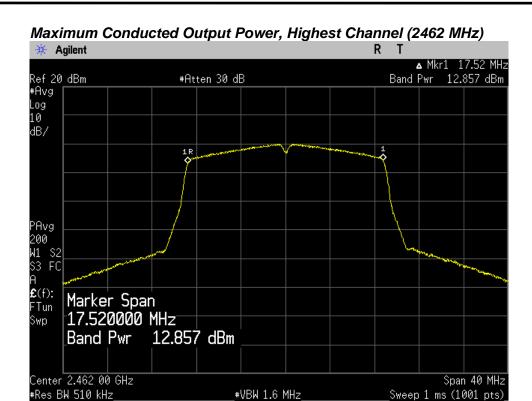


### 802.11n (40 MHz) mode

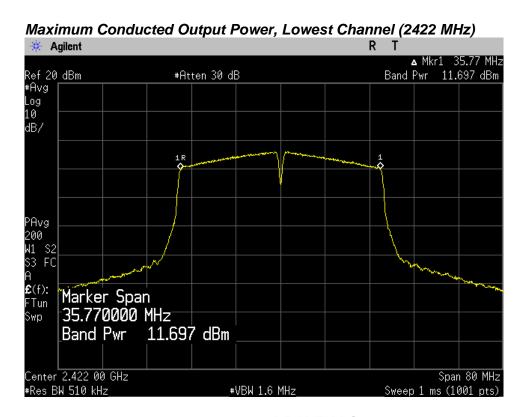


**BRAVEN LC** 





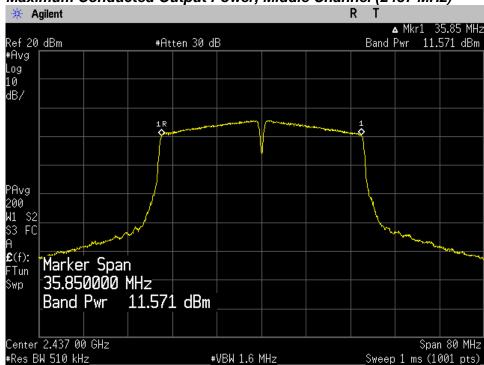

### Maximum Conducted Output Power, Highest Channel (2452 MHz)

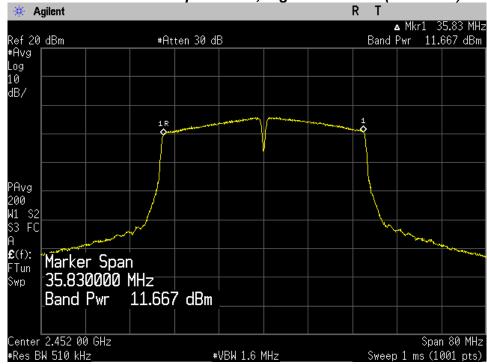



## 8.5 Maximum Power Spectral Density (average)

### FCC §15.247(e), IC RSS-247 Issue 2 5.2

Test Mode: Set to Lowest channel, Middle channel and Highest channel

### 802.11b mode

Channel	Frequency (MHz)	Maximum PSD (dBm)	Limit (dBm)
Lowest	2412	-0.02	8.00
Middle	2437	0.15	8.00
Highest	2462	1.08	8.00

### 802.11g mode

Channel	Frequency (MHz)	Maximum PSD (dBm)	Limit (dBm)
Lowest	2412	-6.85	8.00
Middle	2437	-7.06	8.00
Highest	2462	-5.87	8.00

**BRAVEN LC** NKQF-27-18 (Rev. 00) FCC ID: Z7RBVALE / IC: 10013A-BVALE



802.11n (20 MHz) mode

Channel	Frequency (MHz)	Limit (dBm)	
Lowest	2412	-7.02	8.00
Middle	2437	-7.33	8.00
Highest	2462	-6.23	8.00

802.11n (40 MHz) mode

Channel	nel Frequency (MHz) Maximum PSD (dBm)		Limit (dBm)
Lowest	2422	-10.37	8.00
Middle	2437	-10.73	8.00
Highest	2452	-10.69	8.00

### Note:

The following equation was used for spectrum offset:

Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)




### 802.11b mode


Maximum Power Spectral Density, Lowest Channel (2412 MHz)




Maximum Power Spectral Density, Middle Channel (2437 MHz)

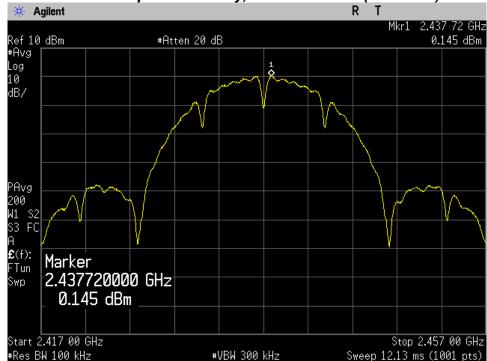



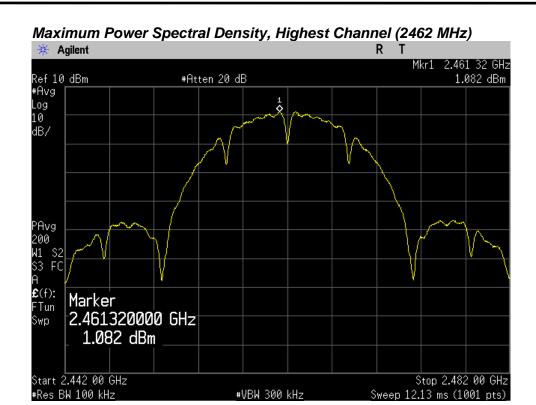


### 802.11g mode

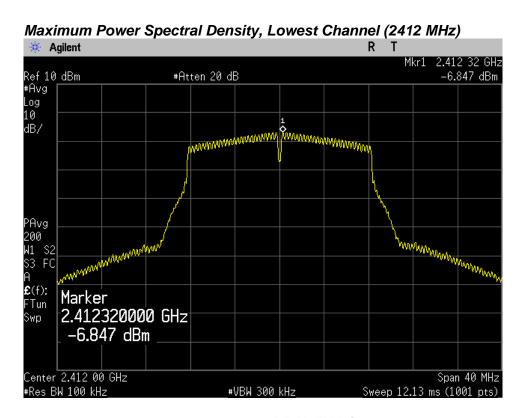


**BRAVEN LC** 





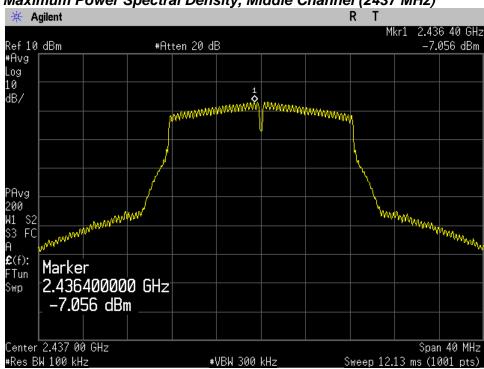


### Maximum Power Spectral Density, Highest Channel (2462 MHz)

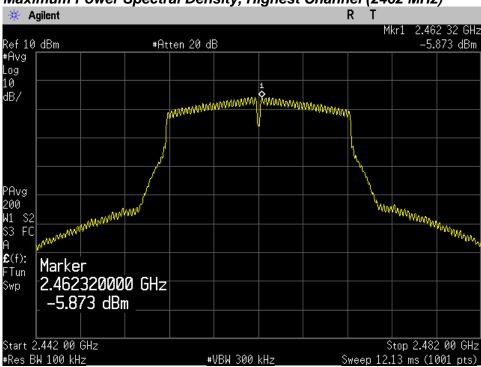




### 802.11n (20 MHz) mode




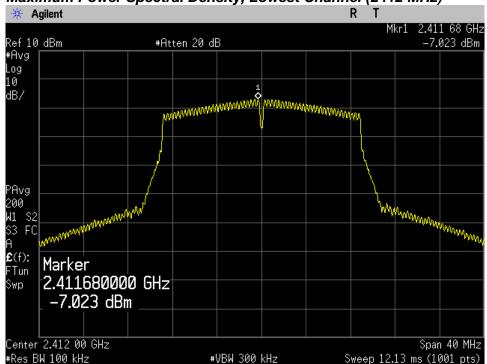


### Maximum Power Spectral Density, Middle Channel (2437 MHz)

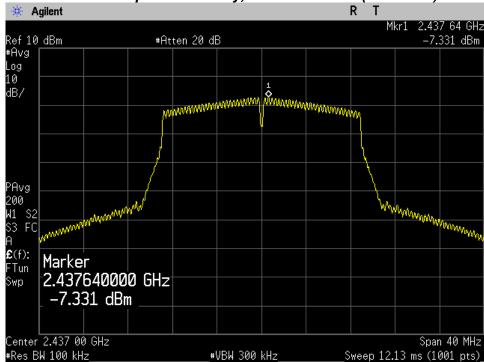



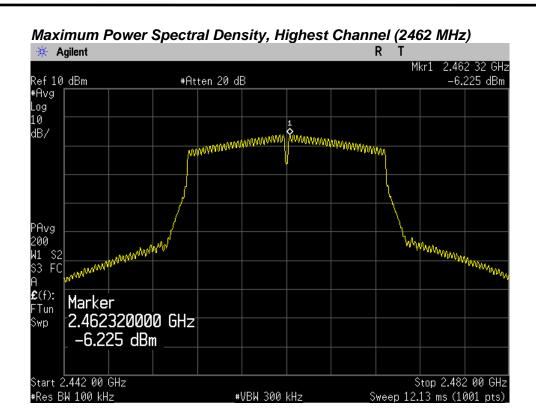


### 802.11n (40 MHz) mode

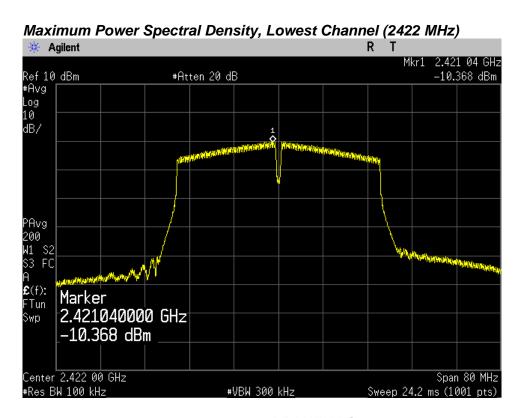


**BRAVEN LC** 





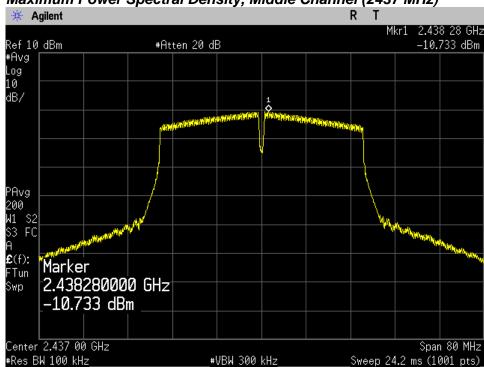

### Maximum Power Spectral Density, Highest Channel (2452 MHz)

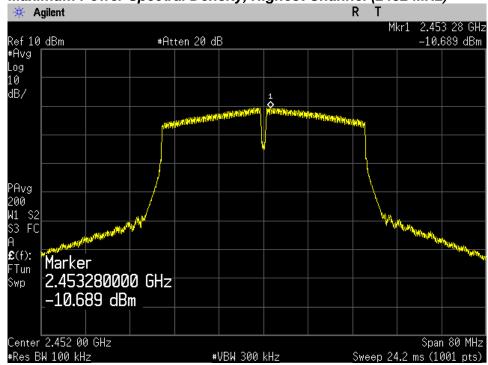



### ILSI DAIA

# **8.6 Conducted Spurious Emissions**

### FCC §15.247(d), IC RSS-247 Issue 2 5.5

## Test Mode: Set to Lowest channel, Middle channel and Highest channel

802.11b mode

Channel	Frequency (MHz) Reference Level (dBm)		Conducted Spurious Emissions (dBc)	Limit (dBc)
Low	2412	9.05	More than 30 dBc	30
Middle	2437	9.01	More than 30 dBc	30
High	2462	10.09	More than 30 dBc	30

802.11g mode

Channel	Frequency (MHz)	Reference Level (dBm)	Conducted Spurious Emissions (dBc)	Limit (dBc)
Low	2412	412 -0.24 More th		30
Middle	2437	-0.31	More than 30 dBc	30
High	2462	0.85	More than 30 dBc	30

802.11n (20 MHz) mode

Channel	Frequency (MHz) Reference Level (		Conducted Spurious Emissions (dBc)	Limit (dBc)
Low	2412	-0.44	-0.44 More than 30 dBc	
Middle	2437	-0.75	More than 30 dBc	30
High	2462	0.54	More than 30 dBc	30



802.11n (40 MHz) mode

Channel	Frequency (MHz)	Reference Level (dBm)	Conducted Spurious Emissions (dBc)	Limit (dBc)
Low	2422 -1.61		More than 30 dBc	30
Middle	2437	-3.68	More than 30 dBc	30
High	2452	-3.54	More than 30 dBc	30


### Notes:

- 1. Reference level in Lowest and Highest channel were measured in Bandedge measuremenst.
- 2. The cable and attenuator loss from 30 MHz to 26 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.




### 802.11b mode



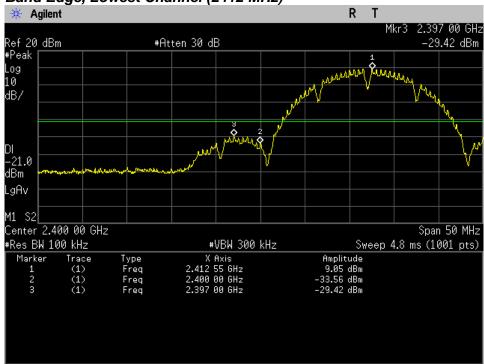


### Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2412 MHz)

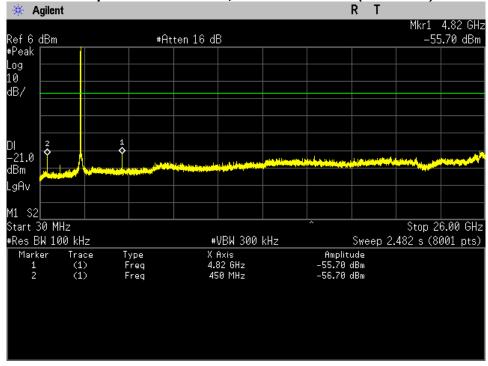







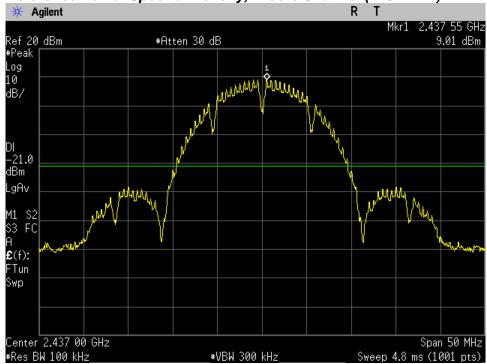


### Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2437 MHz)

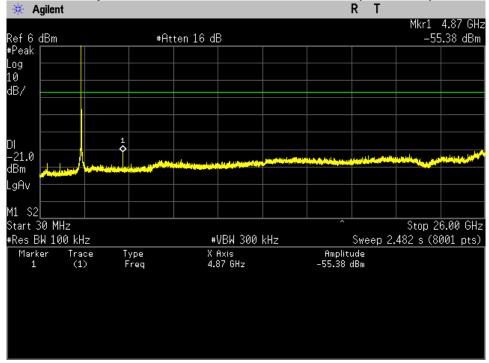



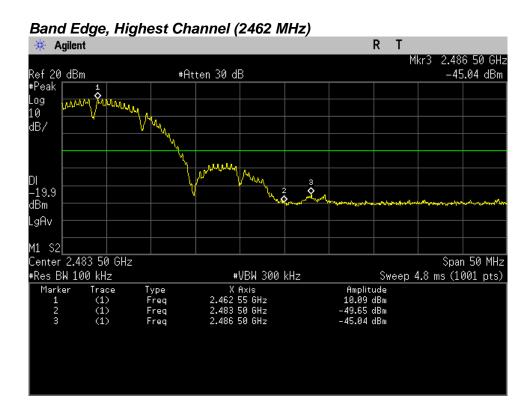




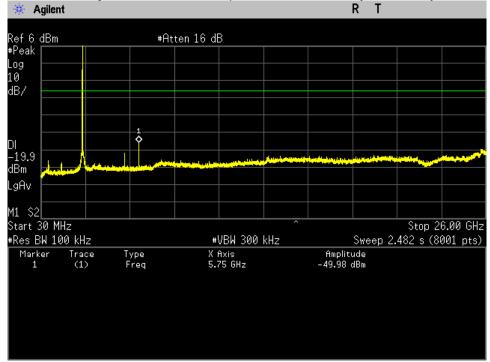




### 802.11g mode

Band Edge, Lowest Channel (2412 MHz)

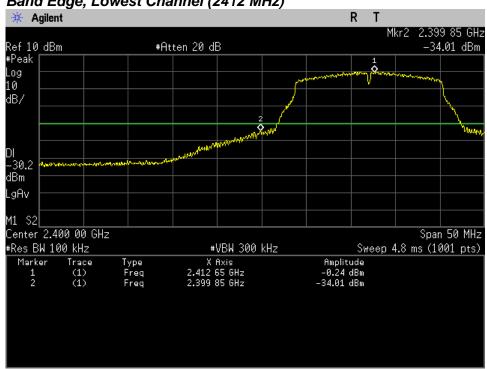


Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2412 MHz)

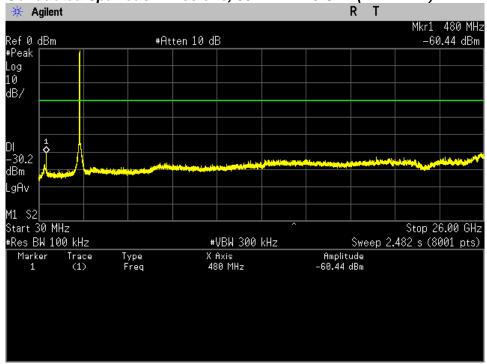







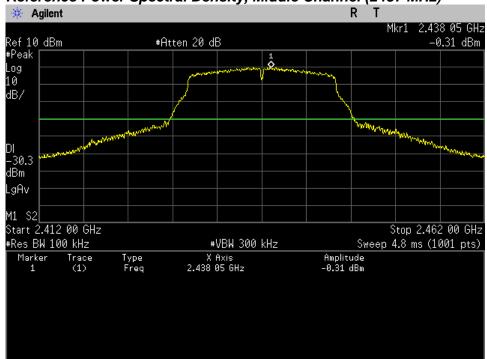


### Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2437 MHz)

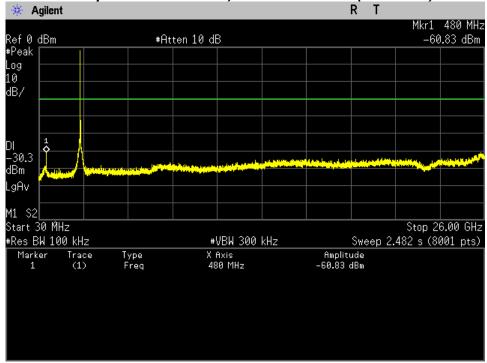



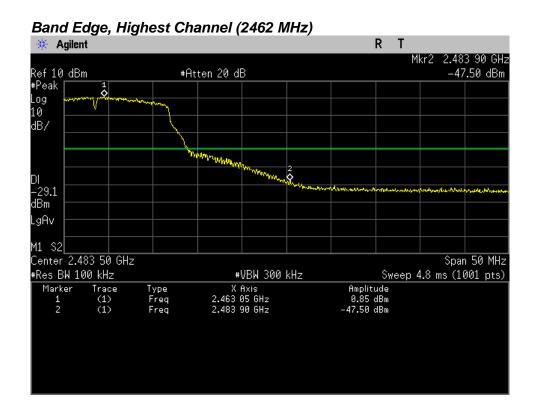




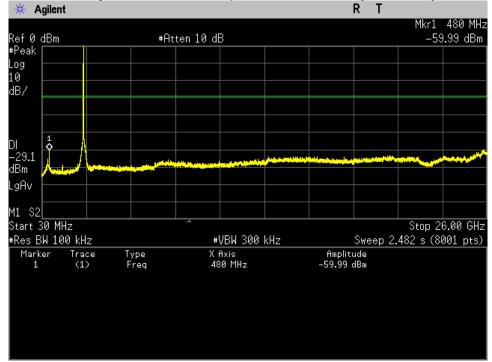




### 802.11n (20 MHz) mode



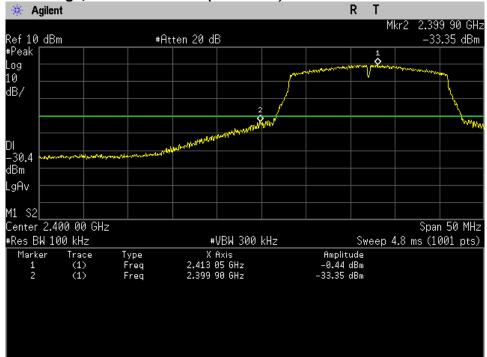




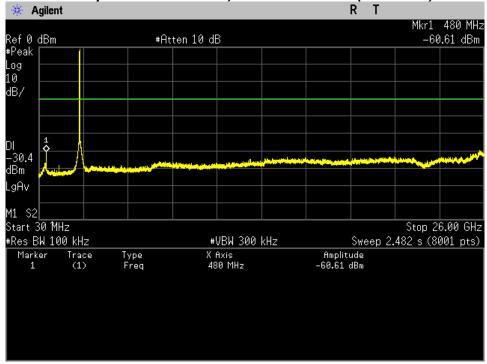






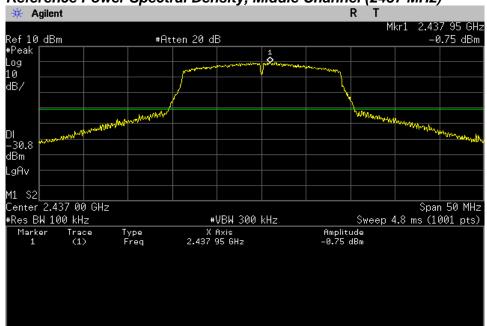


### Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2437 MHz)

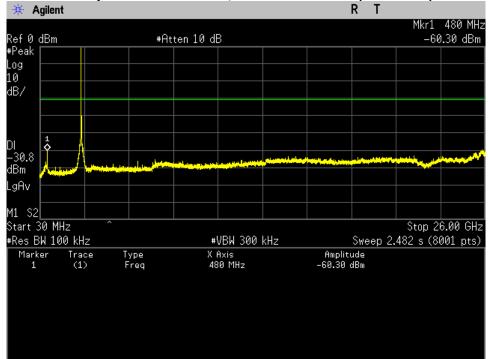






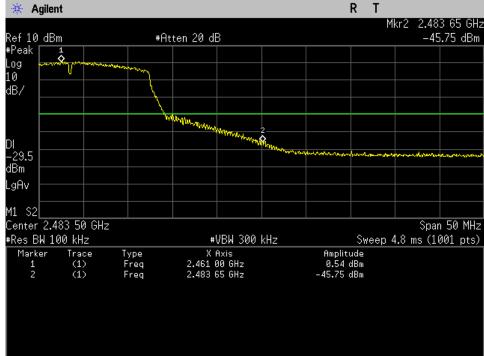


### Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2462 MHz)

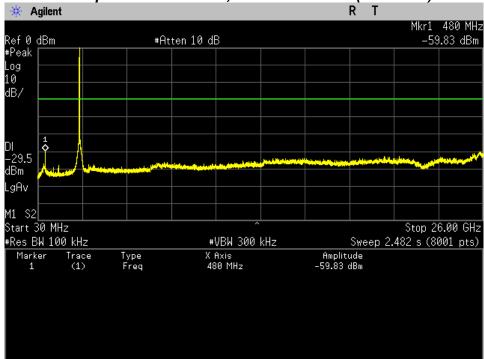




### 802.11n (40 MHz) mode

Band Edge, Lowest Channel (2422 MHz)

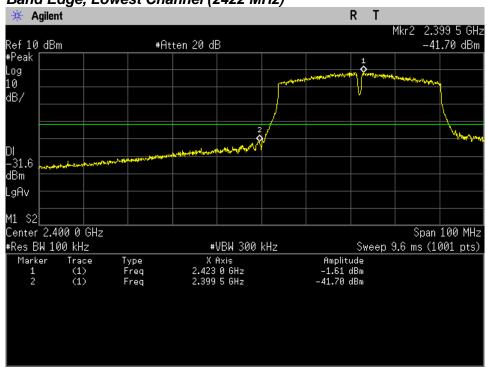


Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2422 MHz)

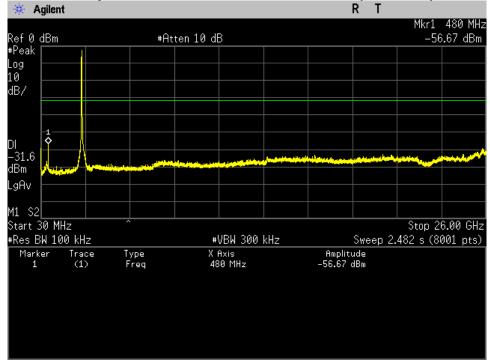





Reference Power Spectral Density, Middle Channel (2437 MHz)

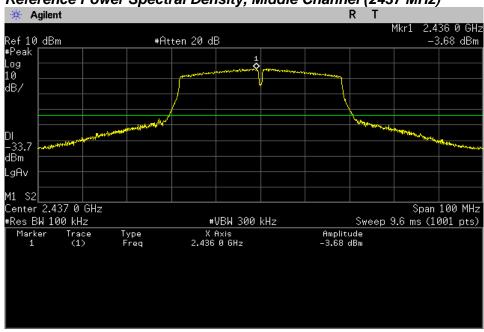


Conducted Spurious Emissions, 30 MHz ~ 26 GHz (2437 MHz)

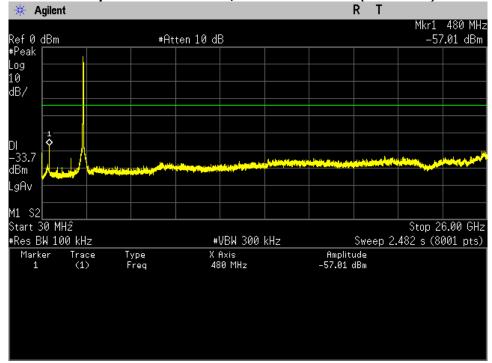



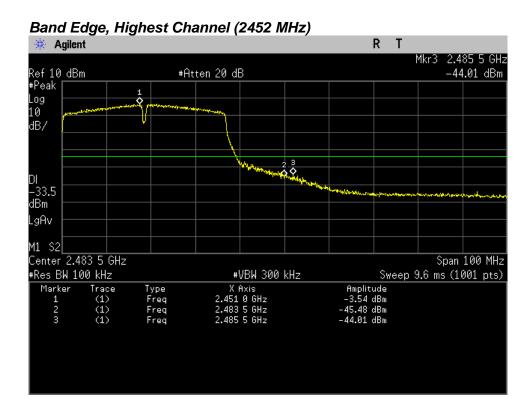



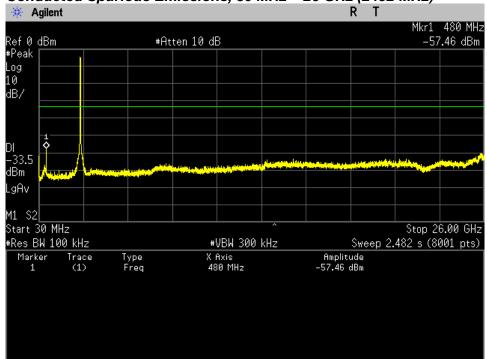

# **8.7 Radiated Spurious Emissions**

FCC §15.247(d), IC RSS-247 Issue 2 5.5

Test Mode: Set to Lowest channel, Middle channel and Highest channel

### 802.11b mode

#### **Lowest Channel**

Frequency	Reading	Pol*	modo	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4824.17	48.6	V	peak	2.1	50.7	74.0	23.3

### **Middle Channel**

Frequency	Reading	Pol*	modo	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4873.83	46.8	V	peak	2.2	49.0	74.0	25.0

**Highest Channel** 

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4924.00	47.9	V	peak	2.4	50.3	74.0	23.7

**BRAVEN LC** 



## 802.11g mode

#### **Lowest Channel**

Frequency	Reading	Pol*	mode	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
1200.50	53.1	Н	peak	-11.3	41.8	74.0	32.2

### **Middle Channel**

Frequency	Reading	Pol*	modo	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4874.67	41.9	V	peak	2.2	44.1	74.0	29.9

**Highest Channel** 

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4924.50	41.7	Н	peak	2.4	44.1	74.0	29.9



## 802.11n (20 MHz) mode

### **Lowest Channel**

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4824.50	43.0	V	peak	2.1	45.1	74.0	28.9

### **Middle Channel**

Frequency	Reading	Pol*	modo	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4871.83	41.9	V	peak	2.2	44.1	74.0	29.9

**Highest Channel** 

Frequency	Reading	Pol*	mode	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4925.83	42.1	V	peak	2.3	44.4	74.0	29.6

FCC and IC Certification



## TEST DATA

### 802.11n (40 MHz) mode

#### **Lowest Channel**

Frequency	Reading	Pol*	mode	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4842.67	41.0	V	peak	2.1	43.1	74.0	30.9

#### Middle Channel


Frequency	Reading	Pol*	modo	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4875.33	41.1	V	peak	2.5	43.6	74.0	30.4

**Highest Channel** 

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
4906.33	41.4	Н	peak	2.6	44.0	74.0	30.1

#### Note:

- 1. \*Pol. H = Horizontal V = Vertical
- 2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- Average measurement was not performed because peak-detected emission complies with the average limit.
- 4. Other spurious was under 30 dB below Fundamental.
- 5. Lowest channel (2412MHz) in b mode was the worst condition.
- 6. The radiated emissions testing were made by rotating the receive antenna with Horizontal, Vertical polarization. The worst data was recorded.
- 7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
- 8. Average emissions were measured using RBW = 1 MHz, VBW = 1 kHz, Detector = Peak, as specified in "12.2.5.3 Average Power Measurement Procedures" in "558074 D01 DTS Meas Guidance v04".
- 9. The spectrum was measured from 9 kHz to 10<sup>th</sup> harmonic and the worst-case emissions were reported. No significant emissions were found beyond the 3nd harmonic for this device.






## PLOTS OF EMISSIONS


### **Worst Case**


### 802.11b mode

## Lowest channel: 1 GHz to 8 GHz\_Peak

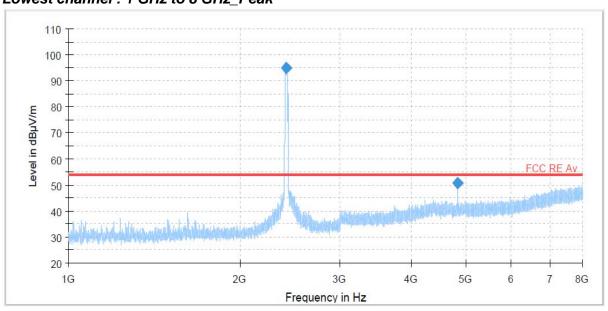

### Lowest channel: 8 GHz to 18 GHz Peak

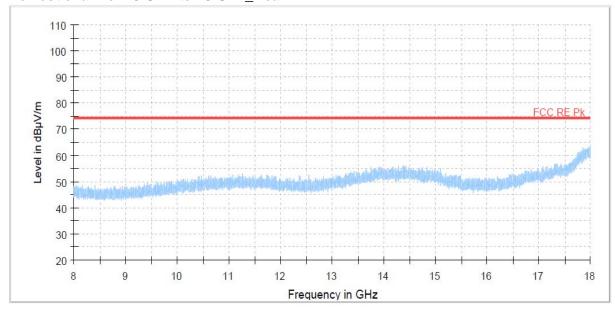







## PLOTS OF EMISSIONS

## Lowest channel: 8 GHz to 18 GHz\_Average

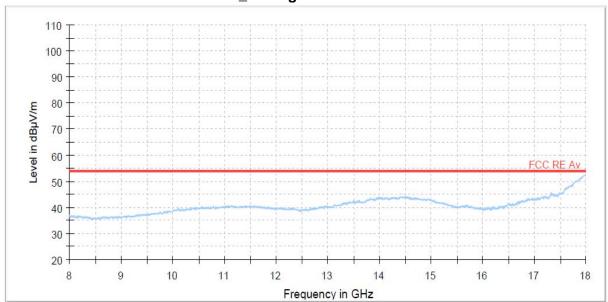

### Lowest channel: 18 GHz to 26.5 GHz\_Peak

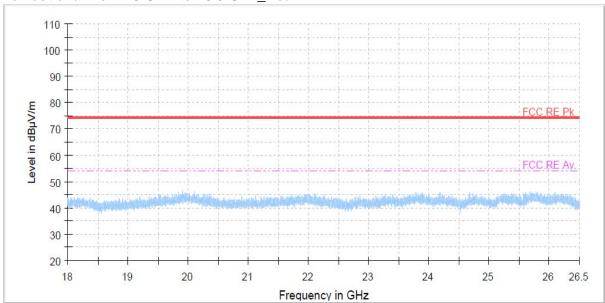



## 8.8 Radiated Band Edge

FCC §15.247(d), IC RSS-247 Issue 2 5.5

**Test Mode: Set to Lowest channel and Highest channel** 

### 802.11b mode

#### **Lowest Channel**

	_						
Frequency	Reading	Pol*	d.a	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
2385.98***	60.1	Н	peak	-8.4	51.7	74.0	22.3
2390.00***	59.2	Н	peak	-8.3	50.9	74.0	23.1

**Highest Channel** 

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
2483.50***	60.0	Н	peak	-8.1	51.9	74.0	22.1



## 802.11g mode

### **Lowest Channel**

Frequency	Reading	Pol*		AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
2390.00	65.6	Н	peak	-8.3	57.3	74.0	16.7
2390.00	51.5	Н	average	-8.3	43.2	54.0	10.8

**Highest Channel** 

inghest one							
Frequency	Reading	Pol*		AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
2483.50	66.5	Н	peak	-8.1	58.4	74.0	15.6
2483.50	55.2	Н	average	-8.1	47.1	54.0	6.9

## 802.11n (20 MHz) mode

### **Lowest Channel**

Frequency (MHz)	Reading (dBµV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2390.00	64.8	Н	peak	-8.3	56.5	74.0	17.5
2390.00	52.7	Н	average	-8.3	44.4	54.0	9.6

**Highest Channel** 

Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)
2483.50	72.9	Н	peak	-8.1	64.8	74.0	9.2
2483.50	57.0	Н	average	-8.1	48.9	54.0	5.1

FCC and IC Certification



## TEST DATA

### 802.11n (40 MHz) mode

#### **Lowest Channel**

Frequency (MHz)	Reading (dBµV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2390.00	68.7	Η	peak	-8.3	60.4	74.0	13.6
2390.00	57.1	Н	average	-8.3	48.8	54.0	5.2

**Highest Channel** 

nghost oname.								
Frequency	Reading	Pol*	mada	AF+CL+Amp	Result	Limit	Margin	
(MHz)	(dBµV)	(H/V)	mode	(dB)**	(dBµV/m)	(dBµV/m)	(dB)	
2483.50	68.2	Н	peak	-8.1	60.1	74.0	13.9	
2485.88	74.9	Н	peak	-8.1	66.8	74.0	7.2	
2483.50	58.9	Н	average	-8.1	50.8	54.0	3.2	

#### Note:


- 1. \*Pol. H = Horizontal V = Vertical
- 2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- 3. \*\*\*Average measurement was not performed because peak-detected emission complies with the average limit.
- 4. Other spurious was under 30 dB below Fundamental.
- 5. Highest channel (2452MHz) in n mode(40MHz) was the worst condition.
- 6. The radiated emissions testing were made by rotating the receive antenna with Horizontal, Vertical polarization. The worst data was recorded.
- 7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
- 8. Average emissions were measured using RBW = 1 MHz, VBW = 1 kHz, Detector = Peak, as specified in "12.2.5.3 Average Power Measurement Procedures" in "558074 D01 DTS Meas Guidance v04".




### **Worst Case**

### 802.11n mode(40MHz)



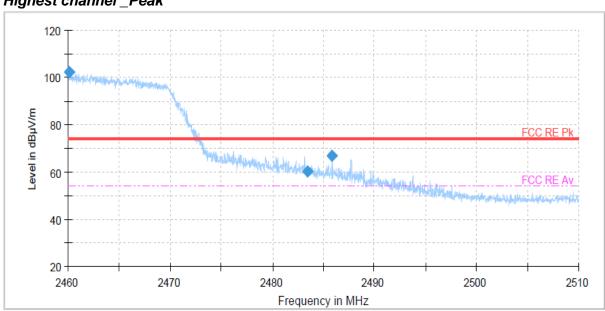

### Highest channel \_Average

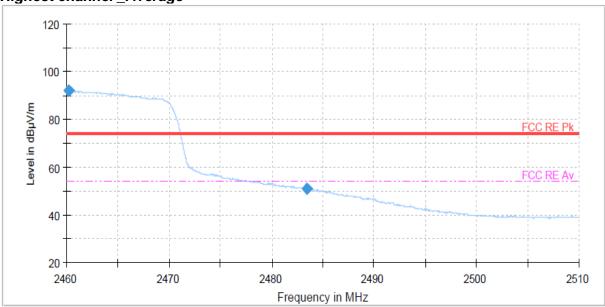



# 9. TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	*Test Receiver	R&S	ESU 40	100202	Apr. 04 2017	1 year
2	*Test Receiver	R&S	ESCS30	100302	Oct. 07 2016	1 year
3	*Attenuator	PASTERNACK	PE7395-10	1441-1	Jul. 13 2017	1 year
4	*Attenuator	FAIRVIEW	SA3N5W-06	N/A	Jan. 09 2017	1 year
5	*Attenuator	FAIRVIEW	SA3N5W-10	N/A	Apr. 03 2017	1 year
6	Attenuator	WEINSCHEL	56-10	58765	Oct. 09 2016	1 year
7	*Amplifier	R&S	SCU 01	10029	Apr. 03 2017	1 year
8	*Amplifier	R&S	SCU18F	180025	Apr. 03 2017	1 year
9	*Amplifier	R&S	SCU26	10011	Jul. 13 2017	1 year
10	Amplifier	R&S	SCU40	100380	Jul. 13 2017	1 year
11	Pre Amplifier	HP	8449B	3008A00107	Jan. 10 2017	1 year
12	Spectrum Analyzer	R&S	FSW43	100732	Apr. 11 2017	1 year
13	*Spectrum Analyzer	Agilent	E4440A	MY44303257	Oct. 06 2016	1 year
14	*Spectrum Analyzer	R&S	FSW43	104084	Apr. 04 2017	1 year
15	*Loop Antenna	R&S	HFH2-Z2	100279	Feb. 22 2016	2 year
16	*Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-508	Feb. 13 2017	2 year
17	*Horn Antenna	Q-par Angus	QSH20S20	8179	Aug. 01 2017	2 year
18	Horn Antenna	Q-par Angus	QSH22K20	8180	Aug. 02 2017	2 year
19	*Trilog-Broadband Antenna	SCHWARZBECK	VULB 9163	946	Apr. 14 2017	2 year
20	*LISN	R&S	ESH3-Z5	833874/006	Oct. 06 2016	1 year
21	ESH2-Z5 Artiticial Mains Network	R&S	ESH2-Z5	100227	Apr. 04 2017	1 year
22	*Position Controller	INNCO	CO2000	12480406/L	N/A	N/A
23	*Controller	INNCO	CO3000	CO3000/937/38330516/L	N/A	N/A
24	*Turn Table	INNCO	DS1200S	N/A	N/A	N/A
25	*Turn Table	INNCO	DT2000-2t	N/A	N/A	N/A
26	*Antenna Mast	INNCO	MA4000	N/A	N/A	N/A
27	*TILT Antenna Mast	INNCO	MA4640-XP-EP	N/A	N/A	N/A
28	*Open Switch And Control Unit	R&S	OSP-120	100081	N/A	N/A
29	*Open Switch And Control Unit	R&S	OSP-120	100015	N/A	N/A
30	*Shielded Room	Seo-Young EMC	N/A	N/A	N/A	N/A
31	*Anechoic Chamber	Seo-Young EMC	N/A	N/A	N/A	N/A
32	*WiFi Filter Bank	R&S	U083	N/A	N/A	N/A
33	*WiFi Filter Bank	R&S	U082	N/A	N/A	N/A

<sup>\*)</sup> Test equipment used during the test

FCC and IC Certification



10. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

### 1. Conducted Uncertainty Calculation

		Uncerta	ainty of <i>Xi</i>	Coverage			
Source of Uncertainty	Χi	Value (dB)	Probability Distribution	factor k	<i>u(Xi)</i> (dB)	Ci	Ci u(Xi) (dB)
Receiver reading	RI	± 0.1	normal 1	1.000	0.1	1	0.1
Attenuation AMN-Receiver	LC	± 0.08	normal 2	2.000	0.04	1	0.04
AMN Voltage division factor	LAMN	± 0.8	normal 2	2.000	0.4	1	0.4
Sine wave voltage	dVSW	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	dVPA	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	dVPR	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	dVNF	± 0.00	-	-	0.00	1	0.00
AMN Impedance	dΖ	± 1.80	triangular	2.449	0.73	1	0.73
(a) Mismatch	М	+ 0.70	U-Shaped	1.414	0.49	1	0.49
Mismatch	М	- 0.80	U-Shaped	1.414	- 0.56	1	- 0.56
Measurement System Repeatability	RS	0.05	normal 1	1.000	0.05	1	0.05
Remark	(a): AMN-Receiver Mismatch : +     (b): AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			± 1.88			
Expended Uncertainty U	Normal ( <i>k</i> = 2)			± 3.76			

**BRAVEN LC** NKQF-27-18 (Rev. 00) FCC ID: Z7RBVALE / IC: 10013A-BVALE



# 2. Radiation Uncertainty Calculation

		Uncert	ainty of <i>Xi</i>	Coverage		Ci	
Source of Uncertainty	Xi	Value (dB)	Probability Distribution	factor k	<i>u(Xi)</i> (dB)		Ci u(Xi) (dB)
Measurement System Repeatability	RS	0.34	normal 1	1.00	0.34	1	0.34
Receiver reading	Ri	± 0.02	normal 2	2.00	0.01	1	0.01
Sine wave voltage	dVsw	± 0.17	normal 2	2.00	0.09	1	0.09
Pulse amplitude response	dVpa	± 0.92	normal 2	2.00	0.46	1	0.46
Pulse repetition rate response	dVpr	± 0.35	normal 2	2.00	0.18	1	0.18
Noise floor proximity	dVnf	± 0.50	normal 2	2.00	0.25	1	0.25
Antenna Factor Calibration	AF	± 2.00	rectangular	√3	1.15	1	1.15
Cable Loss	CL	± 1.00	normal 2	2.00	0.50	1	0.50
Antenna Directivity	AD	± 0.00	rectangular	√3	0.00	1	0.00
Antenna Factor Height Dependence	AH	± 2.00	rectangular	√3	1.15	1	1.15
Antenna Phase Centre Variation	AP	± 0.20	rectangular	√3	0.12	1	0.12
Antenna Factor Frequency Interpolation	Ai	± 0.25	rectangular	√3	0.14	1	0.14
Site Imperfections	Si	± 4.00	triangular	√6	1.63	1	1.63
Measurement Distance Variation	DV	± 0.60	rectangular	√3	0.35	1	0.35
Antenna Balance	Dbal	± 0.90	rectangular	√3	0.52	1	0.52
Cross Polarisation	DCross	± 0.00	rectangular	√3	0.00	1	0.18
Mismatch	М	+ 0.98 - 1.11	U-Shaped	√2	0.74	1	0.74
EUT Volume Diameter	Vd	0.33	normal 1	1.00	0.33	1	0.11
Remark							
Combined Standard Uncertainty	Normal						
Expended Uncertainty U	Normal ( <i>k</i> = 2)						