

## **Certification Test Report**

**FCC ID: Z9O-FAS1533  
IC: 10060A-FAS1533**

**FCC Rule Part: 15.209  
IC Radio Standards Specification: RSS-210**

**ACS Report Number: 13-2145.W06.3A**

Manufacturer: UltraClenz, LLC  
Model(s): FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03

**Test Begin Date: November 4, 2013  
Test End Date: January 8, 2014**

**Report Issue Date: April 9, 2014**



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACLASS, ANSI, or any agency of the Federal Government.

**Project Manager:**

A handwritten signature in black ink, appearing to read "Jean-Charles" followed by a surname.

**Thierry Jean-Charles  
EMC Engineer  
Advanced Compliance Solutions, Inc.**

**Reviewed by:**

A handwritten signature in black ink, appearing to read "Kirby" followed by a surname.

**Kirby Munroe  
Director, Wireless Certifications  
Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 15 pages**

## **TABLE OF CONTENTS**

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose.....	3
1.2	Product description .....	3
1.3	Test Methodology and Considerations .....	3
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
2.1	Location.....	4
2.2	Laboratory Accreditations/Recognitions/Certifications .....	4
2.3	Radiated & Conducted Emissions Test Site Description .....	5
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>7</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT.....</b>	<b>8</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>9</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....</b>	<b>9</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>10</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	10
7.2	20dB / 99% Bandwidth: FCC: Section 15.209 / IC RSS-Gen 4.6.1 .....	10
7.3	Radiated Spurious Emissions – FCC: Section 15.209 / IC: RSS-210 2.5 .....	12
<b>8</b>	<b>CONCLUSION.....</b>	<b>14</b>

## **1 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

### **1.2 Product description**

Models FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03 are soap/sanitizer beacons which include three transceivers operating at 125 kHz, 433 MHz and 2405 MHz. Each model variant is electrically identical and differs only by the cosmetic housing color and power cable length configuration. The FAS1533 series of models are part of a patient safeguard system insuring proper hygiene of healthcare workers. The device wakes-up a badge when the dispenser is activated, collects badge's ID via 2.4 GHz and transmits it to 433 MHz network.

#### Technical Details

Frequency of Operation: 125.6 kHz

Number of Channels: 1

Modulation: OOK

Data Rate: 2.4 kbps

Antenna: Coil Antenna

Input Voltage: 3 VDC battery

Manufacturer Information:

UltraClenz, LLC

1201 Jupiter Park Drive

Jupiter, FL 33458

Test Sample Serial Number(s): 1336UB024

Test Sample Condition: Good

### **1.3 Test Methodology and Considerations**

Models FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03 are electrically identical and differ only by the cosmetic housing color and power cable length configuration. Model FAS1533-02 was evaluated for full compliance and deemed representative of all model variants. The unit was evaluated for radiated emissions for the 125 kHz transmitter in the orientation of typical installation.

The 125 kHz radio does not transmit simultaneously with the 433 MHz and the 2405 MHz co-located radios, per the customer's theory of operation. Therefore, the 125 kHz radio was not evaluated for inter-modulation products with the co-located 433 MHz and 2405 MHz radios.

The 433 MHz and 2405 MHz transmitters are evaluated separately in their respective certification reports. The unintentional emissions evaluation is documented separately in a verification report.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089  
Industry Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACCLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

## 2.3 Radiated & Conducted Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

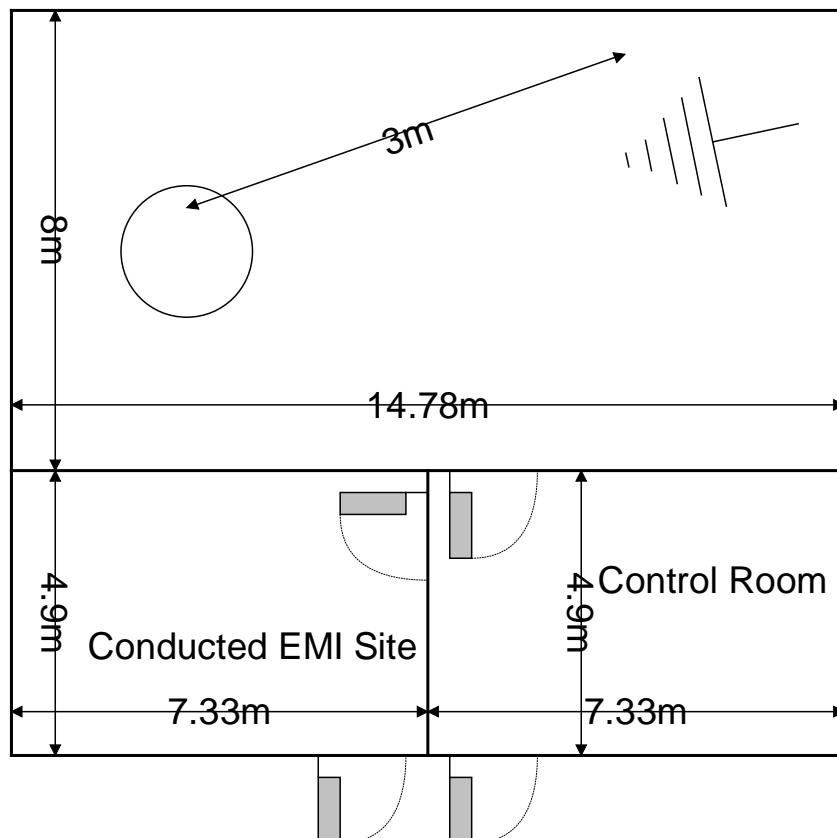


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are  $7.3 \times 4.9 \times 3 \text{ m}^3$ . As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50 50  $\Omega$ /50  $\mu\text{H}$  and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

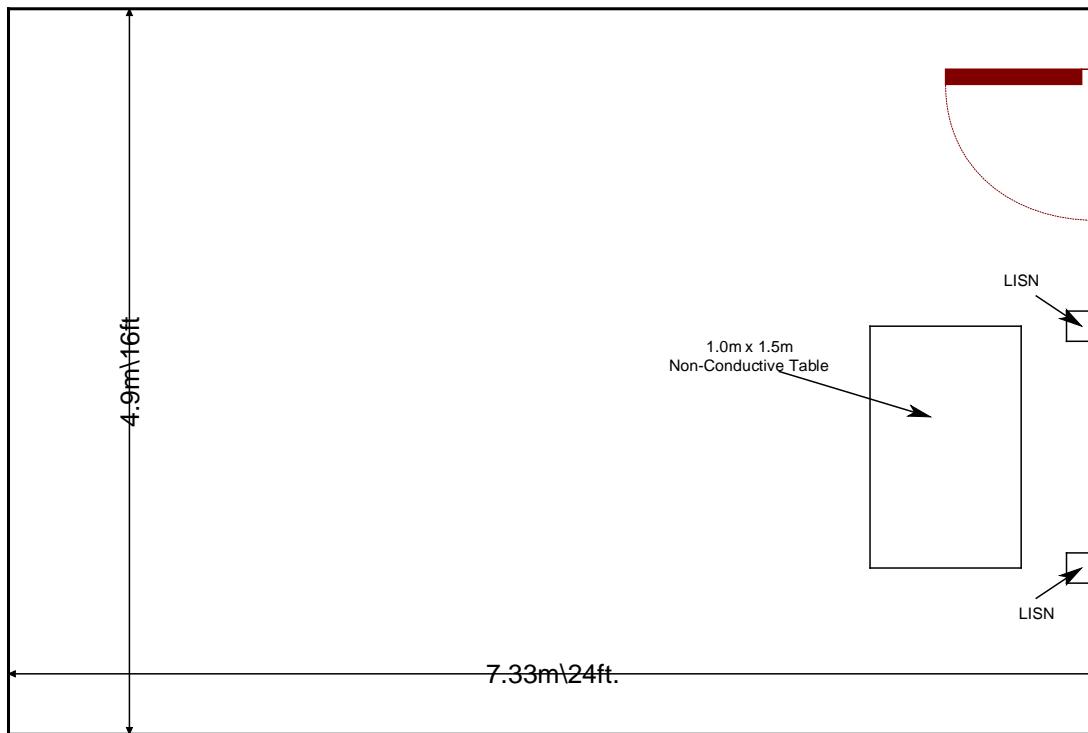


Figure 2.3.2-1: AC Mains Conducted EMI Site

### 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radio communication Equipment, Issue 3, December 2010.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
523	Agilent	E7405	Spectrum Analyzers	MY45103293	1/8/2013	1/8/2015
524	Chase	CBL6111	Antennas	1138	1/7/2013	1/7/2015
479	Electro-Metrics	ALP-70	Antennas	158	11/28/2011	11/28/2013
479	Electro-Metrics	ALP-70	Antennas	158	12/2/2013	12/2/2015
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	12/31/2012	12/31/2013
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	12/31/2013	12/31/2014
2037	ACS Boca	Chamber EMI Cable Set	Cable Set	2037	1/1/2013	1/1/2014
2037	ACS Boca	Chamber EMI Cable Set	Cable Set	2037	1/1/2014	1/1/2015
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR

**Notes:**

- **NCR=No Calibration Required**
- **The asset information is provided to cover the entire test period.**
- **Asset 479 was only used during the active period of the calibration cycle.**

## 5 SUPPORT EQUIPMENT


Table 5-1: EUT and Support Equipment Description

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	UltraClenz	FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03	1336UB024
2	2 AA Battery Holder	N/A	N/A	N/A

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
A	Power Cable	0.5 m	No	EUT to Battery Holder Cable
B	Power Cable	0.4 m	No	EUT power cable to Battery Holder
C	Wire Antenna	0.16 m	No	None

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

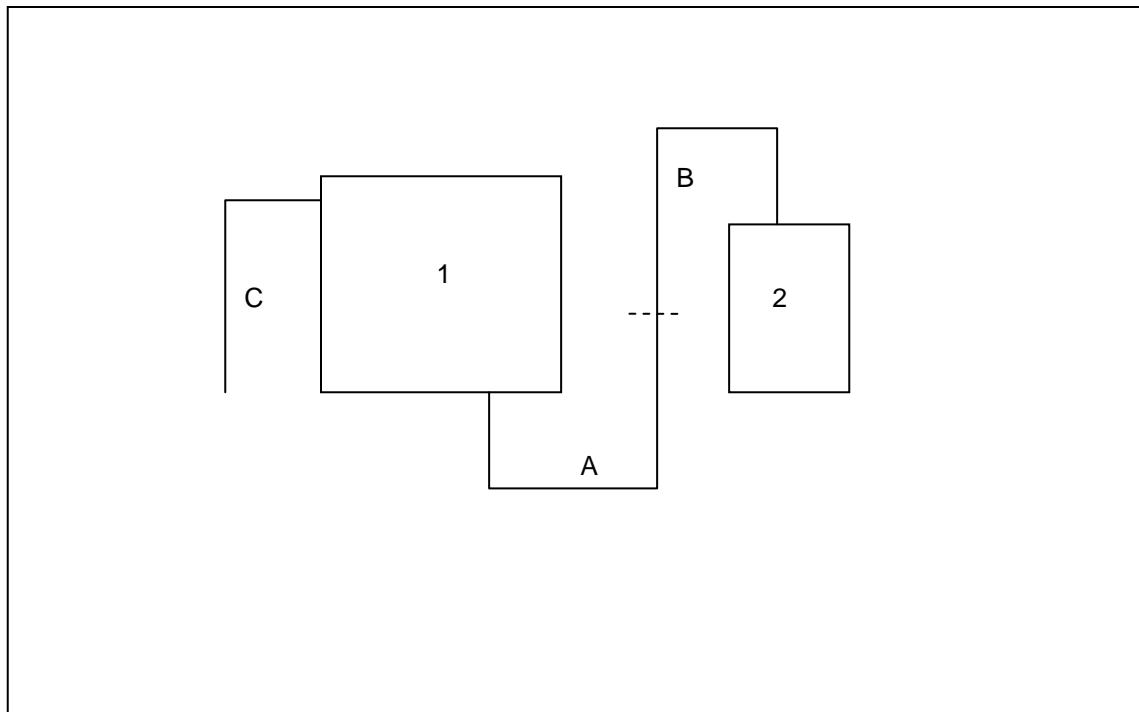

## **7 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### **7.1 Antenna Requirement – FCC: Section 15.203**

The model FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03 use an internal loop antenna that is directly soldered to the PCB. The antenna cannot be removed without damaging the product, thus meeting the requirements of FCC Section 15.203.

### **7.2 20dB / 99% Bandwidth: FCC: Section 15.209 / IC RSS-Gen 4.6.1**

#### **7.2.1 Measurement Procedure**

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected.

The spectrum analyzer span was set to 2 to 5 times the estimated 20 dB bandwidth of the signal. The RBW was to  $\geq 1\%$  to 5% of the estimated emission bandwidth. The trace was set to max hold using a peak detector and the reference level was set to the highest amplitude observed. The bandwidth was measured 20 dB down from the reference level using the delta function of the analyzer.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was greater or equal to 1% of the span. The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power.

#### **7.2.2 Measurement Results**

Results are shown below in Table 7.2.2-1 and Figures 7.2.2-1 through 7.2.2-2

**Table 7.2.2-1: 20dB / 99% Bandwidth**

<b>Frequency [MHz]</b>	<b>20dB Bandwidth [kHz]</b>	<b>99% Bandwidth [kHz]</b>
0.1256	16.375	18.600

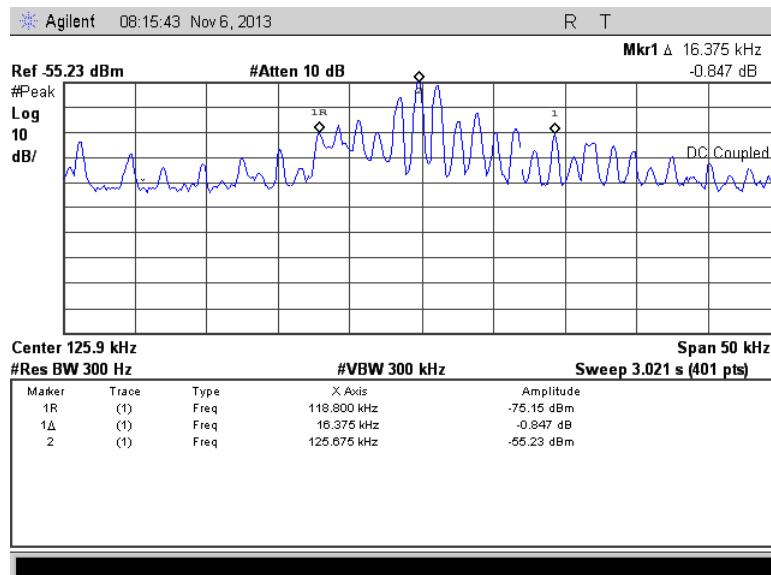


Figure 7.2.2-1: 20dB Bandwidth

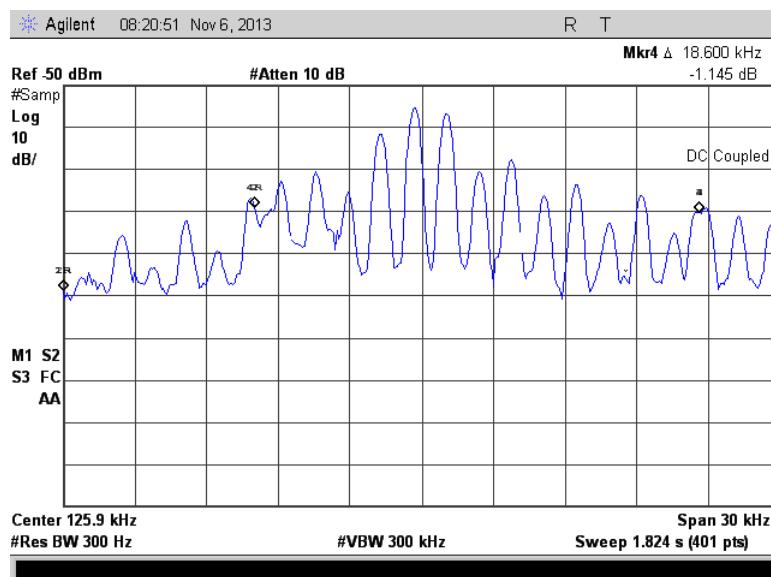


Figure 7.2.2-2: 99% OBW

### 7.3 Radiated Spurious Emissions – FCC: Section 15.209 / IC: RSS-210 2.5

#### 7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 10 kHz to 1GHz. Section 15.33(a)(4) specifies, if the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to frequency specified in 15.33(b)(1) for unintentional radiators. The upper frequency range for the digital device is 1000MHz which is greater than the 10<sup>th</sup> harmonic of the fundamental frequency. The upper frequency range measured was 1000MHz.

Measurements below 30MHz were performed in a semi-anechoic chamber with a 3 meter separation distance between the EUT and measurement antenna. The EUT was rotated 360 and the loop antenna rotated about the vertical axis to maximize each emission. The magnetic loop receiving antenna was positioned with its center 1 meter above the ground.

The spectrum analyzer's resolution and video bandwidth were set to 300 Hz and 1000 Hz respectively for frequencies below 150 kHz and 9 kHz and 30 kHz respectively for frequencies above 150 kHz and below 30 MHz. The fundamental levels were measured using a resolution bandwidth of 30 kHz which is greater than the measured emission bandwidth. For measurements in the frequency bands 9-90 kHz and 110-490 kHz, an average detector was used. When average measurements are specified, the peak emissions were also compared to a limit corresponding to 20 dB above the maximum permitted average limit according to Part 15.35. All other emissions were measured using a Quasi-peak detector. The final measurements were then corrected by antenna correction factors and cable loss for comparison to the limits.

Measurements above 30 MHz were performed in a semi-anechoic chamber with a 3 meter separation distance between the EUT and measurement antenna. The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz.

#### 7.3.2 Distance Correction for Measurements Below 30 MHz – Part 15.31

Radiated measurements were performed at a distance closer than 300 meters and 30m as required, according to Part 15.209. Therefore a correction factor was applied to account for propagation loss at the specified distance. The propagation loss was determined by using the square of an inverse linear distance extrapolation factor (40dB/decade) according to 15.31. A sample calculation of the distance correction factor is shown below for limits expressed at a 300m measurement distance and a 30m measurement distance.

$$\begin{aligned}\text{Distance correction factor (300m Specified Test Distance)} &= 40 * \text{Log}(\text{Test Distance}/300) \\ &= 40 * \text{Log}(3/300) \\ &= -80 \text{ dB}\end{aligned}$$

$$\begin{aligned}\text{Distance correction factor (30m Specified Test Distance)} &= 40 * \text{Log}(\text{Test Distance}/30) \\ &= 40 * \text{Log}(3/30) \\ &= -40 \text{ dB}\end{aligned}$$

### 7.3.3 Measurement Results

Radiated spurious emissions found in the band of 10 kHz to 1GHz are reported in the Table 7.3.3-1 below.

**Table 7.3.3-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
<b>Fundamental Frequency</b>										
<b>0.1256</b>	59.73	52.91	V	28.35	88.08	81.26	125.6	105.6	37.5	24.3
<b>Spurious Emissions</b>										
<b>0.2512</b>	27.52	16.61	V	22.15	49.67	38.76	119.6	99.6	69.9	60.8
<b>0.3768</b>	32.19	23.92	V	18.80	50.99	42.72	116.1	96.1	65.1	53.4
<b>0.628</b>	27.79	18.00	V	15.47	-----	33.47	-----	71.6	-----	38.1
<b>0.8792</b>	31.81	17.95	V	13.71	-----	31.66	-----	68.7	-----	37.0
<b>1.1304</b>	26.29	13.93	V	13.35	-----	27.28	-----	66.5	-----	39.2
<b>Emissions above 30 MHz</b>										
<b>31.2852</b>	28.76	23.41	H	-8.95	-----	14.46	-----	40.0	-----	25.5
<b>93.57</b>	50.12	47.95	H	-16.99	-----	30.96	-----	43.5	-----	12.5
<b>94.929</b>	46.79	45.59	H	-16.70	-----	28.89	-----	43.5	-----	14.6
<b>184.131</b>	39.80	37.15	H	-16.57	-----	20.58	-----	43.5	-----	22.9
<b>990.528</b>	26.37	22.30	H	3.00	-----	25.30	-----	54.0	-----	28.7
<b>30.0391</b>	28.58	23.39	V	-8.26	-----	15.12	-----	40.0	-----	24.9
<b>93.5</b>	49.58	47.38	V	-17.01	-----	30.37	-----	43.5	-----	13.1
<b>132.69</b>	36.02	32.51	V	-14.32	-----	18.19	-----	43.5	-----	25.3
<b>185.554</b>	40.09	37.23	V	-16.59	-----	20.64	-----	43.5	-----	22.9
<b>575.754</b>	29.97	26.31	V	-4.73	-----	21.57	-----	46.0	-----	24.4
<b>579.003</b>	30.45	26.36	V	-4.76	-----	21.60	-----	46.0	-----	24.4
<b>585.254</b>	32.07	27.09	V	-4.56	-----	22.53	-----	46.0	-----	23.5
<b>998.546</b>	25.92	22.07	V	2.57	-----	24.63	-----	54	-----	29.4

\* Note: The fundamental emission was measured using a RBW of 30 kHz which is greater than the emission bandwidth.

#### 7.3.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

#### Example Calculation: Peak

Corrected Level:  $27.52 + 22.15 = 49.67 \text{ dB}\mu\text{V/m}$

Margin:  $119.6 \text{ dB}\mu\text{V/m} - 49.67 \text{ dB}\mu\text{V/m} = 69.9 \text{ dB}$

#### Example Calculation: Average

Corrected Level:  $16.61 + 22.15 - 0 = 38.76 \text{ dB}\mu\text{V/m}$

Margin:  $99.6 \text{ dB}\mu\text{V/m} - 38.76 \text{ dB}\mu\text{V/m} = 60.8 \text{ dB}$

## 8 CONCLUSION

In the opinion of ACS, Inc. the FAS1533-00, FAS1533-01, FAS1533-02, and FAS1533-03, manufactured by UltraClenz, LLC meet the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

**END REPORT**