



# FCC RADIO TEST REPORT

**FCC ID** : ZAT-1312PSIP-3  
**Equipment** : CC1312PSIP  
**Brand Name** : Texas Instruments  
**Model Name** : CC1312PSIPMOT3  
**Applicant** : Texas Instruments Incorporated  
12500 TI BLVD., Dallas, Texas, 75243  
**Manufacturer** : Texas Instruments Incorporated  
12500 TI BLVD., Dallas, Texas, 75243  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Oct. 27, 2023 and testing was performed from Dec. 26, 2023 to Jan. 19, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



# Table of Contents

**History of this test report..... 3**

**Summary of Test Result..... 4**

**1 General Description..... 5**

    1.1 Product Feature of Equipment Under Test..... 5

    1.2 Modification of EUT ..... 5

    1.3 Testing Location ..... 6

    1.4 Applicable Standards..... 6

**2 Test Configuration of Equipment Under Test ..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup ..... 9

    2.6 Measurement Results Explanation Example..... 10

**3 Test Result..... 11**

    3.1 Number of Channel Measurement ..... 11

    3.2 Hopping Channel Separation Measurement ..... 12

    3.3 Dwell Time Measurement..... 13

    3.4 20dB and 99% Bandwidth Measurement ..... 14

    3.5 Output Power Measurement..... 15

    3.6 Conducted Band Edges Measurement..... 16

    3.7 Conducted Spurious Emission Measurement ..... 17

    3.8 Radiated Band Edges and Spurious Emission Measurement ..... 18

    3.9 AC Conducted Emission Measurement..... 23

    3.10 Antenna Requirements..... 25

**4 List of Measuring Equipment ..... 26**

**5 Measurement Uncertainty ..... 28**

**Appendix A. Conducted Test Results**

**Appendix B. AC Conducted Emission Test Result**

**Appendix C. Conducted Spurious Emission**

**Appendix D. Conducted Spurious Emission Plots**

**Appendix E. Cabinet Radiated Spurious Emission**

**Appendix F. Cabinet Radiated Spurious Emission Plots**

**Appendix G. Duty Cycle Plots**

**Appendix H. Setup Photographs**



### History of this test report

Report No.	Version	Description	Issue Date
FR341305-02D	01	Initial issue of report	Feb. 22, 2024
FR341305-02D	02	Revise Section 2.2, Appendix A and Appendix C~F This report is an updated version, replacing the report issued on Feb. 22, 2024.	Apr. 08, 2024
FR341305-02D	03	Revise FCC ID and Model Name This report is an updated version, replacing the report issued on Apr. 08, 2024.	May 06, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(2)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	0.14 dB under the limit at 932.10 MHz
3.9	15.207	AC Conducted Emission	Pass	3.83 dB under the limit at 0.15 MHz
3.10	15.203 15.247(b)	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Danny Lee**  
**Report Producer: Michelle Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b>	
MIOTY, GMSK, 2380bit/s (yields a 20dB bandwidth of ~3.1kHz)	

Antenna Information				
	Brand	Antenna Type	Model	915MHz Gain
1	TI	Integrated PCB antenna	LP-EM-CC1312PSIP antenna	+2.69 dBi
2	Kaadas	Flexi PCB antenna	K1	-5.82 dBi
3	Leederson	Integrated PCB antenna	L1	-4.51 dBi
4	Leederson	Integrated PCB antenna	L2	-1.83 dBi
5	Leederson	Stanced antenna	L3	-9.48 dBi
6	Leederson	Stanced antenna	L4	+0.37 dBi
7	Leederson	Integrated PCB antenna	L5	-1.74 dBi
8	Pulse	External whip antenna	W5017	+0.90 dBi
9	Johanson Technology	Chip antenna	0900AT43A0070	-0.50 dBi
10	Johanson Technology	Chip antenna	0915AT43A0026	+1.0 dBi
11	Pulse	Wire antenna	W3113	+0.80 dBi

**Remark:**

1. The EUT uses the Integrated PCB antenna from Texas Instruments (Antenna #1)
2. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY (TAF Code: 1190)
<b>Remark</b>	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, 03CH13-HY

FCC designation No.: TW1190 and TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz	1	915.257	28	916.114
	2	915.286	29	916.142
	3	915.314	30	916.171
	4	915.343	31	916.200
	5	915.372	32	916.229
	6	915.400	33	916.257
	7	915.429	34	916.286
	8	915.457	35	916.314
	9	915.486	36	916.343
	10	915.514	37	916.371
	11	915.543	38	916.400
	12	915.572	39	916.429
	13	915.600	40	916.457
	14	915.629	41	916.486
	15	915.657	42	916.514
	16	915.686	43	916.543
	17	915.714	44	916.571
	18	915.743	45	916.600
	19	915.771	46	916.628
	20	915.800	47	916.657
	21	915.829	48	916.686
	22	915.857	49	916.714
	23	915.886	50	916.743
	24	915.914		
	25	915.942		
	26	916.057		
	27	916.086		



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	2380bit/s / GFSK
<b>Conducted Test Cases</b>	Mode 1: CH01 Tx_915.257 MHz Mode 2: CH50 Tx_916.743 MHz
<b>Radiated Test Cases</b>	Mode 1: CH01 Tx_915.257 MHz Mode 2: CH50 Tx_916.743 MHz
<b>AC Conducted Emission</b>	Mode 1: MIOTY TX + USB Cable (Charging from Notebook)
<b>Remark:</b> 1. The test mode is configured by test software with the following configurations: <b>For the 14 dBm port:</b> <ul style="list-style-type: none"> <li>• Max power 12.5 dBm without duty cycling (with 100% duty cycle), and tested with antenna gain 2.0 dBi.</li> <li>• Max power 12.0 dBm without duty cycling (with 100% duty cycle), and tested with antenna gain 2.69 dBi.</li> <li>• Max power 14.0 dBm with duty cycling of 60ms_max (with 60% duty cycle), and tested with antenna gain 2.69 dBi.</li> <li>• Max power 14.0 dBm without duty cycling (with 100% duty cycle), and tested with antenna gain 2.69 dBi.</li> </ul> <b>For the 20 dBm port:</b> <ul style="list-style-type: none"> <li>• Max power 19.5 dBm without duty cycling (with 100% duty cycle), and tested with antenna gain 2.69 dBi.</li> </ul> 2. For the RSE measurement of 14 dBm port, the worst case data 14.0 dBm without duty cycling (with 100% duty cycle) is recorded in this report.	



### 2.3 Connection Diagram of Test System

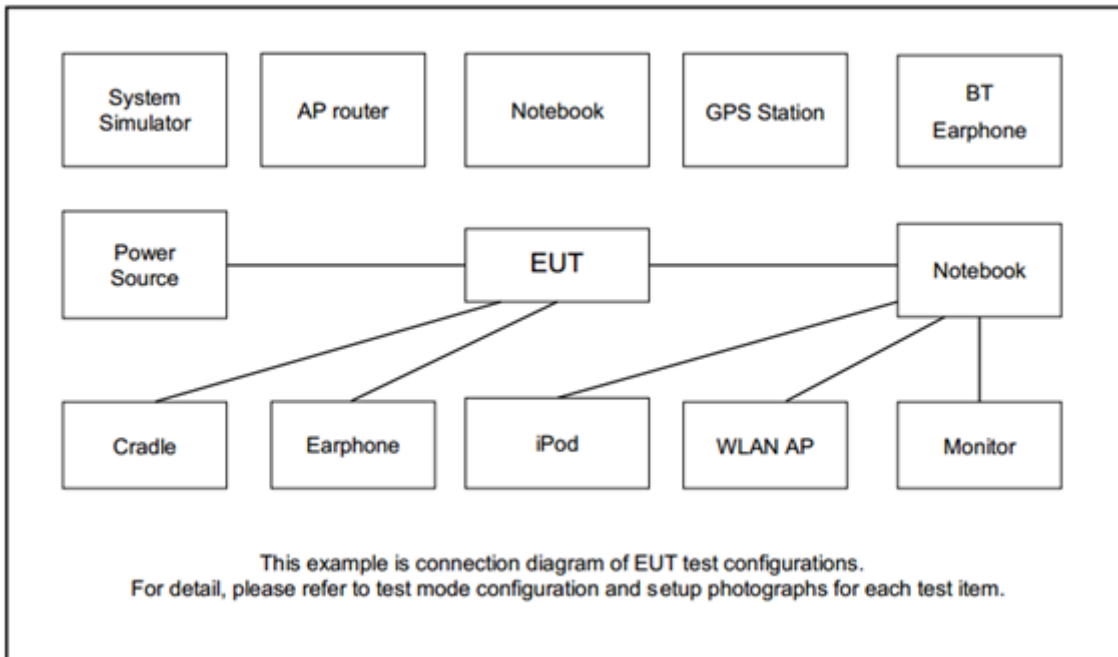

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC55U	FCC DoC	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Acer	N18Q13	PD9AX201NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
5.	Fixture 1	Texas Instruments	LP-XDS110	N/A	N/A	N/A
6.	Fixture 2	Texas Instruments	LP-EM-CC1312PSIP	N/A	N/A	N/A

### 2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.89” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;  
RBW = 30kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.  
The number of hopping frequency used is defined as the number of total channel.
6. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902 – 928 MHz band shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 30kHz for; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.  
Measure and record the results in the test report.

### 3.2.4 Test Setup

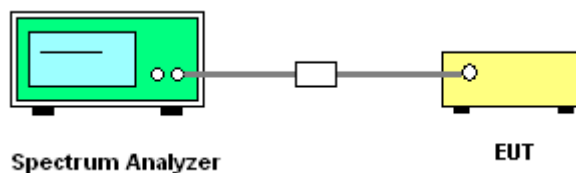

### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 100 kHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

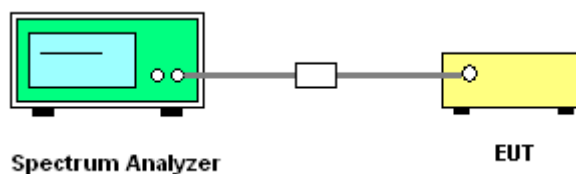

#### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

### 3.4 20dB and 99% Bandwidth Measurement

#### 3.4.1 Limit of 20dB and 99% Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

99% Bandwidth is reporting only.


#### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1-5% of the 99% bandwidth; VBW  $\geq$  3 \* RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

#### 3.4.4 Test Setup

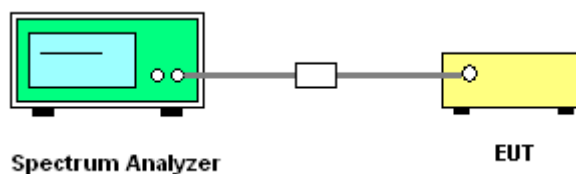

#### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

#### 3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

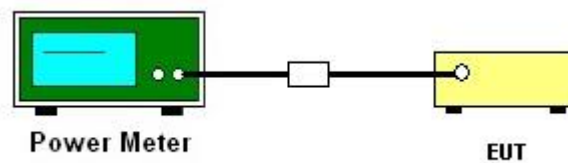

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup



### 3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.



## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup



### 3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.8.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.2 Antenna-port conducted measurements.
2. Measure the conducted output power (in dBm) using the peak detector.
3. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
4. Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies  $\leq$  30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies  $>$  1000 MHz).
5. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:  
$$E = \text{EIRP} - 20 \log d + 104.8,$$
where  
E is the electric field strength in dB $\mu$ V/m  
EIRP is the equivalent isotropically radiated power in dBm  
d is the specified measurement distance in 3m
6. Compare the resultant electric field strength level with the applicable regulatory limit.
7. Corrected Reading for conducted spurious emission: Antenna Factor + Cable Loss + Read Level = Level
8. Perform the cabinet radiated spurious emission test.
9. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
10. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
11. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
12. Corrected Reading for cabinet radiated spurious emission: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
13. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
14. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

15. Use the following spectrum analyzer settings:

- (1) Span shall wide enough to fully capture the emission being measured;
- (2) Set RBW = 100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
- (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.
- (4) For RMS average measurement when 60 ms max TX\_on time duty cycling mode:

use duty cycle correction factor method per 15.35(c).

Duty cycle = On time/100 milliseconds

On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

RMS Average Emission Level = Average Emission Level (reduced VBW) + 20\*log (Duty cycle)


The maximum on time is 60 ms in the 100 ms period please refer to manufacture's Operational Description.

The RMS average levels are calculated from the average level (reduced VBW) corrected with duty cycle correction factor (-4.44 dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.


- (5) For average measurement when no duty cycling mode:
  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.8.4 Test Setup


**For antenna-port conducted measurement setup:**

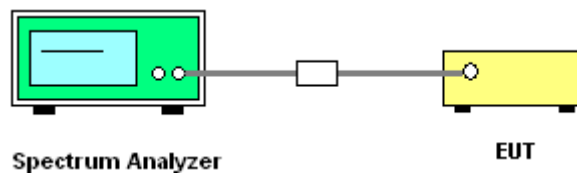


For radiated test below 30MHz

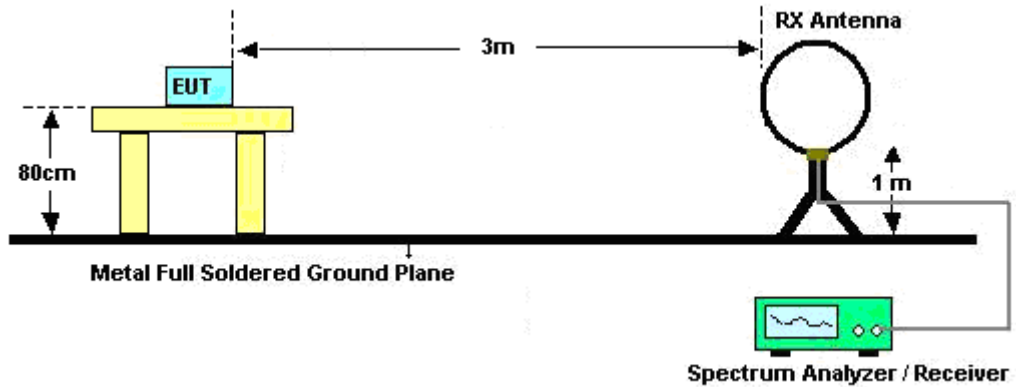

For radiated test from 30MHz to 1GHz

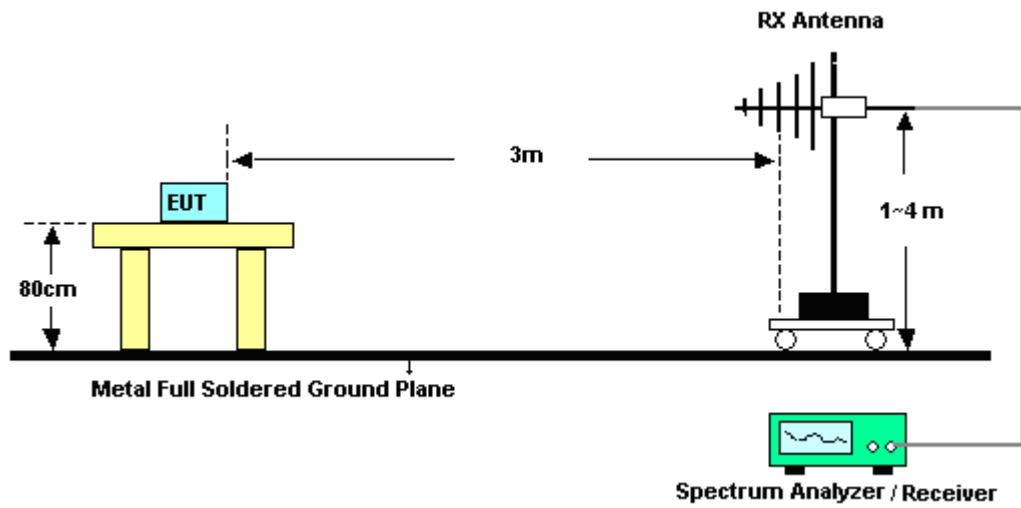

For radiated test above 1GHz

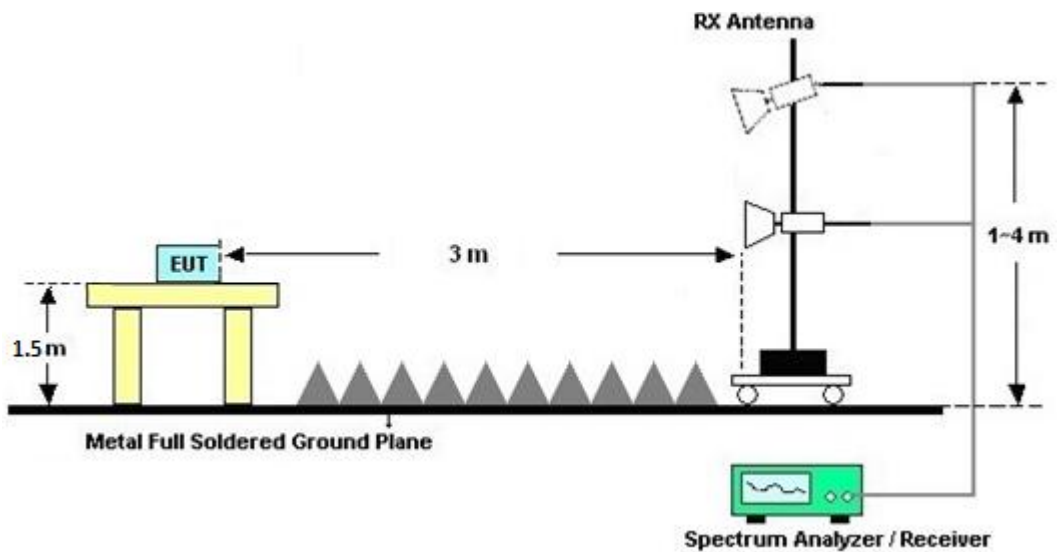



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### **3.8.6 Test Result of Conduced Spurious Emission in the Restricted Band (30 MHz ~ 10th Harmonic)**

Please refer to Appendix C and D.

### **3.8.7 Test Result of Cabinet Radiated Spurious Emission in the Restricted Band (30 MHz ~ 10th Harmonic)**

Please refer to Appendix E and F.

### **3.8.8 Duty Cycle**

Please refer to Appendix G.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

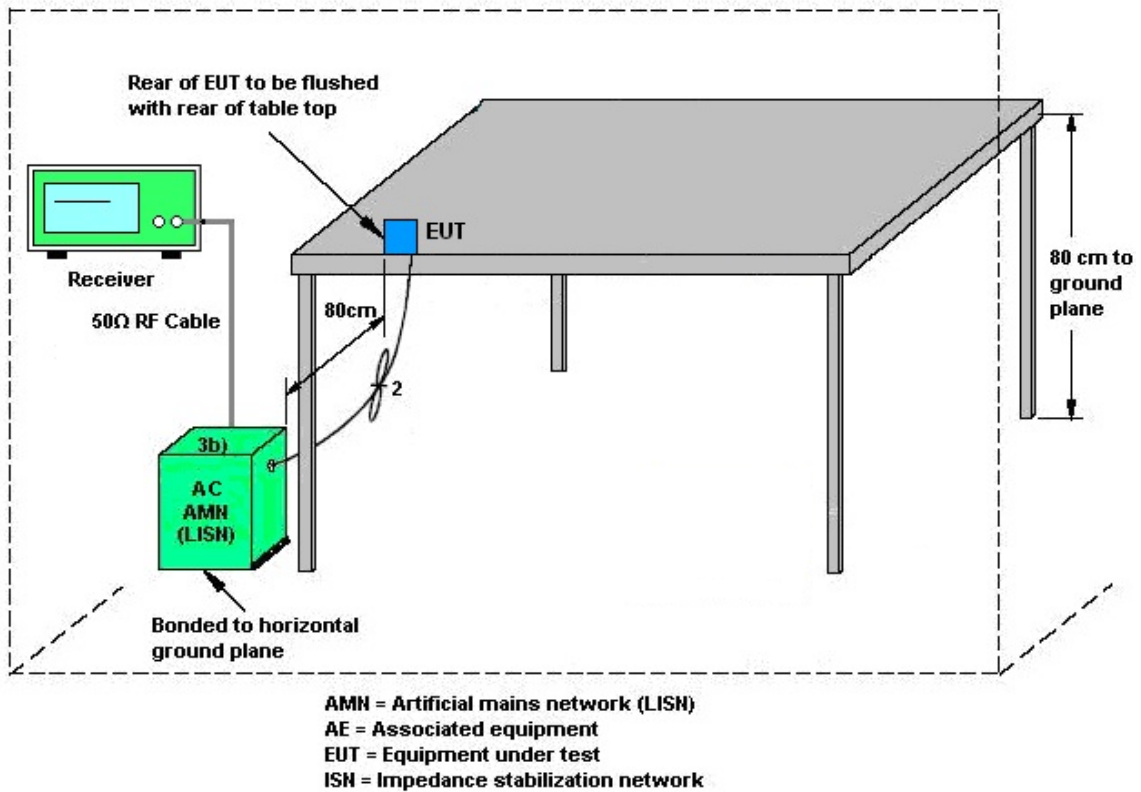

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.





## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101550	10Hz~13.6GHz	Jan. 30, 2023	Dec. 26, 2023~ Jan. 03, 2024	Jan. 29, 2024	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 08, 2023	Dec. 26, 2023~ Jan. 03, 2024	Sep. 07, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	846202	300MHz~40GHz	Sep. 08, 2023	Dec. 26, 2023~ Jan. 03, 2024	Sep. 07, 2024	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 19, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	Jan. 19, 2024	Dec. 05, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 08, 2023	Jan. 19, 2024	Dec. 07, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	Jan. 19, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jan. 19, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2023	Jan. 19, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	Jan. 19, 2024	Dec. 27, 2024	Conduction (CO05-HY)
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101565	10Hz~40GHz	Dec. 19, 2023	Jan. 08, 2024~ Jan. 12, 2024	Dec. 18, 2024	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Feb. 08, 2023	Jan. 08, 2024~ Jan. 12, 2024	Feb. 07, 2024	CSE (TH05-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60ST	SN5	1.2GHz High Pass Filter	Jun. 14, 2023	Jan. 08, 2024~ Jan. 12, 2024	Jun. 13, 2024	CSE (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 28, 2023	Jan. 09, 2024~ Jan. 16, 2024	Feb. 27, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9k~30M	Mar. 07, 2023	Jan. 09, 2024~ Jan. 16, 2024	Mar. 06, 2024	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 13, 2023	Jan. 09, 2024~ Jan. 16, 2024	Dec. 12, 2024	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 23, 2023	Jan. 09, 2024~ Jan. 16, 2024	Apr. 22, 2024	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Apr. 25, 2023	Jan. 09, 2024~ Jan. 16, 2024	Apr. 24, 2024	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 17, 2023	Jan. 09, 2024~ Jan. 16, 2024	Aug. 16, 2024	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 16, 2023	Jan. 09, 2024~ Jan. 16, 2024	May 15, 2024	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 09, 2024	Jan. 09, 2024~ Jan. 16, 2024	Jan. 08, 2025	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 17, 2023	Jan. 09, 2024~ Jan. 16, 2024	Aug. 16, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN4	1.53GHz Low Pass Filter	Jun. 14, 2023	Jan. 09, 2024~ Jan. 16, 2024	Jun. 13, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-935-1000-15000-40ST	SN1	1GHz High Pass Filter	Apr. 27, 2023	Jan. 09, 2024~ Jan. 16, 2024	Apr. 26, 2024	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 08, 2023	Jan. 09, 2024~ Jan. 16, 2024	Feb. 07, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 08, 2023	Jan. 09, 2024~ Jan. 16, 2024	Feb. 07, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 08, 2023	Jan. 09, 2024~ Jan. 16, 2024	Feb. 07, 2024	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jan. 09, 2024~ Jan. 16, 2024	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 09, 2024~ Jan. 16, 2024	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-001124	N/A	N/A	Jan. 09, 2024~ Jan. 16, 2024	N/A	Radiation (03CH13-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.2 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 180000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6 dB
---	--------

### Appendix A. Test Result of Conducted Test Items

Test Engineer:	Tommy Lee	Temperature:	21~25	°C
Test Date:	2023/12/26~2024/01/03	Relative Humidity:	50-56	%

<No duty cycling, 19.5 dBm and antenna gain 2.69 dBi>

<b>TEST RESULTS DATA</b>							
<b>20dB and 99% Occupied Bandwidth</b>							
Operation Band	NTX	CH.	Freq. (MHz)	99% Bandwidth (kHz)	20dB BW (kHz)	20dB BW Limit (kHz)	Pass/Fail
902-928 MHz	1	1	915.257	63.609	18.380	< 500	Pass
902-928 MHz	1	50	916.743	55.528	19.980	< 500	Pass

<b>TEST RESULTS DATA</b>					
<b>Hopping Channel Separation</b>					
Operation Band	NTX	CH.	Hopping Channel Separation (kHz)	Hopping Channel Separation Limit (kHz)	Pass/Fail
902-928 MHz	1	1~2	28.711	> 25.000	Pass
902-928 MHz	1	49~50	28.711	> 25.000	Pass

<b>TEST RESULTS DATA</b>					
<b>Dwell Time</b>					
Operation Band	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Hopping	11.00	19.00	0.21	0.40	Pass

<b>TEST RESULTS DATA</b>									
<b>Peak Power Table</b>									
Operation Band	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
902-928 MHz	1	1	915.257	19.49	30.00	2.69	22.18	36.00	Pass
902-928 MHz	1	50	916.743	19.50	30.00	2.69	22.19	36.00	Pass

<b>TEST RESULTS DATA</b>					
<b>Average Power Table</b>					
<b>(Reporting Only)</b>					
Operation Band	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Duty Factor (dB)
902-928 MHz	1	1	915.257	19.46	0.00
902-928 MHz	1	50	916.743	19.47	0.00

<b>TEST RESULTS DATA</b>		
<b>Number of Hopping Frequency</b>		
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
50	≥ 50	Pass

<60 ms max Tx\_on time duty cycling, 14 dBm and antenna gain 2.69 dBi>

<b>TEST RESULTS DATA</b>							
<b>20dB and 99% Occupied Bandwidth</b>							
Operation Band	NTX	CH.	Freq. (MHz)	99% Bandwidth (kHz)	20dB BW (kHz)	20dB BW Limit (kHz)	Pass/Fail
902-928 MHz	1	1	915.257	51.550	16.380	< 500	Pass
902-928 MHz	1	50	916.743	49.815	13.790	< 500	Pass

<b>TEST RESULTS DATA</b>					
<b>Hopping Channel Separation</b>					
Operation Band	NTX	CH.	Hopping Channel Separation (kHz)	Hopping Channel Separation Limit (kHz)	Pass/Fail
902-928 MHz	1	1~2	28.951	> 25.000	Pass
902-928 MHz	1	49-50	28.771	> 25.000	Pass

<b>TEST RESULTS DATA</b>					
<b>Dwell Time</b>					
Operation Band	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Hopping	10.00	19.00	0.19	0.40	Pass

<b>TEST RESULTS DATA</b>										
<b>Peak Power Table</b>										
Operation Band	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
902-928 MHz	1	1	915.257	13.53	30.00	2.69	16.22	36.00	Pass	
902-928 MHz	1	50	916.743	13.54	30.00	2.69	16.23	36.00	Pass	

<b>TEST RESULTS DATA</b>						
<b>Average Power Table</b>						
<b>(Reporting Only)</b>						
Operation Band	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Duty Factor (dB)	
902-928 MHz	1	1	915.257	13.49	0.00	
902-928 MHz	1	50	916.743	13.50	0.00	

<b>TEST RESULTS DATA</b>		
<b>Number of Hopping Frequency</b>		
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
50	≥ 50	Pass

<No duty cycling, 12 dBm and antenna gain 2.69 dBi>


<b>TEST RESULTS DATA</b>									
<b>Peak Power Table</b>									
Operation Band	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
902-928 MHz	1	1	915.257	12.76	30.00	2.69	15.45	36.00	Pass
902-928 MHz	1	50	916.743	12.77	30.00	2.69	15.46	36.00	Pass

<b>TEST RESULTS DATA</b>					
<b>Average Power Table</b>					
<b>(Reporting Only)</b>					
Operation Band	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Duty Factor (dB)
902-928 MHz	1	1	915.257	12.71	0.00
902-928 MHz	1	50	916.743	12.72	0.00



<No duty cycling, 19.5 dBm and antenna gain 2.69 dBi>

### Number of Hopping Frequency

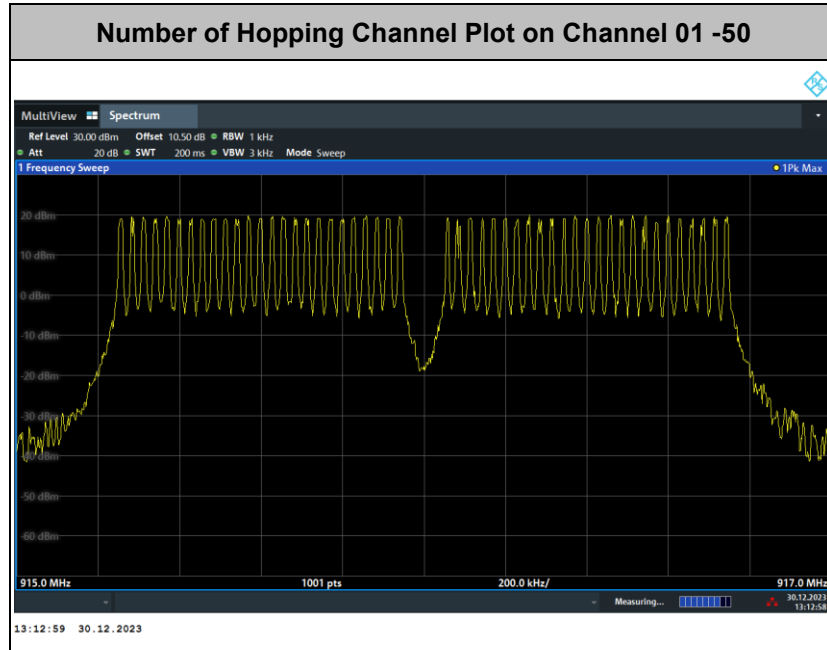







# Hopping Channel Separation

Channel Separation Plot on Channel 01 - 02

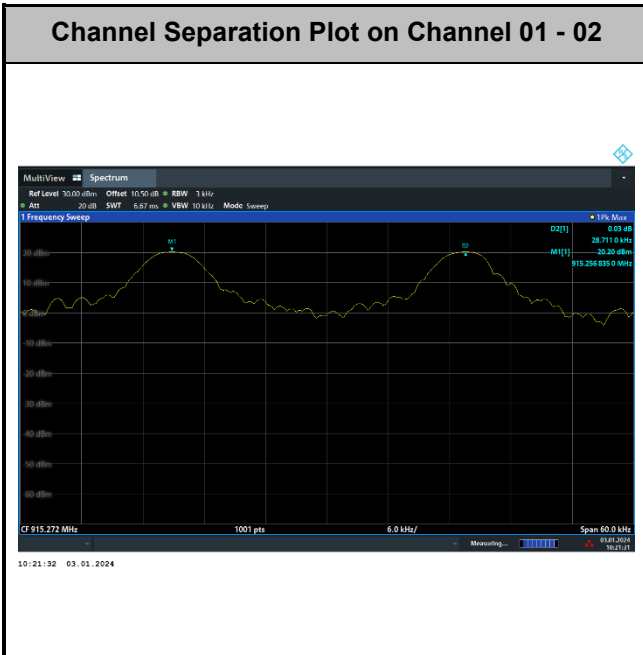


Channel Separation Plot on Channel 49 - 50

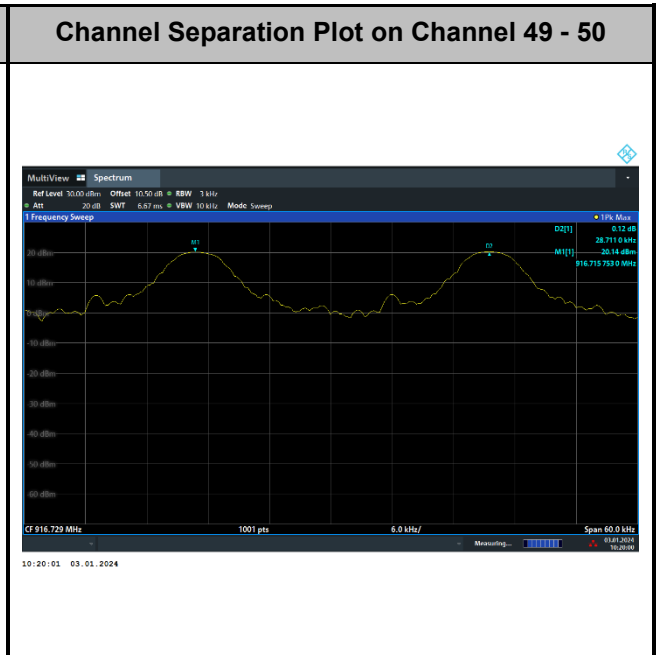




# Dwell Time

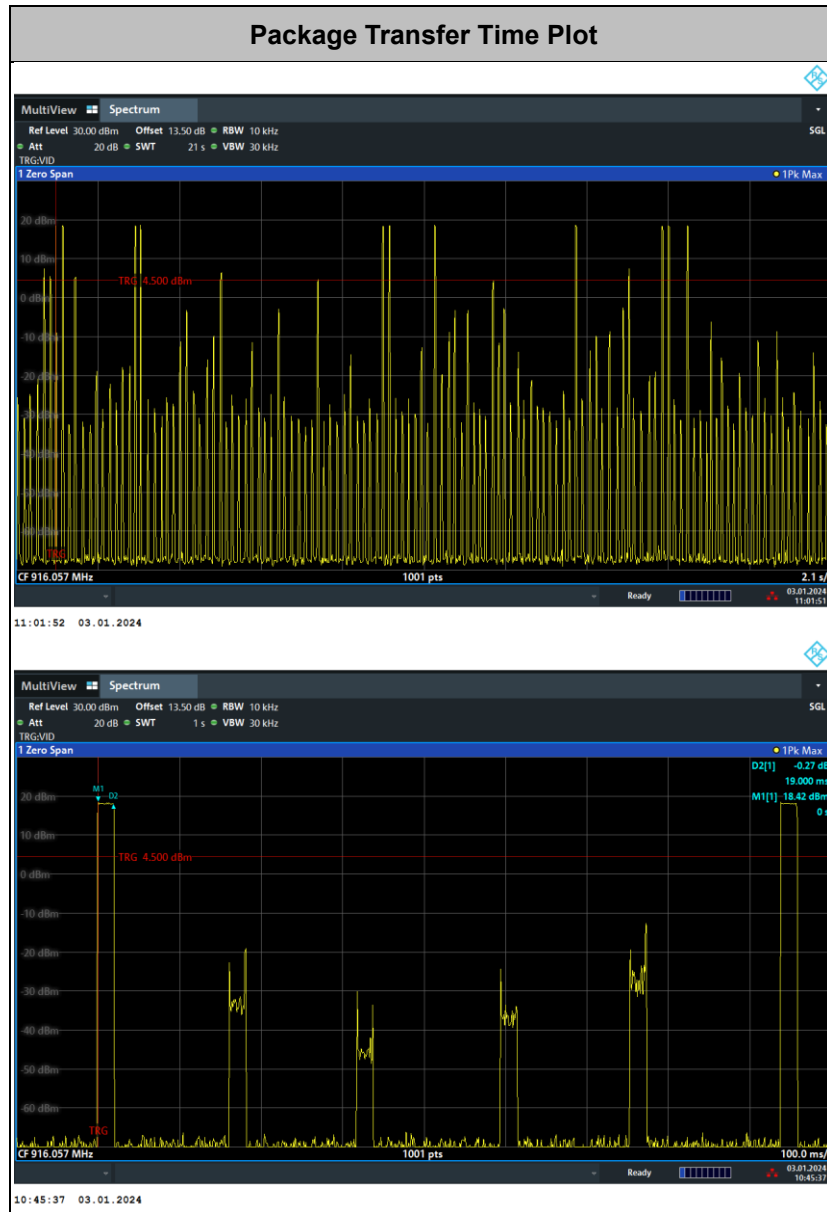




# 20dB Bandwidth

20 dB Bandwidth Plot on Channel 01

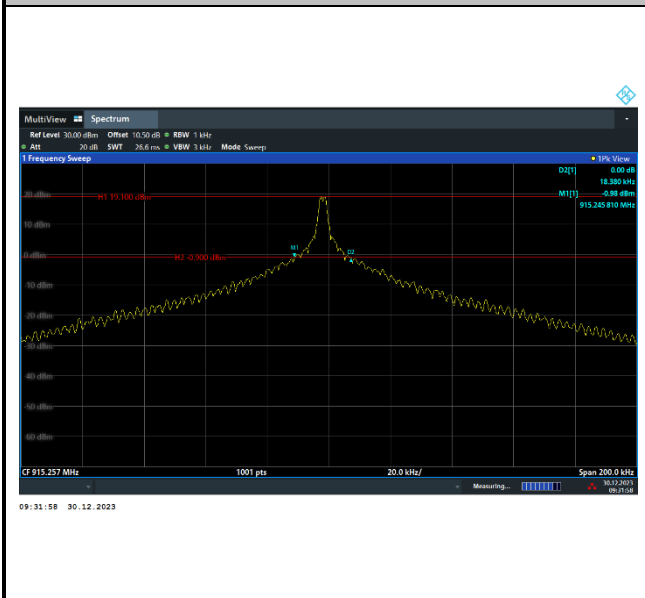

20 dB Bandwidth Plot on Channel 50

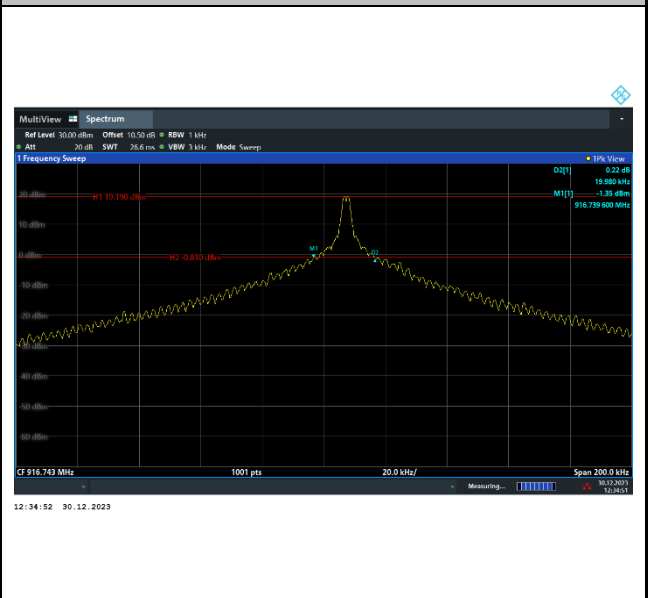




# 99% Occupied Bandwidth

### 99% Occupied Bandwidth on Channel 01



### 99% Occupied Bandwidth on Channel 50

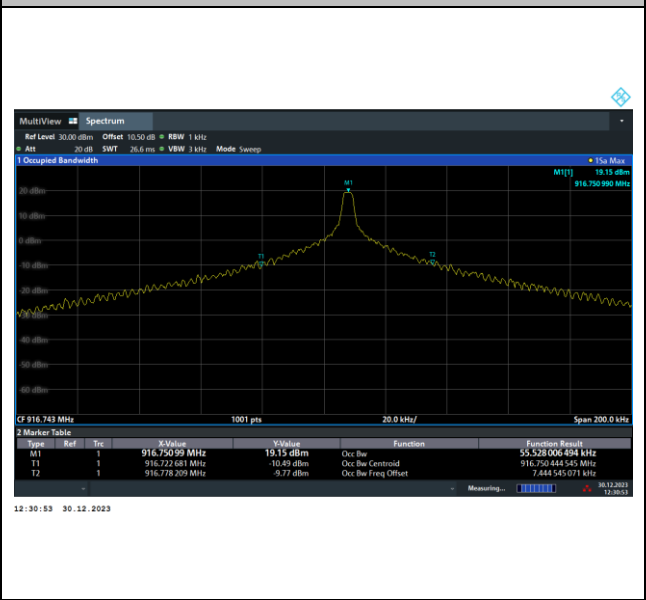


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Band Edges

### Low Band Edge Plot on Channel 01

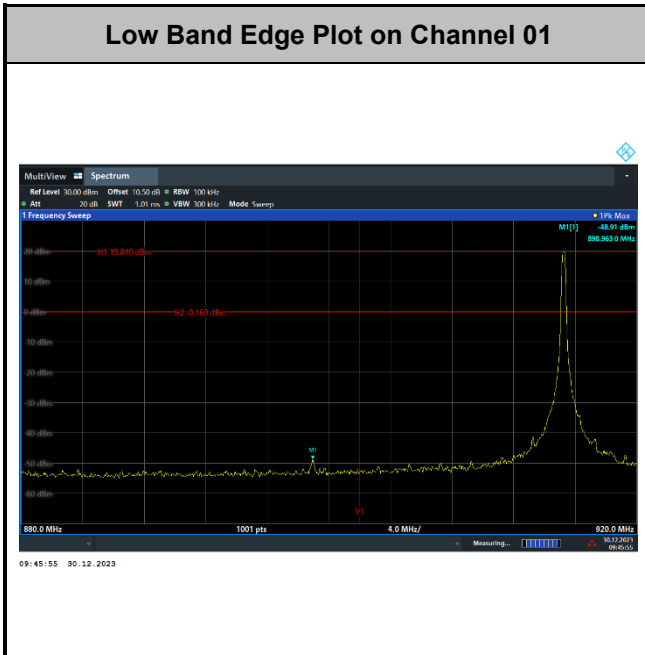


### High Band Edge Plot on Channel 50

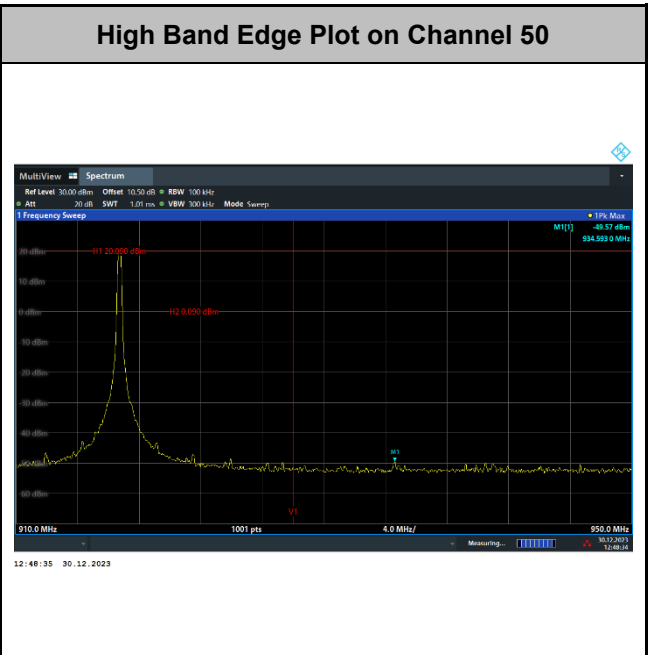


# Hopping Mode Band Edges

### Hopping Mode Low Band Edge Plot

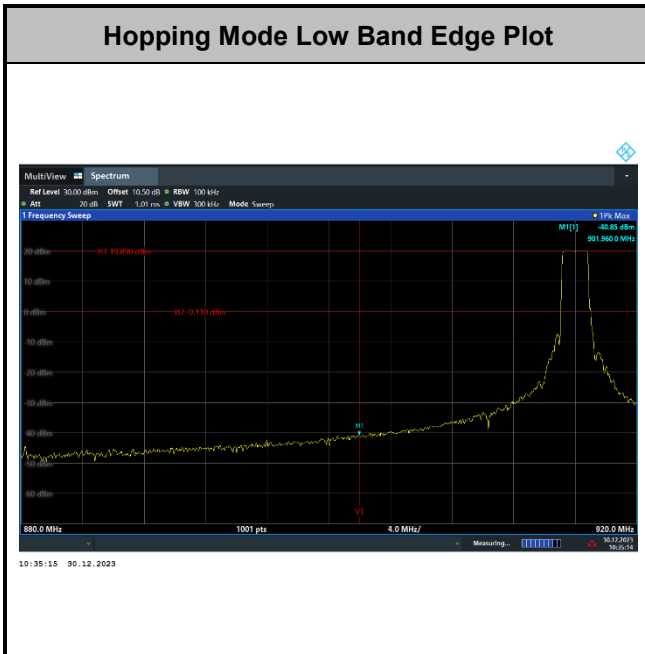


### Hopping Mode High Band Edge Plot

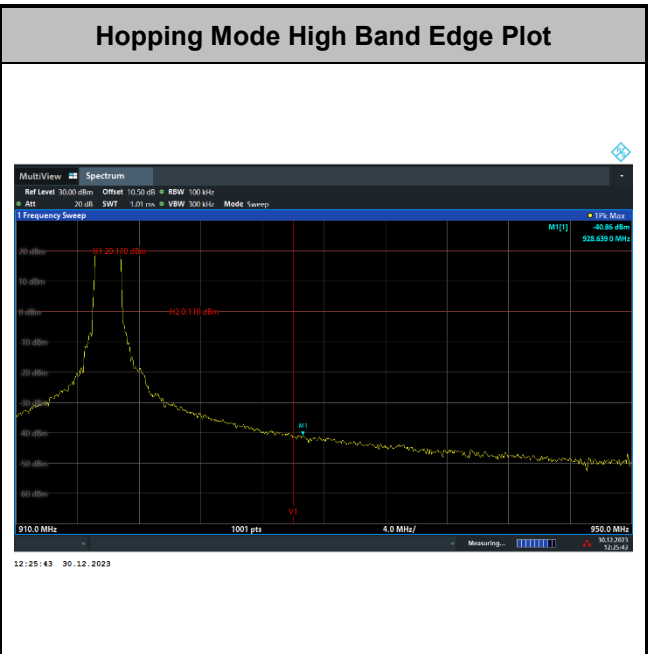




# Spurious Emission

CSE Plot on Ch 01 between 30MHz ~ 10 GHz

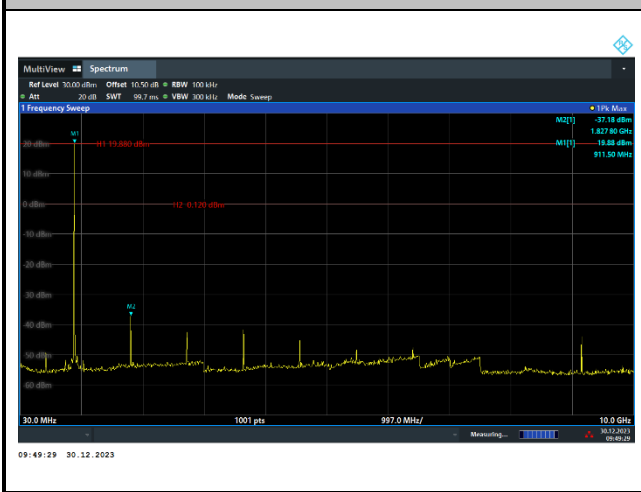


CSE Plot on Ch 50 between 30MHz ~ 10 GHz

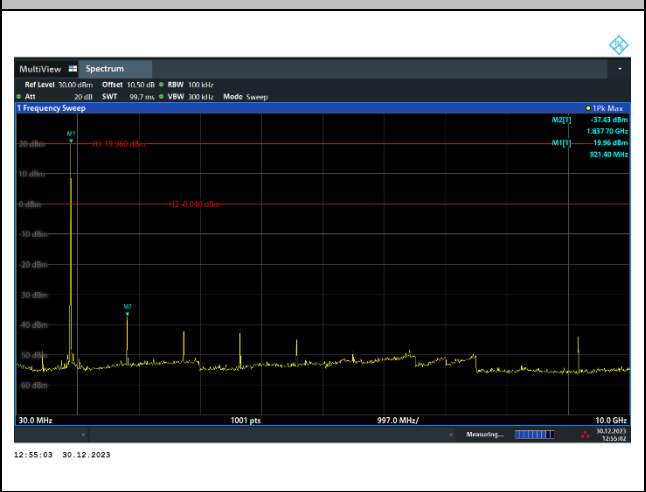



<60 ms max Tx\_on time duty cycling, 14 dBm and antenna gain 2.69 dBi>


### Number of Hopping Frequency

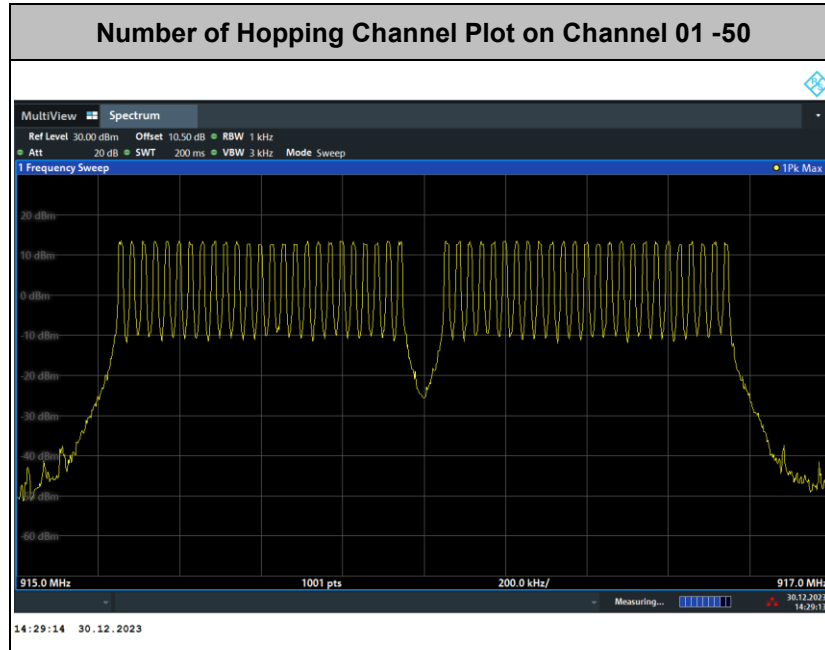




# Hopping Channel Separation

Channel Separation Plot on Channel 01 - 02

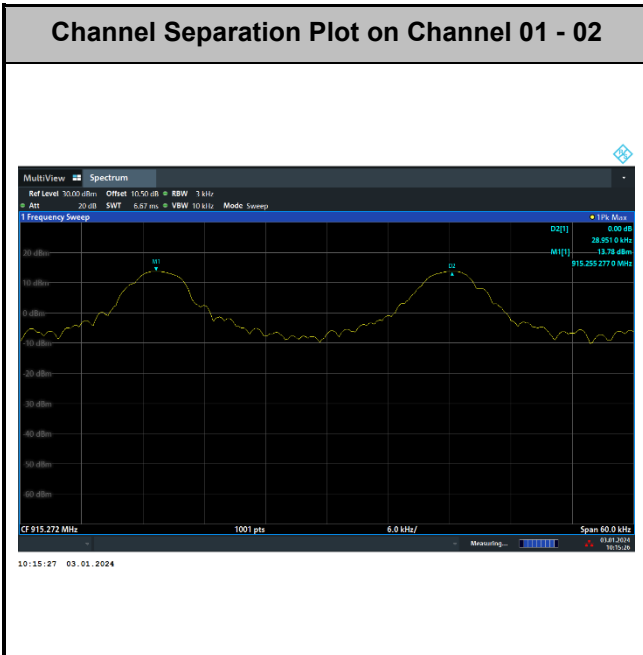


Channel Separation Plot on Channel 49 - 50

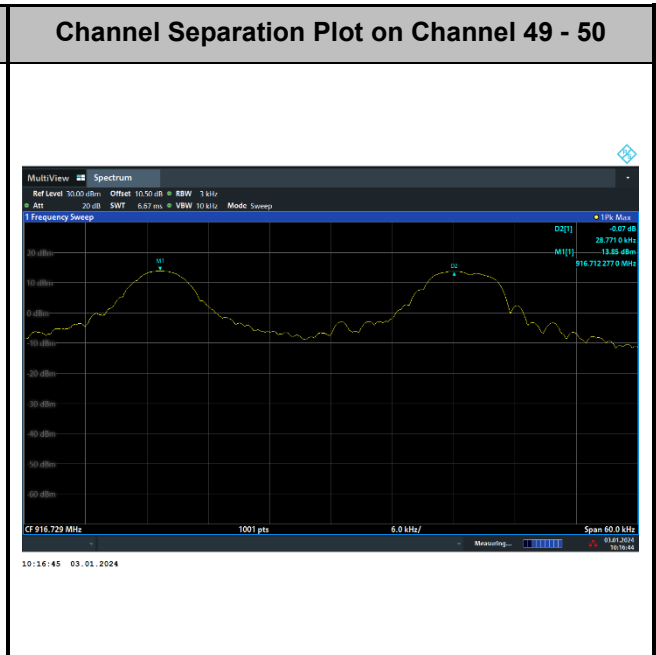






# Dwell Time

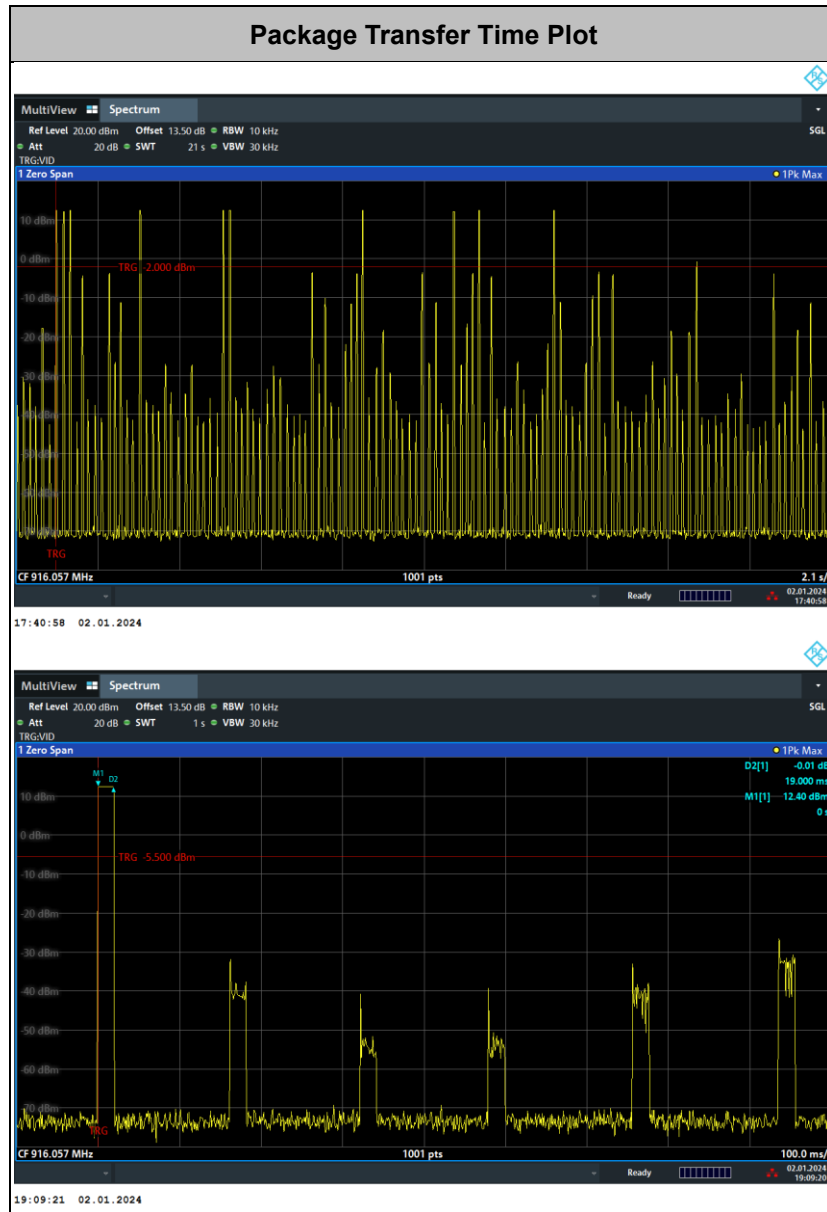




# 20dB Bandwidth

20 dB Bandwidth Plot on Channel 01

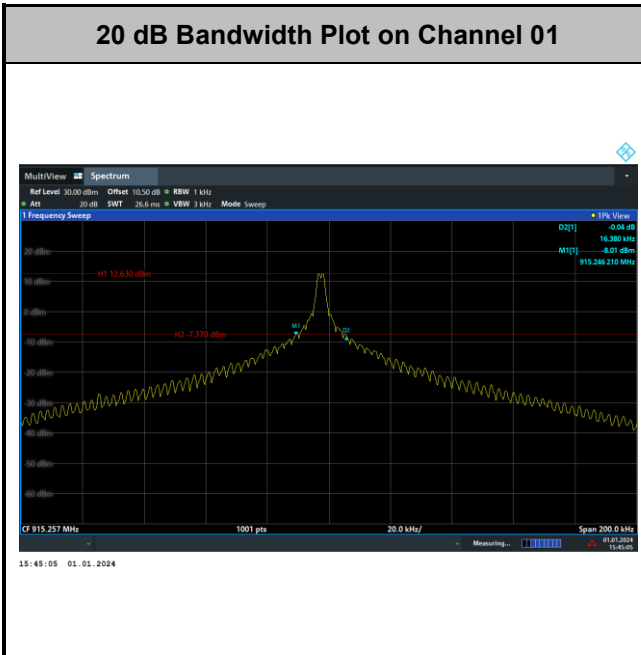


20 dB Bandwidth Plot on Channel 50

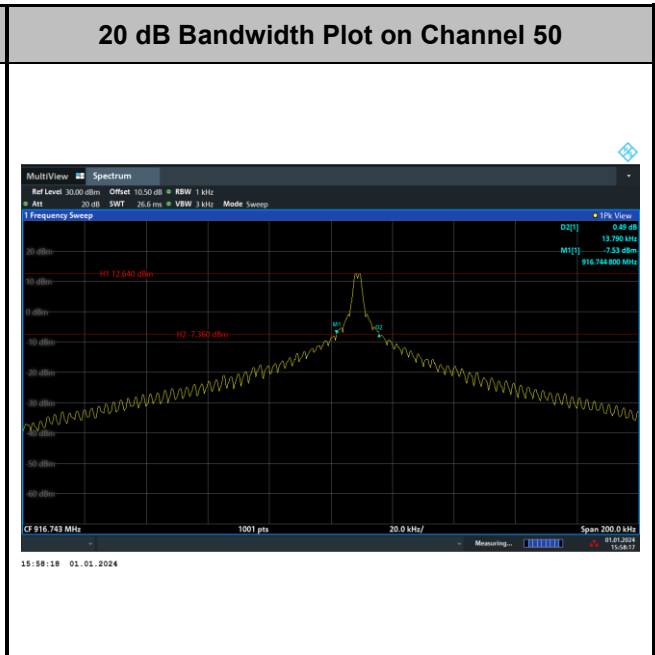




# 99% Occupied Bandwidth

### 99% Occupied Bandwidth on Channel 01

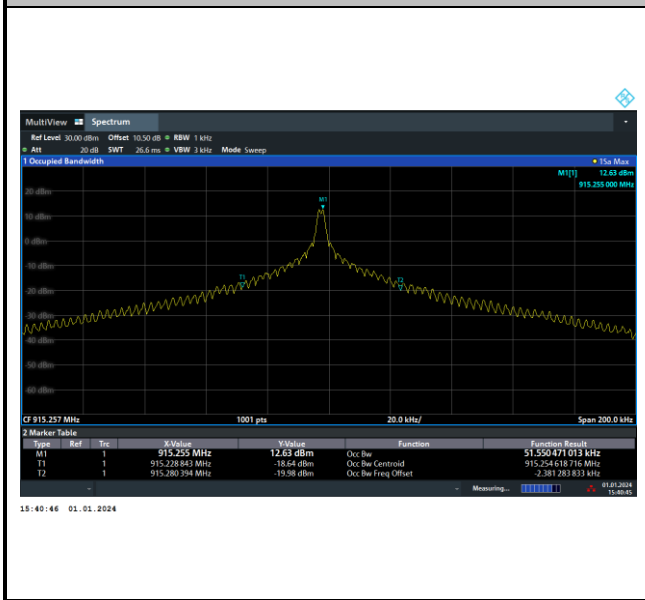

### 99% Occupied Bandwidth on Channel 50

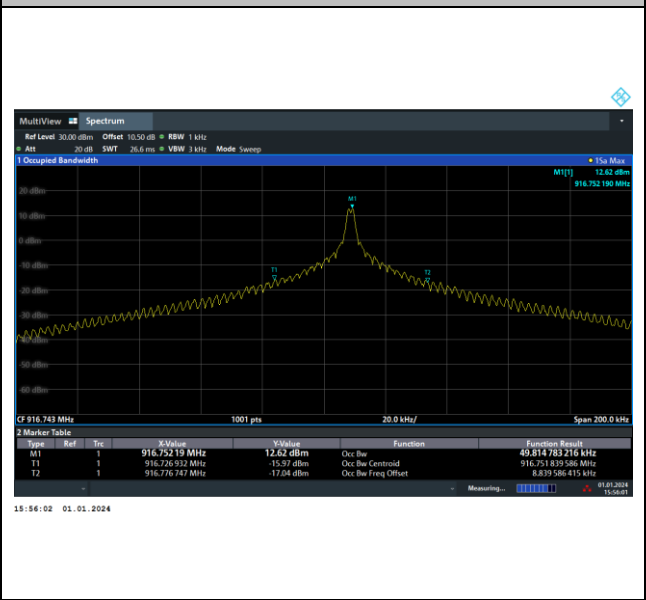


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Band Edges

### Low Band Edge Plot on Channel 01

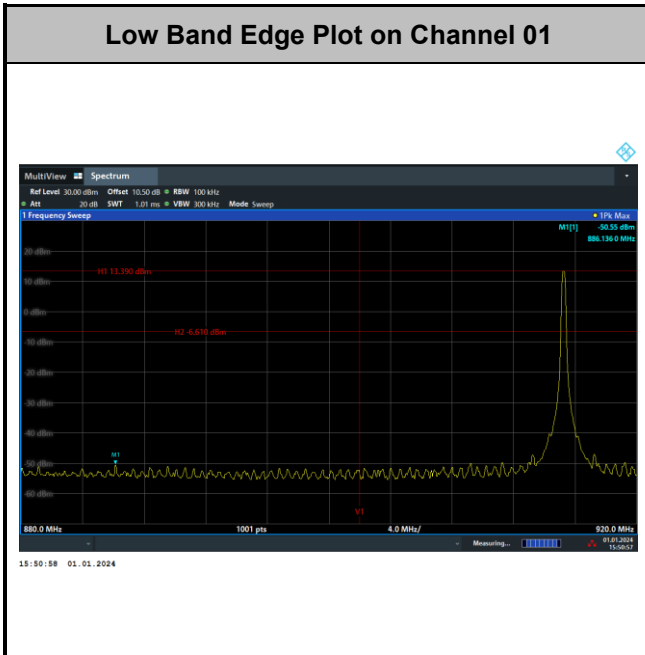


### High Band Edge Plot on Channel 50

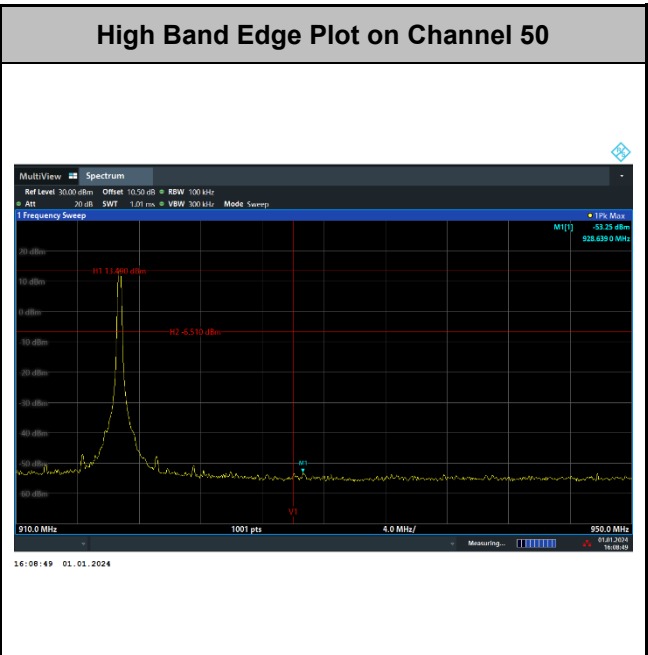


# Hopping Mode Band Edges

### Hopping Mode Low Band Edge Plot

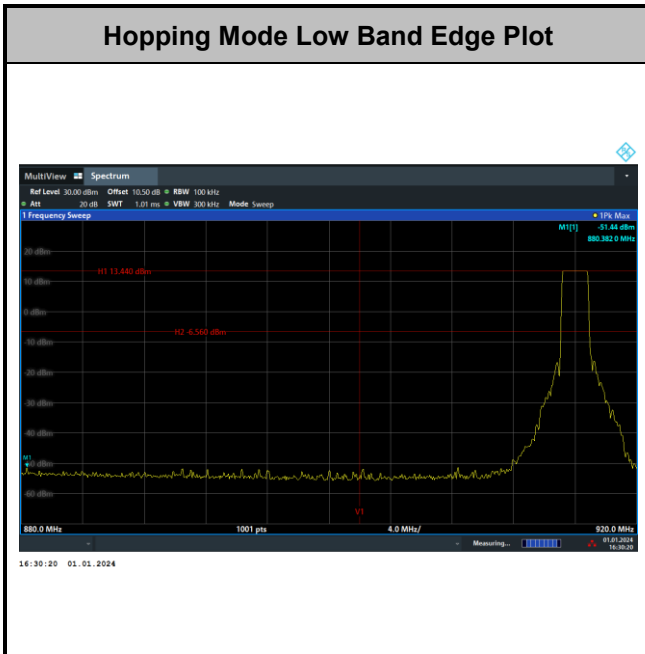


### Hopping Mode High Band Edge Plot

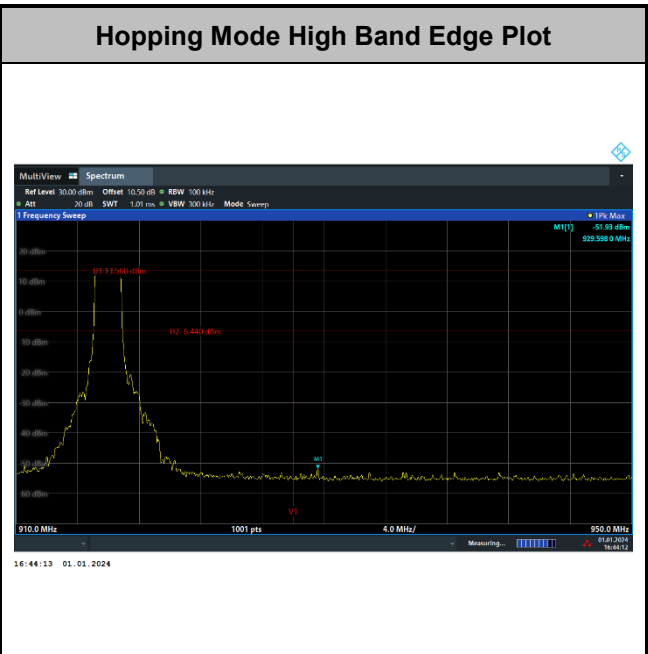




# Spurious Emission

CSE Plot on Ch 01 between 30MHz ~ 10 GHz

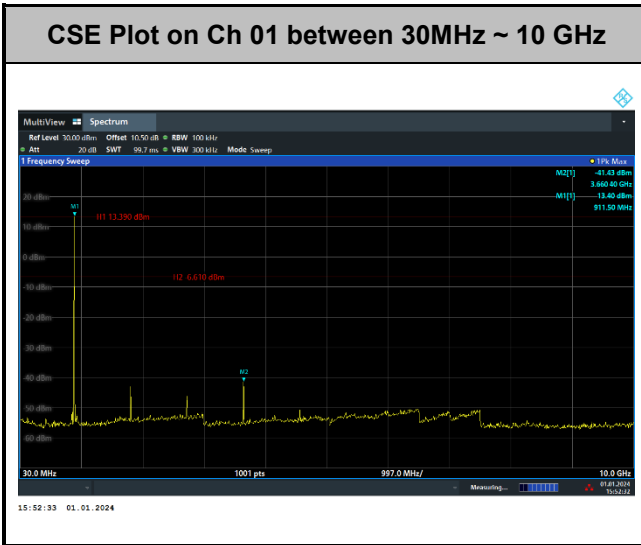

CSE Plot on Ch 50 between 30MHz ~ 10 GHz

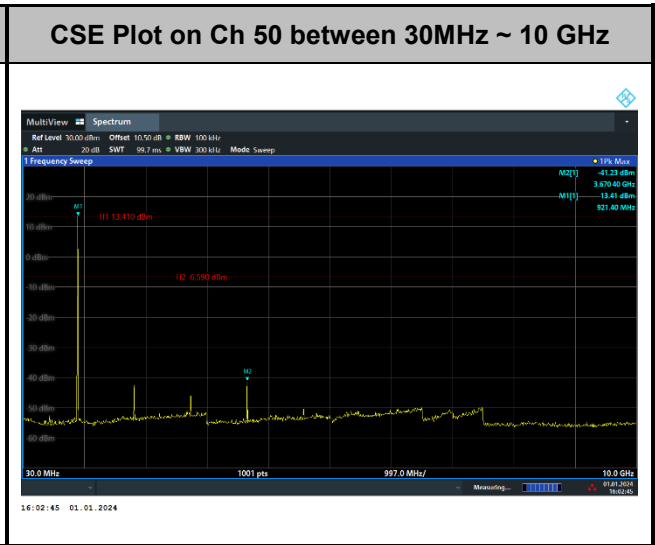




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

# EUT Information

Report NO : 341305-02  
 Test Mode : Mode 1  
 Test Voltage : Power From System  
 Phase : Line

Full Spectrum

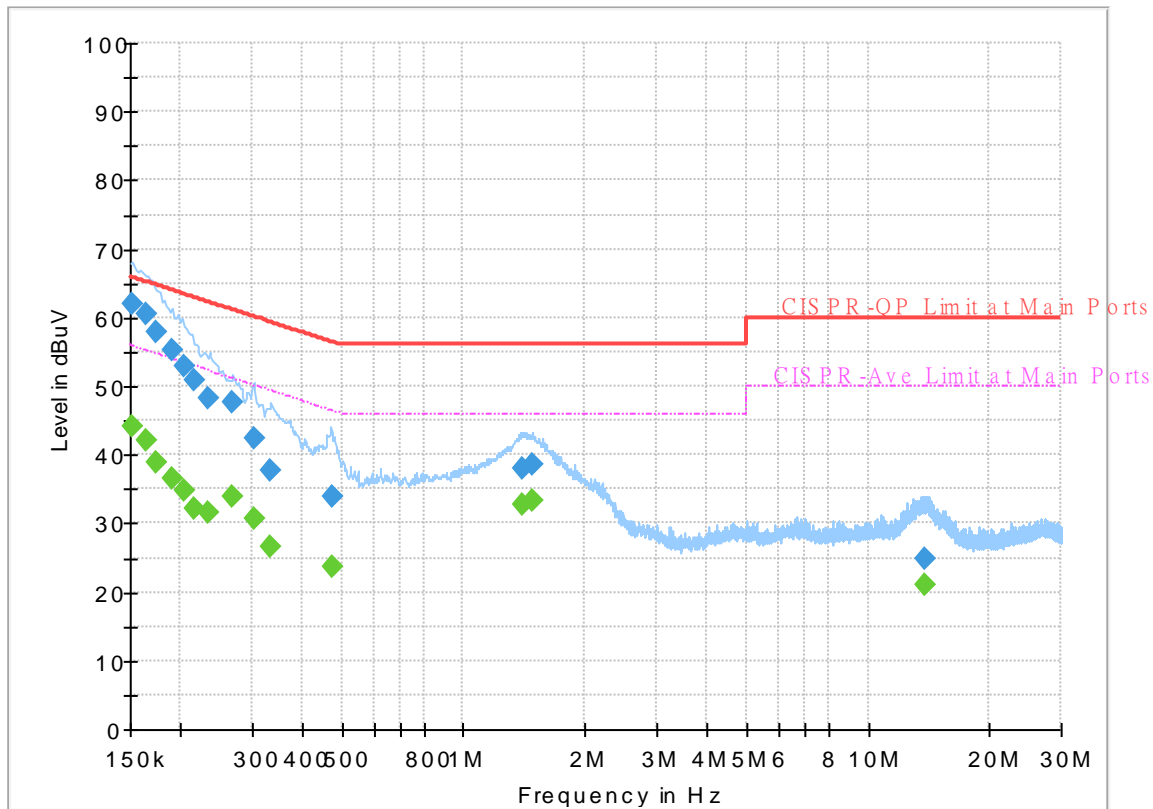

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	44.10	55.88	11.78	L1	OFF	19.8
0.152250	61.91	---	65.88	3.97	L1	OFF	19.8
0.163500	---	41.96	55.28	13.32	L1	OFF	19.8
0.163500	60.59	---	65.28	4.69	L1	OFF	19.8
0.174750	---	38.76	54.73	15.97	L1	OFF	19.8
0.174750	58.02	---	64.73	6.71	L1	OFF	19.8
0.190500	---	36.61	54.02	17.41	L1	OFF	19.8
0.190500	55.36	---	64.02	8.66	L1	OFF	19.8
0.204000	---	34.70	53.45	18.75	L1	OFF	19.8
0.204000	52.92	---	63.45	10.53	L1	OFF	19.8
0.215250	---	32.13	53.00	20.87	L1	OFF	19.8
0.215250	50.90	---	63.00	12.10	L1	OFF	19.8
0.233250	---	31.53	52.33	20.80	L1	OFF	19.8
0.233250	48.17	---	62.33	14.16	L1	OFF	19.8
0.269250	---	33.84	51.14	17.30	L1	OFF	19.8
0.269250	47.60	---	61.14	13.54	L1	OFF	19.8
0.303000	---	30.63	50.16	19.53	L1	OFF	19.8
0.303000	42.47	---	60.16	17.69	L1	OFF	19.8
0.334500	---	26.58	49.34	22.76	L1	OFF	19.8
0.334500	37.83	---	59.34	21.51	L1	OFF	19.8
0.471750	---	23.64	46.48	22.84	L1	OFF	19.8


<b>0.471750</b>	<b>33.80</b>	<b>---</b>	<b>56.48</b>	<b>22.68</b>	<b>L1</b>	<b>OFF</b>	<b>19.8</b>
<b>1.398750</b>	<b>---</b>	<b>32.65</b>	<b>46.00</b>	<b>13.35</b>	<b>L1</b>	<b>OFF</b>	<b>19.8</b>
<b>1.398750</b>	<b>37.96</b>	<b>---</b>	<b>56.00</b>	<b>18.04</b>	<b>L1</b>	<b>OFF</b>	<b>19.8</b>
<b>1.486500</b>	<b>---</b>	<b>33.25</b>	<b>46.00</b>	<b>12.75</b>	<b>L1</b>	<b>OFF</b>	<b>19.8</b>
<b>1.486500</b>	<b>38.59</b>	<b>---</b>	<b>56.00</b>	<b>17.41</b>	<b>L1</b>	<b>OFF</b>	<b>19.8</b>
<b>13.875000</b>	<b>---</b>	<b>21.03</b>	<b>50.00</b>	<b>28.97</b>	<b>L1</b>	<b>OFF</b>	<b>19.9</b>
<b>13.875000</b>	<b>24.71</b>	<b>---</b>	<b>60.00</b>	<b>35.29</b>	<b>L1</b>	<b>OFF</b>	<b>19.9</b>



# EUT Information

Report NO : 341305-02  
 Test Mode : Mode 1  
 Test Voltage : Power From System  
 Phase : Neutral

Full Spectrum

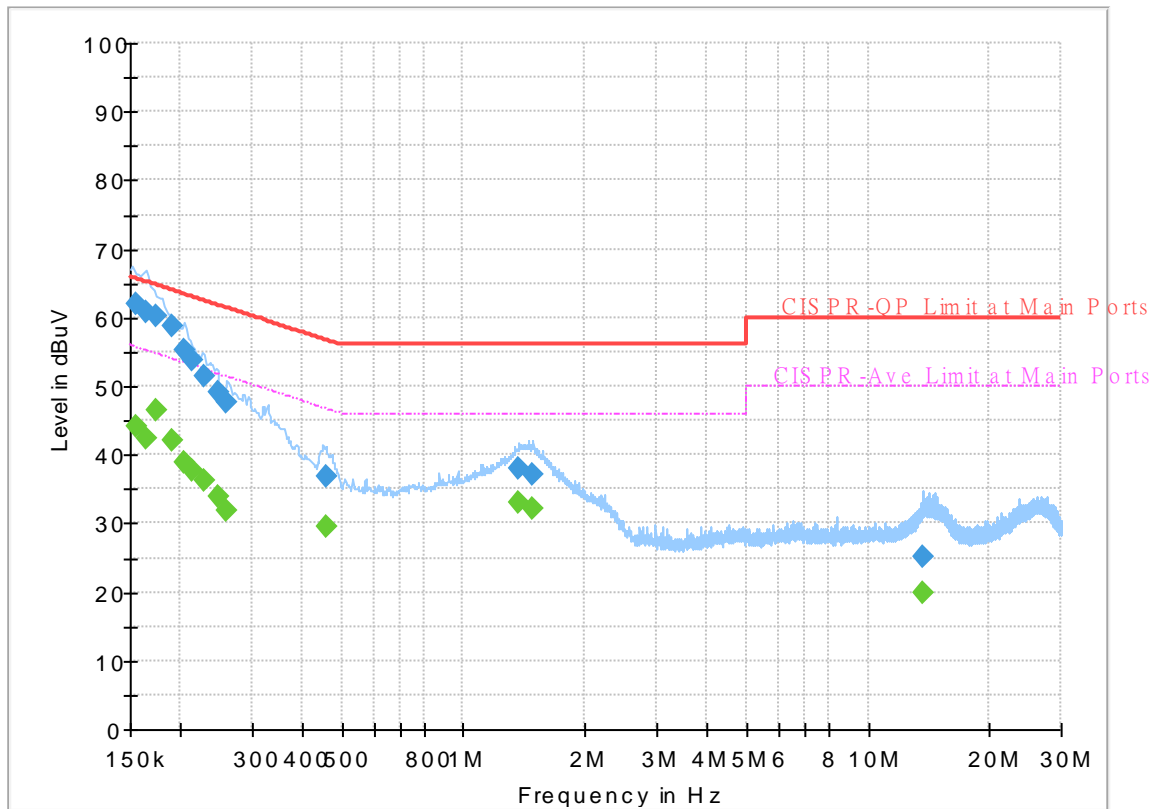

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	44.07	55.75	11.68	N	OFF	19.8
0.154500	61.92	---	65.75	3.83	N	OFF	19.8
0.163500	---	42.31	55.28	12.97	N	OFF	19.8
0.163500	60.77	---	65.28	4.51	N	OFF	19.8
0.174750	---	46.43	54.73	8.30	N	OFF	19.8
0.174750	60.10	---	64.73	4.63	N	OFF	19.8
0.190500	---	41.98	54.02	12.04	N	OFF	19.8
0.190500	58.91	---	64.02	5.11	N	OFF	19.8
0.204000	---	38.80	53.45	14.65	N	OFF	19.8
0.204000	55.13	---	63.45	8.32	N	OFF	19.8
0.213000	---	37.58	53.09	15.51	N	OFF	19.8
0.213000	53.77	---	63.09	9.32	N	OFF	19.8
0.228750	---	36.29	52.50	16.21	N	OFF	19.8
0.228750	51.58	---	62.50	10.92	N	OFF	19.8
0.246750	---	34.01	51.87	17.86	N	OFF	19.8
0.246750	49.17	---	61.87	12.70	N	OFF	19.8
0.260250	---	31.74	51.42	19.68	N	OFF	19.8
0.260250	47.78	---	61.42	13.64	N	OFF	19.8
0.458250	---	29.62	46.72	17.10	N	OFF	19.8
0.458250	36.94	---	56.72	19.78	N	OFF	19.8
1.374000	---	32.97	46.00	13.03	N	OFF	19.8

<b>1.374000</b>	<b>37.98</b>	<b>---</b>	<b>56.00</b>	<b>18.02</b>	<b>N</b>	<b>OFF</b>	<b>19.8</b>
<b>1.477500</b>	<b>---</b>	<b>32.18</b>	<b>46.00</b>	<b>13.82</b>	<b>N</b>	<b>OFF</b>	<b>19.8</b>
<b>1.477500</b>	<b>37.21</b>	<b>---</b>	<b>56.00</b>	<b>18.79</b>	<b>N</b>	<b>OFF</b>	<b>19.8</b>
<b>13.726500</b>	<b>---</b>	<b>20.00</b>	<b>50.00</b>	<b>30.00</b>	<b>N</b>	<b>OFF</b>	<b>20.0</b>
<b>13.726500</b>	<b>25.14</b>	<b>---</b>	<b>60.00</b>	<b>34.86</b>	<b>N</b>	<b>OFF</b>	<b>20.0</b>



### Appendix C. Conducted Spurious Emission

Test Engineer :	Kai Liao	Temperature :	22.3~25.4°C
		Relative Humidity :	57.9~66.1%

<No duty cycling, 19.5 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz)

Mode	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	MIMO Factor	Grounding Factor	Peak QP.
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/Q)
CH 01 915.257 MHz	#	457.628	-46.19	-	-	-54.1	2.69	0.52	0	4.7	P
		773.02	-50.88	-1.68	-49.2	-59.05	2.69	0.78	0	4.7	P
	#	868.08	-49.22	-	-	-57.42	2.69	0.81	0	4.7	P
		899.12	-49.57	-0.37	-49.2	-57.85	2.69	0.89	0	4.7	Q
	*	915.257	26.49	-	-	18.21	2.69	0.89	0	4.7	P
		932.1	-49.34	-0.14	-49.2	-57.67	2.69	0.94	0	4.7	Q
		964.11	-46.11	-4.91	-41.2	-54.44	2.69	0.94	0	4.7	P
CH 50 916.743 MHz	#	458.371	-45.77	-	-	-53.68	2.69	0.52	0	4.7	P
		773.99	-50.8	-1.6	-49.2	-58.97	2.69	0.78	0	4.7	Q
	#	869.05	-49.27	-	-	-57.47	2.69	0.81	0	4.7	P
		893.3	-50.36	-1.16	-49.2	-58.58	2.69	0.83	0	4.7	Q
	*	916.743	26.55	75.75	-49.2	18.27	2.69	0.89	0	4.7	P
		940.83	-50.98	-1.78	-49.2	-59.29	2.69	0.92	0	4.7	Q
		965.08	-46.3	-5.1	-41.2	-54.63	2.69	0.94	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



902 MHz ~ 928 MHz

(1 GHz ~ 10 GHz)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/A)
CH 01 915.257 MHz		1371.7	-54.99	-33.79	-21.2	-59.36	2.69	1.68	0	0	P
	#	1830.514	-17.78	-	-	-21.64	2.69	1.17	0	0	P
		2745.1	-45.78	-24.58	-21.2	-49.61	2.69	1.14	0	0	P
		3661.028	-41.02	-19.82	-21.2	-44.94	2.69	1.23	0	0	P
		3661.028	-44.85	-3.65	-41.2	-48.77	2.69	1.23	0	0	A
		4575	-39.53	-18.33	-21.2	-43.3	2.69	1.08	0	0	P
		4575	-42.98	-1.78	-41.2	-46.75	2.69	1.08	0	0	A
		5492	-44.81	-23.61	-21.2	-48.82	2.69	1.32	0	0	P
		8236	-58.15	-36.95	-21.2	-62.41	2.69	1.57	0	0	P
		9153	-47.76	-26.56	-21.2	-52.14	2.69	1.69	0	0	P
CH 50 916.743 MHz		1375.9	-53.75	-32.55	-21.2	-58.09	2.69	1.65	0	0	P
	#	1833.486	-18.33	-	-	-22.19	2.69	1.17	0	0	P
		2749.3	-45.27	-24.07	-21.2	-49.1	2.69	1.14	0	0	P
		3666.972	-41.31	-20.11	-21.2	-45.24	2.69	1.24	0	0	P
		4582	-40.26	-19.06	-21.2	-44.02	2.69	1.07	0	0	P
		4582	-44.98	-3.78	-41.2	-48.74	2.69	1.07	0	0	A
		5499	-44.1	-22.9	-21.2	-48.12	2.69	1.33	0	0	P
		8250	-57.35	-36.15	-21.2	-61.61	2.69	1.57	0	0	P
		9167	-46.99	-25.79	-21.2	-51.38	2.69	1.7	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



<60 ms max Tx\_on time duty cycling, 14 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz)

Mode	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	MIMO Factor	Grounding Factor	Peak QP.	
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/Q)	
CH 01 915.257 MHz		457.77	-54.03	-4.83	-49.2	-61.94	2.69	0.52	0	4.7	Q	
		773.02	-53.56	-4.36	-49.2	-61.73	2.69	0.78	0	4.7	P	
		868.08	-54.56	-5.36	-49.2	-62.76	2.69	0.81	0	4.7	P	
		898.15	-56.47	-7.27	-49.2	-64.69	2.69	0.83	0	4.7	Q	
	*	915.257	20.47	-	-	12.19	2.69	0.89	0	4.7	P	
		919.49	-57.18	-7.98	-49.2	-65.51	2.69	0.94	0	4.7	Q	
		964.11	-53.14	-11.94	-41.2	-61.47	2.69	0.94	0	4.7	P	
CH 50 916.743 MHz		458.74	-52.01	-2.81	-49.2	-59.92	2.69	0.52	0	4.7	Q	
		773.99	-54.49	-5.29	-49.2	-62.66	2.69	0.78	0	4.7	P	
		869.05	-54.6	-5.4	-49.2	-62.8	2.69	0.81	0	4.7	P	
	*	916.743	19.8	-	-	11.52	2.69	0.89	0	4.7	P	
		965.08	-52.93	-11.73	-41.2	-61.26	2.69	0.94	0	4.7	P	
Remark	1. No other spurious found. 2. All results are PASS against limit line.											



902 MHz ~ 928 MHz

(1 GHz ~ 10 GHz)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/A)
					Line	Level	Gain	Loss	Factor	Factor	Avg.
CH 01 915.257 MHz		1371.7	-60.73	-39.53	-21.2	-65.1	2.69	1.68	0	0	P
	#	1829.5	-37.08	-	-	-40.94	2.69	1.17	0	0	P
		2745.1	-51.07	-29.87	-21.2	-54.9	2.69	1.14	0	0	P
		3658	-38.3	-17.1	-21.2	-42.22	2.69	1.23	0	0	P
		3658	-42.99	-1.79	-41.2	-46.91	2.69	1.23	0	0	A
		4575	-51.98	-30.78	-21.2	-55.75	2.69	1.08	0	0	P
		5492	-64.53	-43.33	-21.2	-68.54	2.69	1.32	0	0	P
		8236	-67.54	-46.34	-21.2	-71.8	2.69	1.57	0	0	P
		9153	-63.63	-42.43	-21.2	-68.01	2.69	1.69	0	0	P
CH 50 916.743 MHz		1375.9	-62.43	-41.23	-21.2	-66.77	2.69	1.65	0	0	P
	#	1833.7	-37.07	-	-	-40.93	2.69	1.17	0	0	P
		2749.3	-50.91	-29.71	-21.2	-54.74	2.69	1.14	0	0	P
		3665	-39.06	-17.86	-21.2	-42.99	2.69	1.24	0	0	P
		3665	-43.56	-2.36	-41.2	-47.49	2.69	1.24	0	0	A
		4582	-50.66	-29.46	-21.2	-54.42	2.69	1.07	0	0	P
		7333	-62.69	-41.49	-21.2	-66.76	2.69	1.38	0	0	P
		8250	-67.39	-46.19	-21.2	-71.65	2.69	1.57	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



<No duty cycling, 12 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz)

Mode	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	MIMO Factor	Grounding Factor	Peak QP.	
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/Q)	
CH 01 915.257 MHz		457.77	-54.89	-5.69	-49.2	-62.8	2.69	0.52	0	4.7	Q	
		773.02	-54.08	-4.88	-49.2	-62.25	2.69	0.78	0	4.7	P	
		879.72	-55.29	-6.09	-49.2	-63.51	2.69	0.83	0	4.7	Q	
		906.88	-56.22	-7.02	-49.2	-64.5	2.69	0.89	0	4.7	Q	
	*	915.257	20.47	-	-	12.19	2.69	0.89	0	4.7	P	
		917.55	-53.83	-4.63	-49.2	-62.11	2.69	0.89	0	4.7	Q	
		951.5	-62.91	-13.71	-49.2	-71.22	2.69	0.92	0	4.7	Q	
CH 50 916.743 MHz		458.74	-53.55	-4.35	-49.2	-61.46	2.69	0.52	0	4.7	Q	
		773.99	-53.26	-4.06	-49.2	-61.43	2.69	0.78	0	4.7	P	
		869.05	-53.19	-3.99	-49.2	-61.39	2.69	0.81	0	4.7	P	
	*	916.743	19.8	-	-	11.52	2.69	0.89	0	4.7	P	
		965.08	-52.23	-11.03	-41.2	-60.56	2.69	0.94	0	4.7	P	
Remark	1. No other spurious found. 2. All results are PASS against limit line.											



902 MHz ~ 928 MHz

(1 GHz ~ 10 GHz)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
					Line	Level	Gain	Loss	Factor	Factor	Avg.
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/A)
CH 01 915.257 MHz		1371.7	-57.22	-36.02	-21.2	-61.59	2.69	1.68	0	0	P
	#	1829.5	-35.54	-	-	-39.4	2.69	1.17	0	0	P
		2745.1	-59.91	-38.71	-21.2	-63.74	2.69	1.14	0	0	P
		3658	-45.19	-23.99	-21.2	-49.11	2.69	1.23	0	0	P
		4575	-54.13	-32.93	-21.2	-57.9	2.69	1.08	0	0	P
		8236	-68.99	-47.79	-21.2	-73.25	2.69	1.57	0	0	P
		9153	-68.53	-47.33	-21.2	-72.91	2.69	1.69	0	0	P
CH 50 916.743 MHz		1375.9	-60.26	-39.06	-21.2	-63.55	2.69	1.65	0	0	P
	#	1833.7	-36.36	-	-	-39.68	2.69	1.17	0	0	P
		2749.3	-56.03	-34.83	-21.2	-59.5	2.69	1.14	0	0	P
		3665	-42.01	-20.81	-21.2	-45.68	2.69	1.24	0	0	P
		4582	-54.83	-33.63	-21.2	-58.28	2.69	1.07	0	0	P
		7333	-63.63	-42.43	-21.2	-67.63	2.69	1.38	0	0	P
		8250	-68.3	-47.1	-21.2	-72.39	2.69	1.57	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
#	The unwanted signal can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for conducted spurious emission is shown as below:

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( dB )	( P/A )
CH 01		1825.5	-38.76	-17.56	-21.2	-42.5	2.69	1.05	0	0	P
912.75 MHz		1825.5	-42.33	-1.13	-41.2	-46.07	2.69	1.05	0	0	A

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBm) =  
Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)
3. Margin(dB) = Level(dBm) – Limit Line(dBm)

**For Peak Limit @ 1825.5 MHz:**

1. Level(dBm)  
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)  
= 2.69(dBi) + 1.05(dB) – 42.5(dBm)  
= -38.76 (dBm)
2. Margin(dB)  
= Level(dBm) – Limit Line(dBm)  
= -38.76(dBm) +21.2(dBm)  
= -17.56(dB)

**For Average Limit @ 1825.5MHz:**

1. Level(dBm)  
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)  
= 2.69(dBi) + 1.05(dB) – 46.07(dBm)  
= -42.33 (dBm)
2. Margin(dB)  
= Level(dBm) – Limit Line(dBm)  
= -42.33(dBm) + 41.2(dBm)  
= -1.13(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



# Appendix D. Conducted Spurious Emission Plots

Test Engineer :	Kai Liao	Temperature :	22.3~25.4°C
		Relative Humidity :	57.9~66.1%

< No duty cycling, 19.5 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz)

902 MHz ~ 928 MHz		
	CH01 915.257 MHz	CH50 916.743 MHz
Peak/ QP	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+2.69 HORIZONTAL REW: 120.000kHz VIEW: 300.000kHz SWT: 9.500sec</p>	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+3.69 HORIZONTAL REW: 120.000kHz VIEW: 300.000kHz SWT: 9.500sec</p>

**Remark:** The unwanted signals #1 and #3 can be ignored since fall within the non-restricted band and meet the requirements of 15.247 (d).



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz)

902 MHz ~ 928 MHz		
	CH01 915.257 MHz	CH50 916.743 MHz
Peak/ QP	<p>Site Condition : THIS-HY : FCC CLASS-B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VIEW:3000.000kHz SWT:Auto</p>	<p>Site Condition : THIS-HY : FCC CLASS-B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VIEW:3000.000kHz SWT:Auto</p>

**Remark:** The unwanted signal of 2nd Harmonic in plot falls within the non-restricted band and meet the requirements of 15.247 (d).



<60 ms max Tx\_on time duty cycling, 14 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz)

902 MHz ~ 928 MHz		
	CH01 915.257 MHz	CH50 916.743 MHz
Peak/ QP	<p>Site : TH05-HY Condition : FCC CLASS B_CON ANT GAIN+2.69 HORIZONTAL RESW 120.000MHz VIEW 300.000MHz SWT 0.500sec</p>	<p>Site : TH05-HY Condition : FCC CLASS B_CON ANT GAIN+2.69 HORIZONTAL RESW 120.000MHz VIEW 300.000MHz SWT 0.500sec</p>



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz)



902 MHz ~ 928 MHz		
	CH01 915.257 MHz	CH50 916.743 MHz
Peak/ QP	<p>Site Condition : THIS-RY : FCC CLASS_B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>	<p>Site Condition : THIS-RY : FCC CLASS_B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>

**Remark:** The unwanted signal of 2nd Harmonic in plot falls within the non-restricted band and meet the requirements of 15.247 (d).



<No duty cycling, 12 dBm and antenna gain 2.69 dBi>

902 MHz ~ 928 MHz  
(30 MHz ~ 1 GHz)

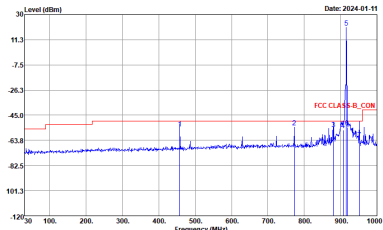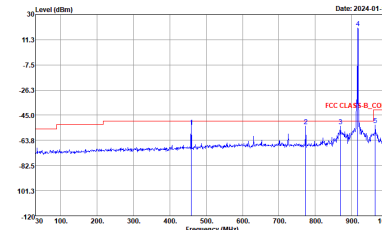902 MHz ~ 928 MHz		
	CH01 915.257 MHz	CH50 916.743 MHz
Peak/ QP	 <p>Site : TH05-HY Condition : FCC CLASS B, CONSTANT GAIN+2.69 HORIZONTAL RBW: 120.0000GHz VIEW: 300.0000Hz SWT: 0.500sec</p>	 <p>Site : TH05-HY Condition : FCC CLASS B, CONSTANT GAIN+2.69 HORIZONTAL RBW: 120.0000GHz VIEW: 300.0000Hz SWT: 0.500sec</p>



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz)

902 MHz ~ 928 MHz	
CH01 915.257 MHz	CH50 916.743 MHz
<p>Peak Avg.</p> <p>Site Condition : THIS:HY : FCC CLASS-B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWI7:Auto</p>	<p>Site Condition : THIS:HY : FCC CLASS-B_CON ANT GAIN+2.69 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWI7:Auto</p>

**Remark:** The unwanted signal of 2nd Harmonic in plot falls within the non-restricted band and meet the requirements of 15.247 (d).





## Appendix E. Cabinet Radiated Spurious Emission

Test Engineer :	Jacky Hung, Mancy Chou and Rain Lee	Temperature :	20~26°C
		Relative Humidity :	40~65%

<No duty cycling, 19.5 dBm>

902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz @ 3m)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
CH01 915.257MHz		32.43	22.91	-17.09	40	30.58	23.81	0.86	32.34	-	-	P	H	
		127.47	19.93	-23.57	43.5	33.13	17.75	1.3	32.25	-	-	P	H	
		295.68	29.79	-16.21	46	40.75	19.29	1.84	32.09	-	-	P	H	
		300	29.53	-16.47	46	40.4	19.36	1.85	32.08	-	-	P	H	
		894.3	37.91	-8.09	46	37.48	28.9	3	31.47	-	-	P	H	
	*	915.257	70.33	-	-	69.46	29.13	3.04	31.3	100	8	P	H	
		993	33.81	-20.19	54	30.71	30.56	3.15	30.61	-	-	P	H	
														H
														H
			30.81	22.61	-17.39	40	29.41	24.69	0.83	32.32	-	-	P	V
			136.92	17.45	-26.05	43.5	30.6	17.77	1.31	32.23	-	-	P	V
			295.68	22.94	-23.06	46	33.9	19.29	1.84	32.09	-	-	P	V
			561.8	27.22	-18.78	46	30.77	26.38	2.28	32.21	-	-	P	V
			850.9	30.91	-15.09	46	30.66	29.04	2.95	31.74	-	-	P	V
	*		915.257	61.81	-	-	60.94	29.13	3.04	31.3	200	91	P	V
			990.2	33.31	-20.69	54	30.18	30.63	3.14	30.64	-	-	P	V
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

Mode	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
CH01 915.257MHz		2745.771	48	-26	74	71.86	28.1	5.47	57.43	100	117	P	H	
		2745.771	43.81	-10.19	54	67.67	28.1	5.47	57.43	100	117	A	H	
		3661.028	49.76	-24.24	74	71.94	29.74	6.39	58.31	100	107	P	H	
		3661.028	46.9	-7.1	54	69.08	29.74	6.39	58.31	100	107	A	H	
		4576.285	46.49	-27.51	74	65.64	31.75	7.15	58.05	393	299	P	H	
		4576.285	41.91	-12.09	54	61.06	31.75	7.15	58.05	393	299	A	H	
		7322.056	45.39	-28.61	74	56.58	36.91	8.75	56.85	-	-	P	H	
		8237.313	44.61	-29.39	74	54.58	37	9.49	56.46	-	-	P	H	
		9152.57	46.67	-27.33	74	55.56	38.11	9.76	56.76	-	-	P	H	
														H
			2745.771	49.01	-24.99	74	72.87	28.1	5.47	57.43	227	31	P	V
			2745.771	47.28	-6.72	54	71.14	28.1	5.47	57.43	227	31	A	V
			3661.028	54.43	-19.57	74	76.61	29.74	6.39	58.31	255	178	P	V
			3661.028	53.27	-0.73	54	75.45	29.74	6.39	58.31	255	178	A	V
			4576.285	49.44	-24.56	74	68.59	31.75	7.15	58.05	368	335	P	V
			4576.285	45.92	-8.08	54	65.07	31.75	7.15	58.05	368	335	A	V
			7322.056	46.21	-27.79	74	57.4	36.91	8.75	56.85	-	-	P	V
			8237.313	44.15	-29.85	74	54.12	37	9.49	56.46	-	-	P	V
			9152.57	51.3	-22.7	74	60.19	38.11	9.76	56.76	273	7	P	V
			9152.57	45.84	-8.16	54	54.73	38.11	9.76	56.76	273	7	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz @ 3m)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
CH50 916.743MHz		31.89	22.14	-17.86	40	29.6	24.03	0.85	32.34	-	-	P	H	
		103.98	17.63	-25.87	43.5	31.96	16.72	1.23	32.28	-	-	P	H	
		300	29.43	-16.57	46	40.3	19.36	1.85	32.08	-	-	P	H	
		540.1	32.83	-13.17	46	38.32	24.37	2.34	32.2	-	-	P	H	
		899.9	36.57	-9.43	46	36.05	28.94	3.01	31.43	-	-	P	H	
	*	916.743	70.38	-	-	69.47	29.15	3.04	31.28	100	6	P	H	
		960.1	37.52	-16.48	54	34.25	31.06	3.11	30.9			P	H	
													H	
													H	
			30.54	23.39	-16.61	40	30.12	24.77	0.82	32.32	-	-	P	V
			127.74	17.19	-26.31	43.5	30.4	17.74	1.3	32.25	-	-	P	V
			262.2	19.91	-26.09	46	30.07	20.23	1.74	32.13	-	-	P	V
			540.1	28.01	-17.99	46	33.5	24.37	2.34	32.2	-	-	P	V
			839.7	30.99	-15.01	46	31.08	28.77	2.92	31.78	-	-	P	V
			900.6	34.59	-11.41	46	34.05	28.95	3.01	31.42	-	-	P	V
		*	916.743	62.9	-	-	61.99	29.15	3.04	31.28	200	113	P	V
														V
														V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

Mode	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
CH50 916.743MHz		2750.229	49.61	-24.39	74	73.48	28.1	5.47	57.44	101	121	P	H	
		2750.229	47.82	-6.18	54	71.69	28.1	5.47	57.44	101	121	A	H	
		3666.972	50.79	-23.21	74	72.94	29.77	6.4	58.32	291	55	P	H	
		3666.972	49.12	-4.88	54	71.27	29.77	6.4	58.32	291	55	A	H	
		4583.715	45.94	-28.06	74	65.04	31.77	7.16	58.03	390	298	P	H	
		4583.715	41.99	-12.01	54	61.09	31.77	7.16	58.03	390	298	A	H	
		7333.944	45.91	-28.09	74	57.16	36.86	8.76	56.87	-	-	P	H	
		8250.687	44.49	-29.51	74	54.45	37	9.49	56.45	-	-	P	H	
		9167.43	46.04	-27.96	74	54.9	38.13	9.76	56.75	-	-	P	H	
														H
			2750.229	47.05	-26.95	74	70.92	28.1	5.47	57.44	201	90	P	V
			2750.229	44.19	-9.81	54	68.06	28.1	5.47	57.44	201	90	A	V
			3666.972	54.5	-19.5	74	76.65	29.77	6.4	58.32	328	178	P	V
			3666.972	53.33	-0.67	54	75.48	29.77	6.4	58.32	328	178	A	V
			4583.715	49.43	-24.57	74	68.53	31.77	7.16	58.03	391	336	P	V
			4583.715	46.19	-7.81	54	65.29	31.77	7.16	58.03	391	336	A	V
			7333.944	45.45	-28.55	74	56.7	36.86	8.76	56.87	-	-	P	V
			8250.687	44.48	-29.52	74	54.44	37	9.49	56.45	-	-	P	V
			9167.43	51.75	-22.25	74	60.61	38.13	9.76	56.75	280	8	P	V
			9167.43	46.39	-7.61	54	55.25	38.13	9.76	56.75	280	8	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



<No duty cycling, 14 dBm>

902 MHz ~ 928 MHz  
(30 MHz ~ 1 GHz @ 3m)

Mode	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
CH01 915.257MHz		31.08	22.49	-17.51	40	29.41	24.58	0.83	32.33	-	-	P	H	
		106.95	17.69	-25.81	43.5	31.84	16.88	1.24	32.27	-	-	P	H	
		300	29.31	-16.69	46	40.18	19.36	1.85	32.08	-	-	P	H	
		540.1	34.46	-11.54	46	39.95	24.37	2.34	32.2	-	-	P	H	
		720	34.38	-11.62	46	36.68	27.12	2.68	32.1	-	-	P	H	
	*	915.257	65.7	-	-	64.83	29.13	3.04	31.3	150	178	P	H	
		960.1	37.14	-16.86	54	33.87	31.06	3.11	30.9			P	H	
													H	
													H	
			31.35	23.75	-16.25	40	30.84	24.4	0.84	32.33	-	-	P	V
			135.84	18.16	-25.34	43.5	31.37	17.71	1.32	32.24	-	-	P	V
			300	23.64	-22.36	46	34.51	19.36	1.85	32.08	-	-	P	V
			540.1	28.39	-17.61	46	33.88	24.37	2.34	32.2	-	-	P	V
			717.2	30.88	-15.12	46	33.3	27.02	2.67	32.11	-	-	P	V
	*		915.257	55.7	-	-	54.83	29.13	3.04	31.3	150	118	P	V
			963.6	33.57	-20.43	54	30.22	31.11	3.11	30.87	-	-	P	V
														V
														V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

Mode	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
CH01 915.257MHz		2745.771	36.72	-37.28	74	60.58	28.1	5.47	57.43	-	-	P	H	
		3661.028	43.03	-30.97	74	65.21	29.74	6.39	58.31	100	112	P	H	
		3661.028	37.13	-16.87	54	59.31	29.74	6.39	58.31	100	112	A	H	
		4576.285	39.52	-34.48	74	58.67	31.75	7.15	58.05	-	-	P	H	
		7322.056	46.18	-27.82	74	57.37	36.91	8.75	56.85	-	-	P	H	
		8237.313	44.95	-29.05	74	54.92	37	9.49	56.46	-	-	P	H	
		9152.57	44.72	-29.28	74	53.61	38.11	9.76	56.76	-	-	P	H	
														H
														H
														H
			2745.771	36.99	-37.01	74	60.85	28.1	5.47	57.43	-	-	P	V
			3661.028	43.21	-30.79	74	65.39	29.74	6.39	58.31	383	83	P	V
			3661.028	36.77	-17.23	54	58.95	29.74	6.39	58.31	383	83	A	V
			4576.285	40.61	-33.39	74	59.76	31.75	7.15	58.05	-	-	P	V
			7322.056	45.77	-28.23	74	56.96	36.91	8.75	56.85	-	-	P	V
			8237.313	44.58	-29.42	74	54.55	37	9.49	56.46	-	-	P	V
			9152.57	44.95	-29.05	74	53.84	38.11	9.76	56.76	-	-	P	V
														V
													V	
													V	
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz @ 3m)

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
CH50 916.743MHz		30	23.14	-16.86	40	29.71	24.93	0.81	32.31	-	-	P	H	
		135.84	17.81	-25.69	43.5	31.02	17.71	1.32	32.24	-	-	P	H	
		300	29.24	-16.76	46	40.11	19.36	1.85	32.08	-	-	P	H	
		540.1	34.4	-11.6	46	39.89	24.37	2.34	32.2	-	-	P	H	
		720	32.56	-13.44	46	34.86	27.12	2.68	32.1	-	-	P	H	
	*	916.743	65.79	-	-	64.88	29.15	3.04	31.28	150	177	P	H	
		960.1	37.24	-16.76	54	33.97	31.06	3.11	30.9			P	H	
													H	
													H	
			31.35	22.9	-17.1	40	29.99	24.4	0.84	32.33	-	-	P	V
			109.38	17.31	-26.19	43.5	31.27	17.06	1.25	32.27	-	-	P	V
			300	23.36	-22.64	46	34.23	19.36	1.85	32.08	-	-	P	V
			540.1	28.28	-17.72	46	33.77	24.37	2.34	32.2	-	-	P	V
			867.7	31.35	-14.65	46	30.95	29.07	2.97	31.64	-	-	P	V
	*		916.743	55.81	-	-	54.9	29.15	3.04	31.28	150	122	P	V
			967.1	33.54	-20.46	54	30.15	31.12	3.11	30.84	-	-	P	V
														V
														V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

Mode	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
CH50 916.743MHz		2750.229	36.93	-37.07	74	60.8	28.1	5.47	57.44	-	-	P	H	
		3666.972	43.22	-30.78	74	65.37	29.77	6.4	58.32	114	110	P	H	
		3666.972	37.59	-16.41	54	59.74	29.77	6.4	58.32	114	110	A	H	
		4583.715	40.45	-33.55	74	59.55	31.77	7.16	58.03	-	-	P	H	
		7333.944	45.43	-28.57	74	56.68	36.86	8.76	56.87	-	-	P	H	
		8250.687	44.93	-29.07	74	54.89	37	9.49	56.45	-	-	P	H	
		9167.43	45.13	-28.87	74	53.99	38.13	9.76	56.75	-	-	P	H	
														H
														H
			2750.229	36.39	-37.61	74	60.26	28.1	5.47	57.44	-	-	P	V
			3666.972	43.05	-30.95	74	65.2	29.77	6.4	58.32	372	82	P	V
			3666.972	37.44	-16.56	54	59.59	29.77	6.4	58.32	372	82	A	V
			4583.715	41.02	-32.98	74	60.12	31.77	7.16	58.03	-	-	P	V
			7333.944	46.22	-27.78	74	57.47	36.86	8.76	56.87	-	-	P	V
			8250.687	44.42	-29.58	74	54.38	37	9.49	56.45	-	-	P	V
			9167.43	45.2	-28.8	74	54.06	38.13	9.76	56.75	-	-	P	V
														V
														V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

Mode	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
CH 01 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**




# Appendix F. Cabinet Radiated Spurious Emission Plots

Test Engineer :	Jacky Hung, Mancy Chou and Rain Lee	Temperature :	20~26°C
		Relative Humidity :	40~65%

<No duty cycling, 19.5 dBm>


902 MHz ~ 928 MHz

(30 MHz ~ 1 GHz @ 3m)

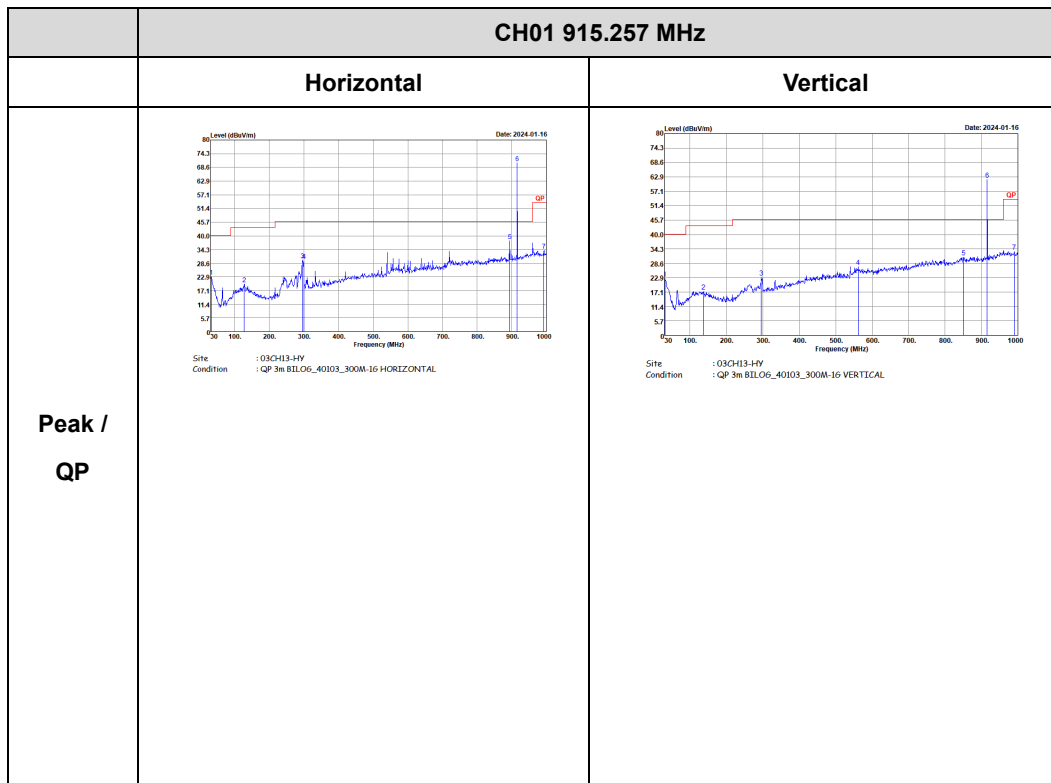



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

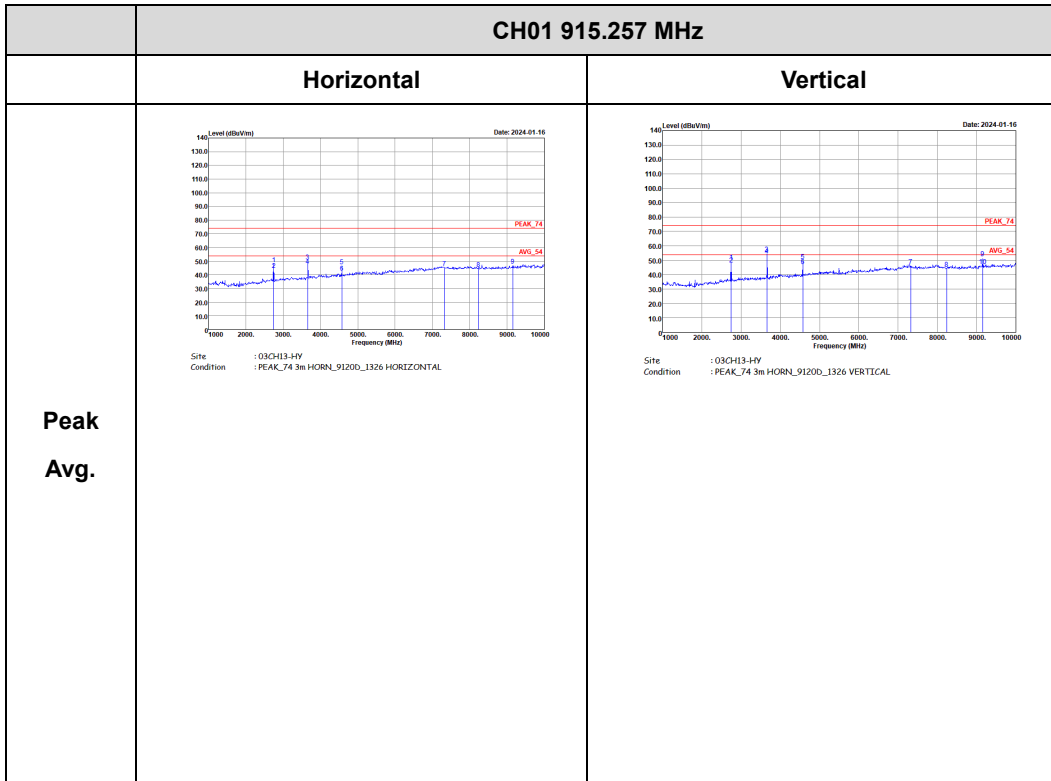



902 MHz ~ 928 MHz  
(30 MHz ~ 1 GHz @ 3m)

CH50 916.743 MHz		
	Horizontal	Vertical
Peak / QP	<p>Site : 03CH13-HY Condition : QP 3m BIL06_40103_300M-16 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : QP 3m BIL06_40103_300M-16 VERTICAL</p>





902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

CH50 916.743 MHz		
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 VERTICAL</p>




<No duty cycling, 14 dBm>

902 MHz ~ 928 MHz  
(30 MHz ~ 1 GHz @ 3m)

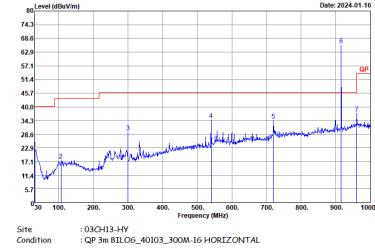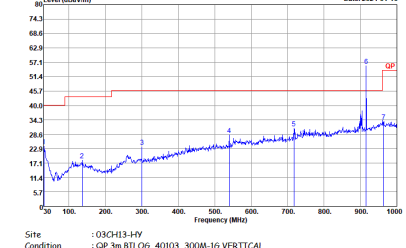CH01 915.257 MHz		
	Horizontal	Vertical
Peak / QP	 <p>Site : 03CH13-HY Condition : QP 3m B1LOG_40103_300M-16 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : QP 3m B1LOG_40103_300M-16 VERTICAL</p>



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

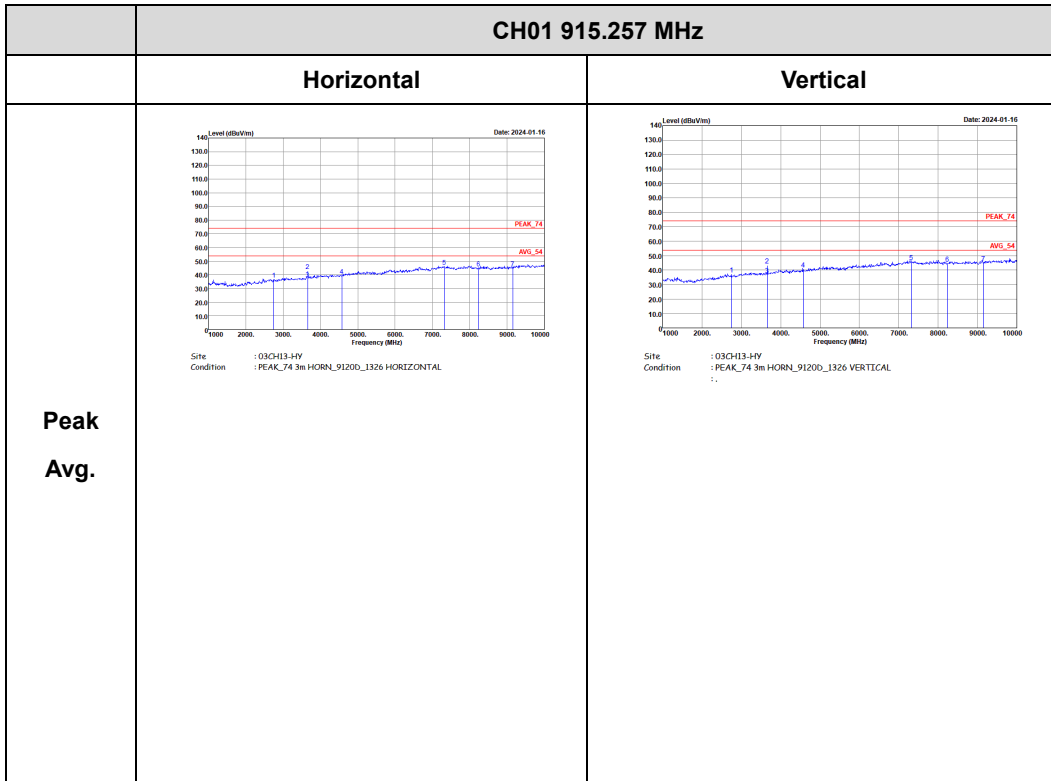





902 MHz ~ 928 MHz  
(30 MHz ~ 1 GHz @ 3m)

CH50 916.743 MHz		
	Horizontal	Vertical
Peak / QP	<p>Site : 03CH13-HY Condition : QP 3m BIL06_40103_300M-16 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : QP 3m BIL06_40103_300M-16 VERTICAL</p>



902 MHz ~ 928 MHz  
(1 GHz ~ 10 GHz @ 3m)

		CH50 916.743 MHz	
		Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1326 VERTICAL</p>	



### Appendix G. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
MIOTY	100.00	-	-	10Hz

