



# FCC RADIO TEST REPORT

**FCC ID** : ZAT-CC2652RSIP  
**Equipment** : CC2652RSIPMOT  
**Brand Name** : Texas Instruments Incorporated  
**Model Name** : CC2652RSIPMOT  
**Marketing Name** : CC2652RSIP SimpleLink™ Multiprotocol  
2.4-GHz Wireless System-in-Package  
**Applicant** : Texas Instruments  
12500 TI BLVD., Dallas, Texas, 75243  
**Manufacturer** : Texas Instruments  
12500 TI BLVD., Dallas, Texas, 75243  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Nov. 09, 2021 and testing was performed from Nov. 15, 2021 to Feb. 17, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	6
1.3 Testing Location .....	7
1.4 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	11
2.6 Measurement Results Explanation Example.....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement.....	17
3.3 Power Spectral Density Measurement .....	18
3.4 Conducted Band Edges and Spurious Emission Measurement .....	23
3.5 Radiated Band Edges and Spurious Emission Measurement .....	29
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements .....	36
<b>4 List of Measuring Equipment .....</b>	<b>37</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>39</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Conducted Spurious Emission</b>	
<b>Appendix D. Conducted Spurious Emission Plots</b>	
<b>Appendix E. Radiated Spurious Emission</b>	
<b>Appendix F. Radiated Spurious Emission Plots</b>	
<b>Appendix G. Duty Cycle Plots</b>	
<b>Appendix H. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR1N0955A	01	Initial issue of report	Mar. 03, 2022
FR1N0955A	02	Revise description in section 3.5.3 and appendix A	Mar. 21, 2022



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.33 dB under the limit at 30.000 MHz
3.6	15.207	AC Conducted Emission	Pass	9.53 dB under the limit at 0.152 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Danny Lee**

**Report Producer: Clio Lo**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth - LE, and Zigbee.

	Brand	Antenna type	Model	2.4 GHz Gain
1	Texas Instruments	Inverted F - PCB	Custom Antenna	3.3dBi
2			Custom Antenna	5.3dBi
3	Ethertronics	Dipole	1000423	-0.6dBi
4	LSR	Rubber Whip / Dipole	001-0012	2dBi
5			080-0013	2dBi
6			080-0014	2dBi
7		PIFA	001-0016	2.5dBi
8	001-0021		2.5dBi	
9	Laird	PCB	CAF94504	2dBi
10			CAF9405	2dBi
11	Pulse	Ceramic Chip	W3006	3.2dBi
12	ACX	Multilayer Chip	AT3216-BR2R7HAA	0.5dBi
13			AT312-T2R4PAA	1.5dBi
14	TDK	Multilayer Ceramic	ANT016008LCD2442MA1	1.6dBi
15		Chip Antenna	ANT016008LCD2442MA2	2.5dBi
16	Mitsubishi Material	Chip Antenna	AM03DP-ST01	1.6dBi
17		Antenna Unit	UB18CP-100ST01	-1.0dBi
18	Taiyo Yuden	Chip Antenna / Helical Monopole	AF216M245001	1.5dBi
19		Chip Antenna / Monopole Type	AH212M245001	1.3dBi
20			AH316M245001	1.9dBi
21	Antenna Technology	Dipole	AA2402SPU	2.0dBi
22			AA2402RSPU	2.0dBi
23			AA2402A-UFLLP	2.0dBi
24			AA2402AU-UFLLP	2.0dBi
25	Staf	Mono-pole	1019-016	2.14dBi
26			1019-017	2.14dBi
27			1019-018	2.14dBi
28			1019-019	2.14dBi



	<b>Brand</b>	<b>Antenna type</b>	<b>Model</b>	<b>2.4 GHz Gain</b>
29	Map Electronics	Rubber Whip	MEIWX-2411SAXX-2400	2.0dBi
30			MEIWX-2411RSXX-2400	2.0dBi
31			MEIWX-1511RSXX-2400	5.0dBi
32			MEIWX-151XSAXX-2400	5.0dBi
33			MEIWX-1451RSXX-2400	4.0dBi
34			MEIWX-282XSAXX-2400	2.0dBi
35			MEIWX-282XRSXX-2400	2.0dBi
36			MEIWF-HP01RS2X-2400	2.0dBi
37	Yageo	Chip	ANT3216A063R2400A	1.69dBi
38	Mag Layers Scientific	Chip	LTA-3216-2G4S3-A1	1dBi
39			LTA-3216-2G4S3-A3	2dBi
40	Advantech	Rubber Whip / Dipole	AN2450-5706RS	2.38dBi
41			AN2450-5010BRS	5.03dBi
42			AN2450-92K01BRS	5.03dBi
43			R-AN2400-5701RS	3.3dBi

**Remark:**

1. The EUT uses the PCB antenna from Texas Instruments (Antenna #1)
2. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

**1.2 Modification of EUT**

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY, 03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY (TAF Code: 3786)
<b>Remark</b>	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory

FCC designation No.: TW1190 and TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	






## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	<b>Bluetooth – LE / GFSK</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>AC Conducted Emission</b>	Mode 1: Bluetooth - LE TX + USB Cable (Charging from Notebook)
	Mode 2: Zigbee TX + USB Cable (Charging from Notebook)
<b>Remark:</b>	
1. The worst case of Conducted Emission is mode 2; only the test data of it was reported.	
2. For Radiated Spurious Emission test on 18 GHz-40 GHz, only test BLE 1 Mbps which with highest output power and power spectral density(worst-case mode).	

### 2.3 Connection Diagram of Test System

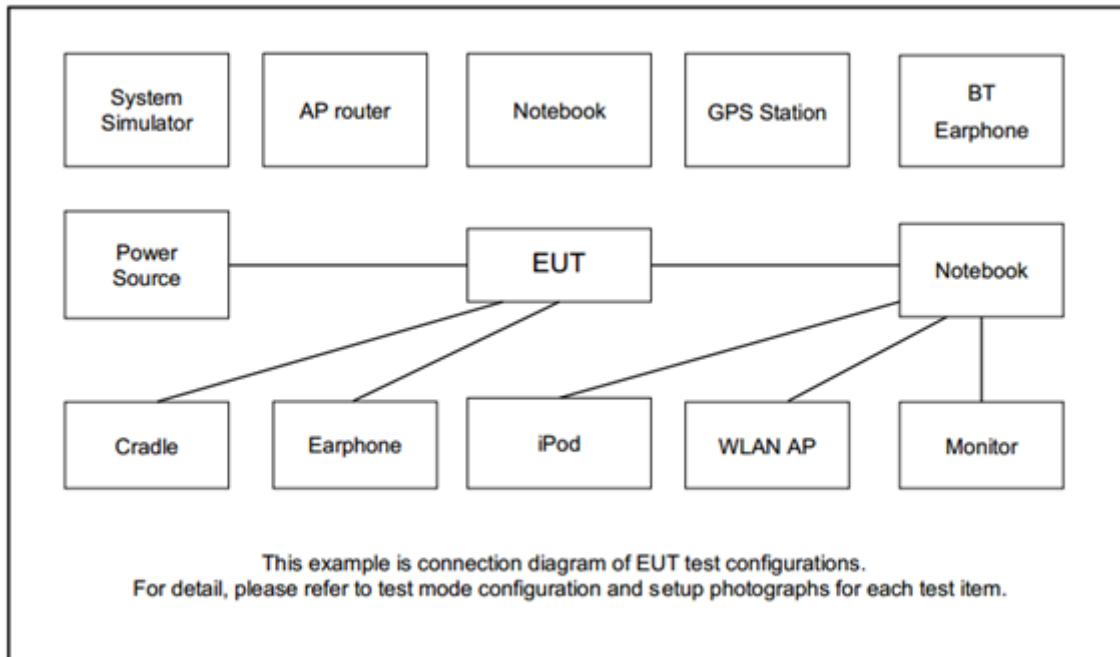

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	Unshielded, 1.0m	Unshielded, 1.8m
2.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0m	N/A
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Dell	E3340	FCC DoC	Shielded, 0.3m	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m



## 2.5 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio 7 v2.23.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

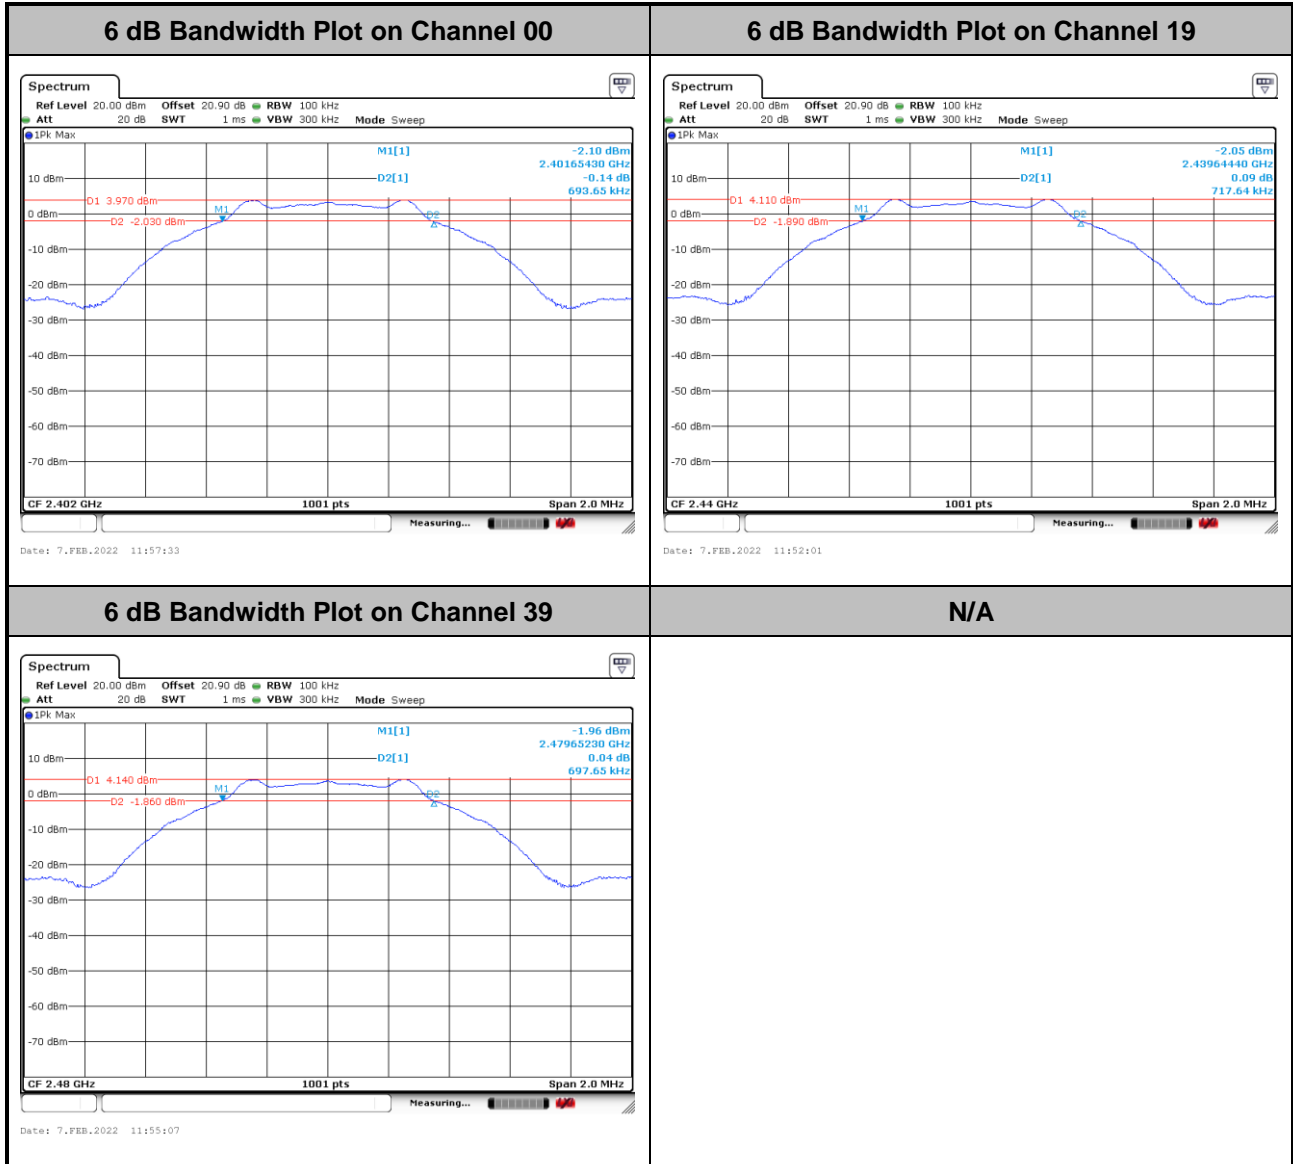



<2Mbps>

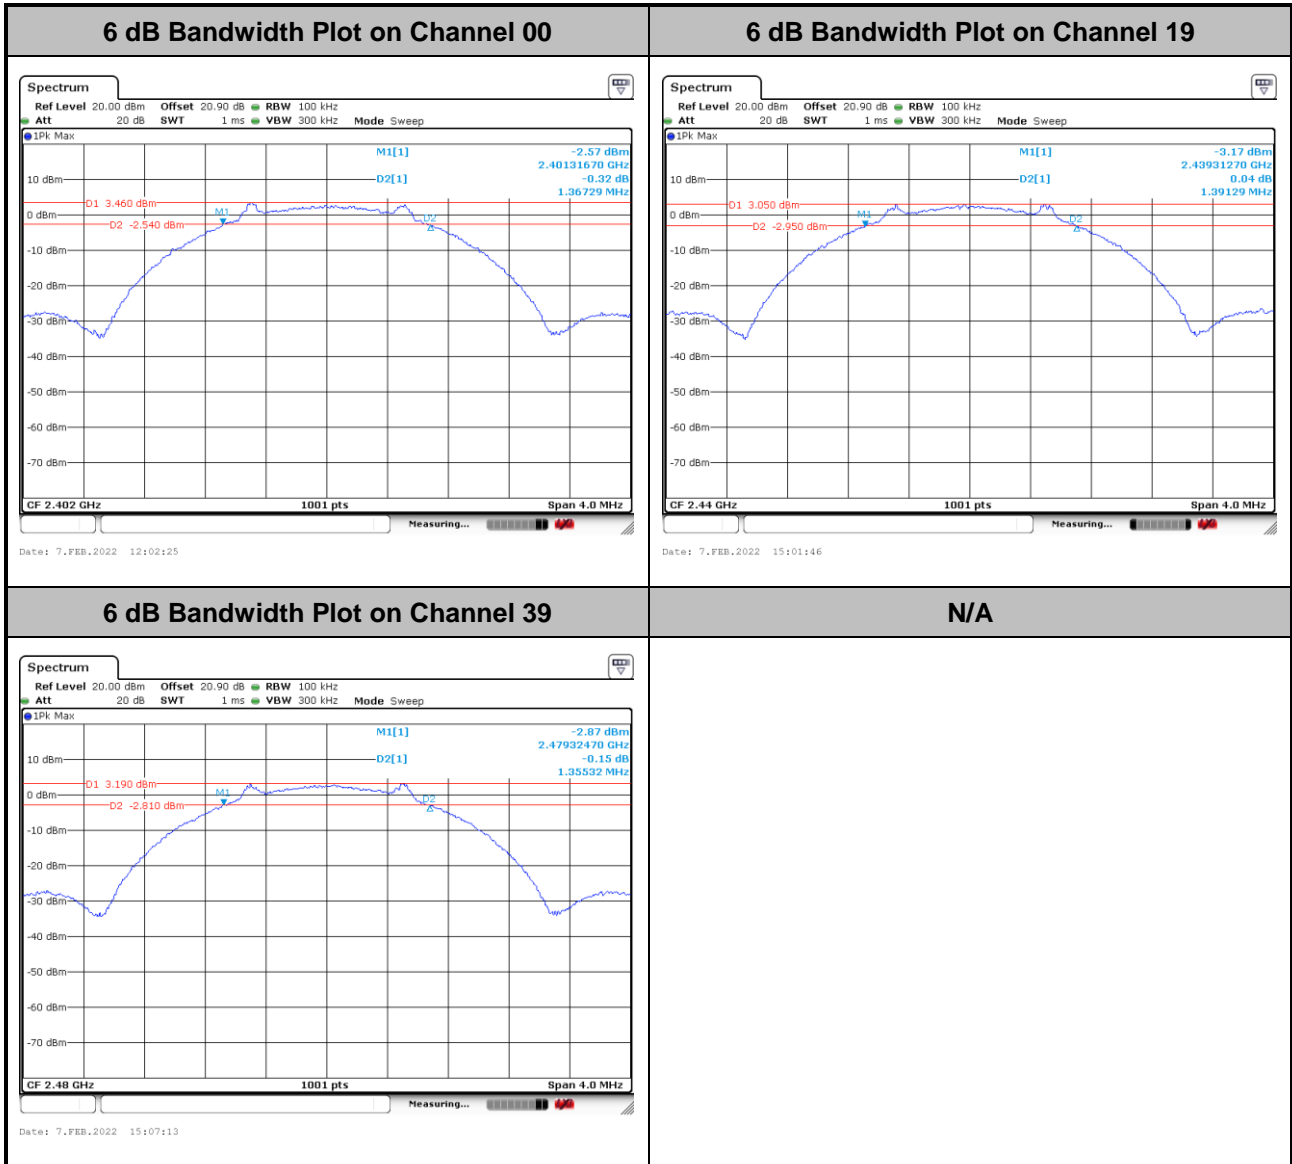




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps

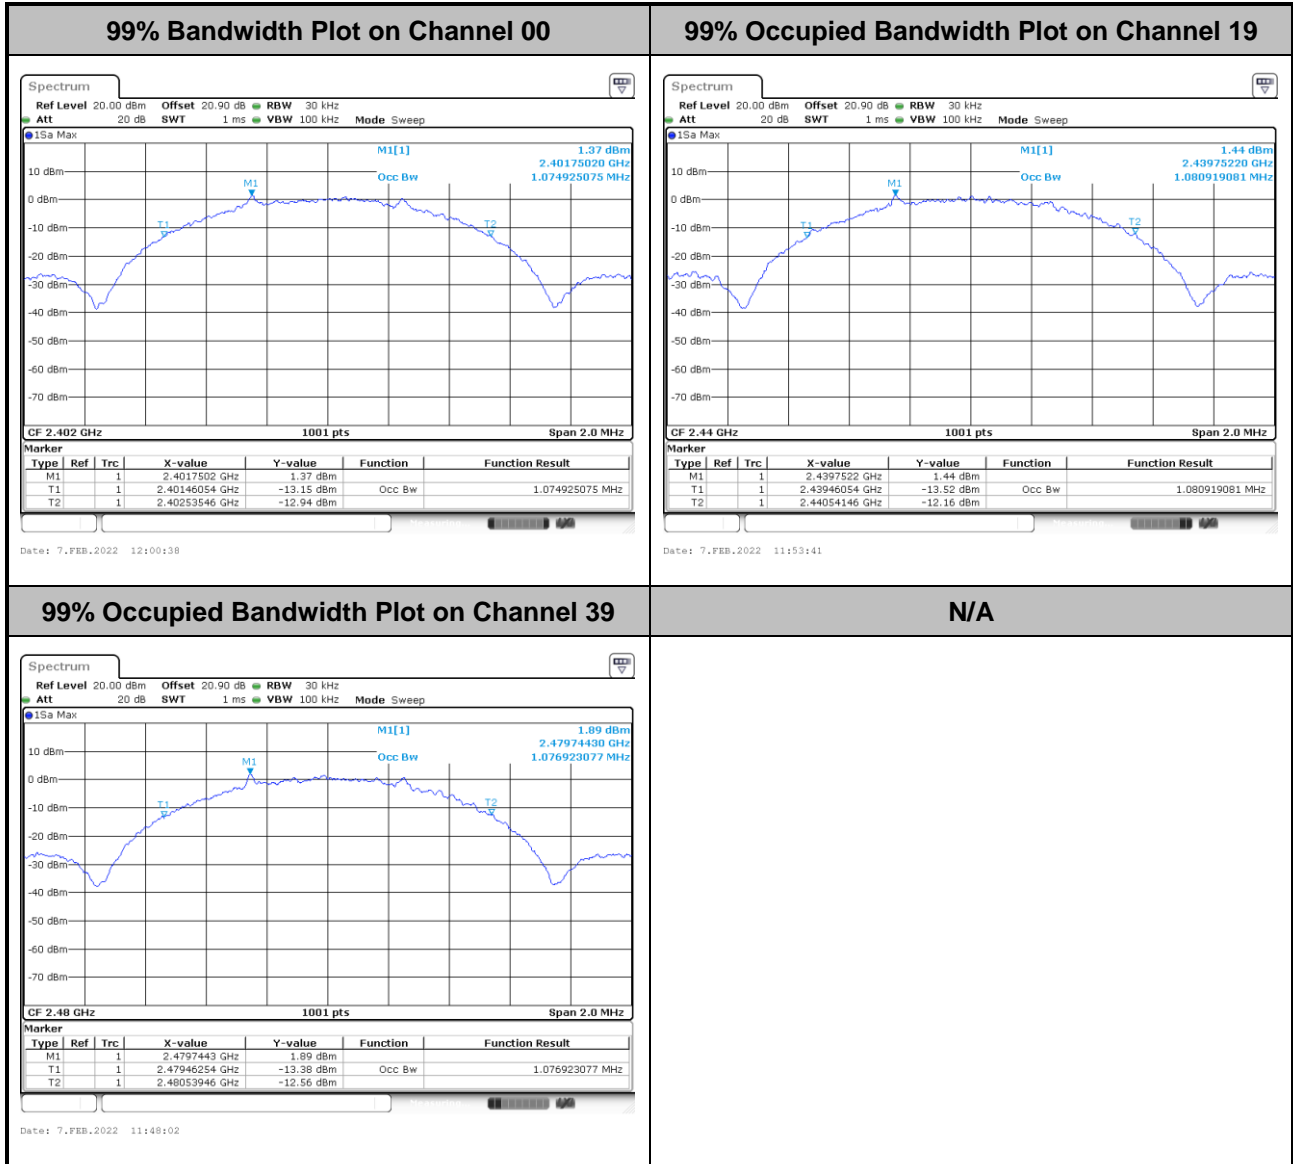

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

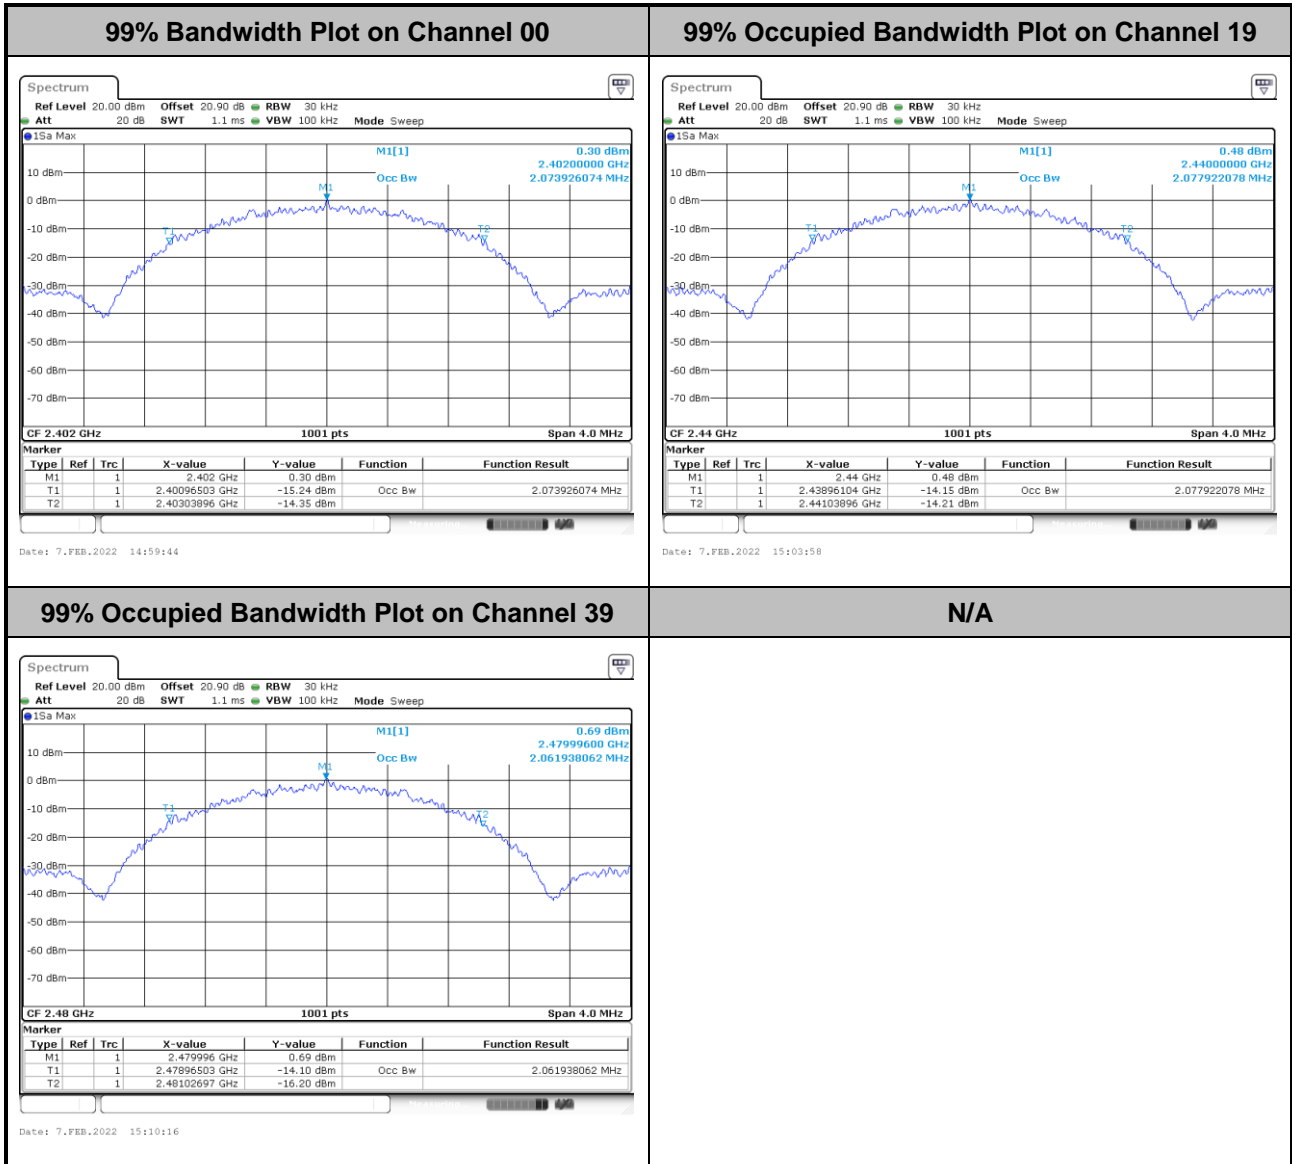

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.1 Method AVGPM
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

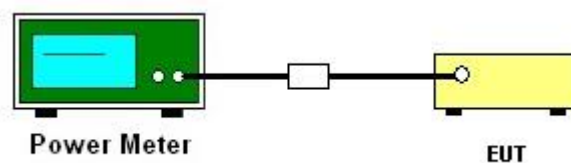

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

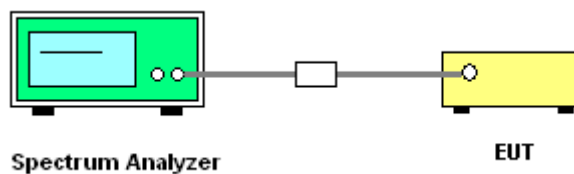


#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

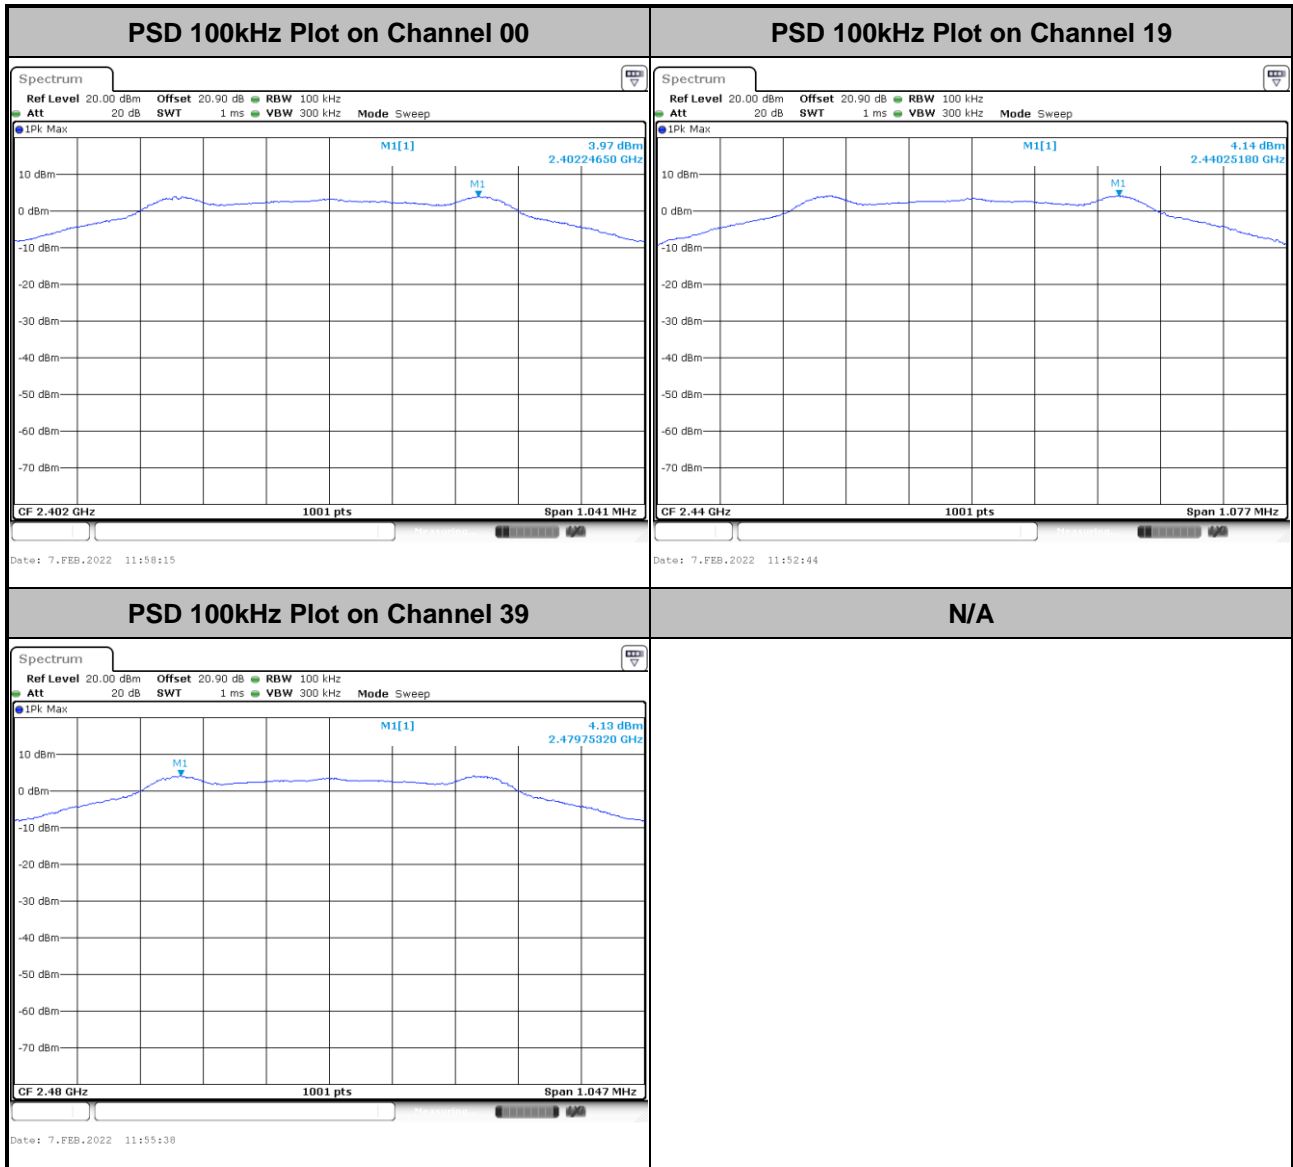




<2Mbps>

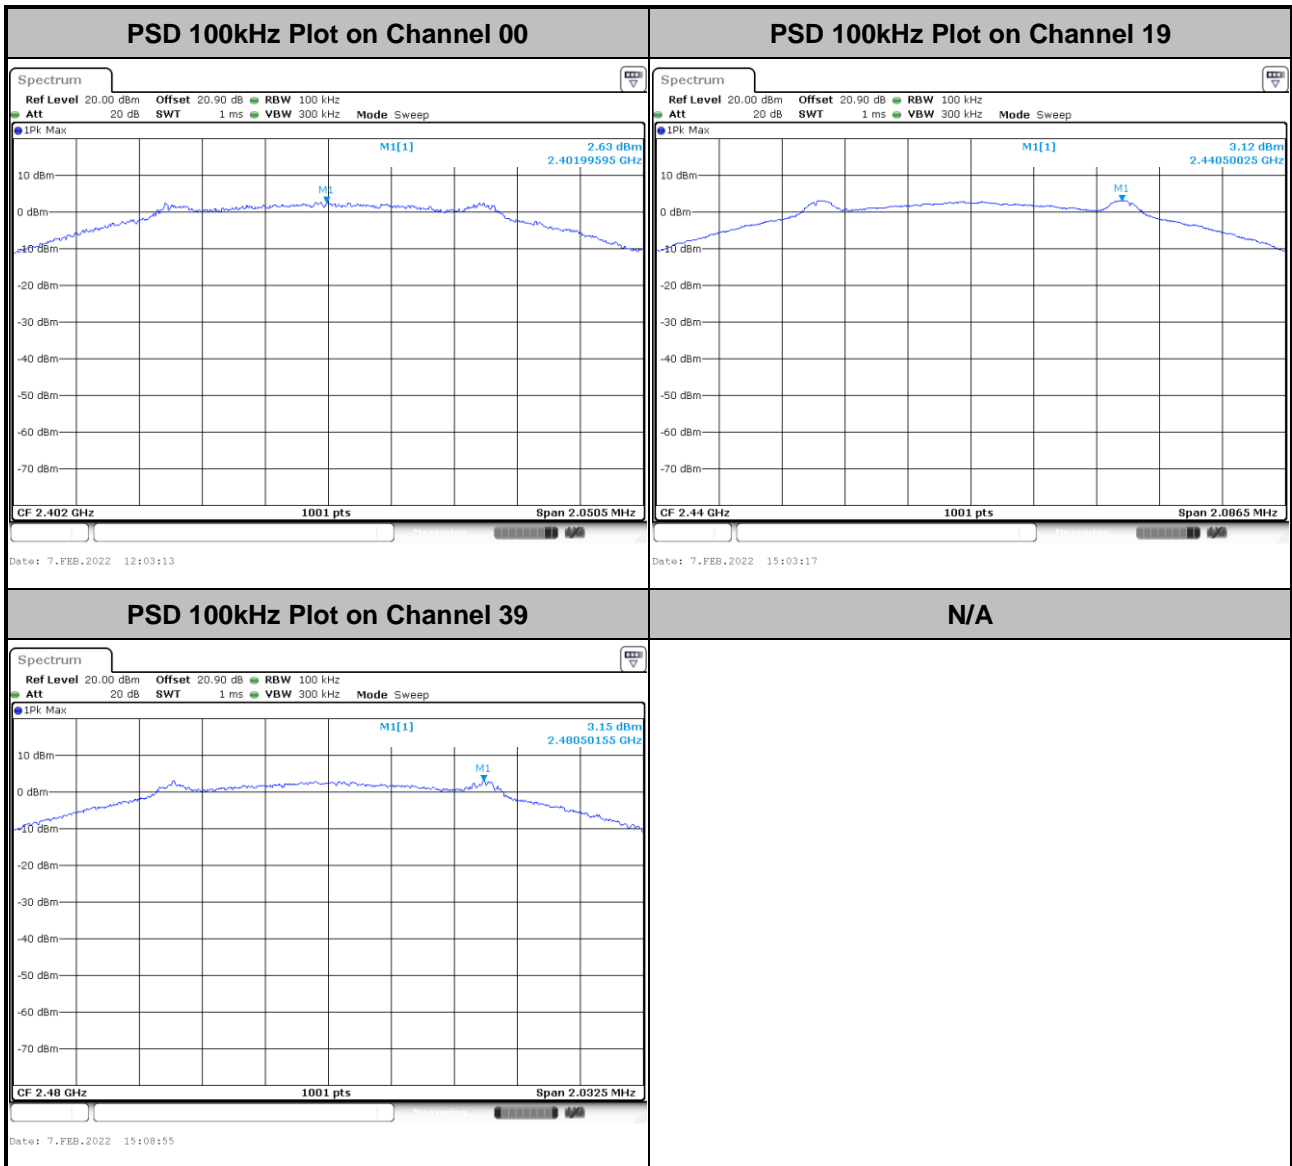




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

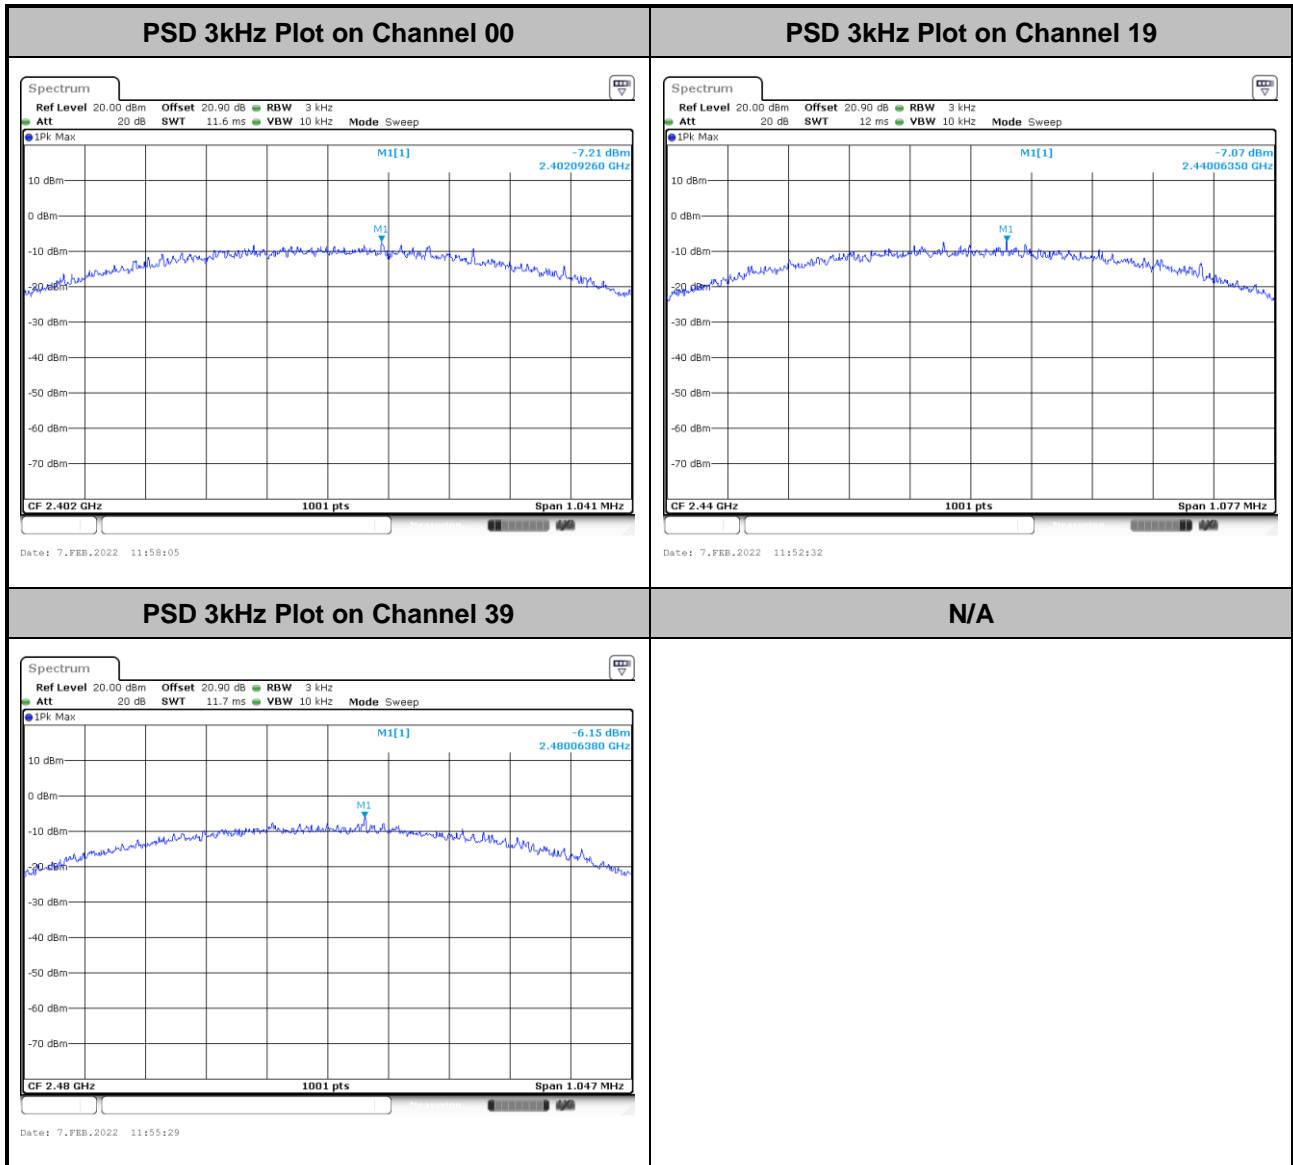



<2Mbps>

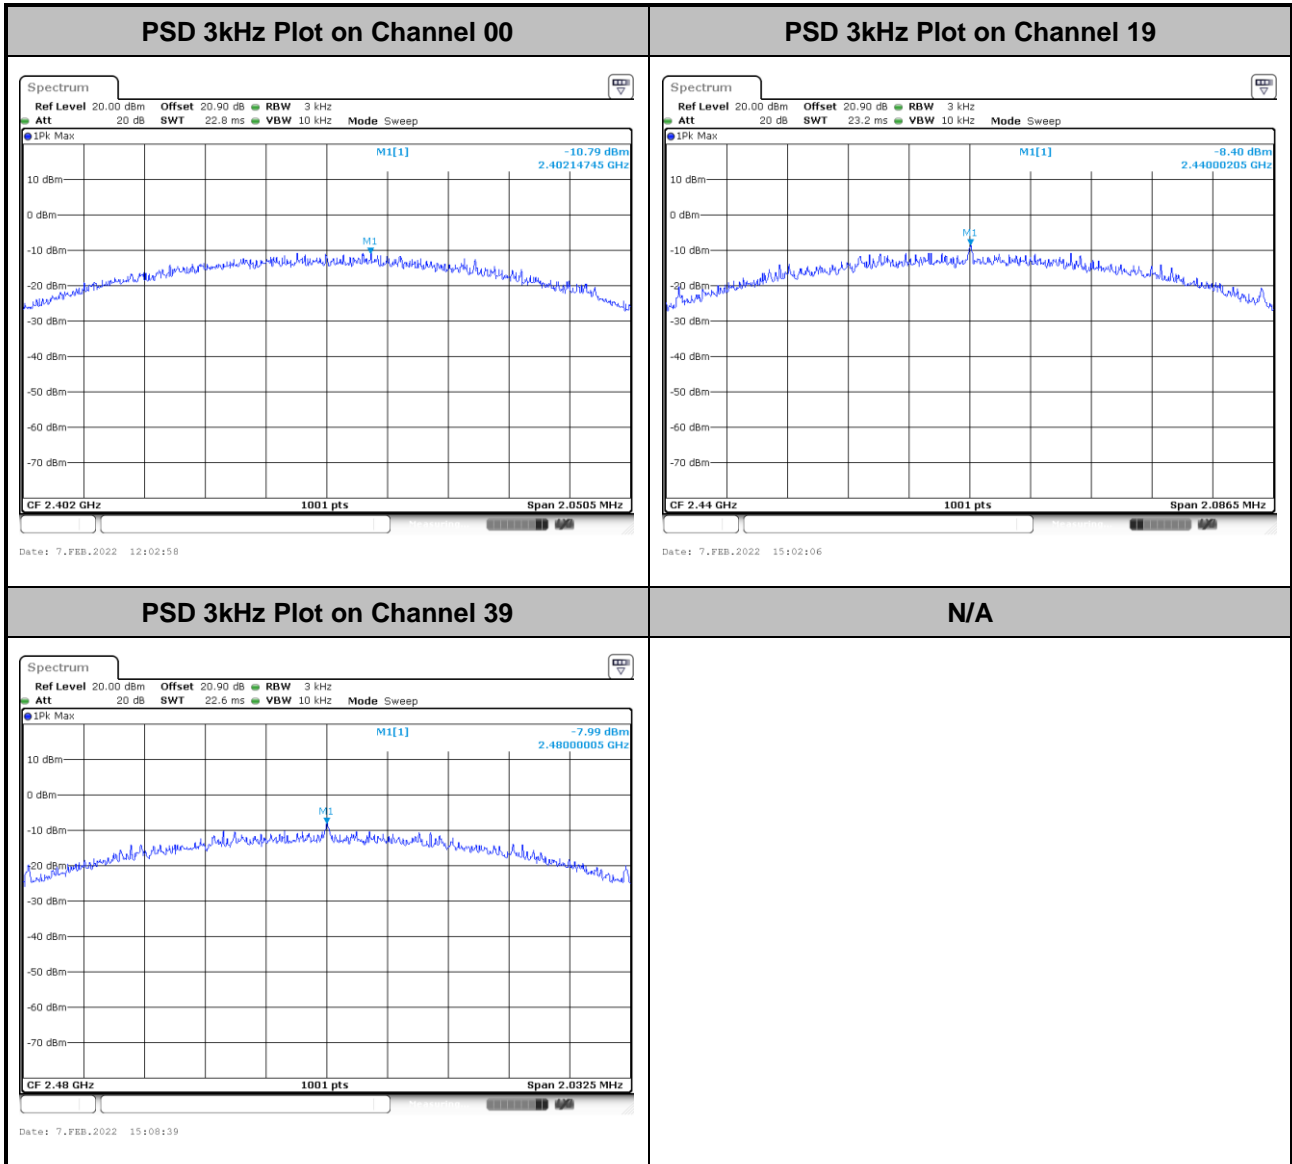

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

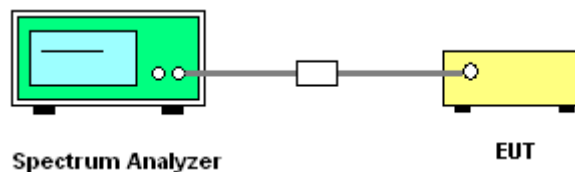




### 3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

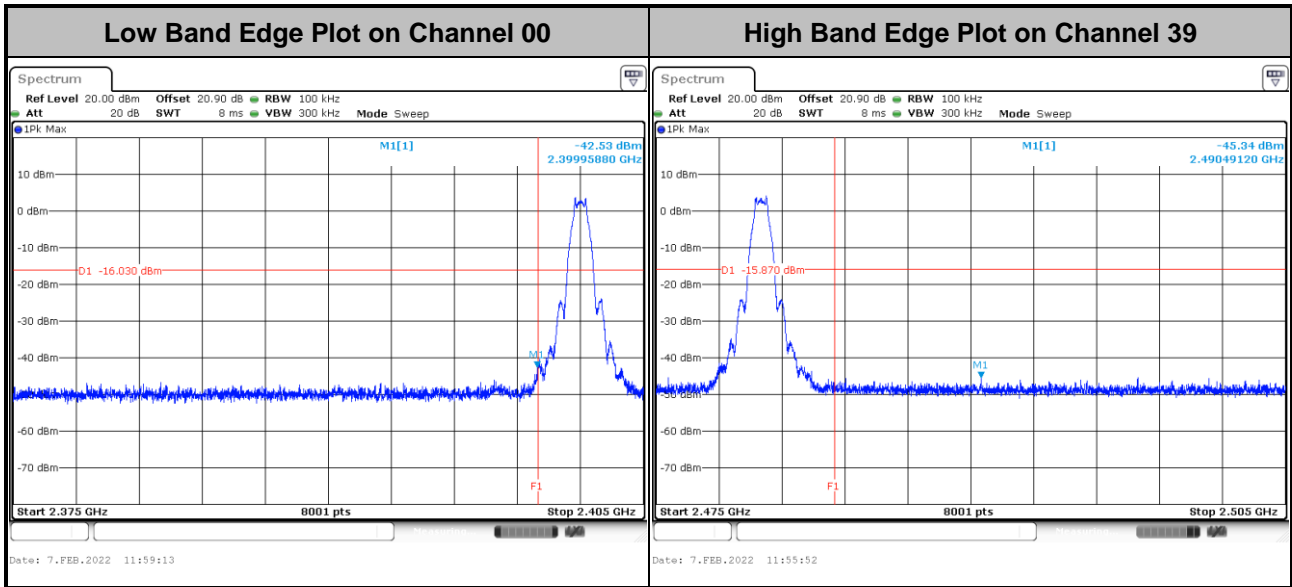

<2Mbps>

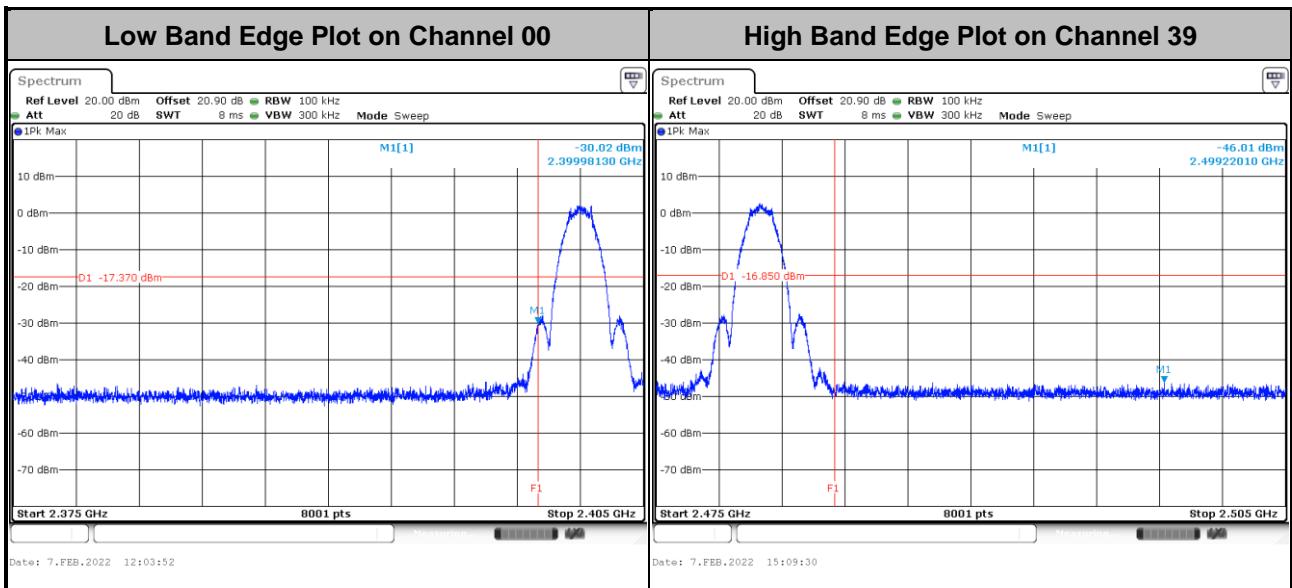







### 3.4.6 Test Result of Conducted Spurious Emission Plots


<1Mbps>

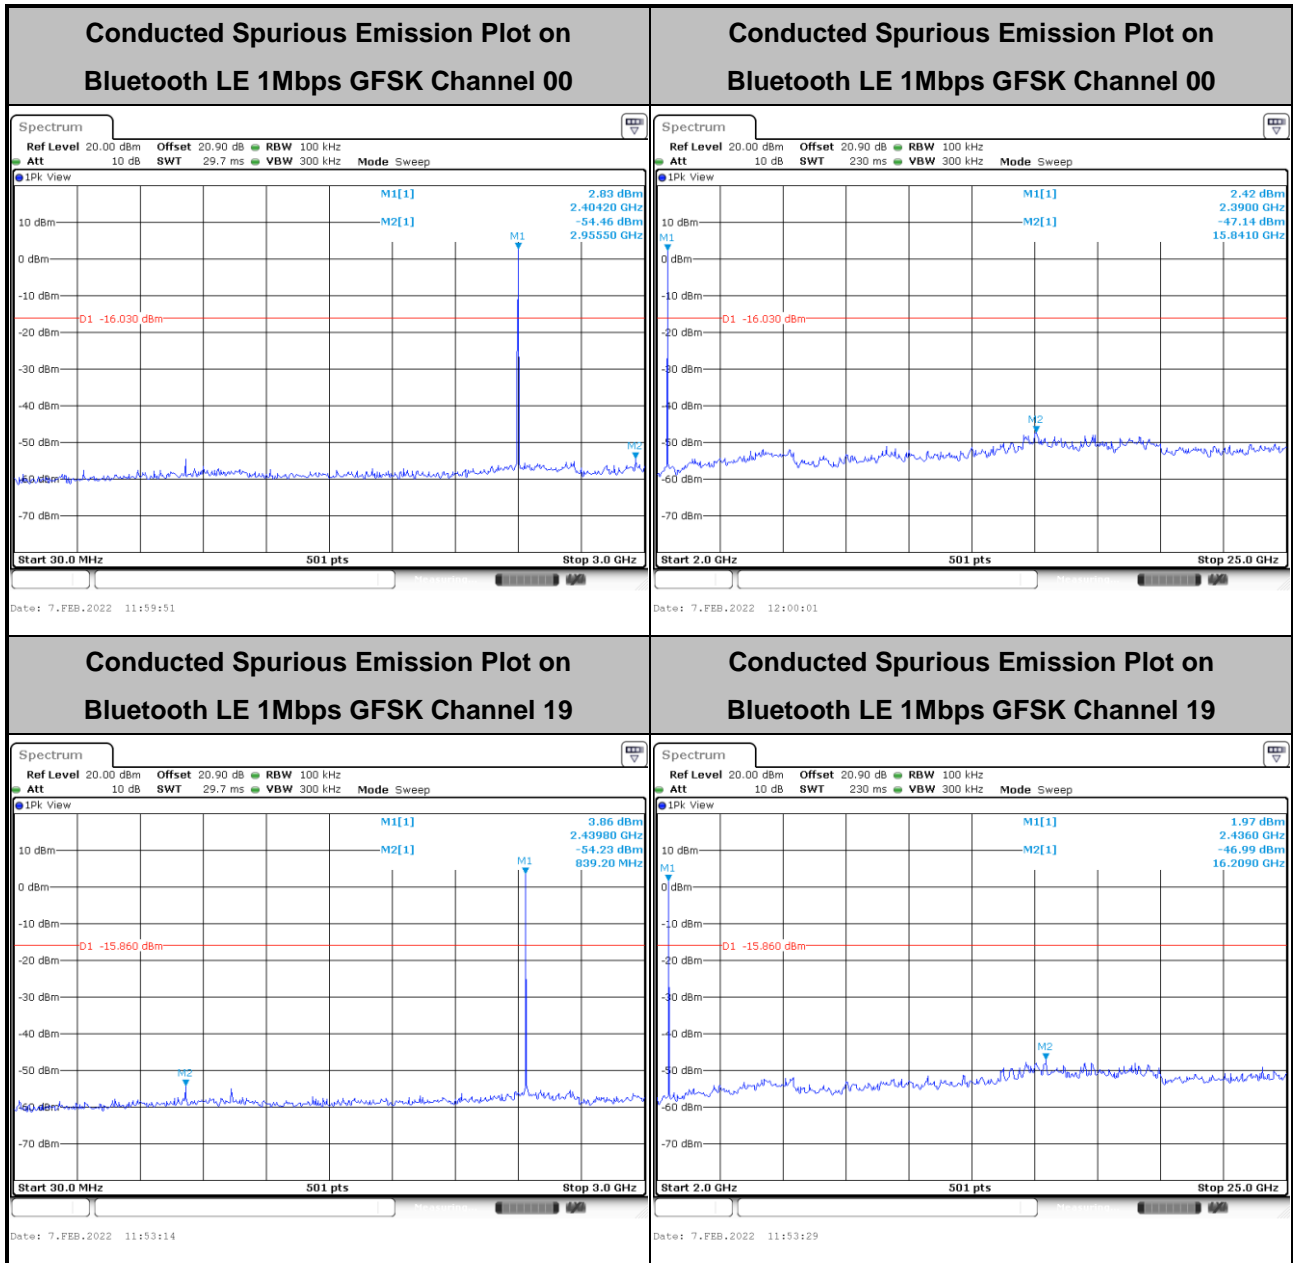


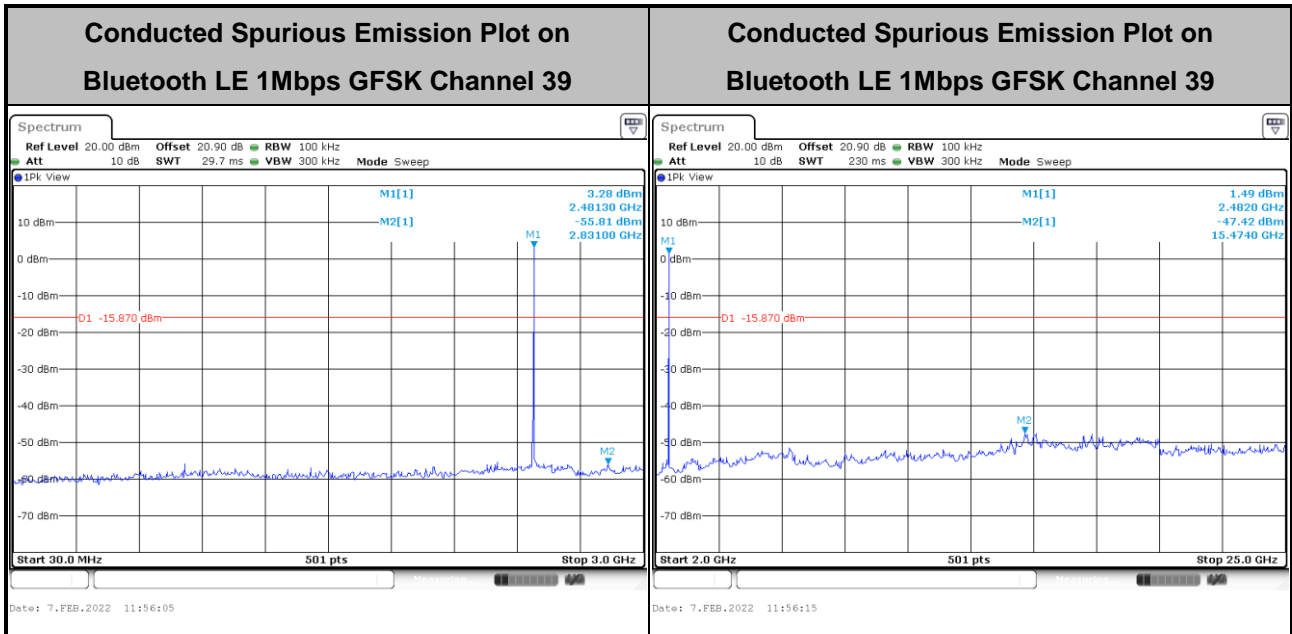



<2Mbps>

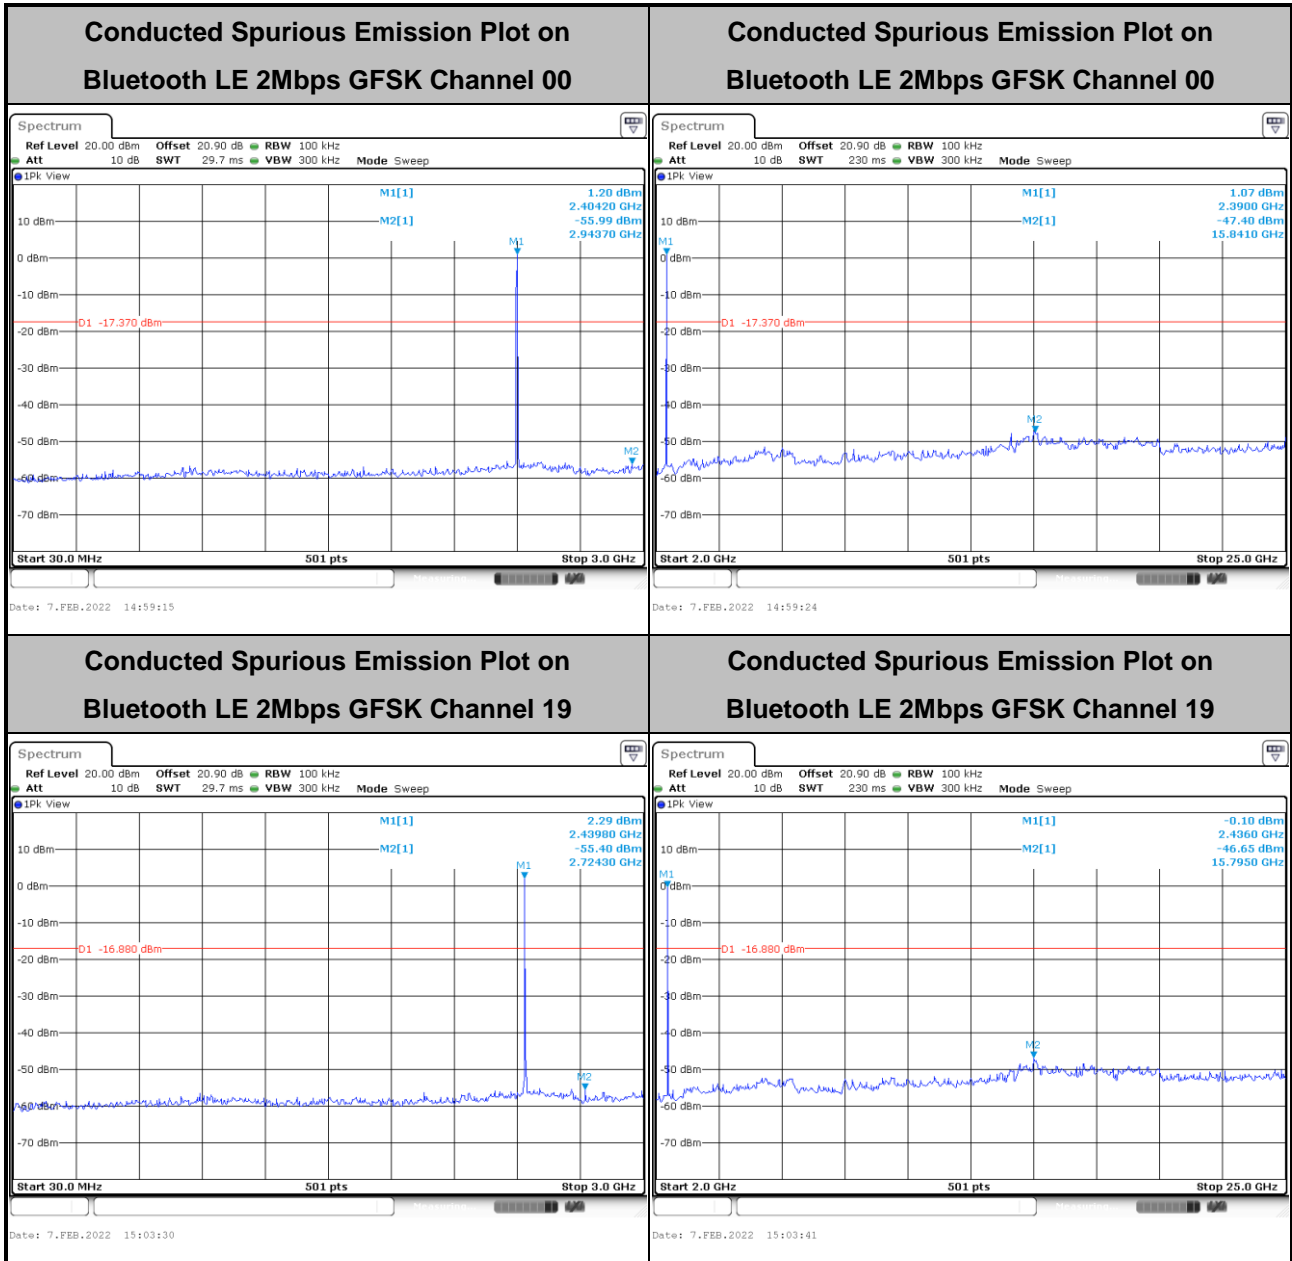

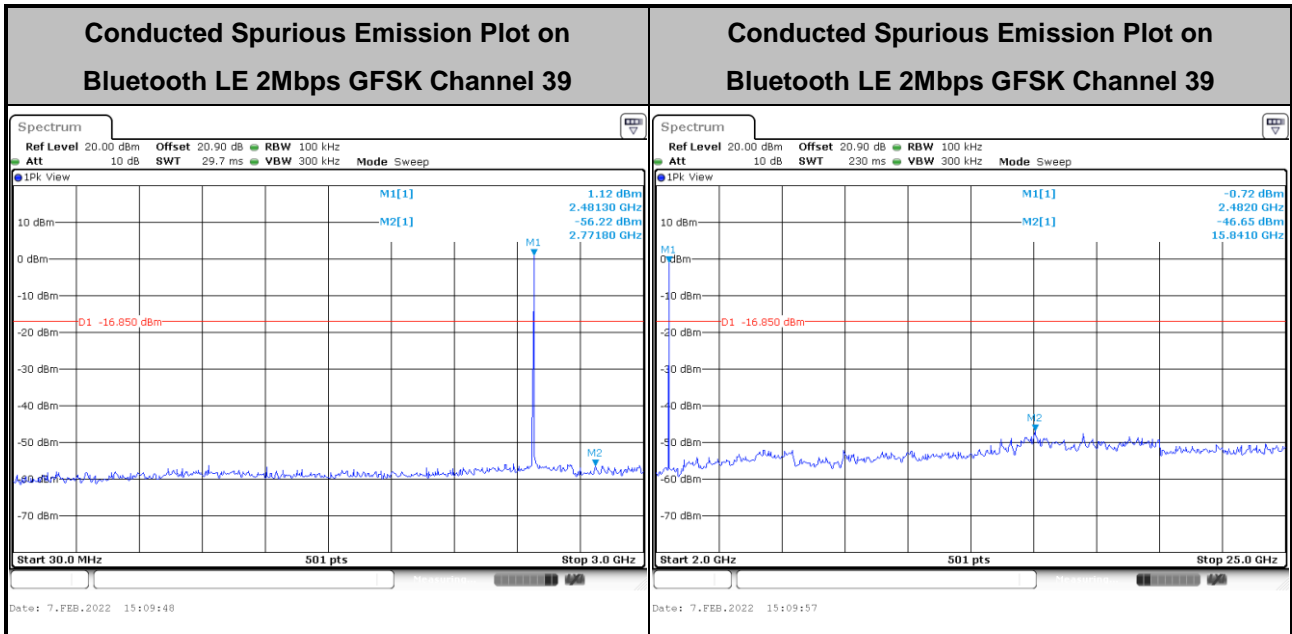



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.2 Antenna-port conducted measurements.
2. Measure the conducted output power (in dBm) using the peak detector.
3. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
4. Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies  $\leq$  30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies  $>$  1000 MHz).
5. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:  
 $E = \text{EIRP} - 20 \log d + 104.8$ , where  
E is the electric field strength in dB $\mu$ V/m  
EIRP is the equivalent isotropically radiated power in dBm  
d is the specified measurement distance in 3m
6. Compare the resultant electric field strength level with the applicable regulatory limit.
7. Perform the cabinet radiated spurious emission test.
8. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turn table (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
9. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
10. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
11. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
12. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
13. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
14. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;


(3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For Conducted Measurement Setup:

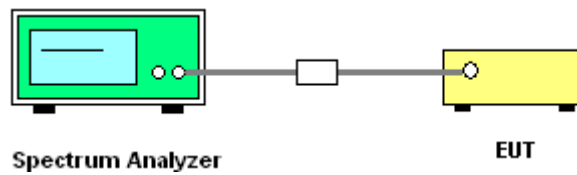


For radiated test below 30MHz

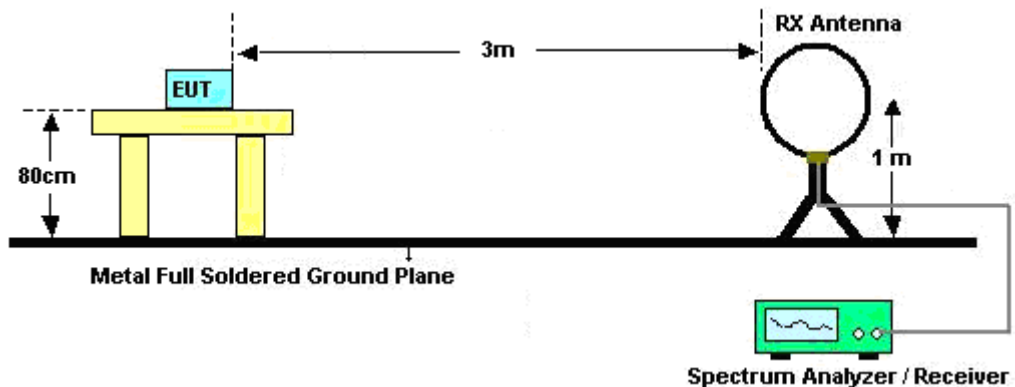


For radiated test from 30MHz to 1GHz

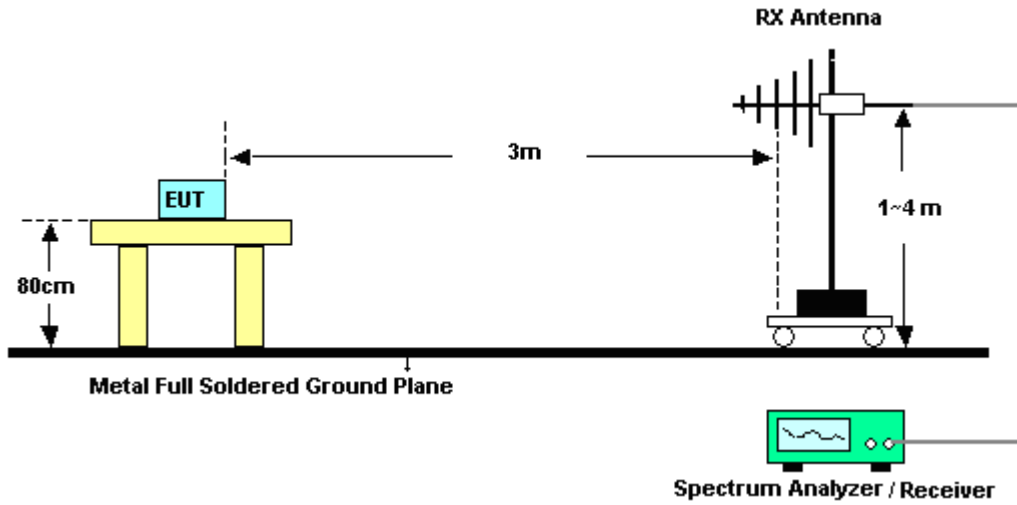

For radiated test from 1GHz to 18GHz

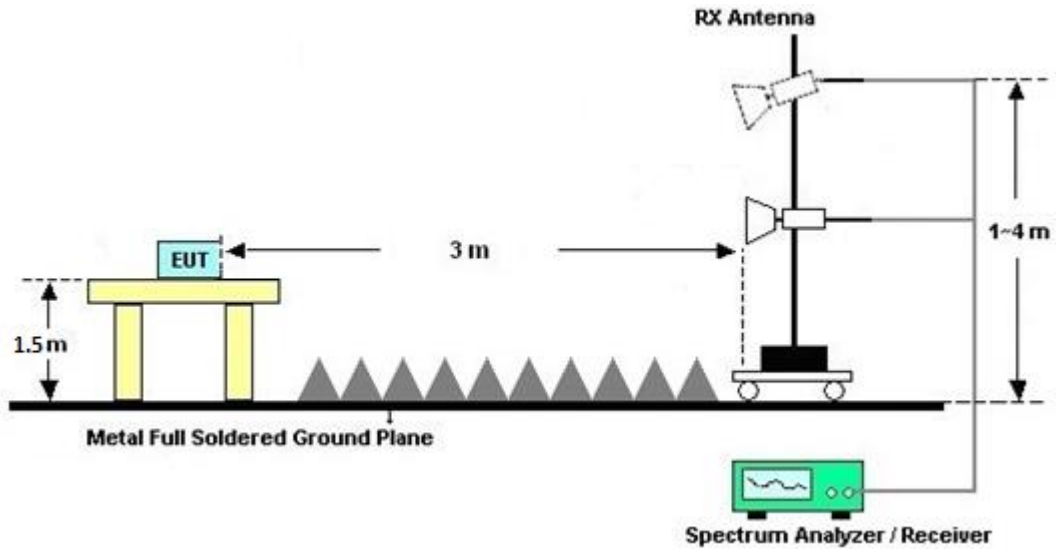

For radiated test above 18GHz

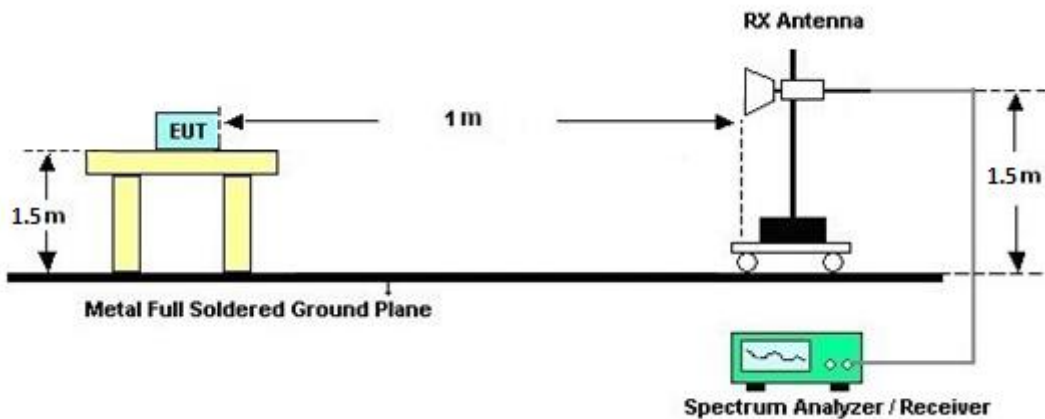





### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### **3.5.6 Test Result of Conduced Spurious at Band Edges in the Restricted Band**

Please refer to Appendix C and D.

### **3.5.7 Test Result of Conduced Spurious Emission in the Restricted Band**

Please refer to Appendix C and D.

### **3.5.8 Test Result of Cabinet Radiated Spurious at Band Edges**

Please refer to Appendix E and F.

### **3.5.9 Test Result of Cabinet Radiated Spurious Emission (30 MHz ~ 10th Harmonic)**

Please refer to Appendix E and F.

### **3.5.10 Duty Cycle**

Please refer to Appendix G.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Jan. 19, 2022~ Jan. 21, 2022	Jan. 06, 2023	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 28, 2021	Jan. 19, 2022~ Jan. 21, 2022	Apr. 27, 2022	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 03, 2021	Jan. 19, 2022~ Jan. 21, 2022	Dec. 02, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	Jan. 19, 2022~ Jan. 21, 2022	Nov. 29, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010180 0-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Jan. 19, 2022~ Jan. 21, 2022	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	Jan. 19, 2022~ Jan. 21, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	Jan. 19, 2022~ Jan. 21, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	Jan. 19, 2022~ Jan. 21, 2022	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	Jan. 19, 2022~ Jan. 21, 2022	Jul. 21, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682-4	30MHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971-4	9kHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655-4	9kHz to 18GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,801 606/2	18GHz~40GHz	Feb. 24, 2021	Jan. 19, 2022~ Jan. 21, 2022	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	Jan. 19, 2022~ Jan. 21, 2022	Sep. 16, 2022	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jan. 19, 2022~ Jan. 21, 2022	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 09, 2021	Jan. 19, 2022~ Jan. 21, 2022	Mar. 08, 2022	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 15, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Nov. 15, 2021	Nov. 29, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	Nov. 15, 2021	Nov. 30, 2021	Conduction (CO05-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Feb. 01, 2021	Nov. 15, 2021	Jan. 30, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 15, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Nov. 15, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Nov. 15, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Power Meter	Anritsu	ML2495A	932001	N/A	Sep. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Sep. 29, 2022	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	846202	300MHz~40GHz	Sep. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Sep. 29, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Nov. 15, 2021~ Feb. 10, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Mainframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Nov. 15, 2021~ Feb. 10, 2022	Aug. 11, 2022	Conducted (TH05-HY)
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101565	10Hz~40GHz	Dec. 29, 2021	Jan. 13, 2022~ Feb. 17, 2022	Dec. 28, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Jan. 13, 2022~ Feb. 17, 2022	Mar. 10, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Jan. 13, 2022~ Feb. 17, 2022	Dec. 09, 2022	CSE (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Jan. 13, 2022~ Feb. 17, 2022	Feb. 21, 2022	CSE (TH05-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass Filter	Mar. 17, 2021	Jan. 13, 2022~ Feb. 17, 2022	Mar. 16, 2022	CSE (TH05-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Jul. 12, 2021	Jan. 13, 2022~ Feb. 17, 2022	Jul. 11, 2022	CSE (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.0 dB
---	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Richard Qiu	Temperature:	17-25.9	°C
Test Date:	2021/11/15~2022/2/10	Relative Humidity:	37.5-72.2	%

&lt;Setting 0&gt;

**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.72	30.00	5.30	6.02	36.00	Pass
BLE	1Mbps	1	19	2440	0.44	30.00	5.30	5.74	36.00	Pass
BLE	1Mbps	1	39	2480	0.05	30.00	5.30	5.35	36.00	Pass

**TEST RESULTS DATA****Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.24	30.00	5.30	5.54	36.00	Pass
BLE	1Mbps	1	19	2440	0.03	30.00	5.30	5.33	36.00	Pass
BLE	1Mbps	1	39	2480	-0.64	30.00	5.30	4.66	36.00	Pass



**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	0.63	30.00	5.30	5.93	36.00	Pass
BLE	2Mbps	1	19	2440	0.40	30.00	5.30	5.70	36.00	Pass
BLE	2Mbps	1	39	2480	-0.07	30.00	5.30	5.23	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	0.27	30.00	5.30	5.57	36.00	Pass
BLE	2Mbps	1	19	2440	0.08	30.00	5.30	5.38	36.00	Pass
BLE	2Mbps	1	39	2480	-0.47	30.00	5.30	4.83	36.00	Pass

&lt;Setting 5&gt;

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.075	0.694	0.50	Pass
BLE	1Mbps	1	19	2440	1.081	0.718	0.50	Pass
BLE	1Mbps	1	39	2480	1.077	0.698	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	4.17	30.00	5.30	9.47	36.00	Pass
BLE	1Mbps	1	19	2440	4.27	30.00	5.30	9.57	36.00	Pass
BLE	1Mbps	1	39	2480	4.37	30.00	5.30	9.67	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.79	30.00	5.30	9.09	36.00	Pass
BLE	1Mbps	1	19	2440	3.89	30.00	5.30	9.19	36.00	Pass
BLE	1Mbps	1	39	2480	4.09	30.00	5.30	9.39	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.97	-7.21	5.30	8.00	Pass
BLE	1Mbps	1	19	2440	4.14	-7.07	5.30	8.00	Pass
BLE	1Mbps	1	39	2480	4.13	-6.15	5.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.074	1.367	0.50	Pass
BLE	2Mbps	1	19	2440	2.078	1.391	0.50	Pass
BLE	2Mbps	1	39	2480	2.062	1.355	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.09	30.00	5.30	9.39	36.00	Pass
BLE	2Mbps	1	19	2440	4.20	30.00	5.30	9.50	36.00	Pass
BLE	2Mbps	1	39	2480	4.32	30.00	5.30	9.62	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	3.84	30.00	5.30	9.14	36.00	Pass
BLE	2Mbps	1	19	2440	3.94	30.00	5.30	9.24	36.00	Pass
BLE	2Mbps	1	39	2480	4.06	30.00	5.30	9.36	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.63	-10.79	5.30	8.00	Pass
BLE	2Mbps	1	19	2440	3.12	-8.40	5.30	8.00	Pass
BLE	2Mbps	1	39	2480	3.15	-7.99	5.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

# EUT Information

Report NO : 1N0955  
 Test Mode : Mode 2  
 Test Voltage : Power From System  
 Phase : Line

Full Spectrum

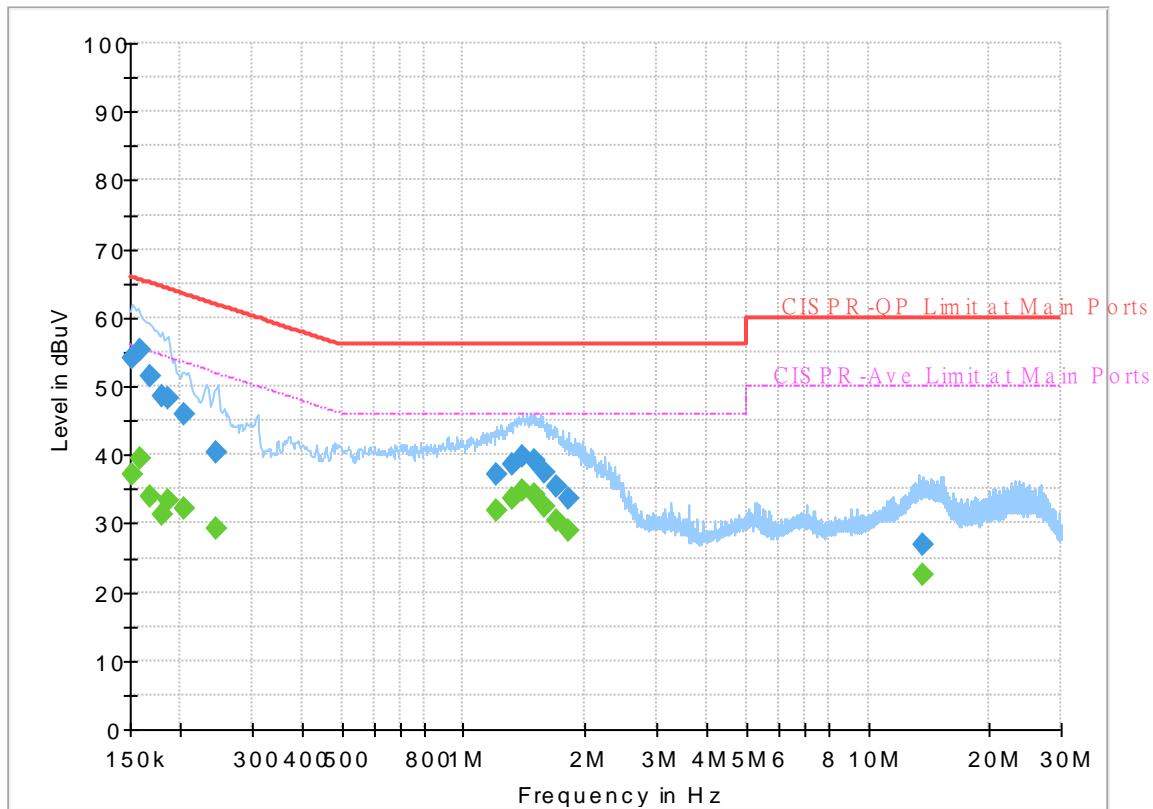

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.25	55.88	18.63	L1	OFF	19.6
0.152250	54.14	---	65.88	11.74	L1	OFF	19.6
0.159000	---	39.37	55.52	16.15	L1	OFF	19.6
0.159000	55.41	---	65.52	10.11	L1	OFF	19.6
0.168000	---	34.04	55.06	21.02	L1	OFF	19.6
0.168000	51.46	---	65.06	13.60	L1	OFF	19.6
0.179250	---	31.30	54.52	23.22	L1	OFF	19.6
0.179250	48.67	---	64.52	15.85	L1	OFF	19.6
0.186000	---	33.25	54.21	20.96	L1	OFF	19.6
0.186000	48.25	---	64.21	15.96	L1	OFF	19.6
0.204000	---	32.15	53.45	21.30	L1	OFF	19.6
0.204000	45.96	---	63.45	17.49	L1	OFF	19.6
0.244500	---	29.34	51.94	22.60	L1	OFF	19.6
0.244500	40.25	---	61.94	21.69	L1	OFF	19.6
1.209750	---	31.92	46.00	14.08	L1	OFF	20.1
1.209750	37.08	---	56.00	18.92	L1	OFF	20.1
1.322250	---	33.63	46.00	12.37	L1	OFF	20.1
1.322250	38.50	---	56.00	17.50	L1	OFF	20.1
1.401000	---	34.86	46.00	11.14	L1	OFF	20.1
1.401000	39.79	---	56.00	16.21	L1	OFF	20.1
1.493250	---	34.33	46.00	11.67	L1	OFF	20.1

1.493250	39.18	---	56.00	16.82	L1	OFF	20.1
1.594500	---	32.54	46.00	13.46	L1	OFF	20.1
1.594500	37.29	---	56.00	18.71	L1	OFF	20.1
1.700250	---	30.53	46.00	15.47	L1	OFF	20.1
1.700250	35.30	---	56.00	20.70	L1	OFF	20.1
1.815000	---	28.90	46.00	17.10	L1	OFF	20.1
1.815000	33.58	---	56.00	22.42	L1	OFF	20.1
13.596000	---	22.48	50.00	27.52	L1	OFF	19.9
13.596000	26.90	---	60.00	33.10	L1	OFF	19.9

# EUT Information

Report NO : 1N0955  
 Test Mode : Mode 2  
 Test Voltage : Power From System  
 Phase : Neutral

Full Spectrum

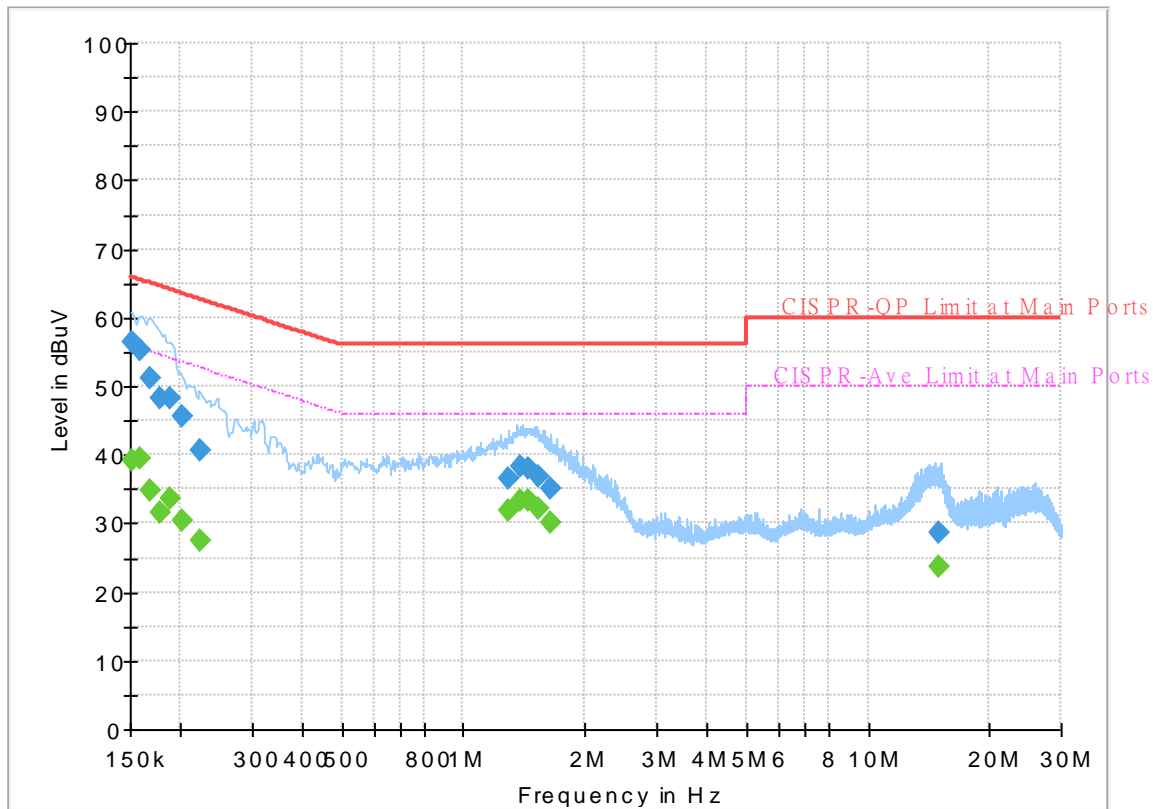

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	39.19	55.88	16.69	N	OFF	19.6
0.152250	56.35	---	65.88	9.53	N	OFF	19.6
0.159000	---	39.38	55.52	16.14	N	OFF	19.6
0.159000	55.19	---	65.52	10.33	N	OFF	19.6
0.168000	---	34.86	55.06	20.20	N	OFF	19.6
0.168000	51.05	---	65.06	14.01	N	OFF	19.6
0.177000	---	31.51	54.63	23.12	N	OFF	19.6
0.177000	48.34	---	64.63	16.29	N	OFF	19.6
0.188250	---	33.72	54.11	20.39	N	OFF	19.6
0.188250	48.27	---	64.11	15.84	N	OFF	19.6
0.201750	---	30.51	53.54	23.03	N	OFF	19.6
0.201750	45.66	---	63.54	17.88	N	OFF	19.6
0.224250	---	27.48	52.66	25.18	N	OFF	19.6
0.224250	40.78	---	62.66	21.88	N	OFF	19.6
1.295250	---	31.77	46.00	14.23	N	OFF	20.1
1.295250	36.56	---	56.00	19.44	N	OFF	20.1
1.387500	---	33.29	46.00	12.71	N	OFF	20.1
1.387500	38.23	---	56.00	17.77	N	OFF	20.1
1.455000	---	33.24	46.00	12.76	N	OFF	20.1
1.455000	37.99	---	56.00	18.01	N	OFF	20.1
1.538250	---	32.08	46.00	13.92	N	OFF	20.1

1.538250	36.91	---	56.00	19.09	N	OFF	20.1
1.637250	---	30.24	46.00	15.76	N	OFF	20.1
1.637250	34.95	---	56.00	21.05	N	OFF	20.1
14.894250	---	23.83	50.00	26.17	N	OFF	20.0
14.894250	28.56	---	60.00	31.44	N	OFF	20.0





### Appendix C. Conducted Spurious Emission

Test Engineer :	Richard Qiu	Temperature :	17.5~24.3°C
		Relative Humidity :	48.7~66.8%

<1Mbps>

#### 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( dB )	( P/A )
BLE CH 00 2402MHz		2347.485	-41.4	-20.2	-21.2	-47.91	5.3	1.21	0	0	P
		2389.8	-55.36	-14.16	-41.2	-61.9	5.3	1.24	0	0	A
	*	2402	9.9	-	-	3.36	5.3	1.24	0	0	P
	*	2402	8.34	-	-	1.8	5.3	1.24	0	0	A
BLE CH 19 2440MHz		2349.48	-44.2	-23	-21.2	-50.71	5.3	1.21	0	0	P
		2310.28	-57.97	-16.77	-41.2	-64.45	5.3	1.18	0	0	A
	*	2440	9.87	-	-	3.33	5.3	1.24	0	0	P
	*	2440	8.17	-	-	1.63	5.3	1.24	0	0	A
		2489.15	-43.46	-22.26	-21.2	-50.01	5.3	1.25	0	0	P
		2488.03	-56.91	-15.71	-41.2	-63.46	5.3	1.25	0	0	A
BLE CH 39 2480MHz	*	2480	9.66	-	-	3.12	5.3	1.24	0	0	P
	*	2480	8.01	-	-	1.47	5.3	1.24	0	0	A
		2483.76	-40.23	-19.03	-21.2	-46.78	5.3	1.25	0	0	P
		2483.5	-53.26	-12.06	-41.2	-59.81	5.3	1.25	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz  
BLE (Harmonic)

BLE	Note	Frequency ( MHz )	Level ( dBm )	Over Limit ( dB )	Limit Line ( dBm )	Read Level (dBm)	Antenna Gain ( dBi )	Path Loss ( dB )	MIMO Factor ( dB )	Groun ding Factor ( dB )	Peak Avg. (P/A)
BLE CH 00 2402MHz		4804	-54.19	-32.99	-21.2	-62.05	5.3	2.56	0	0	P
		7206	-59.61	-38.41	-21.2	-67.63	5.3	2.72	0	0	P
		12010	-51.36	-30.16	-21.2	-60.66	5.3	4	0	0	P
		14412	-46.41	-25.21	-21.2	-56.49	5.3	4.78	0	0	P
BLE CH 19 2440MHz		4880	-42.63	-21.43	-21.2	-50.44	5.3	2.51	0	0	P
		7320	-61.74	-40.54	-21.2	-69.87	5.3	2.83	0	0	P
		12200	-56.4	-35.2	-21.2	-65.85	5.3	4.15	0	0	P
		14640	-43.57	-22.37	-21.2	-53.8	5.3	4.93	0	0	P
BLE CH 39 2480MHz		4960	-48.89	-27.69	-21.2	-56.56	5.3	2.37	0	0	P
		12400	-62.42	-41.22	-21.2	-72.04	5.3	4.32	0	0	P
		14880	-50.44	-29.24	-21.2	-60.81	5.3	5.07	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Gain	Path Loss	MIMO Factor	Grounding Factor	Peak Avg.
		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/A)
BLE CH 00 2402MHz		2382.24	-43.79	-22.59	-21.2	-50.32	5.3	1.23	0	0	P
		2385.18	-57.34	-16.14	-41.2	-63.88	5.3	1.24	0	0	A
	*	2402	9.38	-	-	2.84	5.3	1.24	0	0	P
	*	2402	6.15	-	-	-0.39	5.3	1.24	0	0	A
BLE CH 19 2440MHz		2315.74	-43.92	-22.72	-21.2	-50.41	5.3	1.24	0	0	P
		2311.82	-58.07	-16.87	-41.2	-64.56	5.3	1.19	0	0	A
	*	2440	9.38	-	-	2.84	5.3	1.24	0	0	P
	*	2440	6.25	-	-	-0.29	5.3	1.24	0	0	A
		2495.66	-42.96	-21.76	-21.2	-49.5	5.3	1.25	0	0	P
		2488.17	-57	-15.8	-41.2	-63.55	5.3	1.25	0	0	A
BLE CH 39 2480MHz	*	2480	9.15	-	-	2.61	5.3	1.24	0	0	P
	*	2480	6.2	-	-	-0.34	5.3	1.24	0	0	A
		2483.55	-36.72	-15.52	-21.2	-43.27	5.3	1.25	0	0	P
		2483.5	-49.14	-7.94	-41.2	-55.69	5.3	1.25	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz  
BLE (Harmonic)

BLE	Note	Frequency ( MHz )	Level ( dBm )	Over Limit ( dB )	Limit Line ( dBm )	Read Level (dBm)	Antenna Gain ( dBi )	Path Loss ( dB )	MIMO Factor ( dB )	Groun ding Factor ( dB )	Peak Avg. (P/A)
BLE CH 00 2402MHz		4804	-54.19	-32.99	-21.2	-62.05	5.3	2.56	0	0	P
		7206	-59.71	-38.51	-21.2	-67.73	5.3	2.72	0	0	P
		12010	-51.3	-30.1	-21.2	-60.6	5.3	4	0	0	P
		14412	-46.7	-25.5	-21.2	-56.78	5.3	4.78	0	0	P
BLE CH 19 2440MHz		4880	-42.7	-21.5	-21.2	-50.51	5.3	2.51	0	0	P
		4880	-54.59	-13.39	-41.2	-62.4	5.3	2.51	0	0	A
		7320	-61.45	-40.25	-21.2	-69.58	5.3	2.83	0	0	P
		12200	-57.04	-35.84	-21.2	-66.49	5.3	4.15	0	0	P
		14640	-43.79	-22.59	-21.2	-54.02	5.3	4.93	0	0	P
BLE CH 39 2480MHz		4960	-49.18	-27.98	-21.2	-56.85	5.3	2.37	0	0	P
		12400	-63.14	-41.94	-21.2	-72.76	5.3	4.32	0	0	P
		14880	-50.18	-28.98	-21.2	-60.55	5.3	5.07	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		( MHz )	( dBm )	( dB )	Limit	Level	Factor	Loss	Factor	Factor	Avg.
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( dB )	( P/A )
2.4GHz BLE LF		73.2	-82.31	-27.11	-55.2	-92.76	5.3	0.45	0	4.7	P
		145.56	-81.59	-29.89	-51.7	-92.16	5.3	0.57	0	4.7	P
		248.97	-81.19	-31.99	-49.2	-91.9	5.3	0.71	0	4.7	P
		584.2	-80.73	-31.53	-49.2	-91.72	5.3	0.99	0	4.7	P
		958	-79.78	-30.58	-49.2	-91.2	5.3	1.42	0	4.7	P
		993	-80.27	-39.07	-41.2	-91.84	5.3	1.57	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Factor	Loss	Factor	Factor	Avg.
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( dB )	( P/A )
BLE CH 00		2390	-45.8	-24.6	-21.2	-48.44	2	0.64	0	0	P
2402MHz		2390	-59.91	-18.71	-41.2	-62.58	2	0.67	0	0	A

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBm) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBm)
3. Over Limit(dB) = Level(dBm) – Limit Line(dBm)

**For Peak Limit @ 2390MHz:**

1. Level(dBm)  
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)  
= 2(dBi) + 0.64(dB) - 48.44(dBm)  
= -45.8 (dBm)
2. Over Limit(dB)  
= Level(dBm) – Limit Line(dBm)  
= -45.8(dBm) + 21.2(dBm)  
= -24.6(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBm)  
= Antenna Factor(dBi) + Path Loss(dB) + Read Level(dBm)  
= 2(dBi) + 0.67(dB) - 62.58(dBm)  
= -59.91 (dBm)
2. Over Limit(dB)  
= Level(dB m) – Limit Line(dBm)  
= -59.91(dBμV/m) + 41.2(dBm)  
= -18.71(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Conducted Spurious Emission Plots

Test Engineer :	Richard Qiu	Temperature :	17.5~24.3°C
		Relative Humidity :	48.7~66.8%

### Note symbol

-L	Low channel location
-R	High channel location













<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge)

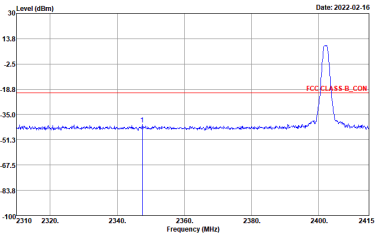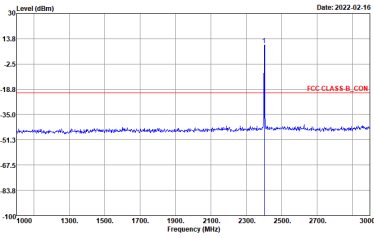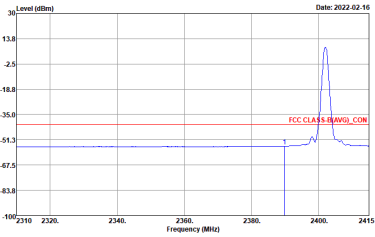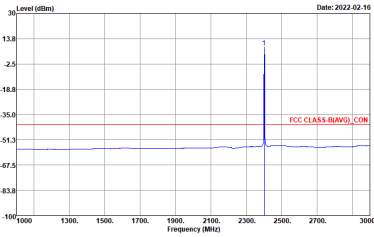BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH00 2402MHz		
CSE		Fundamental
Peak	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Peak. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line indicates the FCC CLASS B_CON limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL RFW 1000.0000kHz URW 1000.000kHz</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at approximately 2402 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC CLASS B_CON limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL RFW 1000.0000kHz URW 1000.000kHz</p>
Avg.	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Avg. The plot shows a peak at approximately 2402 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line indicates the FCC CLASS-B(AVG)_CON limit at -35.0 dBm. The peak level is above this limit.</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL RFW 1000.0000kHz URW 0.0100kHz</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a peak at approximately 2402 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC CLASS-B(AVG)_CON limit at -35.0 dBm. The peak level is above this limit.</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL RFW 1000.0000kHz URW 0.0100kHz</p>

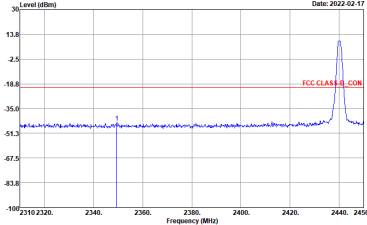
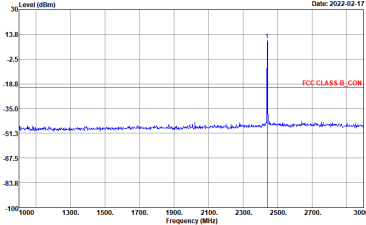
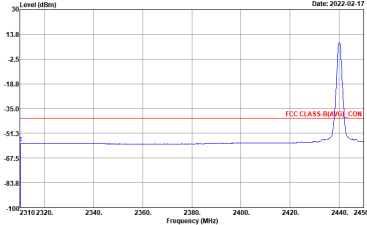
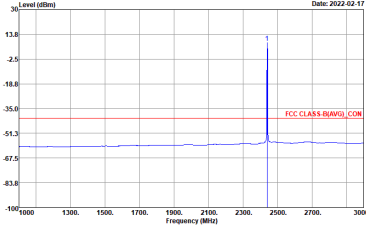


BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH19 2440MHz - L		
	CSE	Fundamental
Peak	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Peak. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line indicates the FCC CLASS B COM limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site Condition: TH05-HY, FCC CLASS_B_CON ANT GAIN+5.3 HORIZONTAL, DRW-1500 02/06/17+ URW-1500 02/06/17</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1900 to 3000 MHz. A red horizontal line indicates the FCC CLASS B COM limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site Condition: TH05-HY, FCC CLASS_B_CON ANT GAIN+5.3 HORIZONTAL, DRW-1500 02/06/17+ URW-1500 02/06/17</p>
Avg.	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Avg. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2310 to 2450 MHz. A red horizontal line indicates the FCC CLASS B COM limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site Condition: TH05-HY, FCC CLASS_B_CON ANT GAIN+5.3 HORIZONTAL, DRW-1500 02/06/17+ URW-1500 02/06/17</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1900 to 3000 MHz. A red horizontal line indicates the FCC CLASS B COM limit at -18.8 dBm. The peak level is significantly above this limit.</p> <p>Site Condition: TH05-HY, FCC CLASS_B_CON ANT GAIN+5.3 HORIZONTAL, DRW-1500 02/06/17+ URW-1500 02/06/17</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH19 2440MHz - R		
	CSE	Fundamental
Peak	<p>Site : TH05-HY Condition : FCC CLASS-B CON ANT GAIN+5.3 HORIZONTAL - RBW 1000 0000+ VBW 1000 0000+*</p>	Left blank
Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG) CON ANT GAIN+5.3 HORIZONTAL - RBW 1000 0000+ VBW 1000 0000+*</p>	Left blank

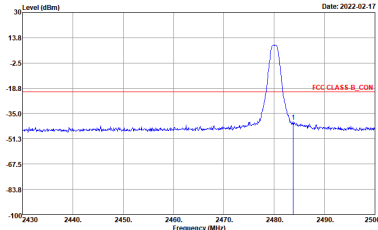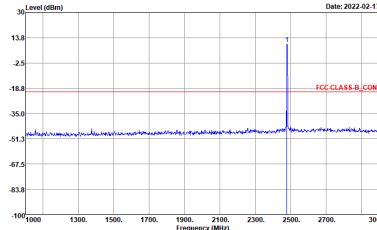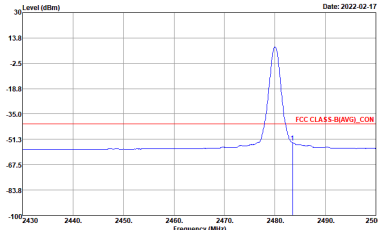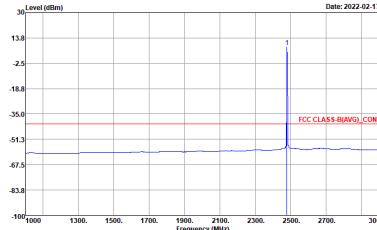

BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH39 2480MHz		
	CSE	Fundamental
Peak	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Peak. The plot shows a sharp peak at 2480 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A red horizontal line indicates the FCC CLASS B_CON limit at -18.8 dBm. The peak level is approximately 13.8 dBm. The date is 2022-02-17.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a sharp peak at 2480 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC CLASS B_CON limit at -18.8 dBm. The peak level is approximately 13.8 dBm. The date is 2022-02-17.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>
Avg.	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Avg. The plot shows a sharp peak at 2480 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B(AVG)_CON limit at -35.0 dBm. The peak level is approximately 13.8 dBm. The date is 2022-02-17.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a sharp peak at 2480 MHz. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC CLASS-B(AVG)_CON limit at -35.0 dBm. The peak level is approximately 13.8 dBm. The date is 2022-02-17.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>




2.4GHz 2400~2483.5MHz

BLE 1Mbps (Harmonic)

BLE	2.4GHz 2400~2483.5MHz Harmonic	
	BLE	
	CH00 2402MHz	CH19 2440MHz
Peak Avg.	<p>Site Condition : TH05-HY : FCC CLASS-B_CONSTANT GAIN+5.3 HORIZONTAL : RFRW 1000.0000Hz UFRW 1000.0000Hz</p>	<p>Site Condition : TH05-HY : FCC CLASS-B_CONSTANT GAIN+5.3 HORIZONTAL : RFRW 1000.0000Hz UFRW 1000.0000Hz</p>

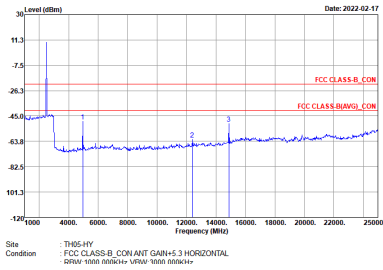

BLE	2.4GHz 2400~2483.5MHz Harmonic	
	BLE	
	CH39 2480MHz	
<p>Peak Avg.</p>	 <p>Level (dBm)</p> <p>Date: 2022-02-17</p> <p>FCC CLASS B_CON</p> <p>FCC CLASS B(AVG)_CON</p> <p>Site : TH05-HY</p> <p>Condition : FCC CLASS B_CON ANT GAIN+5.3 HORIZONTAL</p> <p>RF BW : 100.0000kHz UR BW : 1000.0000kHz</p>	



<2Mbps>

2.4GHz 2400~2483.5MHz  
BLE (Band Edge)

BLE	2.4GHz 2400~2483.5MHz Band Edge	
	BLE CH00 2402MHz	
	CSE	Fundamental
Peak	<p>Date: 2022-02-17</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL DRW: 1000.0000kHz VRW: 1000.0000kHz</p>	<p>Date: 2022-02-17</p> <p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL DRW: 1000.0000kHz VRW: 1000.0000kHz</p>
Avg.	<p>Date: 2022-02-17</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL DRW: 1000.0000kHz VRW: 0.0100kHz</p>	<p>Date: 2022-02-17</p> <p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL DRW: 1000.0000kHz VRW: 0.0100kHz</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH19 2440MHz - L		
	CSE	Fundamental
Peak	<p>Site Condition: TH05-HY FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL SRW: 1000 dB/dec+ URM: 1000 dB/dec+</p>	<p>Site Condition: TH05-HY FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL SRW: 1000 dB/dec+ URM: 1000 dB/dec+</p>
Avg.	<p>Site Condition: TH05-HY FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL SRW: 1000 dB/dec+ URM: 1000 dB/dec+</p>	<p>Site Condition: TH05-HY FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL SRW: 1000 dB/dec+ URM: 1000 dB/dec+</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH19 2440MHz - R		
	CSE	Fundamental
Peak	<p>Site : TH05-HY Condition : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL -RFRW 1000 00000+ VRW 1000 00000+</p>	Left blank
Avg.	<p>Site : TH05-HY Condition : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL -RFRW 1000 00000+ VRW 1000 00000+</p>	Left blank

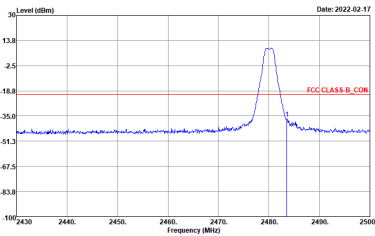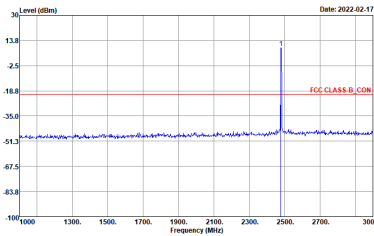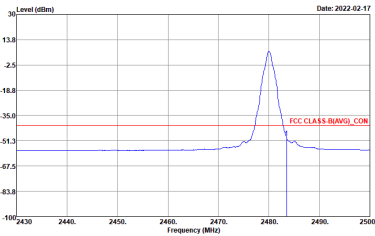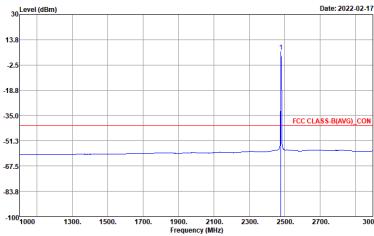

BLE	2.4GHz 2400~2483.5MHz Band Edge	
BLE CH39 2480MHz		
	CSE	Fundamental
Peak	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Peak. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A sharp peak is visible at 2480 MHz, reaching approximately 13.8 dBm. A red horizontal line indicates the FCC CLASS B CON limit at -18.8 dBm.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Peak. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A sharp peak is visible at 2480 MHz, reaching approximately 13.8 dBm. A red horizontal line indicates the FCC CLASS B CON limit at -18.8 dBm.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>
Avg.	 <p>Level (dBm) vs Frequency (MHz) plot for CSE Avg. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A peak is visible at 2480 MHz, reaching approximately 13.8 dBm. A red horizontal line indicates the FCC CLASS-B(AVG) CON limit at -35.0 dBm.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>	 <p>Level (dBm) vs Frequency (MHz) plot for Fundamental Avg. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 1000 to 3000 MHz. A peak is visible at 2480 MHz, reaching approximately 13.8 dBm. A red horizontal line indicates the FCC CLASS-B(AVG) CON limit at -35.0 dBm.</p> <p>Site Condition : TH05-HY            : FCC CLASS-B(AVG)_CON ANT GAIN+5.3 HORIZONTAL            : RFRW: 1000.0000kHz+ VFRW: 1000.0000kHz+</p>




2.4GHz 2400~2483.5MHz

BLE (Harmonic)


BLE	2.4GHz 2400~2483.5MHz Harmonic	
BLE		
CH00 2402MHz		CH19 2440MHz
<p><b>Peak</b> <b>Avg.</b></p>		

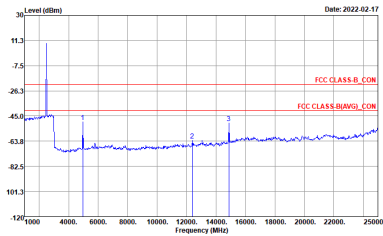

BLE	2.4GHz 2400~2483.5MHz Harmonic	
	BLE	
	CH39 2480MHz	
<p>Peak Avg.</p>	 <p>Level (dBm)</p> <p>Date: 2022-02-17</p> <p>FCC CLASS B COM</p> <p>FCC CLASS B(AVG) COM</p> <p>Frequency (MHz)</p> <p>Site : TH05-HY Condition : FCC CLASS B, CON ANT GAIN+5.3 HORIZONTAL - RFRW 1000.00000+ VRW 1000.00000+</p>	



Emission below 1GHz  
2.4GHz BLE (LF)

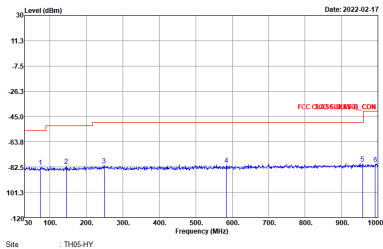BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
Peak	 <p>Date: 2022-02-17</p> <p>FCC CLASS B (A/B) CON</p> <p>Level (dBm)</p> <p>Frequency (MHz)</p> <p>Site : TH05.HY Condition : FCC CLASS-B, CONSTANT GAIN+5.3 HORIZONTAL RESOL 120.0000GHz, VRESOL 100.0000MHz</p>	Left blank



## Appendix E. Cabinet Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	19.5~21.4°C
		Relative Humidity :	60.5~65.5%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2338.665	52.91	-21.09	74	38.94	31.45	17.91	35.39	100	303	P	H	
		2389.905	42.15	-11.85	54	28.03	31.4	18.14	35.42	100	303	A	H	
	*	2402	75.61	-	-	61.42	31.42	18.19	35.42	100	303	P	H	
	*	2402	74.7	-	-	60.51	31.42	18.19	35.42	100	303	A	H	
													H	
														H
			2327.64	52.98	-21.02	74	39.03	31.49	17.85	35.39	295	266	P	V
			2388.12	42.15	-11.85	54	28.03	31.4	18.13	35.41	295	266	A	V
	*		2402	71.76	-	-	57.57	31.42	18.19	35.42	295	266	P	V
	*		2402	70.66	-	-	56.47	31.42	18.19	35.42	295	266	A	V
														V
													V	
BLE CH 19 2440MHz		2334.64	52.96	-21.04	74	39.01	31.46	17.88	35.39	106	308	P	H	
		2389.94	42.14	-11.86	54	28.02	31.4	18.14	35.42	106	308	A	H	
	*	2440	73.94	-	-	59.43	31.72	18.22	35.43	106	308	P	H	
	*	2440	72.82	-	-	58.31	31.72	18.22	35.43	106	308	A	H	
			2489.64	53.99	-20.01	74	39.07	32.12	18.25	35.45	106	308	P	H
			2492.86	43.06	-10.94	54	28.13	32.14	18.25	35.46	106	308	A	H
			2338.14	52.72	-21.28	74	38.75	31.45	17.91	35.39	332	270	P	V
			2386.02	42.15	-11.85	54	28.04	31.4	18.12	35.41	332	270	A	V
	*		2440	72.2	-	-	57.69	31.72	18.22	35.43	332	270	P	V
	*		2440	71.09	-	-	56.58	31.72	18.22	35.43	332	270	A	V
			2496.15	53.56	-20.44	74	38.6	32.17	18.25	35.46	332	270	P	V
		2499.86	43.1	-10.9	54	28.1	32.2	18.26	35.46	332	270	A	V	



<b>BLE CH 39 2480MHz</b>	*	2480	75.29	-	-	60.46	32.04	18.24	35.45	100	303	P	H
	*	2480	74.06	-	-	59.23	32.04	18.24	35.45	100	303	A	H
		2485.88	54.04	-19.96	74	39.15	32.09	18.25	35.45	100	303	P	H
		2498.72	42.97	-11.03	54	27.98	32.19	18.26	35.46	100	303	A	H
													H
													H
	*	2480	72.85	-	-	58.02	32.04	18.24	35.45	362	279	P	V
	*	2480	71.95	-	-	57.12	32.04	18.24	35.45	362	279	A	V
		2488.32	53.13	-20.87	74	38.23	32.11	18.24	35.45	362	279	P	V
		2497.6	42.99	-11.01	54	28.01	32.18	18.26	35.46	362	279	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	41.06	-32.94	74	52.13	34.01	12.91	57.99	-	-	P	H	
		14475	46.66	-27.34	74	43.22	39.55	21.98	58.09	-	-	P	H	
		15885	48.46	-25.54	74	41.13	40.87	23.39	56.93	-	-	P	H	
		15885	37.73	-16.27	54	30.4	40.87	23.39	56.93	-	-	A	H	
		17835	50.6	-23.4	74	40.42	41.53	24.73	56.08	-	-	P	H	
		17835	40.27	-13.73	54	30.09	41.53	24.73	56.08	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4804	42.57	-31.43	74	53.64	34.01	12.91	57.99	-	-	P	V
			14475	46.53	-27.47	74	43.09	39.55	21.98	58.09	-	-	P	V
			16140	48.58	-25.42	74	40.56	41.2	23.6	56.78	-	-	P	V
			16140	38.19	-15.81	54	30.17	41.2	23.6	56.78	-	-	A	V
			17895	50.91	-23.09	74	40.77	41.41	24.77	56.04	-	-	P	V
			17895	40.55	-13.45	54	30.41	41.41	24.77	56.04	-	-	A	V
													V	
													V	
													V	
													V	
													V	
													V	





BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	42.12	-31.88	74	53.12	34.04	12.86	57.9	-	-	P	H	
		7320	40.73	-33.27	74	48.06	35.68	14.91	57.92	-	-	P	H	
		14490	47.41	-26.59	74	43.93	39.58	21.99	58.09	-	-	P	H	
		15690	48.33	-25.67	74	41.85	40.38	23.2	57.1	-	-	P	H	
		15690	37.09	-16.91	54	30.61	40.38	23.2	57.1	-	-	A	H	
		17790	50.34	-23.66	74	40.16	41.59	24.7	56.11	-	-	P	H	
		17790	40.46	-13.54	54	30.28	41.59	24.7	56.11	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4880	42.38	-31.62	74	53.38	34.04	12.86	57.9	-	-	P	V
			7320	40.84	-33.16	74	48.17	35.68	14.91	57.92	-	-	P	V
			14490	46.78	-27.22	74	43.3	39.58	21.99	58.09	-	-	P	V
			16170	48.58	-25.42	74	40.53	41.2	23.62	56.77	-	-	P	V
			16170	38.66	-15.34	54	30.61	41.2	23.62	56.77	-	-	A	V
			17850	50.23	-23.77	74	40.06	41.5	24.74	56.07	-	-	P	V
			17850	40.41	-13.59	54	30.24	41.5	24.74	56.07	-	-	A	V
													V	
													V	
													V	
													V	
													V	



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	42.23	-31.77	74	53.12	34.1	12.82	57.81	-	-	P	H	
		7440	40.26	-33.74	74	47.51	35.82	14.97	58.04	-	-	P	H	
		14475	46.59	-27.41	74	43.15	39.55	21.98	58.09	-	-	P	H	
		15840	47.71	-26.29	74	40.55	40.78	23.35	56.97	-	-	P	H	
		17730	51.04	-22.96	74	40.99	41.53	24.66	56.14	-	-	P	H	
		17730	40.71	-13.29	54	30.66	41.53	24.66	56.14	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4960	41.96	-32.04	74	52.85	34.1	12.82	57.81	-	-	P	V
			7440	40.04	-33.96	74	47.29	35.82	14.97	58.04	-	-	P	V
			14499	46.72	-27.28	74	43.21	39.6	22	58.09	-	-	P	V
			16170	48.21	-25.79	74	40.16	41.2	23.62	56.77	-	-	P	V
			16170	38.59	-15.41	54	30.54	41.2	23.62	56.77	-	-	A	V
			17835	50.24	-23.76	74	40.06	41.53	24.73	56.08	-	-	P	V
			17835	40.24	-13.76	54	30.06	41.53	24.73	56.08	-	-	A	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> <li>The emission level close to 18GHz is checked that the average emission level is noise floor only.</li> </ol>													



Emission above18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		23432	36.65	-37.35	74	50.17	38.7	6.36	58.58	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23754	35.84	-38.16	74	48.82	38.88	6.44	58.3	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		102.63	31.19	-12.31	43.5	43.24	16.21	1.73	29.99	-	-	P	H	
		196.32	30.28	-13.22	43.5	43	14.91	2.34	29.97	-	-	P	H	
		240.87	38.81	-7.19	46	49.09	17.14	2.55	29.97	100	0	Q	H	
		347.6	34.46	-11.54	46	41.26	20.21	2.97	29.98	-	-	P	H	
		855.8	32.73	-13.27	46	28.5	28.82	4.62	29.21	-	-	P	H	
		951.7	32.91	-13.09	46	26.34	30.39	4.88	28.7	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	33.67	-6.33	40	38.23	24.57	0.9	30.03	-	-	P	V
			64.83	27.84	-12.16	40	44.66	11.76	1.42	30	-	-	P	V
			234.12	35.83	-10.17	46	46.78	16.5	2.52	29.97	-	-	P	V
			799.8	30.97	-15.03	46	28.42	27.74	4.4	29.59	-	-	P	V
			902	32.77	-13.23	46	28.39	28.61	4.67	28.9	-	-	P	V
			958.7	33.4	-12.6	46	26.43	30.75	4.9	28.68	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2341.605	53.62	-20.38	74	39.67	31.43	17.92	35.4	101	302	P	H	
		2389.59	42.17	-11.83	54	28.04	31.4	18.14	35.41	101	302	A	H	
	*	2402	75.62	-	-	61.43	31.42	18.19	35.42	101	302	P	H	
	*	2402	73.87	-	-	59.68	31.42	18.19	35.42	101	302	A	H	
													H	
													H	
			2381.4	52.72	-21.28	74	38.62	31.4	18.11	35.41	295	266	P	V
			2389.8	42.16	-11.84	54	28.04	31.4	18.14	35.42	295	266	A	V
	*		2402	71.61	-	-	57.42	31.42	18.19	35.42	295	266	P	V
	*		2402	69.73	-	-	55.54	31.42	18.19	35.42	295	266	A	V
													V	
												V		
BLE CH 19 2440MHz		2313.92	52.61	-21.39	74	38.67	31.54	17.79	35.39	103	309	P	H	
		2389.52	42.1	-11.9	54	27.97	31.4	18.14	35.41	103	309	A	H	
	*	2440	73.87	-	-	59.36	31.72	18.22	35.43	103	309	P	H	
	*	2440	72.1	-	-	57.59	31.72	18.22	35.43	103	309	A	H	
			2495.17	53.59	-20.41	74	38.64	32.16	18.25	35.46	103	309	P	H
			2497.97	43.08	-10.92	54	28.1	32.18	18.26	35.46	103	309	A	H
			2386.44	52.72	-21.28	74	38.6	31.4	18.13	35.41	328	266	P	V
			2389.38	42.12	-11.88	54	27.99	31.4	18.14	35.41	328	266	A	V
	*		2440	71.78	-	-	57.27	31.72	18.22	35.43	328	266	P	V
	*		2440	69.91	-	-	55.4	31.72	18.22	35.43	328	266	A	V
			2492.09	54.33	-19.67	74	39.4	32.14	18.25	35.46	328	266	P	V
		2496.92	43.07	-10.93	54	28.09	32.18	18.26	35.46	328	266	A	V	



<b>BLE CH 39 2480MHz</b>	*	2480	75.09	-	-	60.26	32.04	18.24	35.45	100	304	P	H
	*	2480	73.35	-	-	58.52	32.04	18.24	35.45	100	304	A	H
		2494	53.34	-20.66	74	38.4	32.15	18.25	35.46	100	304	P	H
		2495.6	43.03	-10.97	54	28.08	32.16	18.25	35.46	100	304	A	H
													H
													H
	*	2480	73.22	-	-	58.39	32.04	18.24	35.45	361	280	P	V
	*	2480	71.27	-	-	56.44	32.04	18.24	35.45	361	280	A	V
		2493.4	53.57	-20.43	74	38.63	32.15	18.25	35.46	361	280	P	V
		2499.76	43.03	-10.97	54	28.03	32.2	18.26	35.46	361	280	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	41.9	-32.1	74	52.97	34.01	12.91	57.99	-	-	P	H	
		14490	46.66	-27.34	74	43.18	39.58	21.99	58.09	-	-	P	H	
		15975	48.19	-25.81	74	40.58	40.97	23.49	56.85	-	-	P	H	
		15975	38.06	-15.94	54	30.45	40.97	23.49	56.85	-	-	A	H	
		17760	50.43	-23.57	74	40.31	41.56	24.68	56.12	-	-	P	H	
		17760	40.35	-13.65	54	30.23	41.56	24.68	56.12	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4804	42.16	-31.84	74	53.23	34.01	12.91	57.99	-	-	P	V
			14499	47.12	-26.88	74	43.61	39.6	22	58.09	-	-	P	V
			16005	48.42	-25.58	74	40.73	41.01	23.51	56.83	-	-	P	V
			16005	38.16	-15.84	54	30.47	41.01	23.51	56.83	-	-	A	V
			17760	50.38	-23.62	74	40.26	41.56	24.68	56.12	-	-	P	V
			17760	40.27	-13.73	54	30.15	41.56	24.68	56.12	-	-	A	V
													V	
													V	
													V	
													V	
													V	
													V	



BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 19 2440MHz		4880	41.95	-32.05	74	52.95	34.04	12.86	57.9	-	-	P	H	
		7320	41.12	-32.88	74	48.45	35.68	14.91	57.92	-	-	P	H	
		14499	47.07	-26.93	74	43.56	39.6	22	58.09	-	-	P	H	
		15915	48.82	-25.18	74	41.38	40.92	23.42	56.9	-	-	P	H	
		15915	38.19	-15.81	54	30.75	40.92	23.42	56.9	-	-	A	H	
		17730	50.29	-23.71	74	40.24	41.53	24.66	56.14	-	-	P	H	
		17730	39.95	-14.05	54	29.9	41.53	24.66	56.14	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4880	42	-32	74	53	34.04	12.86	57.9	-	-	P	V
			7320	41.03	-32.97	74	48.36	35.68	14.91	57.92	-	-	P	V
			14490	46.94	-27.06	74	43.46	39.58	21.99	58.09	-	-	P	V
			15840	48.19	-25.81	74	41.03	40.78	23.35	56.97	-	-	P	V
			15840	37.69	-16.31	54	30.53	40.78	23.35	56.97	-	-	A	V
			17820	50.55	-23.45	74	40.36	41.56	24.72	56.09	-	-	P	V
			17820	40.72	-13.28	54	30.53	41.56	24.72	56.09	-	-	A	V
													V	
													V	
													V	
													V	
													V	





BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	40.37	-33.63	74	51.26	34.1	12.82	57.81	-	-	P	H	
		7440	40.06	-33.94	74	47.31	35.82	14.97	58.04	-	-	P	H	
		14475	47.22	-26.78	74	43.78	39.55	21.98	58.09	-	-	P	H	
		15870	48.13	-25.87	74	40.85	40.84	23.38	56.94	-	-	P	H	
		15870	37.76	-16.24	54	30.48	40.84	23.38	56.94	-	-	A	H	
		17850	50.84	-23.16	74	40.67	41.5	24.74	56.07	-	-	P	H	
		17850	40.36	-13.64	54	30.19	41.5	24.74	56.07	-	-	A	H	
														H
														H
														H
														H
														H
			4960	41.58	-32.42	74	52.47	34.1	12.82	57.81	-	-	P	V
			7440	41.38	-32.62	74	48.63	35.82	14.97	58.04	-	-	P	V
			14490	47.21	-26.79	74	43.73	39.58	21.99	58.09	-	-	P	V
			15795	48.06	-25.94	74	41.07	40.69	23.31	57.01	-	-	P	V
			15795	37.52	-16.48	54	30.53	40.69	23.31	57.01	-	-	A	V
			17850	50.5	-23.5	74	40.33	41.5	24.74	56.07	-	-	P	V
			17850	40.3	-13.7	54	30.13	41.5	24.74	56.07	-	-	A	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> <li>The emission level close to 18GHz is checked that the average emission level is noise floor only.</li> </ol>													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix F. Cabinet Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	19.5~21.4°C
		Relative Humidity :	60.5~65.5%

### Note symbol

-L	Low channel location
-R	High channel location



<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz; VBW:3000.000kHz; SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz; VBW:3000.000kHz; SWT:Auto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz; VBW:0.010MHz; SWT:Auto</p>	<p>Site : 03CH07-HY Condition : AVG_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz; VBW:0.010MHz; SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2310 to 2415 MHz. A sharp peak is visible at approximately 2402 MHz. The plot includes a red horizontal line indicating the peak level and a blue trace showing the signal spectrum. The date is 2022-01-20.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A sharp peak is visible at approximately 2402 MHz. The plot includes a red horizontal line indicating the peak level and a blue trace showing the signal spectrum. The date is 2022-01-20.</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2310 to 2415 MHz. A broader peak is visible at approximately 2402 MHz. The plot includes a red horizontal line indicating the average level and a blue trace showing the signal spectrum. The date is 2022-01-20.</p> <p>Site : 03CH07-HY Condition : AVG_BE_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A broader peak is visible at approximately 2402 MHz. The plot includes a red horizontal line indicating the average level and a blue trace showing the signal spectrum. The date is 2022-01-20.</p> <p>Site : 03CH07-HY Condition : AVG_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : AVG_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

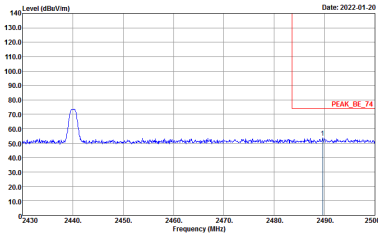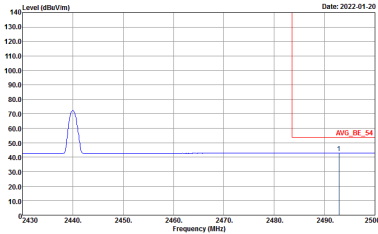



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SWFAuto</p>	<p>Left blank</p>



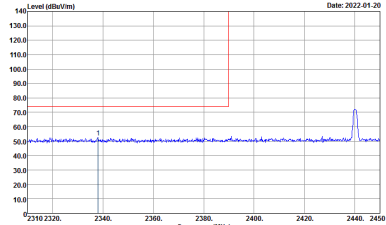
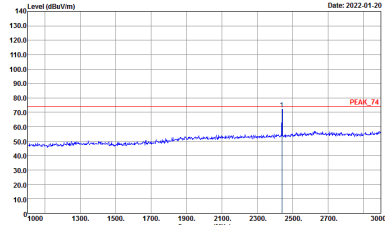
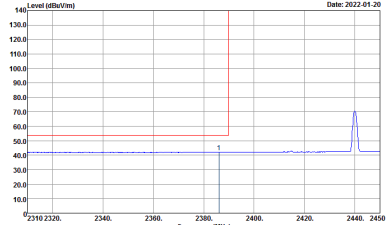
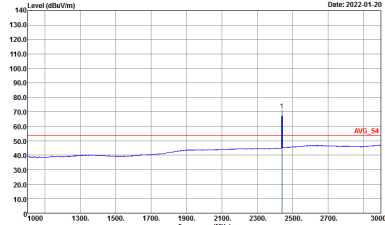


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



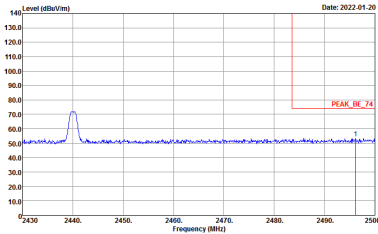
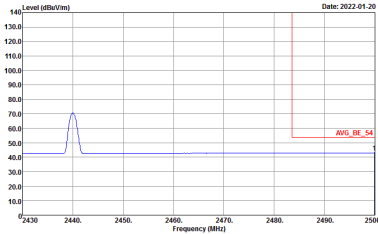


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-RY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	Left blank
Avg.	 <p>Site : 03CH07-RY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SWFAuto</p>	Left blank

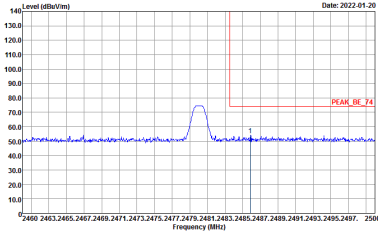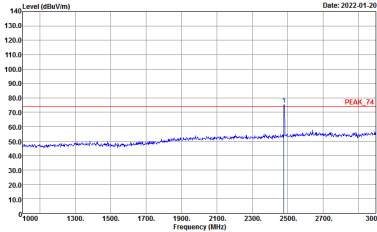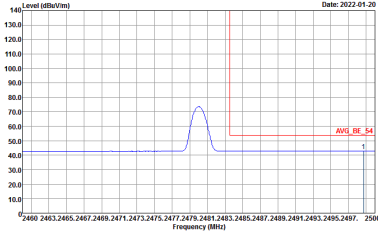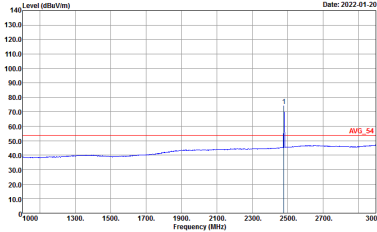

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

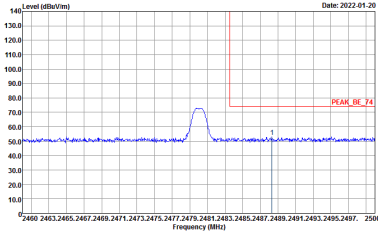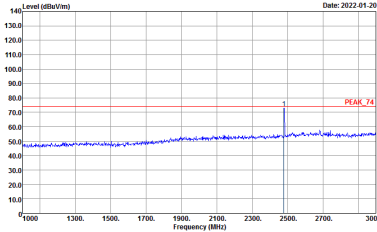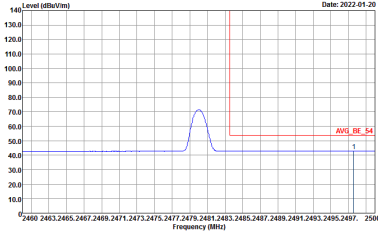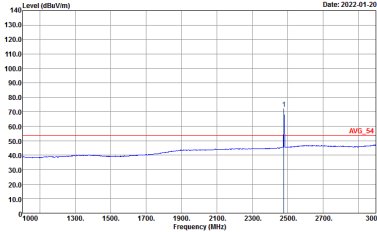

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : :PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : :PEAK_74 3m HF_ANT_00075962 VERTICAL</p>

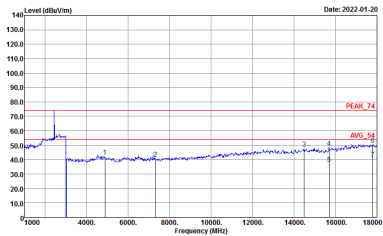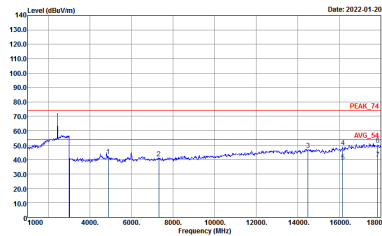

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	 <p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Emission above 18GHz
2.4GHz BLE (SHF @ 1m)

Table with 2 columns: Horizontal and Vertical. Each column contains a graph of Level (dBuV/m) vs Frequency (MHz) for Peak and Avg. values. Includes site and condition details for each graph.





Emission below 1GHz  
2.4GHz BLE (LF)





BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL</p>



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

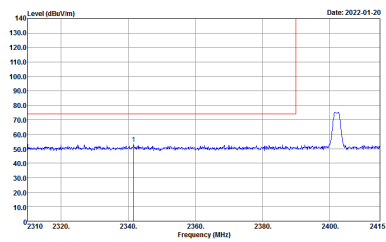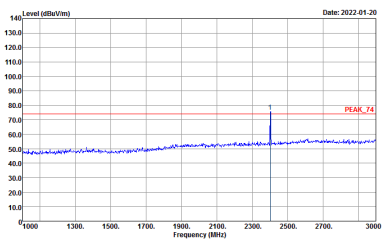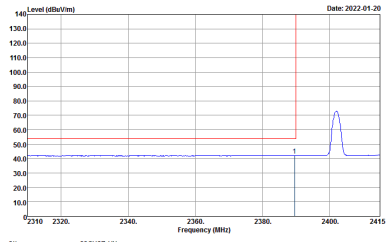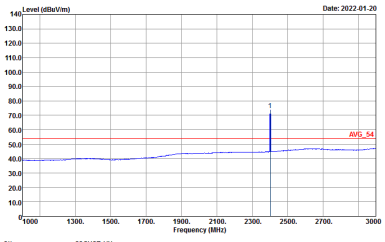BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site Condition : 03CH07-HY : AVG_S4 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2310 to 2415 MHz. A peak is visible at approximately 2402 MHz. The plot includes a red line for the peak level and a blue line for the noise floor. The peak level is approximately 75 dBuV/m.</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A peak is visible at approximately 2402 MHz. The plot includes a red line for the peak level and a blue line for the noise floor. The peak level is approximately 75 dBuV/m.</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg	<p>Vertical Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2310 to 2415 MHz. The plot shows the average level of the signal. A peak is visible at approximately 2402 MHz. The peak level is approximately 75 dBuV/m.</p> <p>Site : 03CH07-HY Condition : AVG_BE_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Fundamental Avg Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. The plot shows the average level of the signal. A peak is visible at approximately 2402 MHz. The peak level is approximately 75 dBuV/m.</p> <p>Site : 03CH07-HY Condition : AVG_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Date: 2022-01-20</p> <p>Site : 03CH07-HY Condition : AVG_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

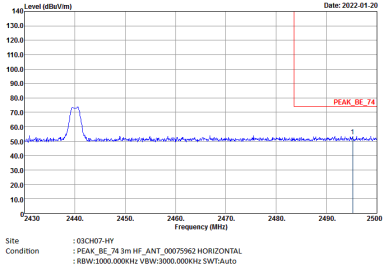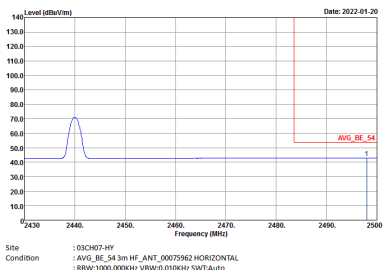

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : :PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz :VBW:3000.000kHz SWFAuto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : :AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL :RBW:1000.000kHz :VBW:0.020kHz SWFAuto</p>	Left blank

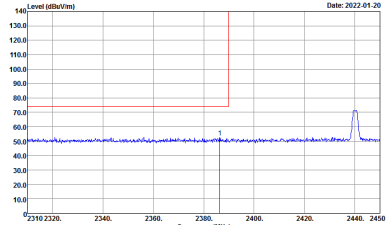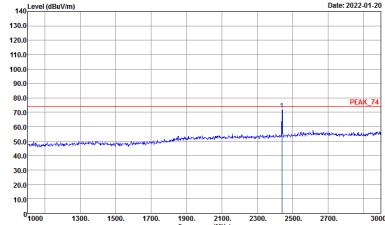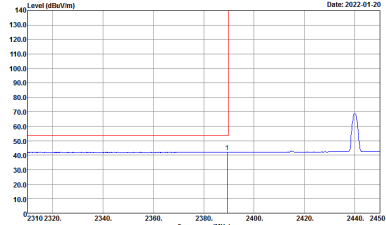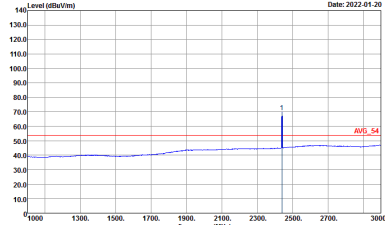

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_34 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	Left blank
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SWFAuto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



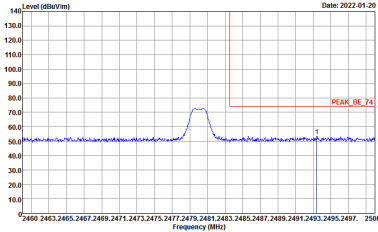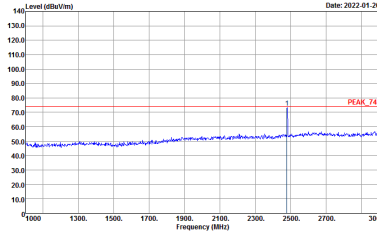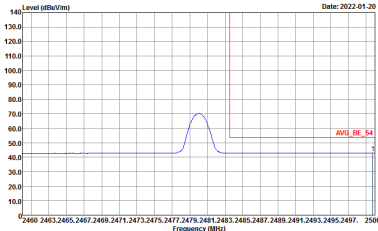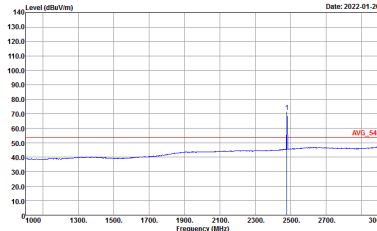

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2022-01-20. The plot shows a blue signal line with a red peak marker labeled 'PEAK_74' and a red average marker labeled 'AVG_54'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 0 to 18000 MHz. The signal is relatively flat around 50 dBuV/m with a small peak at approximately 2440 MHz.</p> <p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2022-01-20. The plot shows a blue signal line with a red peak marker labeled 'PEAK_74' and a red average marker labeled 'AVG_54'. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 0 to 18000 MHz. The signal is relatively flat around 50 dBuV/m with a small peak at approximately 2440 MHz.</p> <p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : 1-PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



## Appendix G. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 1Mbps	100	-	-	10Hz
Bluetooth –LE for 2Mbps	100	-	-	10Hz

