



Test report no. : 182227-4

Item tested : CC2544 Dongle

Type of equipment : 2.4GHz USB Dongle

FCC ID : ZAT2544USB

Client : Texas Instruments Norway AS

FCC Part 15.247

Digital Transmission System

RSS-210, Issue 8

Low Power Licence-Exempt
Radiocommunication Devices

2012-03-15

Authorized by : 

Frode Sveinsen
Technical Vericator

CONTENTS

- 1 GENERAL INFORMATION 3**
- 1.1 Testhouse Info 3
- 1.2 Client Information..... 3
- 1.3 Responsible Manufacturer (If other than client) 3
- 2 Test Information..... 4**
- 2.1 Test Item 4
- 2.2 Test Environment..... 5
- 2.2.1 Normal test condition 5
- 2.3 Test Period..... 5
- 3 TEST REPORT SUMMARY 6**
- 3.1 General 6
- 3.2 Test Summary..... 7
- 3.3 Description of modification for Modification Filing..... 7
- 3.4 Comments 7
- 3.5 Family List Rational 7
- 4 TEST RESULTS 8**
- 4.1 Power-line Conducted Emissions 8
- 4.2 Minimum 6 dB Bandwidth 10
- 4.3 20 dB Bandwidth..... 14
- 4.4 Peak Power Output..... 15
- 4.5 Spurious Emissions (Radiated) 19
- 4.6 Receiver Spurious Emissions 30
- 4.7 Power Spectral Density (PSD)..... 33
- 5 LIST OF TEST EQUIPMENT..... 37**
- 6 BLOCK DIAGRAM 38**
- 6.1 Power Line Conducted Emission 38
- 6.2 Test Site Radiated Emission..... 38

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko AS
Address : Nemko Kjeller
Instituttveien 6, Box 96
NO-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm : 994405
IC OATS : 2040D-1
Total Number of Pages: 38

1.2 Client Information

Name : Texas Instruments Norway AS
Address : Gaustadalléen 21,
NO-0349 Oslo, Norway
Telephone : +47 22 95 85 44
Fax : +47 22 95 85 46

Contact:

Name : Dag Grini
Telephone : +47 22 95 83 01
E-mail : d.grini@ti.com

1.3 Responsible Manufacturer (If other than client)

Name : /
Address : /

2 Test Information

2.1 Test Item

Name :	Texas Instruments
FCC ID :	ZAT2544USB
IC :	451H-2544USB
Model/version :	CC2544 Dongle
Serial number :	/
Hardware identity and/or version:	/
Software identity and/or version :	/
Frequency Range :	2402 – 2480 MHz
Number of Channels :	/
Type of Modulation :	Digital (GFSK)
Rated output power:	/
Data rate:	2Mbps
User Frequency Adjustment :	None
Type of Power Supply :	Primary Batteries (3xAA batteries)
Antenna Connector :	Integral
Antenna Diversity Supported :	No
Desktop Charger :	None

Description of Test Item

The tested EUT is a 2.4GHz transceiver with integral antenna.

Exposure Evaluation

The EUT is exempted from RF Exposure Evaluation.

2.2 Test Environment

2.2.1 Normal test condition

Temperature:	20 – 23 °C
Relative humidity:	33 – 45 %
Normal test voltage:	4.5 V DC

The radiated emissions tests were performed with the EUT powered from a test-jig with 3xAA primary batteries. New batteries were used for all tests.

The values are the limit registered during the test period.

2.3 Test Period

Item received date: 2011-11-21

Test period : from 2011-11-24 to 2011-11-29 and 15-03-2012

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Texas Instruments
Model No.: CC2544 Dongle
Serial No.: /

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.247 and Industry Canada RSS-210 Issue 8.

Radiated tests were conducted in accordance with ANSI C63.4-2003. The radiated tests were made in a semi-anechoic chamber at measuring distances of 3m and 10m.

- | | |
|---|---|
| <input checked="" type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| DTS Equipment Code | <input type="checkbox"/> Family Listing |

THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.
Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT #: 182227-4

TESTED BY: G. Suhanthakumar
G. Suhanthakumar, Test engineer

DATE: 2012-03-15

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

3.2 Test Summary

Name of test	FCC Part 15 reference	RSS-210 Issue 8 reference	Result
Antenna Requirement	15.203	7.1.4 (RSS-GEN)	Pass
Power Line Conducted Emission	15.107(a) 15.207(a)	7.2.2 (RSS-GEN)	Pass
Minimum 6 dB Bandwidth	15.247(a)(2)	A8.2	Pass
Peak Power Output	15.247(b)	A8.4	Pass
Power Spectral Density	15.247(d)	A8.2	Pass
Spurious Emissions (Antenna Conducted)	15.247(c)	A8.5	N/A*
Spurious Emissions (Radiated)	15.247(c) 15.109(a) 15.209(a)	A8.5	Pass
Receiver Emissions (Radiated)	N/A	2.3	Pass

*Integral antenna.

3.3 Description of modification for Modification Filing

Not applicable.

3.4 Comments

All ports were populated during spurious emission measurements.

3.5 Family List Rational

Not Applicable.

4 TEST RESULTS

4.1 Power-line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: Thomas Dangle	Date of Test: 24.11.2011
----------------------------------	--------------------------

Measurement procedure: ANSI C63.4-2009 using 50 μ H/50 ohms LISN.

Test Results: Complies.

Measurement Data: Peak detector was used.

EUT is connected at the USB port and in communication mode.

The graph shows peak scan and highest values. The QP and AV values are given in the table below.


Measured at AC mains 120V AC, 60Hz.

Lap Top Model:Dell Latitude D420

AC/DC adapter model: LA90PE1-01

Highest measured value (L and N):

See the attached plot for peak scan.

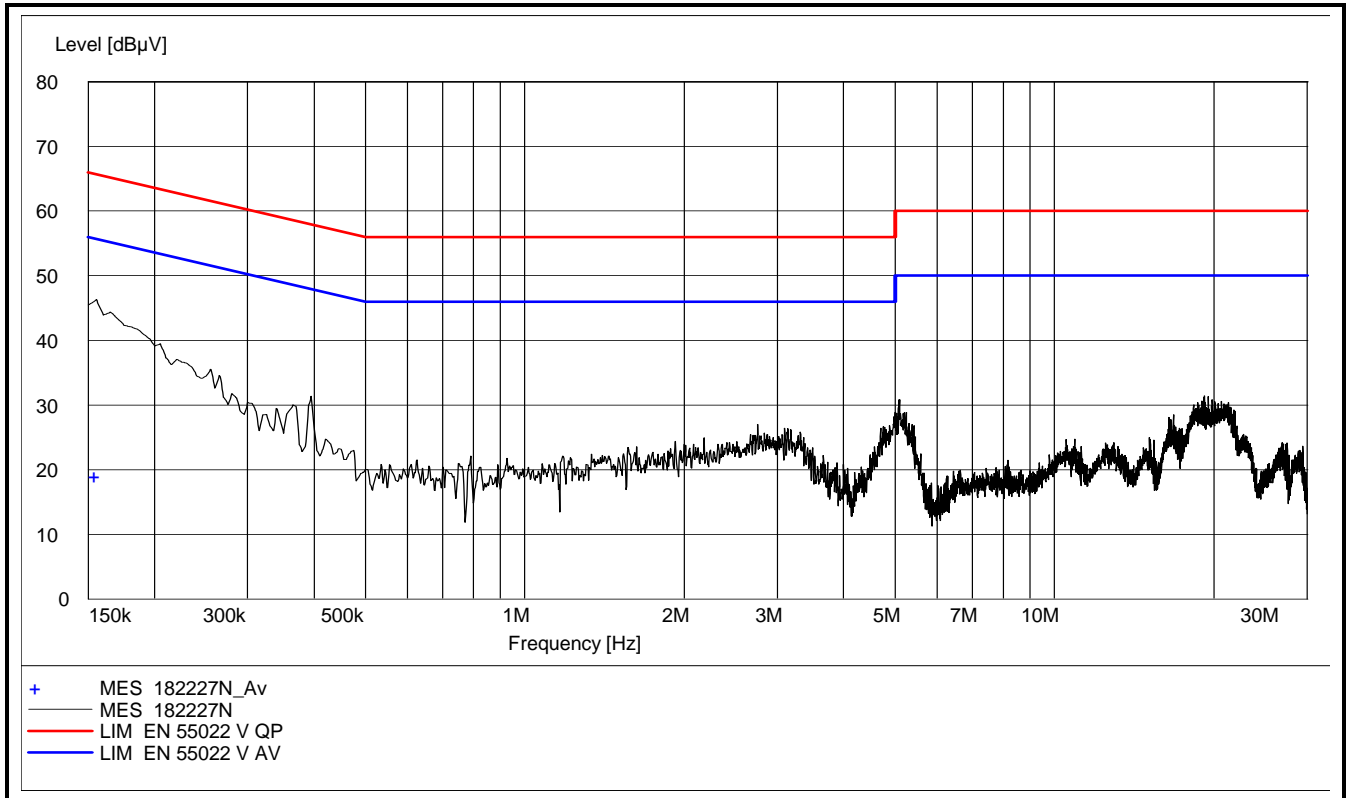
QUASI PEAK DETECTOR

Frequency [MHz]	Level [dBµV]	Af [dB]	Limit [dBµV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
None	-	-	-	-	-	-	-

AVERAGE DETECTOR

Frequency [MHz]	Level [dBµV]	Af [dB]	Limit [dBµV]	Margin [dB]	Det	Position	Verdict [Pass/Fail]
0.155000	19.10	10.10	55.70	36.60	AV	L1	Pass

4.2 Minimum 6 dB Bandwidth

Para. No.: 15.247 (a)(2)

Test Performed By: G.Suhamthakumar	Date of Test: 15 Mar 2012
------------------------------------	---------------------------


Test Results: Complies

Measurement Data:

Measured 6 dB Bandwidth (MHz)		
2402MHz	2440 MHz	2480MHz
0.841	0.851	0.841


Requirements:

For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

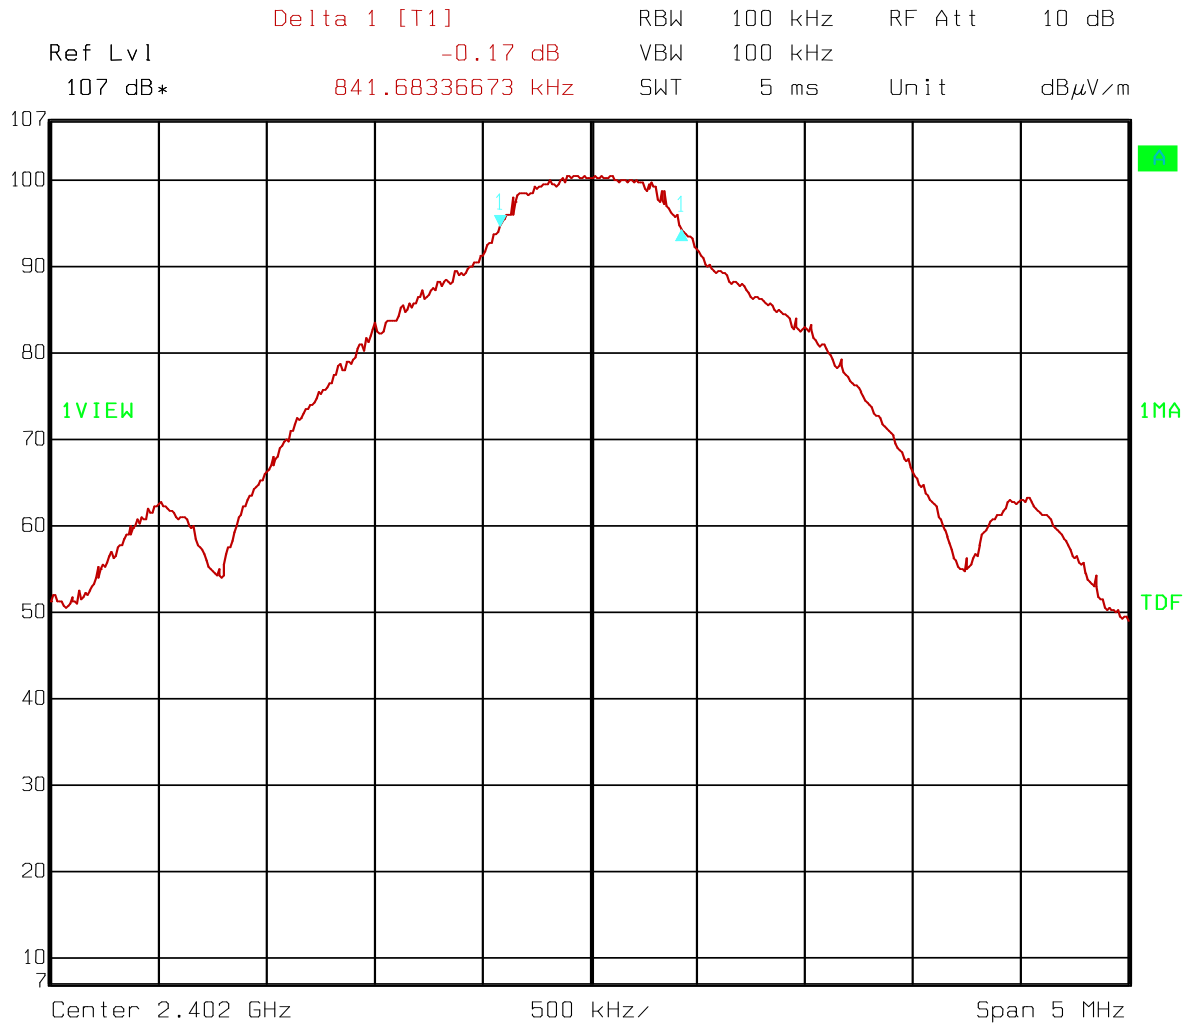

Date: 15.MAR.2012 17:33:21

6 dB Bandwidth at 2402 MHz

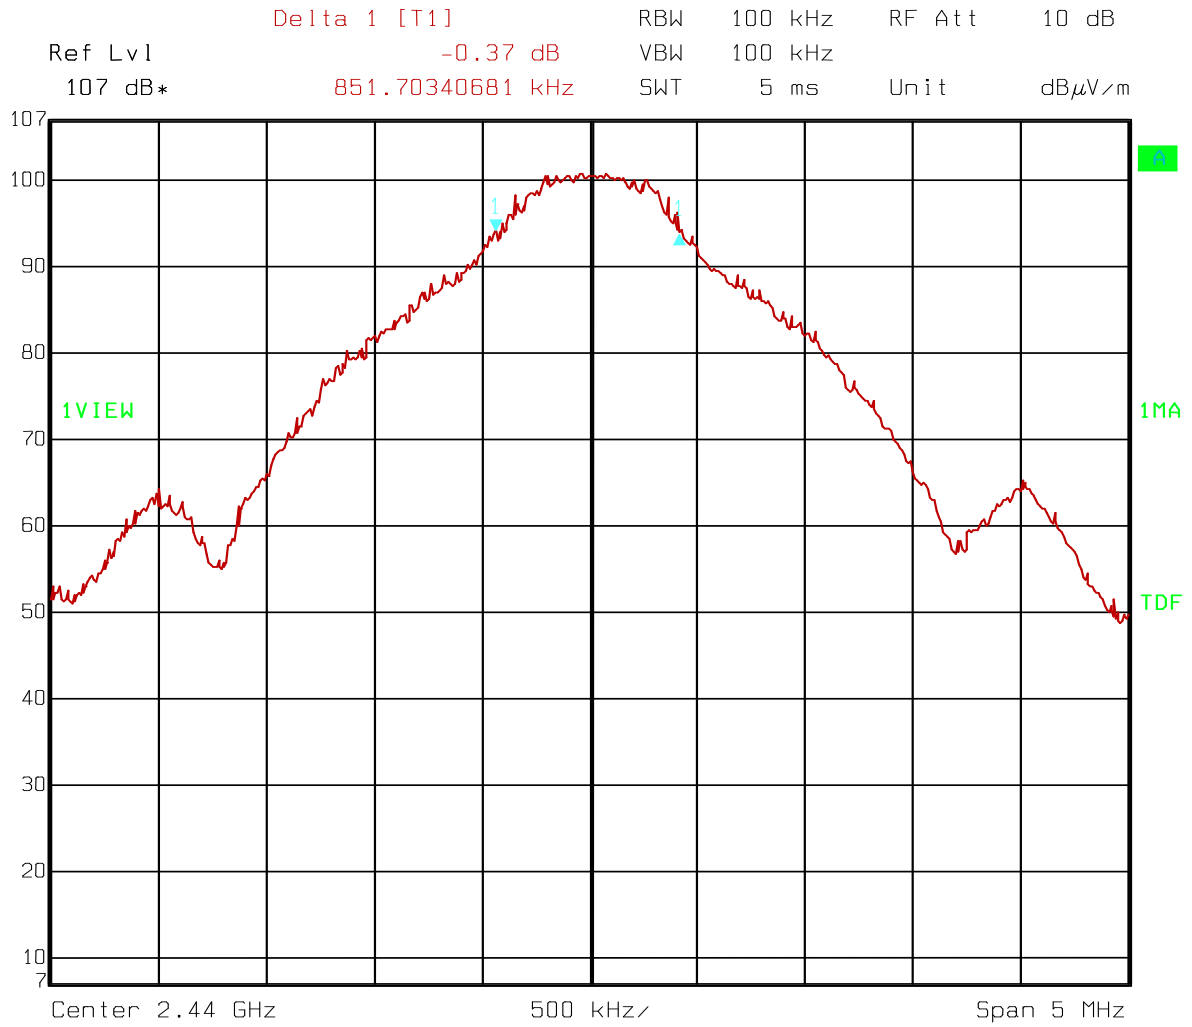

Date: 15.MAR.2012 17:44:45

6 dB Bandwidth at 2440 MHz

4.3 20 dB Bandwidth


Test Performed By: G.Suhandhakumar	Date of Test: 24 Nov 2011
------------------------------------	---------------------------

Measurement Data:

Measured 20 dB Bandwidth (MHz)
2440 MHz
2.24

Requirements:

No requirements. Reported for information only.

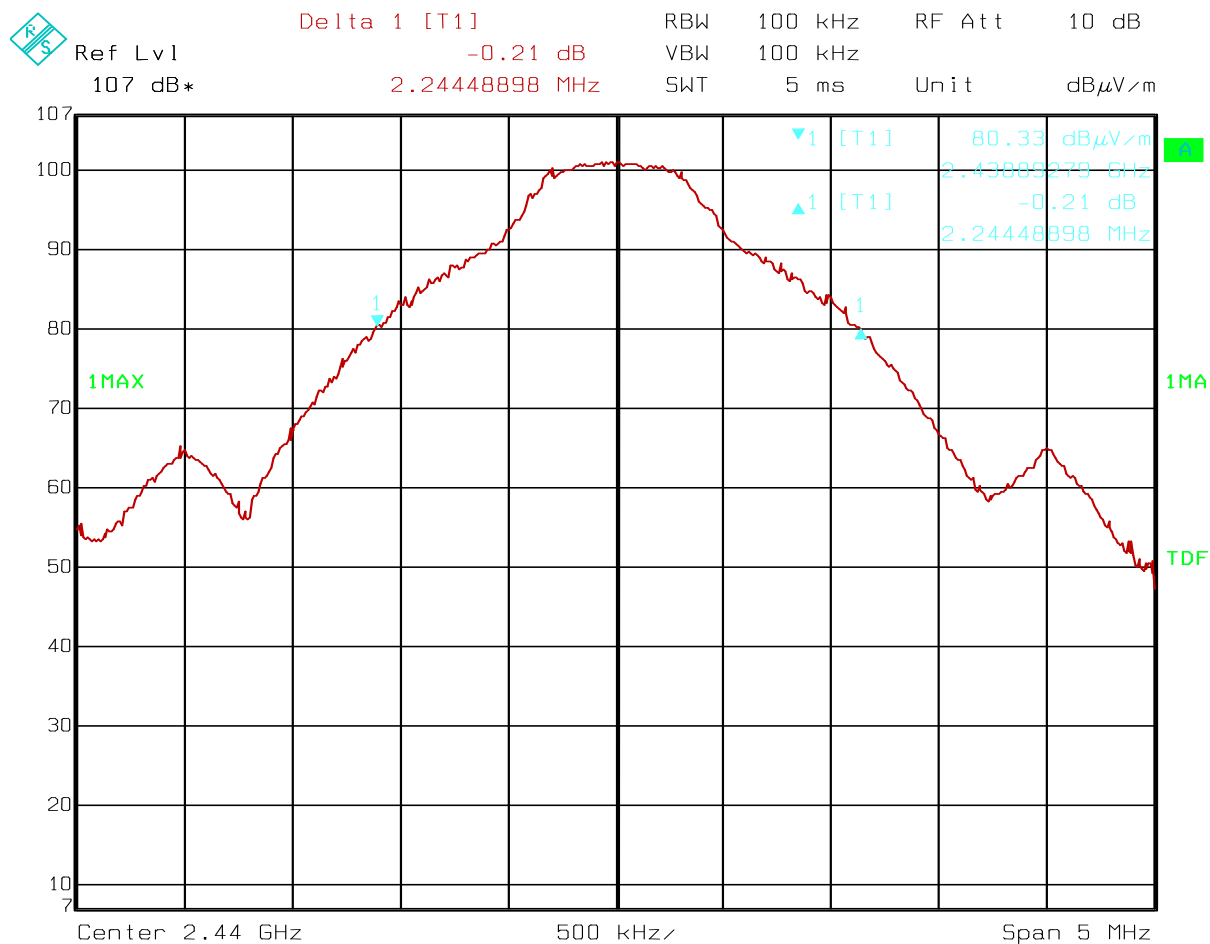

Date: 24.NOV.2011 11:26:11

20 dB Bandwidth at 2440 MHz

4.4 Peak Power Output

Para. No.: 15.247 (b)

Test Performed By: G.Suwanthakumar	Date of Test: 24 Nov 2011
------------------------------------	---------------------------

Test Results: Complies

Measurement Data:

RF channel	2402 MHz	2440 MHz	2480 MHz
Measured Fieldstrength (dB μ V/m)- HP	100.10	100.41	99.79
Measured Fieldstrength (dB μ V/m)- VP	101.13	101.47	101.50
Radiated Power (dBm)	5.90	6.24	6.27
Radiated Power (mw)	3.89	4.20	4.23

Radiated Power is calculated from measured field strength by the formula in DA00-705.

See attached graph.

Detachable antenna?

Yes No

If detachable, is the antenna connector non-standard?

Yes No


Type of antenna connector: SMA.

Requirements:

The maximum peak output power shall not exceed the following limits:


For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

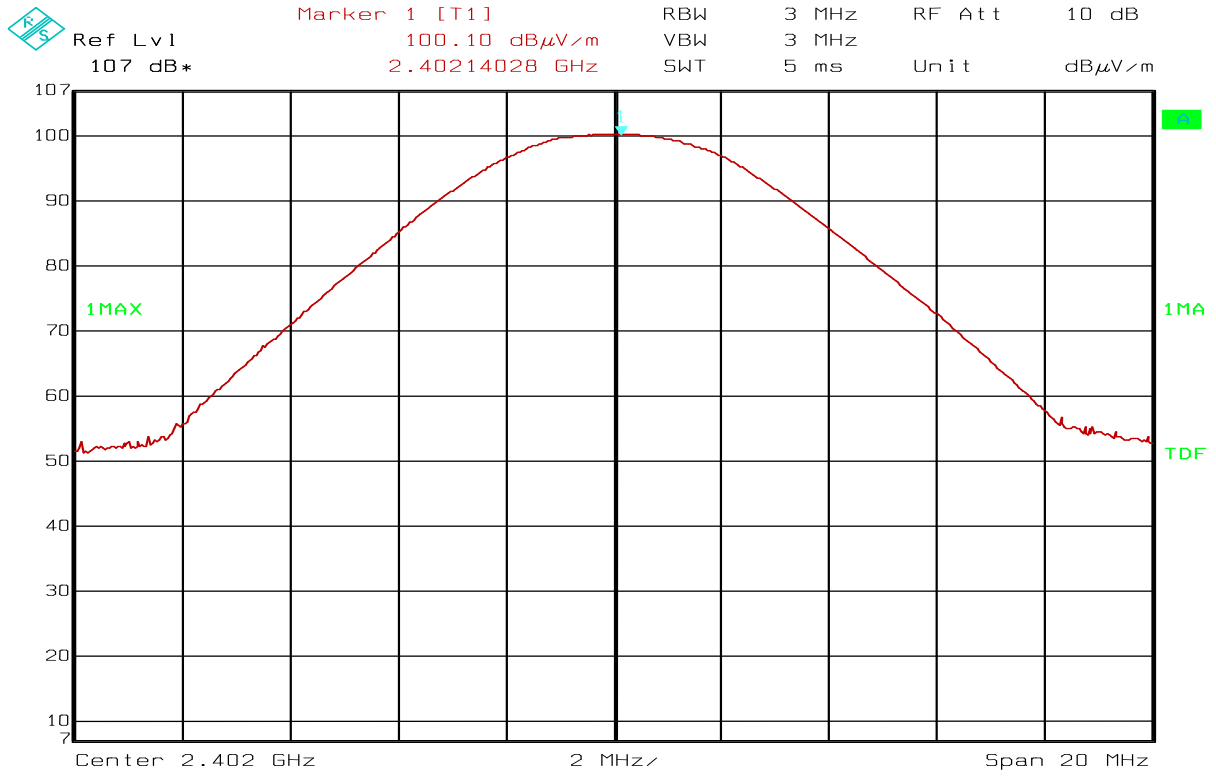


Date: 24.NOV.2011 10:51:44

HP, Field strength, 2402 MHz

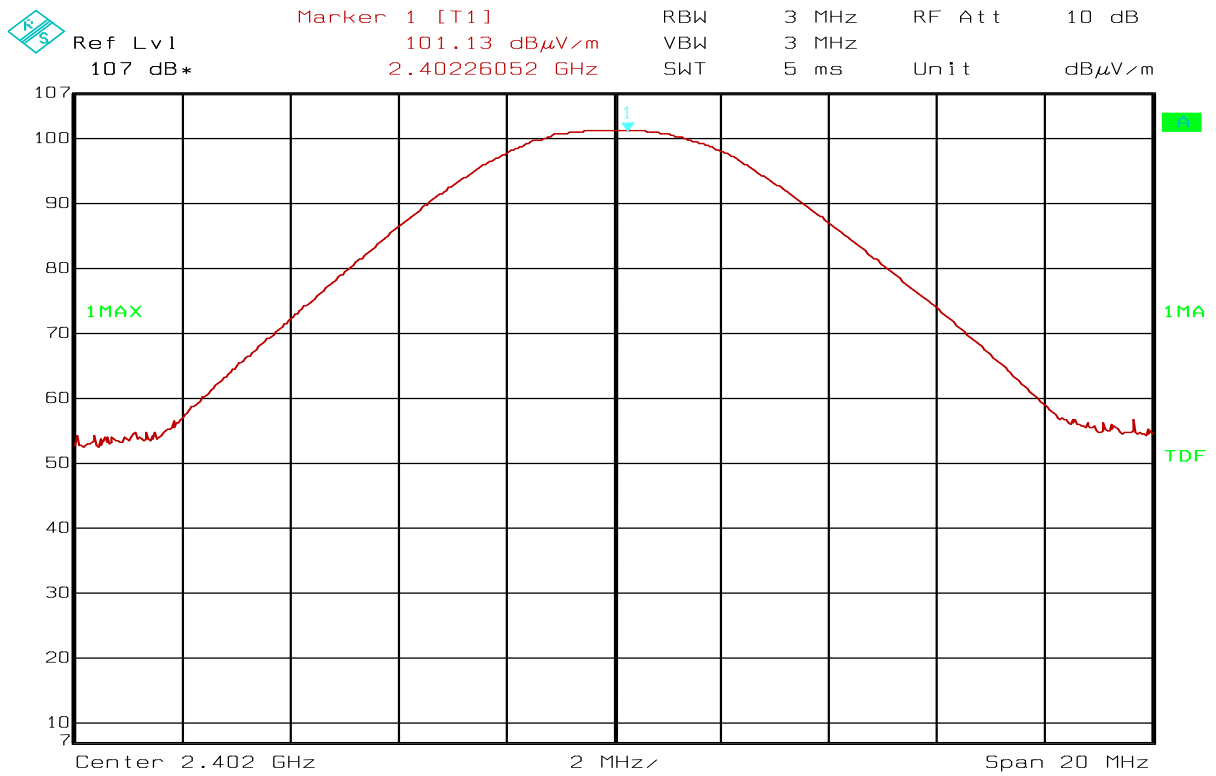


Date: 24.NOV.2011 10:43:40

VP, Field strength, 2402 MHz

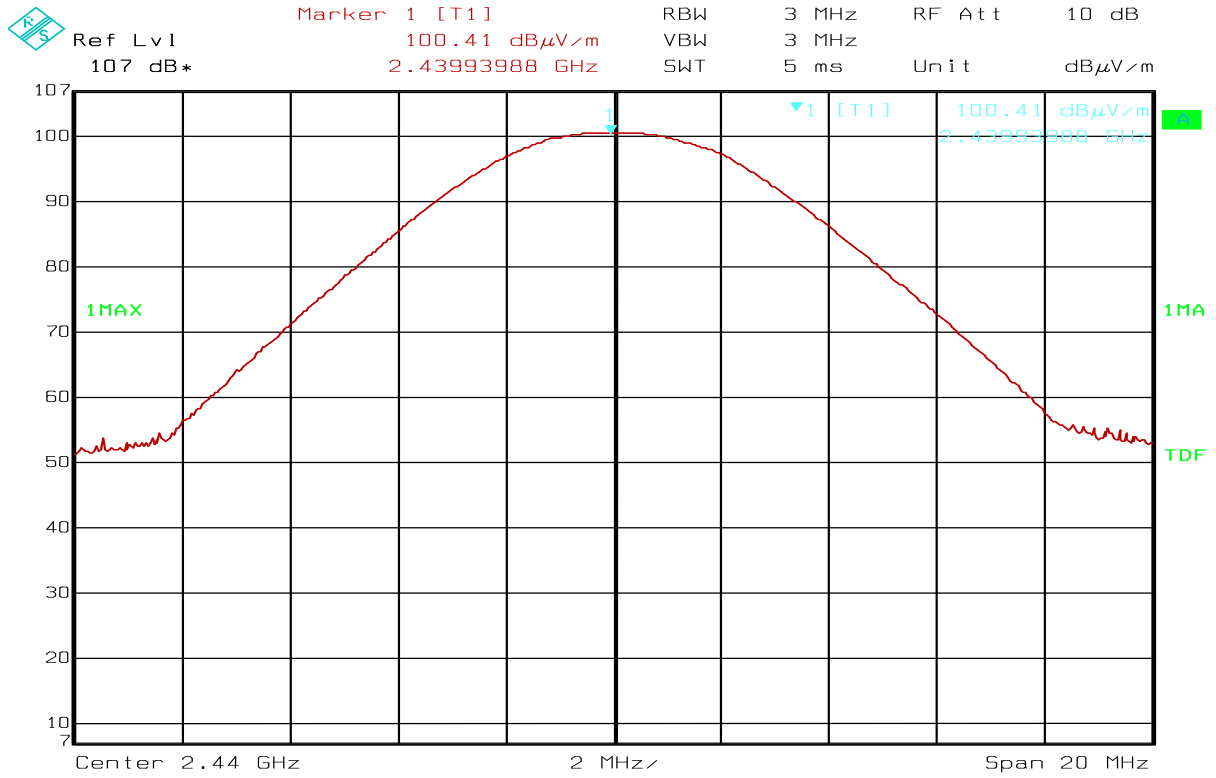


Date: 24.NOV.2011 11:34:30

HP, Field strength, 2440 MHz

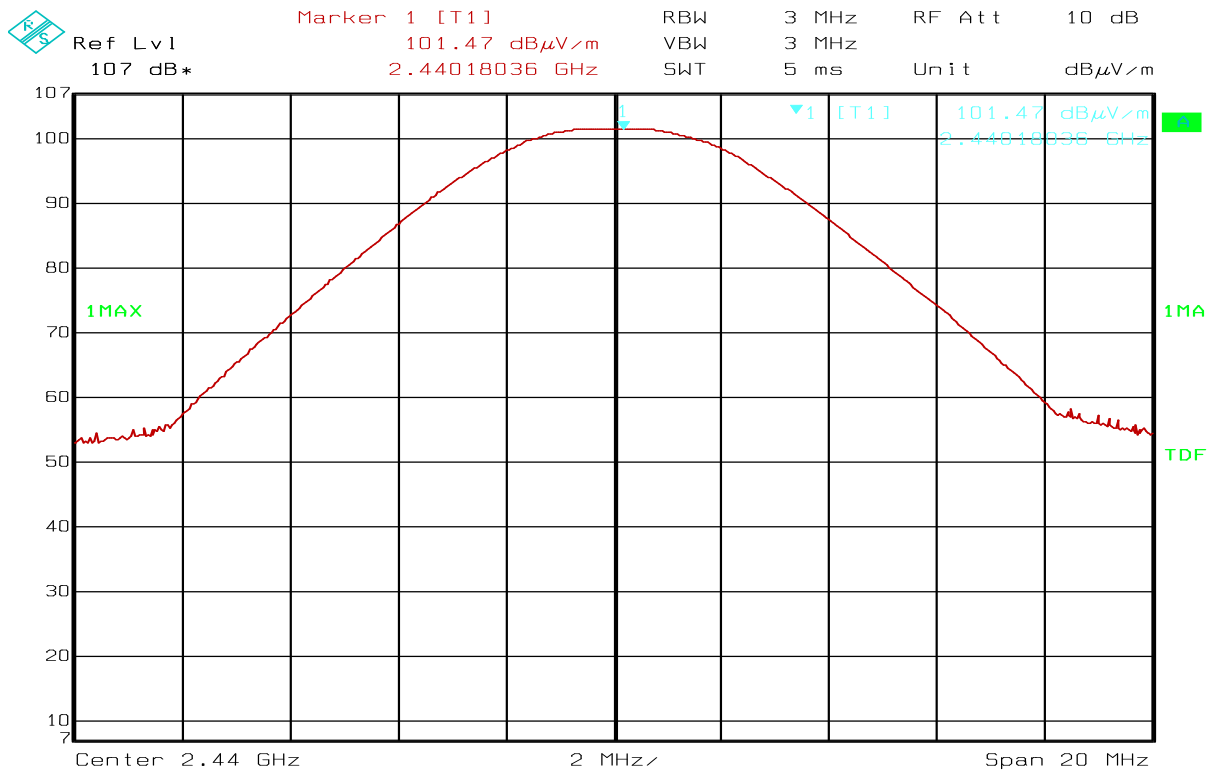


Date: 24.NOV.2011 11:20:56

VP, Field strength, 2440 MHz

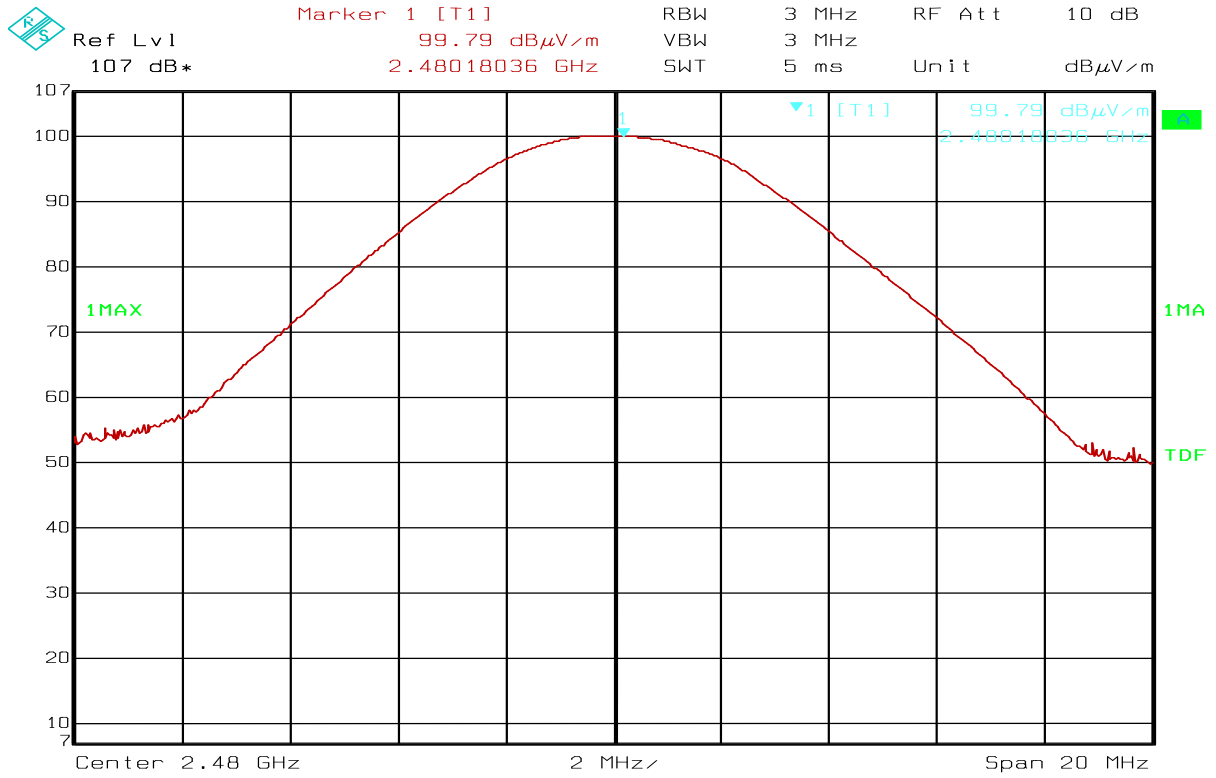

Date: 24.NOV.2011 11:35:40

HP, Field strength, 2480 MHz

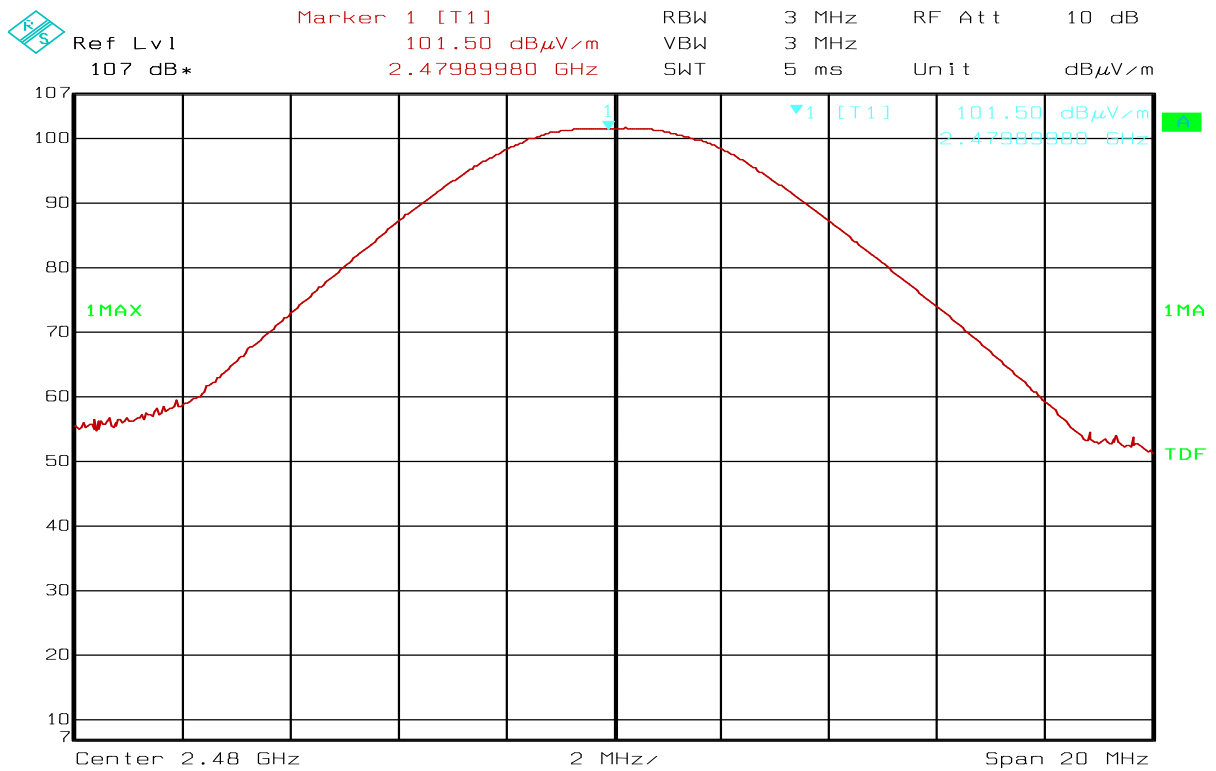

Date: 24.NOV.2011 11:37:08

VP, Field strength, 2480 MHz

4.5 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

Test Performed By: G.Suhandhakumar	Date of Test: 24 Nov 2011
------------------------------------	---------------------------

Test Results: Complies

Measurement Data:

Band-edge, @3m

Frequency	Measured Field Strength @3m, dB μ V/m	Detector	Limit dB μ V/m	Margin dB
2.39 GHz	-	AV	54	-
	34.71	PK	74	39.29
2.4835 GHz	-	AV	54	-
	49.32	PK	74	24.68

See attached plots.

Marker Delta Calculation:


Max: 101.48 dB μ V/m

Delta: 51.50 dB

Band Edge Field Strength, Peak: 101.48 – 51.50 dB μ V/m = 49.98 dB μ V/m



Ref Lvl 107 dB*
 Marker 1 [T1] 34.71 dB μ V/m
 2.39008016 GHz
 RBW 100 kHz RF Att 10 dB
 VBW 100 kHz
 SWT 7.5 ms Unit dB μ V/m

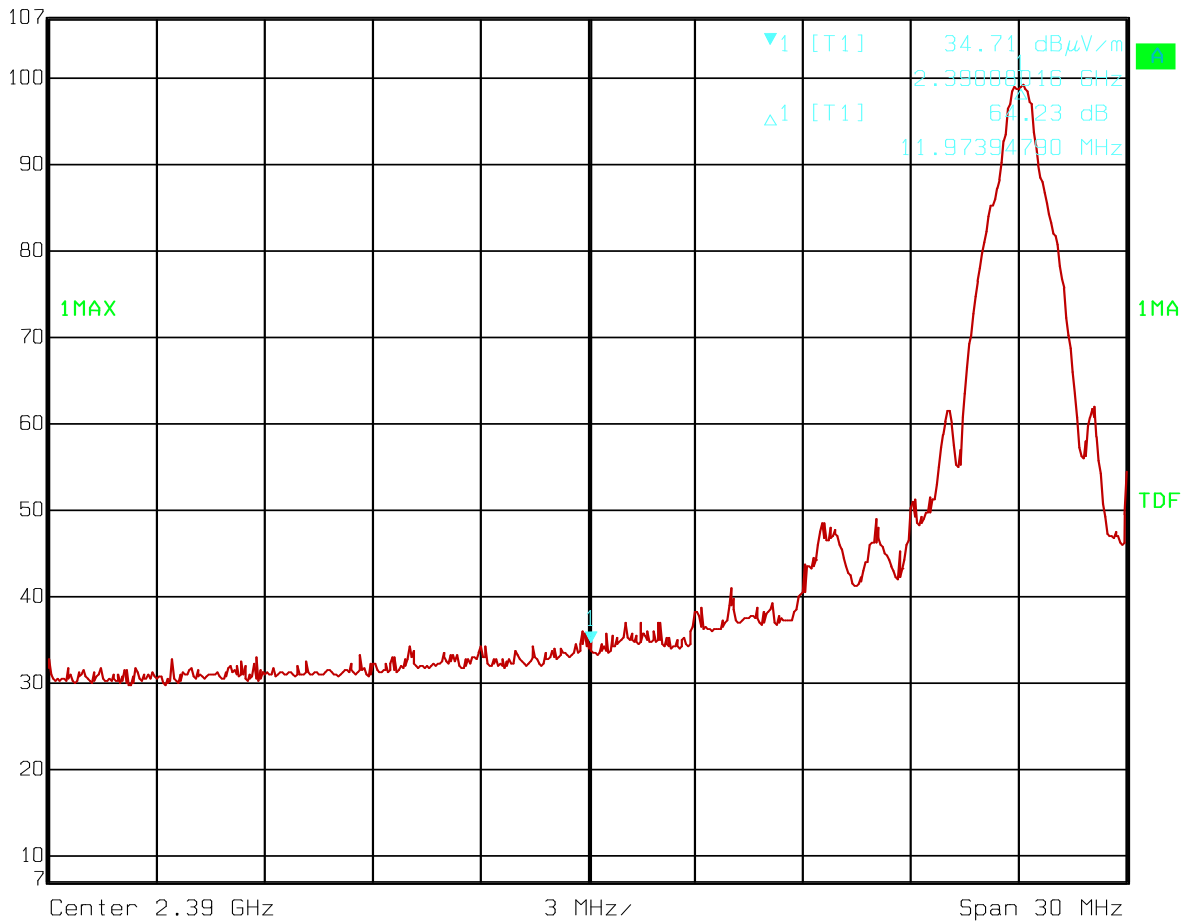


Date: 24.NOV.2011 10:55:37

Band Edge, 2390 MHz, Peak Detector

Marker 1 [T1]
101.48 dB μ V/m
2.48028557 GHz

Ref Lvl 107 dB*
 RBW 1 MHz RF Att 10 dB
 VBW 1 MHz
 SWT 5 ms Unit dB μ V/m

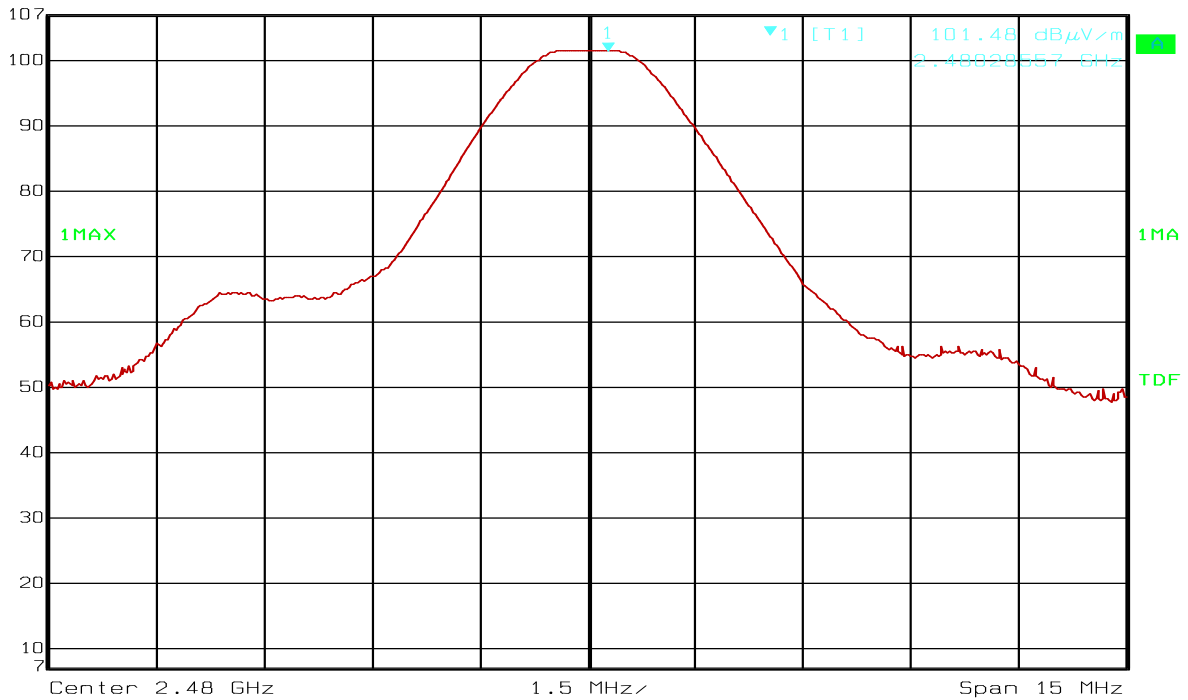


Date: 24.NOV.2011 11:47:22

Band Edge, 2483.5 MHz, Marker Delta, Max

Delta 1 [T1]
51.50 dB
-3.96793587 MHz

Ref Lvl 107 dB*
 RBW 100 kHz RF Att 10 dB
 VBW 100 kHz
 SWT 7.5 ms Unit dB μ V/m

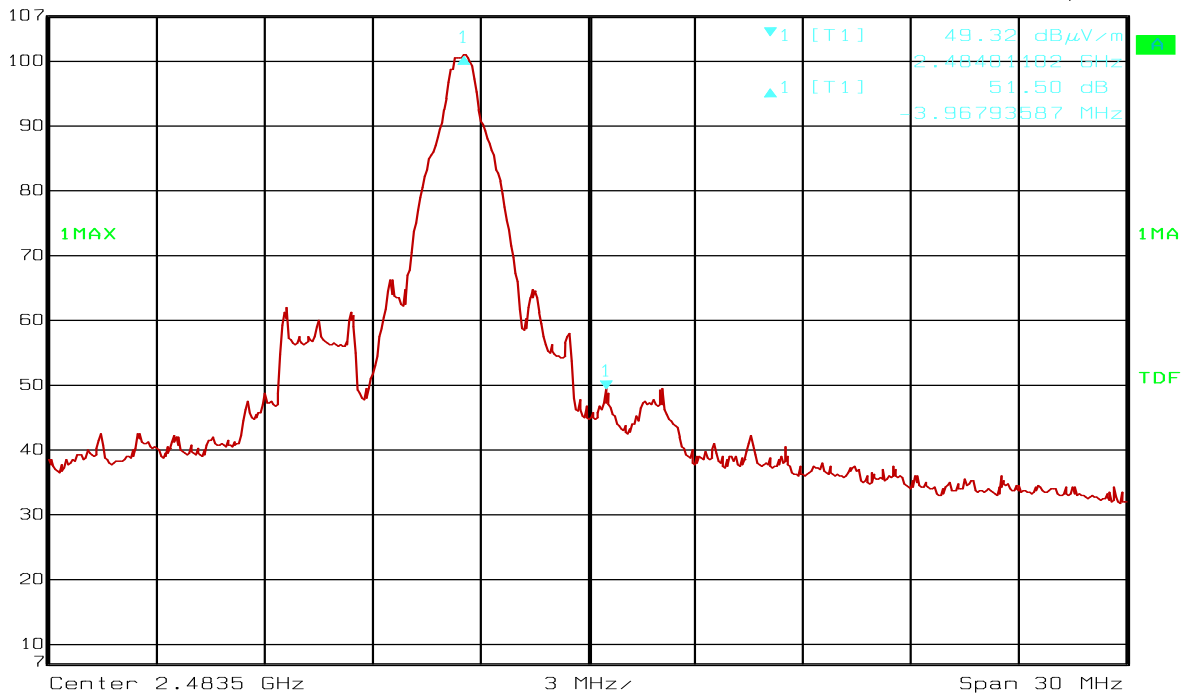

Date: 24.NOV.2011 11:45:57

Band Edge, 2483.5 MHz, Marker Delta, Delta


Radiated emission 30 – 1000 MHz.

Detector: Peak

Measuring distance 3m.

All values are below the limit even when measured with Peak Detector.

See attached plot.

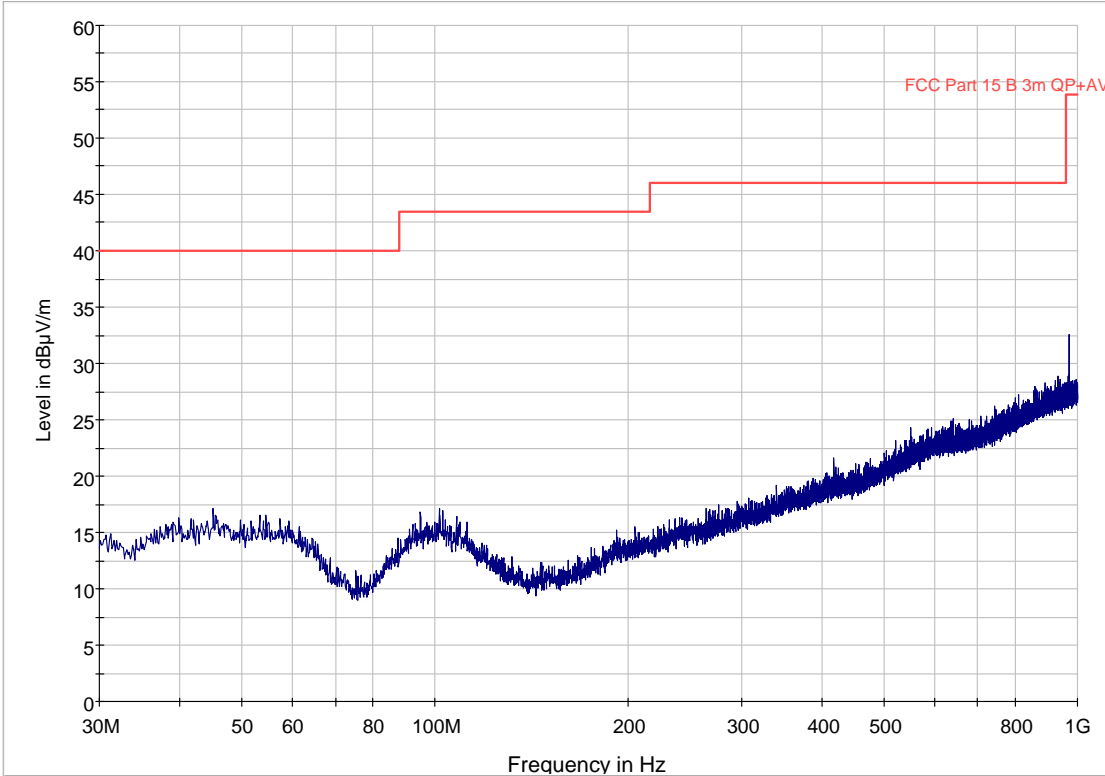

Radiated Emissions, 30 – 1000 MHz, VP and HP, @3m

Radiated Emissions, 1-25 GHz

1-10 GHz measured at a distance of 3m

10 - 18 GHz measured at 1m

Prescan performed from 18 to 25 GHz.

PK - Dectector

Frequency MHz	Field strength @3m dBµV/m	Detector	Limit dBµV/m	Margin dB
4810	54.22	Pk	74	19.78
4880	52.99	Pk	74	21.01
4960	52.99	Pk	74	21.01

AV - Dectector


Frequency MHz	Field strength @3m dBµV/m	Detector	Limit dBµV/m	Margin dB
4810	50.24	AV	54	3.76
4880	50.21	AV	54	3.79
4960	48.60	AV	54	5.40

Maximum is obtained at vertical polarization

All emissions are below the Average Limit, even when measured with Peak Detector.


Antenna factor, amplifier gain and cable loss are included in Spectrum Analyzer "Transducer factor".

See attached graphs.

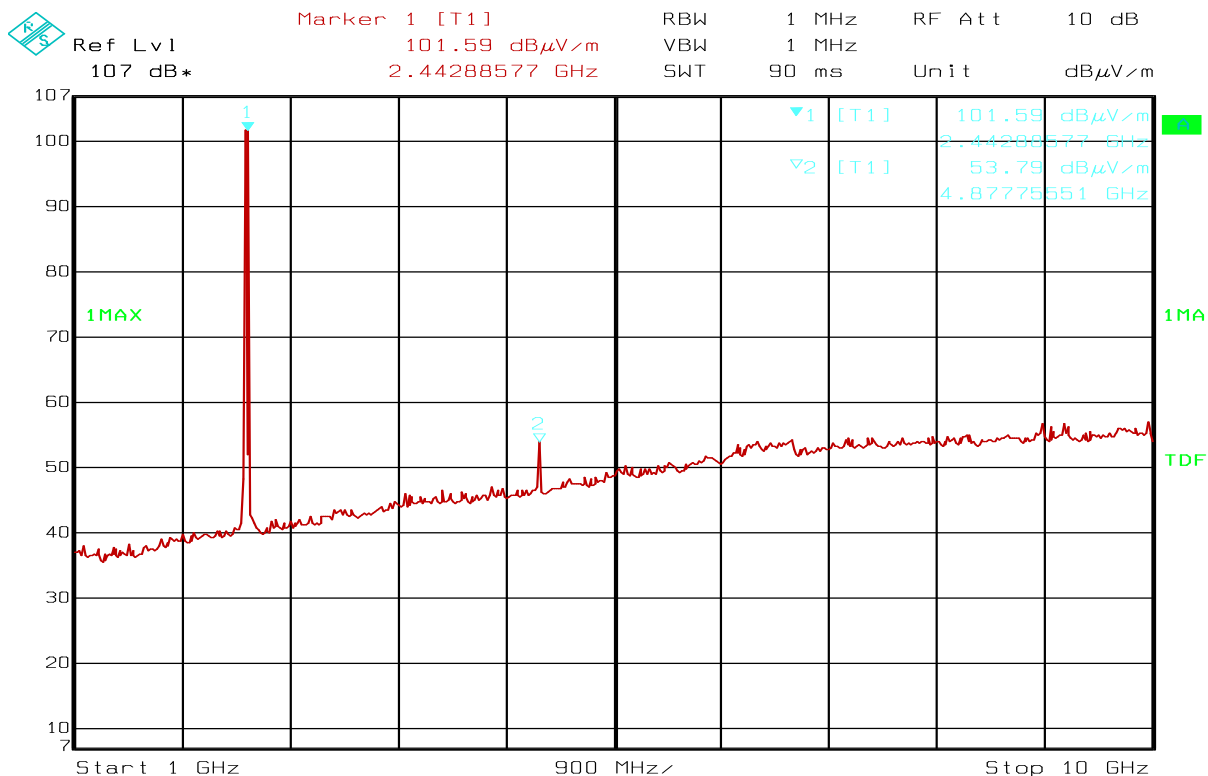

Date: 24.NOV.2011 11:23:44


Radiated Emissions, 1 – 10 GHz, VP, @3m

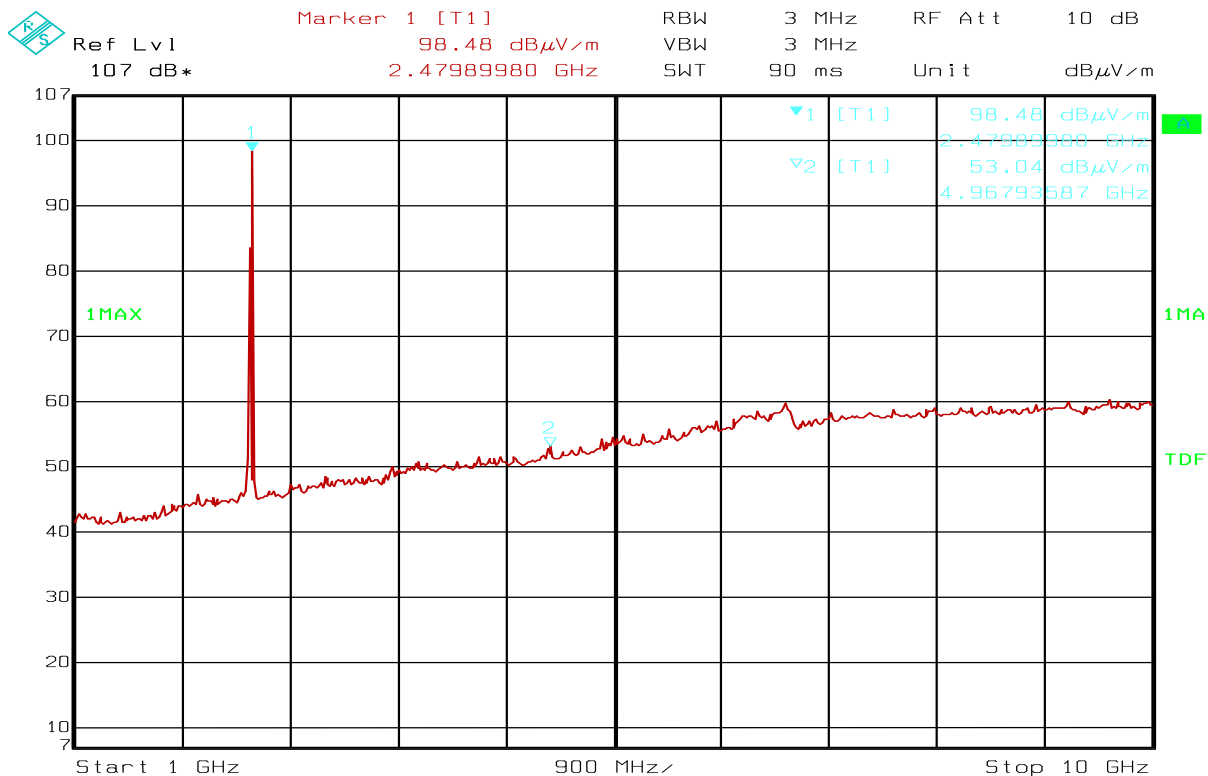

Date: 24.NOV.2011 11:39:57

Radiated Emissions, 1 – 10 GHz, HP, @3m


Marker 1 [T1] RBW 1 MHz RF Att 0 dB
-75.91 dBm VBW 1 MHz
14.08817635 GHz SWT 80 ms Unit dBm
 Ref Lvl -10 dBm

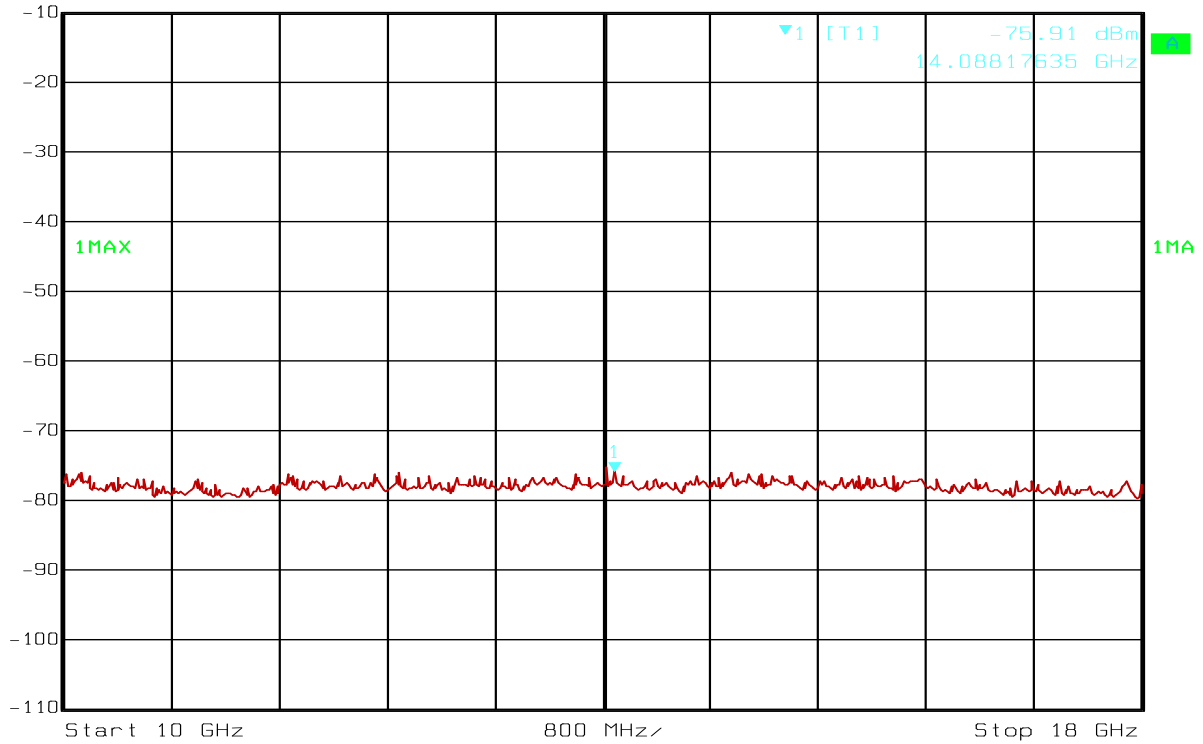

Date: 29.NOV.2011 08:54:31


Radiated Emissions, 10 – 18 GHz, VP, @1m – pre-view scan

Marker 1 [T1] RBW 1 MHz RF Att 0 dB
-76.66 dBm VBW 1 MHz
15.81963928 GHz SWT 80 ms Unit dBm
 Ref Lvl -10 dBm

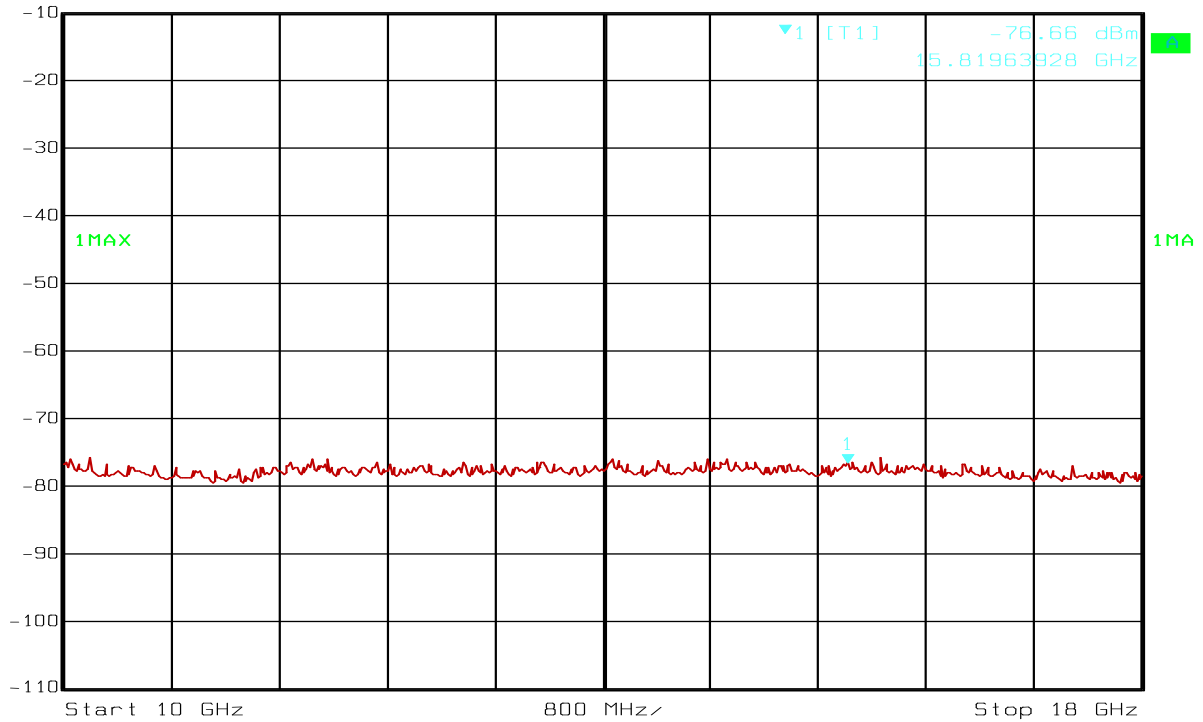


Date: 29.NOV.2011 08:53:51

Radiated Emissions, 10 – 18 GHz, HP, @1m- pre-view scan

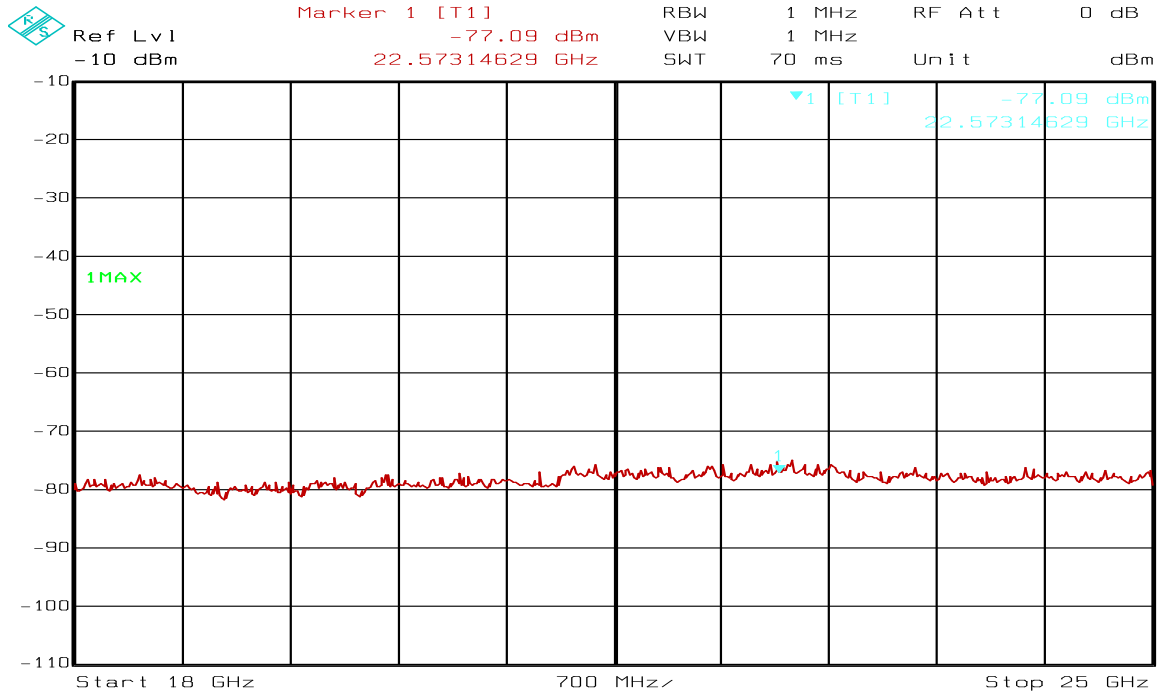

Date: 29.NOV.2011 08:52:49


Radiated Emissions, 18 – 25 GHz, VP, @1m – pre-view scan

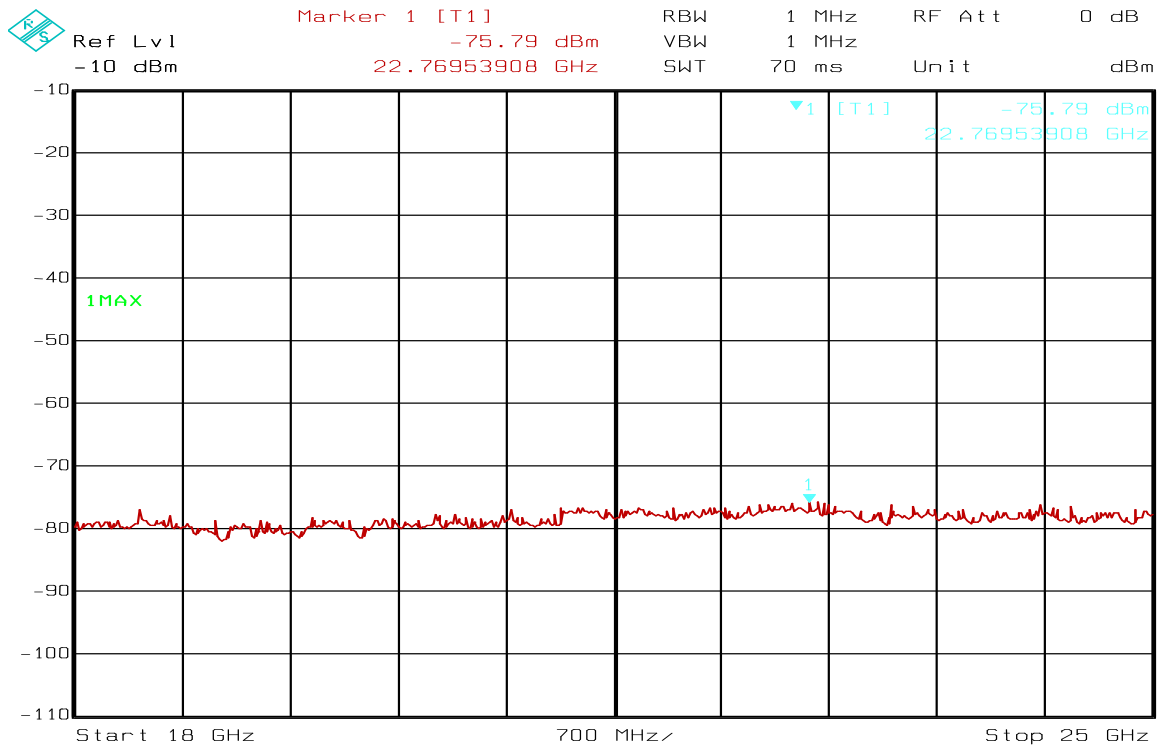

Date: 29.NOV.2011 08:53:19

Radiated Emissions, 18 – 25 GHz, HP, @1m – pre-view scan


FS
Marker 1 [T1]
RBW 1 MHz
RF Att 10 dB
Ref Lvl 107 dB*
54.22 dB μ V/m
VBW 1 MHz
107 dB*
4.80342886 GHz
SWT 5 ms
Unit dB μ V/m

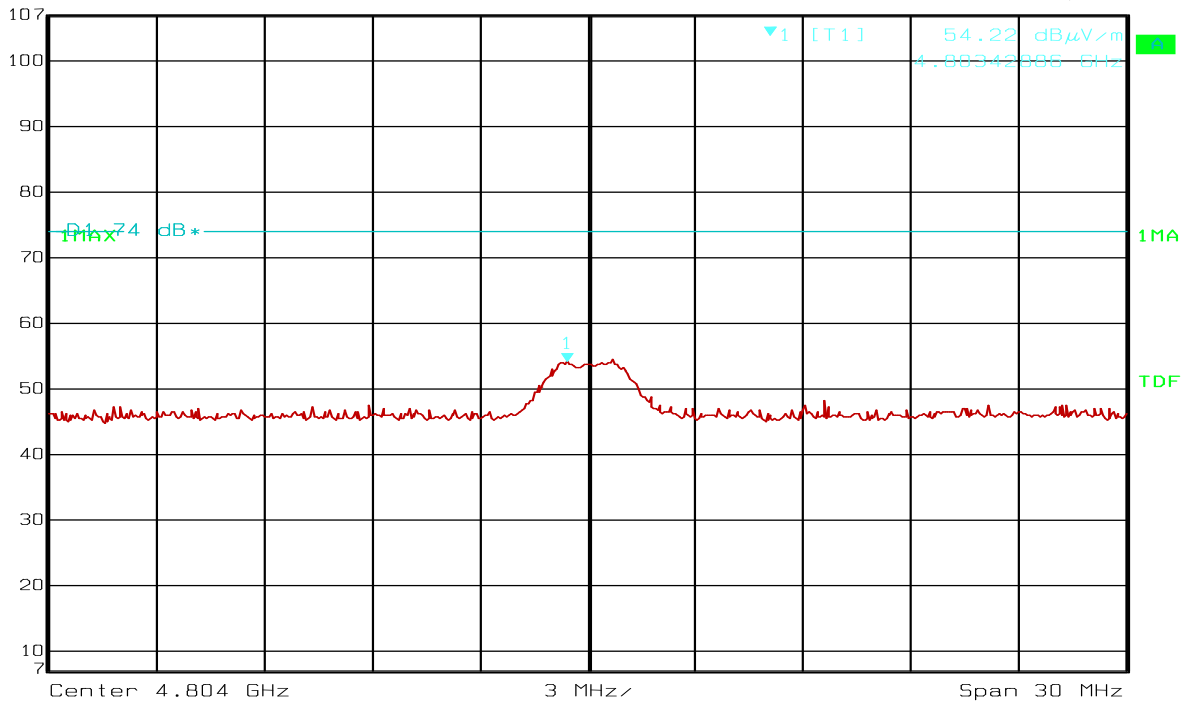

Date: 24.NOV.2011 11:16:55

Radiated Emissions, 4804 MHz, Max, Pk Det.


FS
Marker 1 [T1]
RBW 1 MHz
RF Att 10 dB
Ref Lvl 107 dB*
50.23 dB μ V/m
VBW 10 MHz
107 dB*
4.80403006 GHz
SWT 5 ms
Unit dB μ V/m

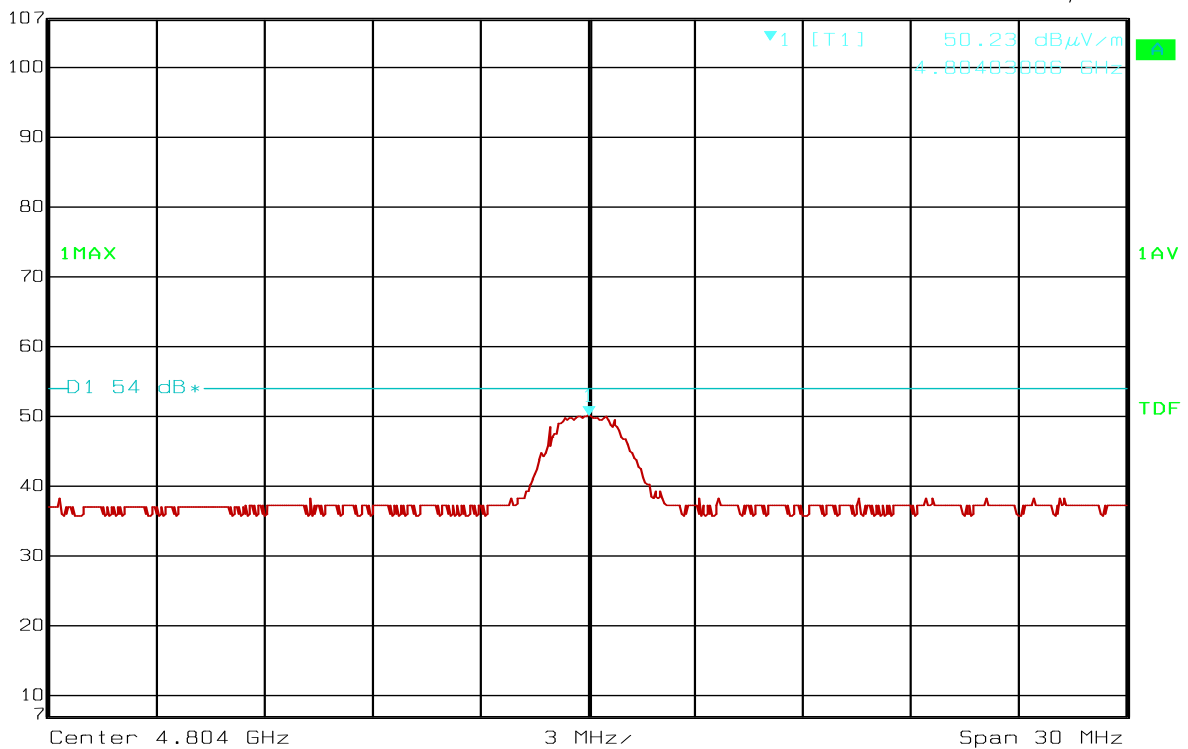

Date: 24.NOV.2011 11:17:45

Radiated Emissions, 4804 MHz, Max, AV Det.


Marker 1 [T1]
 Ref Lvl 107 dB*
52.99 dB μ V/m
4.95936874 GHz
 RBW 1 MHz RF Att 10 dB
 VBW 1 MHz
 SWT 5 ms Unit dB μ V/m

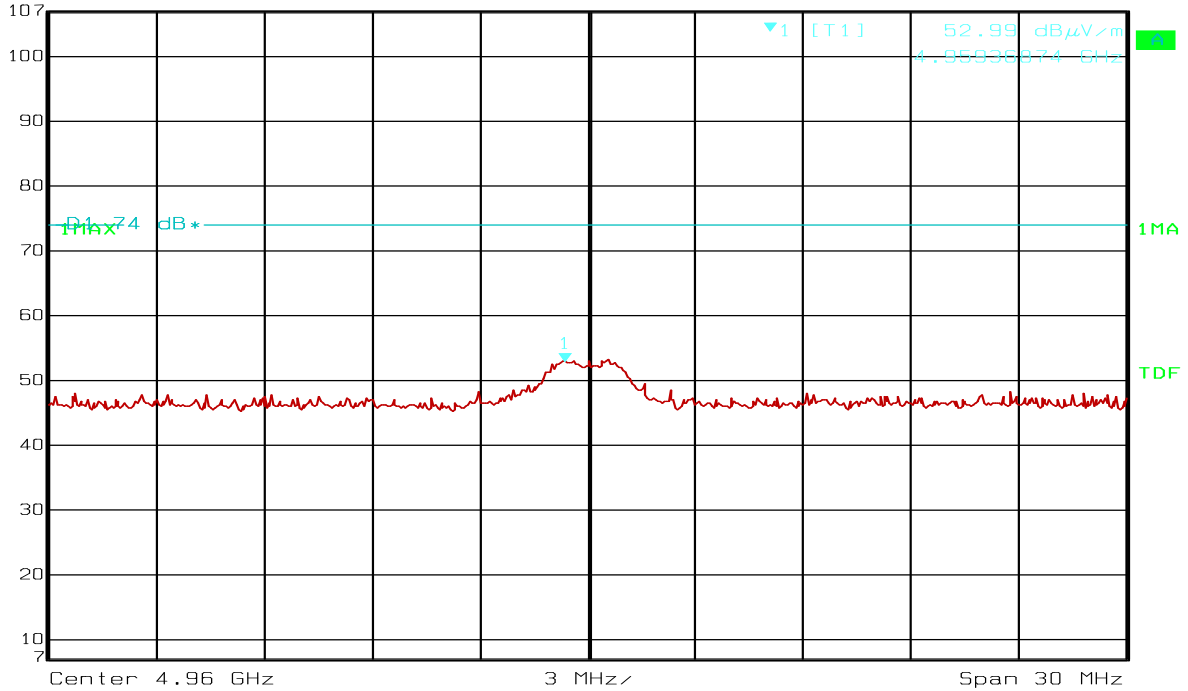

Date: 24.NOV.2011 11:42:00


Radiated Emissions, 4880 MHz, Max, Pk Det.

Marker 1 [T1]
 Ref Lvl 107 dB*
50.21 dB μ V/m
4.87969940 GHz
 RBW 1 MHz RF Att 10 dB
 VBW 10 MHz
 SWT 5 ms Unit dB μ V/m

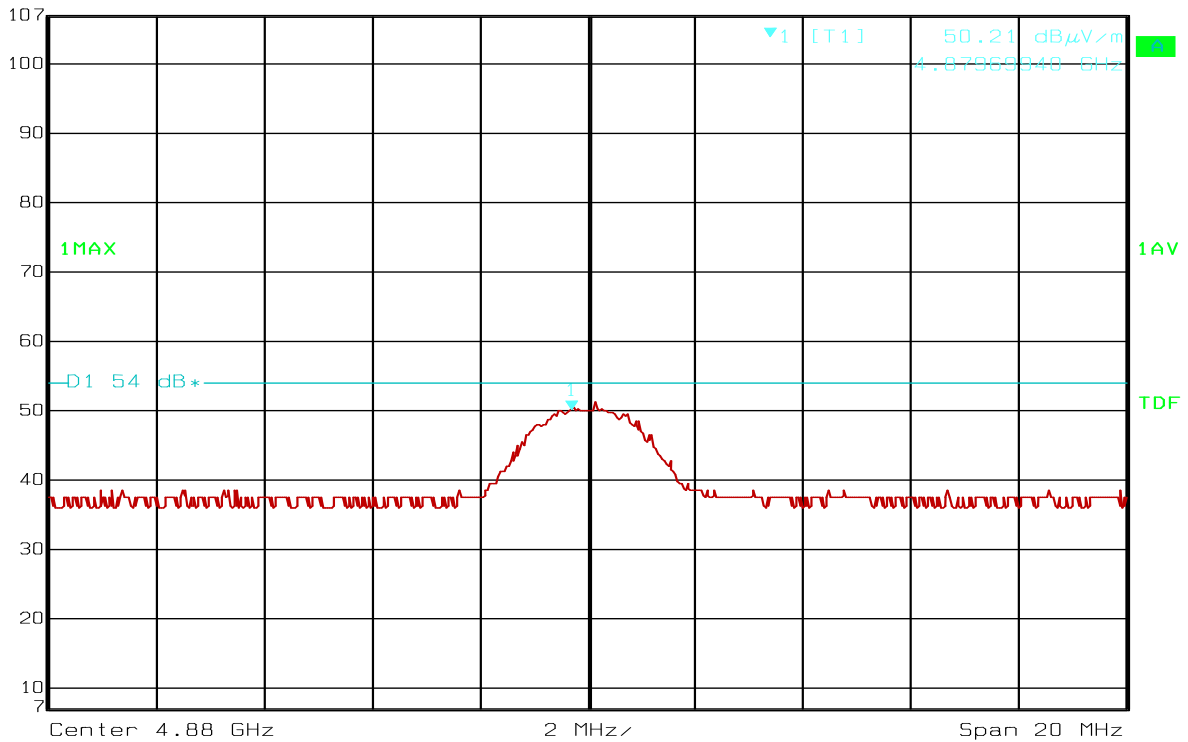


Date: 24.NOV.2011 11:22:06

Radiated Emissions, 4880 MHz, Max, AV Det.

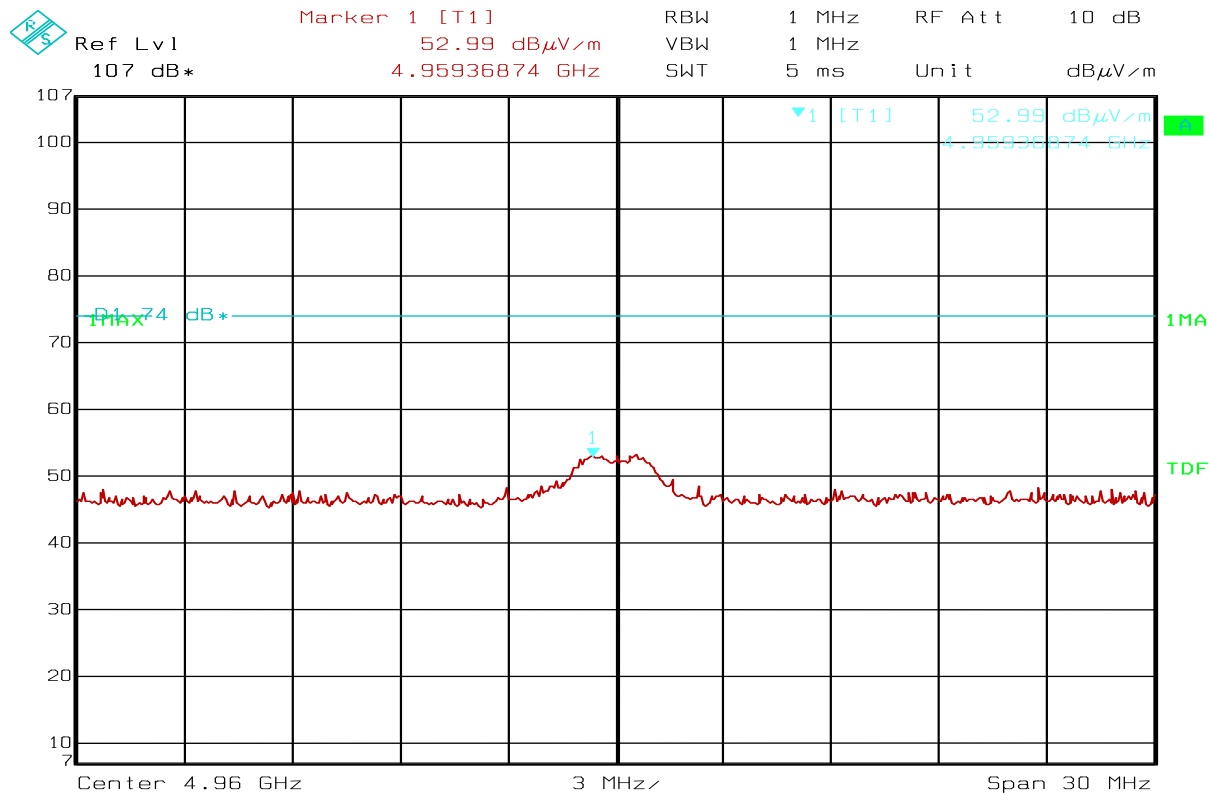

Date: 24.NOV.2011 11:42:00

Radiated Emissions, 4960 MHz, Max, Pk Det.

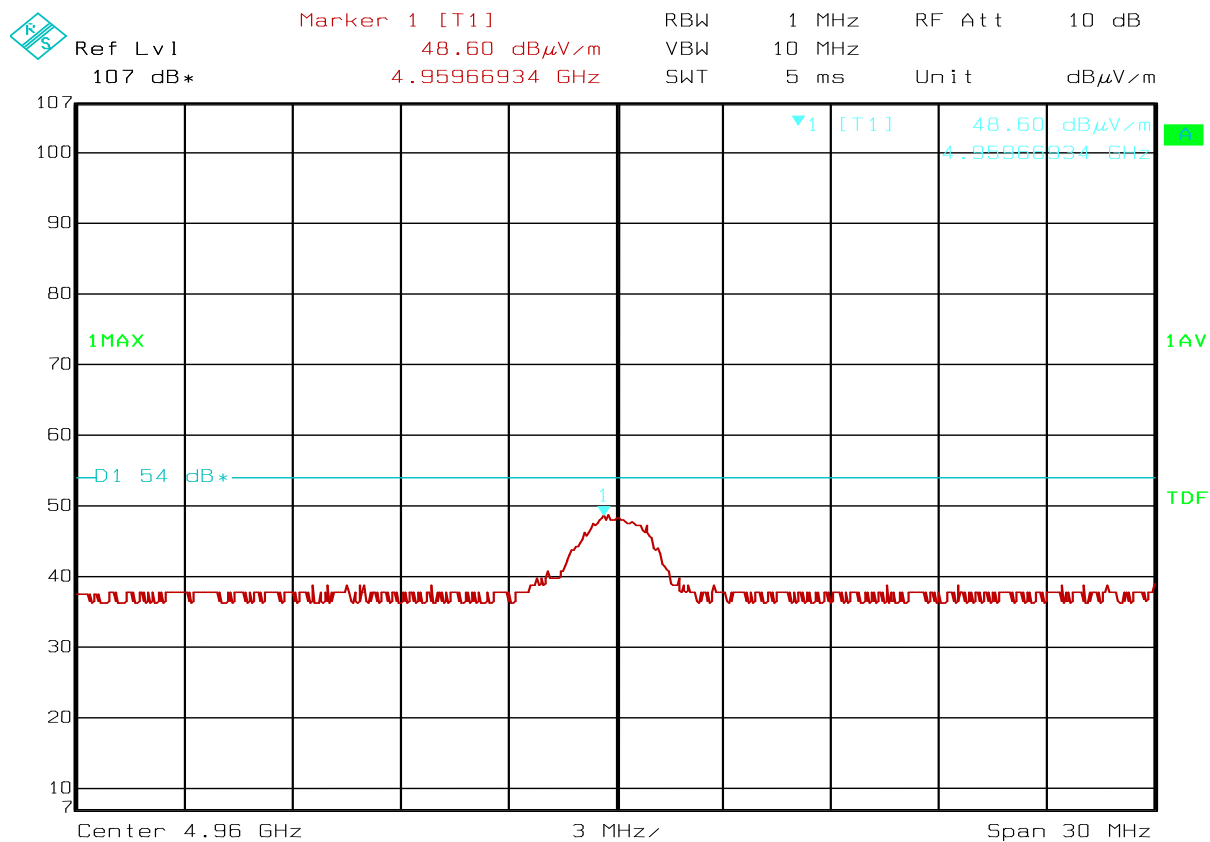

Date: 24.NOV.2011 11:42:35

Radiated Emissions, 4960 MHz, Max, AV Det.

4.6 Receiver Spurious Emissions

Measurement Procedure:

Industry Canada RSS-210 paragraph 2.3 and RSS-GEN paragraphs 4.10 and 6.

Test results:

Frequency MHz	Carrier Freq. MHz	Measured Value Radiated dBuV/m @3m	Limit dBuV/m @3m	Margin dB
30 – 1000	all	None found	/	/
> 1000 (all others)	all	None found	54	/

The measurement was performed radiated with the EUT in receive-only mode.


Requirements, RSS-GEN Issue 3, clause 6

The measurement can be performed either radiated or conducted.


When measured Conducted: no spurious signals appearing at the antenna terminals shall exceed 2 nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nW above 1 GHz.

When measured Radiated: See Table 2 in RSS-GEN Issue 3, clause 6.

FCC Pt15 Class B 30-2000M 3m

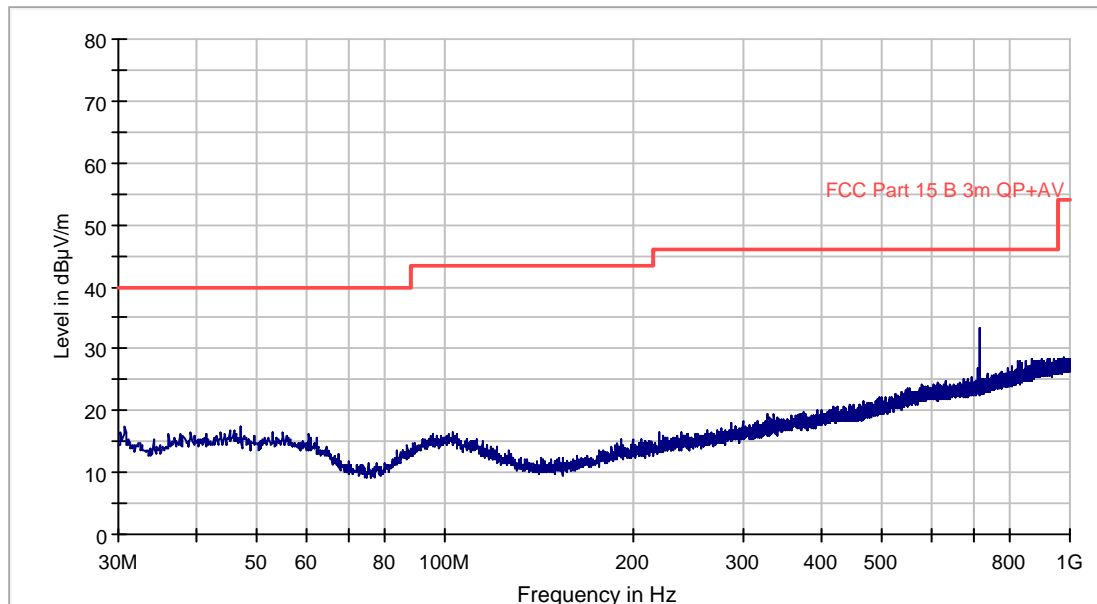


Radiated Emissions, 30 – 1000 MHz, VP and HP, @3m

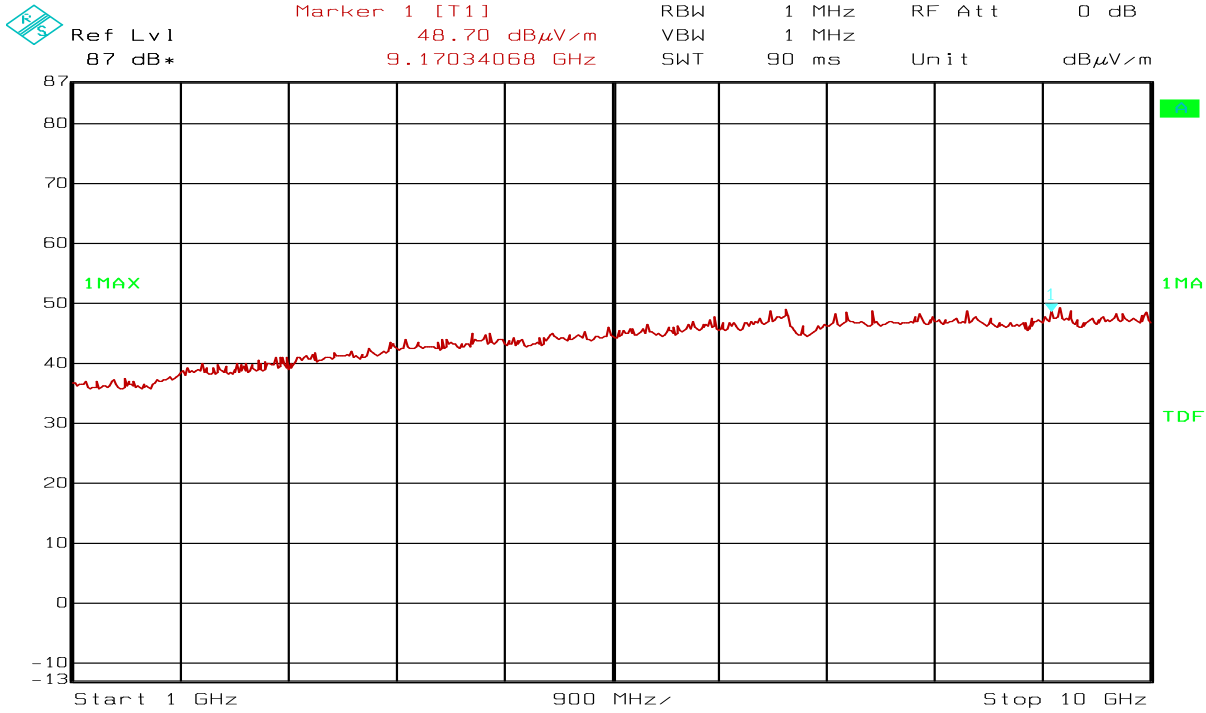

Date: 24.NOV.2011 10:32:46

Receiver Radiated Emissions, HP/VP, 1 – 10GHz@3m

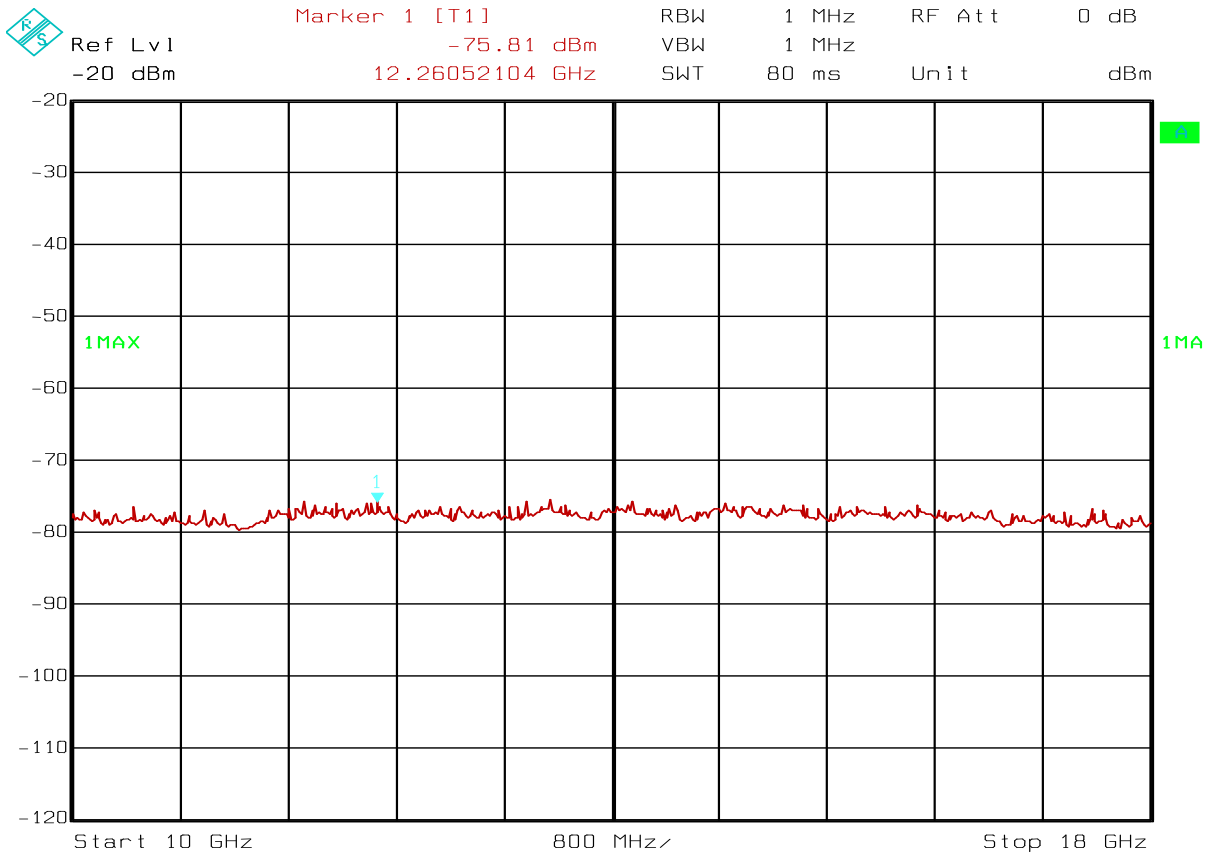

Date: 24.NOV.2011 10:33:55

Receiver Radiated Emissions, HP/VP, 10 - 18GHz –pre-viewscan

4.7 Power Spectral Density (PSD)

Para. No.: 15.247 (d)

Test Performed By: G.Suwanthakumar	Date of Test: 15 Mar 2012
------------------------------------	---------------------------

Test Results: Passed

Measured and Calculated Data:

The alternative test procedures in point 2) A , B and formula 1 described in guidance on measurements for Digital Transmission Systems is used.

	Measured PSD
Power Spectral Density @2402 MHz	-6.37 dBm
Power Spectral Density @2440 MHz	-2.95 dBm
Power Spectral Density @2480 MHz	-5.10 dBm

2402MHz - Lower Channel:

$$\text{PSD} = 35 - 41.37 \text{ dBm/Hz} = -6.37 \text{ dBm}$$

2440MHz - Middle Channel:

$$\text{PSD} = 35 - 37.95 \text{ dBm/Hz} = -2.95 \text{ dBm}$$


2480MHz - Upper Channel:

$$\text{PSD} = 35 - 40.10 \text{ dBm/Hz} = -5.10 \text{ dBm}$$

The spectrum line spacing is less than 3 kHz, therefore used noise power density and corrected 35 dB for 3 kHz


Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band.

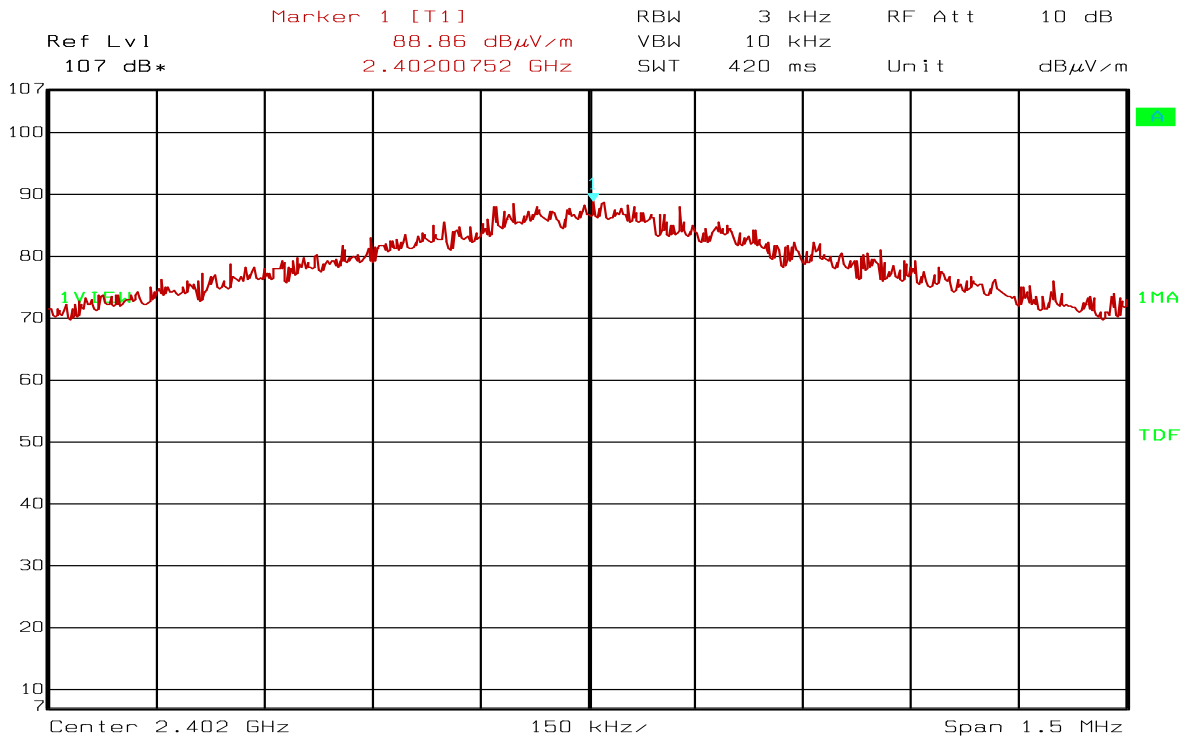


Date: 15.MAR.2012 17:35:08

2402MHz - PSD Overview

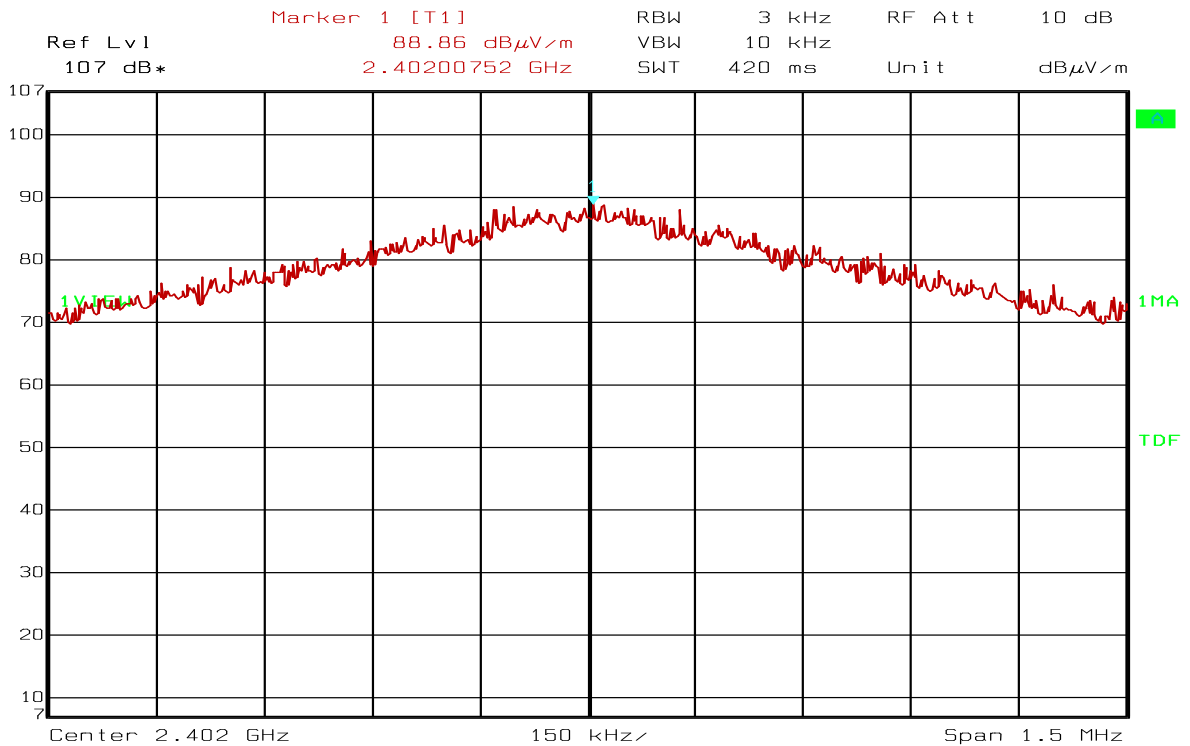


Date: 15.MAR.2012 17:35:08

2402MHz - PSD Measurement

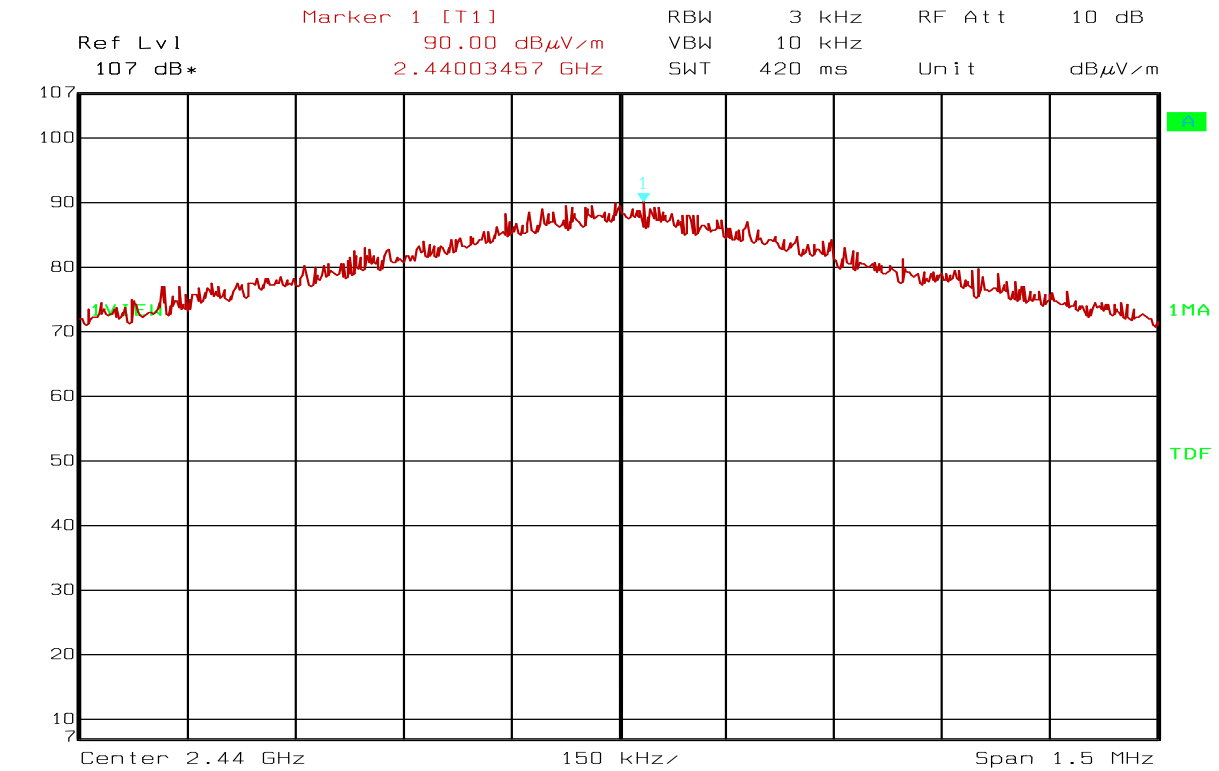


Date: 15.MAR.2012 17:39:15

2440MHz - PSD Overview

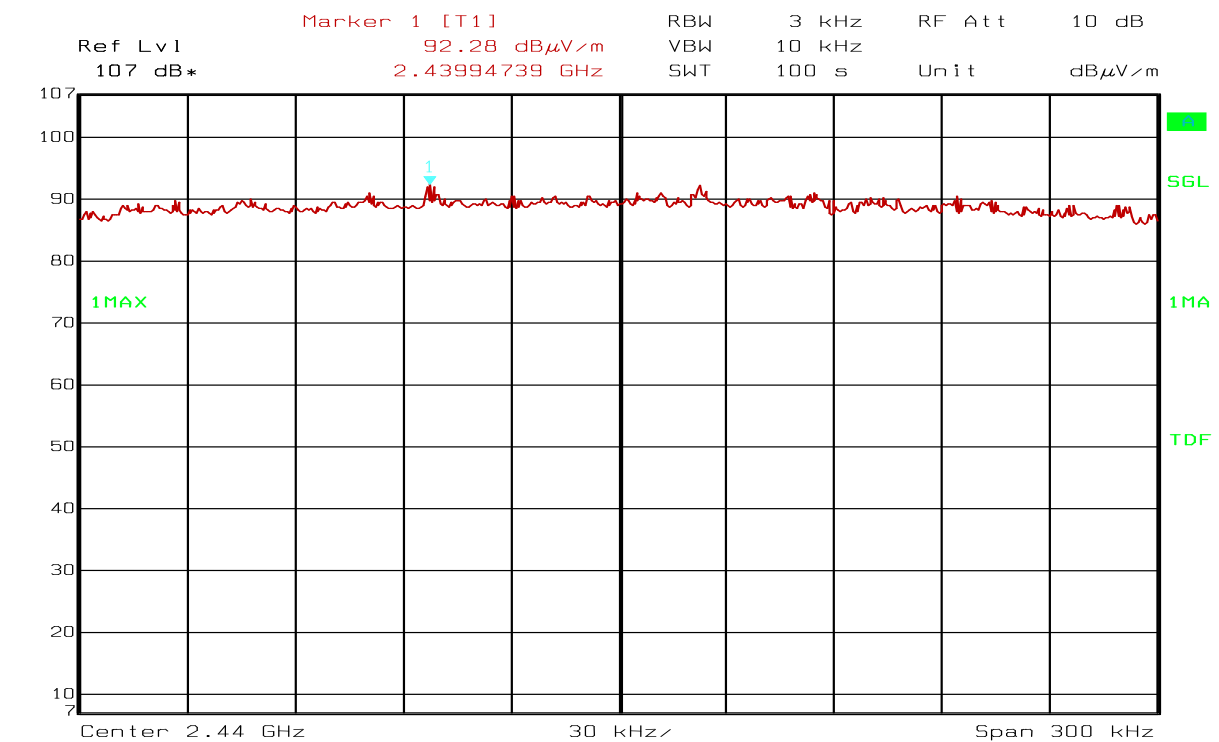


Date: 15.MAR.2012 17:42:11

2402MHz - PSD Measurement

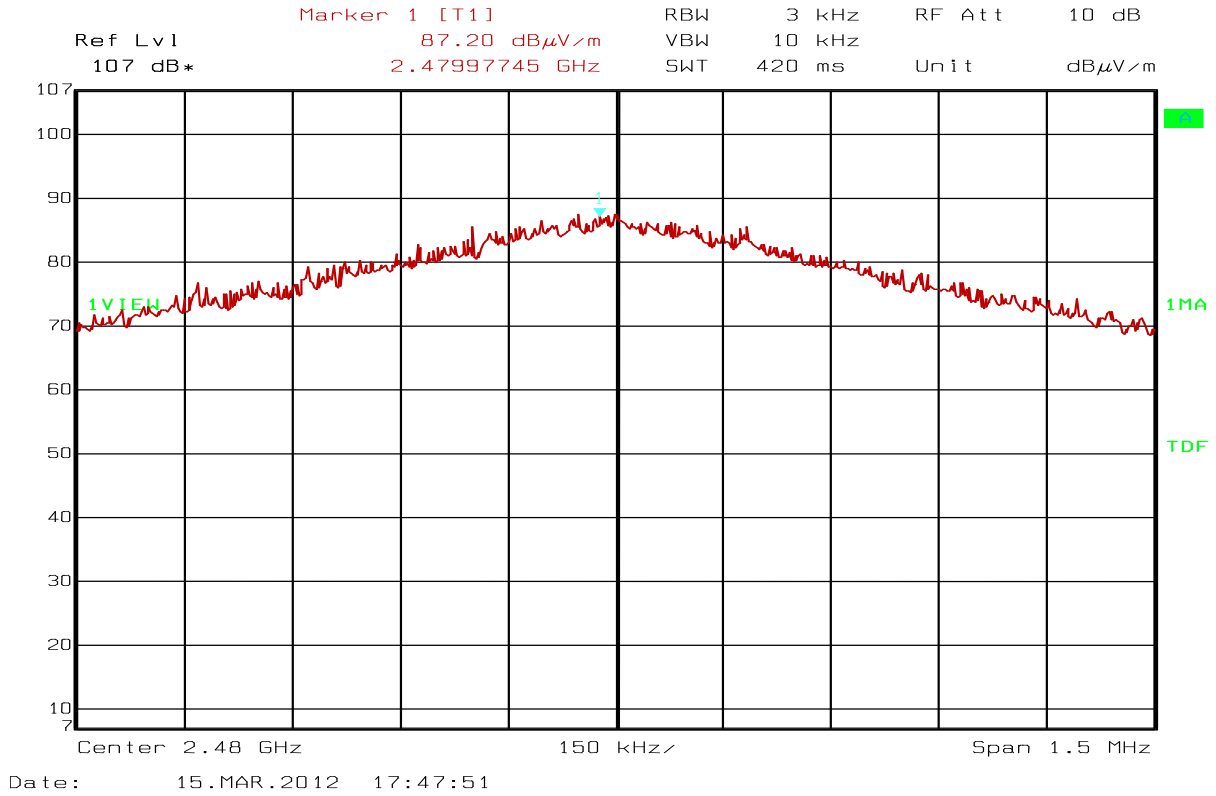

2480MHz - PSD Overview

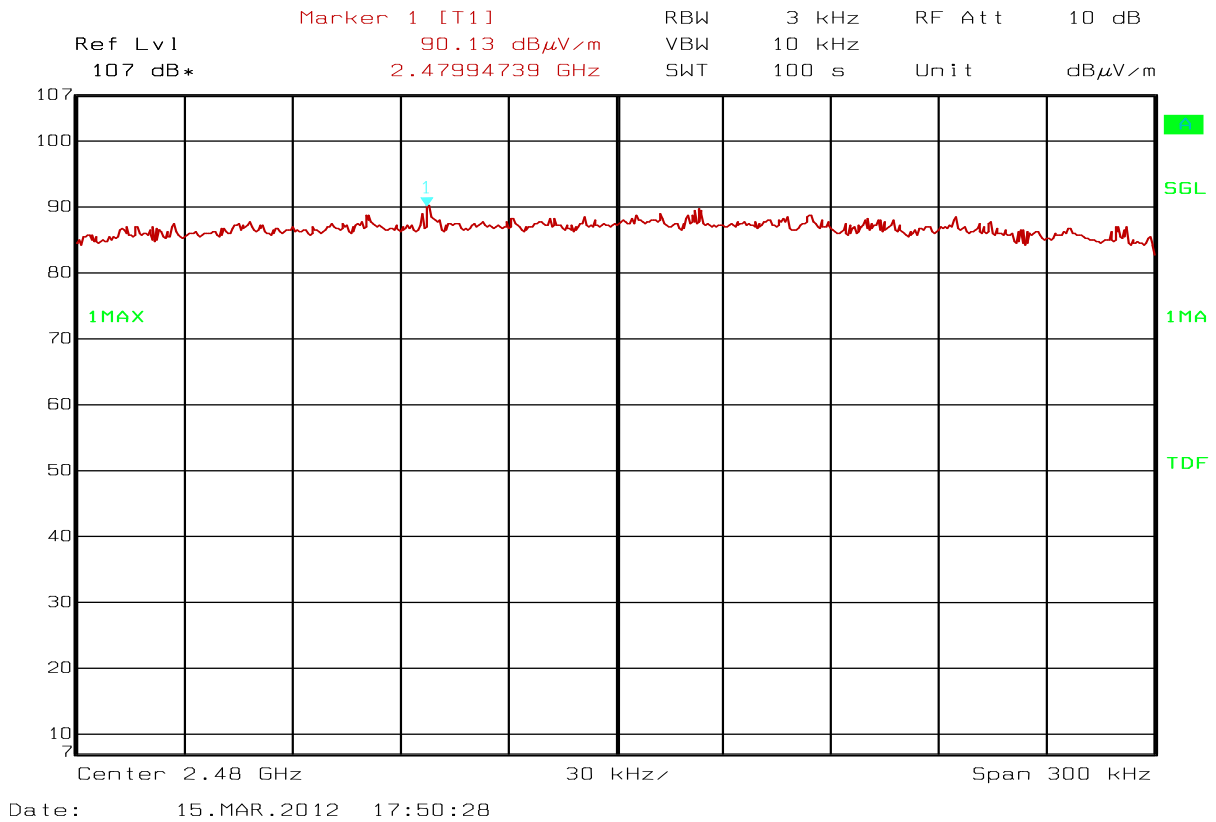

2480MHz - PSD Overview

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the test laboratory.


No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1	FSEK	Spectrum Analyzer	Rohde & Schwarz	LR 1337	2010.12.15	2012.12.15
2	ESHS10	Spectrum Analyzer	Rohde & Schwarz	N-3528	2011.06.21	2012.06.21
3	3115	Antenna horn	EMCO	LR 1330	2010.08.05	2013.08.05
4	643	Antenna horn	Narda	LR 093	2009.01.26	2012.01.26
5	642	Antenna horn	Narda	LR 220	2009.01.26	2012.01.26
6	PM7320X	Antenna horn	Siverts lab	LR 103	2009.01.26	2012.01.26
7	DBF-520-20	Antenna horn	Systron Donner	LR 101	2009.01.26	2012.01.26
8	638	Antenna horn	Narda	LR 098	2010.06.17	2015.06.17
9	VULB 9163	Antenna TriLog	Schwarzbeck	LR1616	2010-08	2012-08
10	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2011-09-27	2012-09-27
11	LNA6900	Pre-amplifier	Teseq	LR 1593	2010-11	2011-11
12	ESCI	Test Receiver	Rohde & Schwarz	N-4529	2010.11.08	2012.11.08
13	ESH3-Z3	LISN	Rohde & Schwarz	LR 1076	2011-11-03	2013-11-03
14	80S	Signal Generator	Powertron	LT 502	Cal b4 use	
15	Model 87 V	Multimeter	Fluke	LR 1598	2010-12-14	2011-12-14
16	FSP30	Spectrum Analyzer	Rohde & Schwarz	LR 1551	2011-03	2012-02
17	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504	2010.09.28	2012.09.28
18	ESH3-Z2	Puls Limiter	Rohde & Schwarz	N-3932	2010.11.04	2012.11.04

15-03-2012:

No.	Instrument/ ancillary	Type of instrument/ ancillary	Manufacturer	Ref. no.	Cal. Date	Cal. Due
1	FSEK	Spectrum Analyzer	Rohde & Schwarz	LR 1337	2010.12.15	2012.12.15
2	3115	Antenna horn	EMCO	LR 1330	2010.08.05	2013.08.05
3	8449B	Pre-amplifier	Hewlett Packard	LR 1322	2011-09-27	2012-09-27

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

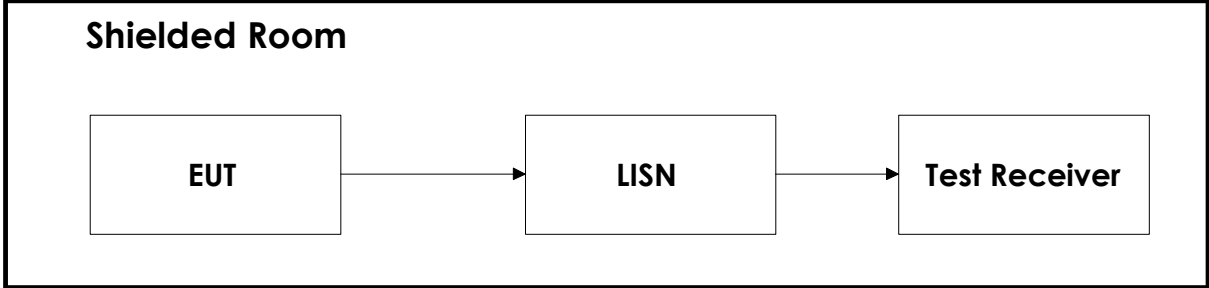

6.2 Test Site Radiated Emission

