

---

# FCC Test Report

---

Report No.: AGC04987160301FE03

**FCC ID** : ZAY-Z-S2

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Bluetooth Headset

**BRAND NAME** : ZONOKI

**MODEL NAME** : Z-S2

**CLIENT** : SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD.

**DATE OF ISSUE** : Apr.20, 2016

**STANDARD(S)** : FCC Part 15 Rules

**TEST PROCEDURE(S)**

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.20, 2016	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
5.1. CONFIGURATION OF EUT SYSTEM .....	9
5.2. EQUIPMENT USED IN EUT SYSTEM .....	9
5.3. SUMMARY OF TEST RESULTS .....	9
<b>6. TEST FACILITY .....</b>	<b>10</b>
<b>7. ALL TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>8. RADIATED EMISSION .....</b>	<b>12</b>
8.1 TEST LIMIT .....	12
8.2. MEASUREMENT PROCEDURE .....	13
8.3. TEST SETUP .....	15
8.4. TEST RESULT .....	17
<b>9. BAND EDGE EMISSION .....</b>	<b>45</b>
9.1. MEASUREMENT PROCEDURE .....	45
9.2 TEST SETUP .....	45
9.3 RADIATED TEST RESULT .....	46
<b>10. 20DB BANDWIDTH .....</b>	<b>54</b>
10.1. MEASUREMENT PROCEDURE .....	54
10.2. TEST SET-UP .....	54
10.3. LIMITS AND MEASUREMENT RESULTS .....	54
<b>11. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>63</b>
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	63
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	63
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	64
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	64
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	65
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>69</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>71</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>71</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD.
<b>Address</b>	1-3 Floor, Building B, NO.49, ShangXia Street, Henggang Road, Lonnggang District, Shenzhen, China, 518115
<b>Manufacturer</b>	SHENZHEN ZONOKI DIGITAL TECHNOLOGY CO., LTD
<b>Address</b>	1-3 Floor, Building B, NO.49, ShangXia Street, Henggang Road, Lonnggang District, Shenzhen, China, 518115
<b>Product Designation</b>	Bluetooth Headset
<b>Brand Name</b>	ZONOKI
<b>Test Model</b>	Z-S2
<b>Date of test</b>	Apr.06, 2016 to Apr.14, 2016
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By



Time Huang(Huang Nanhui)

Apr.20, 2016

Reviewed By



Forrest Lei(Lei Yonggang)

Apr.20, 2016

Approved By



Solger Zhang(Zhang Hongyi)  
Authorized Officer

Apr.20, 2016

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	-3.42dBm(Max)
<b>Bluetooth Version</b>	V4.1
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Number of channels</b>	79 for BR/EDR, 40 for BLE
<b>Hardware Version</b>	Z-S2-V4
<b>Software Version</b>	4.1
<b>Antenna Designation</b>	PCB Antenna (Met 15.203 Antenna requirement)
<b>Antenna Gain</b>	-5dBi
<b>Power Supply</b>	DC 3.7V

Note: The USB port only used for charging and can't be used to transfer data with PC.  
The EUT supports Bluetooth Low Energy Mode.

### 2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

<b>Frequency Band</b>	<b>Channel Number</b>	<b>Frequency</b>
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately 95 % .


No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	Standby with charging

Note:


1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

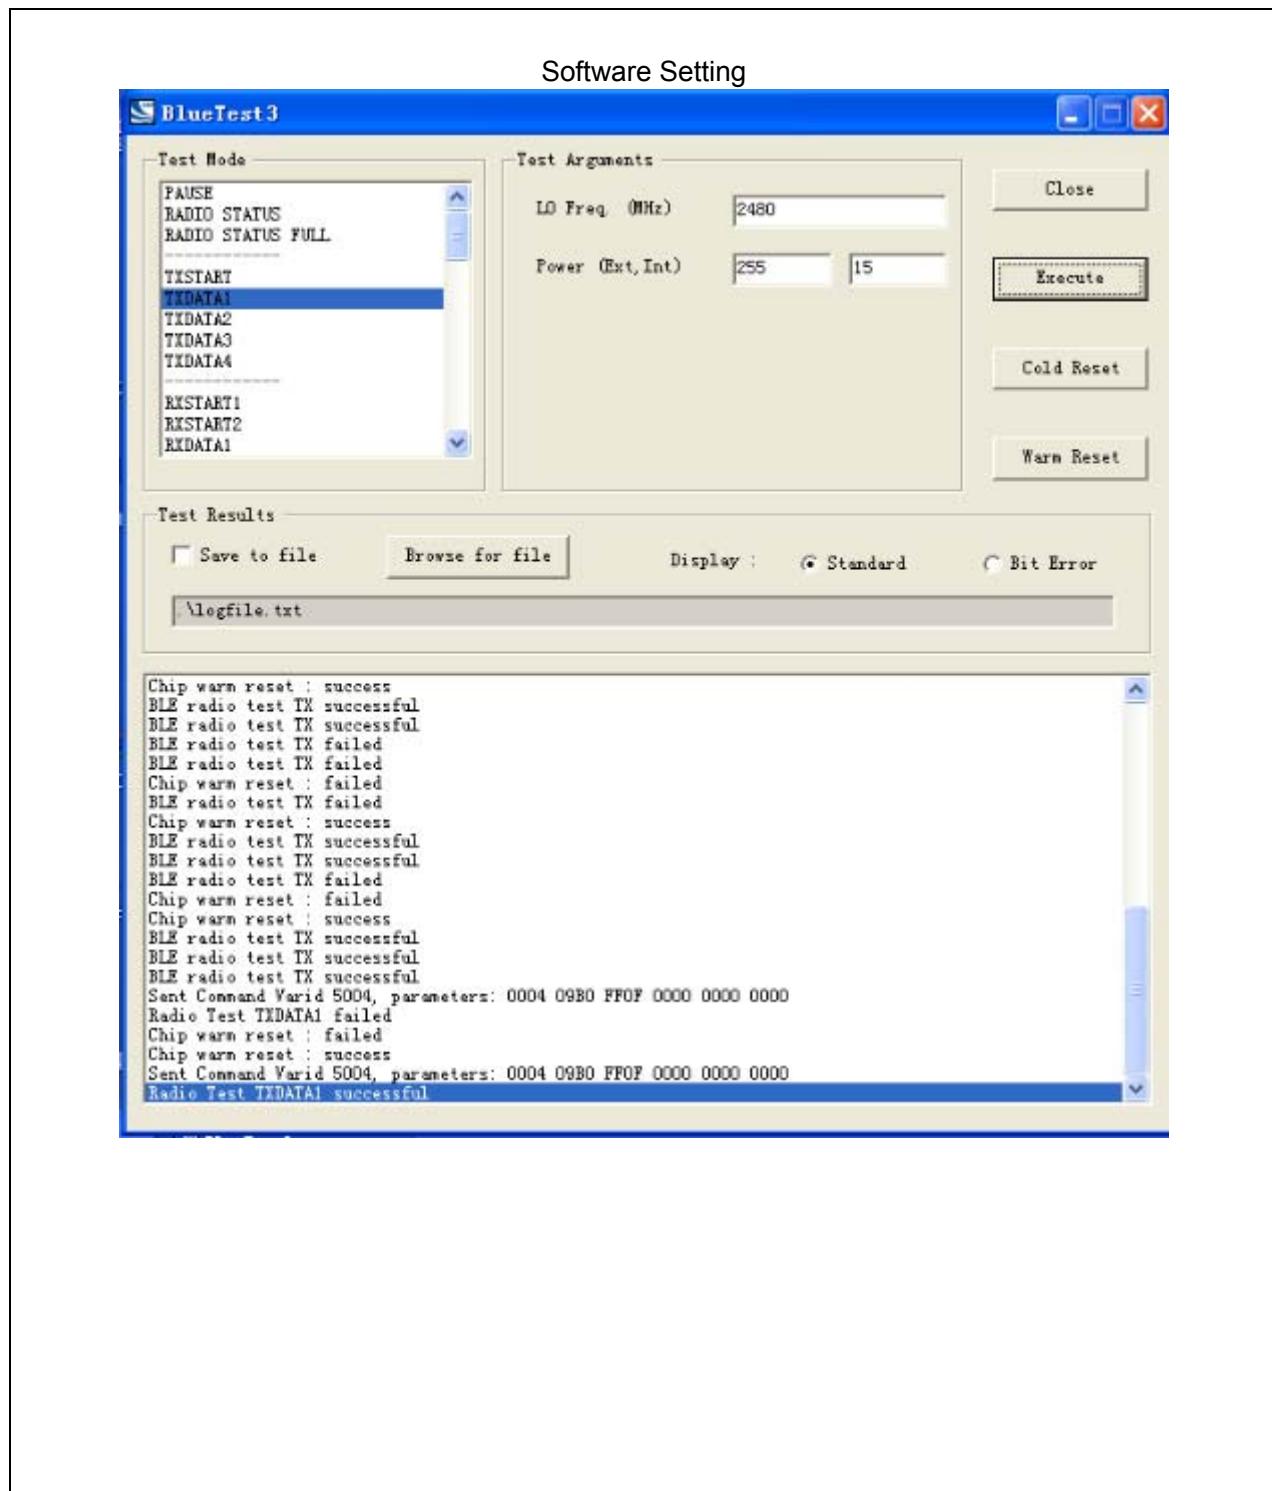

## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

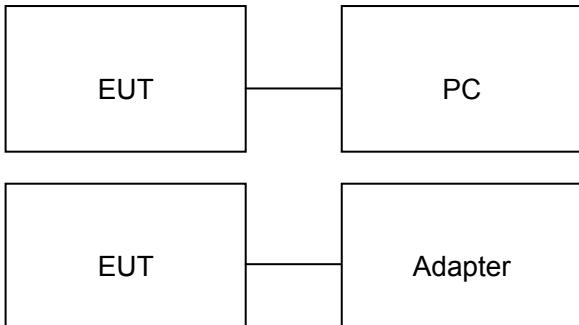

**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

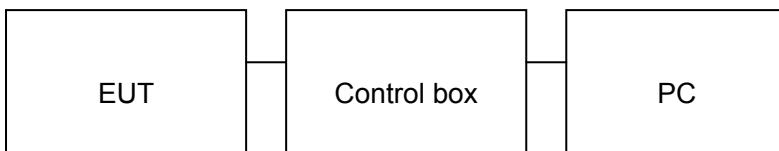

### 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Headset	Z-S2	FCC ID: ZAY-Z-S2	EUT
2	Battery	401120	DC3.7V/ 60mAh	Accessory
3	PC	E1412AYCW	Sony	A.E
4	Control box	N/A	N/A	A.E
5	Adapter	ETPCA-050100U	N/A	A.E
6	Temporary antenna connector	T10	N/A	A.E.

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	BANDWIDTH	Compliant

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

## TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013

## 7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016

Conducted Emission Test Site

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	- Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6, 2015	June 5, 2016
Conduction Cable	MXT	SE1	S003	June 6, 2015	June 5, 2016

## 8. RADIATED EMISSION

### 8.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m  
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 8.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(below 1GHz)
2. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(above 1GHz)

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


3. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

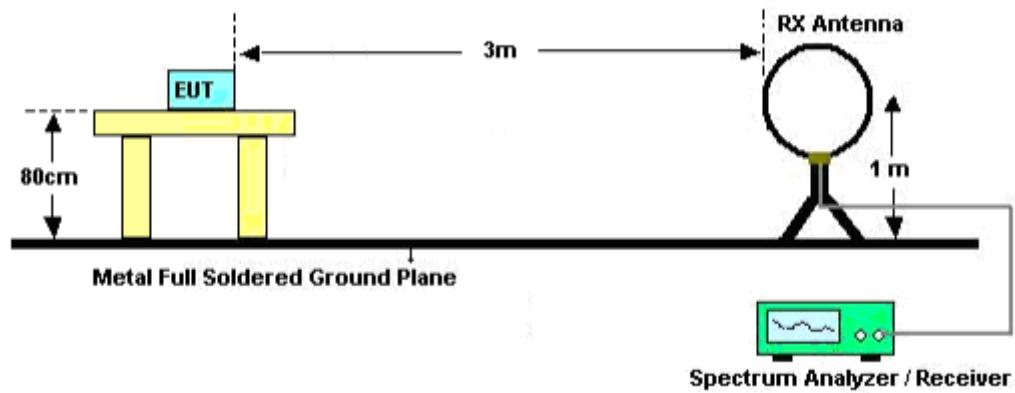

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

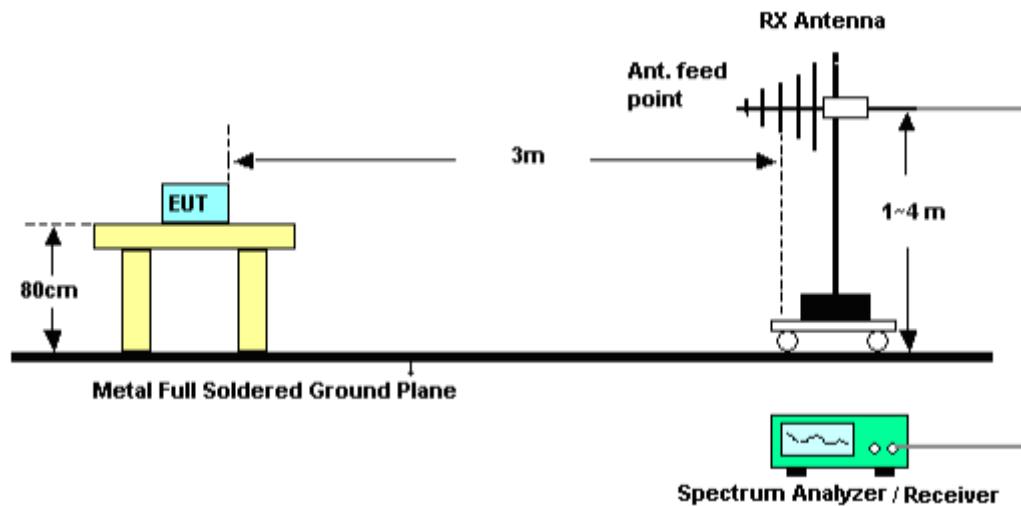

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

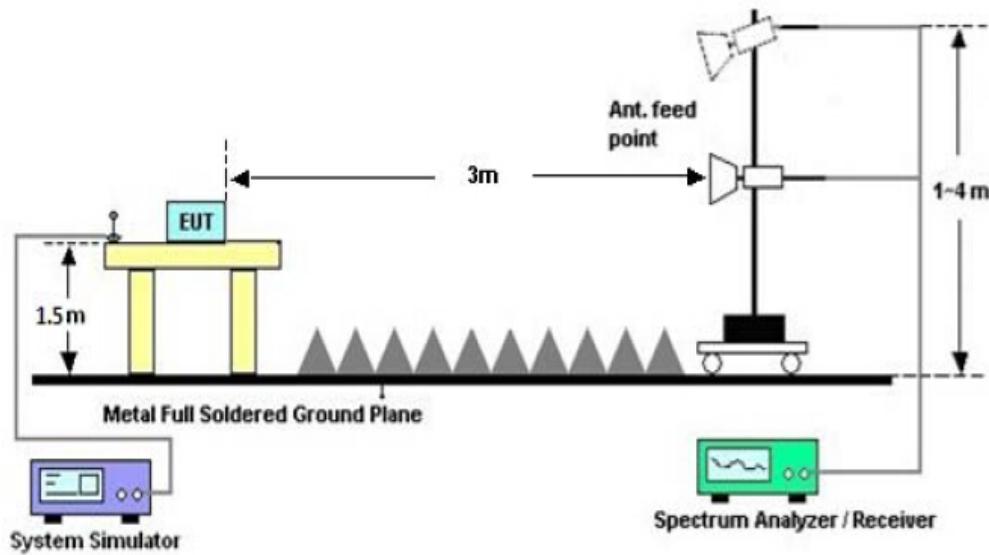

## 8.4. TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR

### RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION BELOW 1GHZ

#### RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT:Bluetooth Headset  
M/N:Z-S2  
Mode:Low Channel TX  
Note:

Polarization: **Horizontal**

Temperature: 22.5

Power:

Humidity: 55.4 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	25.17	5.12	30.29	40.00	-9.71	peak			
2		175.5000	14.02	10.90	24.92	43.50	-18.58	peak			
3		275.7333	18.13	11.28	29.41	46.00	-16.59	peak			
4		364.6500	10.56	18.84	29.40	46.00	-16.60	peak			
5		484.2833	11.48	20.96	32.44	46.00	-13.56	peak			
6		820.5500	5.08	27.32	32.40	46.00	-13.60	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1 Polarization: *Vertical* Temperature: 22.5  
 Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode:Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	75.2667	25.39	2.96	28.35	40.00	-11.65	peak			
2		152.8667	8.35	15.28	23.63	43.50	-19.87	peak			
3		278.9667	10.95	14.77	25.72	46.00	-20.28	peak			
4		461.6500	12.27	20.72	32.99	46.00	-13.01	peak			
5		822.1667	5.52	27.32	32.84	46.00	-13.16	peak			
6		930.4833	2.50	29.46	31.96	46.00	-14.04	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL





---

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.5
Limit: FCC Class B 3M Radiation	Power:	Humidity: 55.4 %
EUT:Bluetooth Headset	Distance:	
M/N:Z-S2		
Mode:Middle Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	27.17	5.12	32.29	40.00	-7.71	peak			
2		99.5167	18.93	10.00	28.93	43.50	-14.57	peak			
3		175.5000	17.52	10.90	28.42	43.50	-15.08	peak			
4		275.7333	19.13	11.28	30.41	46.00	-15.59	peak			
5		484.2833	11.48	20.96	32.44	46.00	-13.56	peak			
6		820.5500	5.58	27.32	32.90	46.00	-13.10	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

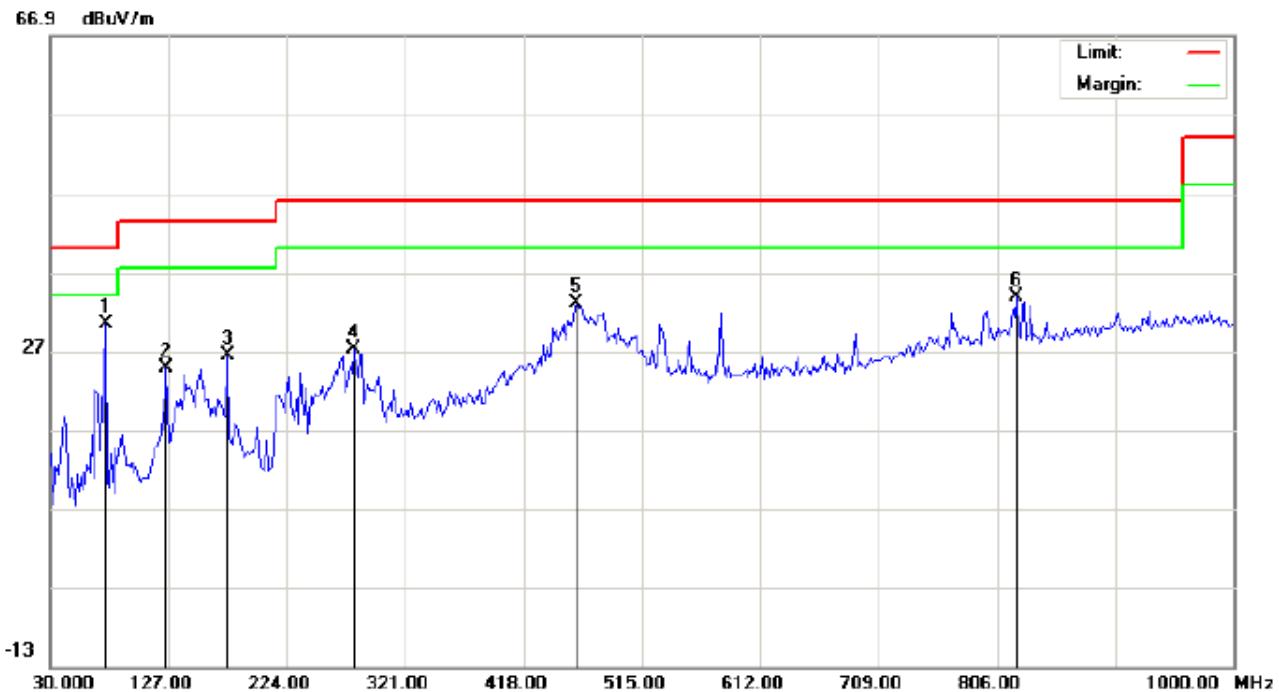

Site: site #1

Polarization: Vertical

Temperature: 22.5

Limit: FCC Class B 3M Radiation

Power:

Humidity: 55.4 %

EUT:Bluetooth Headset

Distance:

M/N:Z-S2

Mode:Middle Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	27.39	2.96	30.35	40.00	-9.65	peak			
2		125.3833	15.65	9.10	24.75	43.50	-18.75	peak			
3		175.5000	11.99	14.35	26.34	43.50	-17.16	peak			
4		278.9667	12.45	14.77	27.22	46.00	-18.78	peak			
5		461.6500	12.27	20.72	32.99	46.00	-13.01	peak			
6		822.1667	6.52	27.32	33.84	46.00	-12.16	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

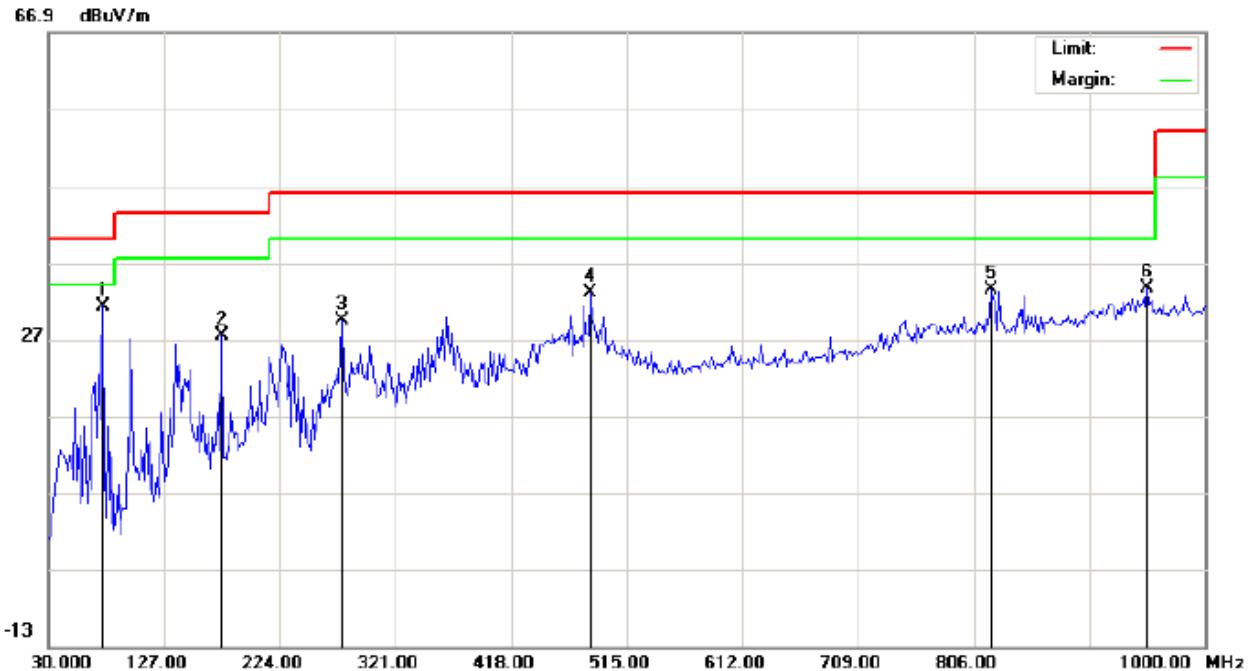

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT:Bluetooth Headset  
M/N:Z-S2  
Mode:High Channel TX  
Note:

Polarization: *Horizontal*

Temperature: 22.5

Power:

Humidity: 55.4 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	26.17	5.12	31.29	40.00	-8.71	peak			
2		175.5000	16.52	10.90	27.42	43.50	-16.08	peak			
3		275.7333	18.13	11.28	29.41	46.00	-16.59	peak			
4		484.2833	11.98	20.96	32.94	46.00	-13.06	peak			
5		820.5500	6.08	27.32	33.40	46.00	-12.60	peak			
6		951.5000	3.65	29.99	33.64	46.00	-12.36	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1 Polarization: **Vertical** Temperature: 22.5  
 Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode:High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	25.89	2.96	28.85	40.00	-11.15	peak			
2		152.8667	7.85	15.28	23.13	43.50	-20.37	peak			
3		235.3167	11.74	12.46	24.20	46.00	-21.80	peak			
4		461.6500	11.27	20.72	31.99	46.00	-14.01	peak			
5		822.1667	6.02	27.32	33.34	46.00	-12.66	peak			
6		953.1167	2.53	29.97	32.50	46.00	-13.50	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE

**RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHZ**

**RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL**



Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 22.5
Limit: FCC Class B 3M Radiation	Power:	Humidity: 55.4 %
EUT:Bluetooth Headset	Distance:	
M/N:Z-S2		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	24.17	5.12	29.29	40.00	-10.71	peak			
2		136.7000	11.27	13.66	24.93	43.50	-18.57	peak			
3		225.6167	17.90	9.39	27.29	46.00	-18.71	peak			
4		275.7333	20.13	11.28	31.41	46.00	-14.59	peak			
5		364.6500	10.56	18.84	29.40	46.00	-16.60	peak			
6		820.5500	4.08	27.32	31.40	46.00	-14.60	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL



Site: site #1 Polarization: *Vertical* Temperature: 22.5  
Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
EUT:Bluetooth Headset Distance:  
M/N:Z-S2  
Mode:Low Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	75.2667	27.89	2.96	30.85	40.00	-9.15	peak			
2		152.8667	9.85	15.28	25.13	43.50	-18.37	peak			
3		235.3167	13.74	12.46	26.20	46.00	-19.80	peak			
4		278.9667	11.95	14.77	26.72	46.00	-19.28	peak			
5		461.6500	12.27	20.72	32.99	46.00	-13.01	peak			
6		797.9167	4.65	27.29	31.94	46.00	-14.06	peak			

## RESULT: PASS

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

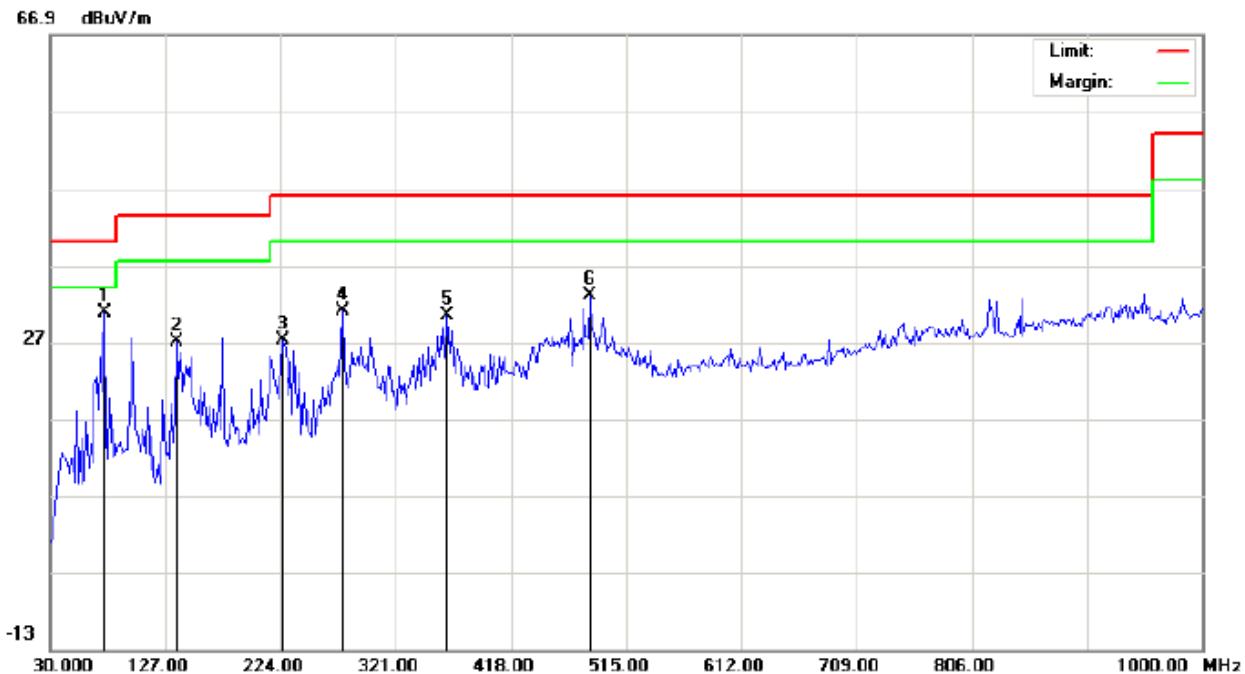

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT:Bluetooth Headset  
 M/N:Z-S2  
 Mode:Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	25.67	5.12	30.79	40.00	-9.21	peak			
2		136.7000	13.27	13.66	26.93	43.50	-16.57	peak			
3		225.6167	17.90	9.39	27.29	46.00	-18.71	peak			
4		275.7333	19.63	11.28	30.91	46.00	-15.09	peak			
5		364.6500	11.56	18.84	30.40	46.00	-15.60	peak			
6		484.2833	11.98	20.96	32.94	46.00	-13.06	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL



Site: site #1 Polarization: **Vertical** Temperature: 22.5  
Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
EUT:Bluetooth Headset Distance:  
M/N:Z-S2  
Mode:Middle Channel TX  
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	75.2667	28.39	2.96	31.35	40.00	-8.65	peak			
2		152.8667	10.85	15.28	26.13	43.50	-17.37	peak			
3		175.5000	12.99	14.35	27.34	43.50	-16.16	peak			
4		278.9667	13.45	14.77	28.22	46.00	-17.78	peak			
5		461.6500	12.77	20.72	33.49	46.00	-12.51	peak			
6		822.1667	6.02	27.32	33.34	46.00	-12.66	peak			

## RESULT: PASS

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

## RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

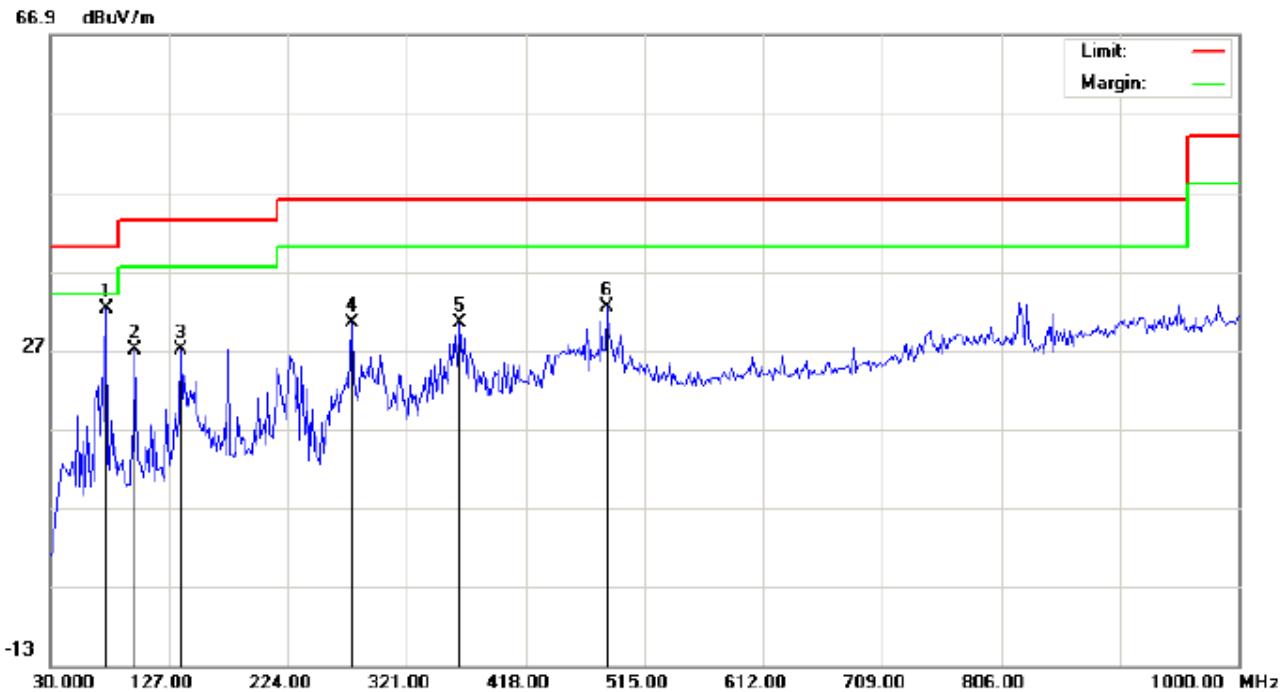

Site: site #1 Polarization: **Horizontal** Temperature: 22.5  
Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
EUT:Bluetooth Headset Distance:  
M/N:Z-S2  
Mode:High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	75.2667	27.17	5.12	32.29	40.00	-7.71	peak			
2		99.5167	16.93	10.00	26.93	43.50	-16.57	peak			
3		136.7000	13.27	13.66	26.93	43.50	-16.57	peak			
4		275.7333	19.13	11.28	30.41	46.00	-15.59	peak			
5		364.6500	11.56	18.84	30.40	46.00	-15.60	peak			
6		484.2833	11.48	20.96	32.44	46.00	-13.56	peak			

## RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL



Site: site #1 Polarization: *Vertical* Temperature: 22.5  
 Limit: FCC Class B 3M Radiation Power: Humidity: 55.4 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode:High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	75.2667	26.89	2.96	29.85	40.00	-10.15	peak			
2		139.9333	9.36	15.17	24.53	43.50	-18.97	peak			
3		175.5000	11.49	14.35	25.84	43.50	-17.66	peak			
4		278.9667	10.95	14.77	25.72	46.00	-20.28	peak			
5		461.6500	12.27	20.72	32.99	46.00	-13.01	peak			
6		822.1667	6.52	27.32	33.84	46.00	-12.16	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.  
 2. The "Factor" value can be calculated automatically by software of measurement system.

## RADIATED EMISSION ABOVE 1GHZ

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

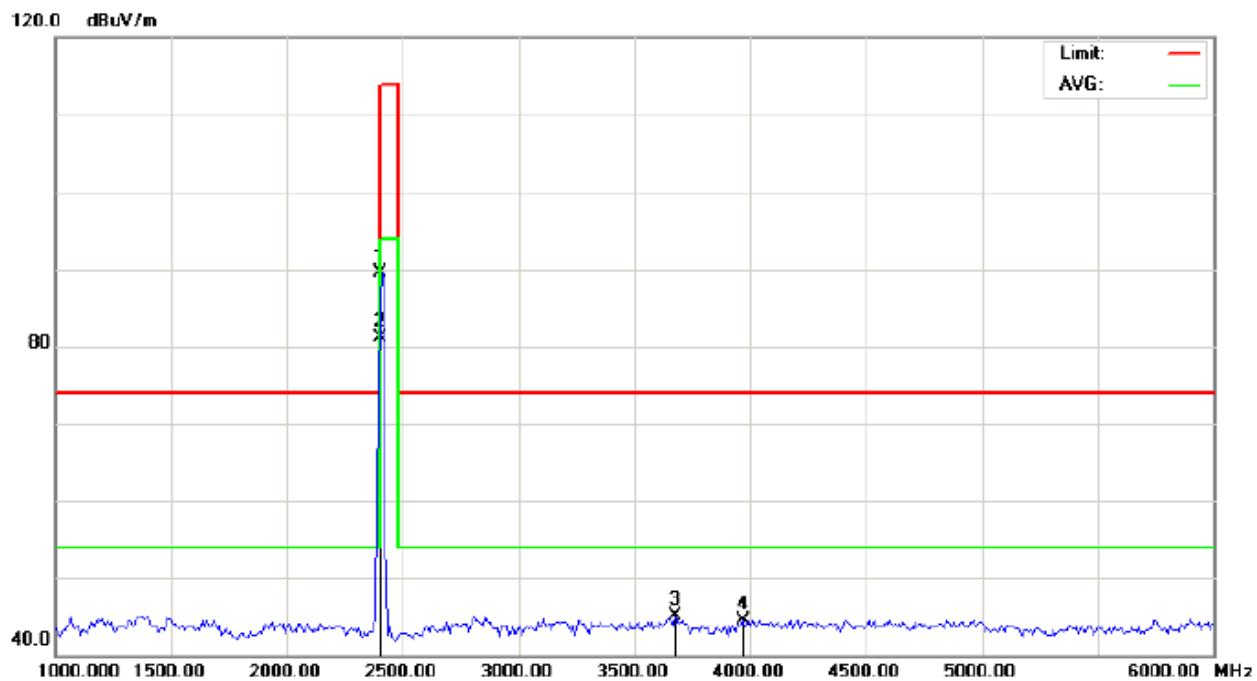



---

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance: 3m  
 M/N:Z-S2  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	99.23	-9.68	89.55	114.00	-24.45	peak			
2	*	2402.000	90.70	-9.68	81.02	94.00	-12.98	AVG	100	231	
3		3675.000	51.95	-6.81	45.14	74.00	-28.86	peak			
4		3966.667	49.50	-5.02	44.48	74.00	-29.52	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

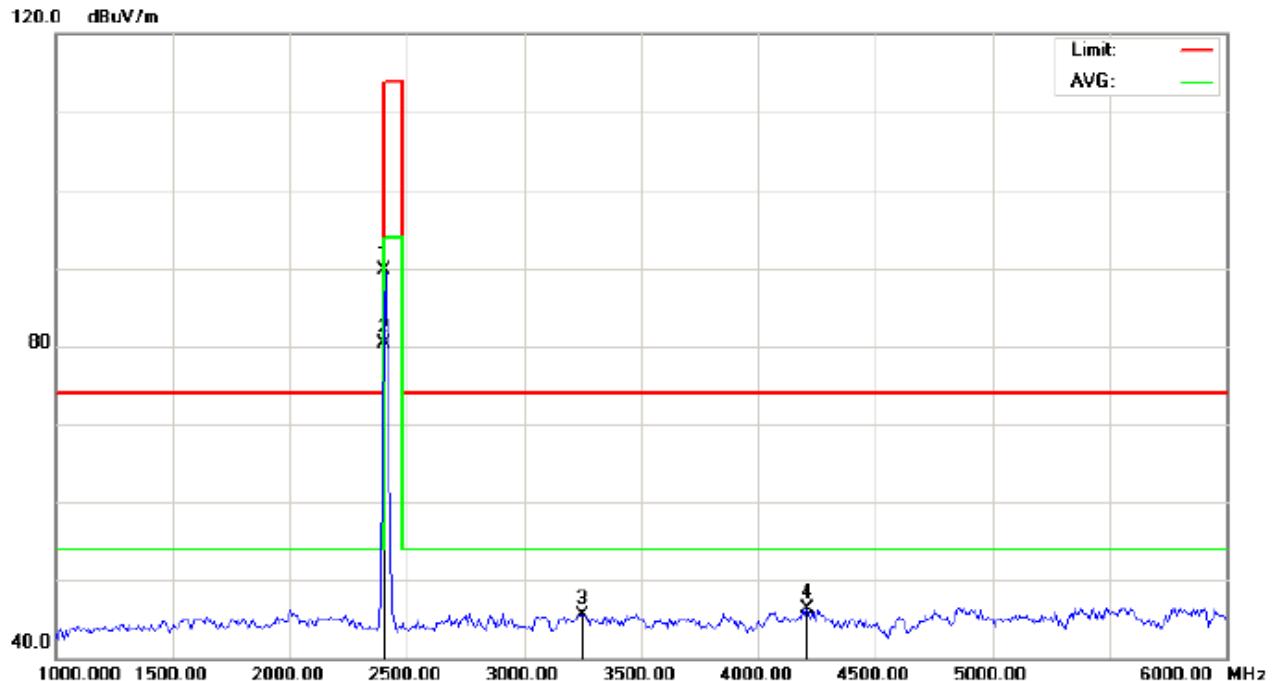


Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	99.31	-9.68	89.63	114.00	-24.37	peak			
2	*	2402.000	89.89	-9.68	80.21	94.00	-13.79	AVG	100	23	
3		3250.000	53.70	-8.12	45.58	74.00	-28.42	peak			
4		4208.333	50.35	-4.10	46.25	74.00	-27.75	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

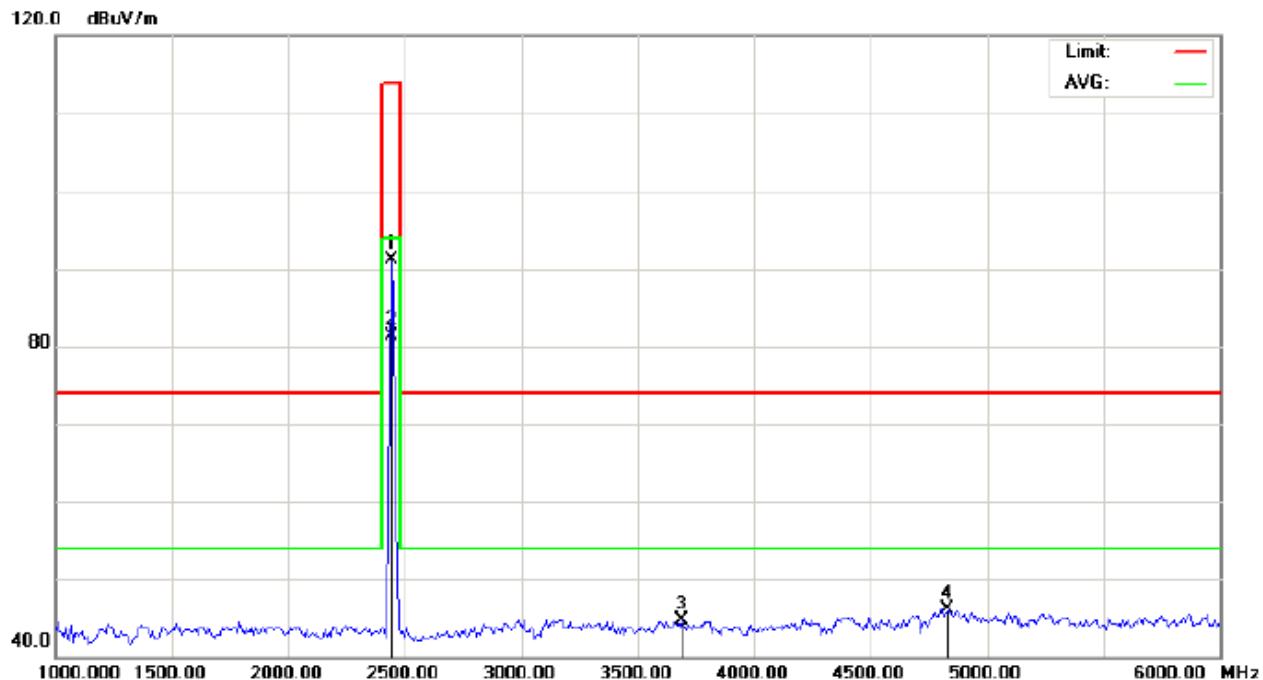


Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	100.79	-9.63	91.16	114.00	-22.84	peak			
2	*	2441.000	90.95	-9.63	81.32	94.00	-12.68	AVG	100	132	
3		3691.667	51.38	-6.71	44.67	74.00	-29.33	peak			
4		4833.333	48.37	-2.24	46.13	74.00	-27.87	peak			

## RESULT: PASS

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

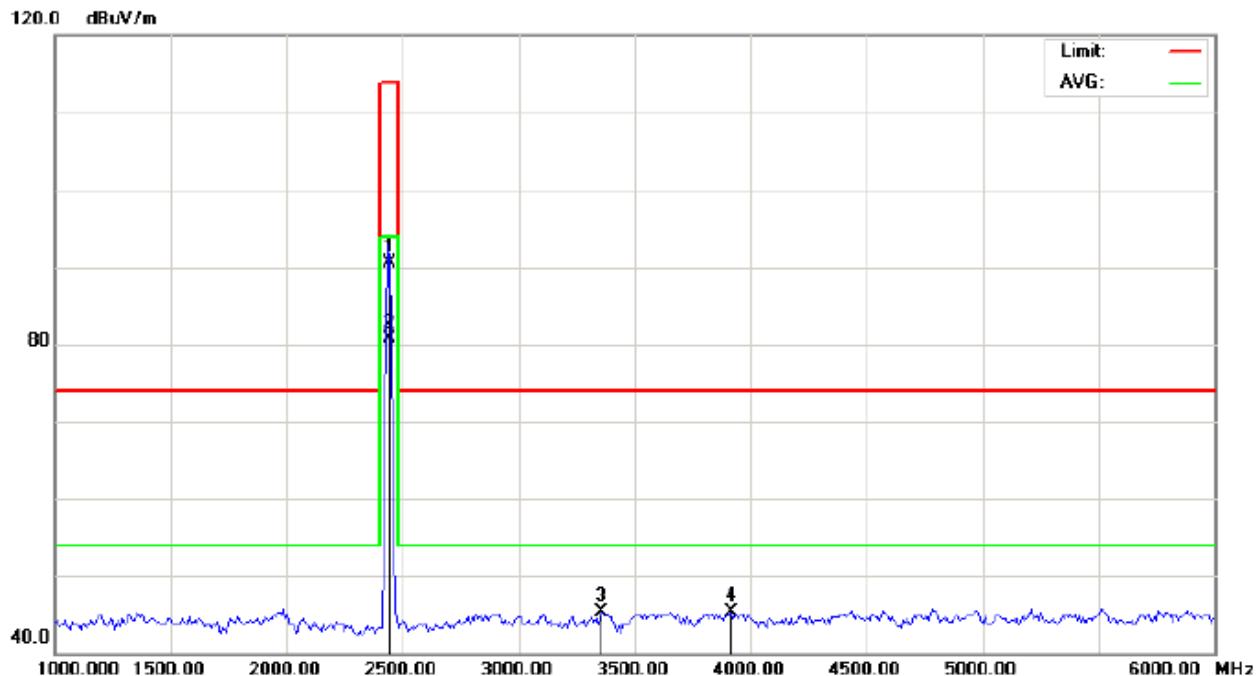


Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	100.23	-9.63	90.60	114.00	-23.40	peak			
2	*	2441.000	90.42	-9.63	80.79	94.00	-13.21	AVG	150	211	
3		3358.333	53.36	-8.02	45.34	74.00	-28.66	peak			
4		3916.667	50.54	-5.32	45.22	74.00	-28.78	peak			

## RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

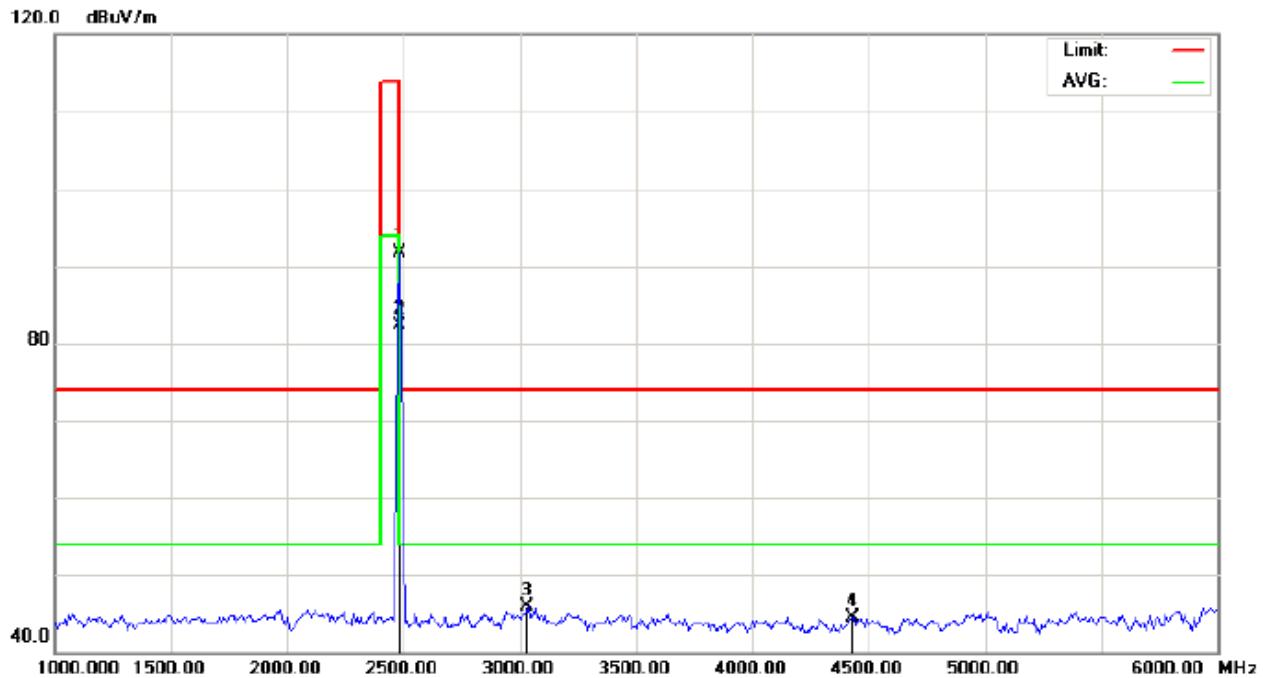



---

Site: site #1      Polarization: *Horizontal*      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power:      Humidity: 60 %  
 EUT:Bluetooth Headset      Distance: 3m  
 M/N:Z-S2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.37	-9.59	91.78	114.00	-22.22	peak			
2	*	2480.000	91.90	-9.59	82.31	94.00	-11.69	AVG	100	234	
3		3033.333	54.23	-8.33	45.90	74.00	-28.10	peak			
4		4433.333	47.88	-3.34	44.54	74.00	-29.46	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

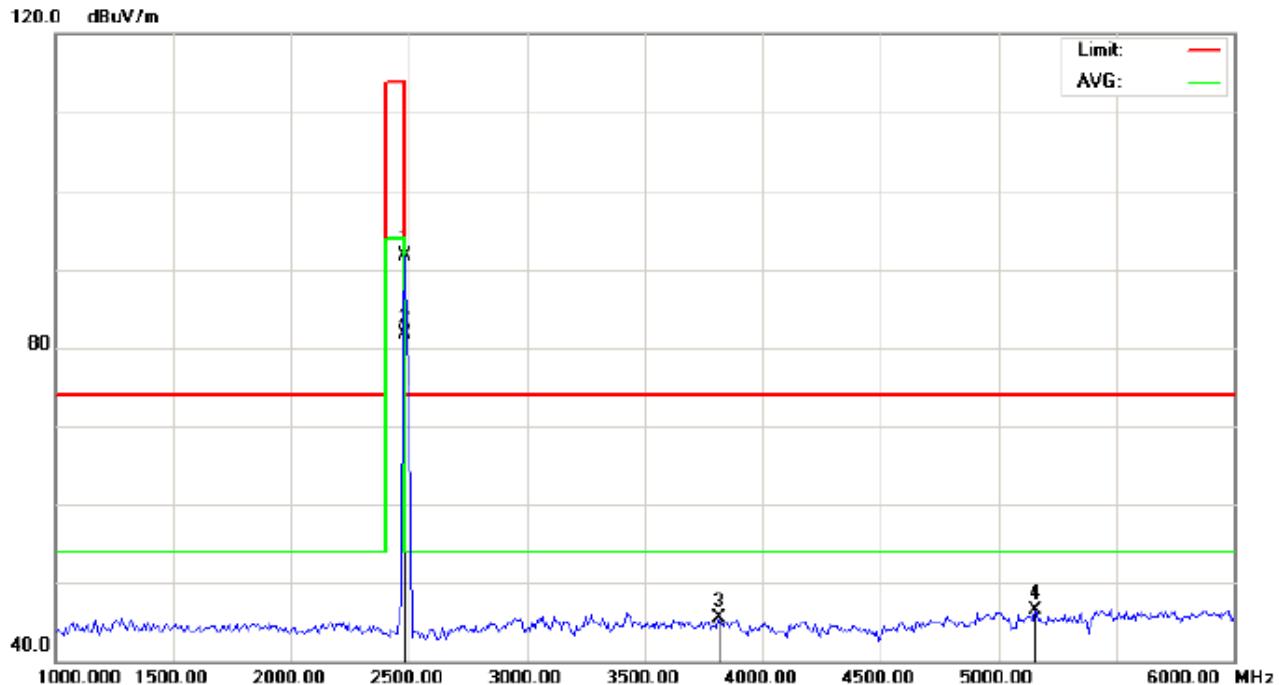

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.29	-9.59	91.70	114.00	-22.30	peak			
2	*	2480.000	91.23	-9.59	81.64	94.00	-12.36	AVG	100	289	
3		3816.667	51.38	-5.94	45.44	74.00	-28.56	peak			
4		5158.333	48.29	-1.80	46.49	74.00	-27.51	peak			

## RESULT: PASS

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal**

**1Mbps Result:**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	99.23	-9.68	89.55	114	-24.45	Horizontal
2402	99.31	-9.68	89.63	114	-24.37	Vertical
2441	100.79	-9.63	91.16	114	-22.84	Horizontal
2441	100.23	-9.63	90.60	114	-23.40	Vertical
2480	101.37	-9.59	91.78	114	-22.22	Horizontal
2480	101.29	-9.59	91.70	114	-22.30	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	90.70	-9.68	81.02	94	-12.98	Horizontal
2402	89.89	-9.68	80.21	94	-13.79	Vertical
2441	90.95	-9.63	81.32	94	-12.68	Horizontal
2441	90.42	-9.63	80.79	94	-13.21	Vertical
2480	91.90	-9.59	82.31	94	-11.69	Horizontal
2480	91.23	-9.59	81.64	94	-12.36	Vertical

**2Mbps Result:**

**Peak value**

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	98.7	-9.68	89.02	114	-24.98	Horizontal
2402	98.75	-9.68	89.07	114	-24.93	Vertical
2441	100.71	-9.63	91.08	114	-22.92	Horizontal
2441	100.81	-9.63	91.18	114	-22.82	Vertical
2480	100.73	-9.59	91.14	114	-22.86	Horizontal
2480	100.81	-9.59	91.22	114	-22.78	Vertical

**Average value**

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	89.91	-9.68	80.23	94	-13.77	Horizontal
2402	90.25	-9.68	80.57	94	-13.43	Vertical
2441	91.73	-9.63	82.10	94	-11.90	Horizontal
2441	90.17	-9.63	80.54	94	-13.46	Vertical
2480	91.96	-9.59	82.37	94	-11.63	Horizontal
2480	90.88	-9.59	81.29	94	-12.71	Vertical

**3Mbps Result:**

**Peak value**


Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	98.55	-9.68	88.87	114	-25.13	Horizontal
2402	98.37	-9.68	88.69	114	-25.31	Vertical
2441	98.90	-9.63	89.27	114	-24.73	Horizontal
2441	99.25	-9.63	89.62	114	-24.38	Vertical
2480	99.97	-9.59	90.38	114	-23.62	Horizontal
2480	99.45	-9.59	89.86	114	-24.14	Vertical

**Average value**

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	89.73	-9.68	80.05	94	-13.95	Horizontal
2402	90.01	-9.68	80.33	94	-13.67	Vertical
2441	89.94	-9.63	80.31	94	-13.69	Horizontal
2441	90.24	-9.63	80.61	94	-13.39	Vertical
2480	91.11	-9.59	81.52	94	-12.48	Horizontal
2480	90.76	-9.59	81.17	94	-12.83	Vertical

## FOR BLE

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

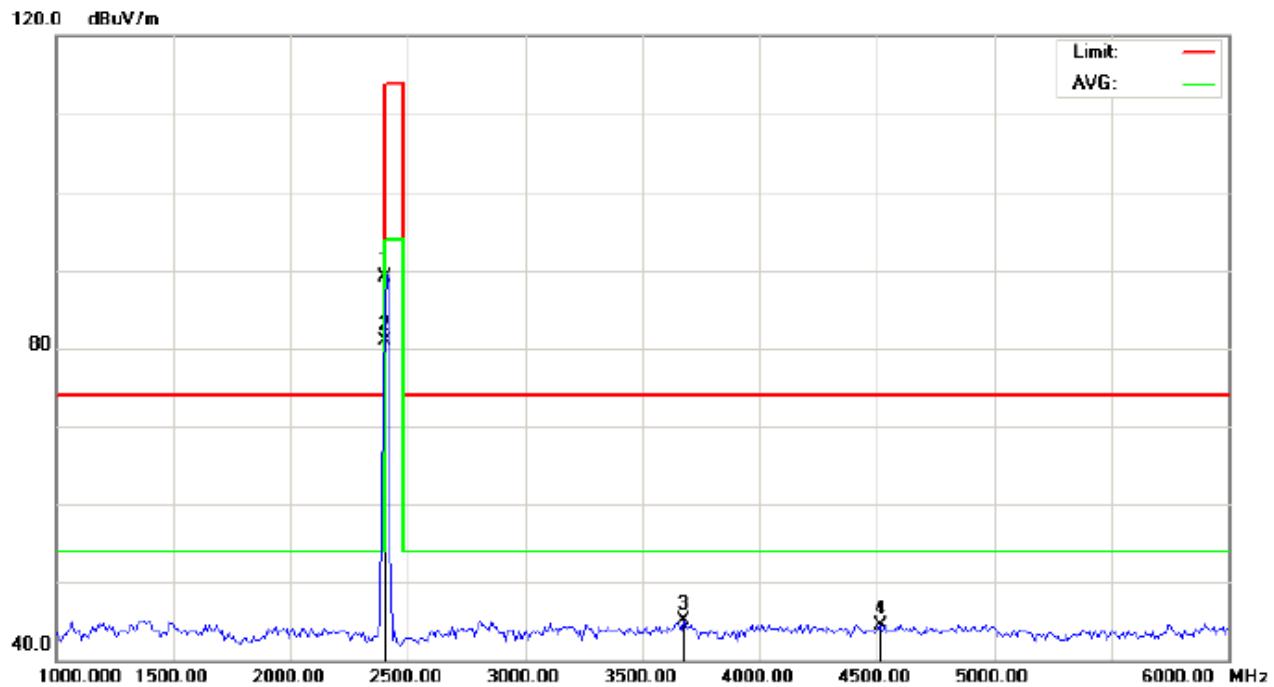


Site: site #1 Polarization: **Horizontal** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	98.73	-9.68	89.05	114.00	-24.95	peak			
2	*	2402.000	90.51	-9.68	80.83	94.00	-13.17	AVG	150	21	
3		3675.000	51.95	-6.81	45.14	74.00	-28.86	peak			
4		4516.667	47.56	-3.07	44.49	74.00	-29.51	peak			

## RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

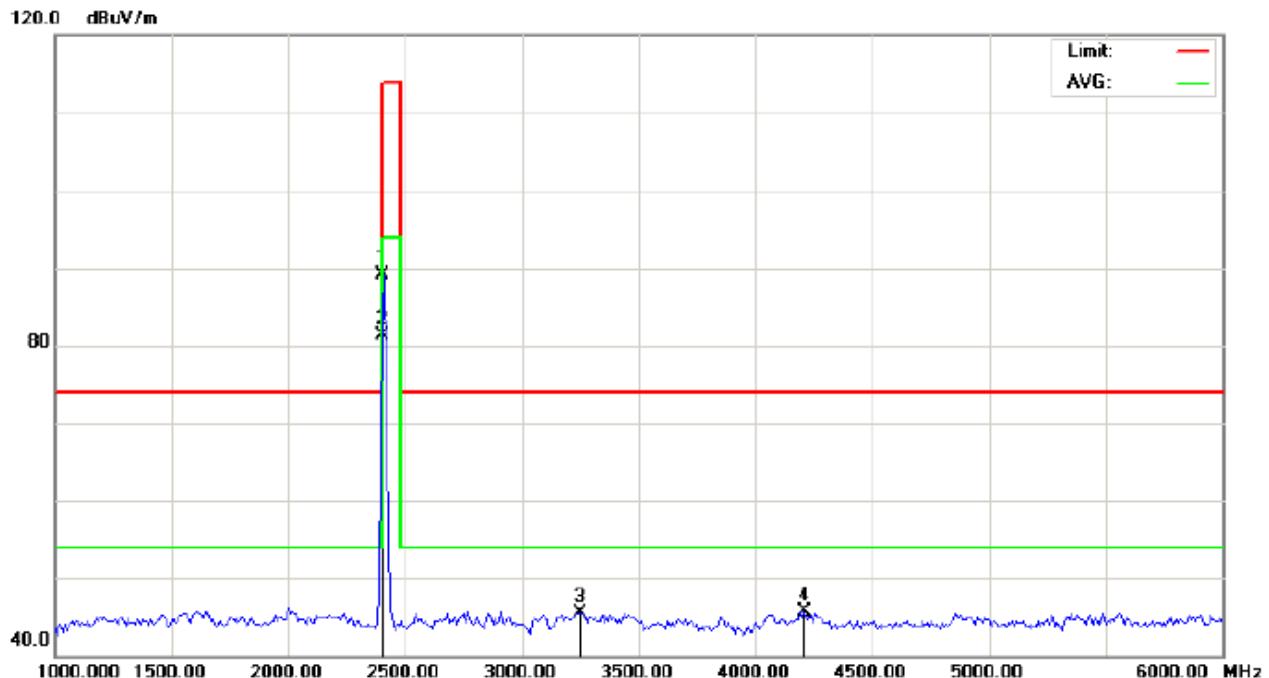


Site: site #1 Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance: 3m  
 M/N:Z-S2  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	98.83	-9.68	89.15	114.00	-24.85	peak			
2	*	2402.000	91.07	-9.68	81.39	94.00	-12.61	AVG	100	43	
3		3250.000	53.70	-8.12	45.58	74.00	-28.42	peak			
4		4208.333	49.85	-4.10	45.75	74.00	-28.25	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

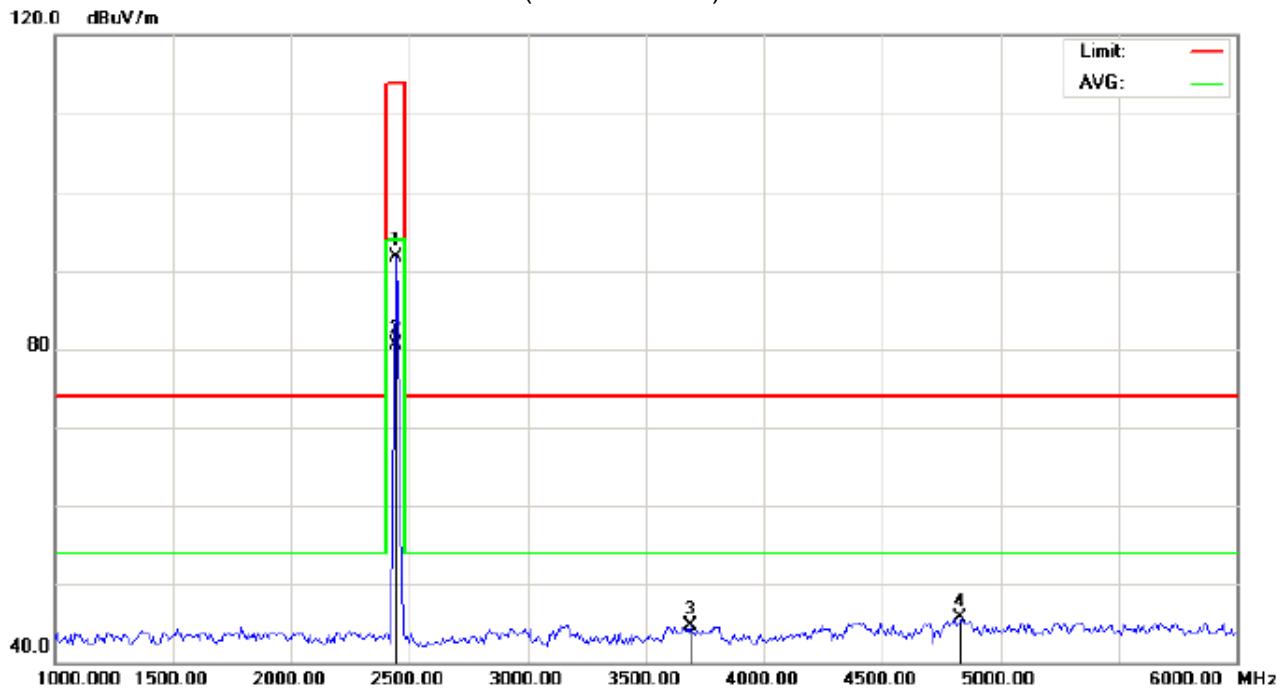


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance: 3m  
 M/N:Z-S2  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2440.000	101.29	-9.63	91.66	114.00	-22.34	peak			
2	*	2440.000	90.10	-9.63	80.47	94.00	-13.53	AVG	150	331	
3		3691.667	51.38	-6.71	44.67	74.00	-29.33	peak			
4		4833.333	47.87	-2.24	45.63	74.00	-28.37	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

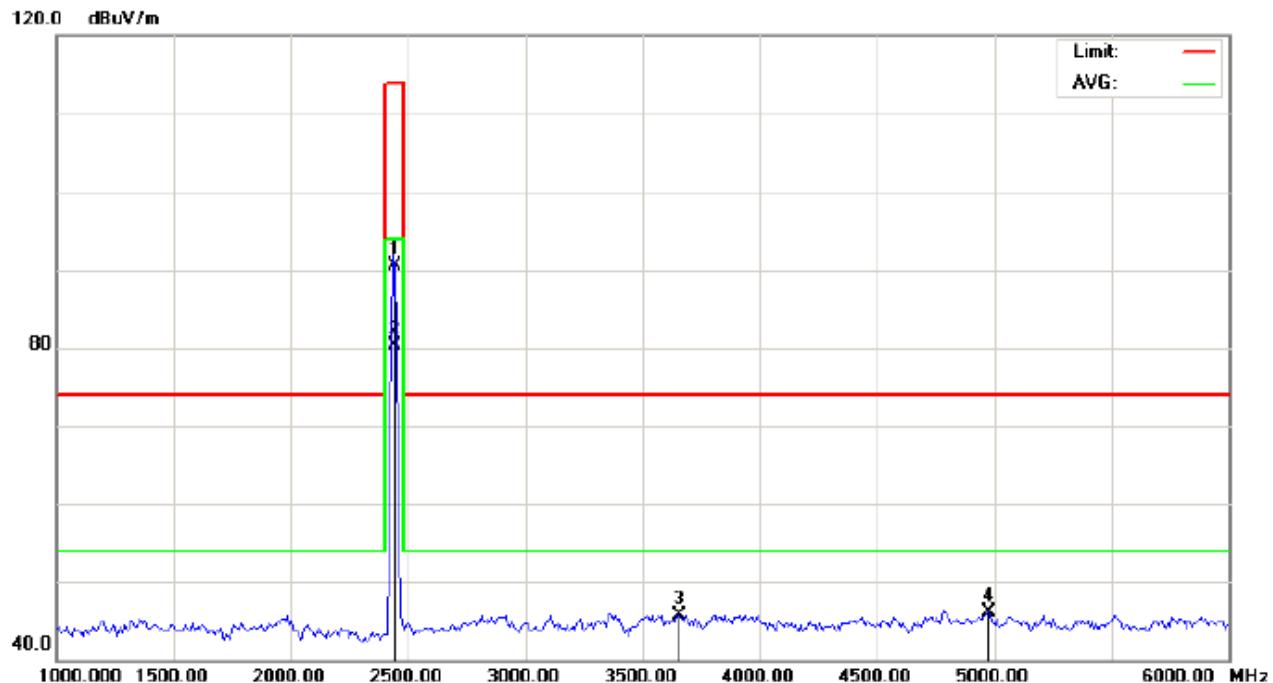

Site: site #1 Polarization: *Vertical* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:Z-S2


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2440.000	100.23	-9.63	90.60	114.00	-23.40	peak			
2	*	2440.000	89.86	-9.63	80.23	94.00	-13.77	AVG	150	245	
3		3658.333	52.71	-6.91	45.80	74.00	-28.20	peak			
4		4975.000	47.95	-1.87	46.08	74.00	-27.92	peak			

**RESULT: PASS**

## RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

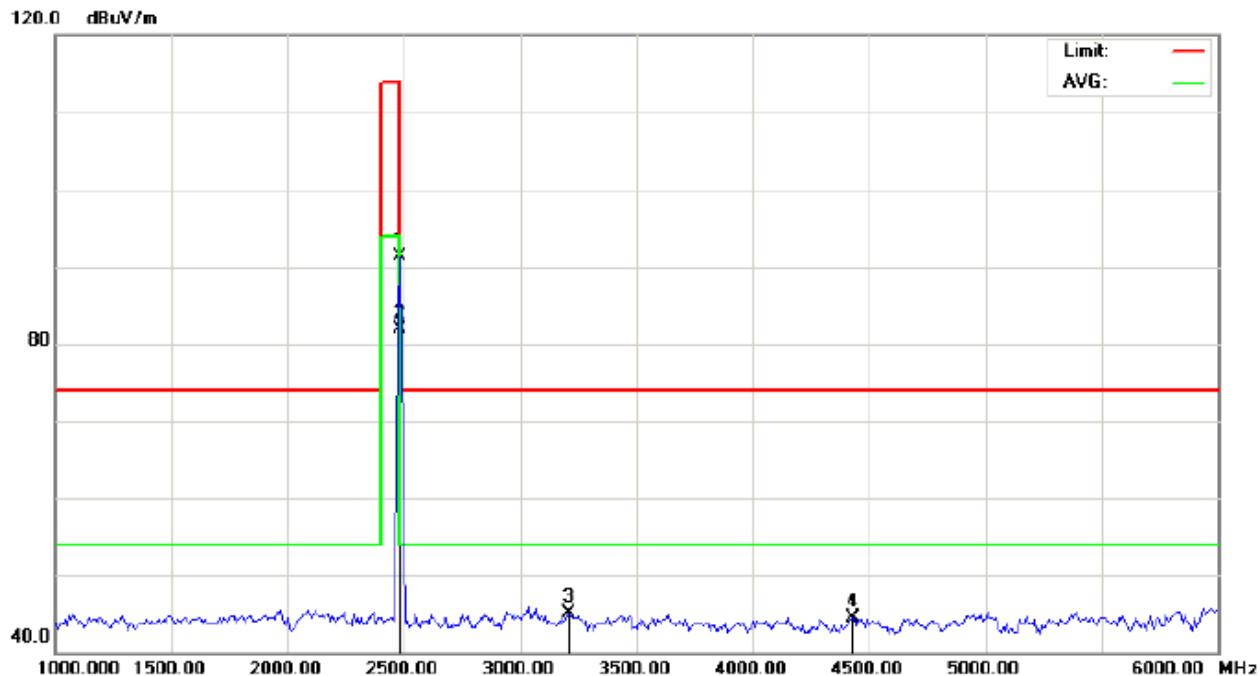


Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance: 3m  
M/N:Z-S2  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	100.87	-9.59	91.28	114.00	-22.72	peak			
2	*	2480.000	91.52	-9.59	81.93	94.00	-12.07	AVG	150	122	
3		3208.333	53.22	-8.16	45.06	74.00	-28.94	peak			
4		4433.333	47.88	-3.34	44.54	74.00	-29.46	peak			

## RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

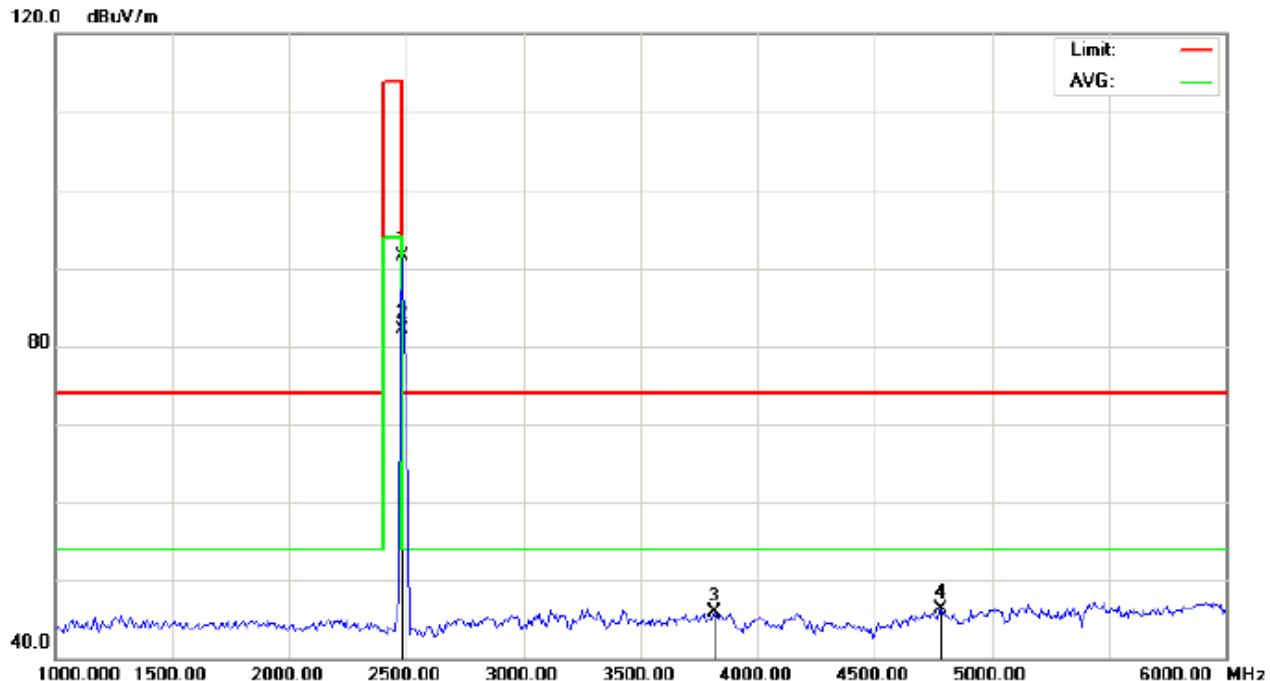

Site: site #1 Polarization: *Vertical* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Headset Distance: 3m

M/N:Z-S2

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	101.07	-9.59	91.48	114.00	-22.52	peak			
2	*	2480.000	91.65	-9.59	82.06	94.00	-11.94	AVG	100	45	
3		3816.667	51.88	-5.94	45.94	74.00	-28.06	peak			
4		4783.333	48.58	-2.37	46.21	74.00	-27.79	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal**

**Peak value**

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	98.73	-9.68	89.05	114	-24.95	Horizontal
2402	98.83	-9.68	89.15	114	-24.85	Vertical
2440	101.29	-9.63	91.66	114	-22.34	Horizontal
2440	100.23	-9.63	90.60	114	-23.40	Vertical
2480	100.87	-9.59	91.28	114	-22.72	Horizontal
2480	101.07	-9.59	91.48	114	-22.52	Vertical

**Average value**

Frequency (MHz)	Reading Level (dBuv)	Factor (dB/m)	Measurement (dBuv/m)	Limit (dBuv/m)	Over (dB)	Antenna Polarization
2402	90.51	-9.68	80.83	94	-13.17	Horizontal
2402	91.07	-9.68	81.39	94	-12.61	Vertical
2440	90.10	-9.63	80.47	94	-13.53	Horizontal
2440	89.86	-9.63	80.23	94	-13.77	Vertical
2480	91.52	-9.59	81.93	94	-12.07	Horizontal
2480	91.65	-9.59	82.06	94	-11.94	Vertical


## 9. BAND EDGE EMISSION

### 9.1. MEASUREMENT PROCEDURE

- 1 The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2 Max hold the trace of the step 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3 Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

### 9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

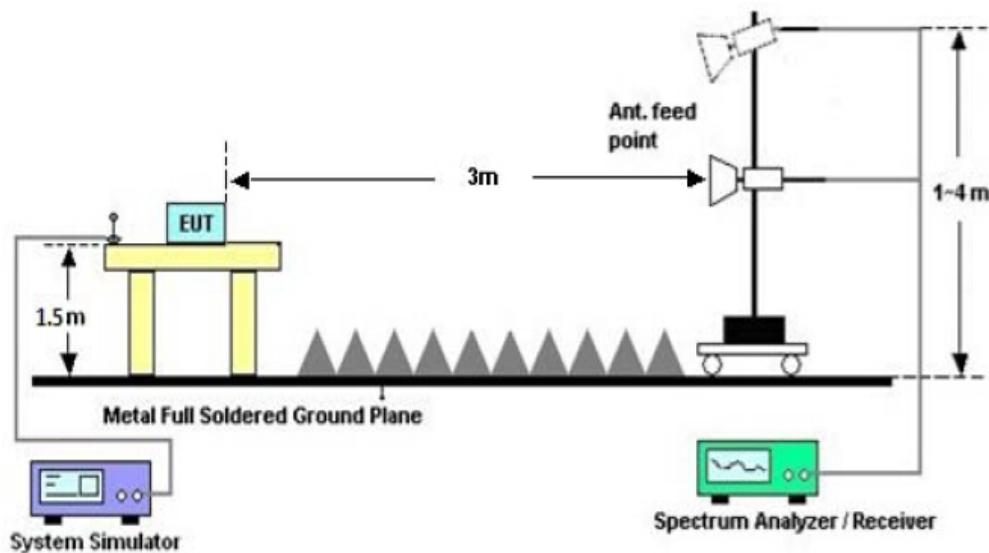


### 9.3 RADIATED TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

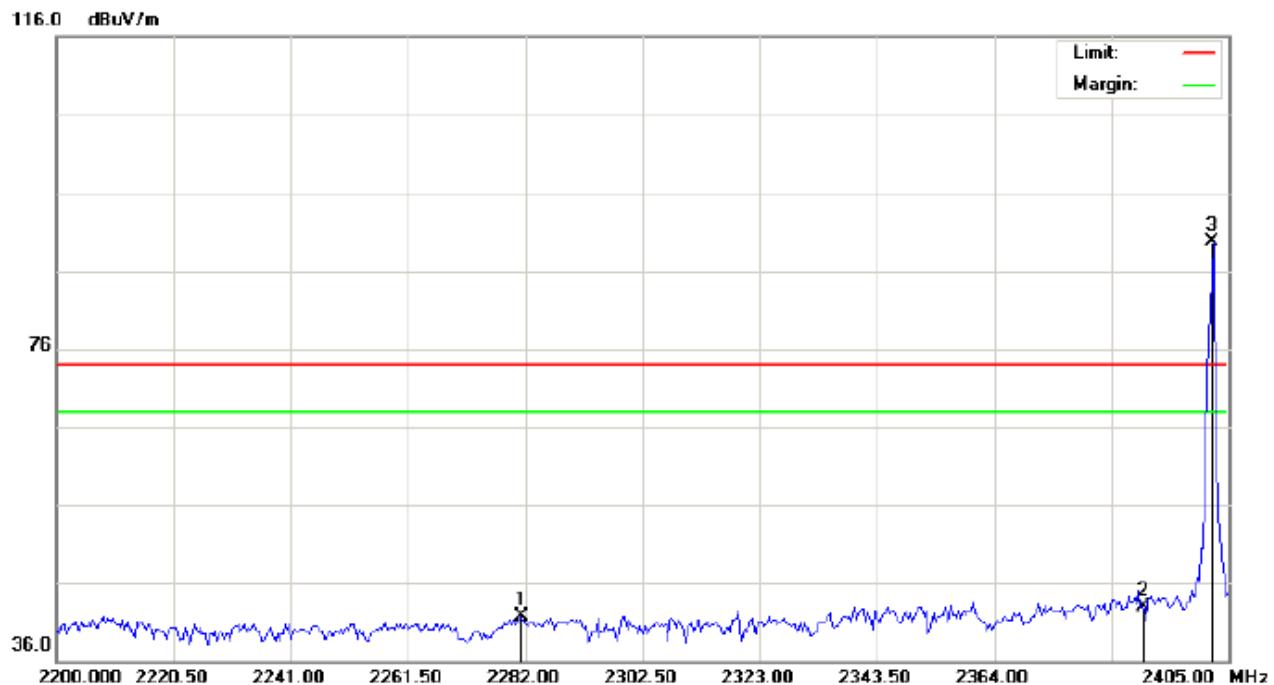

Site: site #1 Polarization: *Horizontal* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Headset Distance:


M/N:Z-S2

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2281.317	31.54	10.19	41.73	74.00	-32.27	peak			
2		2390.000	32.62	10.31	42.93	74.00	-31.07	peak			
3	*	2402.000	79.41	10.32	89.73	74.00	15.73	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

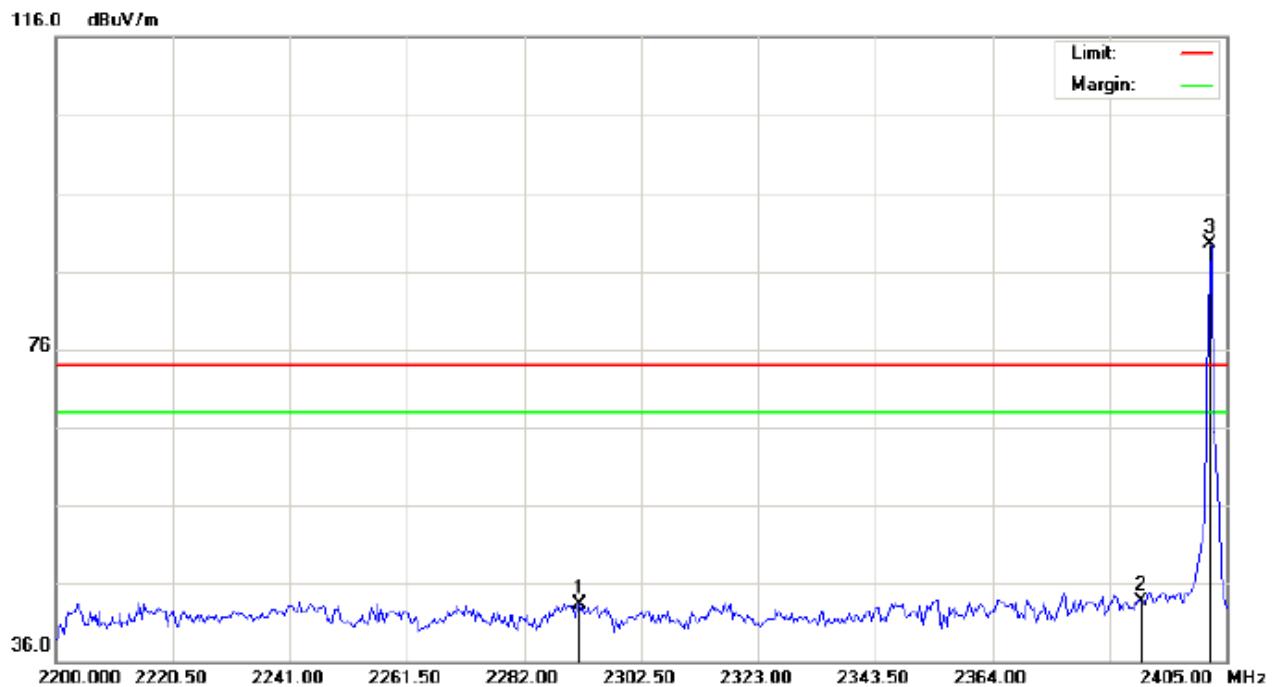

Site: site #1 Polarization: **Vertical** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2291.567	33.05	10.20	43.25	74.00	-30.75	peak			
2		2390.000	33.35	10.31	43.66	74.00	-30.34	peak			
3	*	2402.000	79.26	10.32	89.58	74.00	15.58	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

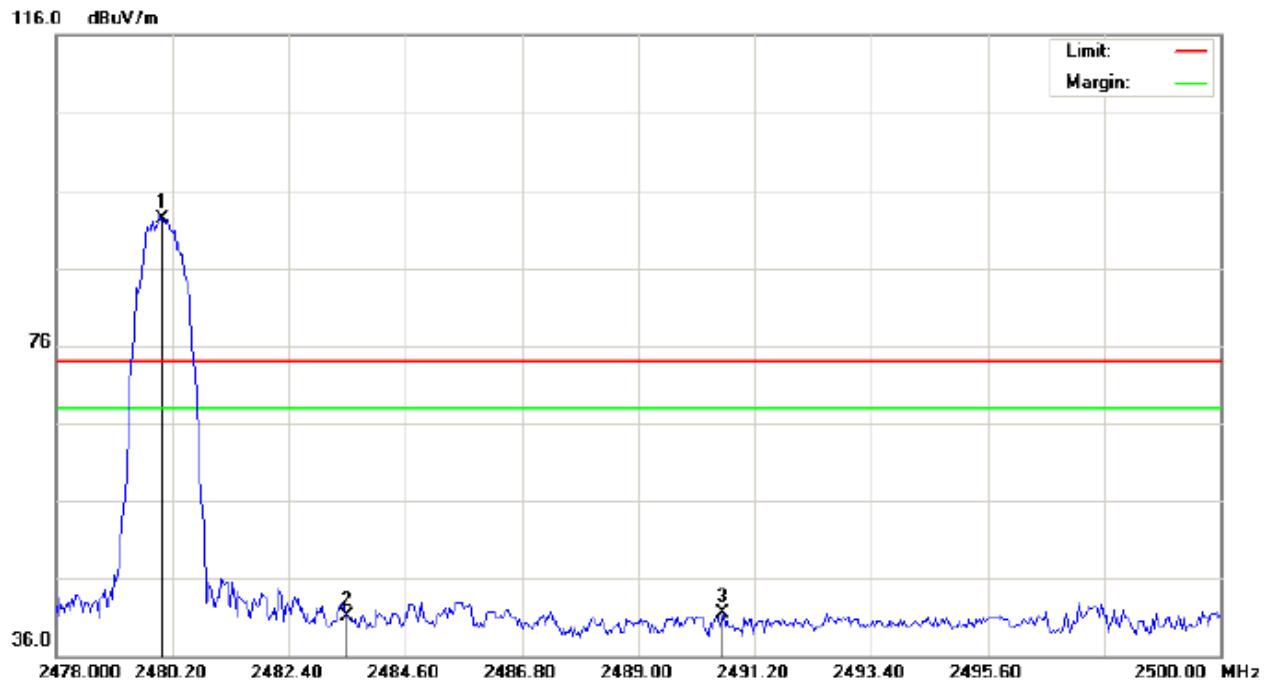

Site: site #1 Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	81.96	10.41	92.37	74.00	18.37	peak			
2		2483.500	30.75	10.41	41.16	74.00	-32.84	peak			
3		2490.613	31.06	10.42	41.48	74.00	-32.52	peak			

## TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

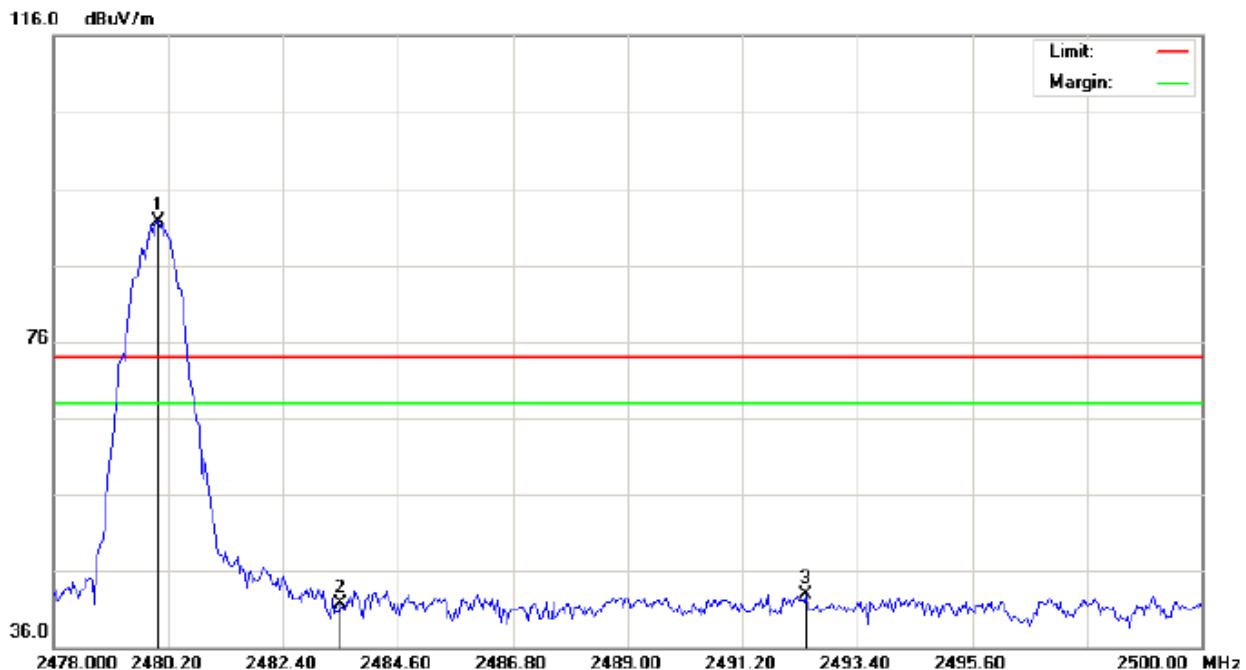

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance:  
M/N:Z-S2  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	81.35	10.41	91.76	74.00	17.76	peak			
2		2483.500	31.37	10.41	41.78	74.00	-32.22	peak			
3		2492.410	32.41	10.42	42.83	74.00	-31.17	peak			

## RESULT: PASS

**Note:** The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

**FOR BLE**


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

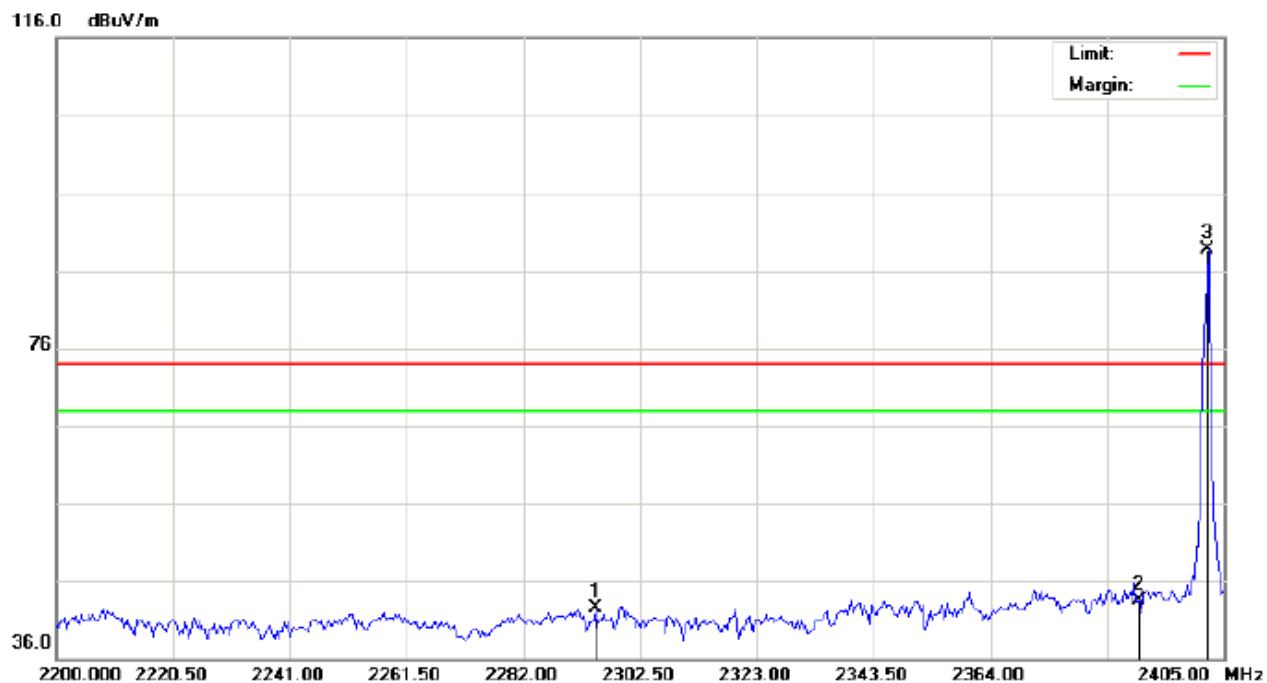

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode: Low Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2294.642	32.34	10.20	42.54	74.00	-31.46	peak			
2		2390.000	33.12	10.31	43.43	74.00	-30.57	peak			
3	*	2402.000	78.41	10.32	88.73	74.00	14.73	peak			

## TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

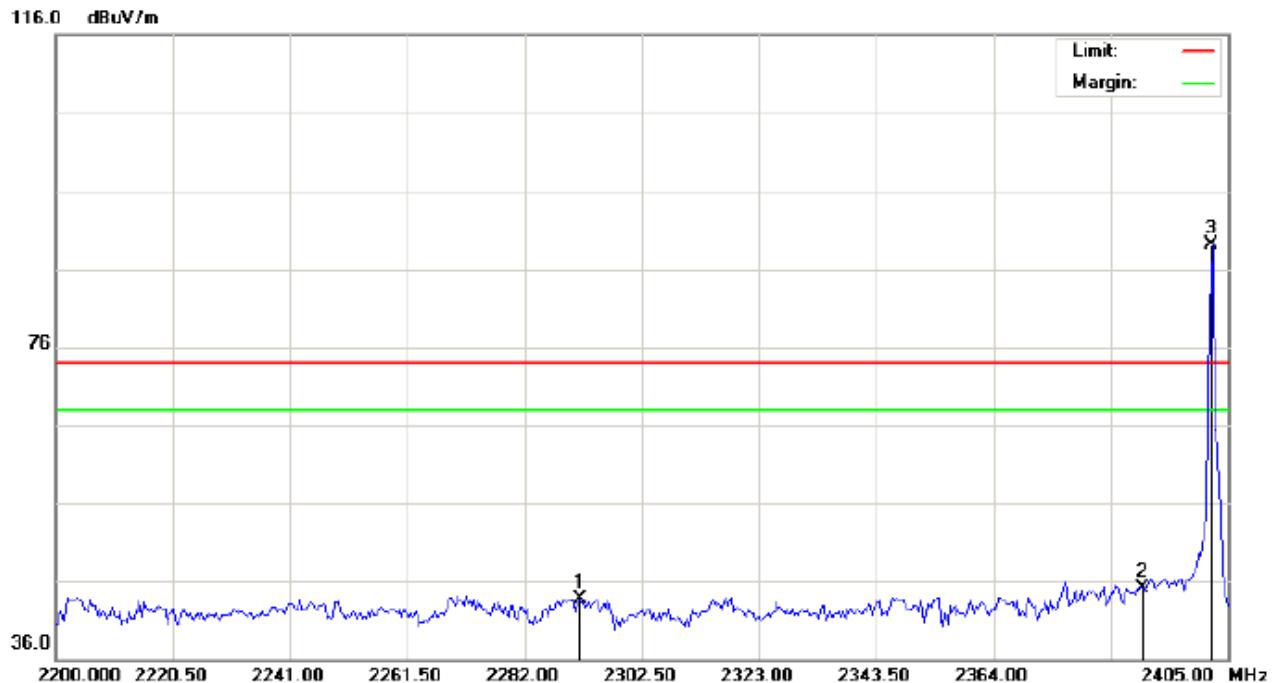

Site: site #1 Polarization: *Vertical* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT:Bluetooth Headset Distance:  
M/N:Z-S2  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2291.567	33.55	10.20	43.75	74.00	-30.25	peak			
2		2390.000	34.85	10.31	45.16	74.00	-28.84	peak			
3	*	2402.000	78.76	10.32	89.08	74.00	15.08	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal



Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT:Bluetooth Headset Distance:  
 M/N:Z-S2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
								cm	degree		
1	*	2480.000	80.96	10.41	91.37	74.00	17.37	peak			
2		2483.500	30.25	10.41	40.66	74.00	-33.34	peak			
3		2490.613	31.06	10.42	41.48	74.00	-32.52	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

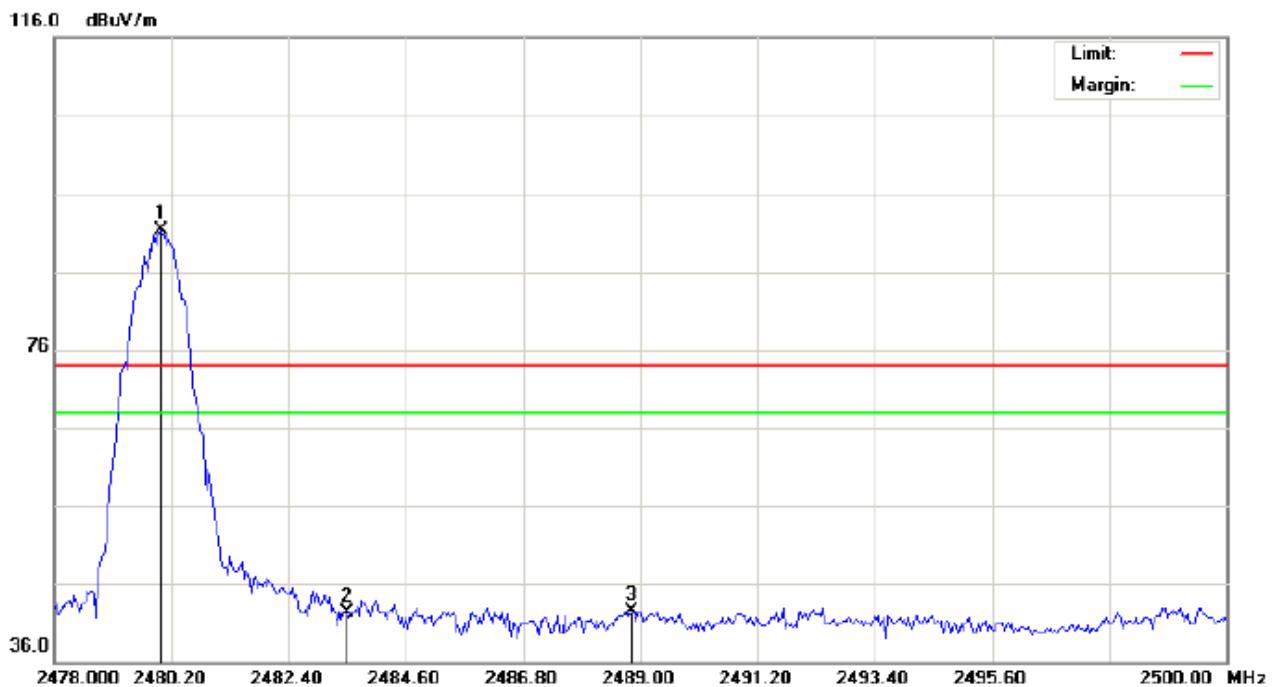


---

Site: site #1      Polarization: **Vertical**      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT:Bluetooth Headset      Distance:  
 M/N:Z-S2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	80.85	10.41	91.26	74.00	17.26	peak			
2		2483.500	31.87	10.41	42.28	74.00	-31.72	peak			
3		2488.853	32.13	10.42	42.55	74.00	-31.45	peak			

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


## 10. 20DB BANDWIDTH

### 10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 10.2. TEST SET-UP

#### (BLOCK DIAGRAM OF CONFIGURATION)

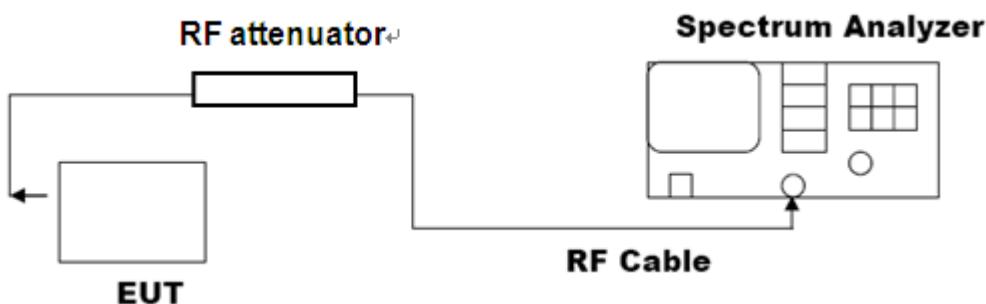

Note: The EUT has been used temporary antenna connector for testing.

### 10.3. LIMITS AND MEASUREMENT RESULTS

#### FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
N/A	Low Channel	1.093	PASS
	Middle Channel	1.089	PASS
	High Channel	1.090	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL




**BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT**

Applicable Limits	Measurement Result	
	Test Data (MHz)	Criteria
N/A	Low Channel	1.384
	Middle Channel	1.354
	High Channel	1.348


**TEST PLOT OF BANDWIDTH FOR LOW CHANNEL**

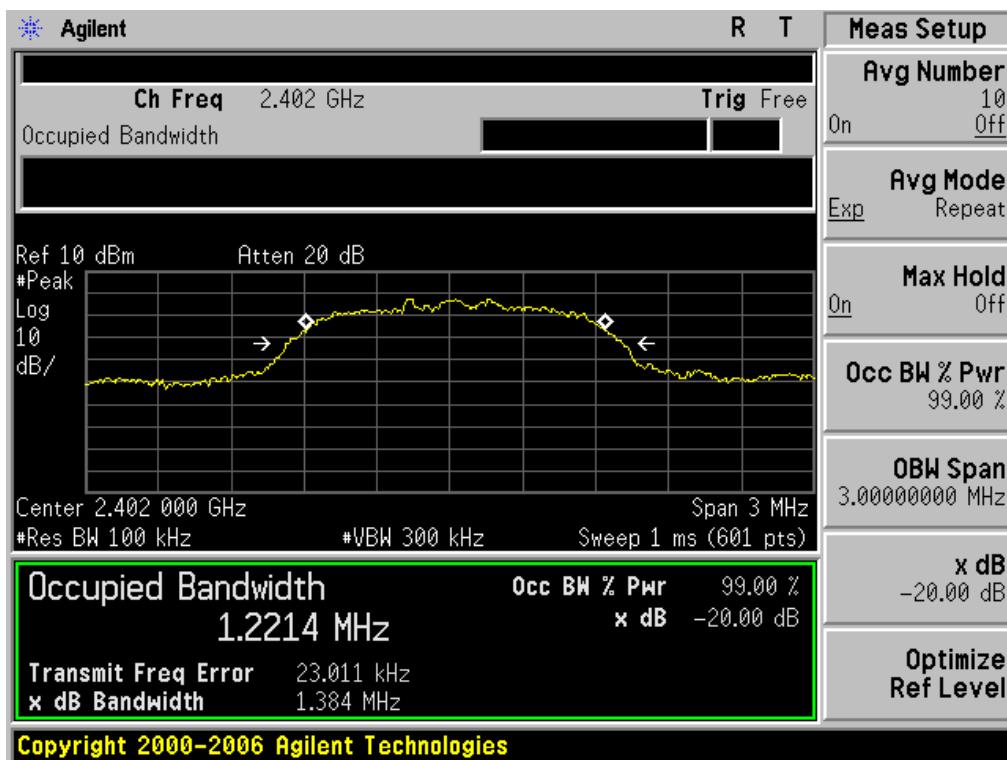

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

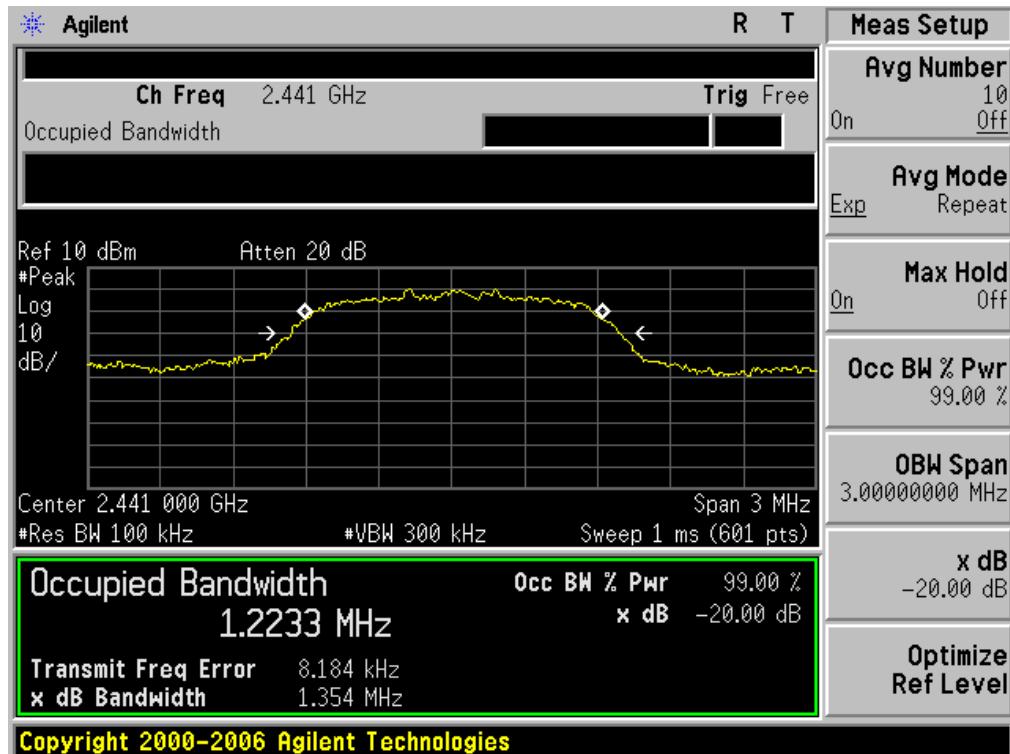


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

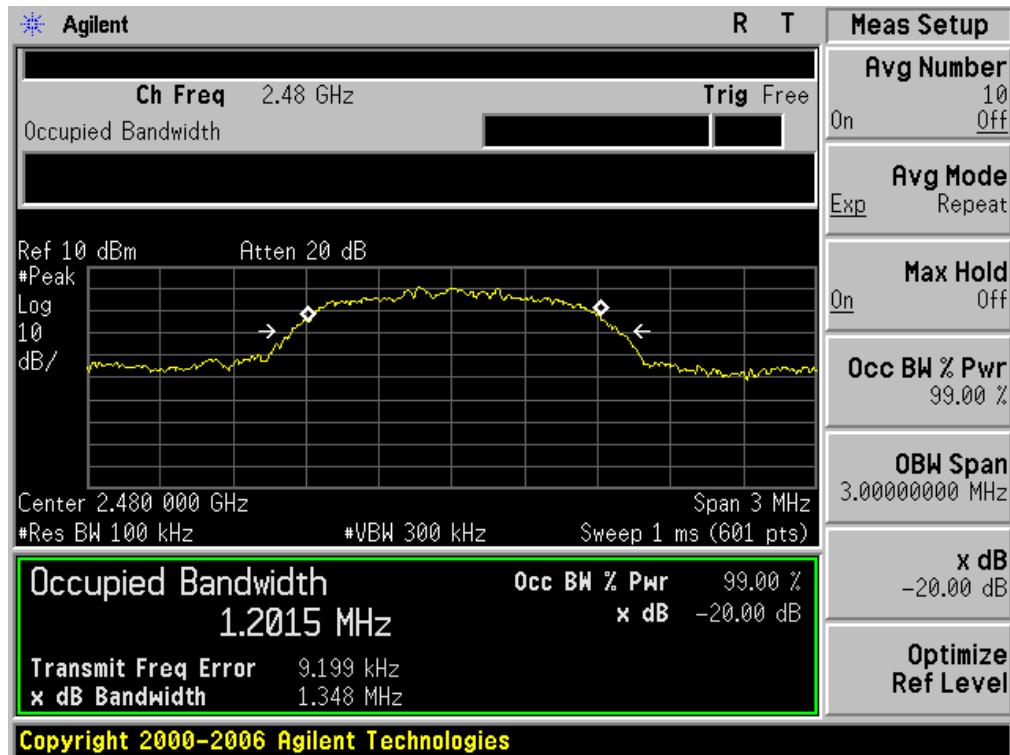



### BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT

Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.367	PASS
	Middle Channel	1.363	PASS
	High Channel	1.379	PASS

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

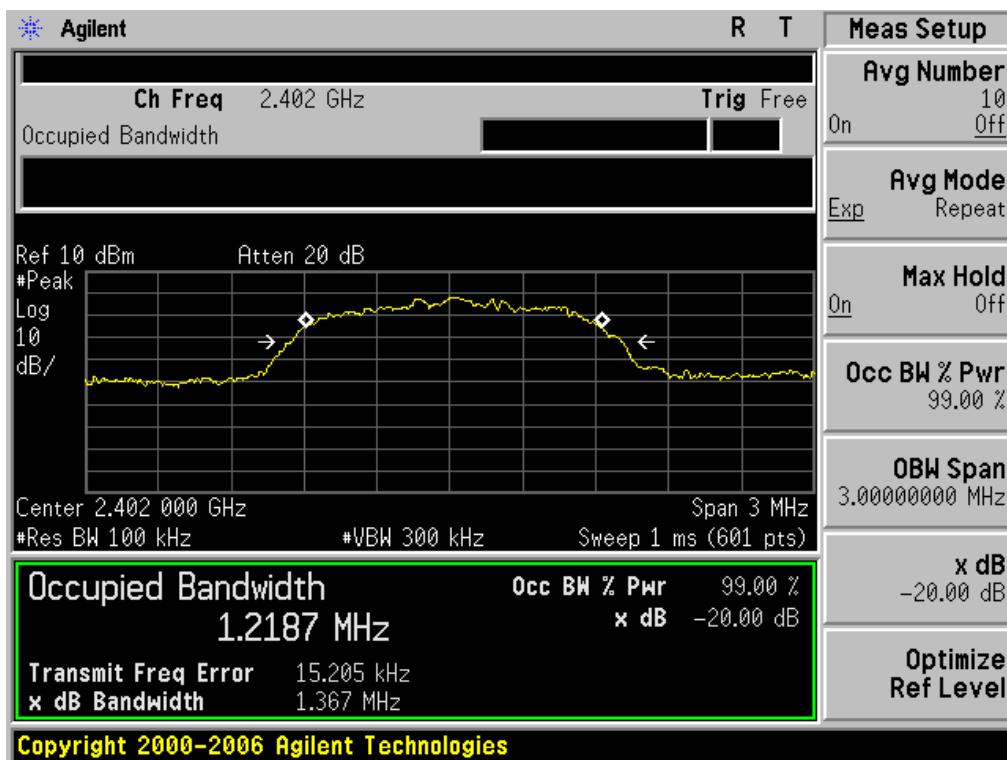

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

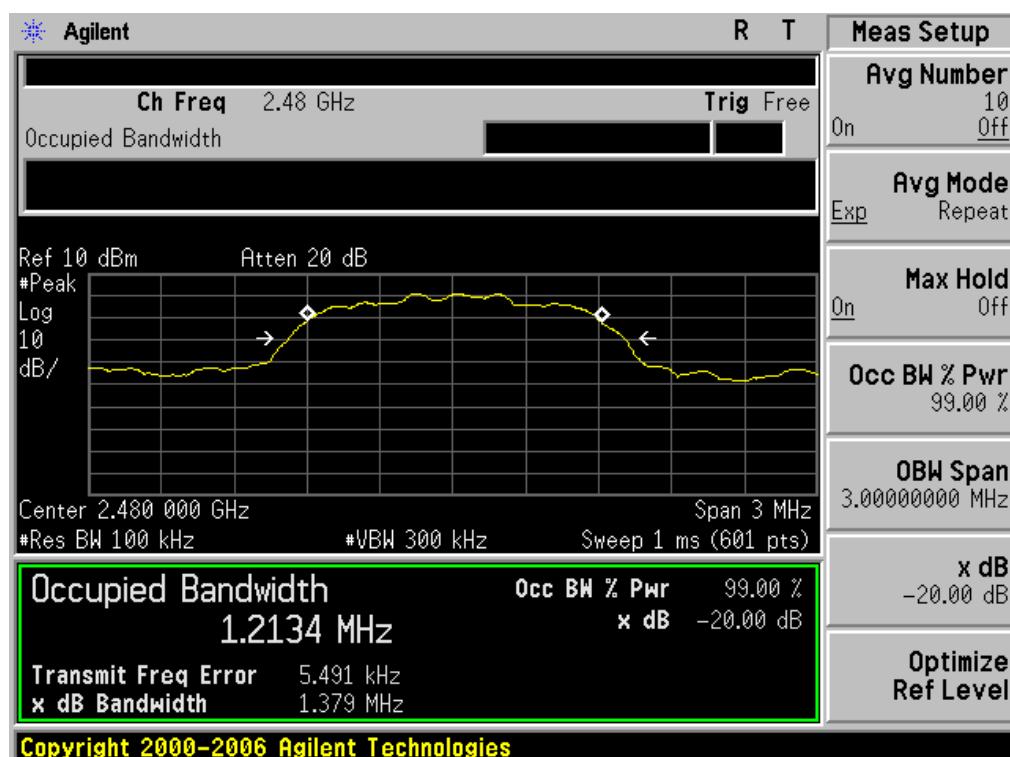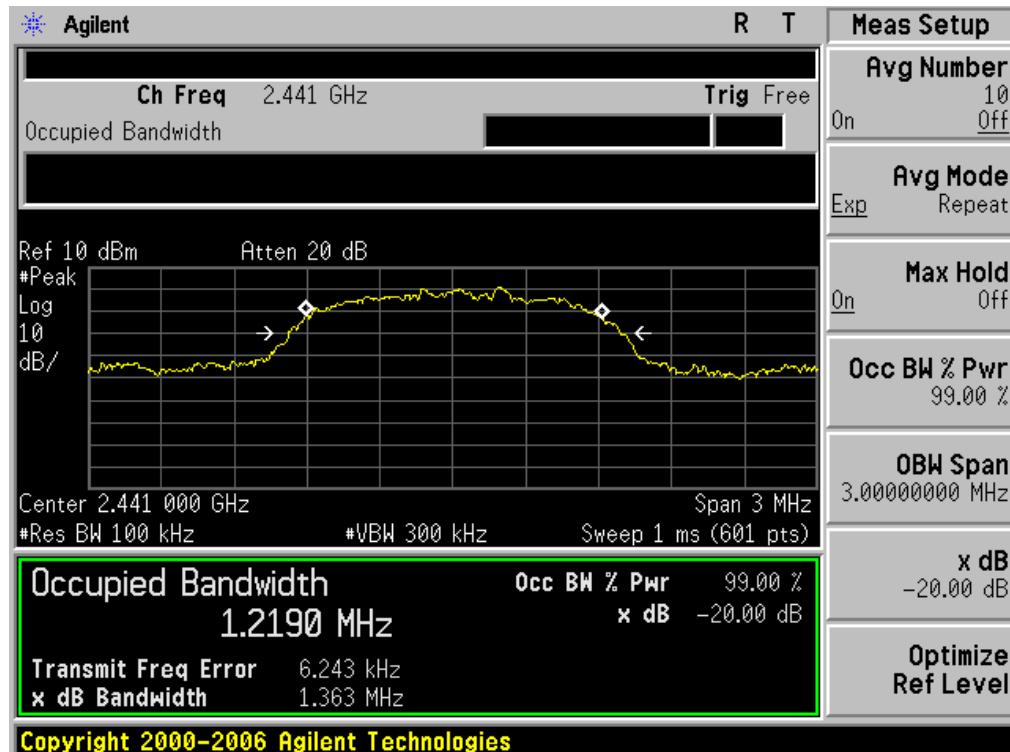


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.211	PASS
	Middle Channel	1.210	PASS
	High Channel	1.203	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

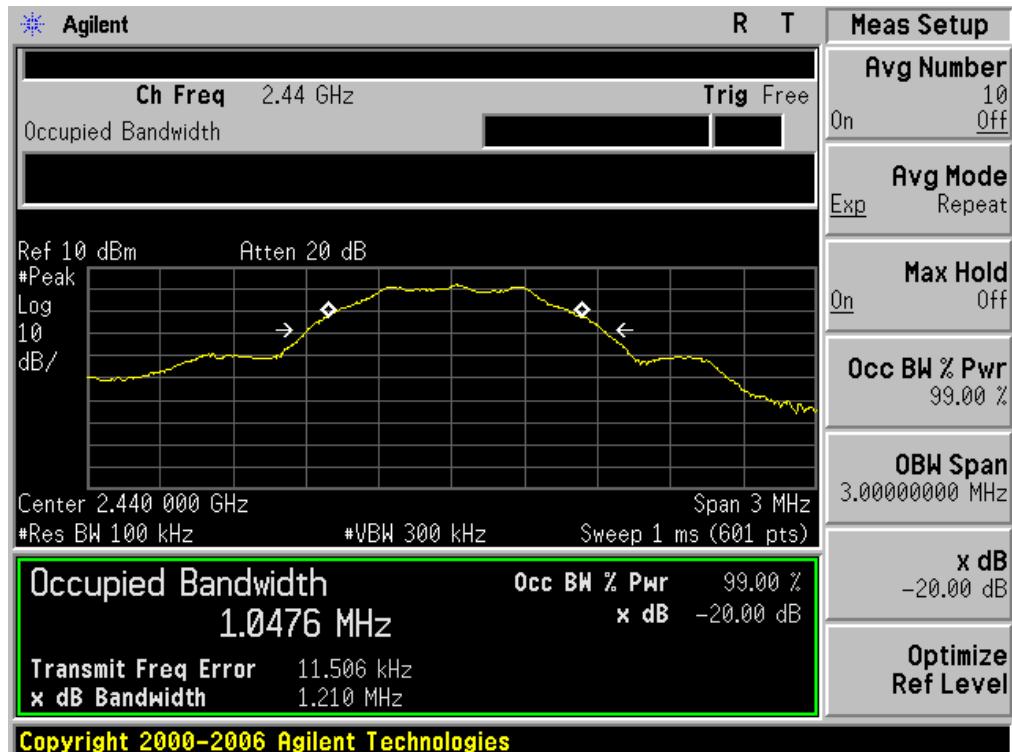

## 11. FCC LINE CONDUCTED EMISSION TEST


### 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. ( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

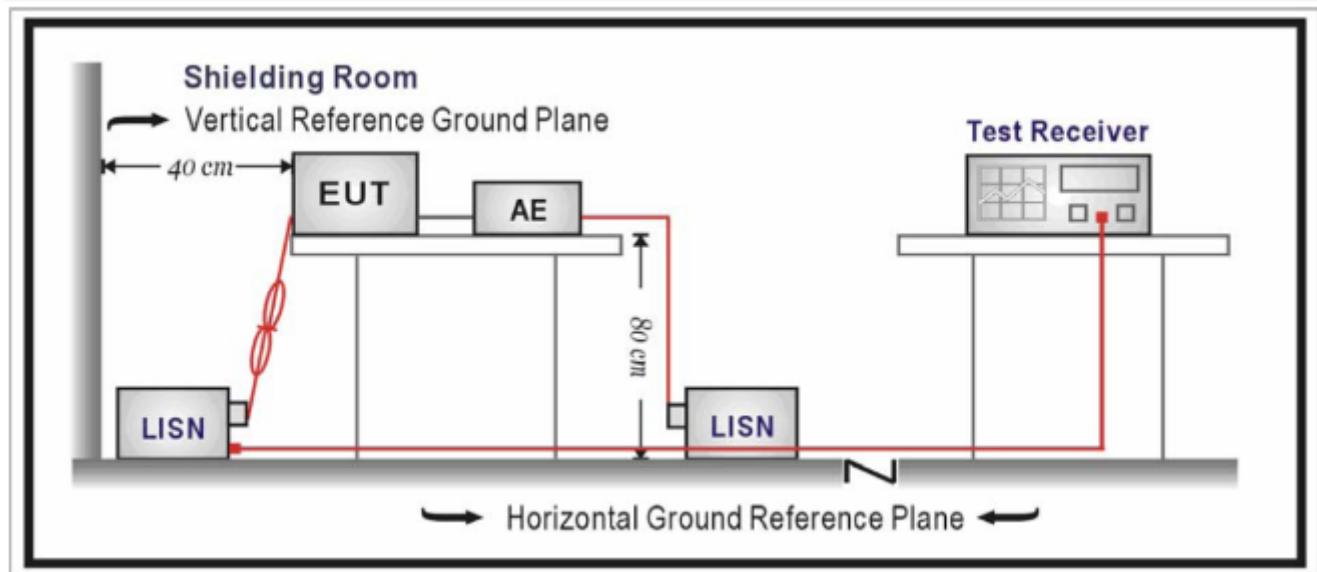

### **11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported.

## 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

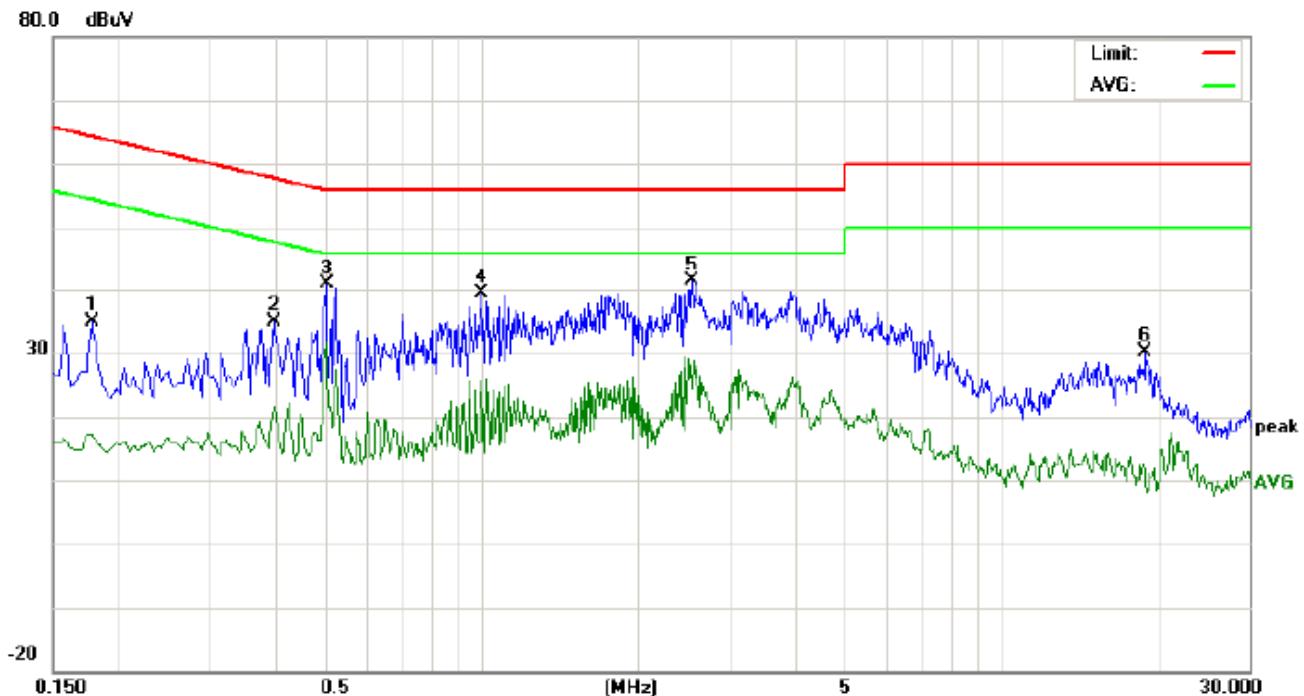

Site: Conduction Phase: *L1* Temperature: 22.5

Limit: FCC Class B Conduction(QP) Power: Humidity: 53.6 %

EUT:Bluetooth Headset


M/N:Z-S2

Mode: BT Link with charging

Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1780	24.71		6.89	10.19	34.90		17.08	64.57	54.57	-29.67	-37.49	P	
2	0.3980	24.49		11.29	10.33	34.82		21.62	57.89	47.89	-23.07	-26.27	P	
3	0.5020	30.49		21.11	10.40	40.89		31.51	56.00	46.00	-15.11	-14.49	P	
4	1.0020	28.96		15.29	10.37	39.33		25.66	56.00	46.00	-16.67	-20.34	P	
5	2.5500	30.81		13.94	10.44	41.25		24.38	56.00	46.00	-14.75	-21.62	P	
6	18.9459	19.96		-0.18	10.12	30.08		9.94	60.00	50.00	-29.92	-40.06	P	

Line Conducted Emission Test Line 2-N

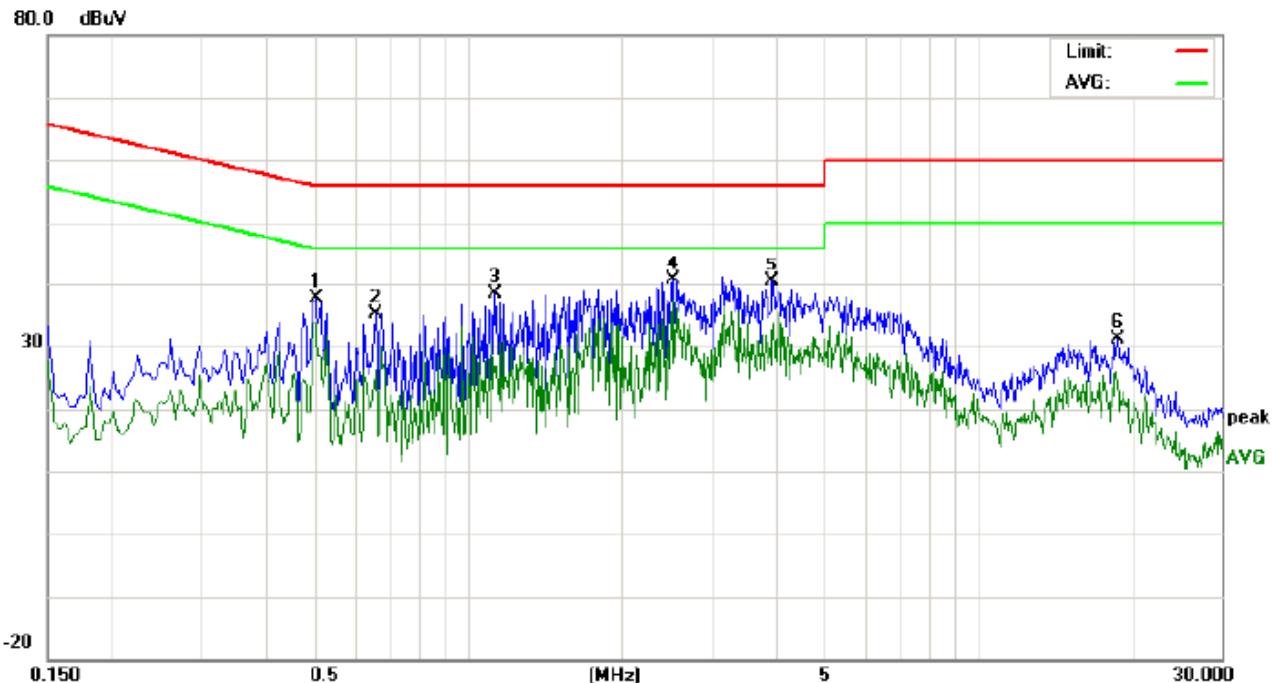

Site: Conduction Phase: **N** Temperature: 22.5

Limit: FCC Class B Conduction(QP) Power: Humidity: 53.6 %

EUT:Bluetooth Headset

M/N:Z-S2


Mode: BT Link with charging

Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5020	27.34		23.29	10.40	37.74		33.69	56.00	46.00	-18.26	-12.31	P	
2	0.6580	24.76		15.90	10.33	35.09		26.23	56.00	46.00	-20.91	-19.77	P	
3	1.1340	28.06		15.59	10.37	38.43		25.96	56.00	46.00	-17.57	-20.04	P	
4	2.5300	30.17		26.84	10.44	40.61		37.28	56.00	46.00	-15.39	-8.72	P	
5	3.9540	29.96		21.52	10.44	40.40		31.96	56.00	46.00	-15.60	-14.04	P	
6	18.7739	20.98		13.76	10.12	31.10		23.88	60.00	50.00	-28.90	-26.12	P	

**FOR BLE**


Line Conducted Emission Test Line 1-L

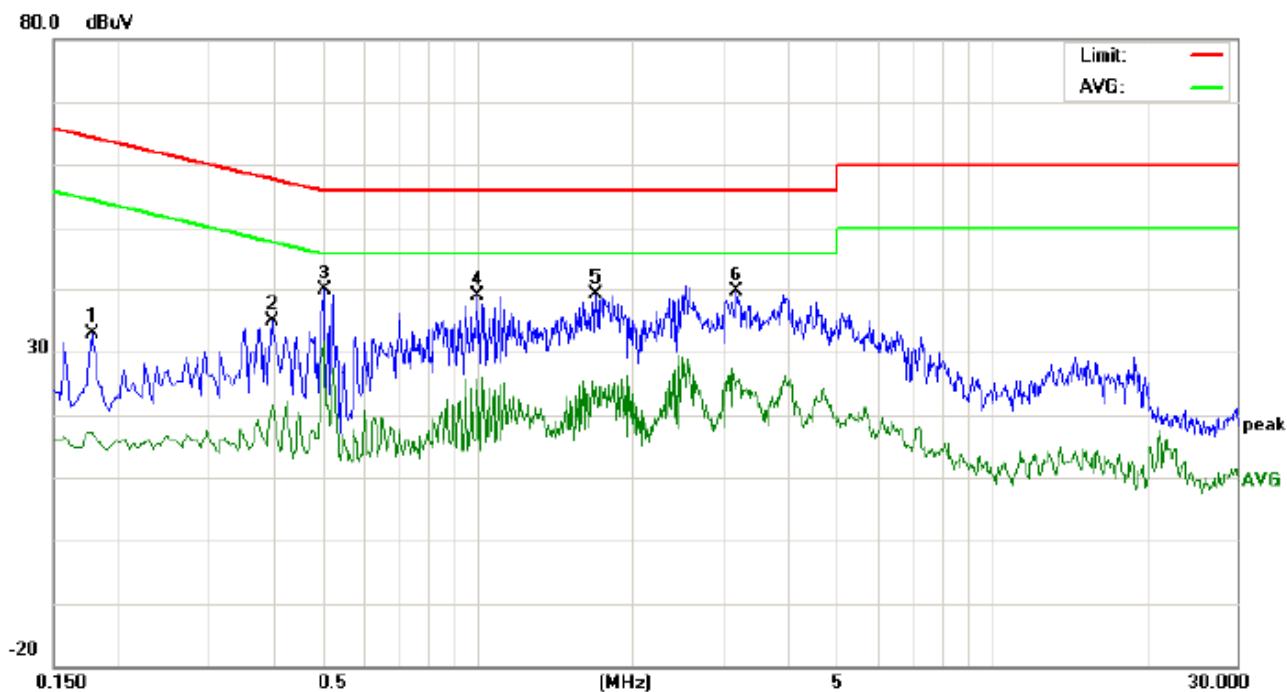

Site: Conduction Phase: L1 Temperature: 22.5  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 53.6 %  
 EUT:Bluetooth Headset  
 M/N:Z-S2  
 Mode: BT Link with charging  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.1779	22.71		6.89	10.19	32.90		17.08	64.58	54.58	-31.68	-37.50	P	
2	0.3980	24.49		11.29	10.33	34.82		21.62	57.89	47.89	-23.07	-26.27	P	
3	0.5020	29.49		21.11	10.40	39.89		31.51	56.00	46.00	-16.11	-14.49	P	
4	1.0020	28.46		15.29	10.37	38.83		25.66	56.00	46.00	-17.17	-20.34	P	
5	1.7019	28.91		14.09	10.32	39.23		24.41	56.00	46.00	-16.77	-21.59	P	
6	3.2019	29.12		14.41	10.53	39.65		24.94	56.00	46.00	-16.35	-21.06	P	

Line Conducted Emission Test Line 2-N

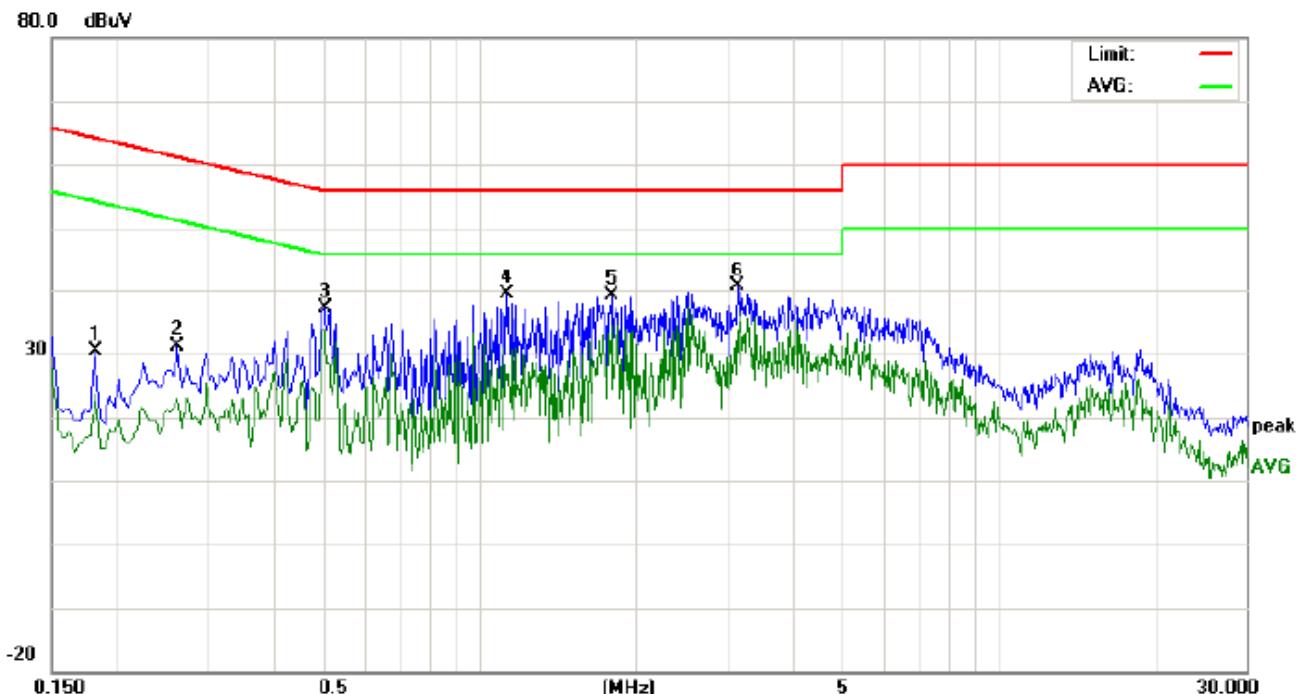

Site: Conduction Phase: **N** Temperature: 22.5  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 53.6 %  
 EUT:Bluetooth Headset  
 M/N:Z-S2  
 Mode: BT Link with charging  
 Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	Avg		dB	Peak	QP	Avg	QP	Avg	QP	Avg	
1	0.1819	20.21		13.42	10.20	30.41		23.62	64.39	54.39	-33.98	-30.77	P	
2	0.2620	20.91		12.69	10.27	31.18		22.96	61.36	51.36	-30.18	-28.40	P	
3	0.5020	26.84		23.29	10.40	37.24		33.69	56.00	46.00	-18.76	-12.31	P	
4	1.1339	29.06		15.59	10.37	39.43		25.96	56.00	46.00	-16.57	-20.04	P	
5	1.7980	28.92		24.02	10.28	39.20		34.30	56.00	46.00	-16.80	-11.70	P	
6	3.1538	30.18		22.99	10.54	40.72		33.53	56.00	46.00	-15.28	-12.47	P	

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### FCC LINE CONDUCTED EMISSION TEST SETUP



### FCC RADIATED EMISSION TEST SETUP

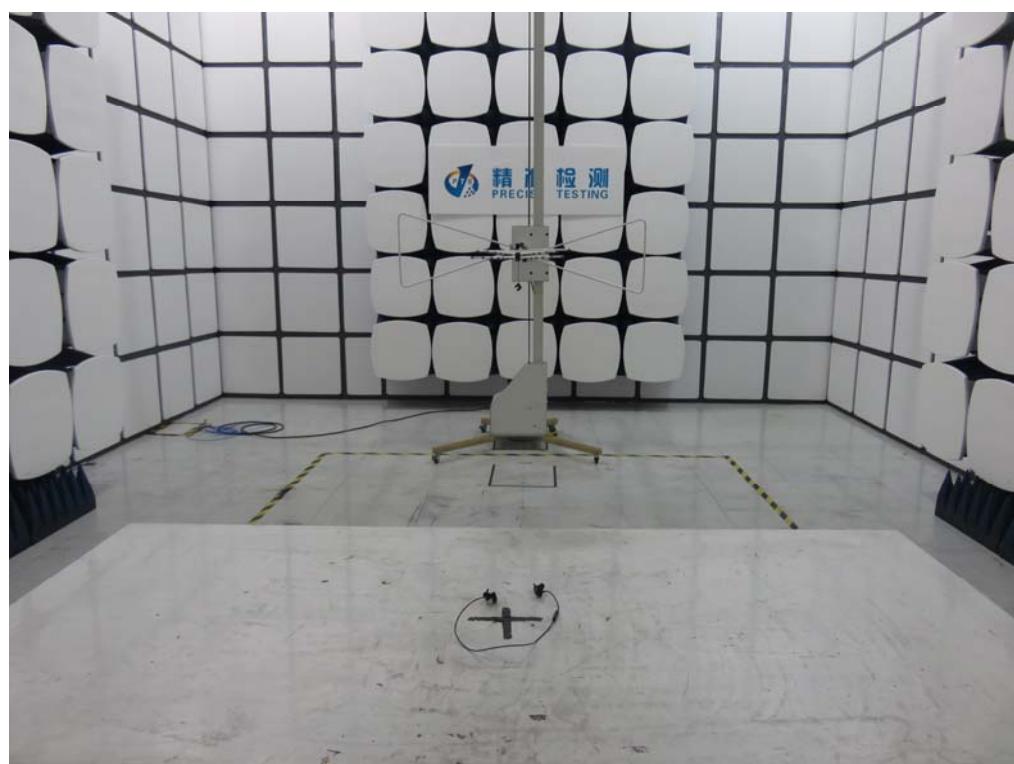



ADAPTER(AE)



Note: This adapter was provided by AGC Lab and used for testing only.

**APPENDIX B: PHOTOGRAPHS OF EUT**  
**ALL VIEW OF EUT**



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT




VIEW OF EUT (PORT)

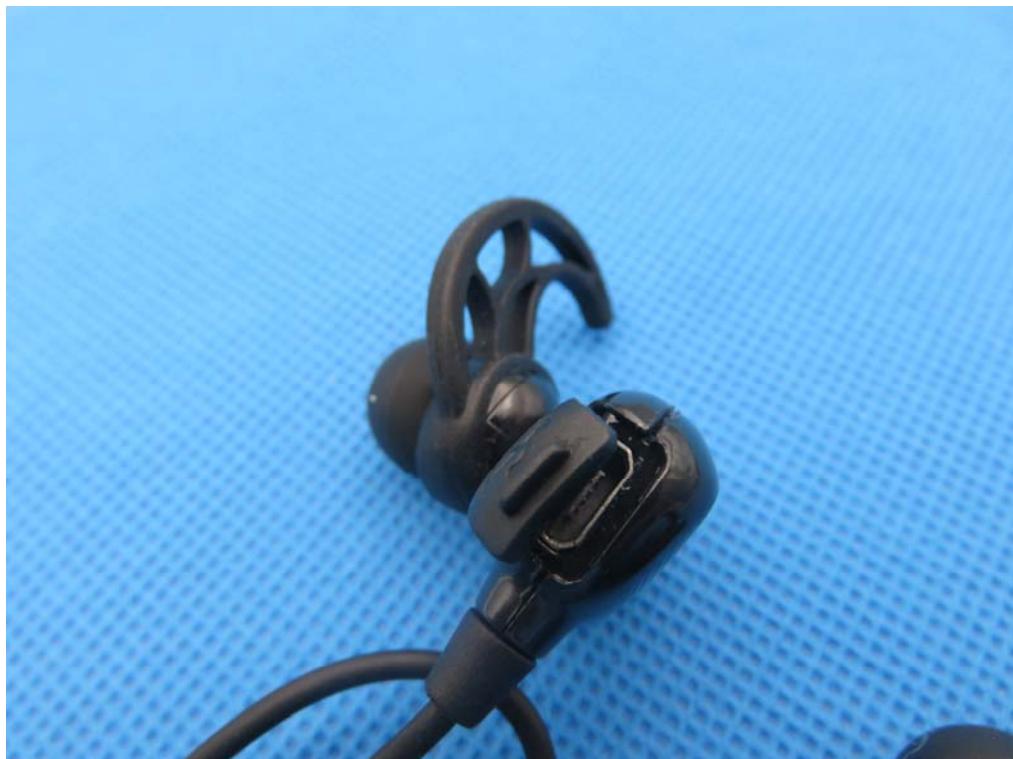


OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

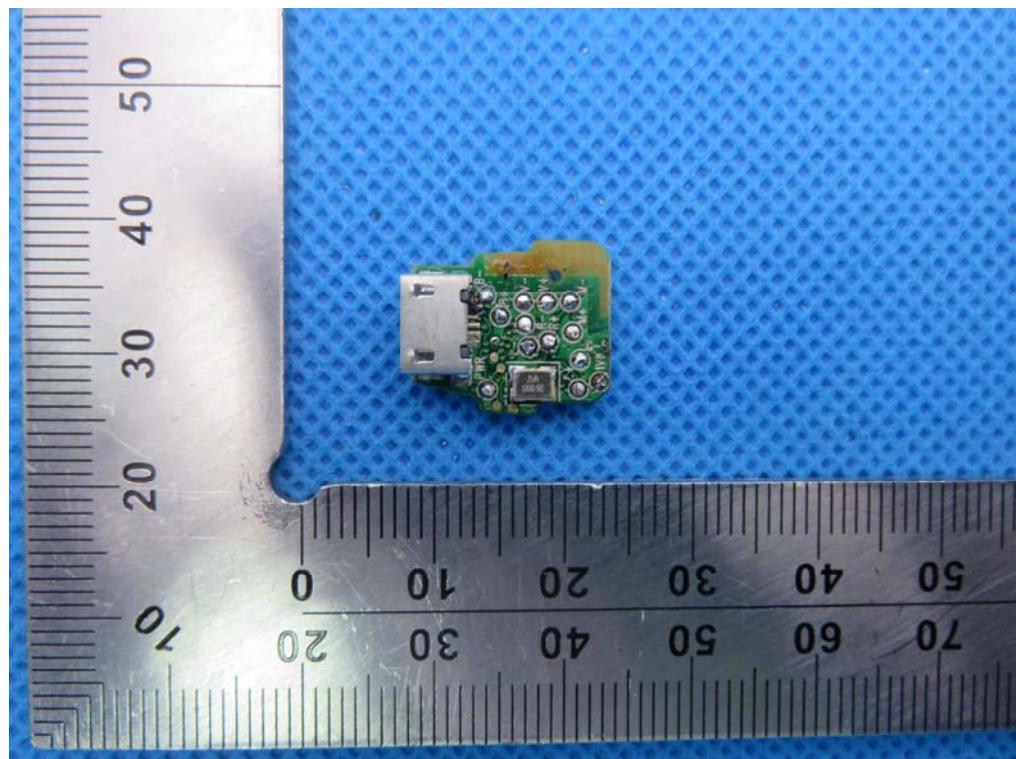


INTERNAL VIEW OF EUT-2

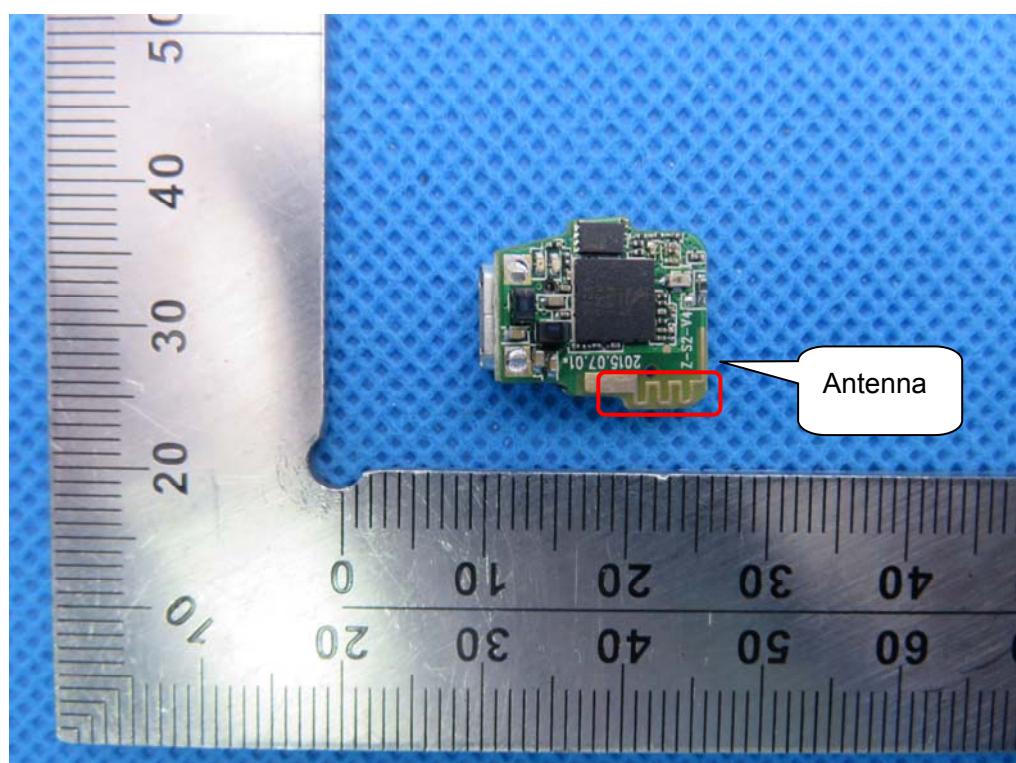

INTERNAL VIEW OF EUT-3

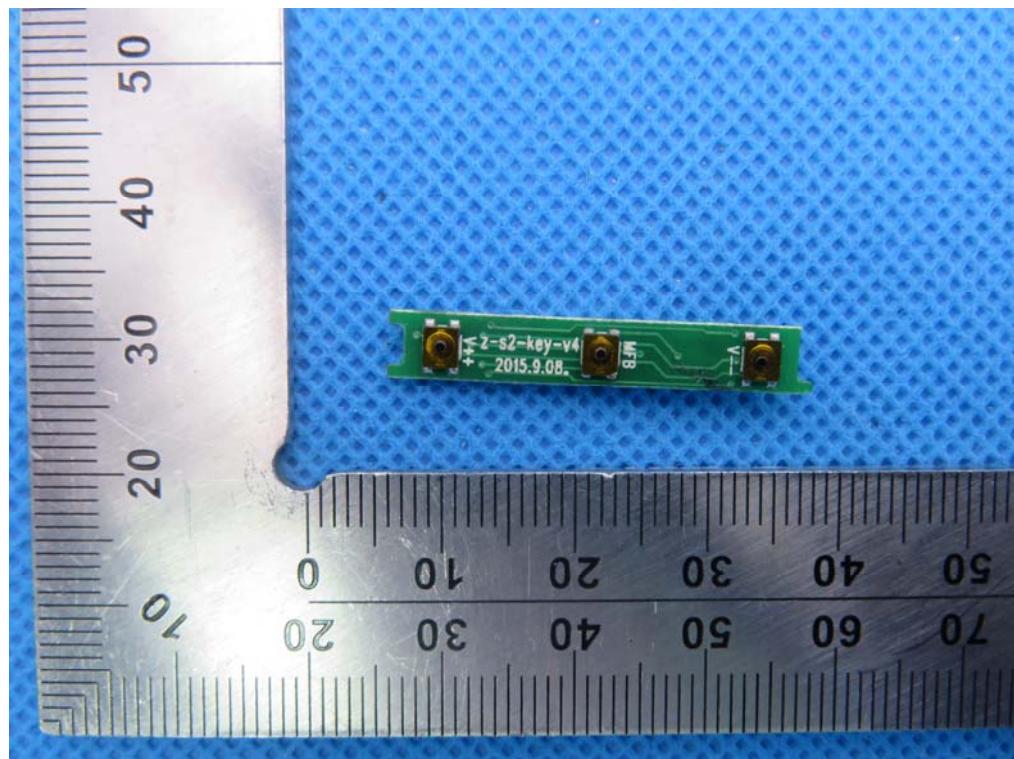

INTERNAL VIEW OF EUT-4

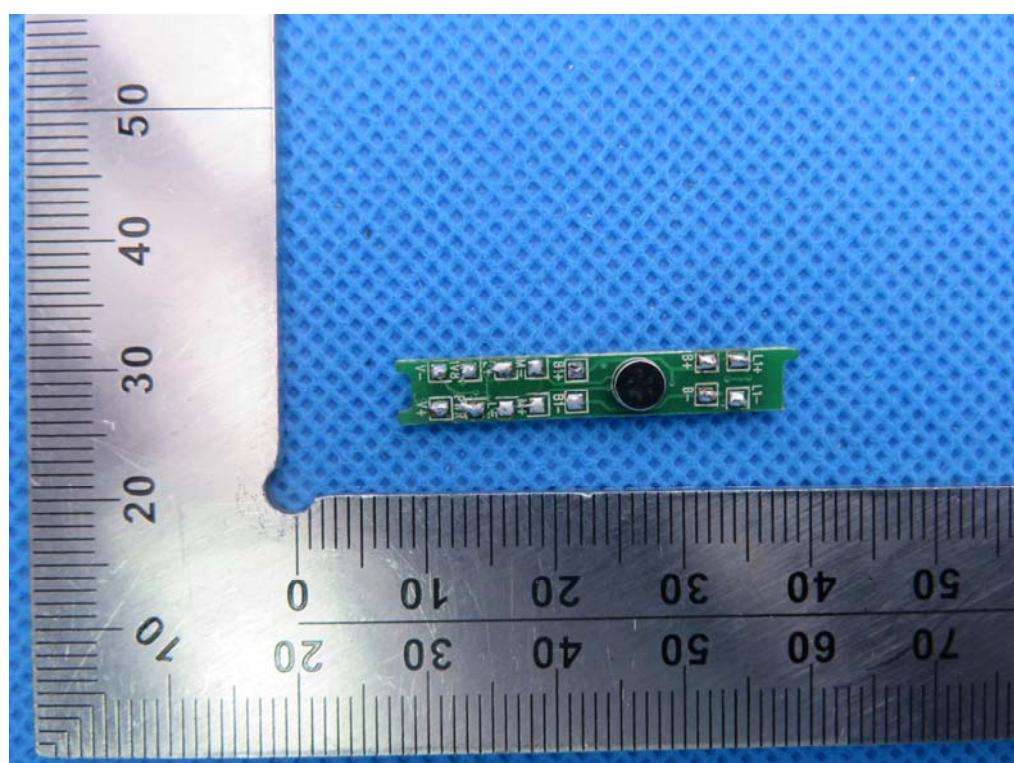

----END OF REPORT----