



# TEST REPORT

No. I21N02633-WLAN

**IDEMIA Identity and Security France**

**ID Screen US**

**Model Name: MPH-MB003C**

**with**

**Hardware Version: V01(M32N)**

**Software Version: IDEMIA\_WM28\_V01\_210803**

**FCC ID: ZBW-MPHMB003C**

**Issued Date: 2021-09-22**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: [yewu@caict.ac.cn](mailto:yewu@caict.ac.cn), website: [www.cszit.com](http://www.cszit.com)



## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT.....</b>	<b>3</b>
1.1. TEST ITEMS.....	3
1.2. TEST STANDARDS .....	3
1.3. TEST RESULT .....	3
1.4. TESTING LOCATION .....	3
1.5. PROJECT DATA .....	3
1.6. SIGNATURE .....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION .....	4
2.2. MANUFACTURER INFORMATION .....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT .....	5
3.3. INTERNAL IDENTIFICATION OF AE.....	5
3.4. GENERAL DESCRIPTION.....	5
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. TEST RESULTS .....</b>	<b>8</b>
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS .....	8
5.3. STATEMENTS.....	8
<b>6. TEST EQUIPMENTS UTILIZED .....</b>	<b>9</b>
<b>7. LABORATORY ENVIRONMENT.....</b>	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
A.0 ANTENNA REQUIREMENT .....	12
A.1 MAXIMUM OUTPUT POWER - CONDUCTED.....	13
A.2 PEAK POWER SPECTRAL DENSITY .....	14
A.3 6DB BANDWIDTH.....	21
A.4 BAND EDGES COMPLIANCE .....	28
A.5 CONDUCTED EMISSION .....	33
A.6 RADIATED EMISSION.....	40
A.7 AC POWER LINE CONDUCTED EMISSION .....	56
<b>ANNEX B: SPOT CHECK OF OUTPUT POWER .....</b>	<b>59</b>



## **1. Summary of Test Report**

### **1.1. Test Items**

Description	ID Screen US
Model Name	MPH-MB003C
Applicant's name	IDEMIA Identity and Security France
Manufacturer's Name	IDEMIA Identity and Security France

### **1.2. Test Standards**

FCC Part15-2019; ANSI C63.10-2013

### **1.3. Test Result**

**Pass**

### **1.4. Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,  
Futian District, Shenzhen, Guangdong, P. R. China

### **1.5. Project data**

Testing Start Date:	2020-04-16
Testing End Date:	2020-05-27

### **1.6. Signature**

---

Lin Kanfeng  
(Prepared this test report)

---

An Ran  
(Reviewed this test report)

---

Zhang Bojun  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: IDEMIA Identity and Security France  
Address: IDEMIA Identity and Security France 2 place Samuel de Champlain  
92400 Courbevoie FRANCE  
Contact Person: Christophe SUEUR  
E-Mail: christophe.sueur@idemia.com  
Telephone: +33130201434  
Fax: /

### **2.2. Manufacturer Information**

Company Name: IDEMIA Identity and Security France  
Address: IDEMIA Identity and Security France 2 place Samuel de Champlain  
92400 Courbevoie FRANCE  
Contact Person: Christophe SUEUR  
E-Mail: christophe.sueur@idemia.com  
Telephone: +33130201434  
Fax: /



### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	ID Screen US
Model Name	MPH-MB003C
Brand Name	IDEMIA
RF Protocol	IEEE 802.11 b/g/n-HT20/n-HT40
Operating Frequency	2412MHz~2462MHz
Number of Channels	11
Antenna Type	Integrated
Antenna Gain	-1.0dBi
Power Supply	3.85V DC by Battery
FCC ID	ZBW-MPHMB003C
Condition of EUT as received	No abnormality in appearance

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Receive Date</b>
UT07aa	354520110003828	V01 (M16N)	V01	2020-04-21
UT01aa	354520110005740	V01 (M16N)	V01	2020-04-16

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>AE ID*</b>
AE1	Battery	/
AE2	Charger	Aa01a,Aa02a
AE3	Data Cable	Ca01a,Ca02a Cb01a,Cb02a

##### AE1

Model	MPH-MB003A(178177093)
Manufacturer	Zhongshan Tianmao Battery Co., Ltd.
Capacity	5000mAh19.25Wh
Nominal Voltage	3.85V

##### AE2

Model	S008ACM0500200
Manufacturer	Ten Pao Electronics (Huizhou) Co., Ltd.

##### AE3

Model	JWUB1454-M01
Manufacturer	HUIZHOU JUWEI ELECTRONICS CO.,LTD

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment under Test (EUT) is a model of ID Screen US with integrated antenna and battery. It consists of normal options: Lithium Battery, Charger and USB Cable. Manual and specifications of the EUT were provided to fulfil the test.



No. I21N02633-WLAN

Samples undergoing test were selected by the client.

According to the customer's description, MPH-MB003C is a variant product of MPH-MB003A/MPH-MB003B. All results were from the initial model. The initial model report number is I20N00956-WLAN.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



## 5. Test Results

### 5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

### 5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Conducted Emission	15.247 (d)	P
6	Radiated Emission	15.247, 15.205, 15.209	P
7	AC Power line Conducted	15.207	P

See **ANNEX A** for details.

### 5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.





## 6. Test Equipments Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2021-12-30	1 year
2	Power Sensor	U2021XA	MY55430013	Agilent	2022-01-13	1 year
3	Data Acquisition	U2531A	TW55443507	Agilent	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Calibration Period
1	LISN	ESH2-Z5	100196	R&S	2022-01-01	1 year
2	Test Receiver	ESCI	100701	R&S	2022-08-04	1 year
3	Loop Antenna	HLA6120	35779	TESEQ	2022-05-01	3 year
4	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2024-02-15	3 year
5	Horn Antenna	3117	00066585	ETS-Lindgren	2022-03-04	3 year
6	Test Receiver	ESR7	101675	R&S	2022-07-16	1 year
7	Spectrum Analyzer	FSP 40	100378	R&S	2021-12-11	1 year
8	Chamber	FACT5-2.0	4166	ETS-Lindgren	2024-05-11	3 year
9	Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2024-01-13	3 year
10	Antenna	QSH-SL-2 6-40-K-20	17014	Q-par	2024-01-09	3 year

### Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

### Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

## 7. Laboratory Environment

### Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

### Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

### Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz



## 8. Measurement Uncertainty

Test Name	Uncertainty ( $k=2$ )	
1. RF Output Power - Conducted	1.32dB	
2. Power Spectral Density - Conducted	2.32dB	
3. Occupied channel bandwidth - Conducted	66Hz	
4. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f \leq 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f \leq 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f \leq 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f \leq 30\text{MHz}$	1.70dB
	$30\text{MHz} \leq f \leq 1\text{GHz}$	4.90dB
	$1\text{GHz} \leq f \leq 18\text{GHz}$	4.60dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	4.10dB
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	3.00dB



## **ANNEX A: Detailed Test Results**

### **A.0 Antenna requirement**

#### **Measurement Limit:**

<b>Standard</b>	<b>Requirement</b>
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -1.0 dBi.  
The RF transmitter uses an integrate antenna without connector.**



### A.1 Maximum Output Power - Conducted

**Measurement of method :See ANSI C63.10-2013-Clause 11.9.2.3.2**

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**Measurement Results:**

Mode	Channel	Frequency (MHz)	Average Conducted Power (dBm)	Conclusion
802.11b	CH 1	2412	16.20	<b>P</b>
	CH 6	2437	16.89	<b>P</b>
	CH 11	2462	16.25	<b>P</b>
802.11g	CH 1	2412	13.42	<b>P</b>
	CH 6	2437	13.83	<b>P</b>
	CH 11	2462	13.10	<b>P</b>
802.11n HT20	CH 1	2412	13.07	<b>P</b>
	CH 6	2437	13.27	<b>P</b>
	CH 11	2462	11.60	<b>P</b>
802.11n HT40	CH 3	2422	12.84	<b>P</b>
	CH 6	2437	13.17	<b>P</b>
	CH 9	2452	11.69	<b>P</b>

**Note:**

Worst-case data rates as provided by the client were: 1Mbps (802.11b), 6Mbps (802.11g), MCS0 (802.11n). is selected as the worst condition.

The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.



### A.2 Peak Power Spectral Density

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**Measurement Results:**

Mode	Channel	Frequency (MHz)	Test Results (dBm)		Conclusion
802.11b	CH 1	2412	Fig.1	-6.35	P
	CH 6	2437	Fig.2	-5.44	P
	CH 11	2462	Fig.3	-6.07	P
802.11g	CH 1	2412	Fig.4	-10.80	P
	CH 6	2437	Fig.5	-9.45	P
	CH 11	2462	Fig.6	-10.53	P
802.11n HT20	CH 1	2412	Fig.7	-12.34	P
	CH 6	2437	Fig.8	-11.26	P
	CH 11	2462	Fig.9	-13.88	P
802.11n HT40	CH 3	2422	Fig.10	-13.36	P
	CH 6	2437	Fig.11	-13.88	P
	CH 9	2452	Fig.12	-17.24	P

See below for test graphs.

**Conclusion: PASS**

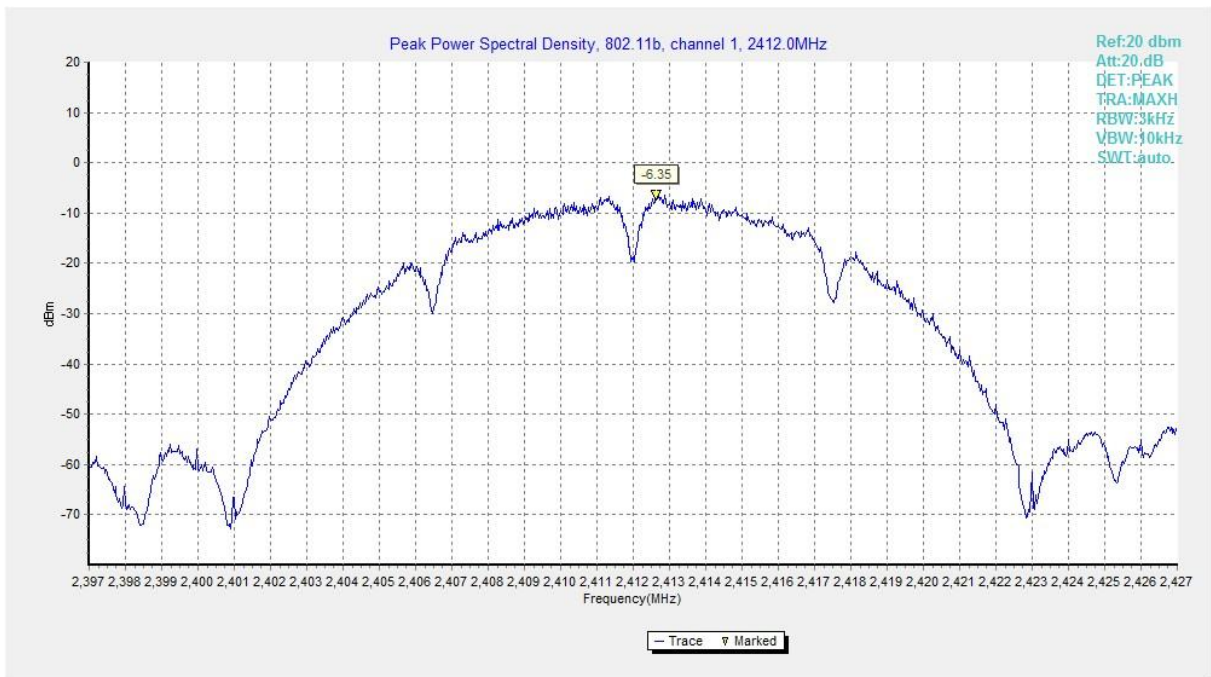


Fig.1 Power Spectral Density (802.11b, CH 1)

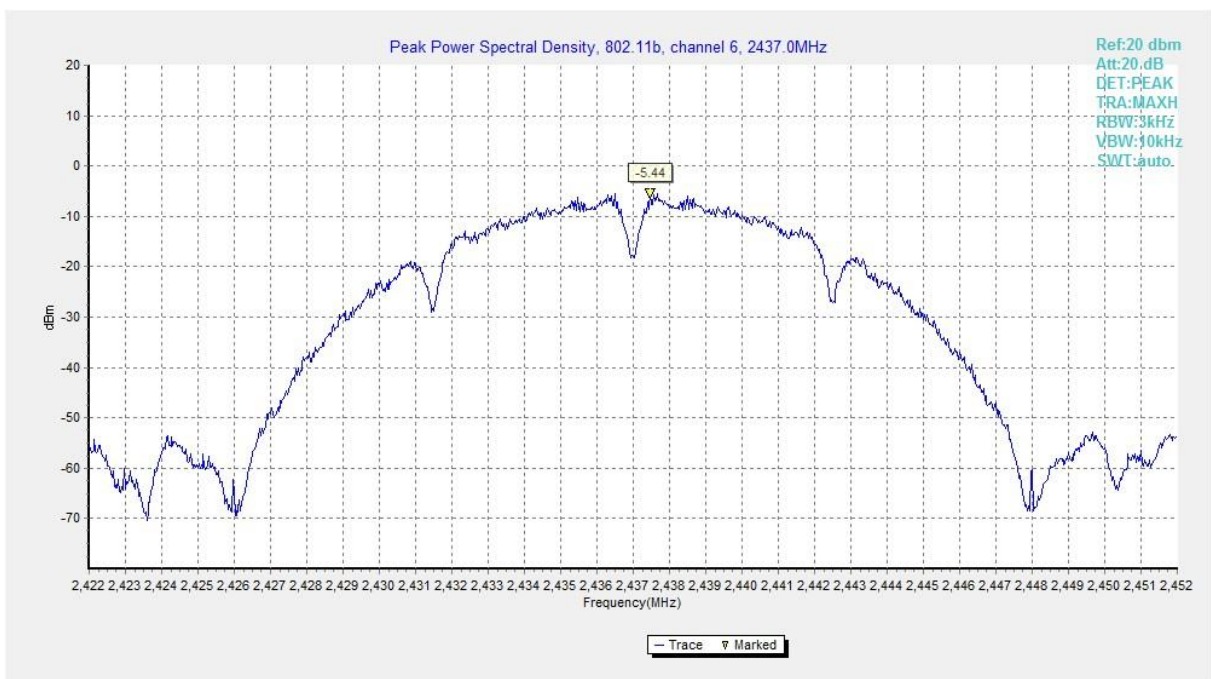


Fig.2 Power Spectral Density (802.11b, CH 6)

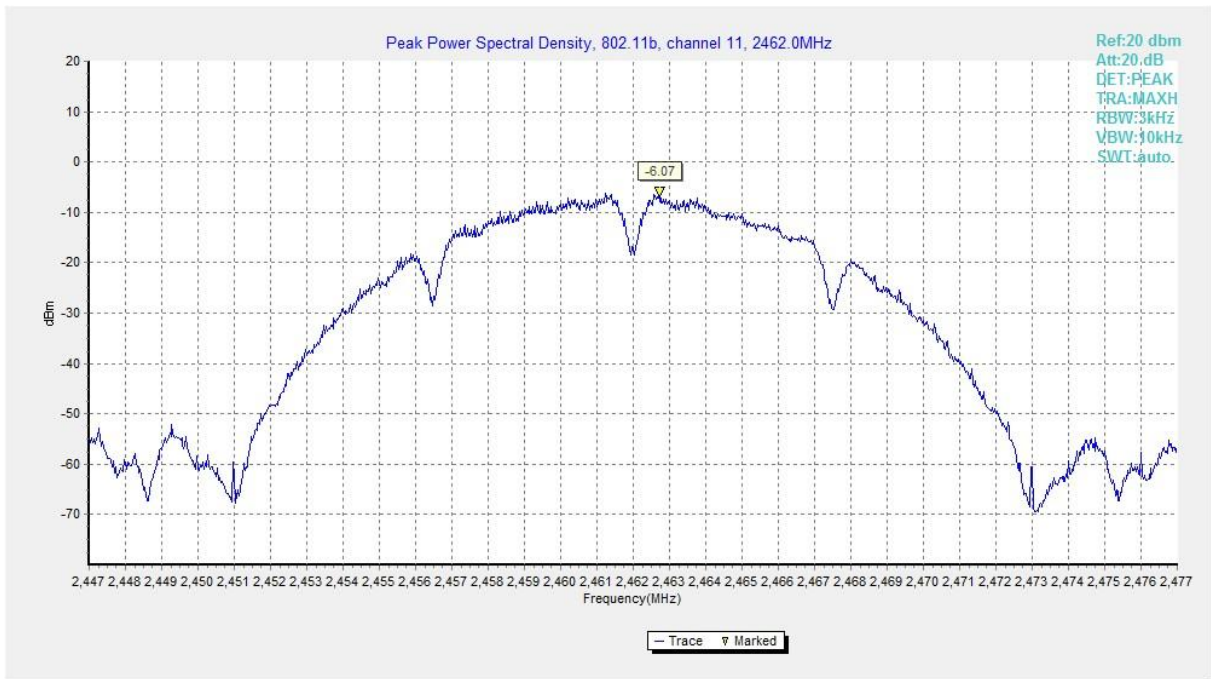


Fig.3 Power Spectral Density (802.11b, CH 11)

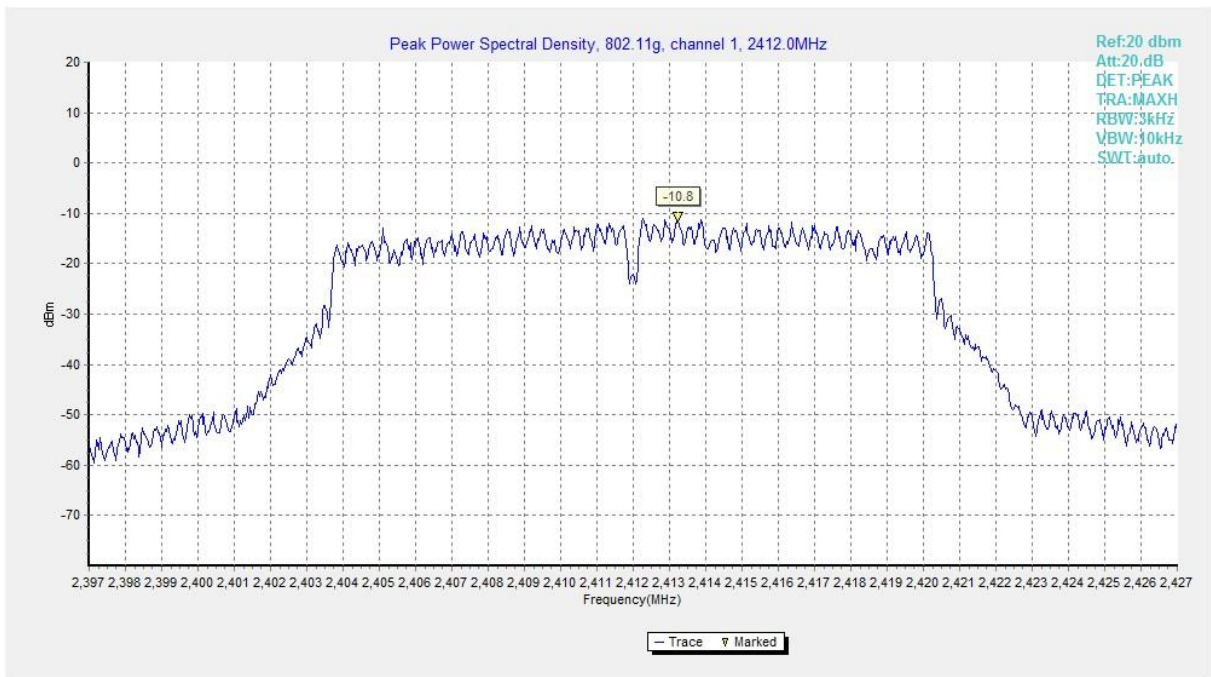


Fig.4 Power Spectral Density (802.11g, CH 1)



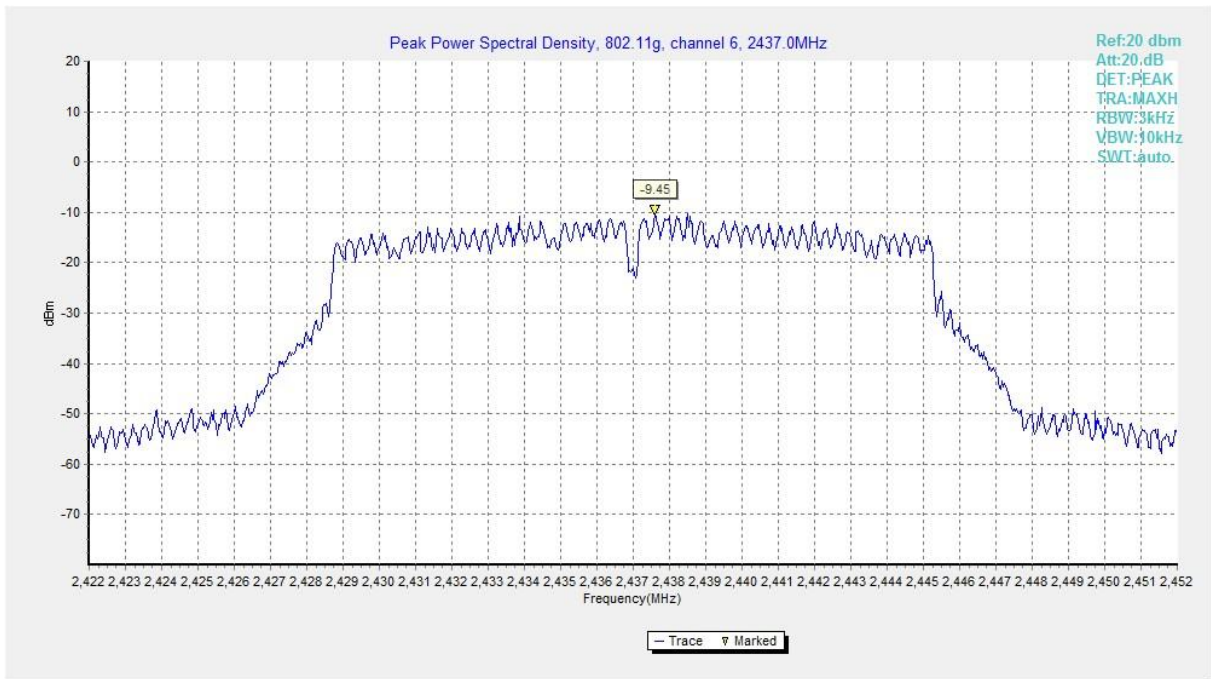


Fig.5 Power Spectral Density (802.11g, CH 6)

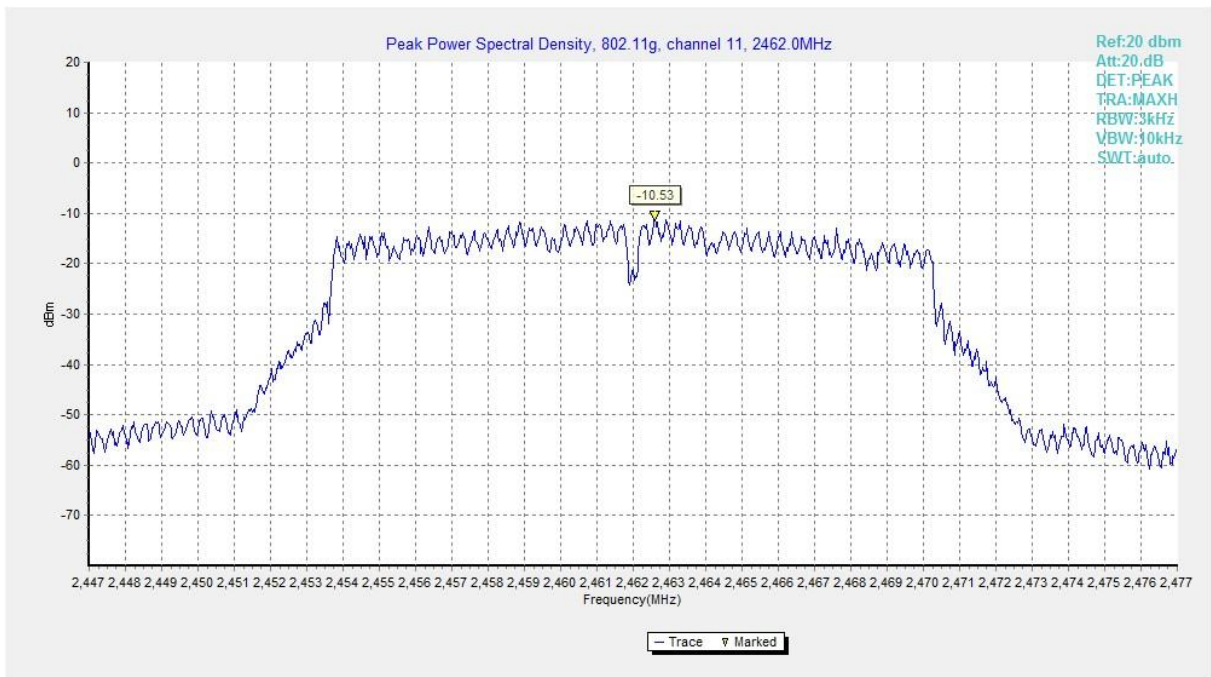


Fig.6 Power Spectral Density (802.11g, CH 11)

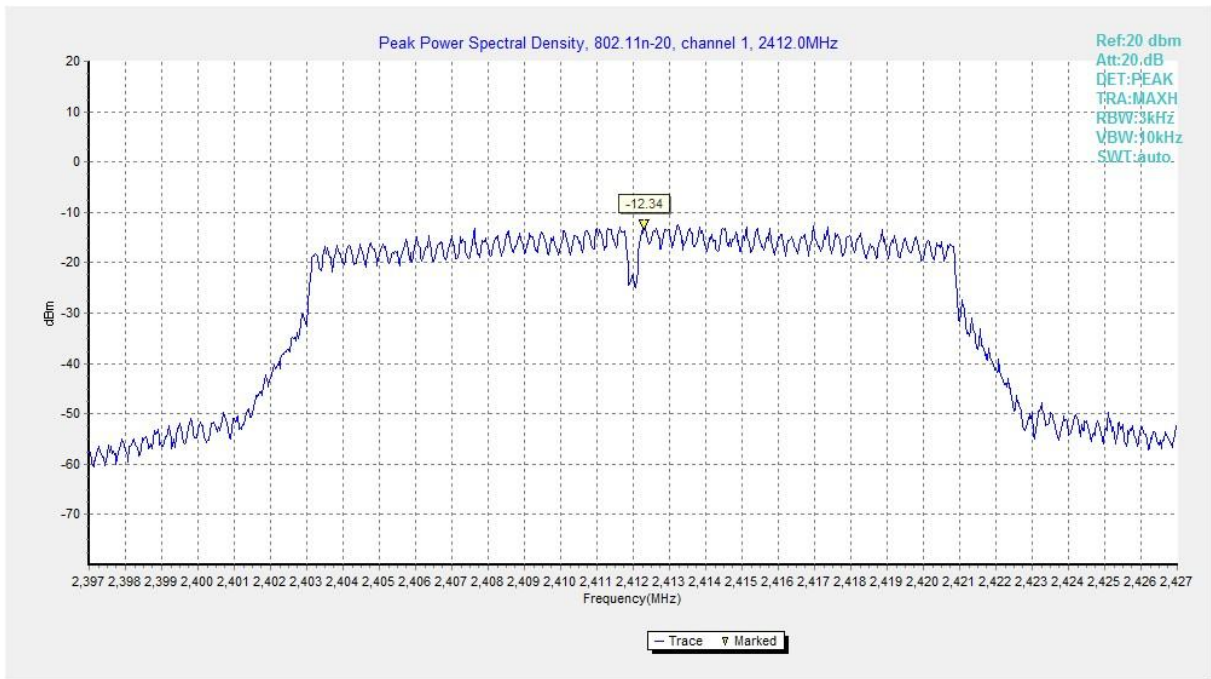


Fig.7 Power Spectral Density (802.11n HT20, CH 1)



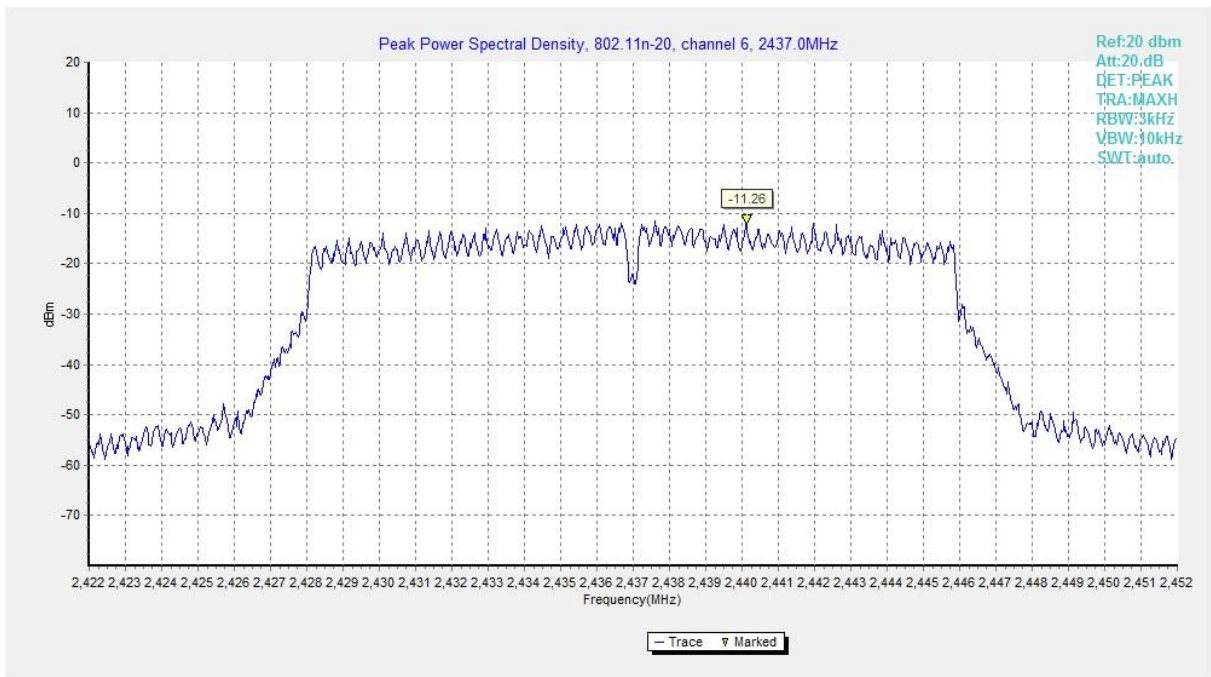


Fig.8 Power Spectral Density (802.11n HT20, CH 6)

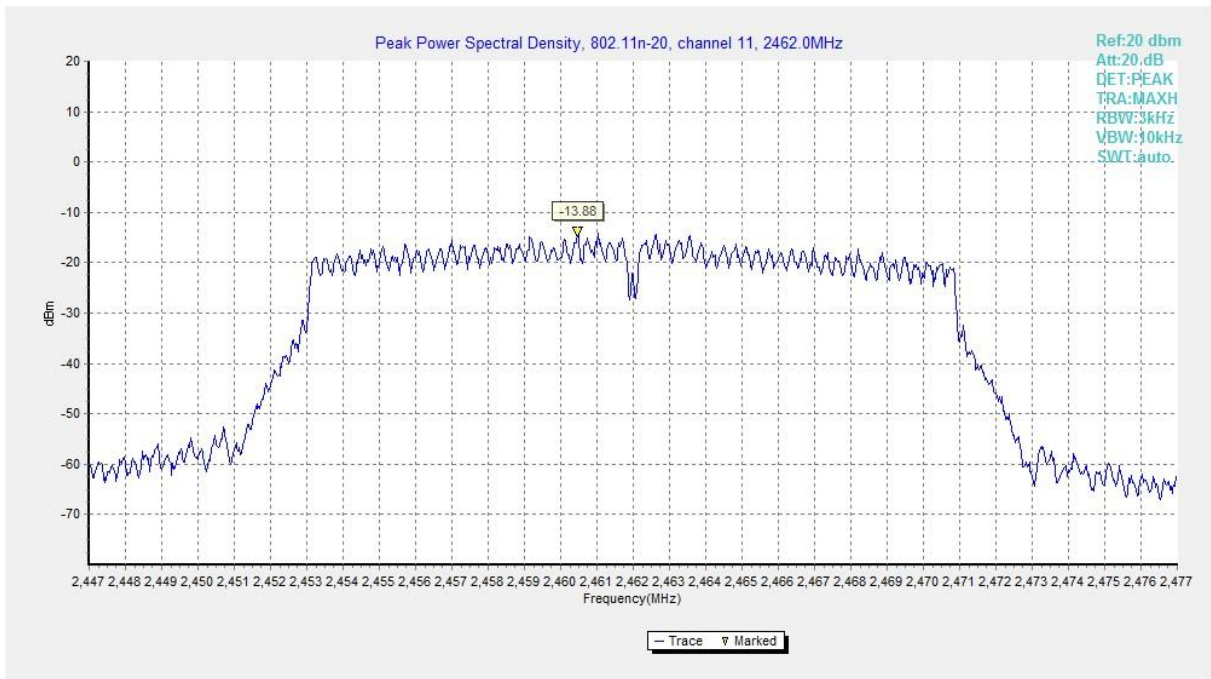

**Fig.9 Power Spectral Density (802.11n HT20, CH 11)**

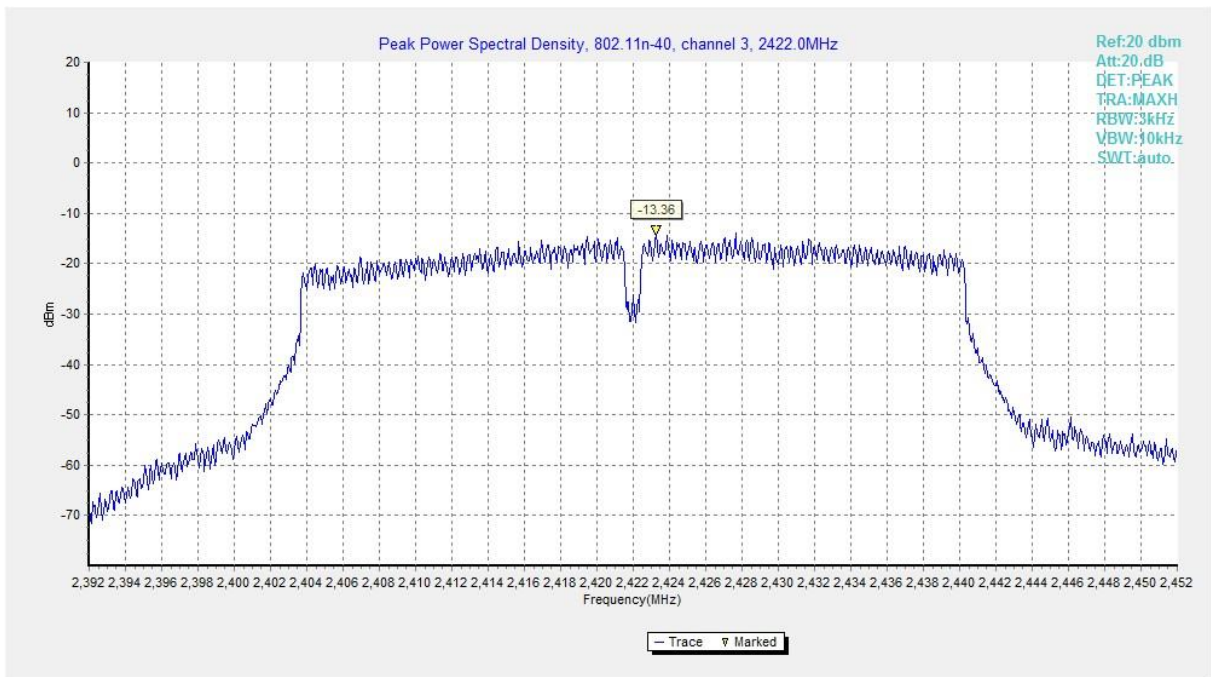

**Fig.10 Power Spectral Density (802.11n HT40, CH 3)**

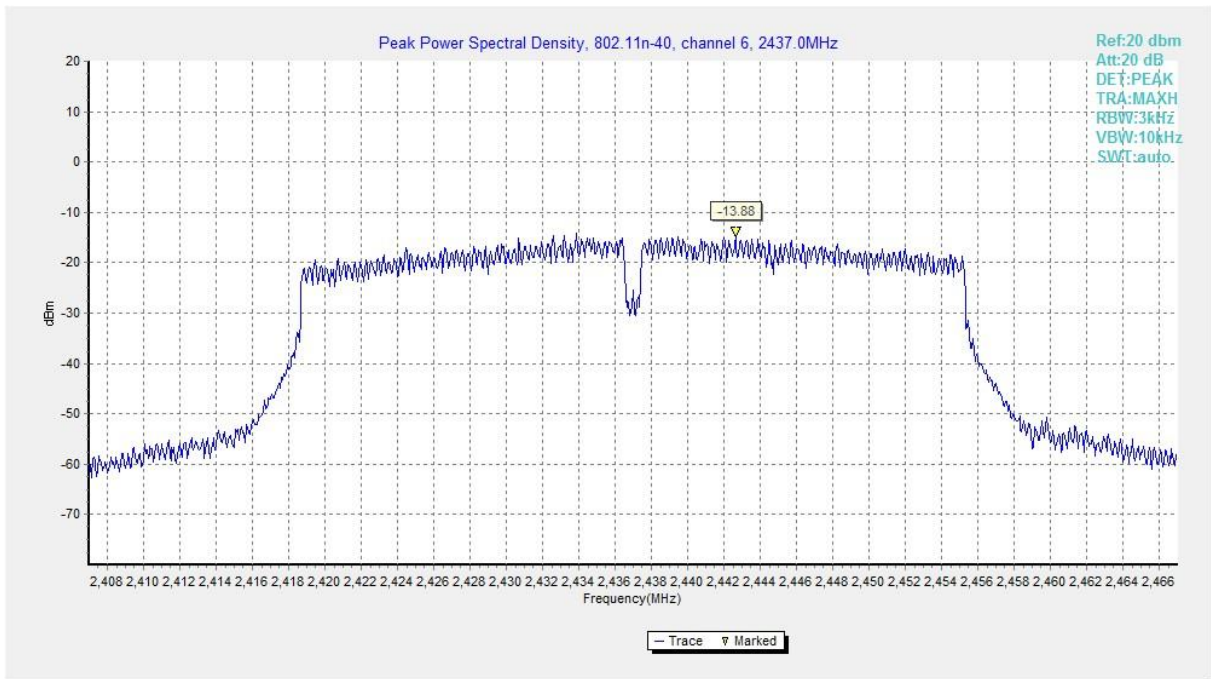


Fig.11 Power Spectral Density (802.11n HT40, CH 6)

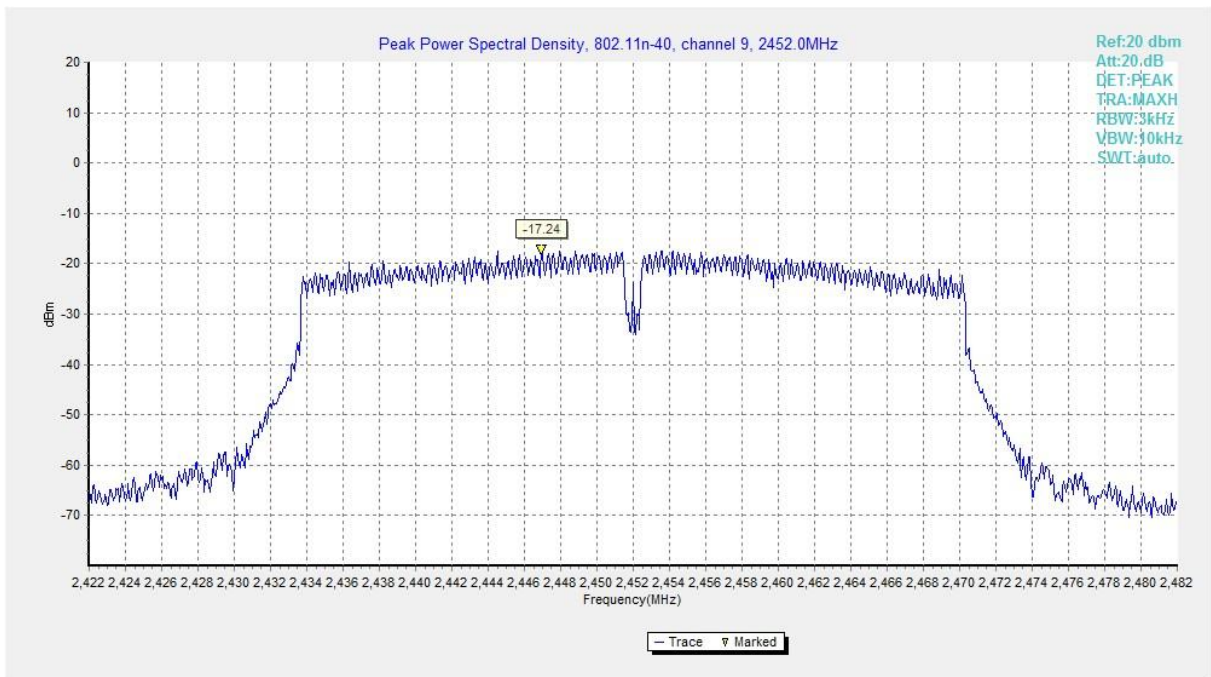


Fig.12 Power Spectral Density (802.11n HT40, CH 9)



**A.3 6dB Bandwidth**

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**Measurement Result:**

Mode	Channel	Frequency (MHz)	Test Results ( kHz)		Conclusion
			Fig.	Value	
802.11b	CH 1	2412	Fig.13	8050	<b>P</b>
	CH 6	2437	Fig.14	8100	<b>P</b>
	CH 11	2462	Fig.15	8050	<b>P</b>
802.11g	CH 1	2412	Fig.16	15450	<b>P</b>
	CH 6	2437	Fig.17	15100	<b>P</b>
	CH 11	2462	Fig.18	15100	<b>P</b>
802.11n HT20	CH 1	2412	Fig.19	15450	<b>P</b>
	CH 6	2437	Fig.20	15100	<b>P</b>
	CH 11	2462	Fig.21	15150	<b>P</b>
802.11n HT40	CH 3	2422	Fig.22	33840	<b>P</b>
	CH 6	2437	Fig.23	35120	<b>P</b>
	CH 9	2452	Fig.24	35040	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

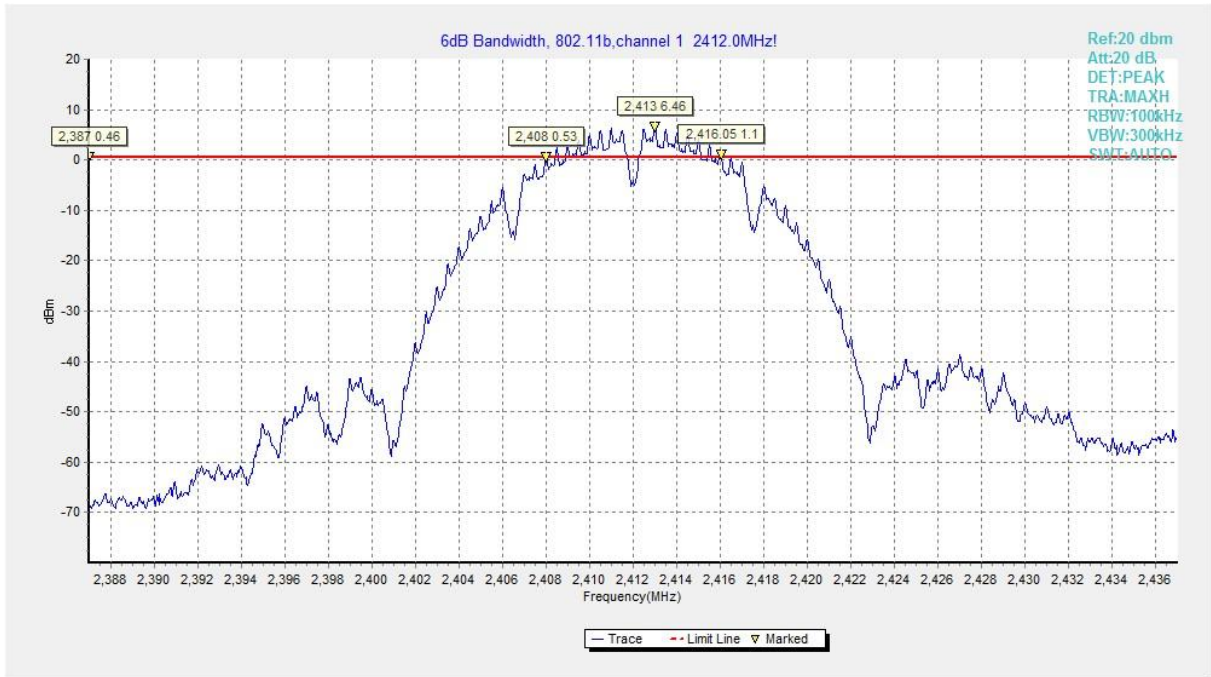


Fig.13 6dB Bandwidth (802.11b, CH 1)

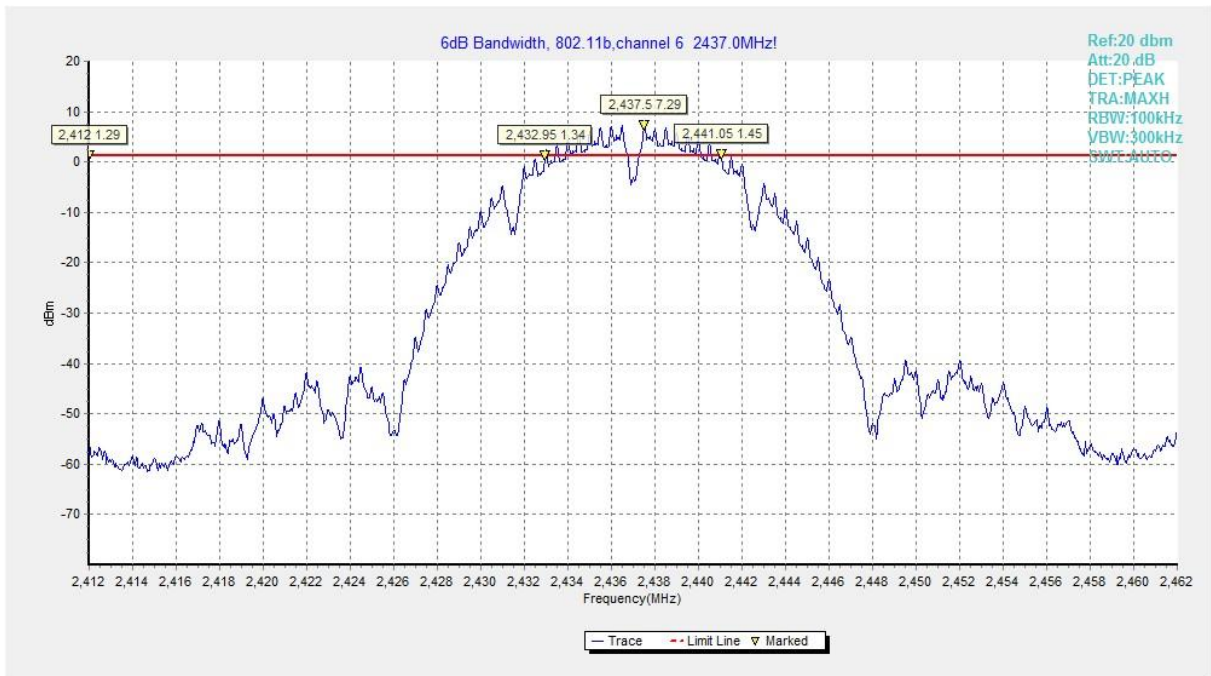


Fig.14 6dB Bandwidth (802.11b, CH 6)

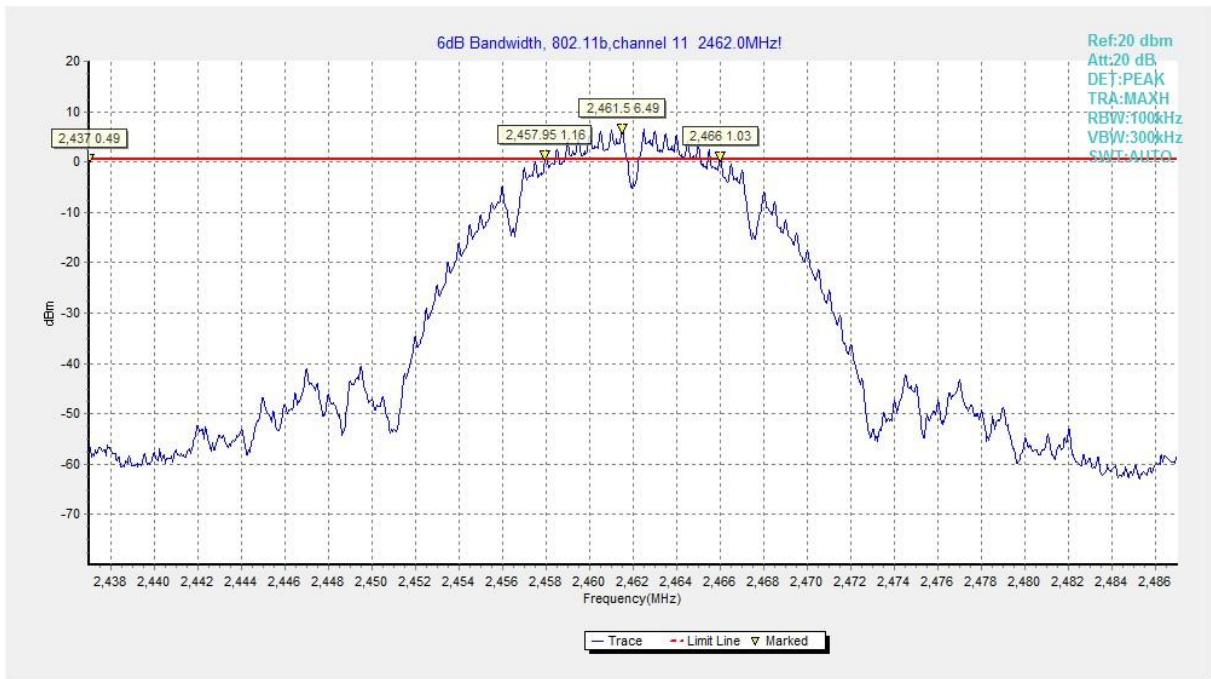


Fig.15 6dB Bandwidth (802.11b, CH 11)

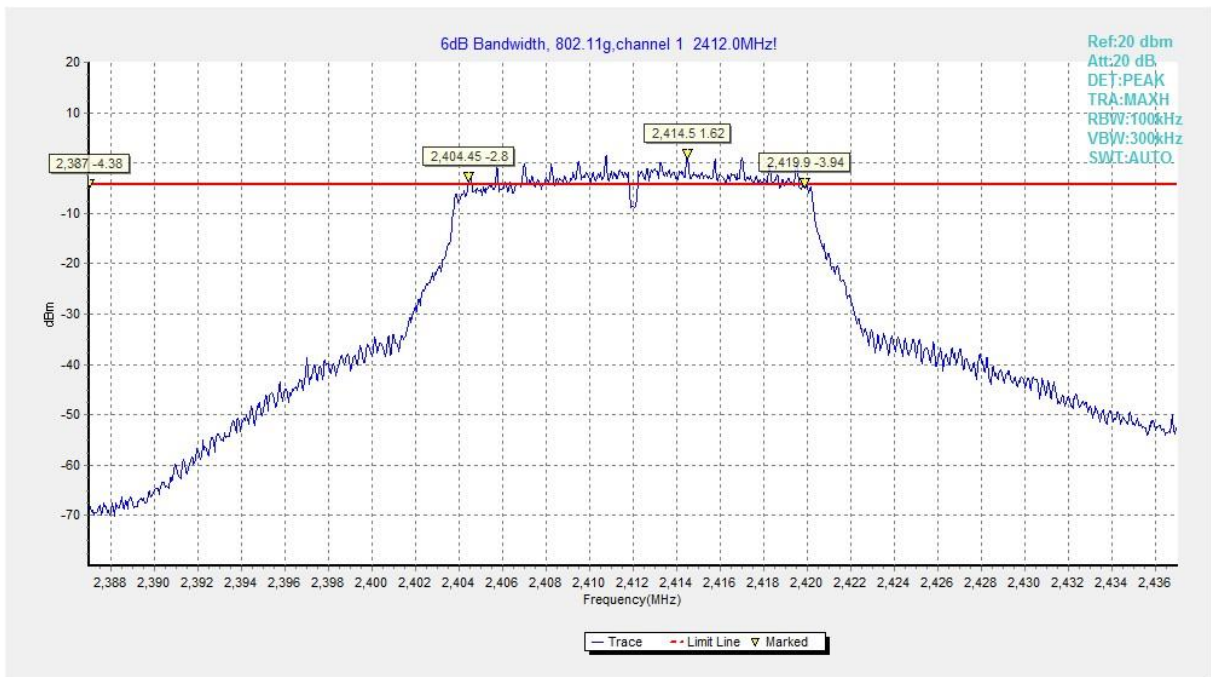


Fig.16 6dB Bandwidth (802.11g, CH 1)

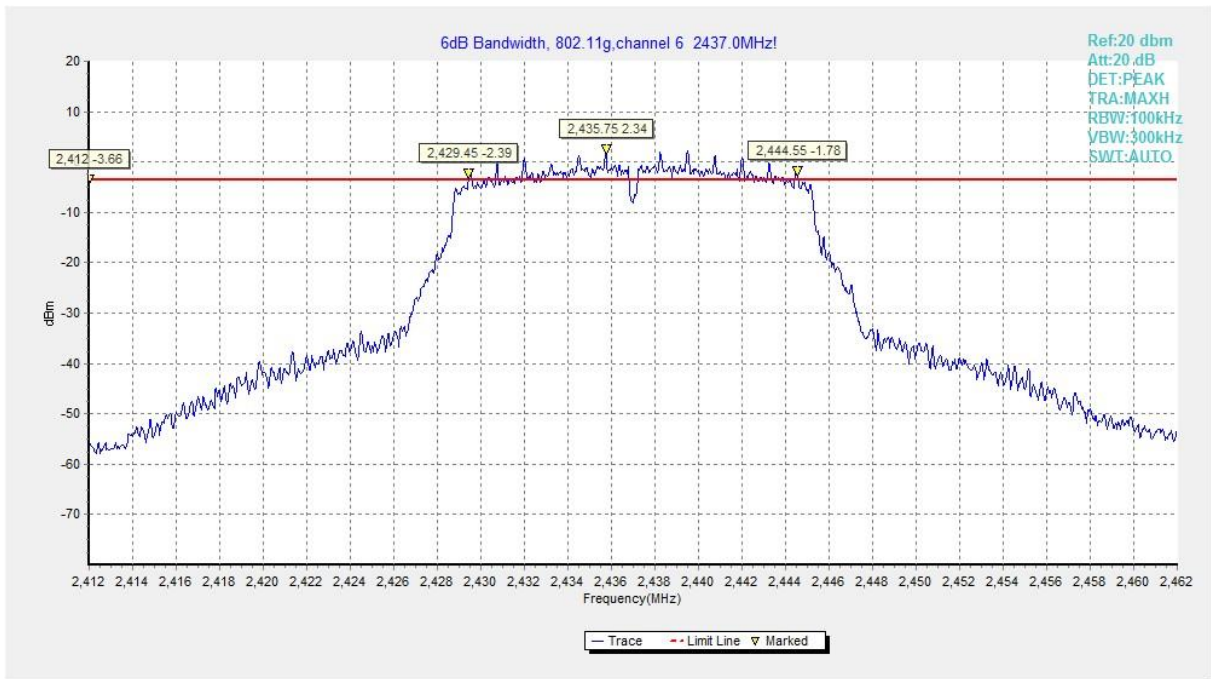


Fig.17 6dB Bandwidth (802.11g, CH 6)

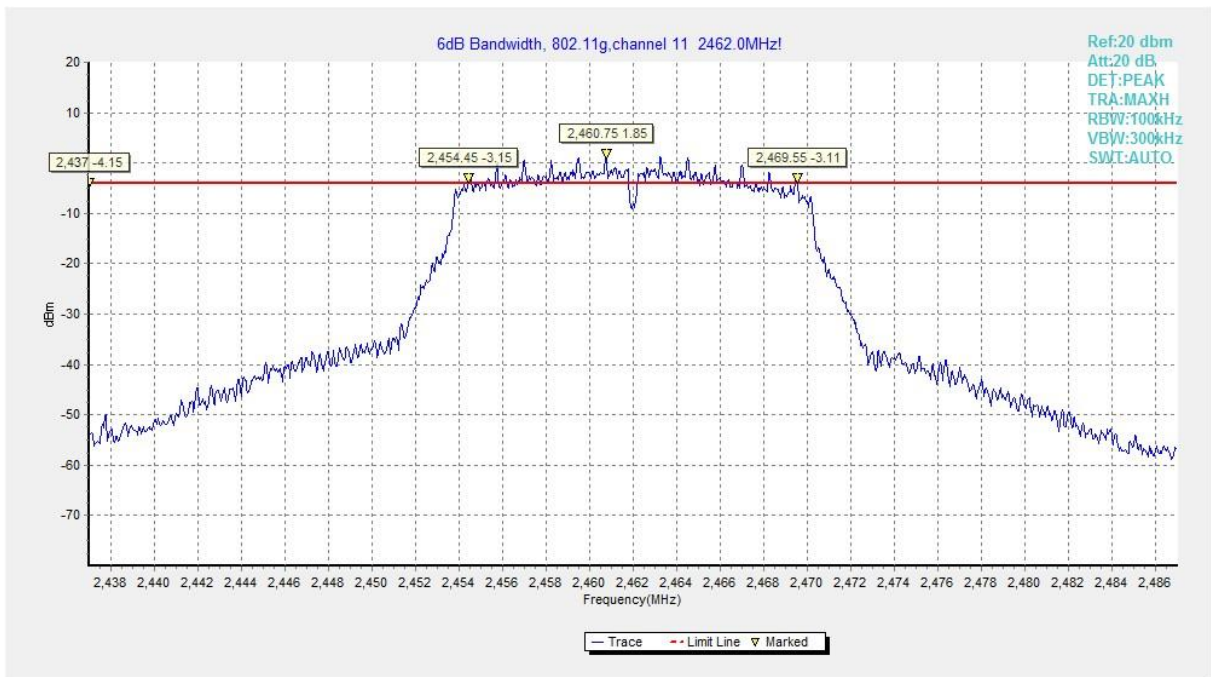


Fig.18 6dB Bandwidth (802.11g, CH 11)



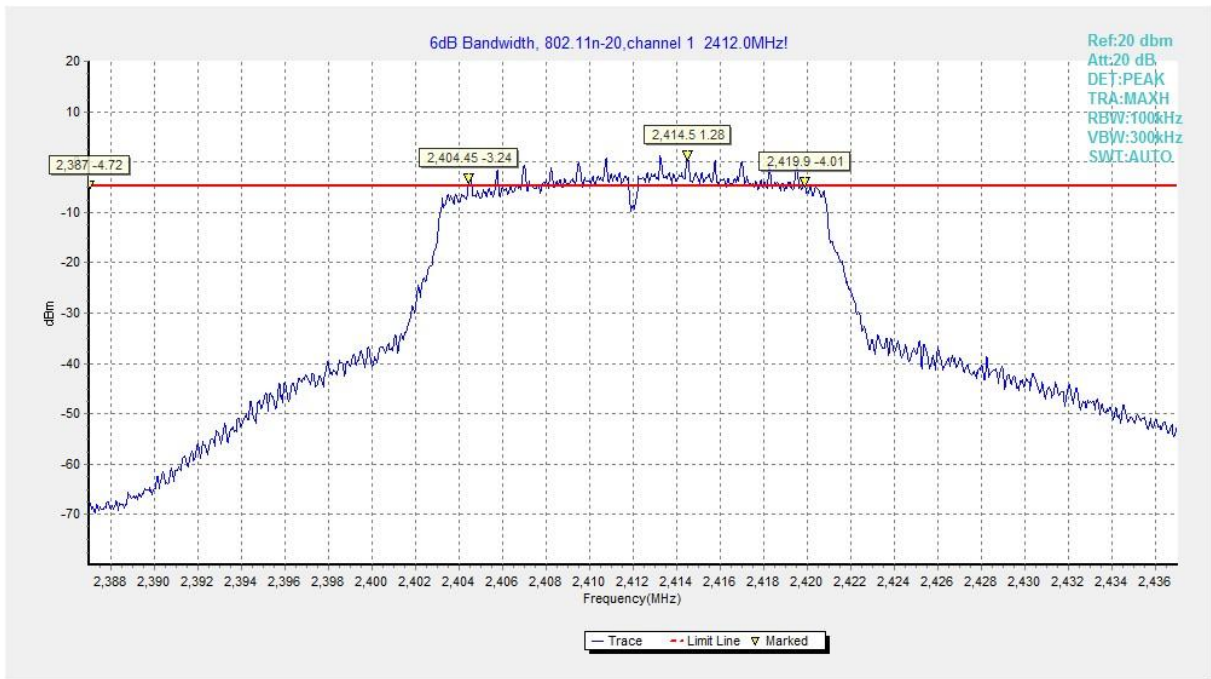


Fig.19 6dB Bandwidth (802.11n HT20, CH 1)

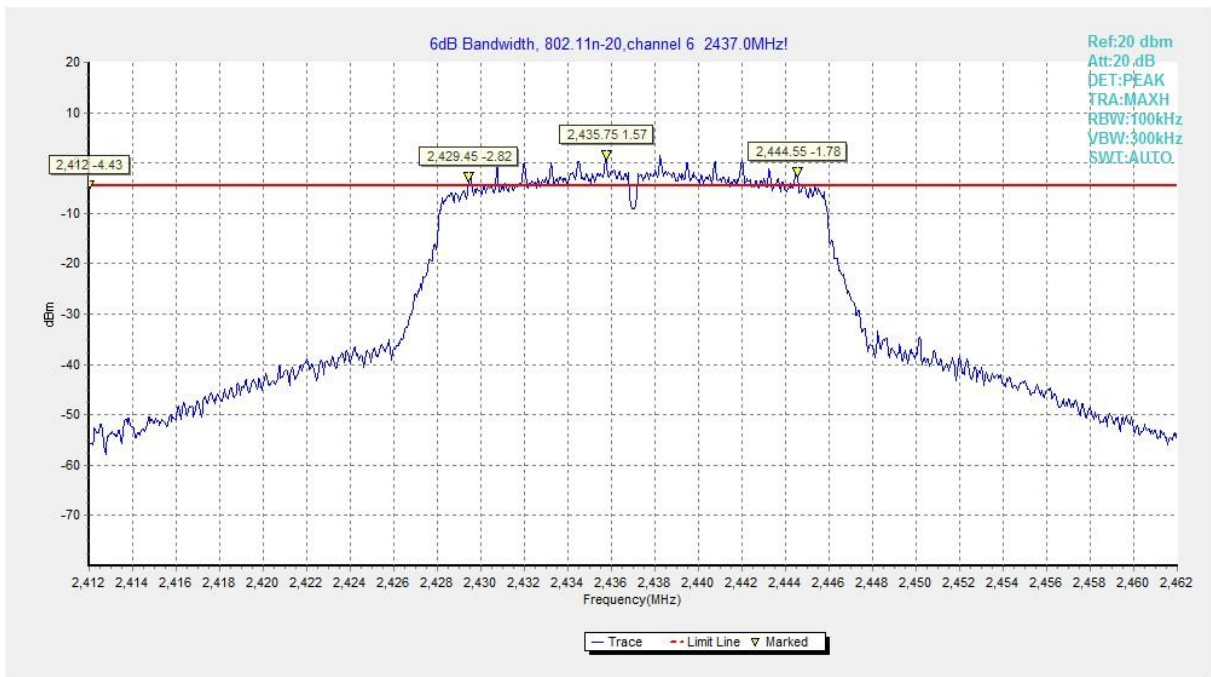


Fig.20 6dB Bandwidth (802.11n HT20, CH 6)

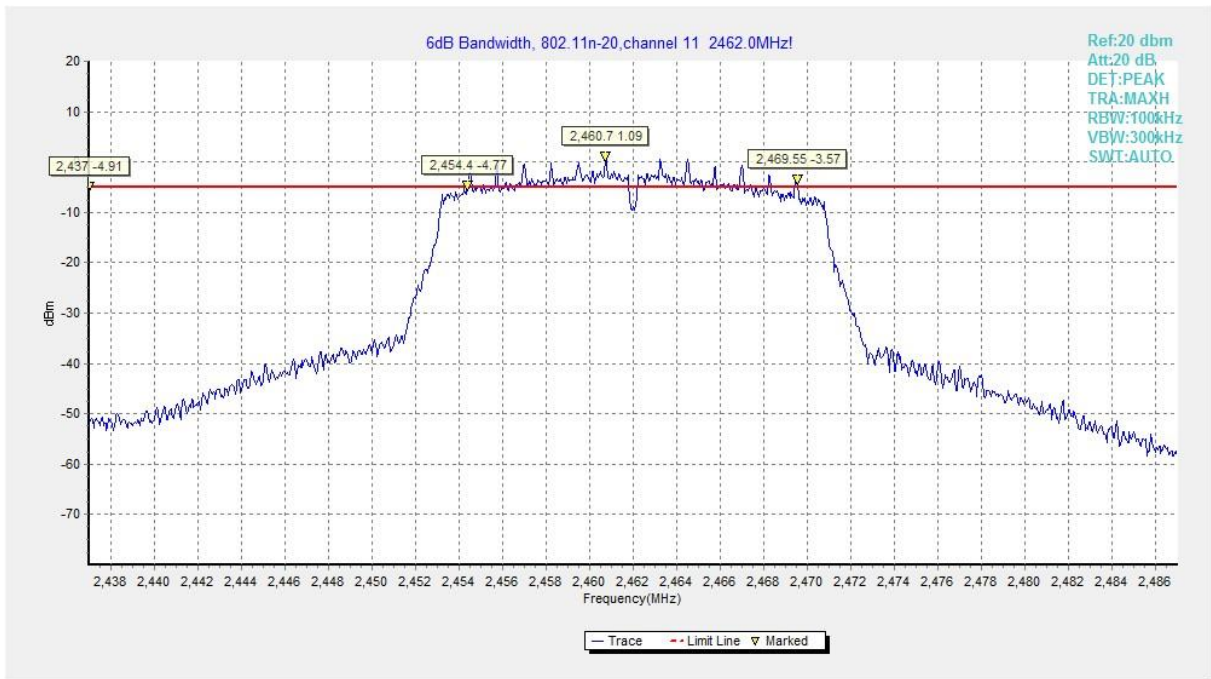


Fig.21 6dB Bandwidth (802.11n HT20, CH 11)

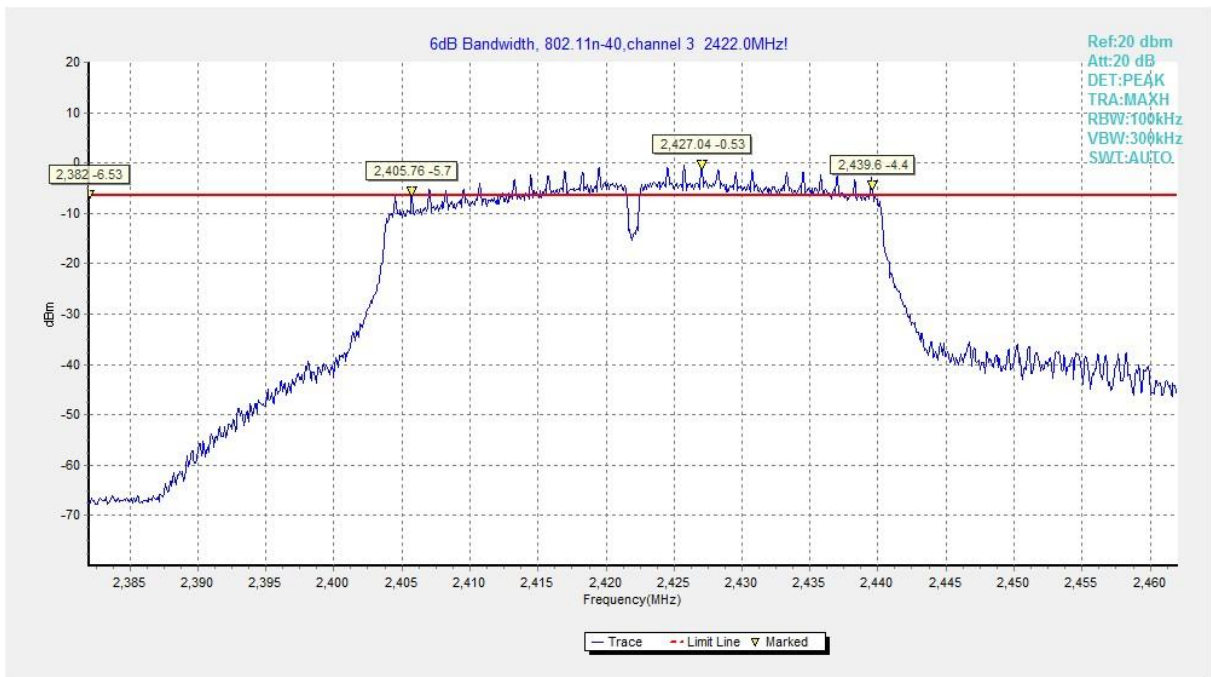


Fig.22 6dB Bandwidth (802.11n HT40, CH 3)

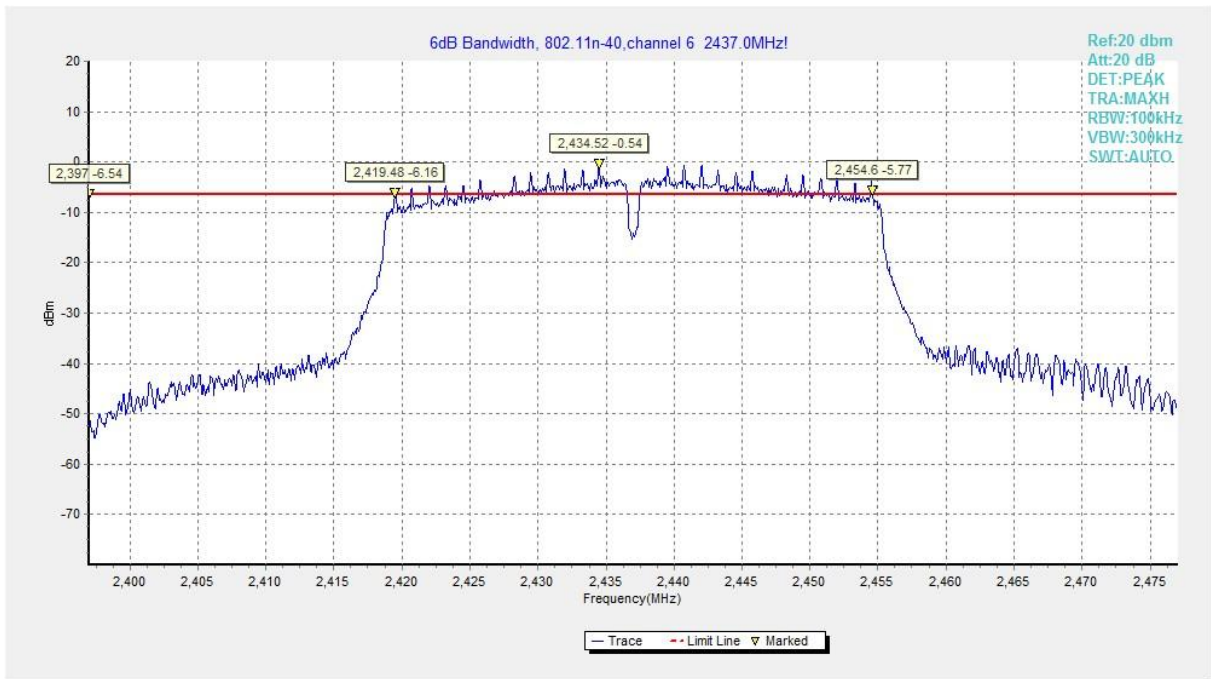


Fig.23 6dB Bandwidth (802.11n HT40, CH 6)

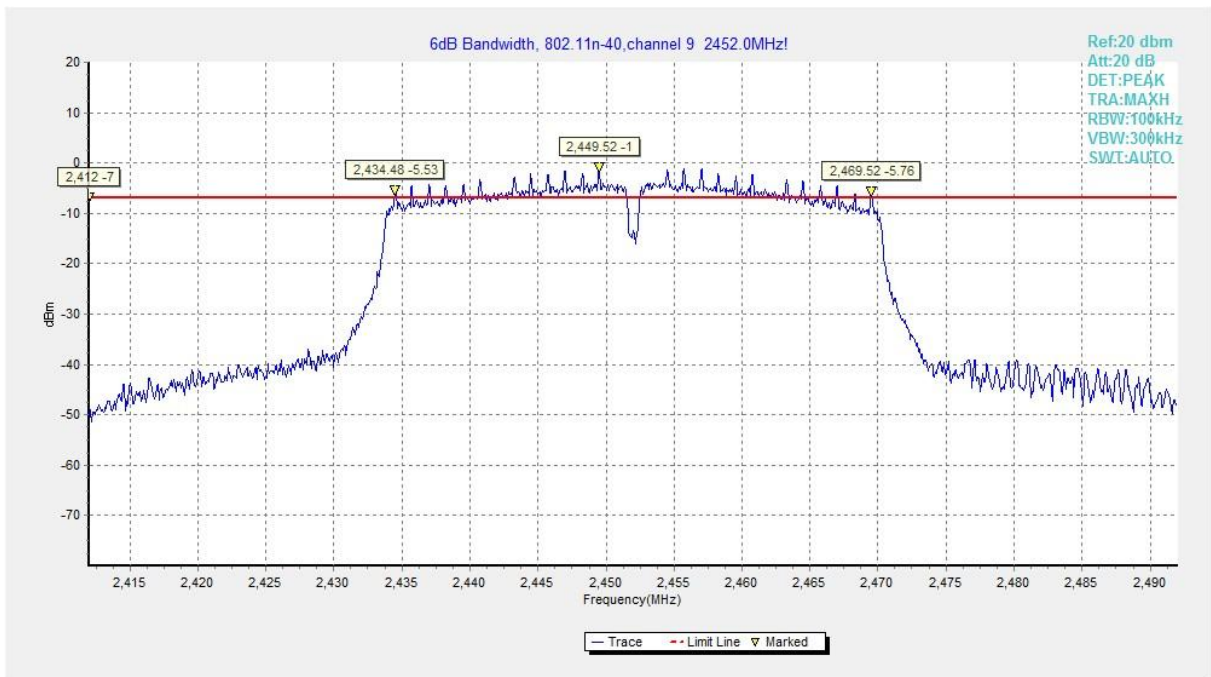


Fig.24 6dB Bandwidth (802.11n HT40, CH 9)



### A.4 Band Edges Compliance

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 30

**Measurement Result:**

Mode	Channel	Frequency (MHz)	Test Results (dBc)		Conclusion
			Fig.	Value	
802.11b	CH1	2412	Fig.25	51.93	<b>P</b>
	CH11	2462	Fig.26	64.93	<b>P</b>
802.11g	CH1	2412	Fig.27	38.37	<b>P</b>
	CH11	2462	Fig.28	55.19	<b>P</b>
802.11n HT20	CH1	2412	Fig.29	36.91	<b>P</b>
	CH11	2462	Fig.30	56.60	<b>P</b>
802.11n HT40	CH3	2422	Fig.31	40.87	<b>P</b>
	CH9	2452	Fig.32	50.76	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

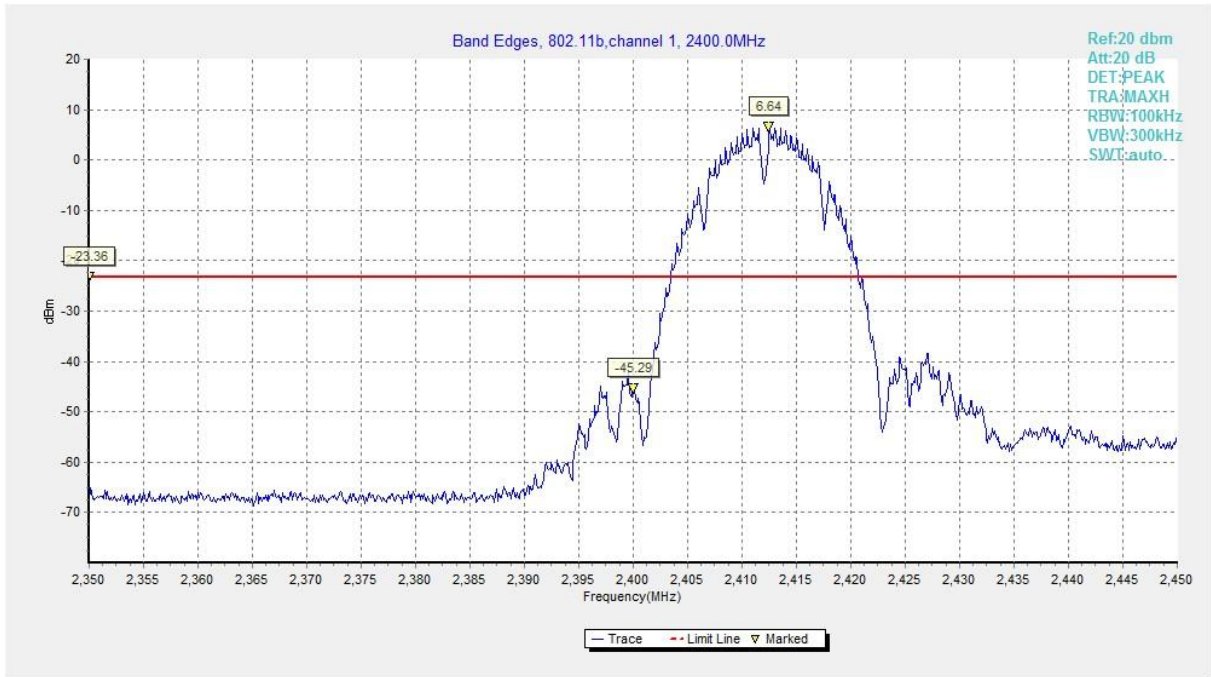


Fig.25 Band Edges (802.11b, CH 1)



Fig.26 Band Edges (802.11b, CH 11)

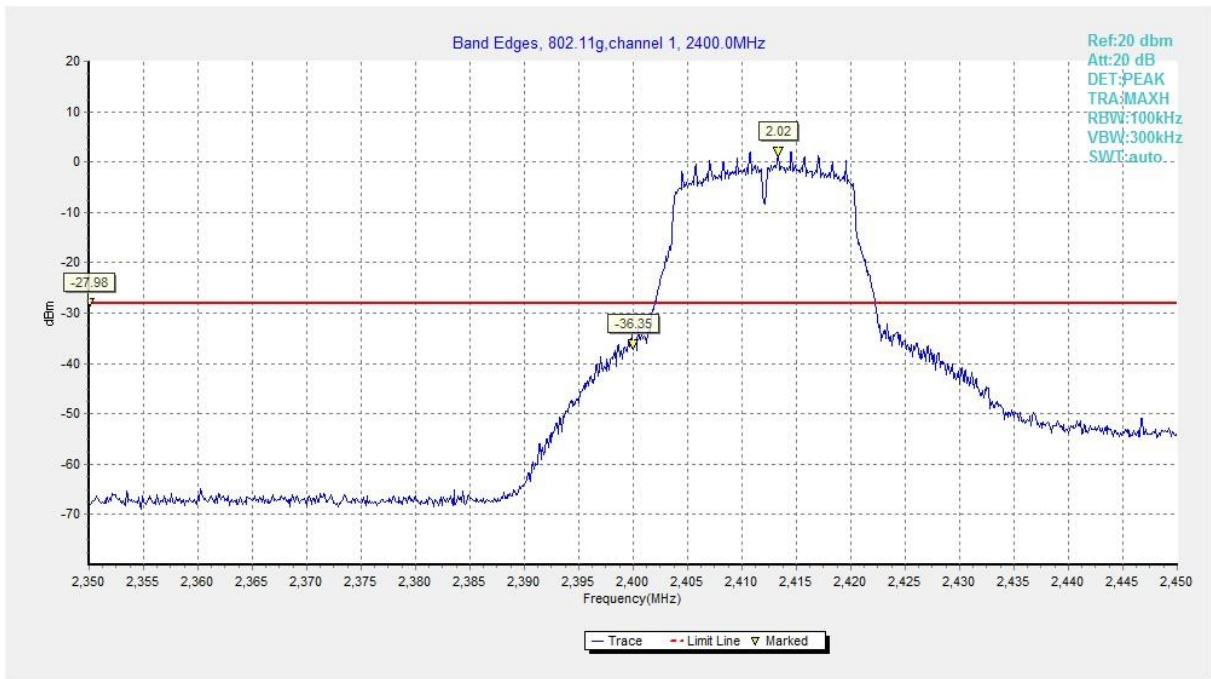


Fig.27 Band Edges (802.11g, CH 1)

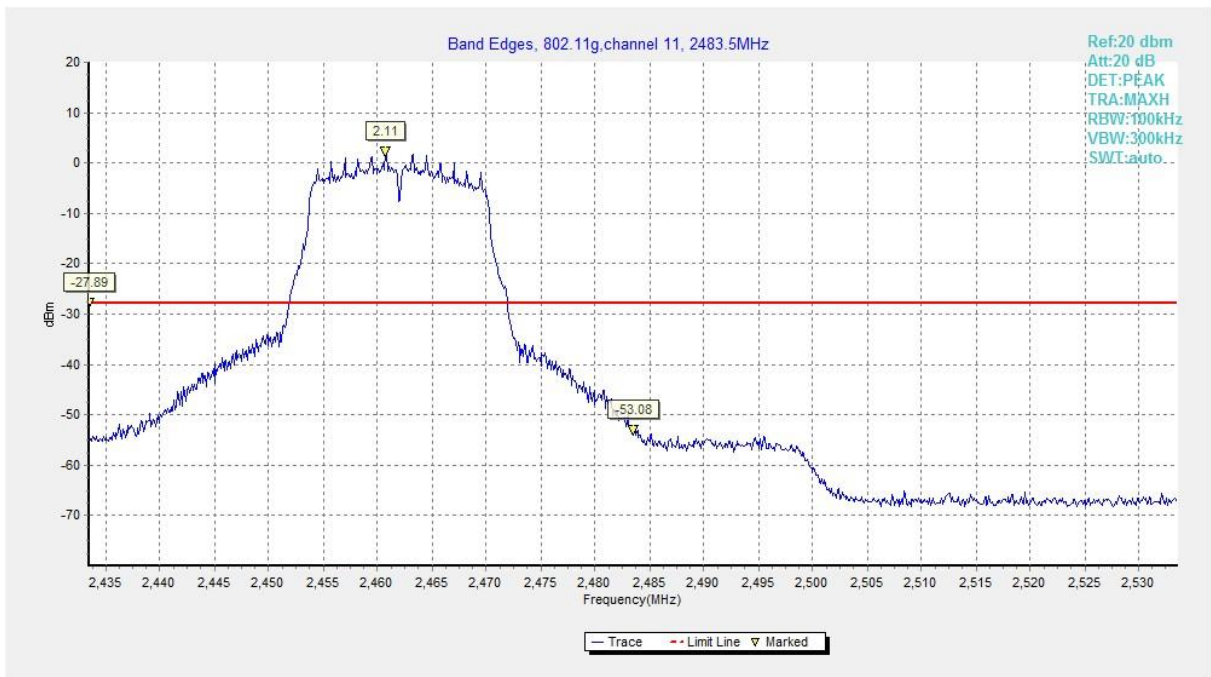


Fig.28 Band Edges (802.11g, CH 11)



Fig.29 Band Edges (802.11n HT20, CH 1)



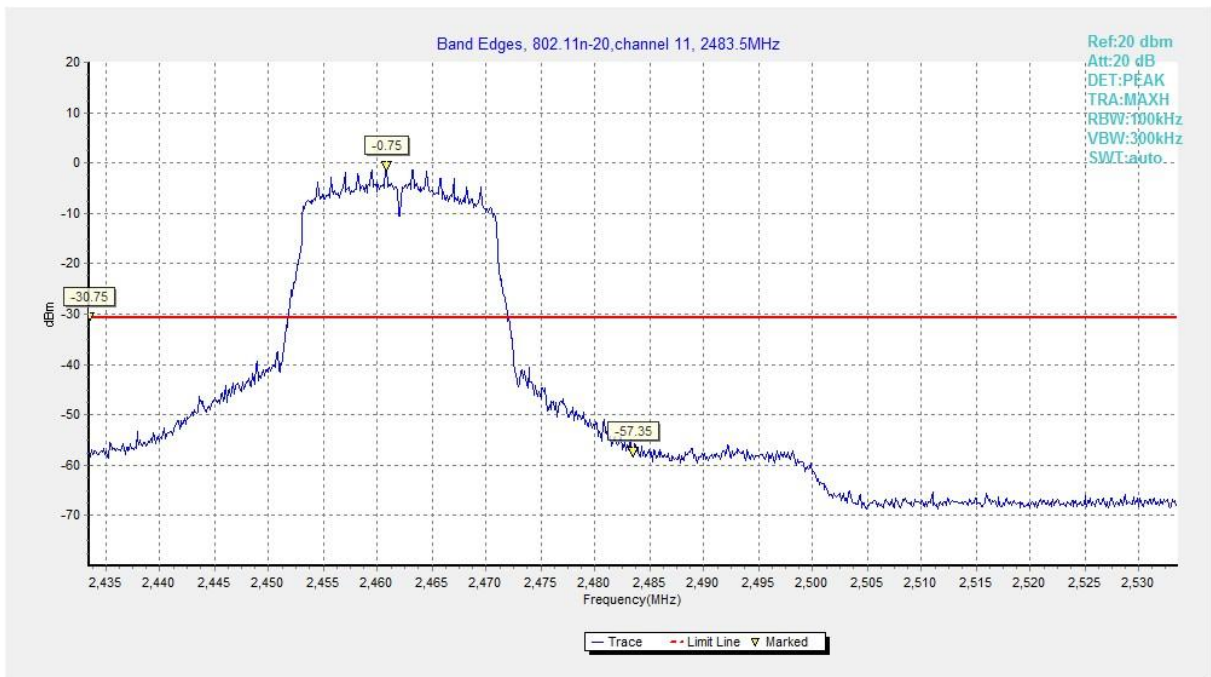


Fig.30 Band Edges (802.11n HT20, CH 11)

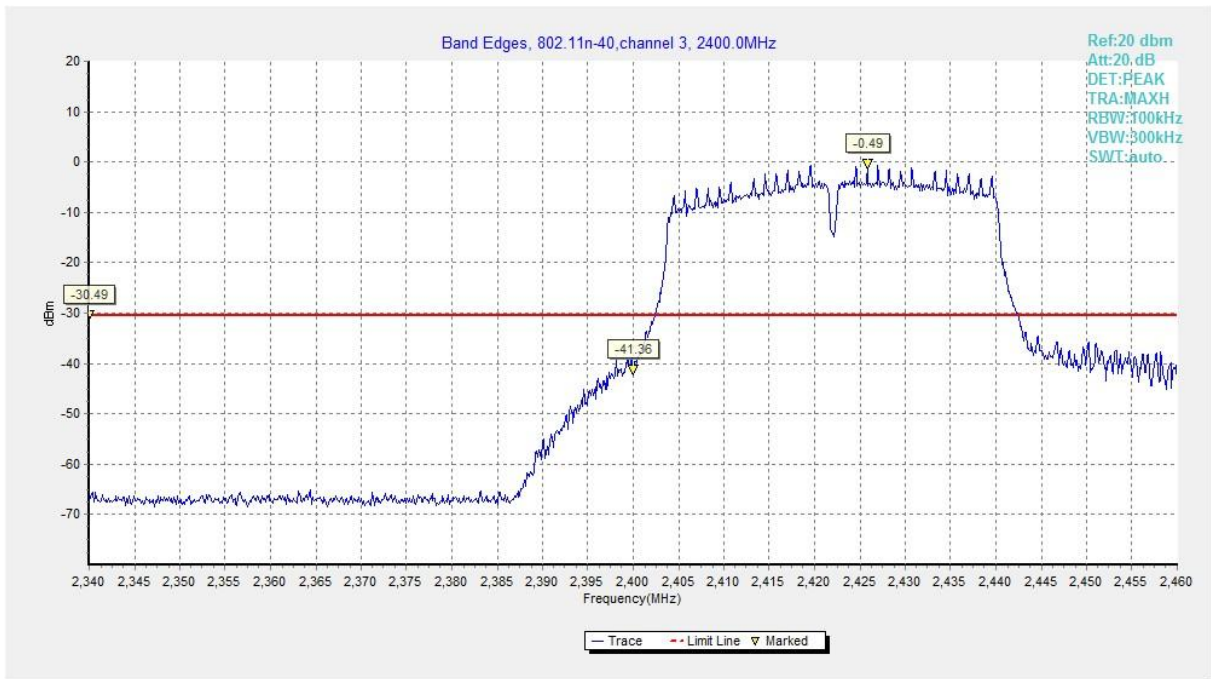

**Fig.31 Band Edges (802.11n HT40, CH 3)**

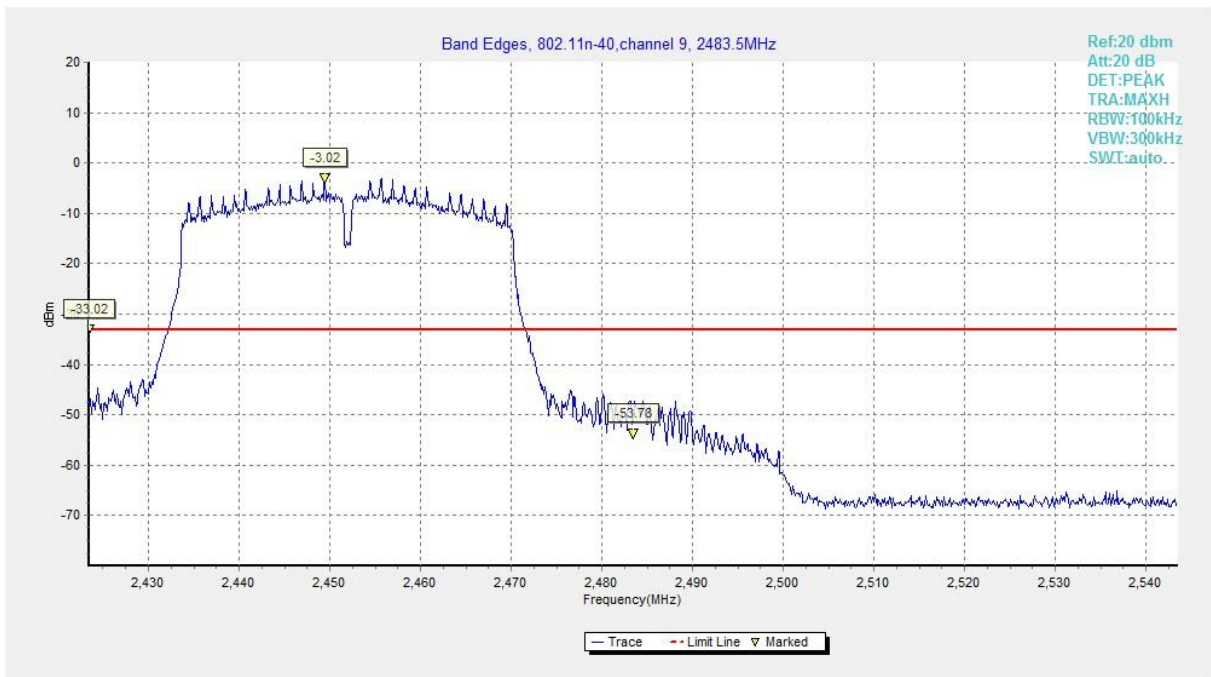

**Fig.32 Band Edges (802.11n HT40, CH 9)**





**A.5 Conducted Emission**

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	30dB below peak output power in 100 kHz bandwidth

**Measurement Results:**

Mode	Channel	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	CH 1	2412	30MHz-26GHz	Fig.33	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.34	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.35	<b>P</b>
802.11g	CH 1	2412	30MHz-26GHz	Fig.36	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.37	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.38	<b>P</b>
802.11n- HT20	CH 1	2412	30MHz-26GHz	Fig.39	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.40	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.41	<b>P</b>
802.11n- HT40	CH 3	2422	30MHz-26GHz	Fig.42	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.43	<b>P</b>
	CH 9	2452	30MHz-26GHz	Fig.44	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

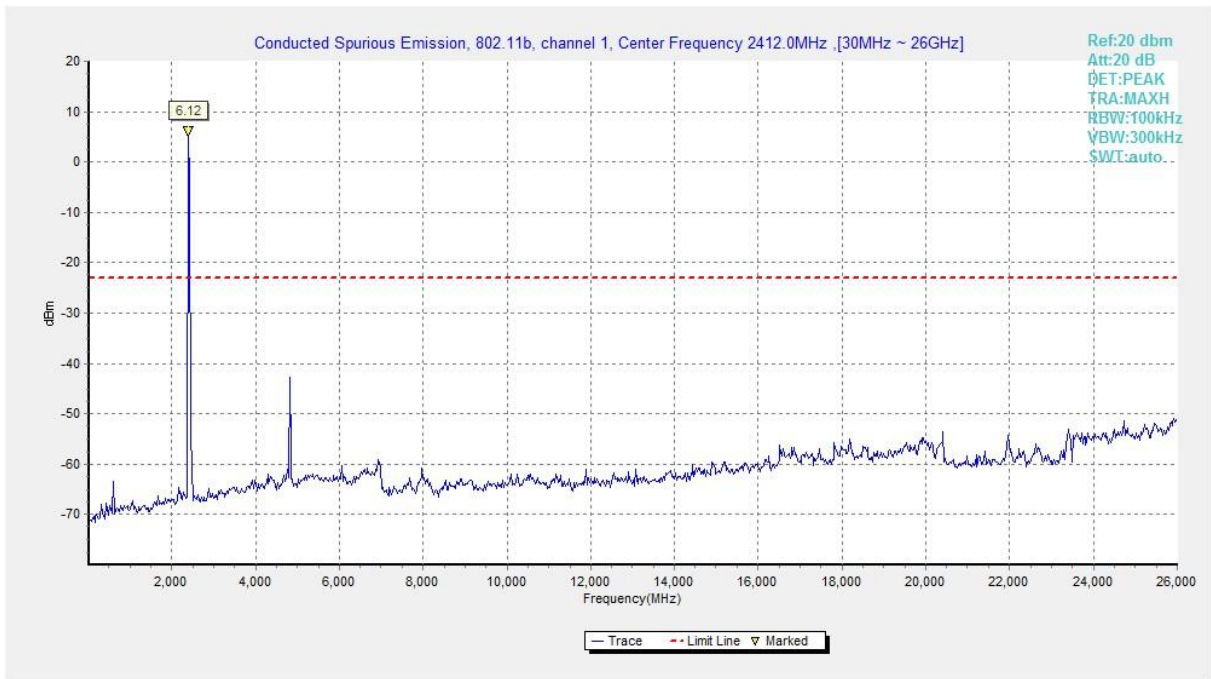


Fig.33 Conducted Spurious Emission (802.11b, CH1)



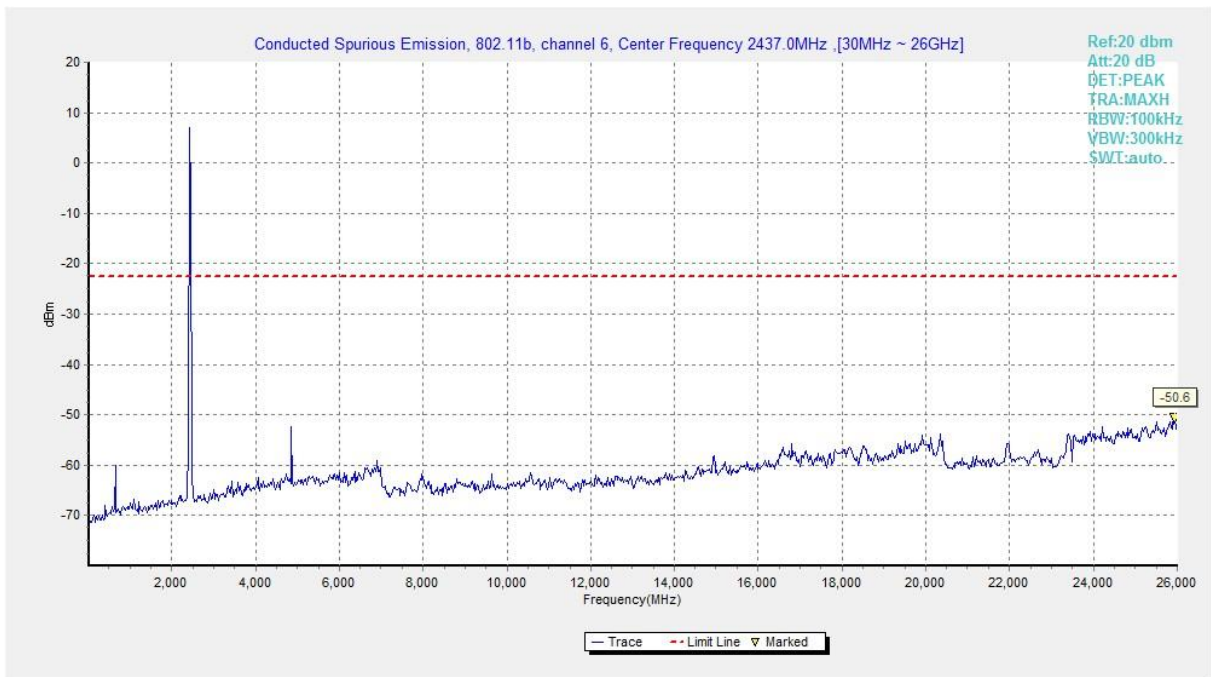


Fig.34 Conducted Spurious Emission (802.11b, CH6)

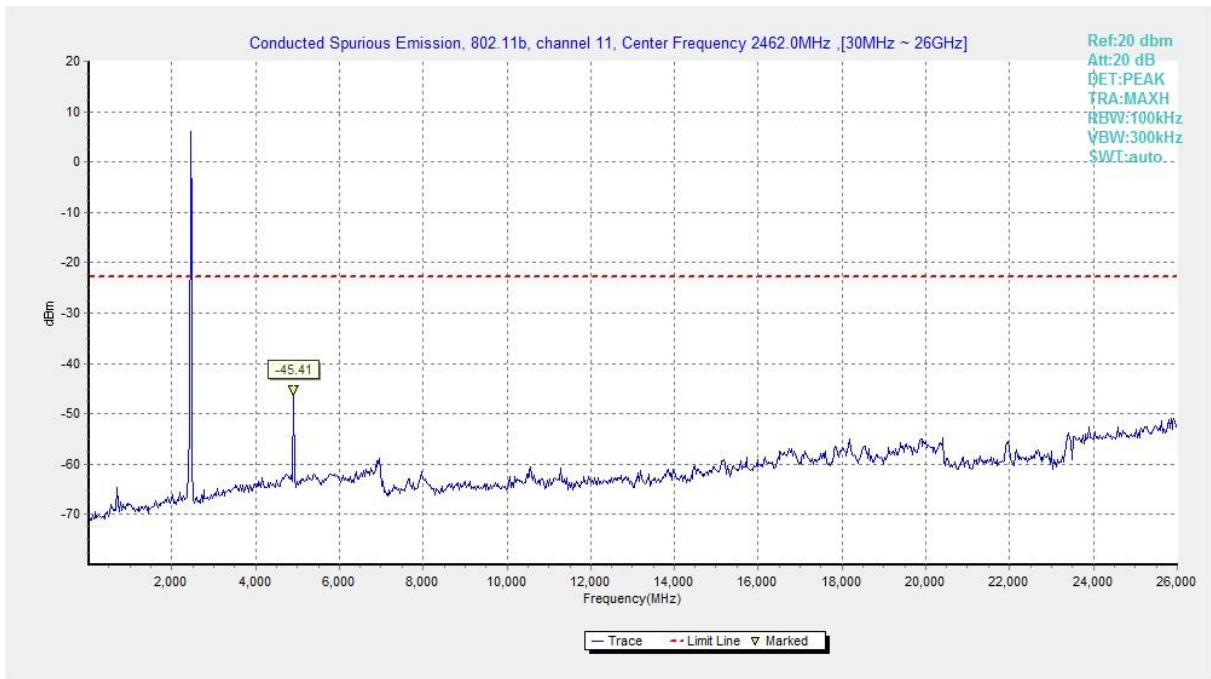

**Fig.35 Conducted Spurious Emission (802.11b, CH11)**

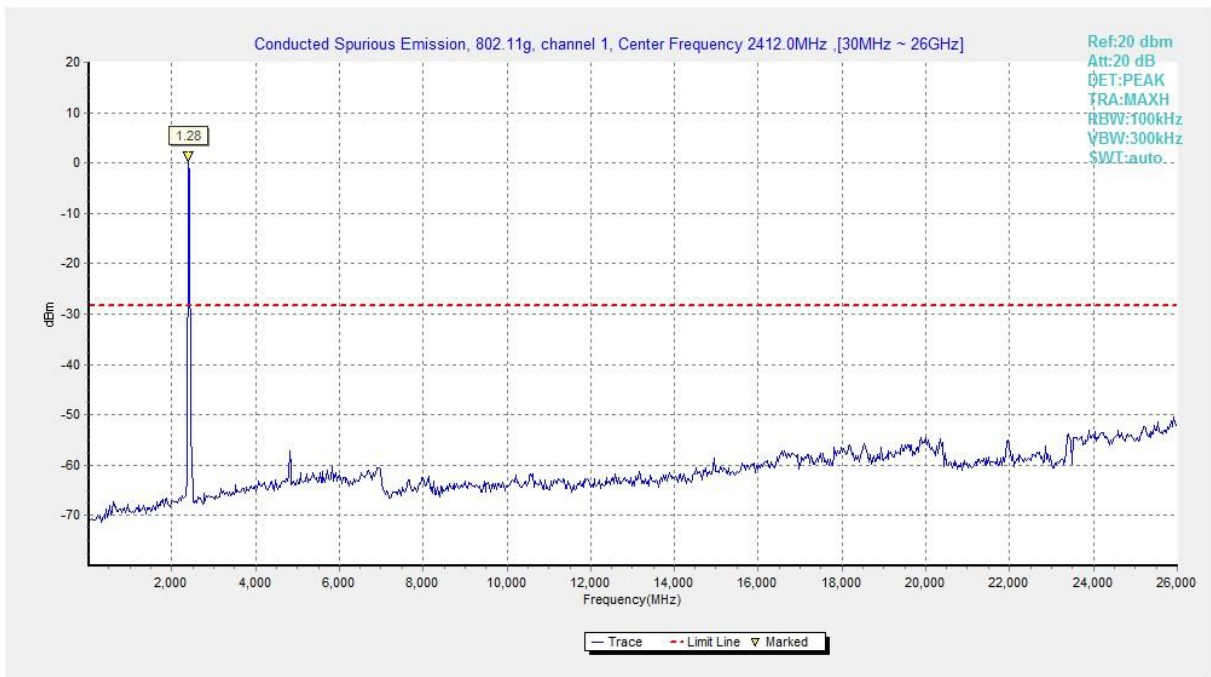

**Fig.36 Conducted Spurious Emission (802.11g, CH1)**

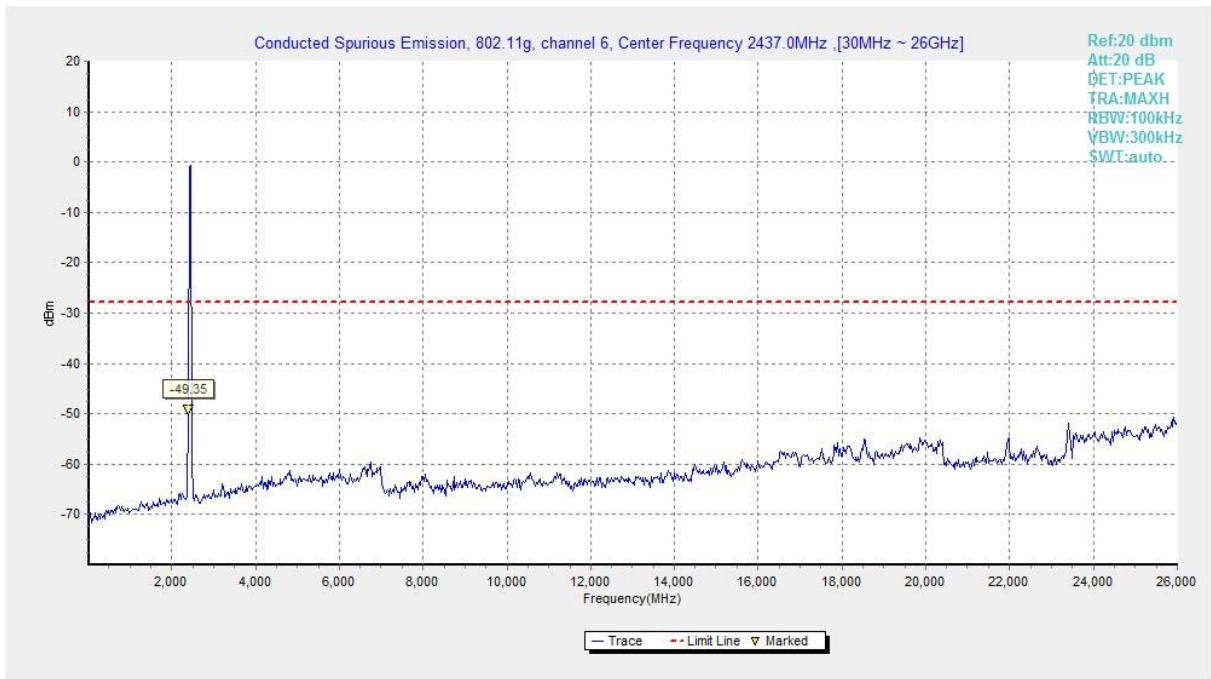


Fig.37 Conducted Spurious Emission (802.11g, CH6)

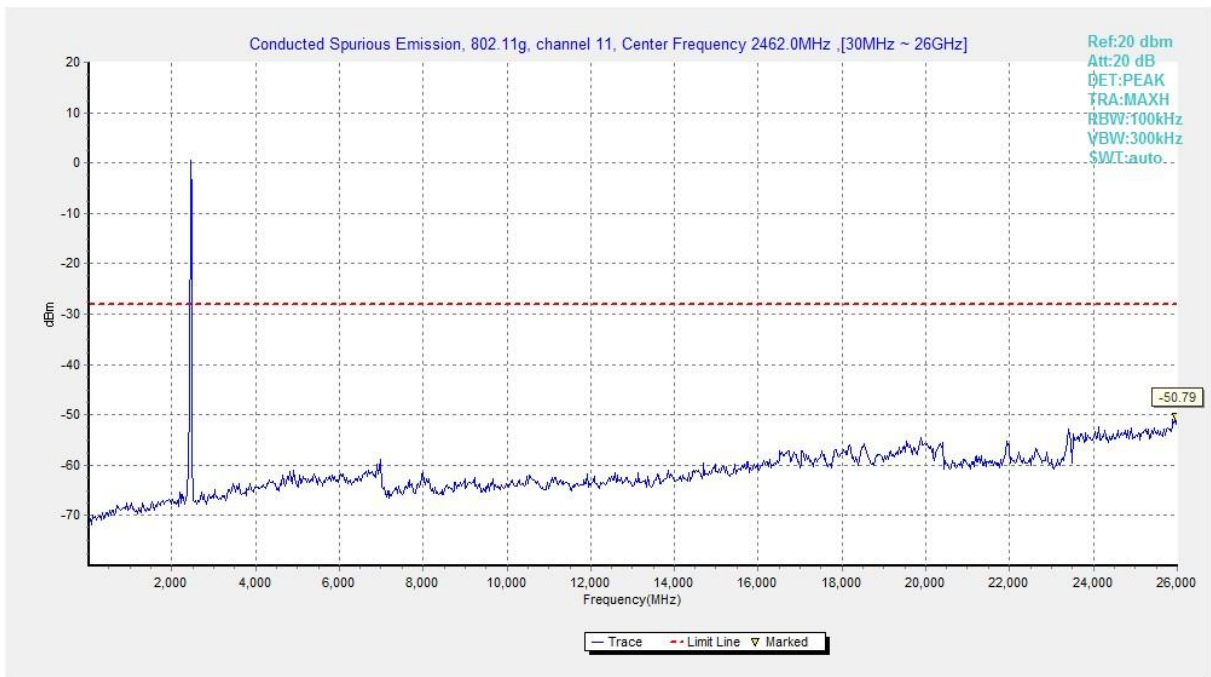


Fig.38 Conducted Spurious Emission (802.11g, CH11)

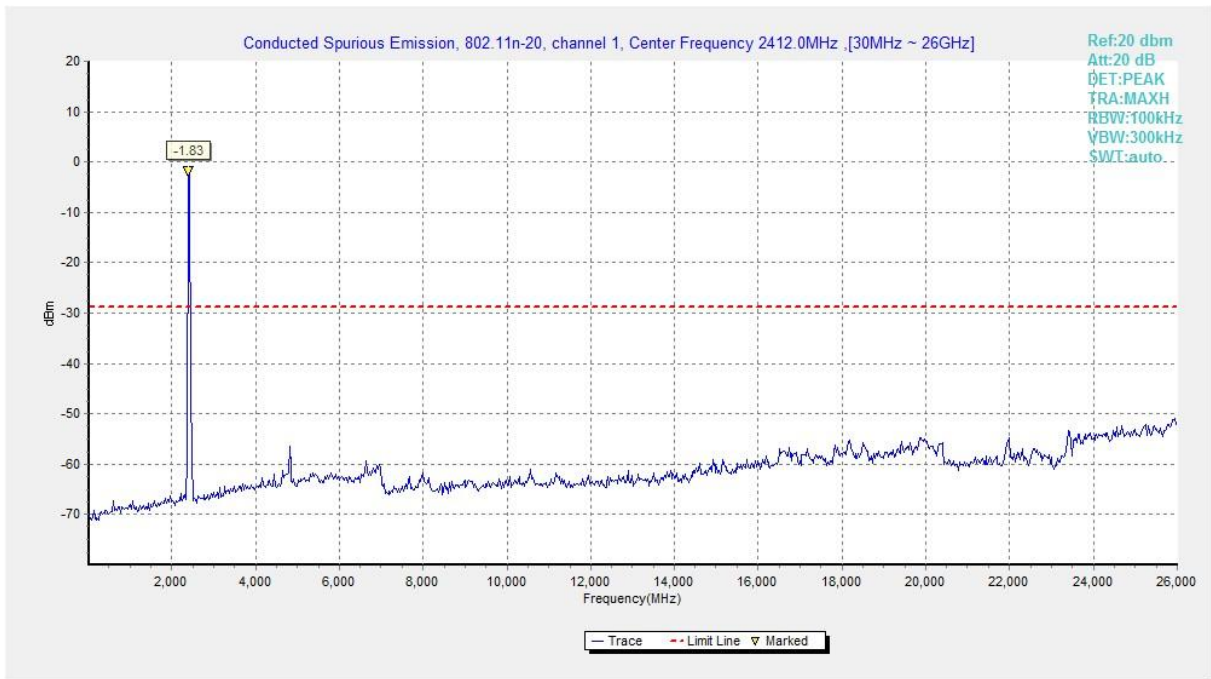


Fig.39 Conducted Spurious Emission (802.11n HT20, CH1)

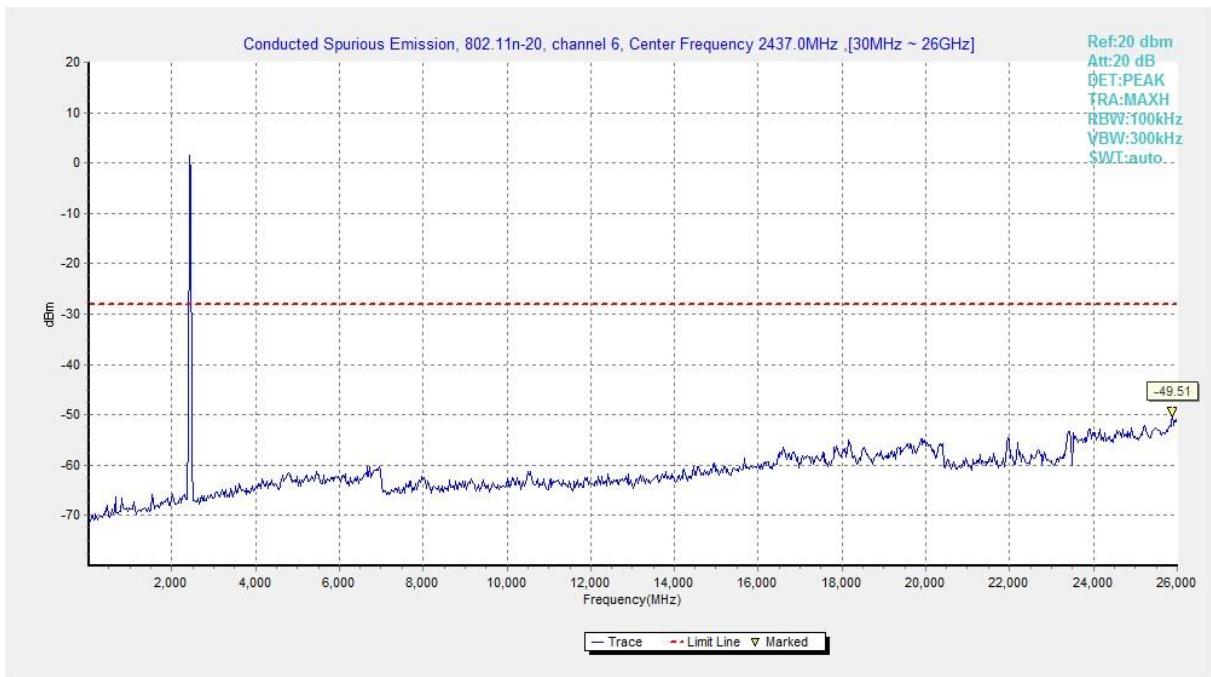


Fig.40 Conducted Spurious Emission (802.11n HT20, CH6)

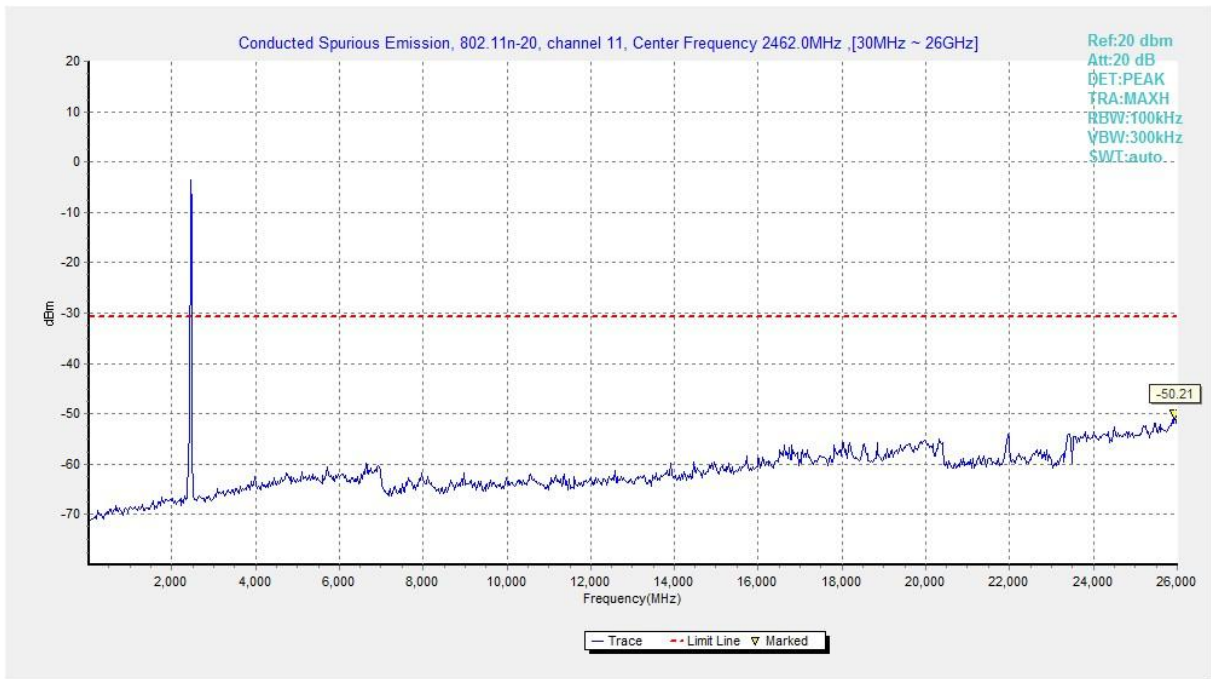


Fig.41 Conducted Spurious Emission (802.11n HT20, CH11)

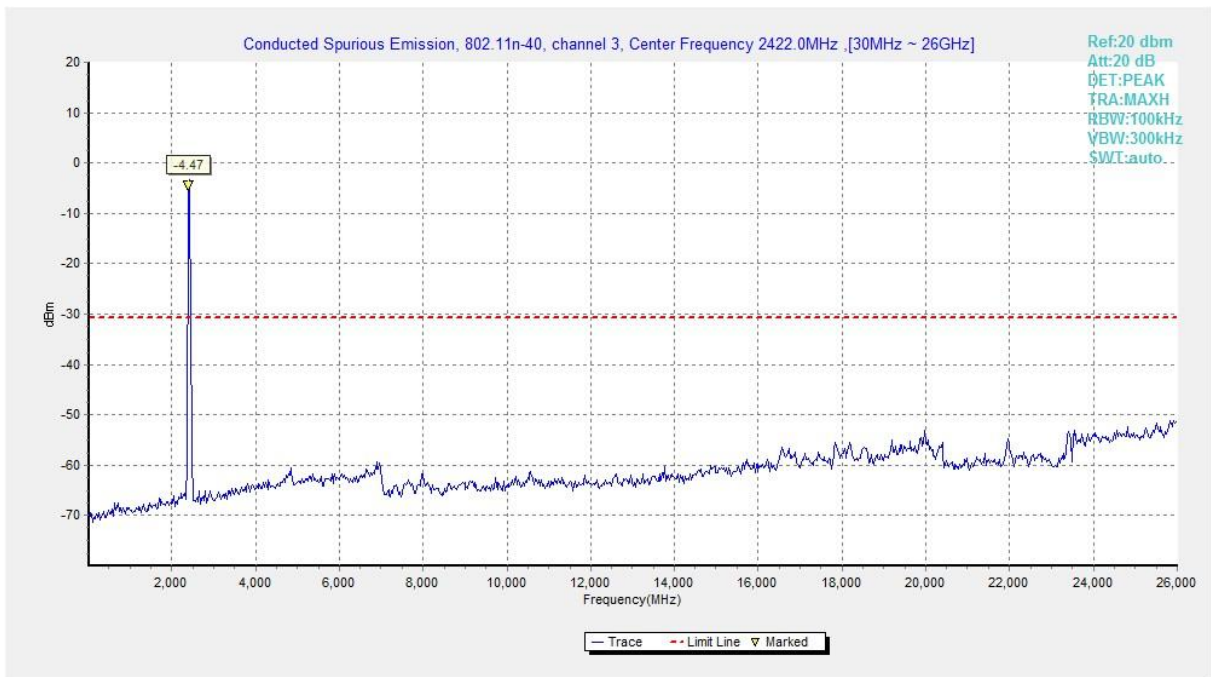


Fig.42 Conducted Spurious Emission (802.11n HT40, CH3)

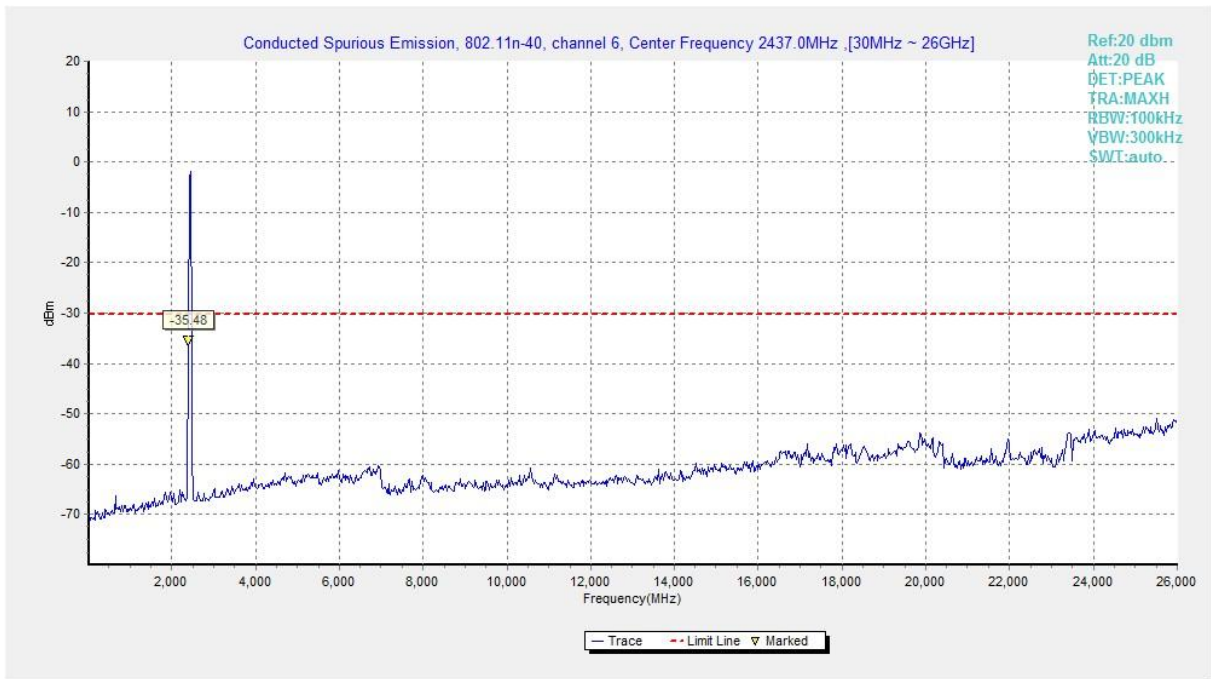


Fig.43 Conducted Spurious Emission (802.11n HT40, CH6)

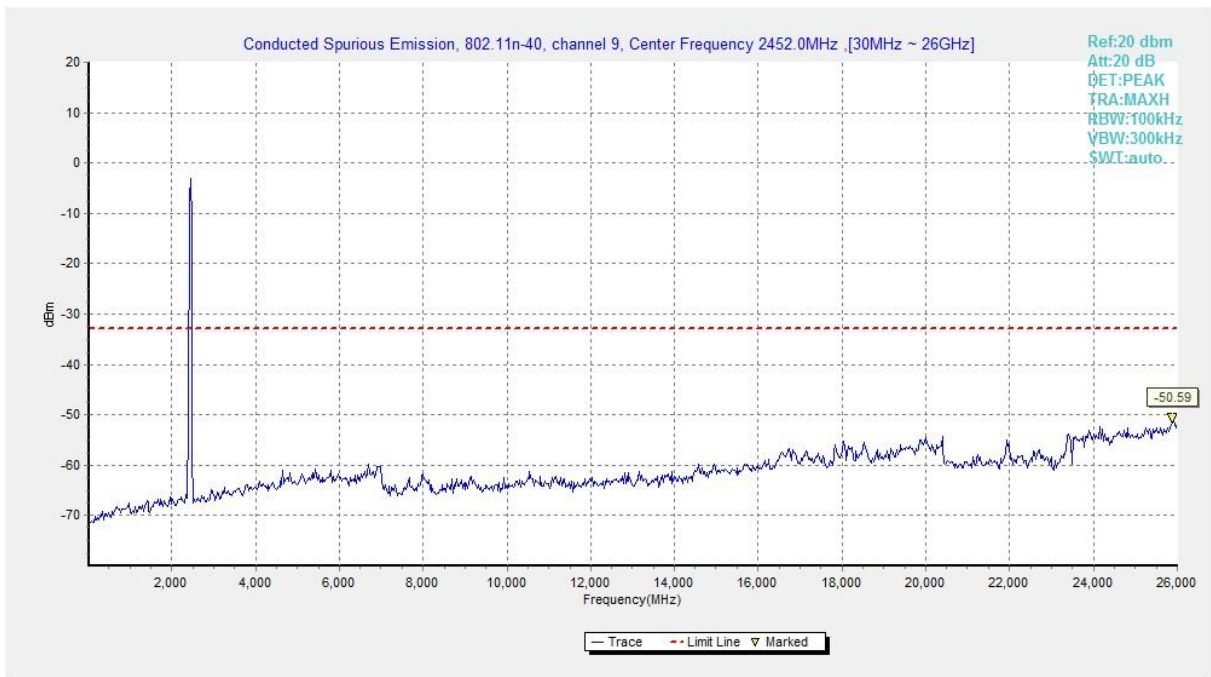


Fig.44 Conducted Spurious Emission (802.11n HT40, CH9)

## A.6 Radiated Emission

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Limit in restricted band:

Frequency of emission (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.



**Measurement Results:**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	CH 1	1 GHz ~18 GHz	Fig.45	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.46	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.47	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.48	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.49	<b>P</b>
802.11g	CH 1	1 GHz ~18 GHz	Fig.50	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.51	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.52	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.53	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.54	<b>P</b>
802.11n HT20	CH 1	1 GHz ~18 GHz	Fig.55	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.56	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.57	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.58	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.59	<b>P</b>
802.11n HT40	CH 3	1 GHz ~18 GHz	Fig.60	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.61	<b>P</b>
	CH 9	1 GHz ~18 GHz	Fig.62	<b>P</b>
	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.63	<b>P</b>
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.64	<b>P</b>
/	All Channels	9 kHz ~30 MHz	Fig.65	<b>P</b>
		30 MHz ~1 GHz	Fig.66	<b>P</b>
		18 GHz ~26.5 GHz	Fig.67	<b>P</b>



**Worst-Case Result:**

**802.11b CH6 (1-18GHz)**

Frequency (MHz)	MaxPeak (dBUV/m)	Average (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol	Corr. (dB)
2979.600000	49.3	---	74.00	24.7	H	11.0
4873.600000	45.6	---	74.00	28.4	H	-7.5
7414.400000	44.9	---	74.00	29.1	V	-0.5
9955.200000	49.0	---	74.00	25.0	H	2.3
14123.000000	51.1	---	74.00	22.9	H	6.9
17949.200000	57.8	---	74.00	16.2	V	14.9
2997.600000	---	37.4	54.00	16.6	H	11.0
4873.600000	---	40.8	54.00	13.2	H	-7.5
7688.000000	---	33.6	54.00	20.4	H	-0.3
9972.000000	---	36.7	54.00	17.3	H	2.3
13504.000000	---	38.7	54.00	15.3	V	6.9
17948.800000	---	45.4	54.00	8.6	V	14.9

**802.11g CH6 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBUV/m)	Average (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol	Corr. (dB)
2994.800000	49.1	---	74.00	24.9	V	11.0
4880.800000	42.3	---	74.00	31.7	H	-7.4
7669.600000	46.6	---	74.00	27.4	H	-0.4
9975.200000	47.8	---	74.00	26.2	V	2.3
14181.000000	51.3	---	74.00	22.7	H	7.1
17980.800000	56.4	---	74.00	17.6	H	15.3
2997.000000	---	37.5	54.00	16.5	V	11.0
4865.600000	---	30.4	54.00	23.6	H	-7.4
7670.400000	---	33.4	54.00	20.6	V	-0.4
9972.800000	---	36.5	54.00	17.5	V	2.3
14357.000000	---	39.2	54.00	14.8	V	7.1
17984.800000	---	45.0	54.00	9.0	H	15.3



**802.11n HT20 CH6 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
2617.200000	54.9	---	74.00	19.1	V	10.2
2950.800000	50.0	---	74.00	24.0	V	10.7
4877.600000	41.8	---	74.00	32.2	H	-7.4
9916.000000	48.8	---	74.00	25.2	H	2.1
14489.000000	50.6	---	74.00	23.4	V	7.0
17950.000000	57.2	---	74.00	16.8	H	14.9
2617.200000	---	39.4	54.00	14.6	V	10.2
2967.200000	---	37.5	54.00	16.5	H	10.9
4876.000000	---	30.4	54.00	23.6	V	-7.5
9972.000000	---	36.1	54.00	17.9	H	2.3
14361.000000	---	39.1	54.00	14.9	V	7.1
17948.800000	---	44.9	54.00	9.1	V	14.9

**802.11n HT40 CH6 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
2937.200000	49.4	---	74.00	24.6	H	10.8
4872.000000	40.4	---	74.00	33.6	H	-7.5
7580.800000	44.5	---	74.00	29.5	H	-0.8
9956.000000	47.6	---	74.00	26.4	V	2.3
13882.000000	52.0	---	74.00	22.0	V	6.3
17792.800000	57.3	---	74.00	16.7	V	13.2
2966.600000	---	37.5	54.00	16.5	V	10.9
4864.000000	---	29.0	54.00	25.0	H	-7.4
7741.600000	---	33.4	54.00	20.6	H	-0.7
9907.200000	---	36.5	54.00	17.5	V	2.0
14172.500000	---	39.1	54.00	14.9	H	7.1
17947.200000	---	44.9	54.00	9.1	H	14.9


**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument. The measurement results are obtained as described below:


Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.

**See below for test graphs.**


**Conclusion: PASS**

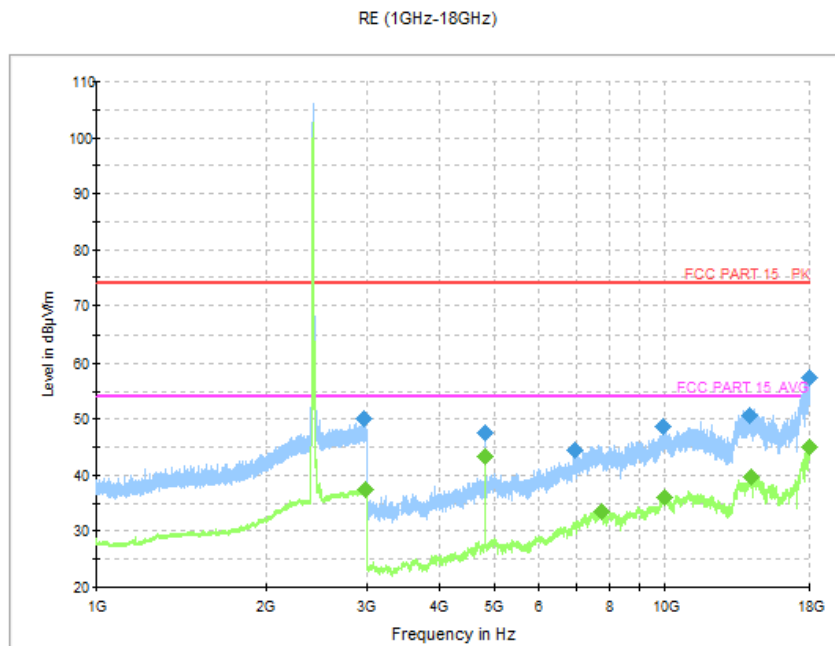


**Fig.45 Radiated Spurious Emission (802.11b, CH1, 1 GHz-18GHz)**

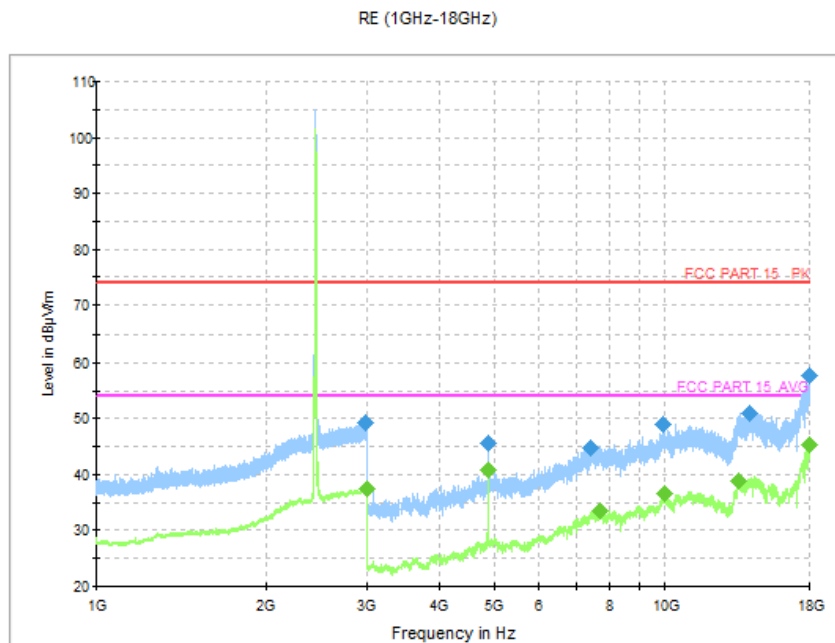


**Fig.46 Radiated Spurious Emission (802.11b, CH6, 1 GHz-18GHz)**

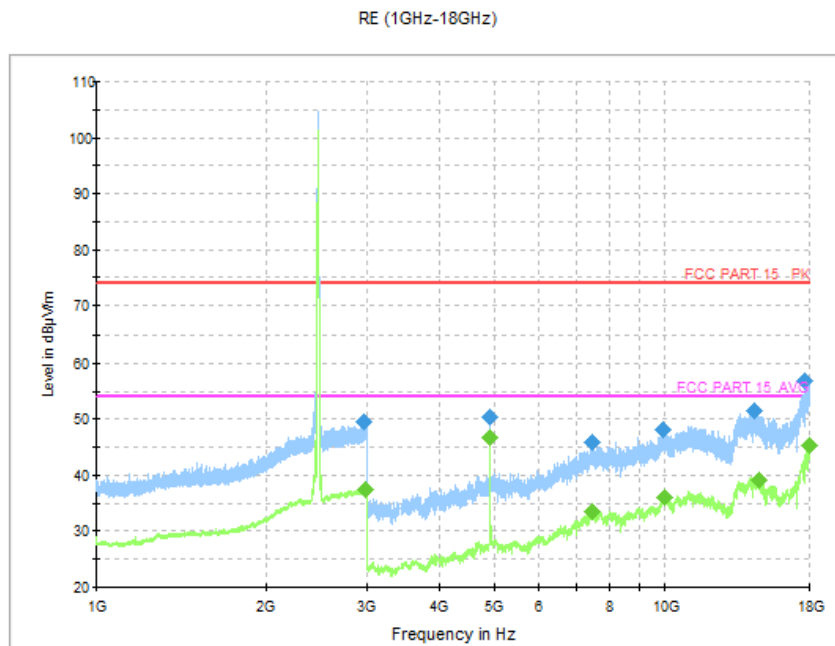


**Fig.47 Radiated Spurious Emission (802.11b, CH11, 1 GHz-18GHz)**

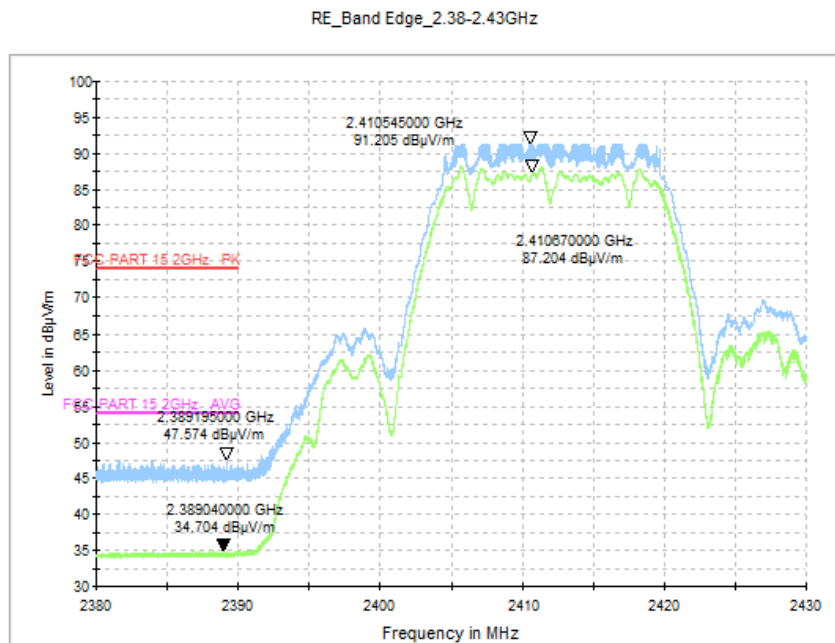


**Fig.48 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)**

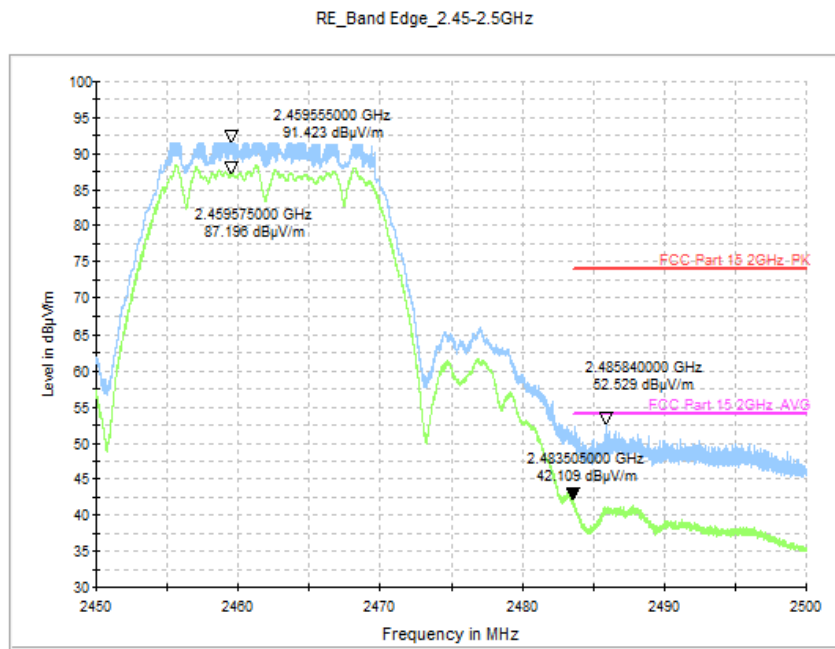


**Fig.49 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)**

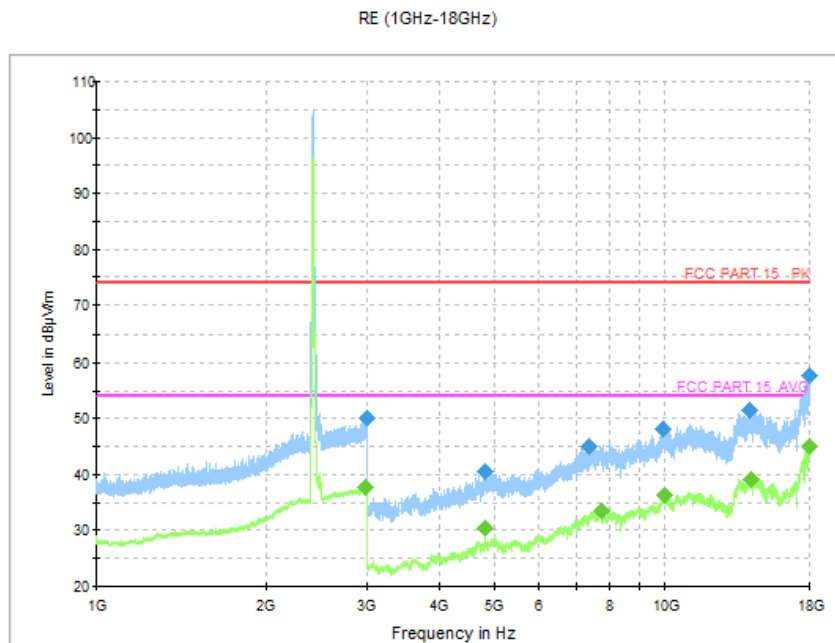

**Fig.50 Radiated Spurious Emission (802.11g, CH1, 1 GHz-18 GHz)**

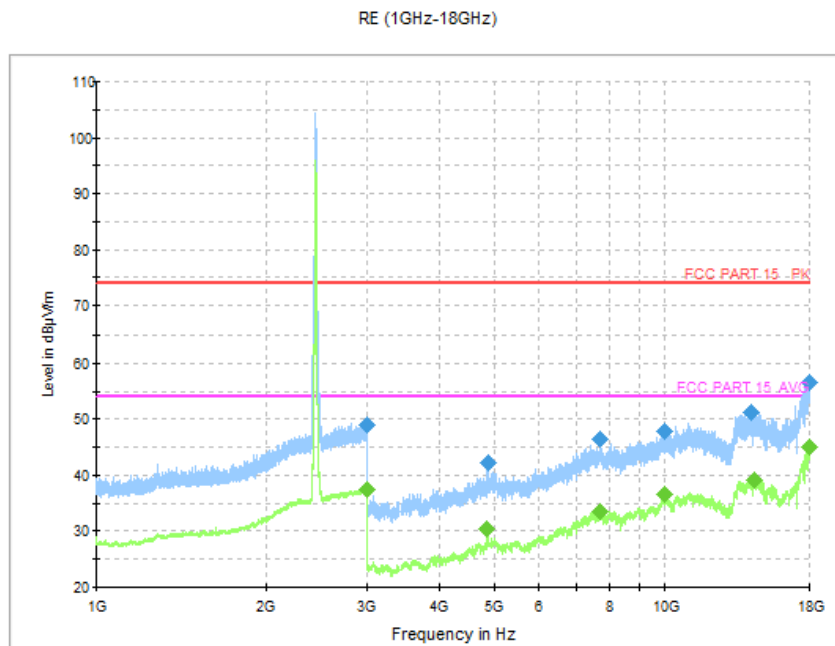

**Fig.51 Radiated Spurious Emission (802.11g, CH6, 1 GHz-18 GHz)**

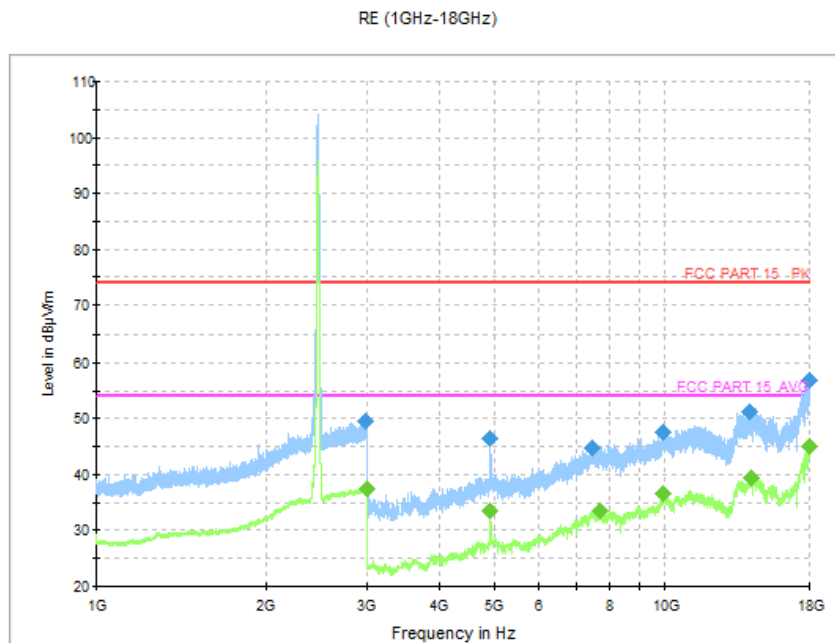

**Fig.52 Radiated Spurious Emission (802.11g, CH11, 1 GHz-18 GHz)**

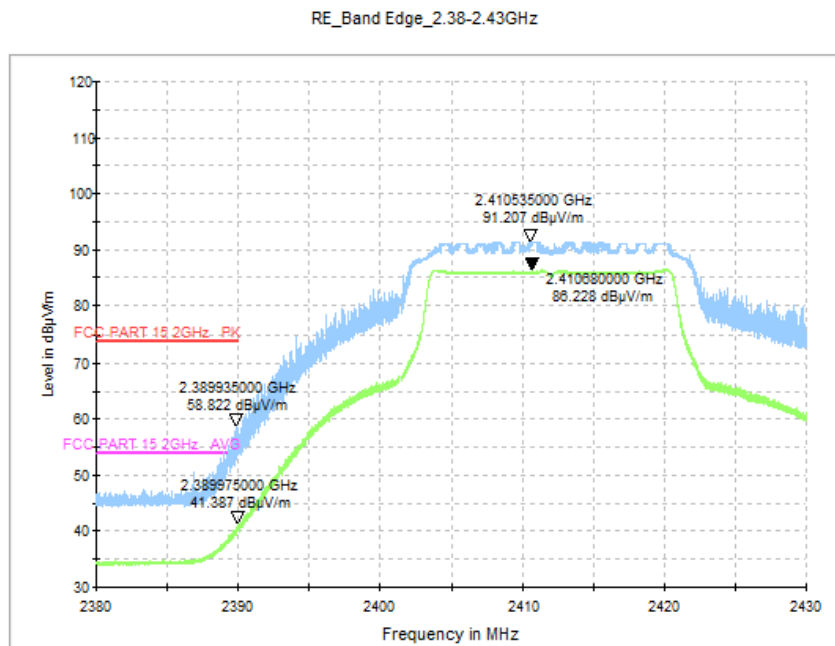


Fig.53 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)



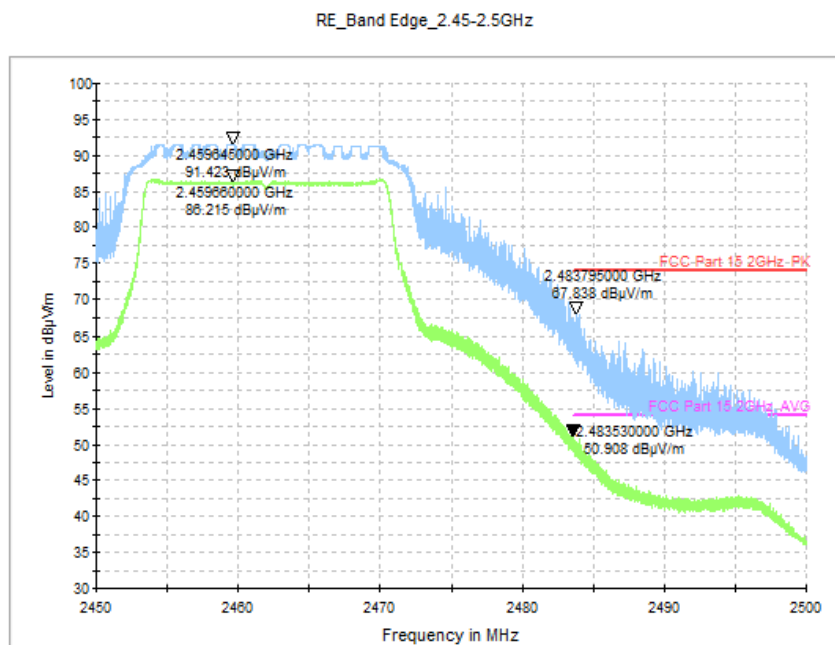


Fig.54 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.5GHz)




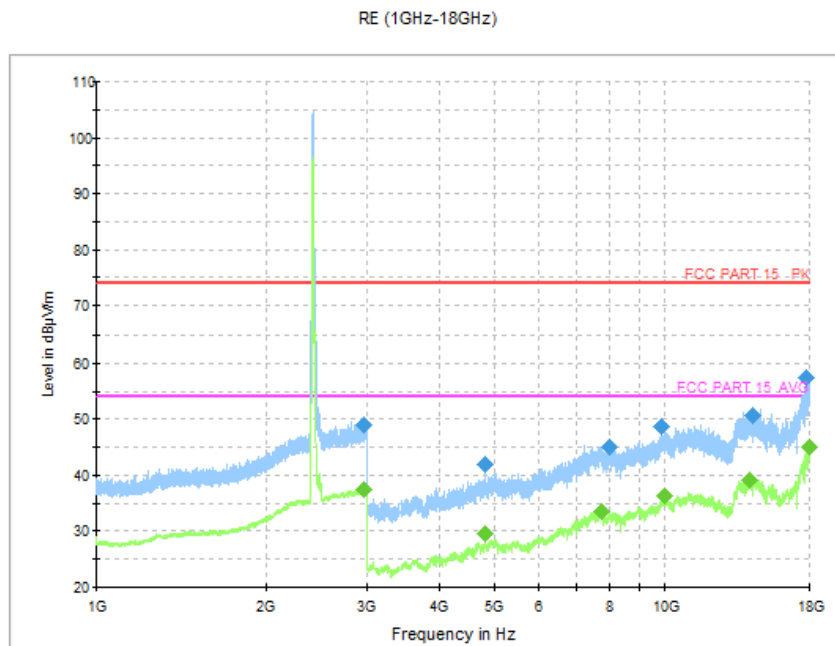


**Fig.55 Radiated Spurious Emission (802.11n HT20, CH1, 1 GHz-18 GHz)**

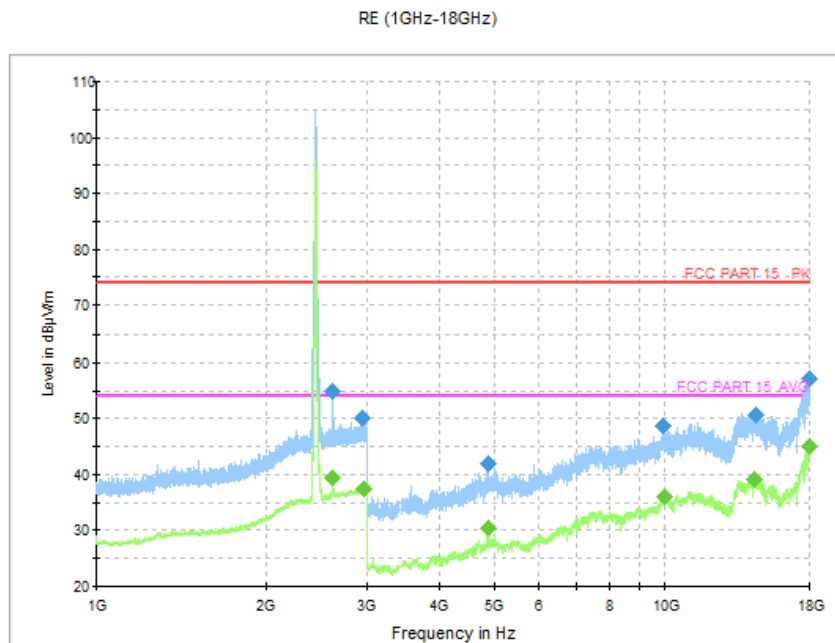

**Fig.56 Radiated Spurious Emission (802.11n HT20, CH6, 1 GHz-18 GHz)**

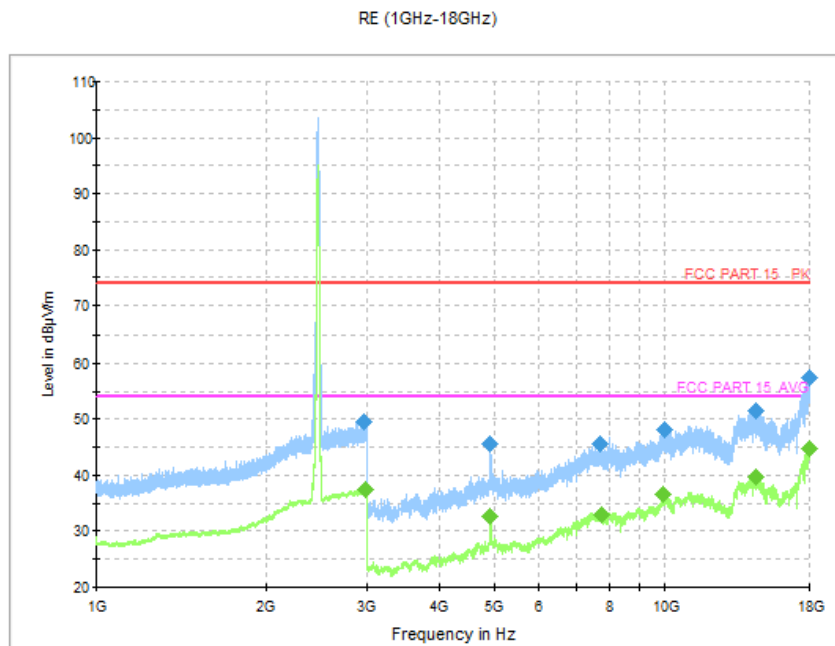

**Fig.57 Radiated Spurious Emission (802.11n HT20, CH11, 1 GHz-18 GHz)**

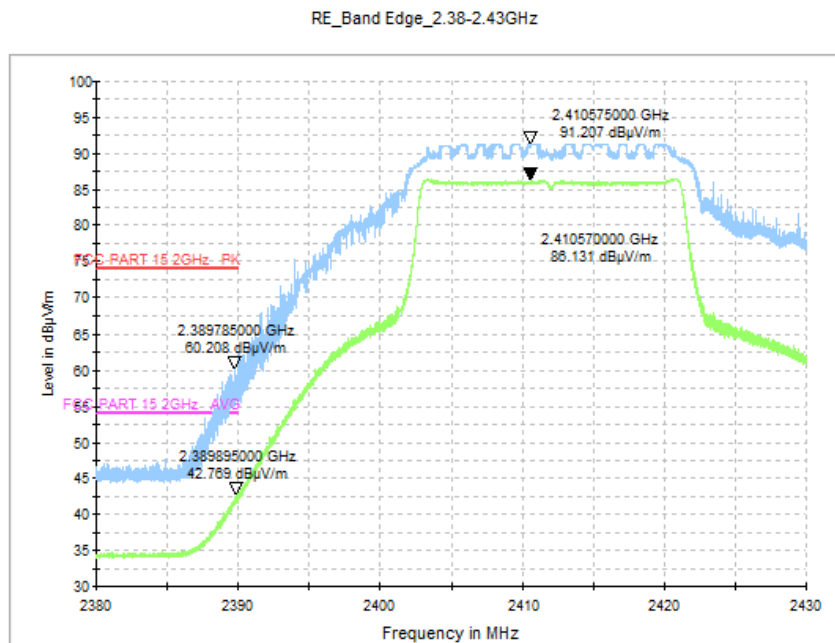

**Fig.58 Radiated Restricted Band (802.11n HT20, CH1, 2.38GHz~2.45GHz)**

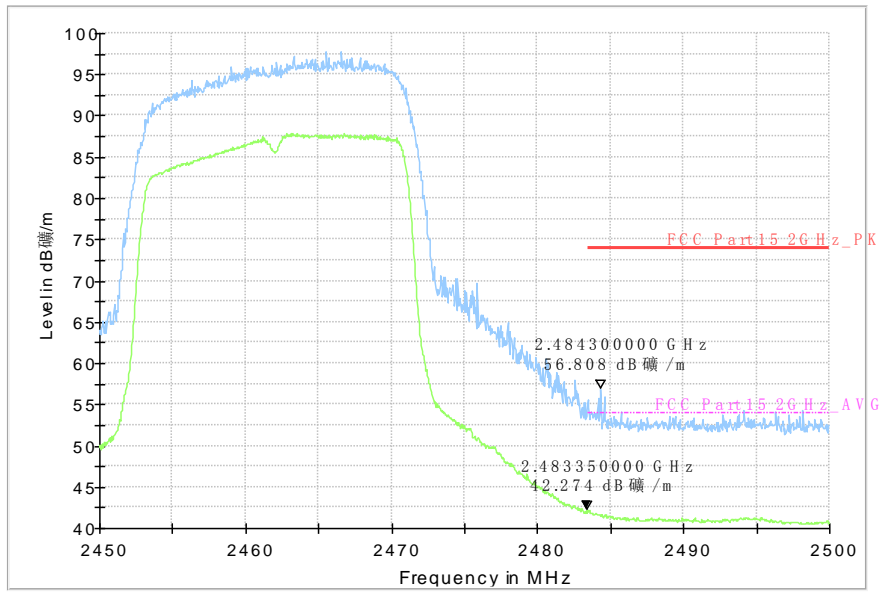


Fig.59 Radiated Restricted Band (802.11n HT20, CH11, 2.45GHz~2.5GHz)



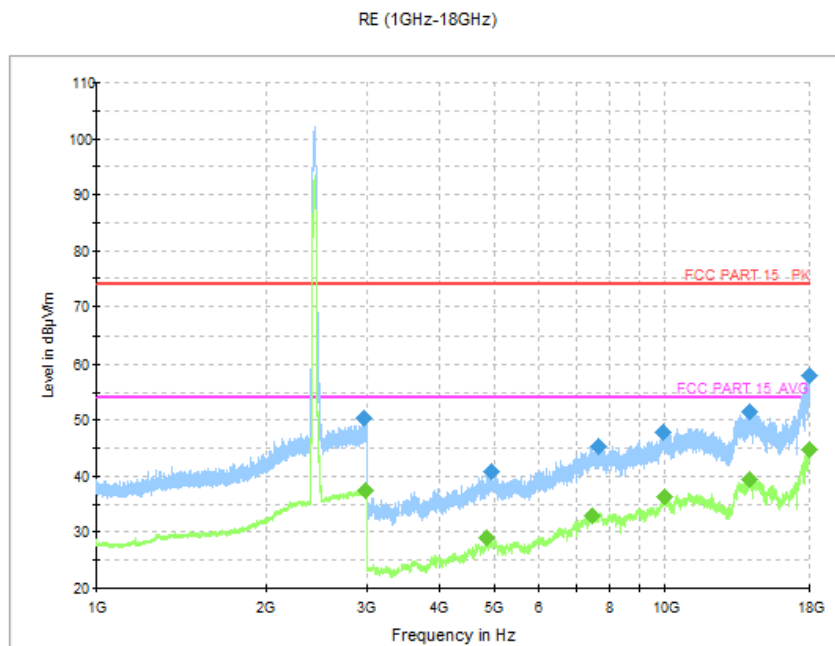


Fig.60 Radiated Spurious Emission (802.11n HT40, CH3, 1 GHz-18 GHz)

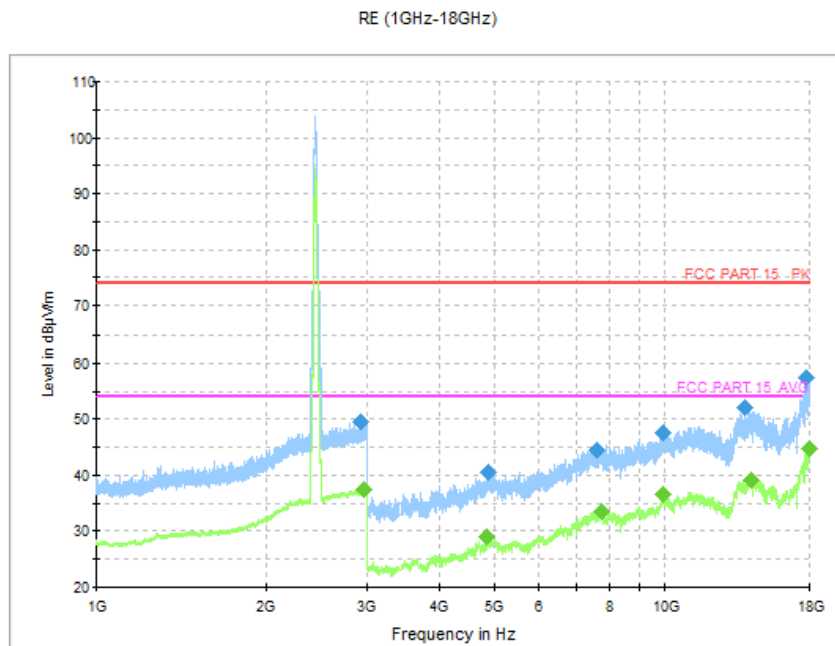

**Fig.61 Radiated Spurious Emission (802.11n HT40, CH6, 1 GHz-18 GHz)**

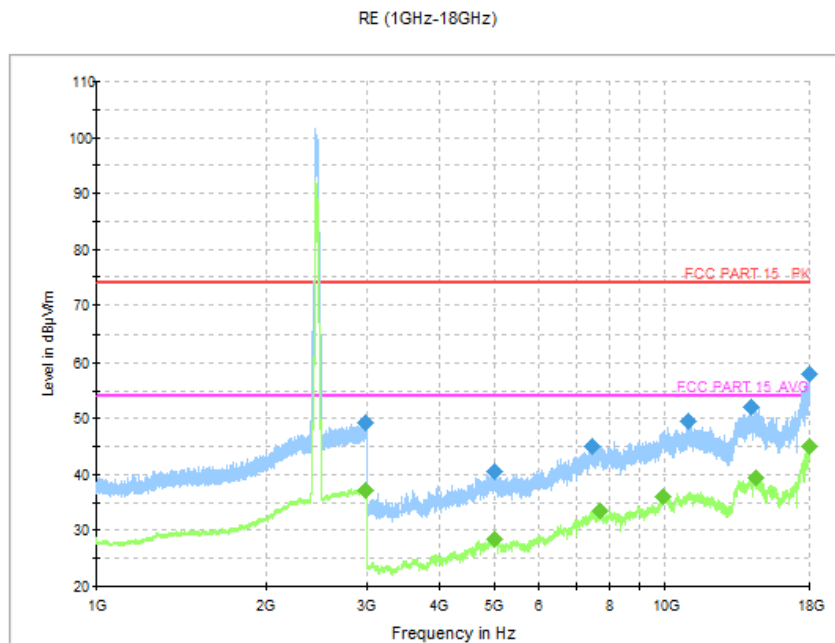

**Fig.62 Radiated Spurious Emission (802.11n HT40, CH9, 1 GHz-18 GHz)**

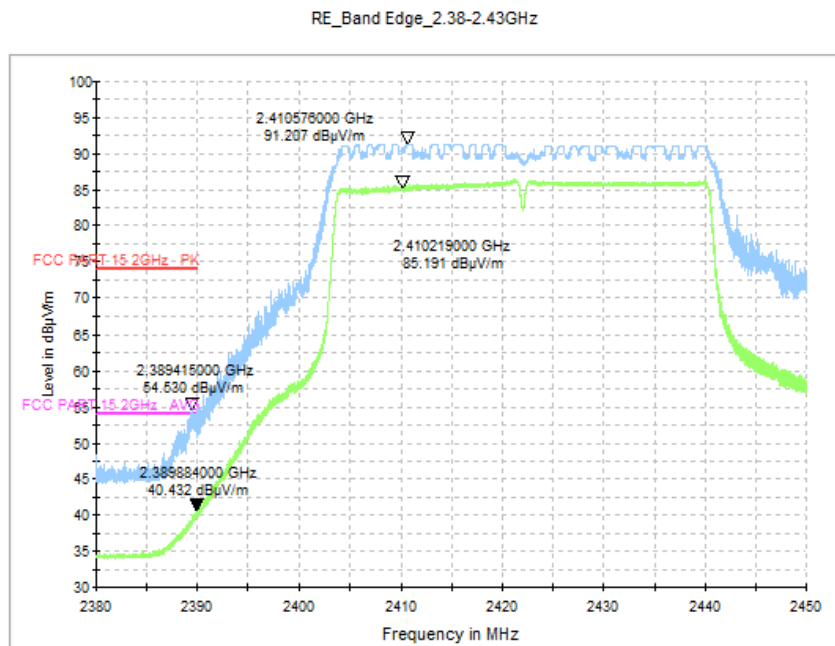


Fig.63 Radiated Restricted Band (802.11n HT40, CH3, 2.38GHz~2.45GHz)



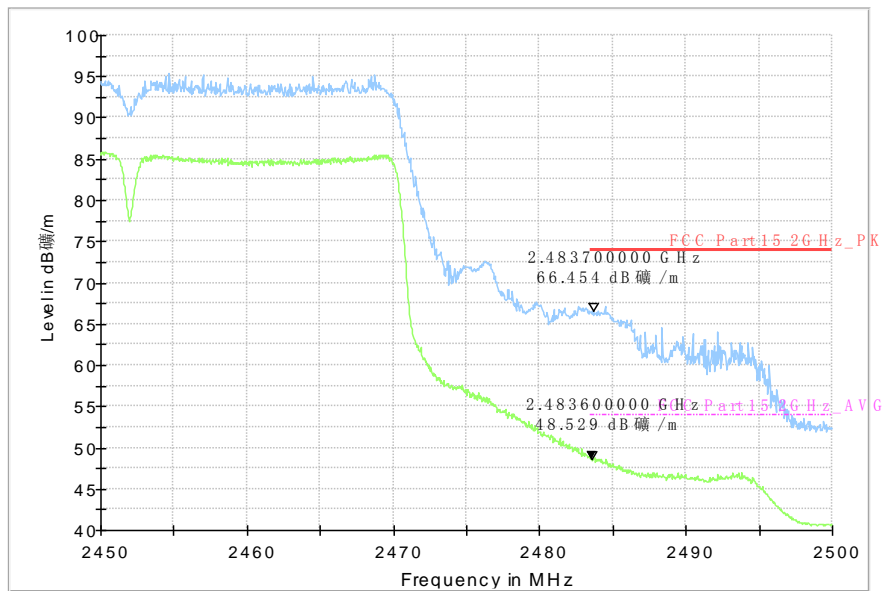


Fig.64 Radiated Restricted Band (802.11n HT40, CH9, 2.45GHz~2.5GHz)

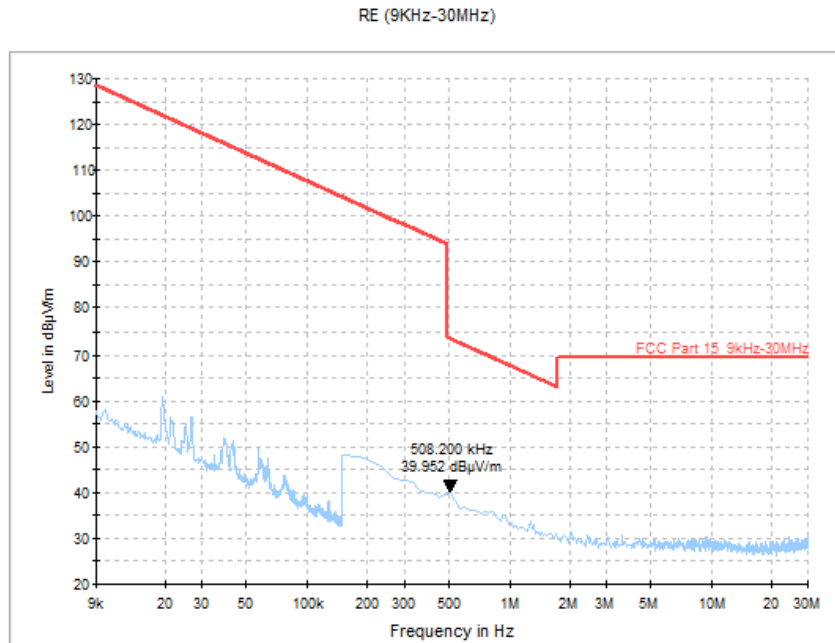

**Fig.65 Radiated Spurious Emission (All Channels, 9kHz-30 MHz)**

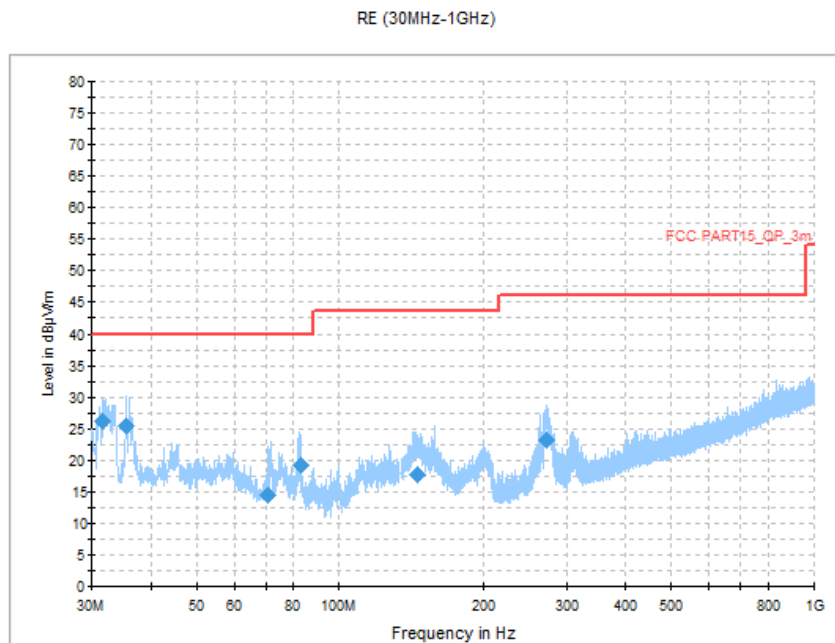

**Fig.66 Radiated Spurious Emission (All Channels, 30MHz-1 GHz)**

RE WLAN 2.4G (18GHz-26.5GHz)

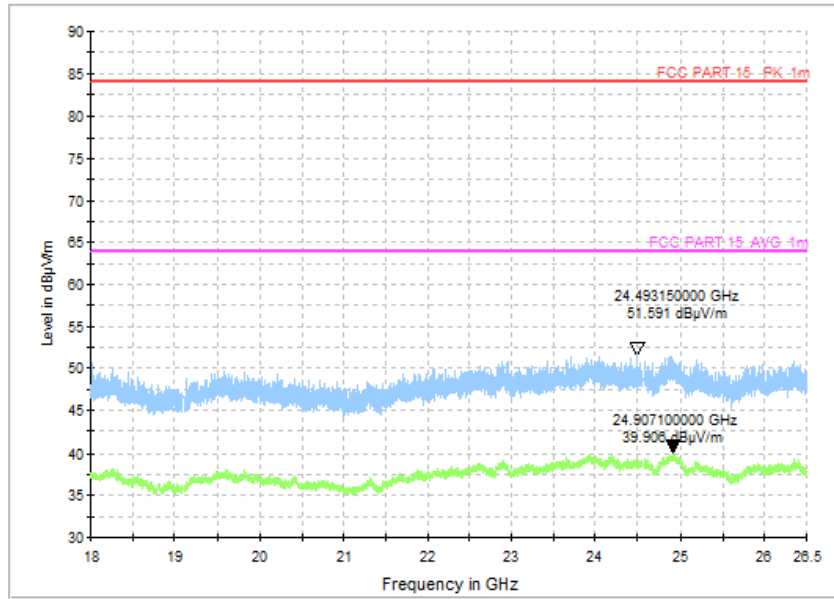


Fig.67 Radiated Spurious Emission (All Channels, 18 GHz-26.5 GHz)



**A.7 AC Power line Conducted Emission**

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.68	Fig.69	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.68	Fig.69	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Note:** The measurement results include the L1 and N measurements.

**See below for test graphs.**

**Conclusion: PASS**



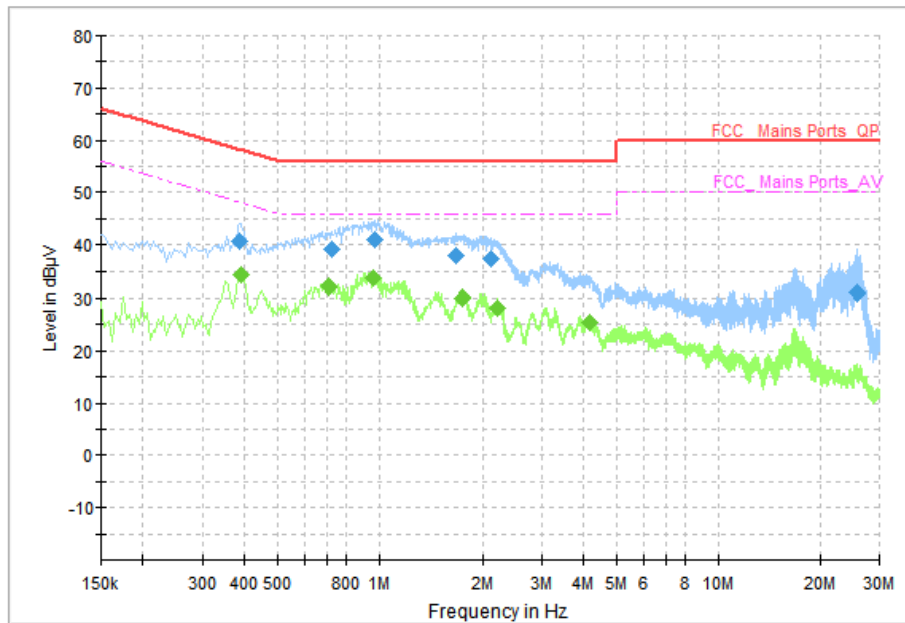



Fig.68 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.386000	40.78	58.15	17.37	N	ON	9.6
0.726000	39.05	56.00	16.95	N	ON	9.7
0.966000	40.87	56.00	15.13	N	ON	9.7
1.666000	37.81	56.00	18.19	L1	ON	9.7
2.126000	37.44	56.00	18.56	L1	ON	9.7
25.698000	31.04	60.00	28.96	L1	ON	10.1

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.390000	34.13	48.06	13.93	N	ON	9.6
0.710000	32.13	46.00	13.87	N	ON	9.7
0.958000	33.66	46.00	12.34	N	ON	9.7
1.750000	30.15	46.00	15.85	N	ON	9.7
2.218000	28.05	46.00	17.95	N	ON	9.7
4.138000	25.47	46.00	20.53	N	ON	9.7

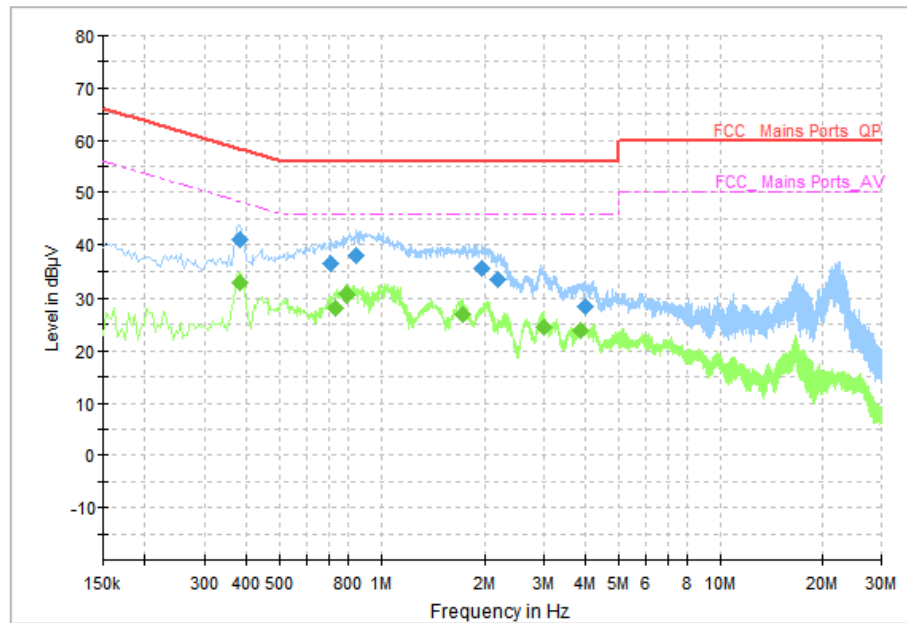
**Fig.69 AC Power line Conducted Emission (Idle)**
**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.382000	41.00	58.24	17.23	N	ON	9.6
0.706000	36.42	56.00	19.58	N	ON	9.7
0.846000	37.78	56.00	18.22	N	ON	9.7
1.962000	35.56	56.00	20.44	L1	ON	9.7
2.198000	33.38	56.00	22.62	L1	ON	9.7
3.986000	28.51	56.00	27.49	N	ON	9.7

**Measurement Results: Average**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.382000	32.85	48.24	15.39	N	ON	9.6
0.730000	28.30	46.00	17.70	N	ON	9.7
0.790000	30.70	46.00	15.30	N	ON	9.7
1.726000	26.85	46.00	19.15	N	ON	9.7
2.998000	24.60	46.00	21.40	N	ON	9.7
3.850000	23.84	46.00	22.16	N	ON	9.7



## **ANNEX B: Spot Check of Output Power**

**Company Name:** IDEMIA Identity and Security France

**Product Name:** ID Screen US

**Model Name:** MPH-MB003A/MPH-MB003B (FCC ID: ZBW-MPHMB003), MPH-MB003C (FCC ID: ZBW-MPHMB003C)

### **Spot Check of Different Mode**

<b>Model</b>	<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Conducted Power (dBm)</b>
MPH-MB003A/MPH-MB003B	LE 1M	2440 (CH19)	-2.41
	BR (GFSK)	2441 (CH39)	9.71
	802.11b	2437 (CH6)	16.89
	802.11a	5180 (Ch36)	12.67
		5745 (CH149)	11.63
MPH-MB003C	LE 1M	2440 (CH19)	-2.46
	BR (GFSK)	2441 (CH39)	9.65
	802.11b	2437 (CH6)	16.72
	802.11a	5180 (Ch36)	12.47
		5745 (CH149)	11.51

Note: Spot check test data included for the variants based on worst-case results reported in the original FCC ID filing. From the above data, it can be concluded that the conducted output power of the variant is less than or near to the original. And the variant test data can refer to the original report. This condition applies to the reports I20N00956.

**\*\*\*END OF REPORT\*\*\***