



**FCC PART 15
TEST REPORT
No.I20Z70377-IOT04**

for

Samsung Electronics Co., Ltd.

Smart Phone

SM-A025U

FCC ID : ZCASMA025U

with

Hardware Version: REV1.0

Software Version: A025U.001

Issued Date: 2021-01-28

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
No.I20Z70377-IOT04	Rev.0	1st edition	2021-01-28

CONTENTS

CONTENTS.....	3
1. TEST LATORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	6
1.4. PROJECT DATE	6
1.5. SIGNATURE.....	6
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARYEQUIPMENT(AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
3.4. GENERAL DESCRIPTION	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	10
4. REFERENCE DOCUMENTS	10
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	10
4.2. REFERENCE DOCUMENTS FOR TESTING	10
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS.....	11
6.1. SUMMARY OF TEST RESULTS.....	11
6.2. STATEMENTS	11
6.3. TEST CONDITIONS	11
7. TEST EQUIPMENTS UTILIZED	12
8. MEASUREMENT UNCERTAINTY.....	13
8.1 TRANSMITTER OUTPUT POWER.....	13
8.2 PEAK POWER SPECTRAL DENSITY	13
8.3 OCCUPIED CHANNEL BANDWIDTH	13
8.4 BAND EDGES COMPLIANCE.....	13
8.5 SPURIOUS EMISSIONS	13
8.6 AC POWER-LINE CONDUCTED EMISSION.....	13
ANNEX A: MEASUREMENT RESULTS.....	14
A.1. MEASUREMENT METHOD.....	14
A.2. MAXIMUM OUTPUT POWER.....	15



No.I20Z70377-IOT04

A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	18
A.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED)	20
A.5. BAND EDGES COMPLIANCE.....	38
A5.1 BAND EDGES - RADIATED	38
A.6. TRANSMITTER SPURIOUS EMISSION	51
A.7. AC POWER LINE CONDUCTED EMISSION (150KHZ- 30MHZ)	92
A.8. 99% OCCUPIED BANDWIDTH.....	95
A.9. POWER CONTROL	100
ANNEX B: ACCREDITATION CERTIFICATE	101

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 3:CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2020-11-23
Testing End Date: 2021-01-28

1.5. Signature

封爱宇

Xie Xiuzhen

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Samsung Electronics Co., Ltd.
Address: 19 Chapin Rd., Building D Pine Brook, NJ 07058
City: /
Postal Code: /
Country: /
Contact: Jenni Chun
Telephone: +1-201-937-4203
E-mail: j1.chun@samsung.com

2.2. Manufacturer Information

Company Name: Samsung Electronics Co., Ltd.
Address: Samsung R5, Maetan dong 129, Samsung ro
Youngtong gu, Suwon city 443 742, Korea



City: Hong Kong
Postal Code: /
Country: Korea
Contact: Sunghoon Cho
Telephone: +82-10-2722-4159
E-mail: ggobi.cho@samsung.com

3. EQUIPMENT UNDER TEST (EUT) AND

ANCILLARY EQUIPMENT (AE)

3.1. About EUT

Description	Smart Phone
Model name	SM-A025U
FCC ID	ZCASMA025U
WLAN Frequency Range	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Voltage	3.85 V

Note: Photographs of EUT are shown in ANNEX C of this test report. Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT12a	2070377UT012a	REV1.0	A025U.001
UT08a	2070377UT08a	REV1.0	A025U.001

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description		SN
AE1	Charger1	/	/
AE2	Charger2	/	/
AE3	Charger3	/	/
AE4	Charger4	/	/
AE5	Charger5	/	/
AE6	USB cable	/	/
AE7	Headset1	/	/
AE8	Headset2	/	/
AE9	battery	/	/

AE1

Model	EP-TA50JWE
Manufacturer	HAEM Co.,Ltd
Length of cable	/

AE2

Model	EP-TA50JWE
-------	------------

Manufacturer	RFTech Electronics(HuiZhou)Co.,LTD
Length of cable	/
AE3	
Model	EP-TA200
Manufacturer	HAEM Co.,Ltd
Length of cable	/
AE4	
Model	EP-TA200
Manufacturer	RFTech Electronics(HuiZhou)Co.,LTD
Length of cable	/
AE5	
Model	EP-TA200
Manufacturer	SoluM Co.,Ltd
Length of cable	/
AE6	
Model	EP-DR140AWE
Manufacturer	Samsung Electronics Co., Ltd.
Length of cable	/
AE7	
Model	EHS61ASFWE
Manufacturer	DONGGUAN YOUNGBO ELECTRONICS CO.,LTD
Length of cable	/
AE8	
Model	EHS61ASFWE
Manufacturer	WATA ELECTRONICS CO.,LTD
Length of cable	/
AE9	
Type	HQ-50S
Manufacturer	SUCD(FUJIAN) Electronics Co.,Ltd
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a smart phone with Bluetooth, WLAN with integrated antenna and inbuilt battery.

It has Bluetooth (EDR)function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Band edge compliance (Radiated)	15.209	/	P
Transmitter spurious emissions (Radiated)	15.407	/	P
AC Powerline Conducted Emission (150kHz- 30MHz)	15.407	/	P
Frequency Stability	15.407	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85 V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2021-05-15
2	Test Receiver	ESCI	100766	Rohde & Schwarz	1 year	2021-05-06
3	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	1 year	2021-05-10
4	Shielding Room	S81	/	ETS-Lindgren	/	/
5	Attenuator	K40	/	Rosenberger	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2021-09-04
2	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	1 year	2021-02-24
3	Dual-Ridge Waveguide Horn Antenna	3117	00058888	ETS-Lindgren	1 year	2021-04-08
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2021-08-05
5	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2021-05-18

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 Occupied Channel Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.40
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.32
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

8.6 AC Power-line Conducted Emission


Measurement Uncertainty : 3.10dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

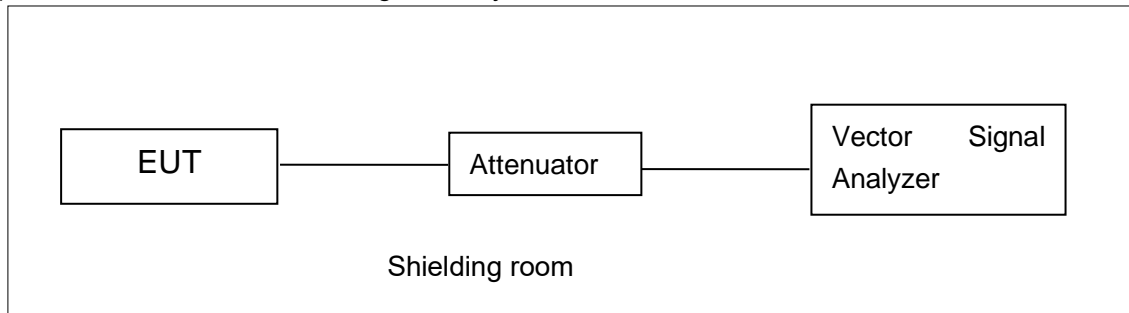


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

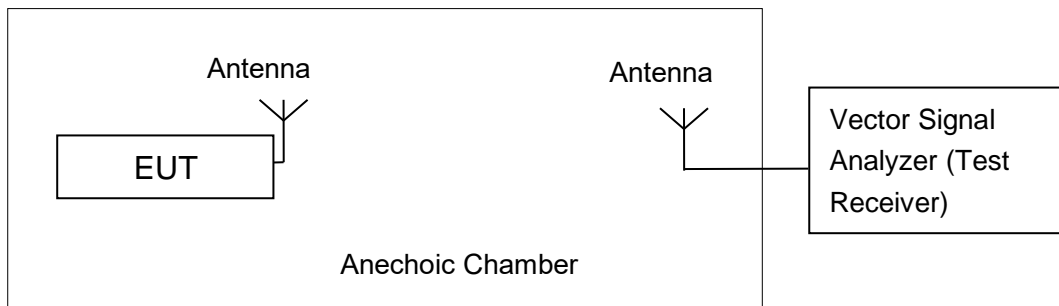

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

Measurement Results:

802.11a mode

Mode	Frequency	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz	11.87	11.42	11.38	11.46	10.81	10.83	10.26	10.28
	5200MHz	11.93	/	/	/	/	/	/	/
	5240MHz	11.98	/	/	/	/	/	/	/
	5260MHz	12.06	/	/	/	/	/	/	/
	5280MHz	11.94	/	/	/	/	/	/	/
	5320MHz	12.03	/	/	/	/	/	/	/
	5500MHz	12.33	/	/	/	/	/	/	/
	5580MHz	12.07	/	/	/	/	/	/	/
	5700MHz	11.78	/	/	/	/	/	/	/
	5720MHz	11.96	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz	11.47	11.44	10.97	10.89	10.81	10.30	10.31	10.27
	5200MHz	11.52	/	/	/	/	/	/	/
	5240MHz	11.55	/	/	/	/	/	/	/
	5260MHz	11.59	/	/	/	/	/	/	/
	5280MHz	11.46	/	/	/	/	/	/	/
	5320MHz	11.57	/	/	/	/	/	/	/
	5500MHz	11.91	/	/	/	/	/	/	/
	5580MHz	11.62	/	/	/	/	/	/	/
	5700MHz	11.24	/	/	/	/	/	/	/
	5720MHz	11.40	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Frequency	Test Result (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac (HT20)	5180MHz	12.03	11.96	11.47	11.47	11.55	11.77	11.78	11.80	10.63
	5200MHz	12.07	/	/	/	/	/	/	/	/
	5240MHz	12.12	/	/	/	/	/	/	/	/
	5260MHz	12.23	/	/	/	/	/	/	/	/
	5280MHz	12.07	/	/	/	/	/	/	/	/
	5320MHz	12.16	/	/	/	/	/	/	/	/
	5500MHz	12.56	/	/	/	/	/	/	/	/
	5580MHz	12.18	/	/	/	/	/	/	/	/
	5700MHz	11.84	/	/	/	/	/	/	/	/
	5720 MHz	11.85	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz	12.43	12.41	12.38	11.72	11.72	11.77	11.23	11.24
	5230MHz	12.51	/	/	/	/	/	/	/
	5270MHz	12.53	/	/	/	/	/	/	/
	5310MHz	12.45	/	/	/	/	/	/	/
	5510MHz	12.86	/	/	/	/	/	/	/
	5550MHz	12.64	/	/	/	/	/	/	/
	5670MHz	12.21	/	/	/	/	/	/	/
	5710MHz	12.20	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (HT40)	5190MHz	12.25	12.49	12.42	12.35	11.97	12.02	12.05	12.22	11.67	11.70
	5230MHz	12.31	/	/	/	/	/	/	/	/	/

	5270MHz	12.33	/	/	/	/	/	/	/	/	/
	5310MHz	12.42	/	/	/	/	/	/	/	/	/
	5510MHz	12.73	/	/	/	/	/	/	/	/	/
	5550MHz	12.39	/	/	/	/	/	/	/	/	/
	5670MHz	12.04	/	/	/	/	/	/	/	/	/
	5710MHz	12.30	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (HT80)	5210MHz	12.90	12.99	13.19	12.75	12.90	12.49	12.47	11.41	11.29	11.36
	5290MHz	12.98	/	/	/	/	/	/	/	/	/
	5530MHz	13.39	/	/	/	/	/	/	/	/	/
	5610MHz	13.02	/	/	/	/	/	/	/	/	/
	5690MHz	12.92	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

Measurement Results:

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	0.02	P
	5200 MHz	-0.11	P
	5240 MHz	-0.03	P
	5260 MHz	0.05	P
	5280 MHz	0.02	P
	5320 MHz	0.03	P
	5500 MHz	0.54	P
	5580 MHz	0.49	P
	5700 MHz	0.14	P
	5720MHz	0.10	P
802.11n HT20	5180 MHz	-0.79	P
	5200 MHz	-0.90	P
	5240 MHz	-0.77	P
	5260 MHz	-0.77	P
	5280 MHz	-0.52	P
	5320 MHz	-0.76	P
	5500 MHz	-0.21	P
	5580 MHz	-0.26	P
	5700 MHz	-0.66	P
	5720MHz	-0.31	P
802.11ac HT20	5180 MHz	-0.24	P
	5200 MHz	-0.27	P
	5240 MHz	-0.18	P
	5260 MHz	-0.19	P
	5280 MHz	-0.24	P
	5320 MHz	-0.22	P
	5500 MHz	0.25	P
	5580 MHz	0.26	P
	5700 MHz	-0.20	P
	5720MHz	-0.20	P
802.11n	5190 MHz	-2.98	P

HT40	5230 MHz	-2.86	P
	5270 MHz	-2.87	P
	5310 MHz	-2.84	P
	5510 MHz	-2.31	P
	5550 MHz	-2.37	P
	5670 MHz	-2.70	P
	5710MHz	-2.23	P
802.11ac HT40	5190 MHz	-2.87	P
	5230 MHz	-2.85	P
	5270 MHz	-2.86	P
	5310 MHz	-2.82	P
	5510 MHz	-2.26	P
	5550 MHz	-2.34	P
	5670 MHz	-2.70	P
802.11ac HT80	5210MHz	-5.27	P
	5290MHz	-5.30	P
	5530MHz	-4.51	P
	5610MHz	-4.86	P
	5690MHz	-4.80	P

Conclusion: PASS

A.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Frequency	Occupied 26dB Bandwidth (MHz)		conclusion
		Fig.	Value	
802.11a	5180 MHz	Fig.1	23.20	P
	5200 MHz	Fig.2	23.00	P
	5240 MHz	Fig.3	23.05	P
	5260 MHz	Fig.4	22.30	P
	5280 MHz	Fig.5	22.45	P
	5320 MHz	Fig.6	22.50	P
	5500 MHz	Fig.7	23.25	P
	5580 MHz	Fig.8	23.00	P
	5700 MHz	Fig.9	23.00	P
	5720MHz	Fig.10	23.10	P
802.11ac HT20	5180 MHz	Fig.11	23.00	P
	5200 MHz	Fig.12	23.00	P
	5240 MHz	Fig.13	23.00	P
	5260 MHz	Fig.14	22.70	P
	5280 MHz	Fig.15	23.20	P
	5320 MHz	Fig.16	22.60	P
	5500 MHz	Fig.17	23.00	P
	5580 MHz	Fig.18	23.20	P
	5700 MHz	Fig.19	22.95	P
	5720MHz	Fig.20	23.00	P

802.11n HT40	5190 MHz	Fig.21	44.72	P
	5230 MHz	Fig.22	43.68	P
	5270 MHz	Fig.23	42.48	P
	5310 MHz	Fig.24	42.48	P
	5510 MHz	Fig.25	44.40	P
	5550 MHz	Fig.26	44.56	P
	5670 MHz	Fig.27	44.16	P
	5710MHz	Fig.28	44.08	P

802.11ac HT80	5210MHz	Fig.29	84.96	P
	5290MHz	Fig.30	83.20	P
	5530MHz	Fig.31	84.95	P
	5610MHz	Fig.32	85.28	P
	5690MHz	Fig.33	84.96	P

Conclusion: PASS
Test graphs as below:

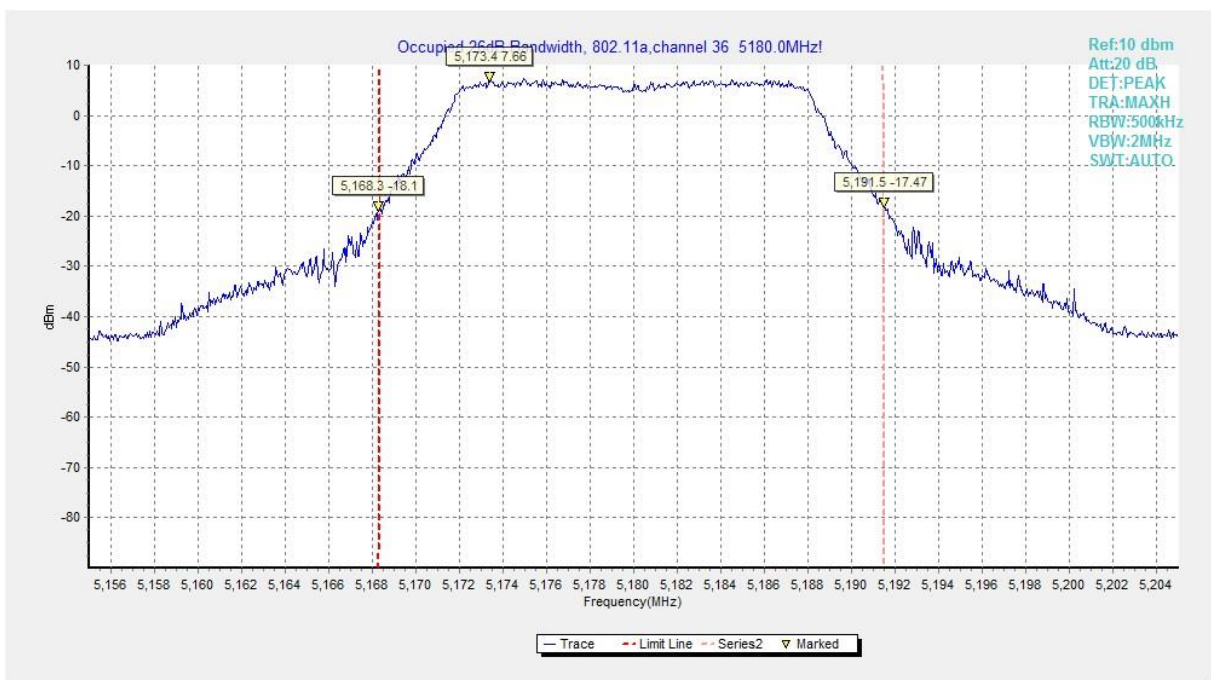


Fig.1 Occupied 26dB Bandwidth (802.11a, 5180MHz)



Fig.2 Occupied 26dB Bandwidth (802.11a, 5200MHz)

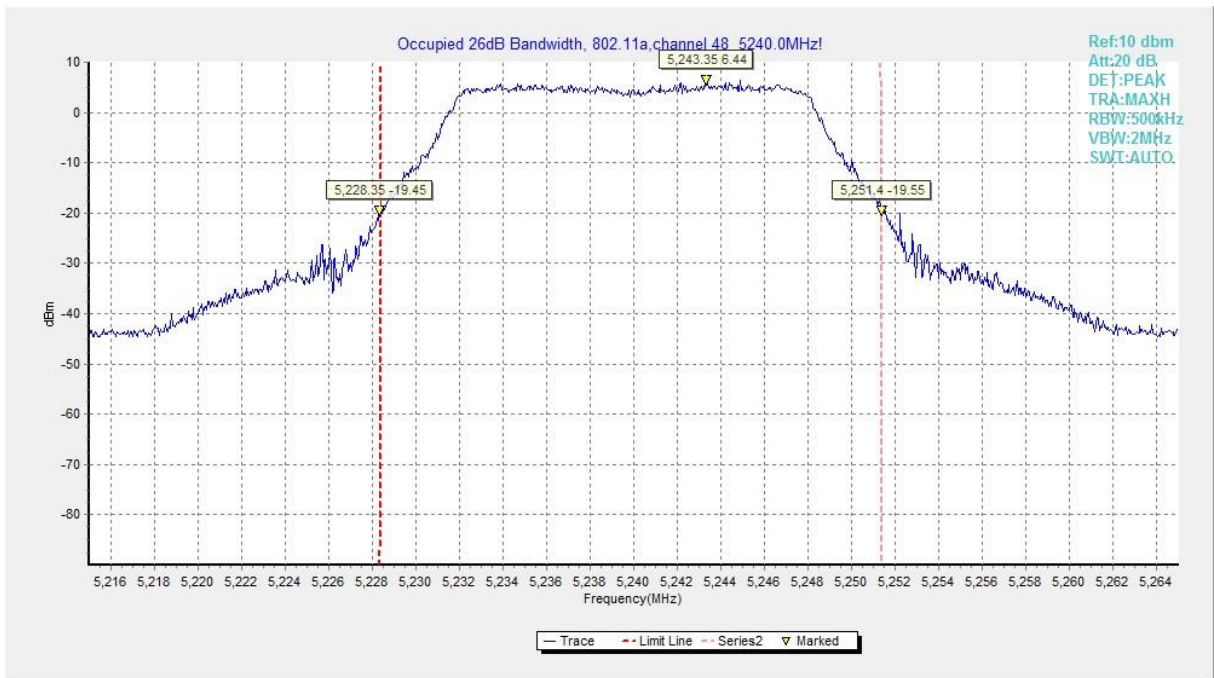


Fig.3 Occupied 26dB Bandwidth (802.11a, 5240MHz)

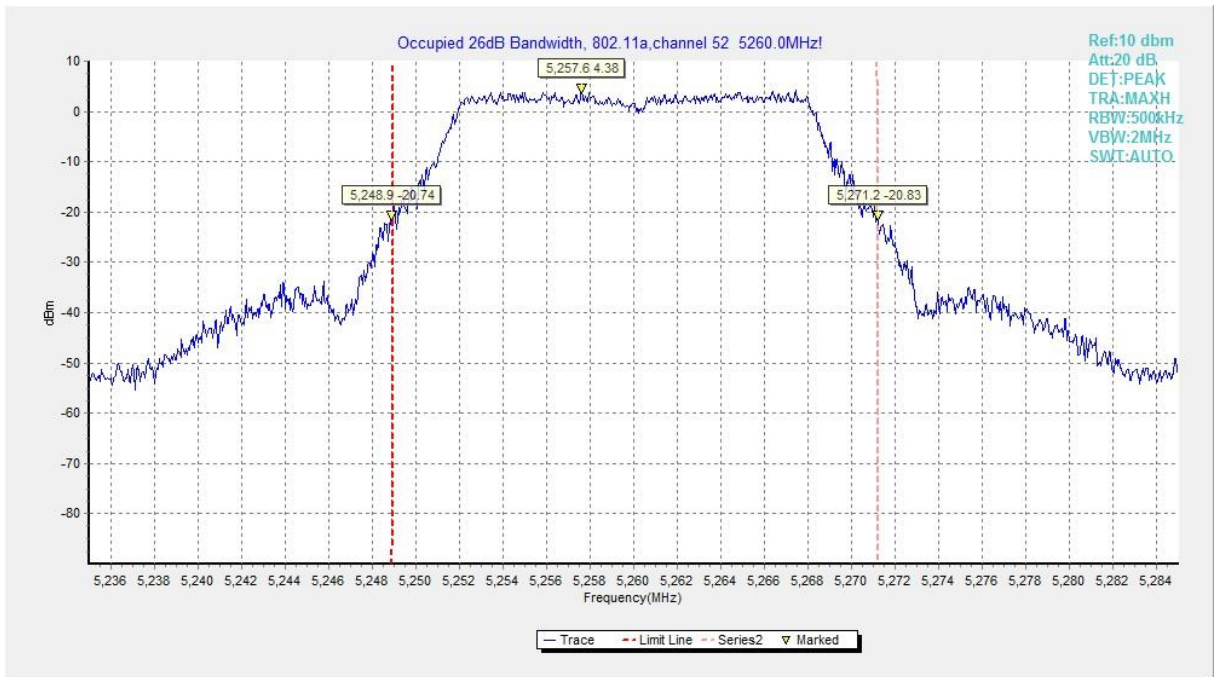


Fig.4 Occupied 26dB Bandwidth (802.11a, 5260MHz)

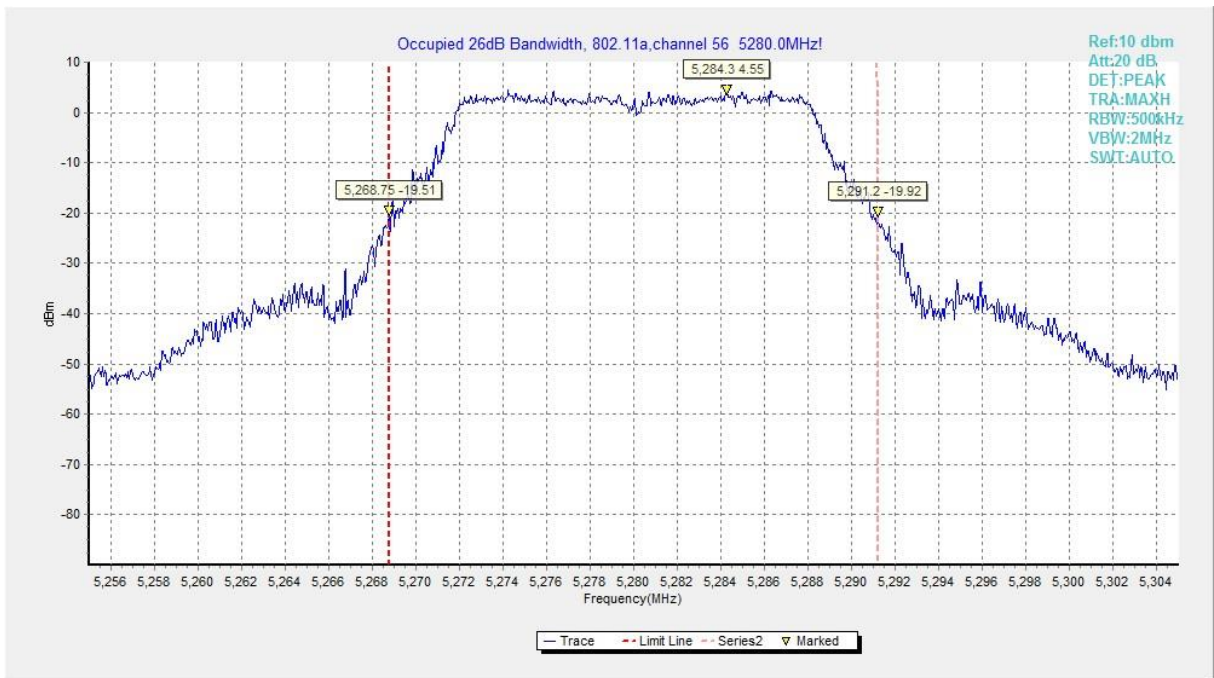


Fig.5 Occupied 26dB Bandwidth (802.11a, 5280MHz)

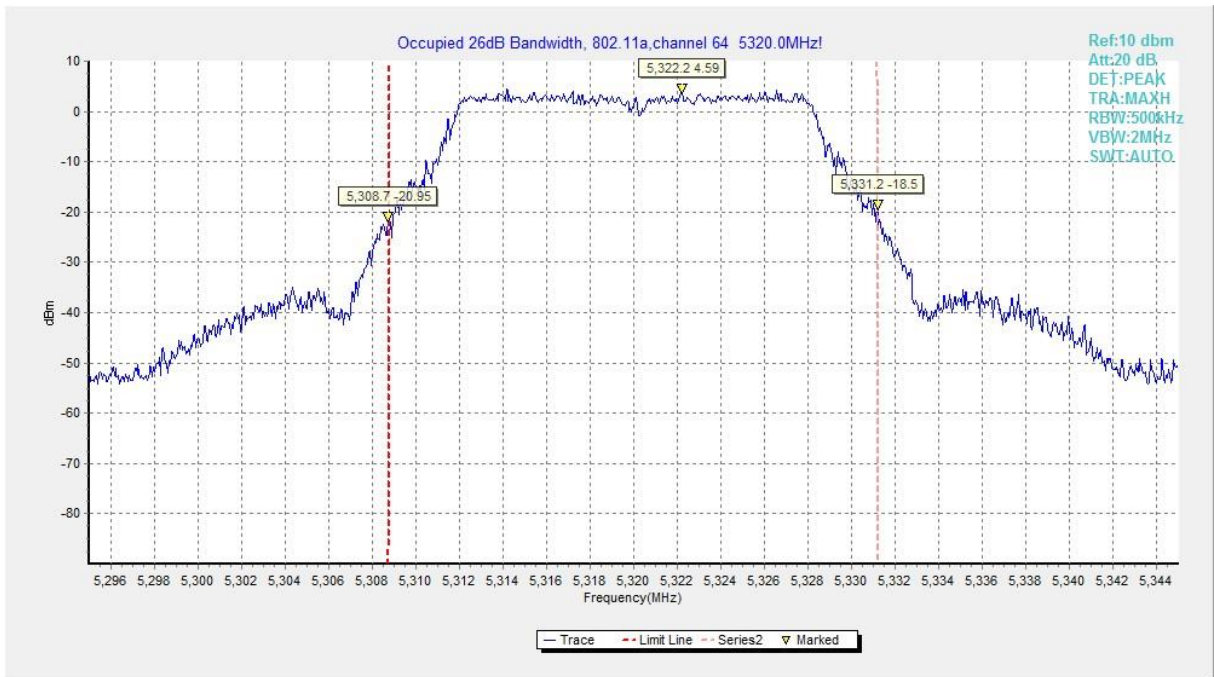


Fig.6 Occupied 26dB Bandwidth (802.11a, 5320MHz)

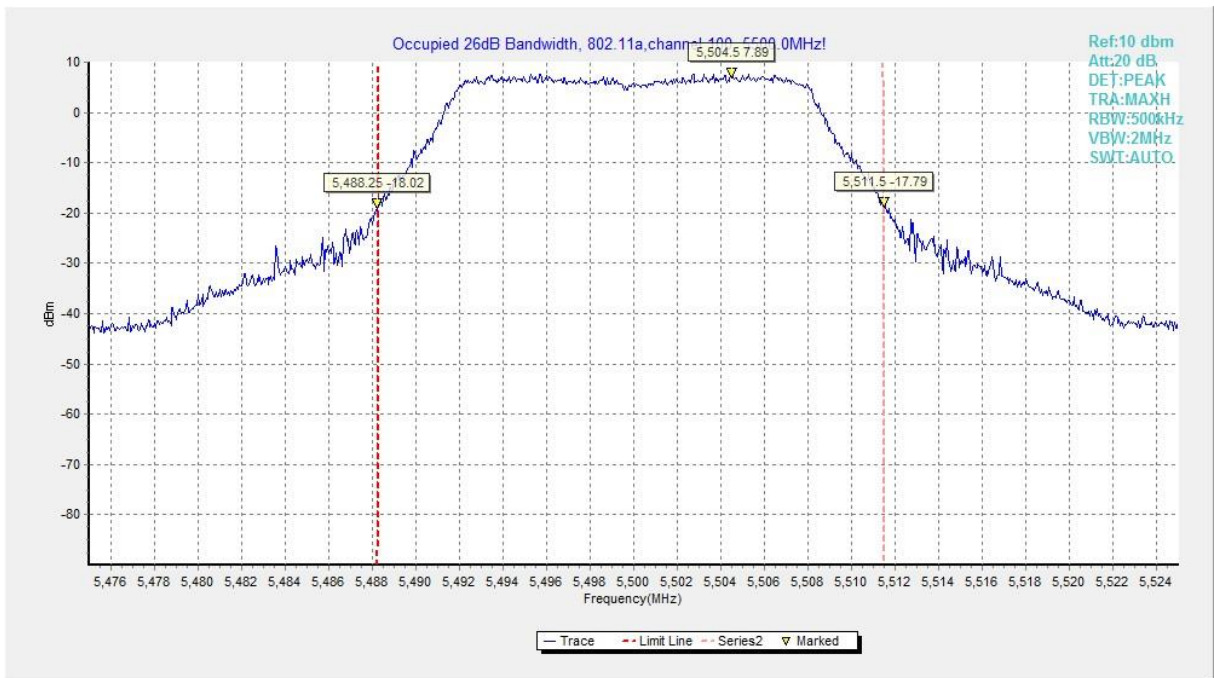


Fig.7 Occupied 26dB Bandwidth (802.11a, 5500MHz)

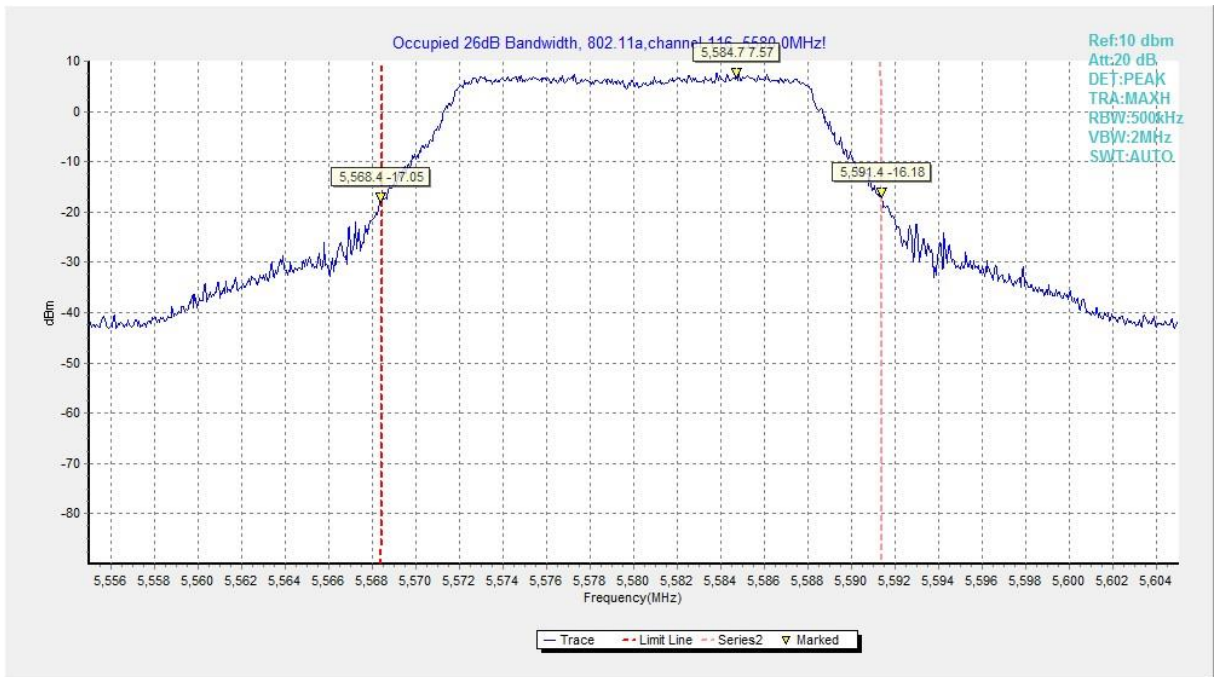


Fig.8 Occupied 26dB Bandwidth (802.11a, 5580MHz)

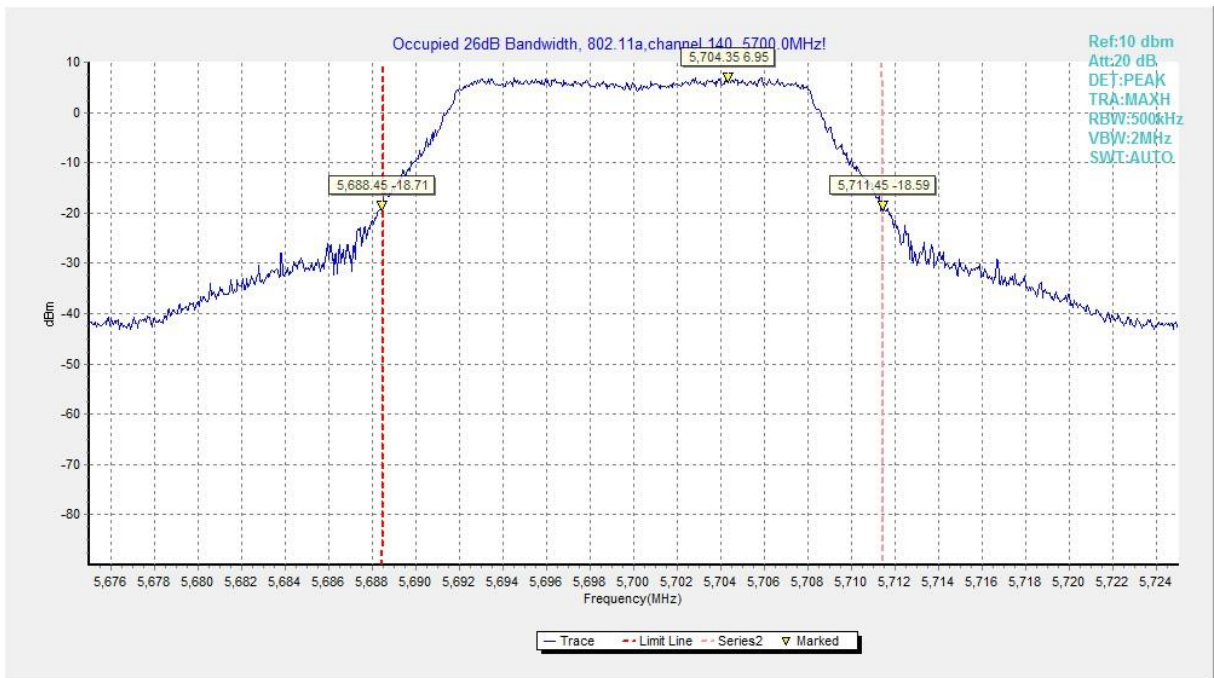


Fig.9 Occupied 26dB Bandwidth (802.11a, 5700MHz)

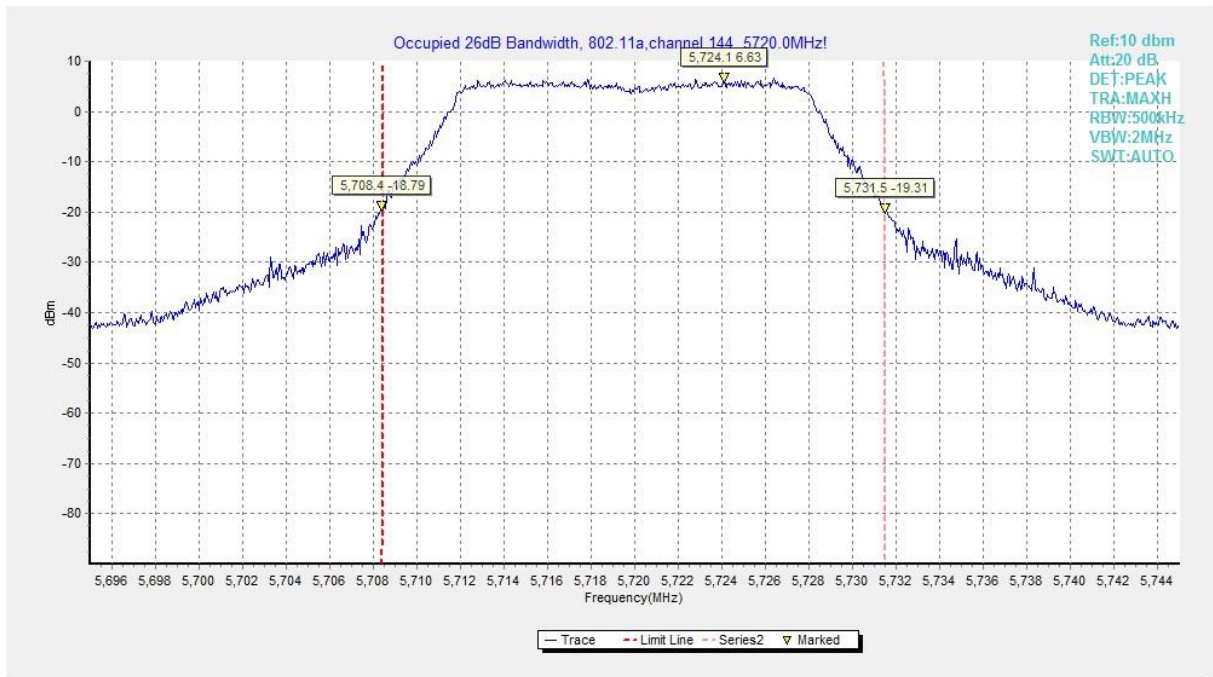


Fig.10 Occupied 26dB Bandwidth (802.11a, 5720MHz)

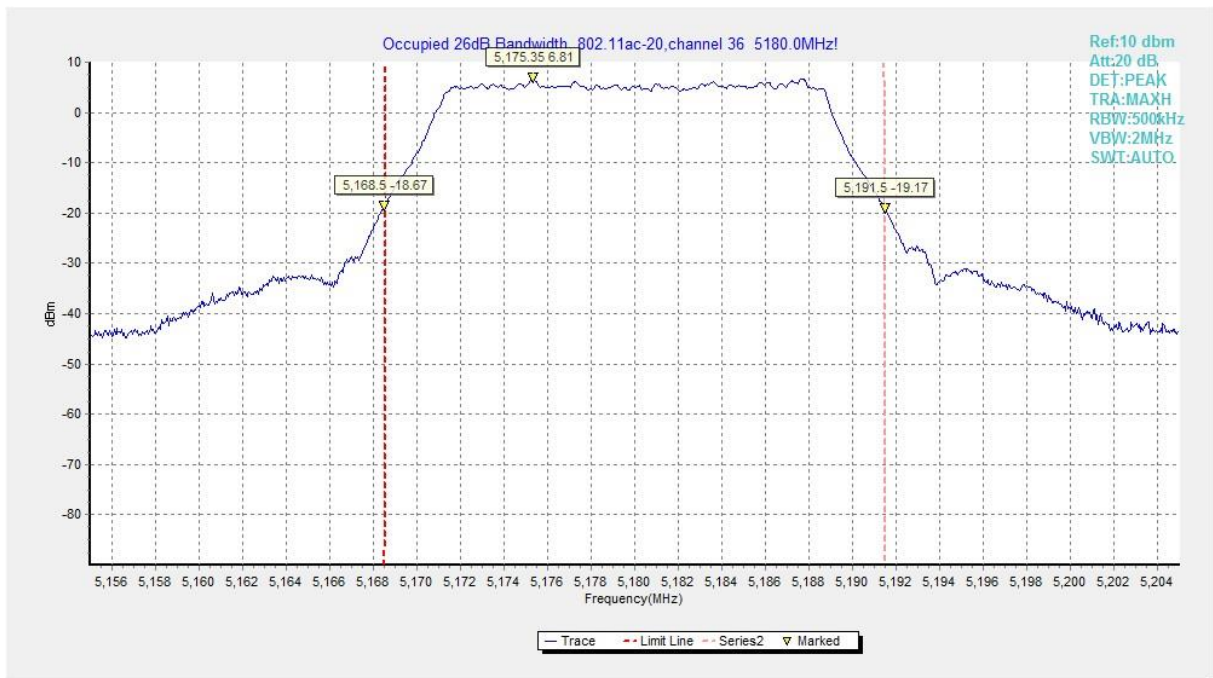


Fig.11 Occupied 26dB Bandwidth (802.11ac-HT20, 5180MHz)

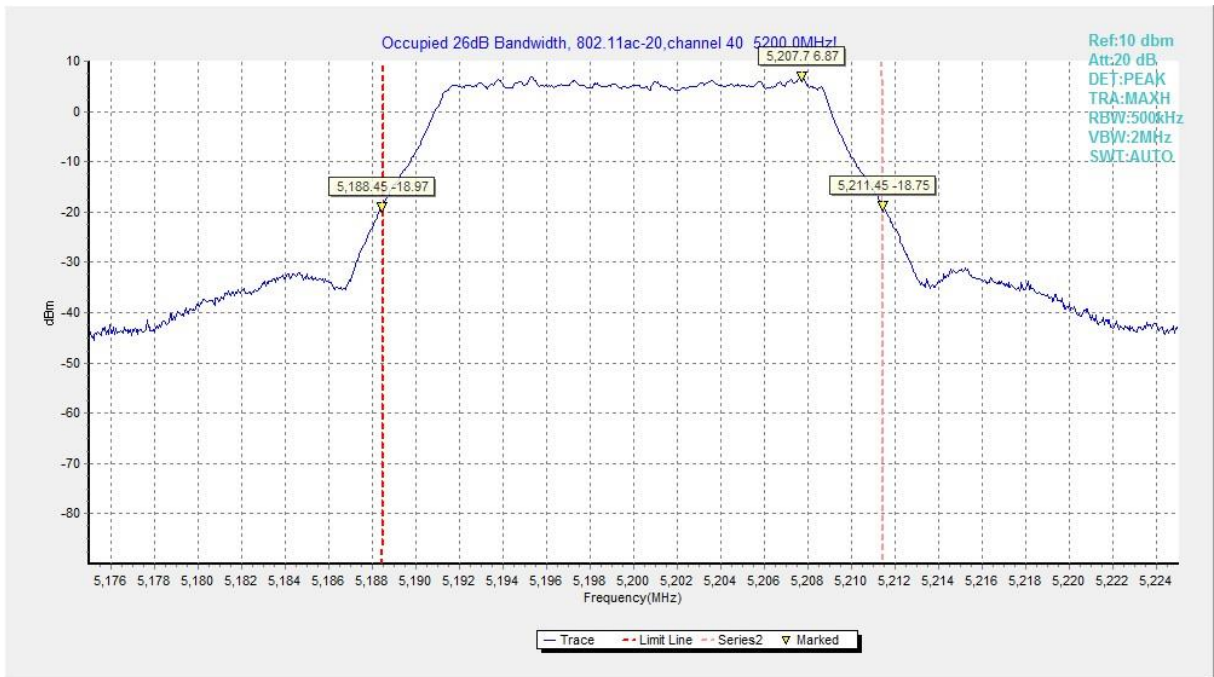


Fig.12 Occupied 26dB Bandwidth (802.11ac-HT20, 5200MHz)

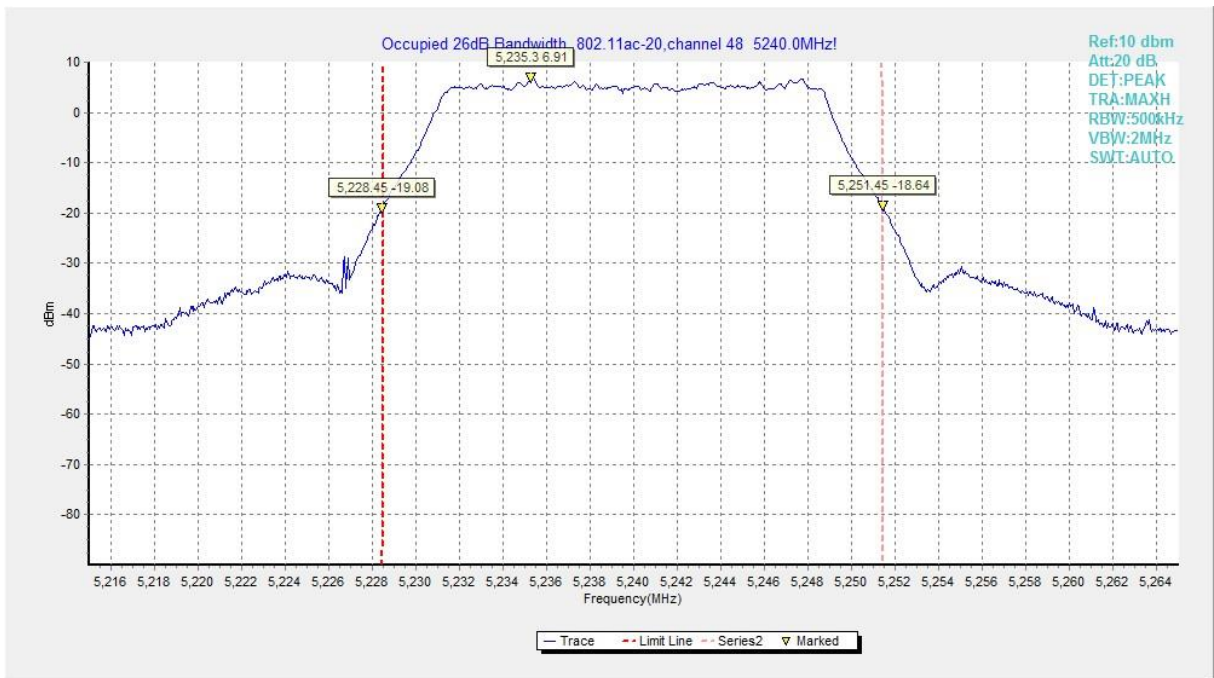


Fig.13 Occupied 26dB Bandwidth (802.11ac-HT20, 5240MHz)

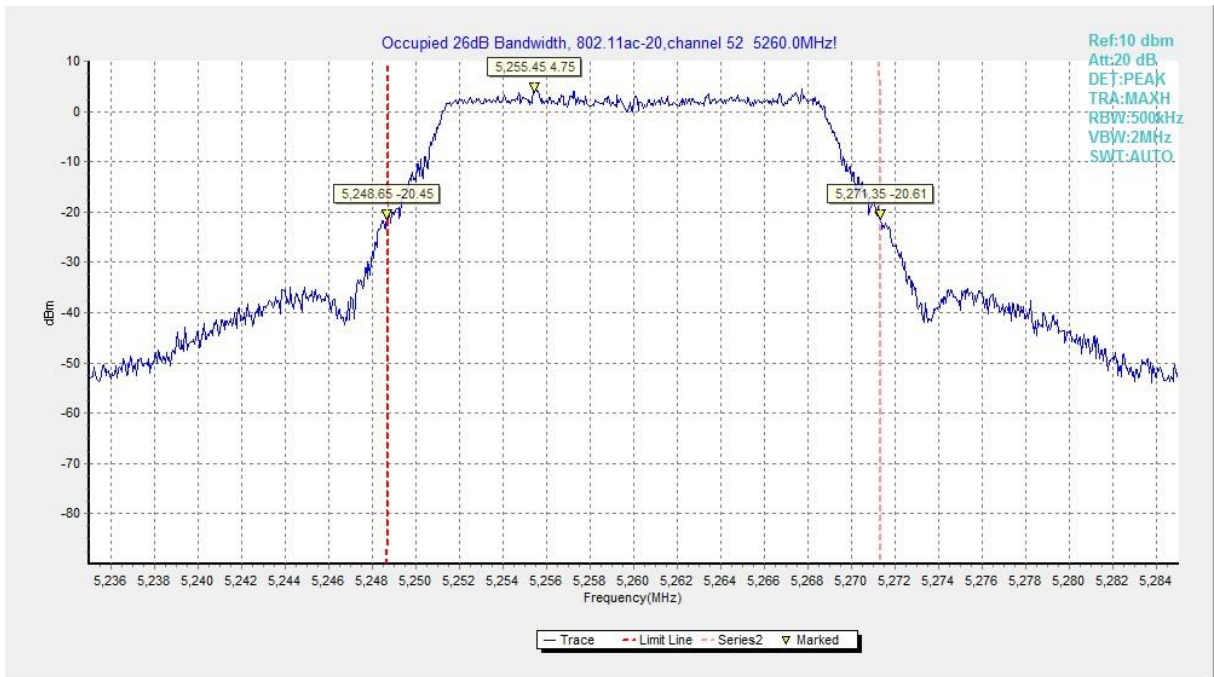


Fig.14 Occupied 26dB Bandwidth (802.11ac-HT20, 5260MHz)

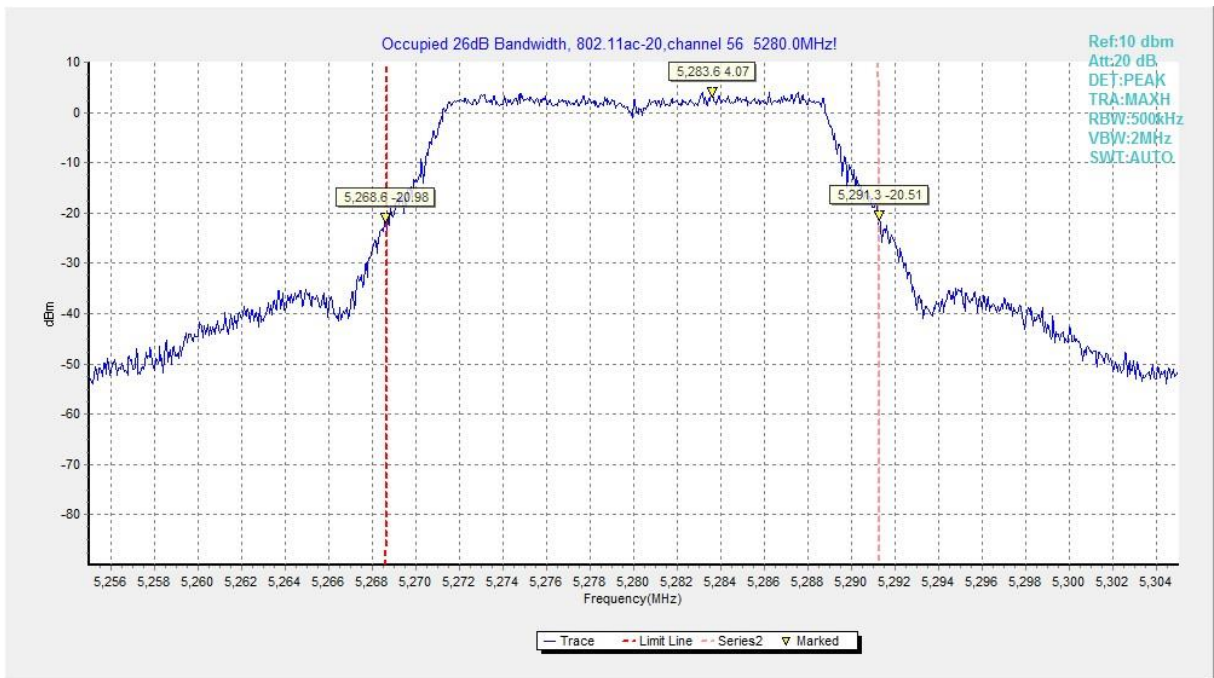


Fig.15 Occupied 26dB Bandwidth (802.11ac-HT20, 5280MHz)

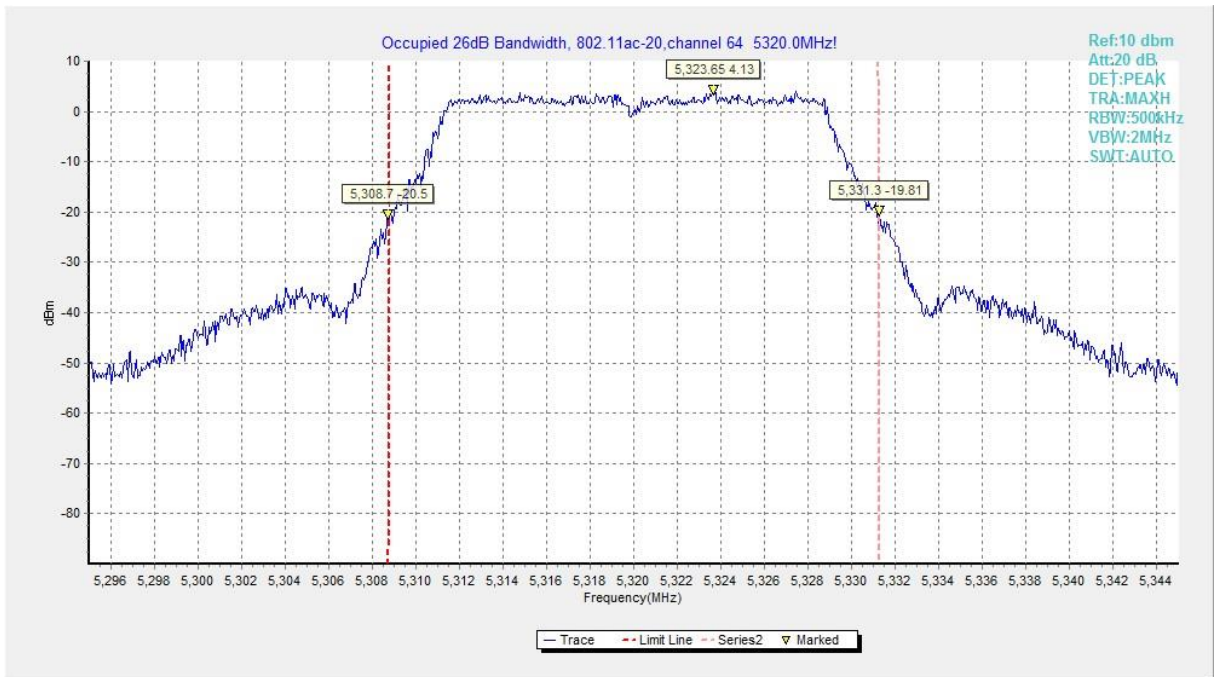


Fig.16 Occupied 26dB Bandwidth (802.11ac-HT20, 5320MHz)

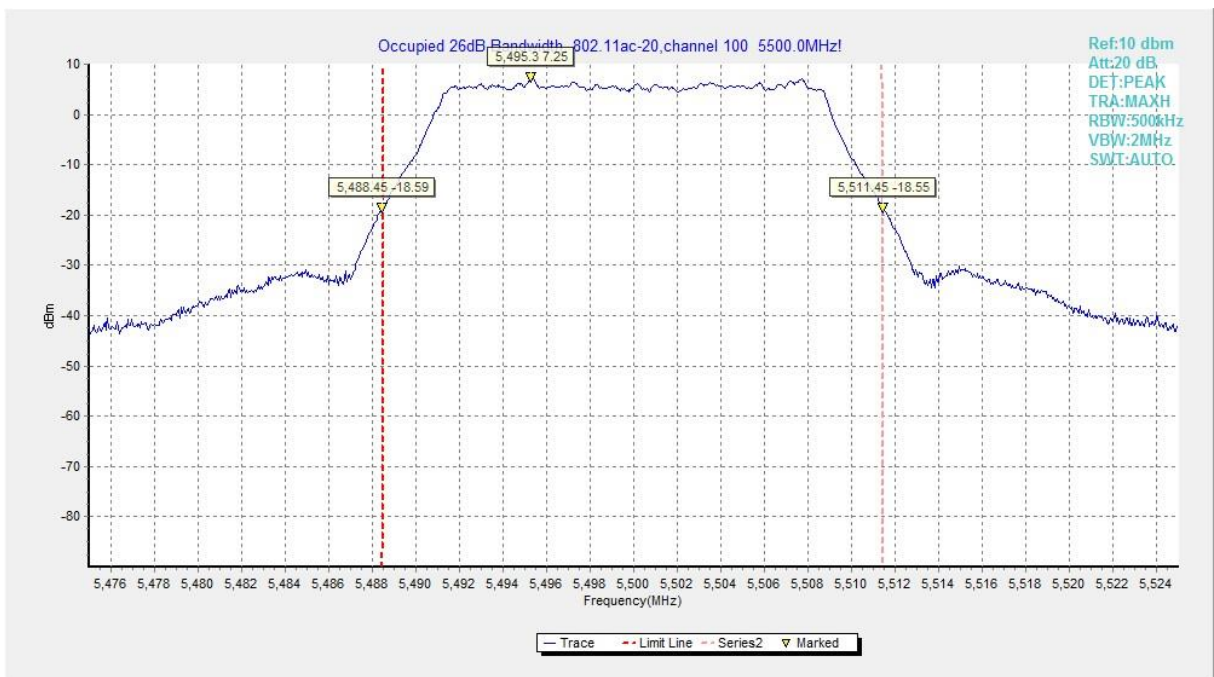


Fig.17 Occupied 26dB Bandwidth (802.11ac-HT20, 5500MHz)

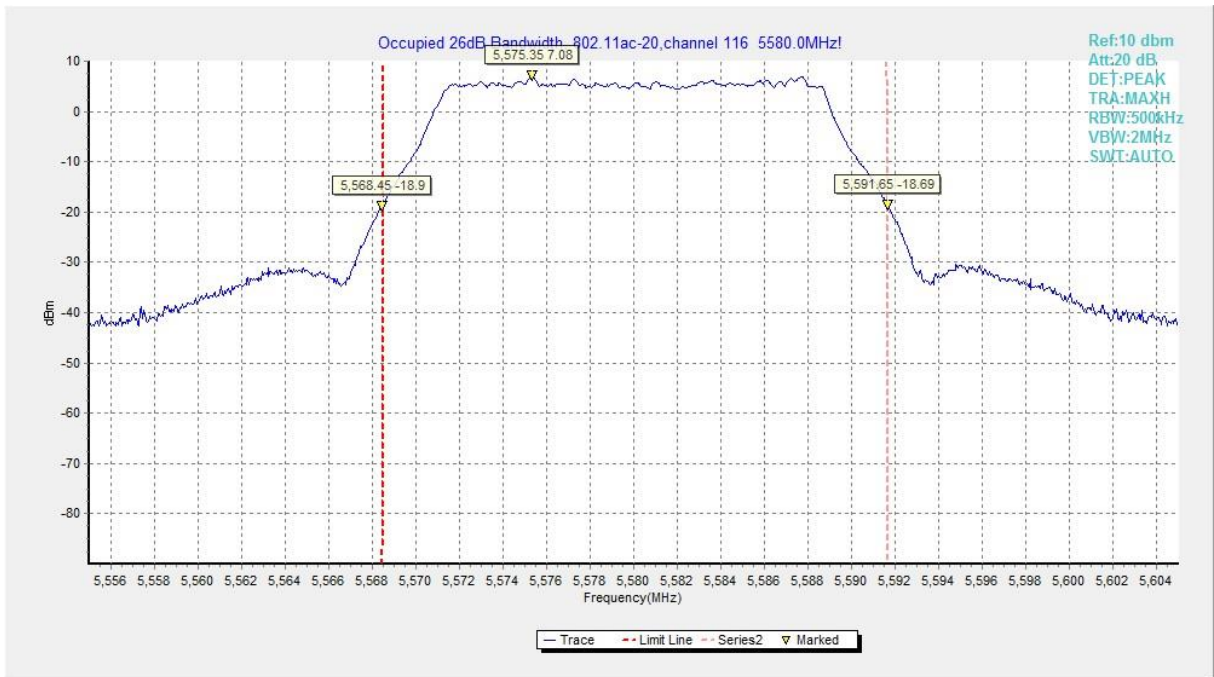


Fig.18 Occupied 26dB Bandwidth (802.11ac-HT20, 5580MHz)

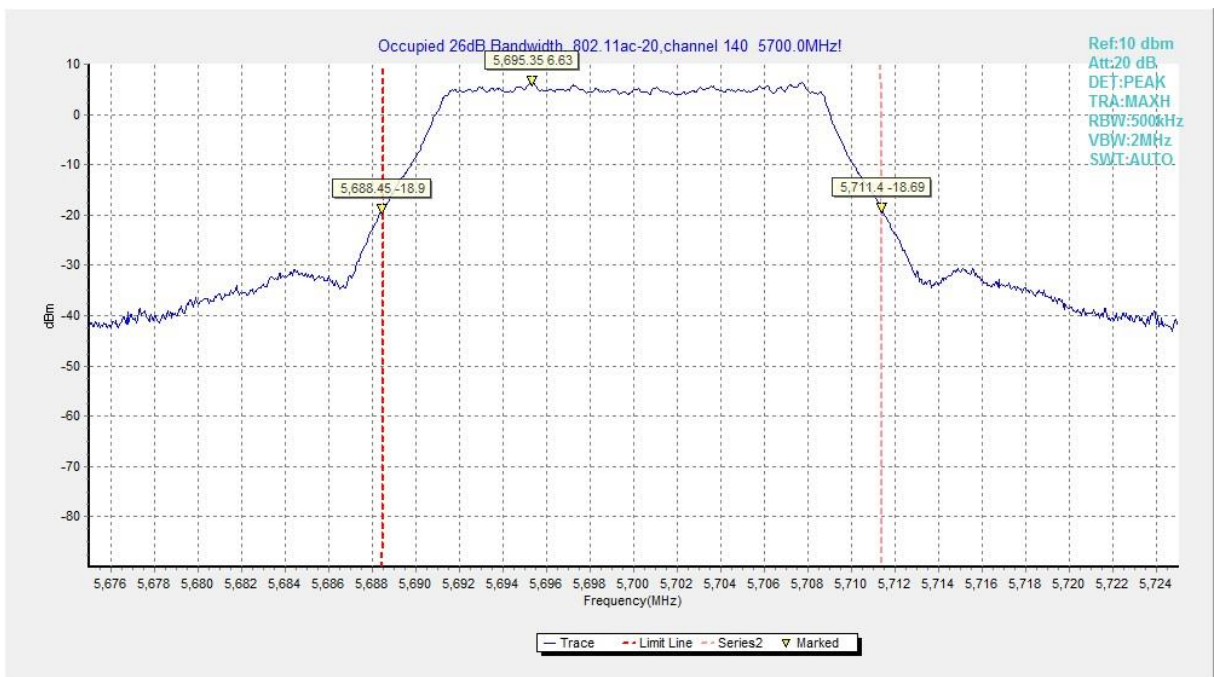


Fig.19 Occupied 26dB Bandwidth (802.11ac-HT20, 5700MHz)

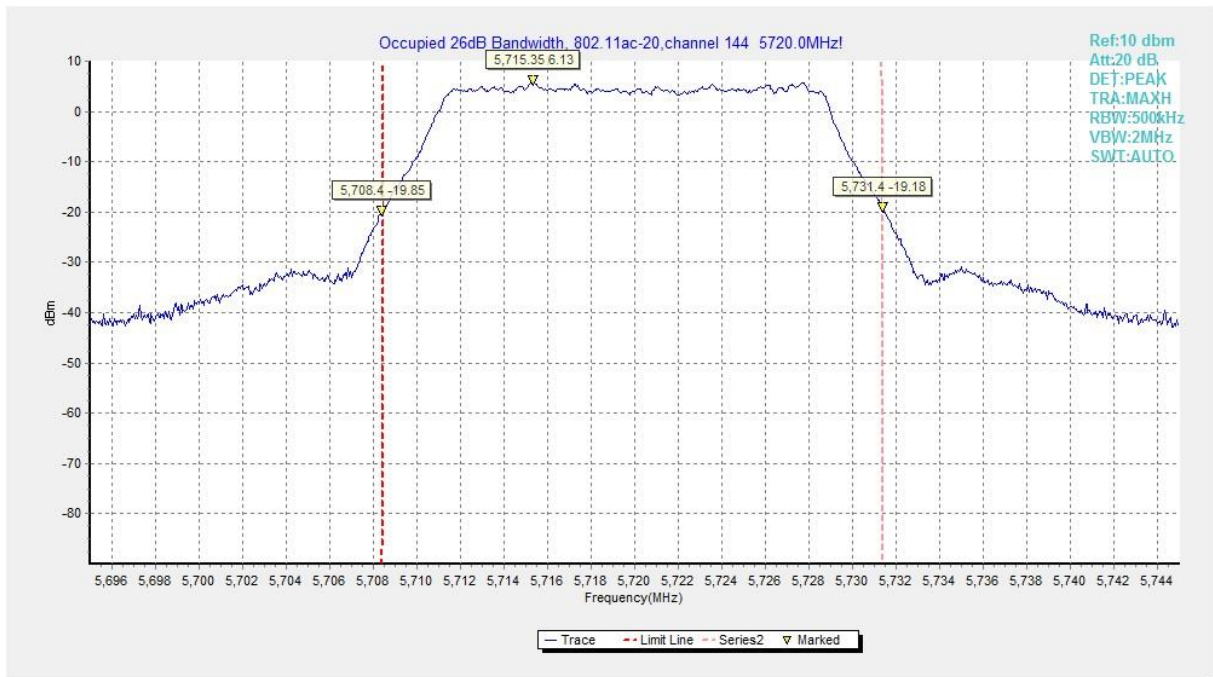


Fig.20 Occupied 26dB Bandwidth (802.11ac-HT20, 5720MHz)

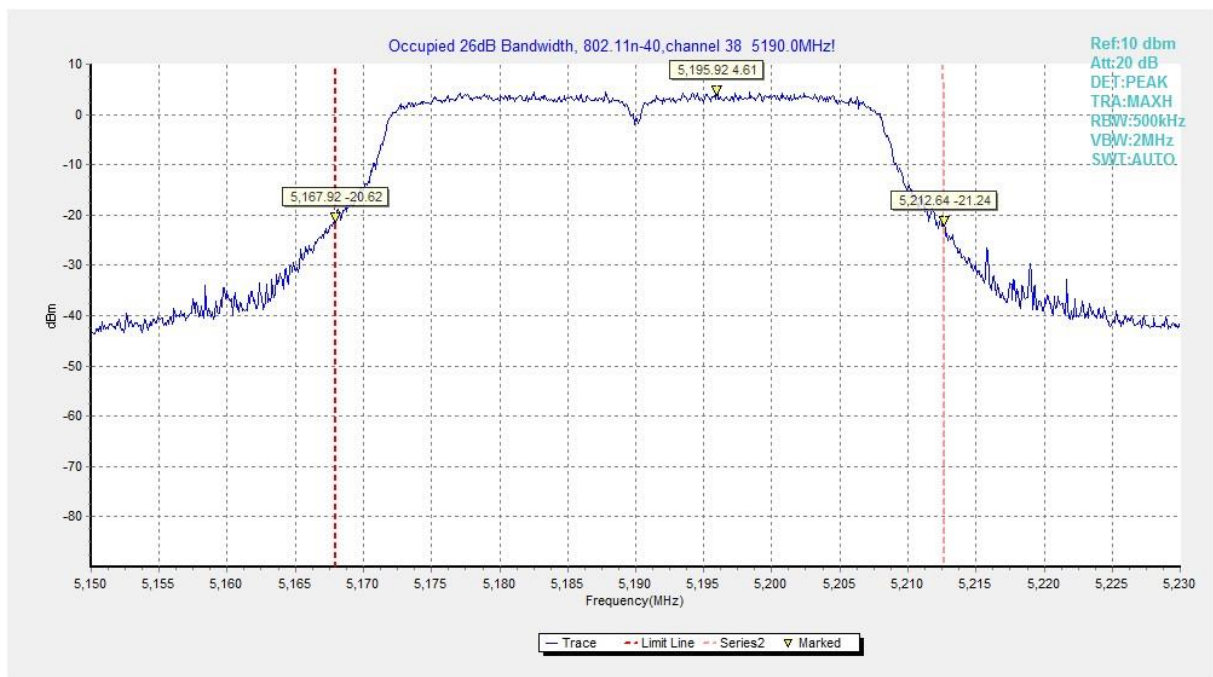


Fig.21 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)

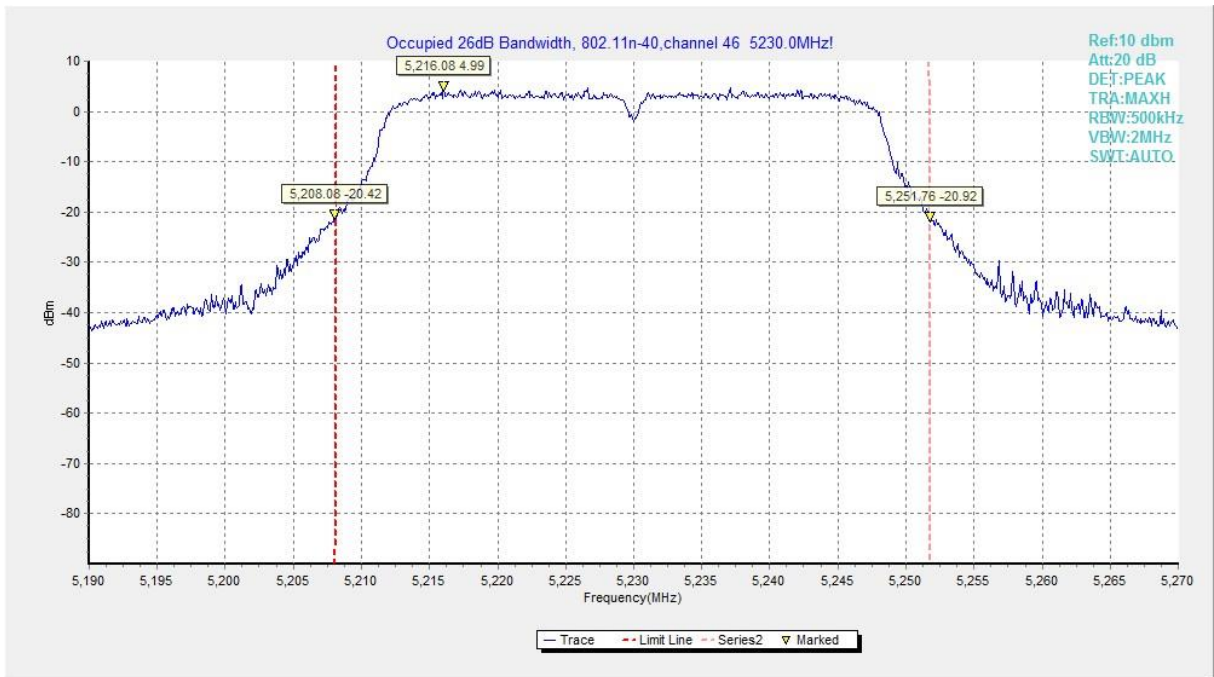


Fig.22 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)

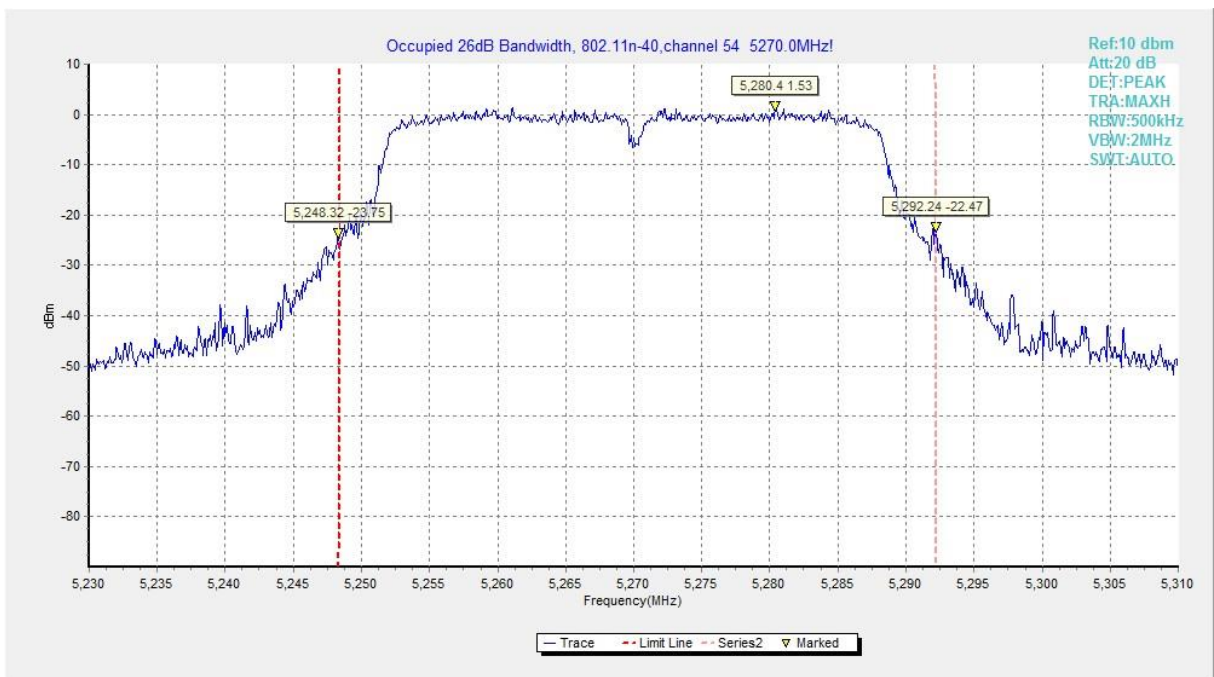


Fig.23 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)

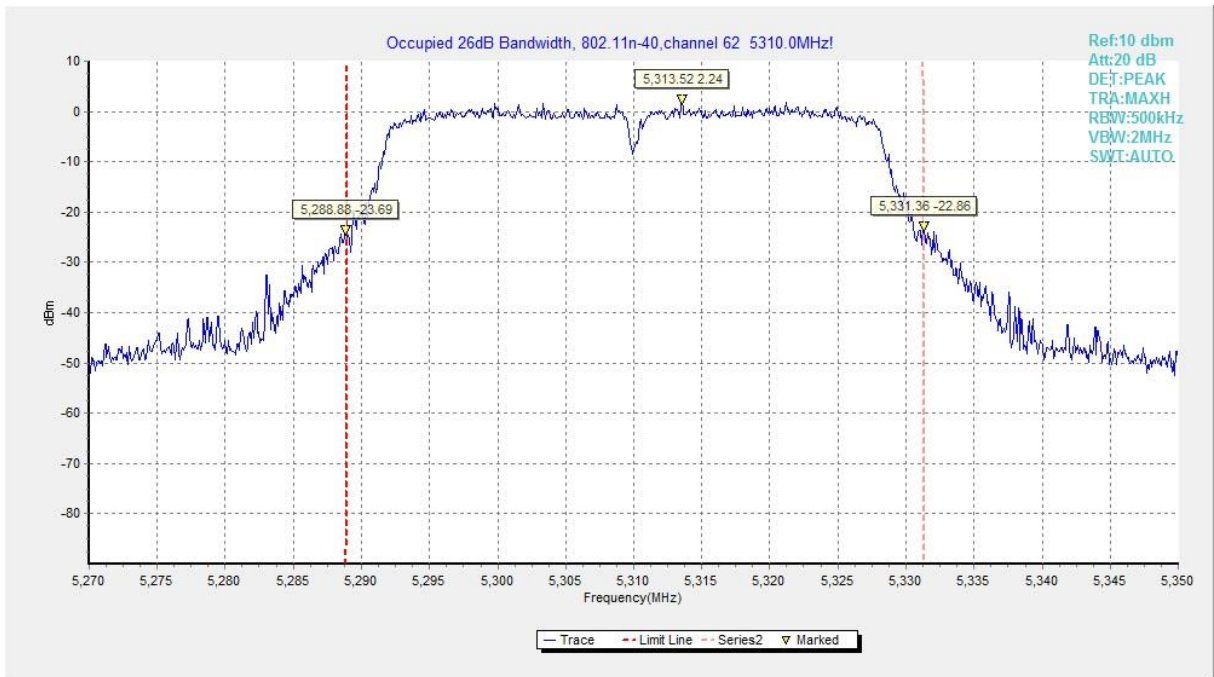


Fig.24 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)

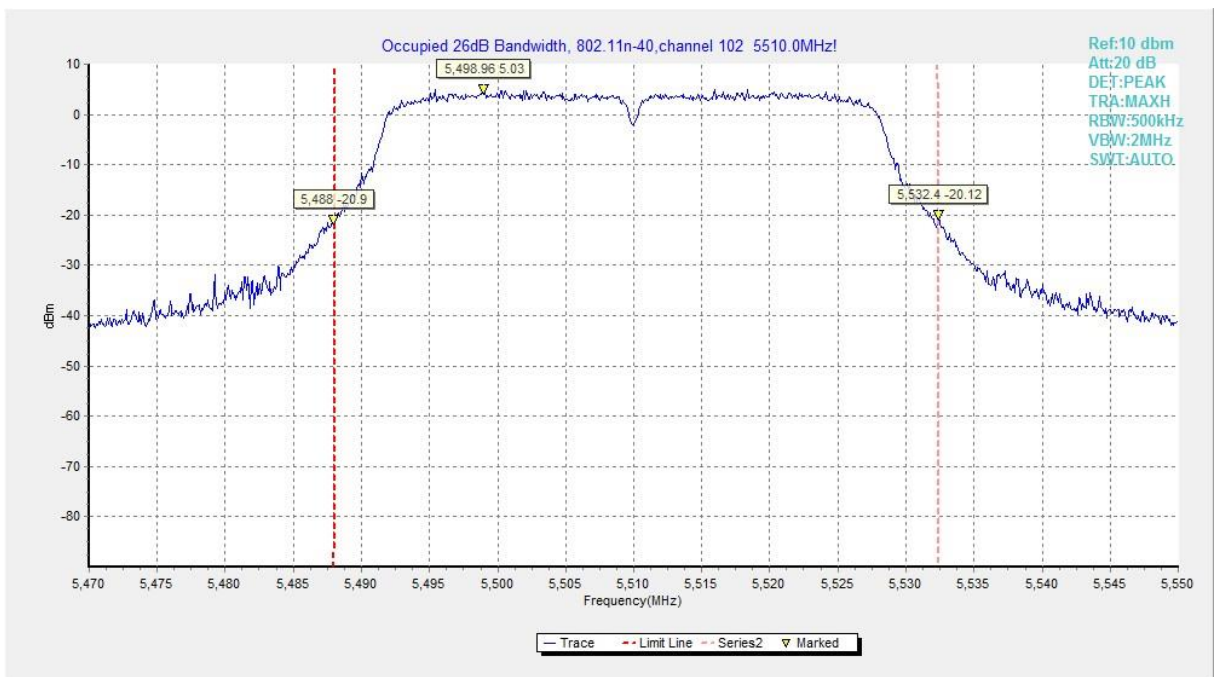


Fig.25 Occupied 26dB Bandwidth (802.11n-HT40, 5510MHz)

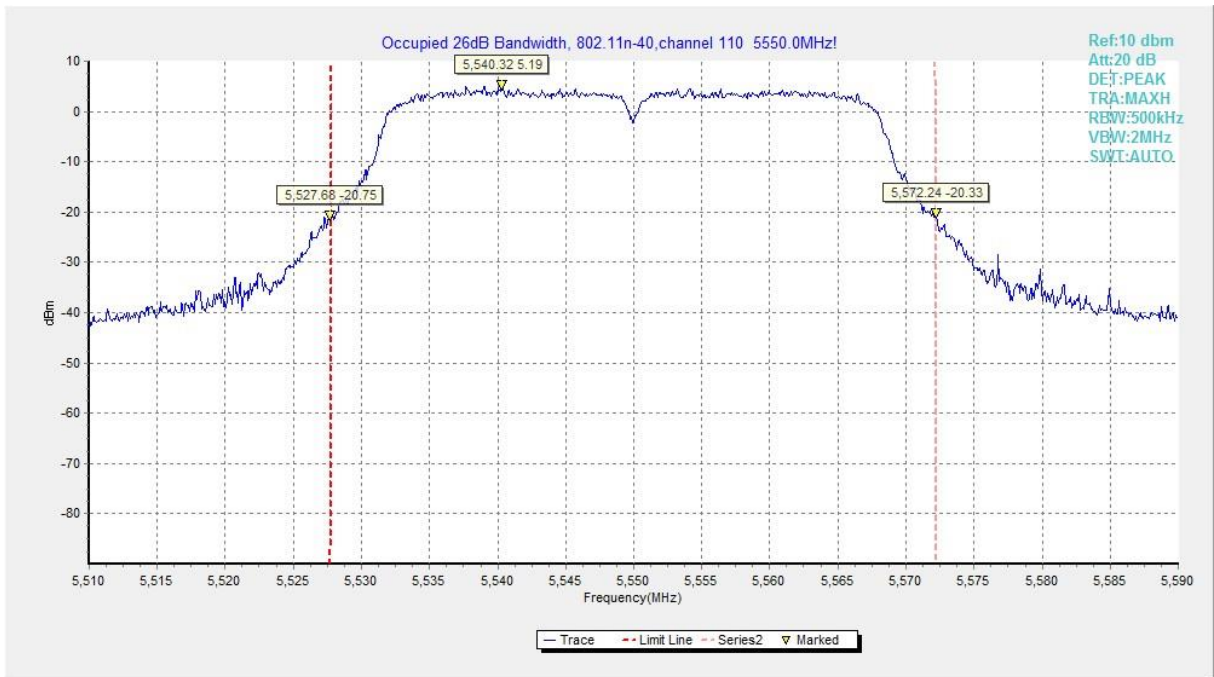


Fig.26 Occupied 26dB Bandwidth (802. 11n-HT40, 5550MHz)

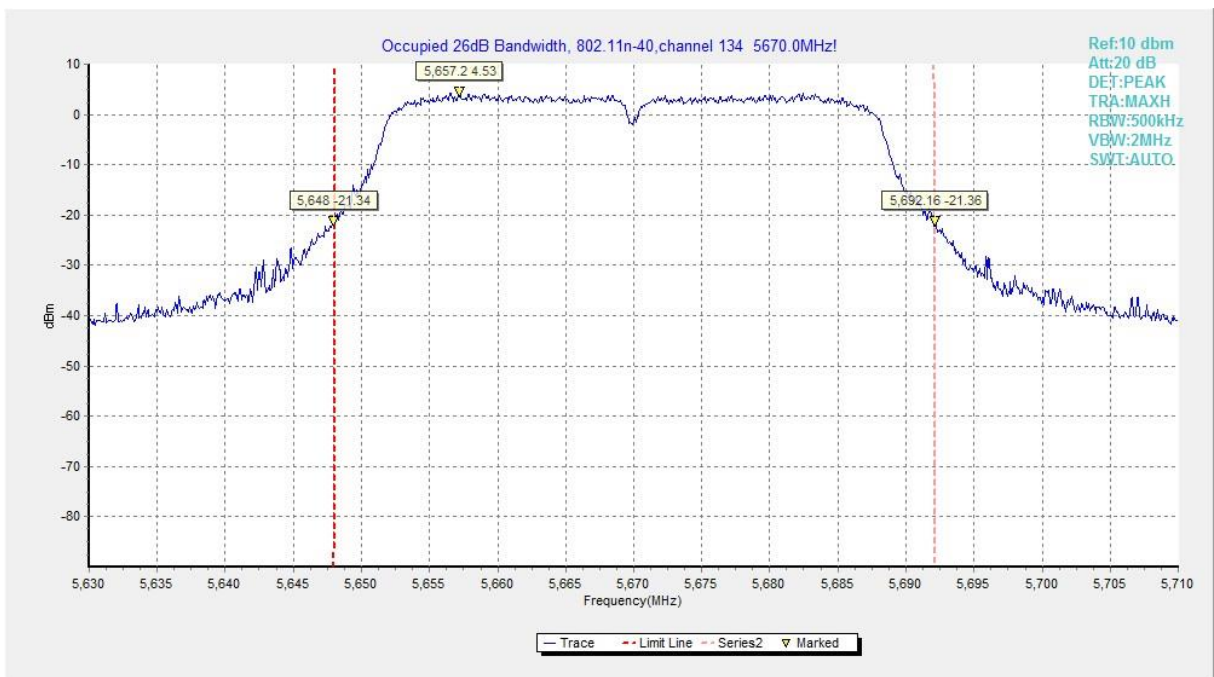


Fig.27 Occupied 26dB Bandwidth (802. 11n-HT40, 5670MHz)

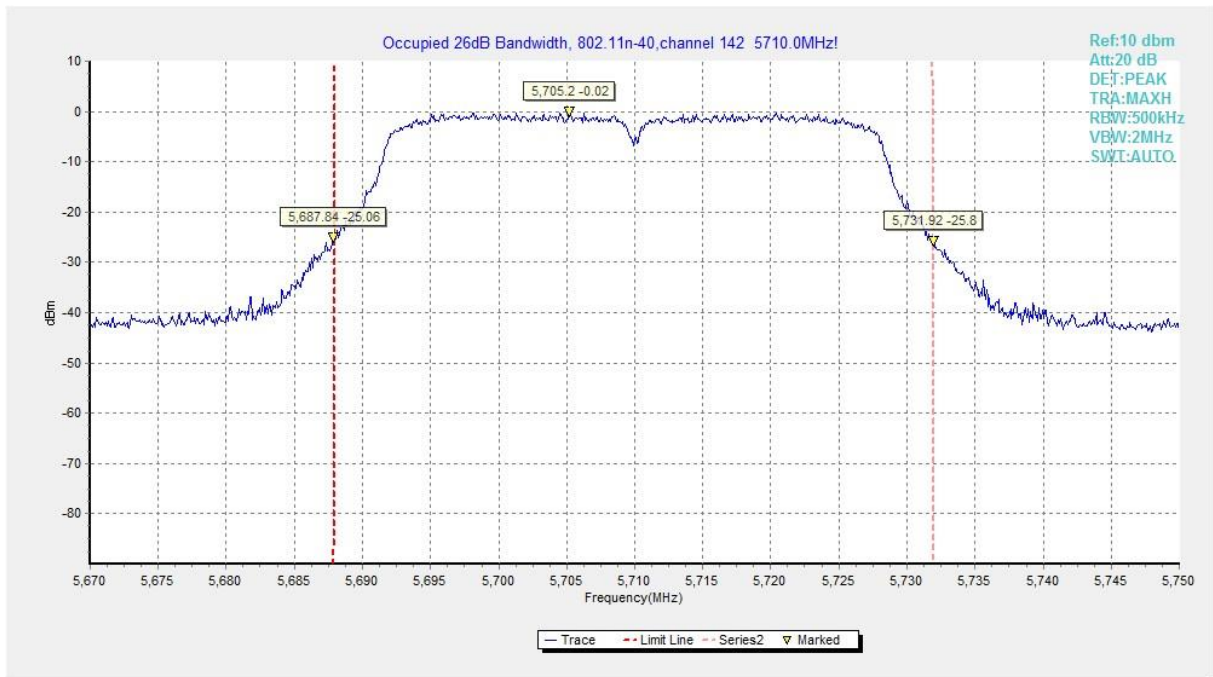


Fig.28 Occupied 26dB Bandwidth (802. 11n-HT40, 5710MHz)

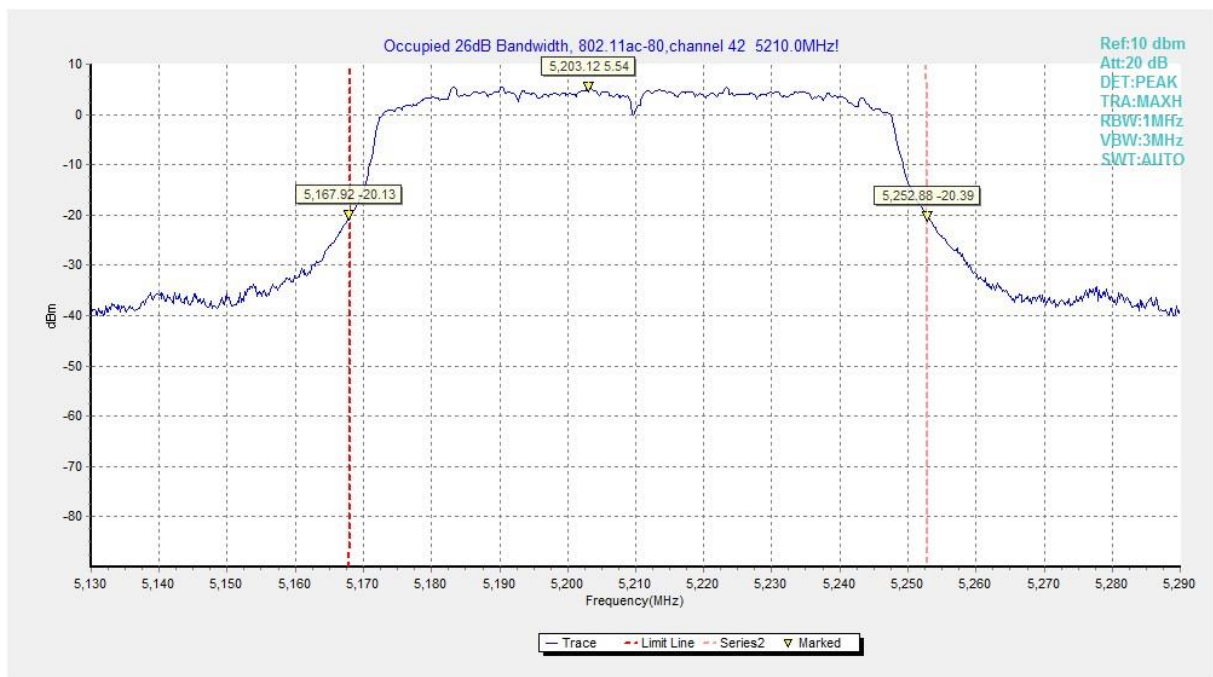


Fig.29 Occupied 26dB Bandwidth (802. 11ac-HT80, 5210MHz)

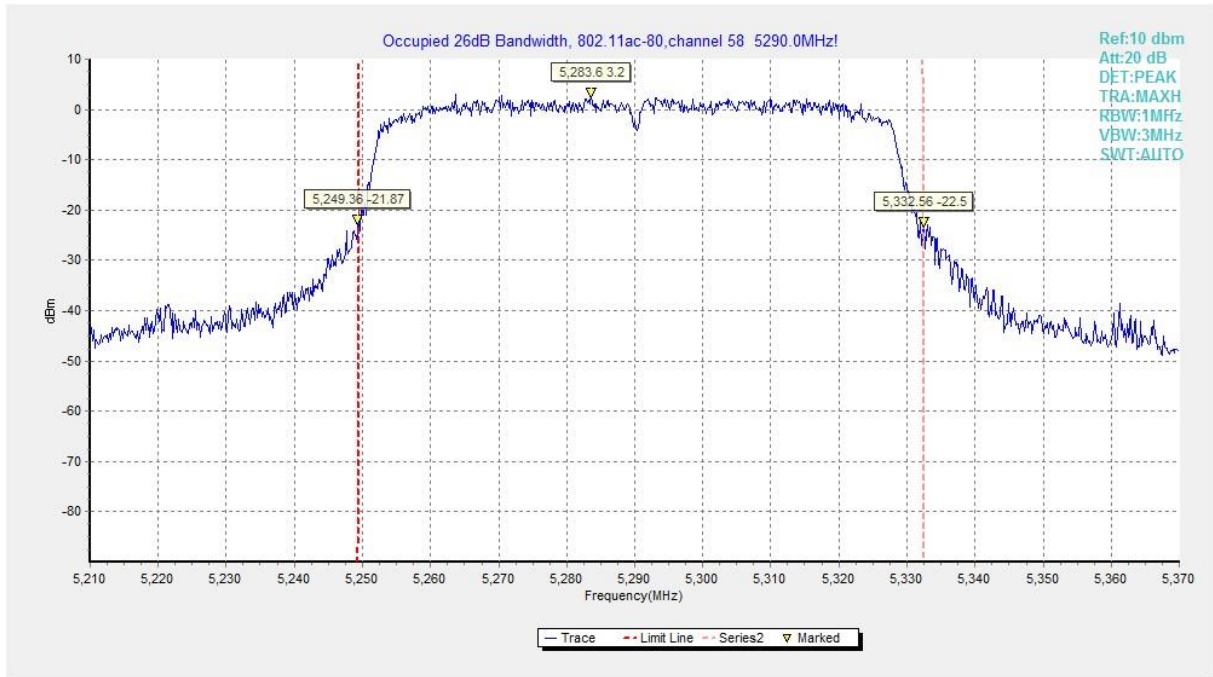


Fig.30 Occupied 26dB Bandwidth (802. 11ac-HT80, 5290MHz)

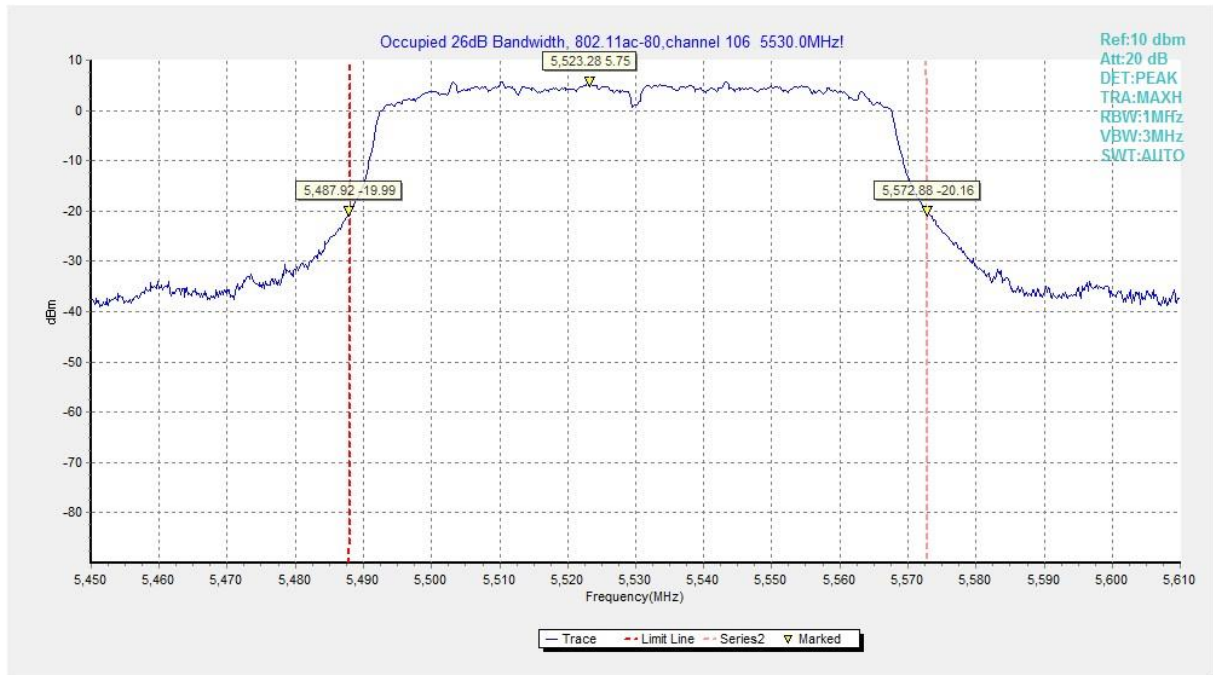


Fig.31 Occupied 26dB Bandwidth (802. 11ac-HT80, 5530MHz)

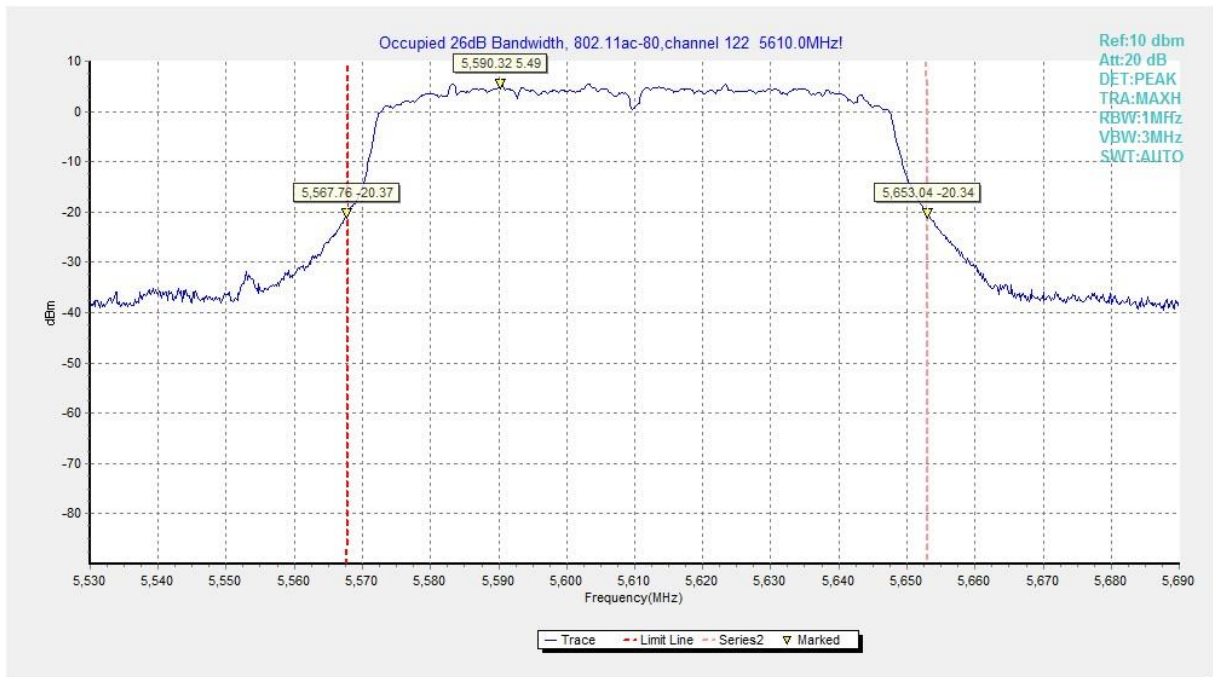


Fig.32 Occupied 26dB Bandwidth (802.11ac-HT80, 5610MHz)

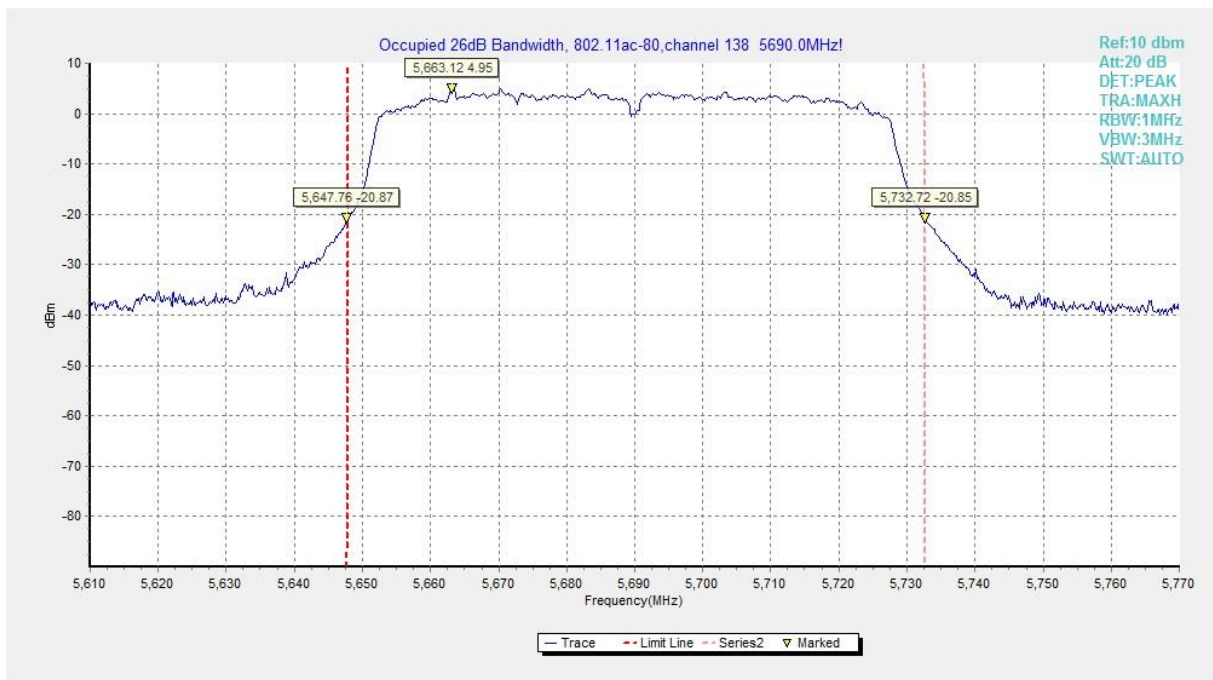


Fig.33 Occupied 26dB Bandwidth (802.11ac-HT80, 5690MHz)

A.5. Band Edges Compliance

A5.1 Band Edges - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.34	P
	5320 MHz	Fig.35	P
	5500 MHz	Fig.36	P
	5700 MHz	Fig.37	P
802.11n HT20	5180 MHz	Fig.38	P
	5320 MHz	Fig.39	P
	5500 MHz	Fig.40	P
	5700 MHz	Fig.41	P
802.11n HT40	5190 MHz	Fig.42	P
	5310 MHz	Fig.43	P
	5510 MHz	Fig.44	P
	5670 MHz	Fig.45	P
802.11ac HT20	5180 MHz	Fig.46	P
	5320 MHz	Fig.47	P
	5500 MHz	Fig.48	P
	5700 MHz	Fig.49	P
802.11ac HT40	5190 MHz	Fig.50	P
	5310 MHz	Fig.51	P
	5510 MHz	Fig.52	P
	5670 MHz	Fig.53	P
802.11ac HT80	5210 MHz	Fig.54	P
	5290 MHz	Fig.55	P
	5530 MHz	Fig.56	P

Conclusion: PASS
Test graphs as below:

RE - Power-5.000GHz-5.175GHz

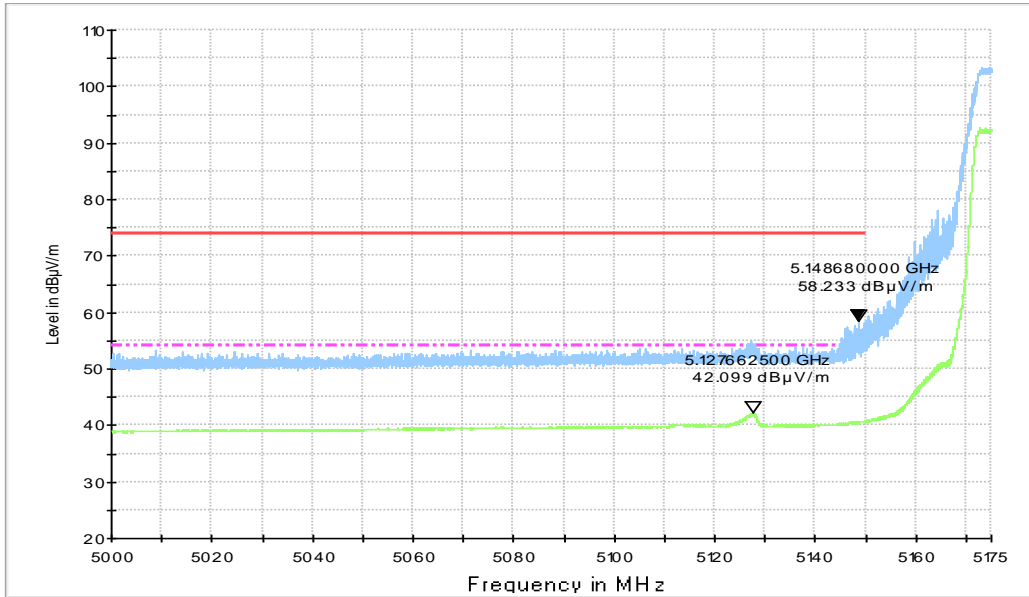


Fig.34 Band Edges (802.11a, 5180MHz)

RE - Power-5.325GHz-5.460GHz

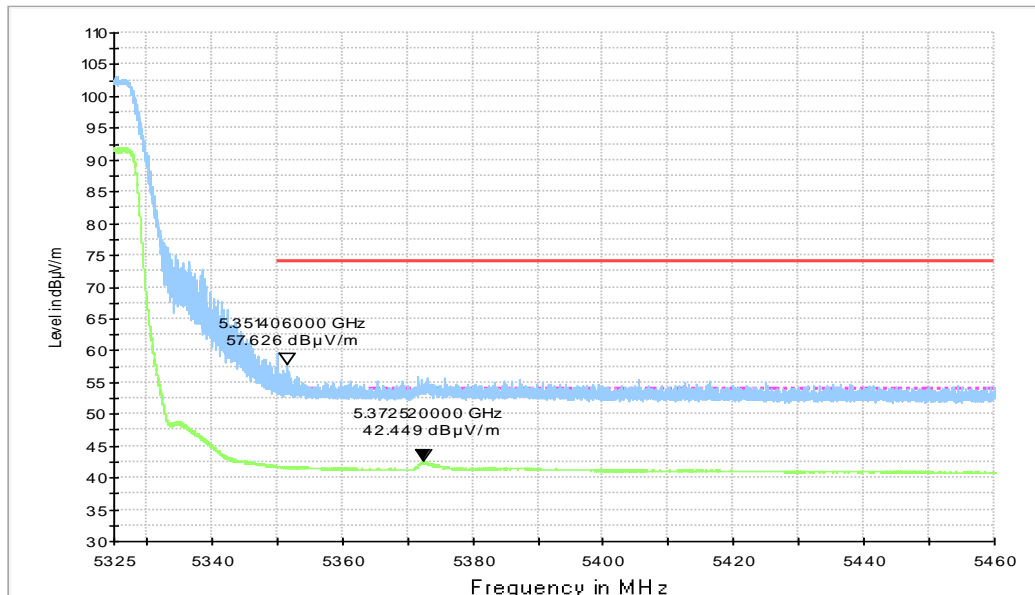


Fig.35 Band Edges (802.11a, 5320MHz)

RE - Power-5.35GHz-5.50GHz

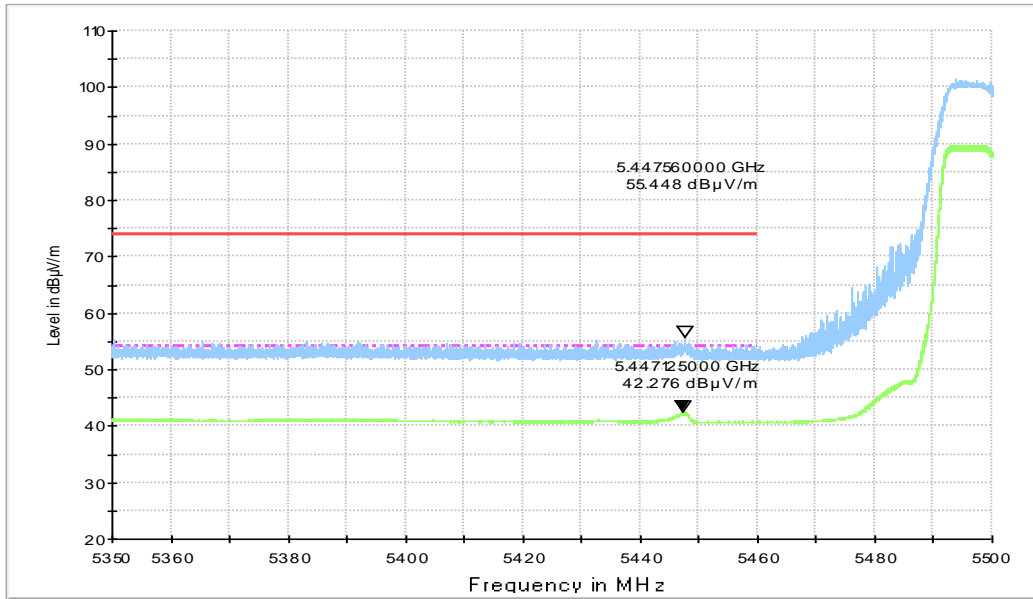


Fig.36 Band Edges (802.11a, 5500MHz)

RE - Power-5.70GHz-5.825GHz

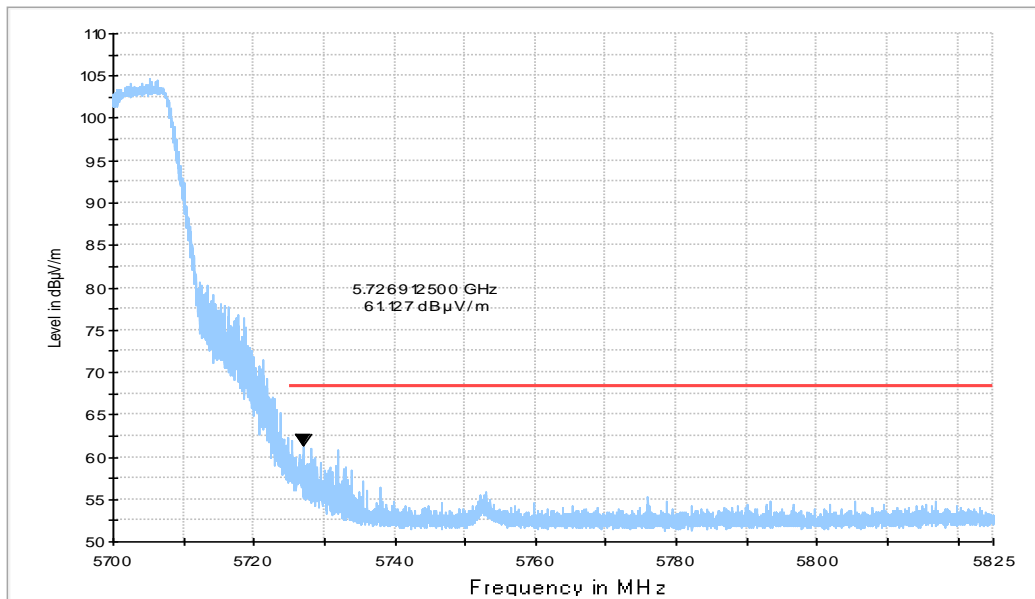


Fig.37 Band Edges (802.11a, 5700MHz)

RE - Power-5.000GHz-5.175GHz

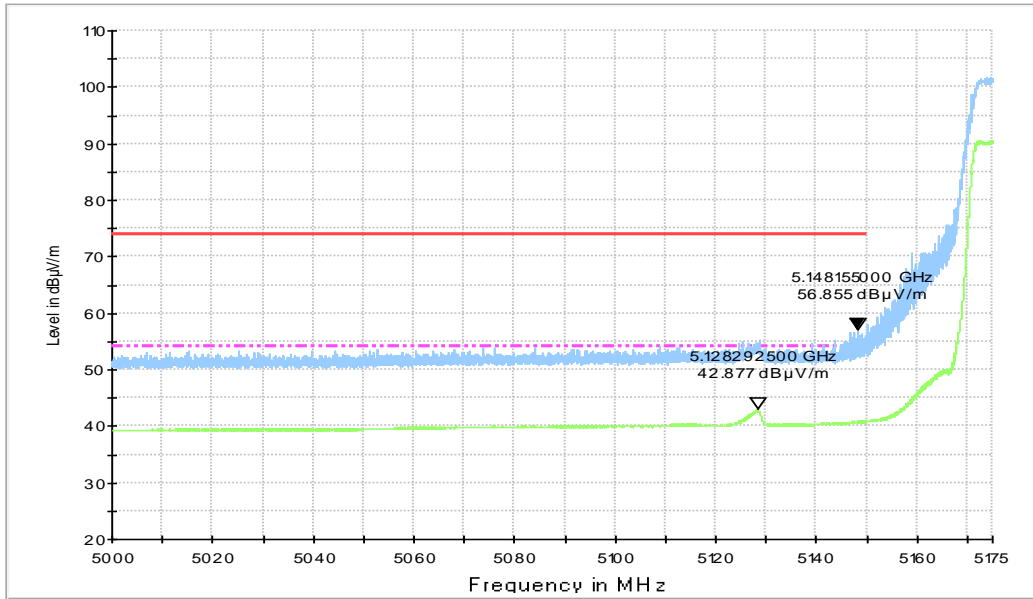


Fig.38 Band Edges (802.11n-HT20, 5180MHz)

RE - Power-5.325GHz-5.460GHz

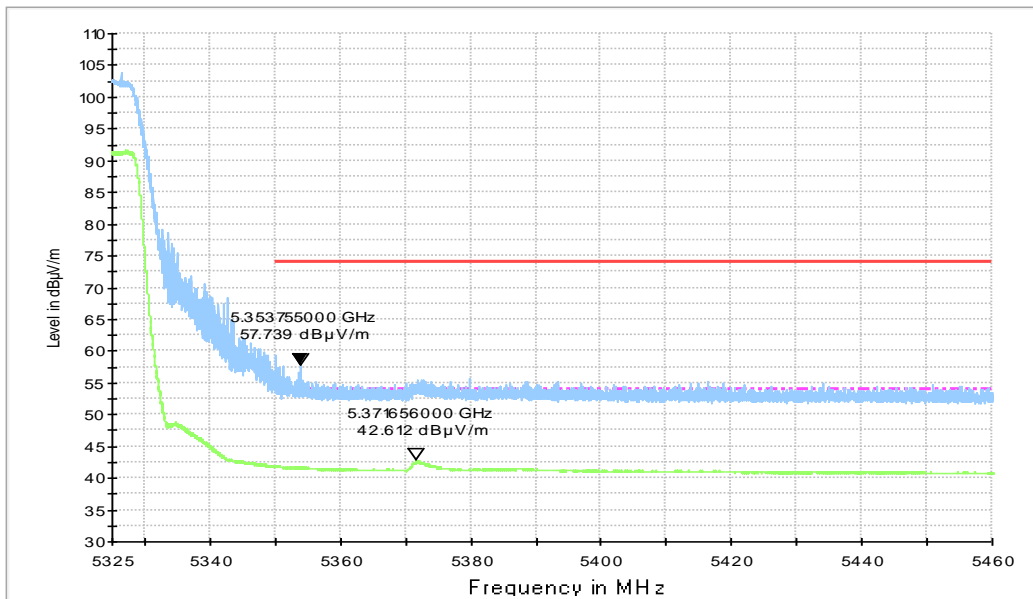


Fig.39 Band Edges (802.11n-HT20, 5320MHz)

RE - Power-5.35GHz-5.50GHz

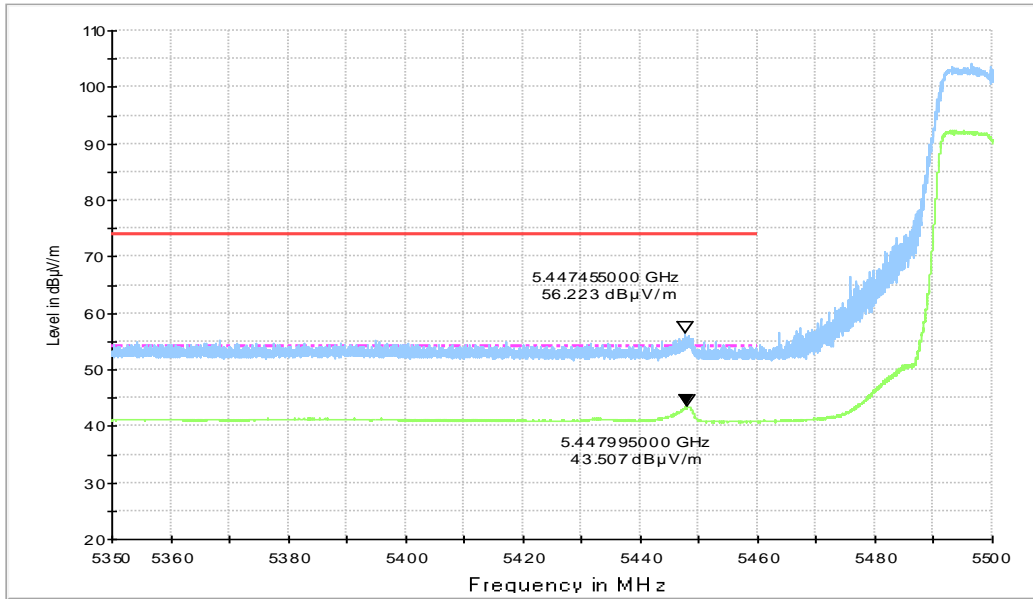


Fig.40 Band Edges (802.11n-HT20, 5500MHz)

RE - Power-5.70GHz-5.825GHz

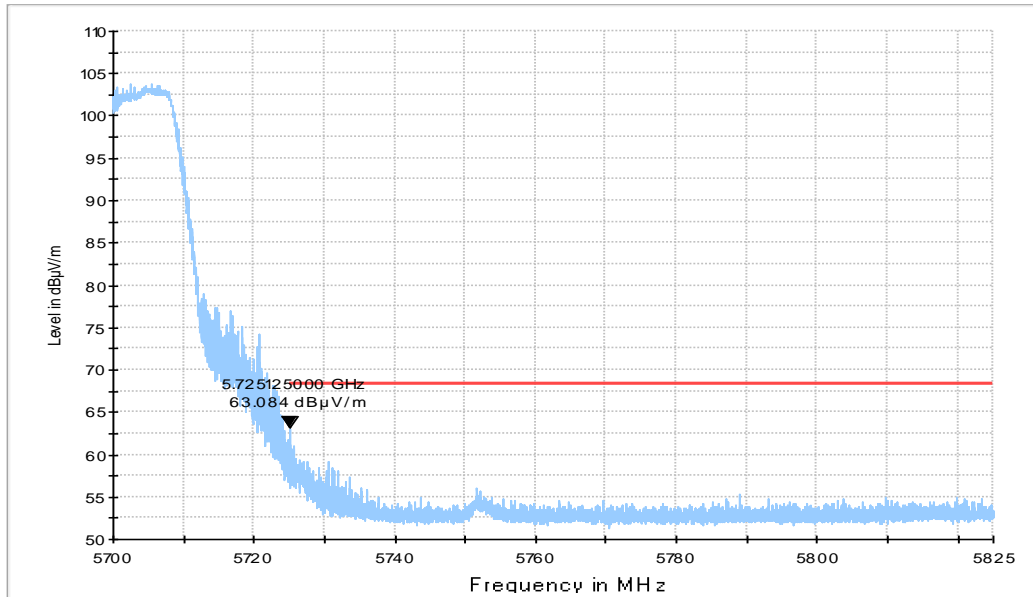


Fig.41 Band Edges (802.11n-HT20, 5700MHz)

RE - Power-5.000GHz-5.175GHz

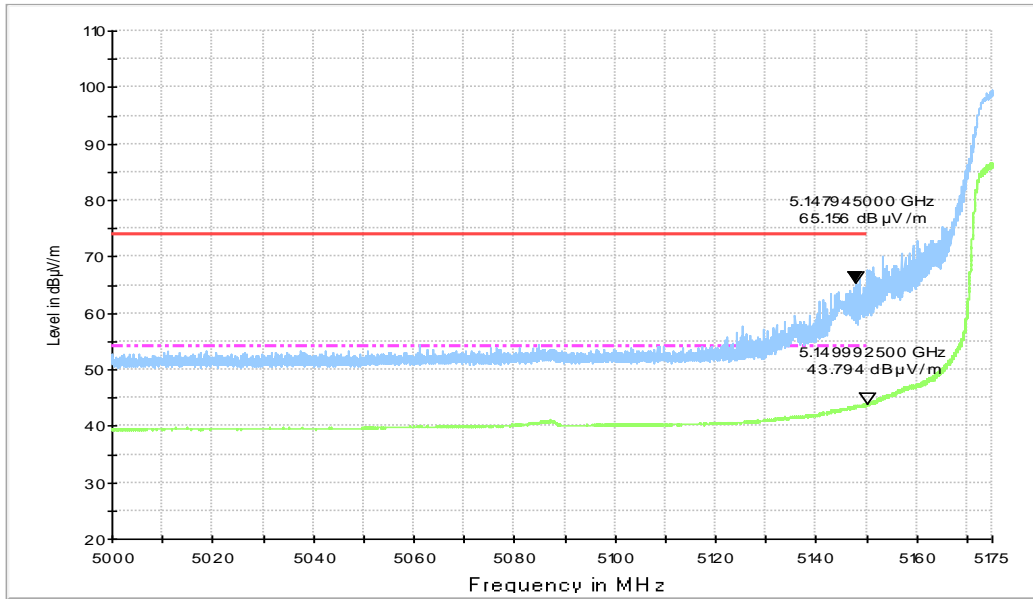


Fig.42 Band Edges (802.11n-HT40, 5190MHz)

RE - Power-5.325GHz-5.460GHz

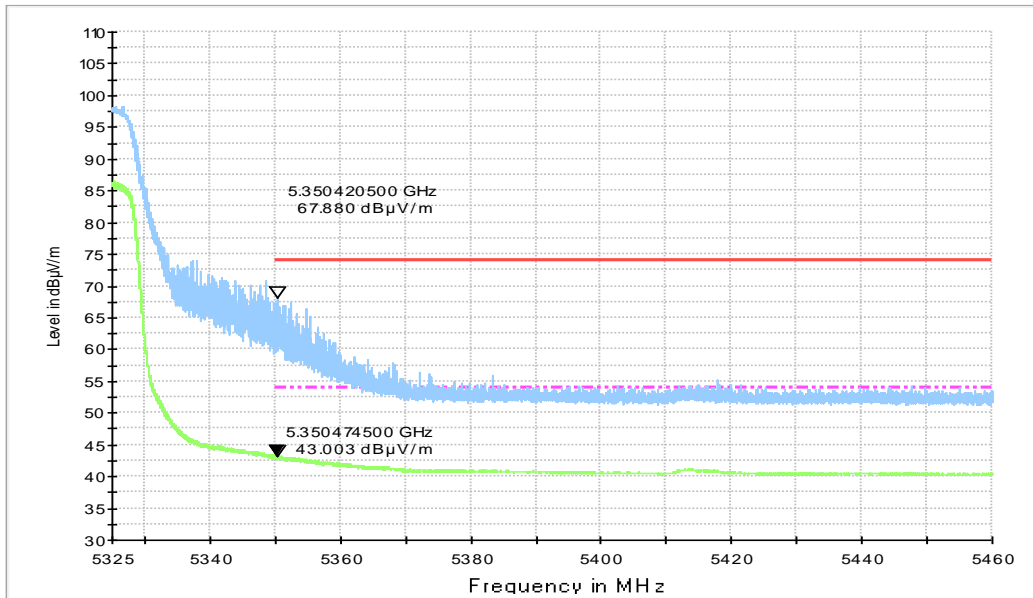


Fig.43 Band Edges (802.11n-HT40, 5310MHz)

RE - Power-5.35GHz-5.50GHz

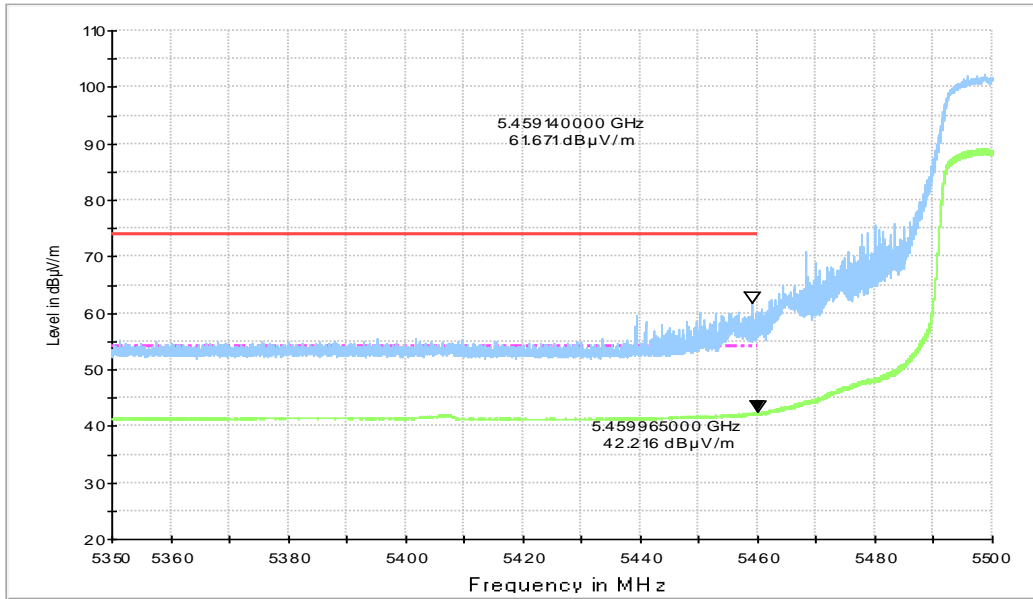


Fig.44 Band Edges (802.11n-HT40, 5510MHz)

RE - Power-5.70GHz-5.825GHz

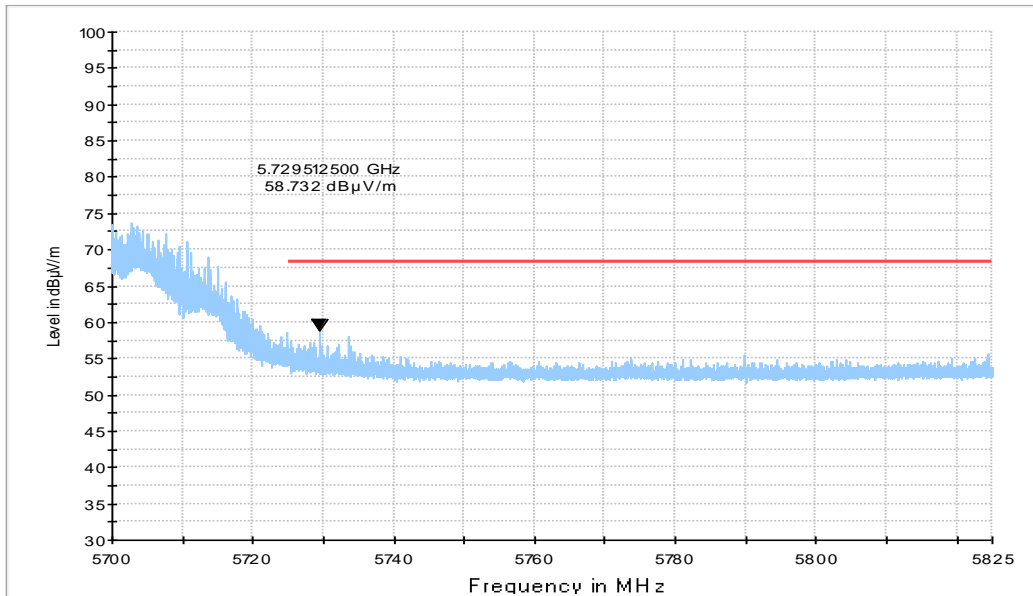


Fig.45 Band Edges (802.11n-HT40, 5670MHz)

RE - Power-5.000GHz-5.175GHz

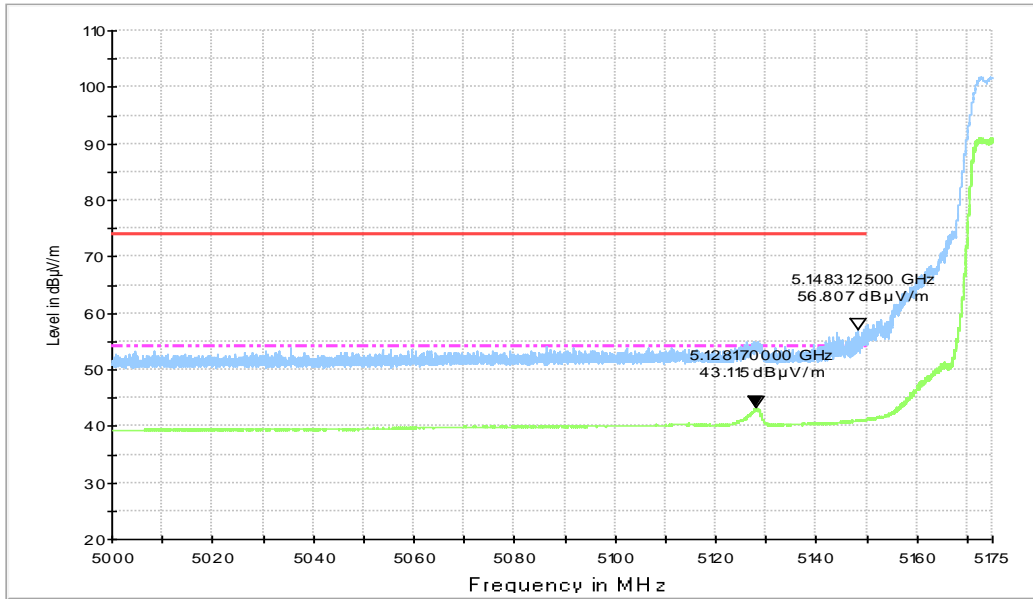


Fig.46 Band Edges (802.11ac-HT20, 5180MHz)

RE - Power-5.325GHz-5.460GHz

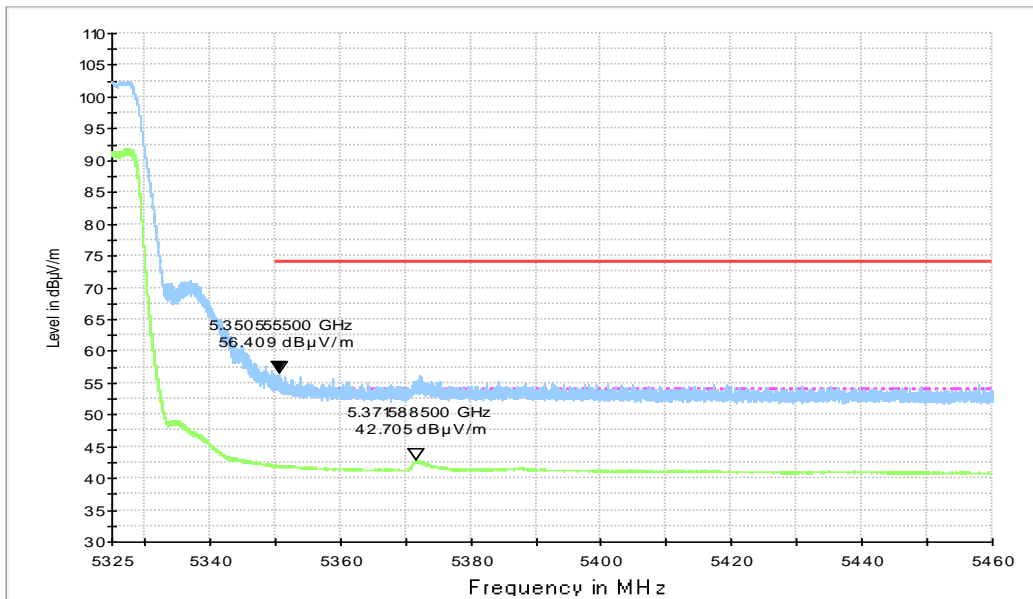


Fig.47 Band Edges (802.11ac-HT20, 5320MHz)

RE - Power-5.35GHz-5.50GHz

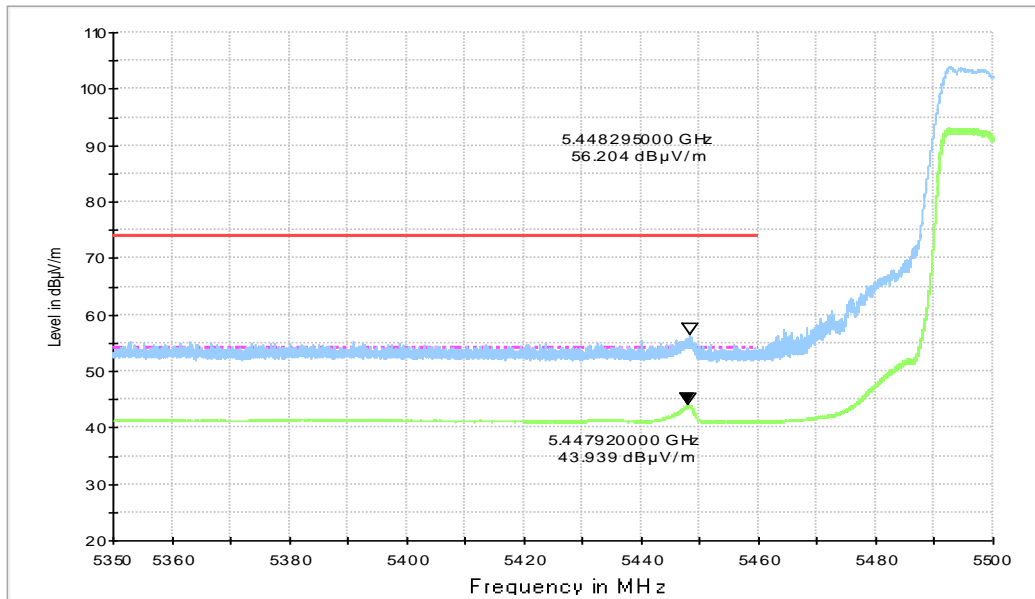


Fig.48 Band Edges (802.11ac-HT20, 5500MHz)

RE - Power-5.70GHz-5.825GHz

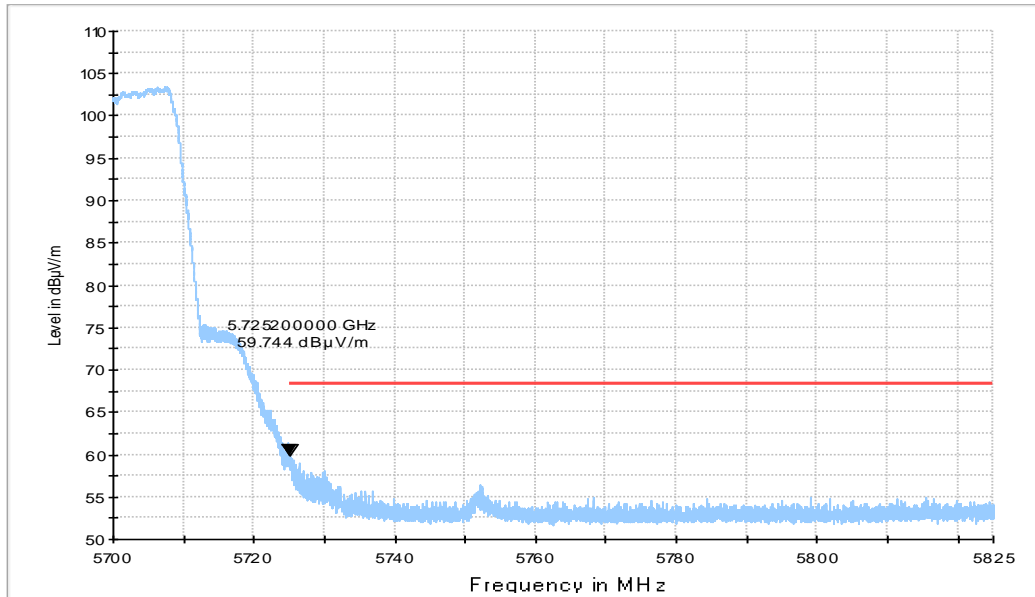


Fig.49 Band Edges (802.11ac-HT20, 5700MHz)

RE - Power-5.000GHz-5.175GHz

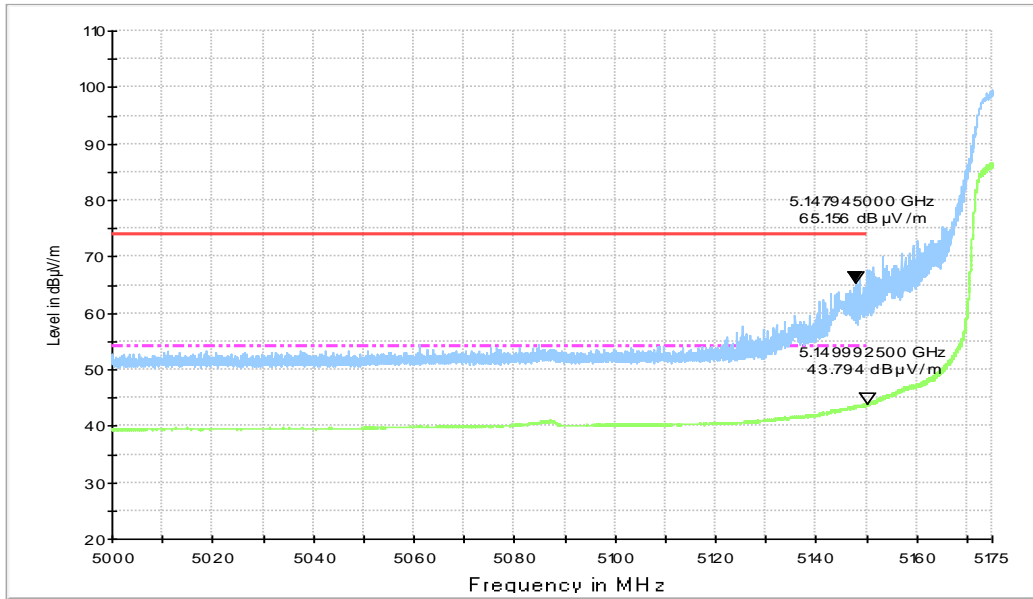


Fig.50 Band Edges (802.11ac-HT40, 5190MHz)

RE - Power-5.325GHz-5.460GHz

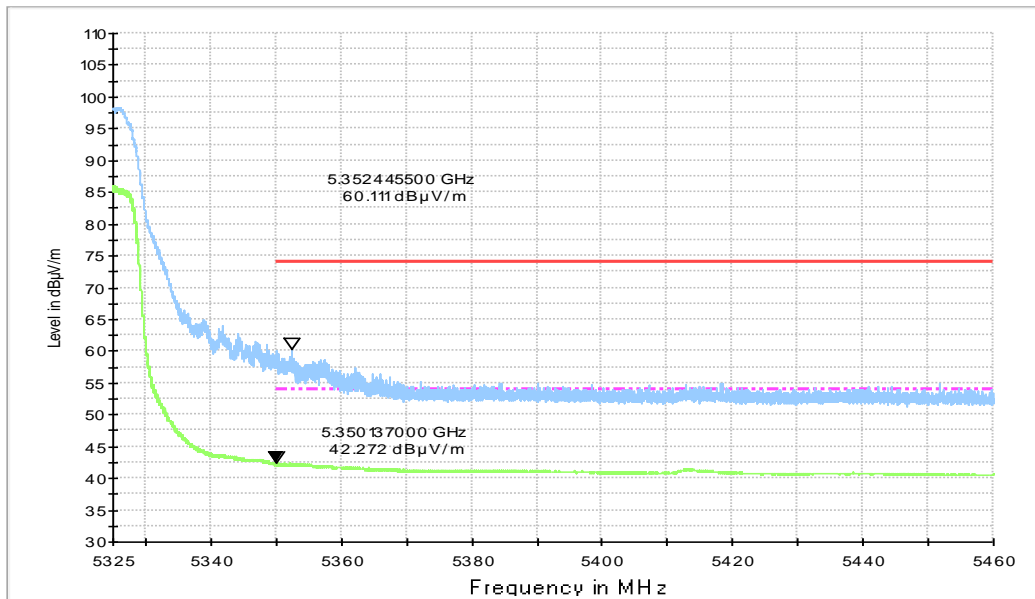


Fig.51 Band Edges (802.11ac-HT40, 5310MHz)

RE - Power-5.35GHz-5.50GHz

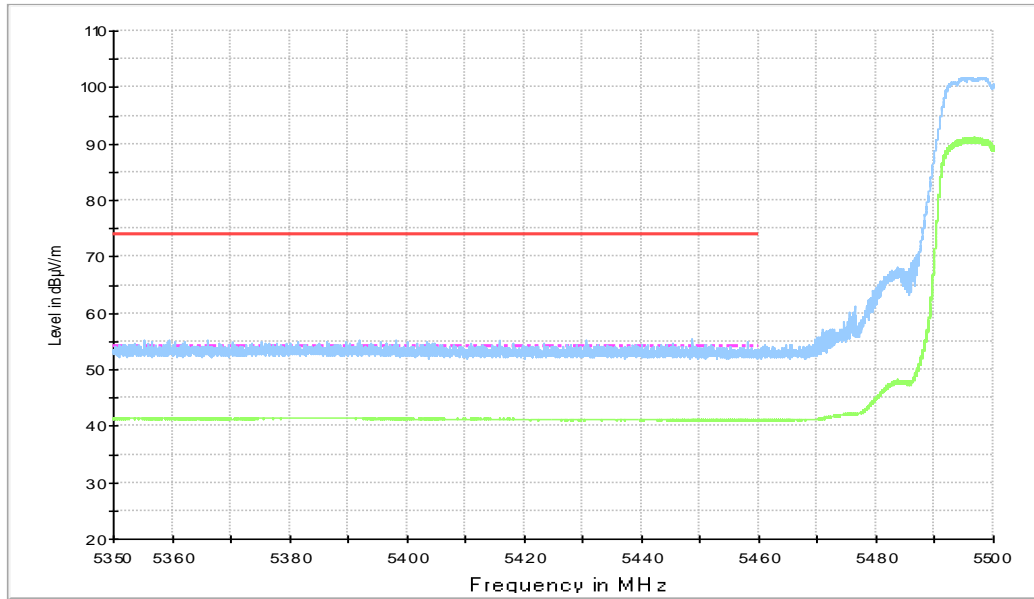


Fig.52 Band Edges (802.11ac-HT40, 5510MHz)

RE - Power-5.70GHz-5.825GHz

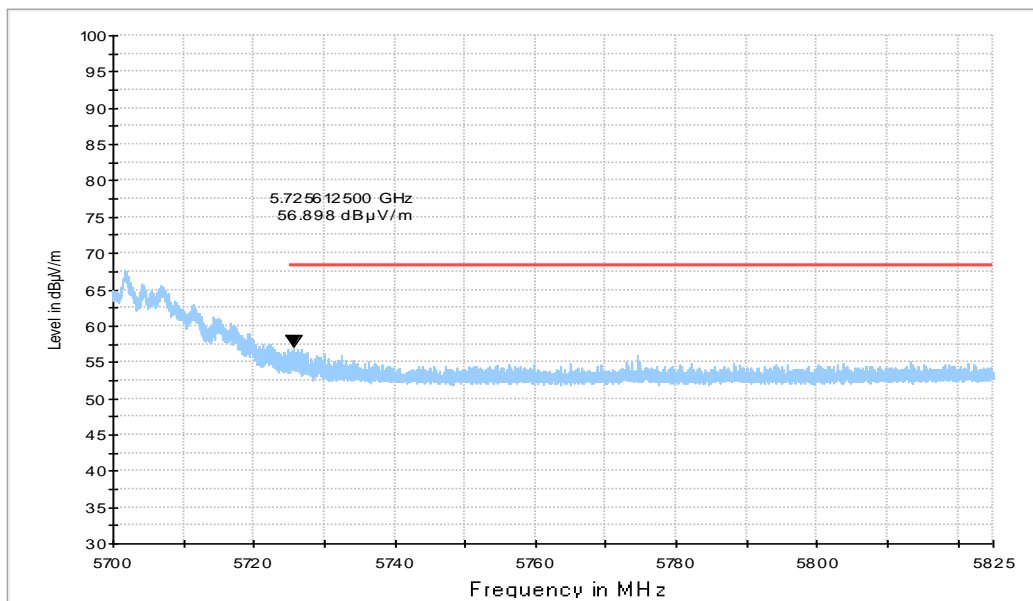


Fig.53 Band Edges (802.11ac-HT40, 5670MHz)

RE - Power-5.000GHz-5.175GHz

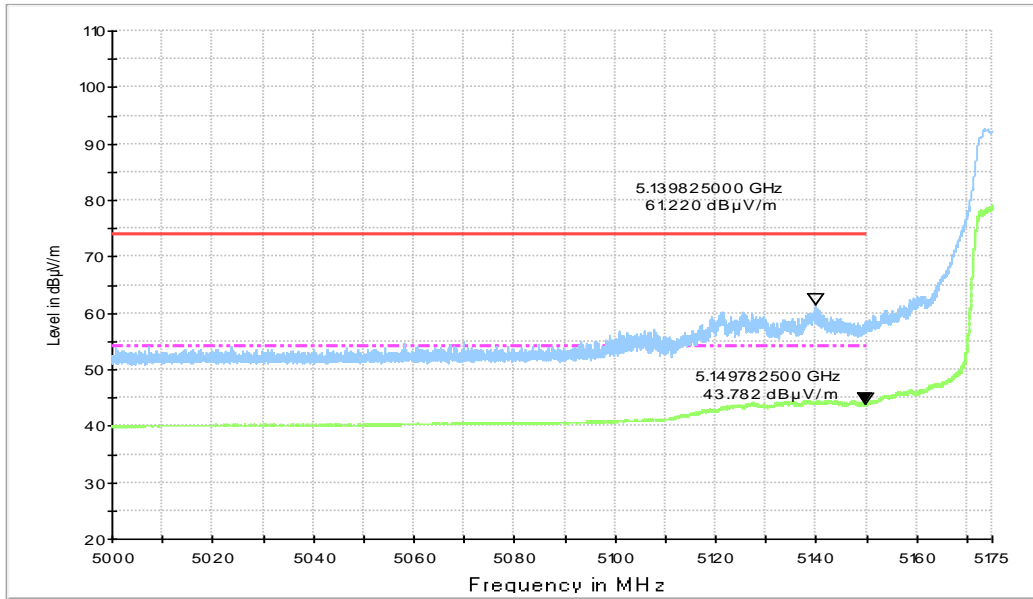


Fig.54 Band Edges (802.11ac-HT80, 5210MHz)

RE - Power-5.325GHz-5.460GHz

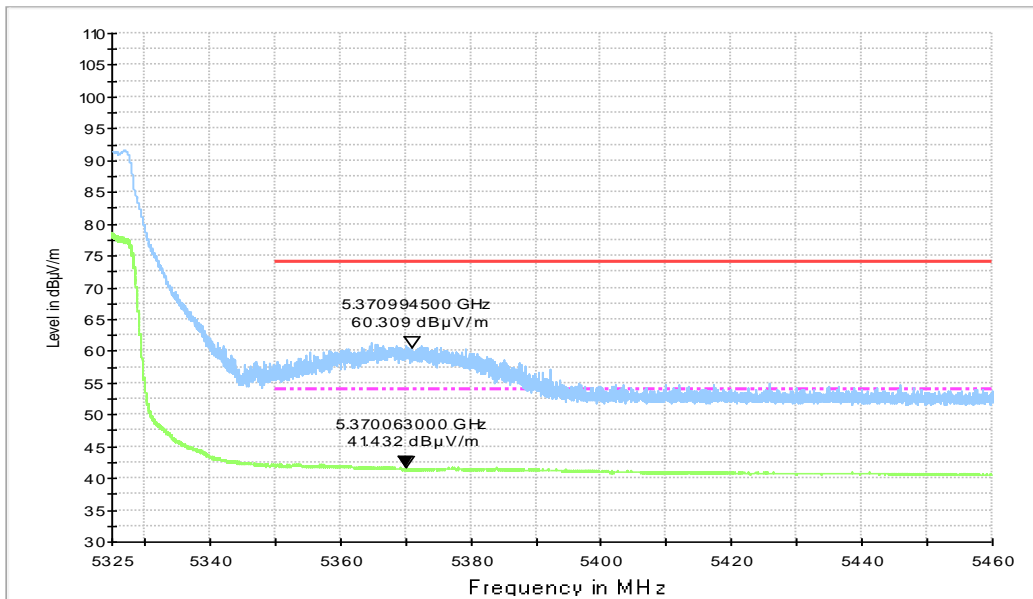


Fig.55 Band Edges (802.11ac-HT80, 5290MHz)

RE - Power-5.35GHz-5.50GHz

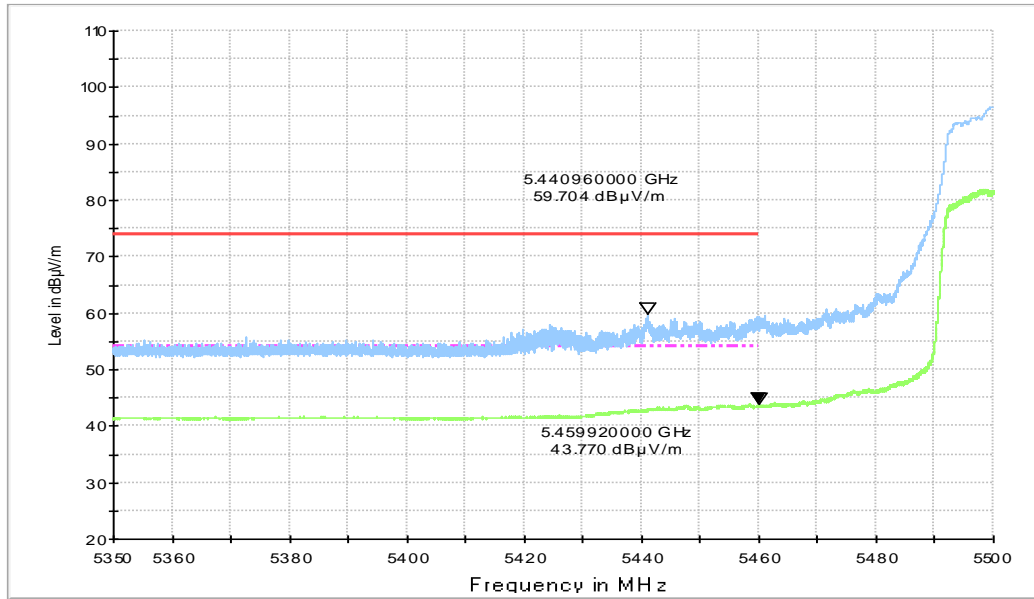


Fig.56 Band Edges (802.11ac-HT80, 5530MHz)

A.6. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Measurement Results:

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
144(5720MHz)	1 GHz ~ 3 GHz	---	P	
	3 GHz ~ 7 GHz	---	P	
	7 GHz ~ 18 GHz	---	P	

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
144(5720MHz)	1 GHz ~ 3 GHz	---	P	
	3 GHz ~ 7 GHz	---	P	
	7 GHz ~ 18 GHz	---	P	

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	134(5670MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	142(5710MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
144(5720MHz)	1 GHz ~ 3 GHz	---	P	
	3 GHz ~ 7 GHz	---	P	
	7 GHz ~ 18 GHz	---	P	

802.11ac-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	134(5670MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	142(5710MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

802.11ac-HT80 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac – HT80	42(5210MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	58(5290MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	106(5530MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	138(5690MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

AVERAGE Results:
802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5127.100	40.2	-23.3	34.3	29.27	54.0	13.8	H
5127.700	40.4	-23.3	34.3	29.44	54.0	13.6	H
10854.400	30.8	-29.8	37.9	22.65	54.0	23.2	H
15540.400	34.2	-24.5	40.1	18.51	54.0	19.8	H
15971.600	35.0	-23.8	40.7	18.13	54.0	19.0	H
78988.000	37.6	0.0	0.0	37.63	54.0	16.4	H

Channel 40

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.900	39.9	-23.3	34.3	28.93	54.0	14.1	H
5350.000	38.1	-22.3	34.3	26.00	54.0	15.9	H
10980.900	30.9	-29.9	38.0	22.78	54.0	23.1	H
15599.800	34.4	-24.5	40.2	18.71	54.0	19.6	H
16058.500	35.4	-23.5	40.8	18.17	54.0	18.6	H
17894.400	37.6	-22.6	41.5	18.65	54.0	16.4	H

Channel 48

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5145.100	37.9	-23.3	34.3	26.92	54.0	16.1	H
5363.800	38.1	-22.3	34.3	26.09	54.0	15.9	H
11021.600	31.4	-29.8	38.0	23.18	54.0	22.6	H
15719.700	34.3	-24.4	40.4	18.32	54.0	19.7	H
17787.700	37.4	-22.4	41.5	18.20	54.0	16.6	H
17912.000	37.7	-22.6	41.5	18.80	54.0	16.3	H

Channel 52

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5149.600	38.6	-23.3	34.3	27.57	54.0	15.4	H
5358.100	39.1	-22.3	34.3	27.07	54.0	14.9	H
11052.400	32.5	-29.8	38.0	24.32	54.0	21.5	H
15780.200	35.4	-24.2	40.4	19.13	54.0	18.6	H
17778.900	38.2	-22.4	41.5	19.05	54.0	15.8	H
17912.000	38.4	-22.6	41.5	19.57	54.0	15.6	H

Channel 56

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5149.900	38.4	-23.3	34.3	27.43	54.0	15.6	H
5356.900	39.1	-22.3	34.3	27.07	54.0	14.9	H
11011.700	32.6	-29.8	38.0	24.41	54.0	21.4	H
15839.600	35.9	-24.1	40.5	19.41	54.0	18.1	H
17774.500	38.2	-22.4	41.5	19.01	54.0	15.8	H
17903.200	38.5	-22.6	41.5	19.63	54.0	15.5	H

Channel 64

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5350.600	39.7	-22.3	34.3	27.65	54.0	14.3	H
5372.200	39.5	-22.3	34.4	27.48	54.0	14.5	H
10639.900	49.0	-29.3	37.9	40.41	54.0	5.0	H
15959.500	36.3	-23.8	40.7	19.49	54.0	17.7	H
17725.000	38.2	-22.2	41.6	18.90	54.0	15.8	H
17903.200	38.5	-22.6	41.5	19.58	54.0	15.5	H

Channel 100

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5410.000	38.5	-22.4	34.4	26.54	54.0	15.5	H
5448.000	39.3	-22.7	34.4	27.62	54.0	14.7	H
10999.600	41.9	-29.9	38.0	33.82	54.0	12.1	H
16149.800	36.3	-23.3	40.9	18.65	54.0	17.7	H
17887.800	38.0	-22.6	41.5	19.03	54.0	16.0	H
17978.000	37.9	-22.8	41.5	19.13	54.0	16.1	H

Channel 120

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5397.200	38.6	-22.3	34.4	26.58	54.0	15.4	H
5413.600	38.6	-22.4	34.4	26.63	54.0	15.4	H
11199.800	44.6	-30.4	38.1	36.91	54.0	9.4	H
16149.800	36.3	-23.3	40.9	18.64	54.0	17.7	H
17826.200	37.9	-22.5	41.5	18.81	54.0	16.1	H
17919.700	38.1	-22.7	41.5	19.25	54.0	15.9	H

Channel 140

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5412.000	38.7	-22.4	34.4	26.76	54.0	15.3	H
5441.600	38.8	-22.6	34.4	27.03	54.0	15.2	H
11400.000	46.1	-29.7	38.2	37.64	54.0	7.9	H
17732.700	37.8	-22.3	41.6	18.52	54.0	16.2	H
17835.000	37.9	-22.5	41.5	18.83	54.0	16.1	H
17914.200	38.2	-22.6	41.5	19.35	54.0	15.8	H

Channel 144

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5414.400	38.7	-22.4	34.4	26.74	54.0	15.3	H
5440.000	38.7	-22.6	34.4	26.97	54.0	15.3	H
11439.600	46.0	-29.5	38.2	37.31	54.0	8.0	H
17879.000	37.9	-22.6	41.5	18.93	54.0	16.1	H
17898.800	38.1	-22.6	41.5	19.20	54.0	15.9	H
17937.300	37.9	-22.7	41.5	19.06	54.0	16.1	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5128.000	41.1	-23.3	34.3	30.13	54.0	12.9	H
5128.300	41.0	-23.3	34.3	30.07	54.0	13.0	H
11156.900	30.8	-30.5	38.1	23.25	54.0	23.2	H
15540.400	34.2	-24.5	40.1	18.57	54.0	19.8	H
17767.900	37.4	-22.3	41.5	18.15	54.0	16.6	H
17904.300	37.7	-22.6	41.5	18.84	54.0	16.3	H

Channel 40

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
5146.600	38.2	-23.3	34.3	27.19	54.0	15.8	H
5358.100	38.4	-22.3	34.3	26.30	54.0	15.6	H
11029.300	31.5	-29.8	38.0	23.28	54.0	22.5	H
15599.800	34.6	-24.5	40.2	18.92	54.0	19.4	H
17767.900	37.4	-22.3	41.5	18.20	54.0	16.6	H
17936.200	37.6	-22.7	41.5	18.79	54.0	16.4	H