

Fig.52. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

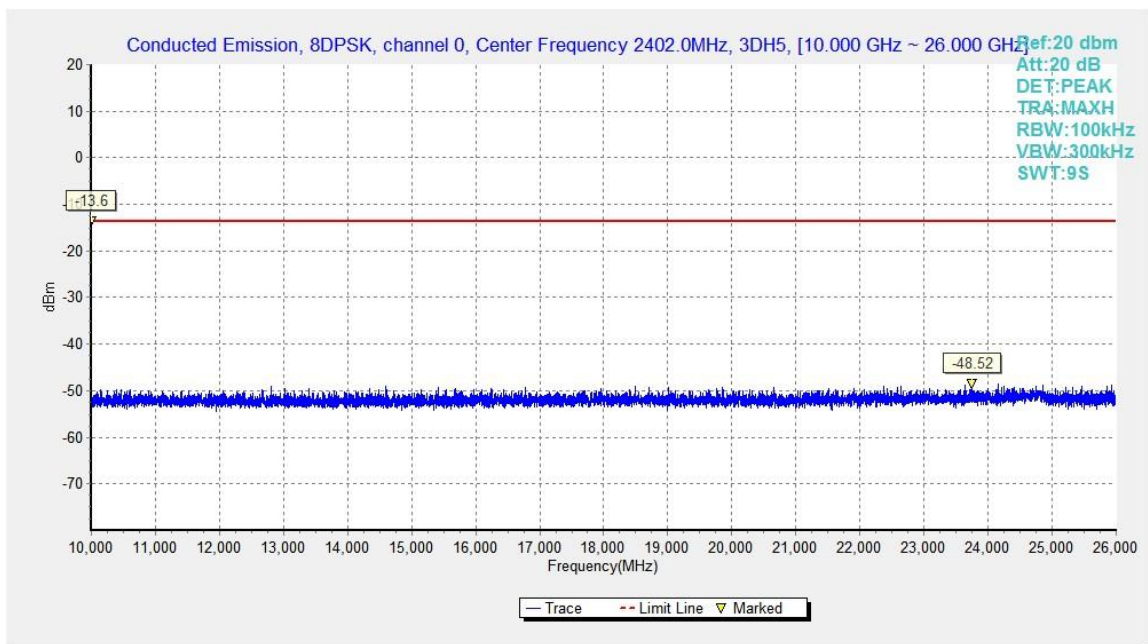


Fig.53. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz

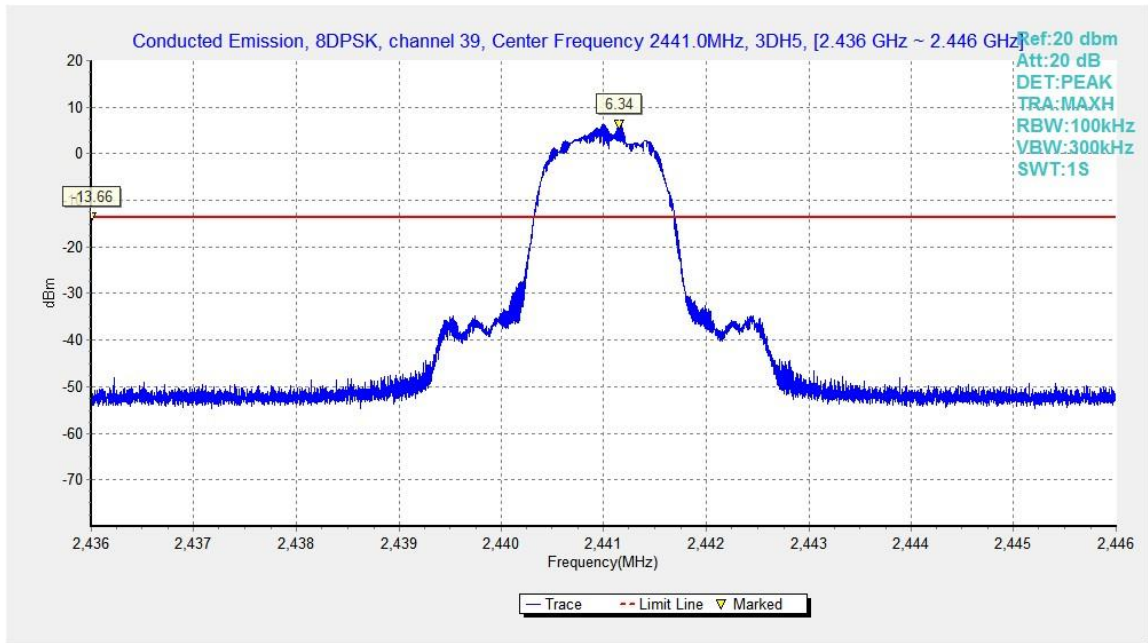


Fig.54. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

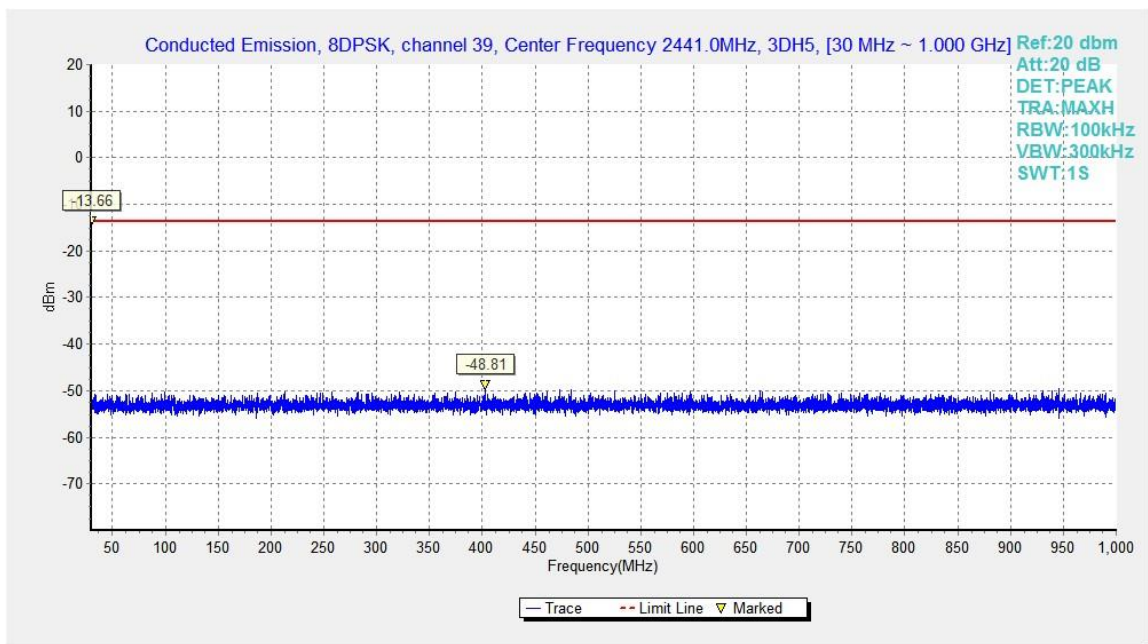


Fig.55. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

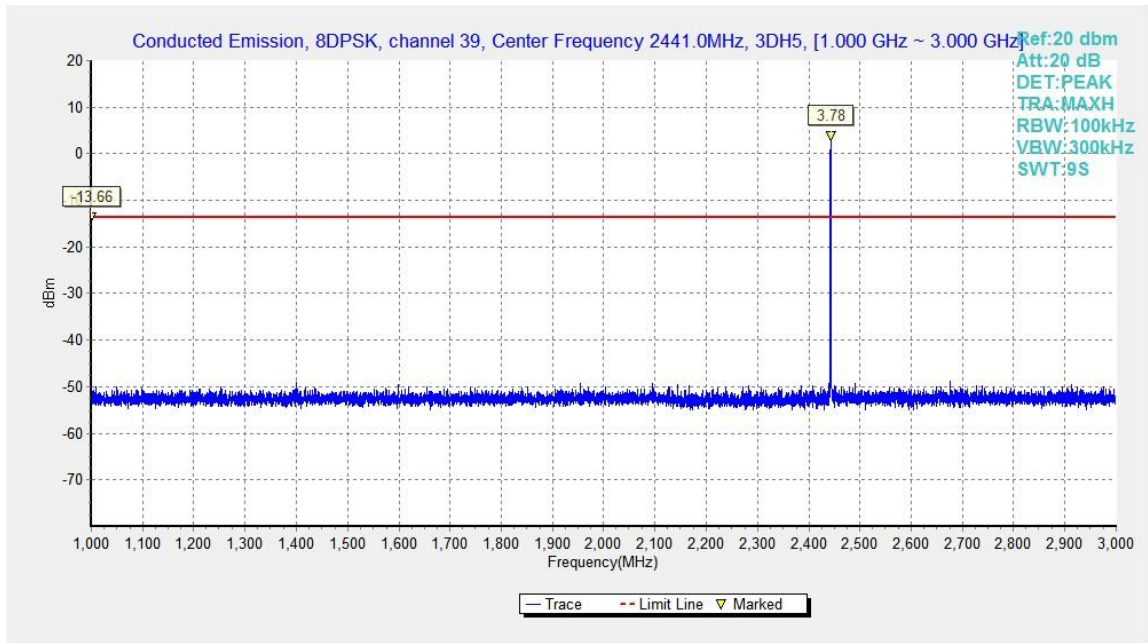


Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

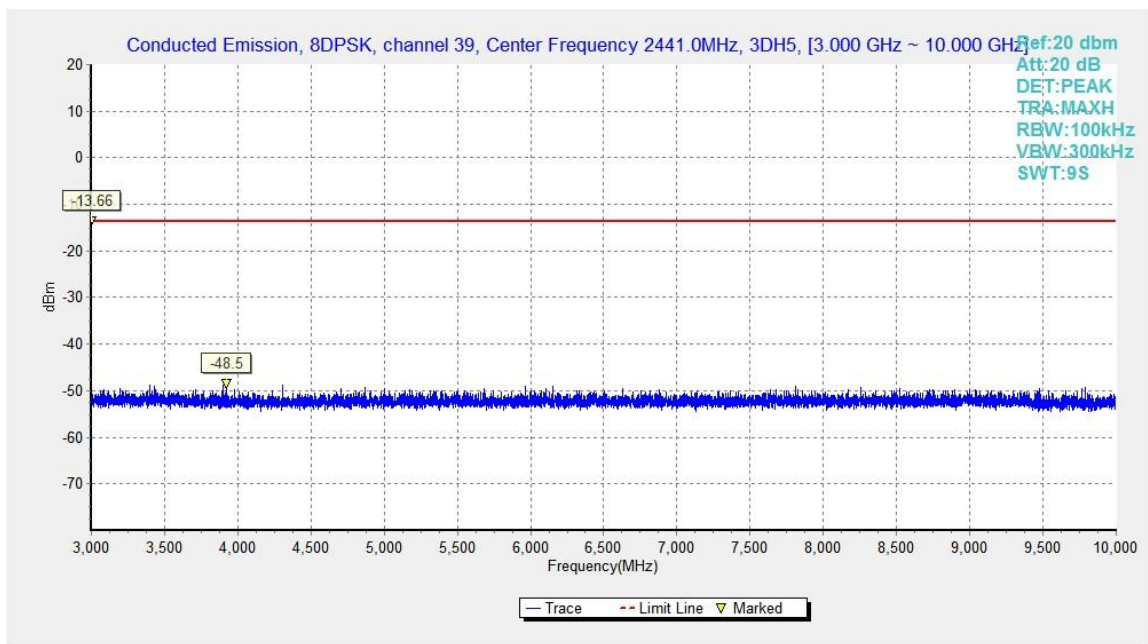


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

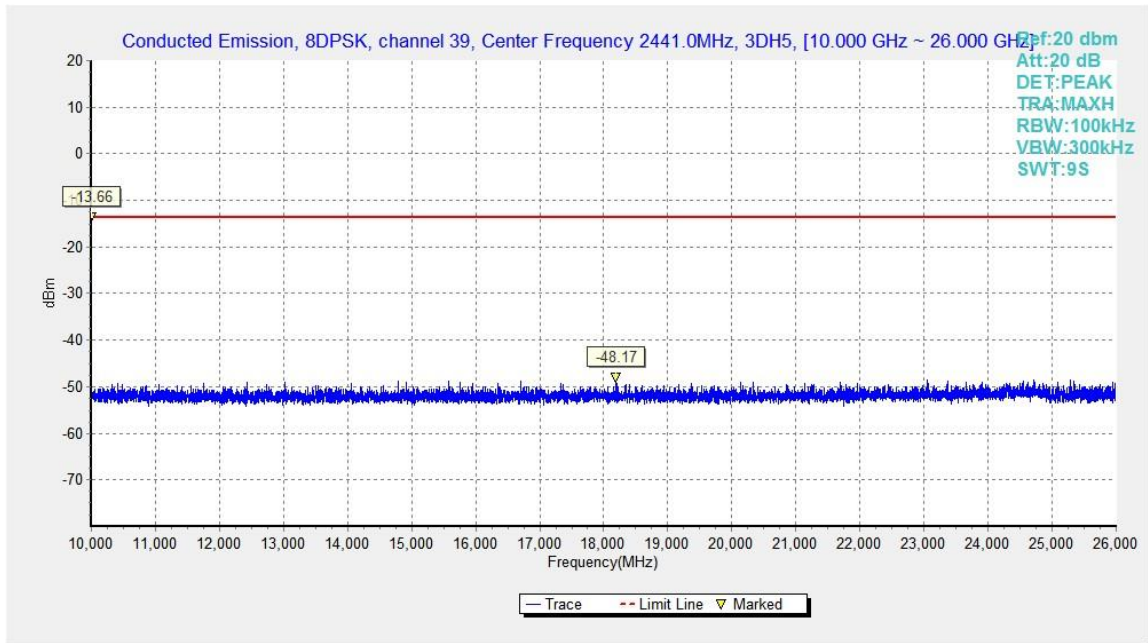


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

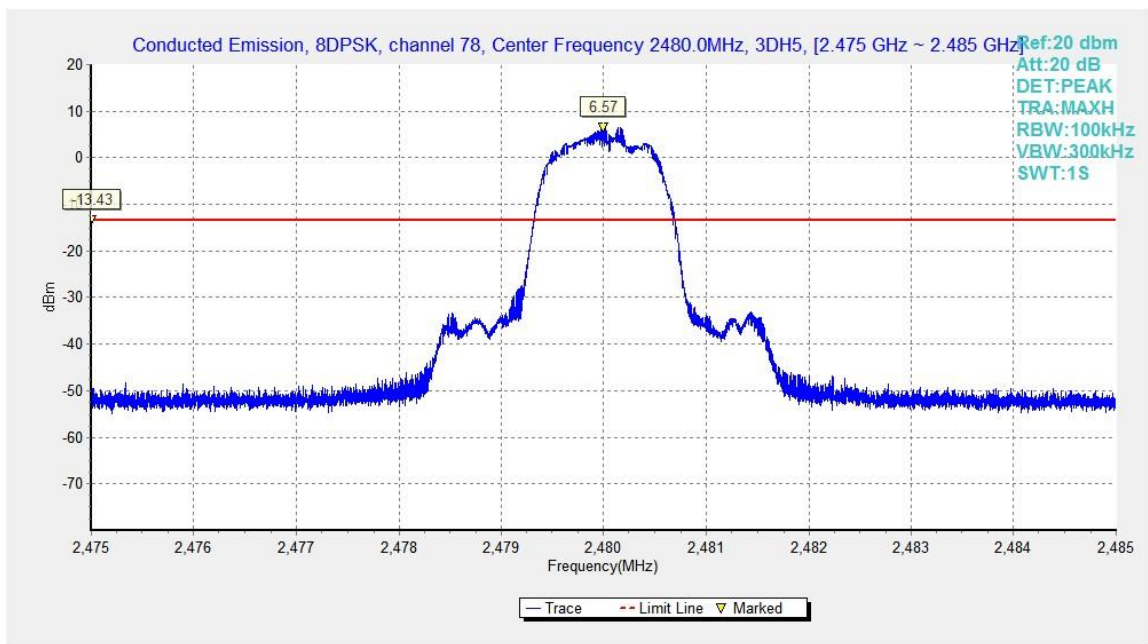


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

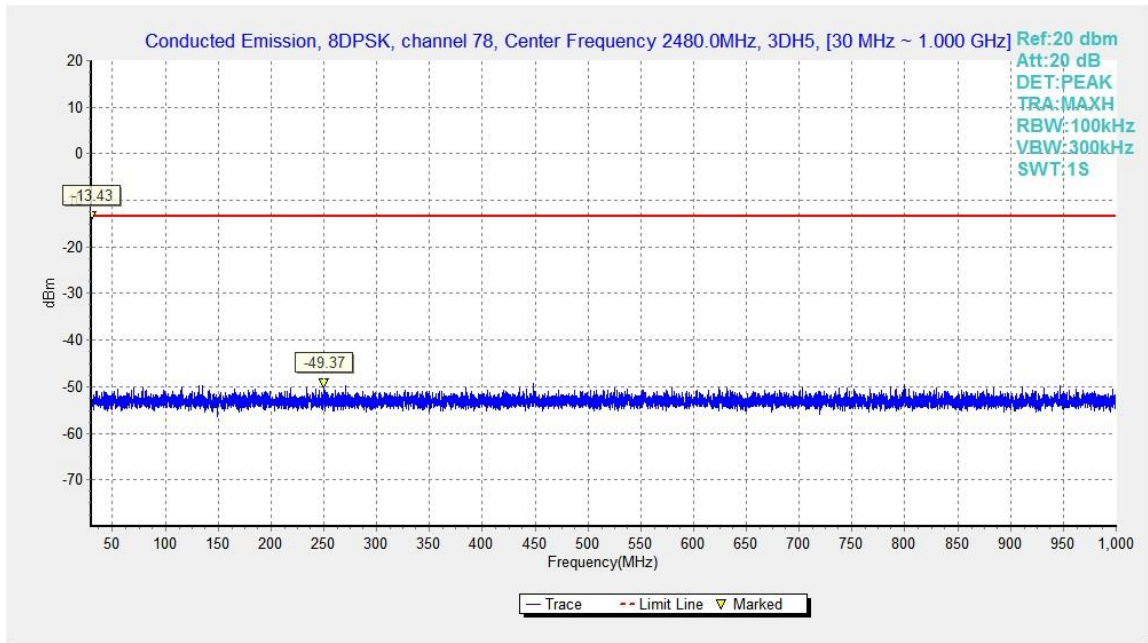


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

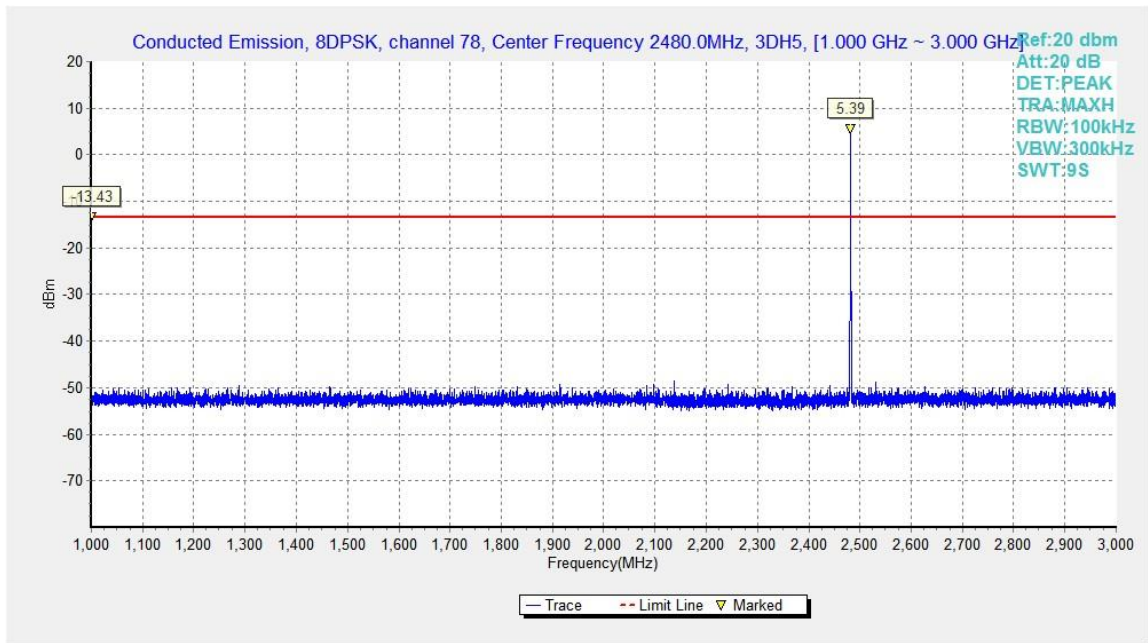


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

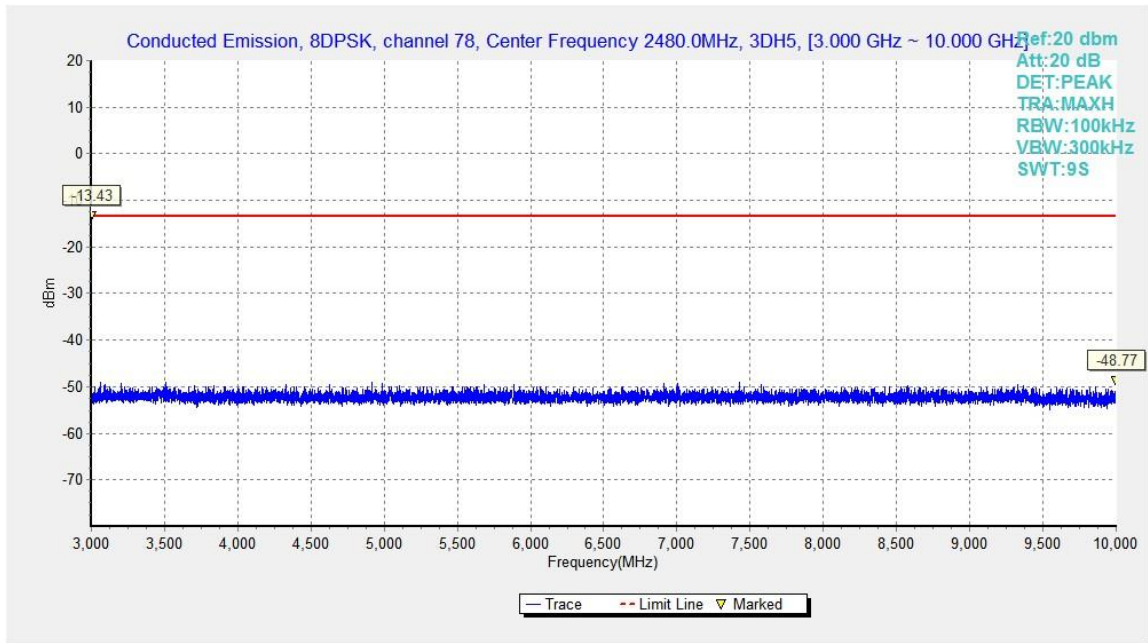


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

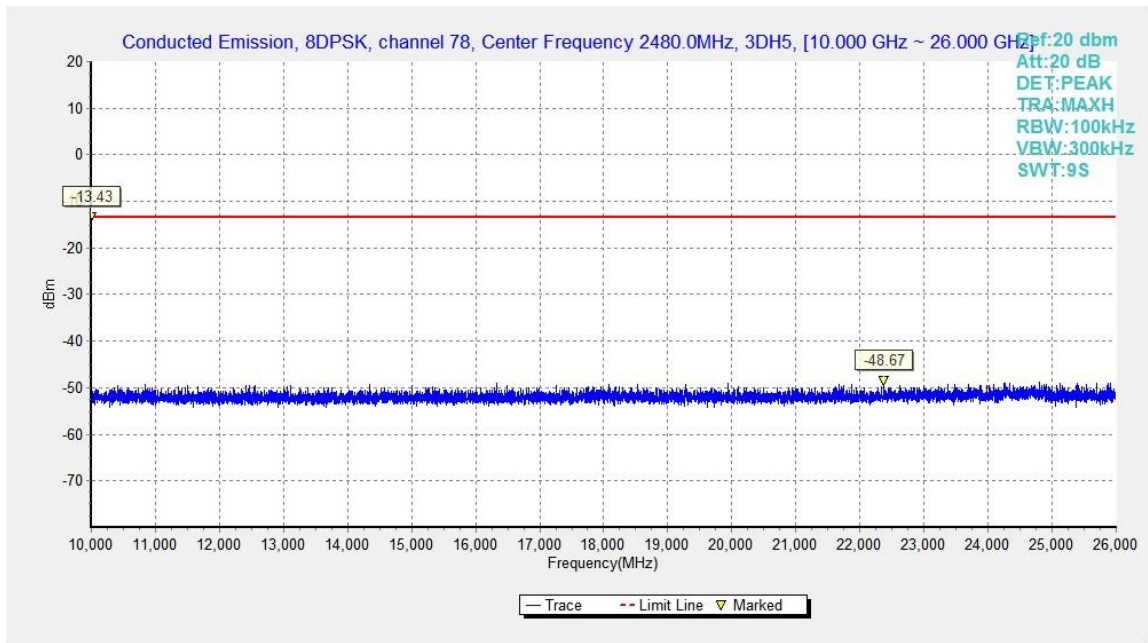


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-clause 6.4 &6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μV/m)	Measurement distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The EUT and transmitting antenna shall be centered on the turntable.

Note:

1. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value showed here only up to 6 maximum emissions noted.

Peak Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17357.000	51.45	-28.60	43.40	36.65	74.00	22.55	V
13605.000	48.89	-31.30	40.80	39.39	74.00	25.11	V
12687.500	46.86	-31.90	39.50	39.26	74.00	27.14	H
9621.000	45.64	-34.30	37.60	42.34	74.00	28.36	H
7214.500	44.68	-35.40	36.20	43.88	74.00	29.32	V
2367.000	55.16	-19.60	28.20	46.56	74.00	18.84	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17545.000	51.79	-29.20	44.90	36.09	74.00	22.21	V
13677.500	48.97	-31.00	41.00	38.97	74.00	25.03	V
11831.500	46.86	-32.00	39.20	39.66	74.00	27.14	V
8327.500	45.90	-35.00	37.20	43.70	74.00	28.10	V
7544.000	44.60	-35.50	36.30	43.80	74.00	29.40	H
4796.000	40.13	-37.50	33.10	44.53	74.00	33.87	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17353.000	52.45	-28.60	43.40	37.65	74.00	21.55	H
13714.000	49.38	-31.00	41.10	39.28	74.00	24.62	H
11293.500	47.18	-32.80	38.70	41.28	74.00	26.82	V
9405.000	46.27	-34.10	37.90	42.47	74.00	27.73	H
7617.000	45.95	-35.60	36.30	45.25	74.00	28.05	V
2496.300	55.68	-19.70	28.20	47.18	74.00	18.32	V

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17978.000	51.60	-29.40	46.00	35.00	74.00	22.40	H
13779.000	48.86	-30.90	41.20	38.56	74.00	25.14	V
12909.000	46.69	-31.50	40.00	38.19	74.00	27.31	H
8875.500	45.68	-34.80	37.80	42.68	74.00	28.32	V
7339.000	45.61	-35.90	36.60	44.91	74.00	28.39	V
2389.700	55.75	-19.80	28.20	47.35	74.00	18.25	H

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17916.500	51.24	-29.40	46.00	34.64	74.00	22.76	V
13747.500	48.73	-31.00	41.10	38.63	74.00	25.27	H
12746.500	47.01	-31.80	39.60	39.11	74.00	26.99	H
9404.000	45.38	-34.10	37.90	41.58	74.00	28.62	V
7442.500	45.10	-35.50	36.50	44.10	74.00	28.90	V
4998.000	40.31	-37.40	33.60	44.11	74.00	33.69	V

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17384.500	51.41	-29.50	43.80	37.11	74.00	22.59	H
13598.500	49.28	-31.30	40.80	39.78	74.00	24.72	V
12920.500	46.78	-31.50	40.00	38.28	74.00	27.22	H
7540.000	45.22	-35.50	36.30	44.42	74.00	28.78	H
8714.500	45.00	-34.80	37.90	41.90	74.00	29.00	H
2496.500	55.62	-19.70	28.20	47.12	74.00	18.38	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17873.500	51.49	-29.40	46.00	34.89	74.00	22.51	H
13676.000	49.62	-31.00	41.00	39.62	74.00	24.38	V
12802.500	47.21	-31.50	39.80	38.91	74.00	26.79	V
9544.500	45.40	-33.80	37.60	41.60	74.00	28.60	V
7440.500	44.72	-35.50	36.50	43.72	74.00	29.28	H
2332.300	55.34	-19.60	28.20	46.74	74.00	18.66	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.500	52.08	-29.40	46.00	35.48	74.00	21.92	V
13801.500	49.28	-30.90	41.20	38.98	74.00	24.72	V
12411.500	48.13	-31.90	38.90	41.13	74.00	25.87	H
7163.500	45.24	-35.60	35.90	44.94	74.00	28.76	V
9958.000	44.89	-34.10	38.00	41.09	74.00	29.11	V
4963.500	41.03	-37.40	33.60	44.83	74.00	32.97	H

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17565.000	52.92	-29.20	44.90	37.22	74.00	21.08	H
13801.000	49.43	-30.90	41.20	39.13	74.00	24.57	V
10868.000	46.76	-33.30	38.50	41.56	74.00	27.24	V
9530.500	45.64	-33.80	37.60	41.84	74.00	28.36	H
7227.000	45.41	-35.40	36.20	44.61	74.00	28.59	V
2498.700	56.17	-19.70	28.20	47.67	74.00	17.83	V

Average Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17451.000	42.13	-28.50	44.20	26.43	54.00	11.87	V
13598.500	39.54	-31.30	40.80	30.04	54.00	14.46	V
12856.500	37.49	-31.90	39.90	29.49	54.00	16.51	V
8995.500	35.50	-34.70	37.70	32.50	54.00	18.50	V
7218.500	35.31	-35.40	36.20	34.51	54.00	18.69	V
2371.900	43.59	-19.60	28.20	34.99	54.00	10.41	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17450.000	41.91	-28.50	44.20	26.21	54.00	12.09	V
14104.000	40.03	-30.20	41.70	28.53	54.00	13.97	V
12766.500	37.04	-31.80	39.60	29.14	54.00	16.96	H
9945.000	35.63	-33.80	37.90	31.53	54.00	18.37	H
7240.000	35.54	-35.60	36.40	34.74	54.00	18.46	V
4779.500	30.82	-37.50	33.10	35.22	54.00	23.18	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17609.000	42.07	-29.60	45.10	26.47	54.00	11.93	V
13759.500	39.98	-31.00	41.10	29.88	54.00	14.02	H
11902.500	37.49	-32.40	39.10	30.79	54.00	16.51	H
9432.500	36.47	-33.60	37.90	32.17	54.00	17.53	H
7137.500	35.80	-35.60	35.90	35.50	54.00	18.20	H
2485.300	43.84	-19.70	28.20	35.34	54.00	10.16	H

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17595.500	42.06	-29.60	45.10	26.46	54.00	11.94	V
13716.000	39.90	-31.00	41.10	29.80	54.00	14.10	V
12846.500	37.11	-31.90	39.90	29.11	54.00	16.89	V
9513.500	35.82	-33.80	37.60	32.02	54.00	18.18	V
7322.000	35.57	-35.40	36.60	34.37	54.00	18.43	V
2367.900	43.59	-19.60	28.20	34.99	54.00	10.41	H

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17453.500	42.05	-28.50	44.20	26.35	54.00	11.95	H
14206.500	39.38	-30.20	41.70	27.88	54.00	14.62	H
12991.000	36.92	-31.90	40.10	28.72	54.00	17.08	V
8708.500	36.12	-34.40	37.70	32.82	54.00	17.88	V
7536.000	35.18	-35.50	36.30	34.38	54.00	18.82	H
4692.500	30.68	-37.50	32.80	35.38	54.00	23.32	V

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17875.500	42.35	-29.40	46.00	25.75	54.00	11.65	V
13693.500	39.70	-31.00	41.00	29.70	54.00	14.30	V
11882.000	37.23	-32.40	39.10	30.53	54.00	16.77	V
7224.000	35.76	-35.40	36.20	34.96	54.00	18.24	V
9432.500	35.55	-33.60	37.90	31.25	54.00	18.45	H
2492.000	44.07	-19.70	28.20	35.57	54.00	9.93	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17149.500	41.86	-29.30	41.70	29.46	54.00	12.14	V
13738.000	39.46	-31.00	41.10	29.36	54.00	14.54	V
12785.500	37.18	-31.50	39.80	28.88	54.00	16.82	V
9896.500	35.84	-33.90	37.90	31.84	54.00	18.16	H
7536.000	35.40	-35.50	36.30	34.60	54.00	18.60	H
2360.300	43.59	-19.60	28.20	34.99	54.00	10.41	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17376.000	41.91	-28.60	43.40	27.11	54.00	12.09	V
13687.000	39.44	-31.00	41.00	29.44	54.00	14.56	H
12697.000	37.53	-31.90	39.50	29.93	54.00	16.47	V
7310.500	35.48	-35.40	36.60	34.28	54.00	18.52	V
9114.500	35.48	-34.30	37.70	32.08	54.00	18.52	V
4941.000	31.15	-37.60	33.30	35.45	54.00	22.85	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17352.500	42.50	-28.60	43.40	27.70	54.00	11.50	H
13799.000	39.42	-30.90	41.20	29.12	54.00	14.58	V
11879.500	36.99	-32.80	39.10	30.59	54.00	17.01	V
9012.000	36.07	-34.30	37.80	32.57	54.00	17.93	V
7342.000	35.56	-35.90	36.60	34.86	54.00	18.44	V
2491.600	44.08	-19.70	28.20	35.58	54.00	9.92	V

Conclusion: Pass

B.7. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Count		
39	DH1	Fig.64	0.38	Fig.65	317	120.46	P
	DH3	Fig.66	1.64	Fig.67	98	160.72	P
	DH5	Fig.68	2.88	Fig.69	64	184.32	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Count		
39	2DH1	Fig.70	0.39	Fig.71	317	123.63	P
	2DH3	Fig.72	1.64	Fig.73	107	175.48	P
	2DH5	Fig.74	2.89	Fig.75	62	179.18	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.39	Fig.77	318	124.02	P
	3DH3	Fig.78	1.64	Fig.79	104	170.56	P
	3DH5	Fig.80	2.89	Fig.81	64	184.96	P

Conclusion: PASS

Test graphs as below:

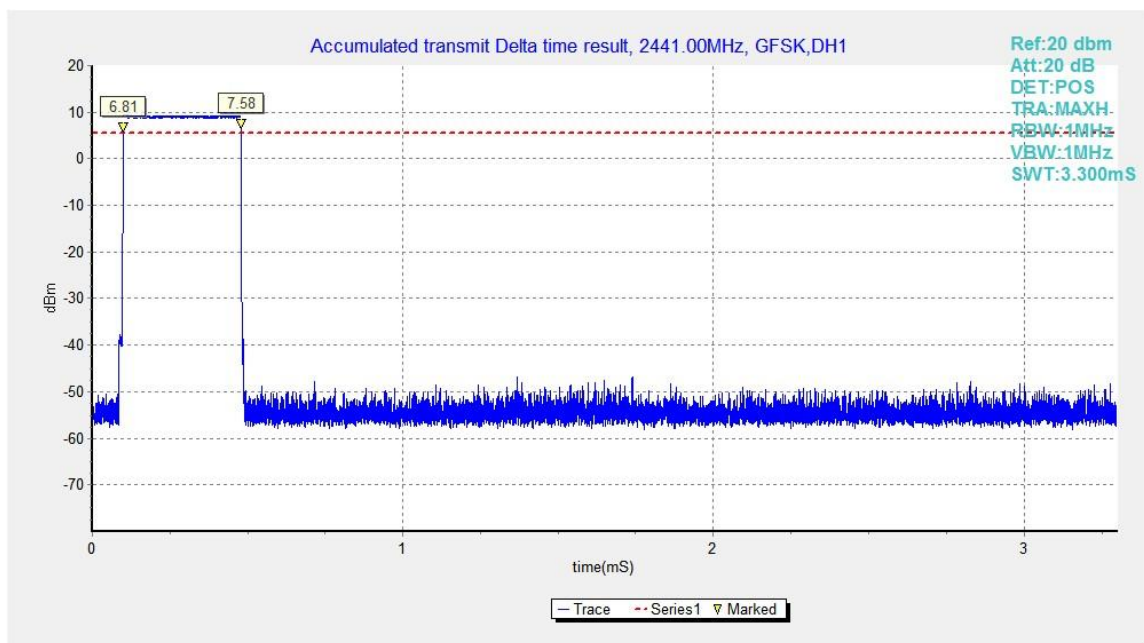


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

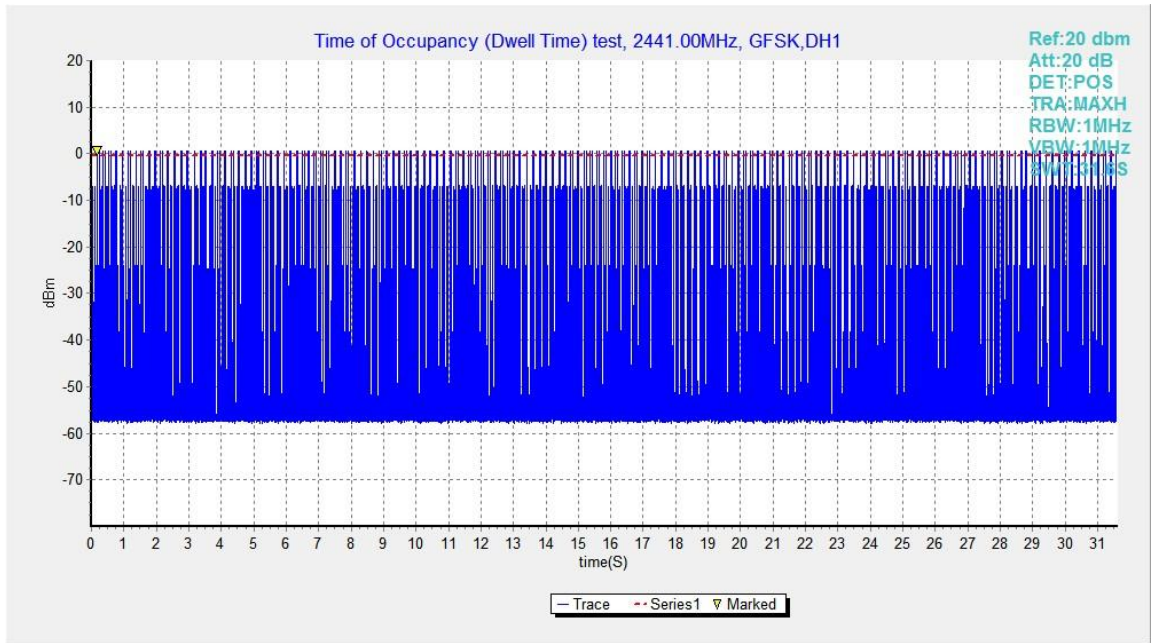


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

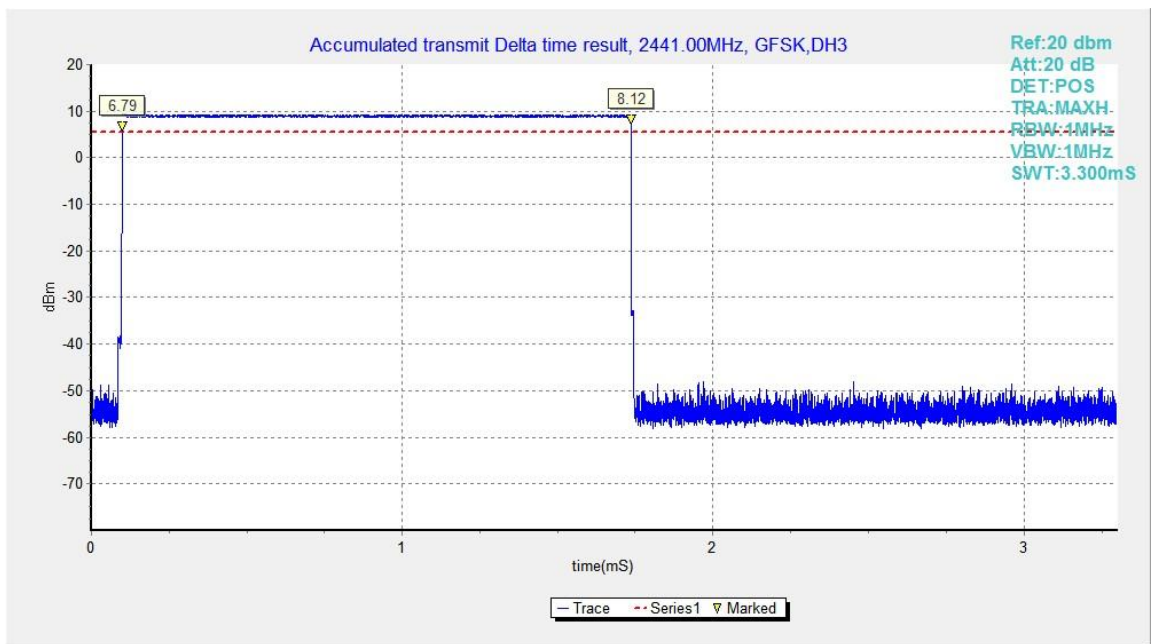


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

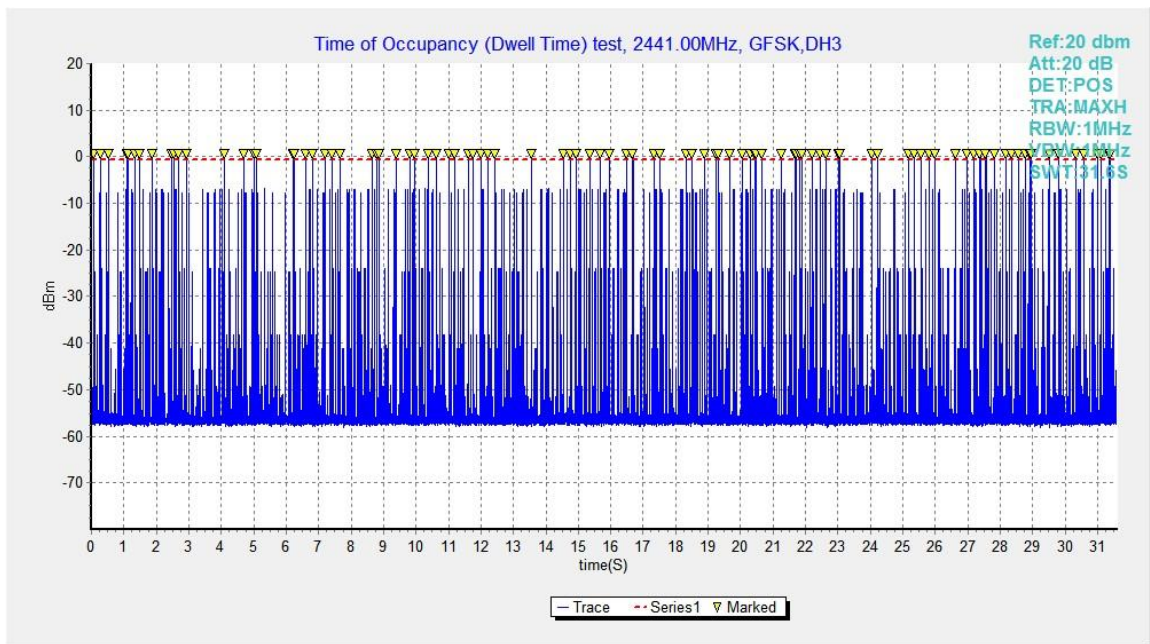


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

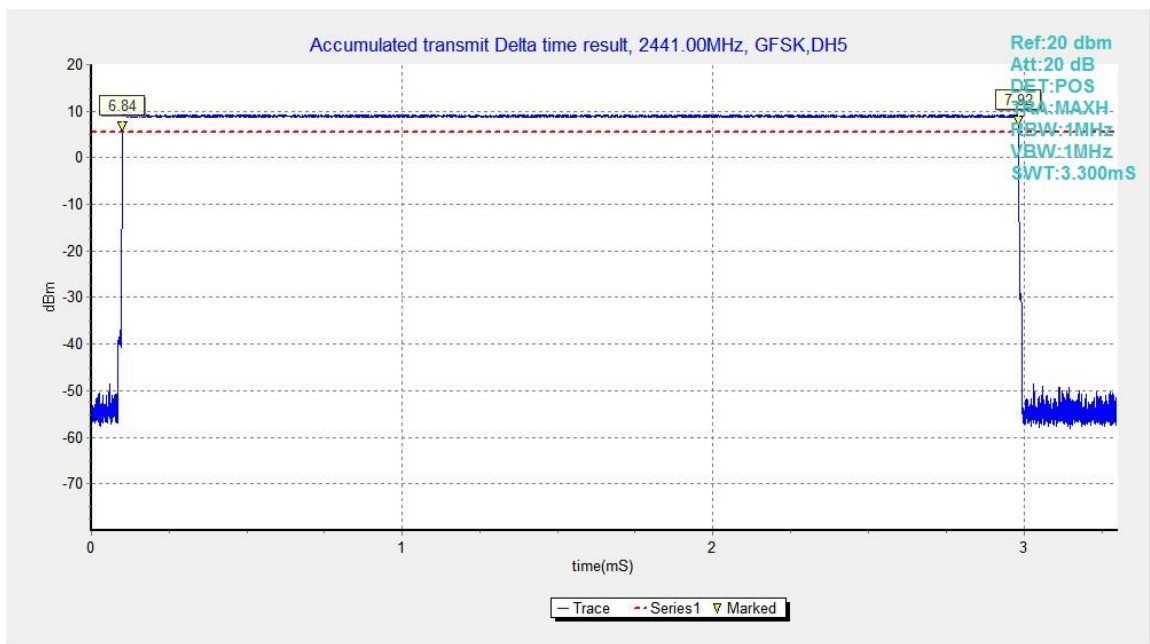


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

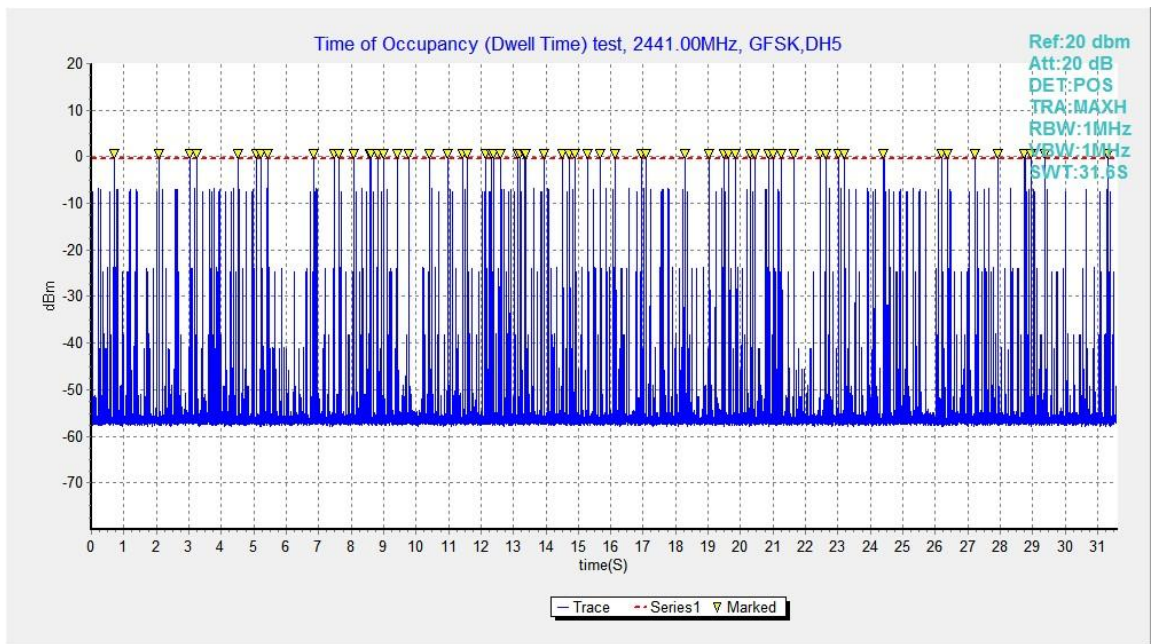


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

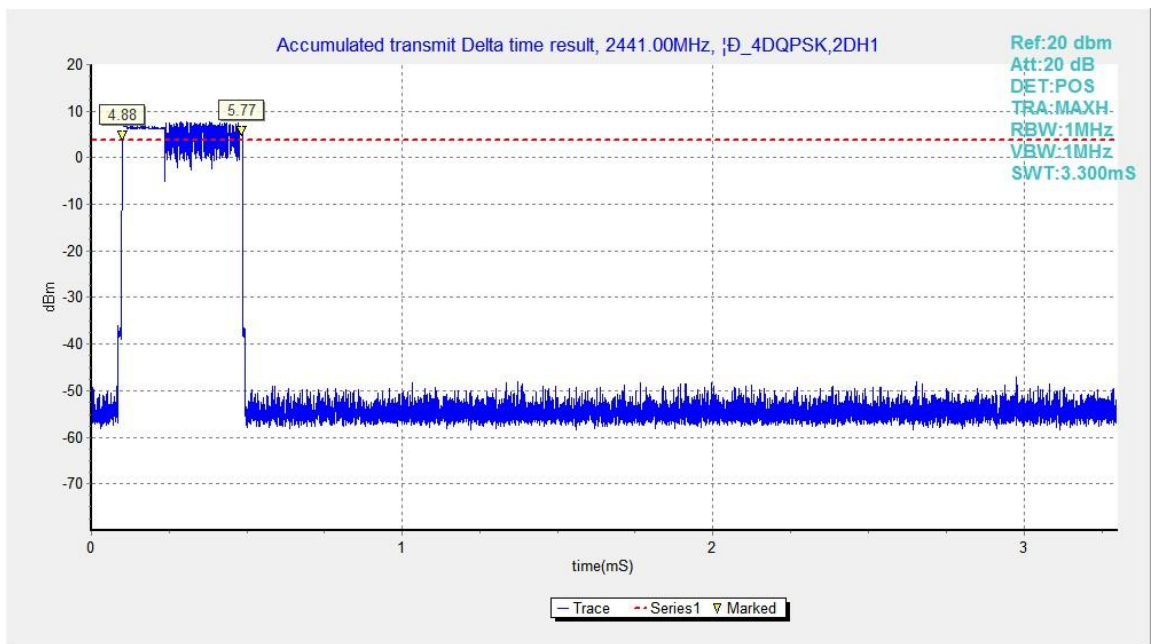


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

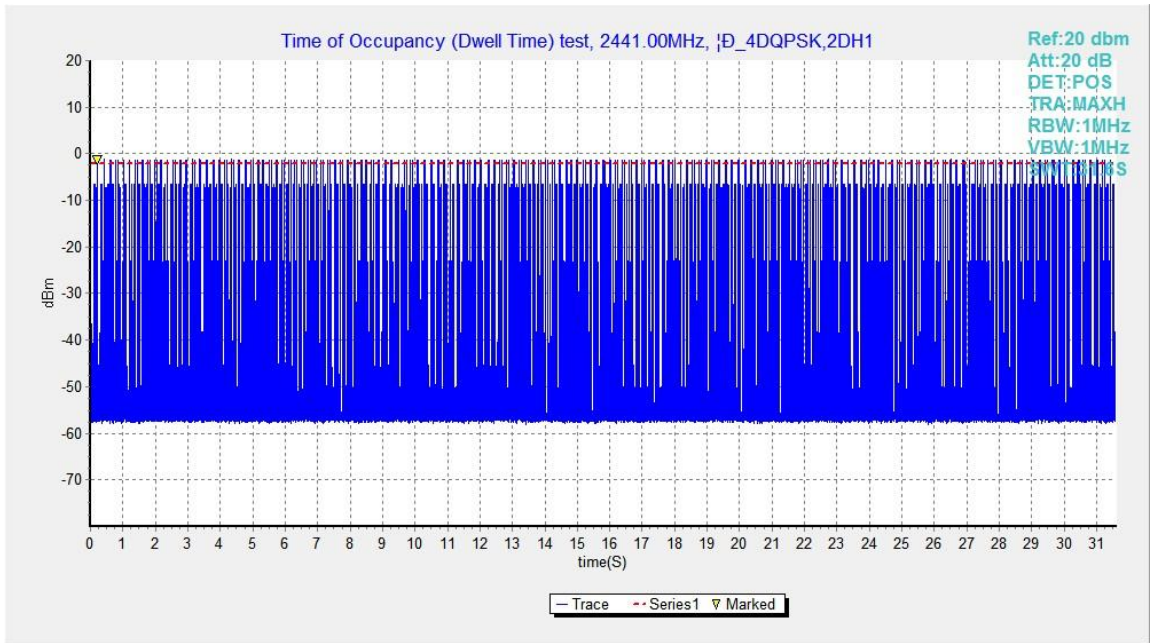


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

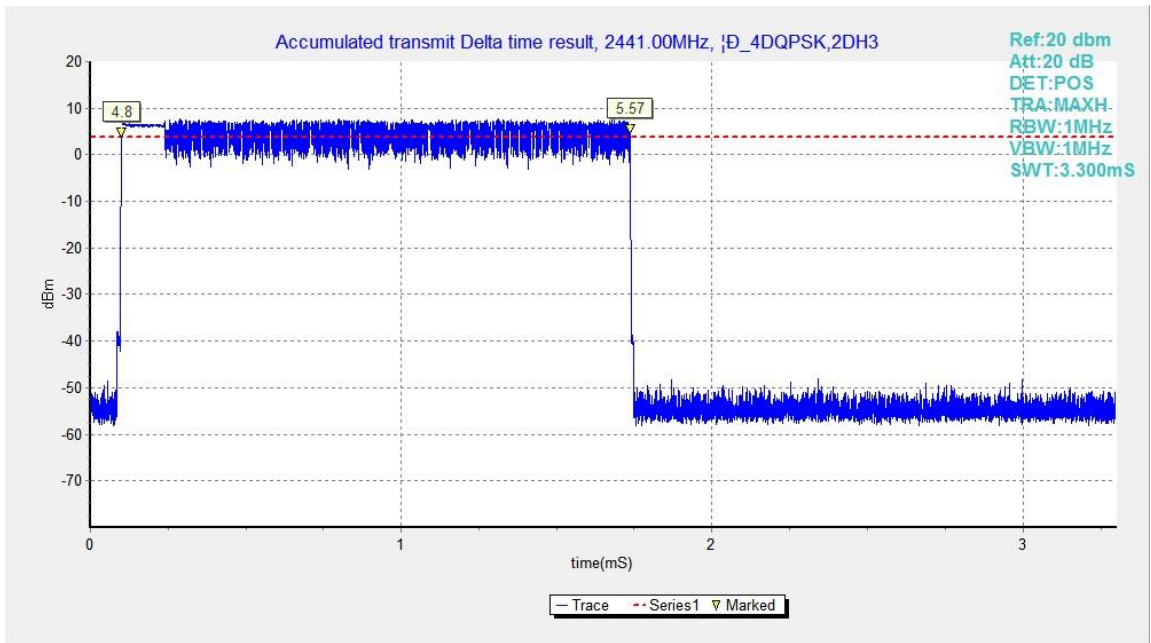


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

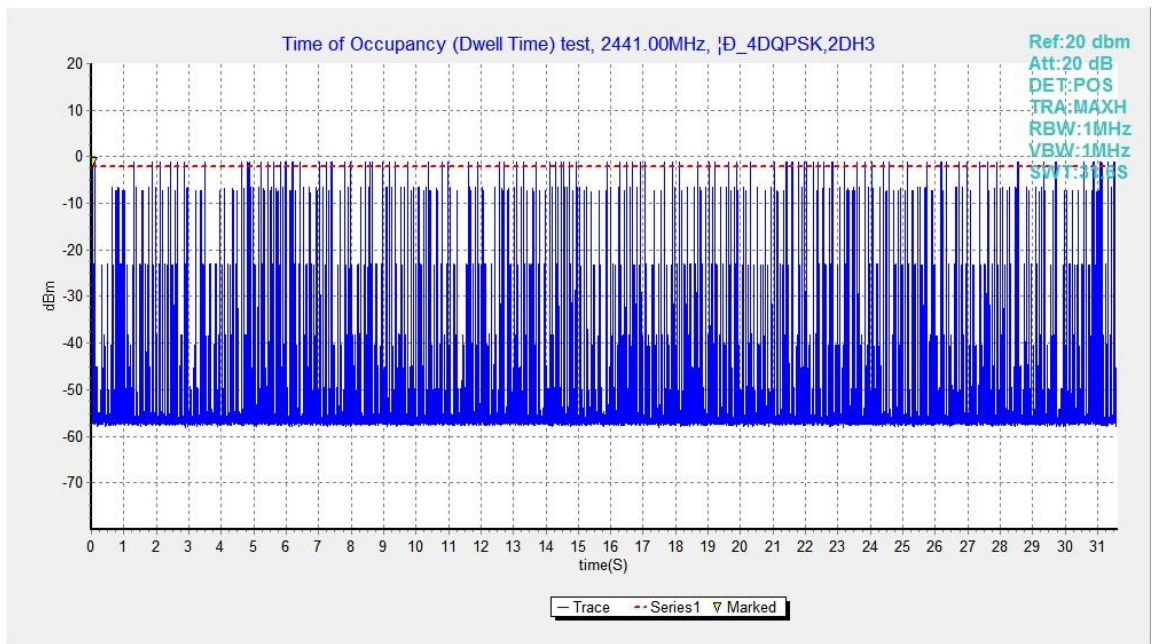


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

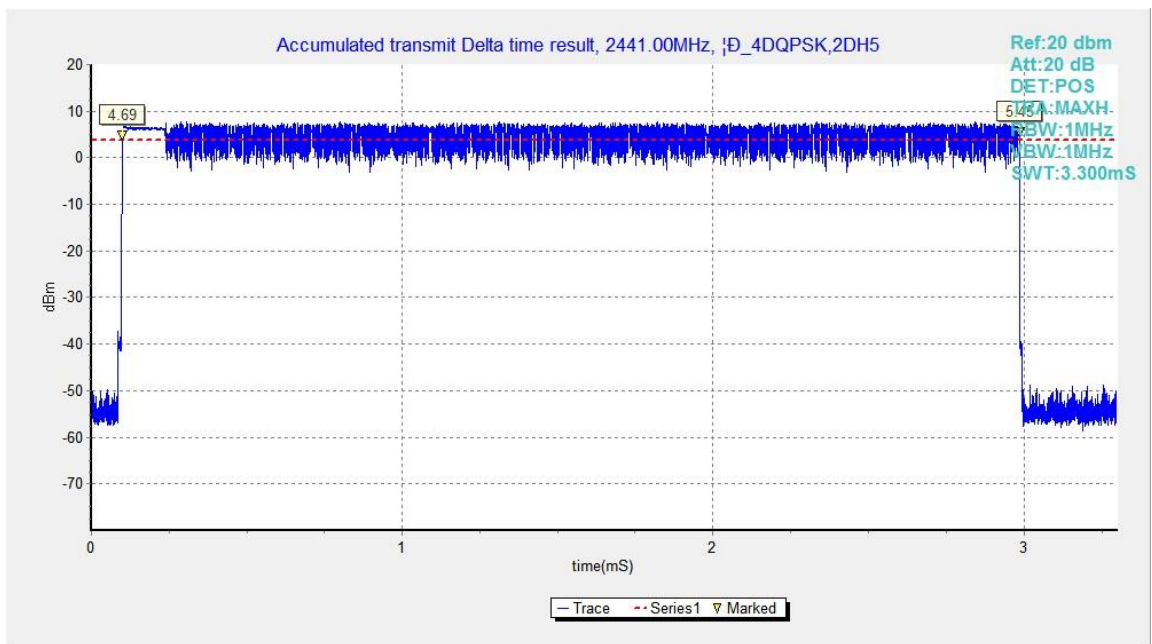


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

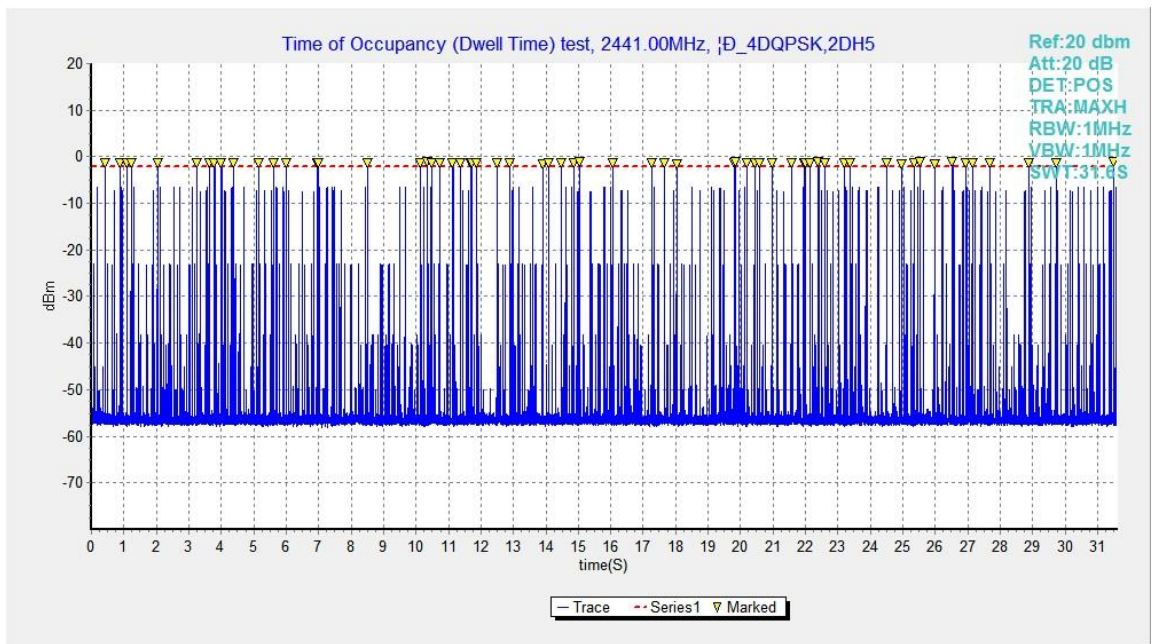


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

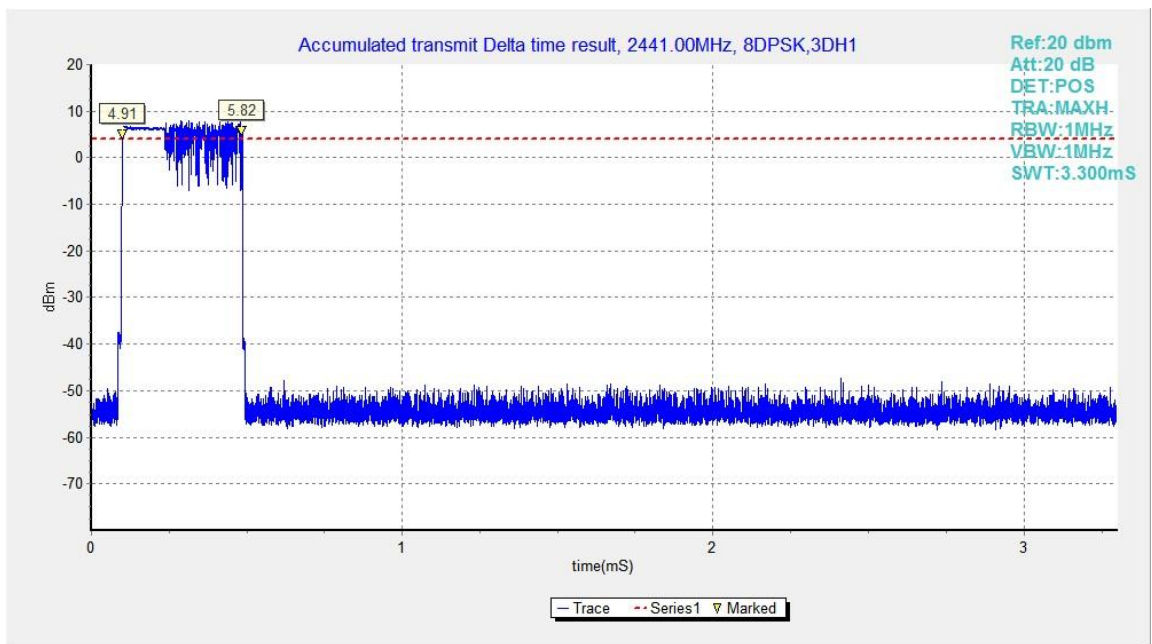


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

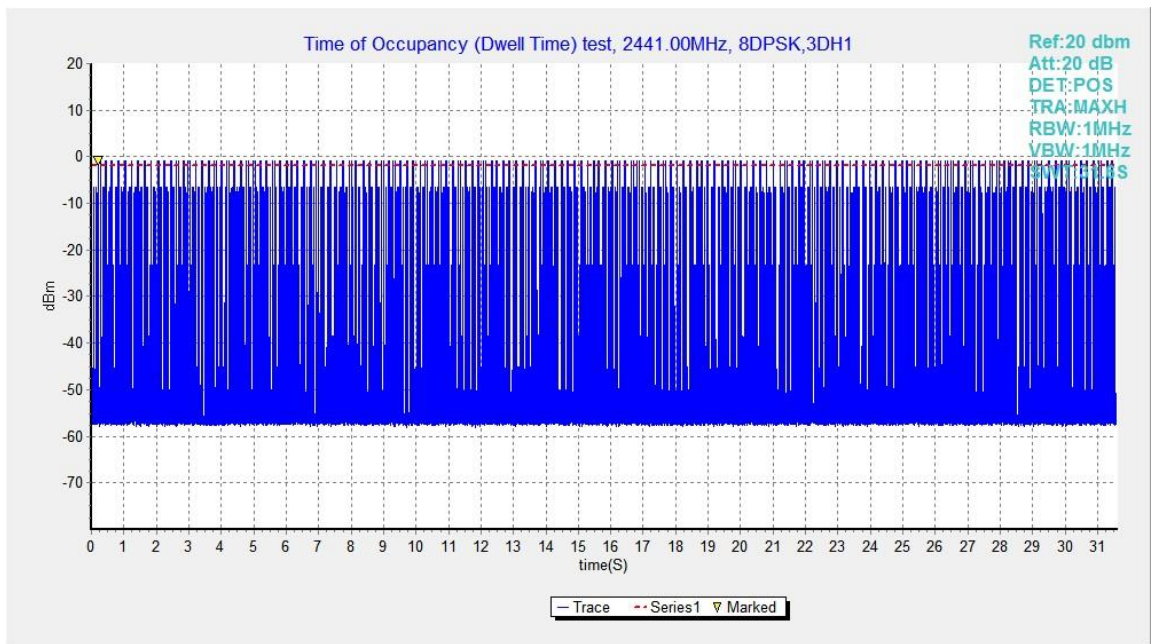


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

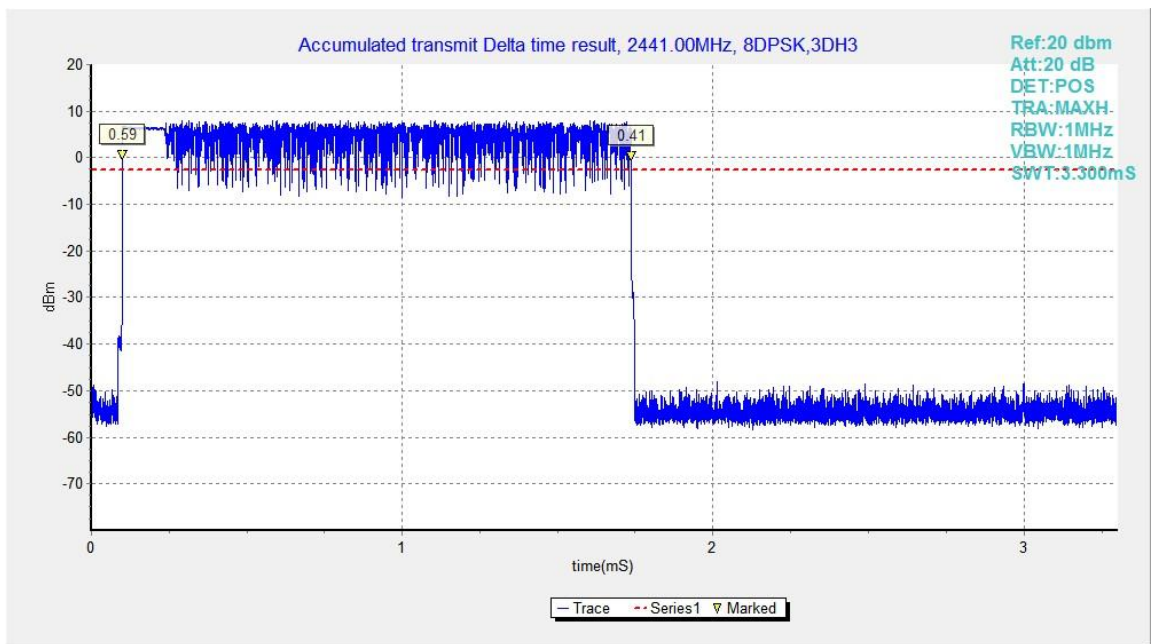


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

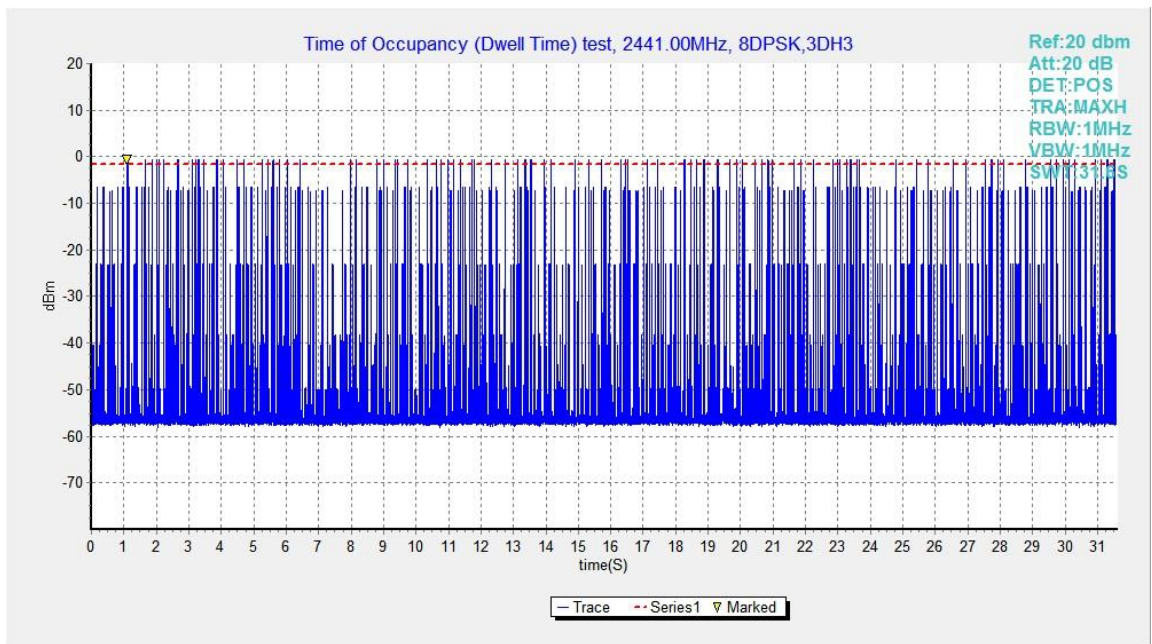


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

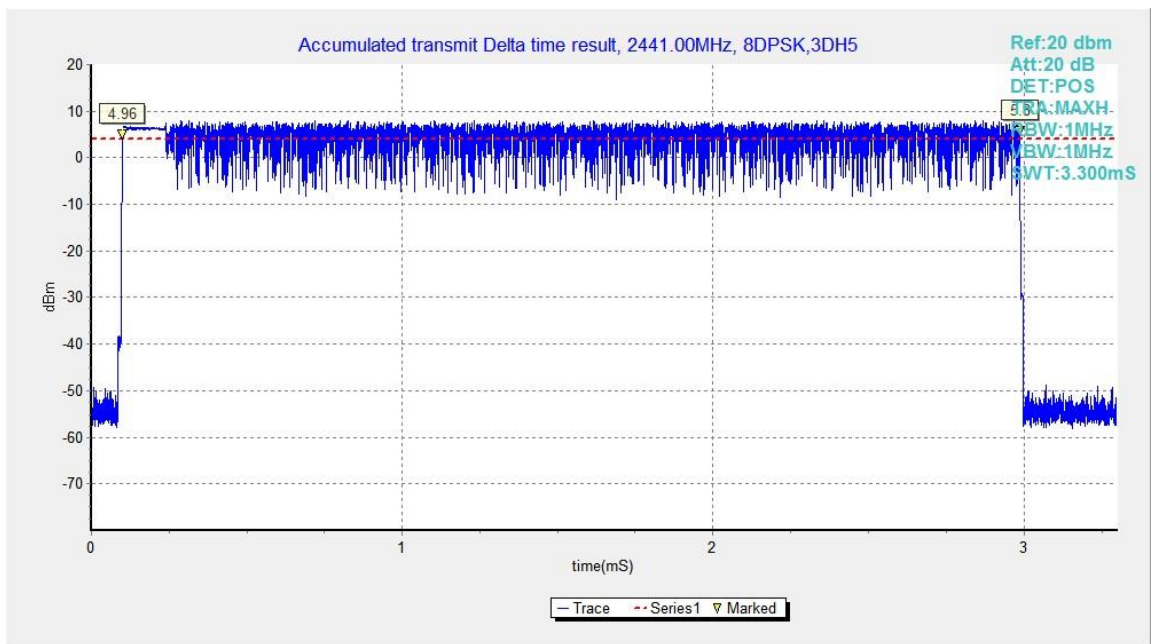


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

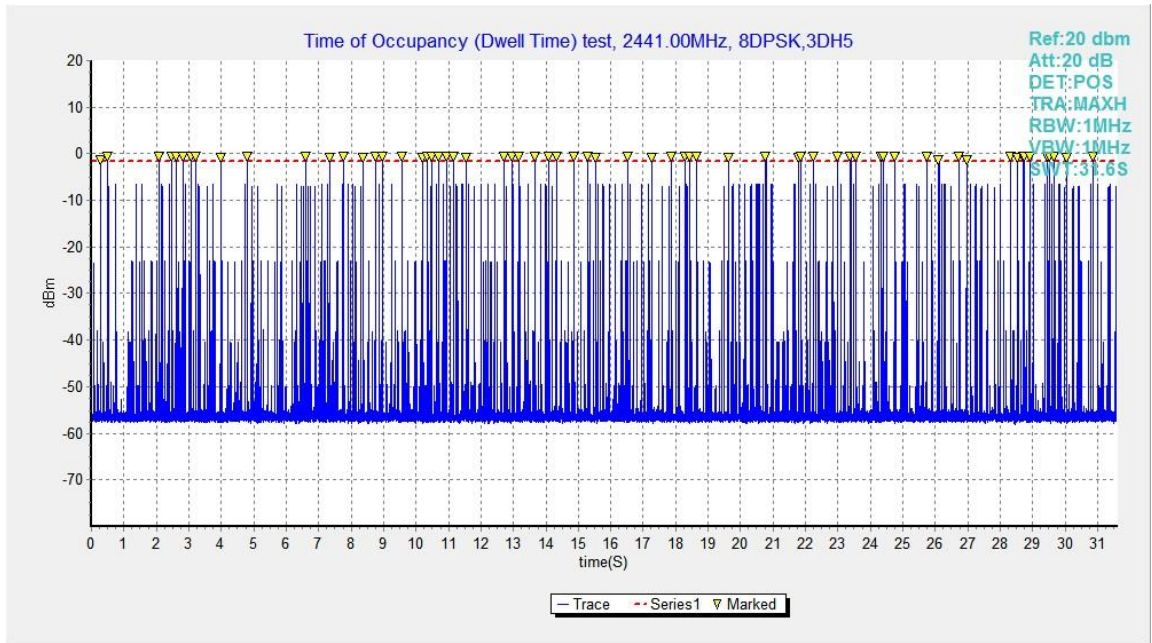


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	919.50	NA
39	Fig.83	926.25	NA
78	Fig.84	923.25	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1290.00	NA
39	Fig.86	1278.00	NA
78	Fig.87	1278.00	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1297.50	NA
39	Fig.89	1299.00	NA
78	Fig.90	1296.75	NA

Conclusion: NA

Test graphs as below:

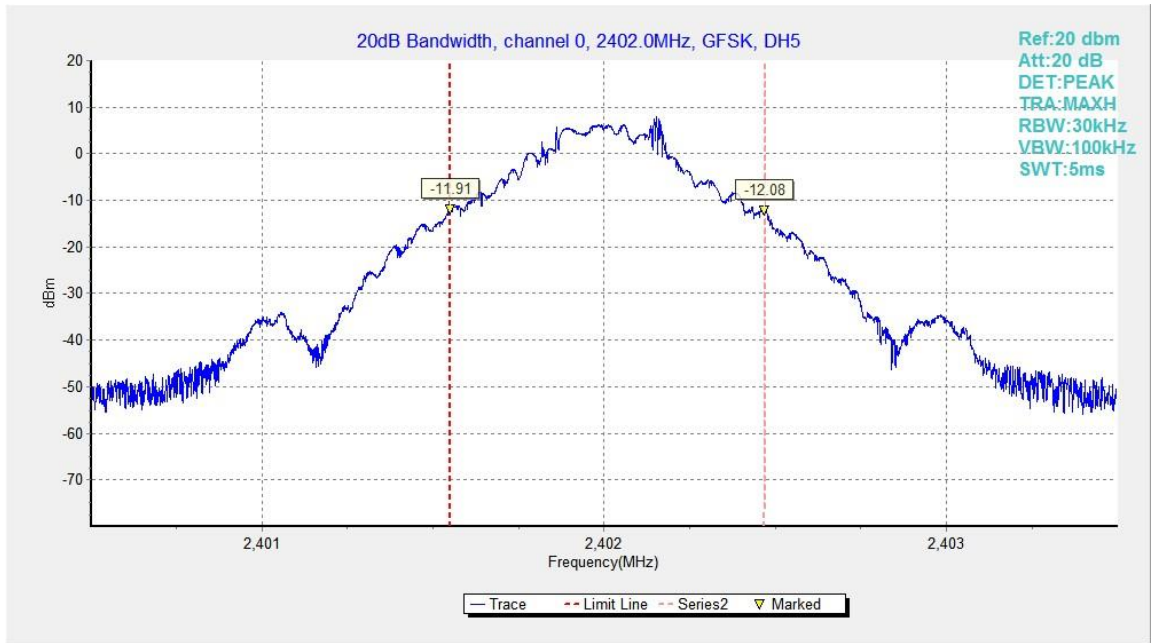


Fig.82. 20dB Bandwidth: GFSK, Channel 0

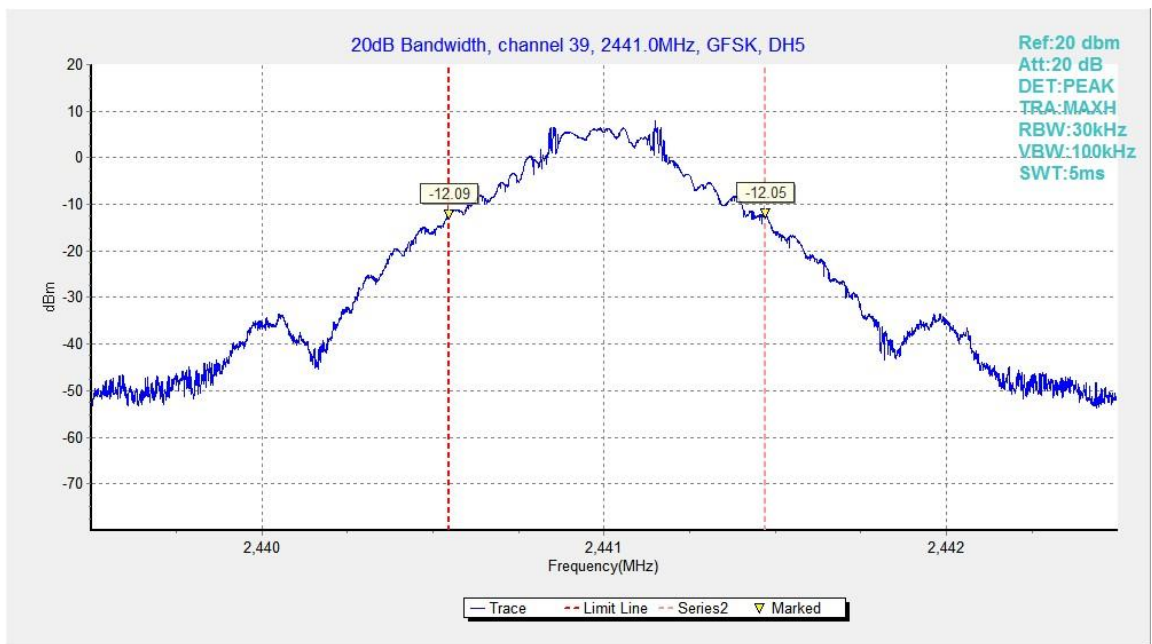


Fig.83. 20dB Bandwidth: GFSK, Channel 39

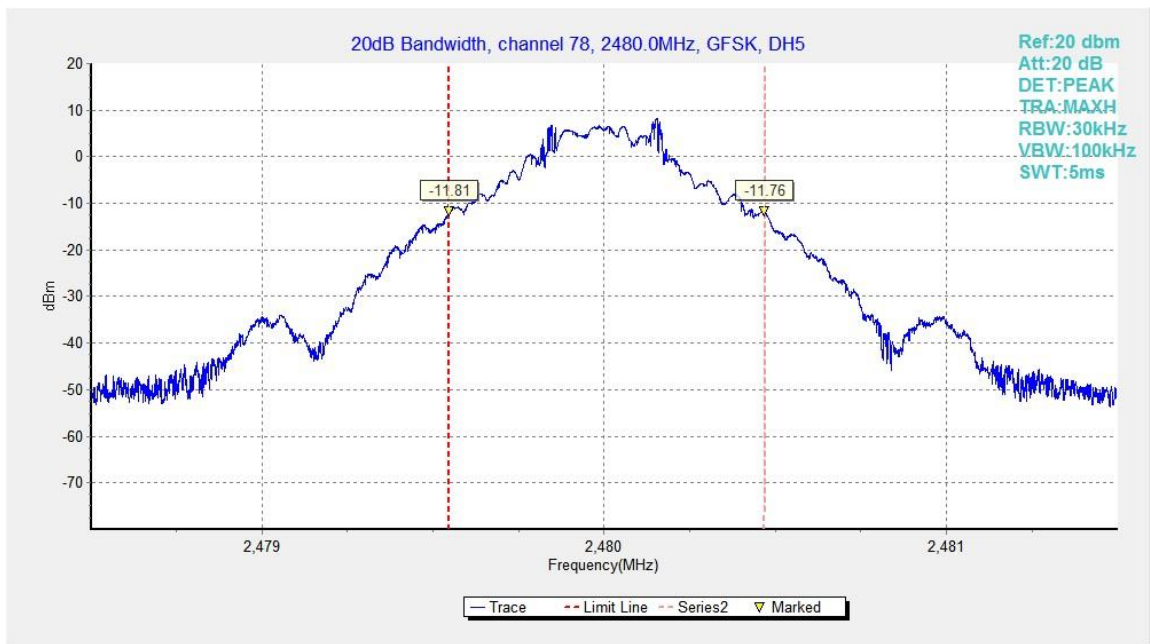


Fig.84. 20dB Bandwidth: GFSK, Channel 78

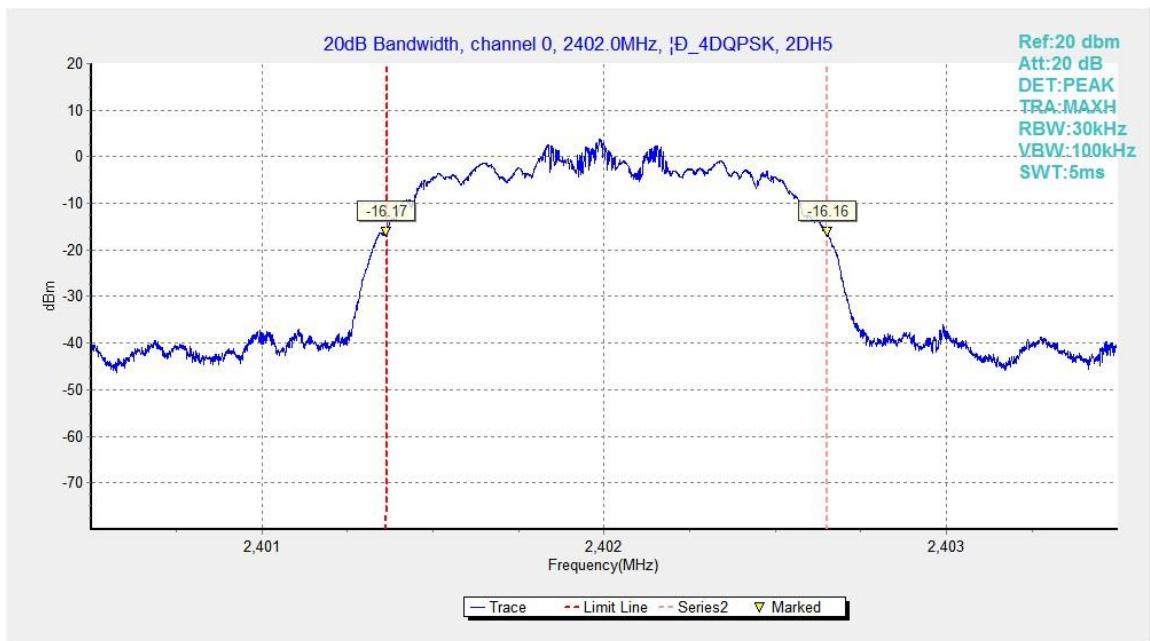


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

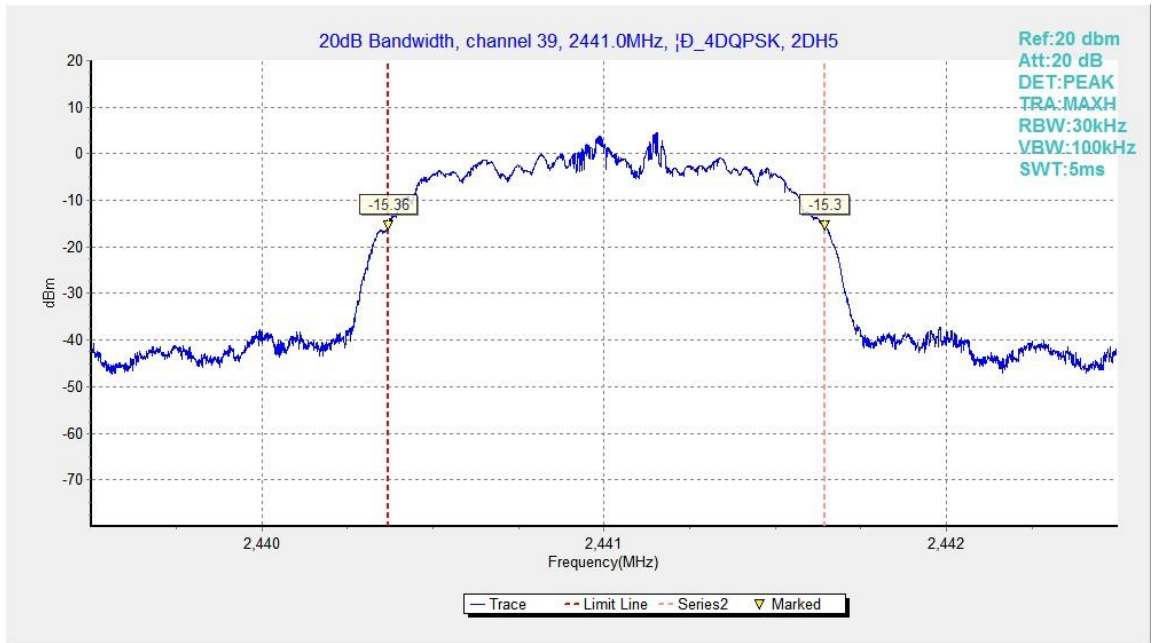


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

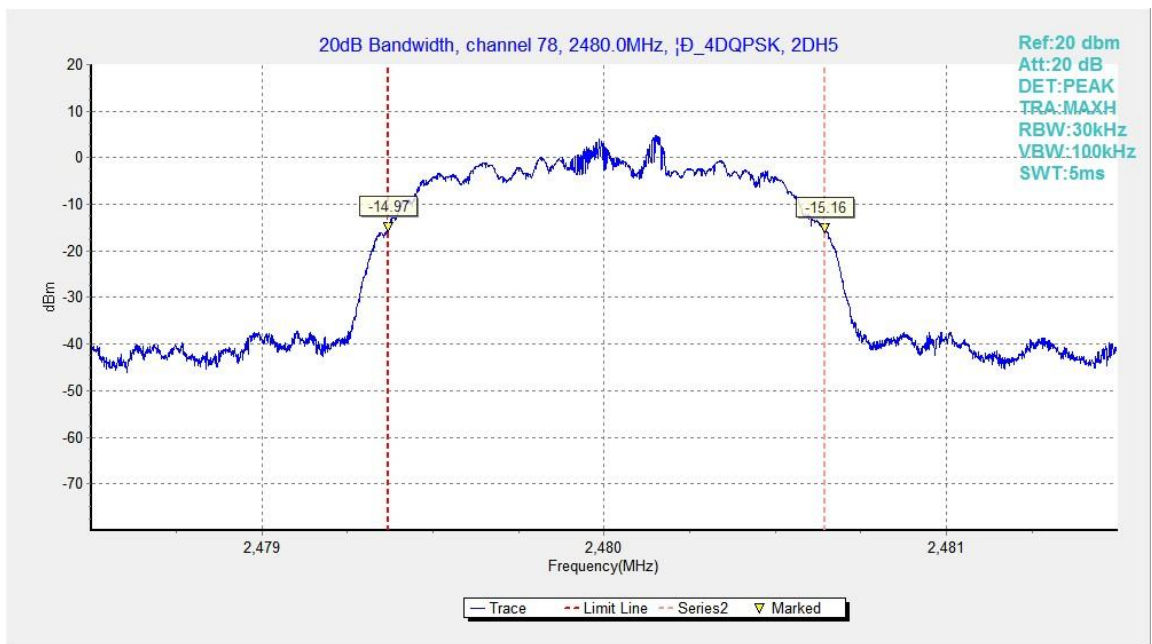


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

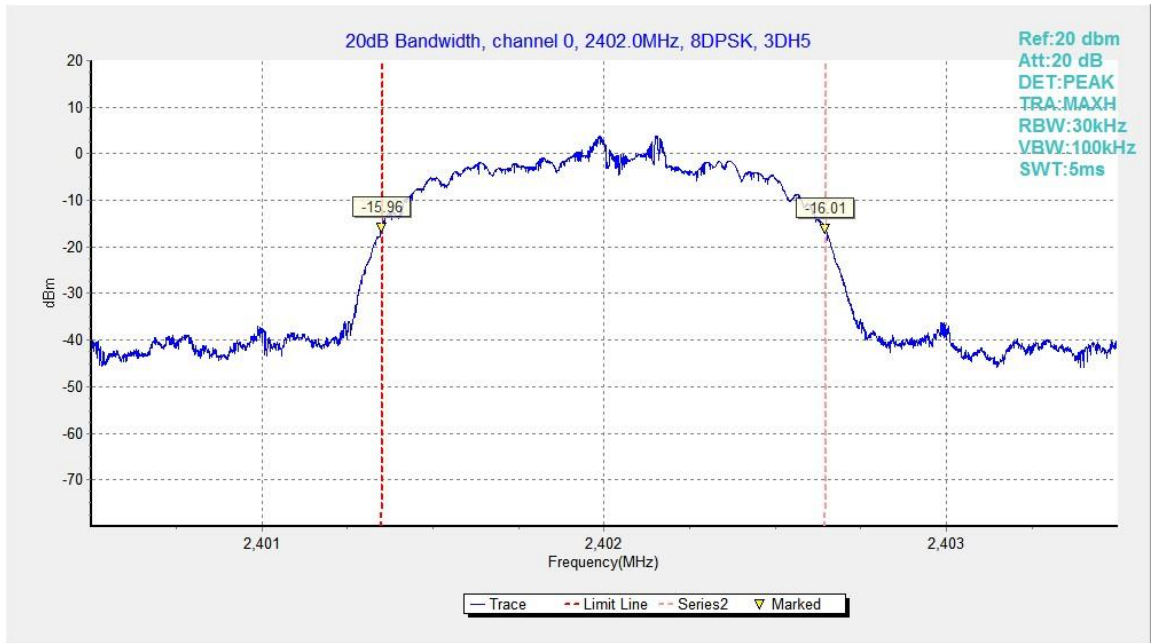


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

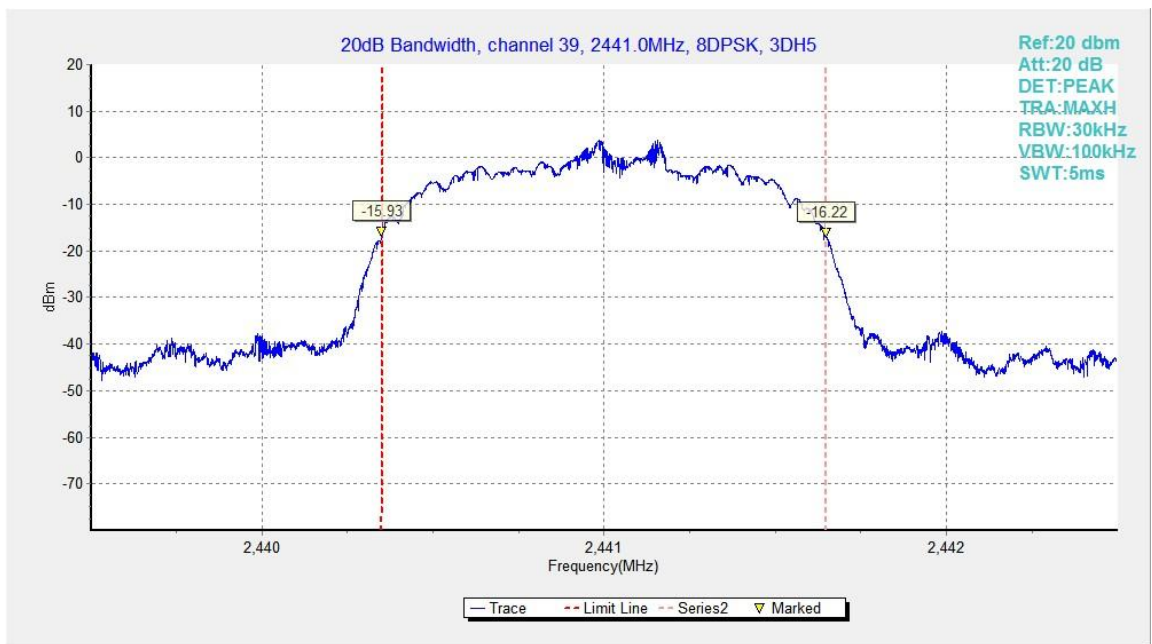


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

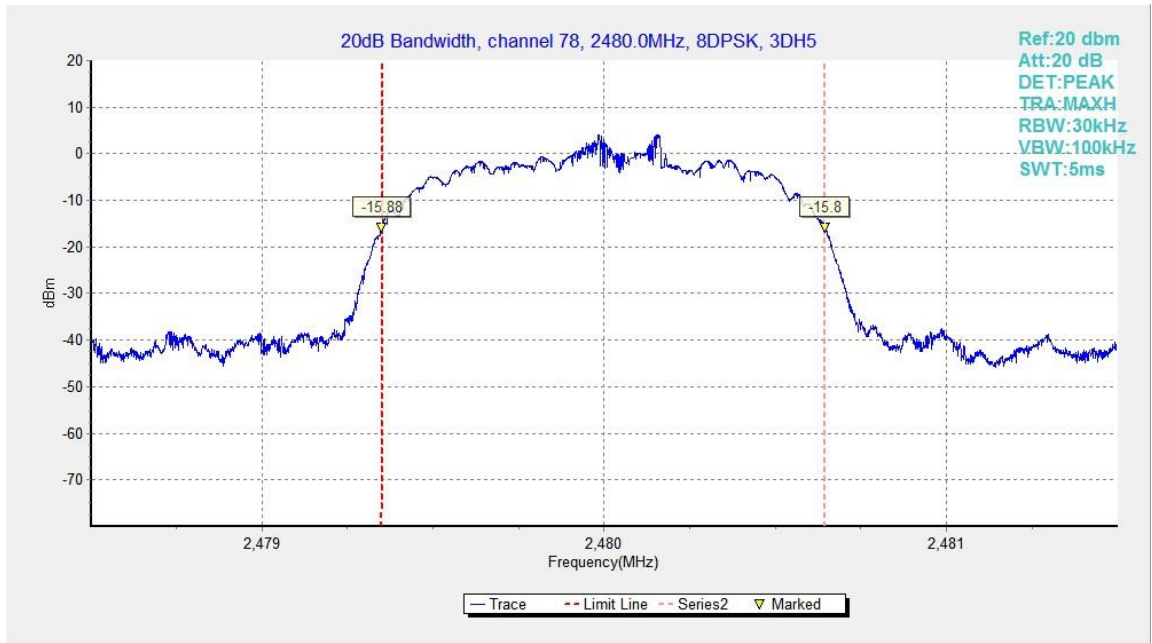


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.91	838.50	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.92	1001.25	P

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.93	1016.25	P

Conclusion: PASS

Test graphs as below:

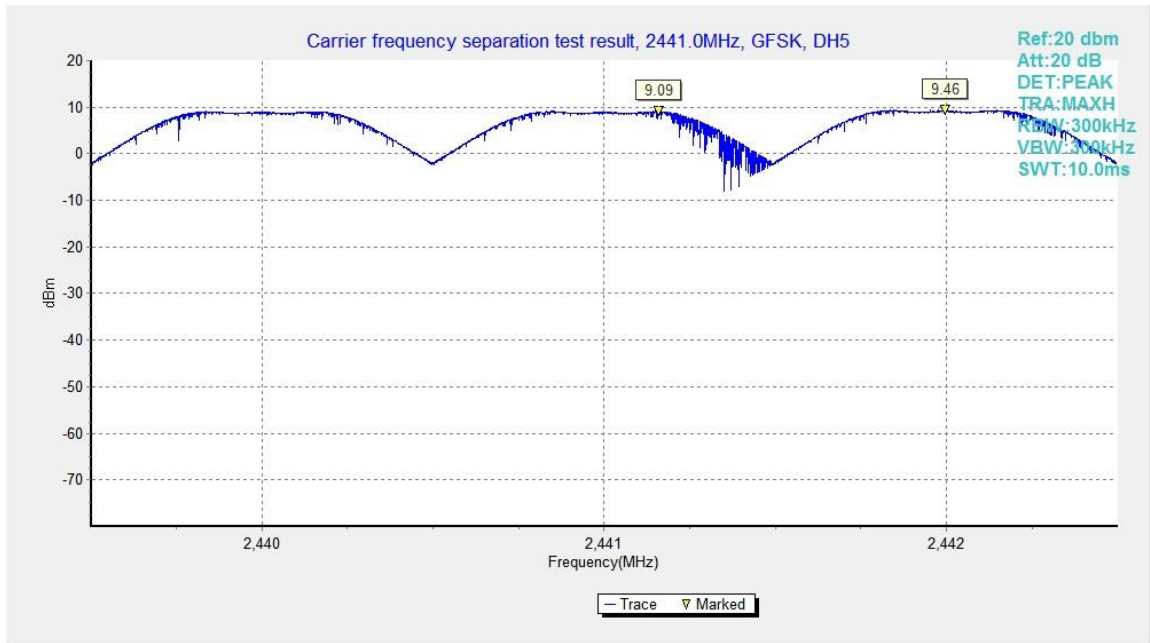


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

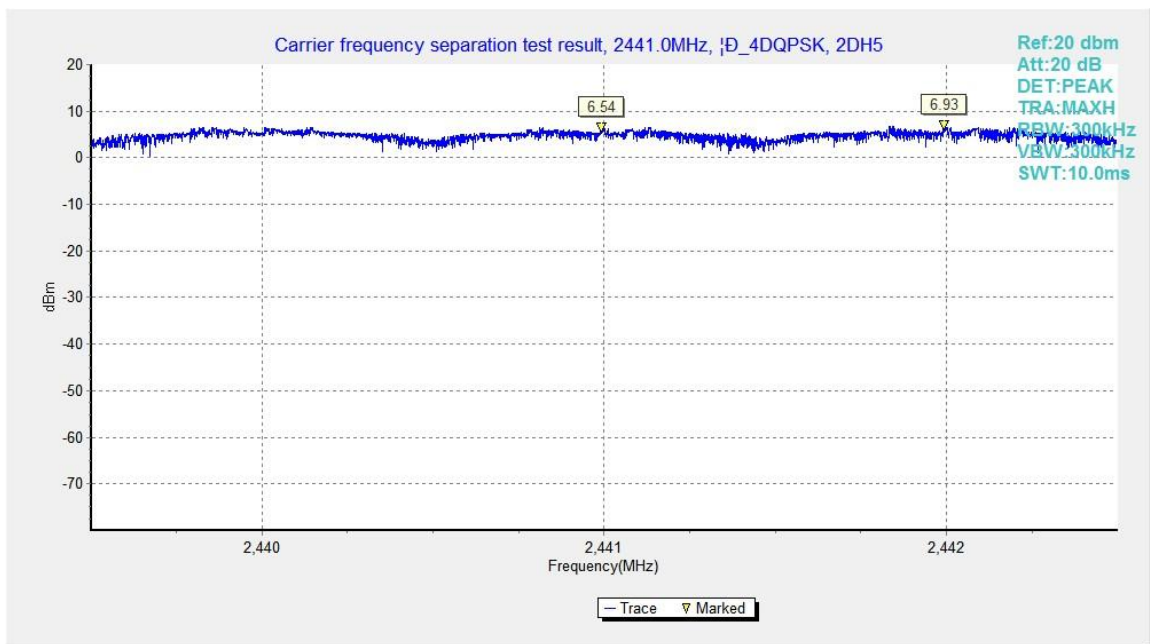


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

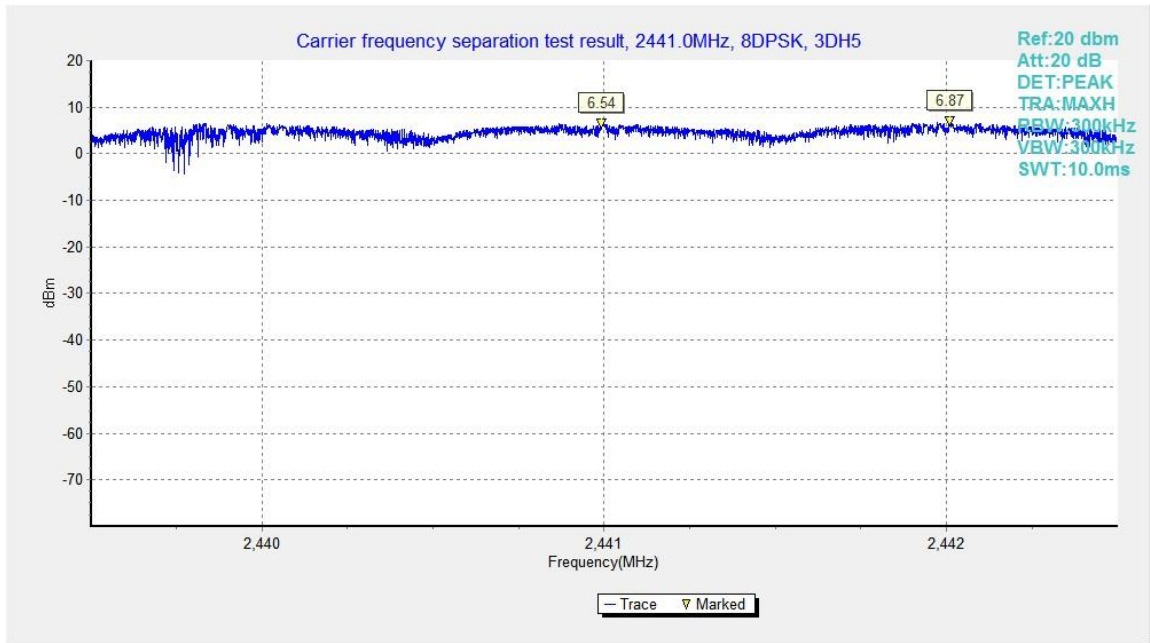


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	P
40~78	Fig.95	

For $\pi/4$ DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	P
40~78	Fig.97	

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	P
40~78	Fig.99	

Conclusion: PASS

Test graphs as below:

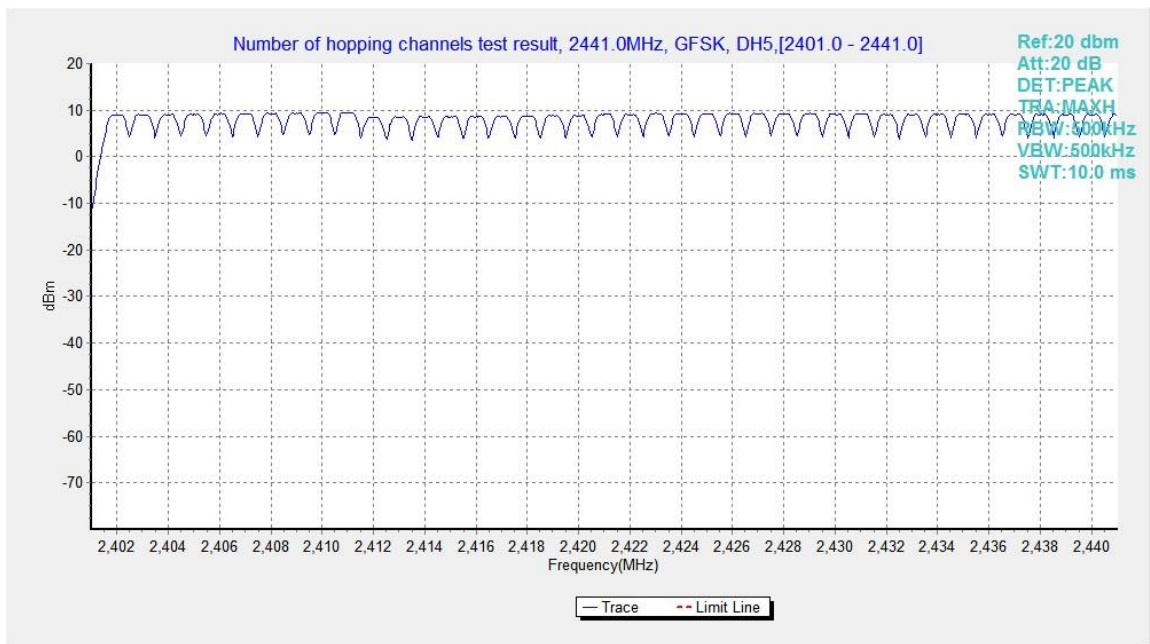


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

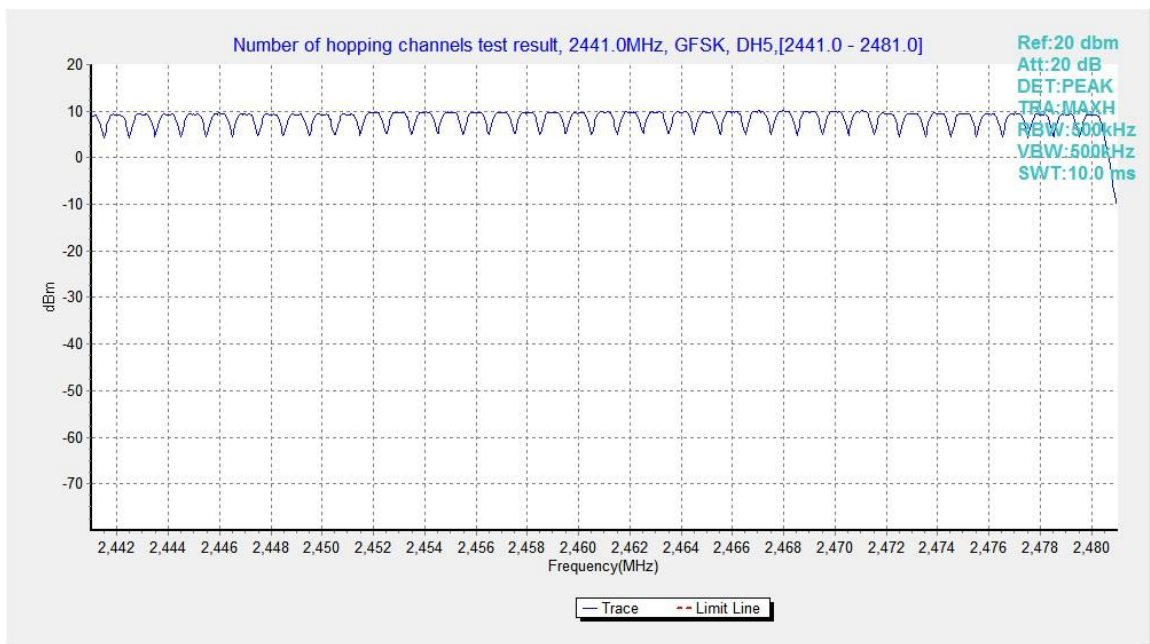


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

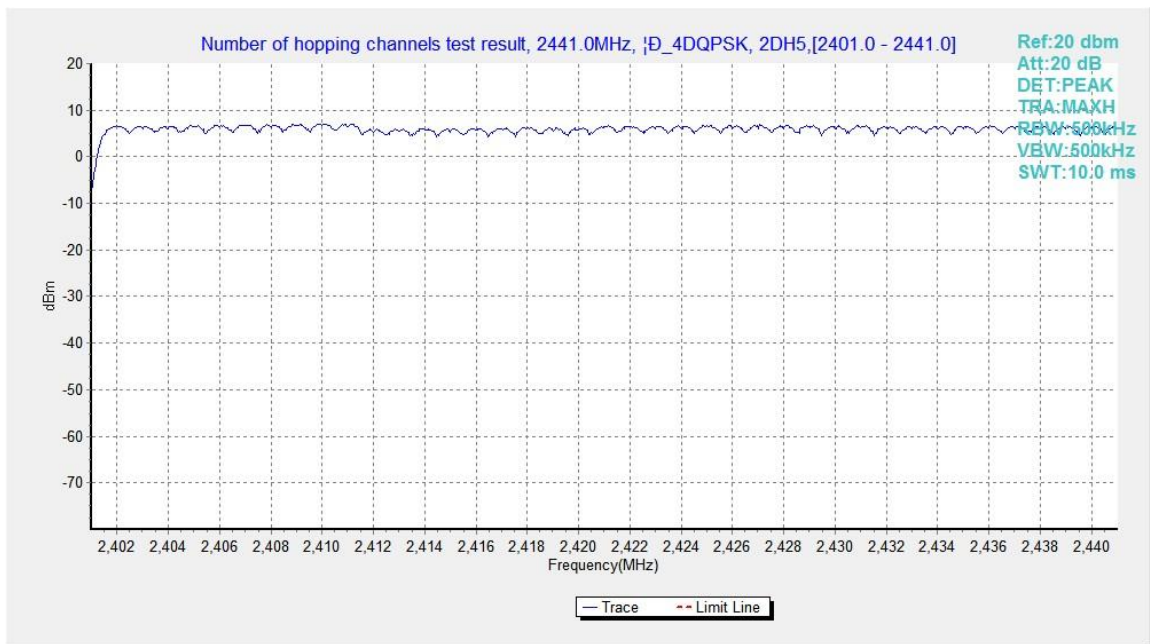


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

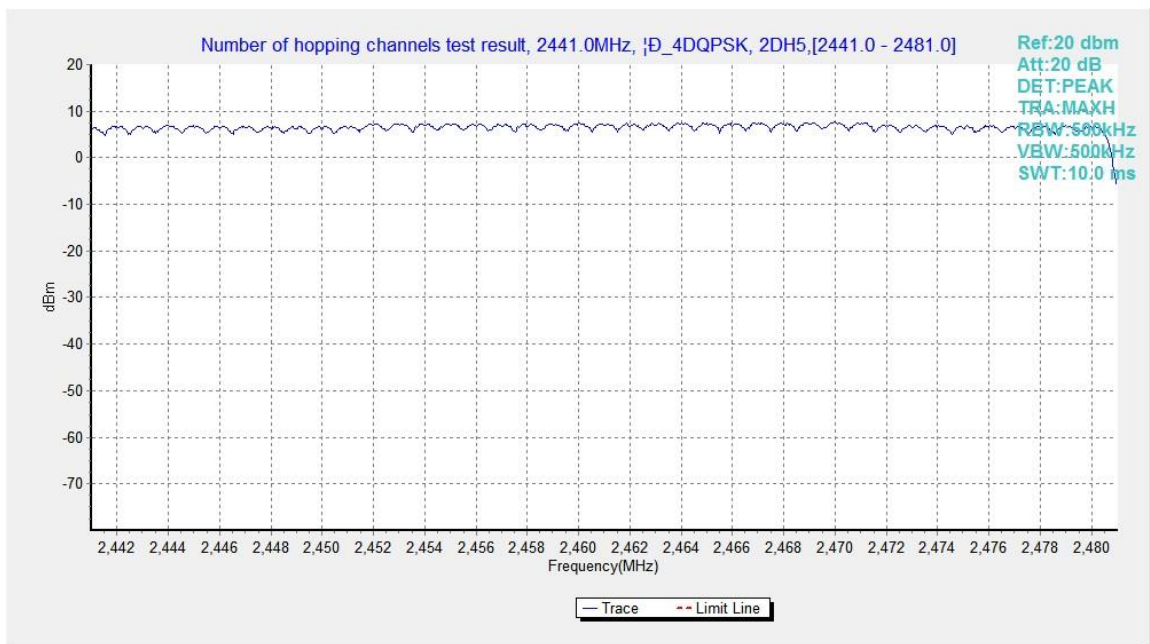


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

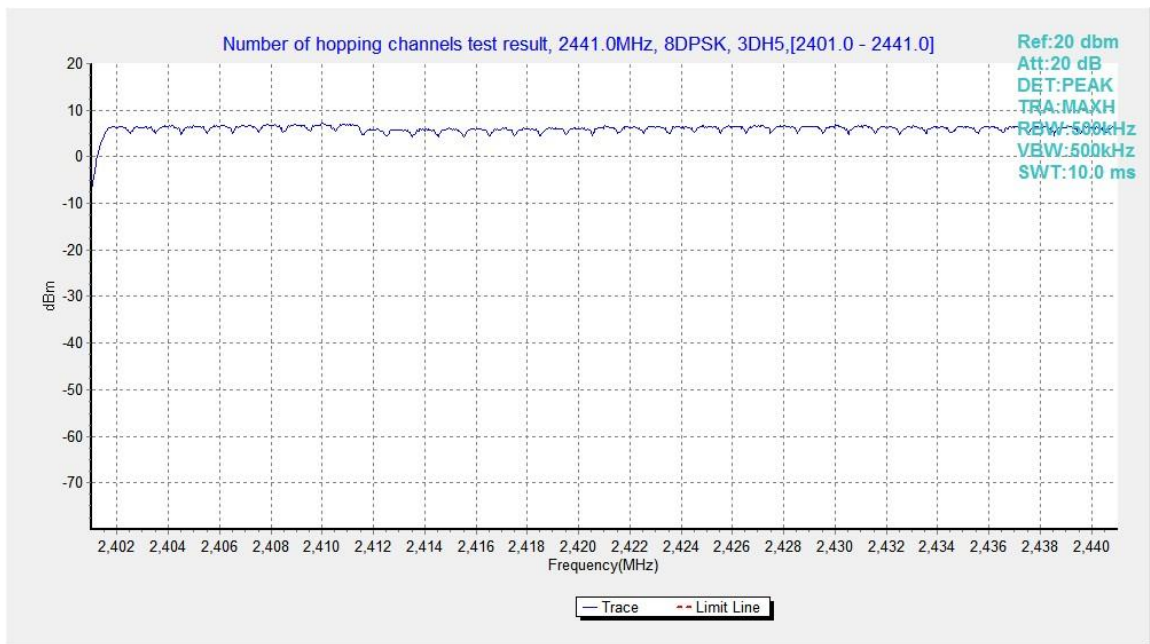


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

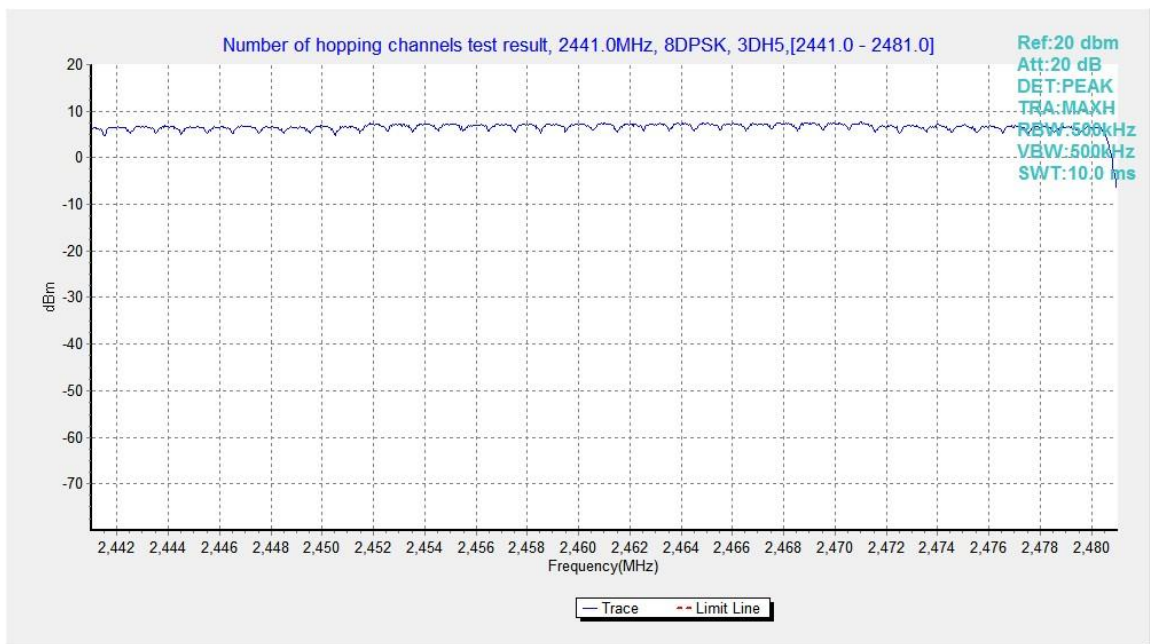


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

B.11. AC Powerline Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

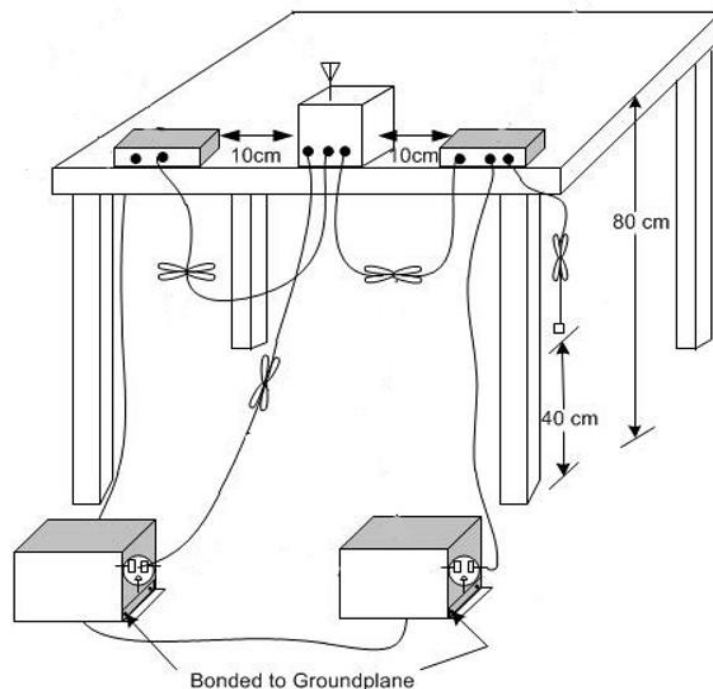

Measurement Result and limit:
EUT ID: UT01a

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

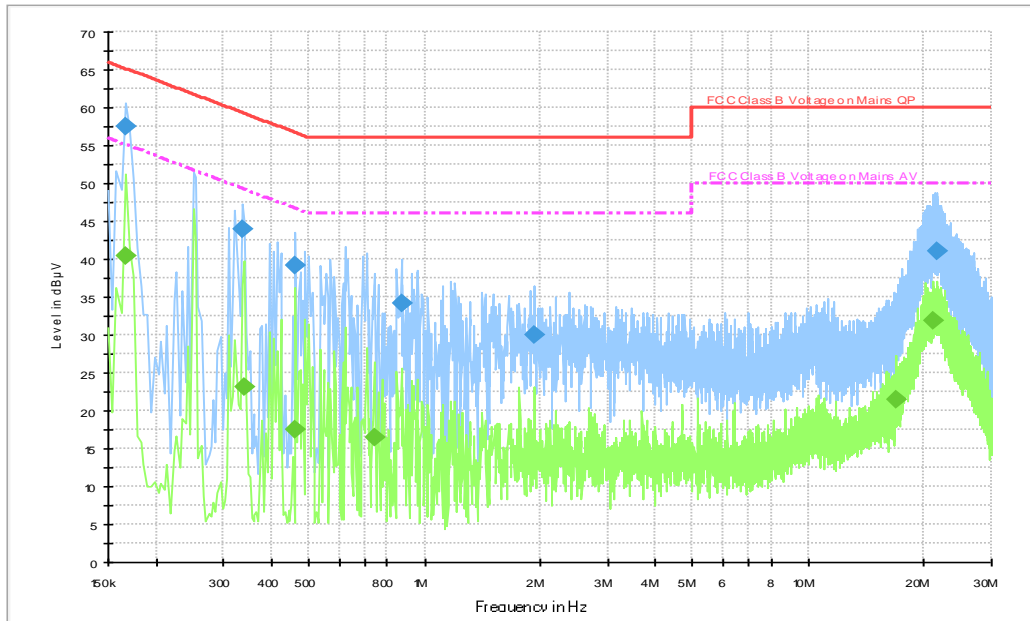


Fig.B.11.1 AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	57.5	2000.0	9.000	On	L1	19.8	7.6	65.2
0.334000	43.9	2000.0	9.000	On	L1	19.7	15.4	59.4
0.462000	39.1	2000.0	9.000	On	N	19.7	17.5	56.7
0.870000	34.1	2000.0	9.000	On	L1	19.6	21.9	56.0
1.926000	30.0	2000.0	9.000	On	L1	19.6	26.0	56.0
21.754000	41.1	2000.0	9.000	On	L1	19.7	18.9	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	40.5	2000.0	9.000	On	L1	19.8	14.7	55.2
0.338000	23.1	2000.0	9.000	On	N	19.7	26.1	49.3
0.462000	17.5	2000.0	9.000	On	N	19.7	29.2	46.7
0.738000	16.4	2000.0	9.000	On	N	19.7	29.6	46.0
17.026000	21.5	2000.0	9.000	On	L1	19.7	28.5	50.0
21.074000	31.8	2000.0	9.000	On	L1	19.7	18.2	50.0

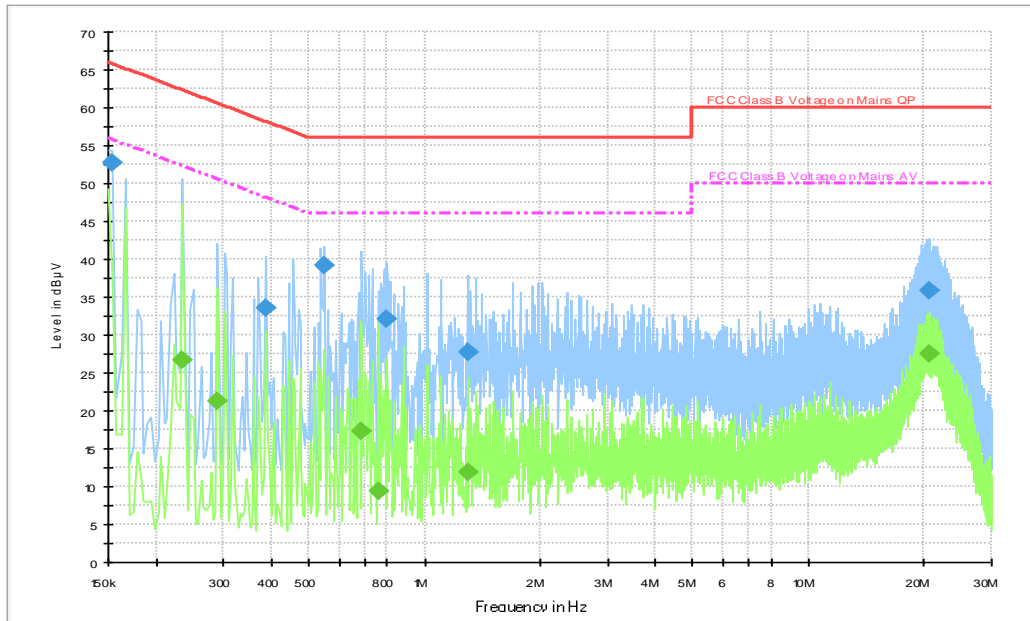


Fig.B.11.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154000	52.7	2000.0	9.000	On	N	19.9	13.1	65.8
0.386000	33.6	2000.0	9.000	On	L1	19.7	24.5	58.1
0.550000	39.2	2000.0	9.000	On	L1	19.7	16.8	56.0
0.798000	32.1	2000.0	9.000	On	L1	19.7	23.9	56.0
1.294000	27.8	2000.0	9.000	On	L1	19.7	28.2	56.0
20.678000	35.8	2000.0	9.000	On	L1	19.7	24.2	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.234000	26.7	2000.0	9.000	On	L1	19.7	25.6	52.3
0.290000	21.2	2000.0	9.000	On	N	19.7	29.3	50.5
0.686000	17.3	2000.0	9.000	On	L1	19.7	28.7	46.0
0.758000	9.3	2000.0	9.000	On	L1	19.7	36.7	46.0
1.294000	11.9	2000.0	9.000	On	L1	19.7	34.1	46.0
20.678000	27.5	2000.0	9.000	On	L1	19.7	22.5	50.0



B.12. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2022-10-01 through 2023-09-30 <i>Effective Dates</i></p>	  <hr/> <p><i>For the National Voluntary Laboratory Accreditation Program</i></p>

END OF REPORT