

Fig.56. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

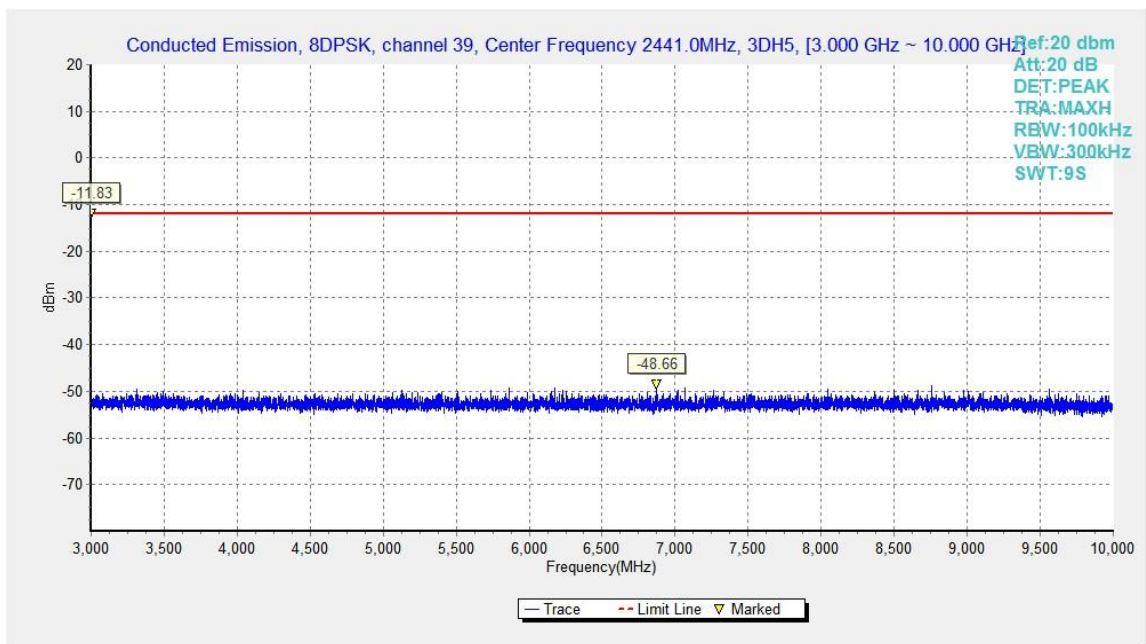


Fig.57. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

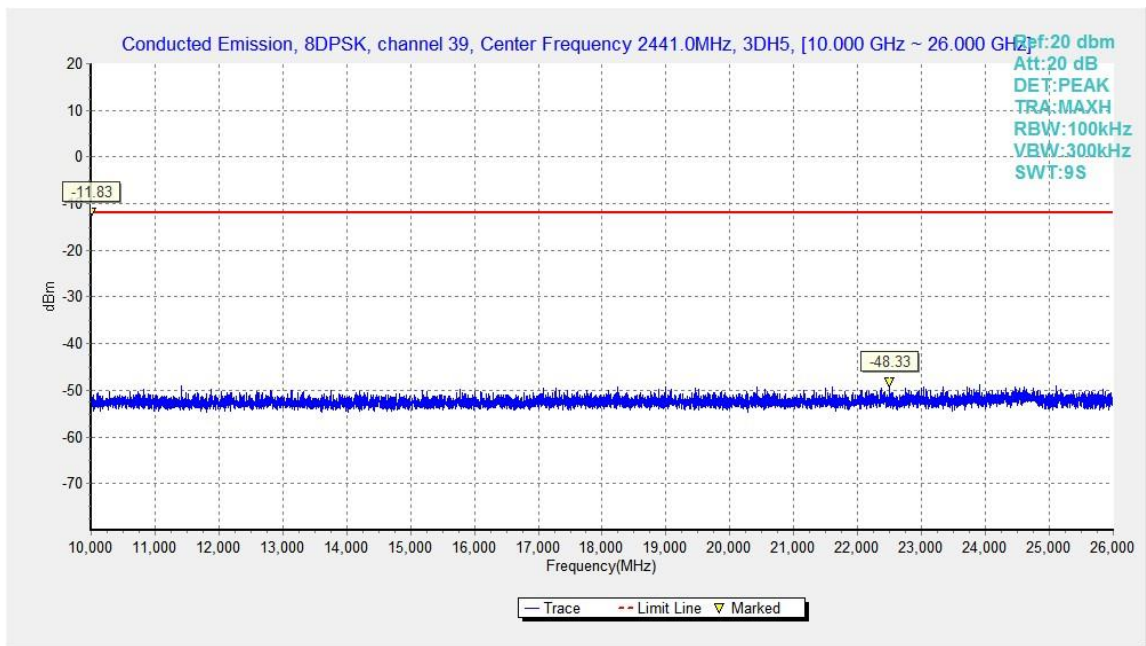


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

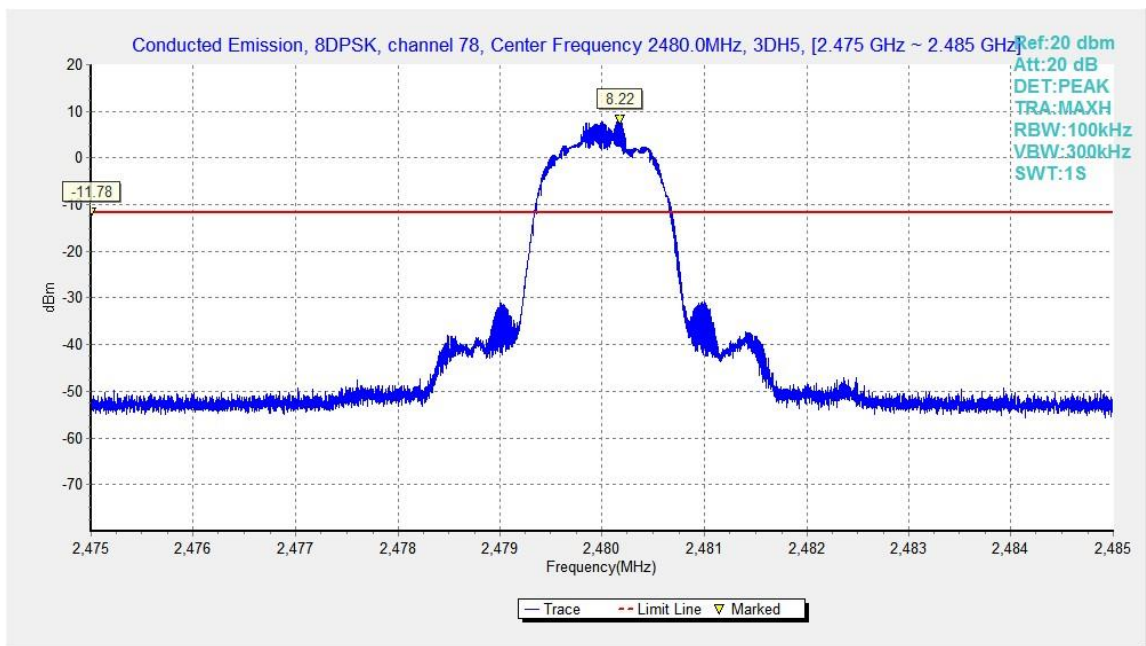


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

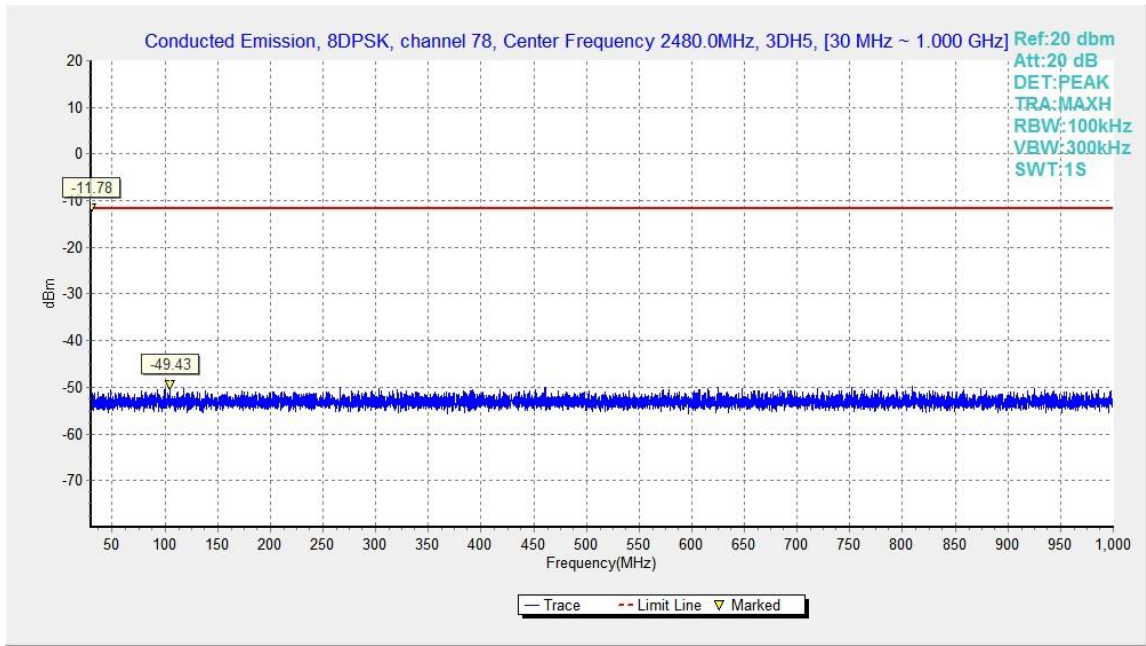


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

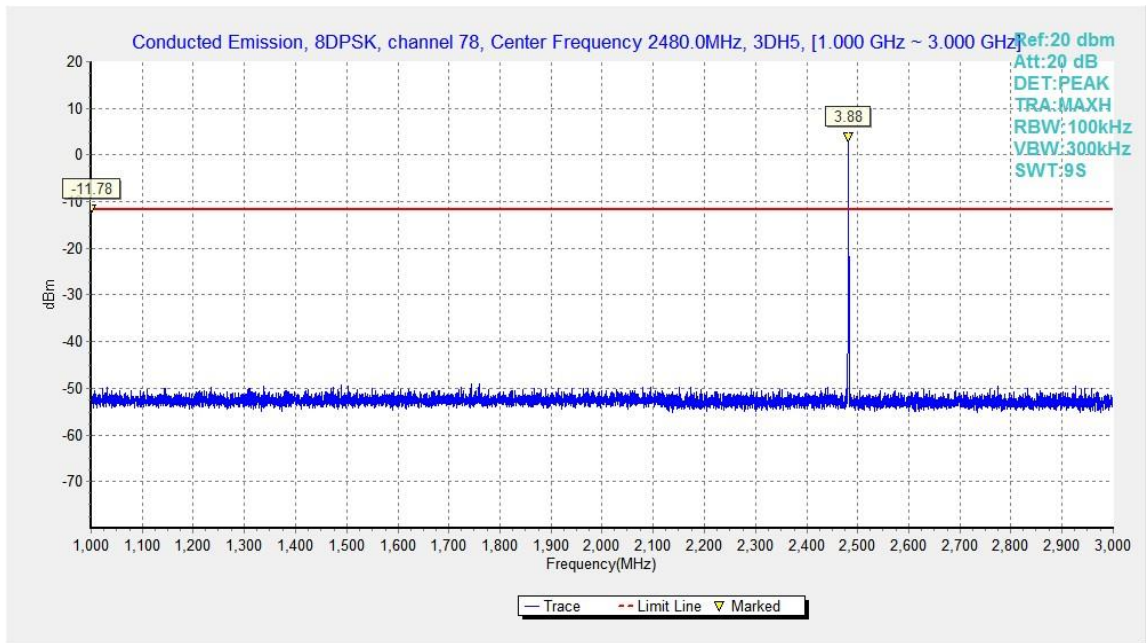


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

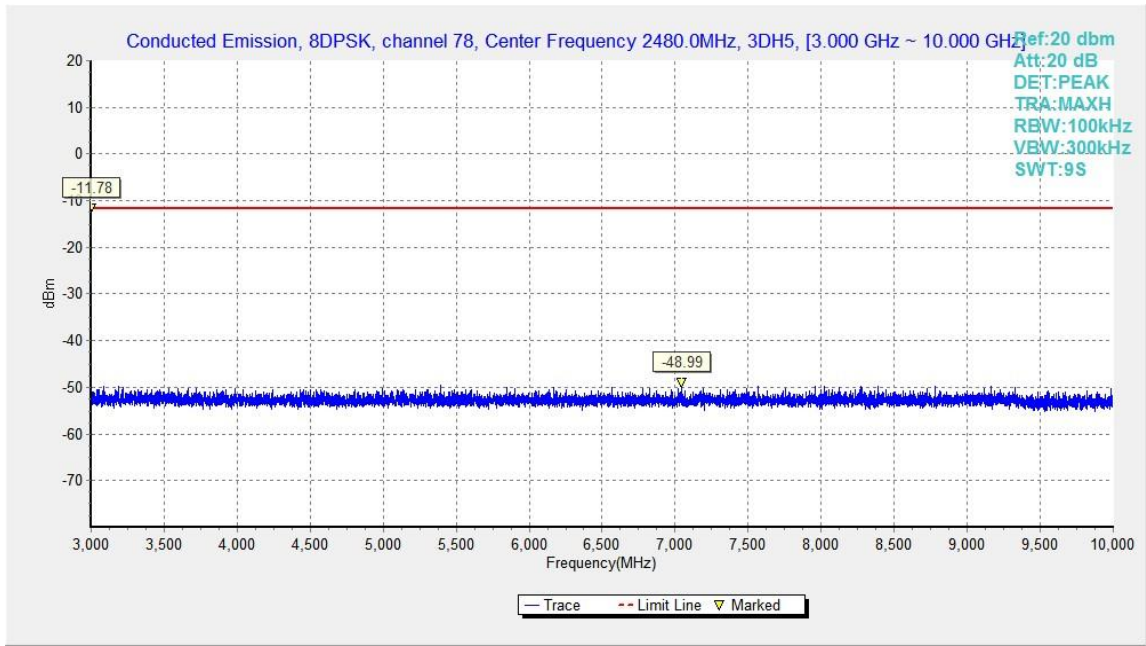


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

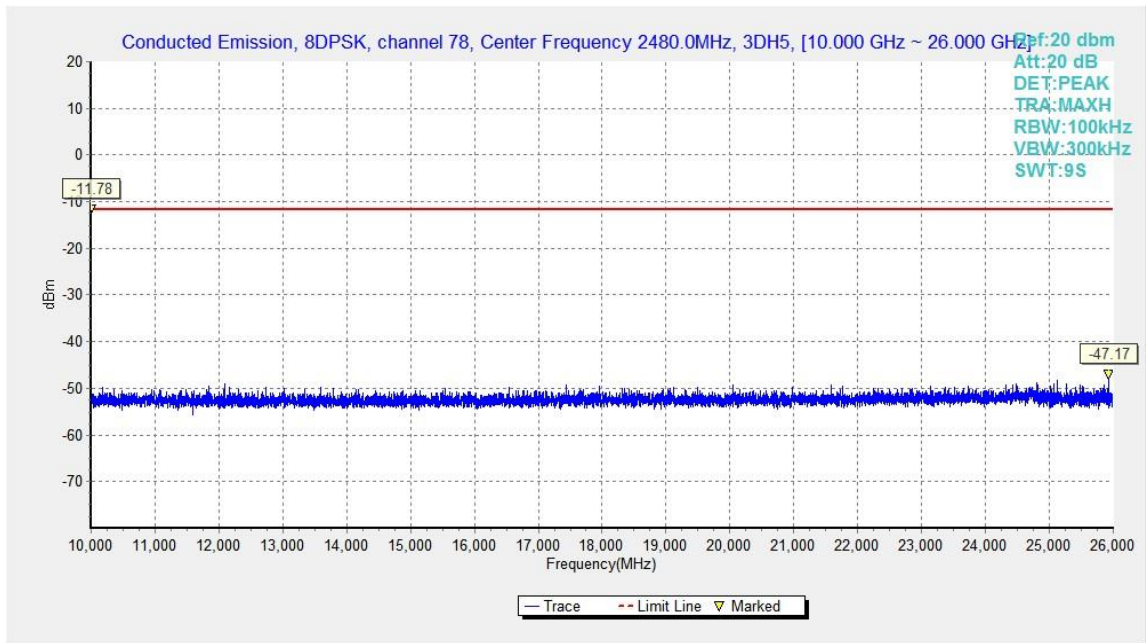


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μV/m)	Measurement distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The EUT and transmitting antenna shall be centered on the turntable.

Note:

1. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value showed here only up to 6 maximum emissions noted.

Peak Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2373.462	55.38	4.57	27.45	23.36	74.00	18.62	V
2382.562	55.48	4.60	27.43	23.45	74.00	18.52	H
4804.000	43.26	-36.04	34.02	45.27	74.00	30.74	H
7206.000	42.34	-34.58	35.64	41.28	74.00	31.66	H
9608.000	43.38	-33.50	36.75	40.12	74.00	30.62	H
12010.100	45.24	-31.69	38.80	38.13	74.00	28.76	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2367.600	44.02	-36.82	32.16	48.69	74.00	29.98	V
2511.800	44.74	-36.73	32.41	49.06	74.00	29.26	V
4882.000	41.50	-35.77	34.05	43.22	74.00	32.50	V
7323.000	42.34	-34.21	35.67	40.89	74.00	31.66	H
9764.000	42.40	-33.57	36.97	38.99	74.00	31.60	H
12205.000	44.44	-31.58	38.84	37.18	74.00	29.56	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2486.620	55.87	4.64	27.89	23.33	74.00	18.13	H
2487.405	56.09	4.64	27.90	23.55	74.00	17.91	H
4960.000	46.52	-35.60	34.08	48.04	74.00	27.48	H
7440.000	42.54	-34.17	35.69	41.02	74.00	31.46	H
9920.000	43.40	-33.25	37.19	39.46	74.00	30.60	V
12400.000	44.51	-31.25	38.88	36.88	74.00	29.49	H

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.426	54.89	4.61	27.43	22.86	74.00	19.11	H
2389.184	54.78	4.61	27.42	22.75	74.00	19.22	V
4804.000	41.10	-36.04	34.02	43.11	74.00	32.90	H
7206.000	43.39	-34.58	35.64	42.33	74.00	30.61	V
9608.000	43.66	-33.50	36.75	40.41	74.00	30.34	H
12010.000	45.17	-31.69	38.80	38.06	74.00	28.83	V

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2366.200	44.39	-36.85	32.15	49.09	74.00	29.61	V
2510.800	46.55	-36.71	32.41	50.85	74.00	27.45	H
4882.000	40.19	-35.77	34.05	41.90	74.00	33.81	H
7323.000	42.82	-34.21	35.67	41.37	74.00	31.18	H
9764.000	42.55	-33.57	36.97	39.14	74.00	31.45	H
12205.000	45.65	-31.58	38.84	38.38	74.00	28.35	V

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.970	55.69	4.65	27.88	23.16	74.00	18.31	V
2485.160	56.07	4.65	27.88	23.54	74.00	17.93	V
4960.000	42.12	-35.60	34.08	43.64	74.00	31.88	V
7440.000	41.10	-34.17	35.69	39.58	74.00	32.90	V
9920.000	42.83	-33.25	37.19	38.89	74.00	31.17	V
12400.000	45.47	-31.25	38.88	37.84	74.00	28.53	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.034	54.10	4.60	27.43	22.07	74.00	19.90	V
2389.688	54.85	4.61	27.42	22.82	74.00	19.15	H
4804.000	40.93	-36.04	34.02	42.94	74.00	33.07	H
7206.000	41.69	-34.58	35.64	40.64	74.00	32.31	H
9608.000	43.75	-33.50	36.75	40.49	74.00	30.25	V
12010.000	45.03	-31.69	38.80	37.92	74.00	28.97	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2369.400	44.31	-36.78	32.16	48.94	74.00	29.69	H
2506.800	45.76	-36.63	32.41	49.98	74.00	28.24	H
4882.000	40.33	-35.77	34.05	42.05	74.00	33.67	H
7323.000	41.98	-34.21	35.67	40.53	74.00	32.02	H
9764.000	42.66	-33.57	36.97	39.25	74.00	31.34	H
12205.000	46.92	-31.58	38.84	39.66	74.00	27.08	H

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2486.225	55.78	4.65	27.89	23.25	74.00	18.22	H
2488.750	55.86	4.64	27.91	23.31	74.00	18.14	V
4960.000	42.55	-35.60	34.08	44.06	74.00	31.45	H
7440.000	41.26	-34.17	35.69	39.74	74.00	32.74	H
9920.000	43.04	-33.25	37.19	39.10	74.00	30.96	V
12400.000	44.84	-31.25	38.88	37.20	74.00	29.16	H

Average Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2369.137	43.58	4.57	27.46	11.55	54.00	10.42	V
2370.863	43.35	4.57	27.46	11.32	54.00	10.65	V
4803.700	31.32	-36.04	34.02	33.33	54.00	22.68	V
7323.100	30.28	-34.21	35.67	28.83	54.00	23.72	H
9763.900	30.98	-33.57	36.97	27.57	54.00	23.02	H
12205.000	32.78	-31.58	38.84	25.52	54.00	21.22	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.512	44.04	4.66	27.54	11.84	54.00	9.96	V
2450.213	43.33	4.67	27.60	11.05	54.00	10.67	V
4881.700	31.76	-35.77	34.05	33.48	54.00	22.24	V
7323.100	30.18	-34.21	35.67	28.72	54.00	23.82	V
9763.900	30.68	-33.57	36.97	27.27	54.00	23.32	V
12205.000	32.64	-31.58	38.84	25.38	54.00	21.36	H

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2503.200	44.76	4.64	28.01	12.10	54.00	9.24	V
2517.600	44.06	4.71	28.07	11.28	54.00	9.94	V
4959.333	33.50	-35.60	34.08	35.02	54.00	20.50	H
7440.100	29.65	-34.17	35.69	28.13	54.00	24.35	V
9919.900	30.84	-33.25	37.19	26.89	54.00	23.16	H
12400.000	33.16	-31.25	38.88	25.53	54.00	20.84	V

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2383.762	42.84	4.60	27.43	10.81	54.00	11.16	V
2386.575	42.68	4.61	27.43	10.64	54.00	11.32	V
4804.000	28.04	-36.04	34.02	30.05	54.00	25.96	H
7206.100	30.07	-34.58	35.64	29.01	54.00	23.93	V
9607.900	31.48	-33.50	36.75	28.23	54.00	22.52	V
12010.000	33.42	-31.69	38.80	26.31	54.00	20.58	V

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.037	44.05	4.66	27.54	11.84	54.00	9.95	V
2444.963	42.98	4.67	27.58	10.73	54.00	11.02	V
4881.840	30.84	-35.77	34.05	32.56	54.00	23.16	H
7323.100	30.27	-34.21	35.67	28.81	54.00	23.73	V
9763.900	30.89	-33.57	36.97	27.48	54.00	23.11	V
12205.000	33.07	-31.58	38.84	25.81	54.00	20.93	H

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2484.037	42.40	4.65	27.87	9.88	54.00	11.60	V
2485.537	42.03	4.65	27.89	9.50	54.00	11.97	V
4960.000	31.52	-35.60	34.08	33.04	54.00	22.48	V
7440.100	29.67	-34.17	35.69	28.15	54.00	24.33	H
9919.900	30.77	-33.25	37.19	26.83	54.00	23.23	V
12400.000	33.03	-31.25	38.88	25.40	54.00	20.97	H

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2387.213	42.45	4.61	27.43	10.42	54.00	11.55	V
2389.375	41.98	4.61	27.42	9.94	54.00	12.02	V
4804.000	28.04	-36.04	34.02	30.05	54.00	25.96	V
7206.100	29.97	-34.58	35.64	28.91	54.00	24.03	H
9607.900	31.37	-33.50	36.75	28.11	54.00	22.63	V
12010.000	33.16	-31.69	38.80	26.05	54.00	20.84	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.550	44.03	4.66	27.54	11.83	54.00	9.97	V
2450.850	43.27	4.67	27.61	10.99	54.00	10.73	V
4881.700	31.45	-35.77	34.05	33.16	54.00	22.55	H
7323.100	30.28	-34.21	35.67	28.83	54.00	23.72	V
9763.900	30.79	-33.57	36.97	27.38	54.00	23.21	H
12205.000	32.81	-31.58	38.84	25.55	54.00	21.19	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.738	42.45	4.65	27.87	9.92	54.00	11.55	V
2484.525	42.25	4.65	27.88	9.73	54.00	11.75	V
4960.200	31.76	-35.60	34.08	33.28	54.00	22.24	H
7440.100	29.53	-34.17	35.69	28.01	54.00	24.47	V
9919.900	30.81	-33.25	37.19	26.86	54.00	23.19	V
12400.000	33.08	-31.25	38.88	25.45	54.00	20.92	V

Conclusion: Pass

B.7. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	DH1	Fig.64	0.37	Fig.65	316	116.92	P
	DH3	Fig.66	1.63	Fig.67	106	172.78	P
	DH5	Fig.68	2.88	Fig.69	79	227.52	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	2DH1	Fig.70	0.38	Fig.71	315	119.7	P
	2DH3	Fig.72	1.63	Fig.73	94	153.22	P
	2DH5	Fig.74	2.88	Fig.75	72	207.36	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	317	120.46	P
	3DH3	Fig.78	1.63	Fig.79	110	179.3	P
	3DH5	Fig.80	2.88	Fig.81	74	213.12	P

Conclusion: PASS

Test graphs as below:

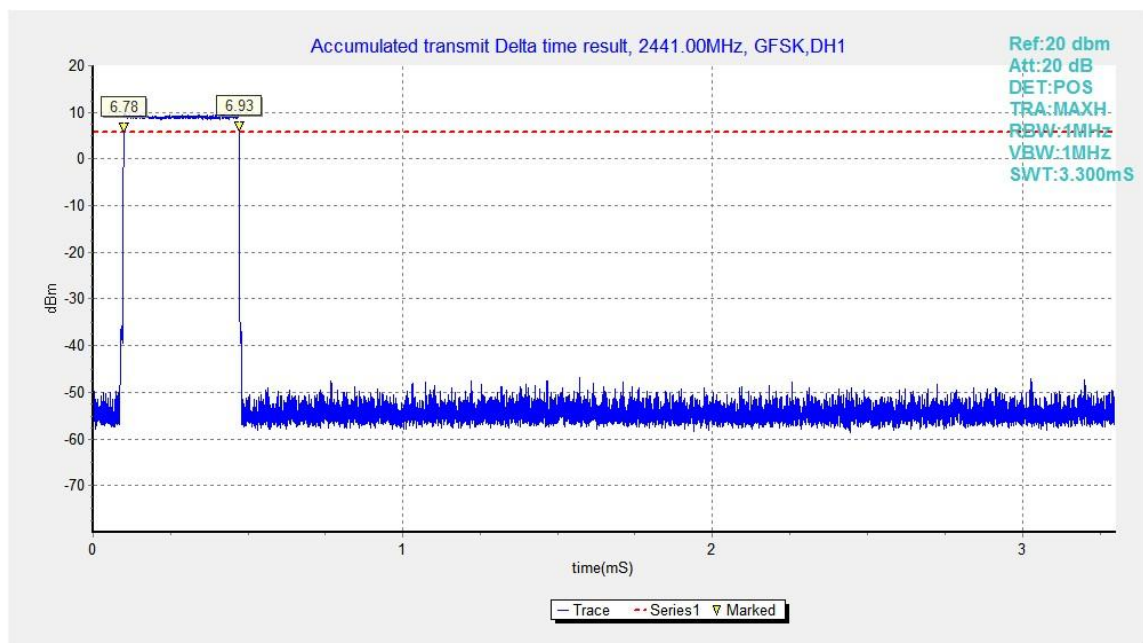


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

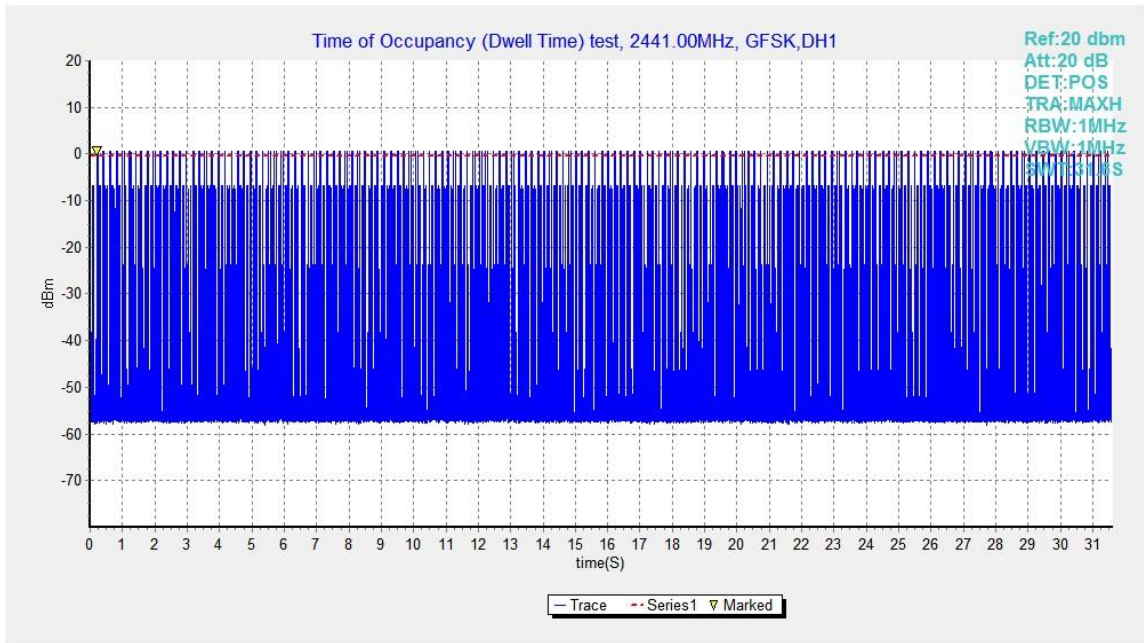


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

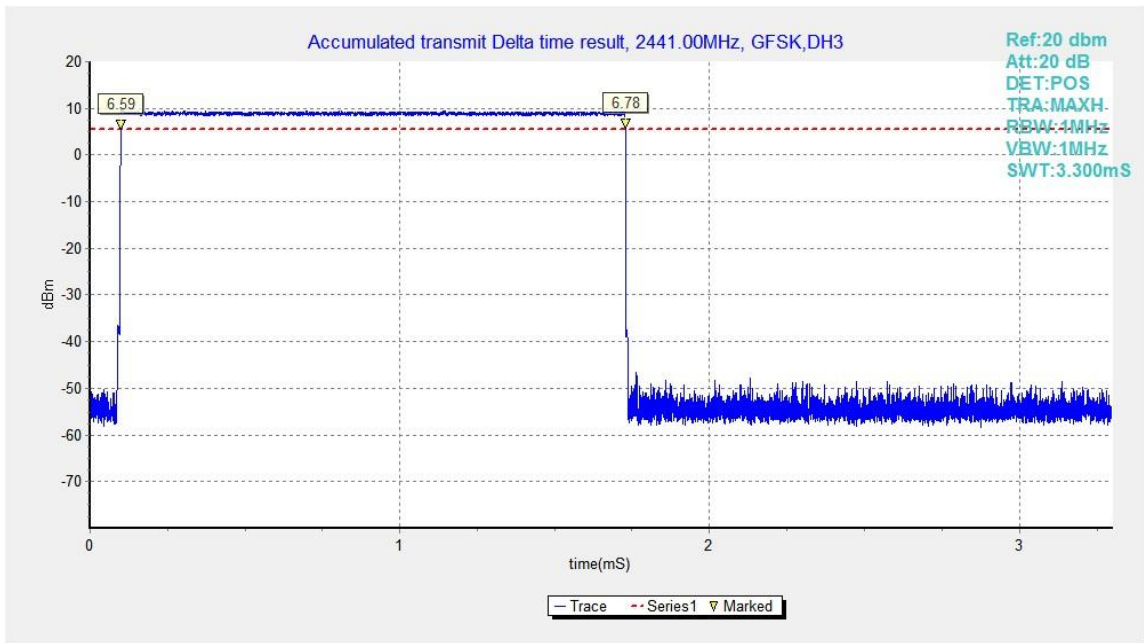


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

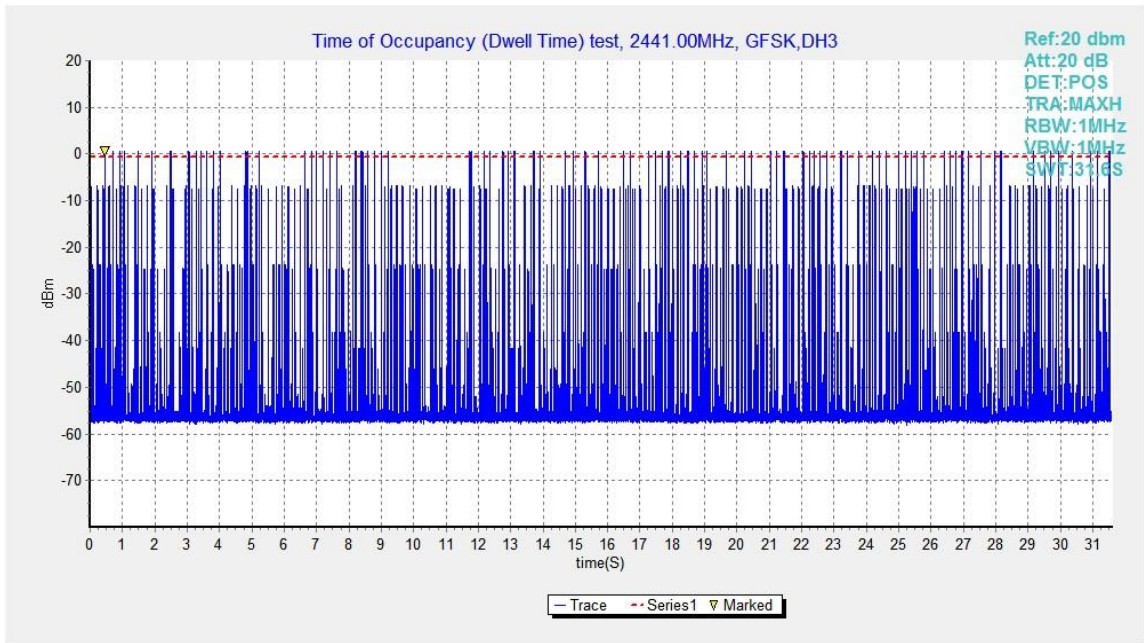


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

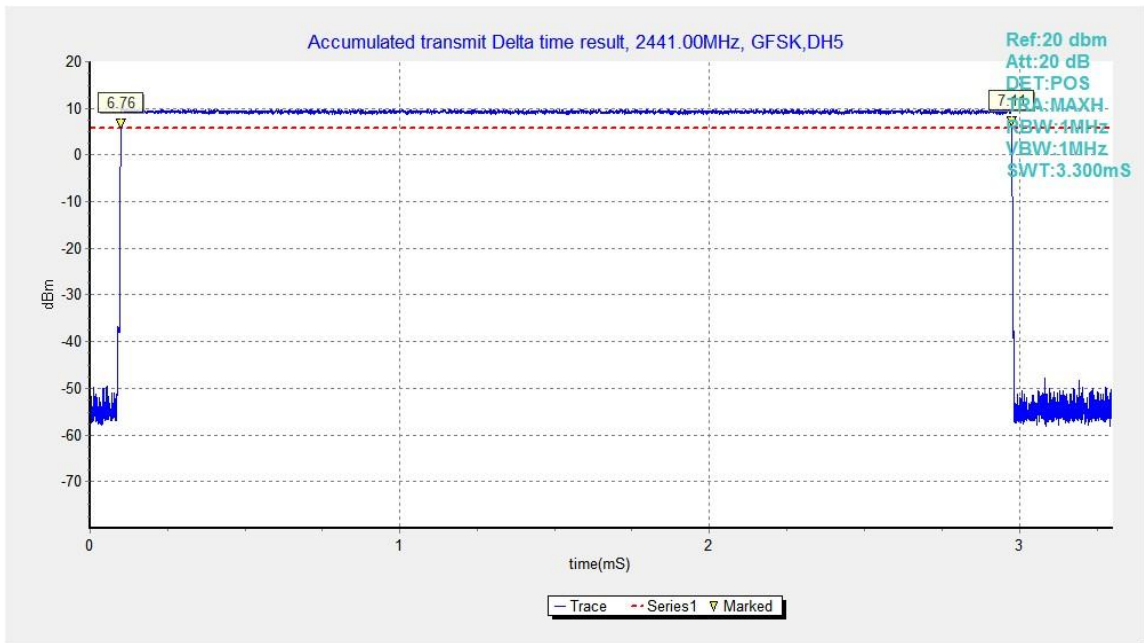


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

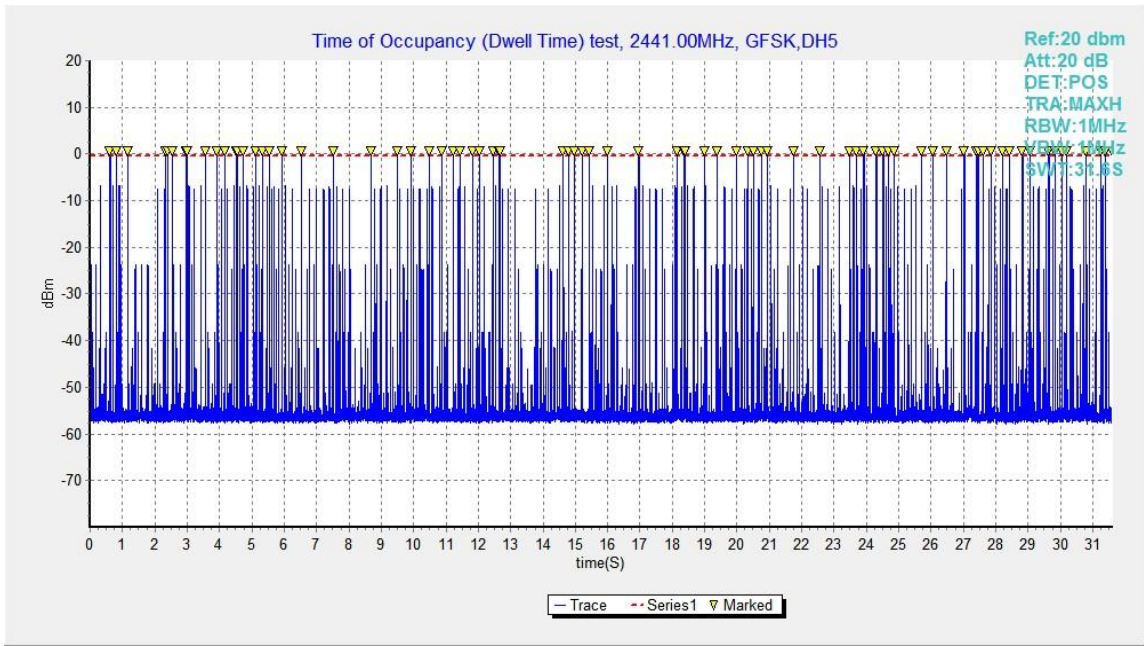


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

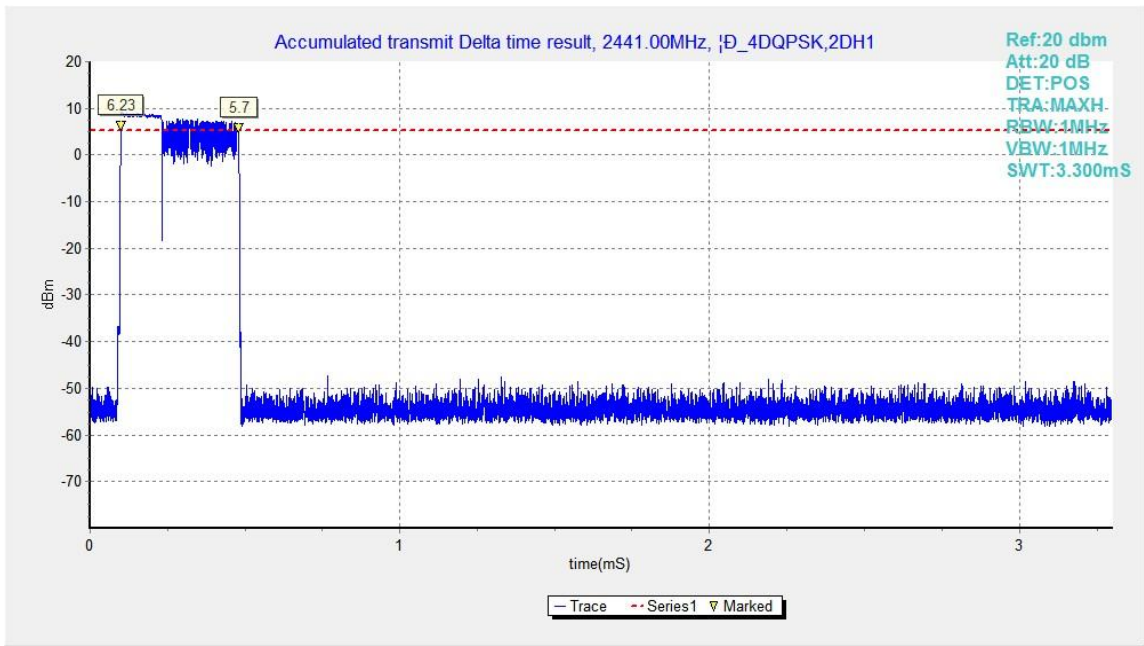


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

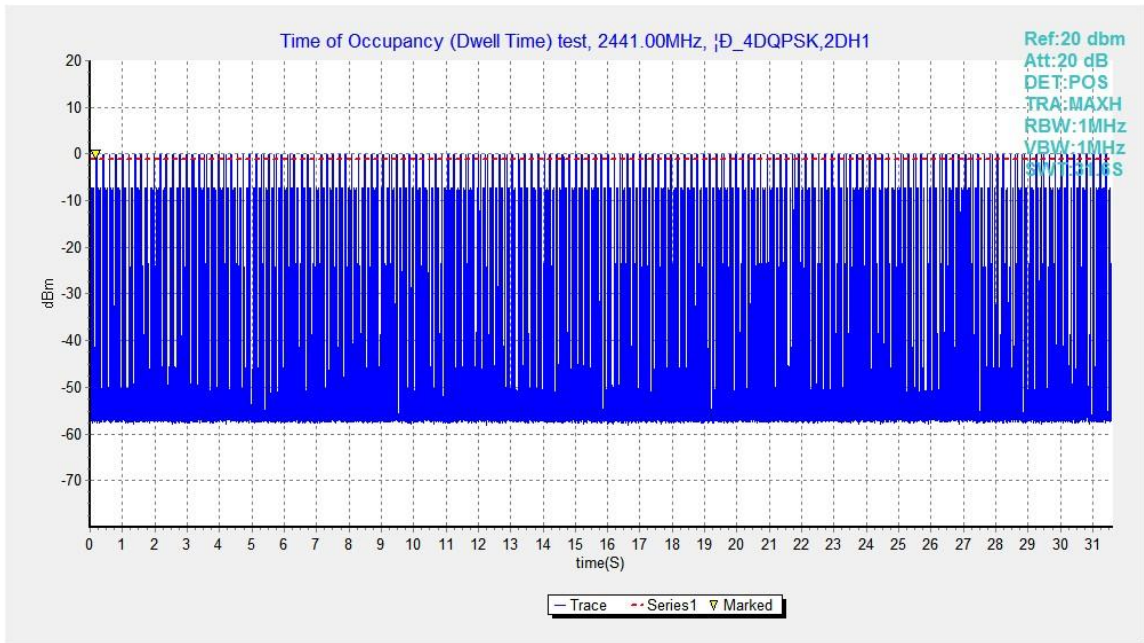


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

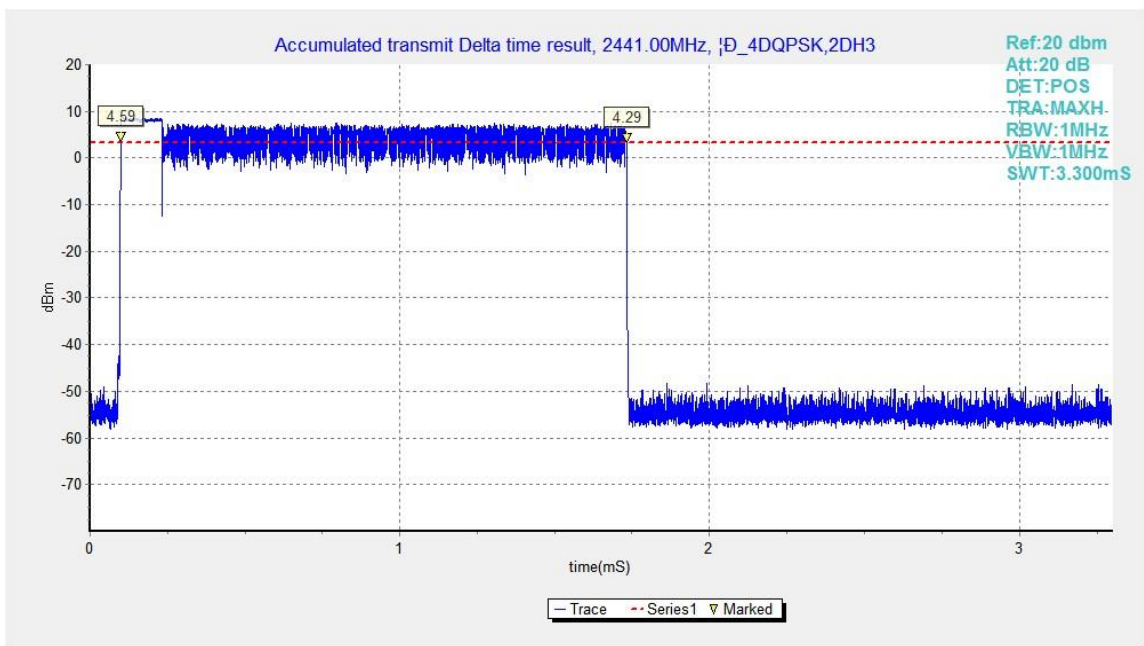


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

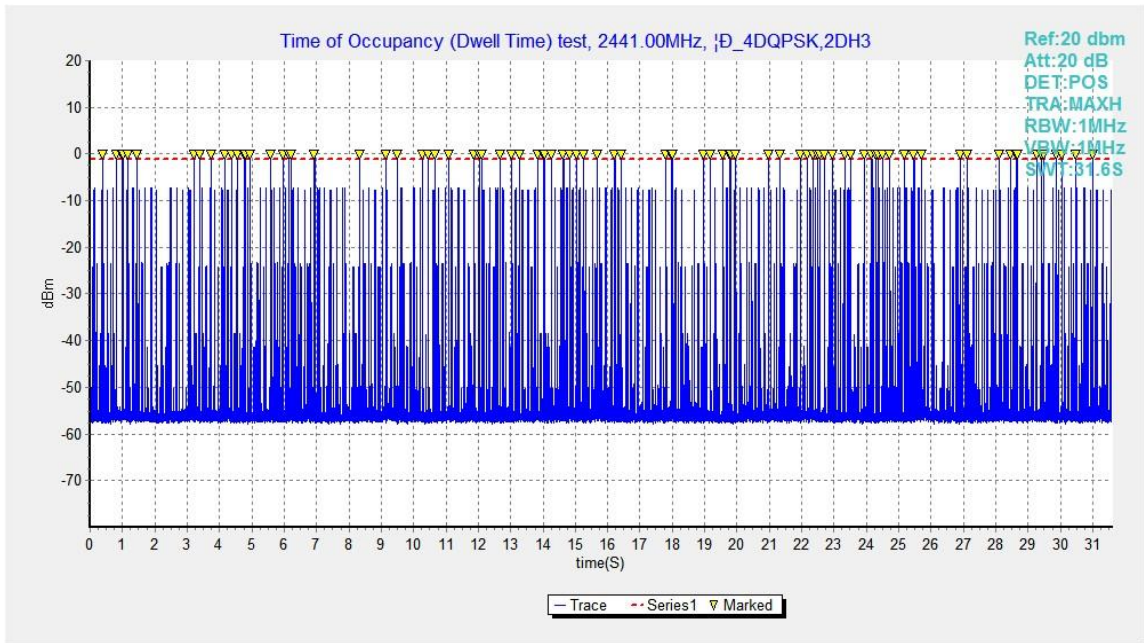


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

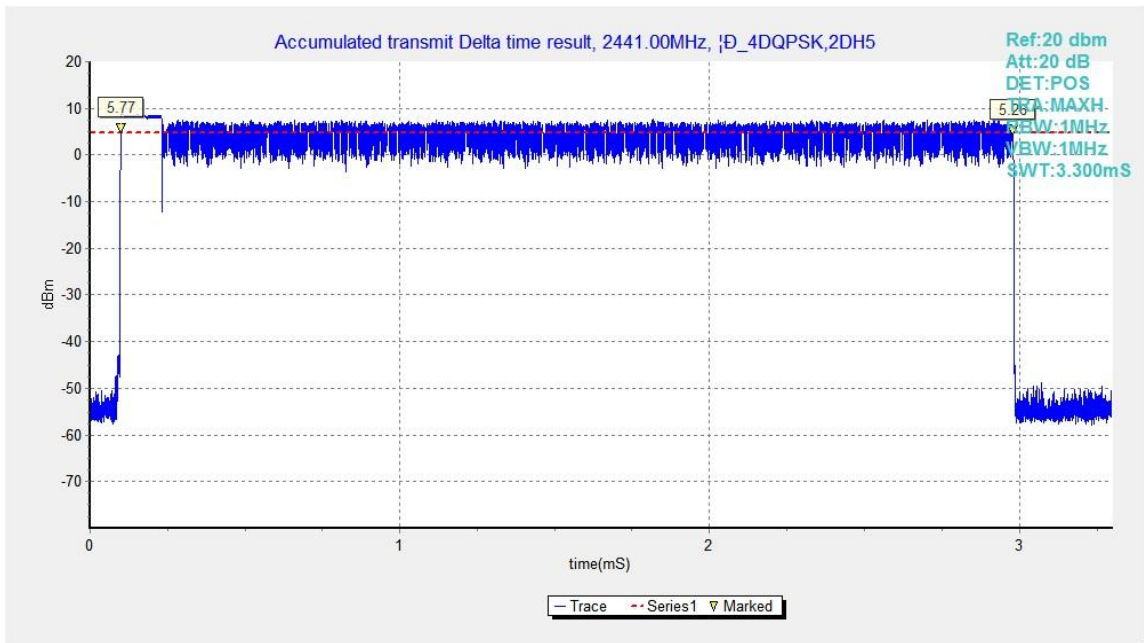


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

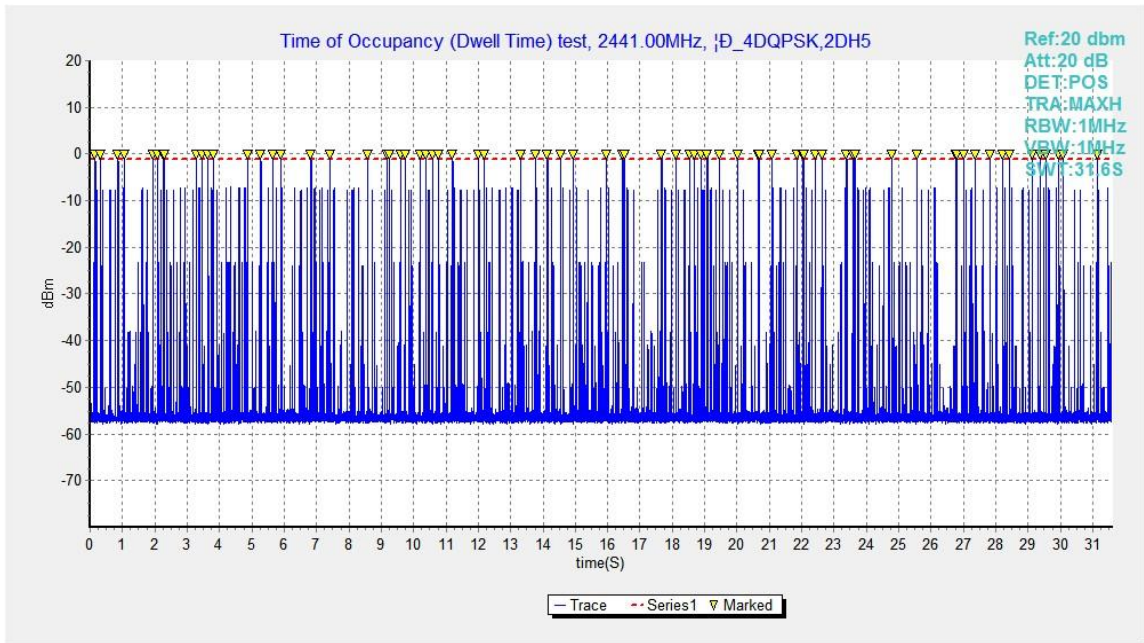


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

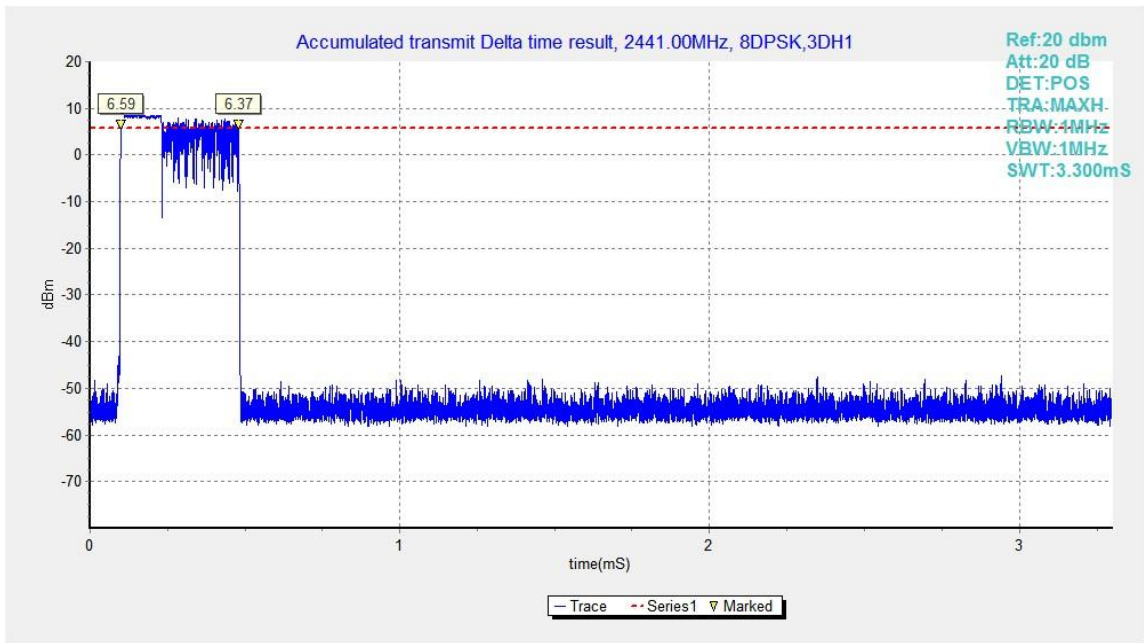


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

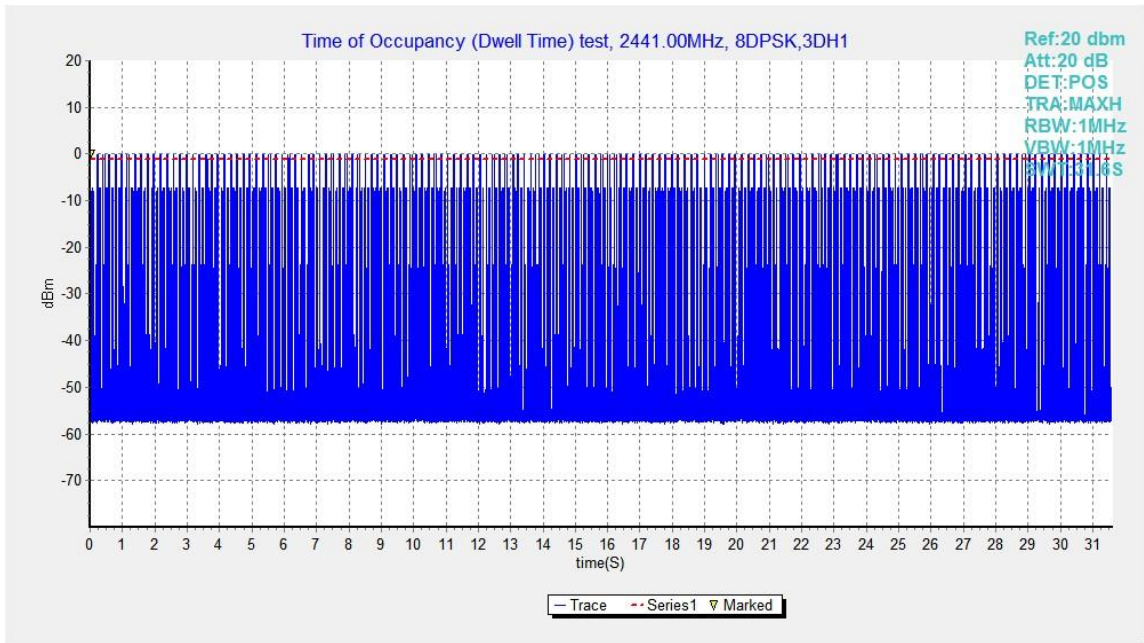


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

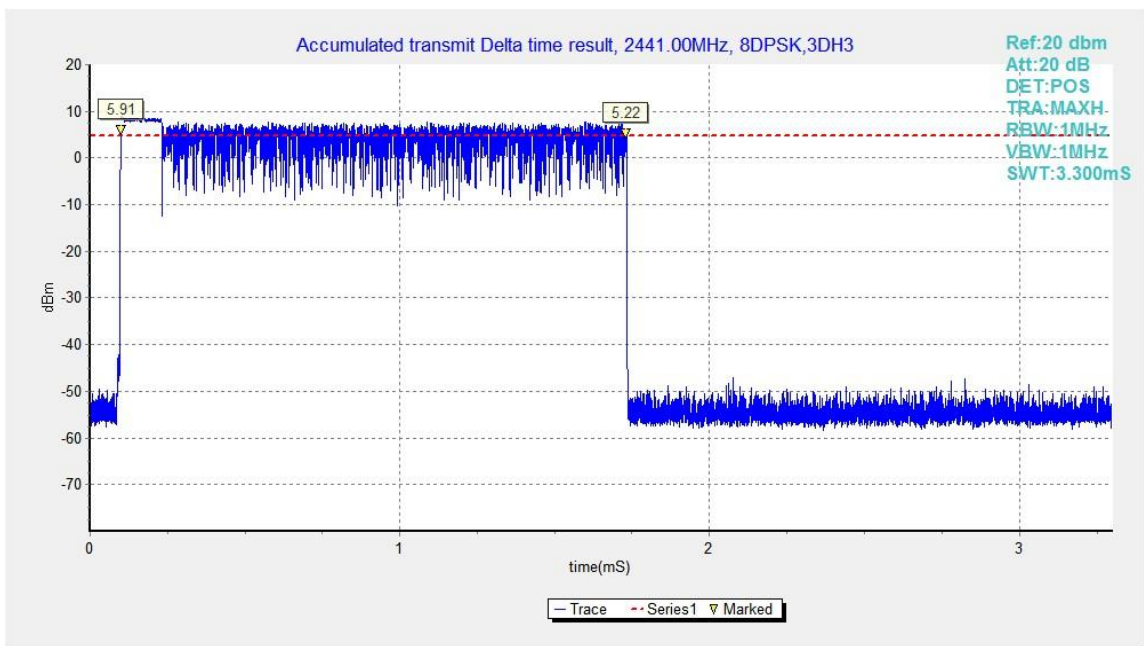


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

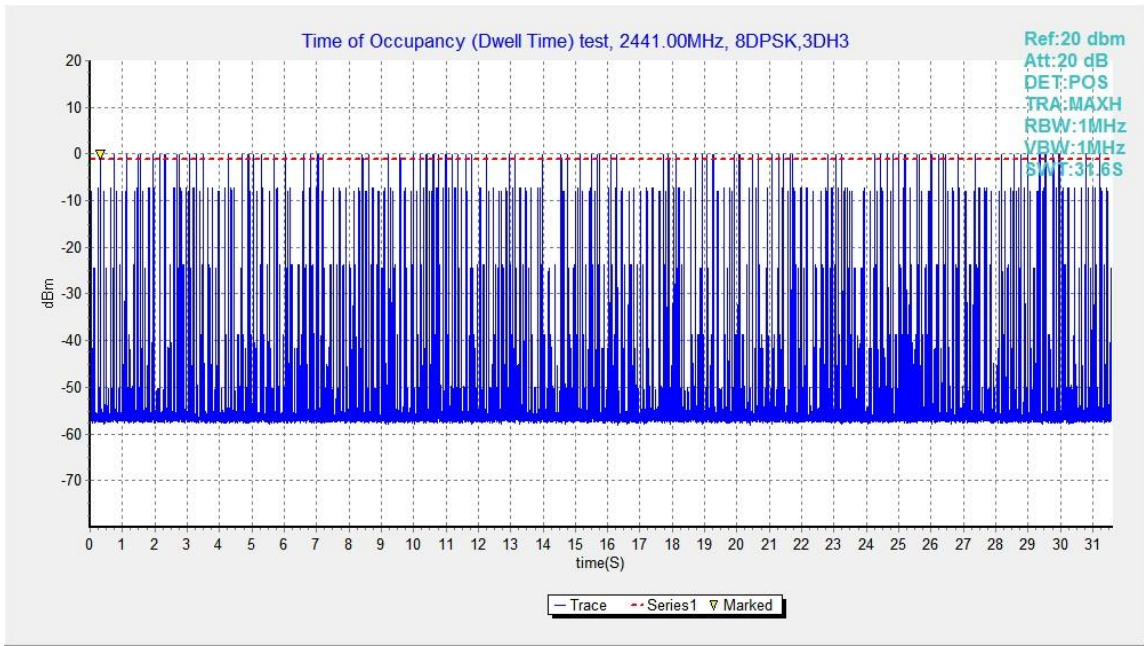


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

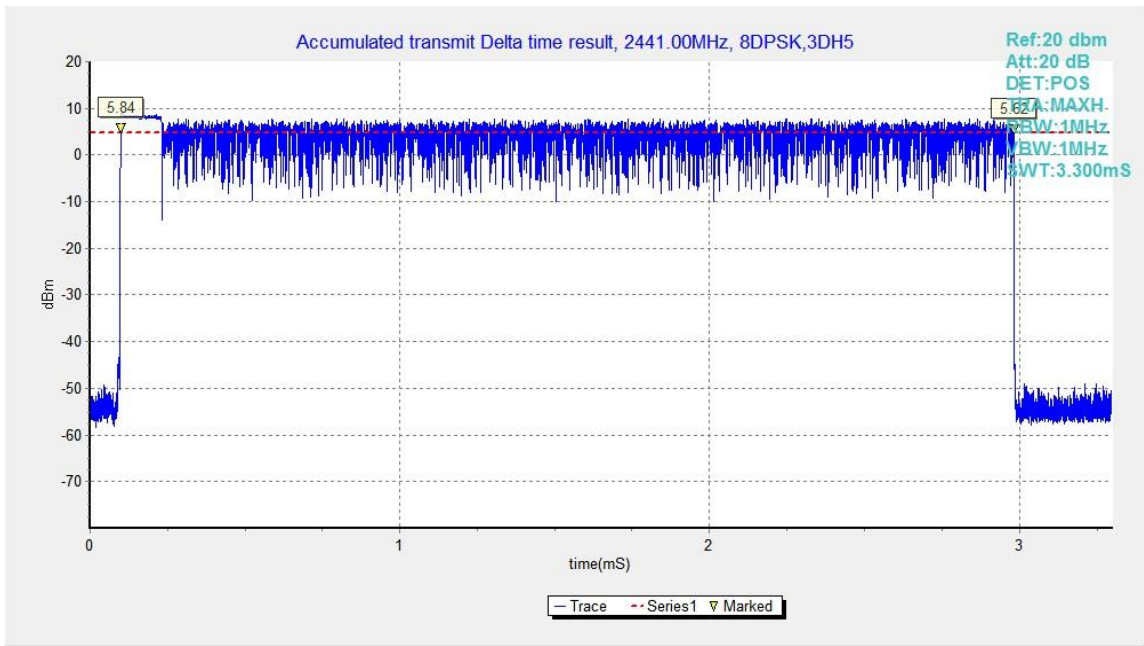


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

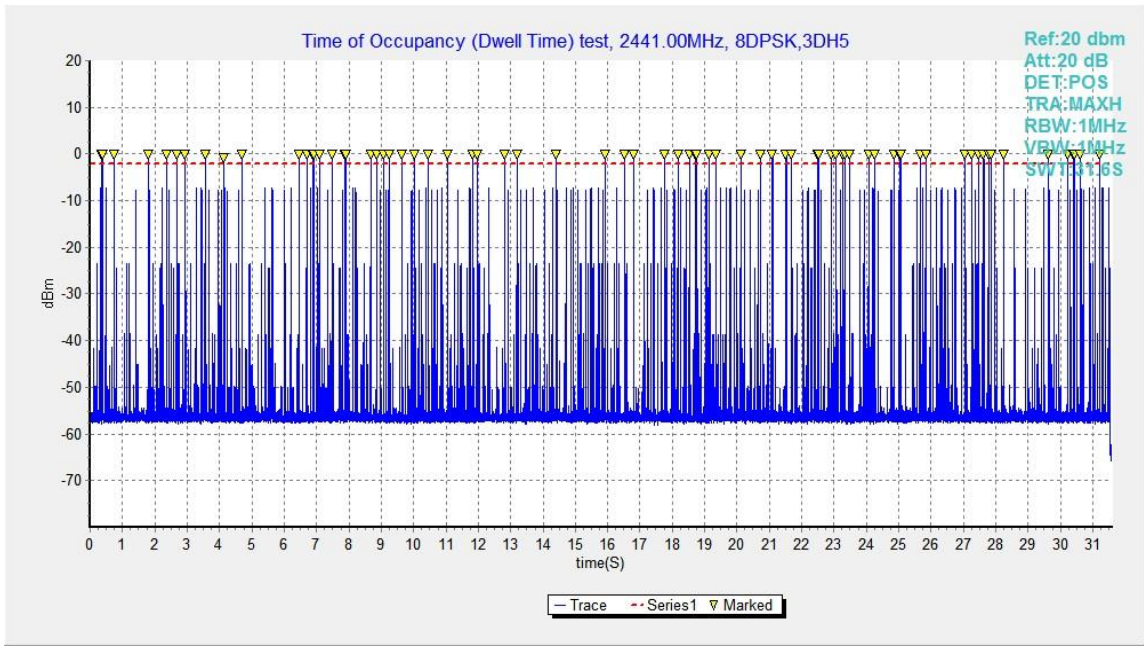


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	941.25	NA
39	Fig.83	939.00	NA
78	Fig.84	943.50	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1258.50	NA
39	Fig.86	1257.00	NA
78	Fig.87	1228.50	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1237.50	NA
39	Fig.89	1266.00	NA
78	Fig.90	1237.50	NA

Conclusion: NA

Test graphs as below:

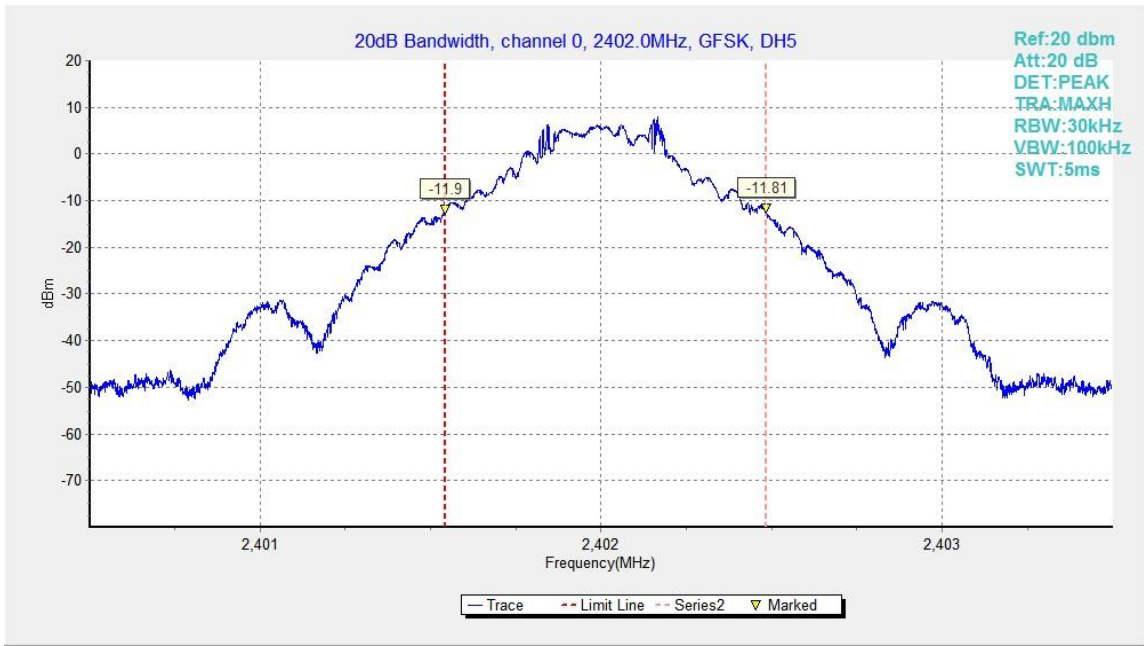


Fig.82. 20dB Bandwidth: GFSK, Channel 0

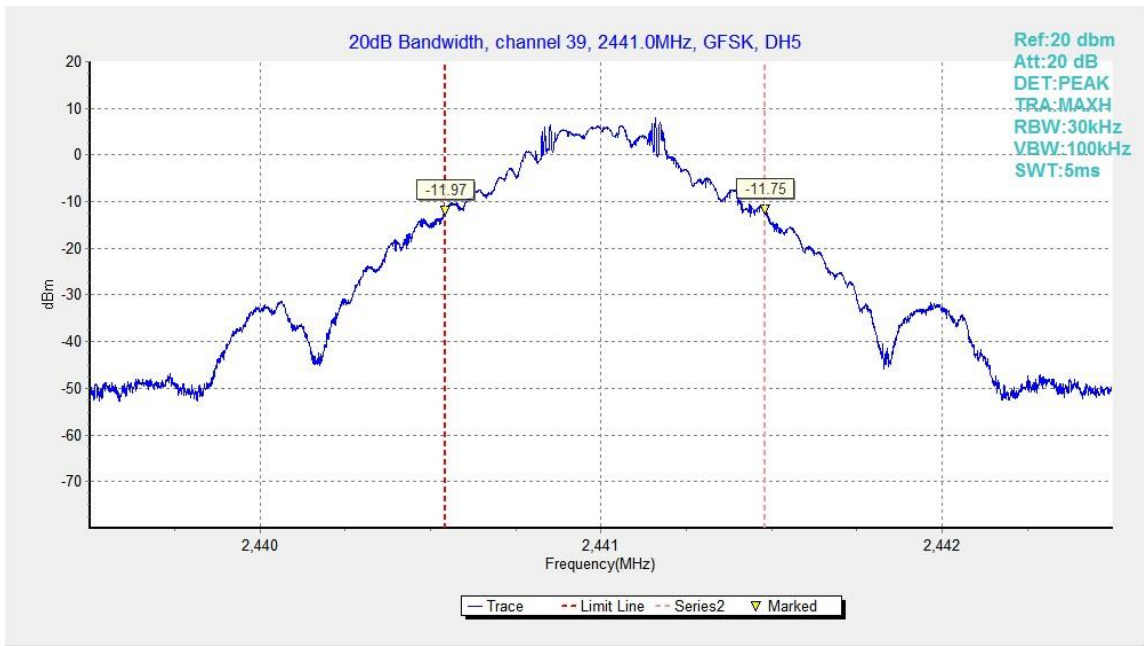


Fig.83. 20dB Bandwidth: GFSK, Channel 39

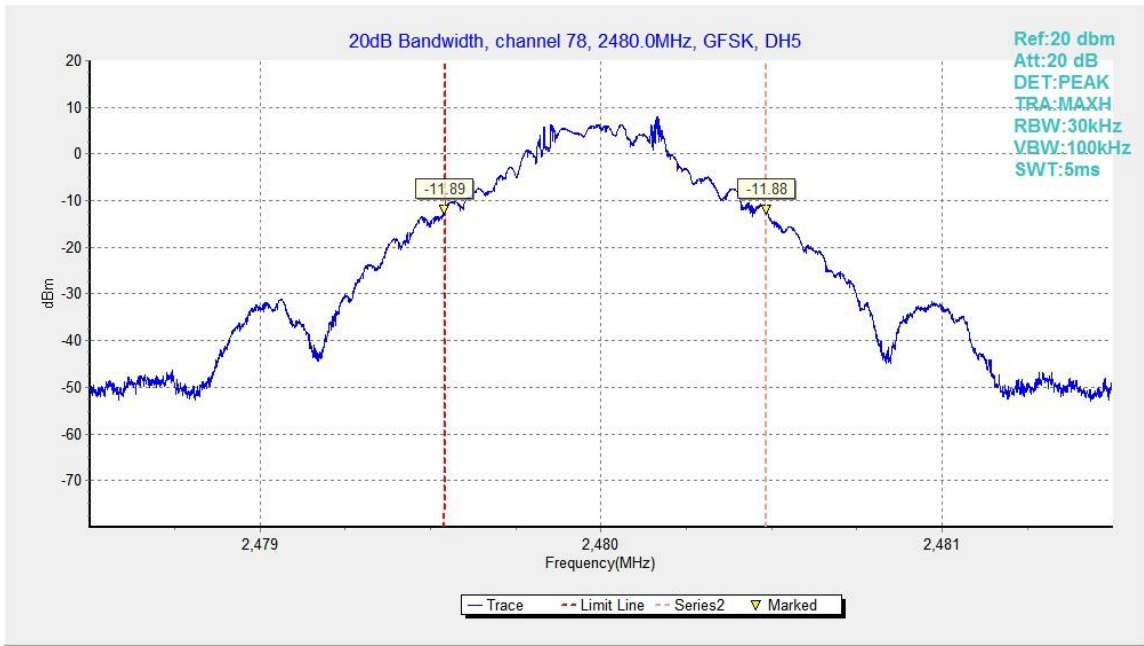


Fig.84. 20dB Bandwidth: GFSK, Channel 78

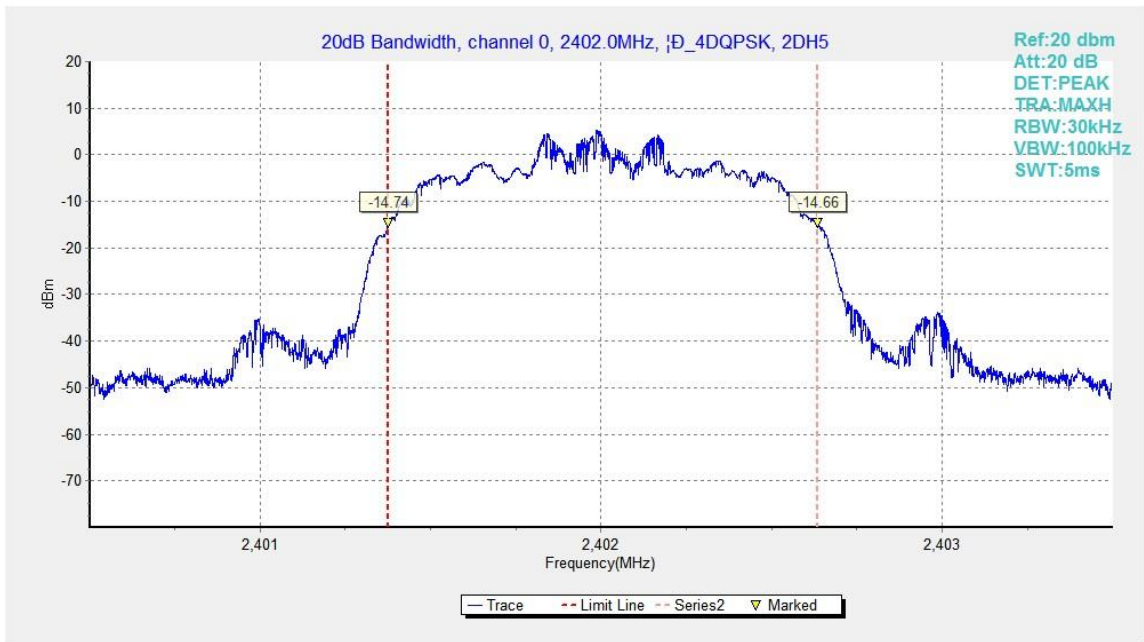


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

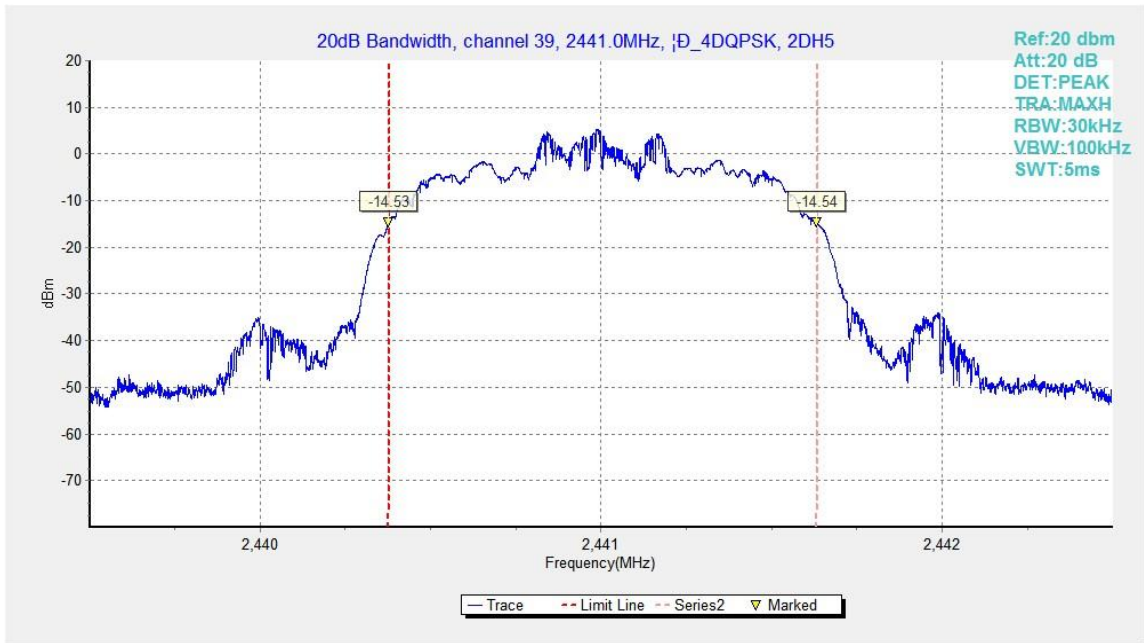


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

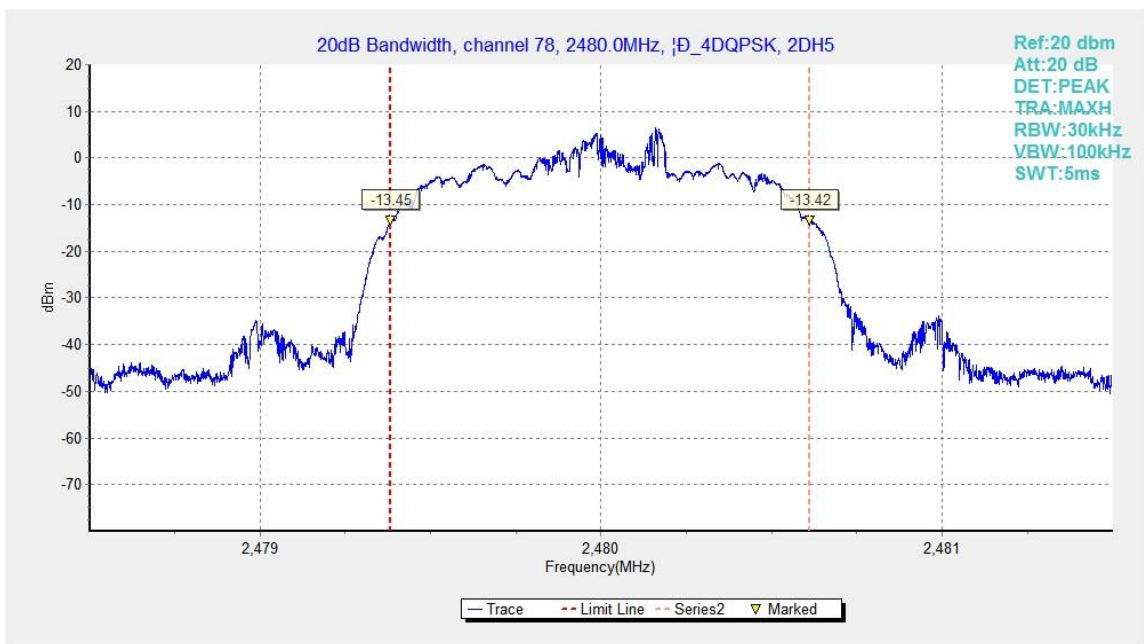


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

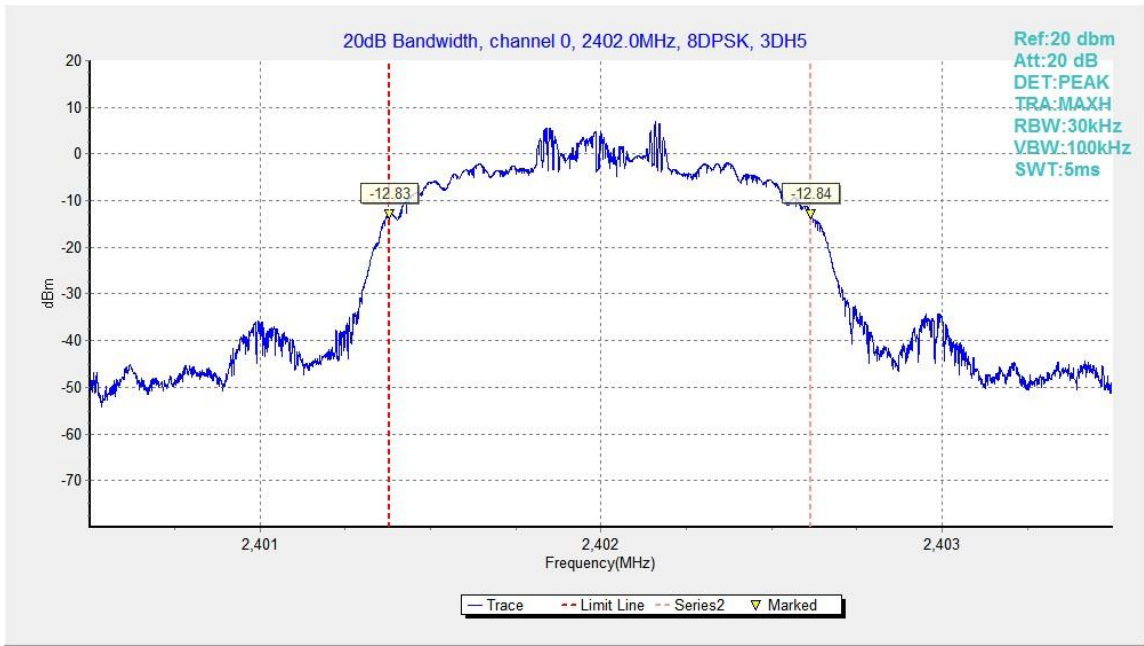


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

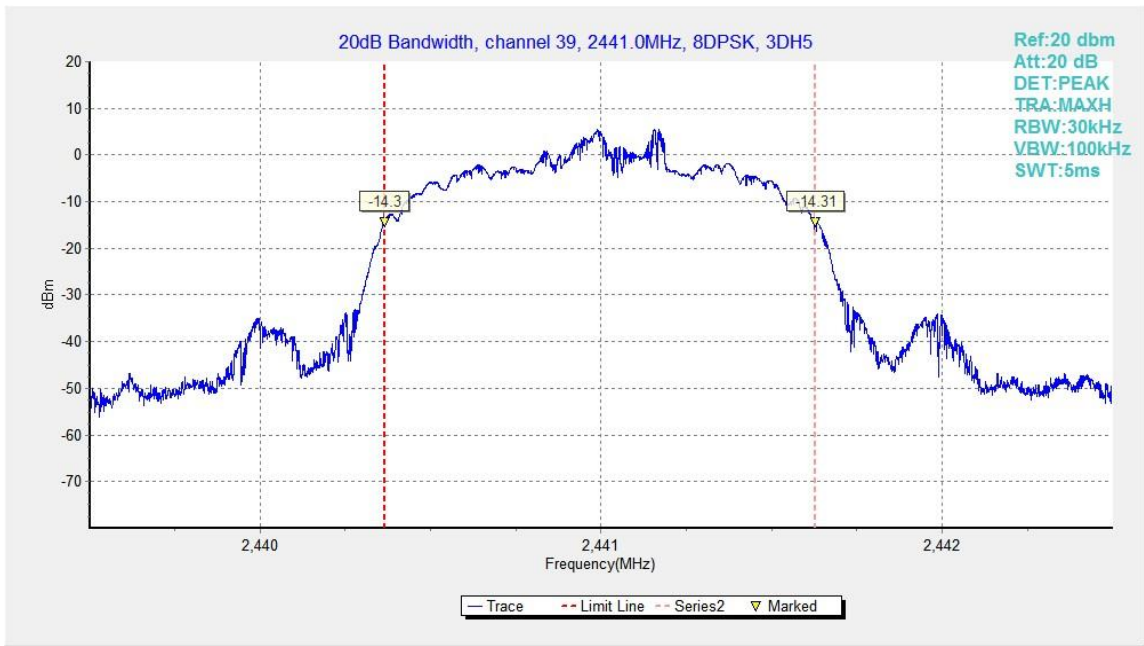


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

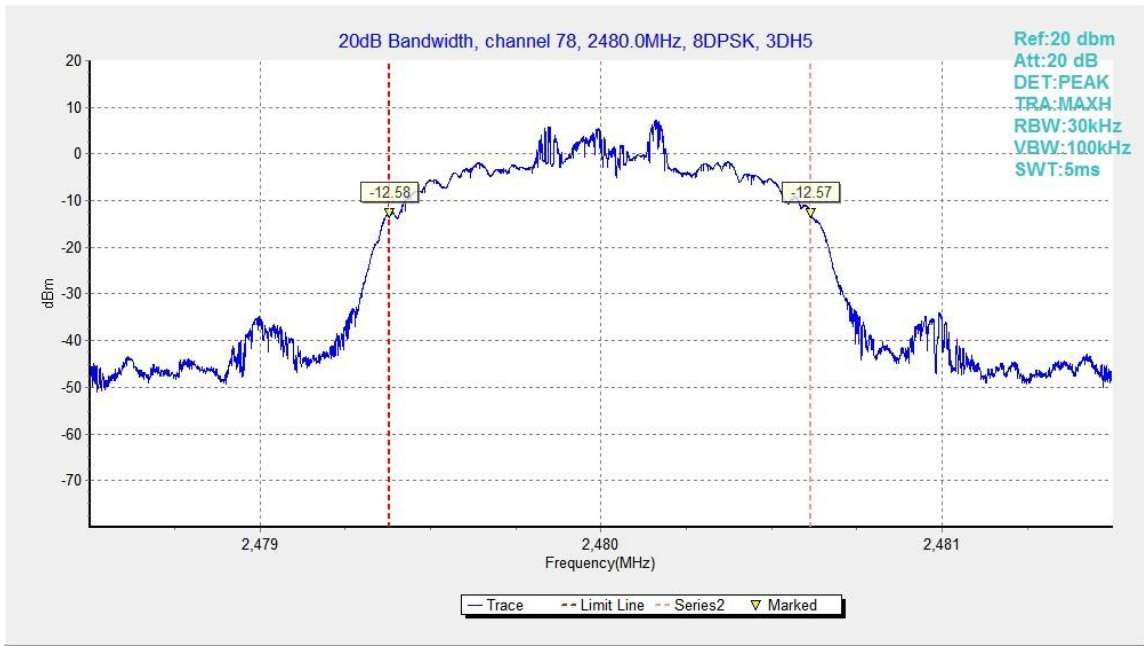


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.91	1171.50	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.92	975.75	P

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.93	969.75	P

Conclusion: PASS

Test graphs as below:

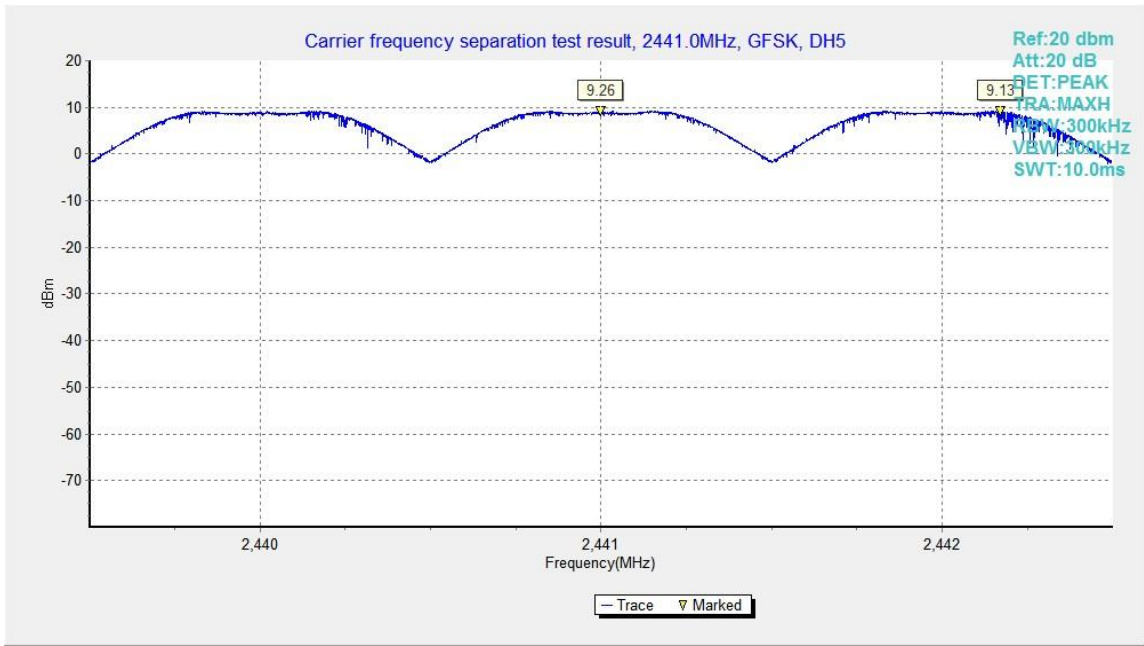


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

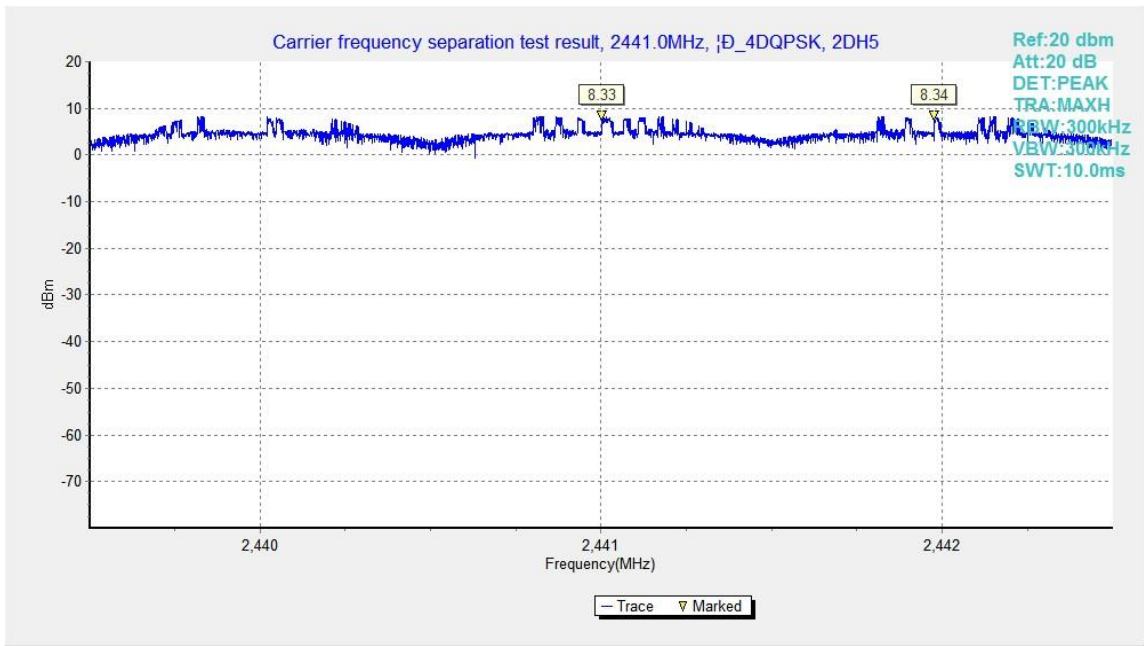


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

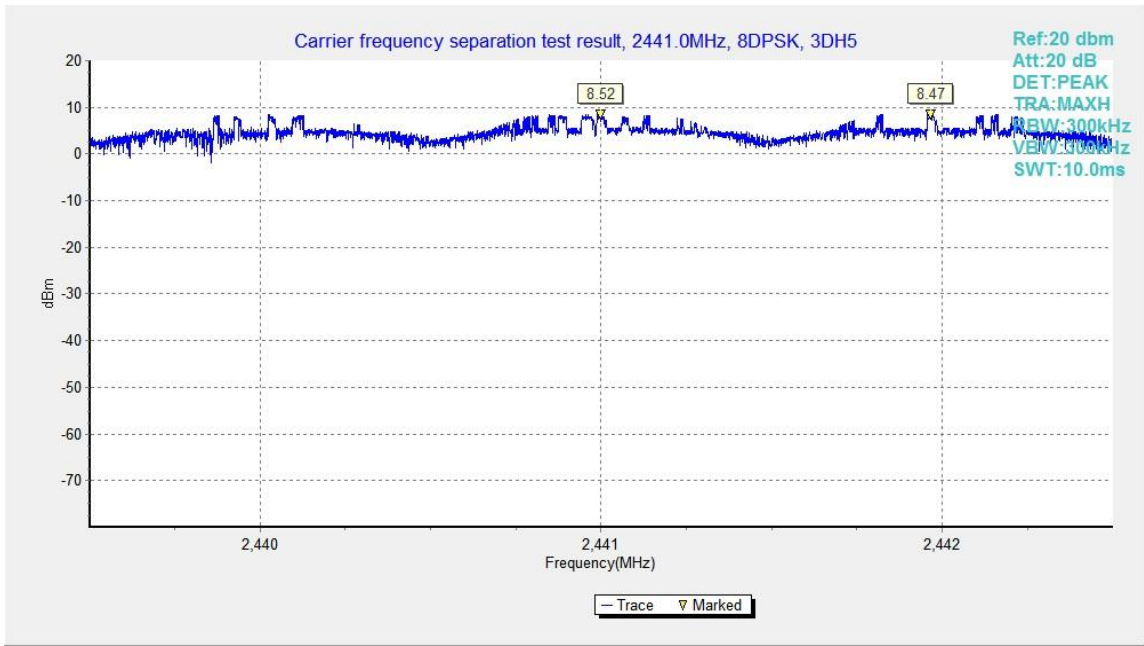


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

Conclusion: PASS

Test graphs as below:

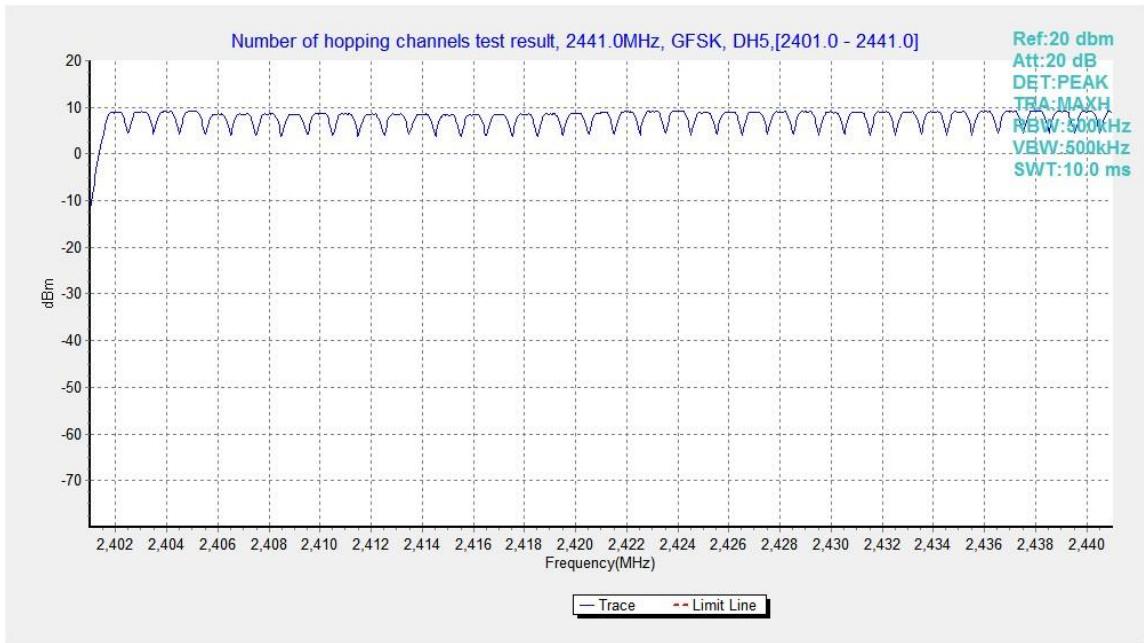


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

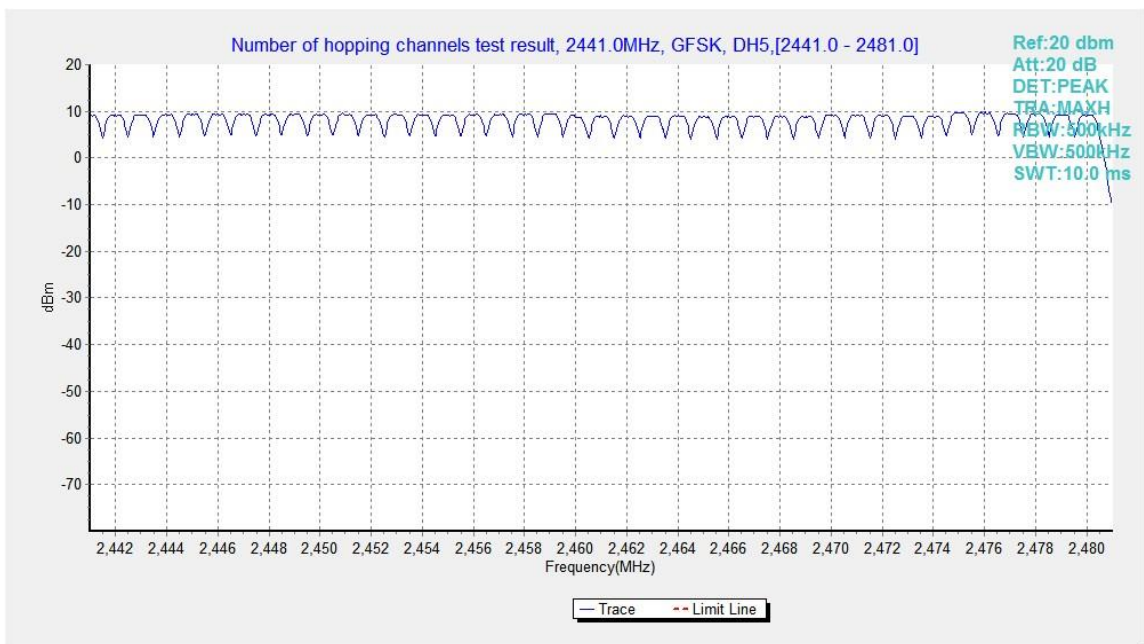


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

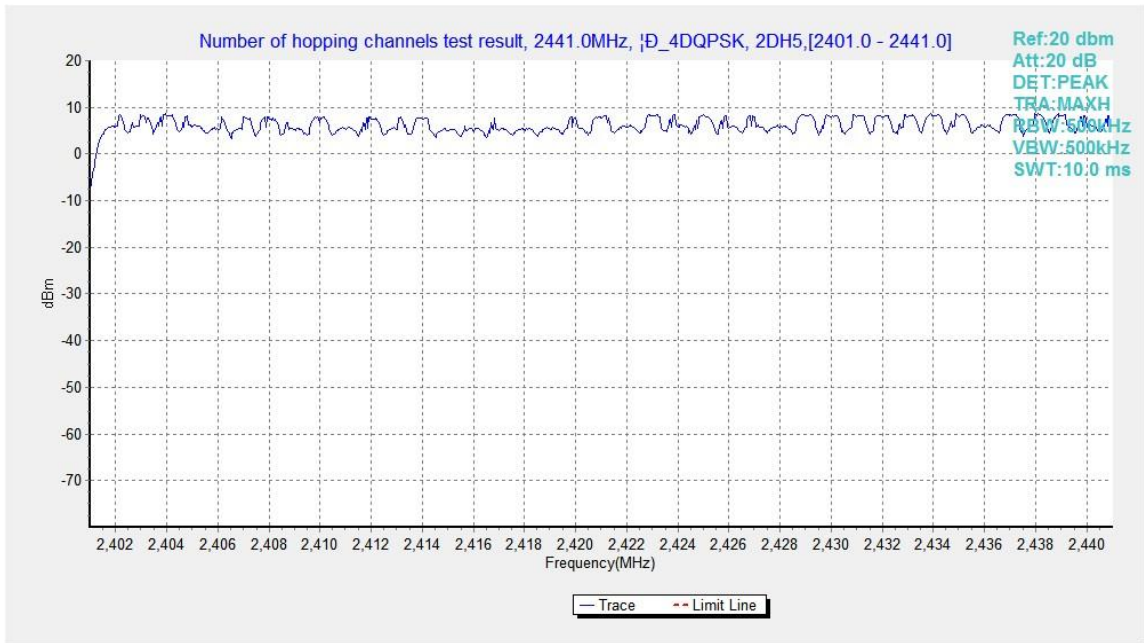


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

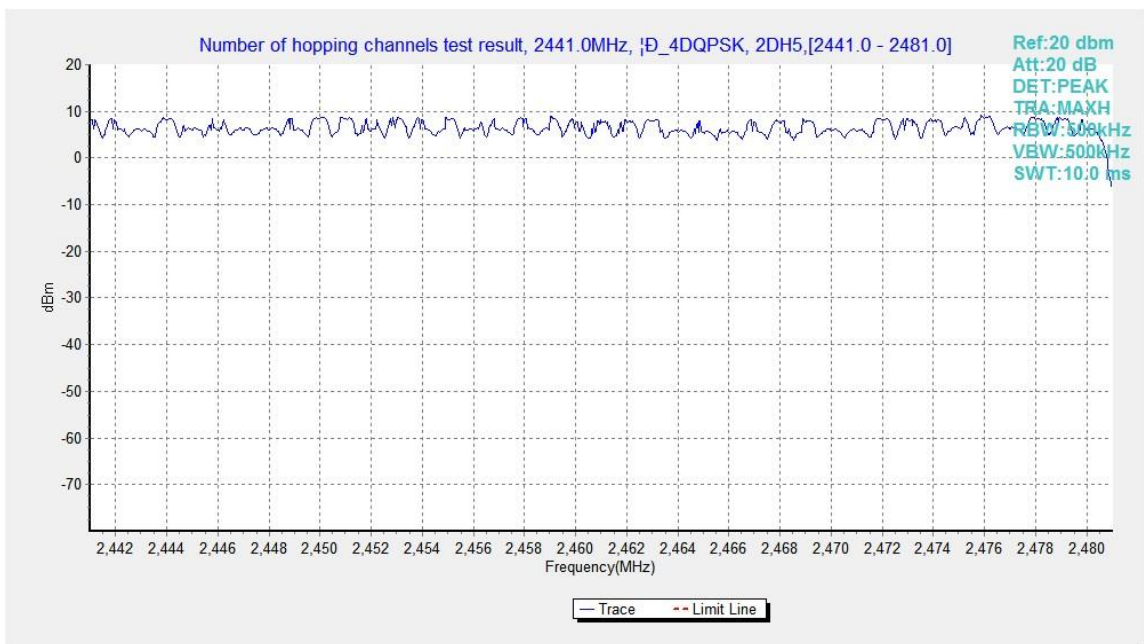


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

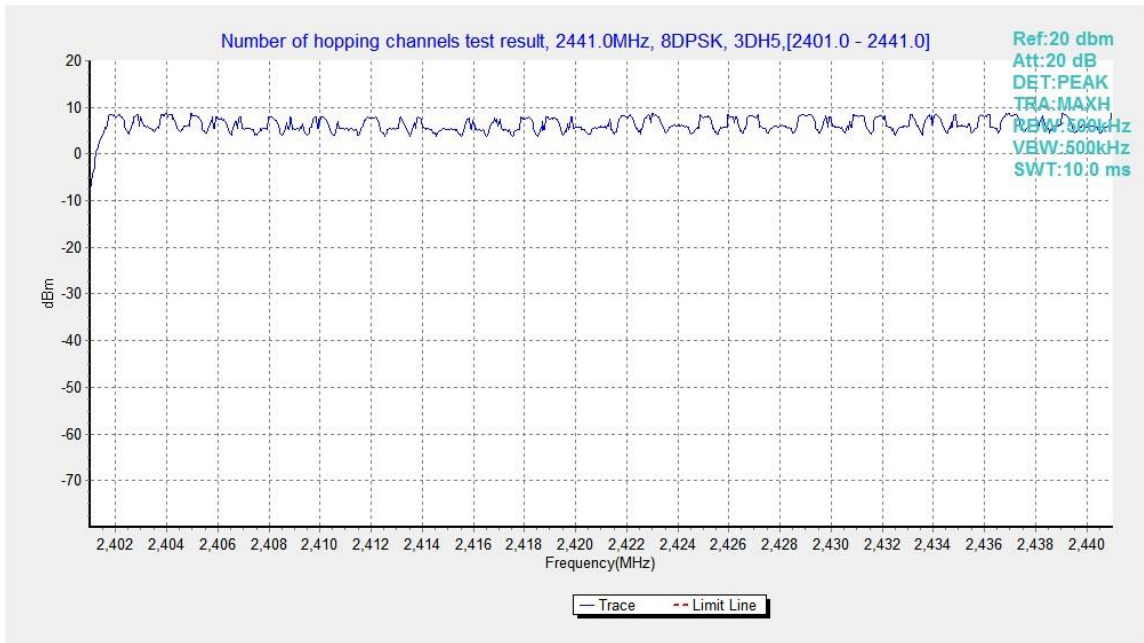


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

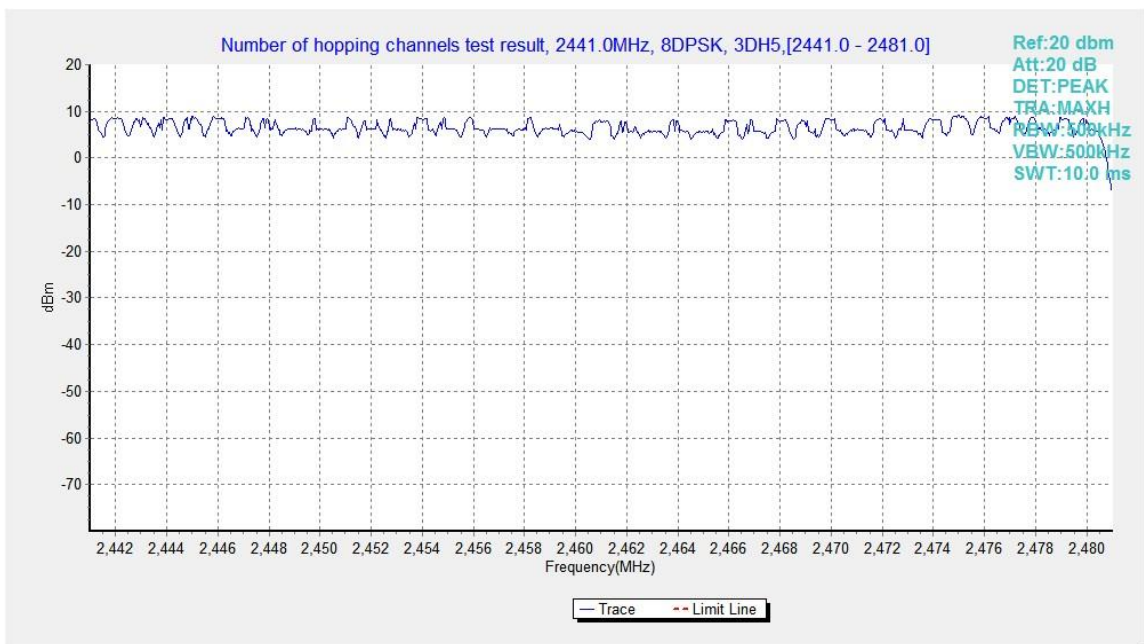


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

B.11. AC Powerline Conducted Emission

Method of Measurement:

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

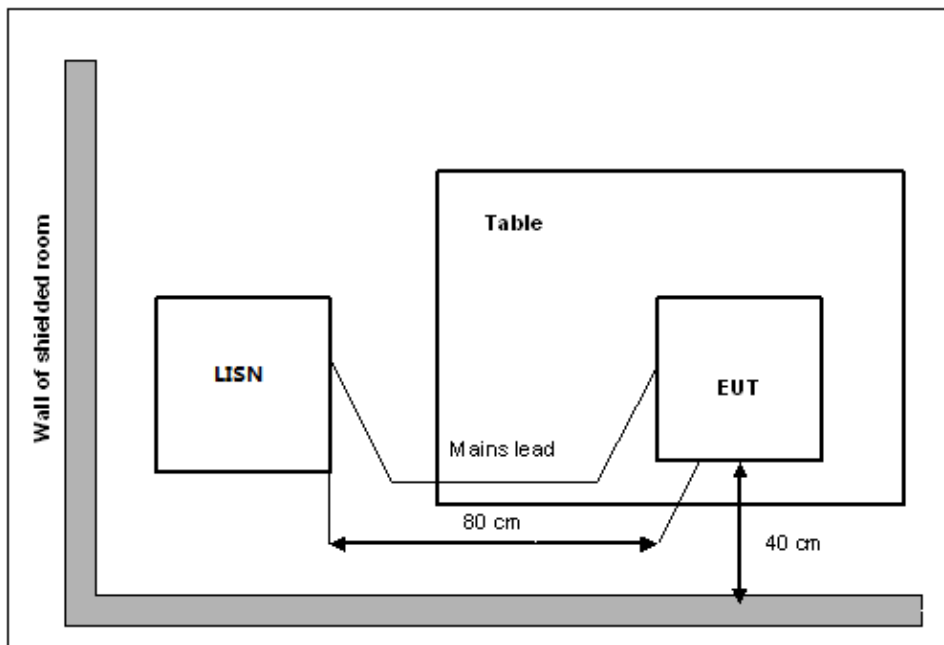

Measurement Result and limit:
EUT ID: UT25a

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

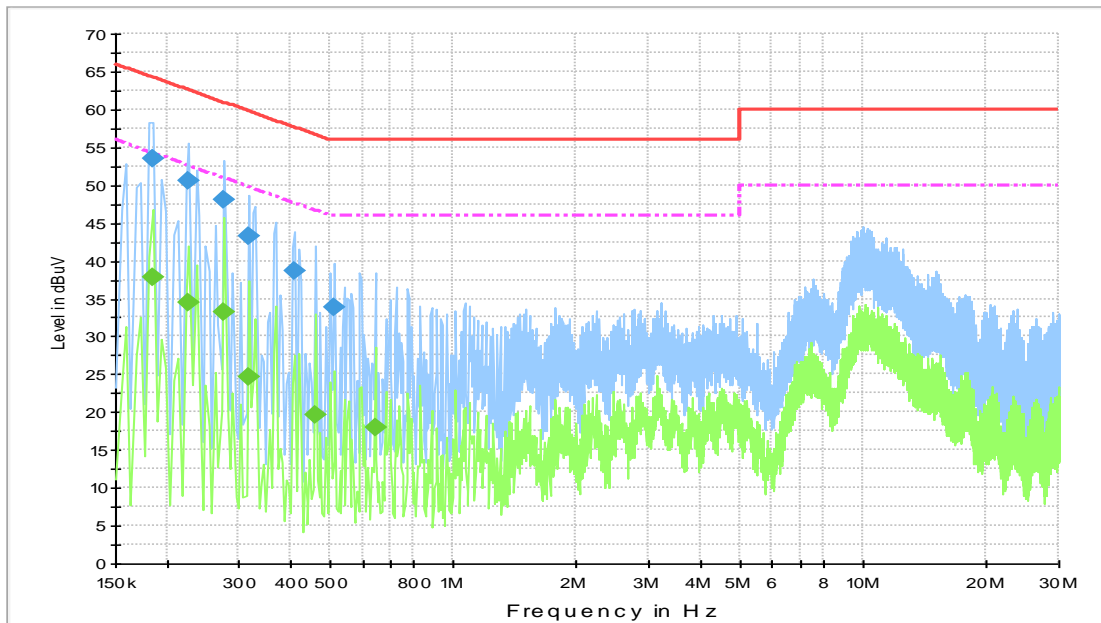


Fig.B.11.1 AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	53.5	3000.0	9.000	On	N	19.8	10.7	64.2
0.226500	50.5	3000.0	9.000	On	N	19.8	12.0	62.6
0.276000	48.0	3000.0	9.000	On	L1	19.8	12.9	60.9
0.316500	43.3	3000.0	9.000	On	L1	19.8	16.5	59.8
0.411000	38.6	3000.0	9.000	On	L1	19.8	19.0	57.6
0.514500	33.9	3000.0	9.000	On	L1	19.8	22.1	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	37.8	3000.0	9.000	On	N	19.8	16.4	54.2
0.226500	34.5	3000.0	9.000	On	N	19.8	18.1	52.6
0.276000	33.2	3000.0	9.000	On	N	19.8	17.7	50.9
0.316500	24.7	3000.0	9.000	On	N	19.8	25.1	49.8
0.460500	19.5	3000.0	9.000	On	L1	19.8	27.1	46.7
0.645000	18.0	3000.0	9.000	On	N	19.8	28.0	46.0

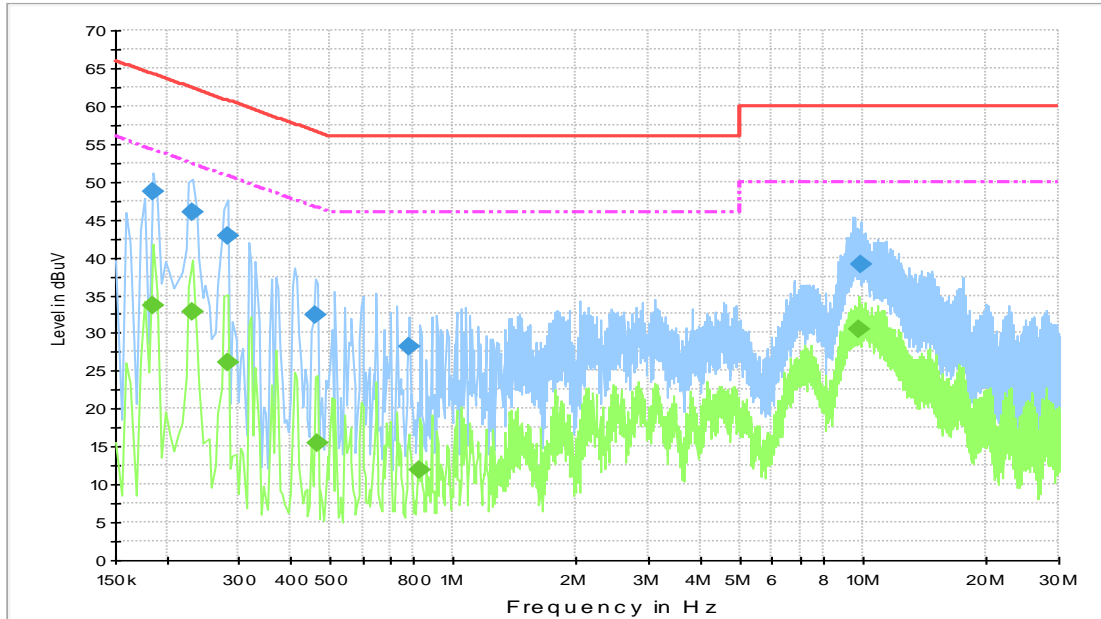


Fig.B.11.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	48.8	3000.0	9.000	On	L1	19.8	15.5	64.2
0.231000	46.0	3000.0	9.000	On	L1	19.8	16.5	62.4
0.280500	42.8	3000.0	9.000	On	N	19.7	18.0	60.8
0.460500	32.5	3000.0	9.000	On	N	19.8	24.2	56.7
0.784500	28.1	3000.0	9.000	On	N	19.7	27.9	56.0
9.879000	39.0	3000.0	9.000	On	N	19.7	21.0	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	33.6	3000.0	9.000	On	L1	19.8	20.6	54.2
0.231000	32.9	3000.0	9.000	On	N	19.8	19.5	52.4
0.280500	26.2	3000.0	9.000	On	N	19.7	24.6	50.8
0.465000	15.5	3000.0	9.000	On	N	19.8	31.1	46.6
0.829500	11.9	3000.0	9.000	On	N	19.7	34.1	46.0
9.748500	30.5	3000.0	9.000	On	N	19.8	19.5	50.0

Note: The measurement results showed here are worst cases of the combination of different adaptor.

ANNEX C: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2022-10-01 through 2023-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT