

A Radio Test Report

FOR

Buddi Limited

ON

Buddi Click System - Clip

DOCUMENT NO. TRA-015303-05-47-02C

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com

TRaC Wireless Test Report : TRA-015303-05-47-02C

Applicant : Buddi Limited

Apparatus : Buddi Click System - Clip

Specification(s) : FCC CFR47 Part 15 (c) & RSS-210 Issue 8

Purpose of Test : Certification

FCC ID : ZDL353A

Authorised by :

: Radio Product Manager

Issue Date : **2nd December 2014**

Authorised Copy Number : *PDF*

Contents

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes relating to the assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	10
3.1	Modifications Performed During Assessment	10
Section 4	General Test Procedures	11
4.1	Radiated Test Setup and Procedures	11
4.2	AC Powerline Conducted Emissions Test Setup and Procedures	12
4.3	Antenna Port Conducted Emissions	12
4.4	Power Supply Variation	13
4.5	Thermal Variation	13
4.6	Time Domain Measurements	13
Appendix A:	Formal Emission Test Results	14
A1	Transmitter Intentional Emission Radiated	15
A2	Transmitter Bandwidth	16
A3	Radiated Electric Field Emissions	17
A4	Unintentional Radiated Emissions	20
Appendix B:	Supporting Graphical Data	22
Appendix C:	Additional Test and Sample Details	31
C1	Test samples	32
C2	EUT operating mode during testing	33
C3	EUT Configuration Information	34
C4	List of EUT Ports	35
C5	Details of Equipment Used	36
Appendix D:	Additional Information	37
Appendix E:	Calculation of the duty cycle correction factor	38
Appendix F:	Photographs and Figures	39
Appendix G:	MPE Calculation	41

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: A Tosif

Report author: A Tosif

This report must not be reproduced except in full without prior written permission from TRaC Global Ltd.

1.2 Tests Requested By

This testing in this report was requested by:

Buddi Limited

Talbot House
17 Church Street
Rickmansworth
Herts
WD3 1DE

1.3 Manufacturer

As above

1.4 Apparatus Assessed

The following apparatus was assessed between: 7th – 29th May 2014

Buddi Click System - Clip.

The Clip is a SRD device operating in 902 – 928 band.

Note – the Clip also contains a pre-approved GSM module (FCC id /IC id) that has been installed in line with the Grant of Equipment Authorization. The module is co-located but does not transmit simultaneously with the SRD.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	FCC Regulation	IC Regulation	Measurement standard	Result
Spurious Emissions Radiated	Title 47 of the CFR: Part 15 Subpart (c) 15.249(a)(d)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	RSS-Gen Issue 3 December 2010 Section 4.10	ANSI C63.10	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	RSS-Gen Issue 3 December 2010 Section 7.2.4	ANSI C63.10	N/A
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a)	RSS-210 Issue 8 December 2010 Annex 2 A2.9	ANSI C63.10	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.215 (c)	RSS-Gen Issue 3 December 2010 Section 4.6.1	ANSI C63.10	Pass

Abbreviations used in the above table:

CFR : Code of Federal Regulations
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution
PLCE : Power Line Conducted Emissions

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 20 to 22 °C
Humidity	: 45 to 75 %

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Section 4

General Test Procedures

4.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst case determined for function, operation, orientation etc for both vertical and horizontal polarisations

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

For devices with intentional emissions below 30 MHz, a shielded loop antenna is used as the test antenna. It is placed at a 1 meter receive height and appropriate low frequency magnetic field extrapolation to the regulatory limit distance is employed. The EUT is rotated through 360° in the azimuth.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360° in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Where regulations allow for direct measurement of field strength, power values measured on the test receiver / analyzer are converted to dBuV/m at the regulatory distance, using:

$$FS = PR + AF + CL - PA + KG + DC - CF \text{ (dBuV/m)}$$

Where:

PR is the power recorded on receiver / spectrum analyzer (dBuV),

AF is the test antenna factor in dB/m,

CL is the cable loss in dB,

PA is the pre-amplifier gain dB (when applicable),

DC is duty correction factor (when applicable) in dB, and

CF is a distance correction (employed only for measurements at alternate distance to limit) in dB.

This field strength value is then compared with the regulatory limit.

If effective radiated power (ERP) or effective isotropic radiated power (EIRP) is required, it is computed as per ANSI C63.10

$$P = \frac{(Ed)^2}{30G}$$

Where

P is the power, in W

E is the measured peak field strength, in V/m

d is the distance at which the measurement was made, in m

G is the numeric gain of the radiating element

If the gain of the radiating element is not known, then either the effective radiated power (ERP) or the effective isotropic radiated power (EIRP) may be calculated from the measured peak field strength, by using either $G = 1.64$ or $G = 1$, respectively.

4.2 AC Powerline Conducted Emissions Test Setup and Procedures

AC Powerline Conducted Emissions from the EUT are checked first by preview scans with Peak and average detectors covering both live and neutral lines. A spectrum analyser is used to determine if any periodic emissions are present. Preview scans are performed in standby or receive mode if the device is subject to these requirements. For transmit mode of operation the device is set to one of the following modes.

- Transmitting operating at full power (single mode device)
- Transmitting at freq / modulation that gives highest output power (multi mode device)
- Transmitter operating in normal TX mode (e.g. FHSS, TDMA etc)

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans.

Battery Power devices are not subject to power line conducted emissions measurements when it is powered solely by its internal battery.

4.3 Antenna Port Conducted Emissions

Antenna port conducted emissions can include, but are not limited to, Carrier power, Power Spectral Density, Occupied bandwidth and spurious emission.

Spurious Emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked to identify frequencies to perform formal measurements on.

Formal measurements are made on frequencies identified from the preview scans and fundamental emission(s). Measurements are made using the correct instrumentation (inc. power meter, receiver, spectrum analyser) that operate with the required detector(s) and bandwidth.

Care is taken to ensure the measurement instrument is not overloaded by the presence of the transmitted signal by use of external attenuation and filtering where required.

Measured levels are corrected for cables, attenuators, and filters. If applicable, for the specific measurement, antenna gain is also taken into account.

4.4 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a lead-acid battery power source, the extreme test voltages are evaluated between 90% and 130% of the nominal battery voltage declared by the manufacturer.

For float charge applications using gel-cell type batteries, extreme test voltages are evaluated between 85% and 115% of the nominal battery voltage declared.

For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.5 Thermal Variation

Tests at extreme temperatures are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

Tests are performed at the upper and lower extremes as required and typically at 10° steps between.

Before any temperature measurements are made, the equipment is allowed to reach a thermal balance in the test chamber.

4.6 Time Domain Measurements

Time domain measurements are made for (but not limited to) use in duty cycle correction, to ensure compliance with time restrictions on certain types of devices.

If measurements of a transmitter's on time are required these are performed with a spectrum analyser in the time domain or with an oscilloscope and RF detector. If time on a specific frequency is required (e.g. FHSS timing) the measurement can only be made with a spectrum analyser.

The triggering, timescale and amplitude settings are adjusted according to the signal to be measured on a case by case basis.

For devices with sharp rise/fall times measurements are made between RF reaching full power (T_{on}) and RF dropping to the measurement instrument noise floor (T_{off}). For longer rise times measurements are made for T_{on} and T_{off} at the RF level required by the occupied bandwidth measurement (e.g. 6 dB, 20 dB etc).

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
EUT	: Equipment Under Test	ATS	: Alternative Test Site
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Test Details	
Regulation	Part15 Subpart (c) 15.249 (a) / RSS-210 Issue 8 Annex 2 A2.9
Measurement standard	ANSI C63.10:2003
EUT sample number	S32
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	25.9
Photographs	Refer to Appendix F

FREQ. (MHz)	MEASUREMENT Rx. READING (dB μ V)	CABLE LOSS (dB)	ANT FACTOR (dB/m)	DUTY CYCLE CORRECTION (dB)	FIELD STRENGTH (dB μ V/m)	FIELD STRENGTH (mV/m)
915.8	70.8	3.6	20.9	-	95.3	57.94pk
915.8	70.8	3.6	20.9	24.8	70.5	3.33av
918.3	70.6	3.6	20.9	-	95.1	56.69pk
918.3	70.6	3.6	20.9	24.8	70.3	3.26av
920.8	70.6	3.6	20.9	-	95.1	56.75pk
920.8	70.6	3.6	20.9	24.8	70.3	3.27av
Limit av			50mV/m @ 3m			

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ f_c = Peak / 120kHz bandwidth
 - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 3m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

A2 Transmitter Bandwidth

Test Details:	
Regulation	Part 15.215 (c) / RSS-Gen Issue 3 Section 4.6.1
Measurement standard	ANSI C63.10:2009
EUT sample number	S33
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	24°C

Band occupancy @ -20 dBc			
FREQ. (MHz)	f lower (MHz)	f higher (MHz)	Occ BW (kHz)
915.8	915.760	915.845	85.128
918.3	918.260	918.345	85.256
920.8	920.759	920.844	85.256

The 20dB Bandwidth of the carrier must be contained within the frequency band 902-928 MHz

99% Band occupancy			
FREQ. (MHz)	f lower (MHz)	f higher (MHz)	Occ BW (kHz)
915.8	915.764	915.842	78.205
918.3	918.263	918.341	78.205
920.8	920.762	920.840	78.205

A3 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.209 (a) / RSS-Gen Issue 3 Section 7.2.5. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Part 15 Subpart (c) Clause 15.249 (a)(d) / RSS-210 Issue 8 Annex 2 A2.9
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz-10GHz
EUT sample number	S32
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	25.9

The worst case emissions are listed below:

Bottom Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dBµV/m)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	1831.592	63.3	2.9	27.2	36.3	-	-	57.2	720.28	5011pk
2.	1831.592	63.3	2.9	27.2	36.3	-	24.8	32.4	41.543	500av
3.	2747.369	50.3	3.1	29.1	36.0	-	-	47.3	232.27	500av
4.	3663.248	47.3	3.1	31.6	35.7	-	-	46.6	215.03	500av
5.	4579.006	41.1	3.5	32.3	35.6	-	-	41.5	118.44	500av
6.	5494.889	41.8	3.9	33.9	35.7	-	-	44.4	165.96	500av
7.	7326.456	39.5	4.4	36.6	36.1	-	-	44.7	171.99	500av

Middle Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dB μ V/m)	FIELD ST'GH (μ V/m)	LIMIT (μ V/m)
8.	1836.600	63.0	3.0	27.2	36.3	-	-	56.9	702.26	5011pk
9.	1836.600	63.0	3.0	27.2	36.3	-	24.8	32.1	40.50	500av
10.	2754.900	50.5	3.1	29.1	36.0	-	-	46.7	216.27	500av
11.	3673.144	48.4	3.1	31.6	35.7	-	-	47.4	233.61	500av
12.	4591.516	41.3	3.5	32.3	35.6	-	-	41.5	118.44	500av
13.	5509.816	41.4	3.9	33.9	35.7	-	-	43.5	149.28	500av
14.	7346.560	49.2	4.4	36.6	36.1	-	-	54.1	508.16	5011pk
15.	7346.560	39.6	4.4	36.6	36.1	-	-	44.5	168.27	500av

Top Channel

Ref No.	FREQ. (MHz)	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	HPF Loss (dB)	Duty Cycle correction (dB)	Field ST'GH (dB μ V/m)	FIELD ST'GH (μ V/m)	LIMIT (μ V/m)
16.	1841.664	63.15	2.9	27.2	36.3	-	-	56.95	703.882	5011pk
17.	1841.664	61.72	2.9	27.2	36.3	-	24.8	32.17	40.5976	500av
18.	2762.432	50.97	3.2	29.1	36.0	-	-	47.27	230.94	500av
19.	3683.232	48.59	3.1	31.7	35.7	-	-	47.69	242.382	500av
20.	4603.952	41.27	3.6	32.3	35.6	-	-	41.57	119.812	500av
21.	5524.816	42.76	3.9	33.9	35.7	-	-	44.86	174.985	500av
22.	7366.36	38.83	4.4	36.7	36.2	-	-	43.73	153.638	500av

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15: Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR part 15- Clause 15.209 / RSS-Gen Issue 3 Section 7.2.5 for all emissions except harmonics:

Frequency of emission (MHz)	Field strength (□V/m)	Measurement Distance (m)	Field strength (dB) □
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A4 Unintentional Radiated Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 6.1. The EUT was set to operate in transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details	
Regulation	Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 4.10
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S32
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	22°C

No emissions were detected within 20dB of the limit.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak (pk)	RBW=VBW= 1MHz
Average (Av)	RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2010 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.109 / RSS-Gen Issue 3 section 6.1 for all emissions:

Frequency of emission (MHz)	Field strength (\square V/m)	Measurement Distance (m)	Field strength (dB) \square
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				


Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

20dB Bandwidth

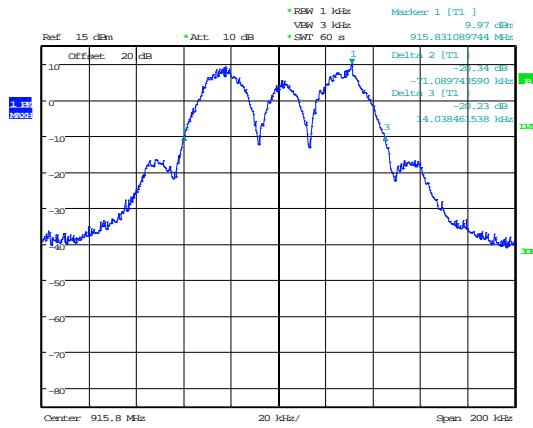


Date: 16.MAY.2014 14:58:17

20dB Bandwidth 915.8MHz

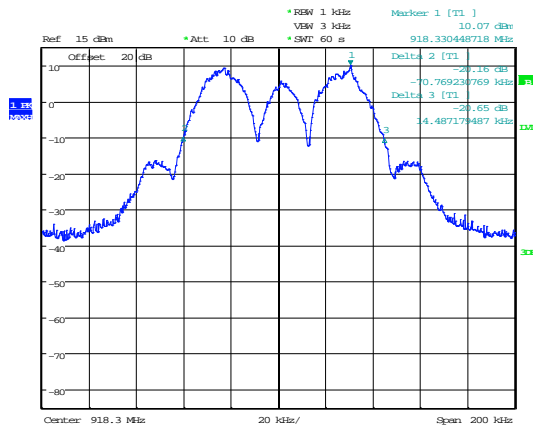

Date: 16.MAY.2014 15:00:43


20dB Bandwidth 918.3MHz

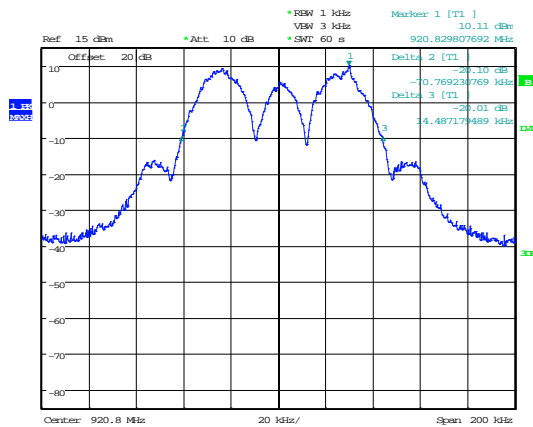

Date: 16.MAY.2014 15:04:12


20dB Bandwidth 920.8MHz

99% Bandwidth

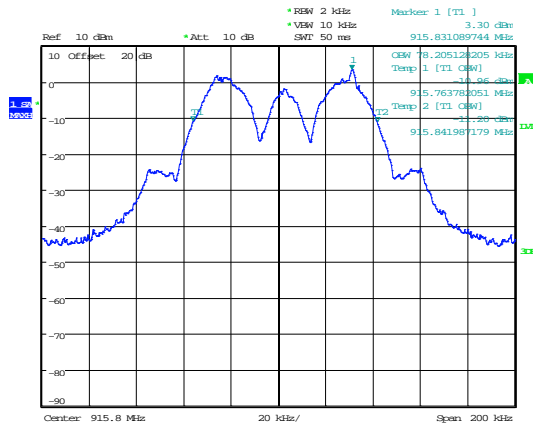


Date: 29.MAY.2014 09:47:27

99% Bandwidth 915.8MHz

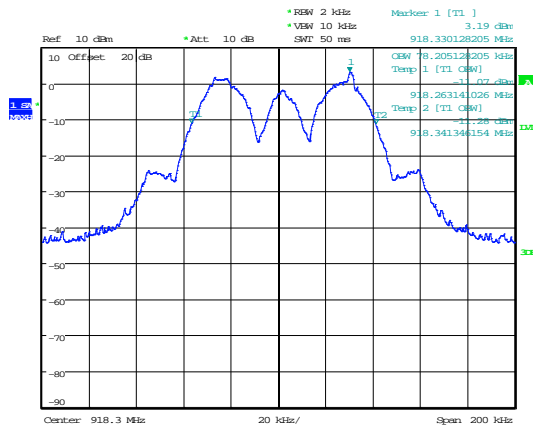

Date: 29.MAY.2014 09:49:02


99% Bandwidth 918.3MHz

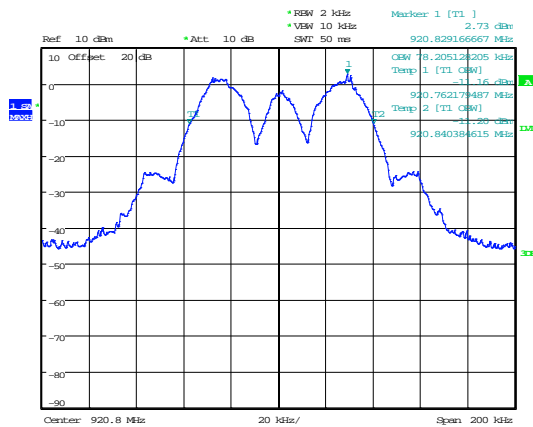


Date: 29.MAY.2014 09:50:04

99% Bandwidth 920.8MHz

Radiated Transmitter Emissions – 915.8MHz

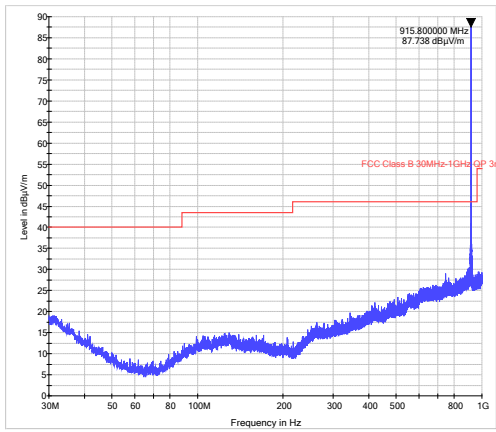


30MHz – 1GHz

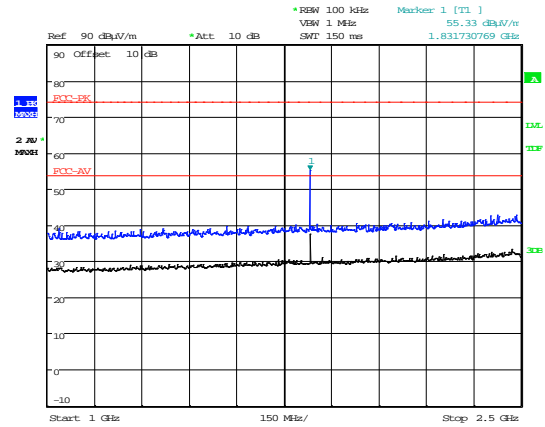


1GHz – 2.5GHz

Date: 15.MAY.2014 12:52:30

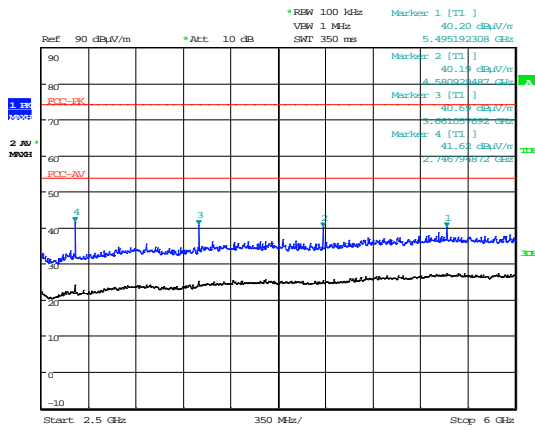

2.5GHz – 6GHz


Date: 15.MAY.2014 13:30:19

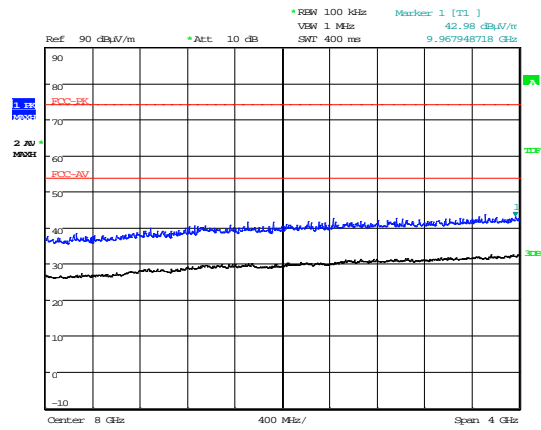


6GHz – 10GHz

Date: 15.MAY.2014 13:29:06

Radiated Transmitter Emissions – 918.3MHz

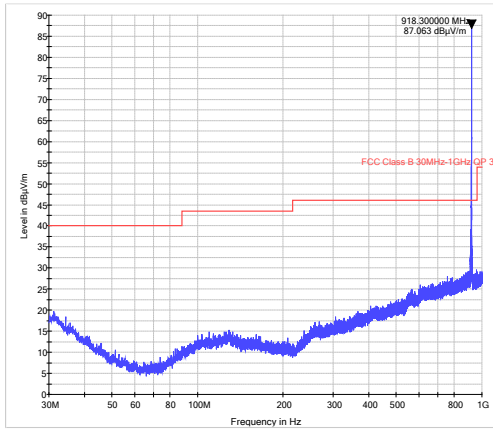


30MHz – 1GHz

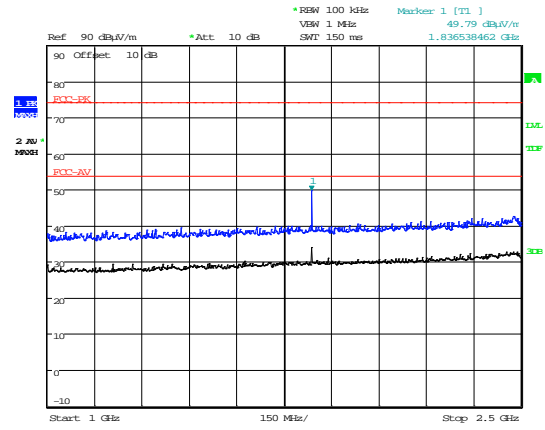


Date: 15.MAY.2014 12:53:46

1GHz – 2.5GHz

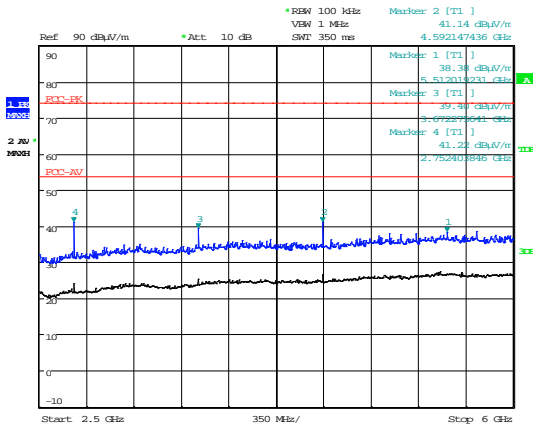

Date: 15.MAY.2014 13:34:48


2.5GHz – 6GHz

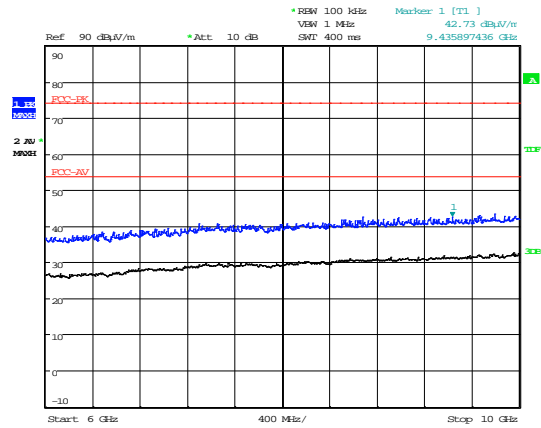


Date: 15.MAY.2014 13:38:14

6GHz – 10GHz

Radiated Transmitter Emissions – 920.8MHz

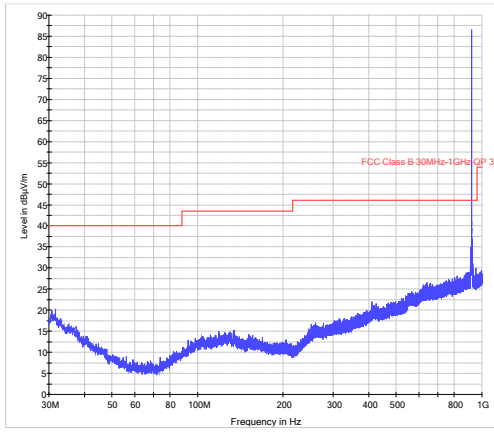


30MHz – 1GHz

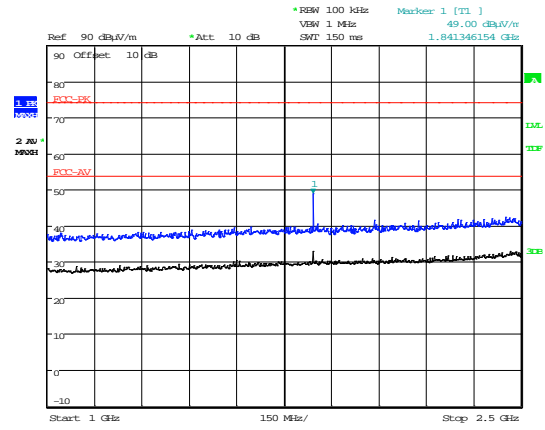


Date: 15.MAY.2014 12:57:43

1GHz – 2.5GHz

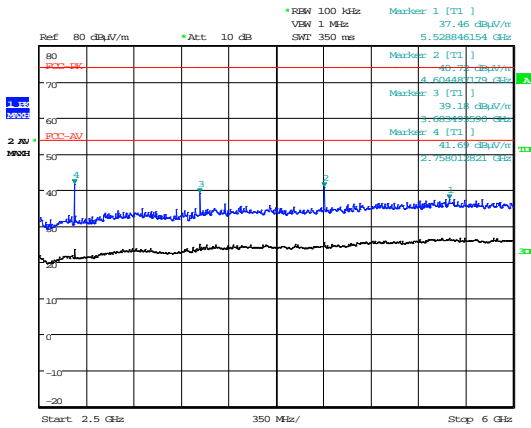

Date: 15.MAY.2014 13:06:12


2.5GHz – 6GHz

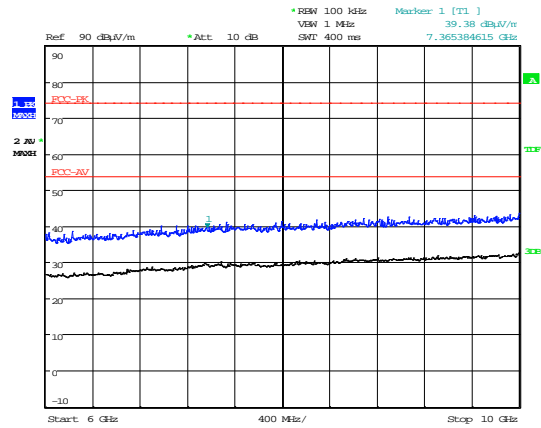


Date: 15.MAY.2014 13:22:30

6GHz – 10GHz

Unintentional Radiated Emissions – 915.8MHz

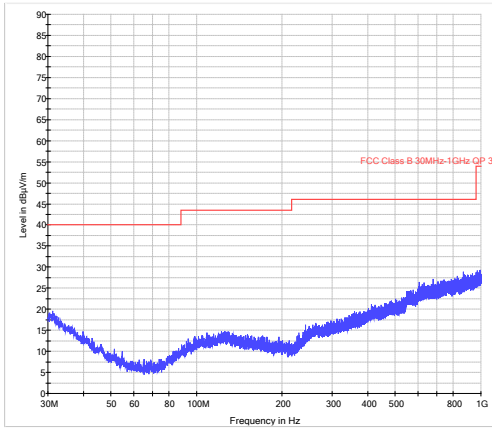


30MHz – 1GHz

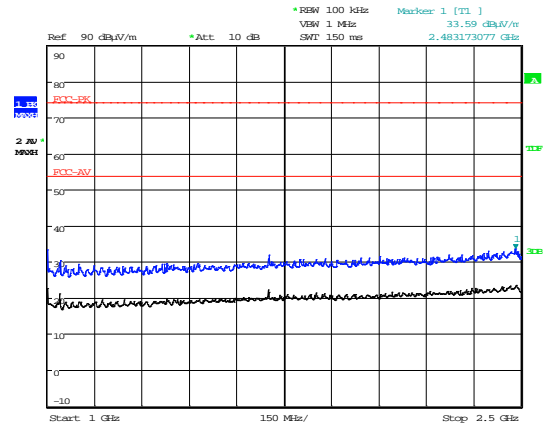


Date: 15.MAY.2014 14:09:28

1GHz – 2.5GHz

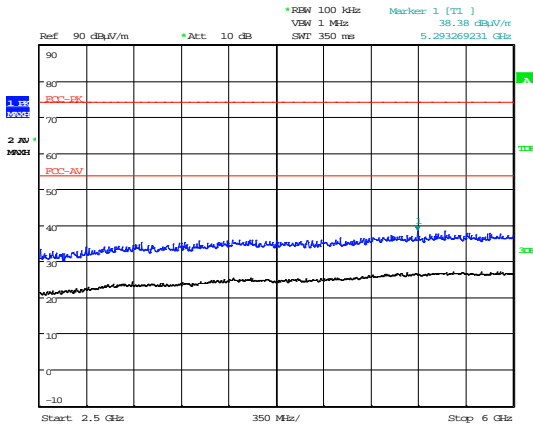

Date: 15.MAY.2014 14:10:44


2.5GHz – 6GHz

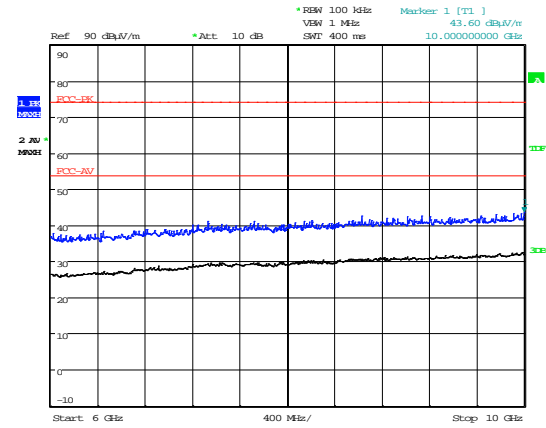


Date: 15.MAY.2014 14:11:32

6GHz – 10GHz

Unintentional Radiated Emissions – 918.3MHz

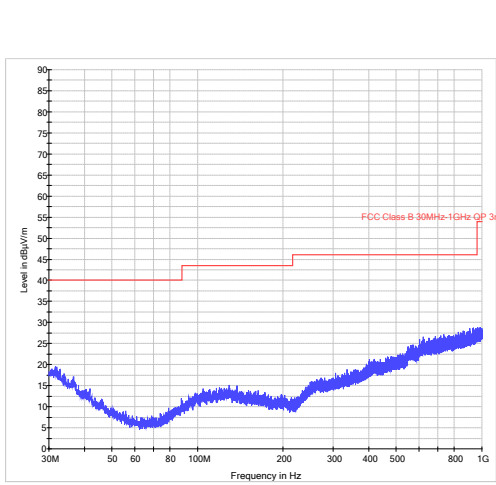


30MHz – 1GHz

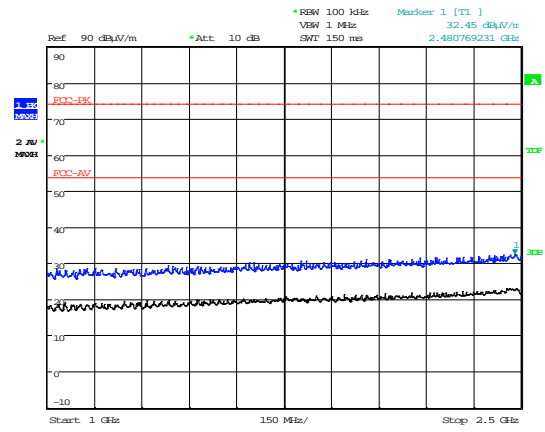


Date: 15.MAY.2014 14:22:05

1GHz – 2.5GHz

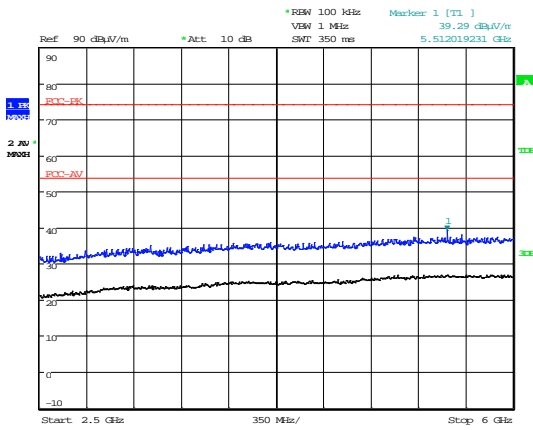

Date: 15.MAY.2014 14:21:07


2.5GHz – 6GHz

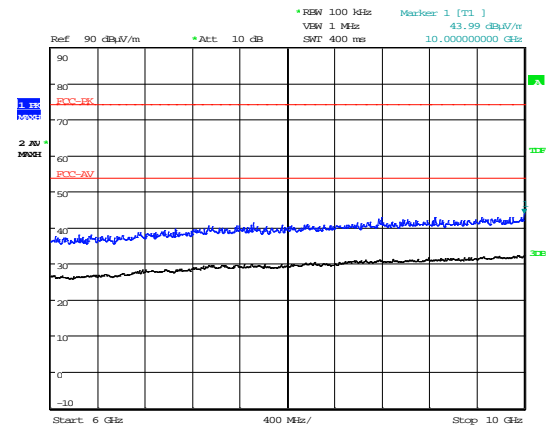


Date: 15.MAY.2014 14:20:15

6GHz – 10GHz

Unintentional Radiated Emissions – 920.8MHz

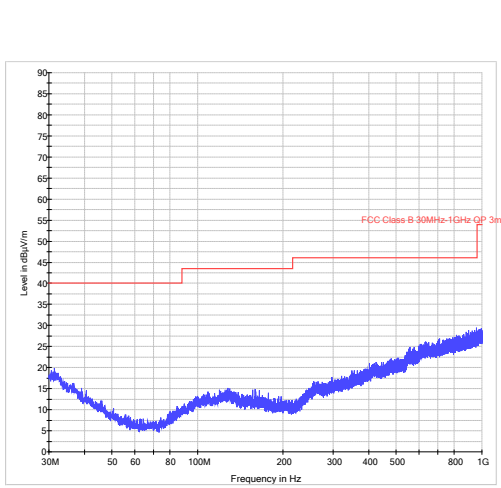


30MHz – 1GHz

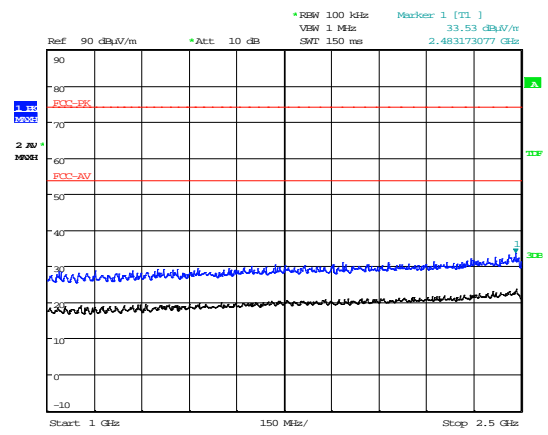


1GHz – 2.5GHz

Date: 15.MAY.2014 14:23:11

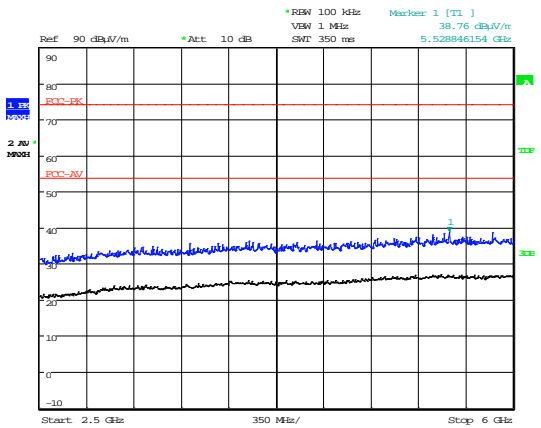

2.5GHz – 6GHz

Date: 15.MAY.2014 14:23:46

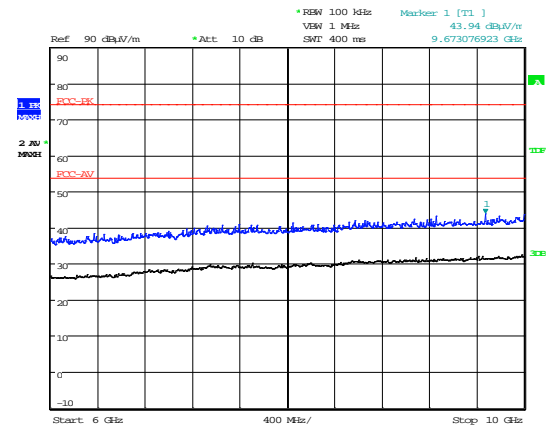

6GHz – 10GHz

Date: 15.MAY.2014 14:24:34

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods – An Overview", which can be supplied by TraC Global upon request.

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S32	Buddi Click System - Clip	C00062
S33	Buddi Click System - Clip	C00045

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following tables:

Test	Description of Operating Mode: Transmit
All tests detailed in this report except receiver radiated spurious emissions	EUT actively transmitting

Test	Description of Operating Mode: Recieve
Receiver radiated spurious emissions	EUT in receive mode

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S32
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
EUT is a battery powered device with no external ports			

C5 Details of Equipment Used

TRaC No	Equipment Type	Equipment Description	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH191	CBL611/A	Bilog	Chase	13/12/2012	24	13/12/2014
UH387	ATS	Chamber 1	Rainford EMC	04/07/2013	24	04/07/2015
UH403	ESCI 7	Receiver	R&S	12/08/2013	12	12/08/2014
REF909	FSU26	Spectrum Analyser	R&S	12/02/2014	12	12/02/2015
UH281	FSU46	Spectrum Analyser	R&S	26/02/2014	12	26/02/2015

Appendix D:

Additional Information

Appendix E: Calculation of the duty cycle correction factor

Using a spectrum analyser in zero span mode, centred on the fundamental carrier frequency with a RBW of 1MHz and a video Bandwidth of 1MHz the sweep time was set accordingly to capture the pulse train. The transmit pulsewidths and period was measured

If the pulse train was less than 100 ms, including blanking intervals, the duty cycle was calculated by averaging the sum of the pulsewidths over one complete pulse train. However if the pulse train exceeds 100ms then the duty cycle was calculated by averaging the sum of the pulsewidths over the 100ms width with the highest average value. (The duty cycle is the value of the sum of the pulse widths in one period (or 100ms), divided by the length of the period (or 100ms). The duty cycle correction factor was then expressed in dB and the peak emissions adjusted accordingly to give an average value of the emission.

Correction factor dB = $20 \times (\text{Log}_{10} \text{ Calculated Duty Cycle})$

Therefore the calculated duty cycle was determined:

Duty cycle = $\frac{\text{the sum of the highest average value pulsewidths over 100ms}}{100\text{ms}}$

e.g

$$= \frac{5.769\text{ms}}{100\text{ms}} = 0.05769$$

Correction factor (dB) = $20 \times (\text{Log}_{10} 0.05769) = 24.8\text{dB}$

Duty cycle correction factor to be used is:

Txon period 5.769ms in 100ms
Worse case 5.769ms in 100ms

Therefore $20\log (5.769 \div 100) = 24.8\text{dB}$.

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement (Front view)
2. Radiated electric field emissions arrangement (Close up)

Photograph 1



Photograph 2



Appendix G:

MPE Calculation

KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

In the frequency range below 100 MHz to 6 GHz and test separation distance of 50mm, the SAR Test Exclusion Threshold for operation at 915.8, 918.3 and 920.8 MHz will be determined as follows

SAR Exclusion Threshold (SARET)

$$\text{SAR Exclusion Threshold} = \text{Step 1} + \text{Step 2}$$

Step 1

$$\text{NT} = [(\text{MP}/\text{TSD}^A) * \sqrt{f_{\text{GHz}}}]$$

- NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)
- MP = Max Power of channel (mW) (inc tune up)
- TSD^A = Min Test separation Distance or 50mm (whichever is lower) = 50

We can transpose this formula to allow us to find the maximum power of a channel allowed and compare this to the measured maximum power.

$$= [(\text{NT} \times \text{TSD}^A) / \sqrt{f_{\text{GHz}}}]$$

For Distances Greater than 50 mm Step 2 applies

Step 2

$$(\text{TSD}^B - 50\text{mm}) * 10\}$$

Where:

$$\text{TSD}^B = \text{Min Test separation Distance (mm)} = 50$$

Operating Frequency 915.8 MHz

$$\begin{aligned} \text{MP} &= [(3.0 \times 50) / \sqrt{0.9158}] + \{ (50 - 50) * [903/150] \} \\ \text{MP} &= 156.7\text{mW} \end{aligned}$$

The calculated output power 1.02mW (Peak) is less than the SAR Exclusion Threshold of 156.7mW.

Operating Frequency 918.3 MHz

$$\begin{aligned} \text{MP} &= [(3.0 \times 50) / \sqrt{0.9183}] + \{ (50 - 50) * [916/150] \} \\ \text{MP} &= 156.5 \text{ mW} \end{aligned}$$

The calculated output power 0.97mW (Peak) is less than the SAR Exclusion Threshold of 156.5mW.

Operating Frequency 920.8 MHz

$$\begin{aligned} \text{MP} &= \{ [(3.0 \times 50) / \sqrt{0.9208}] + (50 - 50) * [927/150] \} \\ \text{MP} &= 156.3 \text{ mW} \end{aligned}$$

The calculated output power 0.97mW (Peak) is less than the SAR Exclusion Threshold of 156.3mW.

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

RSS-102

For purposes of these requirements mobile devices are defined by the Industry Canada as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under Industry Canada rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 6.1W/m² (i.e. 0.61 mW/cm²) power density limit, as required under Industry Canada rules.

Prediction of MPE limit at a given distance

Equation from IEEE C95.1

$$S = \frac{EIRP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{EIRP}{S 4\pi}}$$

Where:

S = power density

R = distance to the centre of radiation of the antenna

EIRP = EUT Maximum power

Note:

The EIRP value was calculated using the peak E Field measurement.

Result

Prediction Frequency (MHz)	Maximum EIRP (mW)	Power density limit (S) (mW/cm ²)	Distance (R) cm required to be less than 0.61 mW/cm ²
915.8	1.02	0.61	0.37

