

# FCC TEST REPORT

Client Name : Sariana LLC

Address : 7365 Mission Gorge Rd, Suite G, San Diego, CA 92120, USA

Product Name : Magnetic Wireless Car Charger

Date : Jul. 29 , 2021

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Test Equipment List.....	5
1.5. Measurement Uncertainty.....	5
1.6. Description of Test Facility.....	6
2. Measurement and Result.....	7
2.1. Requirements.....	7
2.2. Test Setup.....	8
2.3. Test Procedure.....	8
2.4. Test Result.....	8
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	15

# TEST REPORT

Applicant : Sariana LLC.  
Manufacturer : Sariana LLC.  
Product Name : Magnetic Wireless Car Charger  
Model No. : ST-MCMWCM  
Trade Mark : **S A T E C H I**  
Rating(s) : Input Voltage: QC & PD Vdc 5-12V  
Wireless output: 5W, 7.5W, 10W, 15W  
**Test Standard(s) : FCC Part 1.1310, 1.1307(b)**  
**Test Method(s) : KDB680106 D01 RF Exposure Wireless Charging Apps v03**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

May 24, 2021

Date of Test

May 24, ~Jun. 08, 2021

Prepared By



(Ella Liang)

Approved &amp; Authorized Signer



(Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	Sariana LLC
Address	:	7365 Mission Gorge Rd, Suite G, San Diego, CA 92120, USA
Manufacturer	:	Sariana LLC
Address	:	7365 Mission Gorge Rd, Suite G, San Diego, CA 92120, USA
Factory	:	Sariana LLC
Address	:	7365 Mission Gorge Rd, Suite G, San Diego, CA 92120, USA

### 1.2. Description of Device (EUT)

Product Name	:	Magnetic Wireless Car Charger	
Model No.	:	ST-MCMWCM	
Trade Mark	:	S A T E C H I	
Test Power Supply	:	DC 12V	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHZ
	:	Modulation Type:	FSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
<b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Car charger	:	M/N: R5115 Input: 12-24V $\overline{=}$ 3AMAX USB-A Output: 5V $\overline{=}$ 2.4A; USB-C Output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A
Mobile phone	:	M/N: NOH-AN01

### 1.4. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Magnetic field meter	NARDA	ELT-400	423623	Dec. 24, 2018	3 Year
2	E-Field Probe	Narda	EF0391	Q15221	Nov.17, 2020	3 Year
3	H-Field Probe	Narda	HF3061	Q15835	Nov.17, 2020	3 Year

### 1.5. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

## 1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

### **ISED-Registration No.: 8058A**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102



## 2. Measurement and Result

### 2.1. Requirements

According to the item 5.b) of KDB 680106 D01v03:


Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- 1) Power transfer frequency is less than 1 MHz
- 2) Output power from each primary coil is less than or equal to 15 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- 4) Client device is inserted in or placed directly in contact with the transmitter
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- 6) The aggregate H-field strengths at 0-15 cm for each edge/top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				

## 2.2. Test Setup

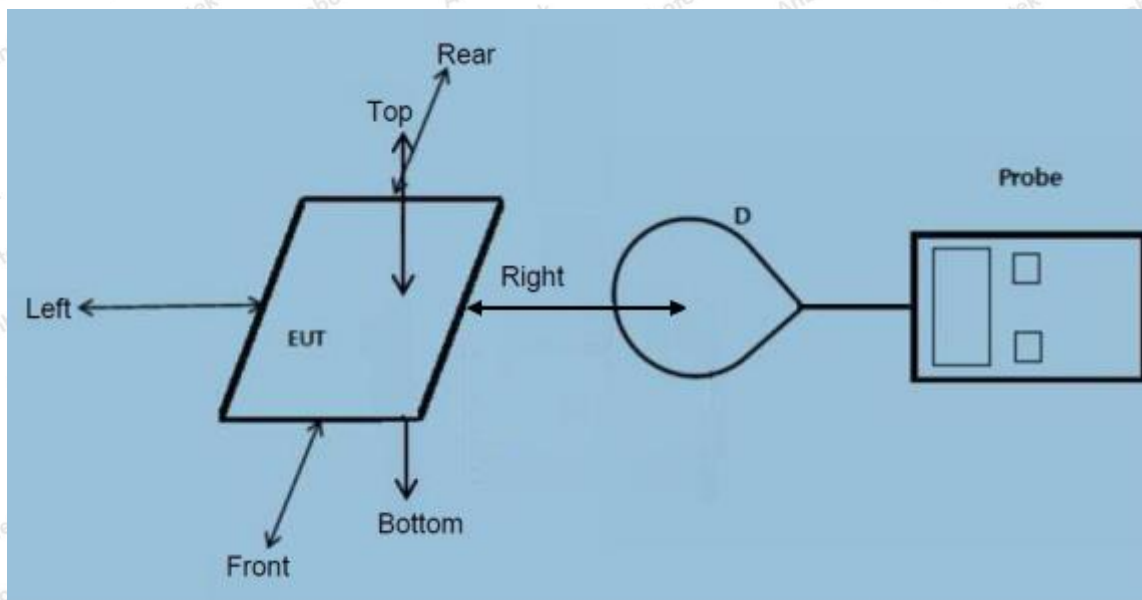

Note: Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from 0cm out to 10 cm, and 15cm. (See TCB Workshop November 2019)

## 2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed. (A is the right, B is the back, C is the left, D is the front, and E is the top.)
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

Remark;

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

## 2.4. Test Result

### 2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03.

- 1) Power transfer frequency is less than 1 MHz
  - The device operate in the frequency range 110.1-205KHz.
- 2) Output power from each primary coil is less than 15 watts
  - The maximum output power of the primary coil is 15W.



3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils

- The transfer system including a charging system with only single primary coils is to detect and allow only between individual pairs of coils.

4) Client device is inserted in or placed directly in contact with the transmitter

- Client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)

- The EUT is a Mobile exposure conditions

6) The aggregate H-field strengths at 0-15 cm for each edge/top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

- Conducted the measurement with the required distance and the test results please refer to the section 2.4.

2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	23.8°C	Relative Humidity:	52 %
Pressure:	1012 hPa	Test Voltage:	DC 12V

E-Field Strength at 0 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.43	0.52	0.47	0.48	0.60	307	614
50%	110.1-205	1.41	1.85	1.34	1.47	1.64	307	614
99%	110.1-205	2.48	2.88	2.49	2.44	2.90	307	614
Stand-by	110.1-205	0.44	0.59	0.43	0.42	0.56	307	614

E-Field Strength at 2 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.42	0.51	0.46	0.47	0.59	307	614
50%	110.1-205	1.44	1.88	1.37	1.50	1.67	307	614
99%	110.1-205	2.44	2.84	2.45	2.40	2.86	307	614
Stand-by	110.1-205	0.45	0.60	0.44	0.43	0.57	307	614

E-Field Strength at 4 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.39	0.48	0.43	0.44	0.56	307	614
50%	110.1-205	1.45	1.89	1.38	1.51	1.68	307	614
99%	110.1-205	2.41	2.81	2.42	2.37	2.83	307	614
Stand-by	110.1-205	0.49	0.64	0.48	0.47	0.61	307	614

E-Field Strength at 6 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.37	0.46	0.41	0.42	0.54	307	614
50%	110.1-205	1.46	1.90	1.39	1.52	1.69	307	614
99%	110.1-205	2.41	2.81	2.42	2.37	2.83	307	614
Stand-by	110.1-205	0.48	0.63	0.47	0.46	0.60	307	614

E-Field Strength at 8 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.36	0.45	0.40	0.41	0.53	307	614
50%	110.1-205	1.37	1.81	1.30	1.43	1.60	307	614
99%	110.1-205	2.40	2.80	2.41	2.36	2.82	307	614
Stand-by	110.1-205	0.41	0.56	0.40	0.39	0.53	307	614

E-Field Strength at 10 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.35	0.44	0.39	0.40	0.52	307	614
50%	110.1-205	1.39	1.83	1.32	1.45	1.62	307	614
99%	110.1-205	2.40	2.80	2.41	2.36	2.82	307	614
Stand-by	110.1-205	0.42	0.57	0.41	0.40	0.54	307	614

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.34	0.43	0.38	0.39	0.51	307	614
50%	110.1-205	1.43	1.87	1.36	1.49	1.66	307	614
99%	110.1-205	2.45	2.85	2.46	2.41	2.87	307	614
Stand-by	110.1-205	0.43	0.58	0.42	0.41	0.55	307	614

E-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
1%	110.1-205	0.33	0.42	0.37	0.38	0.50	307	614
50%	110.1-205	1.39	1.83	1.32	1.45	1.62	307	614
99%	110.1-205	2.41	2.81	2.42	2.37	2.83	307	614
Stand-by	110.1-205	0.44	0.59	0.43	0.42	0.56	307	614

H-Field Strength at 0 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.030	0.052	0.058	0.042	0.052	0.815	1.63
50%	110.1-205	0.38	0.47	0.37	0.37	0.54	0.815	1.63
99%	110.1-205	0.43	0.61	0.50	0.32	0.31	0.815	1.63
Stand-by	110.1-205	0.48	0.30	0.40	0.52	0.38	0.815	1.63

### H-Field Strength at 2 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.029	0.051	0.057	0.041	0.051	0.815	1.63
50%	110.1-205	0.29	0.38	0.28	0.28	0.45	0.815	1.63
99%	110.1-205	0.48	0.66	0.55	0.37	0.36	0.815	1.63
Stand-by	110.1-205	0.56	0.38	0.48	0.60	0.46	0.815	1.63

### H-Field Strength at 4 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.028	0.050	0.056	0.040	0.050	0.815	1.63
50%	110.1-205	0.33	0.42	0.32	0.32	0.49	0.815	1.63
99%	110.1-205	0.43	0.61	0.50	0.32	0.31	0.815	1.63
Stand-by	110.1-205	0.51	0.33	0.43	0.55	0.41	0.815	1.63

### H-Field Strength at 6 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.027	0.049	0.055	0.039	0.049	0.815	1.63
50%	110.1-205	0.39	0.48	0.38	0.38	0.55	0.815	1.63
99%	110.1-205	0.51	0.69	0.58	0.40	0.39	0.815	1.63
Stand-by	110.1-205	0.46	0.28	0.38	0.50	0.36	0.815	1.63

### H-Field Strength at 8 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.027	0.049	0.055	0.039	0.049	0.815	1.63
50%	110.1-205	0.38	0.47	0.37	0.37	0.54	0.815	1.63
99%	110.1-205	0.53	0.71	0.60	0.42	0.41	0.815	1.63
Stand-by	110.1-205	0.52	0.34	0.44	0.56	0.42	0.815	1.63

### H-Field Strength at 10 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.026	0.048	0.054	0.038	0.048	0.815	1.63
50%	110.1-205	0.35	0.44	0.34	0.34	0.51	0.815	1.63
99%	110.1-205	0.52	0.70	0.59	0.41	0.40	0.815	1.63
Stand-by	110.1-205	0.50	0.32	0.42	0.54	0.40	0.815	1.63

### H-Field Strength at 15 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.025	0.047	0.053	0.037	0.047	0.815	1.63
50%	110.1-205	0.31	0.40	0.30	0.30	0.47	0.815	1.63
99%	110.1-205	0.44	0.62	0.51	0.33	0.32	0.815	1.63
Stand-by	110.1-205	0.56	0.38	0.48	0.60	0.46	0.815	1.63


### H-Field Strength at 20 cm surrounding the EUT

Battery power	Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (A/m)	Limits Test (A/m)
1%	110.1-205	0.024	0.046	0.052	0.036	0.046	0.815	1.63
50%	110.1-205	0.30	0.39	0.29	0.29	0.46	0.815	1.63
99%	110.1-205	0.48	0.66	0.55	0.37	0.36	0.815	1.63
Stand-by	110.1-205	0.46	0.28	0.38	0.50	0.36	0.815	1.63

Note: (1)All the situation(full load, half load and empty load) has been tested, only the worst situation (full load 15W) was recorded in the report.

# APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of MPE Measurement

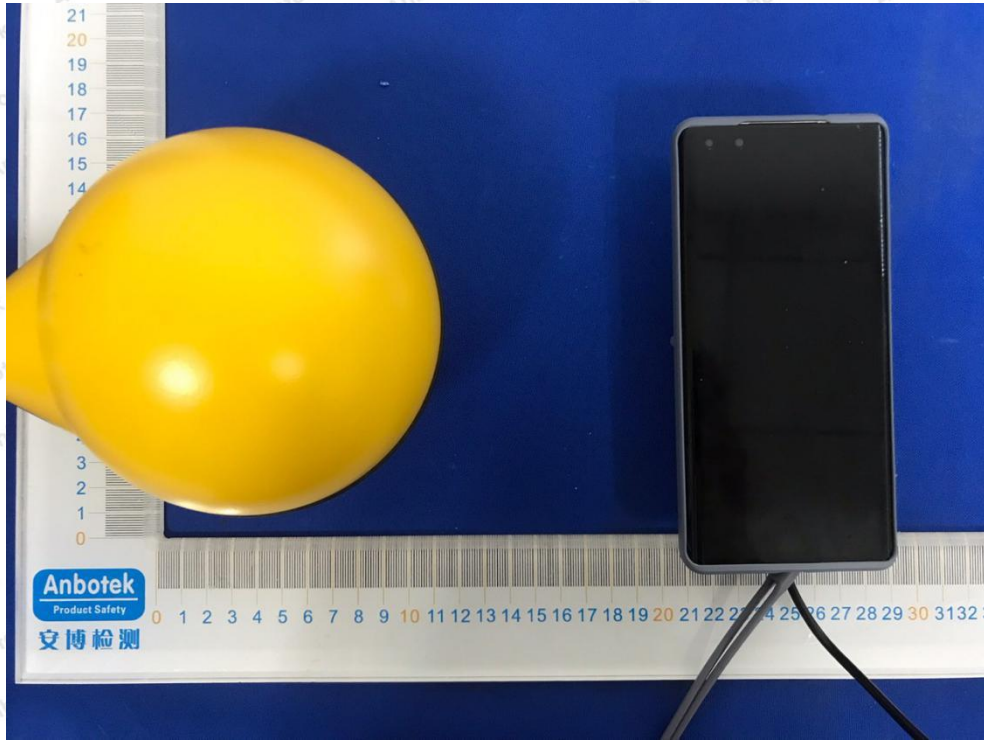



----- End of Report -----