

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM140700391403  
Page: 1 of 108

## FCC REPORT

**Application No:** SZEM1407003914RF  
**Applicant:** HuiKe Electronics(shenzhen)Co., Ltd.  
**Manufacturer:** HuiKe Electronics(shenzhen)Co., Ltd.  
**Factory:** HuiKe Electronics(shenzhen)Co., Ltd.  
**Product Name:** Tablet  
**Model No.(EUT):** M10BK  
**Add Model No.:** M10XX (first "X" can be A-Z, second "X" can be A-Z)  
(except M10BK)  
**Trade mark:** MONSTER  
**FCC ID:** ZFN-M10  
**Standards:** 47 CFR Part 15, Subpart C (2013)  
**Date of Receipt:** 2014-07-28  
**Date of Test:** 2014-08-04 to 2014-09-15  
**Date of Issue:** 2014-09-16

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2014-09-16		Original

Authorized for issue by:			
Tested By		 (Back Huang) /Project Engineer	2014-09-15
Prepared By		 (Linlin Lv) /Clerk	2014-09-16
Checked By		 (Emen Li) /Reviewer	2014-09-19

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
<b>Power Spectral Density</b>	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: M10XX (first "X" can be A-Z, second "X" can be A-Z)

Only the model M10BK was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model No. and color of enclosure.

## 4 Contents

	Page
1 COVER PAGE .....	1
2 VERSION.....	2
3 TEST SUMMARY .....	3
4 CONTENTS .....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS.....	7
5.5 TEST LOCATION .....	7
5.6 TEST FACILITY .....	8
5.7 DEVIATION FROM STANDARDS.....	8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	8
5.10 EQUIPMENT LIST .....	9
6 TEST RESULTS AND MEASUREMENT DATA.....	12
6.1 ANTENNA REQUIREMENT .....	12
6.2 CONDUCTED EMISSIONS .....	13
6.3 CONDUCTED PEAK OUTPUT POWER & AVERAGE OUTPUT POWER.....	17
6.4 6dB OCCUPY BANDWIDTH.....	31
6.5 POWER SPECTRAL DENSITY .....	38
6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	45
6.7 RF CONDUCTED SPURIOUS EMISSIONS .....	49
6.8 RADIATED SPURIOUS EMISSIONS.....	68
6.8.1 <i>Radiated emission below 1GHz</i> .....	71
6.8.2 <i>Transmitter emission above 1GHz</i> .....	73
6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	83-108

## 5 General Information

### 5.1 Client Information

Applicant:	HuiKe Electronics (shenzhen) Co., Ltd.
Address of Applicant:	Huike industrial park, Minying industrial park, Shuitian country, Shiyuan, Baoan District, Shenzhen, China
Manufacturer:	HuiKe Electronics (shenzhen) Co., Ltd.
Address of Manufacturer:	Huike industrial park, Minying industrial park, Shuitian country, Shiyuan, Baoan District, Shenzhen, China
Factory:	HuiKe Electronics (shenzhen) Co., Ltd.
Address of Factory:	Huike industrial park, Minying industrial park, Shuitian country, Shiyuan, Baoan District, Shenzhen, China

### 5.2 General Description of EUT

Product Name:	Tablet	
Model No.:	M10XX (first "X" Can be A-Z, second "X" Can be A-Z)	
Trade Mark:	MONSTER	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz	
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels	
Channel Separation:	5MHz	
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)	
Sample Type:	Portable production	
Antenna Type:	Integral	
Antenna Gain:	1.1dBi	
Power Supply:	AC adapter:	MODEL:TPA-915250UU  INPUT: 100-240V  50/60Hz 0.4A  OUTPUT:5.0V 2500mA
	Lithium polymer battery:DC 3.7V	
Test Voltage:	AC 120V 60Hz	
USB Cable:	100cm(Unshielded)	

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

### 5.3 Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	23.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s)
AC charge +Tx mode :	The EUT transmitted the continuous modulation test signal at the specific channel(s) and AC charge it.

### 5.4 Description of Support Units

The EUT has been tested independently.

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

## 5.7 Deviation from Standards

None.

## 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.

## 5.10 Equipment List

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16






RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04

RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24

Note: The calibration interval is one year, all the instruments are valid.


## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

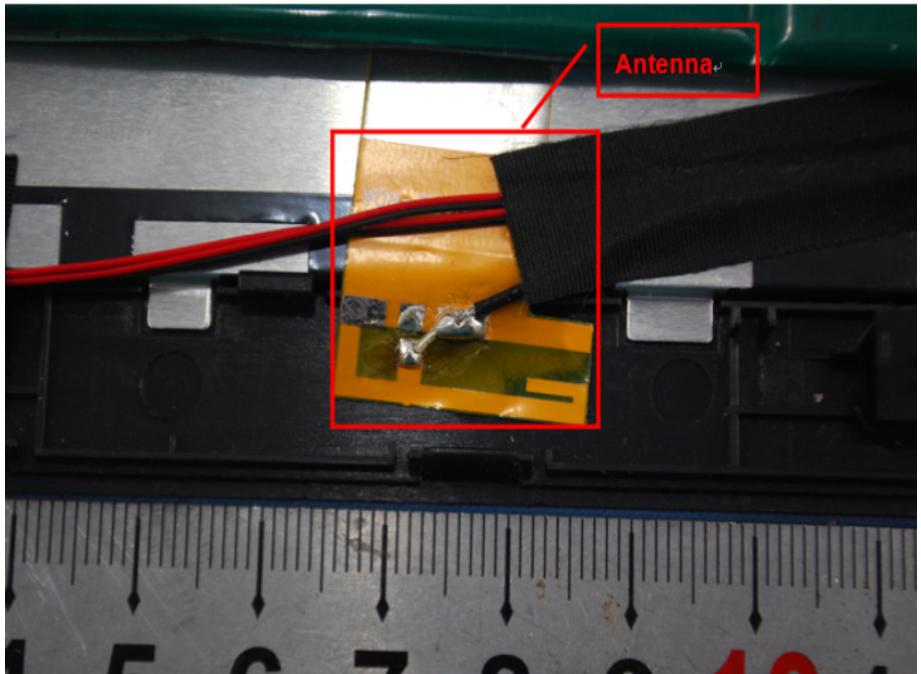Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.203 requirement:  An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	 <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.1dBi.</p>

## 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2009					
Test Frequency Range:	150kHz to 30MHz					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak	Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test Procedure:	<ol style="list-style-type: none"><li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li><li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li><li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li><li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li><li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</li></ol>					

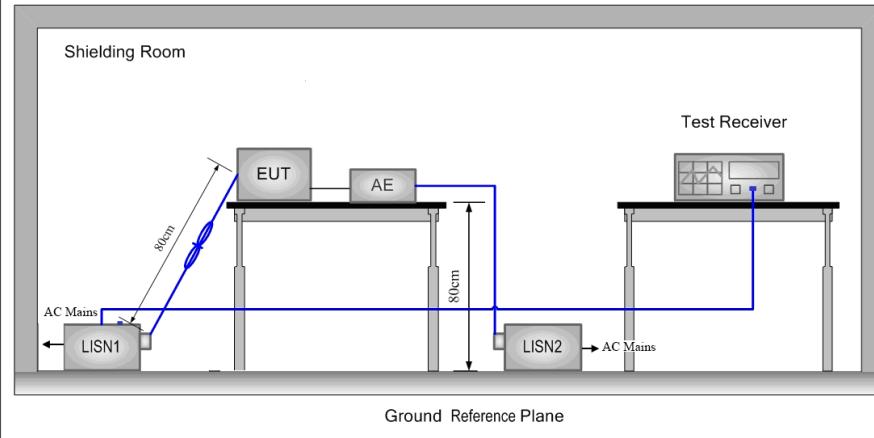
Test Setup:	
Test Mode:	AC charge + Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

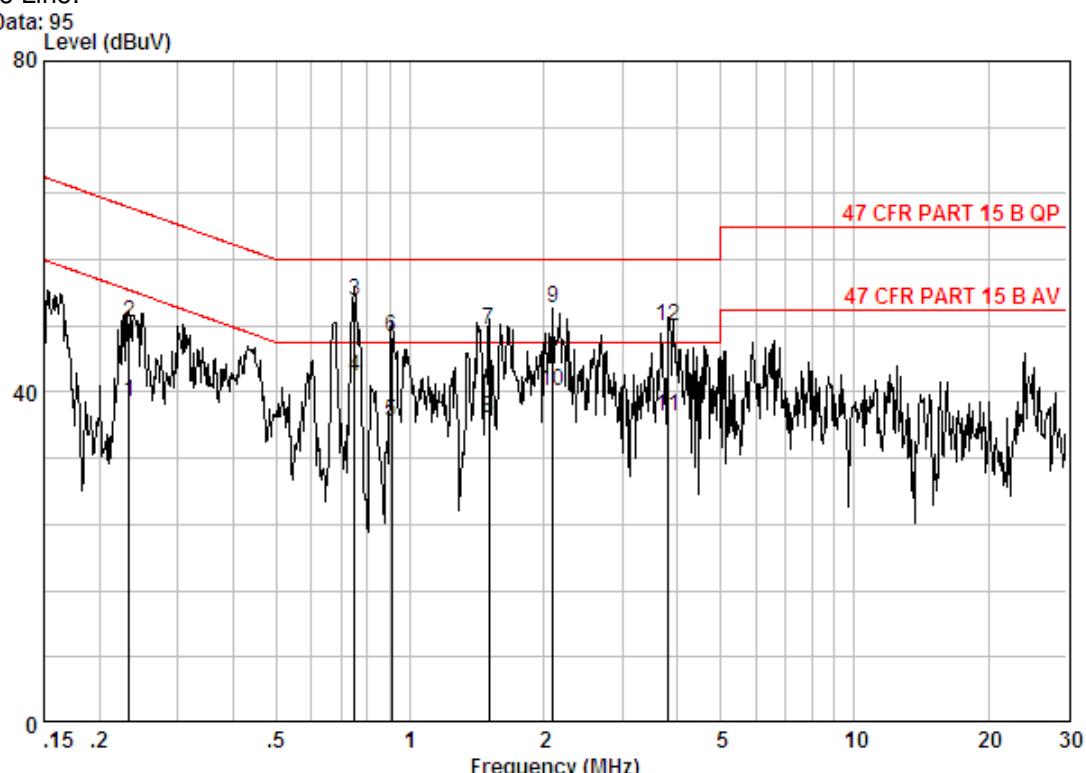

Site : Shielding Room  
Condition : 47 CFR PART 15 B QP CE LINE  
Job No. : 3914RF  
Mode : AC charge + TX

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level				
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.23285	0.11	9.70	28.90	38.71	52.35	-13.64 Average
2	0.23285	0.11	9.70	38.64	48.45	62.35	-13.90 QP
3	0.75094	0.06	9.80	41.20	51.06	56.00	-4.94 QP
4	0.75094	0.06	9.80	32.00	41.86	46.00	-4.14 Average
5	0.90874	0.05	9.80	26.58	36.43	46.00	-9.57 Average
6	0.90874	0.05	9.80	36.69	46.54	56.00	-9.46 QP
7	1.503	0.05	9.80	37.65	47.50	56.00	-8.50 QP
8	1.503	0.05	9.80	27.05	36.90	46.00	-9.10 Average
9	2.099	0.06	9.81	40.20	50.07	56.00	-5.93 QP
10	2.099	0.06	9.81	30.26	40.13	46.00	-5.87 Average
11	3.820	0.16	9.87	27.03	37.06	46.00	-8.94 Average
12	3.820	0.16	9.87	37.85	47.88	56.00	-8.12 QP

## Neutral Line:

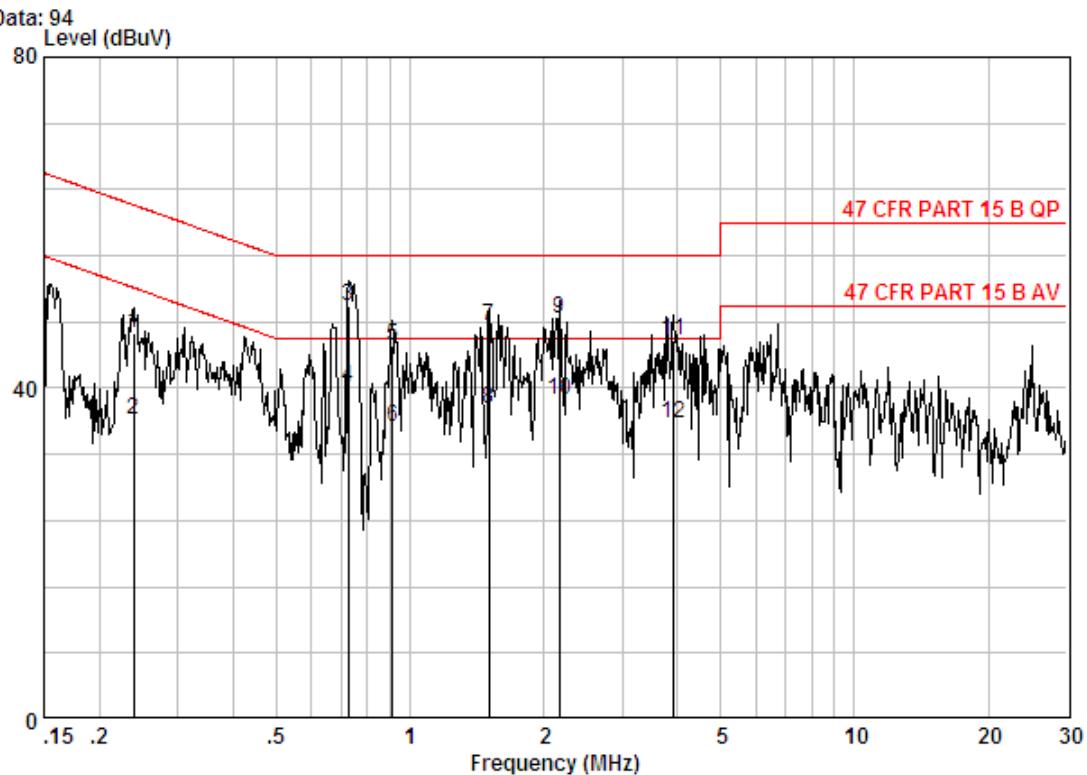


Site : Shielding Room  
Condition : 47 CFR PART 15 B QP CE NEUTRAL  
Job No. : 3914RF  
Mode : AC charge + TX

	Freq	Cable	LISN	Read	Limit	Over	Remark
		MHz	Loss	Factor	Level	Level	
1	0.23910	0.11	9.70	36.80	46.61	62.13	-15.52 QP
2	0.23910	0.11	9.70	26.43	36.24	52.13	-15.89 Average
3	0.72744	0.06	9.80	40.14	50.00	56.00	-6.00 QP
4	0.72744	0.06	9.80	30.27	40.13	46.00	-5.87 Average
5	0.91357	0.05	9.80	35.23	45.08	56.00	-10.92 QP
6	0.91357	0.05	9.80	25.39	35.24	46.00	-10.76 Average
7	1.503	0.05	9.80	37.57	47.42	56.00	-8.58 QP
8	1.503	0.05	9.80	27.64	37.49	46.00	-8.51 Average
9	2.167	0.07	9.81	38.60	48.48	56.00	-7.52 QP
10	2.167	0.07	9.81	28.69	38.57	46.00	-7.43 Average
11	3.901	0.16	9.87	35.85	45.89	56.00	-10.11 QP
12	3.901	0.16	9.87	25.67	35.70	46.00	-10.30 Average

## Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

### 6.3 Conducted Peak Output Power & Average Output power

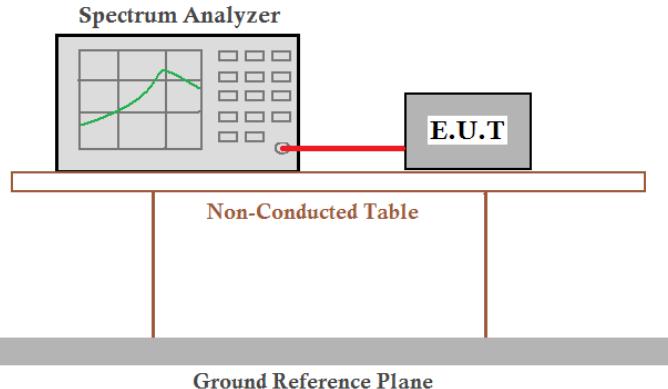Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	KDB558074 D01 v03r02
Test Setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	AC charge + Transmitting mode
Limit:	30dBm
Test Results:	Pass



Pre-scan under all rate at lowest channel 1								
Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	20.41	19.17	19.81	19.24				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	22.57	22.14	22.28	22.34	22.03	21.97	22.09	21.85
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	21.27	21.13	21.05	21.08	20.93	20.97	20.87	21.05

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).

**Conducted Peak output power:****Measurement Data**

802.11b mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.41	30.00	Pass
Middle	20.29	30.00	Pass
Highest	20.05	30.00	Pass

802.11g mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	22.57	30.00	Pass
Middle	22.42	30.00	Pass
Highest	22.18	30.00	Pass


  

802.11n(HT20)mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	21.27	30.00	Pass
Middle	21.06	30.00	Pass
Highest	20.81	30.00	Pass




**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

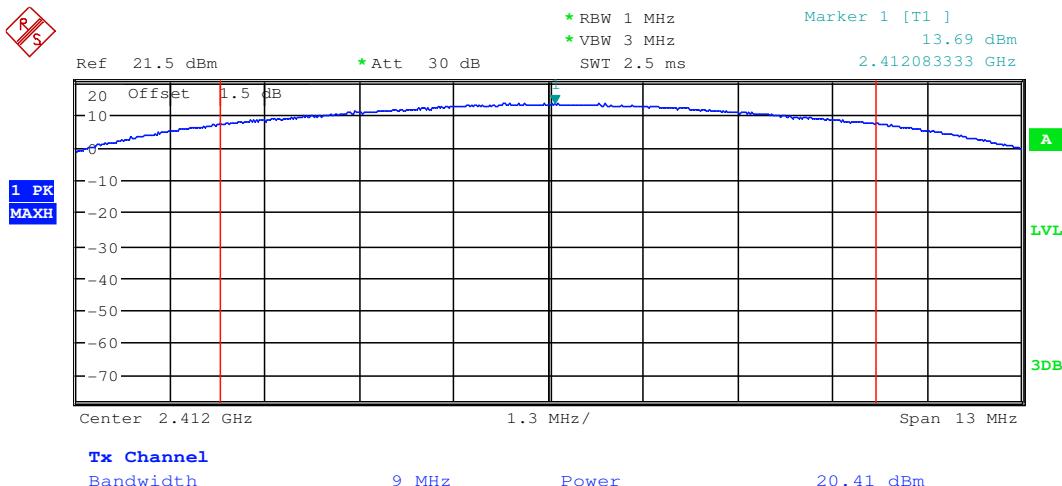


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

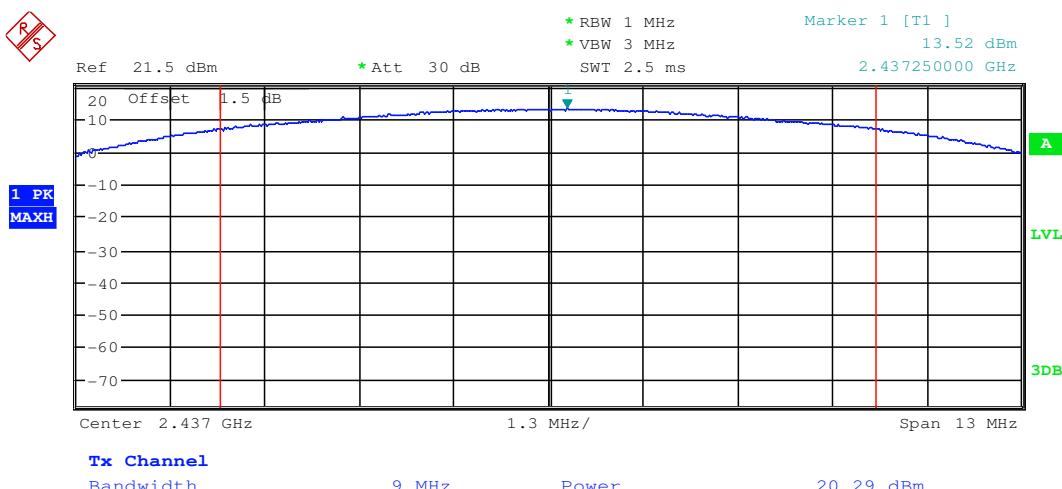


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

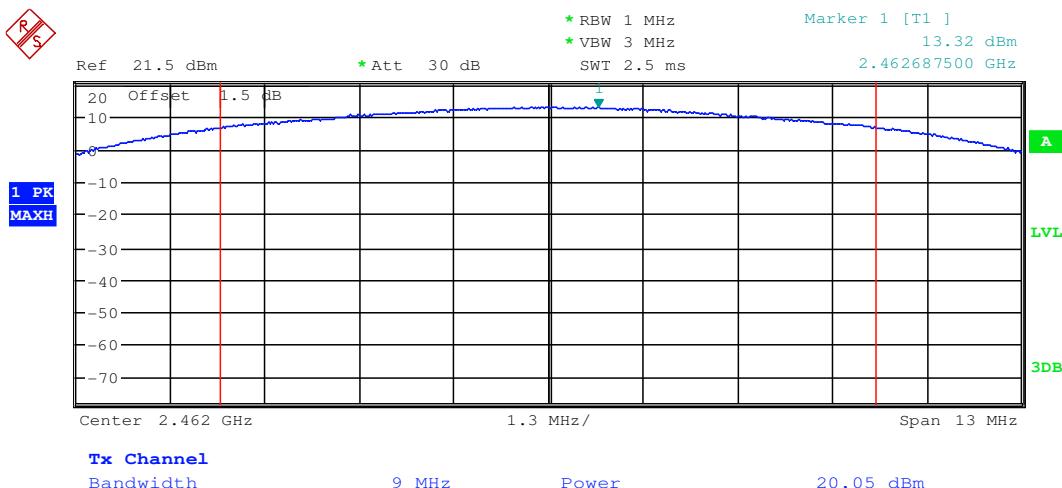


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

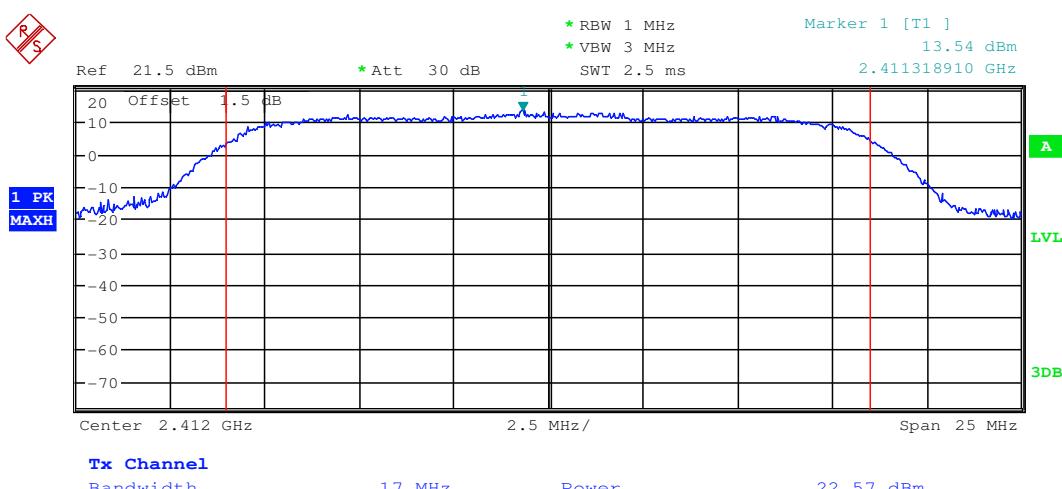


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

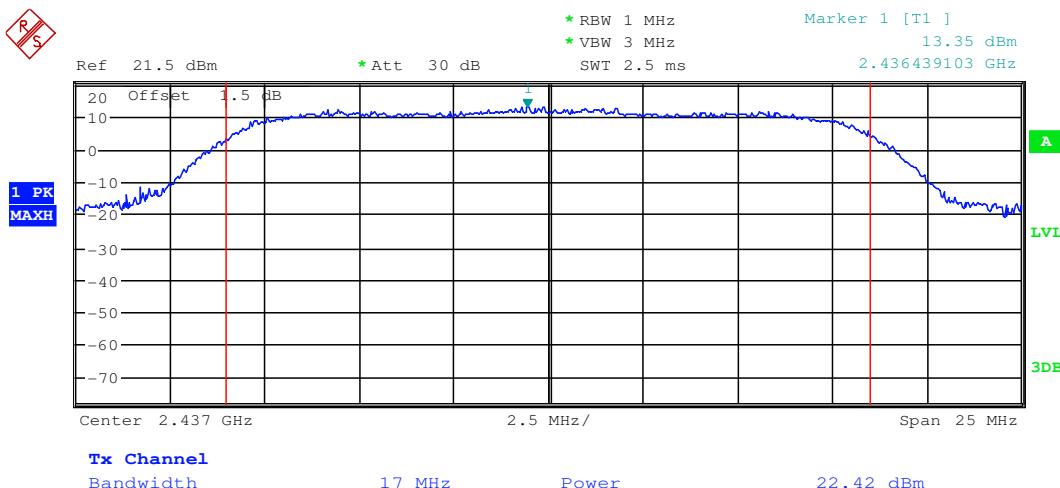


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

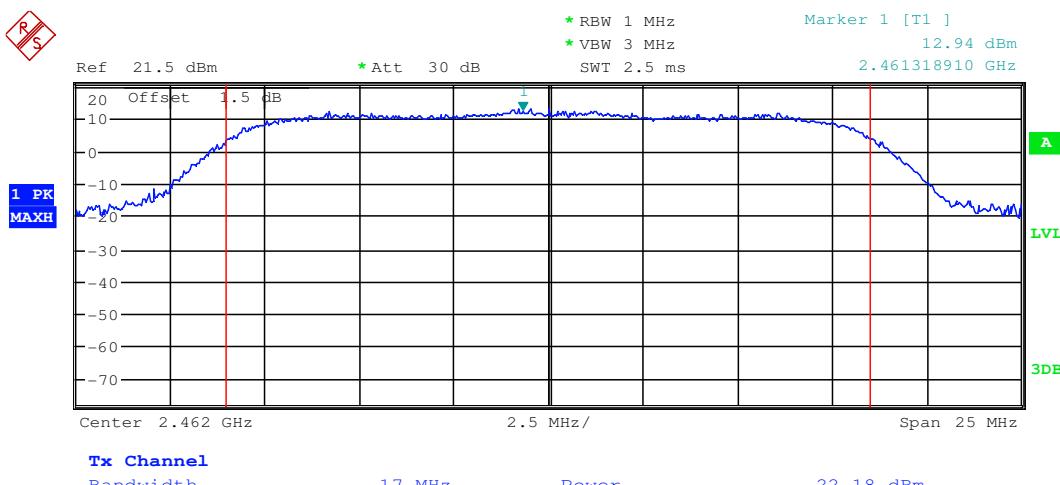


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

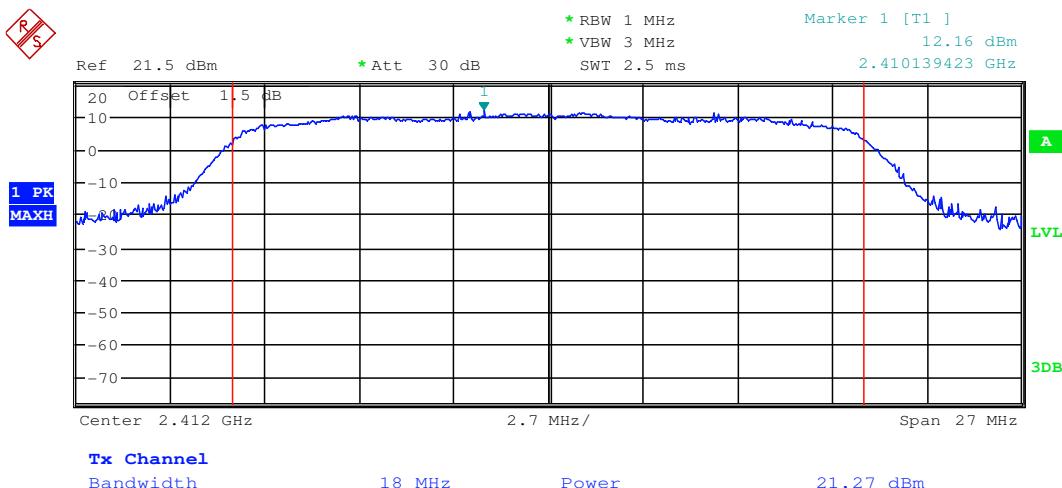

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

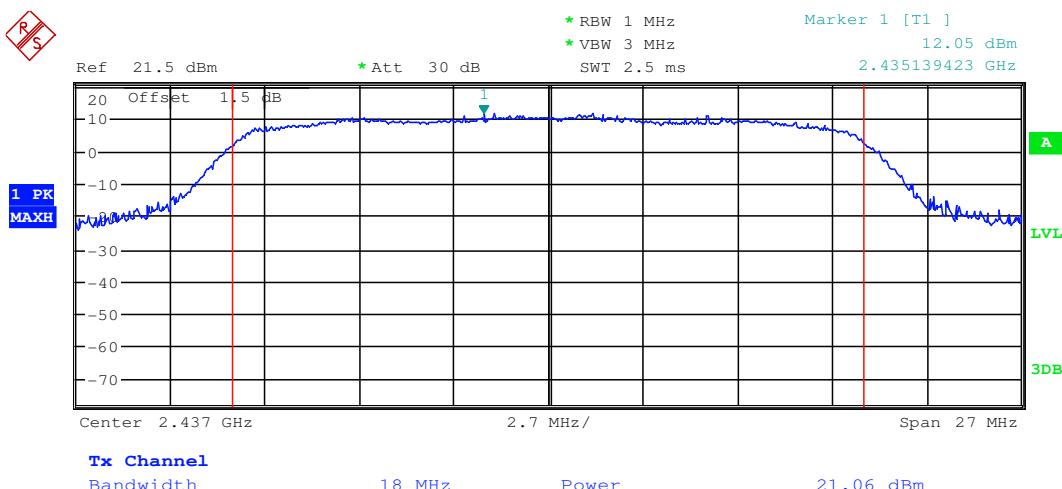

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

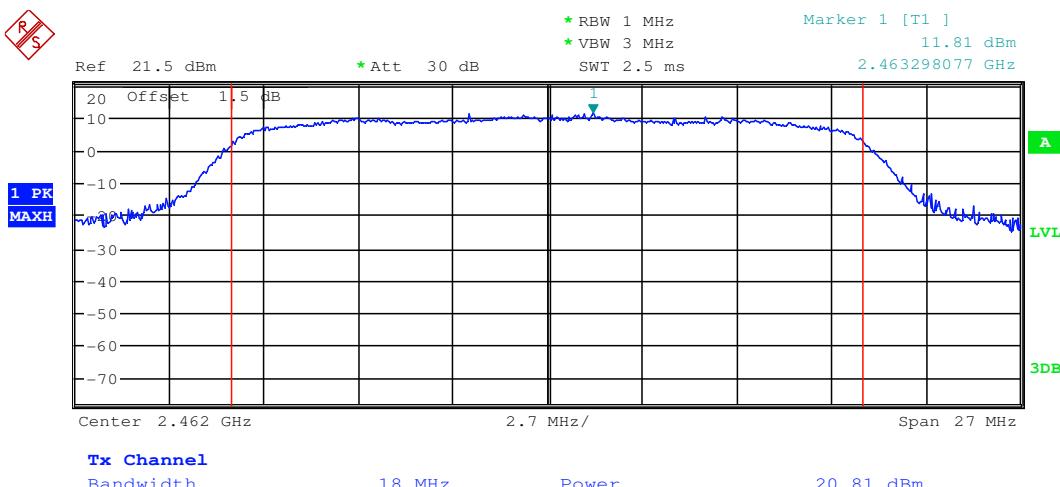


**Conducted Average Output power:****Measurement Data**


Wi-Fi	Average Power (dBm) for Data Rates (Mbps)								
2450MHz	Channel	1	2	5.5	11	/	/	/	/
802.11b	1	14.35	13.11	13.75	13.18	/	/	/	/
	6	14.05	13.86	13.54	13.72	/	/	/	/
	11	13.82	14.12	14.28	13.97	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	1	12.16	11.72	11.86	11.96	11.64	11.58	11.59	11.51
	6	12.41	12.14	12.17	12.19	12.06	11.93	11.97	11.82
	11	12.58	12.08	12.22	12.28	11.97	11.91	12.03	11.79
802.11n (HT20)	Channel	6.5	13	19.5	26	39	52	58.5	65
	1	11.06	10.93	10.71	10.87	11.66	11.64	11.52	11.68
	6	11.39	11.28	11.24	11.27	11.19	11.21	11.08	11.29
	11	11.64	11.41	11.33	11.36	11.21	11.25	11.15	11.33

**Test plot as follows:**

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

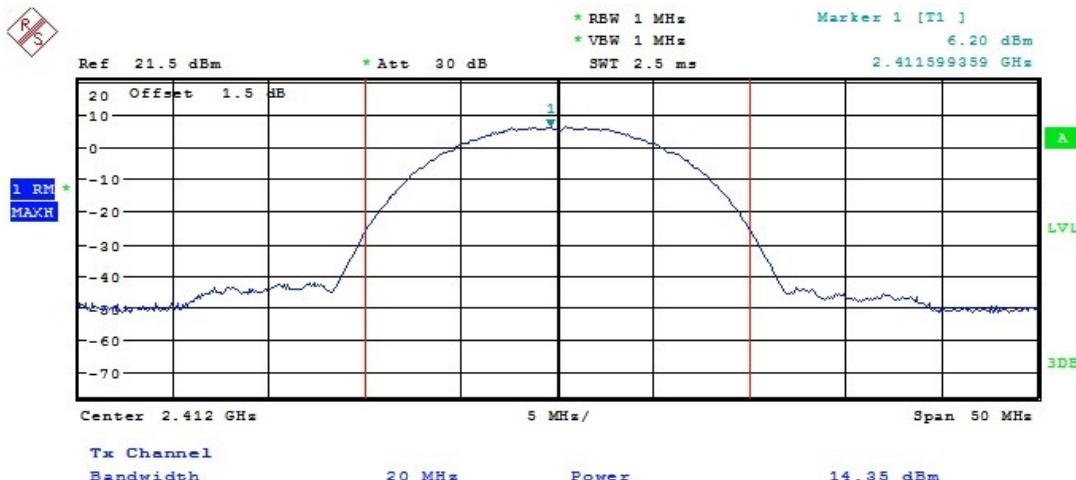


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

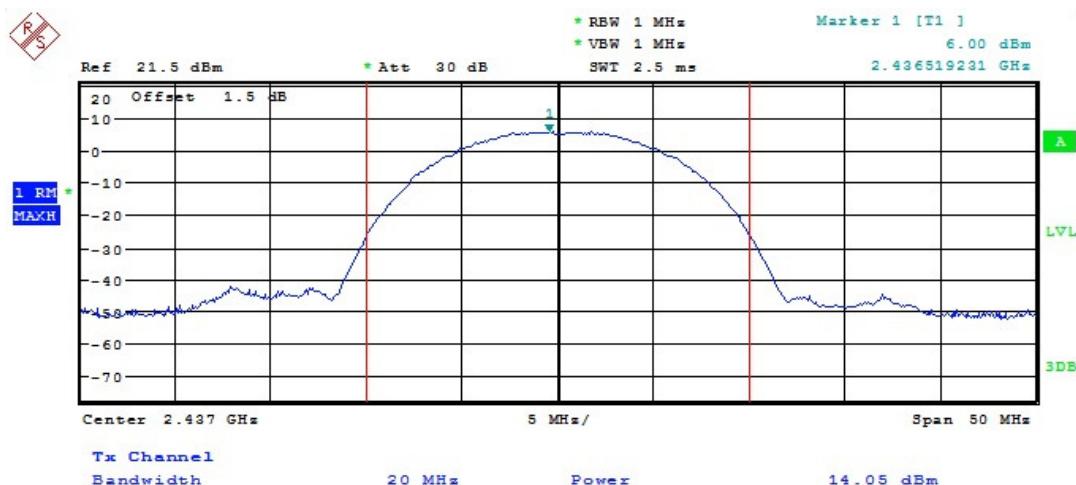


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------




Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

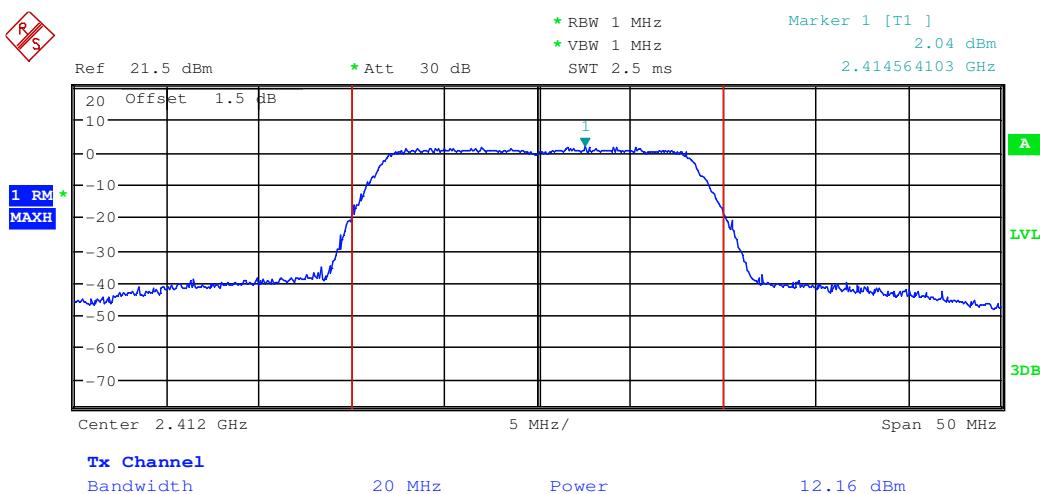


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

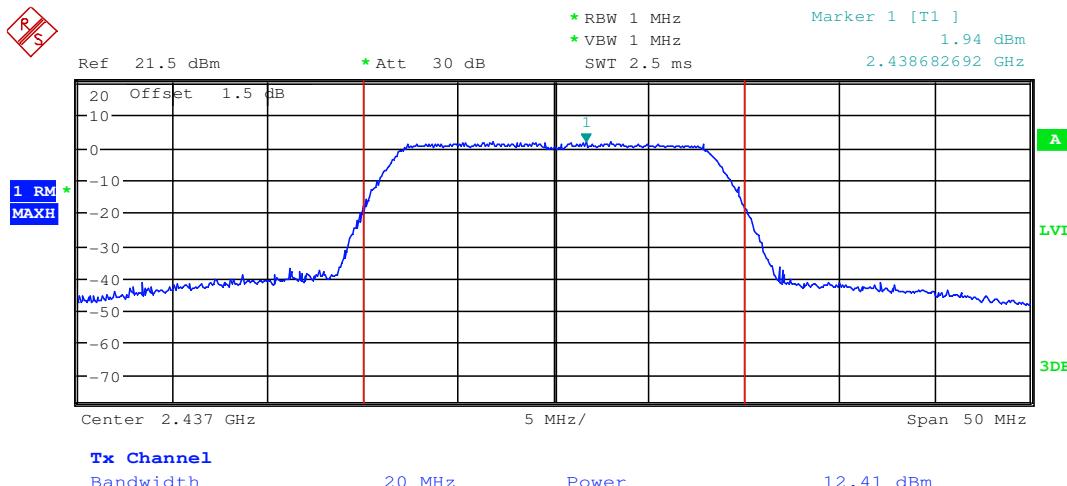


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

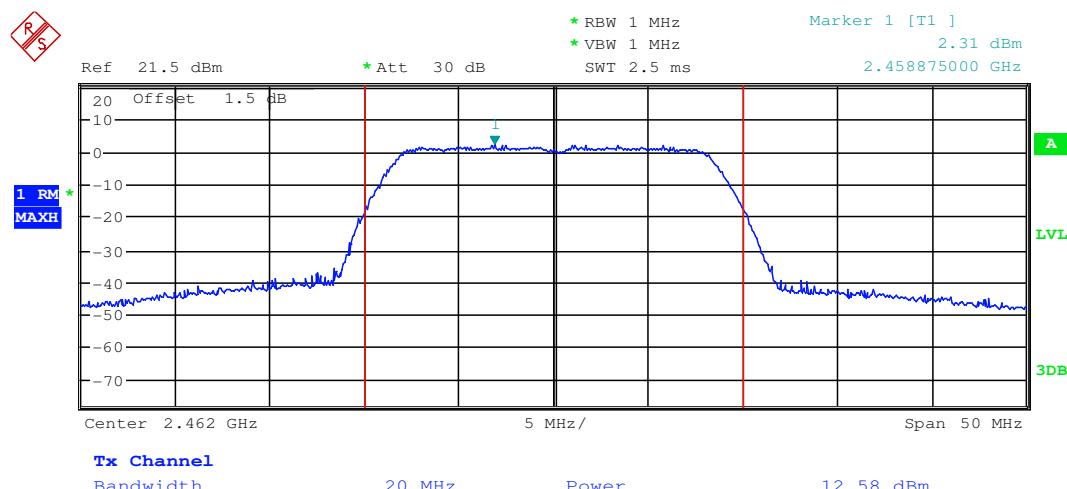


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

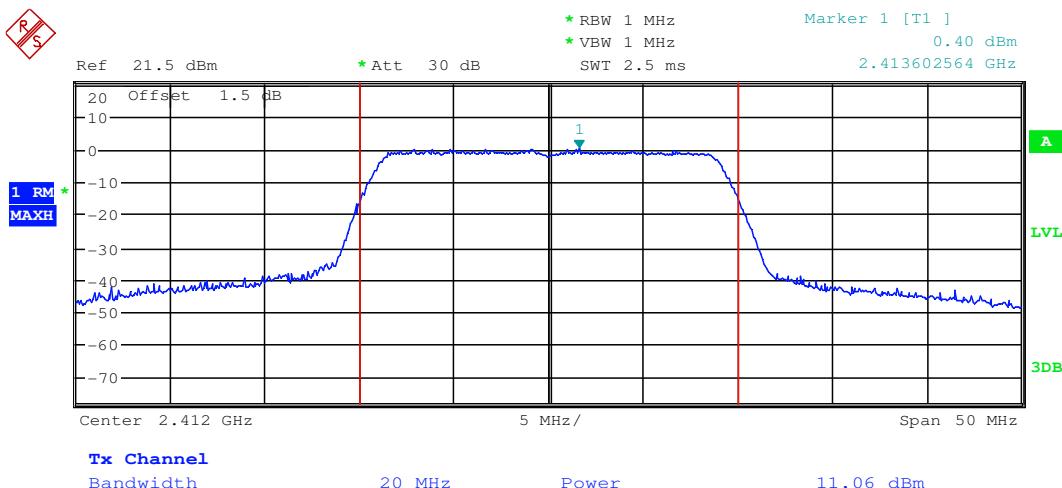


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

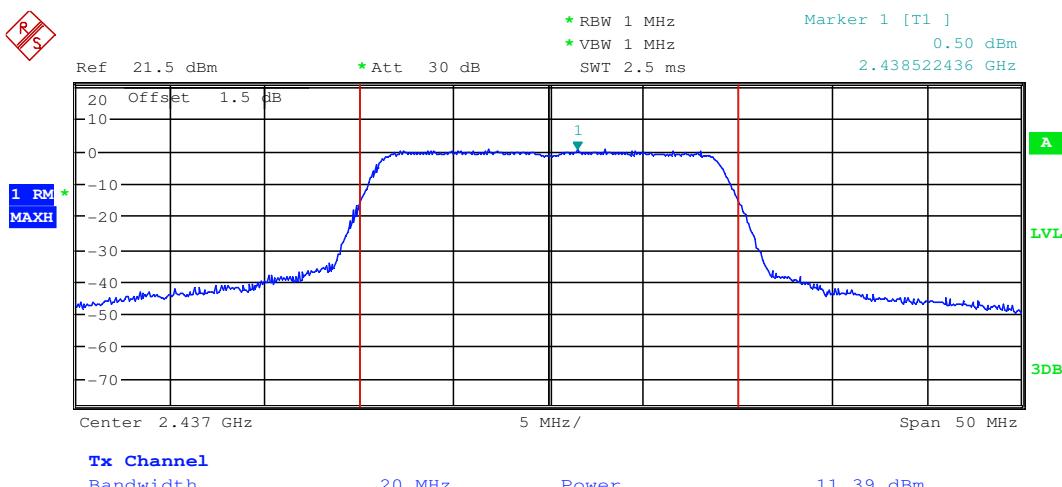

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

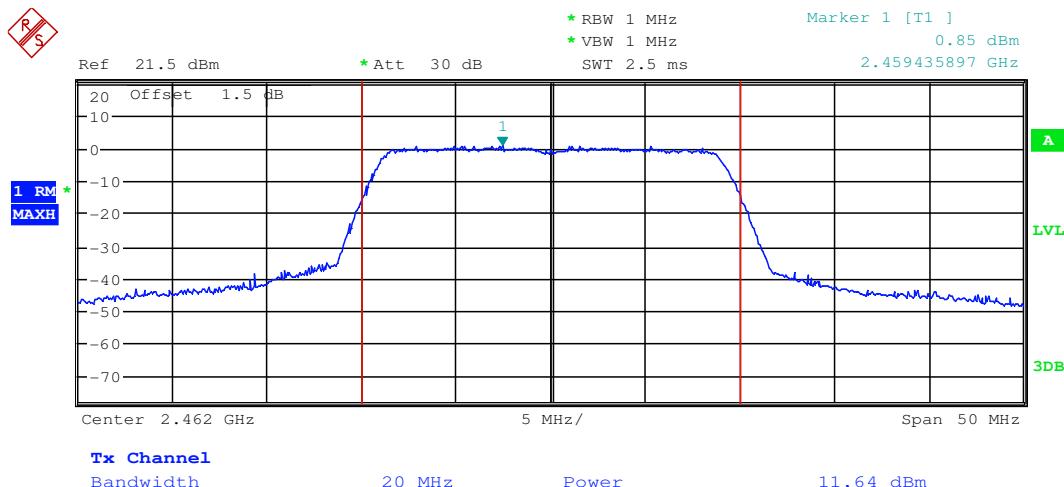

## 6.4 6dB Occupy Bandwidth

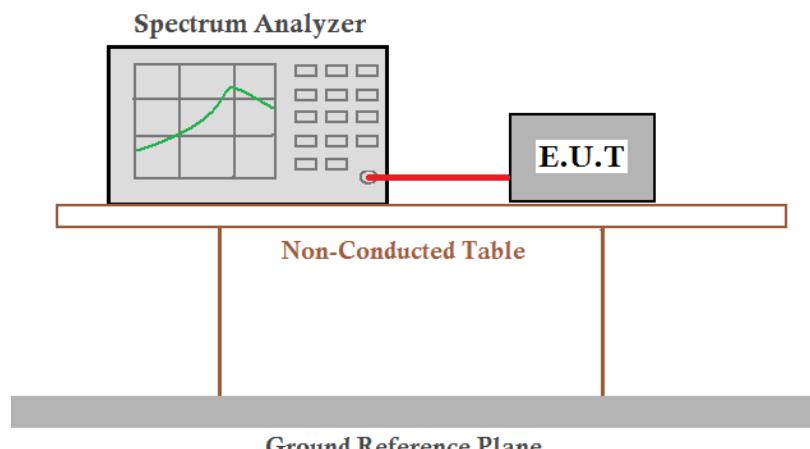Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	KDB558074 D01 v03r02
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Test Mode:	AC charge + Transmitting mode
Limit:	$\geq 500$ kHz
Test Results:	Pass

**Measurement Data**

802.11b mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	8.125	≥500	Pass
Middle	8.125	≥500	Pass
Highest	8.125	≥500	Pass


802.11g mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	16.538	≥500	Pass
Middle	16.490	≥500	Pass
Highest	16.490	≥500	Pass


802.11n(HT20) mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	17.692	≥500	Pass
Middle	17.740	≥500	Pass
Highest	17.692	≥500	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

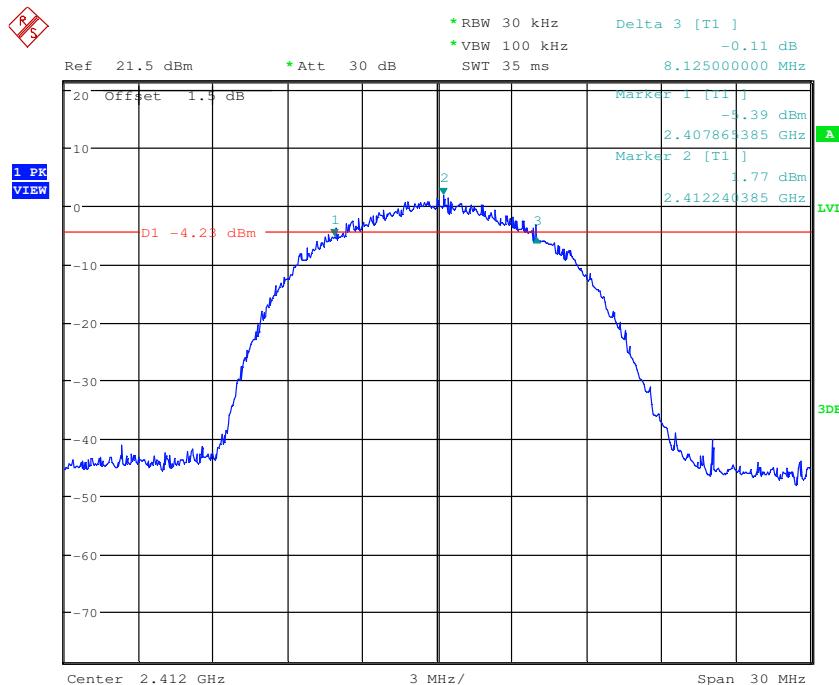


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

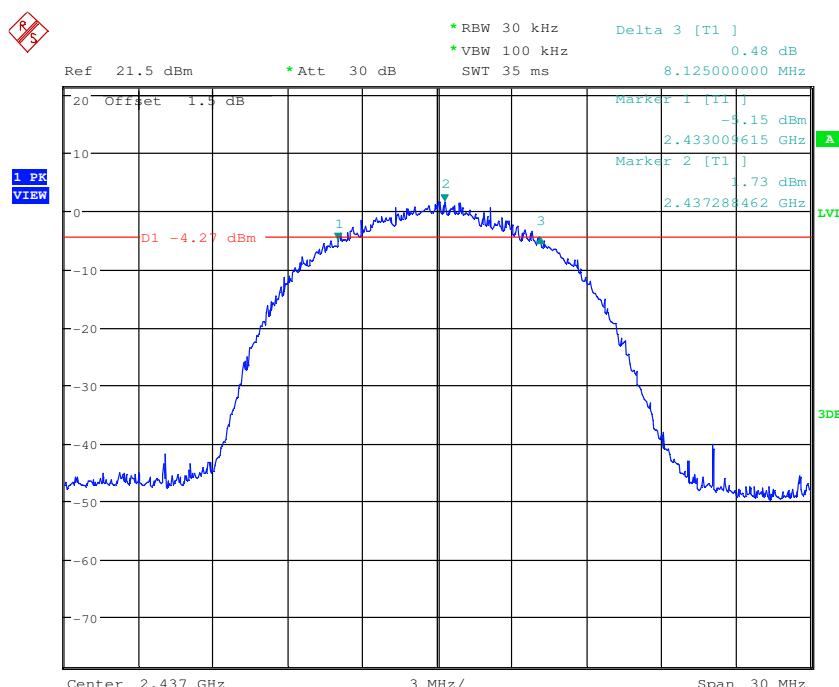


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

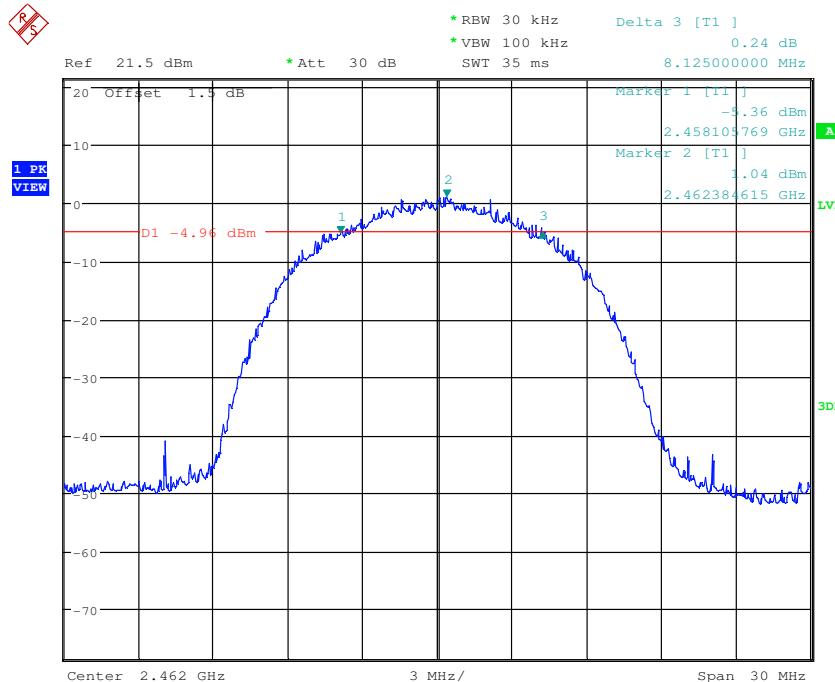


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

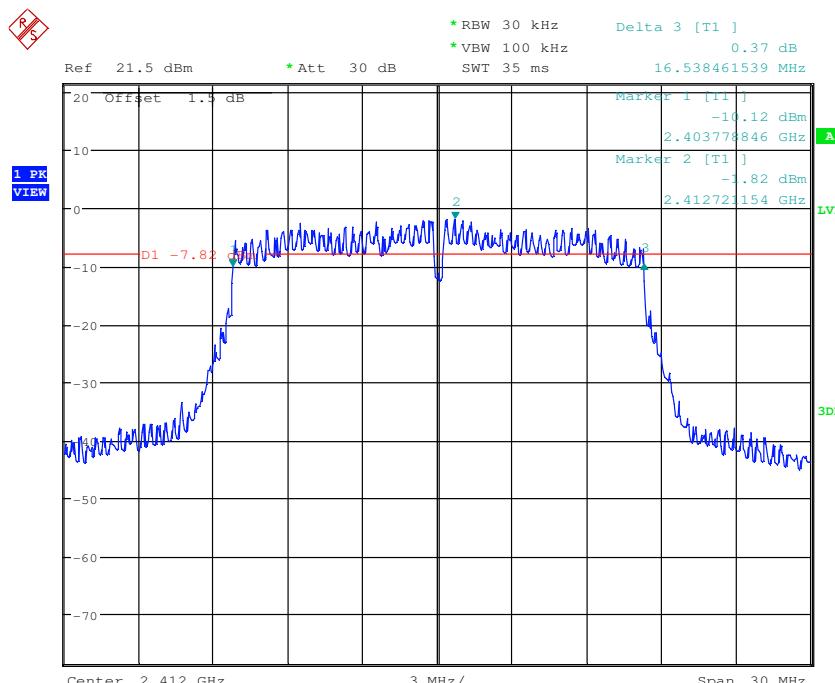


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

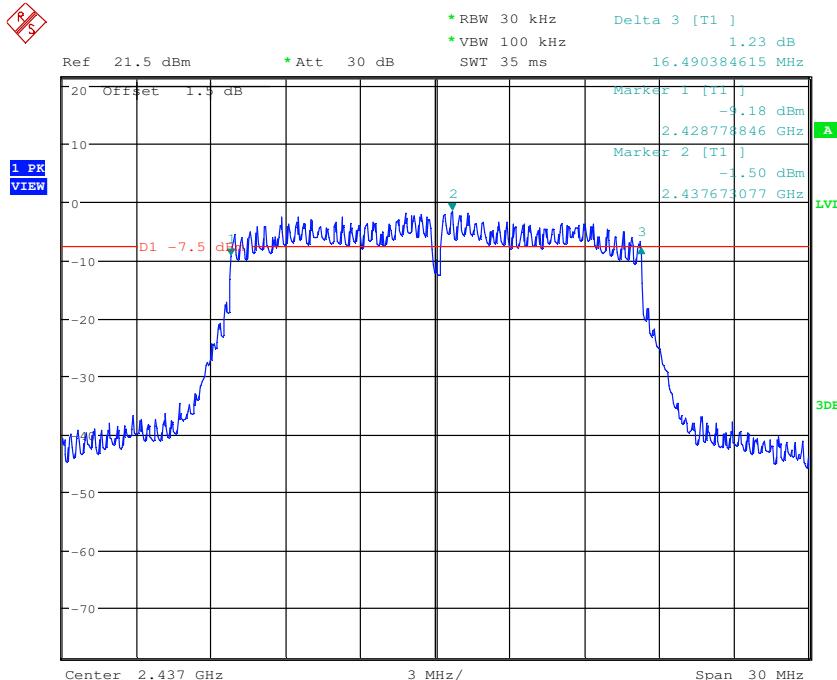


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

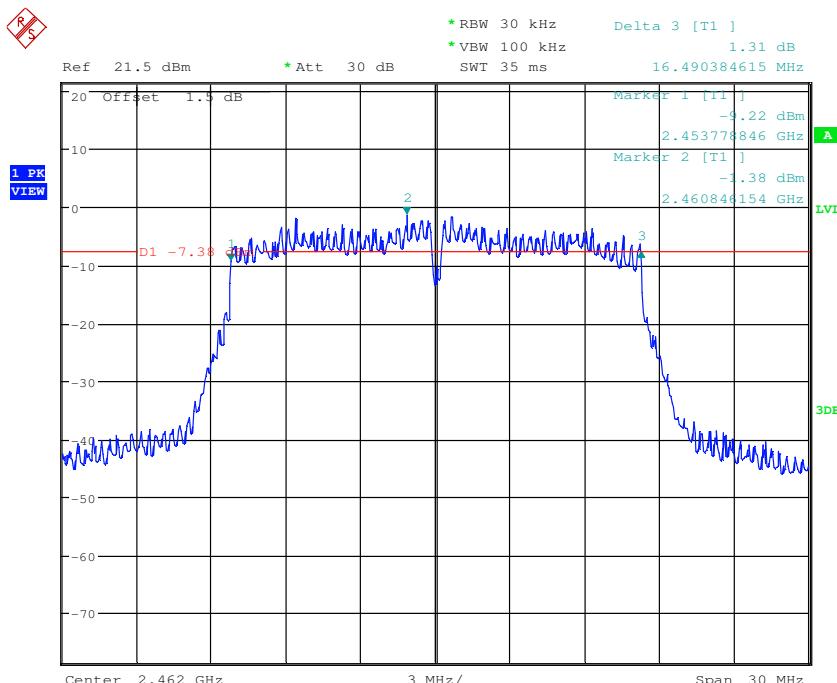


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

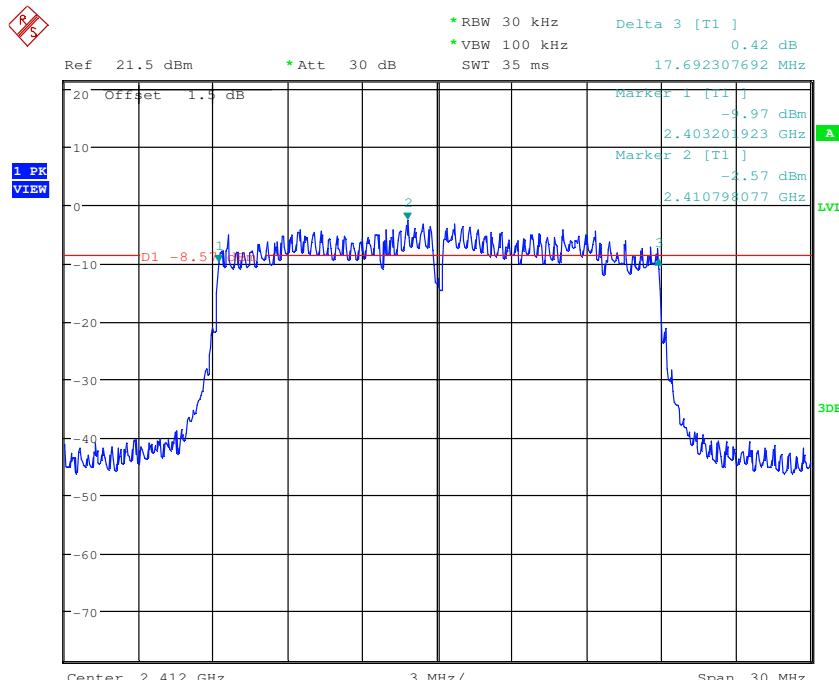


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

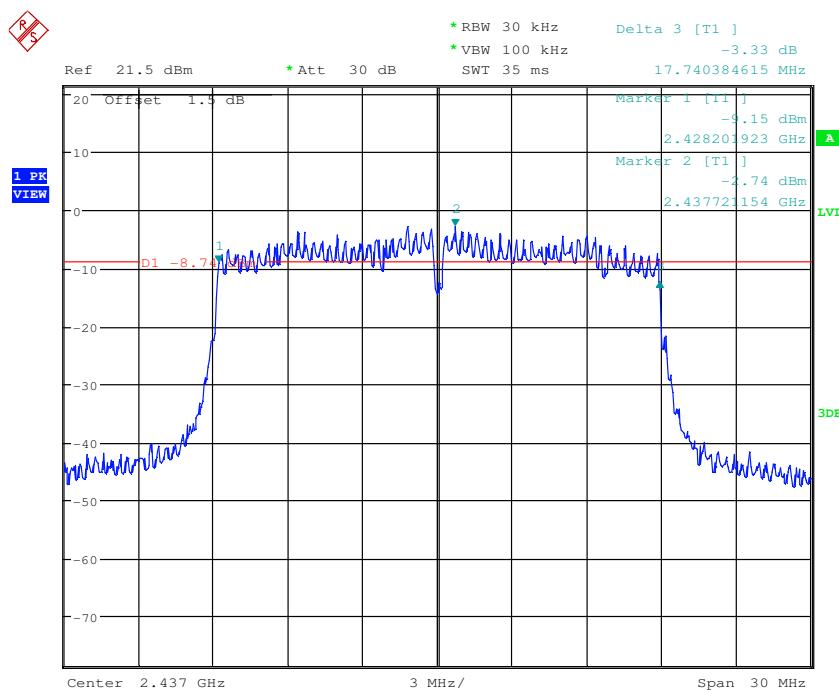

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

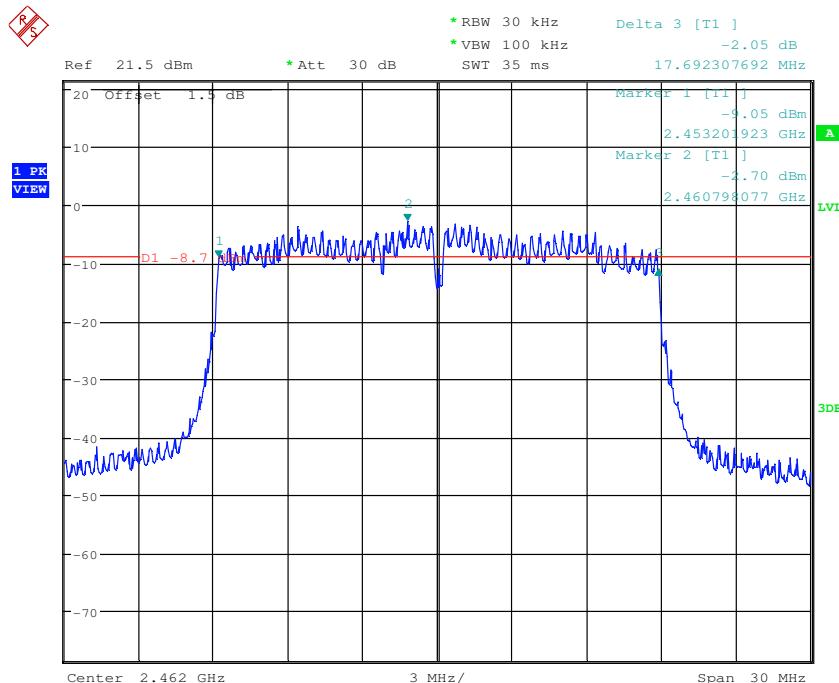

## 6.5 Power Spectral Density

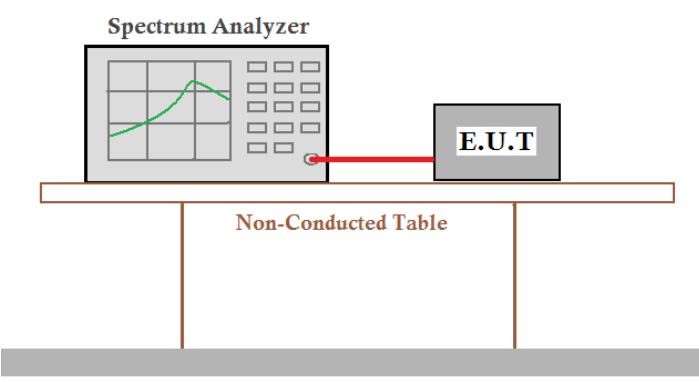Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	KDB558074 D01 v03r02
Test Setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 5.10 for details
Test Mode:	AC charge + Transmitting mode
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

**Measurement Data**

802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-10.56	≤8.00	Pass
Middle	-9.80	≤8.00	Pass
Highest	-8.94	≤8.00	Pass

802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-14.45	≤8.00	Pass
Middle	-14.19	≤8.00	Pass
Highest	-15.50	≤8.00	Pass


  

802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-16.62	≤8.00	Pass
Middle	-16.21	≤8.00	Pass
Highest	-16.40	≤8.00	Pass




**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

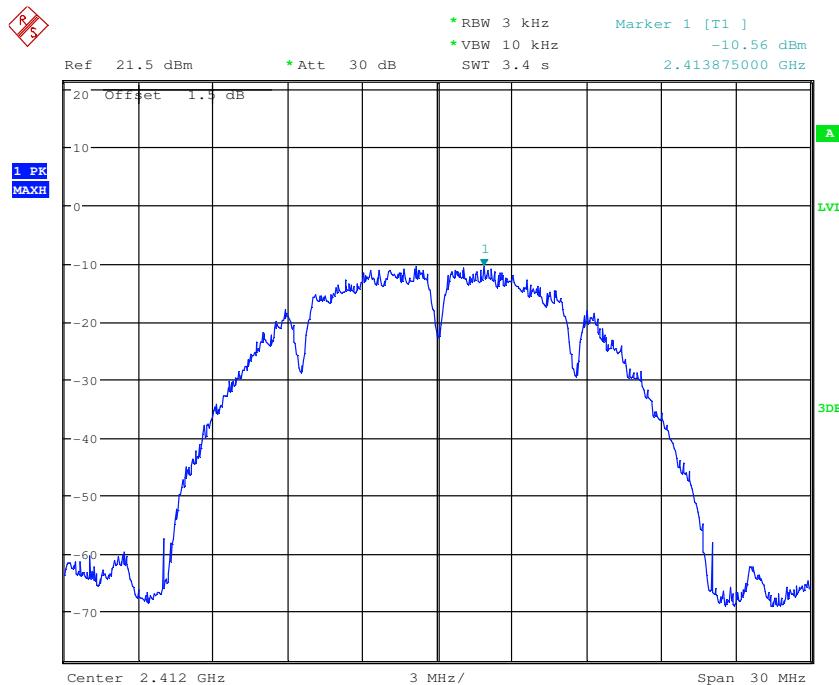


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

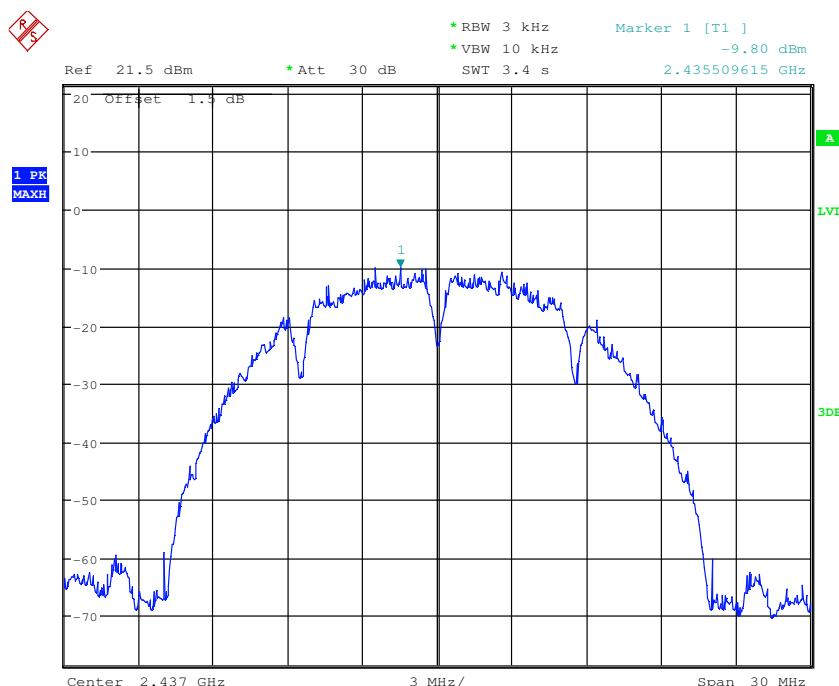


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

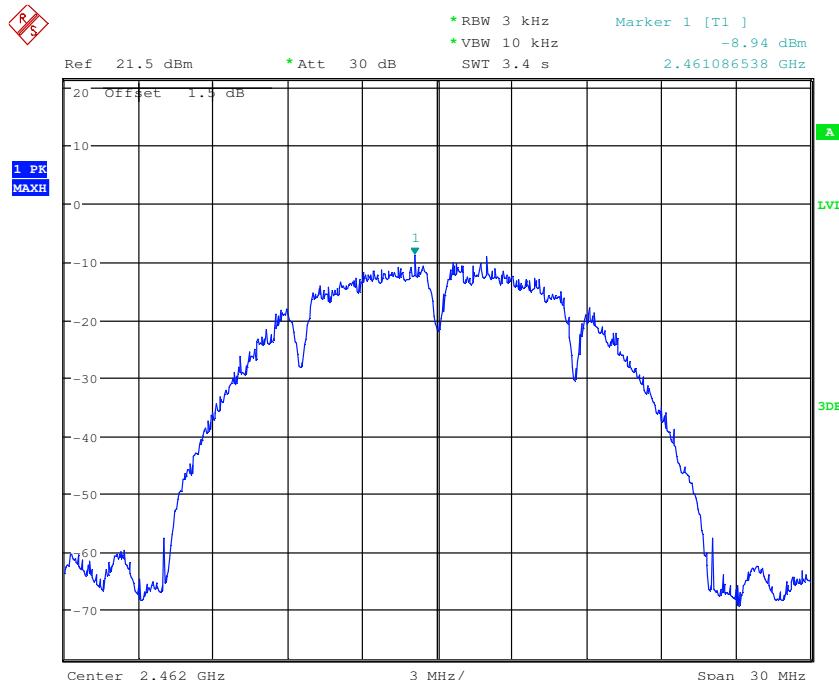


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

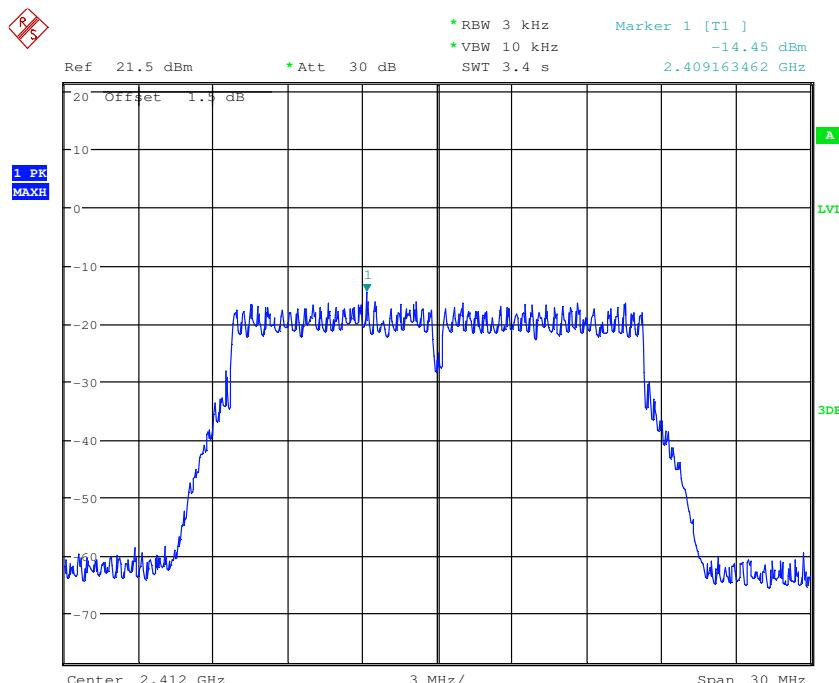


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

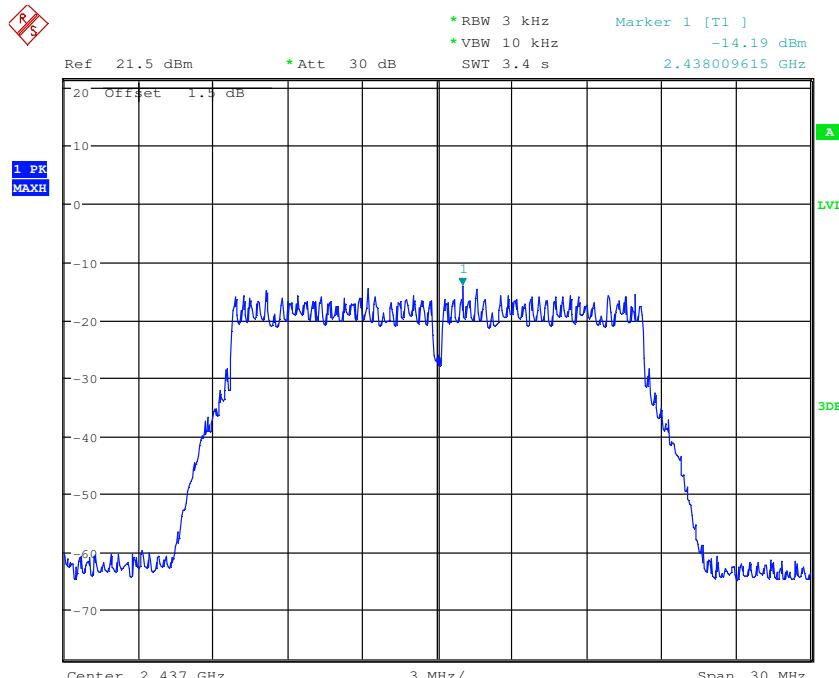


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

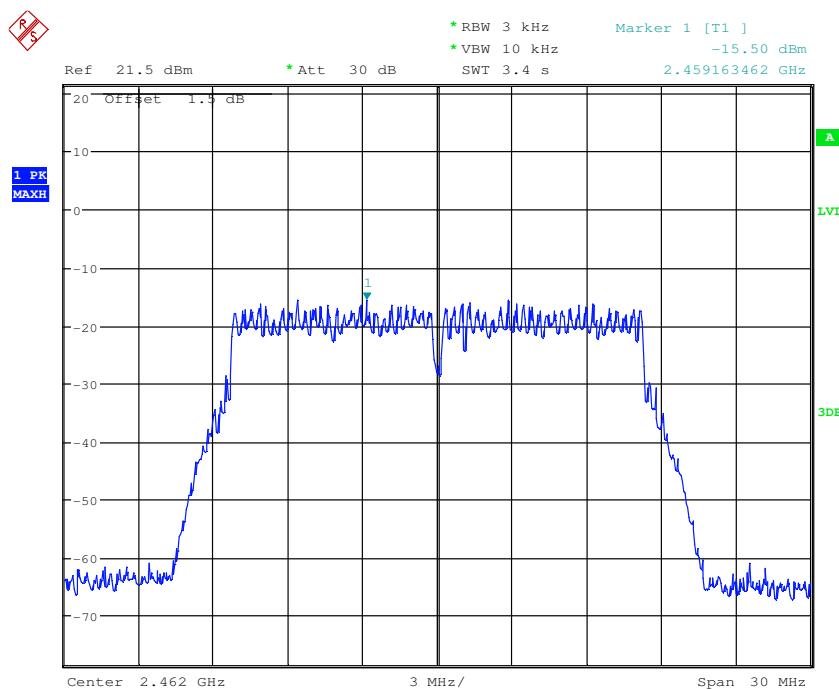


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

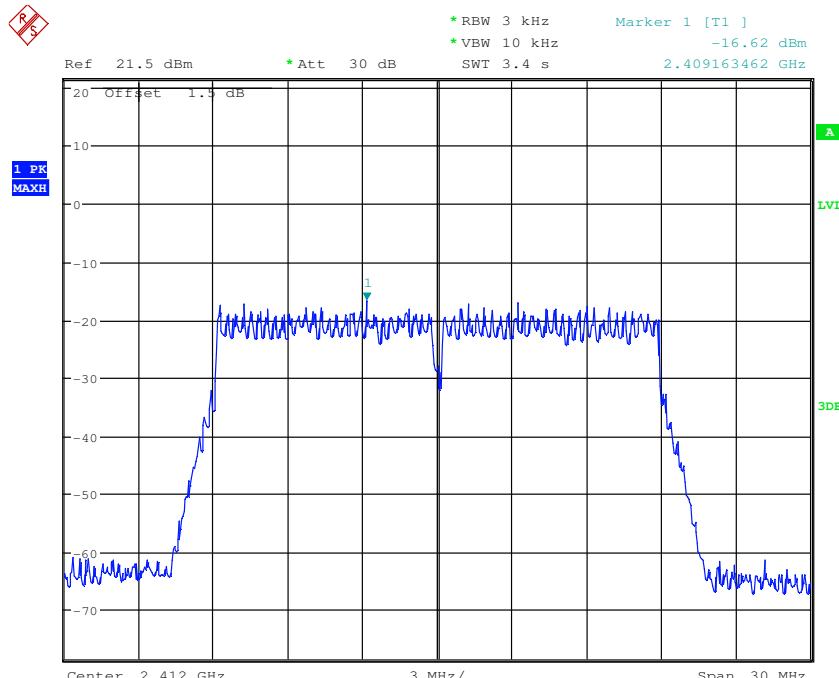


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

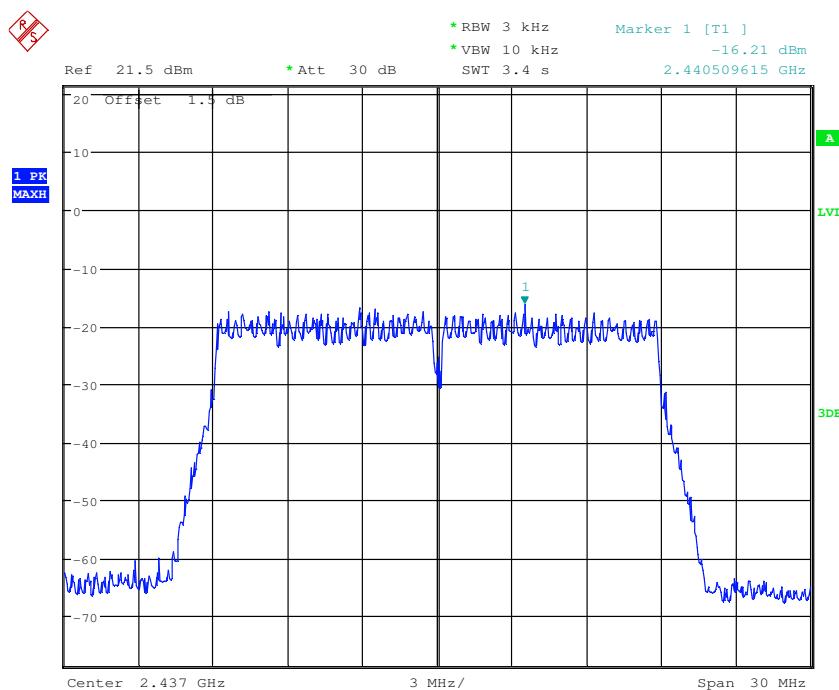

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

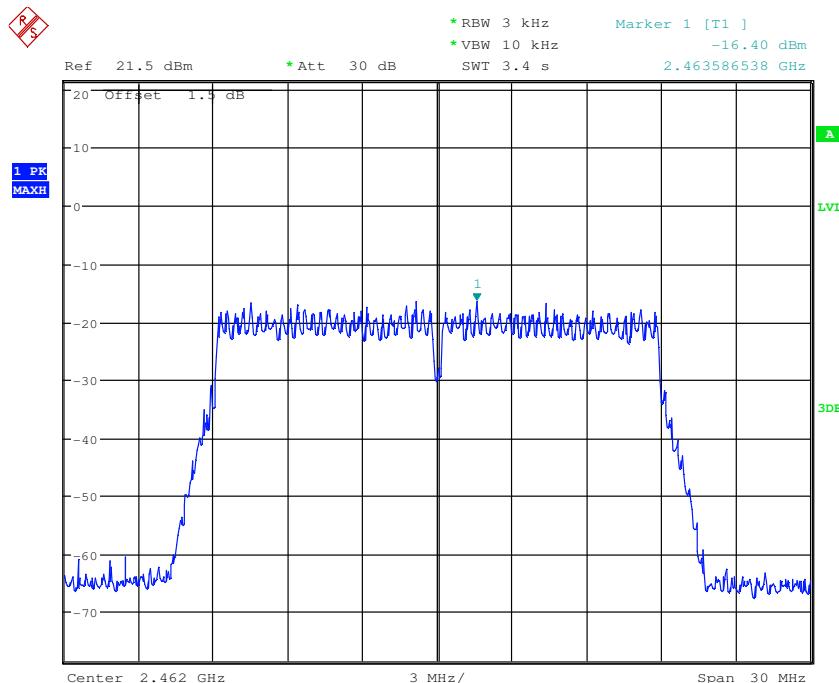


## 6.6 Band-edge for RF Conducted Emissions

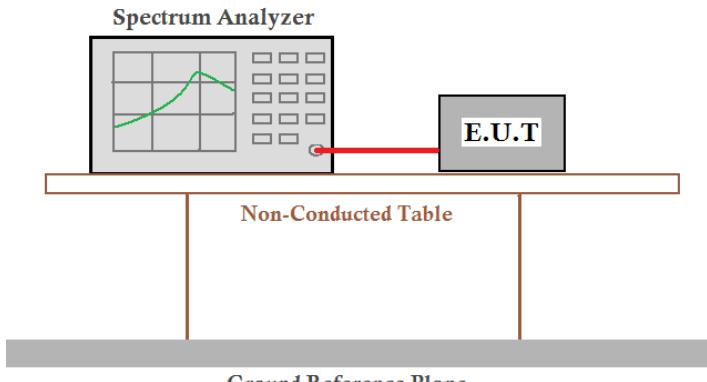
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	 <p>The diagram illustrates the test setup for RF Conducted Emissions. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a red cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Remark:	<i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i>
Test Mode:	AC charge + Transmitting mode
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

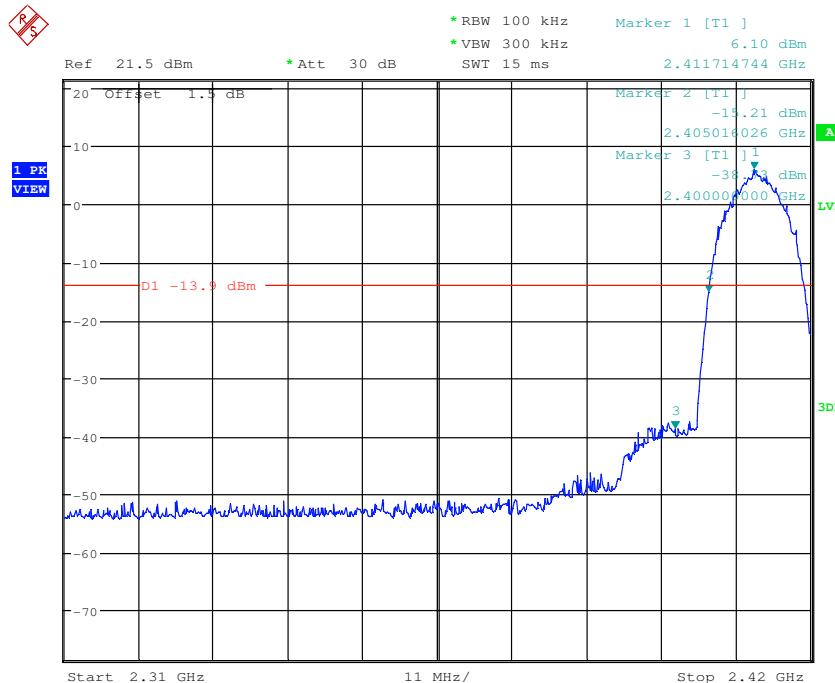


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

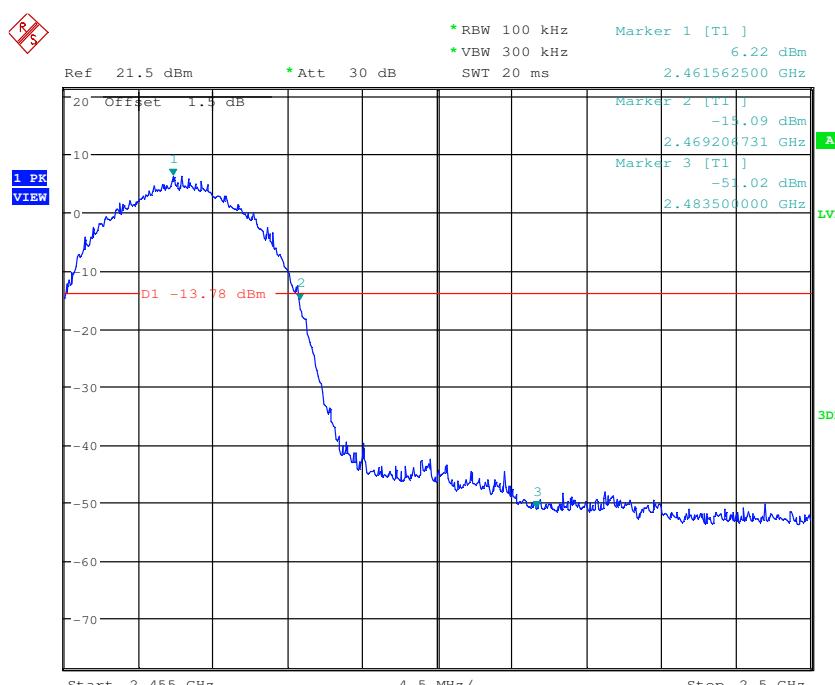


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

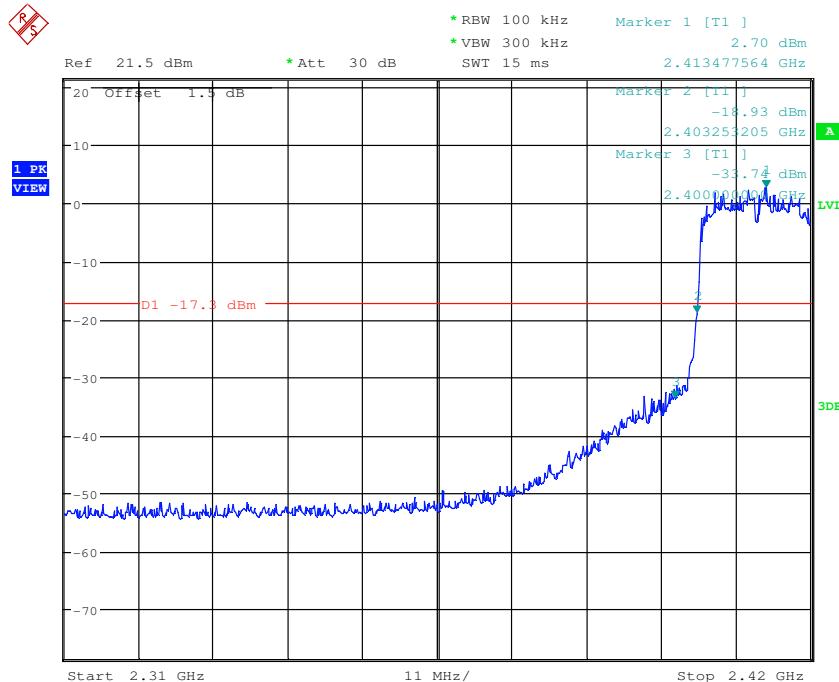


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

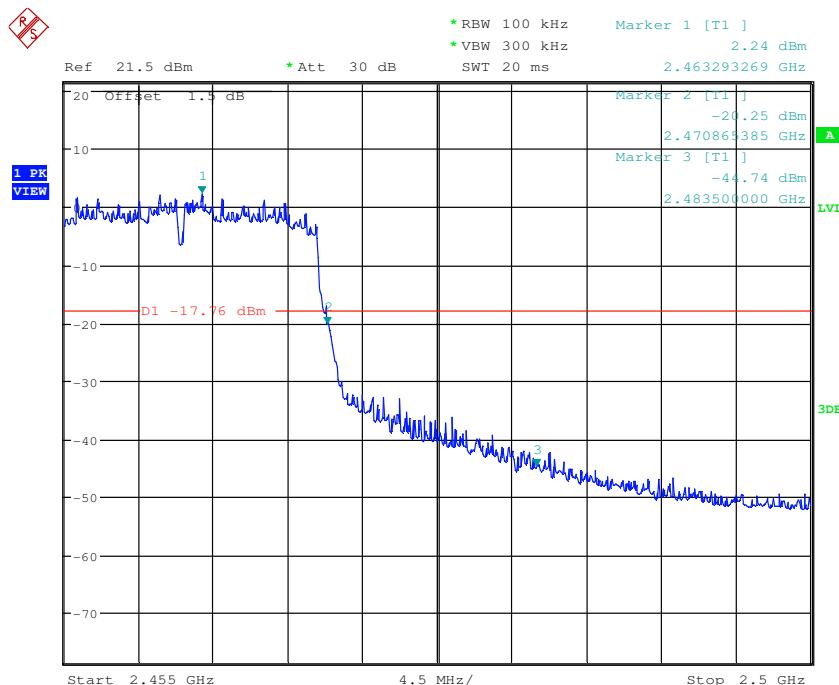


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

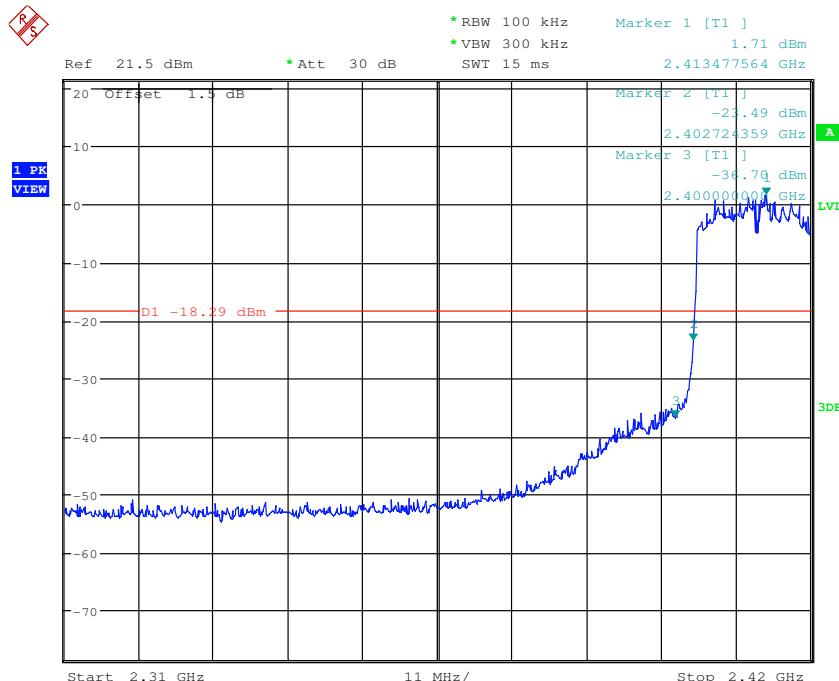

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

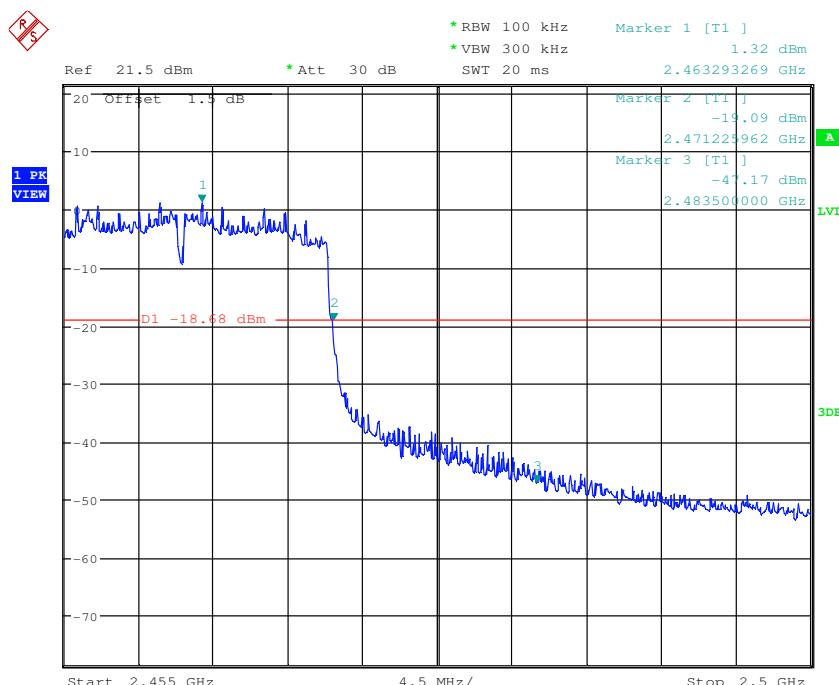



## 6.7 RF Conducted Spurious Emissions


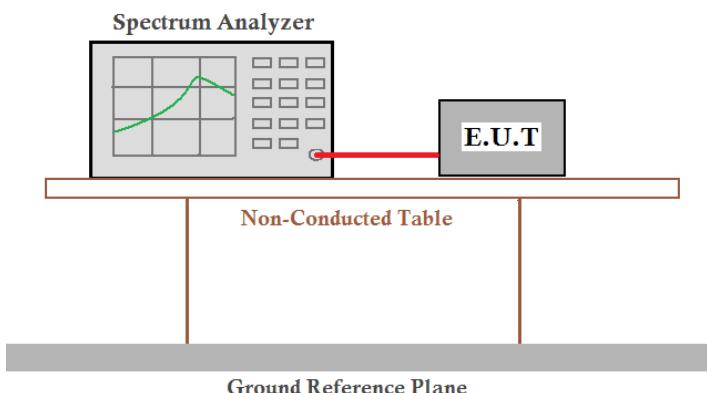
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	 <p><b>Spectrum Analyzer</b> Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Mode:	AC charge + Transmitting mode
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





**Test plot as follows:**



Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

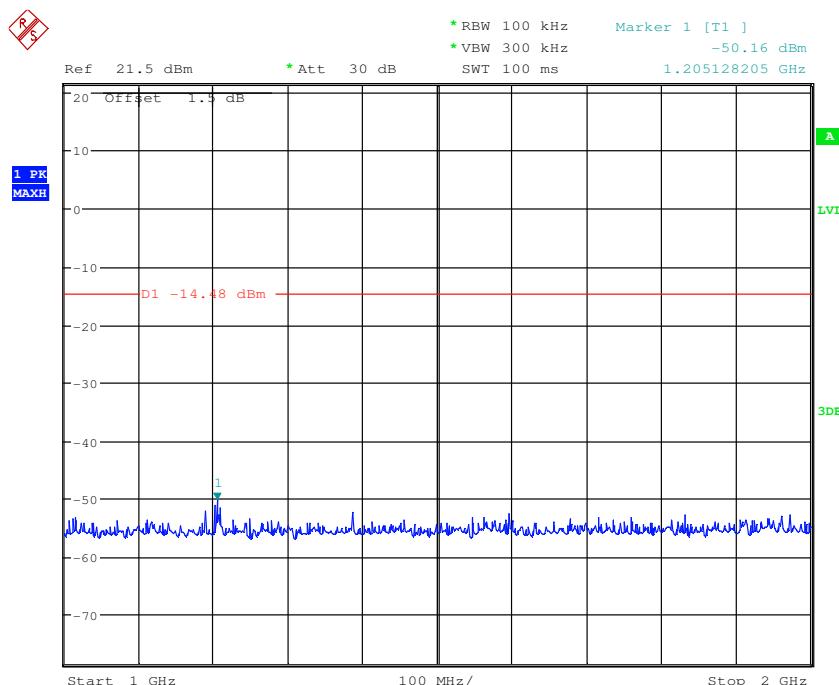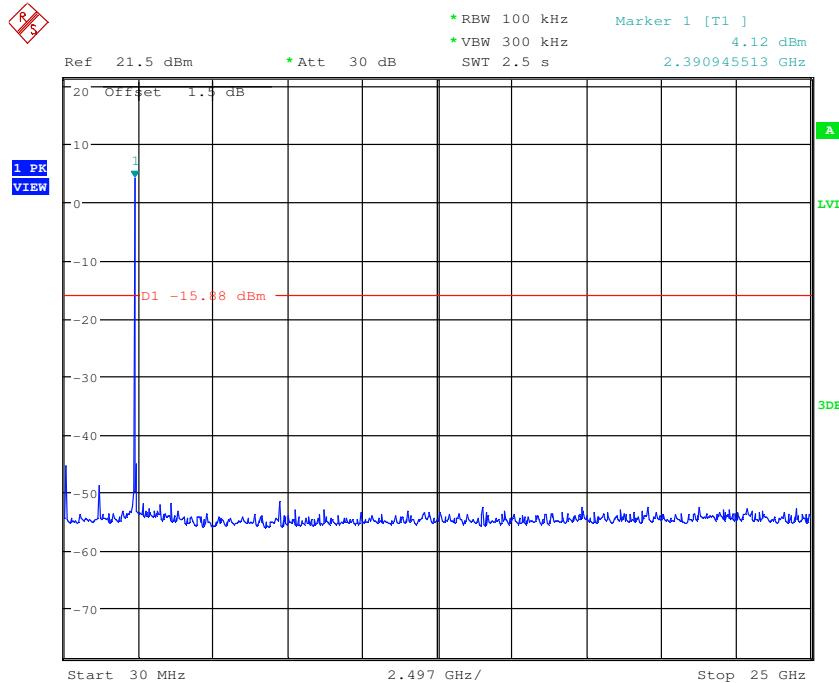

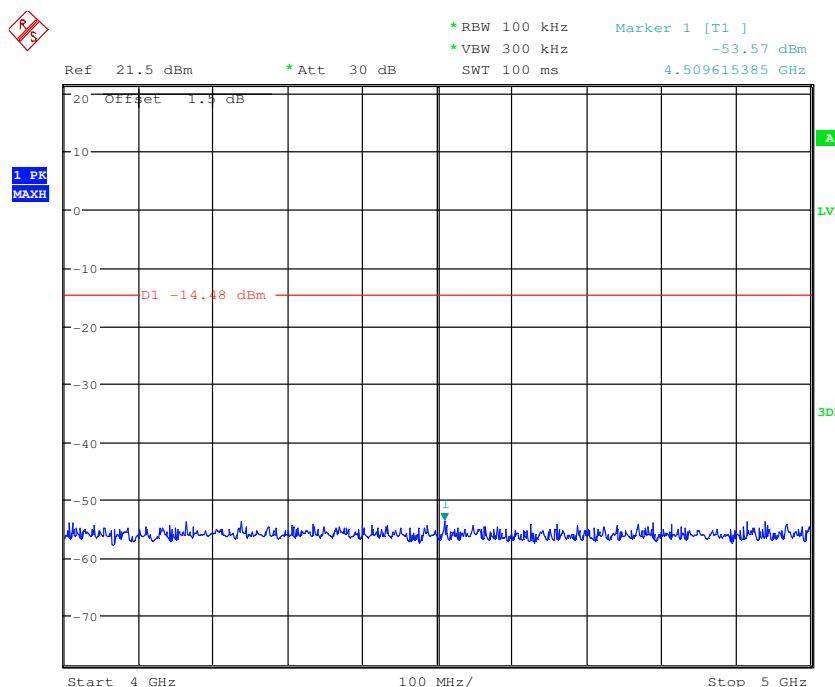
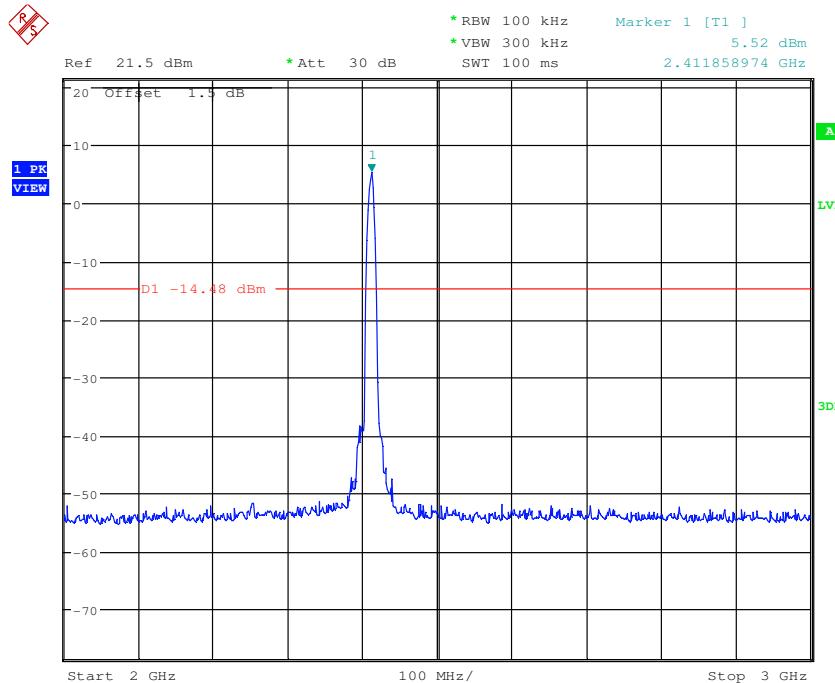




Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

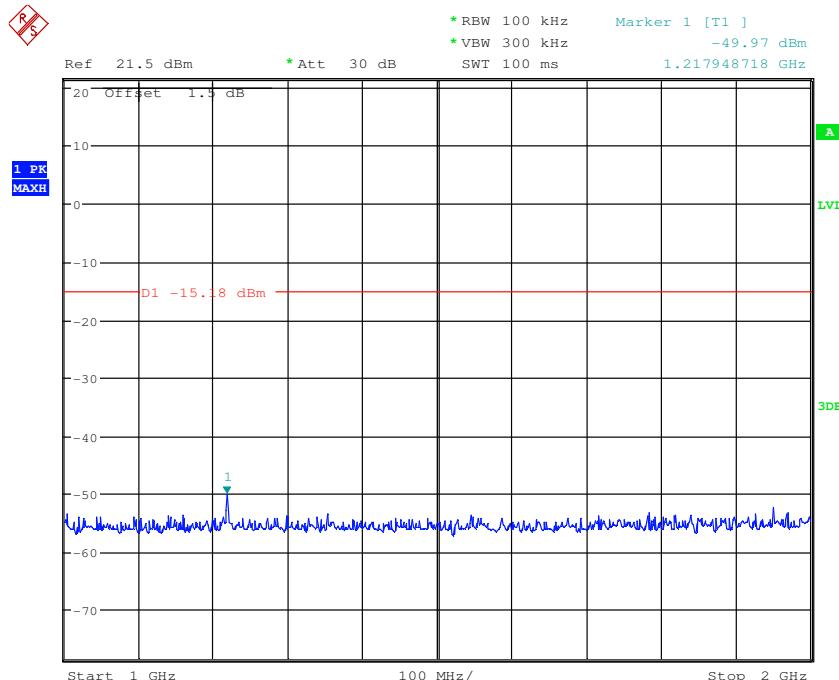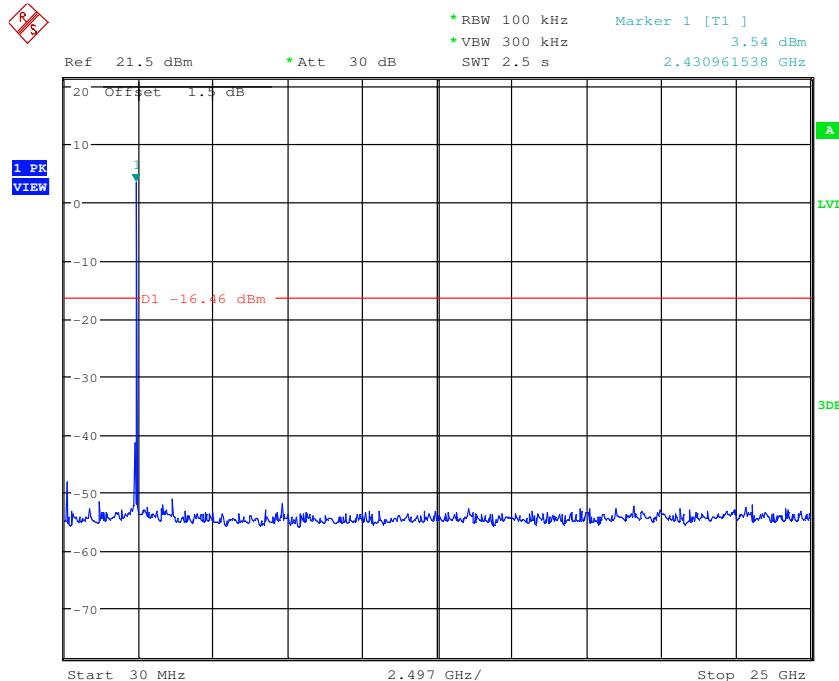

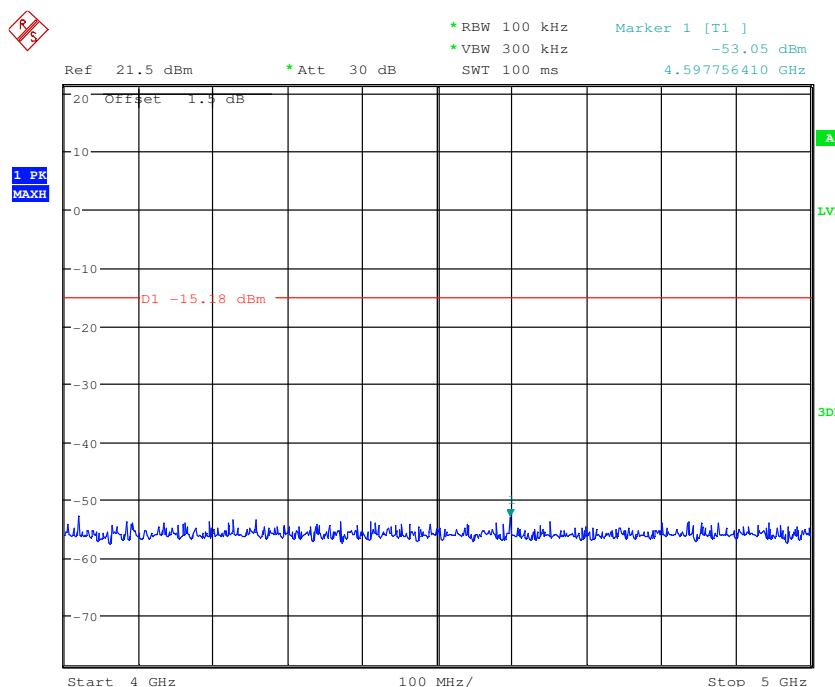
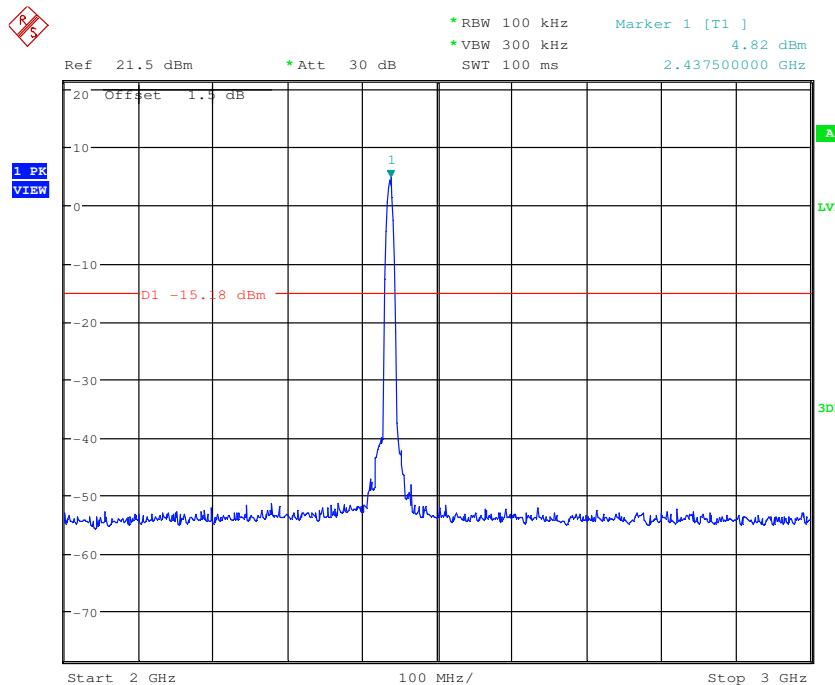




Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

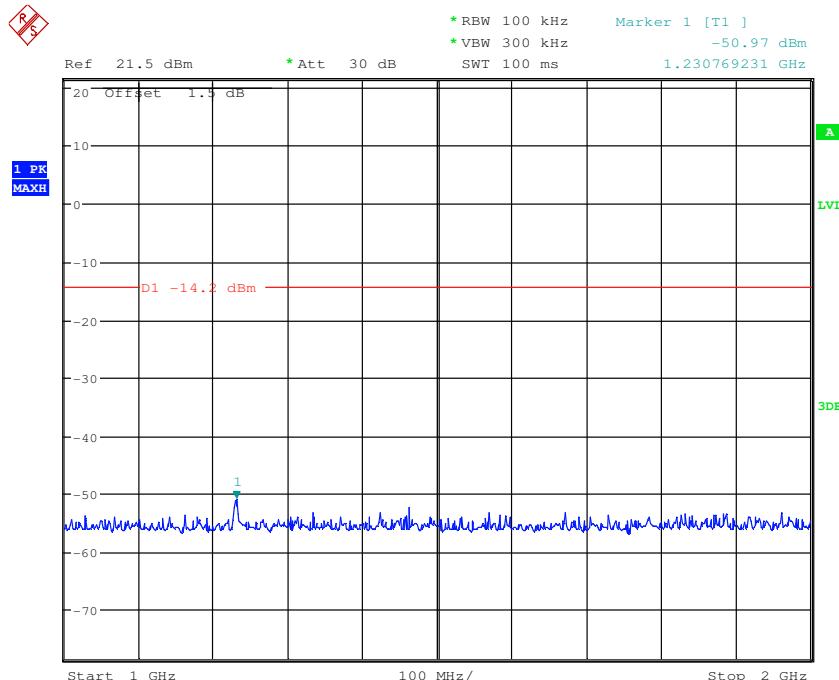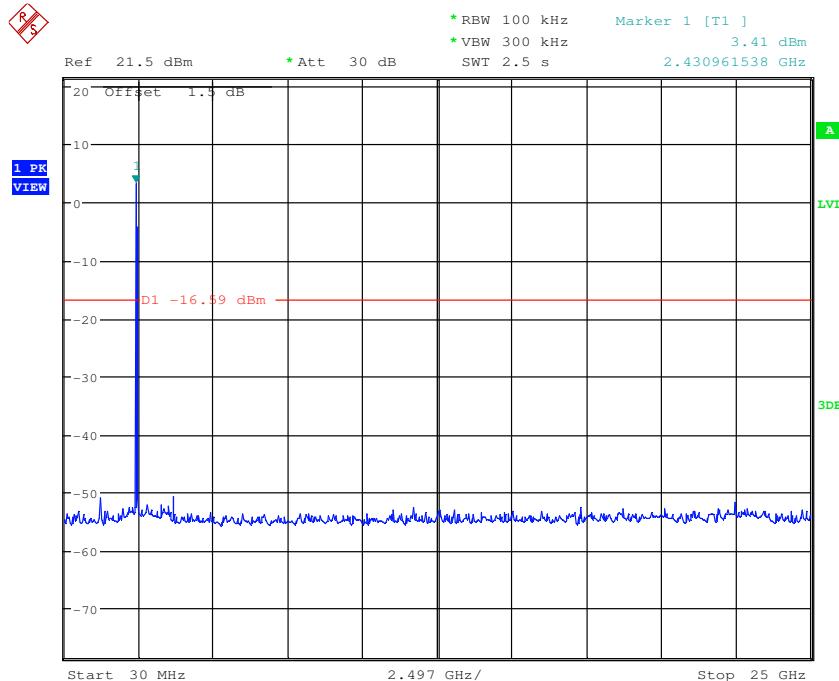

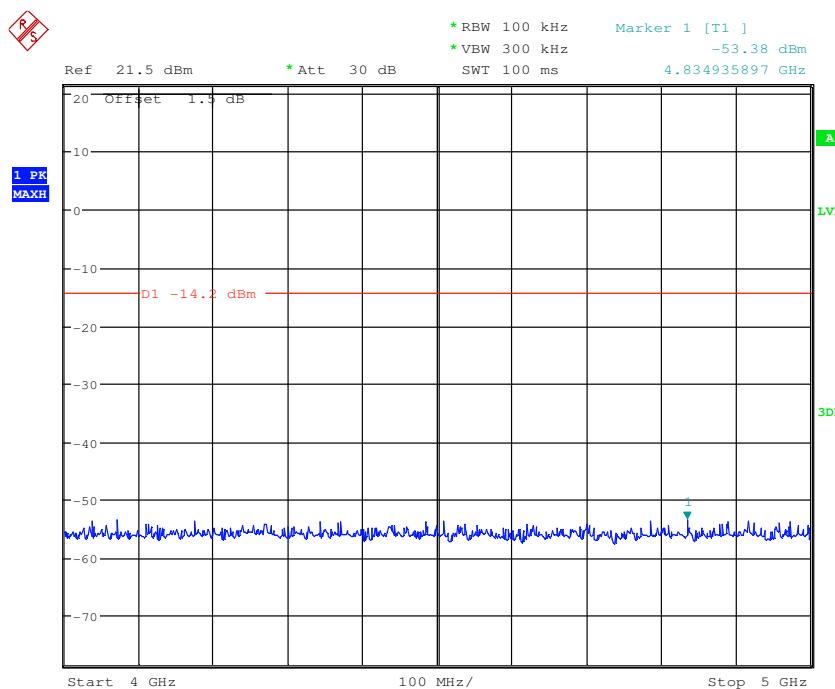
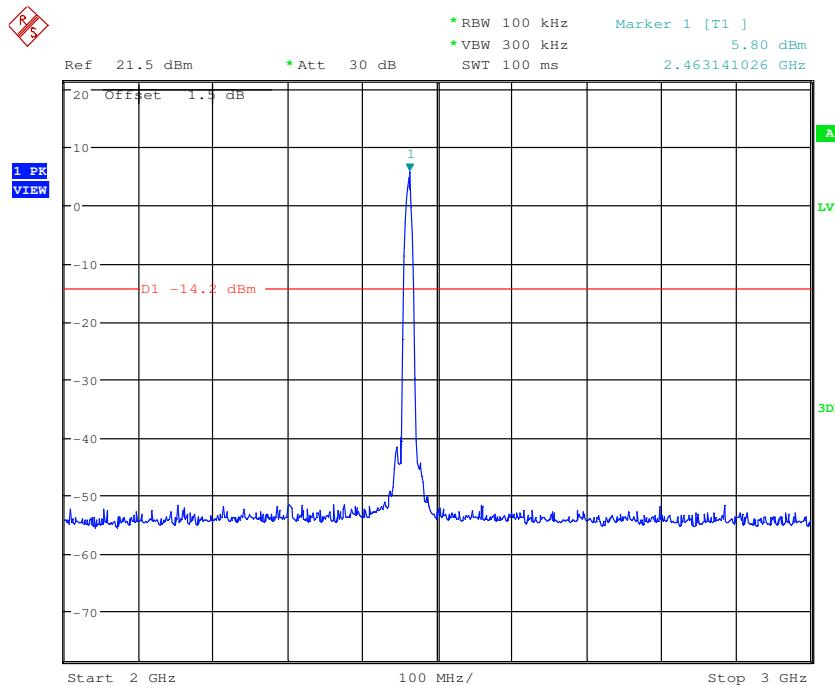




Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

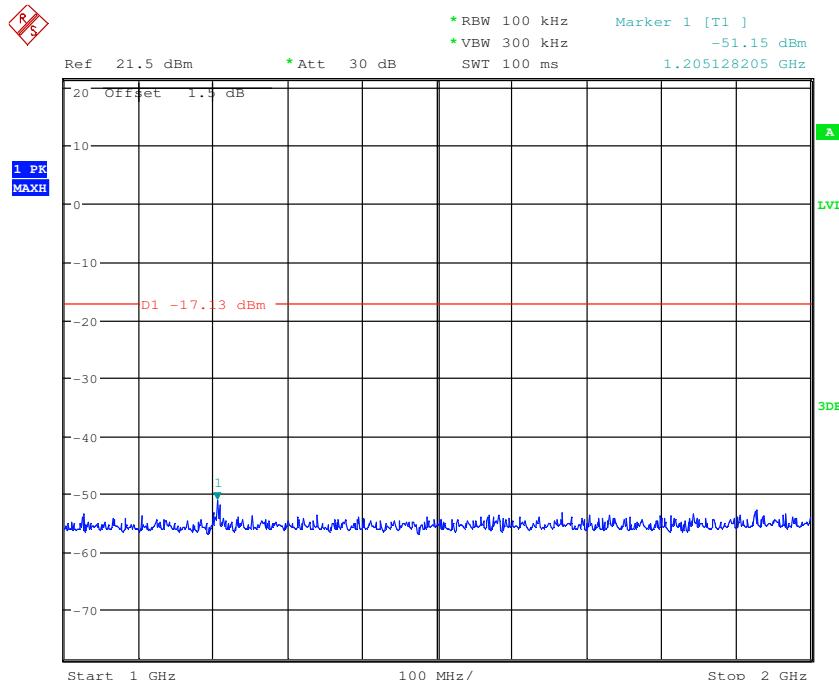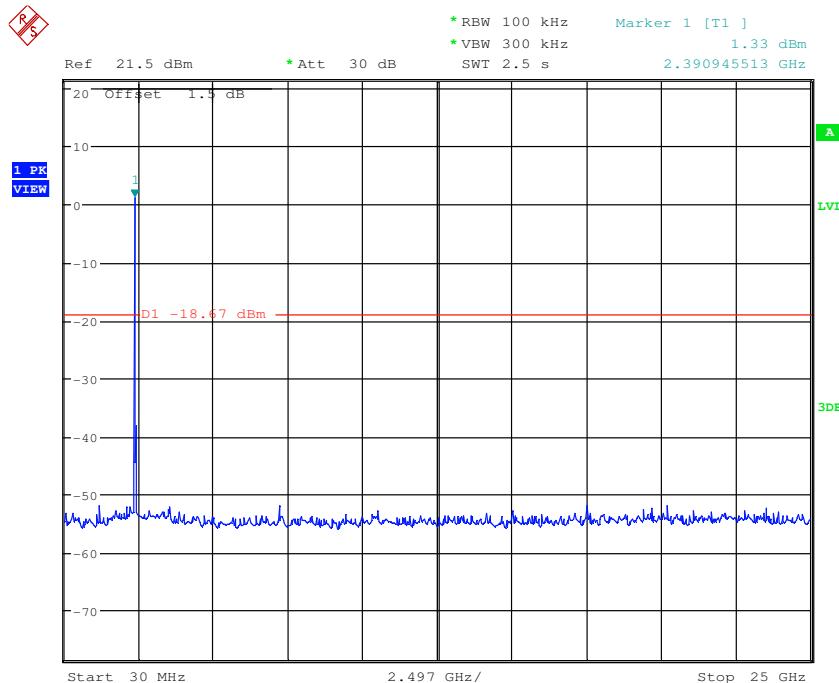

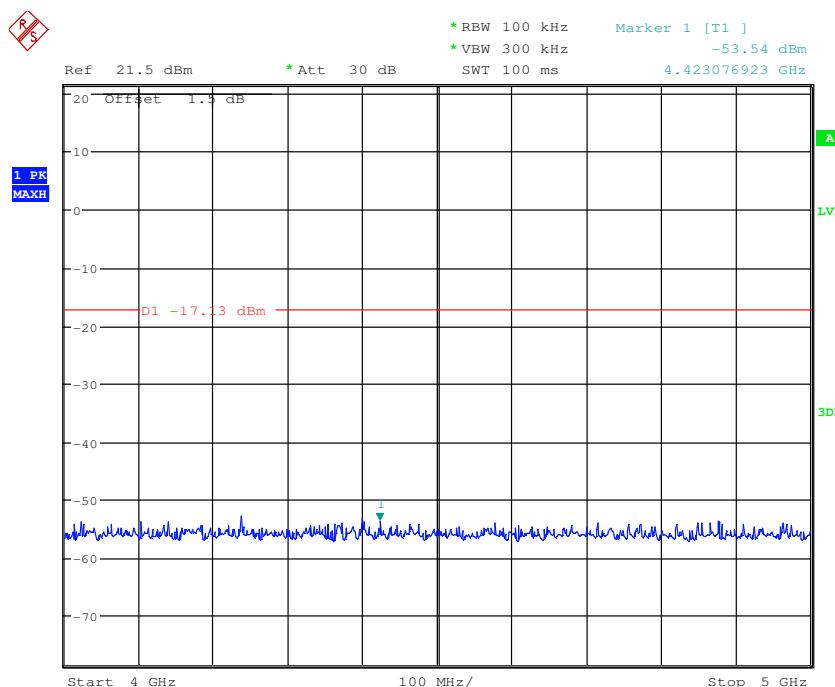
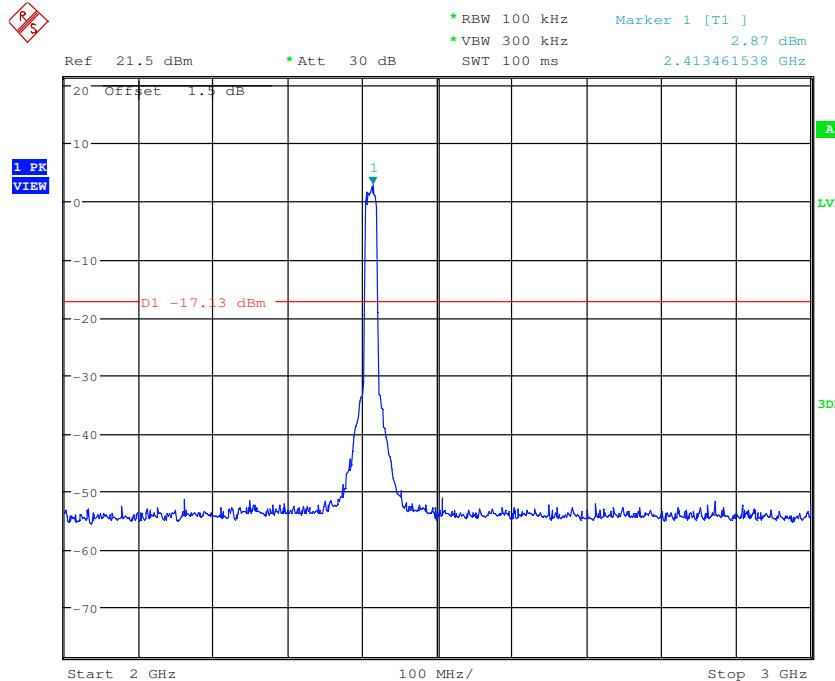




Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

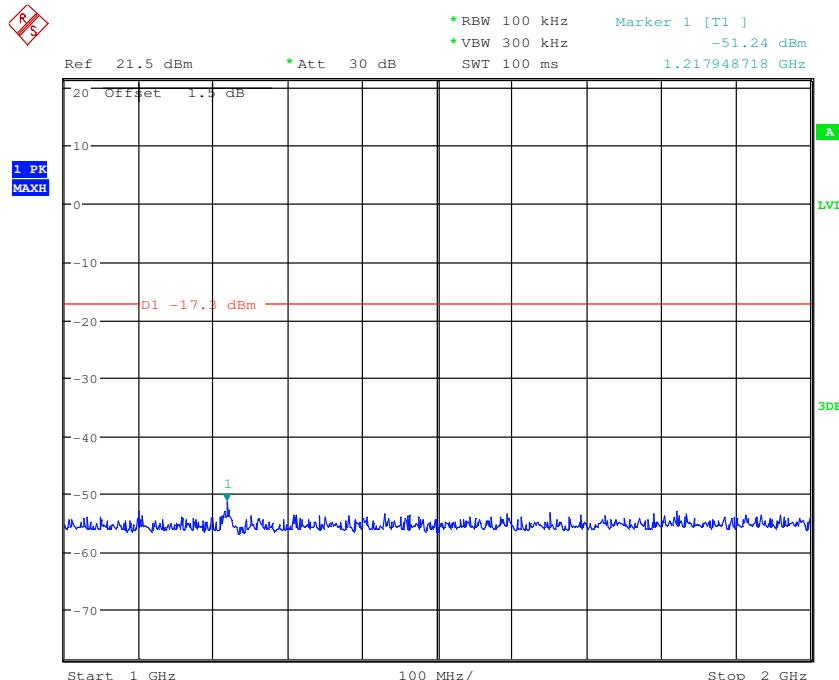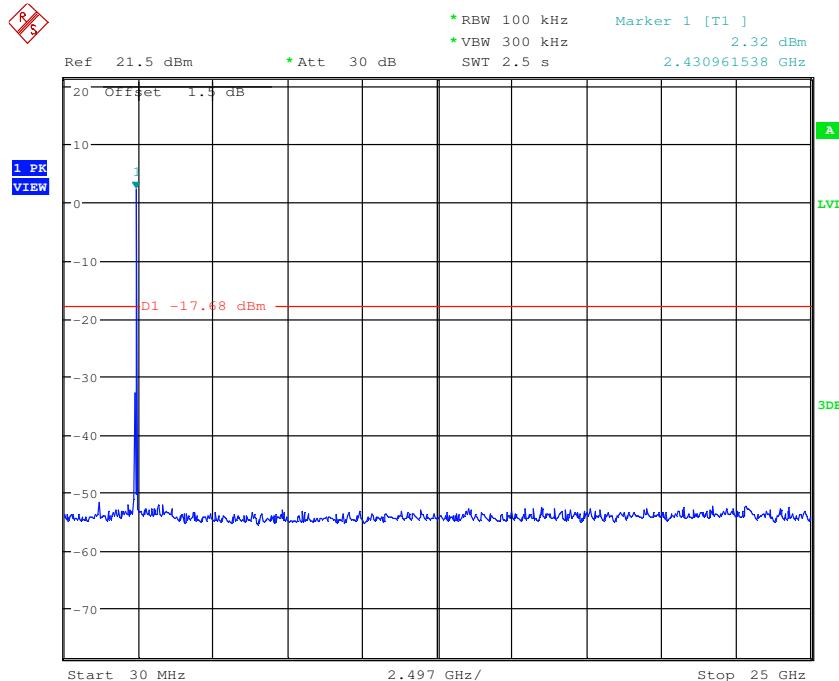

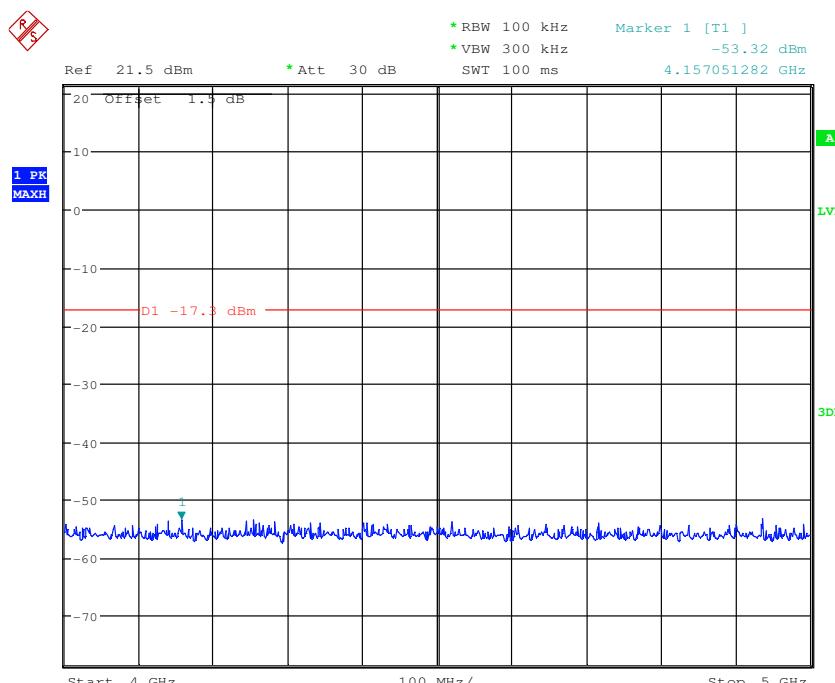
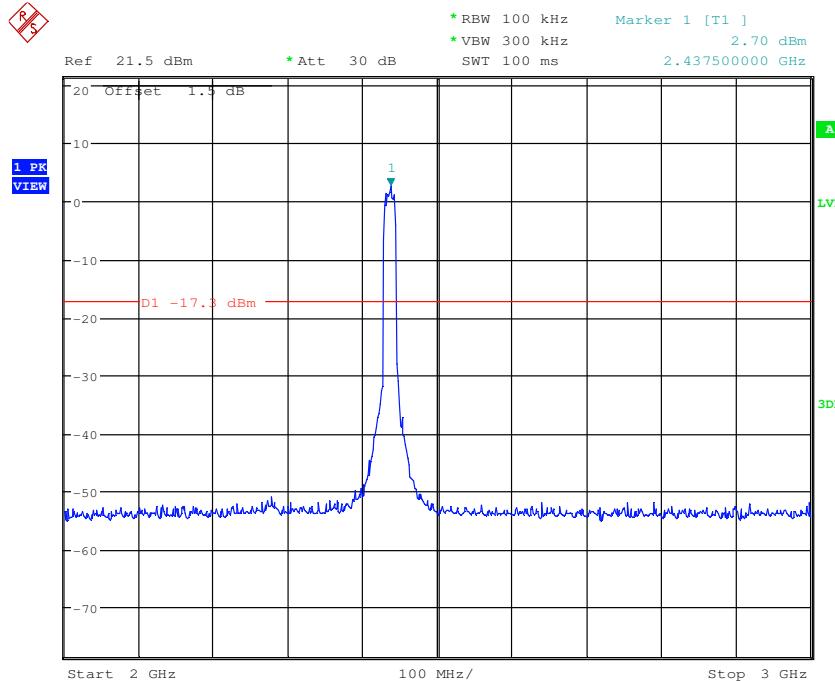




Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

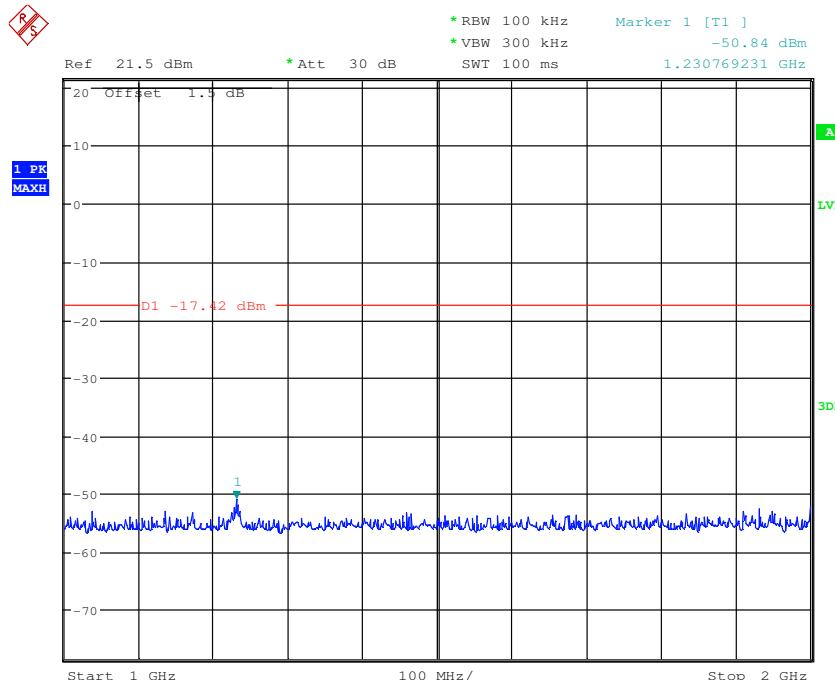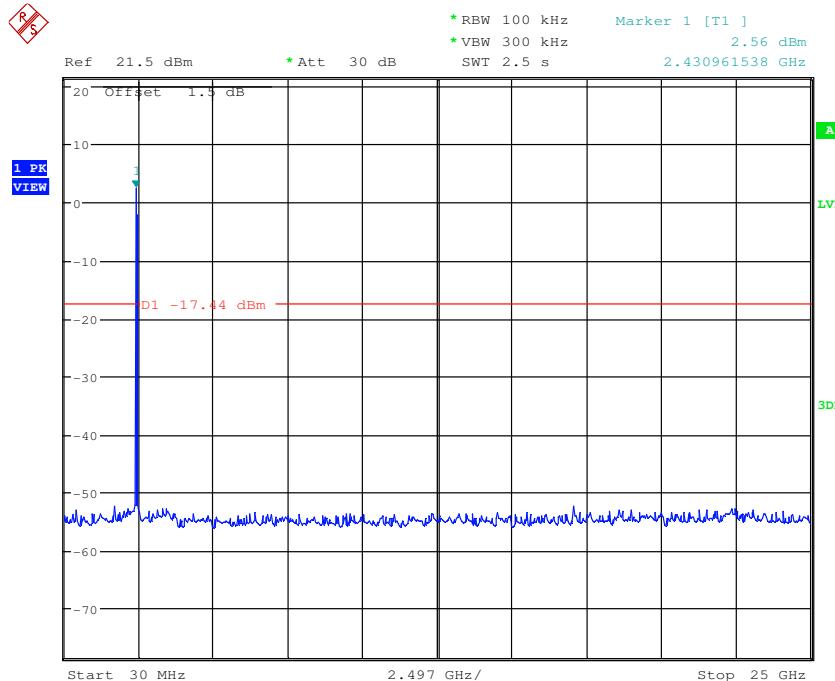

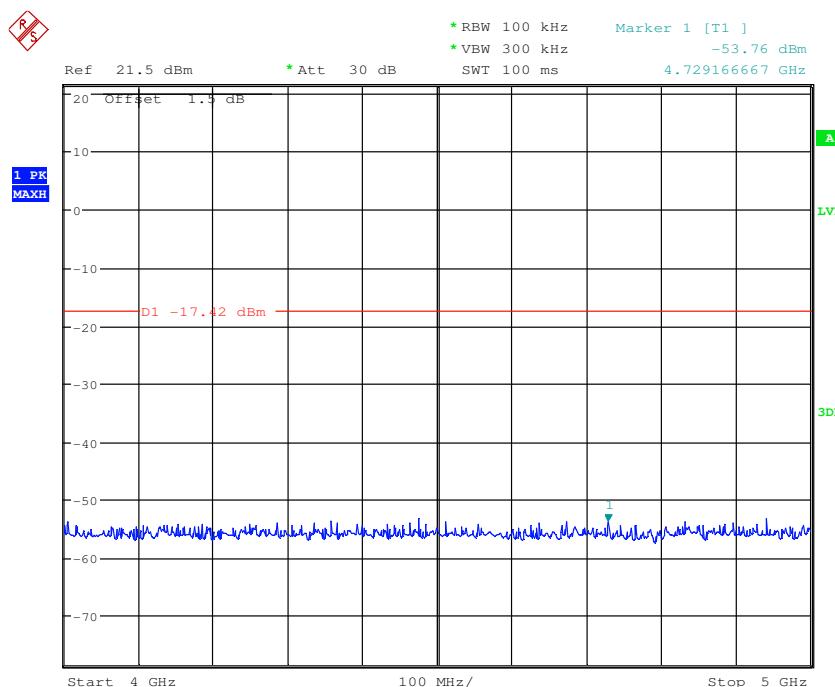
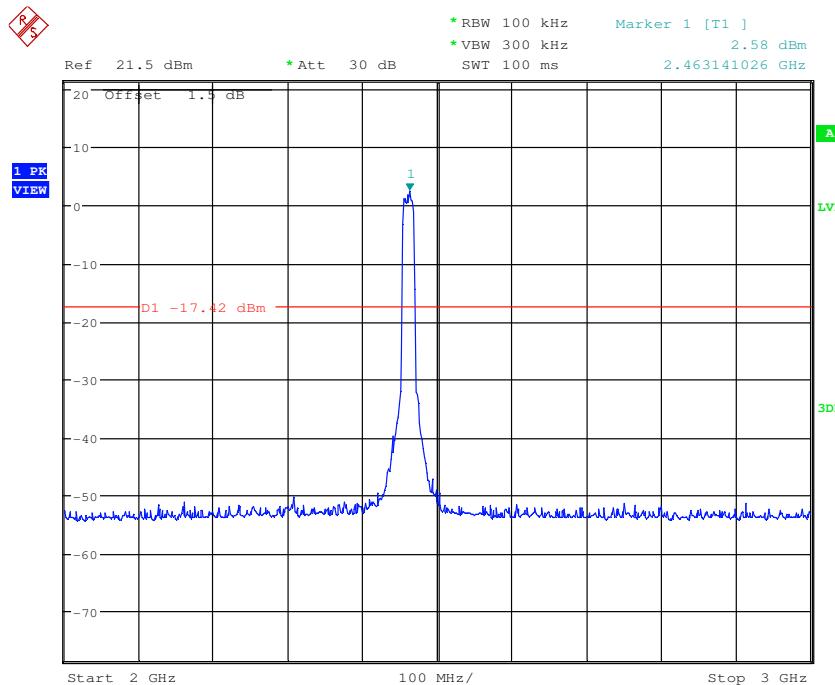




Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

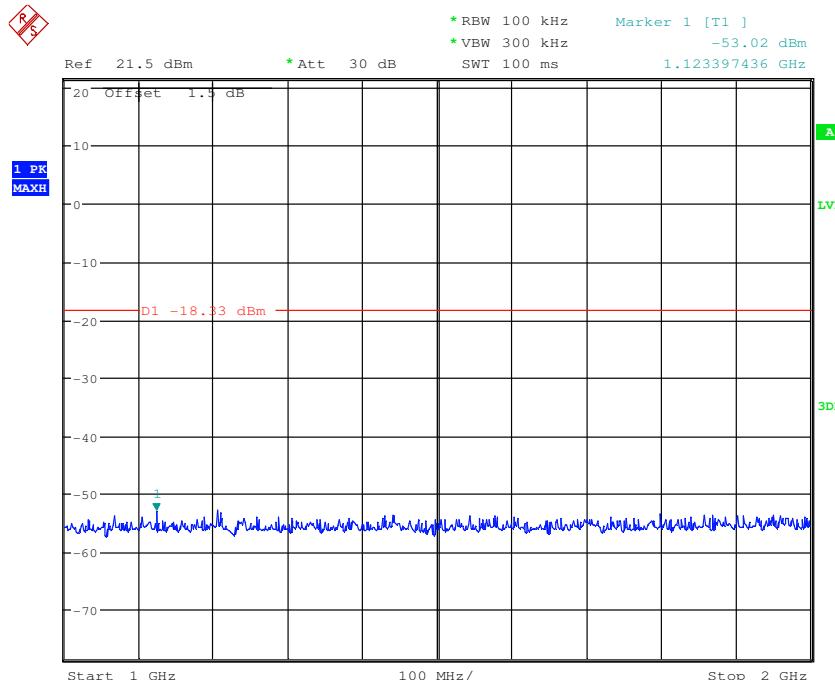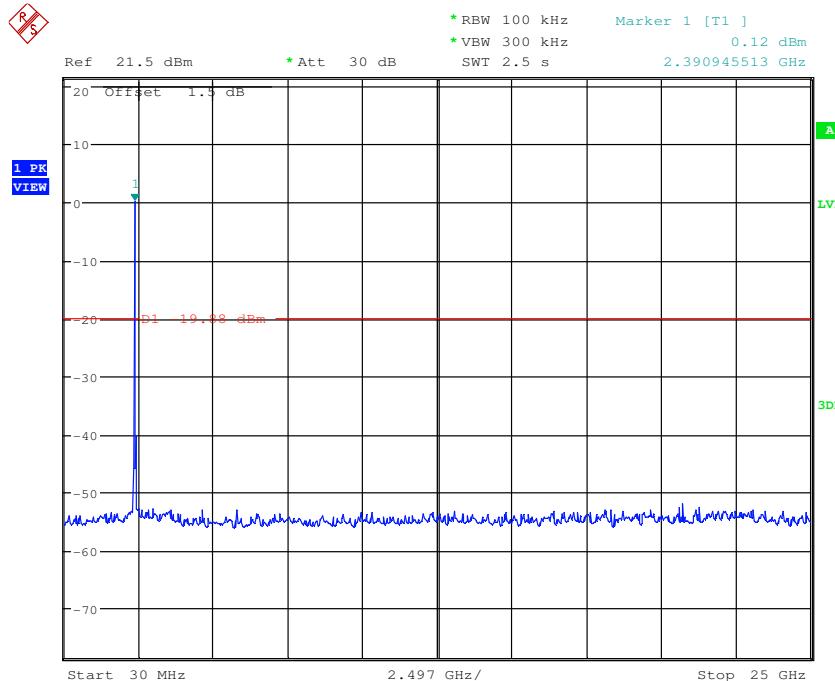

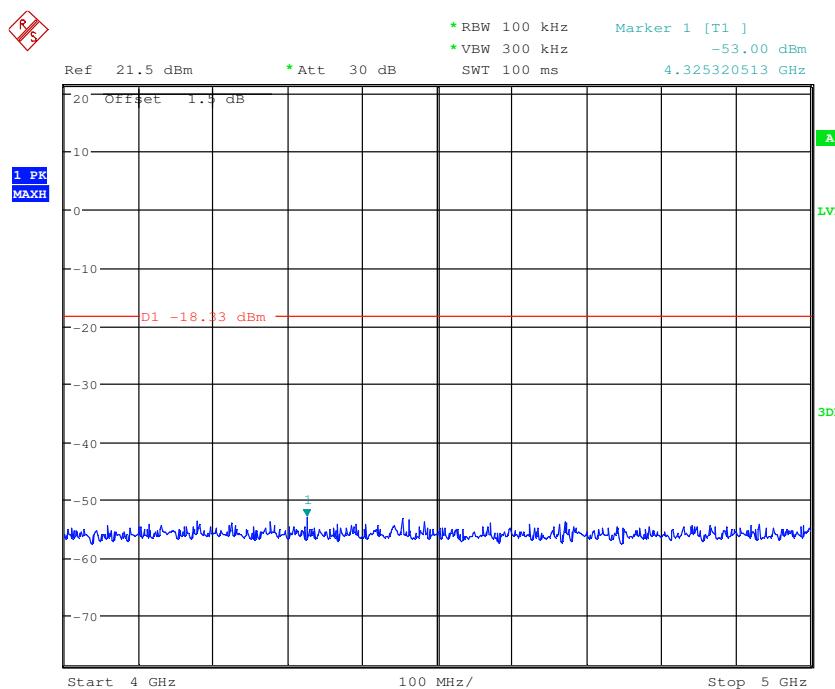
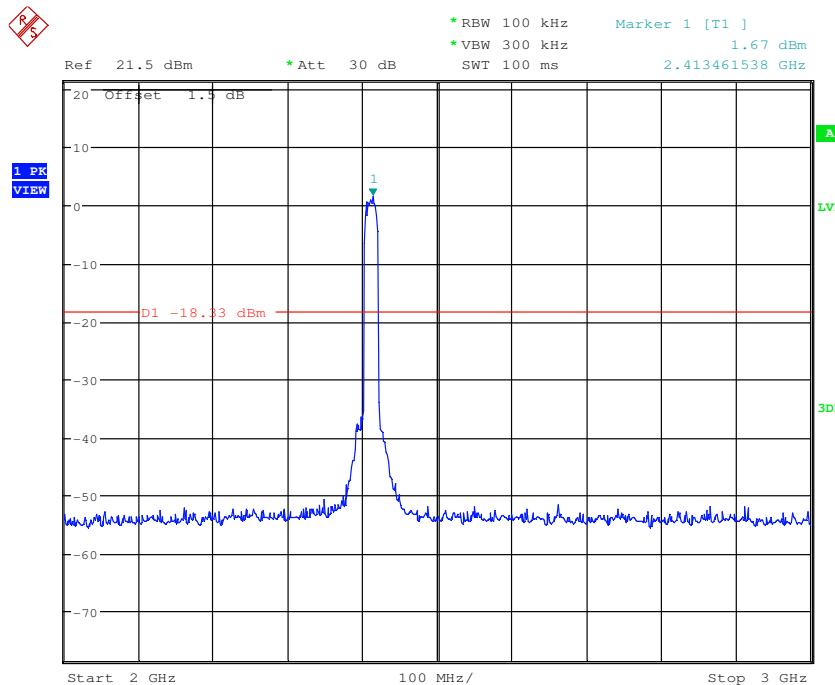




Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

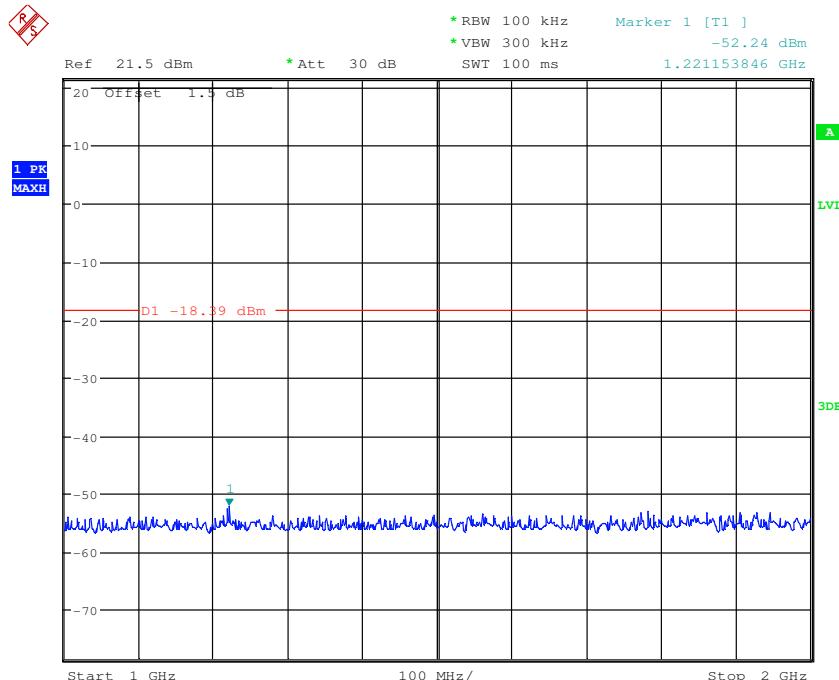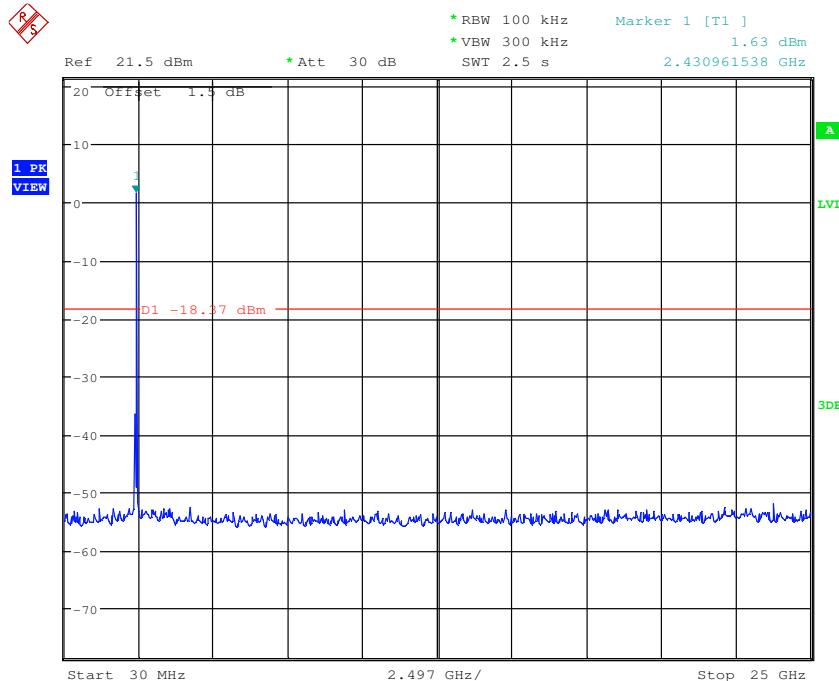

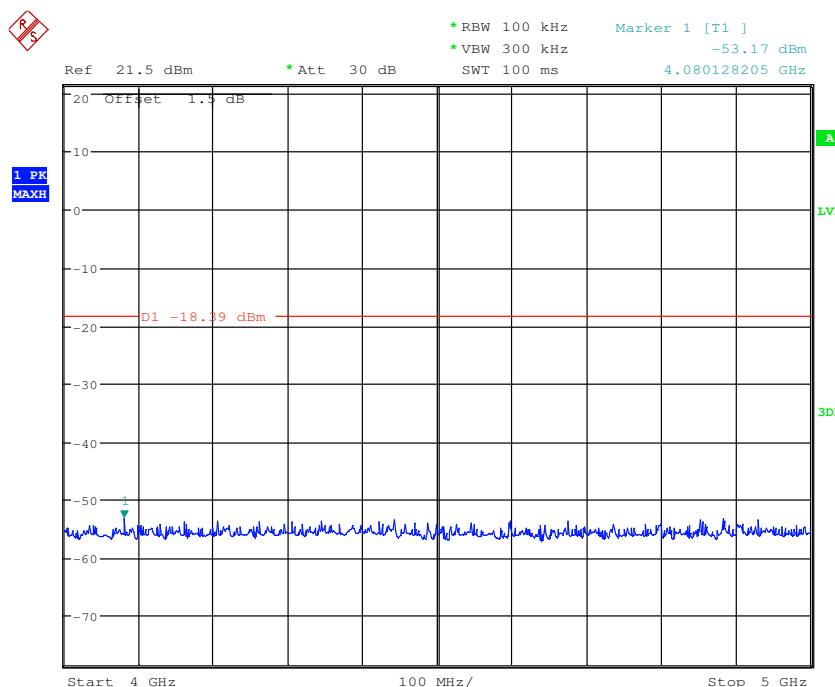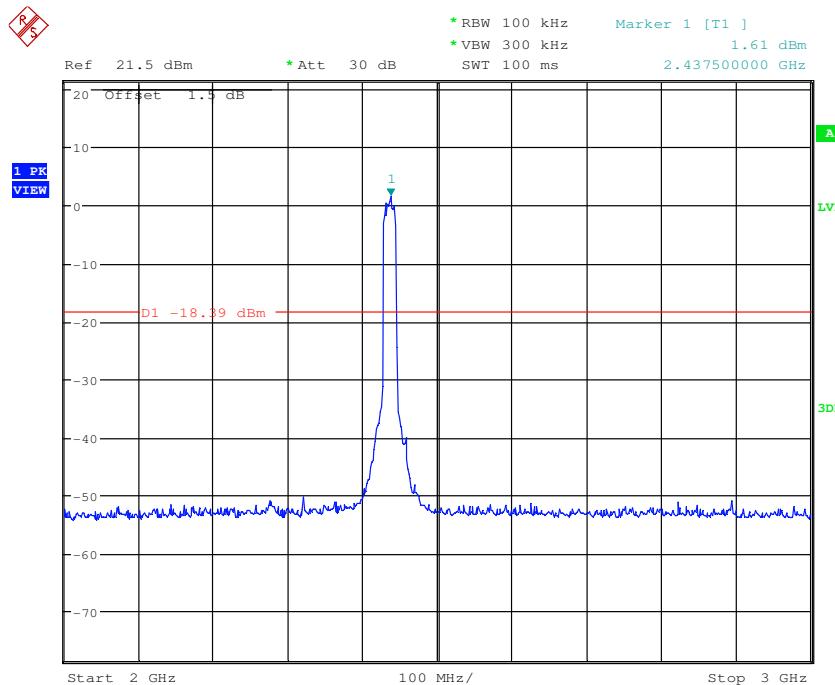

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

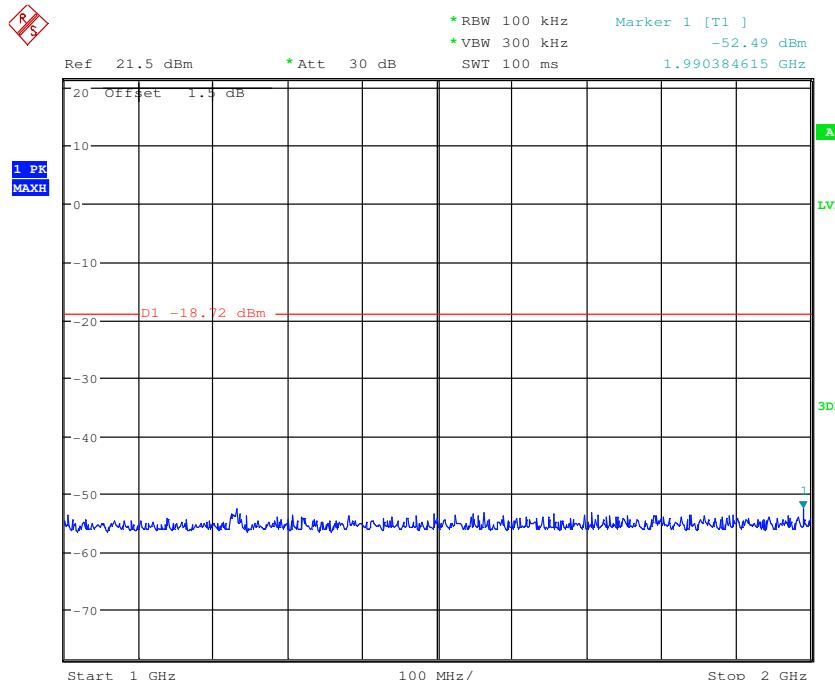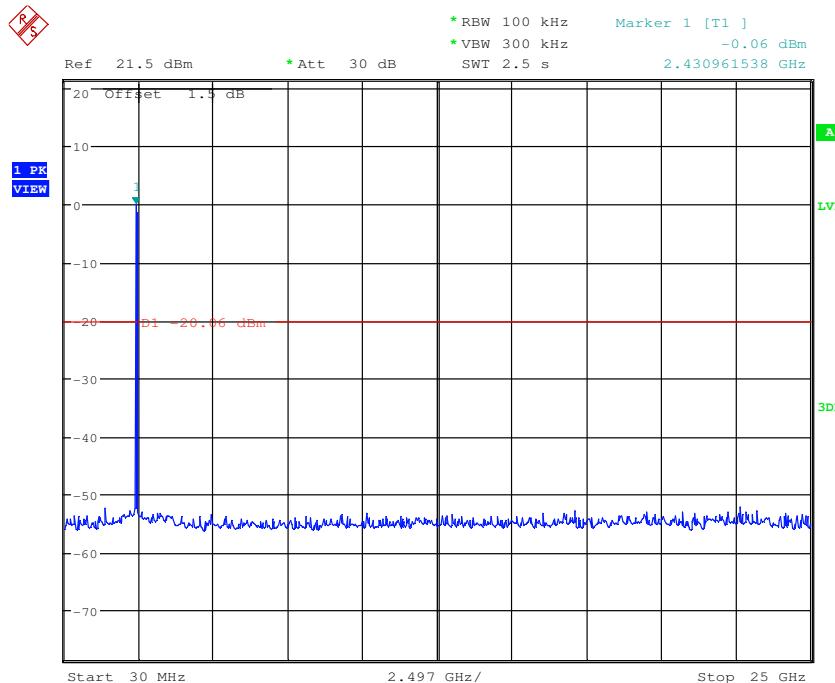

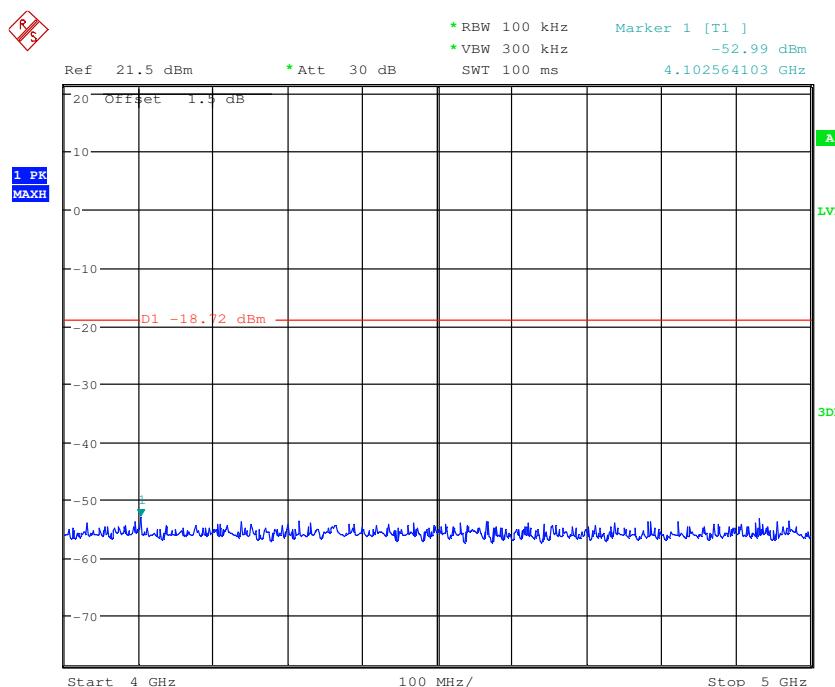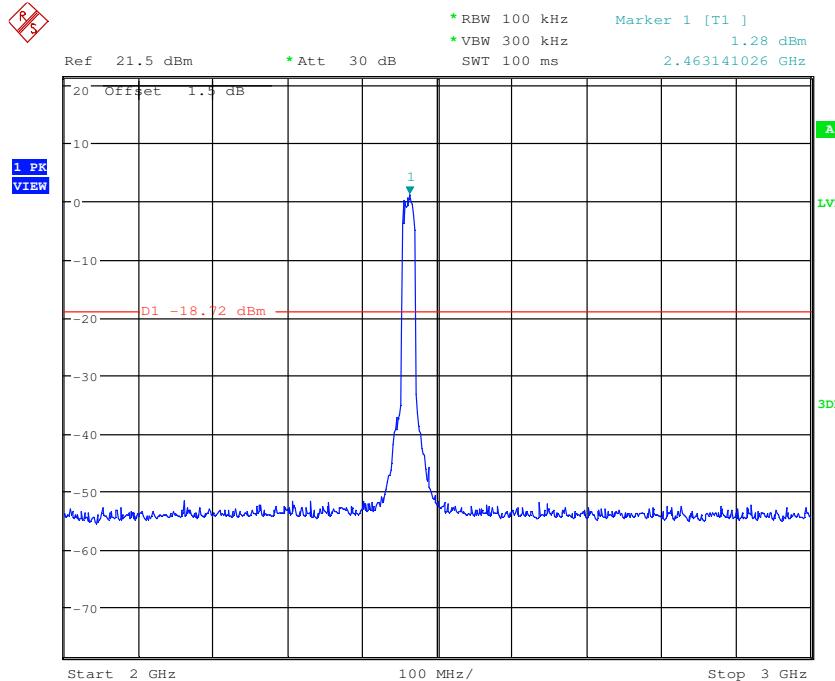


Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.

## 6.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					


Test Setup:	
	<p>Figure 1. Below 30MHz</p> <p>Figure 2. 30MHz to 1GHz</p>
	<p>Figure 3. Above 1 GHz</p>
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average</li> </ol>

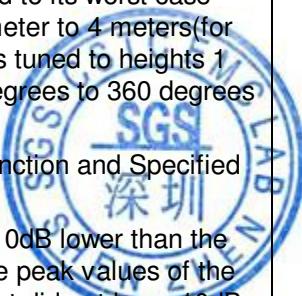

	method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	AC charge + Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

**6.8.1 Radiated emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	AC charge + Transmitting mode	Vertical

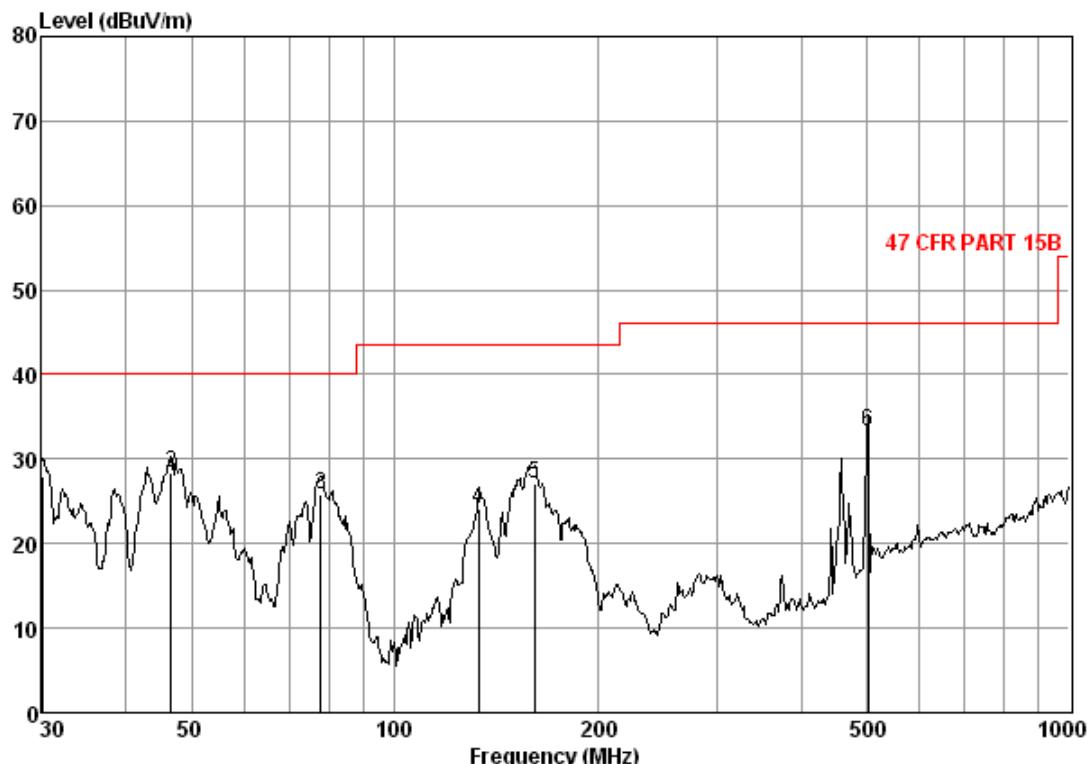


Condition: 47 CFR PART 15B 3m 3142C VERTICAL

Job No. : 3914RF

Mode : TX mode

Freq	Cable		Antenna	Preamplifier	Read	Limit	Over	Over
	Loss	Factor	Factor		Level			
MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	17.90	27.36	36.87	28.01	40.00	-11.99
2	46.67	0.74	8.33	27.30	46.57	28.34	40.00	-11.66
3	77.59	1.03	4.87	27.23	47.21	25.88	40.00	-14.12
4	133.15	1.28	8.26	26.99	41.56	24.11	43.50	-19.39
5	160.91	1.34	9.50	26.86	43.17	27.15	43.50	-16.35
6	502.94	2.60	13.52	27.69	44.77	33.20	46.00	-12.80

Test mode:	AC charge + Transmitting mode	Horizontal
------------	-------------------------------	------------

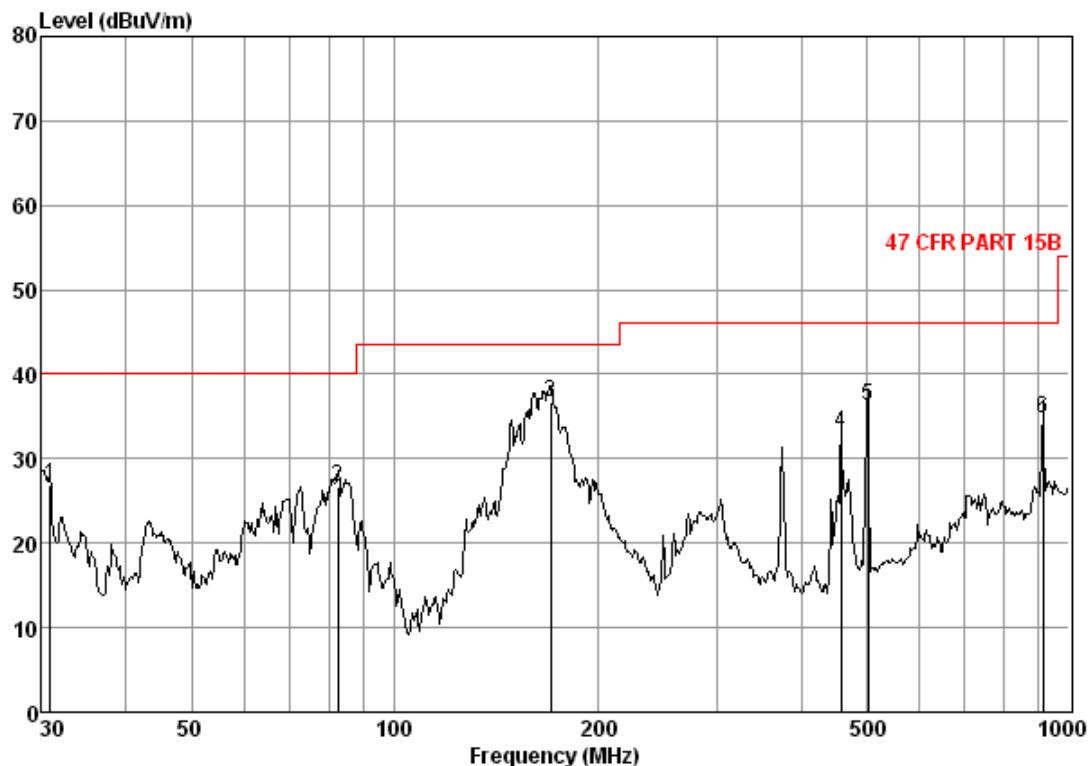

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 3914RF

Mode : TX mode

Freq MHz	Cable Loss	Antenna Factor	Preamp Factor	Read Level dB	Level dBuV	Limit Line dBuV/m	Over Limit dB	Remark
					dBuV/m			
1 30.85	0.60	17.23	27.35	36.43	26.91	40.00	-13.09	
2 82.36	1.10	5.53	27.23	47.23	26.63	40.00	-13.37	
3 170.19	1.35	9.00	26.82	53.18	36.71	43.50	-6.79	
4 459.11	2.45	13.40	27.50	44.66	33.01	46.00	-12.99	
5 502.94	2.60	13.52	27.69	47.75	36.18	46.00	-9.82	
6 912.86	3.61	20.47	26.71	37.47	34.84	46.00	-11.16	

**6.8.2 Transmitter emission above 1GHz**

Test mode:	802.11b		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	52.20	45.04	74	-28.96	Vertical	
3241.498	3.82	32.36	38.62	50.24	47.80	74	-26.20	Vertical	
4824.000	4.31	34.72	39.24	49.41	49.20	74	-24.80	Vertical	
7236.000	5.28	35.60	39.06	49.38	51.20	74	-22.80	Vertical	
9648.000	6.51	37.45	37.91	46.70	52.75	74	-21.25	Vertical	
11994.380	7.21	38.69	38.70	46.48	53.68	74	-20.32	Vertical	
1498.912	2.65	28.56	38.37	51.61	44.45	74	-29.55	Horizontal	
3534.541	4.03	32.93	38.76	48.80	47.00	74	-27.00	Horizontal	
4824.000	4.31	34.72	39.24	49.41	49.20	74	-24.80	Horizontal	
7236.000	5.28	35.60	39.06	48.89	50.71	74	-23.29	Horizontal	
9648.000	6.51	37.45	37.91	46.70	52.75	74	-21.25	Horizontal	
11782.550	7.34	38.48	38.60	46.55	53.77	74	-20.23	Horizontal	

Test mode:	802.11b		Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	33.24	26.08	54	-27.92	Vertical	
3241.498	3.82	32.36	38.62	30.64	28.20	54	-25.80	Vertical	
4824.000	4.31	34.72	39.24	30.21	30.00	54	-24.00	Vertical	
7236.000	5.28	35.60	39.06	30.20	32.02	54	-21.98	Vertical	
9648.000	6.51	37.45	37.91	27.52	33.57	54	-20.43	Vertical	
11994.380	7.21	38.69	38.70	27.53	34.73	54	-19.27	Vertical	
1498.912	2.65	28.56	38.37	31.82	24.66	54	-29.34	Horizontal	
3534.541	4.03	32.93	38.76	29.23	27.43	54	-26.57	Horizontal	
4824.000	4.31	34.72	39.24	30.12	29.91	54	-24.09	Horizontal	
7236.000	5.28	35.60	39.06	29.35	31.17	54	-22.83	Horizontal	
9648.000	6.51	37.45	37.91	27.14	33.19	54	-20.81	Horizontal	
11782.550	7.34	38.48	38.60	26.48	33.70	54	-20.30	Horizontal	



Test mode:		802.11b		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1491.300	2.64	28.52	38.37	49.91	42.70	74	-31.30	Vertical	
3662.775	4.11	33.05	38.81	45.89	44.24	74	-29.76	Vertical	
4874.000	4.36	34.77	39.26	46.34	46.21	74	-27.79	Vertical	
7311.000	5.22	35.52	39.06	44.46	46.14	74	-27.86	Vertical	
9748.000	6.49	37.76	37.85	42.29	48.69	74	-25.31	Vertical	
11545.040	7.56	38.26	38.49	43.79	51.12	74	-22.88	Vertical	
1498.912	2.65	28.56	38.37	52.05	44.89	74	-29.11	Horizontal	
3662.775	4.11	33.05	38.81	46.34	44.69	74	-29.31	Horizontal	
4874.000	4.36	34.77	39.26	46.34	46.21	74	-27.79	Horizontal	
7311.000	5.22	35.52	39.06	45.69	47.37	74	-26.63	Horizontal	
9748.000	6.49	37.76	37.85	42.90	49.30	74	-24.70	Horizontal	
12024.960	7.17	38.73	38.72	44.22	51.40	74	-22.60	Horizontal	

Test mode:		802.11b		Test channel:		Middle	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization	
1491.300	2.64	28.52	38.37	30.21	23.00	54	-31.00	Vertical	
3662.775	4.11	33.05	38.81	26.57	24.92	54	-29.08	Vertical	
4874.000	4.36	34.78	39.26	27.57	27.45	54	-26.55	Vertical	
7311.000	5.20	35.50	39.06	25.62	27.26	54	-26.74	Vertical	
9748.000	6.49	37.82	37.84	23.41	29.88	54	-24.12	Vertical	
11545.040	7.56	38.26	38.49	24.52	31.85	54	-22.15	Vertical	
1498.912	2.65	28.56	38.37	33.25	26.09	54	-27.91	Horizontal	
3662.775	4.11	33.05	38.81	28.55	26.90	54	-27.10	Horizontal	
4874.000	4.37	34.78	39.26	27.45	27.34	54	-26.66	Horizontal	
7311.000	5.20	35.50	39.06	26.59	28.23	54	-25.77	Horizontal	
9748.000	6.49	37.82	37.84	23.89	30.36	54	-23.64	Horizontal	
12024.960	7.17	38.73	38.72	26.32	33.50	54	-20.50	Horizontal	



Test mode:		802.11b		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	51.07	43.91	74	-30.09	Vertical	
3690.853	4.08	33.07	38.82	47.43	45.76	74	-28.24	Vertical	
4924.000	4.40	34.82	39.28	44.82	44.76	74	-29.24	Vertical	
7386.000	5.15	35.44	39.05	45.01	46.55	74	-27.45	Vertical	
9848.000	6.62	38.06	37.79	42.25	49.14	74	-24.86	Vertical	
12024.960	7.17	38.73	38.72	44.49	51.67	74	-22.33	Vertical	
1495.101	2.64	28.54	38.37	52.13	44.94	74	-29.06	Horizontal	
3690.853	4.08	33.07	38.82	46.29	44.62	74	-29.38	Horizontal	
4924.000	4.40	34.82	39.28	44.52	44.46	74	-29.54	Horizontal	
7386.000	5.15	35.44	39.05	45.05	46.59	74	-27.41	Horizontal	
9848.000	6.62	38.06	37.79	42.08	48.97	74	-25.03	Horizontal	
12117.140	7.02	38.85	38.80	44.52	51.59	74	-22.41	Horizontal	

Test mode:		802.11b		Test channel:	Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	32.56	25.40	54	-28.60	Vertical	
3690.853	4.08	33.07	38.82	28.56	26.89	54	-27.11	Vertical	
4924.000	4.40	34.82	39.28	25.87	25.81	54	-28.19	Vertical	
7386.000	5.15	35.44	39.05	26.87	28.41	54	-25.59	Vertical	
9848.000	6.62	38.06	37.79	23.56	30.45	54	-23.55	Vertical	
12024.960	7.17	38.73	38.72	25.64	32.82	54	-21.18	Vertical	
1495.101	2.64	28.54	38.37	33.21	26.02	54	-27.98	Horizontal	
3690.853	4.08	33.07	38.82	27.56	25.89	54	-28.11	Horizontal	
4924.000	4.40	34.82	39.28	25.33	25.27	54	-28.73	Horizontal	
7386.000	5.15	35.44	39.05	26.31	27.85	54	-26.15	Horizontal	
9848.000	6.62	38.06	37.79	23.56	30.45	54	-23.55	Horizontal	
12117.140	7.02	38.85	38.80	26.35	33.42	54	-20.58	Horizontal	



Test mode:		802.11g		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1495.101	2.64	28.54	38.37	52.13	44.94	74	-29.06		Vertical	
3690.853	4.08	33.07	38.82	46.29	44.62	74	-29.38		Vertical	
4824.000	4.31	34.72	39.24	44.49	44.28	74	-29.72		Vertical	
7236.000	5.28	35.60	39.06	44.77	46.59	74	-27.41		Vertical	
9648.000	6.51	37.45	37.91	42.92	48.97	74	-25.03		Vertical	
12117.140	7.02	38.85	38.80	44.52	51.59	74	-22.41		Vertical	
1498.912	2.65	28.56	38.37	51.07	43.91	74	-30.09		Horizontal	
3690.853	4.08	33.07	38.82	47.43	45.76	74	-28.24		Horizontal	
4824.000	4.31	34.72	39.24	44.97	44.76	74	-29.24		Horizontal	
7236.000	5.28	35.60	39.06	44.73	46.55	74	-27.45		Horizontal	
9648.000	6.51	37.45	37.91	43.63	49.68	74	-24.32		Horizontal	
12024.960	7.17	38.73	38.72	44.49	51.67	74	-22.33		Horizontal	

Test mode:		802.11g		Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)		Polarization	
1495.101	2.64	28.54	38.37	33.21	26.02	54	-27.98		Vertical	
3690.853	4.08	33.07	38.82	27.58	25.91	54	-28.09		Vertical	
4824.000	4.31	34.72	39.24	26.23	26.02	54	-27.98		Vertical	
7236.000	5.28	35.60	39.06	26.22	28.04	54	-25.96		Vertical	
9648.000	6.51	37.45	37.91	23.89	29.94	54	-24.06		Vertical	
12117.140	7.02	38.85	38.80	26.08	33.15	54	-20.85		Vertical	
1498.912	2.65	28.56	38.37	32.15	24.99	54	-29.01		Horizontal	
3690.853	4.08	33.07	38.82	28.56	26.89	54	-27.11		Horizontal	
4824.000	4.31	34.72	39.24	26.52	26.31	54	-27.69		Horizontal	
7236.000	5.28	35.60	39.06	25.88	27.70	54	-26.30		Horizontal	
9648.000	6.51	37.45	37.91	25.12	31.17	54	-22.83		Horizontal	
12024.960	7.17	38.73	38.72	26.21	33.39	54	-20.61		Horizontal	



Test mode:	802.11g		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1549.344	2.66	28.89	38.38	50.05	43.22	74	-30.78	Vertical
3662.775	4.11	33.05	38.81	45.89	44.24	74	-29.76	Vertical
4874.000	4.36	34.77	39.26	46.34	46.21	74	-27.79	Vertical
7311.000	5.22	35.52	39.06	44.13	45.81	74	-28.19	Vertical
9748.000	6.49	37.76	37.85	41.31	47.71	74	-26.29	Vertical
11872.880	7.29	38.57	38.64	42.40	49.62	74	-24.38	Vertical
1549.344	2.66	28.89	38.38	50.05	43.22	74	-30.78	Horizontal
3662.775	4.11	33.05	38.81	46.34	44.69	74	-29.31	Horizontal
4874.000	4.36	34.77	39.26	46.34	46.21	74	-27.79	Horizontal
7311.000	5.22	35.52	39.06	45.69	47.37	74	-26.63	Horizontal
9748.000	6.49	37.76	37.85	42.90	49.30	74	-24.70	Horizontal
12024.960	7.17	38.73	38.72	44.22	51.40	74	-22.60	Horizontal

Test mode:	802.11g		Test channel:		Middle	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization
1549.344	2.66	28.89	38.38	31.26	24.43	54	-29.57	Vertical
3662.775	4.11	33.05	38.81	26.23	24.58	54	-29.42	Vertical
4874.000	4.36	34.77	39.26	27.64	27.51	54	-26.49	Vertical
7311.000	5.22	35.52	39.06	25.63	27.31	54	-26.69	Vertical
9748.000	6.49	37.76	37.85	22.34	28.74	54	-25.26	Vertical
11872.880	7.29	38.57	38.64	23.54	30.76	54	-23.24	Vertical
1549.344	2.66	28.89	38.38	31.25	24.42	54	-29.58	Horizontal
3662.775	4.11	33.05	38.81	27.55	25.90	54	-28.10	Horizontal
4874.000	4.36	34.77	39.26	27.58	27.45	54	-26.55	Horizontal
7311.000	5.22	35.52	39.06	27.53	29.21	54	-24.79	Horizontal
9748.000	6.49	37.76	37.85	24.52	30.92	54	-23.08	Horizontal
12024.960	7.17	38.73	38.72	25.69	32.87	54	-21.13	Horizontal



Test mode:		802.11g		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1498.912	2.65	28.56	38.37	51.61	44.45	74	-29.55		Vertical	
3719.146	4.06	33.09	38.84	47.81	46.12	74	-27.88		Vertical	
4924.000	4.40	34.82	39.28	48.26	48.20	74	-25.80		Vertical	
7386.000	5.15	35.44	39.05	48.66	50.20	74	-23.80		Vertical	
9848.000	6.62	38.06	37.79	45.86	52.75	74	-21.25		Vertical	
11692.920	7.39	38.39	38.56	46.34	53.56	74	-20.44		Vertical	
1553.293	2.66	28.91	38.38	50.10	43.29	74	-30.71		Horizontal	
3625.669	4.15	33.02	38.80	48.69	47.06	74	-26.94		Horizontal	
4924.000	4.40	34.82	39.28	49.26	49.20	74	-24.80		Horizontal	
7386.000	5.15	35.44	39.05	49.66	51.20	74	-22.80		Horizontal	
9848.000	6.62	38.06	37.79	45.61	52.50	74	-21.50		Horizontal	
11515.680	7.62	38.24	38.47	46.14	53.53	74	-20.47		Horizontal	

Test mode:		802.11g		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)		Polarization	
1498.912	2.65	28.56	38.37	32.54	25.38	54	-28.62		Vertical	
3719.146	4.06	33.09	38.84	28.45	26.76	54	-27.24		Vertical	
4924.000	4.40	34.82	39.28	29.53	29.47	54	-24.53		Vertical	
7386.000	5.15	35.44	39.05	29.65	31.19	54	-22.81		Vertical	
9848.000	6.62	38.06	37.79	26.98	33.87	54	-20.13		Vertical	
11692.920	7.39	38.39	38.56	27.46	34.68	54	-19.32		Vertical	
1553.293	2.66	28.91	38.38	31.25	24.44	54	-29.56		Horizontal	
3625.669	4.15	33.02	38.80	29.65	28.02	54	-25.98		Horizontal	
4924.000	4.40	34.82	39.28	30.25	30.19	54	-23.81		Horizontal	
7386.000	5.15	35.44	39.05	30.24	31.78	54	-22.22		Horizontal	
9848.000	6.62	38.06	37.79	27.24	34.13	54	-19.87		Horizontal	
11515.680	7.62	38.24	38.47	27.45	34.84	54	-19.16		Horizontal	

Test mode:		802.11n(HT20)		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
1498.912	2.65	28.56	38.37	51.07	43.91	74	-30.09	Vertical		
3634.910	4.14	33.03	38.80	44.69	43.06	74	-30.94	Vertical		
4824.000	4.31	34.72	39.24	44.68	44.47	74	-29.53	Vertical		
7236.000	5.28	35.60	39.06	43.99	45.81	74	-28.19	Vertical		
9648.000	6.51	37.45	37.91	43.09	49.14	74	-24.86	Vertical		
11515.680	7.62	38.24	38.47	43.43	50.82	74	-23.18	Vertical		
1498.250	2.65	28.56	38.37	50.84	43.68	74	-30.32	Horizontal		
3616.451	4.15	33.01	38.79	48.10	46.47	74	-27.53	Horizontal		
4824.000	4.31	34.72	39.24	46.98	46.77	74	-27.23	Horizontal		
7236.000	5.28	35.60	39.06	46.17	47.99	74	-26.01	Horizontal		
9648.000	6.51	37.45	37.91	46.83	52.88	74	-21.12	Horizontal		
11283.550	7.60	38.13	38.36	45.89	53.26	74	-20.74	Horizontal		

Test mode:		802.11n(HT20)		Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization		
1498.912	2.65	28.56	38.37	32.54	25.38	54	-28.62	Vertical		
3634.910	4.14	33.03	38.80	25.67	24.04	54	-29.96	Vertical		
4824.000	4.31	34.72	39.24	26.24	26.03	54	-27.97	Vertical		
7236.000	5.28	35.60	39.06	25.11	26.93	54	-27.07	Vertical		
9648.000	6.51	37.45	37.91	24.58	30.63	54	-23.37	Vertical		
11515.680	7.62	38.24	38.47	24.89	32.28	54	-21.72	Vertical		
1498.250	2.65	28.56	38.37	32.13	24.97	54	-29.03	Horizontal		
3616.451	4.15	33.01	38.79	29.65	28.02	54	-25.98	Horizontal		
4824.000	4.31	34.72	39.24	27.68	27.47	54	-26.53	Horizontal		
7236.000	5.28	35.60	39.06	28.13	29.95	54	-24.05	Horizontal		
9648.000	6.51	37.45	37.91	28.21	34.26	54	-19.74	Horizontal		
11283.550	7.60	38.13	38.36	26.24	33.61	54	-20.39	Horizontal		





Test mode:		802.11n(HT20)		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	52.05	44.89	74	-29.11	Vertical	
3776.385	4.00	33.13	38.86	44.95	43.22	74	-30.78	Vertical	
4874.000	4.36	34.77	39.26	44.98	44.85	74	-29.15	Vertical	
7311.000	5.22	35.52	39.06	45.69	47.37	74	-26.63	Vertical	
9748.000	6.49	37.76	37.85	43.34	49.74	74	-24.26	Vertical	
12024.960	7.17	38.73	38.72	44.22	51.40	74	-22.60	Vertical	
1495.101	2.64	28.54	38.37	52.13	44.94	74	-29.06	Horizontal	
3690.853	4.08	33.07	38.82	46.29	44.62	74	-29.38	Horizontal	
4874.000	4.36	34.77	39.26	44.41	44.28	74	-29.72	Horizontal	
7311.000	5.22	35.52	39.06	44.91	46.59	74	-27.41	Horizontal	
9748.000	6.49	37.76	37.85	42.57	48.97	74	-25.03	Horizontal	
11399.030	7.86	38.15	38.42	43.53	51.12	74	-22.88	Horizontal	

Test mode:		802.11n(HT20)		Test channel:		Middle	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization	
1498.912	2.65	28.56	38.37	33.21	26.05	54	-27.95	Vertical	
3776.385	4.00	33.13	38.86	25.87	24.14	54	-29.86	Vertical	
4874.000	4.36	34.77	39.26	25.89	25.76	54	-28.24	Vertical	
7311.000	5.22	35.52	39.06	26.31	27.99	54	-26.01	Vertical	
9748.000	6.49	37.76	37.85	24.56	30.96	54	-23.04	Vertical	
12024.960	7.17	38.73	38.72	25.87	33.05	54	-20.95	Vertical	
1495.101	2.64	28.54	38.37	33.45	26.26	54	-27.74	Horizontal	
3690.853	4.08	33.07	38.82	27.55	25.88	54	-28.12	Horizontal	
4874.000	4.36	34.77	39.26	25.89	25.76	54	-28.24	Horizontal	
7311.000	5.22	35.52	39.06	25.67	27.35	54	-26.65	Horizontal	
9748.000	6.49	37.76	37.85	23.54	29.94	54	-24.06	Horizontal	
11399.030	7.86	38.15	38.42	25.12	32.71	54	-21.29	Horizontal	



Test mode:		802.11n(HT20)		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
1553.293	2.66	28.91	38.38	50.10	43.29	74	-30.71		Vertical	
3266.346	3.80	32.43	38.63	48.81	46.41	74	-27.59		Vertical	
4924.000	4.40	34.82	39.28	49.26	49.20	74	-24.80		Vertical	
7386.000	5.15	35.44	39.05	49.66	51.20	74	-22.80		Vertical	
9848.000	6.62	38.06	37.79	45.61	52.50	74	-21.50		Vertical	
11515.680	7.62	38.24	38.47	46.14	53.53	74	-20.47		Vertical	
1491.300	2.64	28.52	38.37	49.91	42.70	74	-31.30		Horizontal	
3588.939	4.15	32.99	38.78	44.74	43.10	74	-30.90		Horizontal	
4924.000	4.40	34.82	39.28	44.32	44.26	74	-29.74		Horizontal	
7386.000	5.15	35.44	39.05	44.60	46.14	74	-27.86		Horizontal	
9848.000	6.62	38.06	37.79	41.80	48.69	74	-25.31		Horizontal	
11545.040	7.56	38.26	38.49	43.79	51.12	74	-22.88		Horizontal	

Test mode:		802.11n(HT20)		Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)		Polarization	
1553.293	2.66	28.91	38.38	31.21	24.40	54	-29.60		Vertical	
3266.346	3.80	32.43	38.63	29.12	26.72	54	-27.28		Vertical	
4924.000	4.40	34.82	39.28	30.55	30.49	54	-23.51		Vertical	
7386.000	5.15	35.44	39.05	30.58	32.12	54	-21.88		Vertical	
9848.000	6.62	38.06	37.79	26.47	33.36	54	-20.64		Vertical	
11515.680	7.62	38.24	38.47	27.56	34.95	54	-19.05		Vertical	
1491.300	2.64	28.52	38.37	30.51	23.30	54	-30.70		Horizontal	
3588.939	4.15	32.99	38.78	26.11	24.47	54	-29.53		Horizontal	
4924.000	4.40	34.82	39.28	25.48	25.42	54	-28.58		Horizontal	
7386.000	5.15	35.44	39.05	25.78	27.32	54	-26.68		Horizontal	
9848.000	6.62	38.06	37.79	22.65	29.54	54	-24.46		Horizontal	
11545.040	7.56	38.26	38.49	24.12	31.45	54	-22.55		Horizontal	

## Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

## 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2009		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:	<ul style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li><li>g. Test the EUT in the lowest channel , the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ul>
Test Mode:	AC charge + Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

**Test plot as follows:**

Test mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Vertical
------------	---------	---------------	--------	---------	------	----------

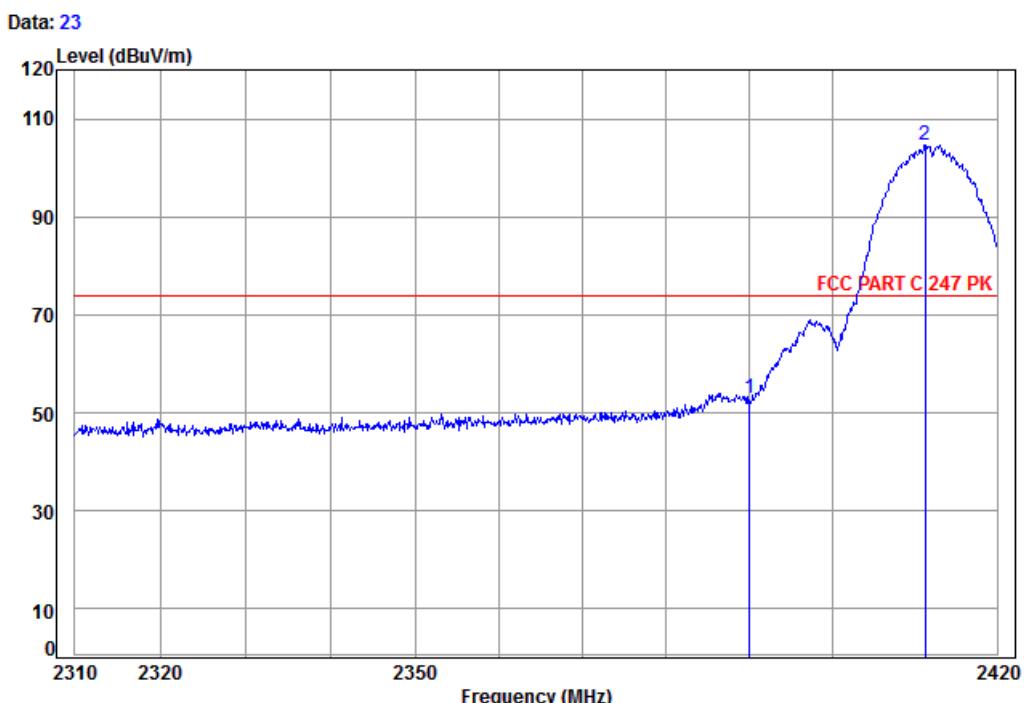

Site : chamber


Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3914RF

Mode: : 2412 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	55.69	52.94	74.00	-21.06
2 pp	2411.24	3.38	32.41	38.46	107.45	104.78	74.00	30.78

Test mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	---------	---------------	--------	---------	------	------------

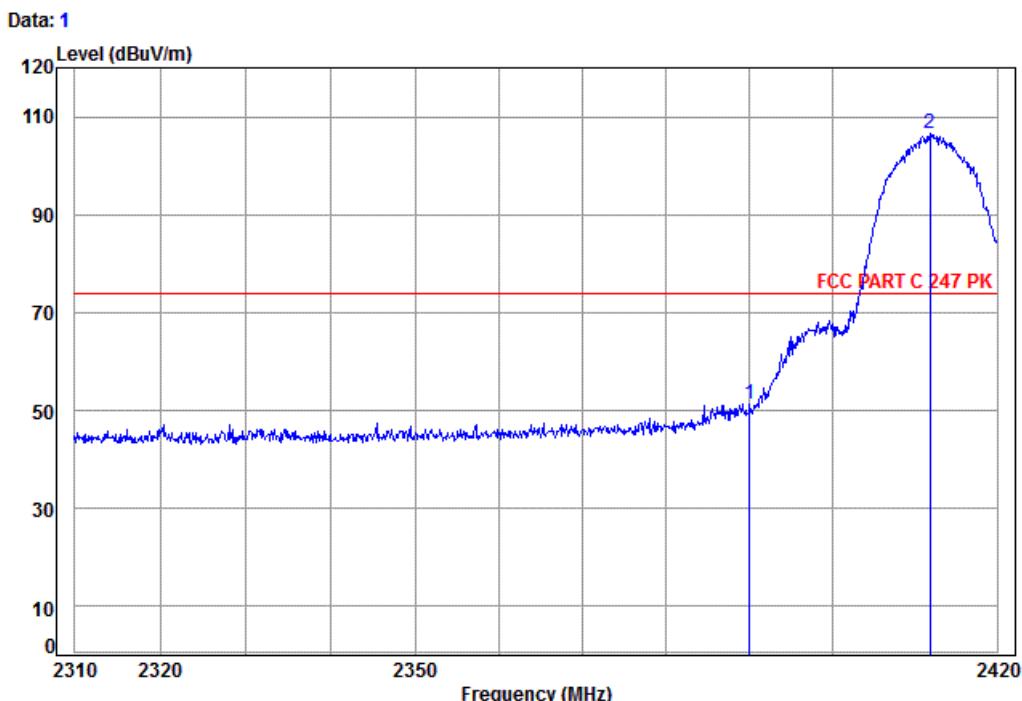


Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal  
Job No: : 3914RF  
Mode: : 2412 B Band edge

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	54.16	51.41	74.00	-22.59
2 pp	2411.80	3.38	32.41	38.46	109.14	106.47	74.00	32.47

Test mode:	802.11b	Test channel:	Lowest	Remark:	Average	Vertical
------------	---------	---------------	--------	---------	---------	----------

Data: 24

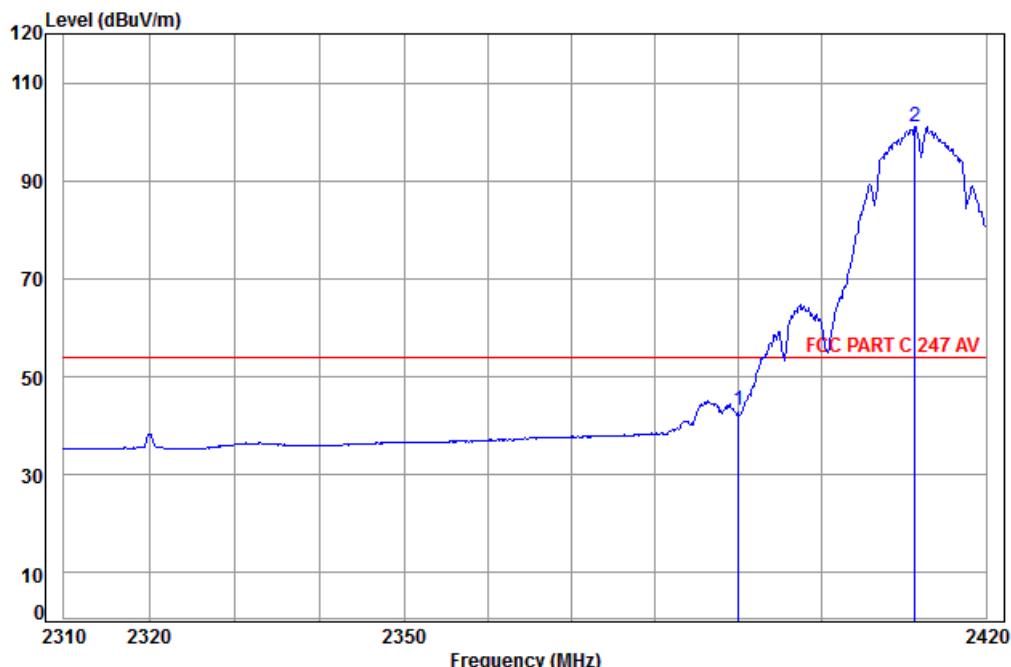

Site : chamber


Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3914RF

Mode: : 2412 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	45.89	43.14	54.00	-10.86
2 pp	2411.35	3.38	32.41	38.46	103.69	101.02	54.00	47.02

Test mode:	802.11b	Test channel:	Lowest	Remark:	Average	Horizontal
------------	---------	---------------	--------	---------	---------	------------

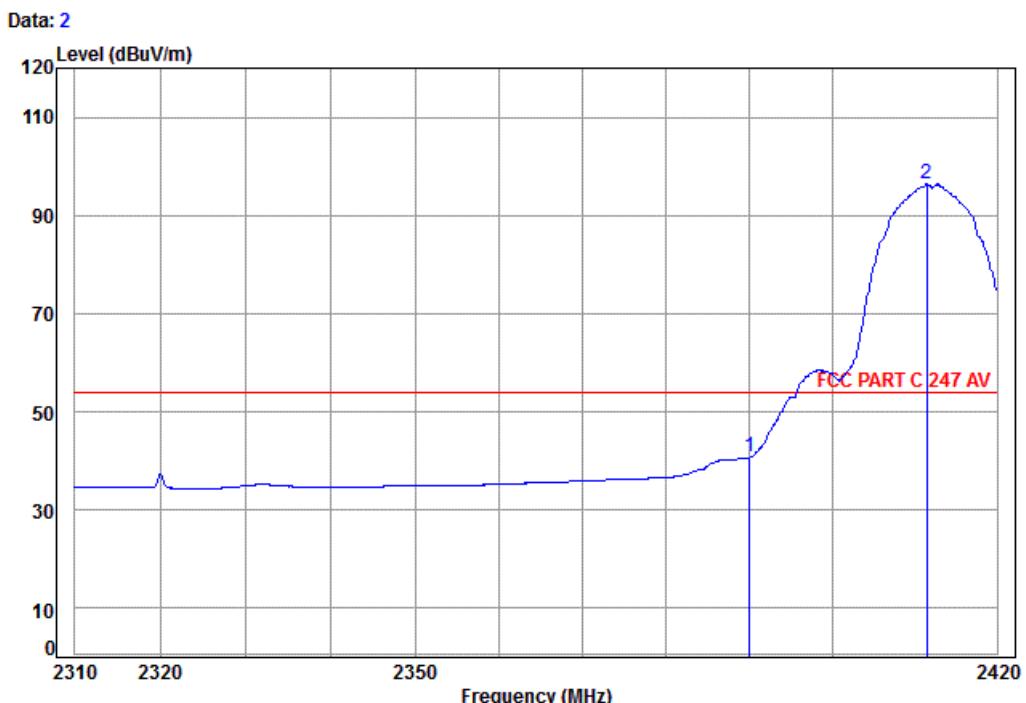

Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 3914RF

Mode: : 2412 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	43.70	40.95	54.00	-13.05
2 pp	2411.46	3.38	32.41	38.46	99.08	96.41	54.00	42.41

Test mode:	802.11b	Test channel:	Highest	Remark:	Peak	Vertical
------------	---------	---------------	---------	---------	------	----------

Data: 21

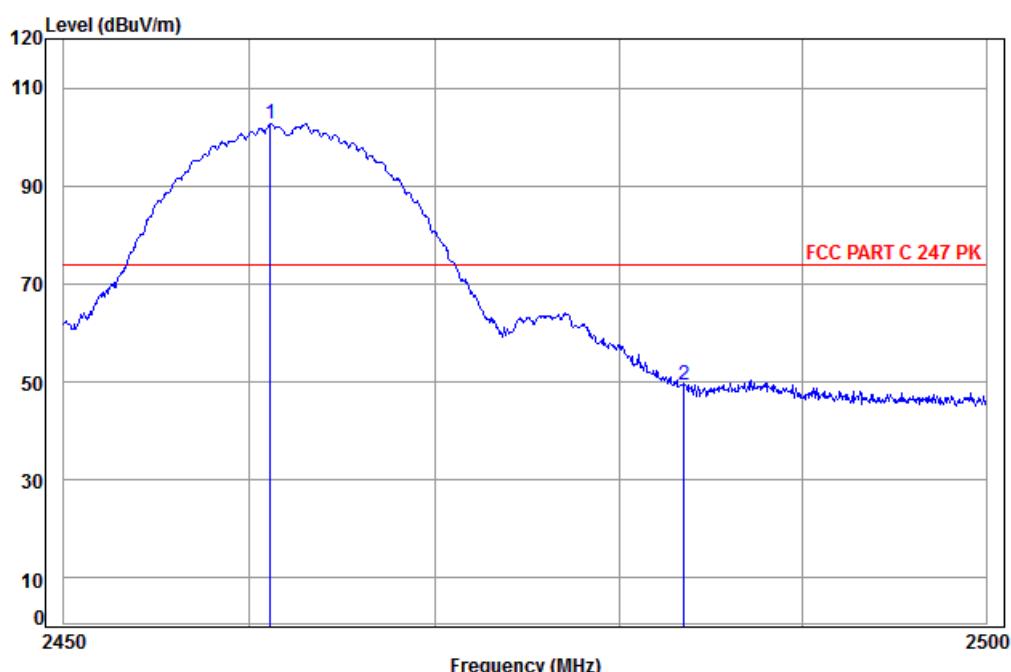

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical


Job No: : 3914RF

Mode: : 2462 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.11	3.44	32.43	38.46	105.28	102.69	74.00	28.69
2	2483.50	3.47	32.44	38.47	51.90	49.34	74.00	-24.66



Test mode:	802.11b	Test channel:	Highest	Remark:	Peak	Horizontal
------------	---------	---------------	---------	---------	------	------------

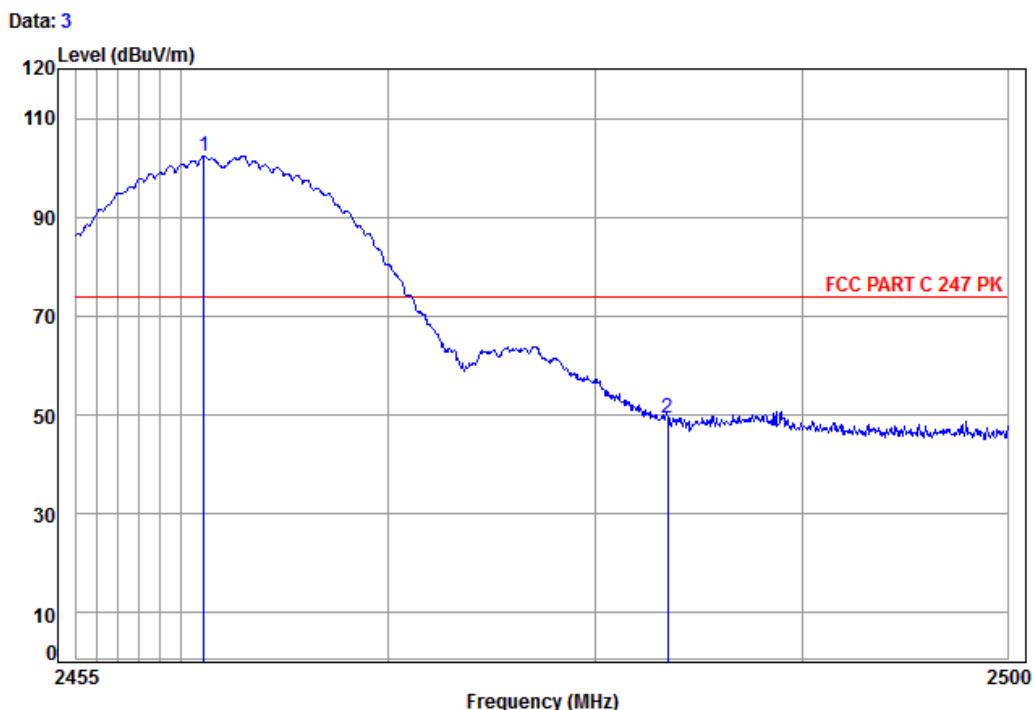

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 3914RF

Mode: : 2462 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
1 pp	2461.12	3.44	32.43	38.46	105.04	102.45	74.00	28.45
2	2483.50	3.47	32.44	38.47	51.92	49.36	74.00	-24.64

Test mode:	802.11b	Test channel:	Highest	Remark:	Average	Vertical
------------	---------	---------------	---------	---------	---------	----------

Data: 22

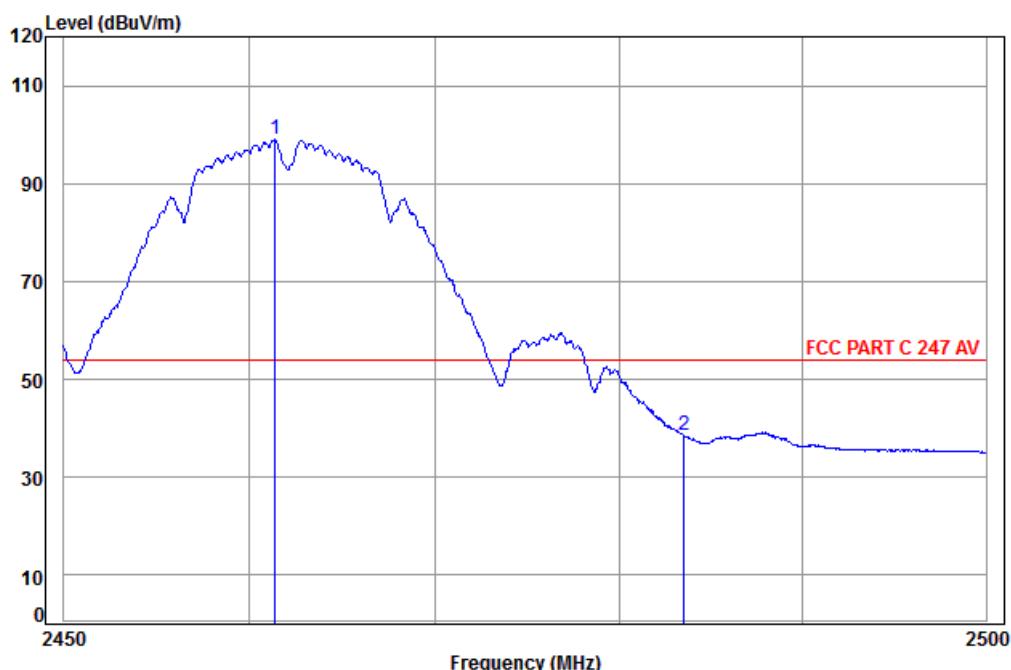

Site : chamber


Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3914RF

Mode: : 2462 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.36	3.44	32.43	38.46	101.56	98.97	54.00	44.97
2	2483.50	3.47	32.44	38.47	41.06	38.50	54.00	-15.50

Test mode:	802.11b	Test channel:	Highest	Remark:	Average	Horizontal
------------	---------	---------------	---------	---------	---------	------------

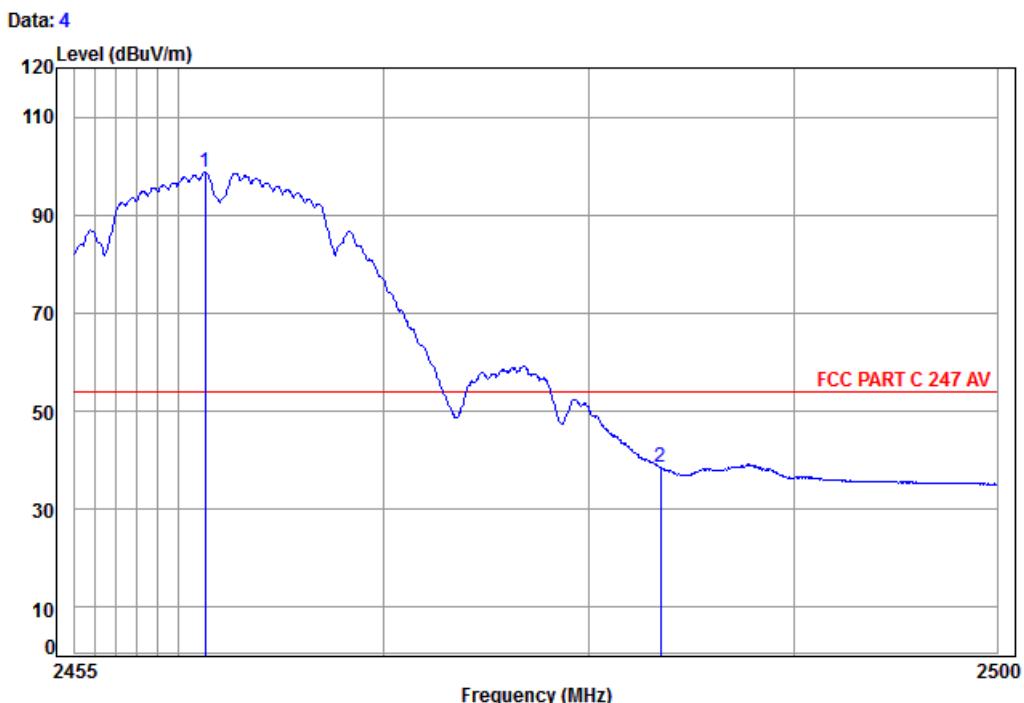

Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal


Job No: : 3914RF

Mode: : 2462 B Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.30	3.44	32.43	38.46	101.29	98.70	54.00	44.70
2	2483.50	3.47	32.44	38.47	41.14	38.58	54.00	-15.42

Test mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Vertical
------------	---------	---------------	--------	---------	------	----------

Data: 17

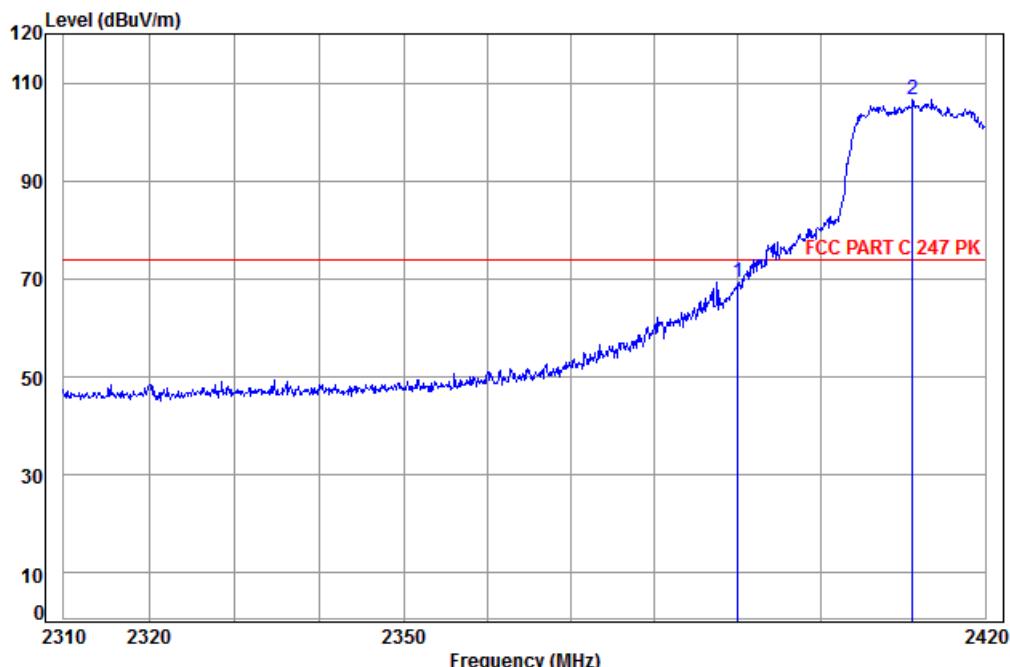

Site : chamber


Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3914RF

Mode: : 2412 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	72.14	69.39	74.00	-4.61
2 pp	2411.12	3.38	32.41	38.46	109.25	106.58	74.00	32.58

Test mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	---------	---------------	--------	---------	------	------------

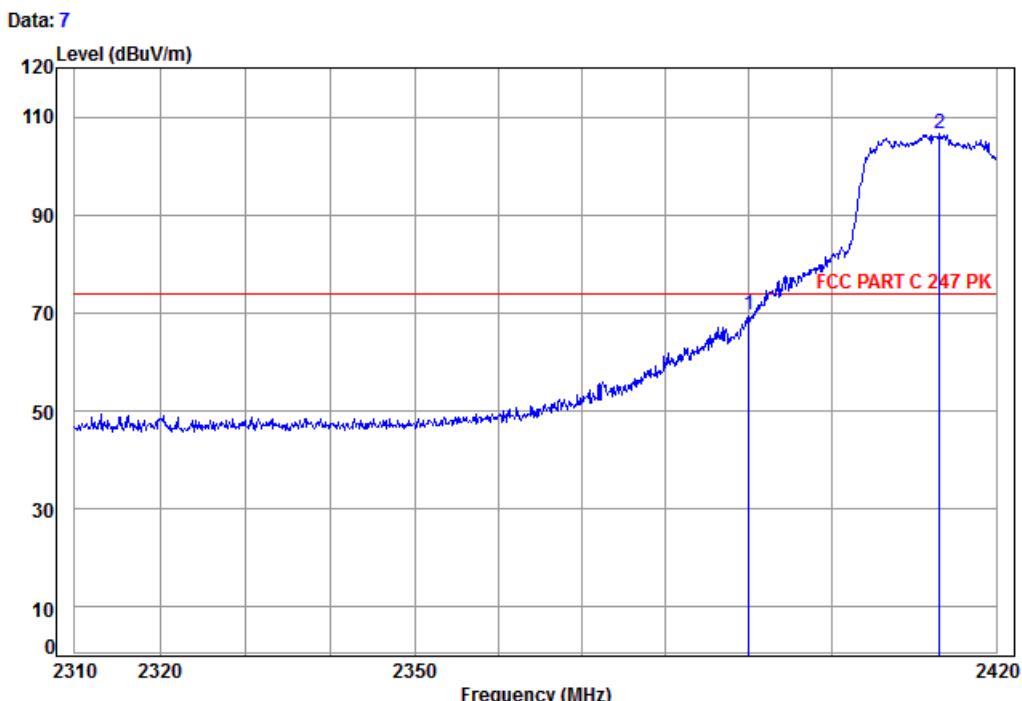

Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 3914RF

Mode: : 2412 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	72.50	69.75	74.00	-4.25
2 pp	2413.14	3.39	32.41	38.46	109.20	106.54	74.00	32.54

Test mode:	802.11g	Test channel:	Lowest	Remark:	Average	Vertical
------------	---------	---------------	--------	---------	---------	----------

Data: 18

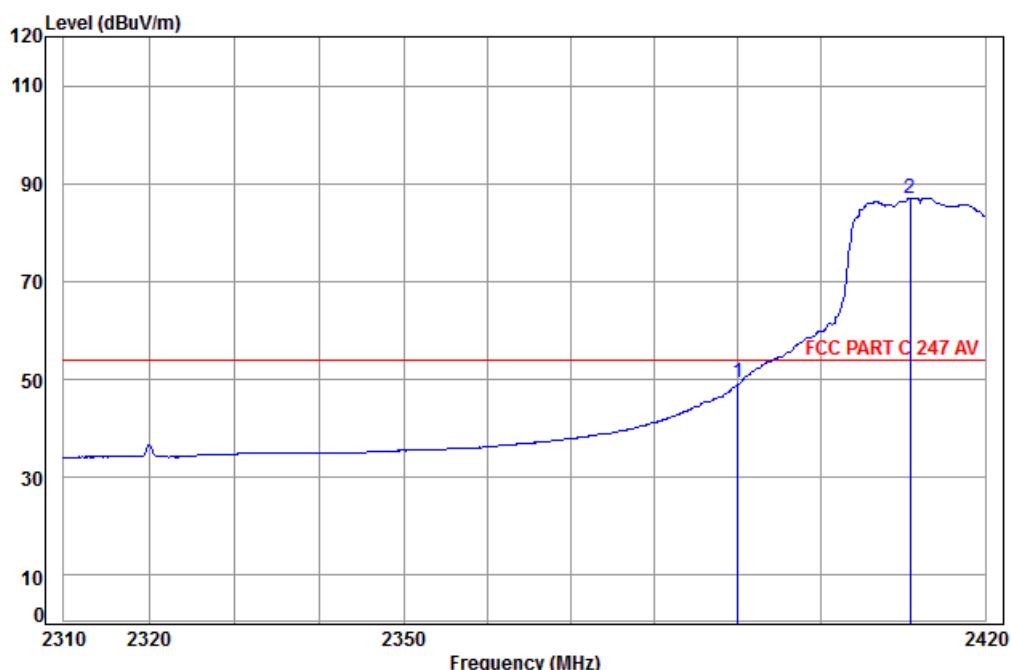

Site : chamber


Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3914RF

Mode: : 2412 G Band edge

Freq	MHz	Cable	Ant	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Level	Line	Limit
1	2390.00	3.36	32.35	38.46	52.00	49.25	54.00	-4.75
2 pp	2410.90	3.38	32.41	38.46	89.80	87.13	54.00	33.13

Test mode:	802.11g	Test channel:	Lowest	Remark:	Average	Horizontal
------------	---------	---------------	--------	---------	---------	------------

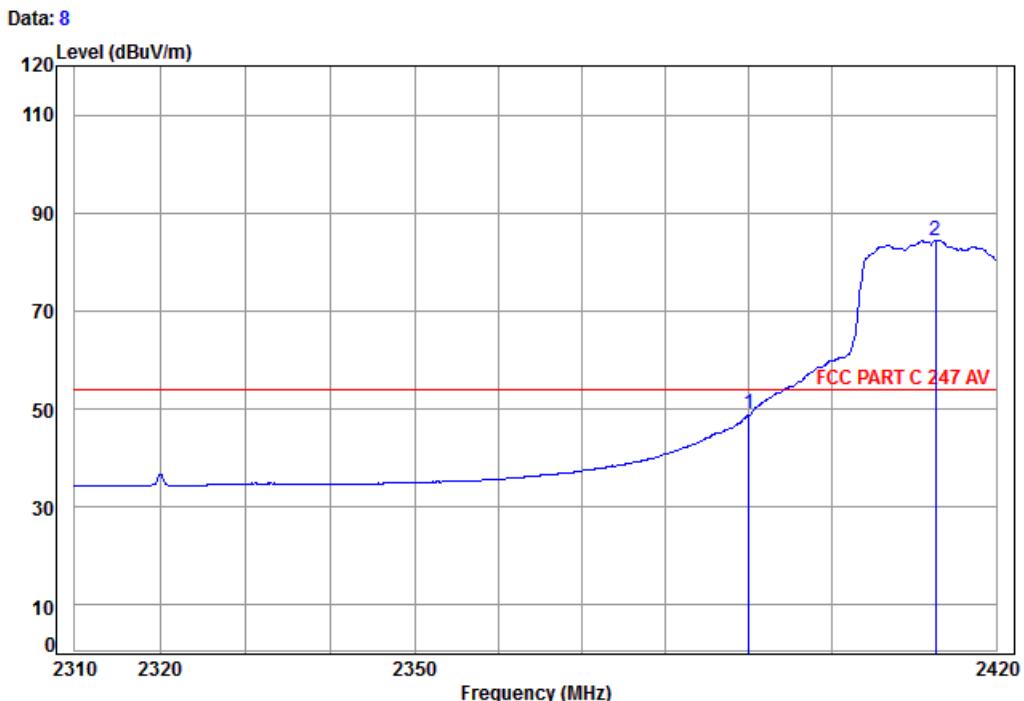


Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3914RF

Mode: : 2412 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	51.68	48.93	54.00	-5.07
2 pp	2412.58	3.39	32.41	38.46	86.97	84.31	54.00	30.31

Test mode:	802.11g	Test channel:	Highest	Remark:	Peak	Vertical
------------	---------	---------------	---------	---------	------	----------

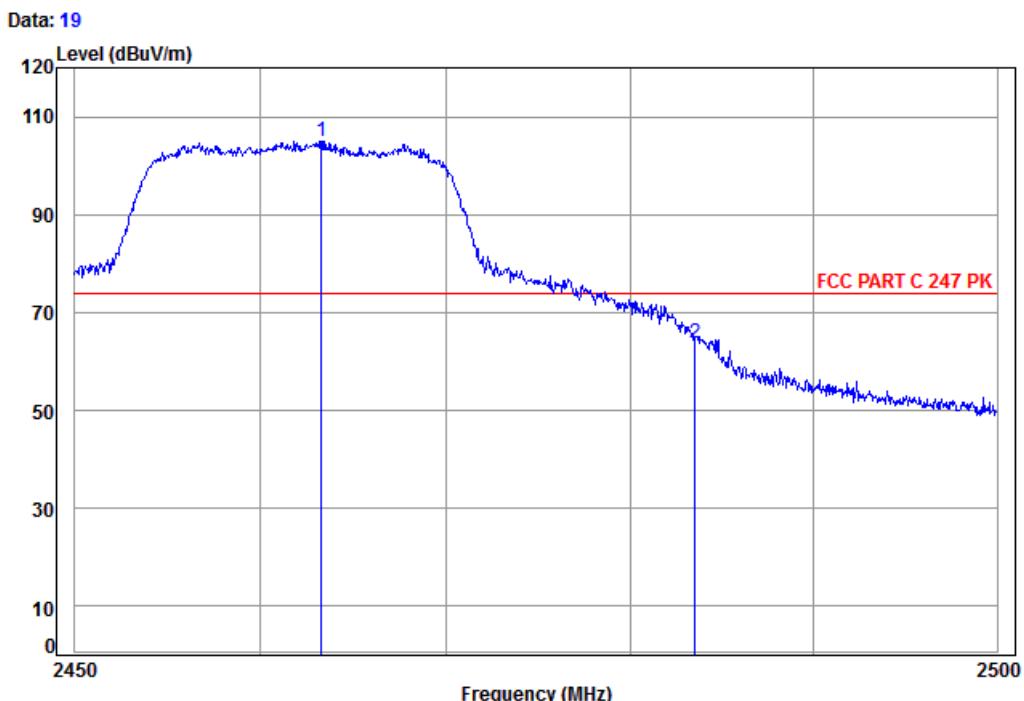

Site : chamber


Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3914RF

Mode: : 2462 G Band edge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Level	Line Limit	Over Limit	
				Level	dBuV	dBuV/m	dBuV/m	dB
MHz	dB	dB/m	dB					
1 pp	2463.25	3.44	32.43	38.46	107.66	105.07	74.00	31.07
2	2483.50	3.47	32.44	38.47	66.37	63.81	74.00	-10.19

Test mode:	802.11g	Test channel:	Highest	Remark:	Peak	Horizontal
------------	---------	---------------	---------	---------	------	------------

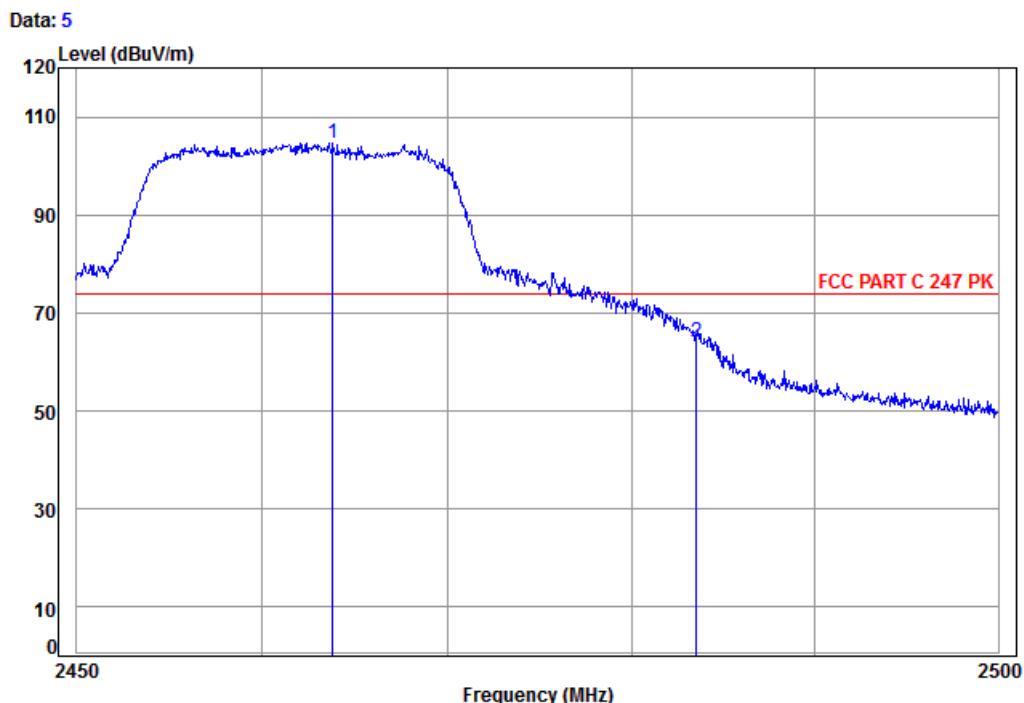

Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 3914RF

Mode: : 2462 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2463.80	3.45	32.43	38.46	107.22	104.64	74.00	30.64
2	2483.50	3.47	32.44	38.47	66.59	64.03	74.00	-9.97

Test mode:	802.11g	Test channel:	Highest	Remark:	Average	Vertical
------------	---------	---------------	---------	---------	---------	----------

Data: 20

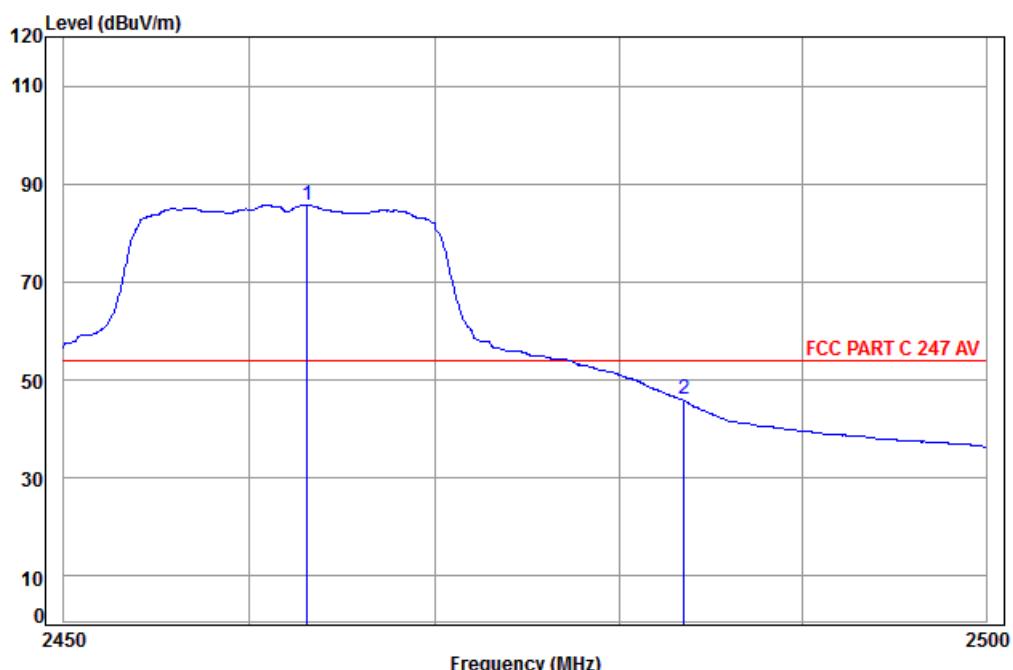

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 3914RF

Mode: : 2462 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2463.10	3.44	32.43	38.46	88.26	85.67	54.00	31.67
2	2483.50	3.47	32.44	38.47	48.50	45.94	54.00	-8.06



Test mode:	802.11g	Test channel:	Highest	Remark:	Average	Horizontal
------------	---------	---------------	---------	---------	---------	------------

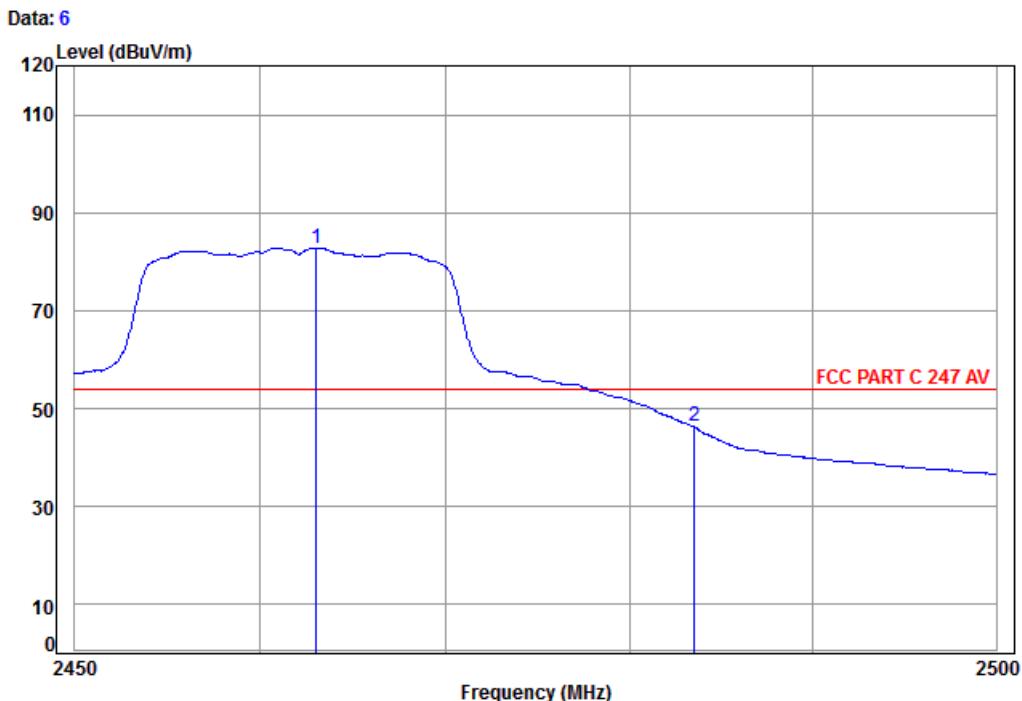


Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3914RF

Mode: : 2462 G Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2463.00	3.44	32.43	38.46	85.41	82.82	54.00	28.82
2	2483.50	3.47	32.44	38.47	48.87	46.31	54.00	-7.69

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Vertical
------------	---------------	---------------	--------	---------	------	----------

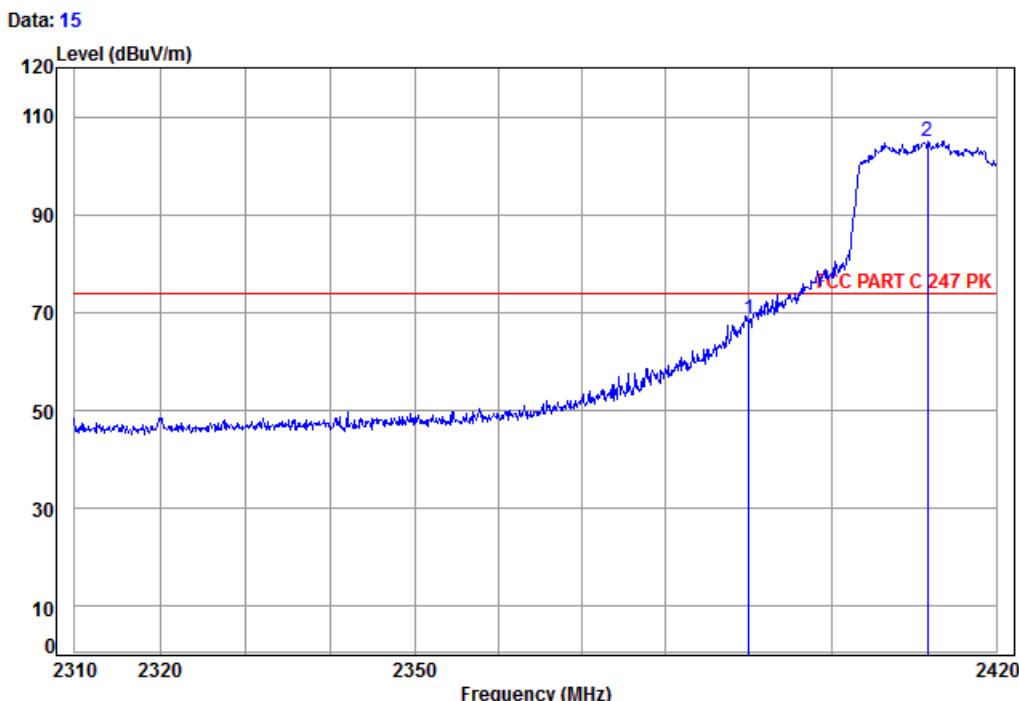


Site : chamber  
Condition: FCC PART C 247 PK 3m Vertical

Job No: : 3914RF

Mode: : 2412 N20 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	71.56	68.81	74.00	-5.19
2 pp	2411.68	3.38	32.41	38.46	107.65	104.98	74.00	30.98

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	---------------	---------------	--------	---------	------	------------

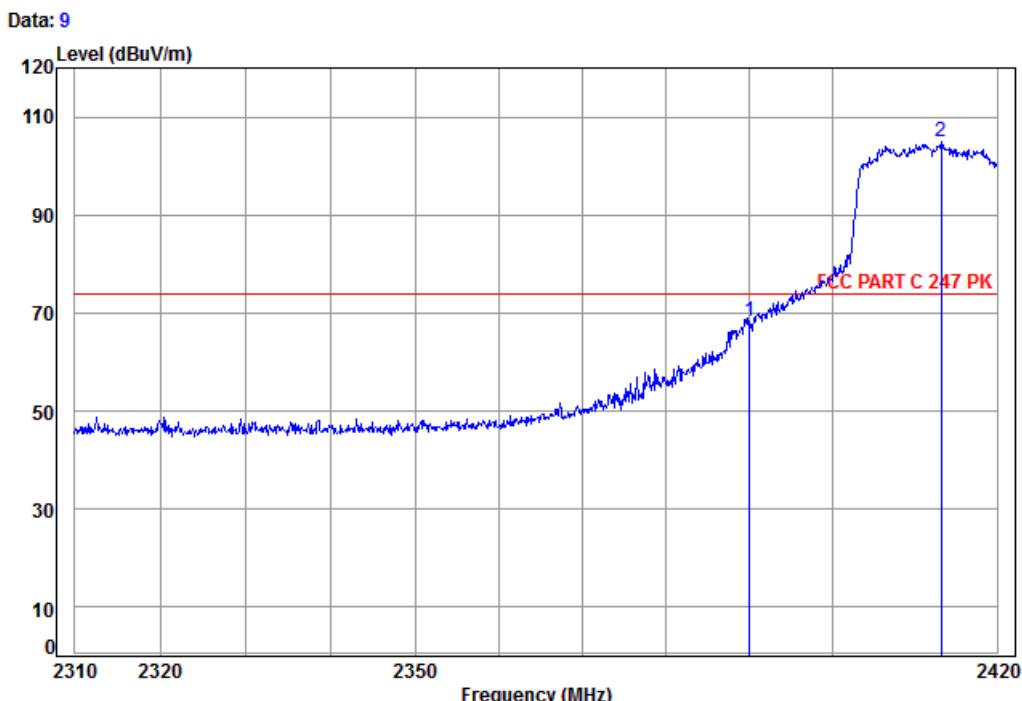


Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal  
Job No: : 3914RF  
Mode: : 2412 N20 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	3.36	32.35	38.46	70.99	68.24	74.00	-5.76
2 pp	2413.26	3.39	32.41	38.46	107.48	104.82	74.00	30.82

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Vertical
------------	---------------	---------------	--------	---------	---------	----------

Data: 16

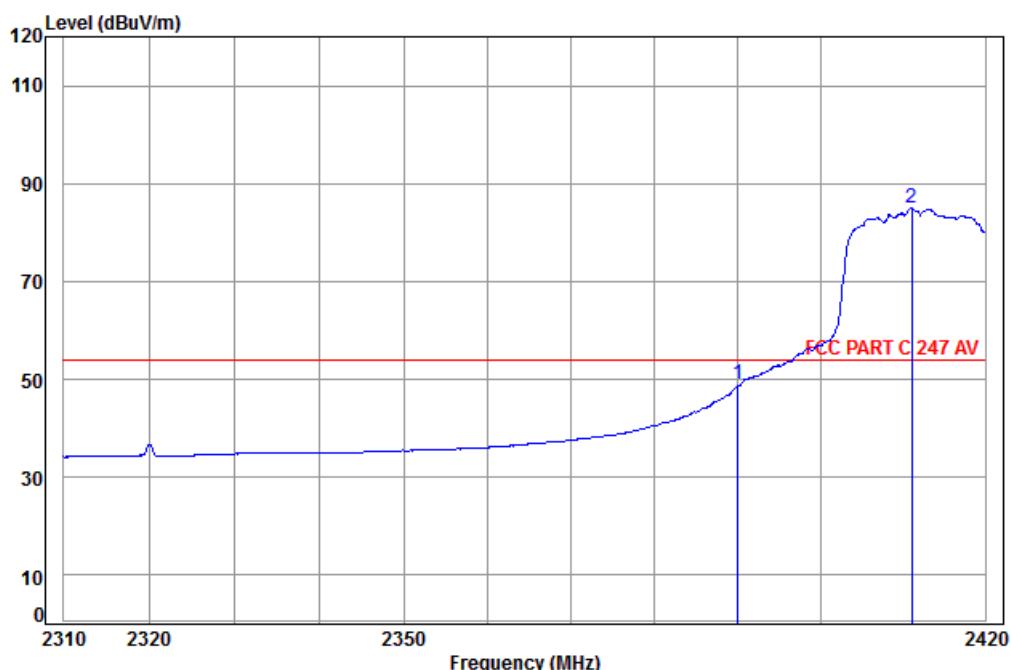

Site : chamber


Condition: FCC PART C 247 AV 3m Vertical

Job No: : 3914RF

Mode: : 2412 N20 Band edge

Freq	MHz	Cable	Ant	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Level	Line	Limit
1	2390.00	3.36	32.35	38.46	51.69	48.94	54.00	-5.06
2 pp	2411.01	3.38	32.41	38.46	87.58	84.91	54.00	30.91


Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Horizontal
------------	---------------	---------------	--------	---------	---------	------------

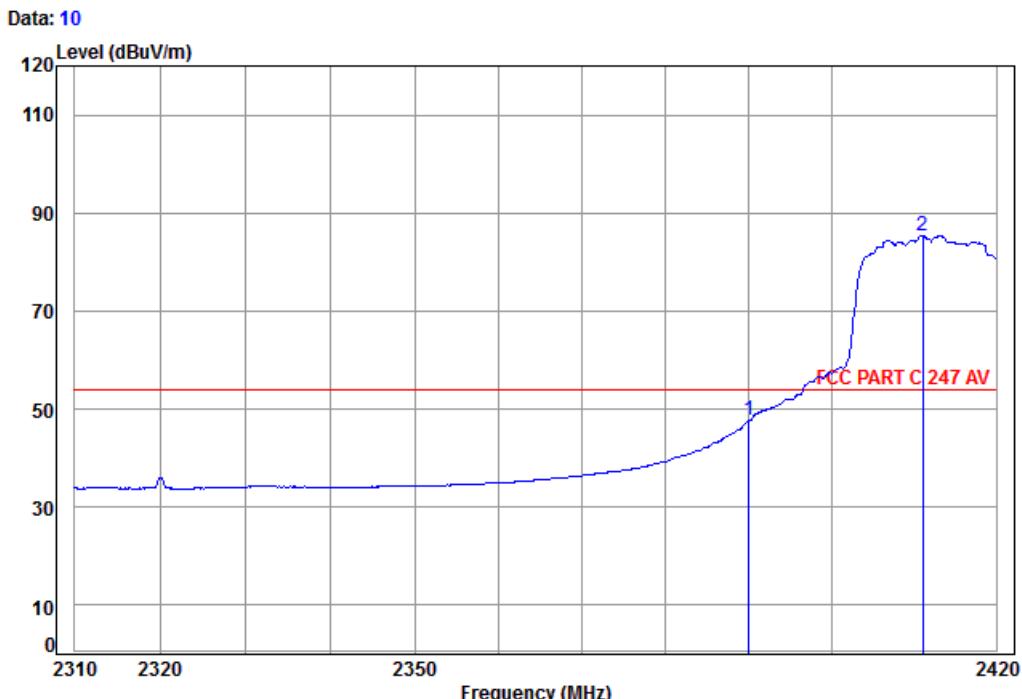

Site : chamber  
Condition: FCC PART C 247 AV 3m Horizontal  
Job No: : 3914RF  
Mode: : 2412 N20 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
1	2390.00	3.36	32.35	38.46	50.61	47.86	54.00	-6.14
2 pp	2411.01	3.38	32.41	38.46	88.16	85.49	54.00	31.49


Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Vertical
------------	---------------	---------------	---------	---------	------	----------

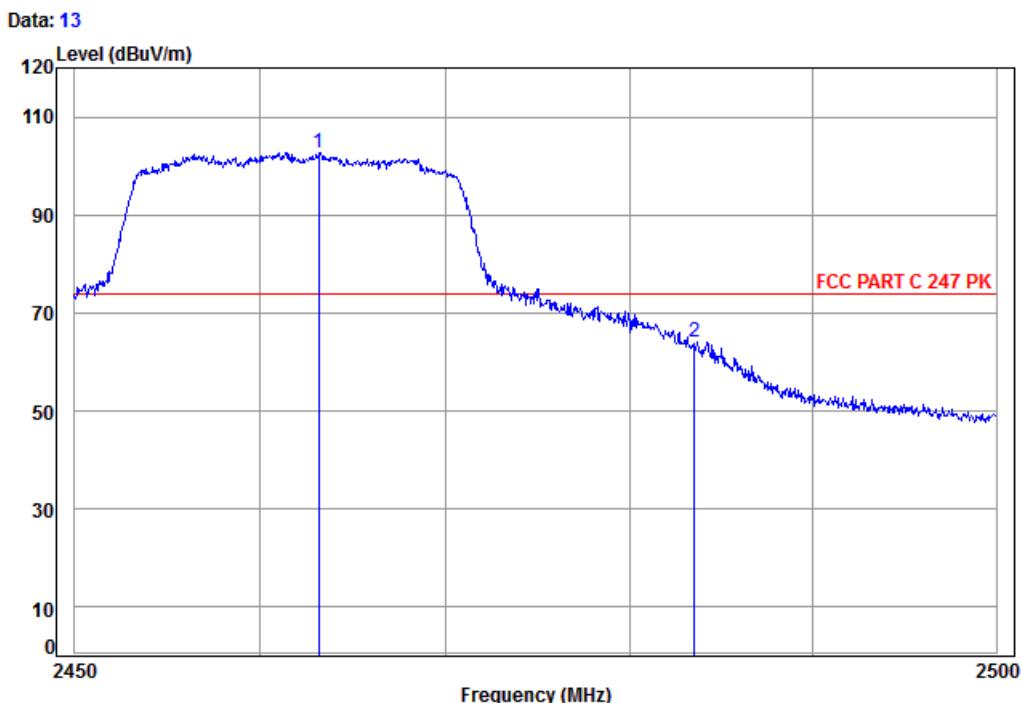

Site : chamber  
Condition: FCC PART C 247 PK 3m Vertical  
Job No: : 3914RF  
Mode: : 2462 N20 Band edge

	Cable	Ant	Preamplifier	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2463.15	3.44	32.43	38.46	105.37	102.78	74.00	28.78
2	2483.50	3.47	32.44	38.47	66.78	64.22	74.00	-9.78

Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Horizontal
------------	---------------	---------------	---------	---------	------	------------

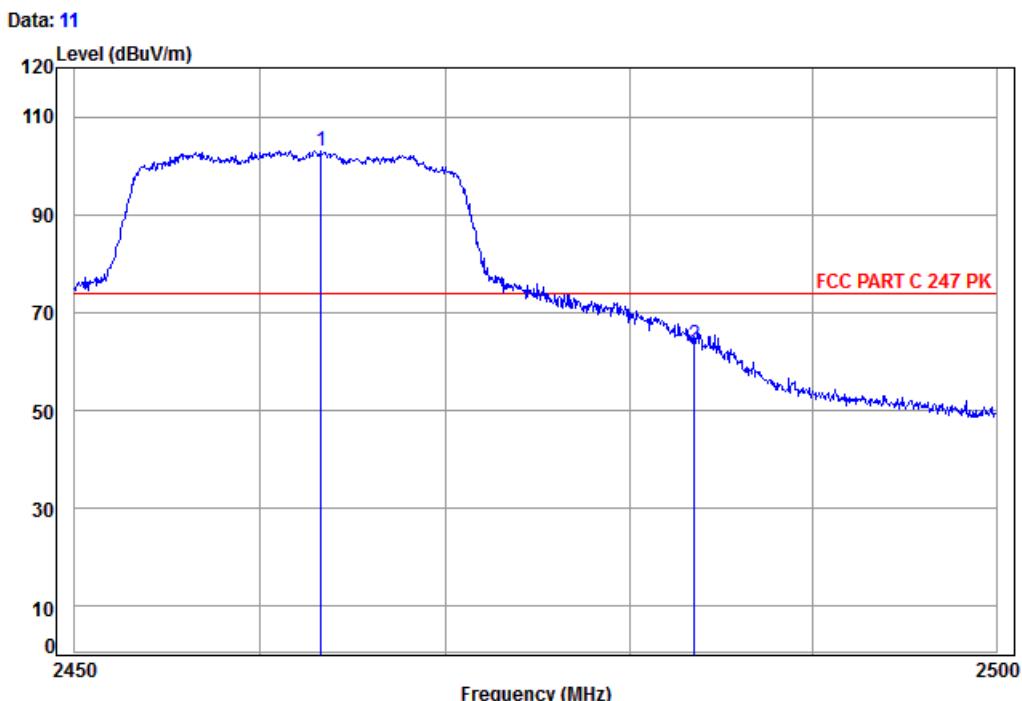

Site : chamber  
Condition: FCC PART C 247 PK 3m Horizontal


Job No: : 3914RF

Mode: : 2462 N20 Band edge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Level	Line Level	Over Limit	
				dB	dB/m	dB	dBuV	dBuV/m
1 pp	2463.25	3.44	32.43	38.46	105.75	103.16	74.00	29.16
2	2483.50	3.47	32.44	38.47	65.93	63.37	74.00	-10.63

Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Vertical
------------	---------------	---------------	---------	---------	---------	----------

Data: 14

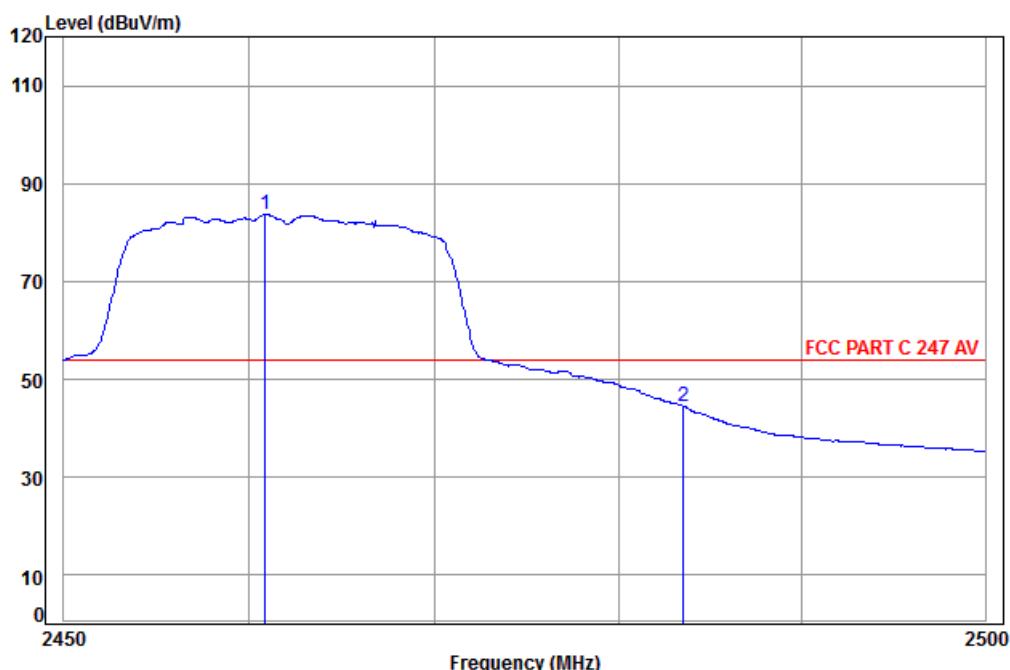

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical


Job No: : 3914RF

Mode: : 2462 N20 Band edge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Level	Line Limit	Over Limit	
				Level				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2460.86	3.44	32.43	38.46	86.27	83.68	54.00	29.68
2	2483.50	3.47	32.44	38.47	47.12	44.56	54.00	-9.44

Test mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Horizontal
------------	---------------	---------------	---------	---------	---------	------------

Data: 12

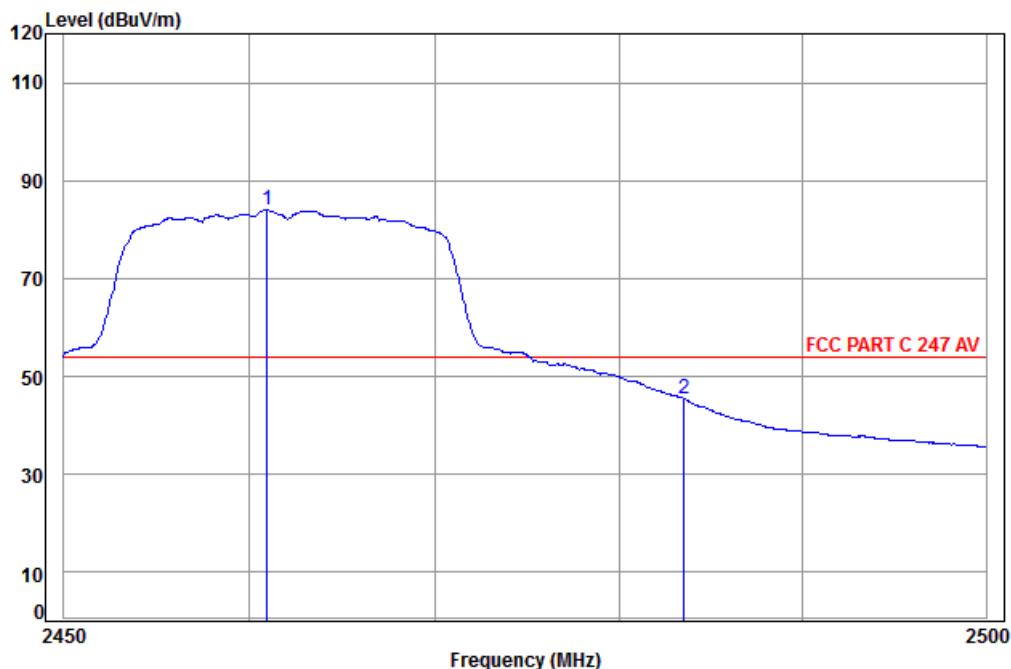

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 3914RF

Mode: : 2462 N20 Band edge

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Level	Over Line	Over Limit
				dB	dB/m	dB	dBuV	dBuV/m
1 pp	2460.91	3.44	32.43	38.46	86.63	84.04	54.00	30.04
2	2483.50	3.47	32.44	38.47	48.09	45.53	54.00	-8.47

## Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor