



Test report No:  
 NIE: 61249REM.004

## Test report

### FCC Rules and Regulations CFR 47, Part 15, Subpart B (10-1-16 Edition) & ICES-003 (January 2016, Updated April 2017)

(*) Identification of item tested	Multimedia System
(*) Trademark	Continental
(*) Model and /or type reference tested	NAC EUR 19W4
Other identification of the product	HW Version: D4 SW Version: 42.01.21.42 FCC ID: ZFW-HW19W4
(*) Features	See on page 4
Manufacturer	Continental Automotive Czech Republic, s.r.o. Prumyslová 1851 250 01 Brandýs nad Labem, Czech Republic
Test method requested, standard	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition) & ICES-003 (January 2016, updated April 2017)
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López EMC Consumer & RF Lab. Manager
Date of issue	2019-09-11
Report template No	FDT08_22 (*) "Data provided by the client"

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty.....	3
Data provided by the client .....	4
Usage of samples .....	4
Test sample description.....	4
Identification of the client .....	7
Testing period and place .....	7
Document history.....	7
Environmental conditions .....	8
Remarks and comments.....	9
Testing verdicts.....	9
List of equipment used during the test.....	9
Summary .....	10
Appendix A: Test results.....	11

## Competences and guarantees

---

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 1000 MHz is  $l = \pm 4,9$  dB for quasi-peak measurements,  $l = \pm 4,6$  dB for peak measurements ( $k = 2$ ).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 1000 MHz to 18GHz is  $l = \pm 2,6$  dB for peaks and average measurements ( $k = 2$ ).

## Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The NAC EUR 19W4 is Multimedia Systems and OEM products for PSA.  
This product is connected to the BSI (Boitier de Servitude Intelligent) via a CAN Low Speed BUS.  
Two displays can be connected.
3. Features:
  - BT 3.0
  - WiFi b, g, n, 2.4 GHz only
  - Radio (AM, FM, DAB band III & L)
  - Navigation (GPS, GLONASS, GALILEO, SBAS)
  - External GMSL colour display, CAN interface to car, Internal Audio Amplifier, USB plug

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples under test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
61249D/016	Multimedia System	NAC EUR 19W4	W4_BS19210000145_ TOP	2019-07-23

Auxiliary elements used with the sample S/01:

Control Nº	Description	Model	Serial Nº	Date of reception
61249D/022	HD Display DGT2	---	00042_DGT2_HD_SN TJ07170830001632	2019-07-23
61249D/045	DB25 Supply Cord for CAN Traffic Simulator (C6)	---	00021	2019-07-23
61249D/047	CAN Traffic Simulator (C6)	---	00025	2019-07-23
61249D/053	Harness with 3 cables (Fakra Connectos)	---	00045	2019-07-23
61249D/054	33 Ohms Resistor with heatsink	---	00046	2019-07-23
61249D/058	4x4 Ohms - loudspeaker Dummy Loads with Heatsink	---	00050	2019-07-23
61249D/059	Full Harness - FAKRA Block Connector	---	00051	2019-07-23
61249D/061	USB Keys - Shielded	---	00032	2019-07-23
61249D/064	USB Keys - Shielded	---	00035	2019-07-23
61249D/066	USB Keys - Shielded	---	00044	2019-07-23
61249D/067	Antenna for Car - AM/FM + DAB	---	00056	2019-07-23
61249D/069	GPS antenna with Fakra plug	---	00053	2019-07-23

## Test sample description

Ports..... :	Port name and description	Cable					
		Specified length [m]	Attached during test	Shielded			
	Power supply	2	<input type="checkbox"/>	<input type="checkbox"/>			
	CAN LS	2	<input type="checkbox"/>	<input type="checkbox"/>			
	Loudspeakers	2	<input type="checkbox"/>	<input type="checkbox"/>			
	Video Input	2	<input type="checkbox"/>	<input type="checkbox"/>			
	CD Power	2	<input type="checkbox"/>	<input type="checkbox"/>			
	CD Audio IN	2	<input type="checkbox"/>	<input type="checkbox"/>			
	Line Out Subwoofer	2	<input type="checkbox"/>	<input type="checkbox"/>			
	Line Out Central	2	<input type="checkbox"/>	<input type="checkbox"/>			
	AUX In Stereo	2	<input type="checkbox"/>	<input type="checkbox"/>			
	Microphone 1	2	<input type="checkbox"/>	<input type="checkbox"/>			
Microphone 2	2	<input type="checkbox"/>	<input type="checkbox"/>				
Supplementary information to the ports..... :							
Rated Power supply..... :	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 12Vdc.					
<input type="checkbox"/>	DC:						
Rated Power .....	12V – 15 A → 180W						
Internal operating frequencies .....	Max. Frequency = Bluetooth $F_{max}$ 2.4835 GHz						
Other parameters.....	FCC ID: ZFW-HW19W4						
Software version .....	42.01.21.42						
Hardware version.....	D4						
Dimensions in cm (L x W x D) .....	22 x 5.2 x 16						
Mounting position..... :	<input type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					

	<input checked="" type="checkbox"/>	Other: Car Dashboard Equipment		
Modules/parts .....	Module/parts of test item		Type	Manufacturer
	--			
Accessories (not part of the test item) .....	Description		Type	Manufacturer
	GPS antenna		Antenna GPS7 M-Fakra Femelle	HIRSCHMANN
	AM/FM/DAB antenna		RDA 015-1450 RD/S	HIRSCHMANN
	CAN SIM Box		C6	RIEDERER ELEKTRONIK
Documents as provided by the applicant.....	Description		File name	Issue date
	Technical Specifications		HW2019_BT.pdf	
	Technical Specifications		HW2019_WIFI.pdf	

## Identification of the client

---

CONTINENTAL AUTOMOTIVE RAMBOUILLET FRANCE S.A.S.  
1, rue de Clairefontaine  
78120, Rambouillet, FRANCE

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2019-07-22
Date (finish)	2019-07-23

## Document history

Report number	Date	Description
61249REM.004	2019-09-11	First release

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 30 % Max. = 60 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar



## Remarks and comments

The test have been performed by the technical personnel: David Rubio & Daniel Lopez.

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

## List of equipment used during the test

Control Number	Description	Model	Manufacturer	Next Calibration
0246	HORN ANTENNA 1-18GHz	11966E	HEWLETT PACKARD	2021-10-13
3545	USB TEMPERATURE AND HUMIDITY SENSOR	HUMIDIPROBE	PICO TECHNOLOGY	2020-04-03
3547	USB TEMPERATURE AND HUMIDITY SENSOR	HUMIDIPROBE	PICO TECHNOLOGY	2020-04-03
4659	PRE-AMPLIFIER G>28dB 1-18GHz	BBV 9718	SCHWARZBECK	2019-05-25
6666	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2020-02-14
6815	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2022-02-01

## Summary

Emission Test		
Requirement – Test case	Verdict	Remark
Radiated emission test (30 MHz – 1000 MHz)	Pass	N/A
Radiated emission test (1 GHz – 18 GHz)	Pass	N/A
Conducted emission test (150 kHz to 30 MHz)	N/A	See 1
<u>Supplementary information and remarks:</u> 1) This test is not applicable for DC power ports.		

## Appendix A: Test results

## Appendix A content

DESCRIPTION OF THE OPERATION MODES .....	13
RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE .....	14

## DESCRIPTION OF THE OPERATION MODES

---

The operation modes described in this paragraph constitute a functionality of the sample under test for itself. The operation modes used by the samples to which the present report refers, are shown in the following table:

OPERATION MODE	DESCRIPTION
OM#01	EUT ON. Bluetooth and WiFi without communication established. GPS in reception mode. FM radio in reception mode. Power Supply: 13.5Vdc


## RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE

<b>LIMITS:</b>	Product standard:	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition), Secs. 15.109; ICES-003 (January 2016, updated April 2017)
	Test standard:	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition), Secs. 15.109; ICES-003 (January 2016, updated April 2017)


### Limits of interference Class B

The applied limit for radiated emissions, 3 m distance, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-16 Edition), Secs. 15.109 & ICES-003 (January 2016, updated April 2017) in the frequency range 30 MHz to 12.75 GHz for class B equipments.

Frequency range (MHz)	QP Limit for 3 m		PK Limit for 3 m
	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30 to 88	100	40	---
88 to 216	150	43.5	---
216 to 960	200	46	---
Above 960	500	54	74

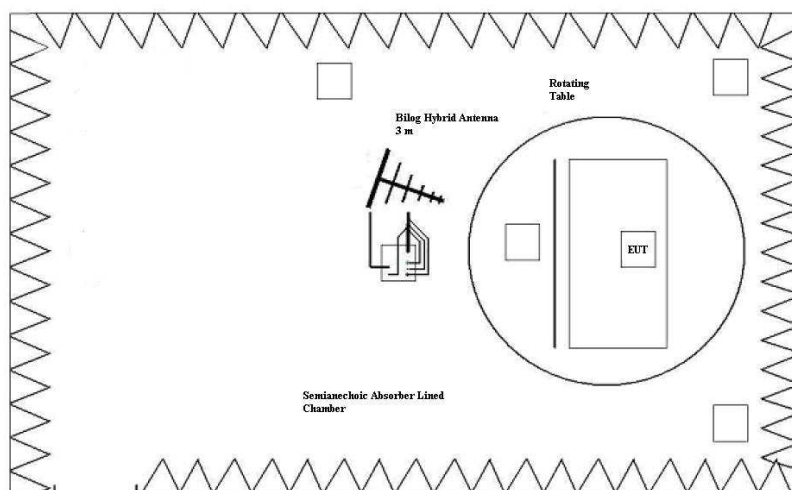

Setup for measurements < 1GHz.

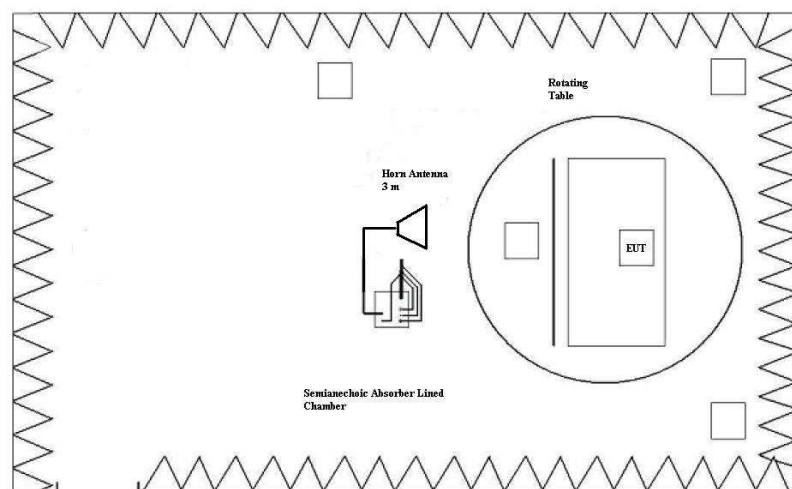

Setup for measurements > 1GHz.

<b>TESTED SAMPLE:</b>	S/01
<b>TESTED OPERATION MODES:</b>	OM#01
<b>TEST RESULTS:</b>	CRmmnnRRPP: CR, Radiated Condition; mm: Sample number; nn: Operation mode; RR: Range; PP: Polarization.


CRmmnnRRPP	Description	Result
CR0101LR	Range: 30 MHz - 1000 MHz.	P
CR0101HR1_VP	Range: 1GHz – 18GHz. Vertical polarization	P
CR0101HR1_HP	Range: 1GHz – 18GHz. Horizontal polarization	P

Note: Range: f>18 GHz. Test required only to the 5th harmonics of the maximum internal work frequency in the EUT.

**Radiated Emission: CR0101LR**

Project: 61249REM.004  
 Company: CONTINENTAL AUTOMOTIVE RAMBOUILLET FRANCE S.A.S.  
 Sample: S/01  
 Operation mode: OM#01  
 Description: EUT ON. Bluetooth and WiFi without communication established.  
 GPS in reception mode. FM radio in reception mode. Power Supply:  
 13.5Vdc.

**FCC Part15 Class B**

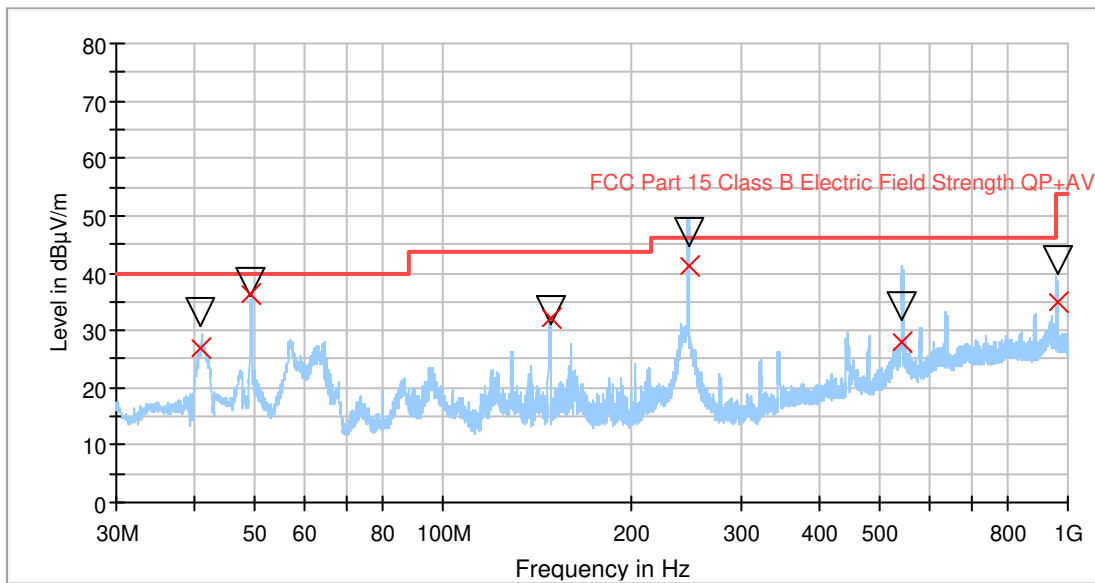

- Peak Preview
- FCC Part 15 Class B Electric Field Strength QP+AV
- ▽ MaxPeak
- × QuasiPeak

**Maximizations**


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Height (cm)	Pol	Azimuth (deg)
41.020000	33.05	26.94	113.0	V	224.0
49.215000	38.47	36.46	104.0	V	157.0
148.460000	33.60	32.17	229.0	H	238.0
247.615000	47.02	41.26	106.0	V	-1.0
539.960000	34.40	28.05	114.0	V	28.0
960.380000	42.12	34.98	131.0	H	105.0



**Radiated Emission: CR0101HR1\_HP**

Project: 61249REM.004  
 Company: CONTINENTAL AUTOMOTIVE RAMBOUILLET FRANCE S.A.S.  
 Sample: S/01  
 Operation mode: OM#01  
 Description: EUT ON. Bluetooth and WiFi without communication established.  
 GPS in reception mode. FM radio in reception mode. Power Supply:  
 13.5Vdc. Horizontal Polarization

**FCC Part 15 ClassB 1-18 GHz**

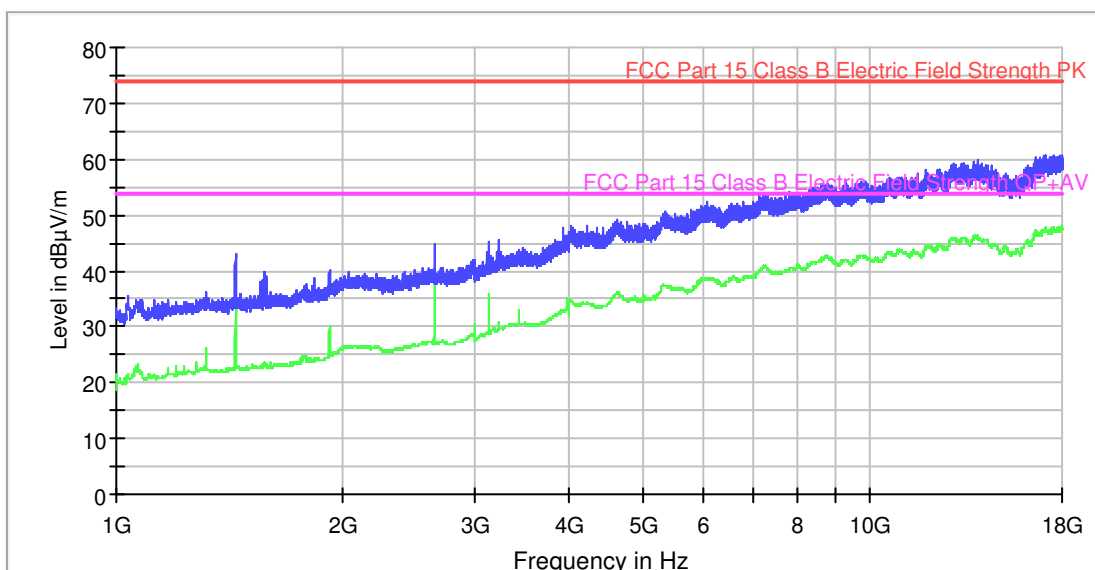

- Average Scan
- Peak Scan
- FCC Part 15 Class B Electric Field Strength PK
- FCC Part 15 Class B Electric Field Strength QP+AV


**Subrange Maxima**

Frequency (MHz)	PK+ CLRWR (dBµV/m)	AVG CLRWR (dBµV/m)
1320.400000	36.2	26.3
1440.000000	43.1	34.0
1920.000000	40.3	30.2
3115.600000	45.3	36.0
4024.800000	48.1	34.6
5352.800000	50.7	37.3
7235.600000	53.8	40.7
9319.200000	56.3	42.0
13305.600000	59.3	45.9
17108.400000	60.6	47.7

**Radiated Emission: CR0101HR1\_VP**

Project: 61249REM.004  
 Company: CONTINENTAL AUTOMOTIVE RAMBOUILLET FRANCE S.A.S.  
 Sample: S/01  
 Operation mode: OM#01  
 Description: EUT ON. Bluetooth and WiFi without communication established.  
 GPS in reception mode. FM radio in reception mode. Power Supply:  
 13.5Vdc. Vertical Polarization

**FCC Part 15 ClassB 1-18 GHz**

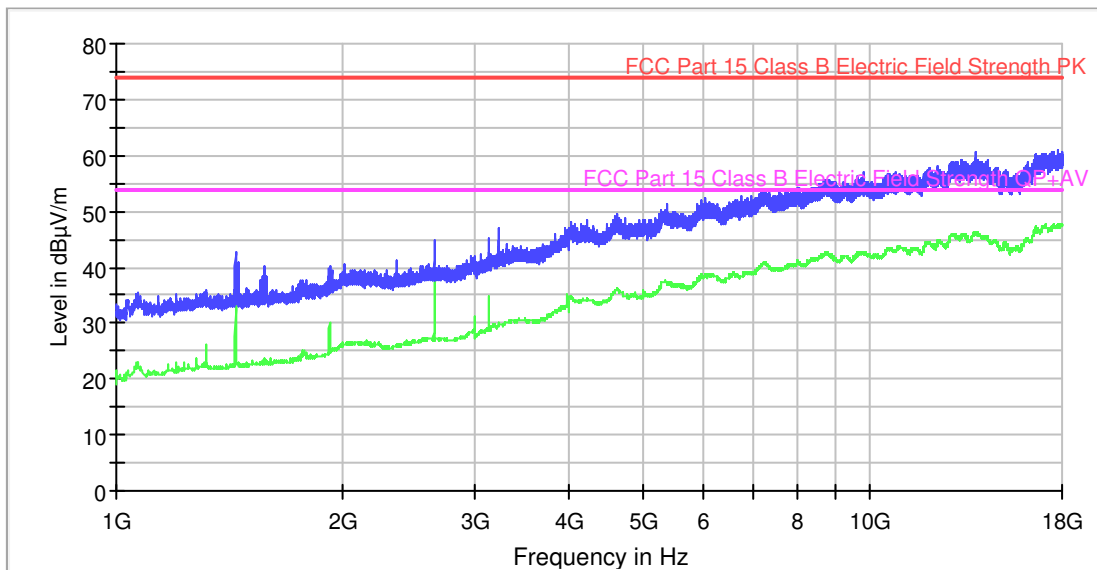

- Average Scan
- Peak Scan
- FCC Part 15 Class B Electric Field Strength PK
- FCC Part 15 Class B Electric Field Strength QP+AV

**Subrange Maxima**

Frequency (MHz)	PK+ CLRWR (dBµV/m)	AVG CLRWR (dBµV/m)
1316.000000	35.8	22.4
1440.000000	42.7	33.8
2357.200000	41.3	26.1
3119.200000	45.1	29.0
4213.600000	48.4	34.2
5402.800000	51.2	37.0
7253.600000	53.8	40.7
9842.800000	57.0	42.5
13288.400000	59.3	46.0
17807.600000	61.0	47.5