




# FCC RADIO TEST REPORT

Applicant : SteelSeries ApS.  
Address : 656 W Randolph St., Suite 3E Chicago, IL 60661,  
USA  
Equipment : Wireless Mouse  
Model No. : M-00028  
Trade Name :   
FCC ID. : ZHK-M00028

**I HEREBY CERTIFY THAT :**

The sample was received on Jul. 28, 2021 and the testing was completed on Sep. 17, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

- 1. **Summary of Test Procedure and Test Results**..... 5
  - 1.1 Applicable Standards ..... 5
- 2. **Test Configuration of Equipment under Test** ..... 6
  - 2.1 Feature of Equipment under Test..... 6
  - 2.2 Carrier Frequency of Channels ..... 7
  - 2.3 Test Mode and Test Software ..... 7
  - 2.4 Description of Test System..... 8
  - 2.5 General Information of Test..... 9
  - 2.6 Measurement Uncertainty ..... 10
- 3. **Test Equipment and Ancillaries Used for Tests** ..... 11
- 4. **Antenna Requirements**..... 13
  - 4.1 Standard Applicable ..... 13
  - 4.2 Antenna Construction and Directional Gain..... 13
- 5. **Test of AC Power Line Conducted Emission** ..... 14
  - 5.1 Test Limit ..... 14
  - 5.2 Test Procedures ..... 14
  - 5.3 Typical Test Setup ..... 15
  - 5.4 Test Result and Data ..... 16
  - 5.5 Test Photographs ..... 18
- 6. **Test of Spurious Emission (Radiated)** ..... 19
  - 6.1 Test Limit ..... 19
  - 6.2 Test Procedures ..... 19
  - 6.3 Typical Test Setup ..... 21
  - 6.4 Test Result and Data (9kHz ~ 30MHz)..... 23
  - 6.5 Test Result and Data (30MHz ~ 1GHz)..... 23
  - 6.6 Test Result and Data (1GHz ~ 25GHz)..... 25
  - 6.7 Restricted Bands of Operation ..... 31
  - 6.8 Test Photographs (30MHz ~ 1GHz)..... 32
  - 6.9 Test Photographs (1GHz ~ 25GHz) ..... 33
- 7. **Test of Spurious Emission (Conducted)**..... 35
  - 7.1 Test Limit ..... 35
  - 7.2 Test Procedure ..... 35
  - 7.3 Test Setup Layout ..... 35
  - 7.4 Test Result and Data ..... 35
- 8. **On Time, Duty Cycle and Measurement methods** ..... 38
  - 8.1 Test Limit ..... 38
  - 8.2 Test Procedure ..... 38
  - 8.3 Test Setup Layout ..... 38
  - 8.4 Test Result and Data ..... 38
- 9. **6dB Bandwidth Measurement Data** ..... 40
  - 9.1 Test Limit ..... 40



9.2 Test Procedures ..... 40

9.3 Test Setup Layout ..... 40

9.4 Test Result and Data ..... 40

**10. Maximum Peak and Average Output Power ..... 42**

10.1 Test Limit ..... 42

10.2 Test Procedures ..... 42

10.3 Test Setup Layout ..... 42

10.4 Test Result and Data ..... 42

**11. Power Spectral Density ..... 43**

11.1 Test Limit ..... 43

11.2 Test Procedures ..... 43

11.3 Test Setup Layout ..... 43

11.4 Test Result and Data ..... 43

**12. Radio Frequency Exposure ..... 45**

12.1 Applicable Standards ..... 45

12.2 EUT Specification ..... 45

12.3 Test Results ..... 46



### History of this test report

Report No.	Issue Date	Description
21070207-TRFCC01	Oct. 04, 2021	Original



# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.247(e)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21070207-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Operation Frequency Range	2400-2483.5MHz
Center Frequency Range	2402-2480MHz
Modulation Type	BLE: GFSK 2.4GHz: $\pi/4$ -DQPSK
Data Rate	BLE: GFSK: 1Mbps 2.4GHz: $\pi/4$ -DQPSK: 2Mbps
Antenna Type	PCB Antenna
Antenna Gain	3.75 dBi
USB TYPE-C Cable	Brand: steelseries Model: ss-c-cable
Battery	Brand: SteelSeries ApS. Model: PL 402535
Firmware Number	HID\VID_1038&PID_185A&REV_0020&MI_04
Serial Number	62618DVT07252100104

Note: For more details, please refer to the User’s manual of the EUT.



### 2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>*01</b>	<b>2402</b>	15	2430	29	2458
02	2404	16	2432	30	2460
03	2406	17	2434	31	2462
04	2408	18	2436	32	2464
05	2410	19	2438	33	2466
06	2412	<b>20</b>	<b>*2440</b>	34	2468
07	2414	21	2442	35	2470
08	2416	22	2444	36	2472
09	2418	23	2446	37	2474
10	2420	24	2448	38	2476
11	2422	25	2450	39	2478
12	2424	26	2452	<b>*40</b>	<b>2480</b>
13	2426	27	2454	--	--
14	2428	28	2456	--	--

Note: Channels remarked \* are selected to perform test.

### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, " USB\_Utility Ver. V02" under Windows OS system was executed to transmit and receive data via 2.4GHz.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	$\pi/4$ -DQPSK(2Mbps) Form System (120V/60 Hz)
2	$\pi/4$ -DQPSK(2Mbps) Form System (240V/60 Hz)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions ((9KHz ~30MHz & 30MHz ~ 1GHz))	
Test Mode	Operating Description
1	$\pi/4$ -DQPSK(2Mbps) Form System (120V/60 Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	$\pi/4$ -DQPSK(2Mbps) Form System (120V/60 Hz)
caused "Test Mode 1" generated the worst case, they were reported as the final data.	

Modulation Type	TX CONFIGURATION
$\pi/4$ -DQPSK	1TX



### 2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS

**2.5 General Information of Test**

Test Site	<b>CerpPASS Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/09/17	28.8°C / 37%	Nick Guan
Radiated Emissions	3M03-NK	2021/09/14~2021/09/16	22~23°C / 44~45%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/09/16	22°C / 52%	Dian Chen



## 2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~25GHz)	±6.6dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A051717	2021/06/03	2022/06/02
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-02203	2021/03/16	2022/03/15
Horn Antenna	EMCO	3116	31974	2020/09/24	2021/09/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2021/08/06	2022/08/05
Preamplifier	EM Electronics corp.	EM330	60820	2021/04/19	2022/04/18
Preamplifier	EM Electronics corp.	EM01G18G	60831	2021/06/25	2022/06/24
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	00419M	2021/06/29	2022/06/28
Cable-1.5m(30M-1G)	HUBER SUHNER	RG-214	00420M	2021/06/29	2022/06/28
Cable-9m(30M-1G)	HUBER SUHNER	RG-214	00430M	2021/06/29	2022/06/28
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130606	2021/3/15	2022/3/14
Cable-1.5m(1G-26.5G)	EMEC	EM104-SMSM-1.5M	EM104-SMSM-1.5M	2021/06/29	2022/06/28
Cable-9m(1G-26.5G)	EMEC	EM104-SMSM-9M	EM104-SMSM-9M	2021/06/29	2022/06/28
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Serial No</b>	<b>Calibration Date</b>	<b>Valid Date</b>
EMI Receiver	ROHDE & SCHWARZ	ESCI	101402	2021/03/12	2022/03/11
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2021/06/02	2022/06/01
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2021/03/10	2022/03/09
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna Type	PCB Antenna
Antenna Gain	3.75 dBi



## 5. Test of AC Power Line Conducted Emission

The power supply is DC source, so this item doesn't require testing.

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

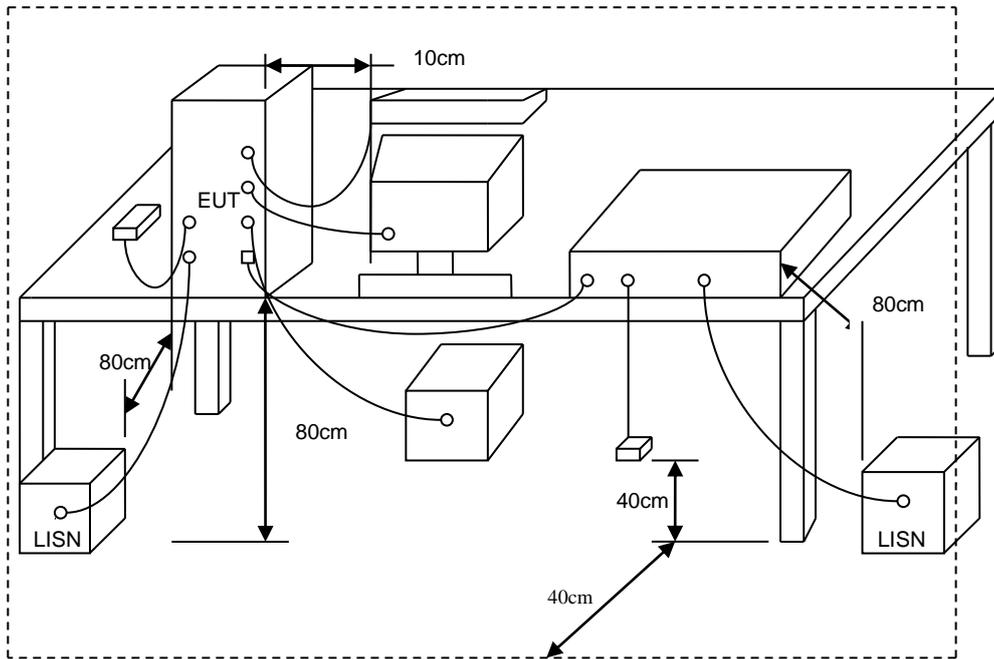



5.4 Test Result and Data

Power	: AC 240V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 2		:

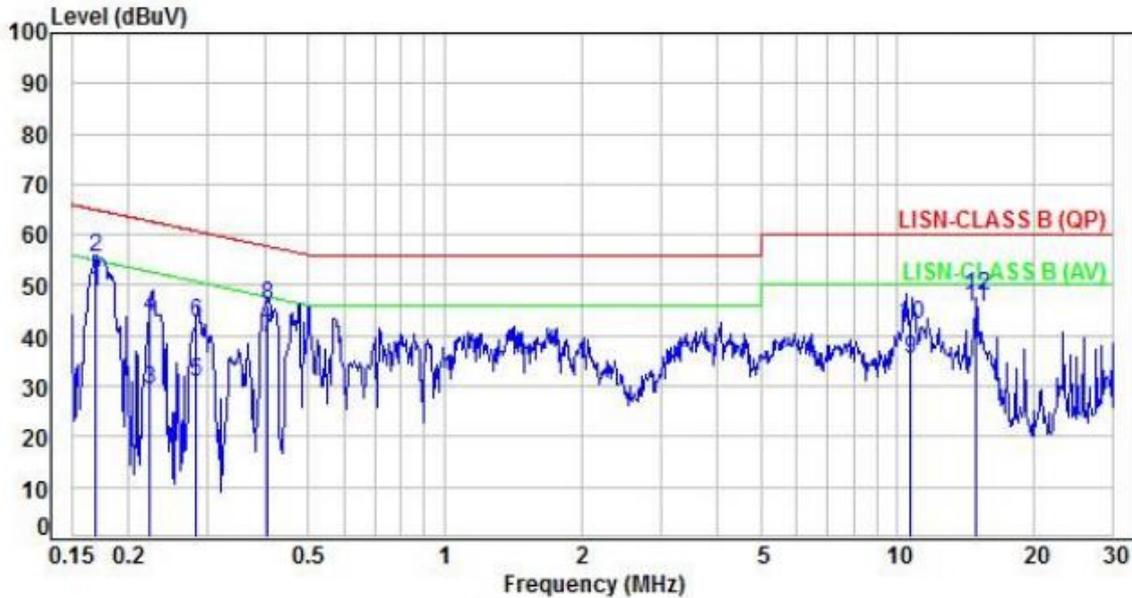


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.97	38.63	48.60	54.99	-6.39	Average	P
2	0.17	9.97	45.60	55.57	64.99	-9.42	QP	P
3	0.22	9.97	19.27	29.24	52.73	-23.49	Average	P
4	0.22	9.97	33.86	43.83	62.73	-18.90	QP	P
5	0.28	9.97	20.95	30.92	50.74	-19.82	Average	P
6	0.28	9.97	32.50	42.47	60.74	-18.27	QP	P
7	0.41	9.98	29.62	39.60	47.72	-8.12	Average	P
8	0.41	9.98	36.04	46.02	57.72	-11.70	QP	P
9	10.67	10.42	24.93	35.35	50.00	-14.65	Average	P
10	10.67	10.42	31.90	42.32	60.00	-17.68	QP	P
11	14.91	10.57	35.18	45.75	50.00	-4.25	Average	P
12	14.91	10.57	37.48	48.05	60.00	-11.95	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 240V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2		

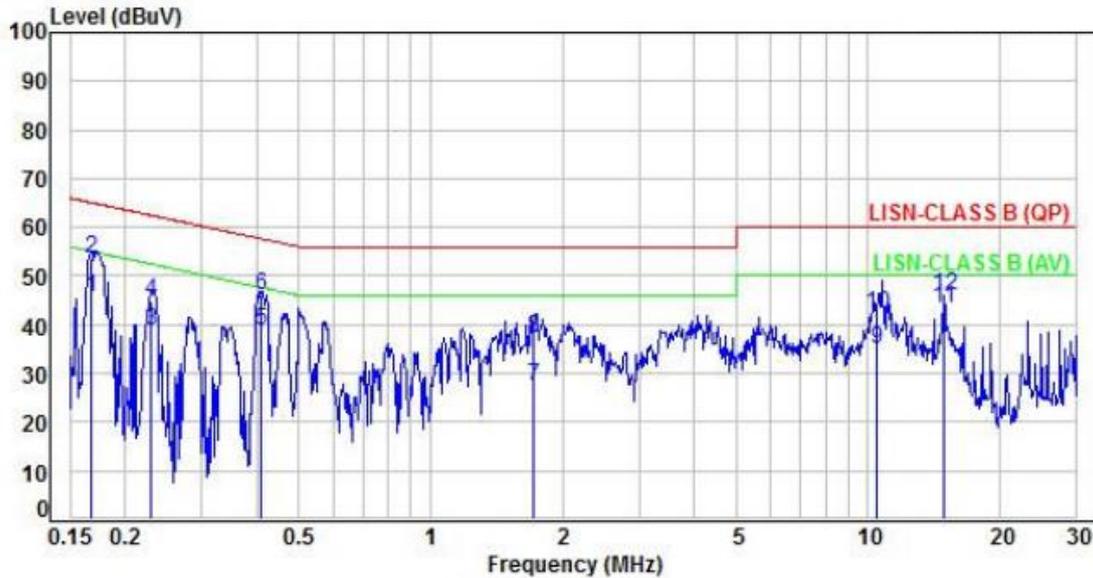

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.97	35.71	45.68	55.05	-9.37	Average	P
2	0.17	9.97	43.74	53.71	65.05	-11.34	QP	P
3	0.23	9.97	28.85	38.82	52.46	-13.64	Average	P
4	0.23	9.97	34.86	44.83	62.46	-17.63	QP	P
5	0.41	9.98	28.69	38.67	47.65	-8.98	Average	P
6	0.41	9.98	36.21	46.19	57.65	-11.46	QP	P
7	1.72	10.09	17.36	27.45	46.00	-18.55	Average	P
8	1.72	10.09	27.27	37.36	56.00	-18.64	QP	P
9	10.51	10.40	24.60	35.00	50.00	-15.00	Average	P
10	10.51	10.40	31.72	42.12	60.00	-17.88	QP	P
11	14.91	10.57	32.95	43.52	50.00	-6.48	Average	P
12	14.91	10.57	35.61	46.18	60.00	-13.82	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 6.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m). There's no corresponding limitation in the actual test item.
- 3.The Average value = Peak value + 20log(Duty cycle)  
Duty Factor = 20log(total duty / period of pulse train)  
= 20log[(Pulse Time) / period of pulse train]  
= 20log[(100 \* 0.14783ms) / 100ms]  
= -16.6

Period of Pulse Train

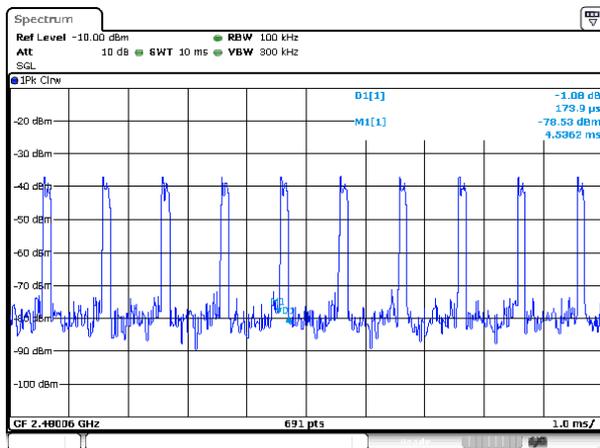


Pulse Time

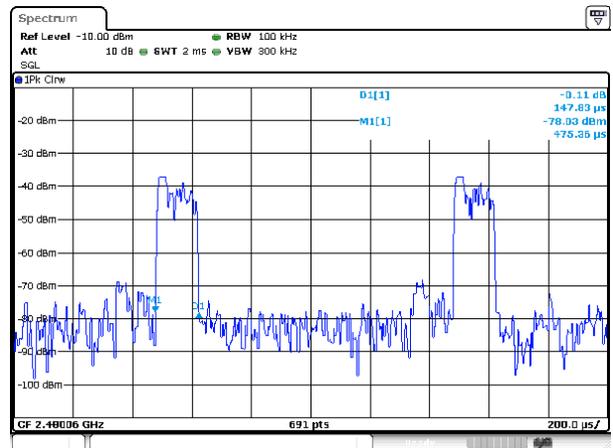




### 6.3 Typical Test Setup

Below 30MHz test setup

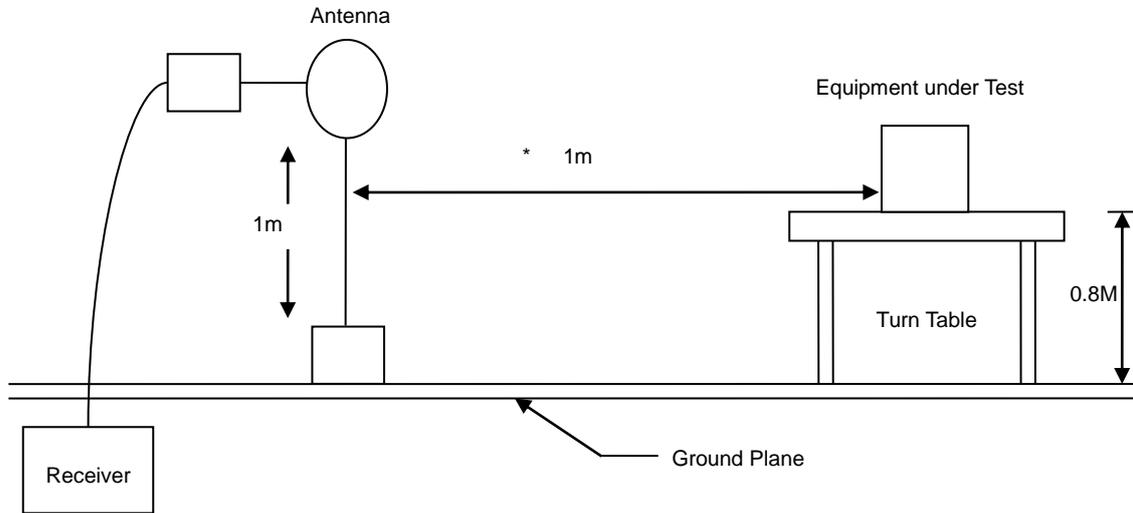


30MHz- 1GHz Test Setup

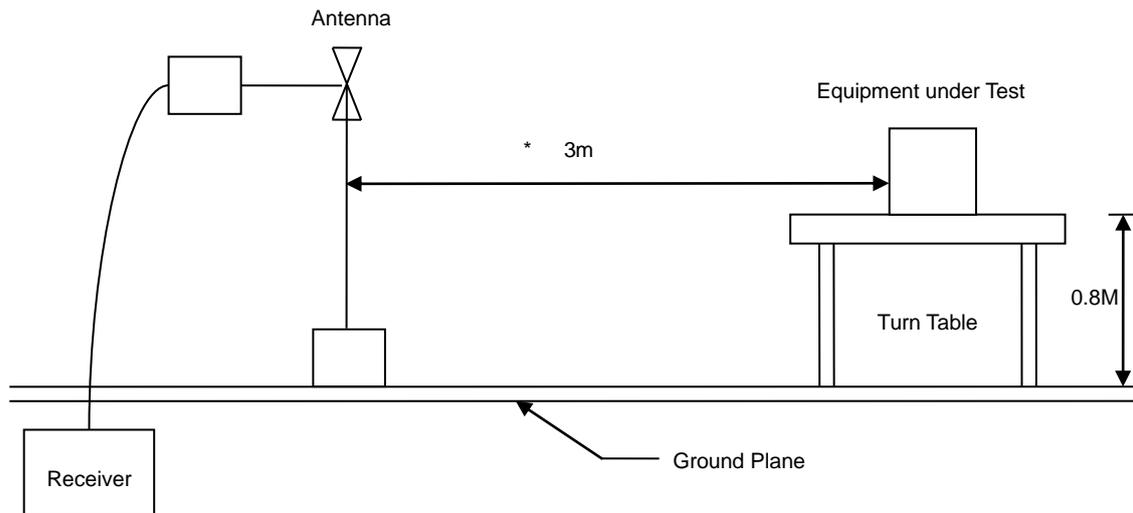



Above 1GHz Test Setup

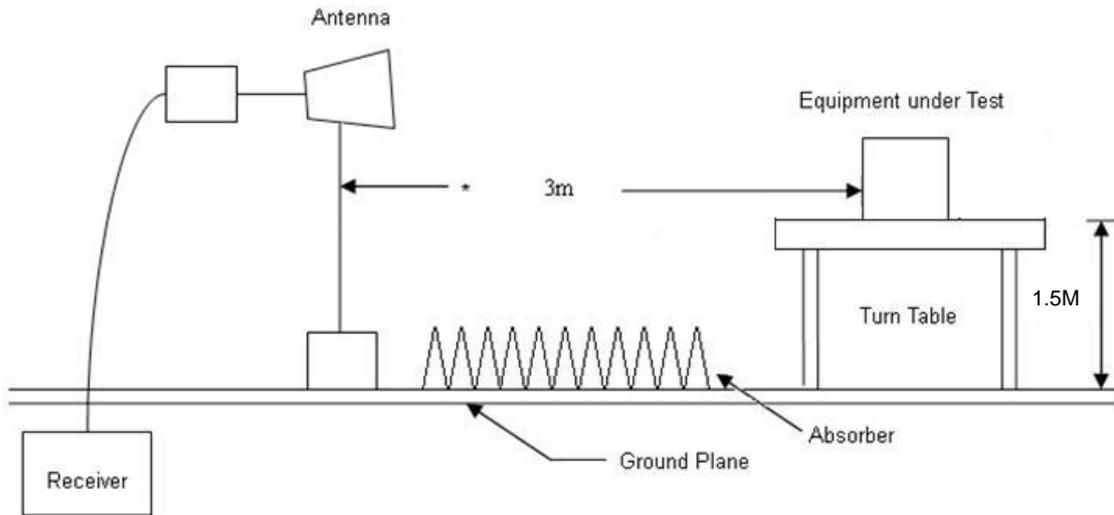




### 6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

### 6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1		:

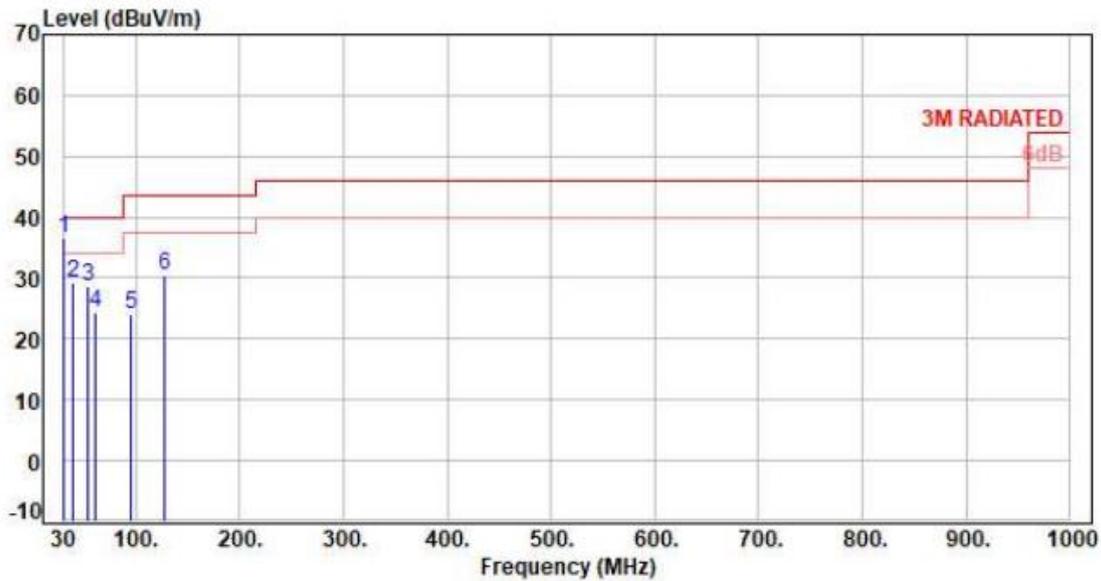


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-3.32	39.92	36.60	40.00	-3.40	Peak	400	360	P
2	39.70	-10.63	39.99	29.36	40.00	-10.64	Peak	400	360	P
3	53.28	-17.47	46.23	28.76	40.00	-11.24	Peak	400	360	P
4	61.04	-17.76	42.13	24.37	40.00	-15.63	Peak	400	360	P
5	95.96	-16.19	40.41	24.22	43.50	-19.28	Peak	400	360	P
6	127.00	-10.61	40.93	30.32	43.50	-13.18	Peak	400	360	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

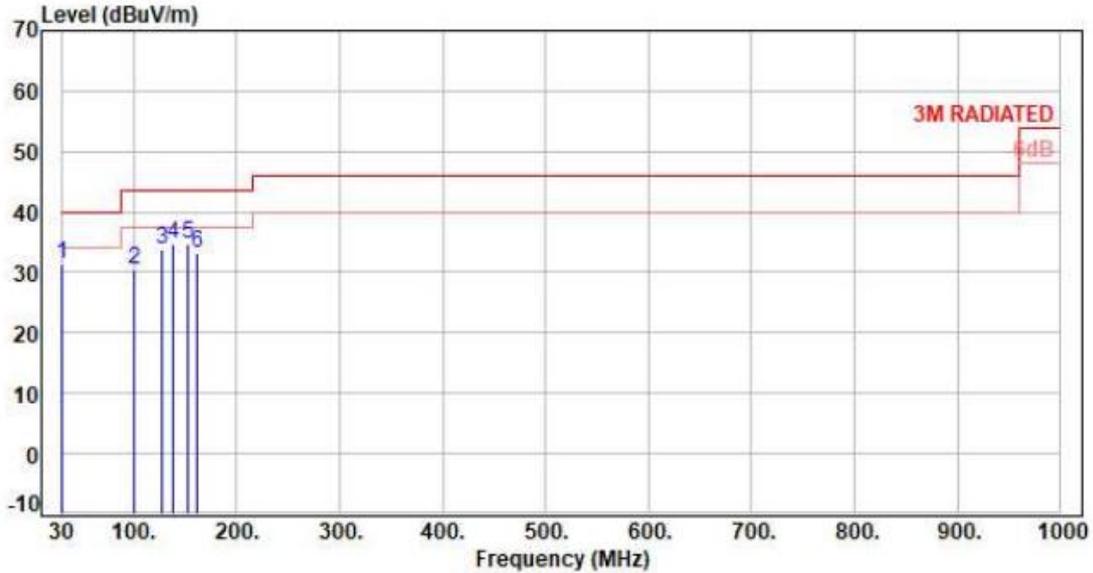


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-3.32	34.62	31.30	40.00	-8.70	Peak	400	360	P
2	99.84	-14.89	45.49	30.60	43.50	-12.90	Peak	400	360	P
3	127.00	-10.61	44.56	33.95	43.50	-9.55	Peak	400	360	P
4	138.64	-11.22	45.79	34.57	43.50	-8.93	Peak	400	360	P
5	152.22	-11.98	46.58	34.60	43.50	-8.90	Peak	400	360	P
6	161.92	-12.12	45.42	33.30	43.50	-10.20	Peak	400	360	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01		:

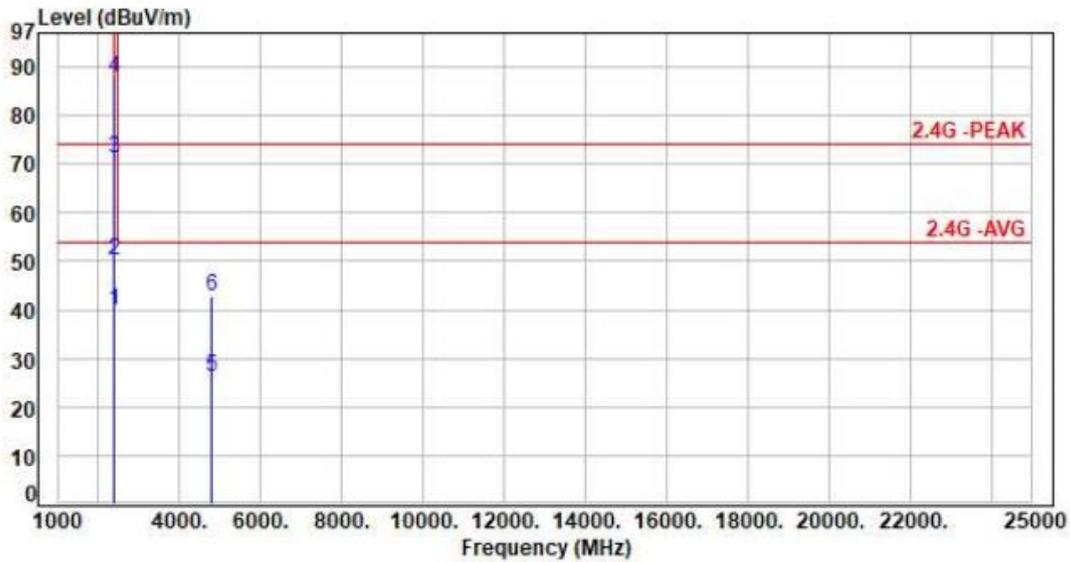


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	54.06	39.87	54.00	-14.13	Average	375	300	P
2	2390.00	-14.19	64.19	50.00	74.00	-24.00	Peak	375	300	P
3	2402.00	-14.22	85.28	71.06	200.00	-128.94	Average	375	300	P
4	2402.00	-14.22	101.88	87.66	200.00	-112.34	Peak	375	300	P
5	4804.00	-8.40	34.63	26.23	54.00	-27.77	Average	100	42	P
6	4804.00	-8.40	51.23	42.83	74.00	-31.17	Peak	100	42	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01		:

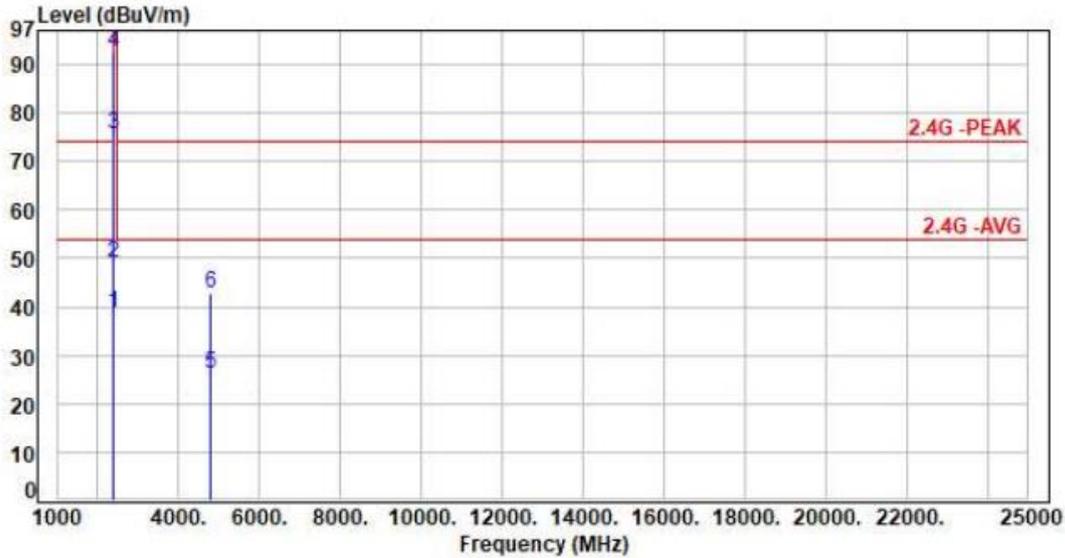


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	53.02	38.83	54.00	-15.17	Average	151	340	P
2	2390.00	-14.19	63.15	48.96	74.00	-25.04	Peak	151	340	P
3	2402.00	-14.22	90.01	75.79	200.00	-124.21	Average	151	340	P
4	2402.00	-14.22	106.61	92.39	200.00	-107.61	Peak	151	340	P
5	4804.00	-8.40	34.42	26.02	54.00	-27.98	Average	100	162	P
6	4804.00	-8.40	51.02	42.62	74.00	-31.38	Peak	100	162	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH20		:

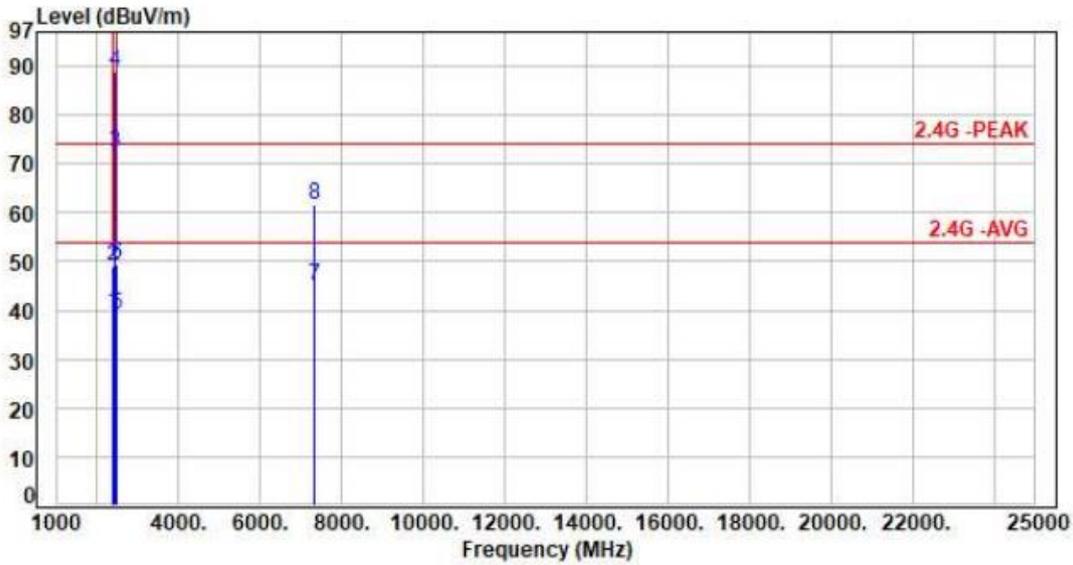

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	53.75	39.56	54.00	-14.44	Average	363	303	P
2	2390.00	-14.19	63.20	49.01	74.00	-24.99	Peak	363	303	P
3	2440.00	-14.17	86.54	72.37	200.00	-127.63	Average	363	303	P
4	2440.00	-14.17	103.14	88.97	200.00	-111.03	Peak	363	303	P
5	2483.50	-14.12	53.30	39.18	54.00	-14.82	Average	363	303	P
6	2483.50	-14.12	63.43	49.31	74.00	-24.69	Peak	363	303	P
7	7320.00	-0.74	45.92	45.18	54.00	-8.82	Average	100	236	P
8	7320.00	-0.74	62.52	61.78	74.00	-12.22	Peak	100	236	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH20		:

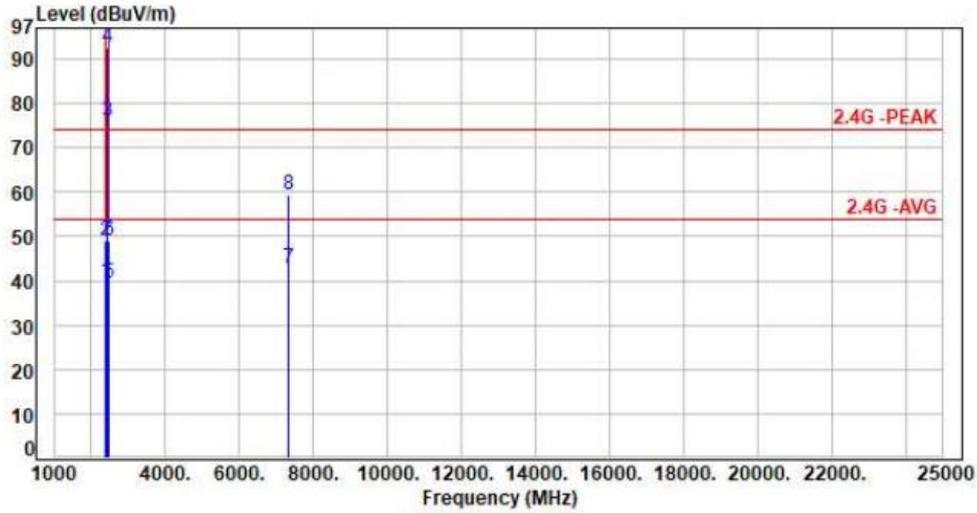


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	53.95	39.76	54.00	-14.24	Average	100	216	P
2	2390.00	-14.19	63.14	48.95	74.00	-25.05	Peak	100	216	P
3	2440.00	-14.17	90.07	75.90	200.00	-124.10	Average	100	216	P
4	2440.00	-14.17	106.67	92.50	200.00	-107.50	Peak	100	216	P
5	2483.50	-14.12	53.76	39.64	54.00	-14.36	Average	100	216	P
6	2483.50	-14.12	63.11	48.99	74.00	-25.01	Peak	100	216	P
7	7320.00	-0.74	43.66	42.92	54.00	-11.08	Average	100	189	P
8	7320.00	-0.74	60.26	59.52	74.00	-14.48	Peak	100	189	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH40		:

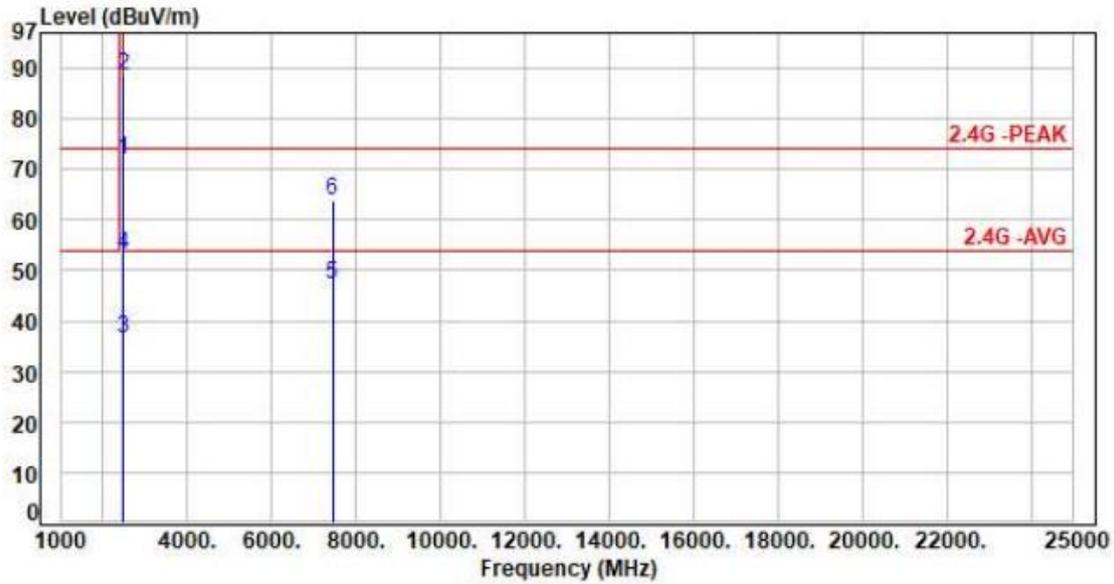


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-14.13	86.18	72.05	200.00	-127.95	Average	100	208	P
2	2480.00	-14.13	102.78	88.65	200.00	-111.35	Peak	100	208	P
3	2483.50	-14.12	50.50	36.38	54.00	-17.62	Average	100	208	P
4	2483.50	-14.12	67.10	52.98	74.00	-21.02	Peak	100	208	P
5	7440.00	-0.67	47.76	47.09	54.00	-6.91	Average	100	237	P
6	7440.00	-0.67	64.36	63.69	74.00	-10.31	Peak	100	237	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH40		:

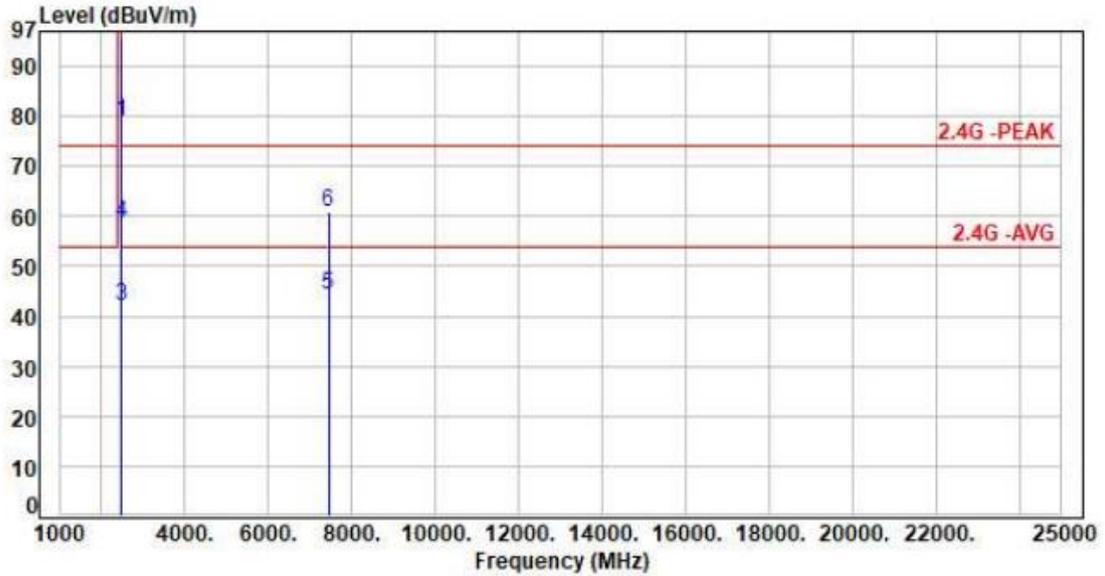

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-14.13	92.93	78.80	200.00	-121.20	Average	218	202	P
2	2480.00	-14.13	109.53	95.40	200.00	-104.60	Peak	218	202	P
3	2483.50	-14.12	56.00	41.88	54.00	-12.12	Average	218	202	P
4	2483.50	-14.12	72.60	58.48	74.00	-15.52	Peak	218	202	P
5	7440.00	-0.67	44.79	44.12	54.00	-9.88	Average	100	180	P
6	7440.00	-0.67	61.39	60.72	74.00	-13.28	Peak	100	180	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. Test of Spurious Emission (Conducted)


### 7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout




### 7.4 Test Result and Data

Note: Test plots refer to the following pages.



Modulation Type:  $\pi/4$ -DQPSK  
CH01

Modulation Type:  $\pi/4$ -DQPSK  
CH20

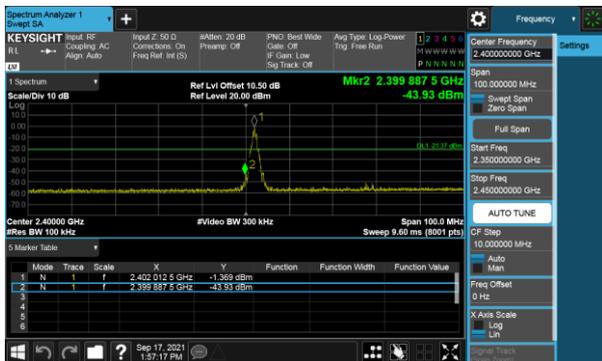



Modulation Type:  $\pi/4$ -DQPSK  
CH40





## 8. On Time, Duty Cycle and Measurement methods


### 8.1 Test Limit

None; for reporting purposes only.

### 8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

### 8.3 Test Setup Layout



### 8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
$\pi/4$ -DQPSK	0.05	1.28	3.98%



Modulation Type:  $\pi/4$ -DQPSK





### 9. 6dB Bandwidth Measurement Data


#### 9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

#### 9.3 Test Setup Layout



#### 9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
π/4-DQPSK (2Mbps)	01	2402	798.00	500
	20	2440	798.00	500
	40	2480	804.00	500



Modulation Type:  $\pi/4$ -DQPSK  
CH01



Modulation Type:  $\pi/4$ -DQPSK  
CH20



Modulation Type:  $\pi/4$ -DQPSK  
CH40





### 10. Maximum Peak and Average Output Power


#### 10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### 10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

#### 10.3 Test Setup Layout



#### 10.4 Test Result and Data

Default	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Power Output (mW)	
				Peak	Average	Peak	Average
Default	π/4-DQPSK (2Mbps)	01	2402	-0.76	-1.02	0.839	0.791
Default		20	2440	-0.95	-1.23	0.804	0.753
Default		40	2480	-1.12	-1.43	0.773	0.719

\*Average Power is for reference only



### 11. Power Spectral Density


#### 11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

#### 11.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer’s resolution bandwidth were set at 3KHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

#### 11.3 Test Setup Layout



#### 11.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit
π/4-DQPSK(2Mbps)	01	2402	-10.96	8.00
	20	2440	-11.14	8.00
	40	2480	-8.74	8.00



Modulation Type:  $\pi/4$ -DQPSK  
CH01



Modulation Type:  $\pi/4$ -DQPSK  
CH20



Modulation Type:  $\pi/4$ -DQPSK  
CH40

