



# FCC/IC Test Report

**FOR:**

**Model Name: Aera CT  
Mobile Cardiac Monitor**

**FCC ID: ZIMTZMR  
IC ID: 9647A-TZMR**

**47 CFR Part 2, 22, 24  
RSS-132 Issue 2  
RSS-133 Issue 5**

**TEST REPORT #: EMC\_TZMED\_001\_10001\_WWAN\_rev2  
DATE: 2012-04-03**



**Bluetooth Qualification  
Test Facility  
(BQTF)**



**FCC listed:  
A2LA Accredited**

**IC recognized #  
3462B-1**

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686



## Table of Contents

<b>1</b>	<b>Assessment .....</b>	<b>3</b>
<b>2</b>	<b>Administrative Data .....</b>	<b>4</b>
2.1	Identification of the Testing Laboratory Issuing the FCC/IC Test Report.....	4
2.2	Identification of the Client .....	4
2.3	Identification of the Manufacturer .....	4
<b>3</b>	<b>Equipment under Test (EUT) .....</b>	<b>5</b>
3.1	Specification of the Equipment under Test .....	5
3.2	Identification of the Equipment Under Test (EUT) .....	5
3.3	Identification of Accessory equipment.....	5
<b>4</b>	<b>Subject of Investigation .....</b>	<b>6</b>
<b>5</b>	<b>Summary of Measurement Results.....</b>	<b>7</b>
<b>6</b>	<b>Measurements.....</b>	<b>9</b>
6.1	RF Power Output.....	9
6.1.1	<i>References .....</i>	<i>9</i>
6.1.2	<i>Measurement requirements:.....</i>	<i>9</i>
6.1.3	<i>Limits: .....</i>	<i>9</i>
6.1.4	<i>Radiated Output Power Measurement procedure.....</i>	<i>10</i>
6.1.5	<i>RF Power Output 850MHz band.....</i>	<i>11</i>
6.1.6	<i>RF Power Output 1900MHz band.....</i>	<i>12</i>
6.1.7	<i>Results:.....</i>	<i>13</i>
6.1.8	<i>Module Output Power Verification - 850MHz Band: .....</i>	<i>19</i>
6.1.9	<i>Module Output Power Verification - 1900MHz Band: .....</i>	<i>20</i>
6.2	Occupied Bandwidth/Emission Bandwidth.....	21
6.3	Frequency Stability .....	21
6.4	Conducted Spurious Emissions.....	21
6.5	Spurious Emissions Radiated .....	22
6.5.1	<i>References .....</i>	<i>22</i>
6.5.2	<i>Measurement requirements:.....</i>	<i>22</i>
6.5.3	<i>Limits: .....</i>	<i>22</i>
6.5.4	<i>Radiated out of band measurement procedure: .....</i>	<i>24</i>
6.5.5	<i>Sample Calculations for Radiated Measurements .....</i>	<i>26</i>
6.5.6	<i>Radiated out of band emissions results on EUT- Transmit Mode:.....</i>	<i>27</i>
<b>7</b>	<b>Test Equipment and Ancillaries used for tests .....</b>	<b>42</b>
<b>8</b>	<b>Block Diagrams .....</b>	<b>43</b>
<b>9</b>	<b>Revision History .....</b>	<b>44</b>



**1 Assessment**

The following device was tested against the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 132 and RSS 133 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
TZ Medical, Inc.	The Aera CT is a battery operated ambulatory electrocardiograph recorder for use in mobile cardiovascular telemetry.	TZMR

**Responsible for Testing Laboratory:**

2012-04-03	Compliance	Sajay Jose (EMC Lab Manager)	
Date	Section	Name	Signature

**Responsible for the Report:**

2012-04-03	Compliance	Calvin Lee EMC Engineer	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.



**2 Administrative Data**

**2.1 Identification of the Testing Laboratory Issuing the FCC/IC Test Report**

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Address:</b>	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Test Lab Director:</b>	Heiko Strehlow
<b>Responsible Project Leader:</b>	Sajay Jose

**2.2 Identification of the Client**

<b>Applicant's Name:</b>	TZ Medical, Inc.
<b>Street Address:</b>	17750 SW Upper Boones Ferry Rd., Suite #150
<b>City/Zip Code</b>	Portland, OR 97224
<b>Country</b>	USA
<b>Contact Person:</b>	John Moore
<b>Phone No.</b>	1-800-944-0187
<b>e-mail:</b>	jmoore@tzmedical.com

**2.3 Identification of the Manufacturer**

<b>Manufacturer's Name:</b>	Same as above.
<b>Manufacturers Address:</b>	
<b>City/Zip Code</b>	
<b>Country</b>	

### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

<b>Marketing Name:</b>	Aera CT
<b>Description:</b>	The Aera CT is a battery operated ambulatory electrocardiograph recorder for use in mobile cardiovascular telemetry.
<b>Model No:</b>	TZMR
<b>Product Type:</b>	Mobile Cardiac Monitor
<b>Hardware Revision :</b>	1.000 (MC75i: Rev B2.1)
<b>Software Revision :</b>	1.0 (MC75i: Revision 01.100)
<b>FCC-ID:</b>	ZIMTZMR
<b>IC-ID :</b>	9647A-TZMR
<b>Frequency:</b>	GSM 850: 824.2-848.8 MHz PCS 1900: 1850.2- 1909.8 MHz
<b>Type of Modulation:</b>	GMSK; 8-PSK
<b>Antenna Type:</b>	PCB antenna, Antenna gain as declared by manufacturer: -1dBi(850), 0dBi(900), 1.8dBi(1800), 0.7dBi(1900)
<b>Power Supply:</b>	3.2V (Low)/ 3.6V(Nom)/ 4.2V(Max)
<b>Temperature Range:</b>	0°C ~ 50°C

#### 3.2 Identification of the Equipment Under Test (EUT)

EUT #	Model Number	Serial Number	HW Version	SW Version
1	TZMR	1024009	1.000 (MC75i: Rev B2.1)	1.0 (MC75i: Rev 0.100)

#### 3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	AC Adapter	TZ Medical, Inc.	FW7333M/05	n/a

#### **4 Subject of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in the following test standards:

- 47 CFR Part 2: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission Frequency allocations and radio treaty matters; general rules and regulations.
- 47 CFR Part 22: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 22- Public mobile services
- 47 CFR Part 24: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 24- Personal communication services
- RSS 132- Issue 2: Spectrum management and telecommunication policy- Radio Standards Specifications Cellular telephones employing new technologies operating in the bands 824-849MHz and 869-894MHz
- RSS 133- Issue 5: Spectrum management and telecommunication policy- Radio Standards Specifications- 2GHz personal communication services

This test report is to support a request for new equipment authorization under the **FCC ID ZIMTZMR** and IC ID **9647A-TZMR**.

All testing was performed on the product referred to in Section 3 as EUT.

The EUT carries a pre-certified GSM/EDGE module with FCC ID# QIPMC75i. Since the module design is not modified and the module is integrated in device under test, only radiated measurements were performed at Cetecom Inc. This test report contains full radiated testing as per FCC 22H/24E on the EUT with the pre-certified GSM/EDGE module. All FCC 22H/24E conducted measurements are covered under the test report# MDE\_Siem\_0714\_FCCf issued on May 8, 2008 which can be found on the FCC database.



## 5 Summary of Measurement Results

### 850 Band:

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §22.913 (a) RSS132 4.4	RF Output Power	Nominal	GSM 850	■	□	□	□	Complies
			EDGE 850	■	□	□	□	Complies
§2.1055 §22.355 RSS132 4.3	Frequency Stability	Nominal	GSM 850	□	□	□	■	Complies
			EDGE 850	□	□	□	■	Complies
§2.1049 §22.917(b) RSS132 4.2	Occupied Bandwidth	Nominal	GSM 850	□	□	□	■	Complies
			EDGE 850	□	□	□	■	Complies
§2.1051 §22.917 RSS132 4.5	Band Edge Compliance	Nominal	GSM 850	□	□	□	■	Complies
			EDGE 850	□	□	□	■	Complies
§2.1051 §22.917 RSS132 4.5	Conducted Spurious Emissions	Nominal	GSM 850	□	□	□	■	Complies
			EDGE 850	□	□	□	■	Complies
§2.1053 §22.917 RSS132 4.5	Radiated Spurious Emissions	Nominal	GSM 850	■	□	□	□	Complies
			EDGE 850	□	□	□	■	Complies
			EDGE 850	□	□	□	■	Complies

**Note 1:** NA= Not Applicable; NP= Not Performed.

All FCC 22H/24E conducted measurements are covered under test report# MDE\_Siem\_0712\_FCCf issued on May 8, 2008.



**1900 Band:**

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§2.1046 §24.232 (a) RSS133 6.4	RF Output Power	Nominal	PCS 1900	■	□	□	□	Complies
			EDGE 1900	■	□	□	□	Complies
§2.1055 §24.235 RSS133 6.3	Frequency Stability	Nominal	PCS 1900	□	□	□	■	Complies
			EDGE 1900	□	□	□	■	Complies
§2.1049 §24.238(b) RSS133 6.2	Occupied Bandwidth	Nominal	PCS 1900	□	□	□	■	Complies
			EDGE 1900	□	□	□	■	Complies
§2.1051 §24.238 RSS133 6.5	Band Edge Compliance	Nominal	PCS 1900	□	□	□	■	Complies
			EDGE 1900	□	□	□	■	Complies
§2.1051 §24.238 RSS133 6.5	Conducted Spurious Emissions	Nominal	PCS 1900	□	□	□	■	Complies
			EDGE 1900	□	□	□	■	Complies
§2.1053 §24.238 RSS133 6.5	Radiated Spurious Emissions	Nominal	PCS 1900	■	□	□	□	Complies
			EDGE 1900	□	□	□	■	Complies
			EDGE 1900	□	□	□	■	Complies

**Note 1:** NA= Not Applicable; NP= Not Performed.

All FCC 22H/24E conducted measurements are covered under test report# MDE\_Siem\_0712\_FCCf issued on May 8, 2008.



## **6 Measurements**

### **6.1 RF Power Output**

#### **6.1.1 References**

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232  
IC: RSS-Gen Section 4.8; RSS 132 Section 4.4; RSS 133 Section 6.4

#### **6.1.2 Measurement requirements:**

##### **6.1.2.1 FCC 2.1046: RF power output.**

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

##### **6.1.2.2 RSS-Gen 4.8: RF power output.**

Transmitter output power measurements shall be carried out before the unwanted emissions test. The transmitter output power value, obtained from this test, serves as the reference level used to determine the unwanted emissions.

#### **6.1.3 Limits:**

##### **6.1.3.1 FCC 22.913 (a) Effective radiated power limits.**

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

##### **6.1.3.2 FCC 24.232 (b)(c) Power limits.**

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP). I Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

##### **6.1.3.3 RSS-132 Section 4.4**

The transmitter output power shall not exceed the limits given in SRSP-503.  
SRSP-503: The maximum EIRP shall be 11.5W for mobile stations.


##### **6.1.3.4 RSS-133 Section 6.4**

The average equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

SRSP-510: Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

### 6.1.4 Radiated Output Power Measurement procedure

Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

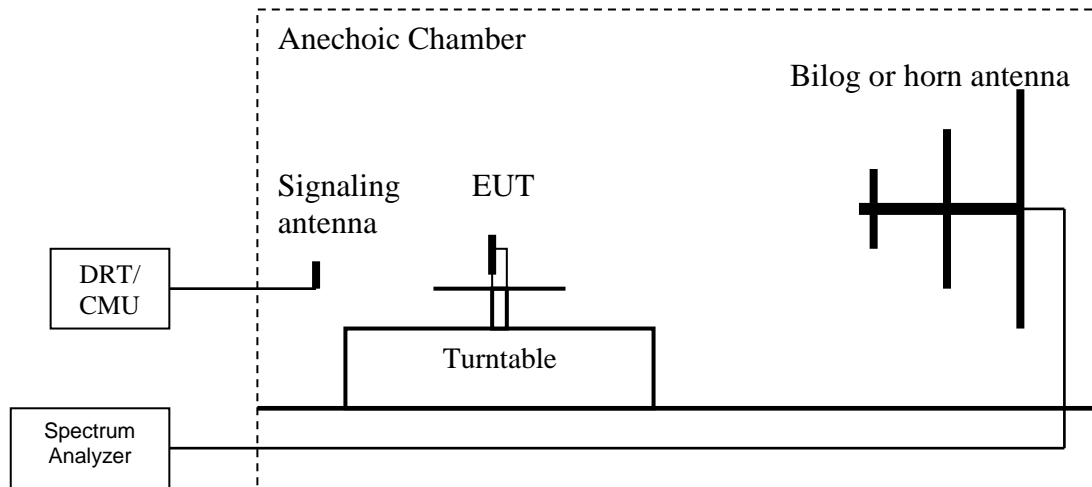

1. Connect the equipment as shown in the above diagram with the EUT's antenna in center of the turn table.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:  
**ERP (dBm) = LVL (dBm) + LOSS (dB)**
8. Determine the EIRP using the following equation:  
**EIRP (dBm) = ERP (dBm) + 2.14 (dB)**
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

**6.1.5 RF Power Output 850MHz band**

**Limit: FCC: Nominal Peak Output Power < 38.45 dBm (7W)**

**IC: Nominal Peak Output Power < 40.60 dBm (11.5W)**

**Measurement Uncertainty (Radiated): ±3.0 dB**

<b>GSM Cellular 850 (GMSK Mode)</b>	
<b>Frequency (MHz)</b>	<b>Radiated Power</b>
	<b>ERP (dBm)</b>
<b>824.2</b>	31.1
<b>836.6</b>	30.1
<b>848.8</b>	31.6

<b>GSM Cellular 850 (8PSK Mode)</b>	
<b>Frequency (MHz)</b>	<b>Radiated Power</b>
	<b>ERP (dBm)</b>
<b>824.2</b>	26.8
<b>836.6</b>	26.4
<b>848.8</b>	27.2

**6.1.5.1 Measurement Result**

Pass.

**6.1.6 RF Power Output 1900MHz band**

**Limit: Nominal Peak Output Power < 33 dBm (2W)**

**Measurement Uncertainty (Radiated): ±3.0 dB**

<b>GSM PCS 1900 (GMSK Mode)</b>	
<b>Frequency (MHz)</b>	<b>Radiated Power</b>
	<b>EIRP (dBm)</b>
<b>1850.2</b>	30.8
<b>1880</b>	30.3
<b>1909.8</b>	30.1


<b>GSM PCS 1900 (8PSK Mode)</b>	
<b>Frequency (MHz)</b>	<b>Radiated Power</b>
	<b>EIRP (dBm)</b>
<b>1850.2</b>	30.3
<b>1880</b>	29.4
<b>1909.8</b>	29.7

**6.1.6.1 Measurement Result**


Pass.

**6.1.7 Results:**

**ERP (GSM Cellular 850 – GMSK Mode) CHANNEL 128**

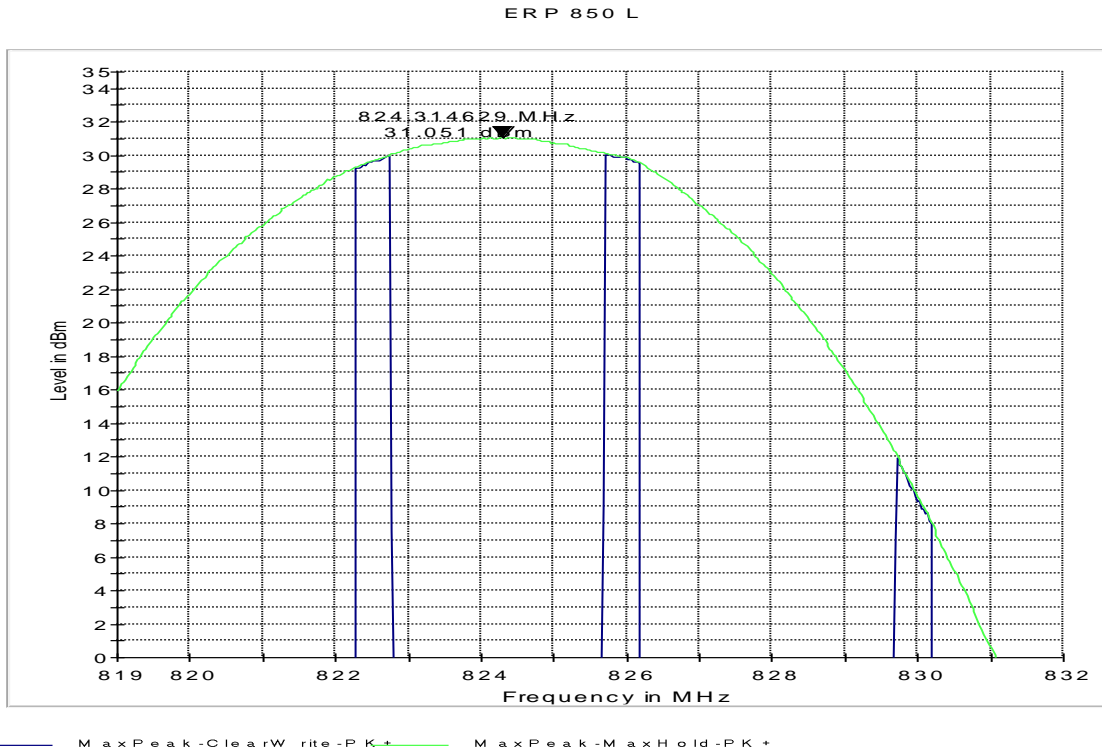


**ERP (GSM Cellular 850 – GMSK Mode) CHANNEL 190**

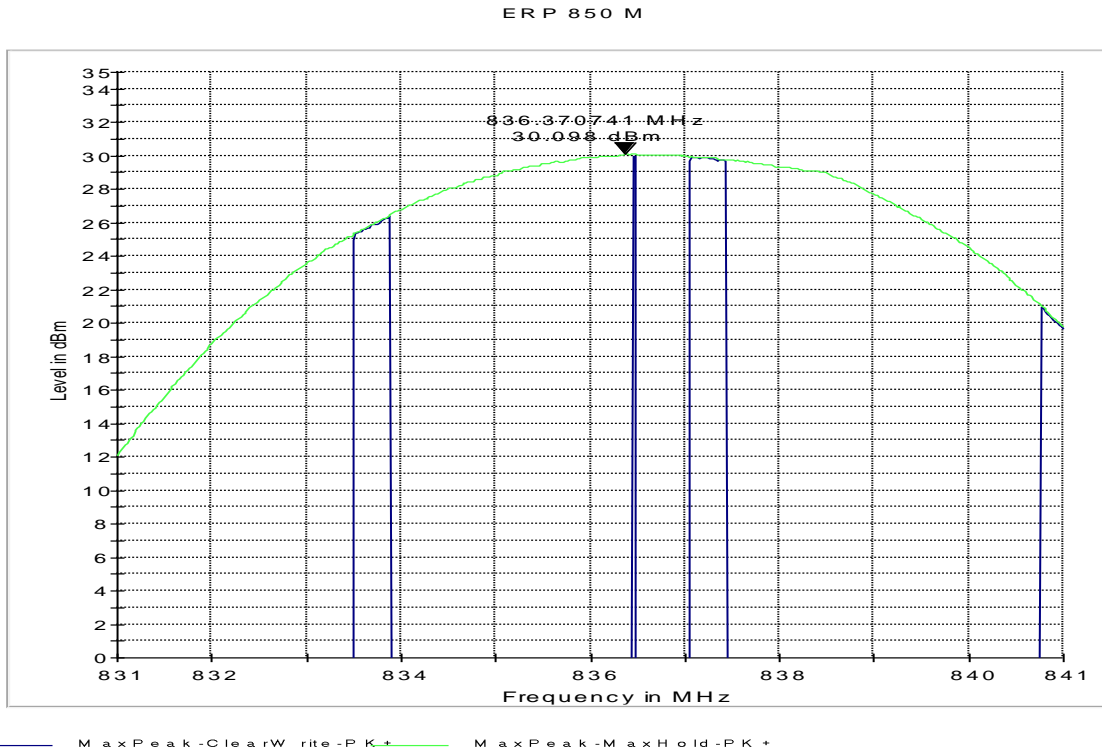




### ERP (GSM Cellular 850 – GMSK Mode) CHANNEL 251

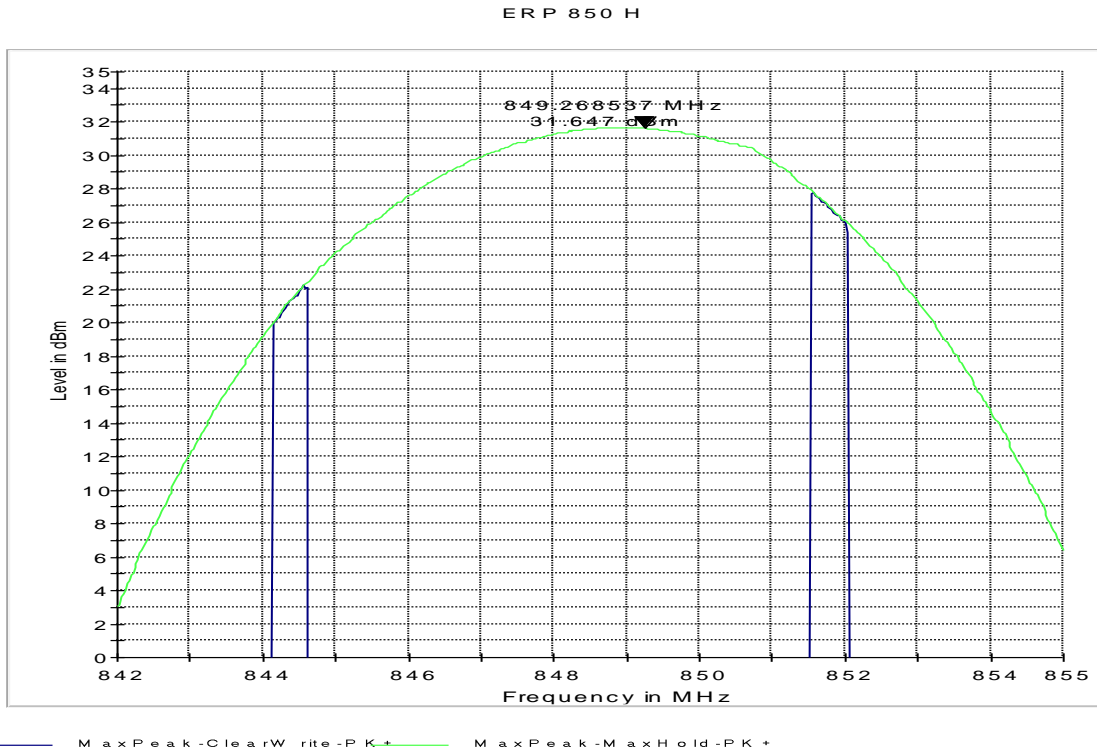


### ERP (GSM Cellular 850 – EGPRS Mode) CHANNEL 128

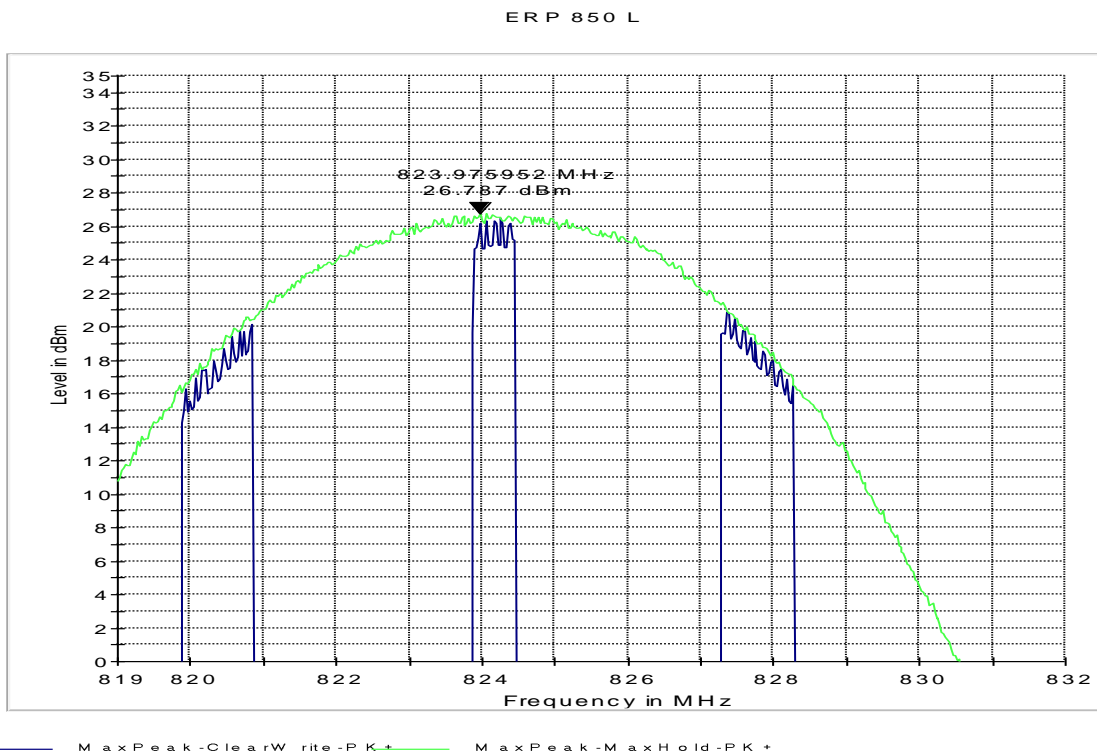




### ERP (GSM Cellular 850 – EGPRS Mode) CHANNEL 190

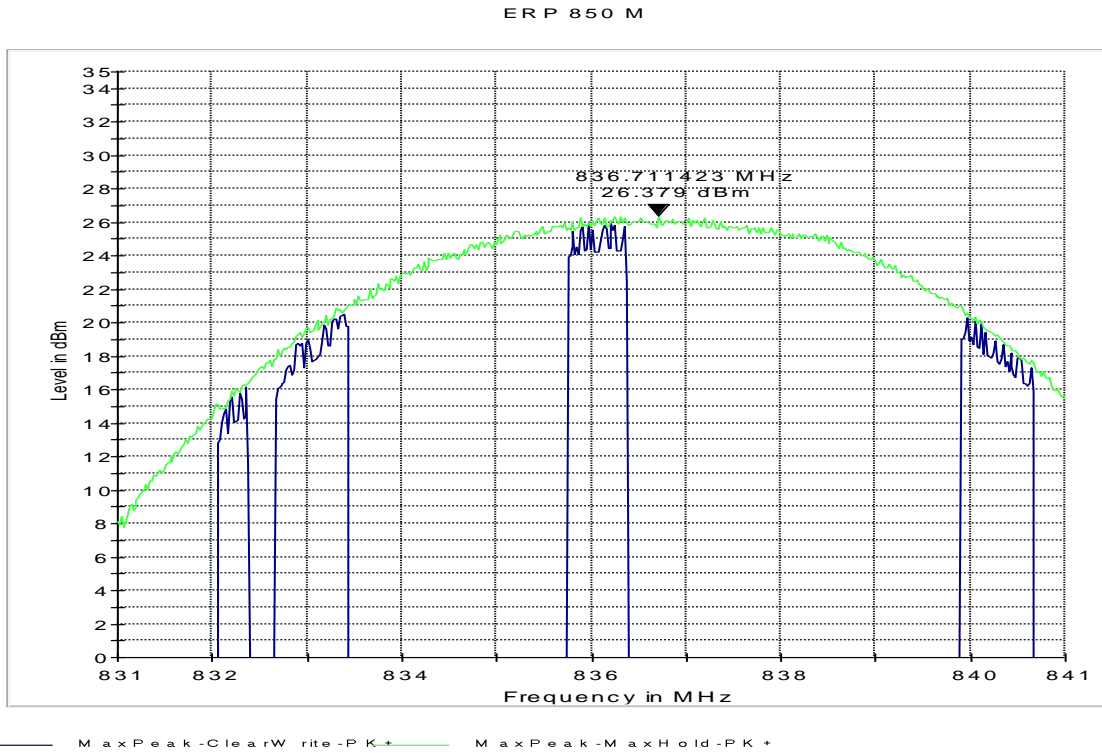


### ERP (GSM Cellular 850 – EGPRS Mode) CHANNEL 251

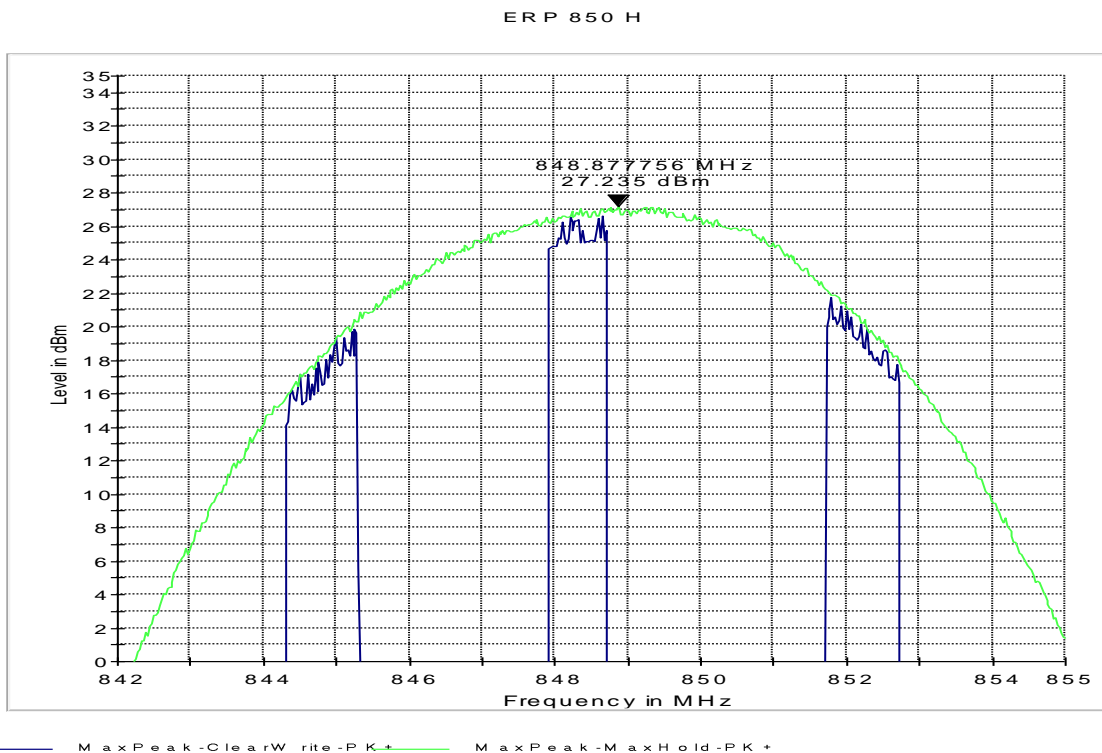




**EIRP (GSM PCS 1900 – GMSK) CHANNEL 512**

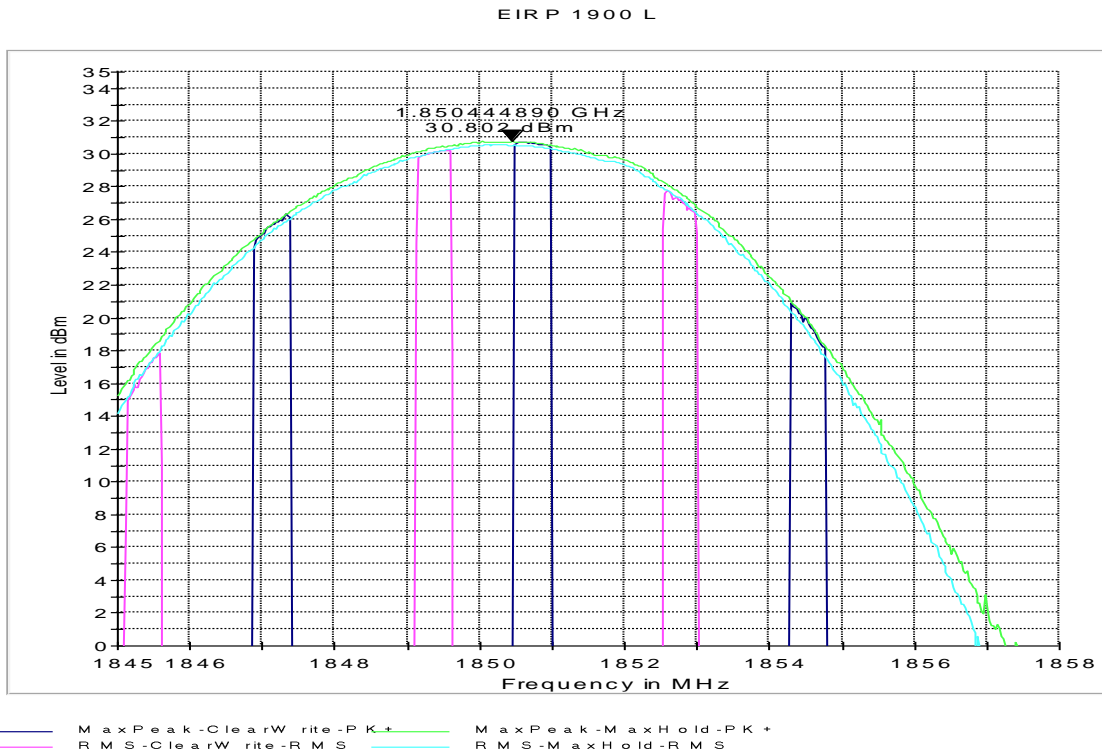


**EIRP (GSM PCS 1900 – GMSK) CHANNEL 661**

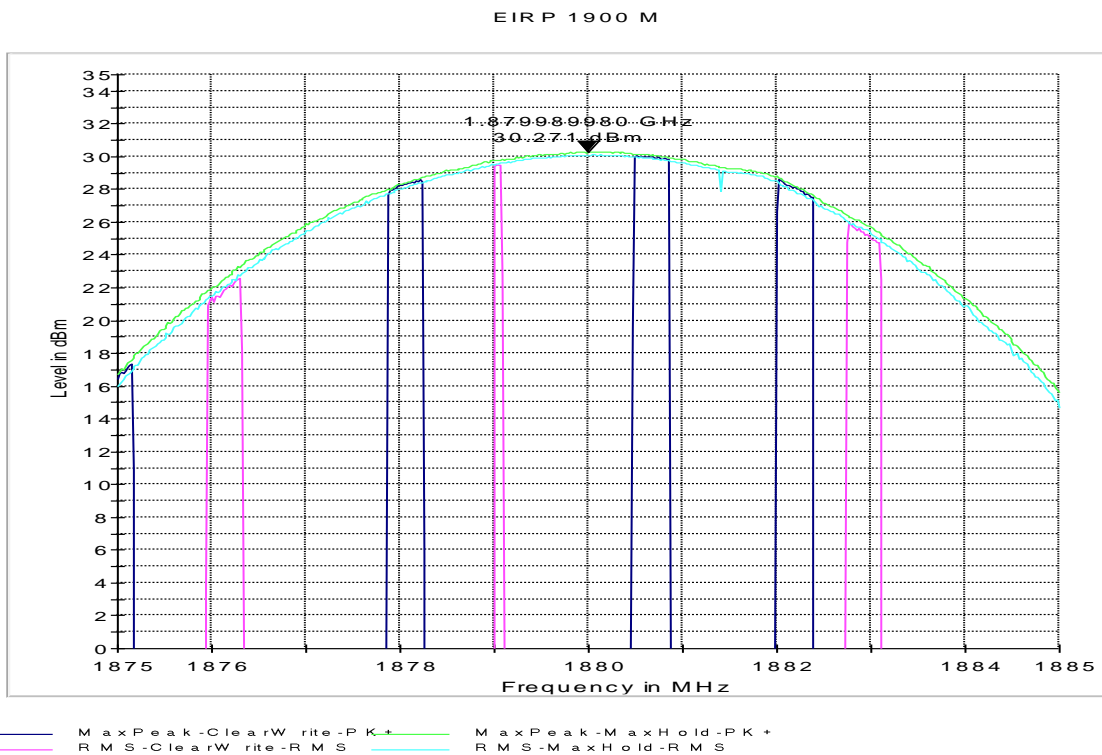







### EIRP (GSM PCS 1900 – GMSK) CHANNEL 810

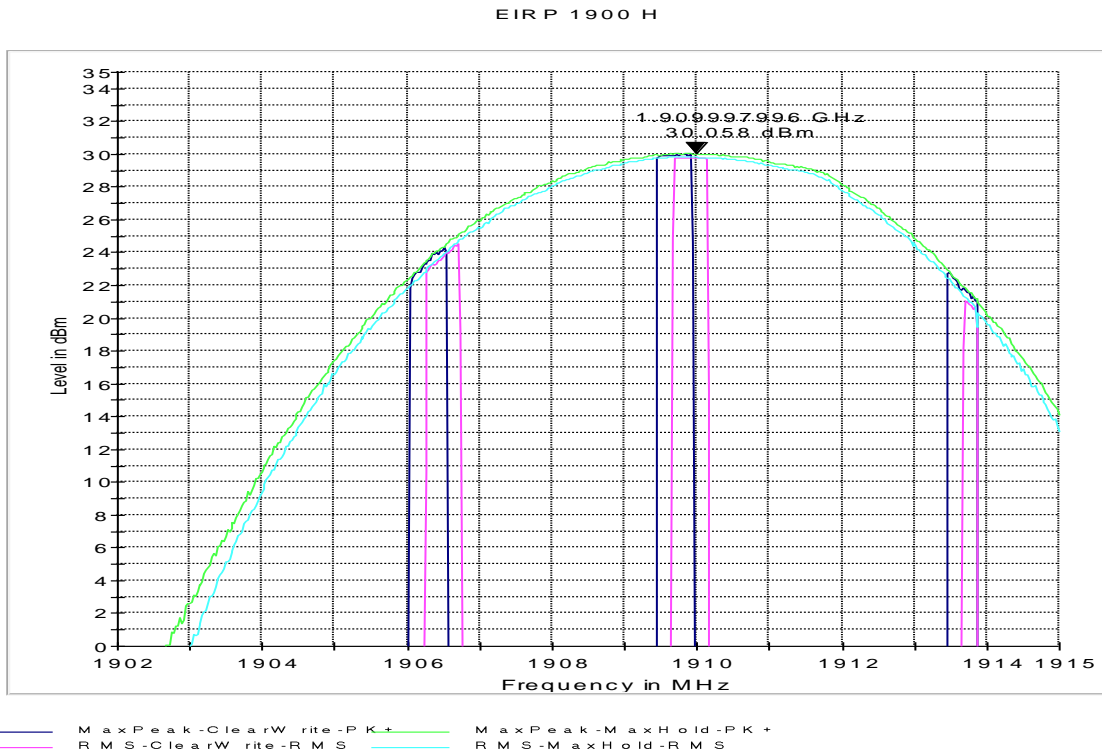


### EIRP (GSM PCS 1900 – EGPRS) CHANNEL 512

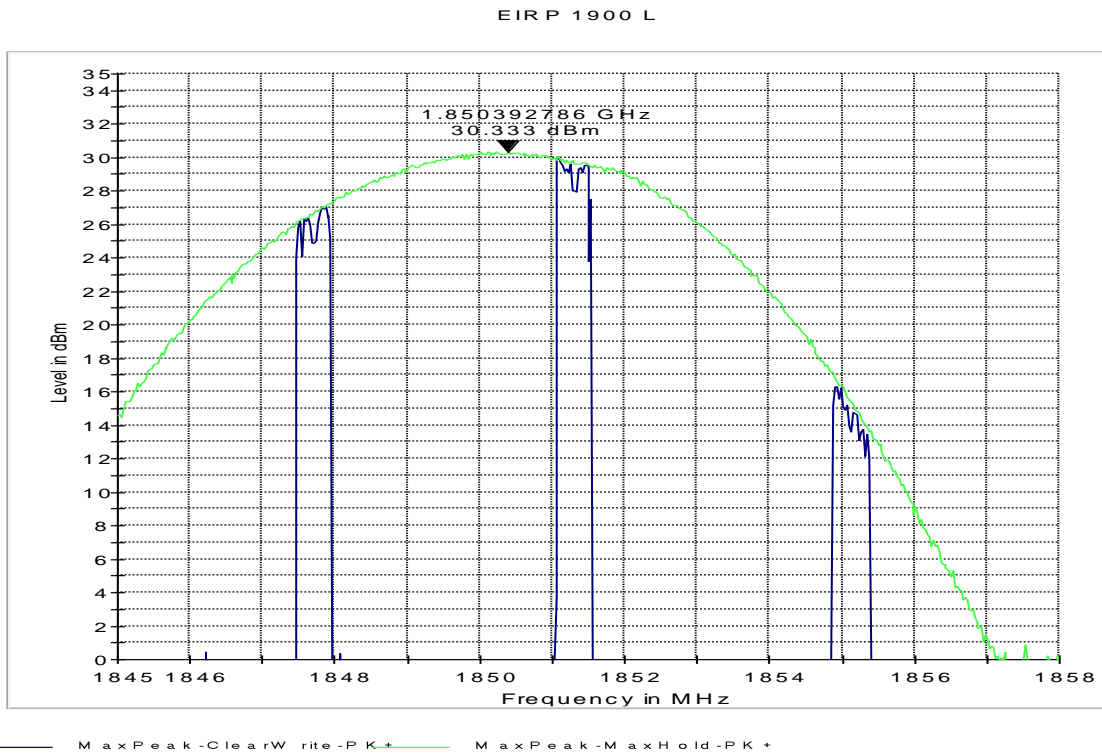

**EIRP (GSM PCS 1900 – EGPRS) CHANNEL 661**

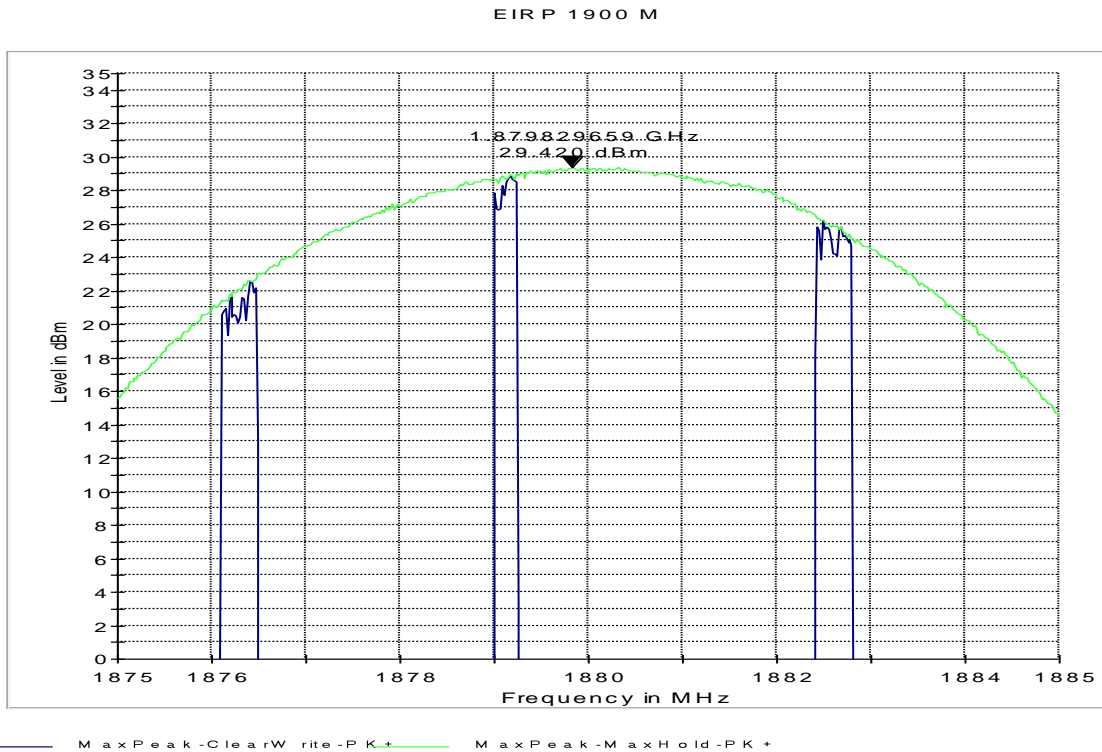

**EIRP (GSM PCS 1900 – EGPRS) CHANNEL 810**

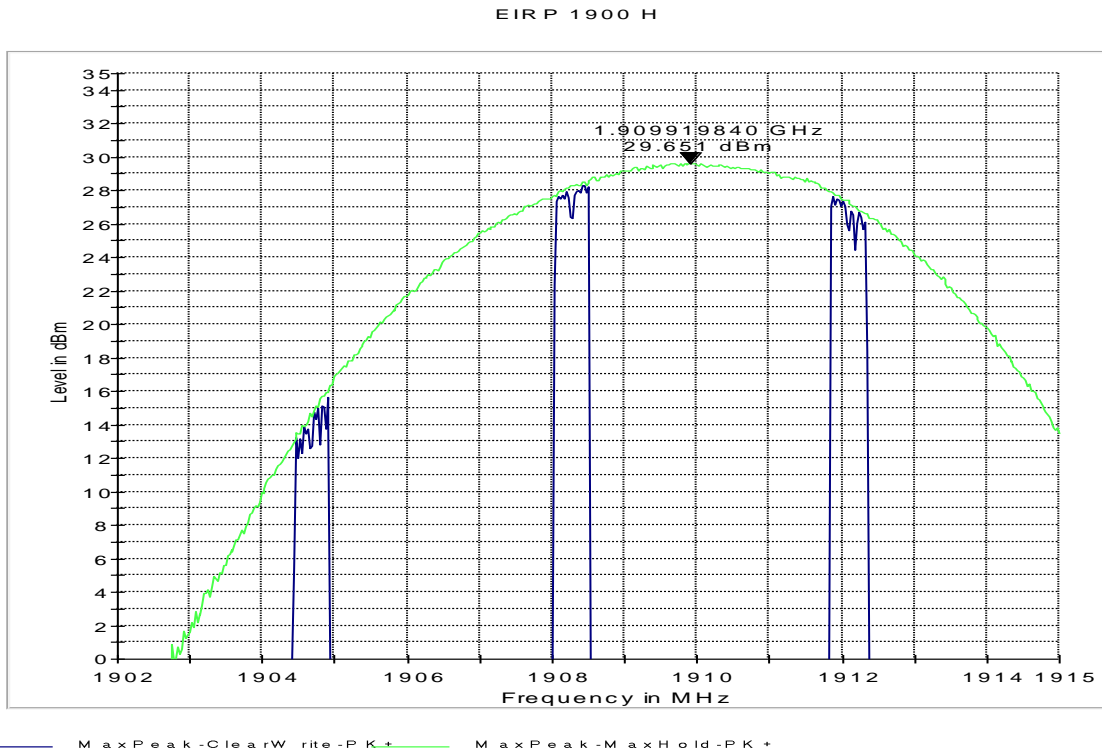

**6.1.8 Module Output Power Verification – 850MHz Band:**

<b>GSM Cellular 850 (GMSK Mode)</b>		
<b>Frequency (MHz)</b>	<b>Pre-Certified Module</b>	<b>Conducted Output Power Measurement Verification</b>
	<b>(dBm)</b>	<b>(dBm)</b>
<b>824.2</b>	32.4	32.5
<b>836.6</b>	32.2	32.4
<b>848.8</b>	32.1	32.2

<b>GSM Cellular 850 (8PSK Mode)</b>		
<b>Frequency (MHz)</b>	<b>Pre-Certified Module</b>	<b>Conducted Output Power Measurement Verification</b>
	<b>(dBm)</b>	<b>(dBm)</b>
<b>824.2</b>	29.7	30.1
<b>836.6</b>	29.6	29.9
<b>848.8</b>	29.5	29.8

**6.1.8.1 Verification Result**

Identical; Within measurement uncertainty.

**6.1.9 Module Output Power Verification – 1900MHz Band:**

<b>GSM PCS 1900 (GMSK Mode)</b>		
<b>Frequency (MHz)</b>	<b>Pre-Certified Module</b>	<b>Conducted Output Power Measurement Verification</b>
	<b>(dBm)</b>	<b>(dBm)</b>
<b>824.2</b>	29.3	30.1
<b>836.6</b>	29.2	30.0
<b>848.8</b>	29.0	29.9

<b>GSM PCS 1900 (8PSK Mode)</b>		
<b>Frequency (MHz)</b>	<b>Pre-Certified Module</b>	<b>Conducted Output Power Measurement Verification</b>
	<b>(dBm)</b>	<b>(dBm)</b>
<b>824.2</b>	28.7	29.3
<b>836.6</b>	28.6	29.2
<b>848.8</b>	28.3	29.0

**6.1.9.1 Verification Result**

Identical; Within measurement uncertainty.

**6.2 Occupied Bandwidth/Emission Bandwidth**

Refer to the test report issued under InterLab Report# MDE\_Siem\_0712\_FCCf (Issued on 2008-05-08)

**6.3 Frequency Stability**

Refer to the test report issued under InterLab Report# MDE\_Siem\_0712\_FCCf (Issued on 2008-05-08)

**6.4 Conducted Spurious Emissions**

Refer to the test report issued under InterLab Report# MDE\_Siem\_0712\_FCCf (Issued on 2008-05-08)

## **6.5 Spurious Emissions Radiated**

### **6.5.1 References**

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238  
IC: RSS-Gen Section 4.9; RSS 132 Section 4.5; RSS 133 Section 6.5

### **6.5.2 Measurement requirements:**

#### **6.5.2.1 FCC 2.1053: Field strength of spurious radiation.**

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

#### **6.5.2.2 RSS-Gen 4.9: Transmitter unwanted spurious emissions**

The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

### **6.5.3 Limits:**

**2012** *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

#### **6.5.3.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **6.5.3.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the

transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### **6.5.3.3 RSS-132 Section 4.5.1.1 and RSS-133 Section 6.5.1**

In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power  $P$  (in watts) by at least  $43 + 10 \log_{10}(P)$ , dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least  $43 + 10 \log_{10}(P)$ , dB, in any 100 kHz bandwidth.

After the first 1.5 MHz, the power of emissions shall be attenuated below the transmitter output power by at least  $43 + 10 \log_{10}(P)$ , dB, in any MHz of bandwidth.

#### 6.5.4 Radiated out of band measurement procedure:

Ref: TIA-603C 2004- 2.2.12 Unwanted emissions: Radiated Spurious

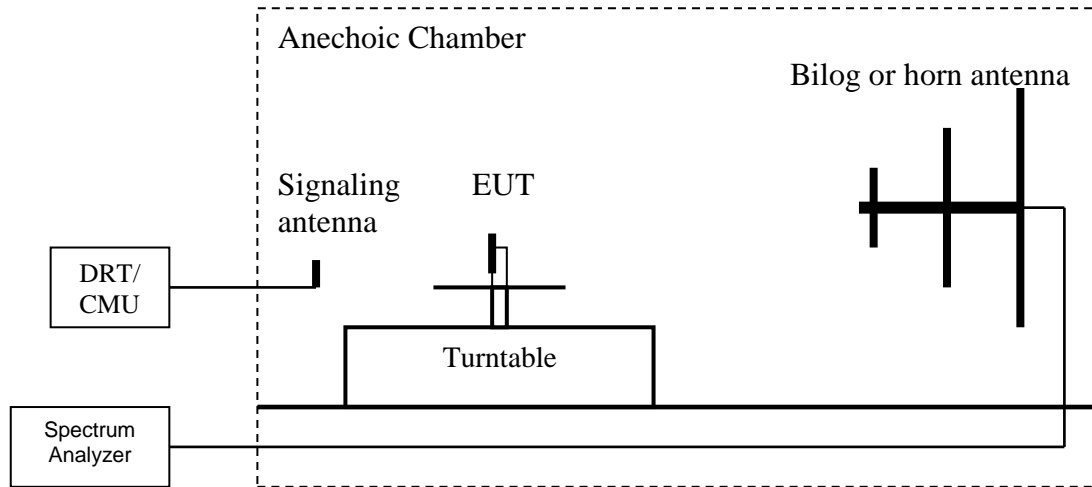

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.  
(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

**Spectrum analyzer settings: RBW=VBW=1MHz**



### Measurement Survey:

The site is constructed in accordance with ANSI C63.4 requirements and is recognized by the FCC to be in compliance for a 3m site. The spectrum is scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated by the EUT.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the 850 & 1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the 850 & 1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

All measurements are done in horizontal and vertical antenna polarization; and on three orientations of the EUT. The plots show the worst case where it is not indicated otherwise. Unless mentioned otherwise, the peaks in the plots are from the carrier frequency.

### 6.5.5 Sample Calculations for Radiated Measurements

#### 6.5.5.1 Field Strength Measurements:

Field Strength measurements are directly taken from the Spectrum Analyzer/ Receiver, taking into account the cable loss between the Receiving Antenna and the Spectrum Analyzer/ Receiver. Antenna Factor is accounted for by the test SW.

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)}$$

Eg:

Frequency (MHz)	Measured SA (dB $\mu$ V)	Cable Loss (dB)	Field Strength Result (dB $\mu$ V/m)
1000	95.5	3.5	99.0

#### 6.5.5.2 Power Measurements using Substitution Procedure:

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

$$\text{EIRP (dBm)} = \text{Signal Generator setting (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

Eg:

Frequency (MHz)	Measured SA (dB $\mu$ V)	Signal Generator setting (dBm)	Antenna Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	EIRP (dBm)
1000	95.5	24.5	6.5	0	3.5	27.5

**6.5.6 Radiated out of band emissions results on EUT- Transmit Mode:**





**6.5.6.1 Test Results Transmitter Spurious Emission GSM 850:**

Harmonic	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
1	824.2	-	836.6	-	848.8	-
2	1648.4	-36	1673.2	-38	1697.6	-37.5
3	2472.6	-35	2509.8	-39	2546.4	-36
4	3296.8	NF	3346.4	-35	3395.2	-34
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = Noise Floor Measurement Uncertainty: ±3dB						

**6.5.6.2 Measurement Result**


Pass.

**Legend for the plots:**

-  -13dBm.LimitLine
-  Preview Result
-  Data Reduction Result
-  Final Measurement Result




**Radiated Spurious Emissions (GSM-850) Tx: Low Channel**  
**Test Results 30MHz-1GHz**  
**Note: Marker placed on transmit signal**

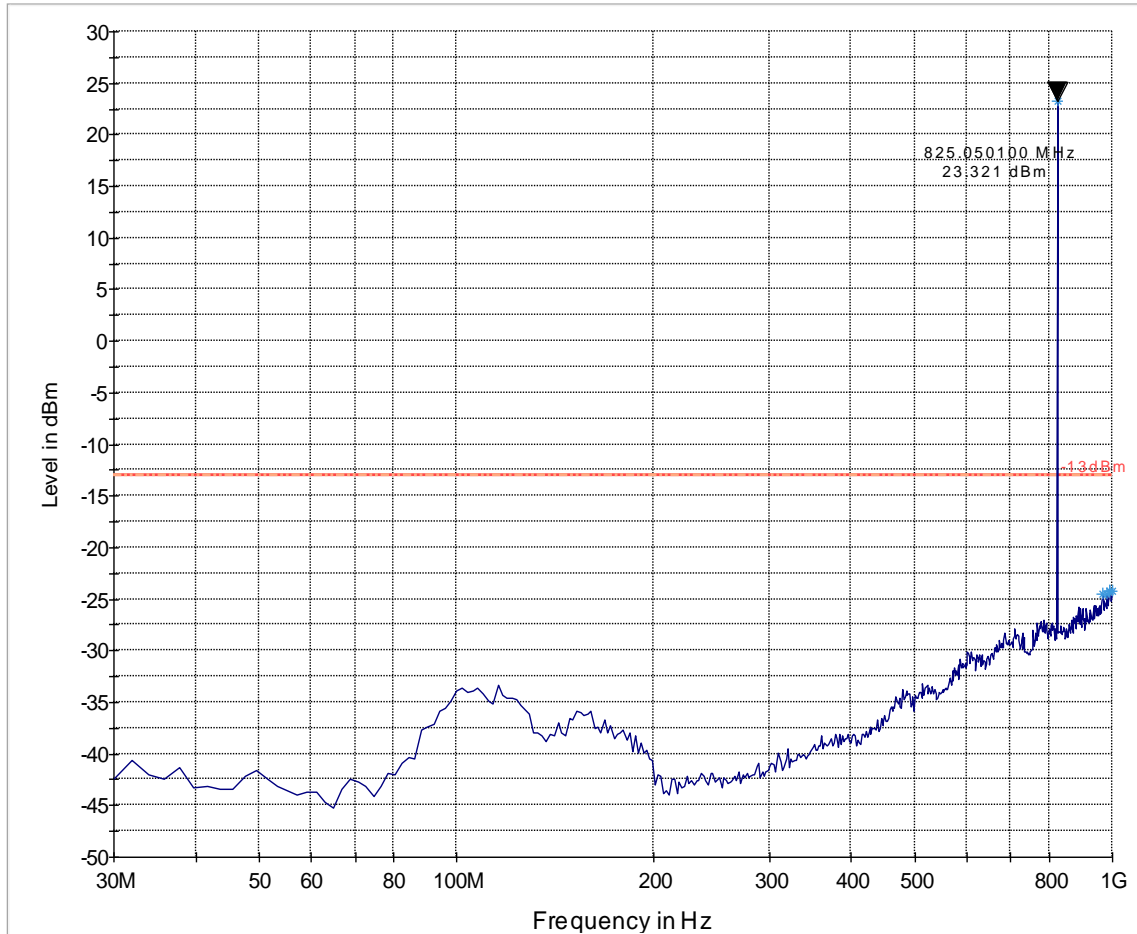

— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+




**Radiated Spurious Emissions (GSM-850) Tx: Low Channel**  
**Test Results 1GHz-9GHz**

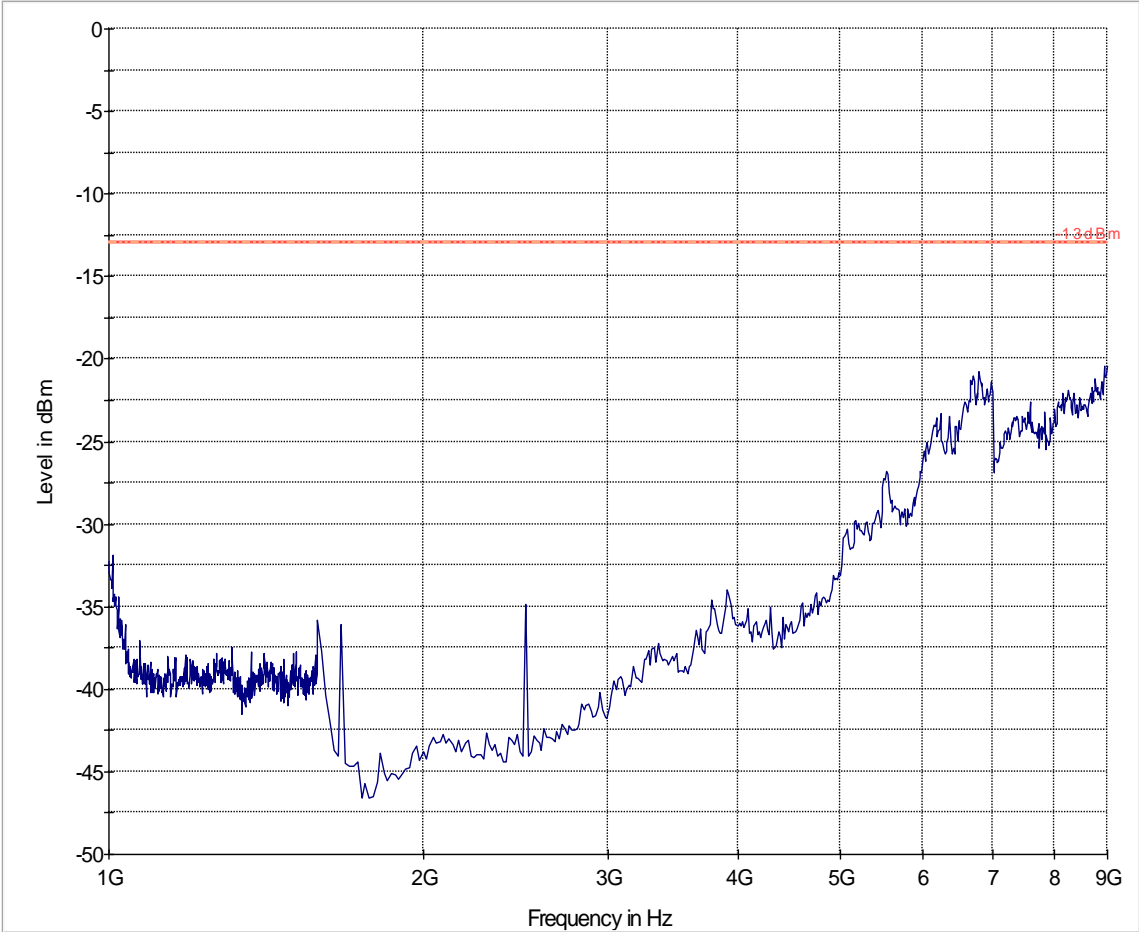

— -13dBm.LimitLine - - - -13dBm.LimitLine — Preview Result 1-PK+


**Radiated Spurious Emissions (GSM-850) Tx: Mid Channel**  
**Test Results 30MHz-1GHz**  
**Note: Marker placed on transmit signal**

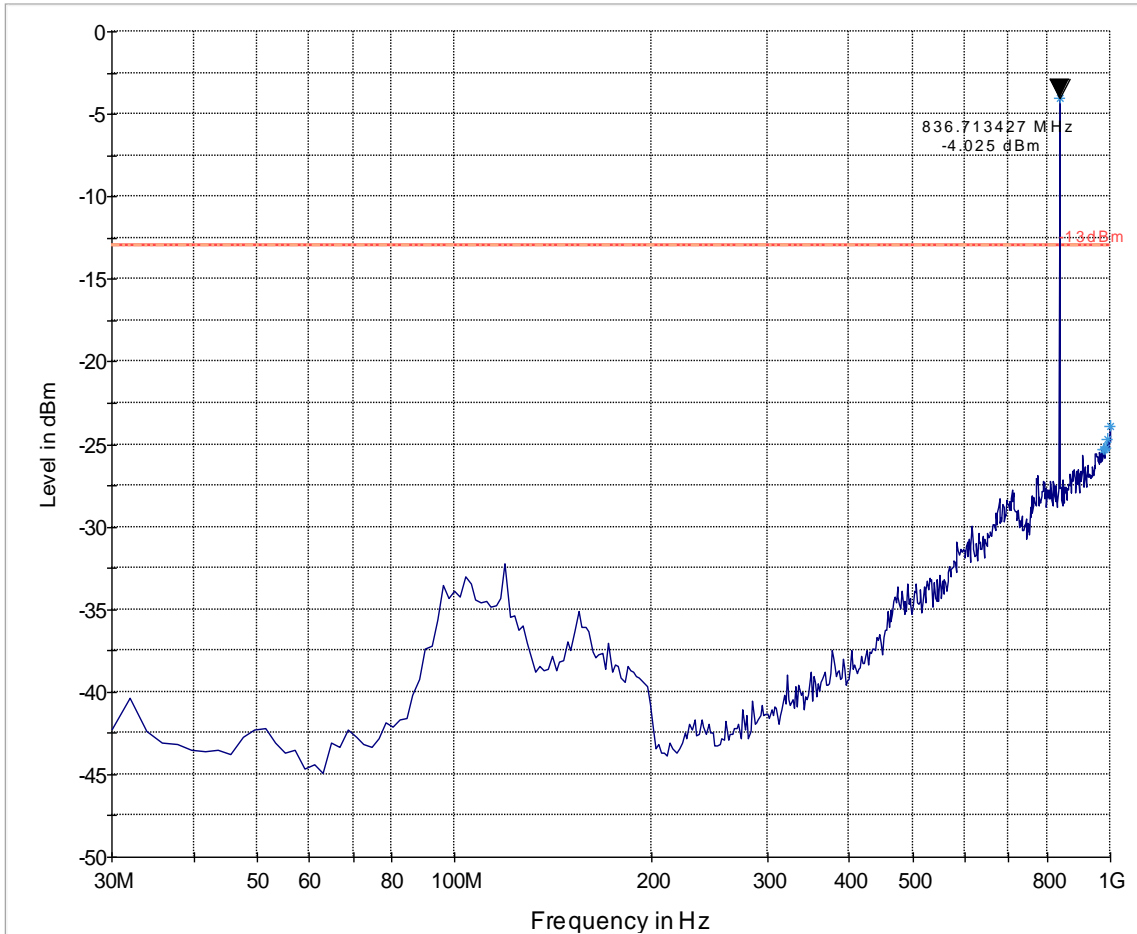

— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+



**Radiated Spurious Emissions (GSM-850) Tx: Mid Channel**  
**Test Results 1GHz-9GHz**

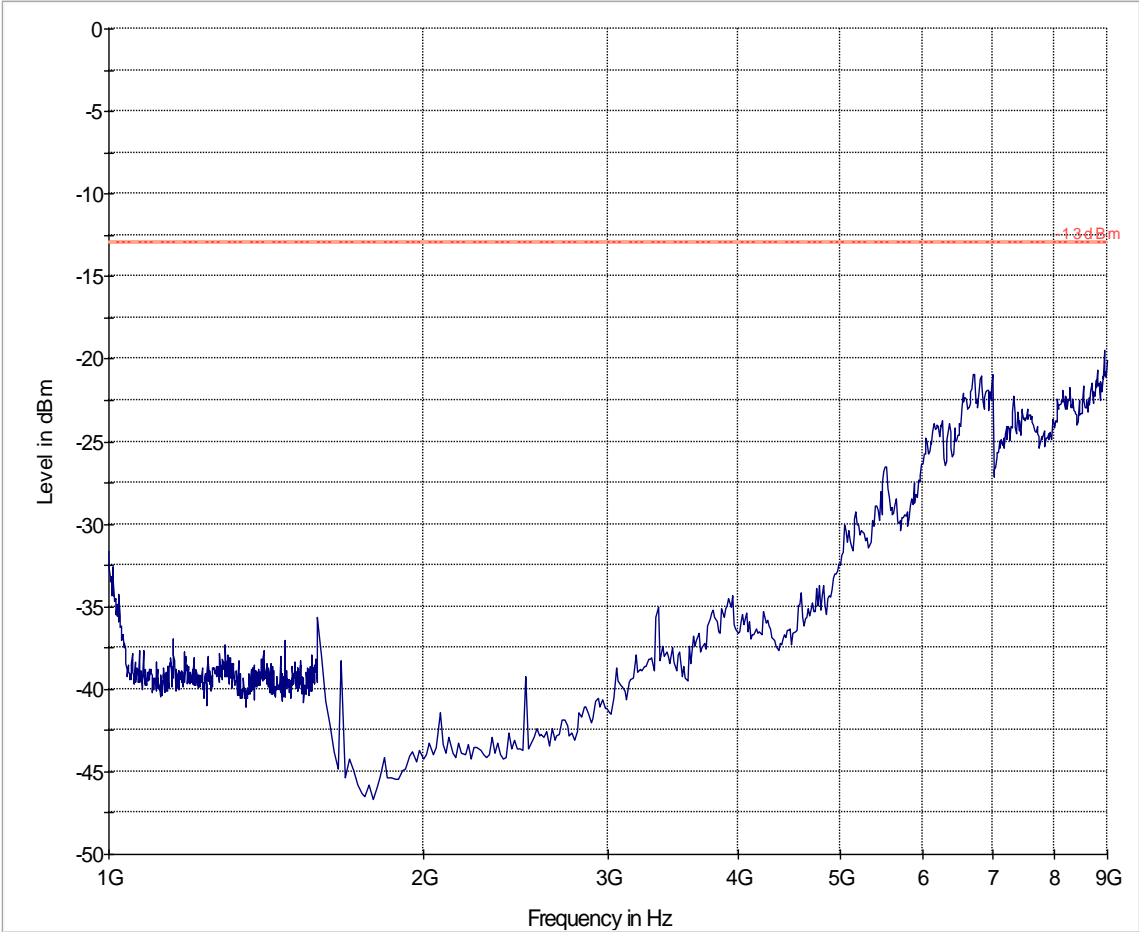


— -13dBm.LimitLine - - - -13dBm.LimitLine — Preview Result 1-PK+



**Radiated Spurious Emissions (GSM-850) Tx: High Channel**

**Test Results 30MHz-1GHz**

**Note: Marker placed on transmit signal**

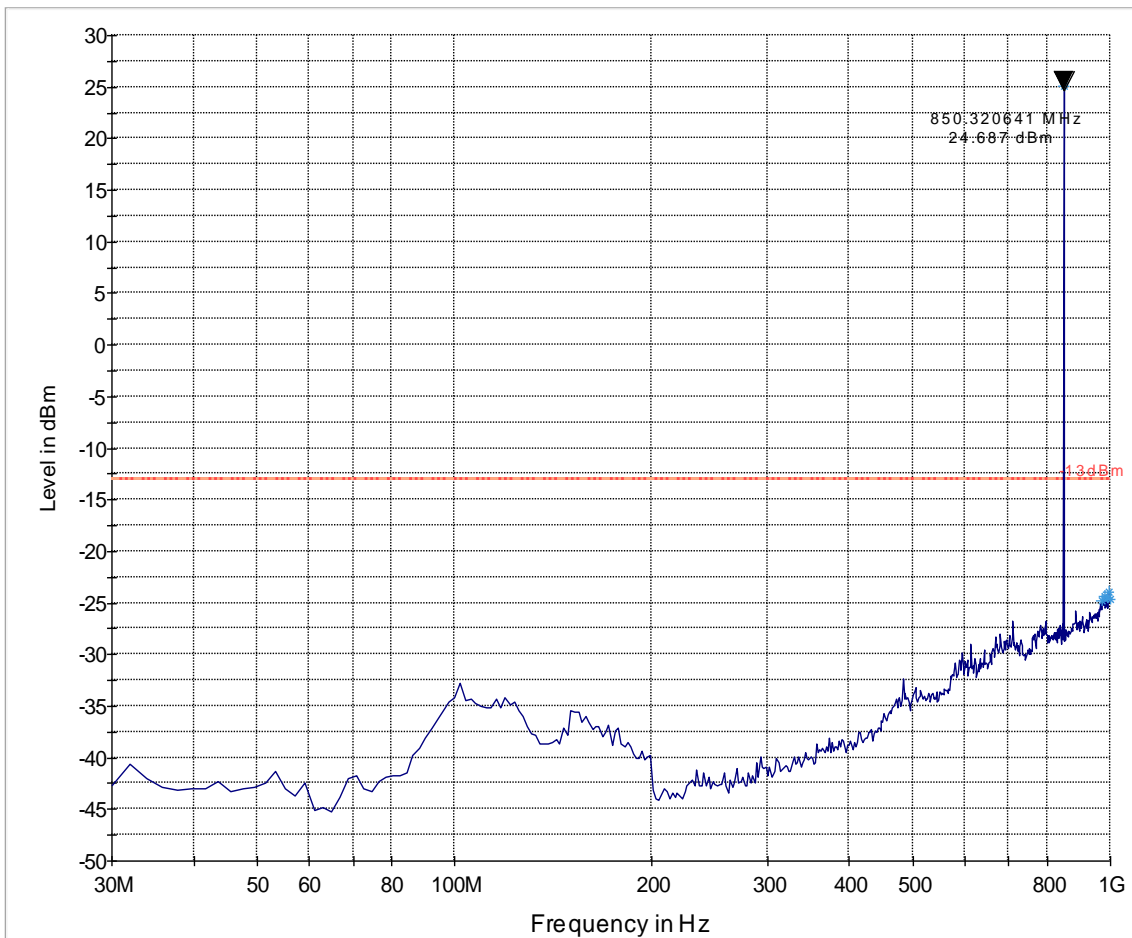


— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+





**Radiated Spurious Emissions (GSM-850) Tx: High Channel**  
**Test Results 1GHz-9GHz**

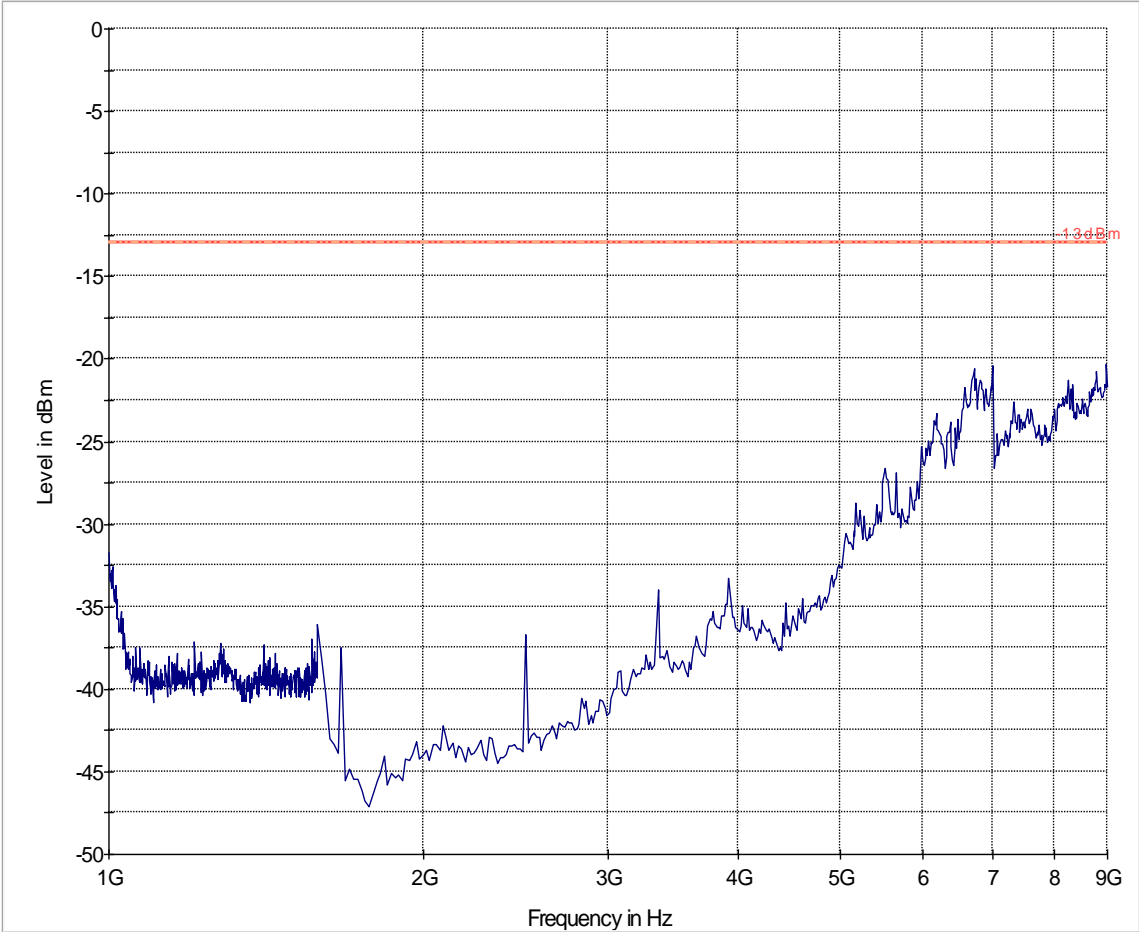





— -13dBm.LimitLine - -13dBm.LimitLine — Preview Result 1-PK+

**6.5.6.3 Test Results Transmitter Spurious Emission PCS-1900:**

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
1	1850.2	-	1880.0	-	1909.8	-
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = Noise Floor Measurement Uncertainty: ±3dB						


**6.5.6.4 Measurement Result**  
 Pass.

**Legend for the plots:**

-  -13dBm.LimitLine
-  Preview Result
-  Data Reduction Result
-  Final Measurement Result




**Radiated Spurious Emissions (PCS-1900) Tx: Low Channel**  
**Test Results 30MHz-1GHz**

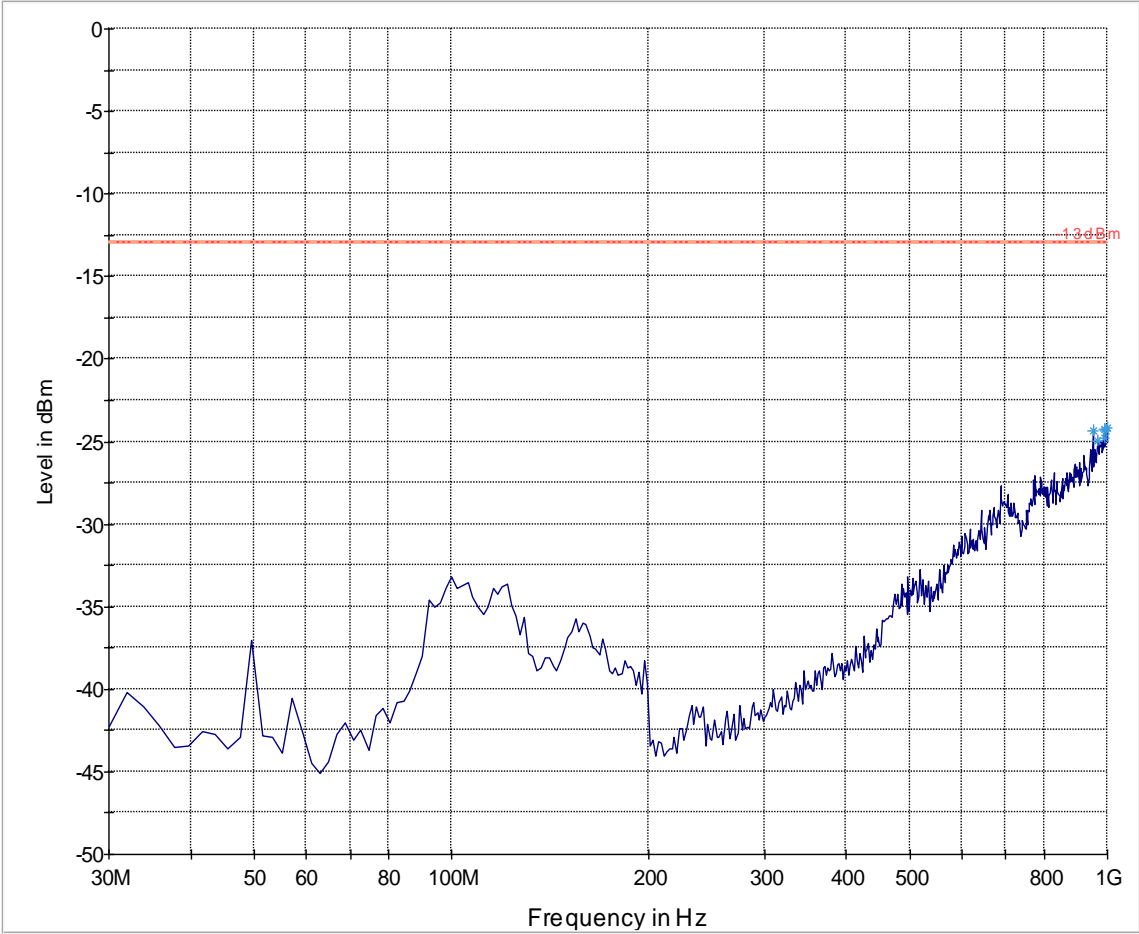

— -13dBm.LimitLine - -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+




**Radiated Spurious Emissions (PCS-1900) Tx: Low Channel**  
**Test Results 1GHz-18GHz**  
**Note: Marker placed on transmit signal**

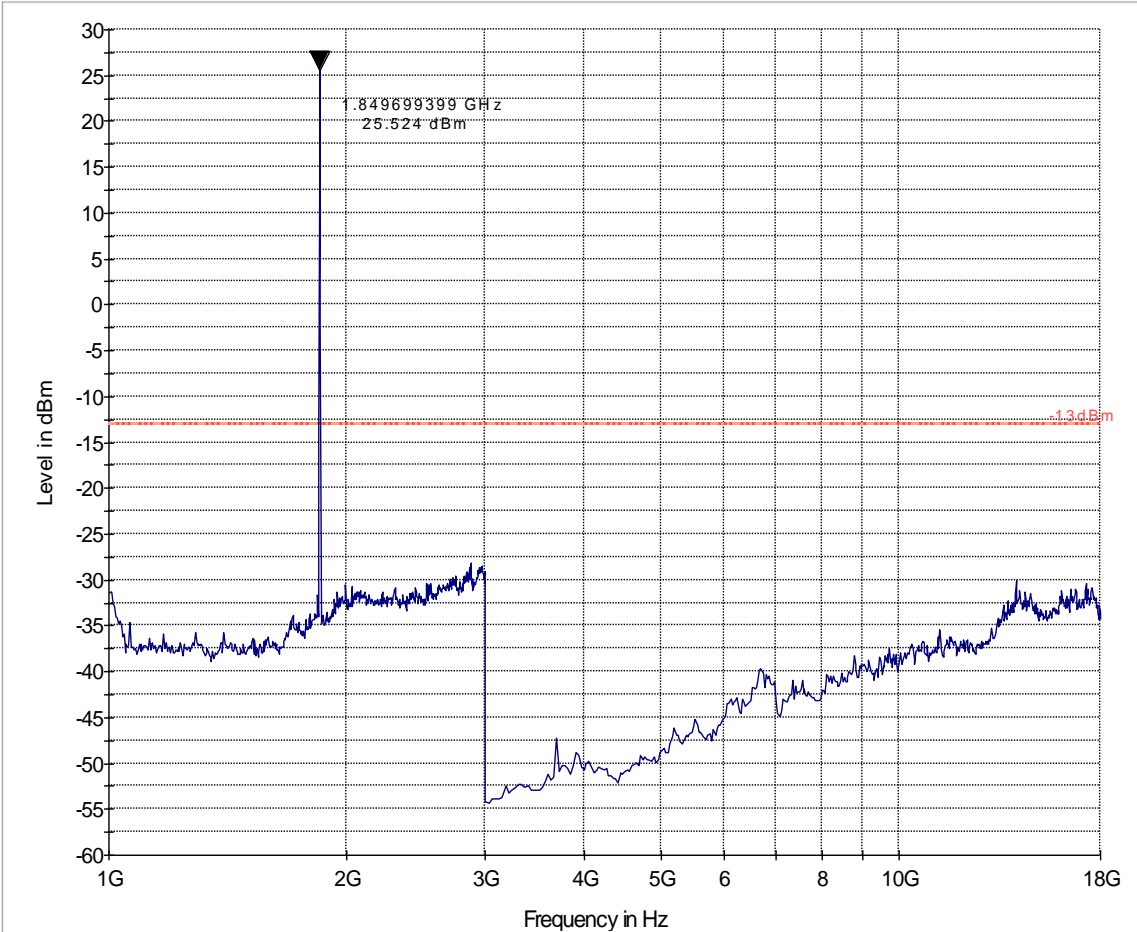

-13dBm.LimitLine -13dBm.LimitLine Preview Result 1-PK+



**Radiated Spurious Emissions (PCS-1900) Tx: Mid Channel**  
**Test Results 30MHz-1GHz**

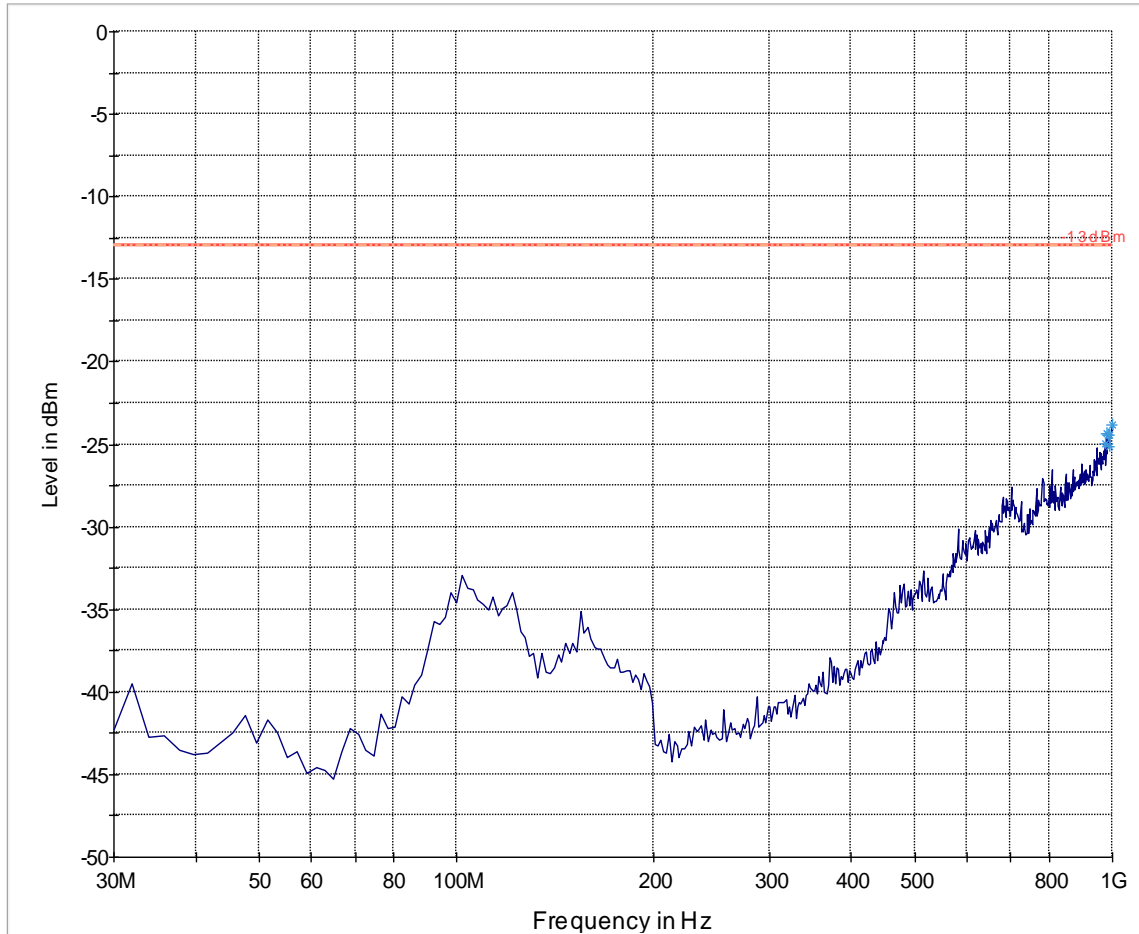


— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+



**Radiated Spurious Emissions (PCS-1900) Tx: Mid Channel**

**Test Results 1GHz-18GHz**


**Note: Marker placed on transmit signal.**

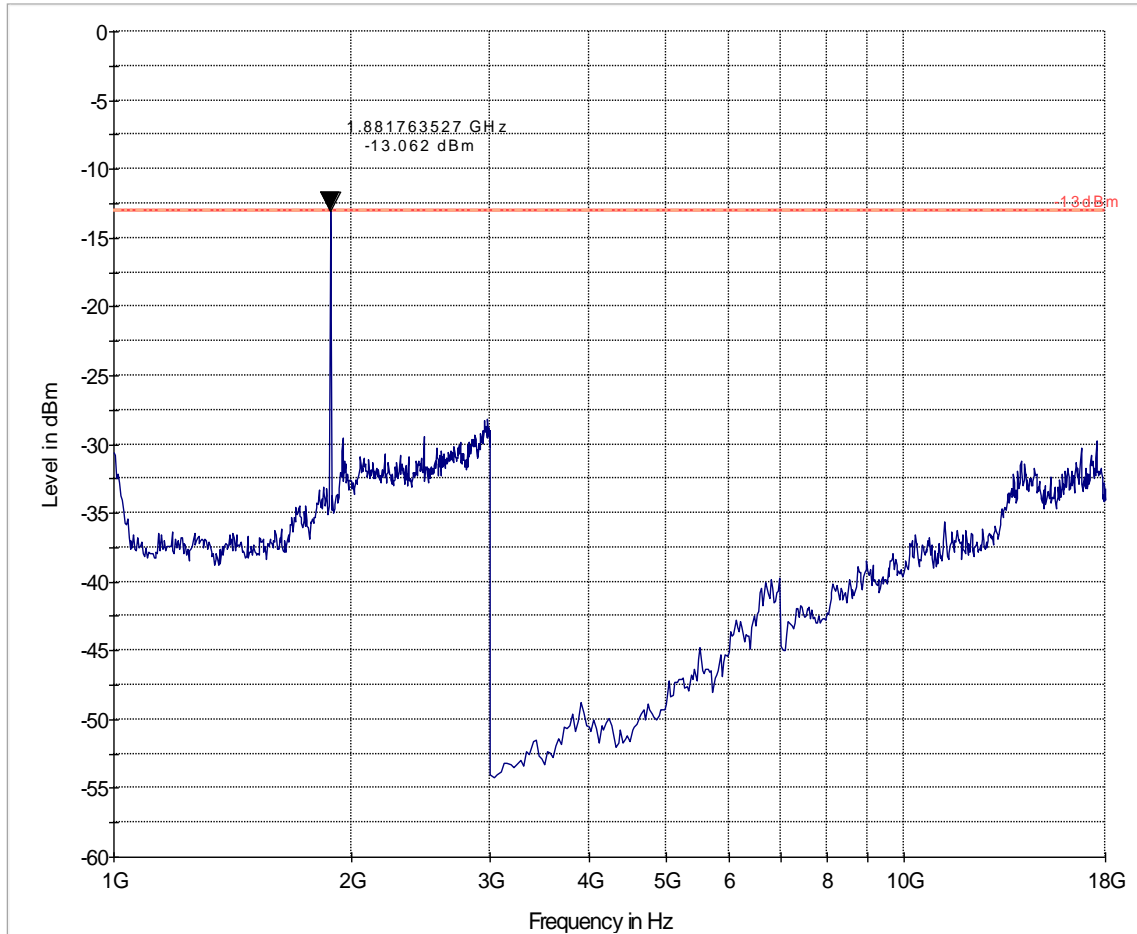

— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+




**Radiated Spurious Emissions (PCS-1900) Tx: High Channel**  
**Test Results 30MHz-1GHz**

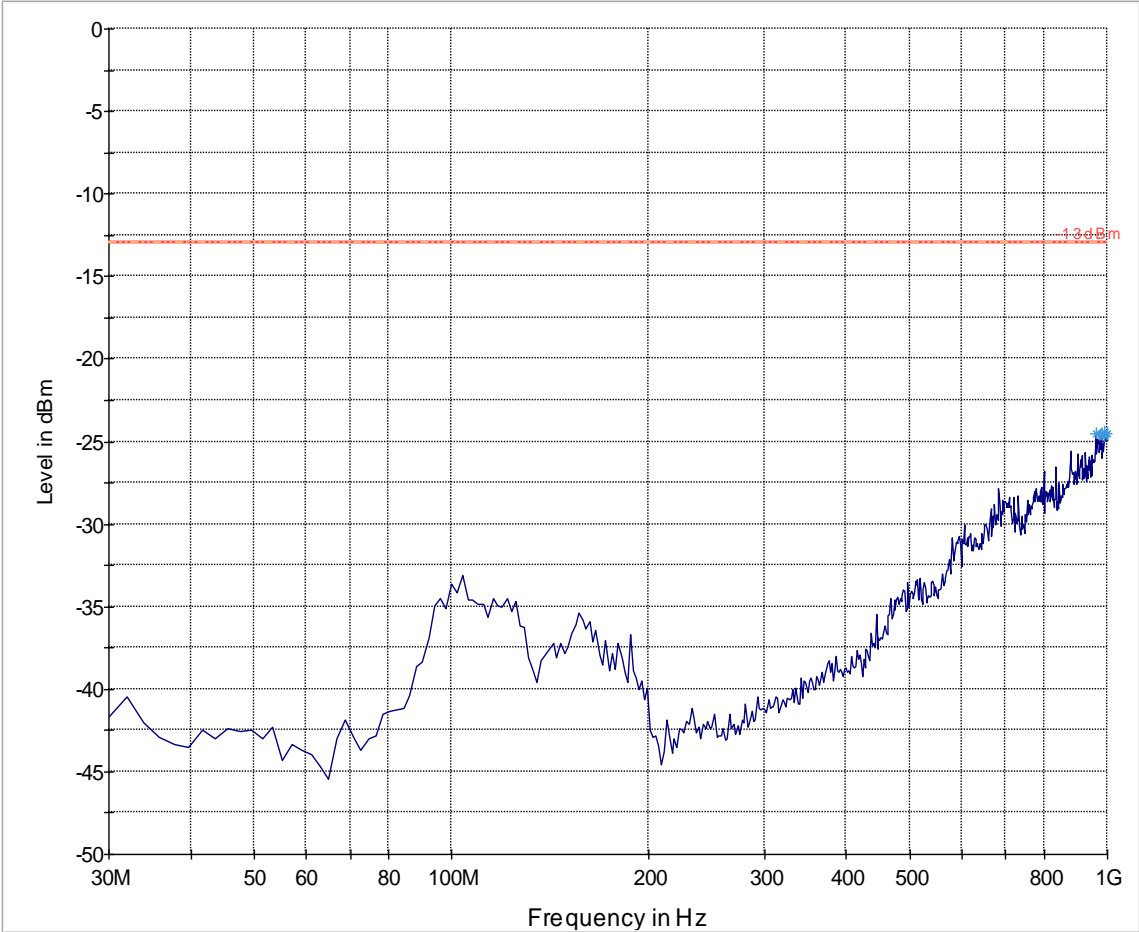

— -13dBm.LimitLine - -13dBm.LimitLine — Preview Result 1-PK+ \* Data Reduction Result 1 [1]-PK+

**Radiated Spurious Emissions (PCS-1900) Tx: High Channel**  
**Test Results 1GHz-18GHz**  
**Note: Marker placed on transmit signal.**

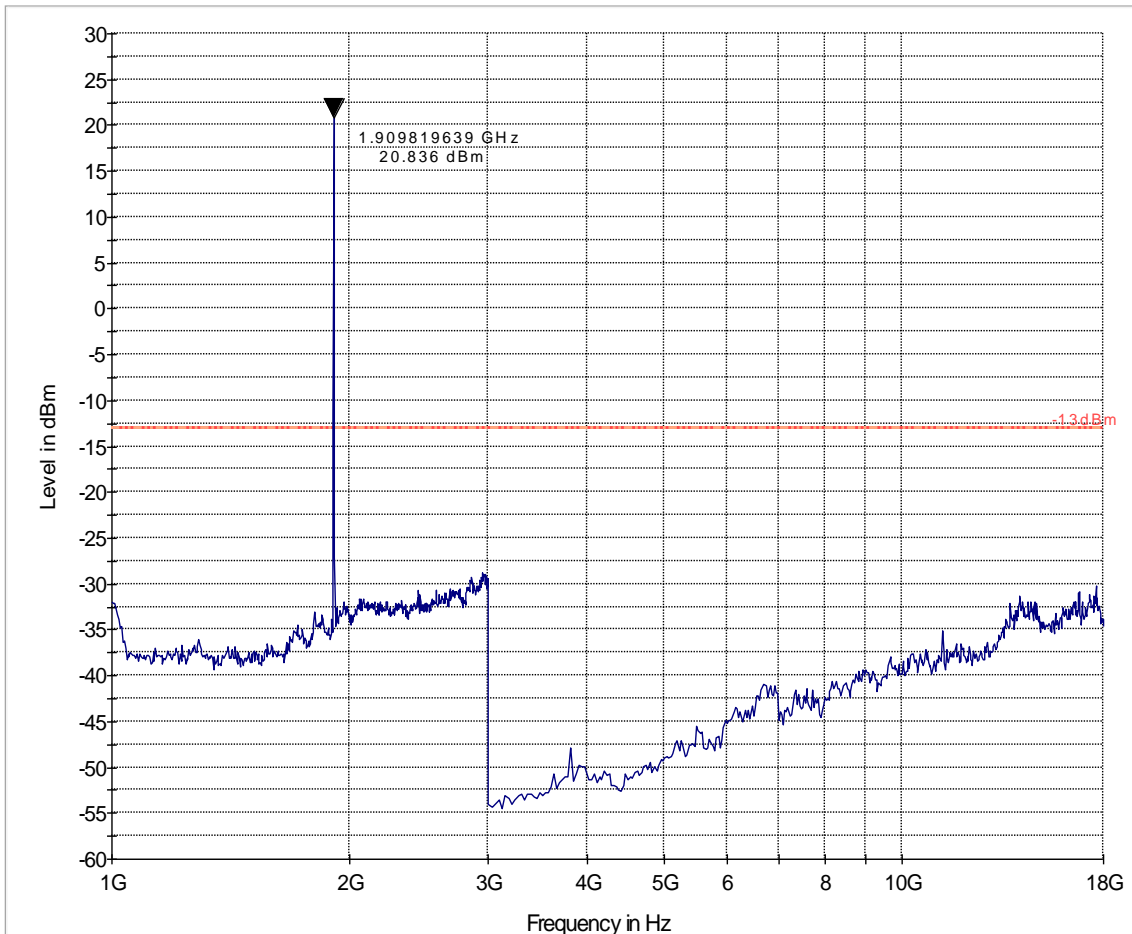


— -13dBm.LimitLine — -13dBm.LimitLine — Preview Result 1-PK+





### Test results 18GHz-19.1GHz

Note: Worst case representation of all channels


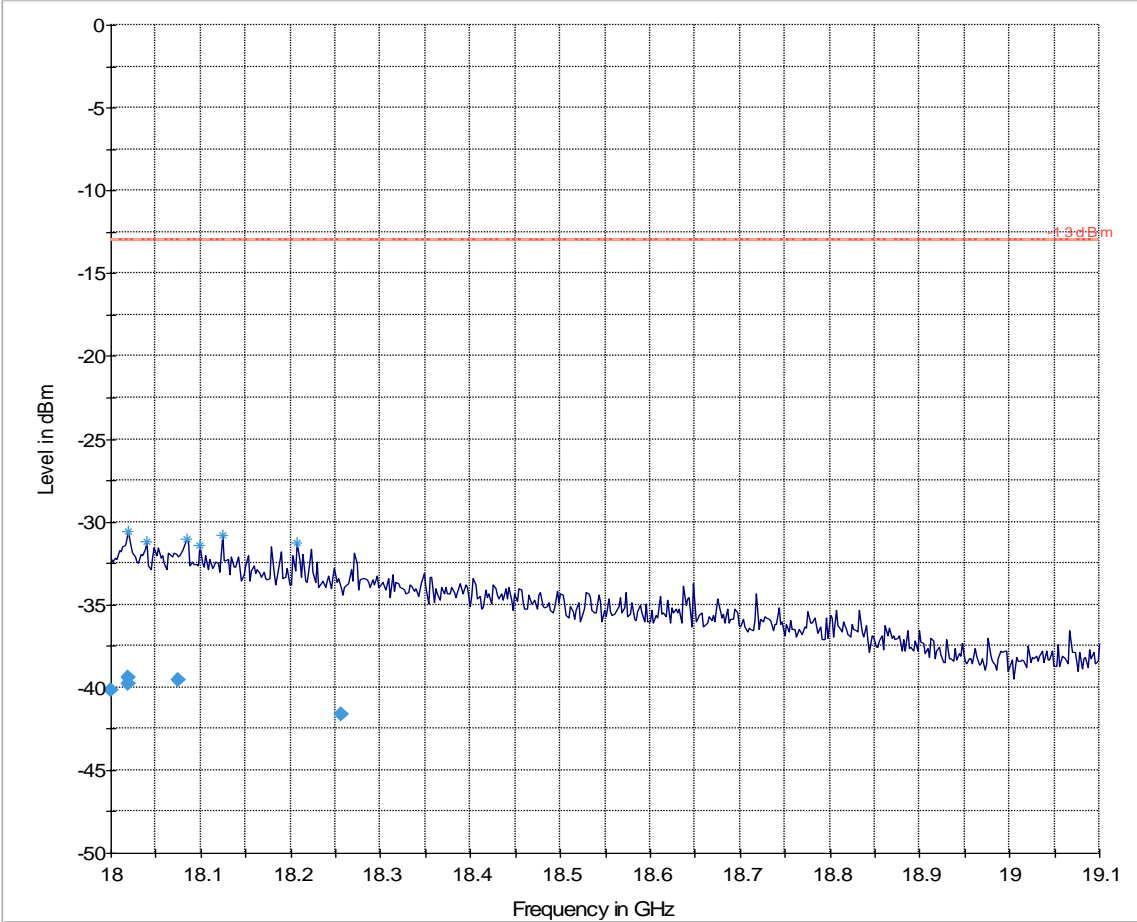


-13dBm.LimitLine      -13dBm.LimitLine      Preview Result 1-PK+  
\*      Data Reduction Result 1 [4]-PK+      Final Measurement Result 1-PK+

**7 Test Equipment and Ancillaries used for tests**

Instrument/Ancillary	Model	Manufacturer	Serial No.	Cal Date	Cal Interval
Radio Communication Tester	CMU 200	Rohde & Schwarz	101821	May 2011	2 Years
EMI Receiver/Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2011	2 Years
Spectrum Analyzer	FSU	Rohde & Schwarz	200302	May 2011	2 Years
Loop Antenna	6512	EMCO	00049838	Aug 2011	3 years
Biconilog Antenna	3141	EMCO	0005-1186	June 2009	3 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Jan 2009	3.5 years
Horn Antenna (1-18GHz)	3115	ETS	00035114	Mar 2009	3 years
Horn Antenna (18-40GHz)	3116	ETS	00070497	Aug 2011	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
LISN	50-25-2-08	FCC	08014	Jan 2012	1 year
Power Smart Sensor	R&S	NRP-Z81	100161	May 2011	2 Years
DC Power Supply	E3610A	Hewlett Packard	KR83021224	n/a	n/a
Multimeter	MM200	Klein	N/A	Apr 2011	2 Years
Temp Hum Logger	TM320	Dickson	03280063	Feb 2011	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Feb 2011	1 Year

## 8 Block Diagrams

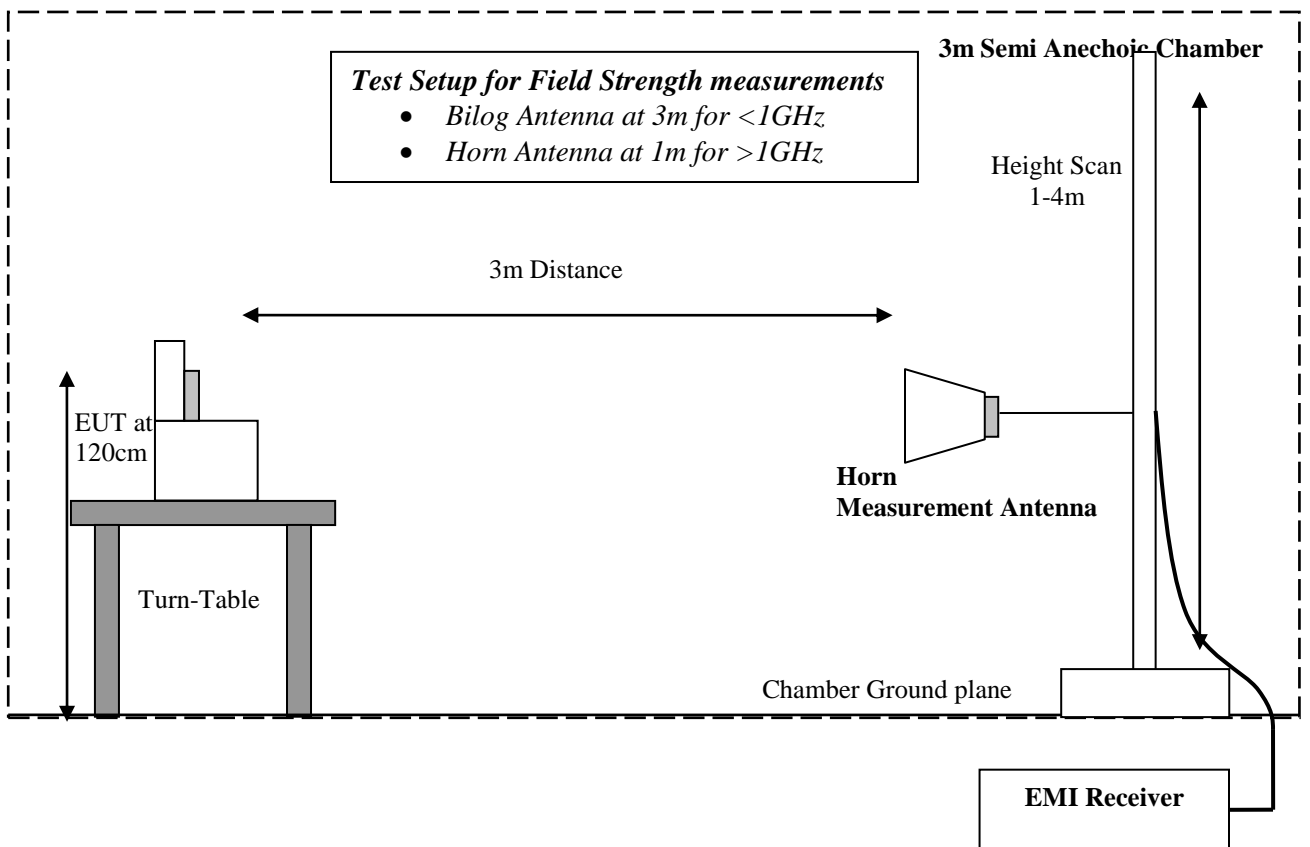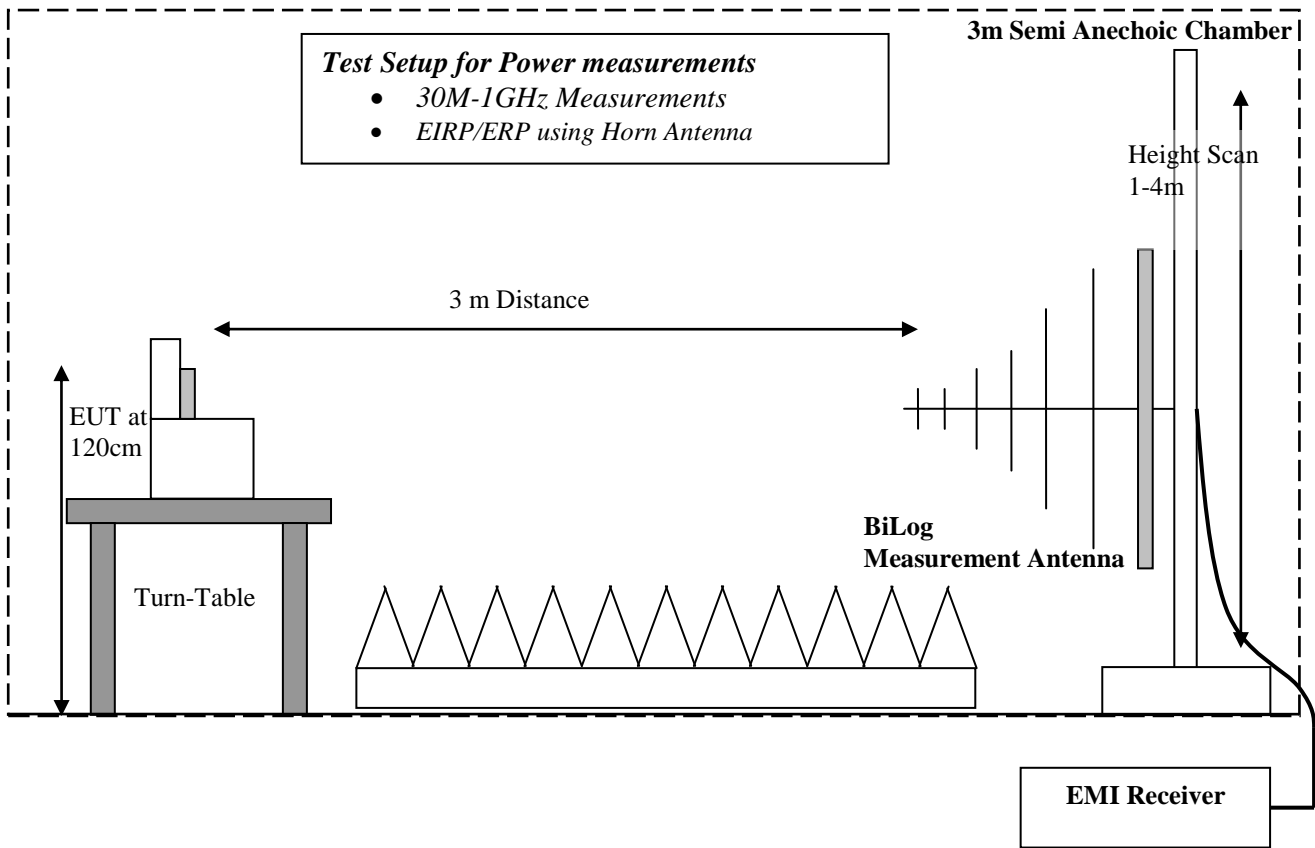

## 9 Revision History

Date	Report Name	Changes to report	Report prepared by
2012-03-06	EMC_TZMED_001_10001_WWAN	First Version	Calvin Lee
2012-03-15	EMC_TZMED_001_10001_WWAN_rev1	Removed Part 15 Reference and Measurement	Calvin Lee
2012-04-03	EMC_TZMED_001_10001_WWAN_rev2	Corrected IC Certificaton Number	Calvin Lee