



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01



Certificate #6613.01

FCC TEST REPORT

(PART 22)

Applicant:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxin RD, Hi-Tech Industrial Park North, Nanshan District, Shenzhen, P.R.C.

Manufacturer or Supplier:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxin RD, Hi-Tech Industrial Park North, Nanshan District, Shenzhen, P.R.C.
Product:	Smart Phone
Brand Name:	RugGear
Model Name:	PSM03G
Marketing name:	RG880
FCC ID:	ZLE-RG880
Date of tests:	Dec. 20, 2023 ~Mar. 20, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H FCC Part 2
 ANSI/TIA/EIA-603-D ANSI C63.26-2015
 ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department

Date: Mar. 20, 2024 Date: Mar. 20, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
1.1 MEASUREMENT UNCERTAINTY	7
1.2 TEST SITE AND INSTRUMENTS	8
2 GENERAL INFORMATION	11
2.1 GENERAL DESCRIPTION OF EUT	11
2.2 CONFIGURATION OF SYSTEM UNDER TEST	14
2.3 DESCRIPTION OF SUPPORT UNITS	15
2.4 TEST ITEM AND TEST CONFIGURATION.....	15
2.5 EUT OPERATING CONDITIONS.....	19
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	20
3 TEST TYPES AND RESULTS.....	21
3.1 OUTPUT POWER MEASUREMENT	21
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT.....	21
3.1.2 TEST PROCEDURES	21
3.1.3 TEST SETUP	22
3.1.4 TEST RESULTS	22
3.2 FREQUENCY STABILITY MEASUREMENT	33
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	33
3.2.2 TEST PROCEDURE.....	33
3.2.3 TEST SETUP	33
3.2.4 TEST RESULTS	34
3.3 OCCUPIED BANDWIDTH MEASUREMENT	35
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	35
3.3.2 TEST SETUP	35
3.3.3 TEST PROCEDURES	35
3.3.4 TEST RESULTS	36
3.4 BAND EDGE MEASUREMENT	37
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	37
3.4.2 TEST SETUP	37
3.4.3 TEST PROCEDURES	38
3.4.4 TEST RESULTS	39
3.5 CONDUCTED SPURIOUS EMISSIONS.....	40
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	40
3.5.2 TEST PROCEDURE.....	40
3.5.3 TEST SETUP	40
3.5.4 TEST RESULTS	41
3.6 RADIATED EMISSION MEASUREMENT	42
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	42
3.6.2 TEST PROCEDURES	42
3.6.3 DEVIATION FROM TEST STANDARD	42
3.6.4 TEST SETUP	43
3.6.5 TEST RESULTS	45



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.7 PEAK TO AVERAGE RATIO	83
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	83
3.7.2 TEST SETUP	83
3.7.3 TEST PROCEDURES	83
3.7.4 TEST RESULTS	84
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	85
5 INFORMATION ON THE TESTING LABORATORIES	86
6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	87
7 APPENDIX:.....	88
GSM850	88
PEAK-TO-AVERAGE RATIO(CCDF)	88
TEST RESULT	88
TEST GRAPHS	89
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	92
TEST RESULT	92
TEST GRAPHS	93
BAND EDGE	99
TEST RESULT	99
TEST GRAPHS	100
CONDUCTED SPURIOUS EMISSION	102
TEST RESULT	102
TEST GRAPHS	103
FREQUENCY STABILITY	106
TEST RESULT	106
CDMA2000 BC0	108
PEAK-TO-AVERAGE RATIO(CCDF)	108
TEST RESULT	108
TEST GRAPHS	109
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	110
TEST RESULT	110
TEST GRAPHS	111
BAND EDGE	112
TEST RESULT	112
TEST GRAPHS	113
CONDUCTED SPURIOUS EMISSION	114
TEST RESULT	114
TEST GRAPHS	115
FREQUENCY STABILITY	116
TEST RESULT	116
WCMDA BAND5	117
PEAK-TO-AVERAGE RATIO	117
TEST RESULT	117
TEST GRAPHS	118
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	120
TEST RESULT	120



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

TEST GRAPHS	121
BAND EDGE	124
TEST RESULT	124
TEST GRAPHS	125
CONDUCTED SPURIOUS EMISSION	126
TEST RESULT	126
TEST GRAPHS	127
FREQUENCY STABILITY	129
TEST RESULT	129
LTE BAND5	131
PEAK-TO-AVERAGE RATIO(CCDF)	131
TEST RESULT	131
TEST GRAPHS	133
6DB BANDWIDTH AND OCCUPIED BANDWIDTH	142
TEST RESULT	142
TEST GRAPHS	143
BAND EDGE	161
TEST RESULT	161
TEST GRAPHS	163
CONDUCTED SPURIOUS EMISSION	186
TEST RESULT	186
TEST GRAPHS	187
FREQUENCY STABILITY	205
TEST RESULT	205



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSU2312200110RF01	Original release	Mar. 20, 2024



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Conducted Output Power	Compliance	A
§22.913 (a)(5) §22.913(a)(2)	Effective Radiated Power	Compliance	A
§2.1055 §22.355	Frequency Stability	Compliance	A/B
§2.1049 §22.917(b)	Occupied Bandwidth	Compliance	A/B
§22.913 (d)	Peak to average ratio*	Compliance	A/B
§22.917(a)	Band Edge Measurements	Compliance	A/B
§2.1051 §22.917(a)	Conducted Spurious Emissions	Compliance	A/B
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance	A/B

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

NOTE: The maximum RF output power level is 1xRTT RC3 SO55 mode for CDMA2000 BC0, so only 1xRTT mode was used for all tests.

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

Lab B:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District
Shenzhen, Guangdong, People's Republic of China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. is 525120; The Designation No. is CN1171.



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

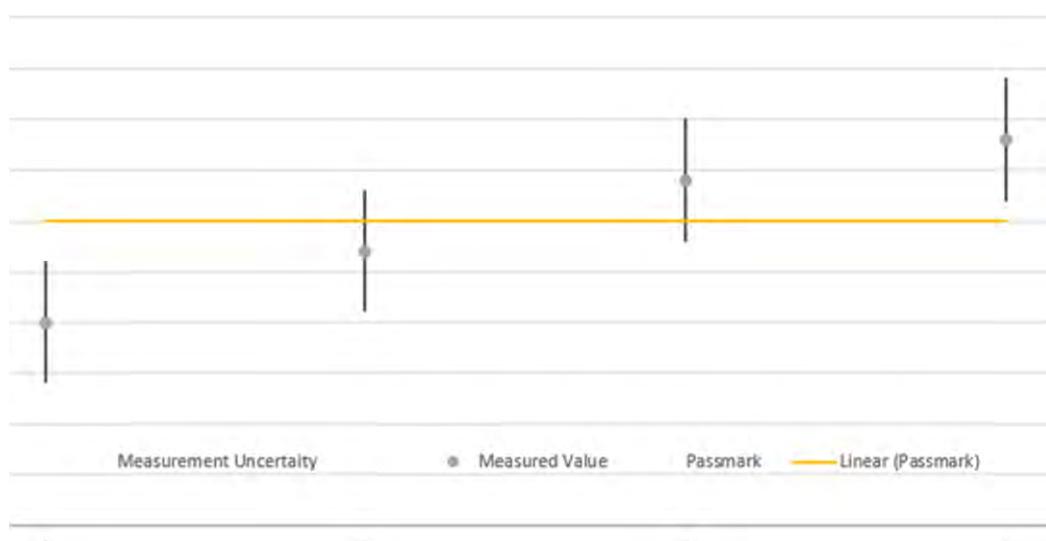

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESR26	101734	Feb.24,24	Feb.23,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24



**BUREAU
VERITAS**

Test Report No.: PSU-QSU2312200110RF01

CABLE	R&S	J12J103539-00-1	SEP-03-20-0 69	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-0 70	Apr.28,23	Apr.27,24
Temperature Chamber	votsch	VT4002	5856607810 0050	May.31,22	May.30,24

- NOTE:** 1. The calibration interval of the above test instruments is 12/ 24 / 36 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.02,23	Sep.01,24
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,23	Feb. 17,24
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 17,24	Feb. 16,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 17,24	Feb. 16,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.03, 23	Sep.02, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 13,24	Feb. 12,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb.16,24	Feb.15,25
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-121 6	Nov. 14,23	Nov. 13,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 13,24	Feb. 12,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 13,24	Feb. 12,25
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
MXG	KEYSIGHT	N5183A	MY50143024	Feb. 13,24	Feb. 12,25



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Analog Microvave Signal Generator					
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.10,23	May.09,24
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 12,22	Aug. 11,23
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24

- NOTE:**
1. The calibration interval of the above test instruments is 12/ 36 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Smart Phone	
BRAND NAME*	RugGear	
MODEL NAME*	PSM03G	
MARKETING NAME*	RG880	
NOMINAL VOLTAGE*	5.0Vdc/ 9.0Vdc/ 12.0Vdc(Adapter) 3.85Vdc (Battery)	
MODULATION TYPE	GSM/EDGE	GMSK, 8PSK
	CDMA2000 BC0	1xRTT: BPSK, QPSK 1xEV-DO: 8PSK
	WCDMA	BPSK, QPSK
	LTE	QPSK, 16QAM, 64QAM
FREQUENCY RANGE	GSM/EDGE	824.2MHz ~ 848.8MHz
	CDMA2000 BC0	824.7MHz ~ 848.31 MHz
	WCDMA	826.4MHz ~ 846.6MHz
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
MAX. ERP POWER	GSM	935.41mW
	EDGE	236.59mW
	CDMA2000 BC0 1xRTT	107.65mW
	CDMA2000 BC0 1xEV-DO	107.4mW
	WCDMA	118.58mW
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	96.38mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	95.5mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	95.28mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	97.27mW
EMISSION	GSM	248KGXW



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

DESIGNATOR/GOGN	EDGE	249KG7W
	CDMA2000 BC0	1M29F9W
	WCDMA	4M16F9W
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M09G7D 16QAM: 1M09W7D 64QAM: 1M08W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M69G7D 16QAM: 2M69W7D 64QAM: 2M69W7D
	LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M52G7D 16QAM: 4M52W7D 64QAM: 4M51W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 8M99G7D 16QAM: 9M00W7D 64QAM: 8M98W7D
ANTENNA TYPE*	PIFA Antenna with -1.7dBi gain for GSM850/ CDMA2000 BC 0/WCDMA V/LTE B5	
HW VERSION*	MP619_MB_V1.02_PCB	
SW VERSION*	RG880_EEA_00.00_1_20240305	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	USB cable: non-shielded cable, with w/o ferrite core, 1.0 meter	
EXTREME TEMPERATURE*	-10°C-50 °C	
EXTREME VOLTAGE*	3.6V – 4.4V	

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and two receivers.

MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/2RX
WCDMA	1TX/2RX
CDMA2000BC0	1TX/2RX
LTE	1TX/2RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

5. List of Accessory:



ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
CPU	QUALCOMM	N/A	SM6225	N/A
eMMC 1 (=ROM 1)	SAMSUNG	N/A	KM2L9001CM-B518	N/A
eMMC 2 (=ROM 2)	Hynix	N/A	H9QT0GECN6X145R	N/A
RAM 1	N/A	N/A	N/A	N/A
RAM 2	N/A	N/A	N/A	N/A
BT/WLAN Module	N/A	N/A	N/A	N/A
NFC chipset	NXP	N/A	N/A	N/A
Battery	N/A	N/A	BL450AGP	Power Rating: 4.4V 4500mAh
Adapter	N/A	SHENZHEN MERRYKING ELECTRONICS CO.. LTD	MK-Q181US	I/P: 100-240Vac, 50/60Hz, 0.5A, O/P:5.0V 3.0A or 9.0V 2.0A or 12.0V 1.5A
USB Cable	N/A	Huizhou Huating Technology Co., Ltd	USB1.0	Signal Line, 1.0meter



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

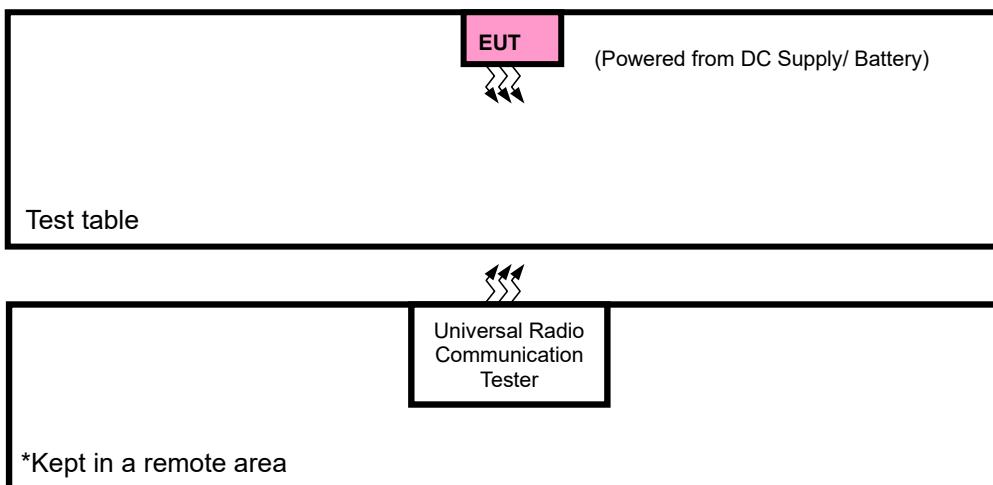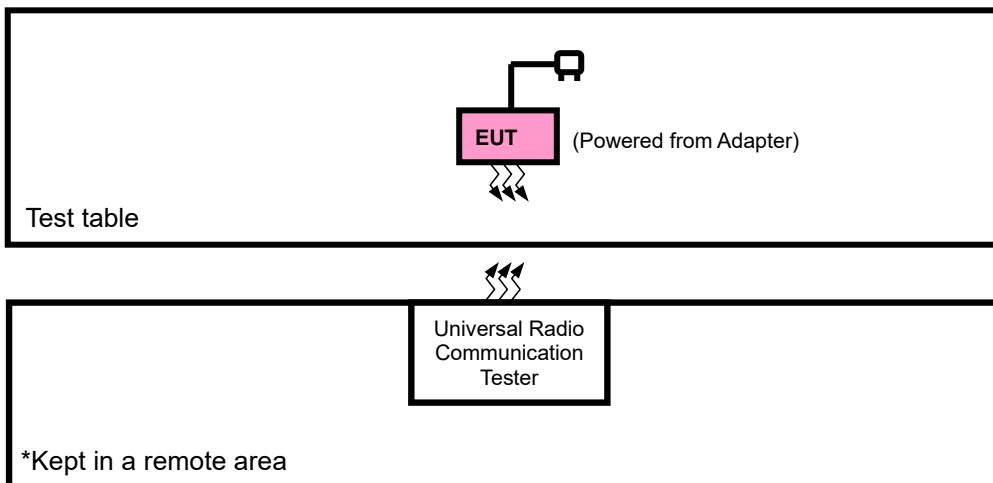



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1.0m;

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM /EDGE /LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with GSM or CDMA2000 or WCDMA or LTE link
B	EUT + Battery with GSM or CDMA2000 or WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	128 to 251	128, 189, 251	GSM,EDGE
B	FREQUENCY STABILITY	128 to 251	128, 189, 251	GSM,EDGE
A	OCCUPIED BANDWIDTH	128 to 251	128, 189, 251	GSM,EDGE
A	BAND EDGE	128 to 251	128, 251	GSM,EDGE
A	CONDUCTED EMISSION	128 to 251	128, 189, 251	GSM,EDGE
A	RADIATED EMISSION	128 to 251	128, 189, 251	GSM,EDGE
A	PEAK TO AVERAGE RATIO	128 to 251	128, 189, 251	GSM,EDGE



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CDMA2000 BC0

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	1013 to 777	1013, 384, 777	CDMA
B	FREQUENCY STABILITY	1013 to 777	1013, 384, 777	CDMA
A	OCCUPIED BANDWIDTH	1013 to 777	1013, 384, 777	CDMA
A	BAND EDGE	1013 to 777	1013, 777	CDMA
A	CONDUCED EMISSION	1013 to 777	1013, 384, 777	CDMA
A	RADIATED EMISSION	1013 to 777	1013, 384, 777	CDMA
A	PEAK TO AVERAGE RATIO	1013 to 777	1013, 384, 777	CDMA

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4132, 4182, 4233	WCDMA
A	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
A	BAND EDGE	4132 to 4233	4132, 4233	WCDMA
A	CONDUCED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	PEAK TO AVERAGE RATIO	4132 to 4233	4132, 4182, 4233	WCDMA



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
A	BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20407 to 20643	20643	1.4 MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK,16QAM,64QAM	1 RB / 5 RB Offset
		20415 to 20635	20635	3 MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425	5MHz	QPSK,16QAM,64QAM	1 RB / 14 RB Offset
		20425 to 20625	20625	5MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450	10MHz	QPSK,16QAM,64QAM	1 RB / 24 RB Offset
		20450 to 20600	20600	10MHz	QPSK,16QAM,64QAM	Full RB / 0 RB Offset



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

A	CONDUCTED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425,20525, 20625	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.6V/ 3.85V/ 4.4V By Battery	Hanwen Xu/ Jace Hu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu/ Jace Hu
BAND EDGE	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu/ Jace Hu
CONDUCED EMISSION	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu/ Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu/ Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu/ Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_c$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:

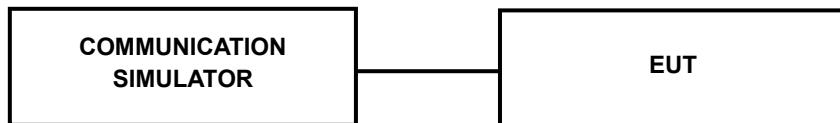

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm):

Band	GSM850		
Channel	128	189	251
Frequency(MHz)	824.2	836.4	848.8
GSM	33.42	33.48	33.37
GPRS 1Tx Slot	33.56	33.49	33.35
GPRS 2Tx Slot	32.14	32.10	32.02
GPRS 3Tx Slot	30.89	30.94	30.87
GPRS 4Tx Slot	26.78	26.91	26.84
EDGE 1Tx Slot	27.37	27.54	27.59
EDGE 2Tx Slot	25.89	25.99	25.96
EDGE 3Tx Slot	24.32	24.43	24.39
EDGE 4Tx Slot	22.25	22.29	22.27

Band	CDMA2000 BC0		
Channel	1013	384	777
Frequency(MHz)	824.7	836.52	848.31
RC1 SO55	23.74	23.95	23.09
RC3 SO55	23.89	24.17	23.32
RC3 SO32 (F+SCH)	23.77	23.86	22.98
RC3 SO32 (+SCH)	23.57	23.87	22.95
RTAP 153.6Kbps	23.81	24.16	23.31
RETAP 4096Bits	23.80	24.15	23.29



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Band	WCDMA V		
TX Channel	4132	4182	4233
Rx Channel	4357	4407	4458
Frequency(MHz)	826.4	836.4	846.6
RMC 12.2K	24.01	24.47	24.59
HSDPA Subtest-1	23.23	23.62	23.79
HSDPA Subtest-2	23.18	23.56	23.84
HSDPA Subtest-3	22.69	23.11	23.29
HSDPA Subtest-4	22.72	23.13	23.29
DC-HSDPA Subtest-1	23.07	23.63	23.64
DC-HSDPA Subtest-2	23.16	23.60	23.62
DC-HSDPA Subtest-3	22.63	23.01	23.25
DC-HSDPA Subtest-4	22.66	23.03	23.17
HSUPA Subtest-1	23.09	23.67	23.68
HSUPA Subtest-2	22.10	22.59	22.70
HSUPA Subtest-3	22.66	23.15	23.28
HSUPA Subtest-4	22.14	22.60	22.74
HSUPA Subtest-5	23.03	23.60	23.63



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz
5/ 1.4	QPSK	1	0	23.38	23.49	23.66
		1	2	23.34	23.29	23.44
		1	5	23.14	23.10	23.04
		3	0	23.59	23.69	23.49
		3	1	23.63	23.47	23.54
		3	3	23.61	23.41	23.48
		6	0	22.71	22.78	22.65
	16QAM	1	0	22.83	22.93	22.55
		1	2	22.86	22.65	22.70
		1	5	22.89	22.44	22.25
		3	0	22.70	22.50	22.48
		3	1	22.84	22.48	22.64
		3	3	22.69	22.63	22.55
		6	0	21.75	21.49	21.57
	64QAM	1	0	21.91	21.71	21.67
		1	2	21.81	21.58	21.52
		1	5	21.90	21.49	21.61
		3	0	21.58	21.47	21.45
		3	1	21.76	21.63	21.53
		3	3	21.66	21.61	21.48
		6	0	20.78	20.55	20.65



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz
5/ 3	QPSK	1	0	23.33	23.65	23.40
		1	7	23.30	23.33	23.42
		1	14	23.14	23.09	23.09
		8	0	22.72	22.68	22.57
		8	3	22.65	22.48	22.52
		8	7	22.56	22.38	22.57
		15	0	22.81	22.84	22.57
	16QAM	1	0	22.88	22.95	22.56
		1	7	22.86	22.62	22.58
		1	14	22.92	22.39	22.35
		8	0	21.68	21.45	21.50
		8	3	21.71	21.48	21.68
		8	7	21.79	21.64	21.65
		15	0	21.83	21.56	21.57
	64QAM	1	0	21.91	21.72	21.70
		1	7	21.75	21.58	21.64
		1	14	21.84	21.39	21.51
		8	0	20.70	20.45	20.47
		8	3	20.78	20.53	20.57
		8	7	20.66	20.53	20.56
		15	0	20.80	20.55	20.59



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz
5/ 5	QPSK	1	0	23.40	23.64	23.38
		1	12	23.31	23.40	23.41
		1	24	23.16	23.22	23.07
		12	0	22.62	22.65	22.55
		12	6	22.68	22.42	22.54
		12	13	22.65	22.51	22.54
		25	0	22.74	22.85	22.56
	16QAM	1	0	22.84	22.88	22.67
		1	12	22.92	22.71	22.70
		1	24	22.94	22.41	22.33
		12	0	21.69	21.48	21.47
		12	6	21.79	21.41	21.58
		12	13	21.83	21.51	21.56
		25	0	21.86	21.58	21.64
	64QAM	1	0	21.82	21.74	21.67
		1	12	21.88	21.66	21.62
		1	24	21.89	21.50	21.54
		12	0	20.66	20.48	20.54
		12	6	20.76	20.66	20.60
		12	13	20.71	20.56	20.47
		25	0	20.80	20.56	20.59



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz
5/ 10	QPSK	1	0	23.48	23.73	23.52
		1	24	23.44	23.42	23.45
		1	49	23.20	23.23	23.18
		25	0	22.71	22.73	22.63
		25	12	22.70	22.56	22.61
		25	25	22.69	22.52	22.62
		50	0	22.83	22.87	22.71
	16QAM	1	0	22.97	22.98	22.69
		1	24	22.95	22.74	22.72
		1	49	22.96	22.45	22.37
		25	0	21.81	21.54	21.59
		25	12	21.85	21.51	21.73
		25	25	21.84	21.66	21.67
		50	0	21.90	21.63	21.65
	64QAM	1	0	21.97	21.83	21.74
		1	24	21.89	21.67	21.65
		1	49	21.99	21.52	21.62
		25	0	20.72	20.59	20.56
		25	12	20.82	20.68	20.67
		25	25	20.81	20.66	20.59
		50	0	20.85	20.69	20.73



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

ERP POWER (dBm)

GSM 850

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	33.56	-1.7	29.71	935.41	7
190	836.6	33.49	-1.7	29.64	920.45	7
251	848.8	33.37	-1.7	29.52	895.36	7

EDGE 850

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	27.37	-1.7	23.52	224.91	7
190	836.6	27.54	-1.7	23.69	233.88	7
251	848.8	27.59	-1.7	23.74	236.59	7

CDMA2000 BC0 1xRTT

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
1013	824.7	23.89	-1.7	20.04	100.93	7
384	836.52	24.17	-1.7	20.32	107.65	7
777	848.31	23.32	-1.7	19.47	88.51	7

CDMA2000 BC0 1xEV-DO

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
1013	824.7	23.81	-1.7	19.96	99.08	7
384	836.52	24.16	-1.7	20.31	107.4	7
777	848.31	23.31	-1.7	19.46	88.31	7

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
4132	826.4	24.01	-1.7	20.16	103.75	7
4182	836.4	24.47	-1.7	20.62	115.35	7
4233	846.6	24.59	-1.7	20.74	118.58	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	23.63	-1.7	19.78	95.06	7
20525	836.5	23.69	-1.7	19.84	96.38	7
20643	848.3	23.66	-1.7	19.81	95.72	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.89	-1.7	19.04	80.17	7
20525	836.5	22.93	-1.7	19.08	80.91	7
20643	848.3	22.7	-1.7	18.85	76.74	7

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	21.91	-1.7	18.06	63.97	7
20525	836.5	21.71	-1.7	17.86	61.09	7
20643	848.3	21.67	-1.7	17.82	60.53	7



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	23.33	-1.7	19.48	88.72	7
20525	836.5	23.65	-1.7	19.8	95.5	7
20635	847.5	23.42	-1.7	19.57	90.57	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	22.92	-1.7	19.07	80.72	7
20525	836.5	22.95	-1.7	19.1	81.28	7
20635	847.5	22.58	-1.7	18.73	74.64	7

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	21.91	-1.7	18.06	63.97	7
20525	836.5	21.72	-1.7	17.87	61.24	7
20635	847.5	21.7	-1.7	17.85	60.95	7



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	23.4	-1.7	19.55	90.16	7
20525	836.5	23.64	-1.7	19.79	95.28	7
20625	846.5	23.41	-1.7	19.56	90.36	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.94	-1.7	19.09	81.1	7
20525	836.5	22.88	-1.7	19.03	79.98	7
20625	846.5	22.7	-1.7	18.85	76.74	7

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	21.89	-1.7	18.04	63.68	7
20525	836.5	21.74	-1.7	17.89	61.52	7
20625	846.5	21.67	-1.7	17.82	60.53	7



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	23.48	-1.7	19.63	91.83	7
20525	836.5	23.73	-1.7	19.88	97.27	7
20600	844	23.52	-1.7	19.67	92.68	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	22.97	-1.7	19.12	81.66	7
20525	836.5	22.98	-1.7	19.13	81.85	7
20600	844	22.72	-1.7	18.87	77.09	7

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	21.99	-1.7	18.14	65.16	7
20525	836.5	21.83	-1.7	17.98	62.81	7
20600	844	21.74	-1.7	17.89	61.52	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

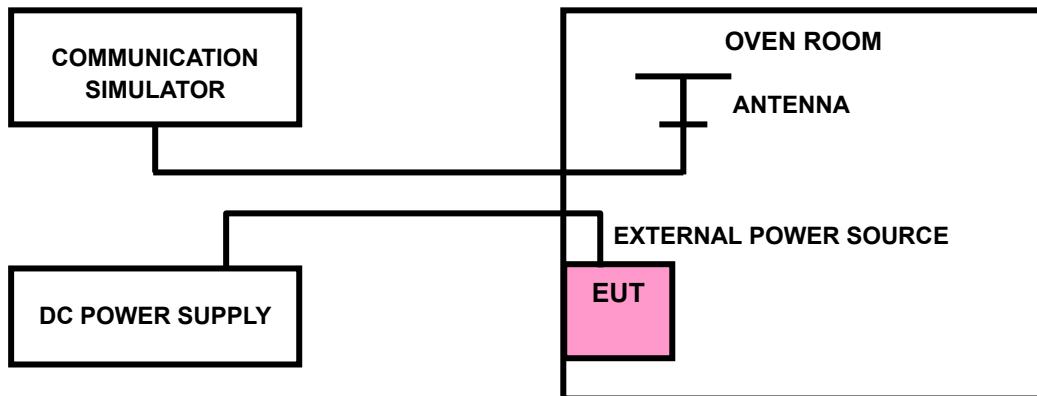



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.

Note: VL = Low voltage(3.6V); VN/NV = Normal voltage(3.85V); VH = High voltage(4.4V);
NT = Normal temperature (25°C)



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

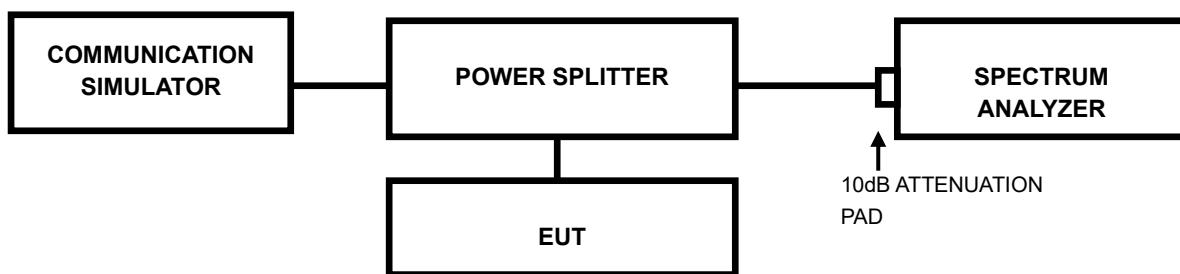

3.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

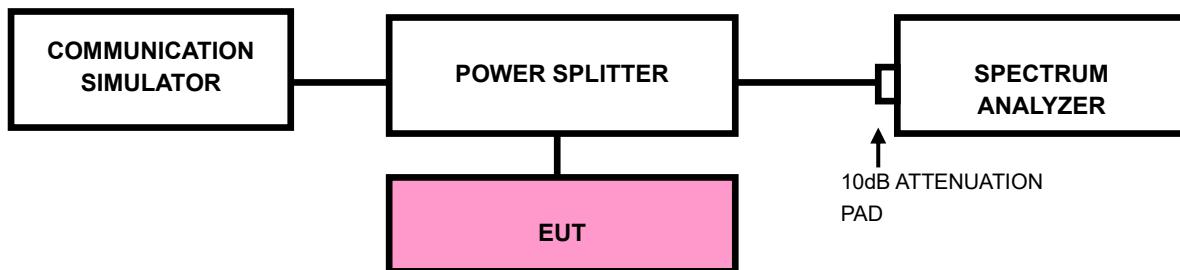



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

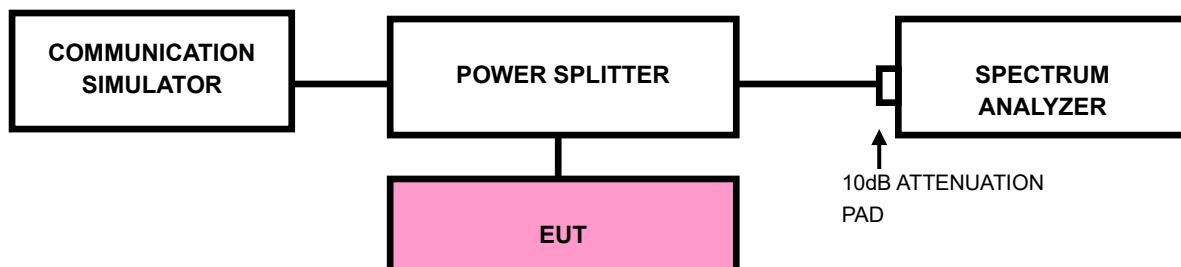



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD

No deviation




BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

3.6.4 TEST SETUP

< Frequency Range below 30MHz >

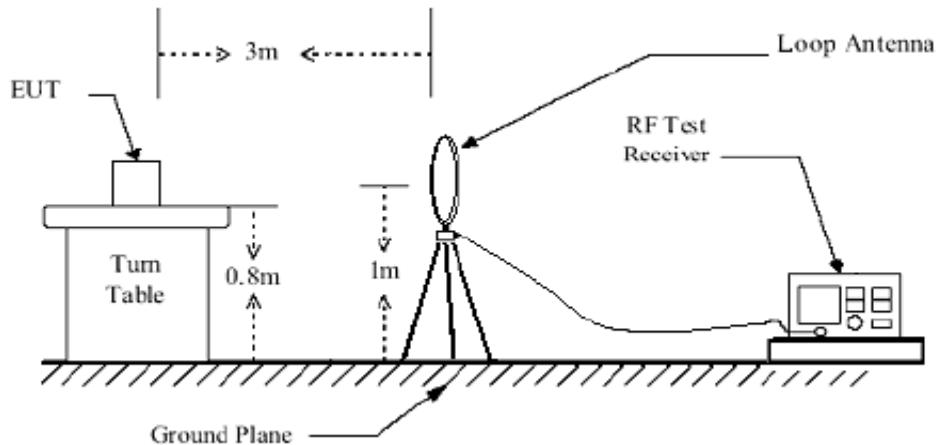

< Frequency Range 30MHz~1GHz >

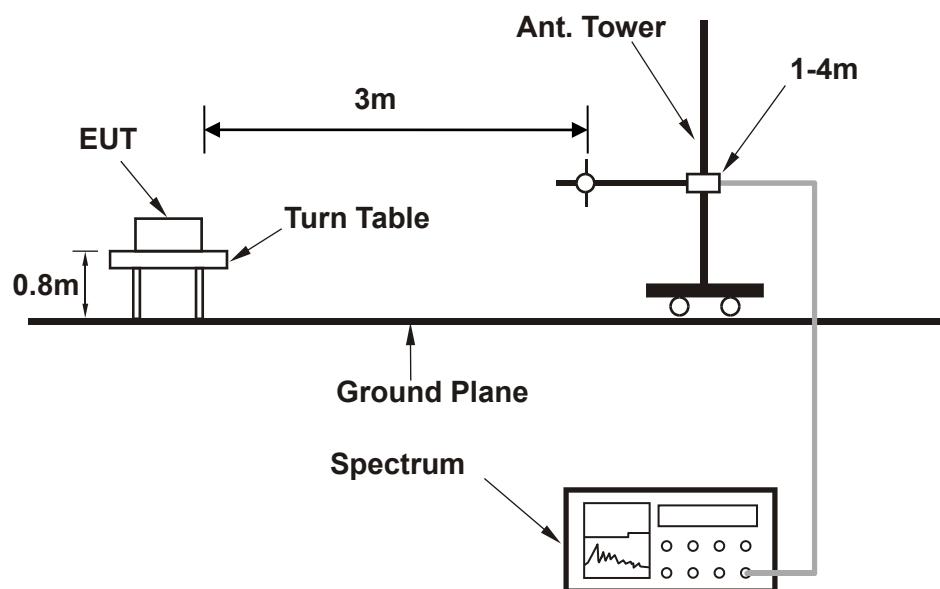




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

<Frequency Range above 1GHz>

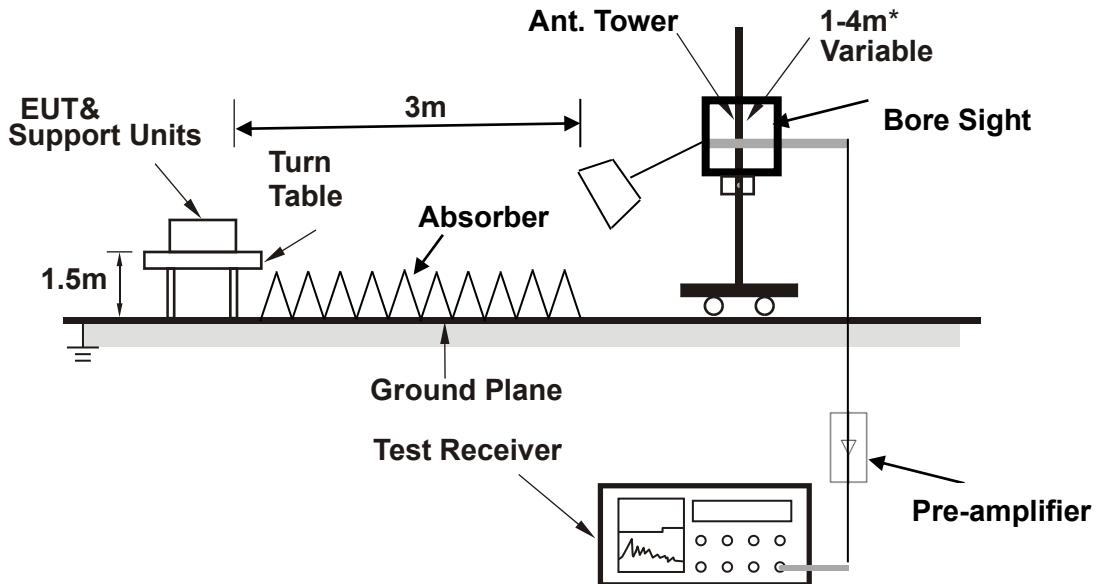

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

GSM 850 :

CHANNEL BANDWIDTH: 128 ~ 251

MODE	TX channel 189	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M	

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	44.550	-55.49	-13.00	42.49	3.61	H	75	2.00
1	86.260	-44.48	-13.00	31.48	-7.83	H	355.7	2.00
1	153.190	-54.72	-13.00	41.72	-9.24	H	355.7	2.00
1	193.445	-51.94	-13.00	38.94	0.23	H	54.3	1.00
1	304.510	-57.76	-13.00	44.76	1.11	H	192.2	2.00
1	464.560	-59.84	-13.00	46.84	5.65	H	111.7	1.00

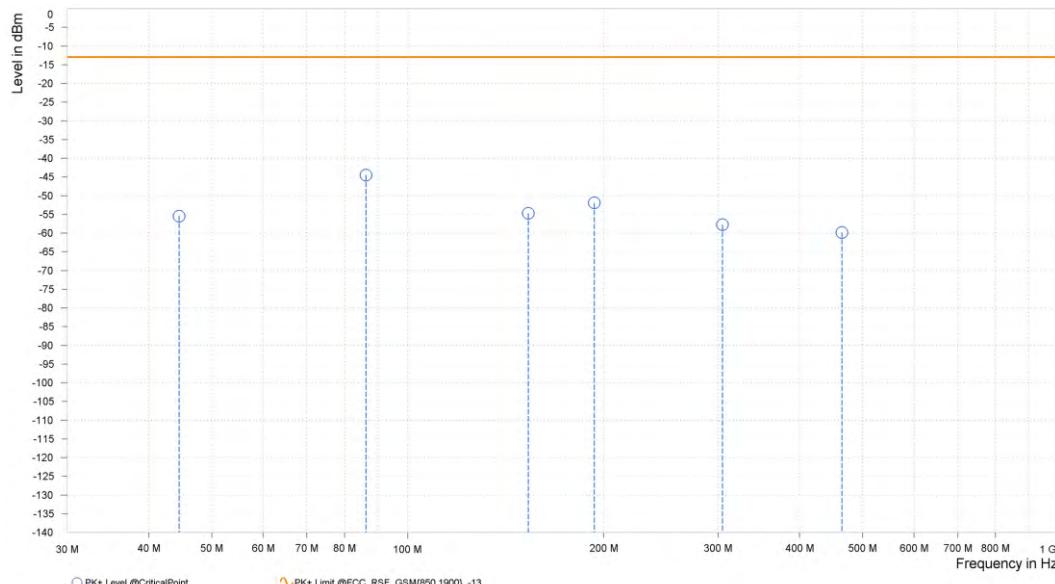




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 189	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	35.820	-46.52	-13.00	33.52	-5.08	V	355.7	2.00
1	65.405	-45.48	-13.00	32.48	-2.53	V	355.7	2.00
1	99.840	-52.47	-13.00	39.47	9.70	V	355.7	2.00
1	191.505	-58.95	-13.00	45.95	-3.09	V	285	1.00
1	304.510	-58.49	-13.00	45.49	2.97	V	226.4	1.00
1	437.400	-62.63	-13.00	49.63	5.85	V	0.9	2.00

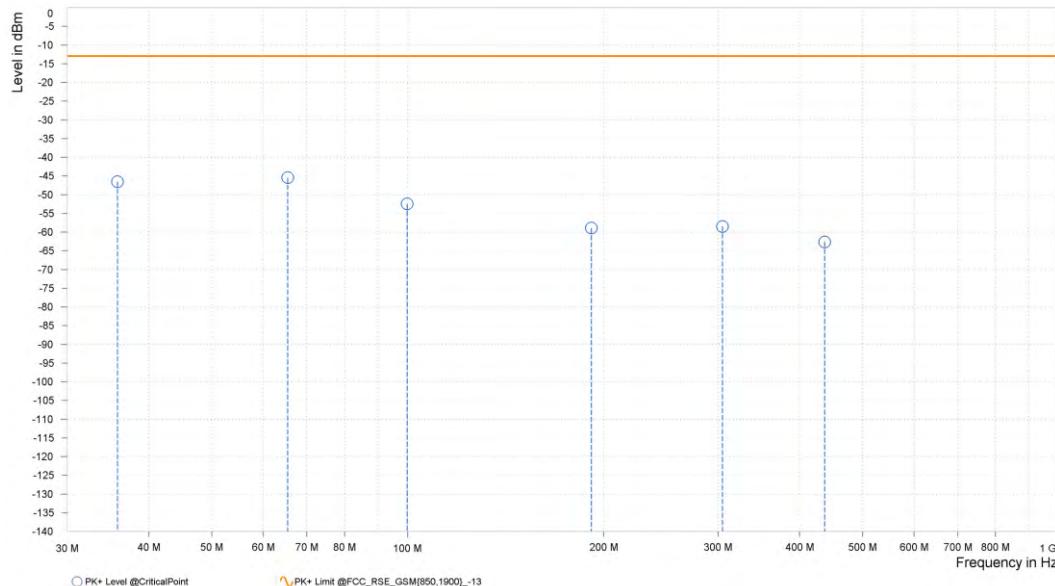



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

GSM 850

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.000	-30.41	-13.00	17.41	17.43	H	271	2.00
3	2,472.600	-46.72	-13.00	33.72	22.42	H	198.1	2.00

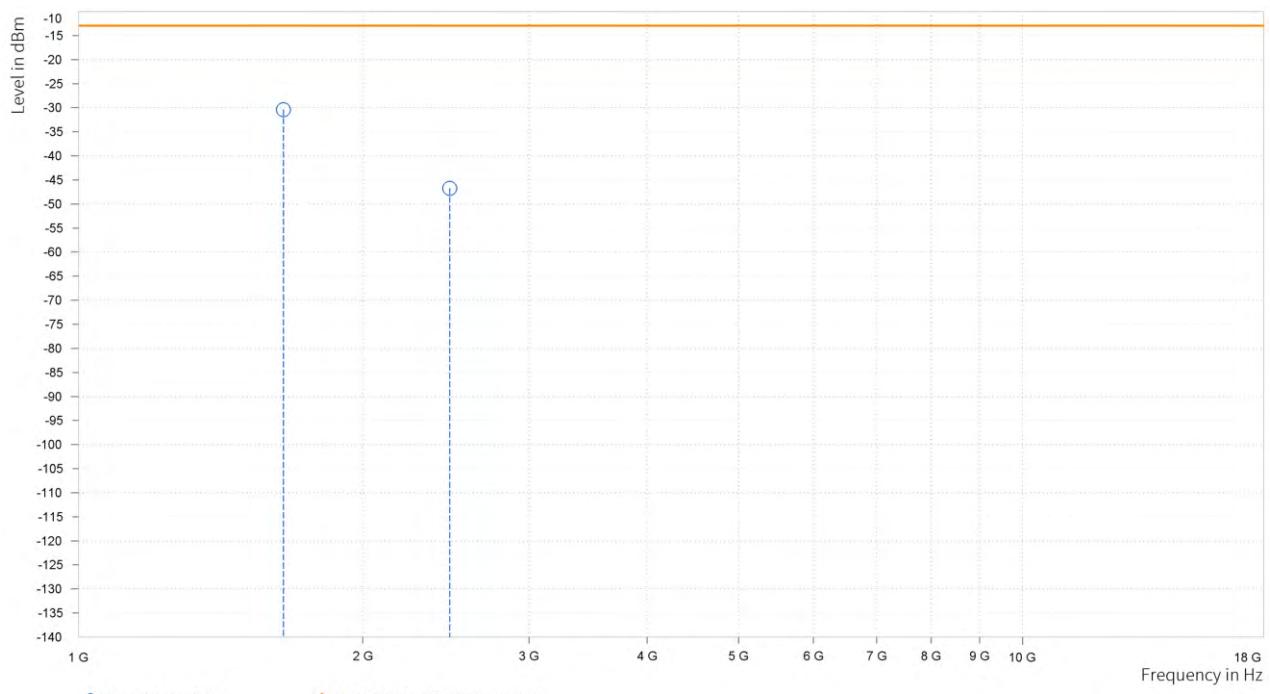




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,649.000	-29.82	-13.00	16.82	17.03	V	87.7	1.00
3	2,473.000	-46.88	-13.00	33.88	22.68	V	359.1	1.00

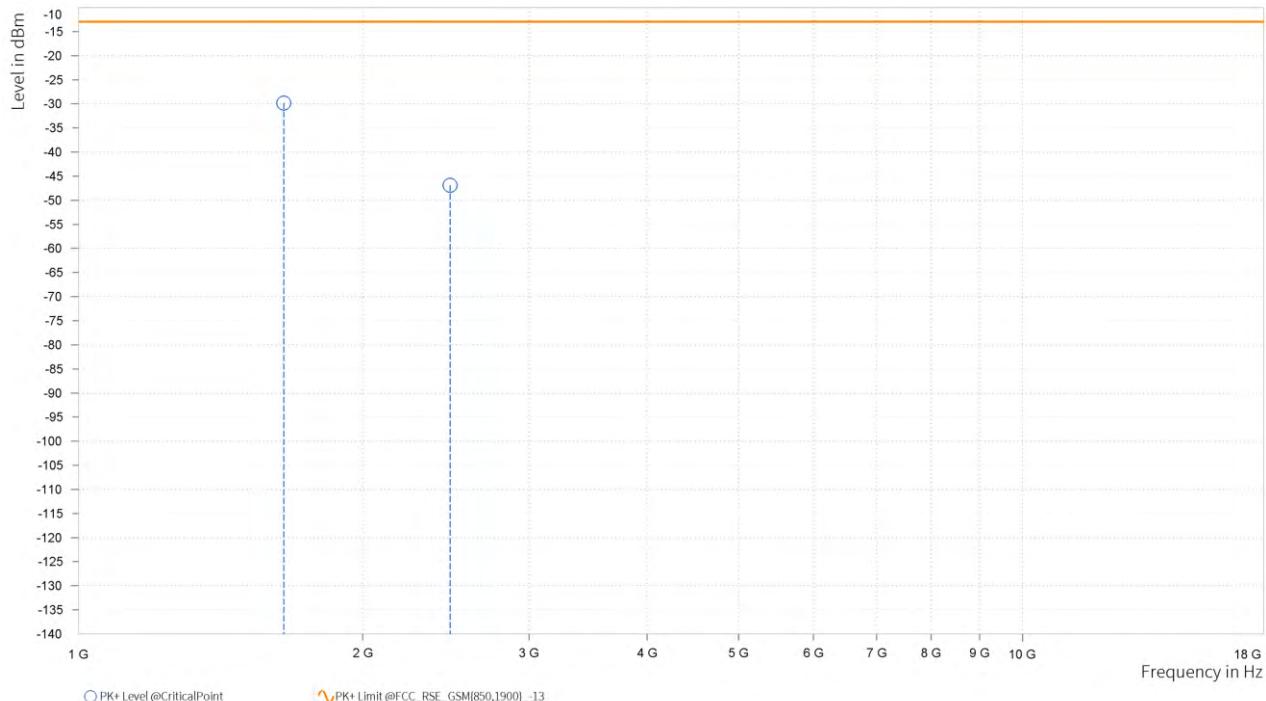




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-31.00	-13.00	18.00	18.24	H	272.2	2.00
3	2,509.200	-45.92	-13.00	32.92	22.46	H	161.9	1.00

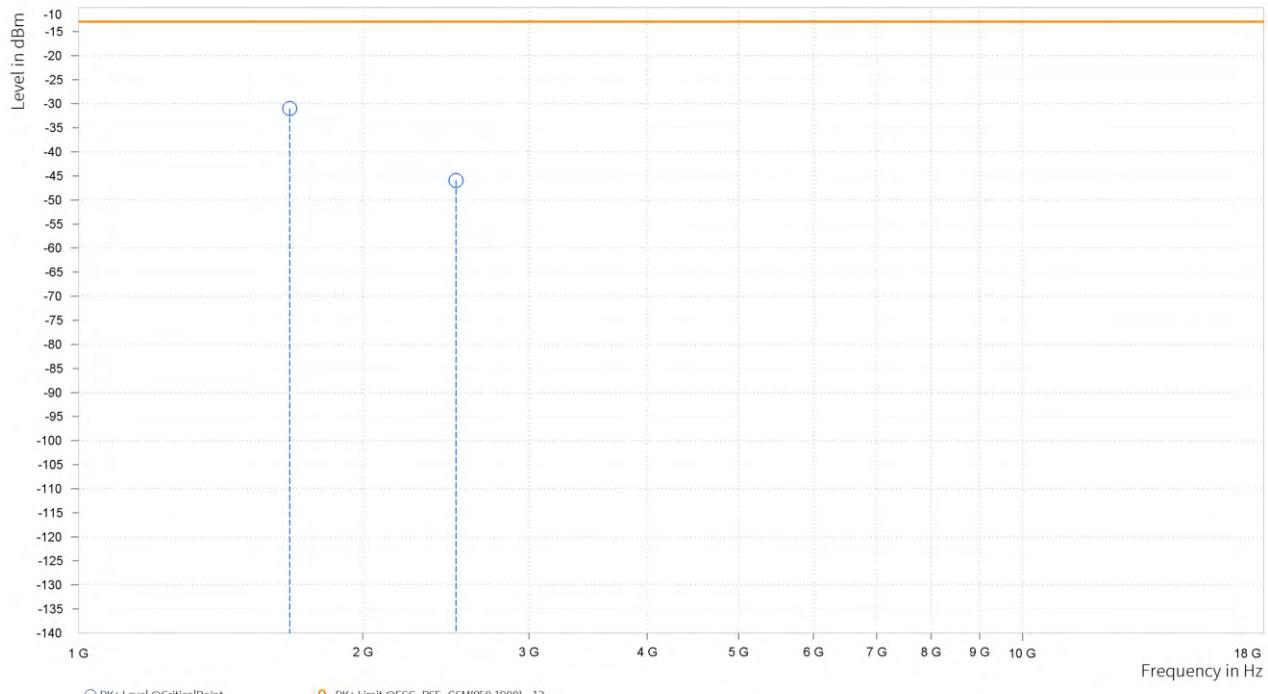




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,673.500	-27.41	-13.00	14.41	17.15	V	89	1.00
3	2,510.000	-43.43	-13.00	30.43	23.07	V	198.1	2.00

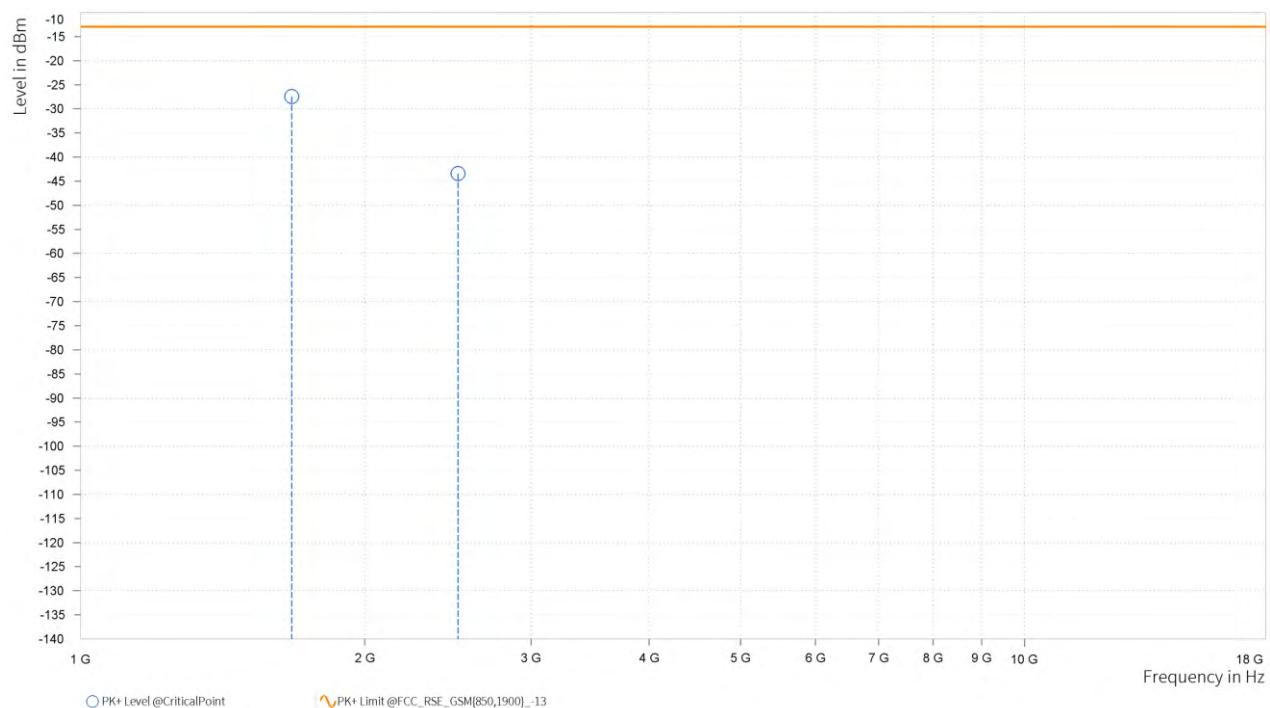




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-30.86	-13.00	17.86	18.62	H	89	1.00
3	2,546.400	-46.61	-13.00	33.61	22.51	H	359	2.00

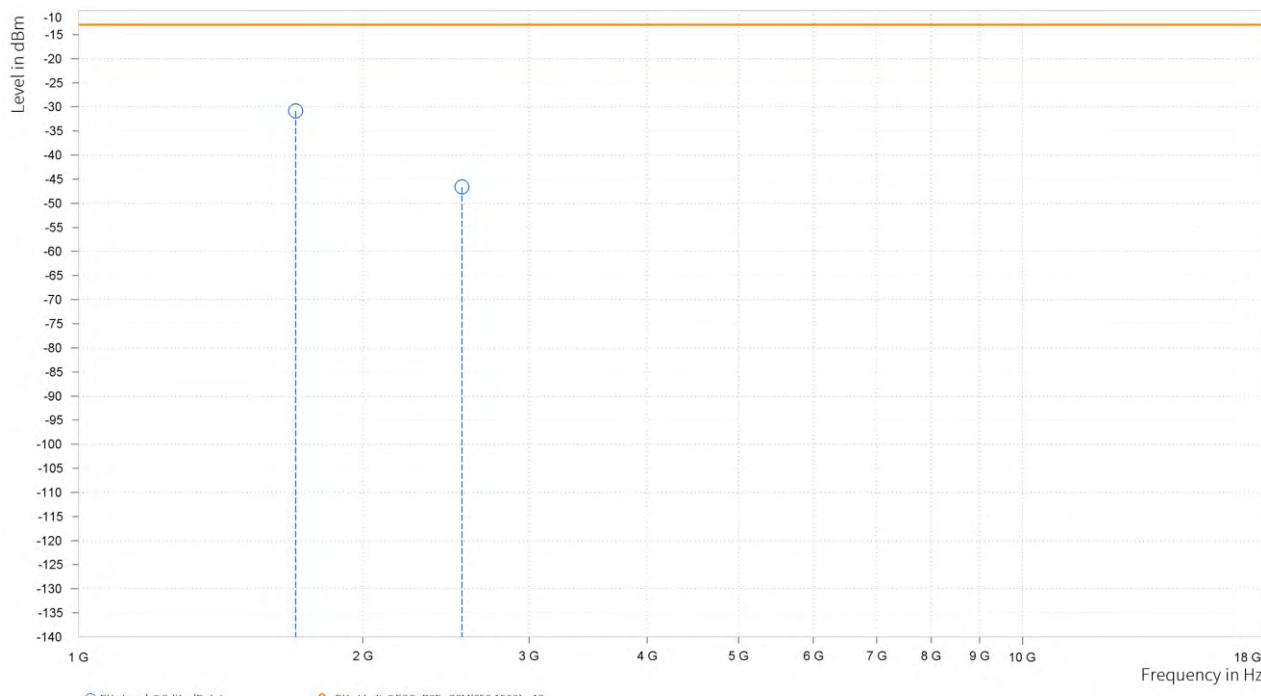




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.000	-36.47	-13.00	23.47	17.82	V	272.2	2.00
3	2,546.400	-43.81	-13.00	30.81	23.13	V	198.1	2.00

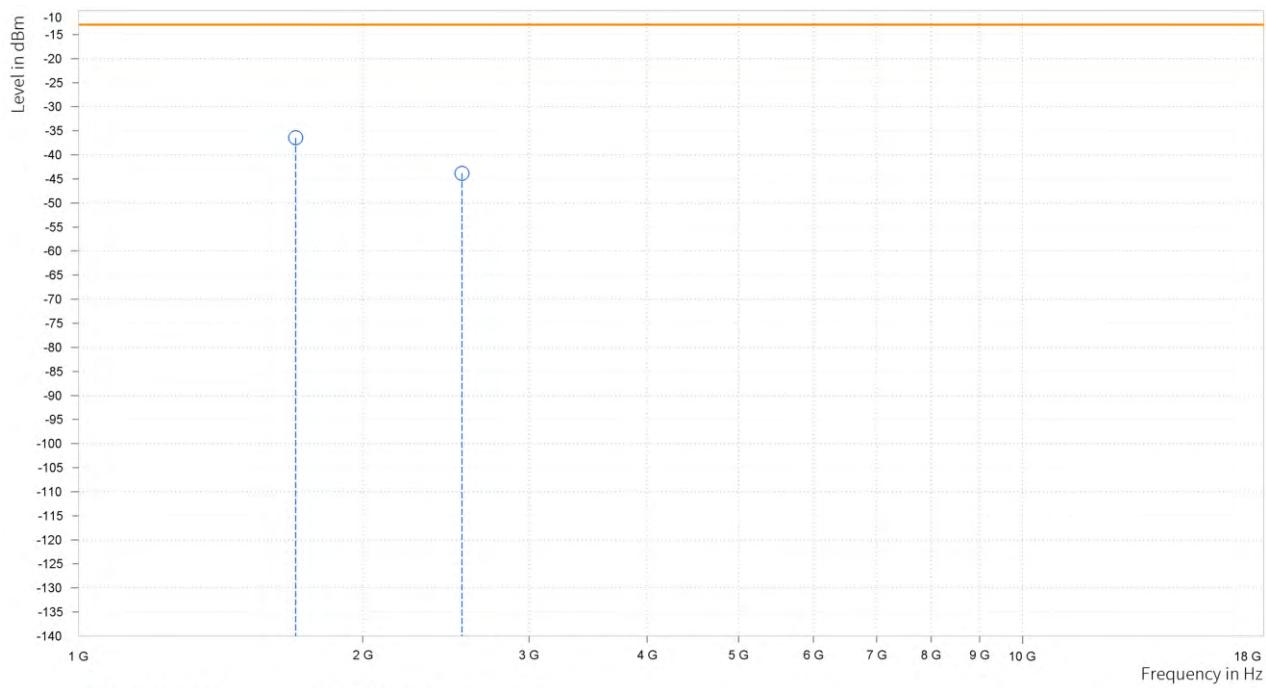



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

EDGE 850:

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.000	-32.83	-13.00	19.83	17.43	H	88.9	1.00
3	2,473.000	-46.26	-13.00	33.26	22.43	H	1	1.00

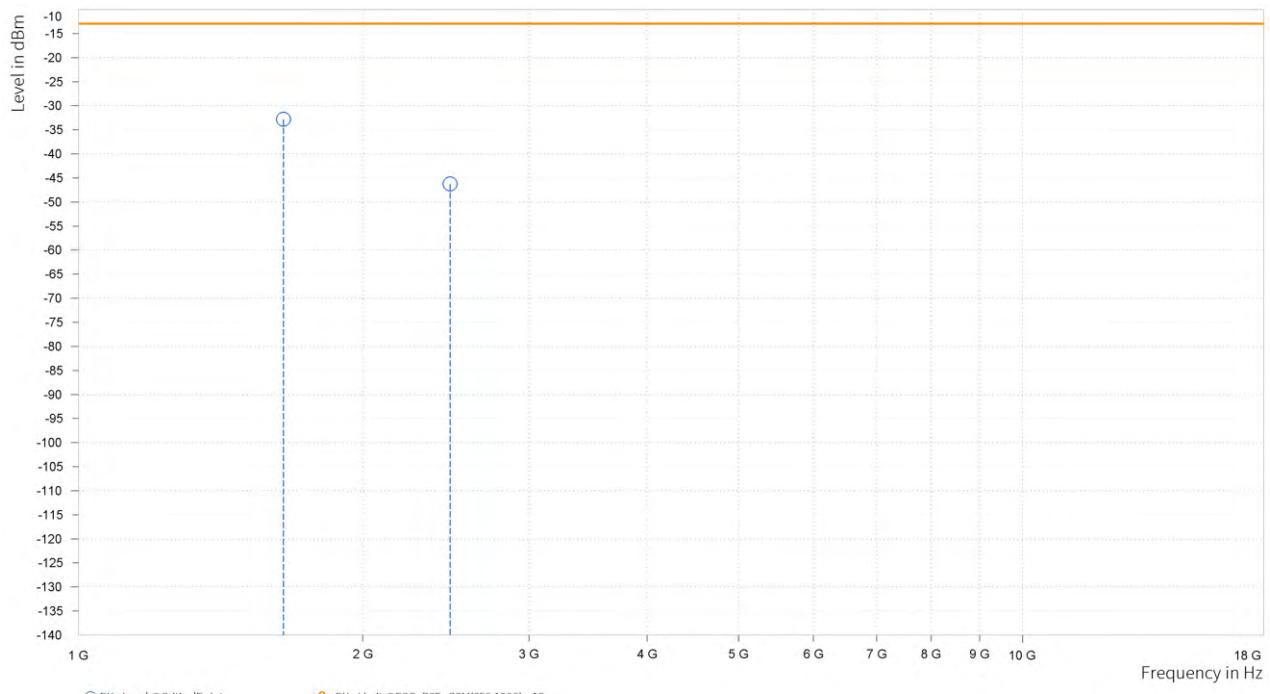




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,648.500	-31.34	-13.00	18.34	17.04	V	88.9	1.00
3	2,473.000	-47.28	-13.00	34.28	22.68	V	195.8	2.00

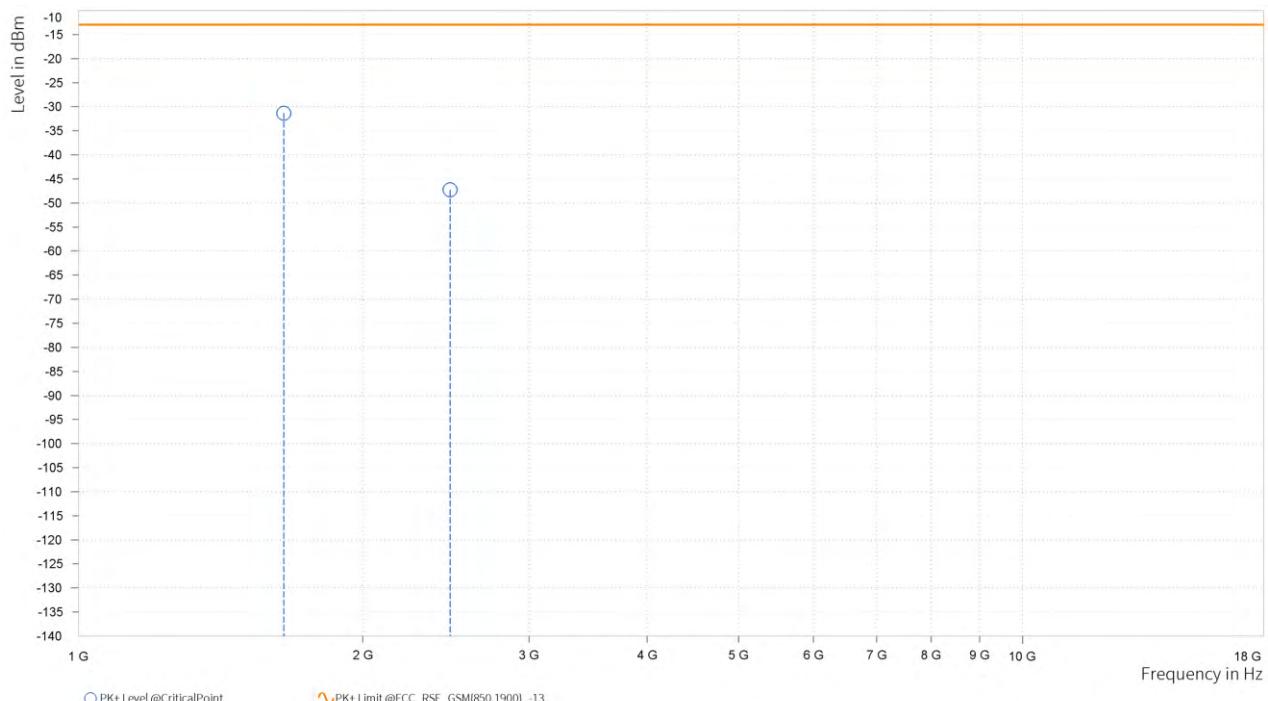




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 189:

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-38.20	-13.00	25.20	18.24	H	1.6	2.00
3	2,509.000	-46.64	-13.00	33.64	22.46	H	359	1.00

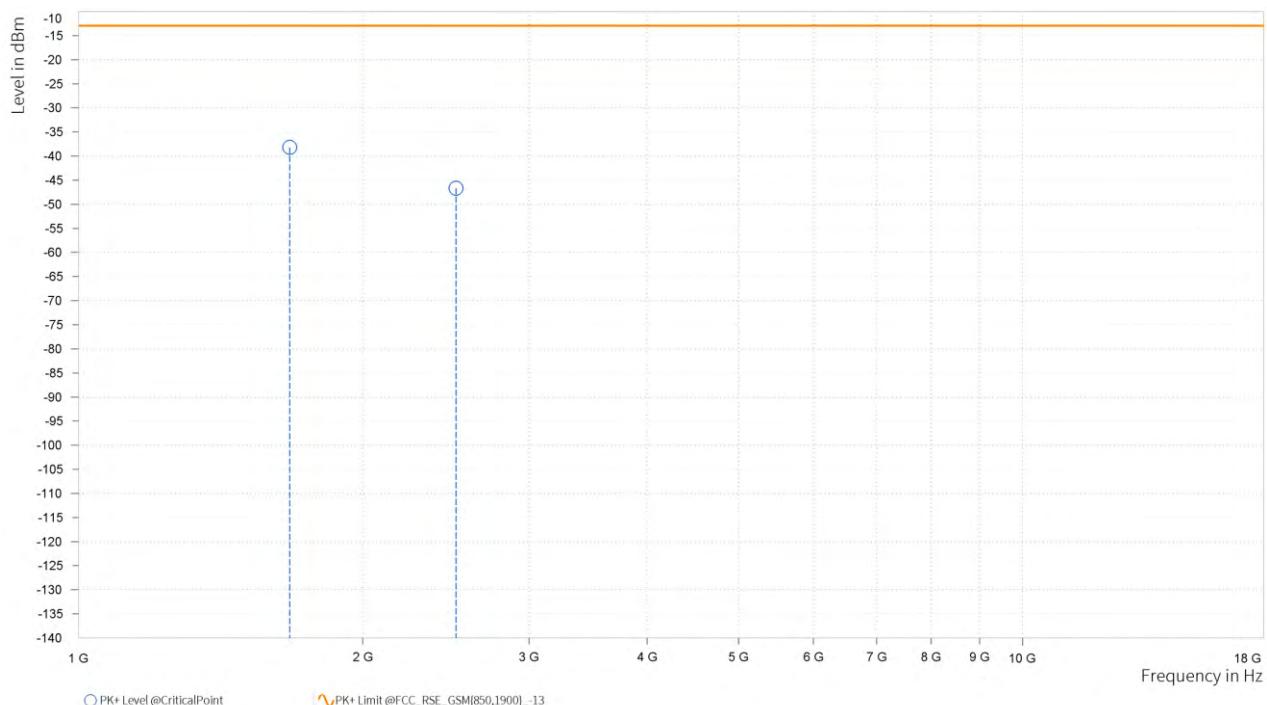




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,673.000	-30.48	-13.00	17.48	17.14	V	87.8	1.00
3	2,509.000	-46.76	-13.00	33.76	23.06	V	163	1.00

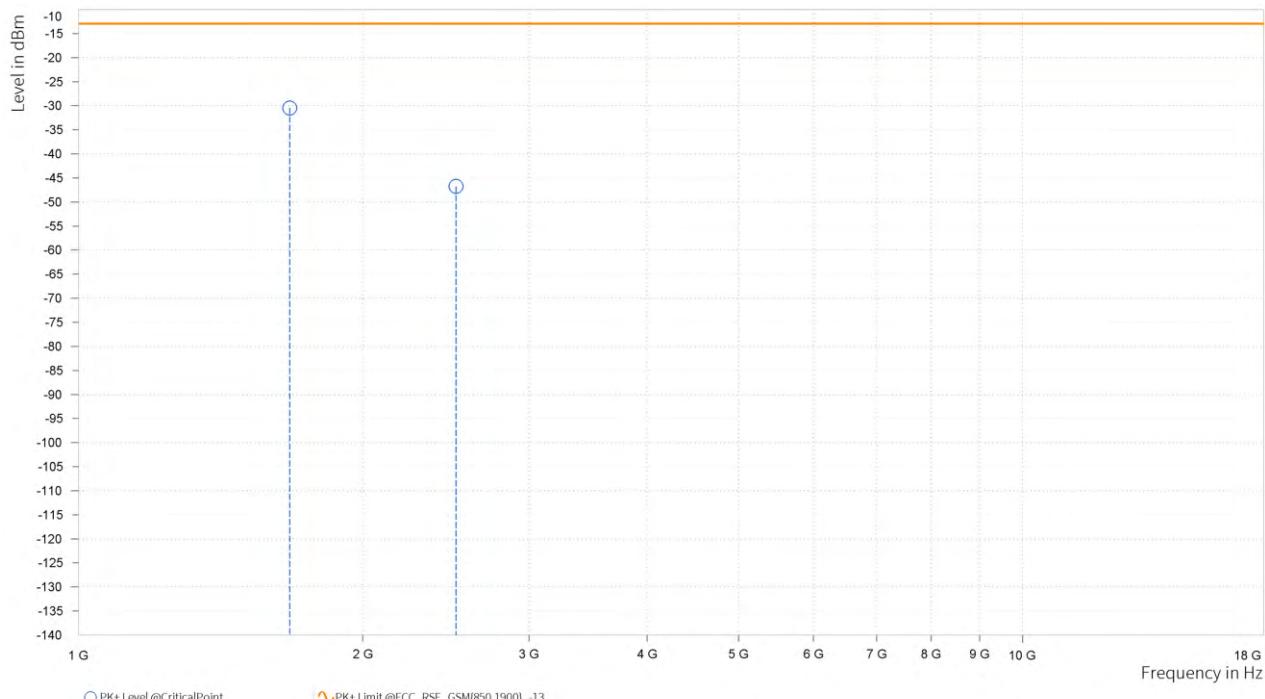




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-32.34	-13.00	19.34	18.62	H	271	2.00
3	2,546.400	-44.76	-13.00	31.76	22.51	H	359	1.00

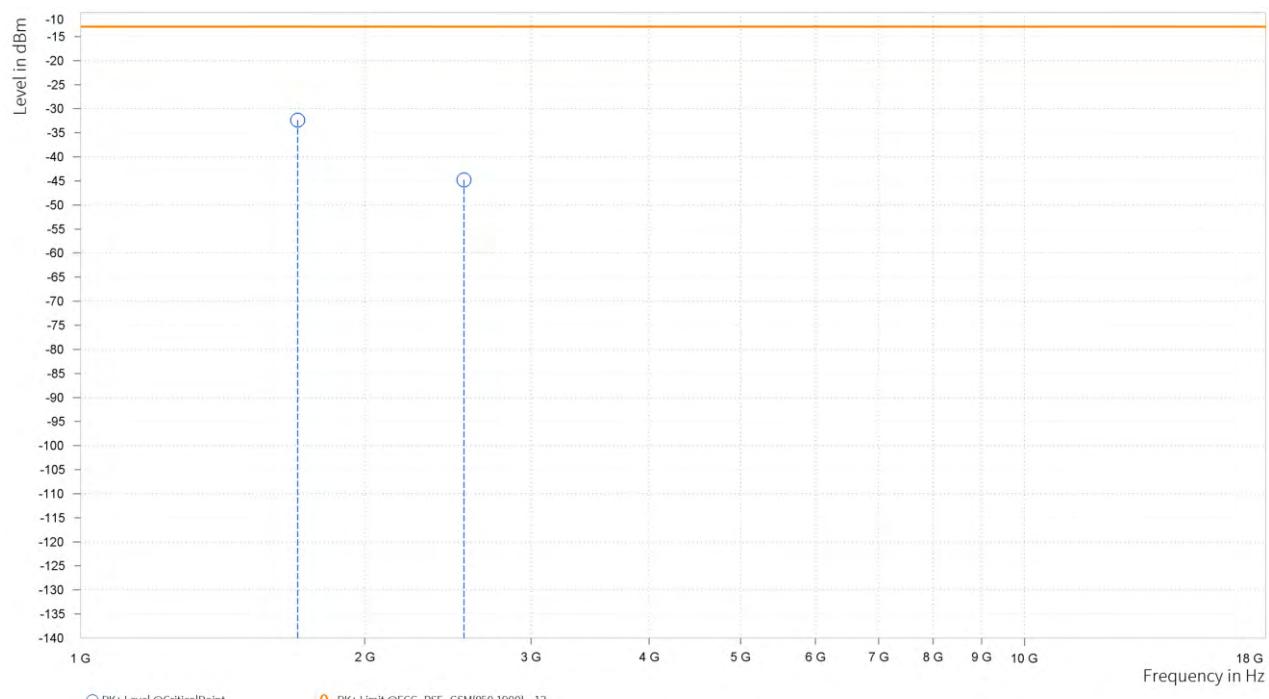




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,697.500	-33.96	-13.00	20.96	17.84	V	272.2	2.00
3	2,546.000	-45.08	-13.00	32.08	23.11	V	198.1	2.00

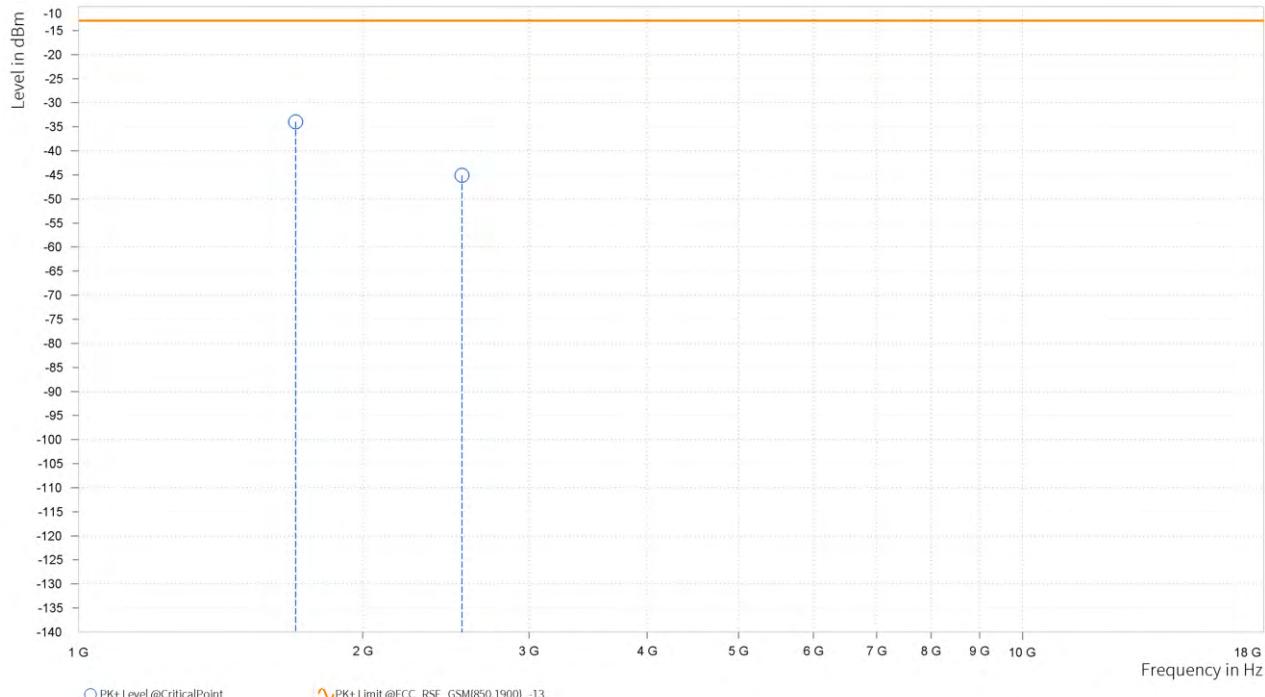



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

CDMA2000 BC0:

CH 1013

MODE	TX channel 1013	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Freq	Level	Read	Limit	Over	Remark	Pol/Phase
		Level	Line	Limit Factor		
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 PP	1648.000	-33.41	-37.07	-13.00	-20.41	3.66 Peak Horizontal
2	2472.000	-48.41	-54.43	-13.00	-35.41	6.02 Peak Horizontal

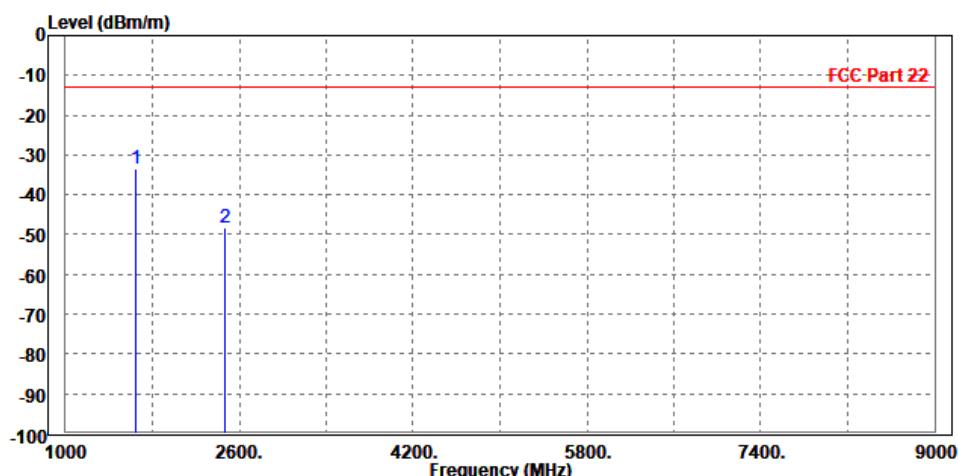




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 1013	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Freq	Level	Read	Limit	Over	Remark	Pol/Phase
		Level	Line	Limit Factor		
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 PP 1648.000	-43.12	-46.51	-13.00	-30.12	3.39 Peak	Vertical
2 2474.100	-53.39	-59.08	-13.00	-40.39	5.69 Peak	Vertical

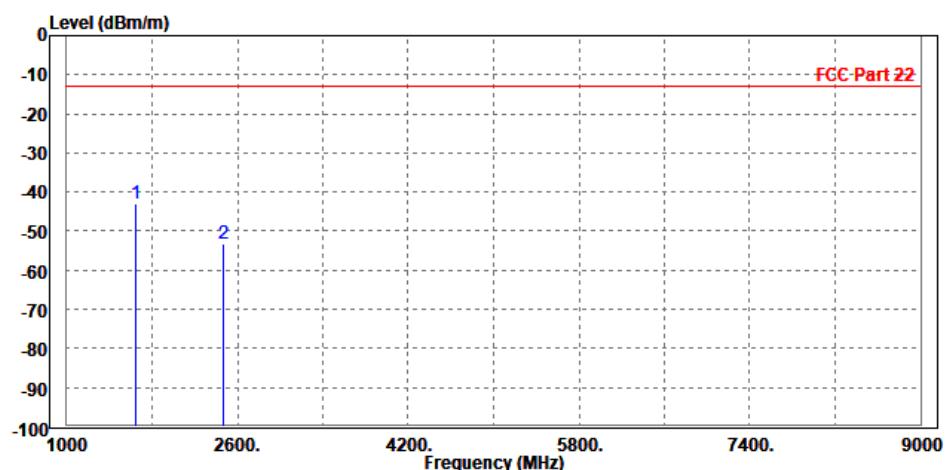




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 384

MODE	TX channel 384	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Freq MHz	Level dBm/m	Read Level dBm	Read Line dBm/m	Limit Line dBm/m	Over Limit dB	Factor	Remark	Pol/Phase
1 PP 1672.000	-32.95	-36.68	-13.00	-19.95	3.73	Peak	Horizontal	
2 2512.000	-50.19	-56.34	-13.00	-37.19	6.15	Peak	Horizontal	

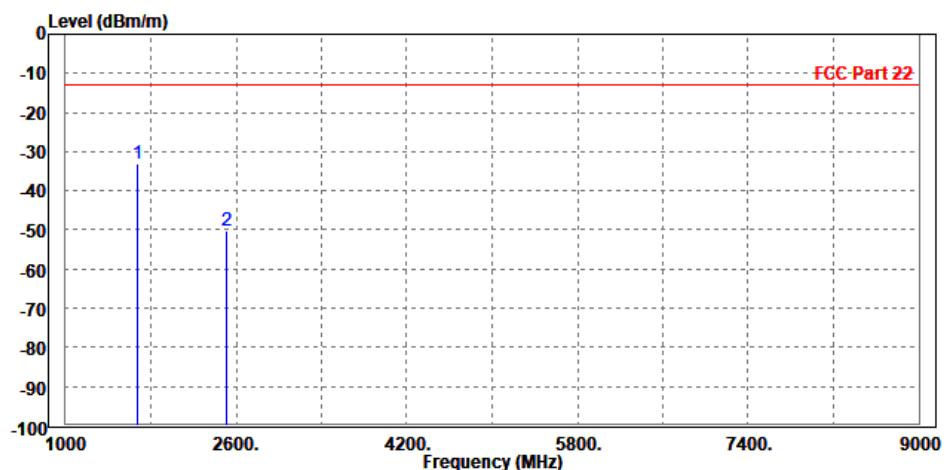




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 384	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Freq	Level	Read	Limit	Over	Factor	Remark	Pol/Phase
		Line	dBm/m	dBm			
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP 1672.000	-42.93	-46.36	-13.00	-29.93	3.43	Peak	Vertical
2 2509.560	-53.57	-59.41	-13.00	-40.57	5.84	Peak	Vertical

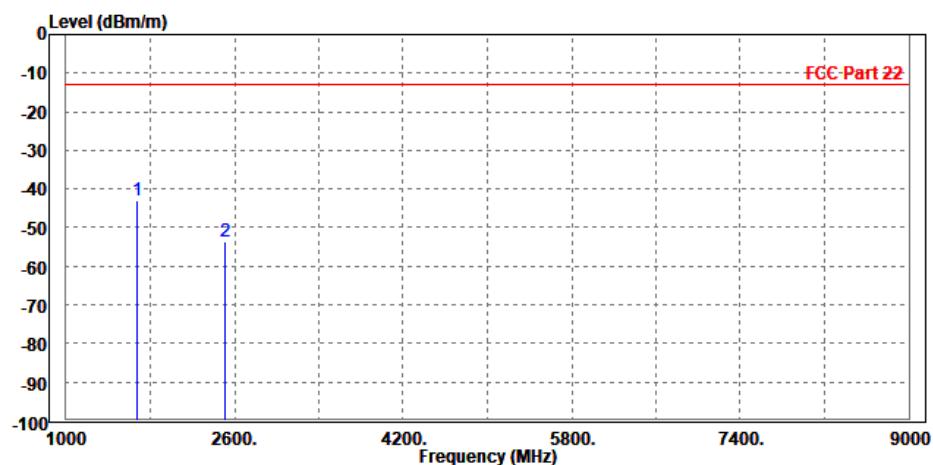




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 777

MODE	TX channel 777	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Freq MHz	Level dBm/m	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		dBm	dBm/m	dB	dB/m		
1 PP 1696.000	-35.89	-39.70	-13.00	-22.89	3.81	Peak	Horizontal
2 2544.930	-52.46	-58.75	-13.00	-39.46	6.29	Peak	Horizontal

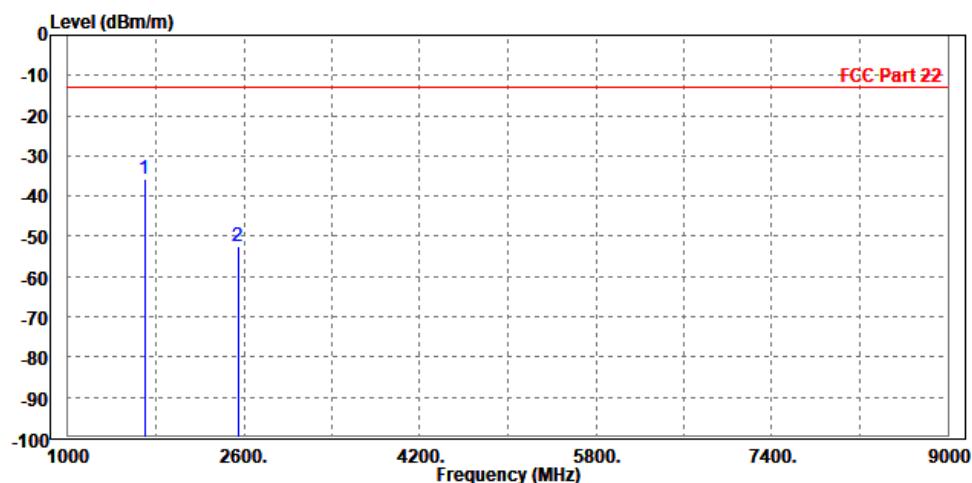




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 777	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Freq	Level	Read	Limit	Over	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm			
1	PP	1696.620	-43.06	-46.53	-13.00	-30.06	3.47 Peak Vertical
2		2544.000	-53.18	-59.23	-13.00	-40.18	6.05 Peak Vertical

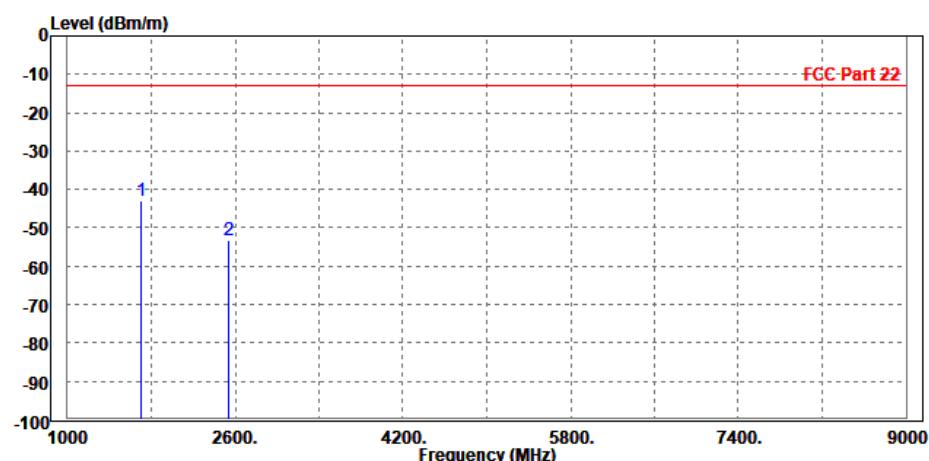



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

WCDMA Band V:

CH 4132:

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,652.800	-46.71	-13.00	33.71	22.15	H	1	1
3	2,479.200	-44.66	-13.00	31.66	24.74	H	133.4	1

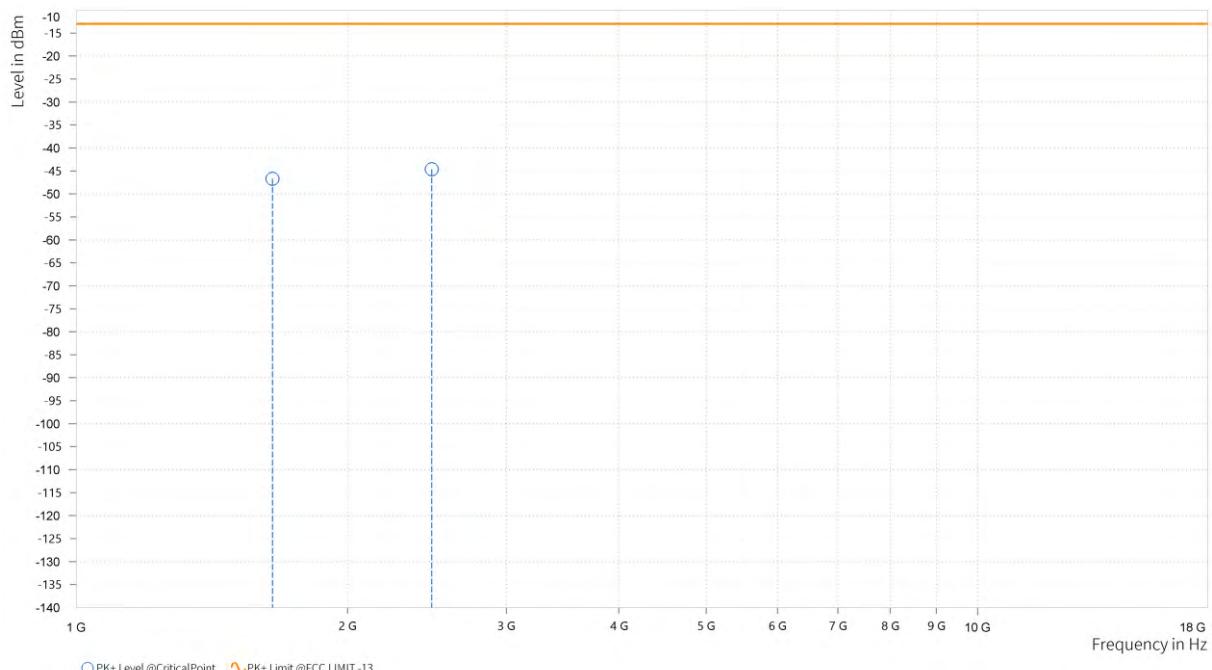




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,652.800	-48.62	-13.00	35.62	21.61	V	287.5	2
3	2,479.200	-45.60	-13.00	32.60	24.40	V	359	1

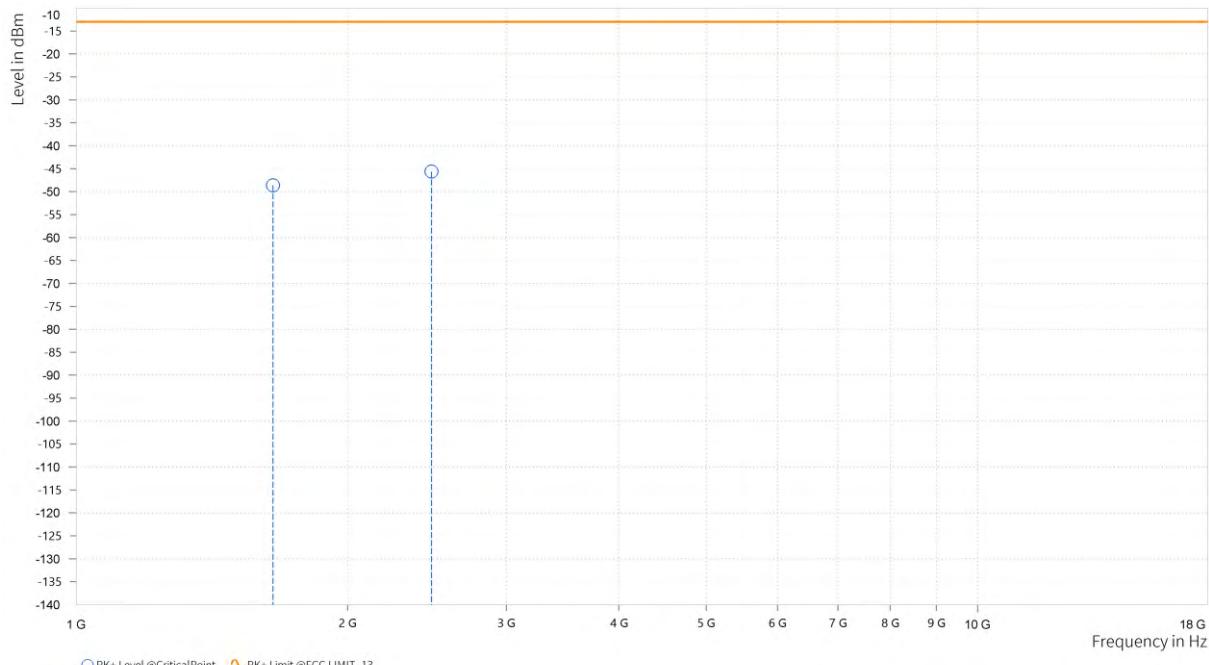




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 4182:

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,671.500	-43.47	-13.00	30.47	23.69	H	1	1
3	2,509.000	-46.60	-13.00	33.60	24.21	H	359	2

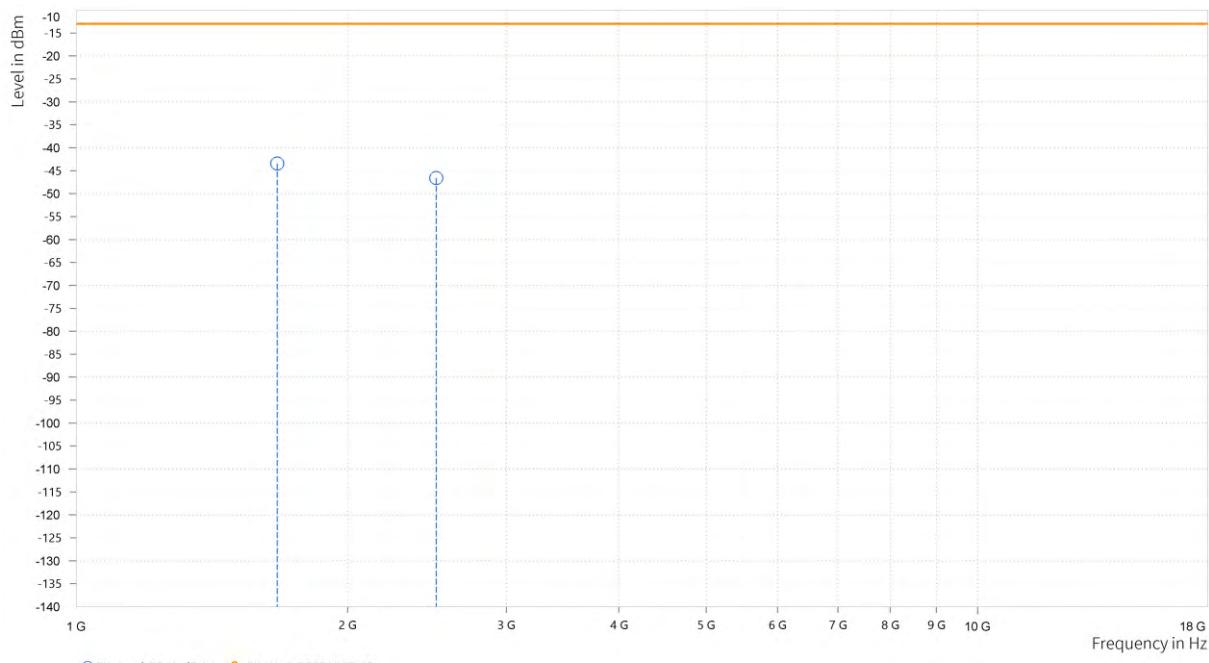




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,673.000	-46.31	-13.00	33.31	23.65	V	293.5	2
3	2,508.500	-47.47	-13.00	34.47	23.88	V	359	1

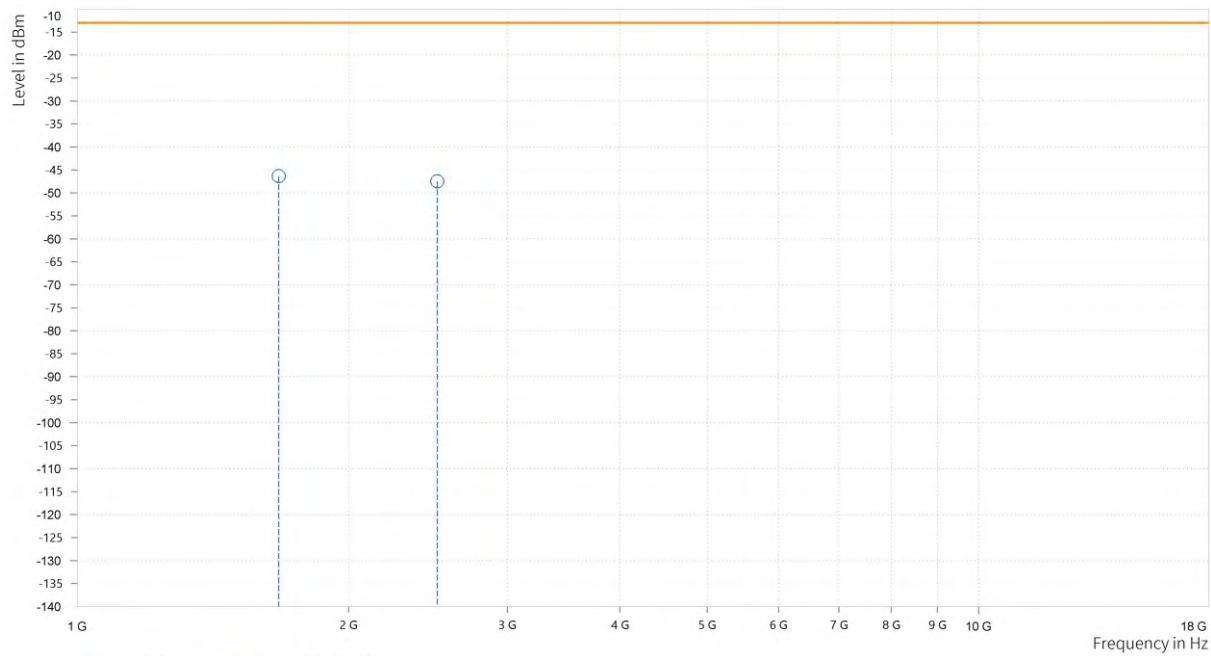




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH 4233:

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,693.200	-46.37	-13.00	33.37	23.25	H	359.1	1
3	2,539.800	-46.67	-13.00	33.67	24.68	H	1	2

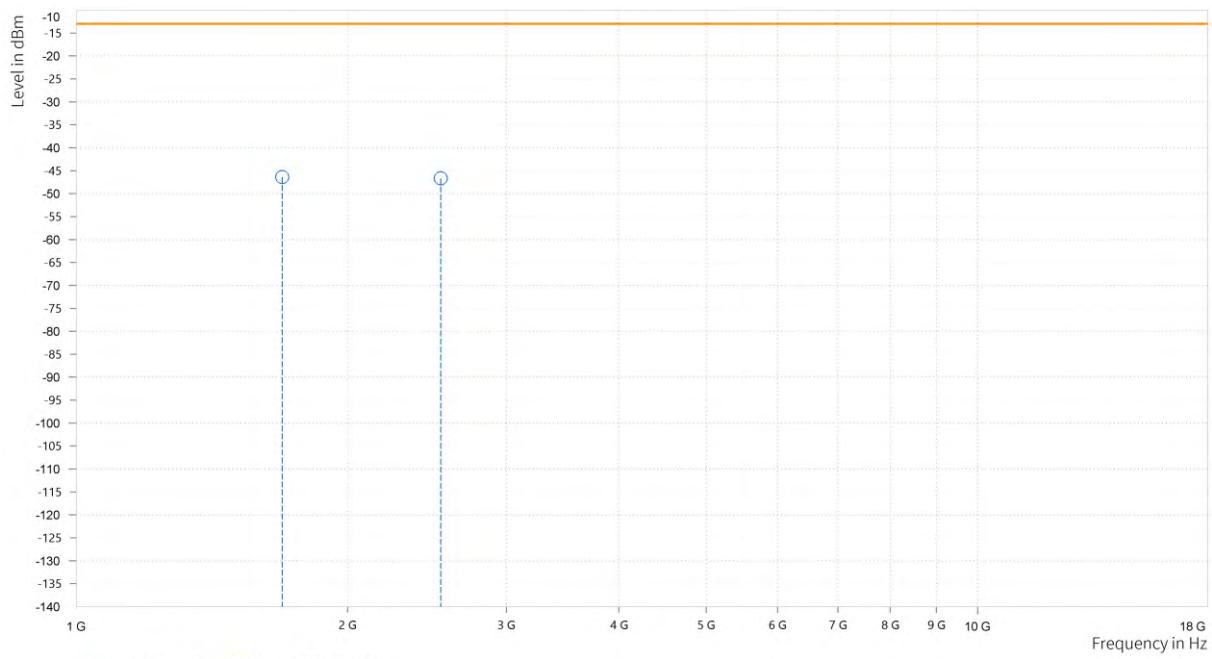




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,693.200	-46.70	-13.00	33.70	23.36	V	1	2
3	2,539.800	-46.82	-13.00	33.82	24.44	V	358.9	1

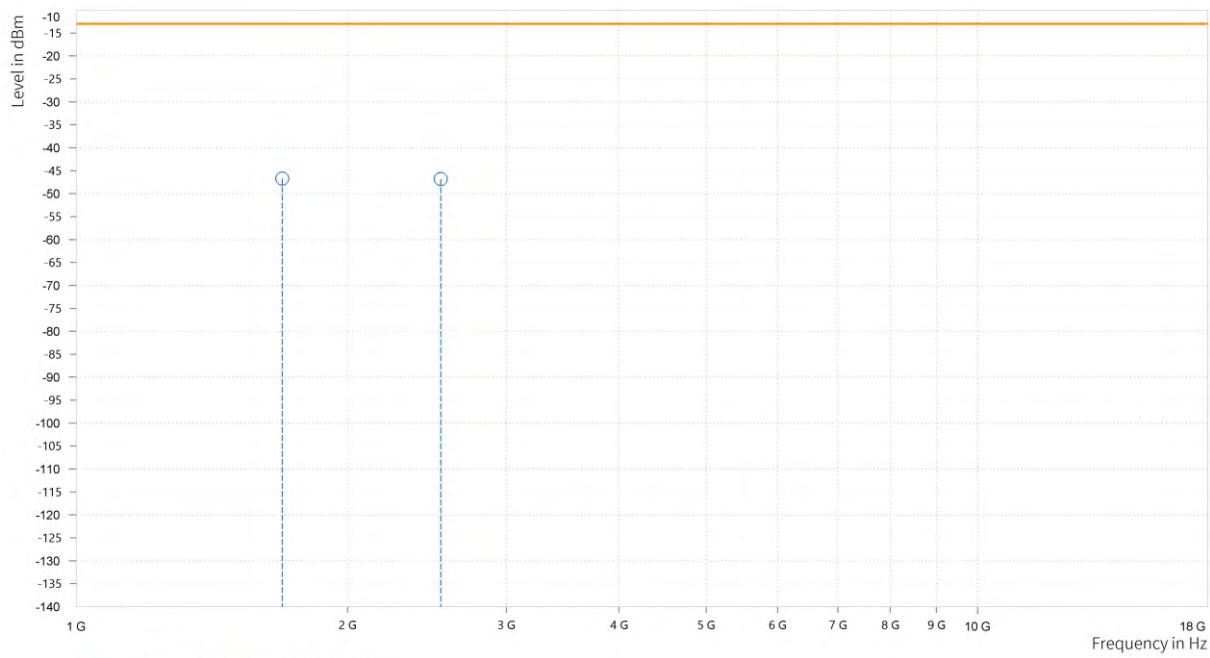



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,671.740	-46.84	-13.00	33.84	23.69	H	359	1
3	2,507.710	-46.76	-13.00	33.76	24.19	H	140.6	1

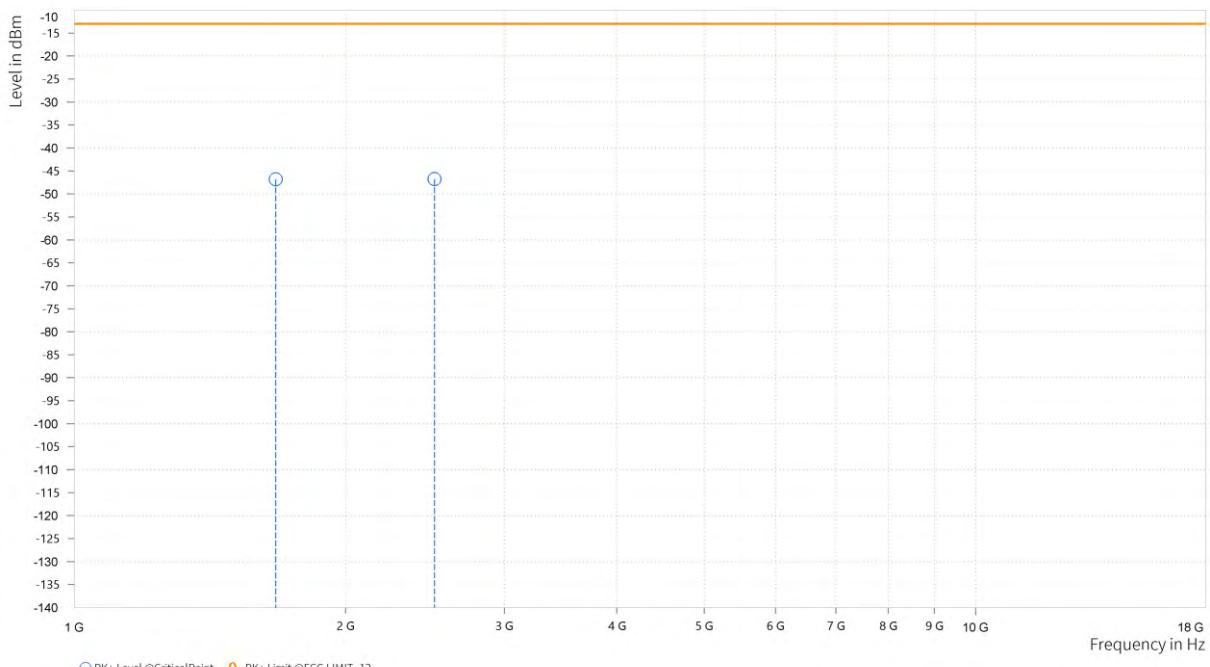




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,671.740	-46.74	-13.00	33.74	23.59	V	1	1
3	2,507.610	-47.28	-13.00	34.28	23.87	V	359	1

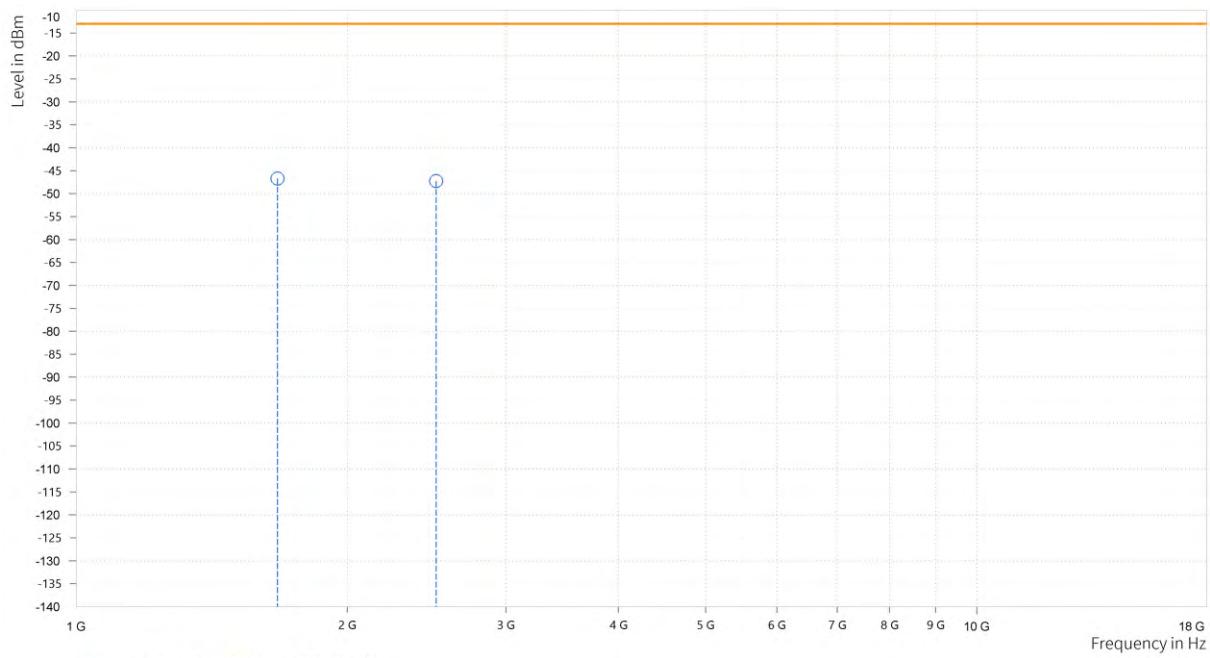




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.300	-47.25	-13.00	34.25	23.84	H	287.5	2
3	2,505.450	-46.84	-13.00	33.84	24.21	H	0.9	2

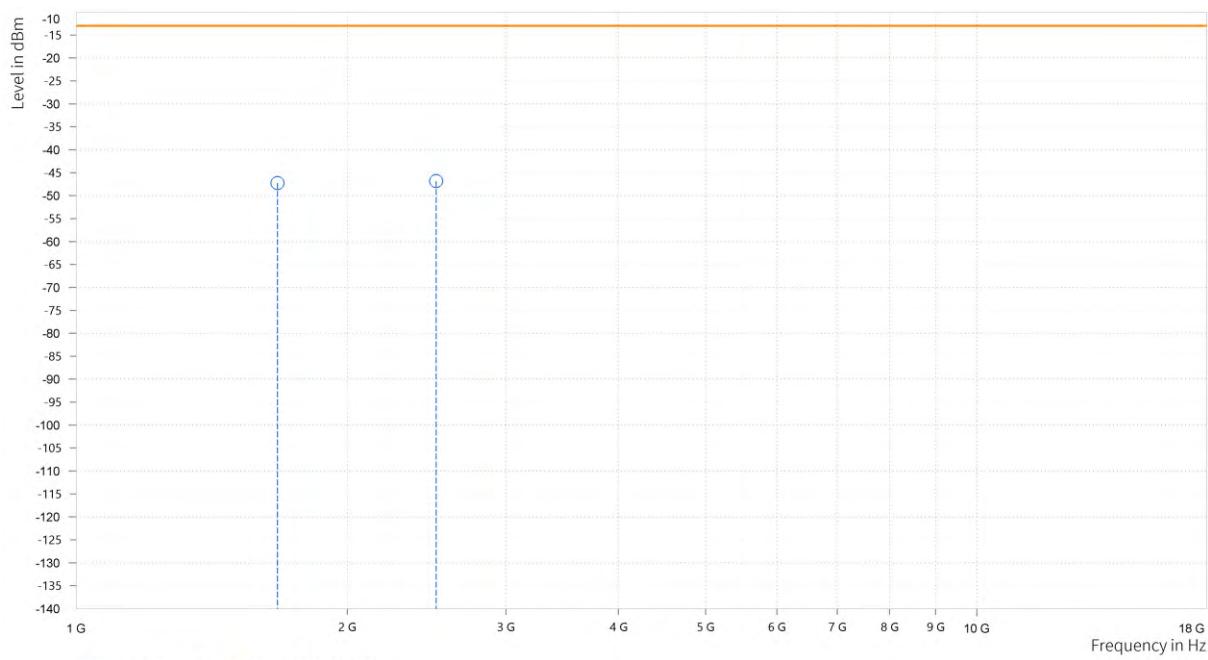




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.300	-47.64	-13.00	34.64	23.59	V	78.5	1
3	2,505.450	-47.85	-13.00	34.85	23.90	V	359.1	1

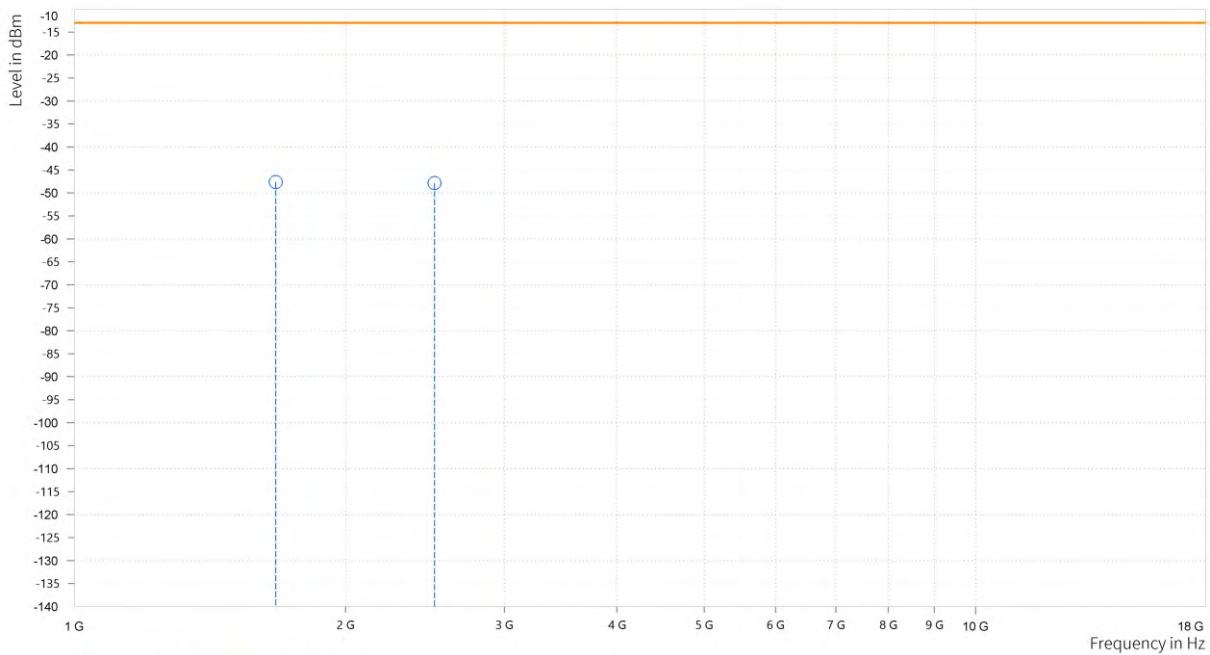




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 5MHz / QPSK
CH20425

MODE	TX channel 20425	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,653.500	-47.76	-13.00	34.76	22.12	H	359.1	1
3	2,480.250	-46.18	-13.00	33.18	24.71	H	138.2	1

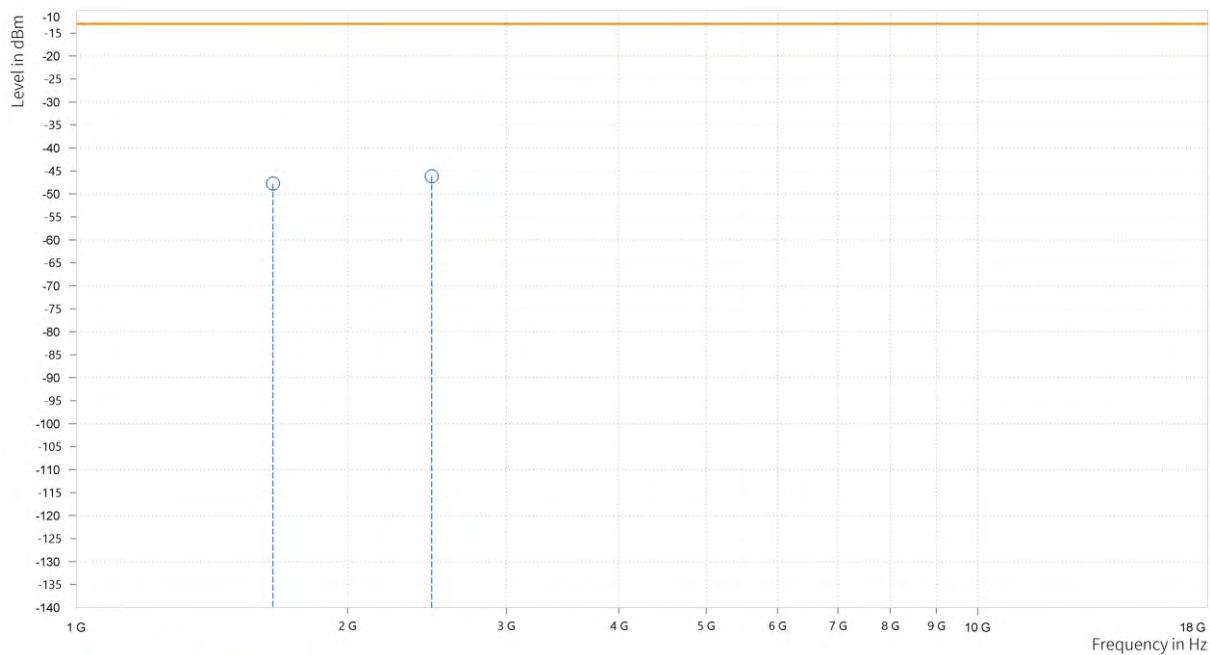




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20425	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,653.500	-48.34	-13.00	35.34	21.61	V	297.1	2
3	2,480.250	-44.98	-13.00	31.98	24.37	V	359	1

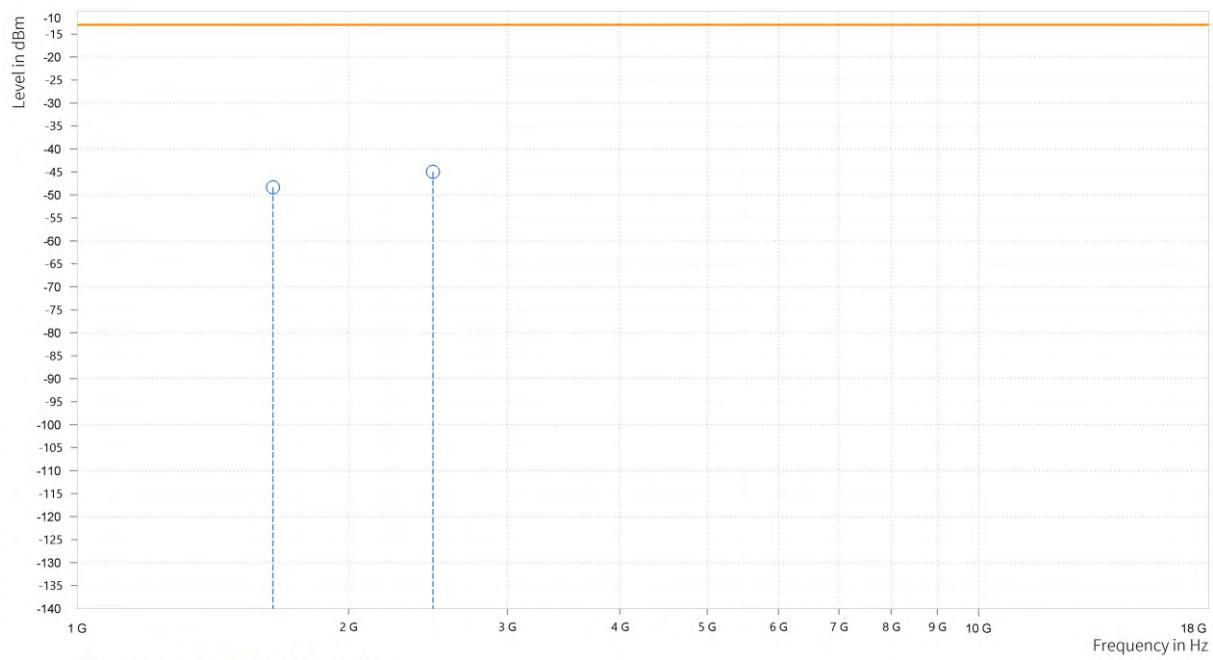




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-44.00	-13.00	31.00	23.37	H	70	1
3	2,502.750	-46.04	-13.00	33.04	24.34	H	1	1

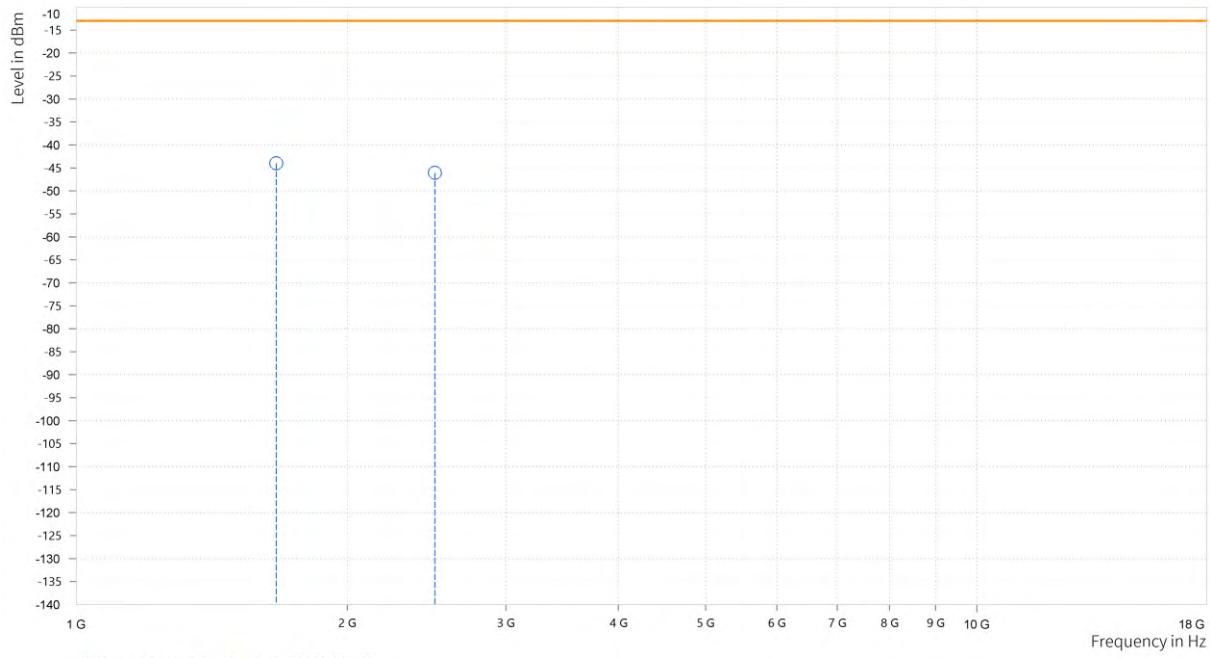




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-46.54	-13.00	33.54	23.10	V	1	1
3	2,502.750	-45.41	-13.00	32.41	23.86	V	0.9	2

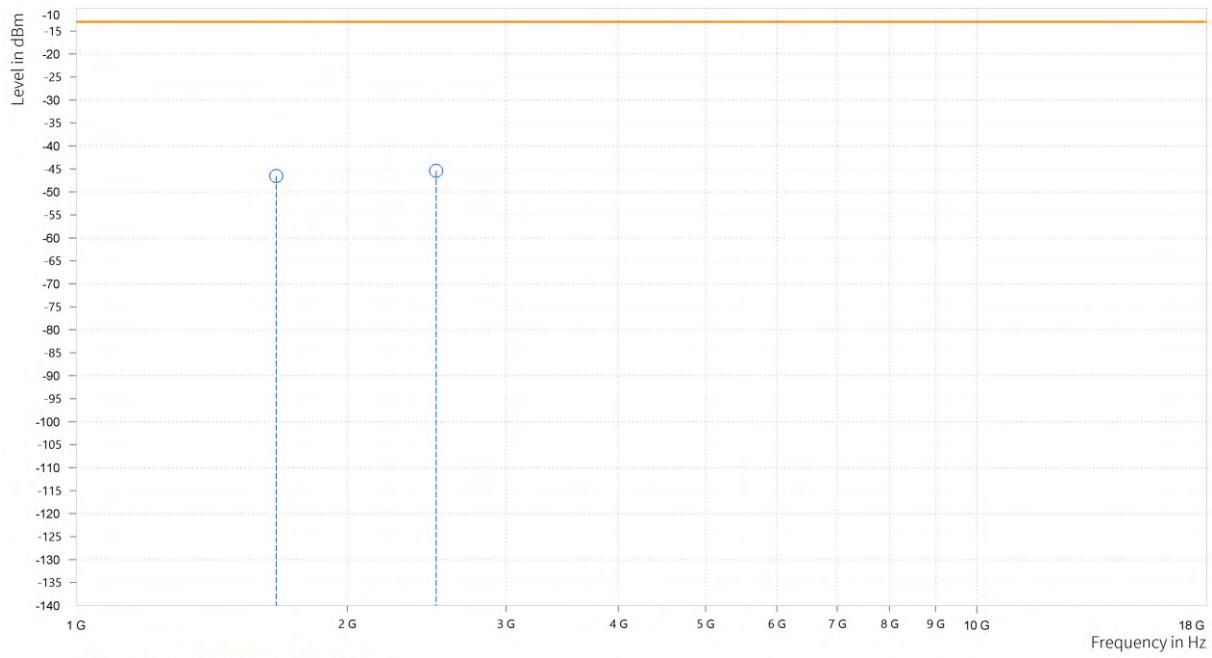




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CH20625

MODE	TX channel 20625	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,683.500	-46.12	-13.00	33.12	23.54	H	63	1
3	2,525.250	-46.17	-13.00	33.17	24.49	H	226.6	2

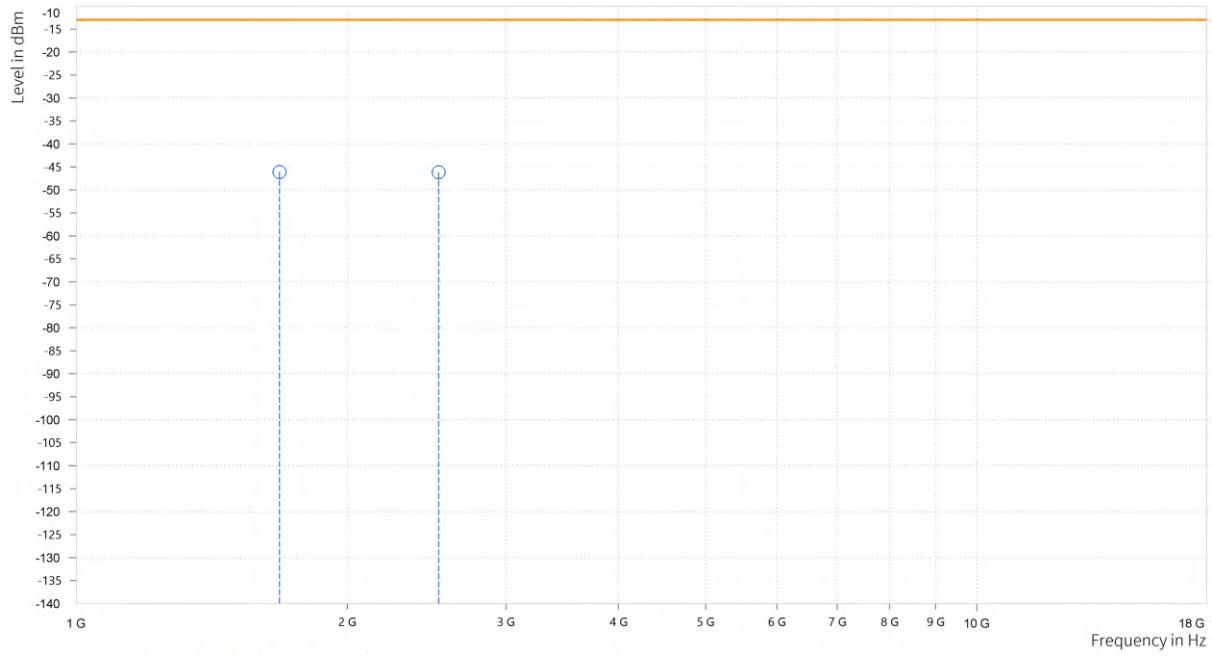

○ PK+ Level @CriticalPoint ▲ PK+ Limit @FCC LIMIT -13




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20625	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,683.500	-46.74	-13.00	33.74	23.45	V	0.9	2
3	2,525.250	-45.77	-13.00	32.77	24.18	V	0.9	2

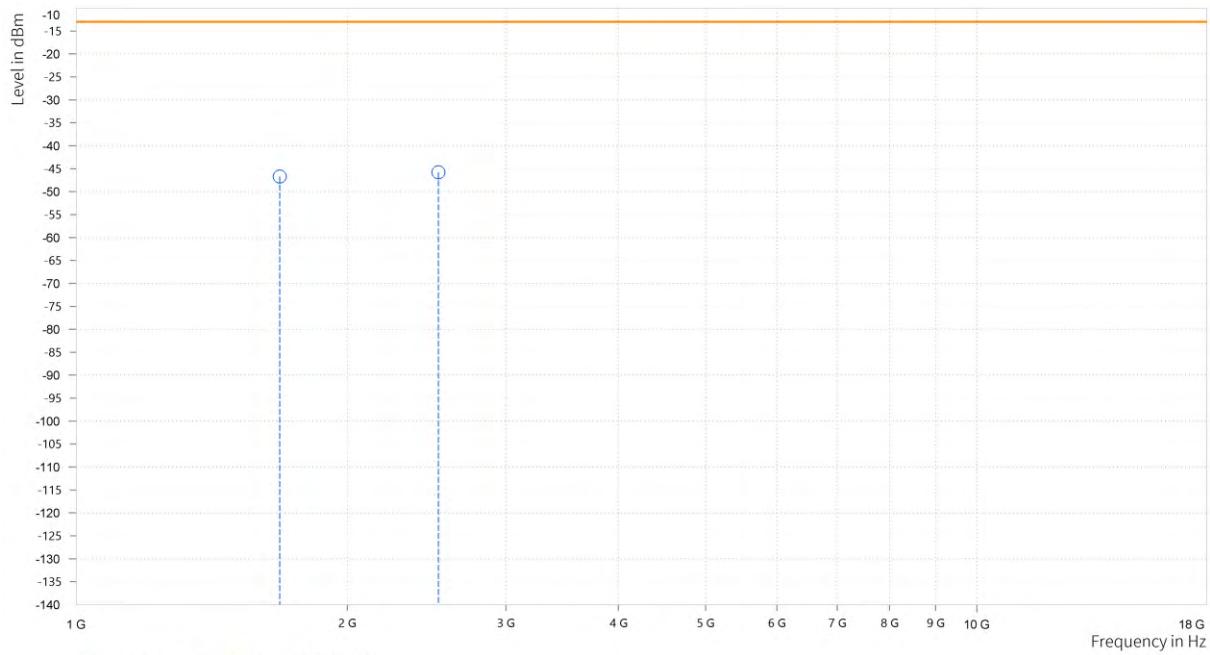




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-48.15	-13.00	35.15	23.63	H	359	2
3	2,496.000	-46.33	-13.00	33.33	24.22	H	359	2

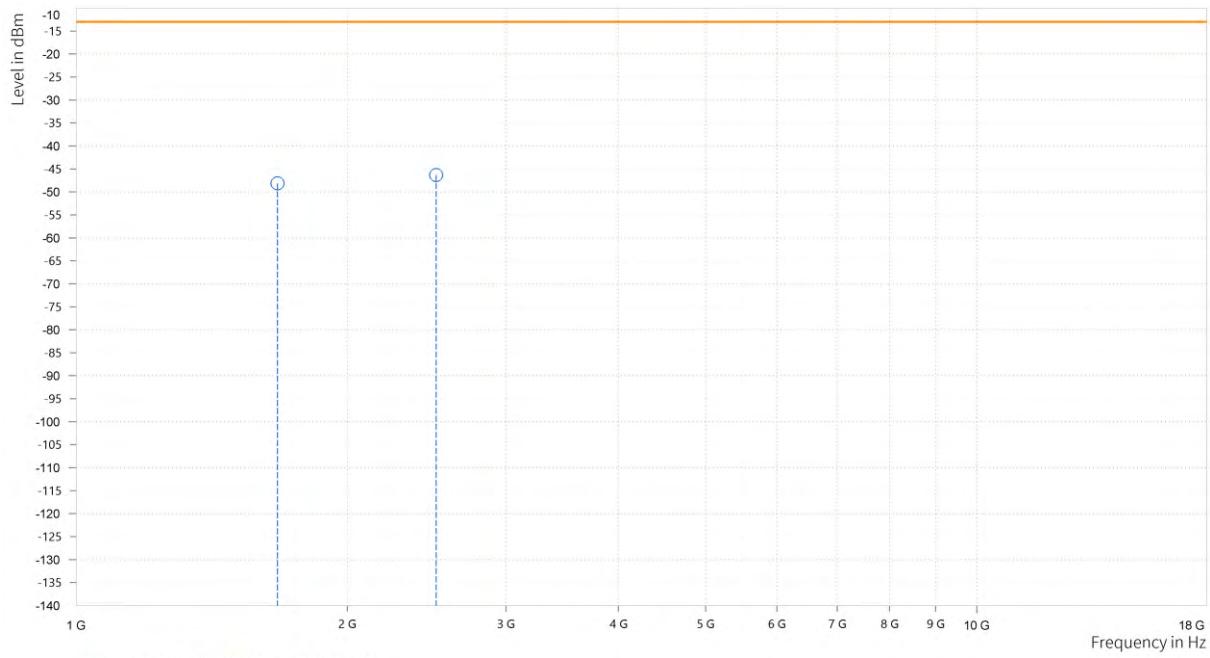




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz	
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ	
TESTED BY	Hanwen Xu	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M		

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-47.64	-13.00	34.64	23.59	V	0.9	2
3	2,496.000	-47.71	-13.00	34.71	23.87	V	359	1

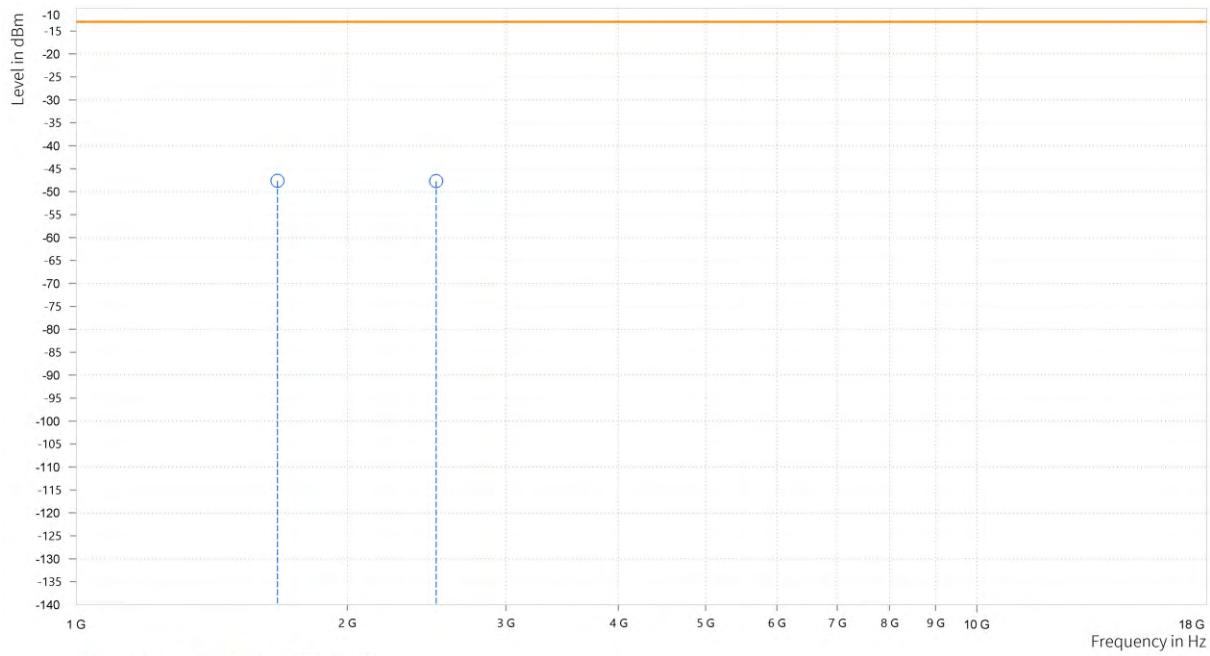



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

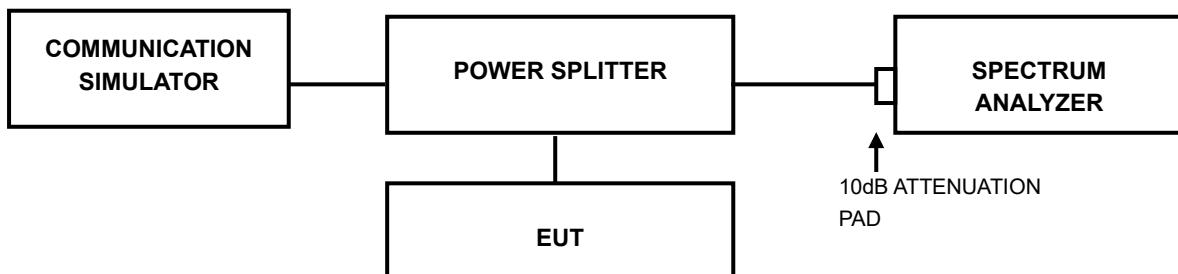

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

5 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

7 APPENDIX:

GSM850

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result


Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM850	128	8.36	13	PASS
GSM850	189	8.38	13	PASS
GSM850	251	8.34	13	PASS
EGPRS850	128	11.66	13	PASS
EGPRS850	189	11.82	13	PASS
EGPRS850	251	11.40	13	PASS



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01


Test Graphs

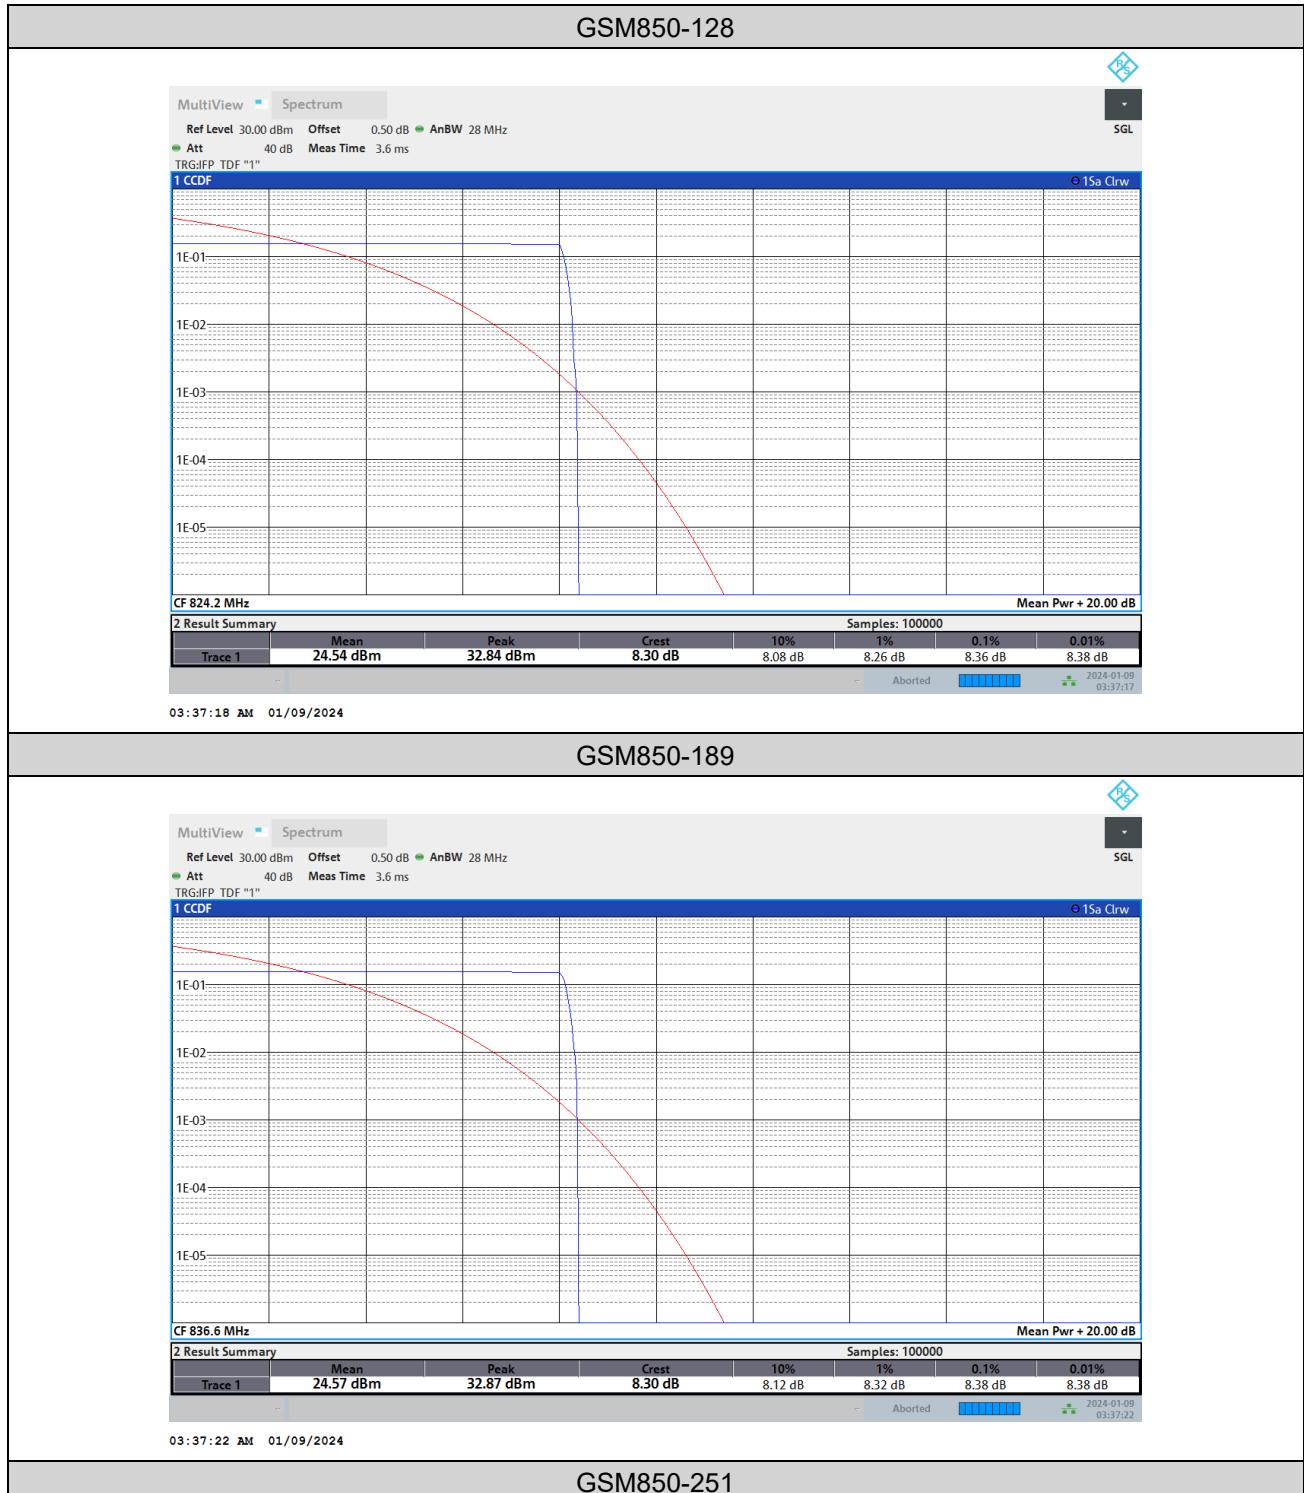



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

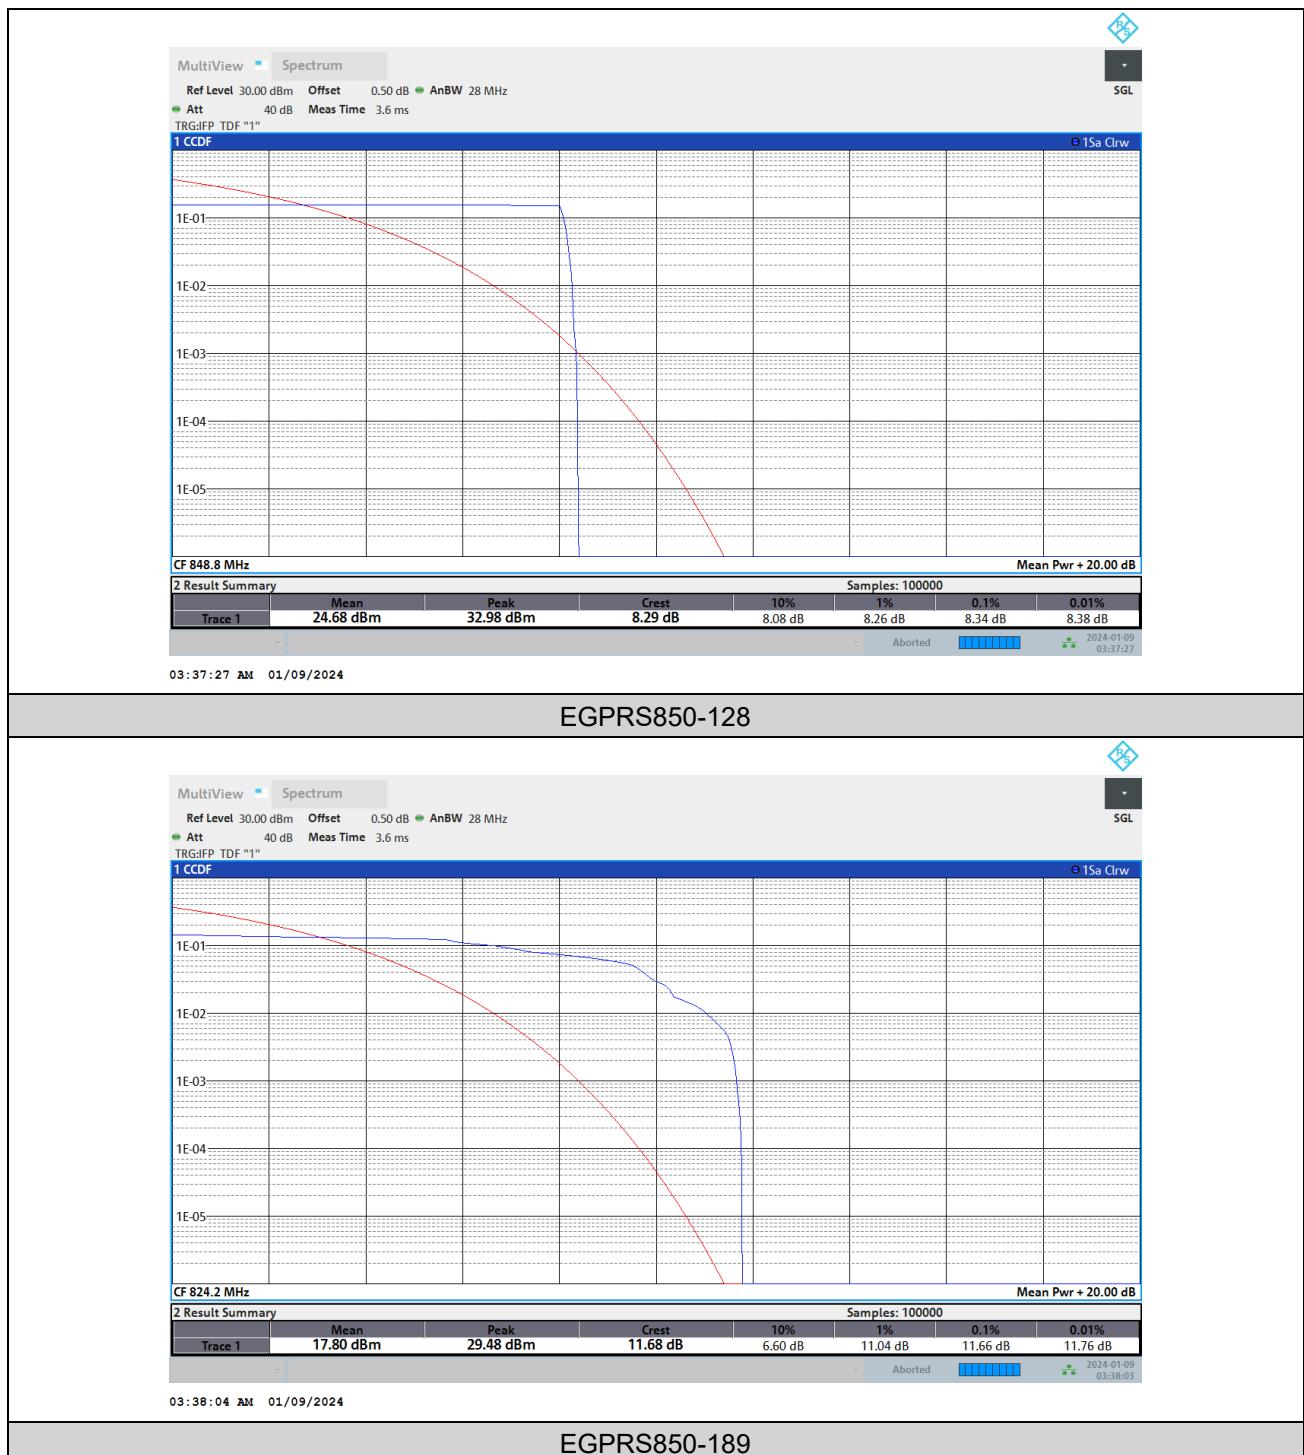



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

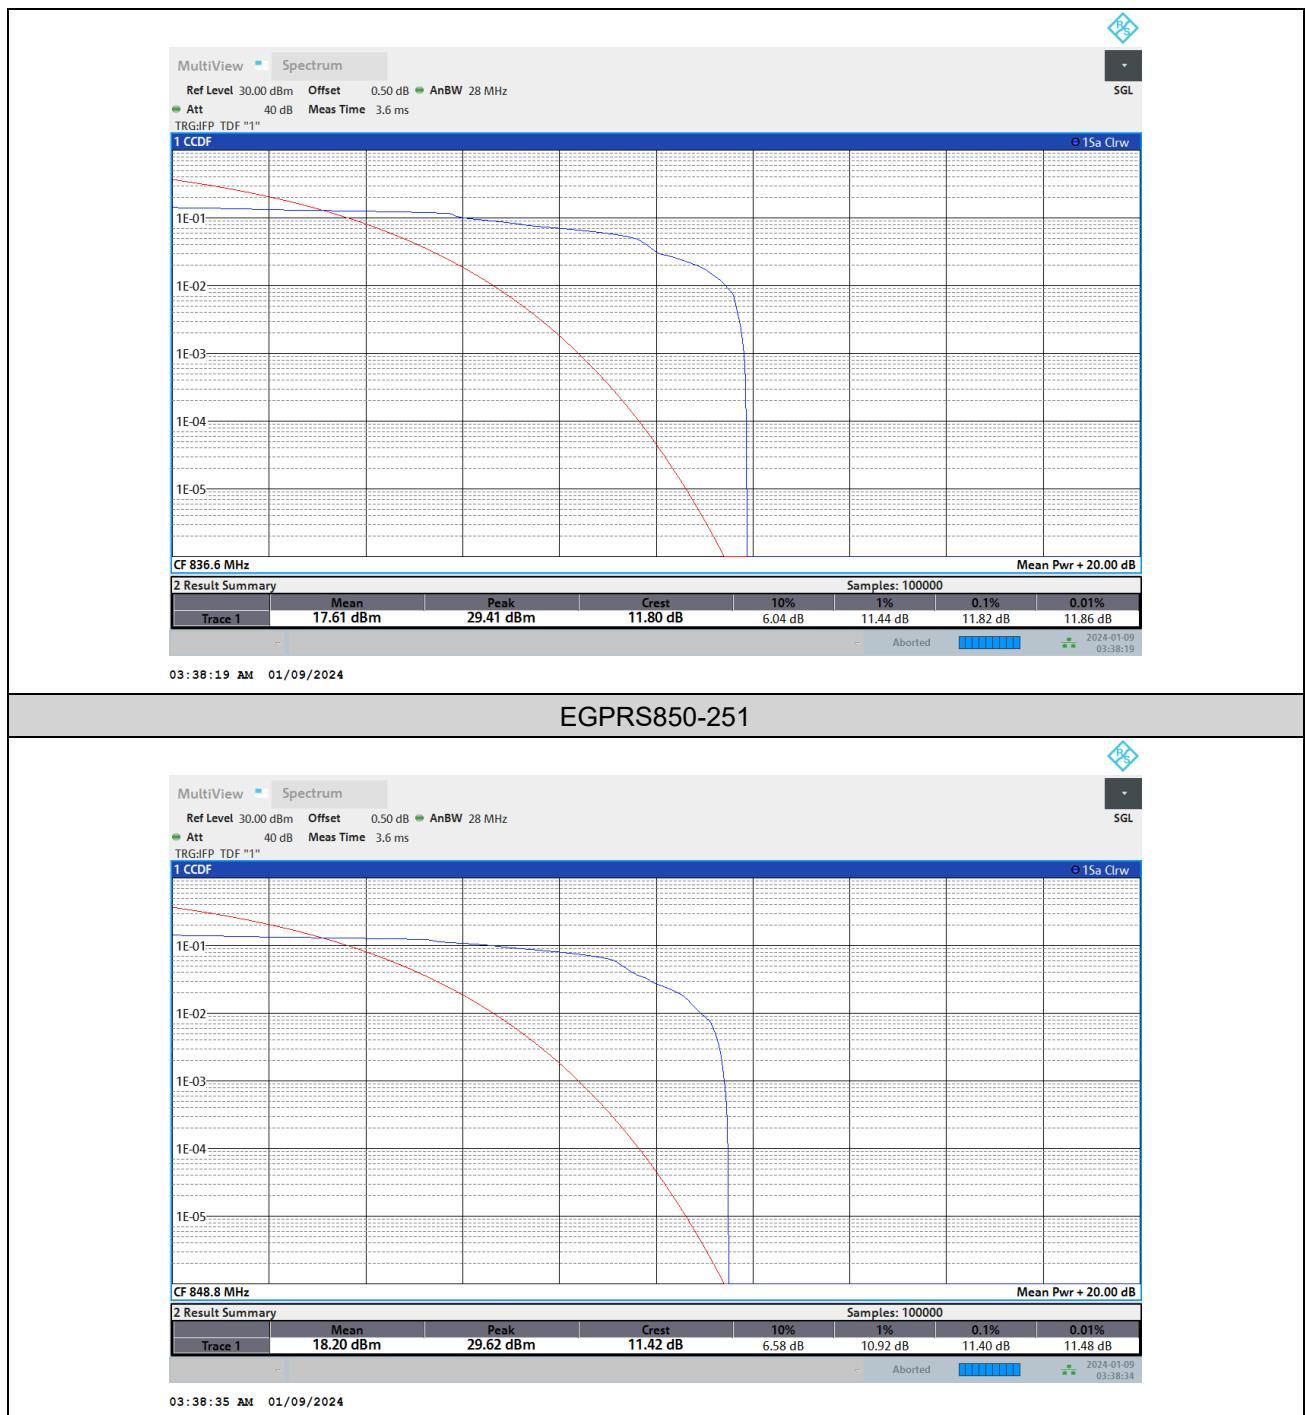



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

26dB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Channel	Occupied Bandwidth (KHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	246.176	316.680	---	PASS
GSM850	189	246.495	317.680	---	PASS
GSM850	251	247.630	318.180	---	PASS
EGPRS850	128	245.681	313.190	---	PASS
EGPRS850	189	247.562	313.690	---	PASS
EGPRS850	251	248.508	314.690	---	PASS




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

Test Graphs

Occupied Bandwidth

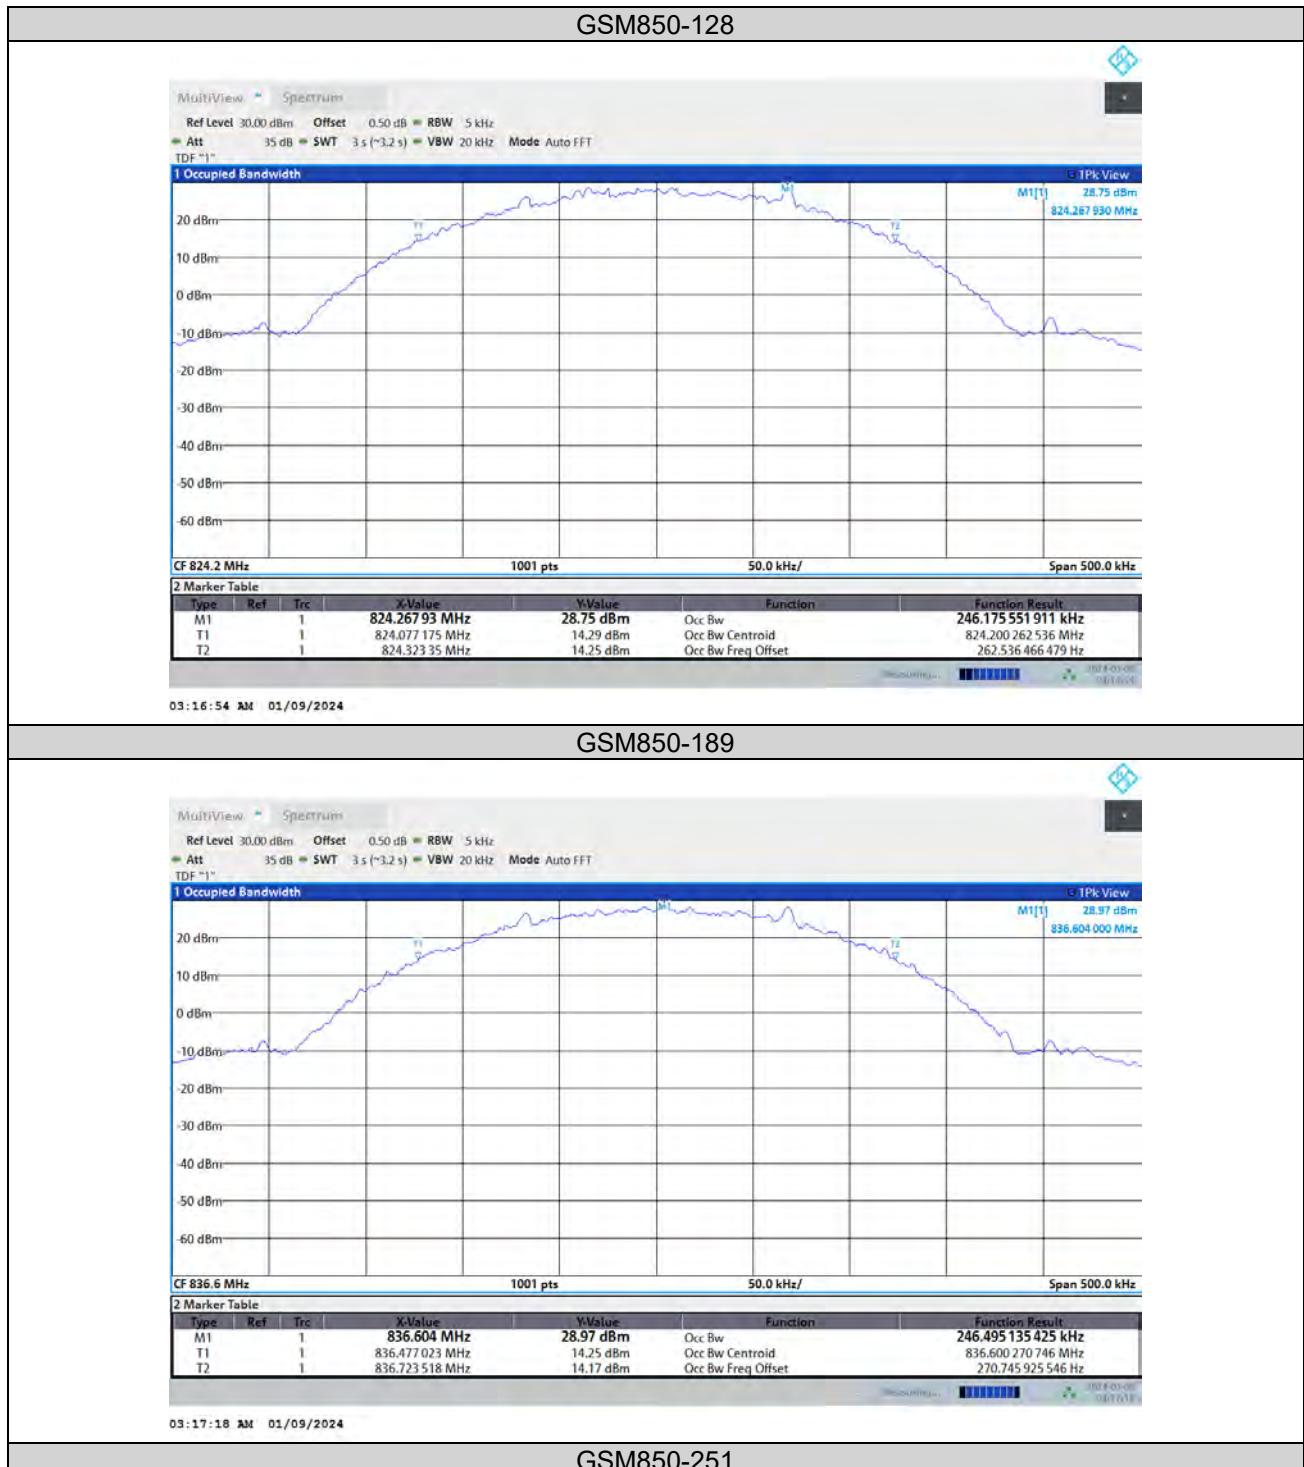



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01



05:17:43 AM 01/09/2024

EGPRS850-128




03:18:39 AM 01/09/2024

EGPRS850-189




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

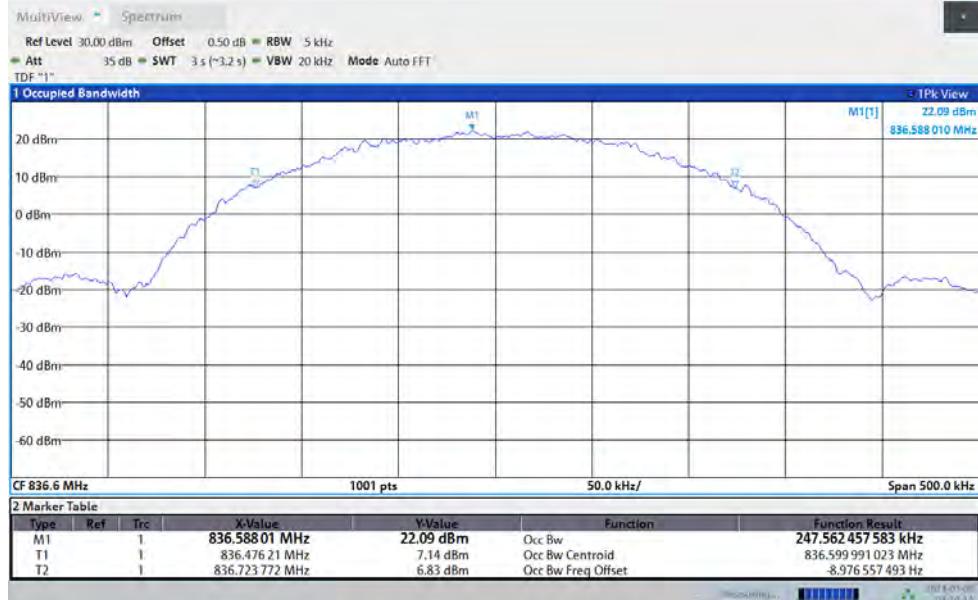

05:19:14 AM 01/09/2024

EGPRS850-251

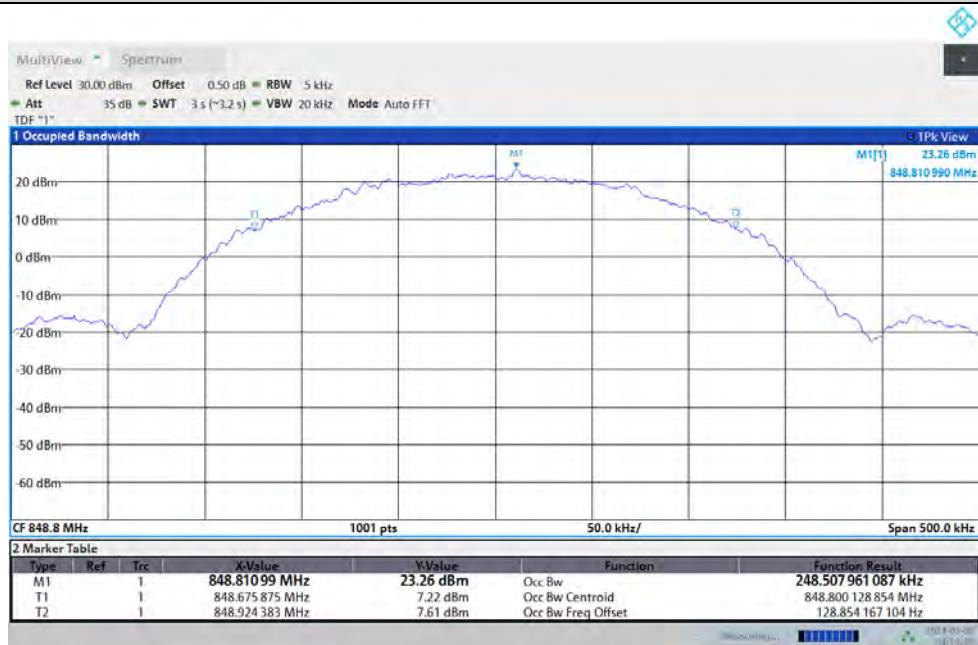

03:19:50 AM 01/09/2024



BUREAU
VERITAS


Test Report No.: PSU-QSU2312200110RF01

26dB Bandwidth

GSM850-128



GSM850-189

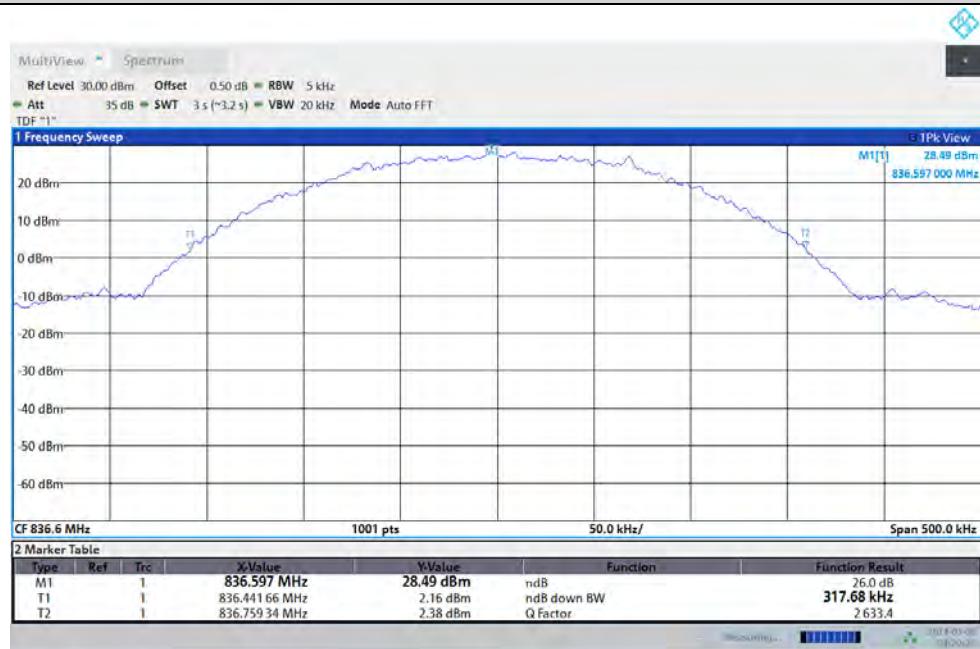

GSM850-251




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01



EGPRS850-128

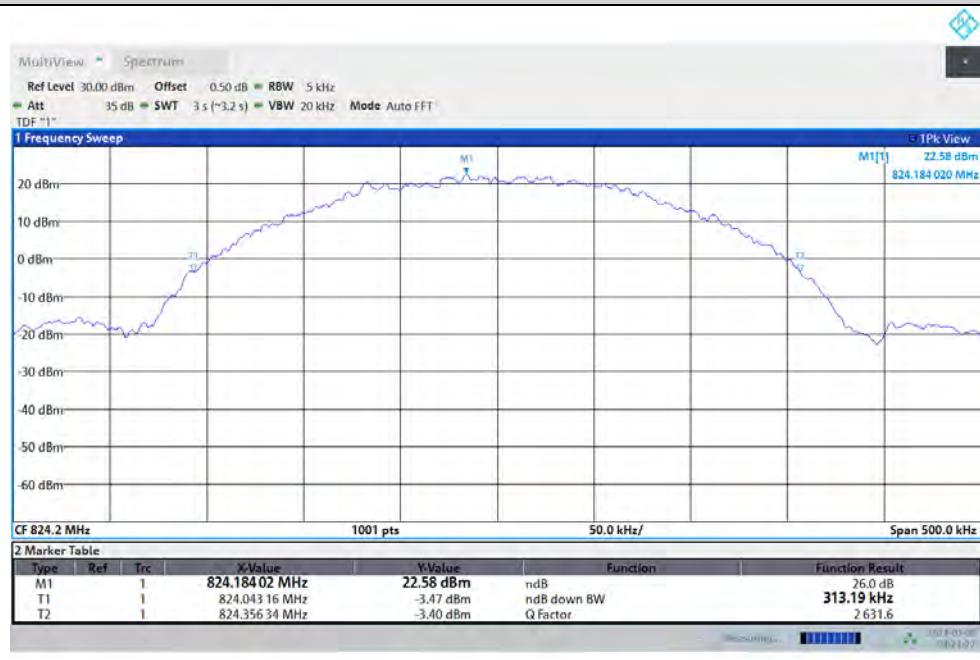


EGPRS850-189




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

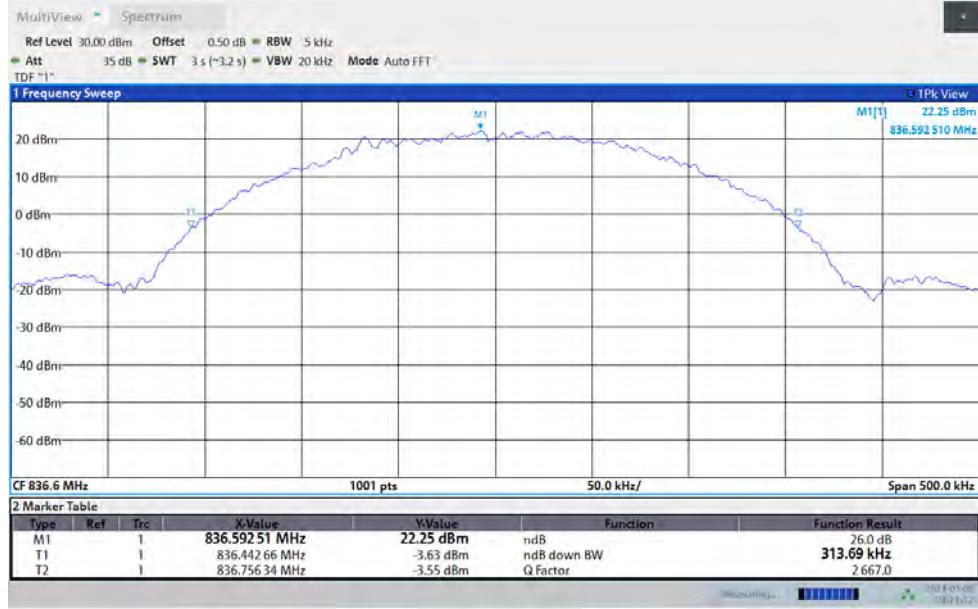

EGPRS850-251

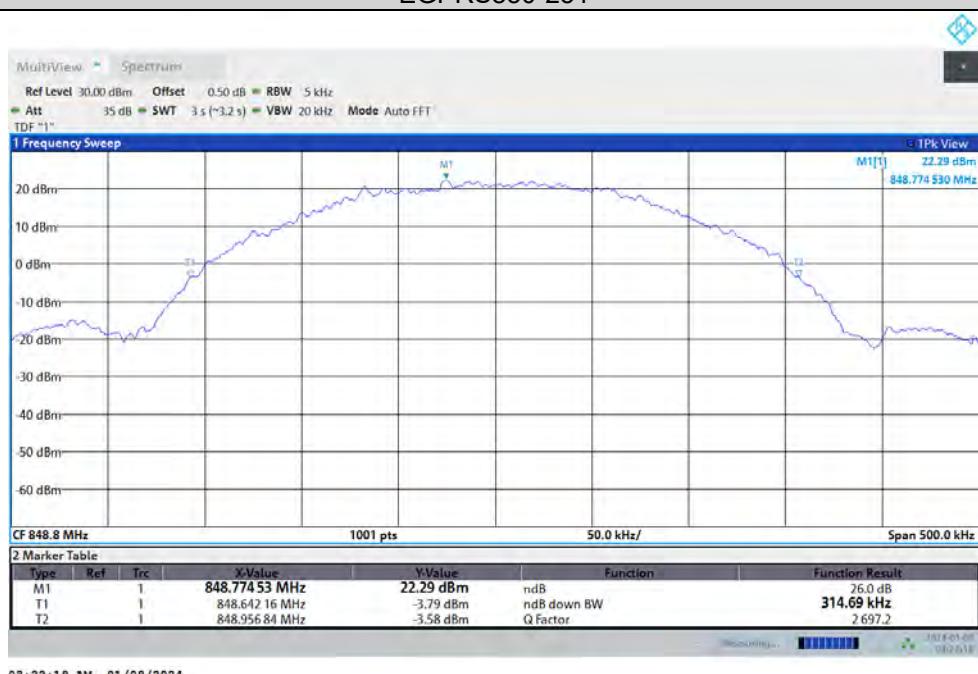



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

BAND EDGE

Test Result


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	823.996	-27.880	-13	PASS
GSM850	251	849.022	-26.805	-13	PASS
EGPRS850	128	823.988	-35.971	-13	PASS
EGPRS850	251	849.02	-37.522	-13	PASS



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01


Test Graphs

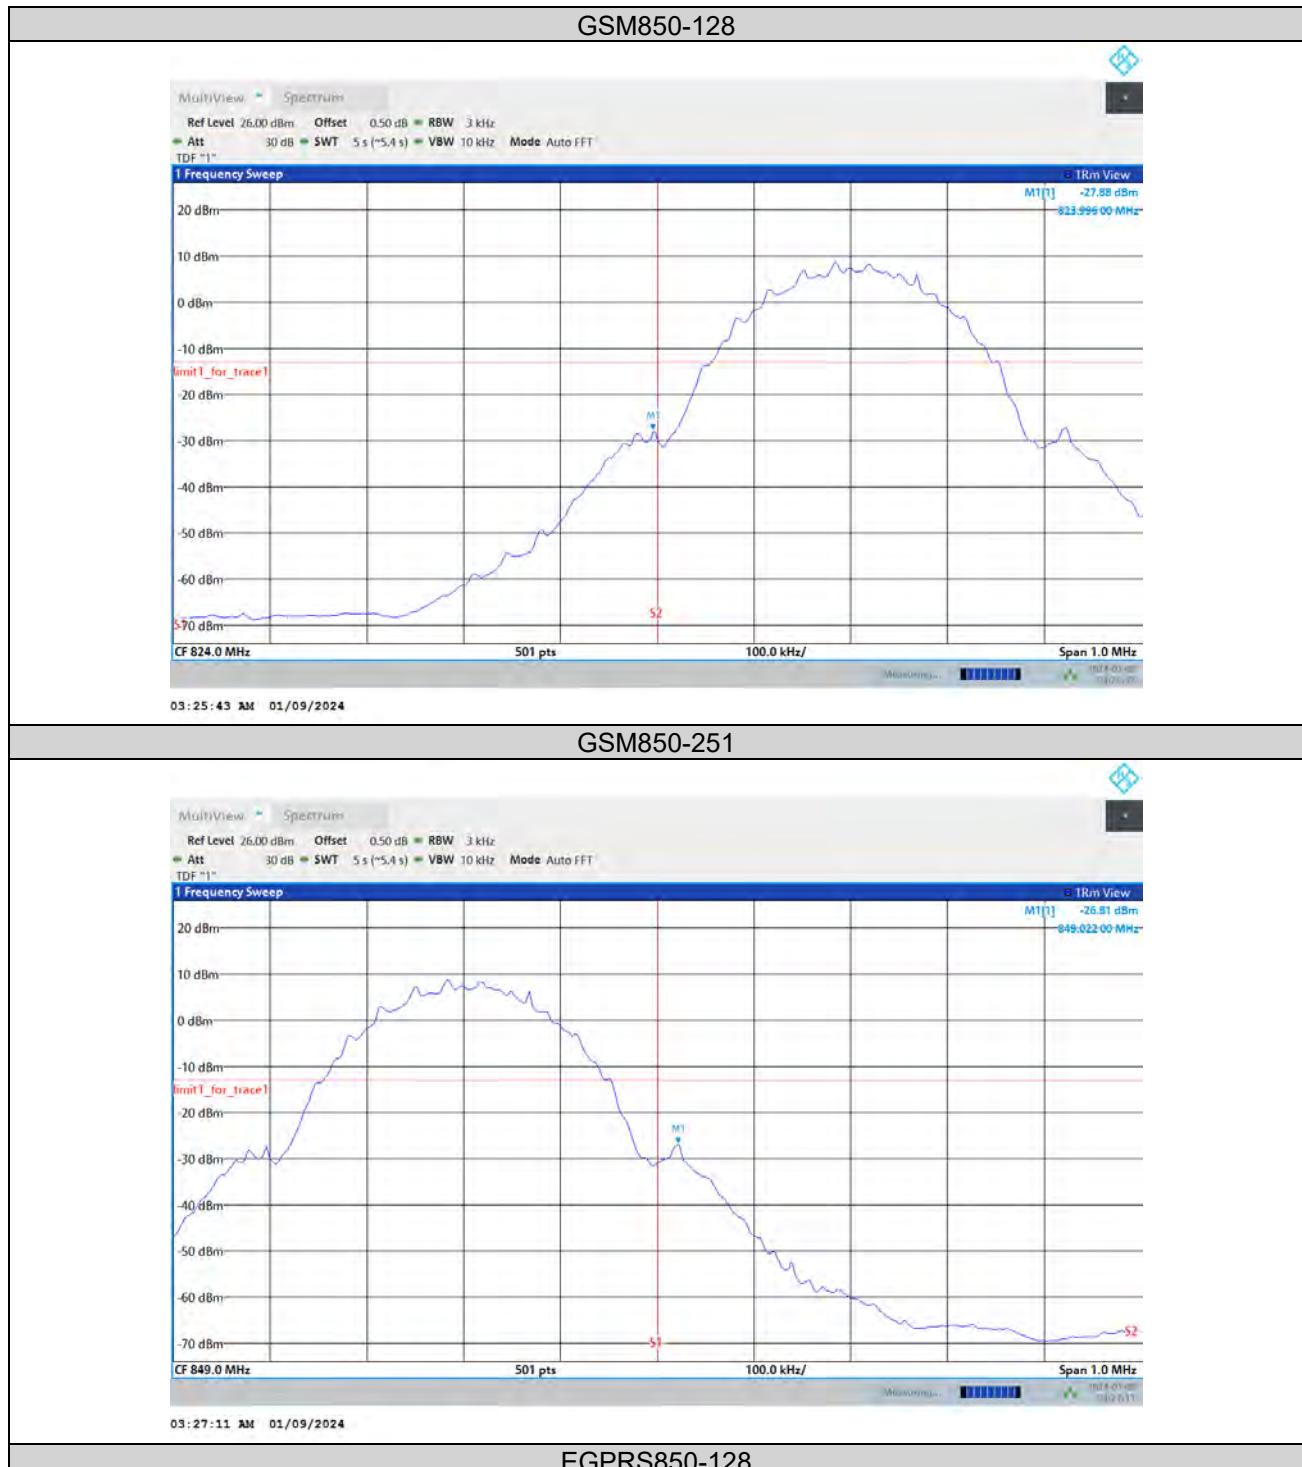



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

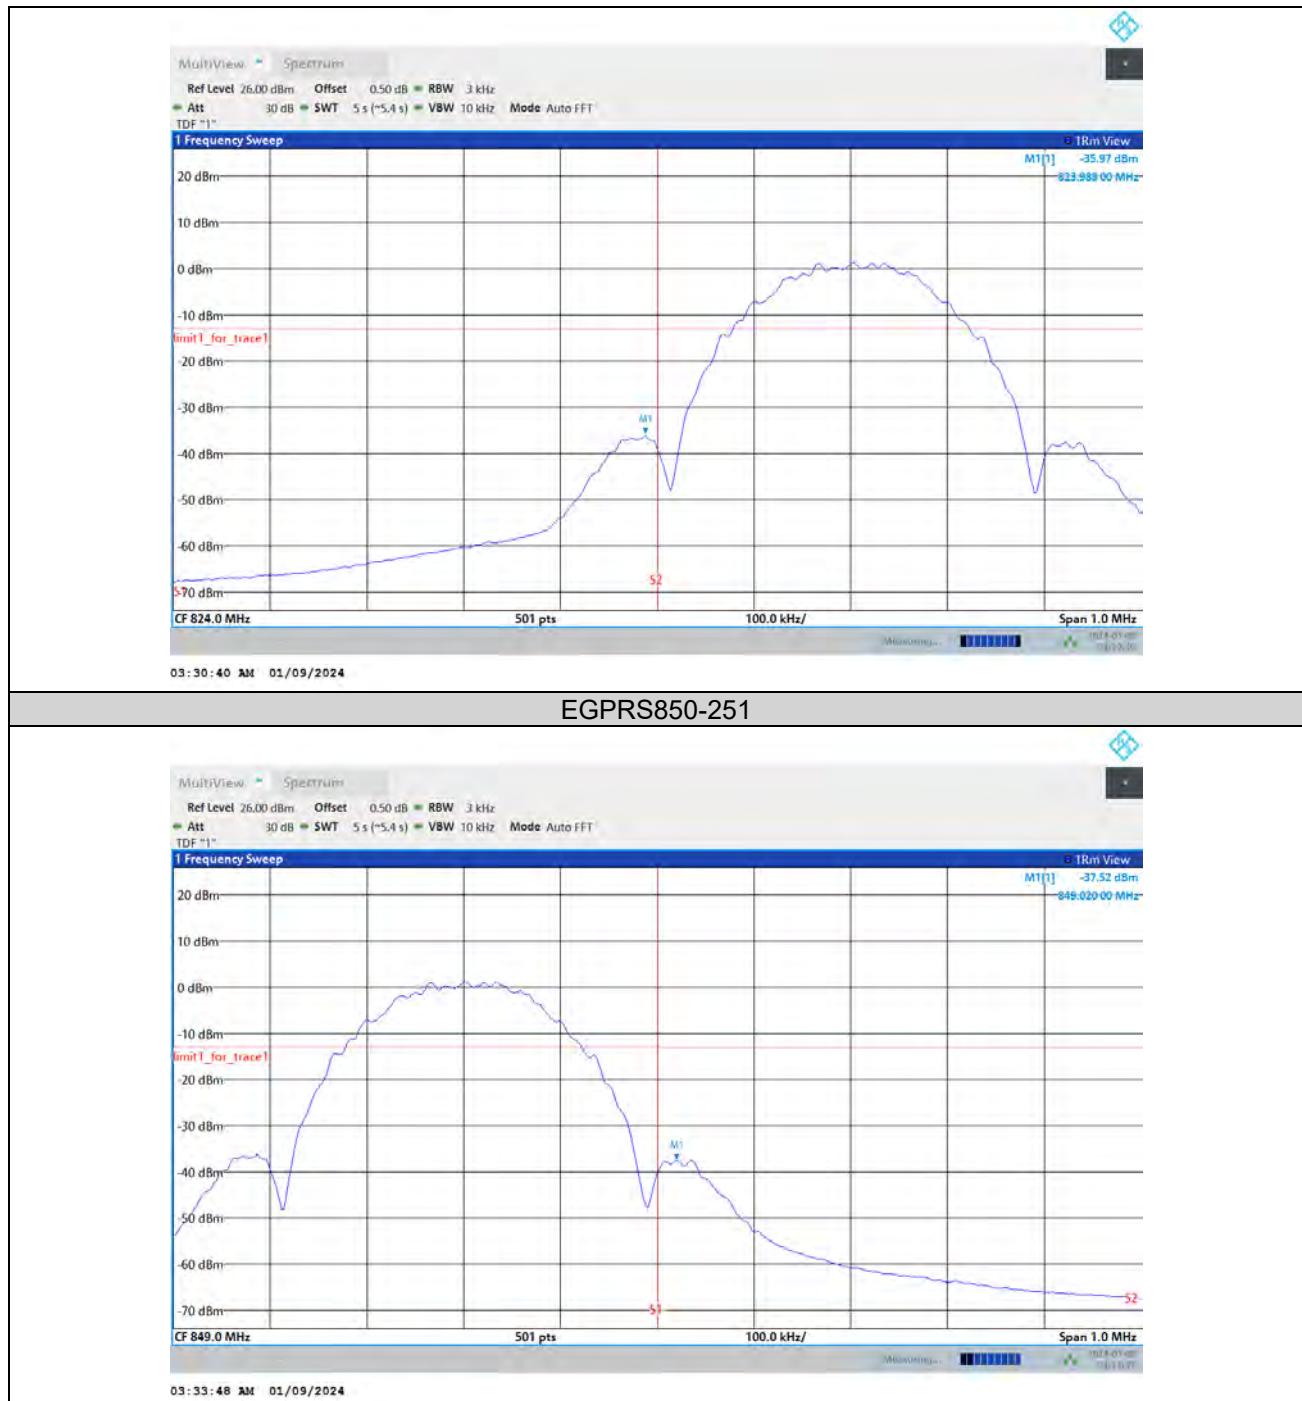



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CONDUCTED SPURIOUS EMISSION

Test Result


Band	Channel	Frequency Range(MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	30~10000MHz	See Graph	-13	PASS
GSM850	189	30~10000MHz	See Graph	-13	PASS
GSM850	251	30~10000MHz	See Graph	-13	PASS
EGPRS850	128	30~10000MHz	See Graph	-13	PASS
EGPRS850	189	30~10000MHz	See Graph	-13	PASS
EGPRS850	251	30~10000MHz	See Graph	-13	PASS



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01


Test Graphs

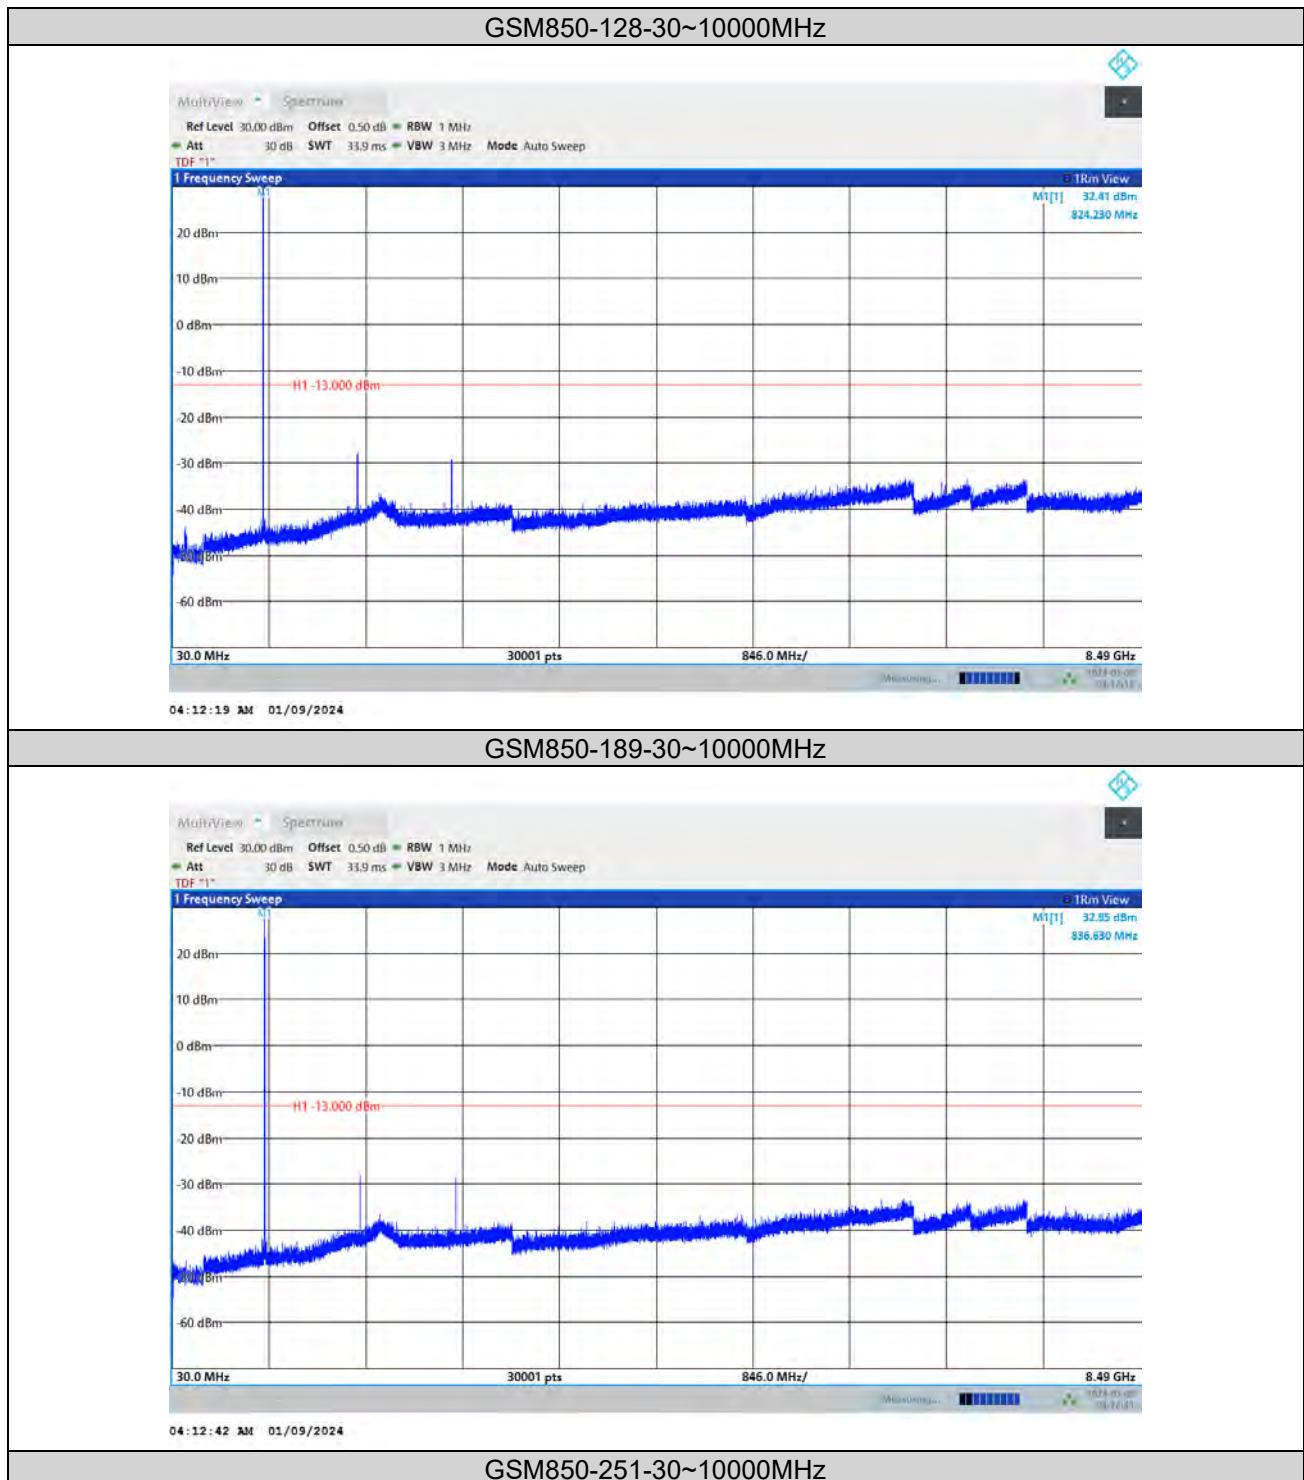




BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

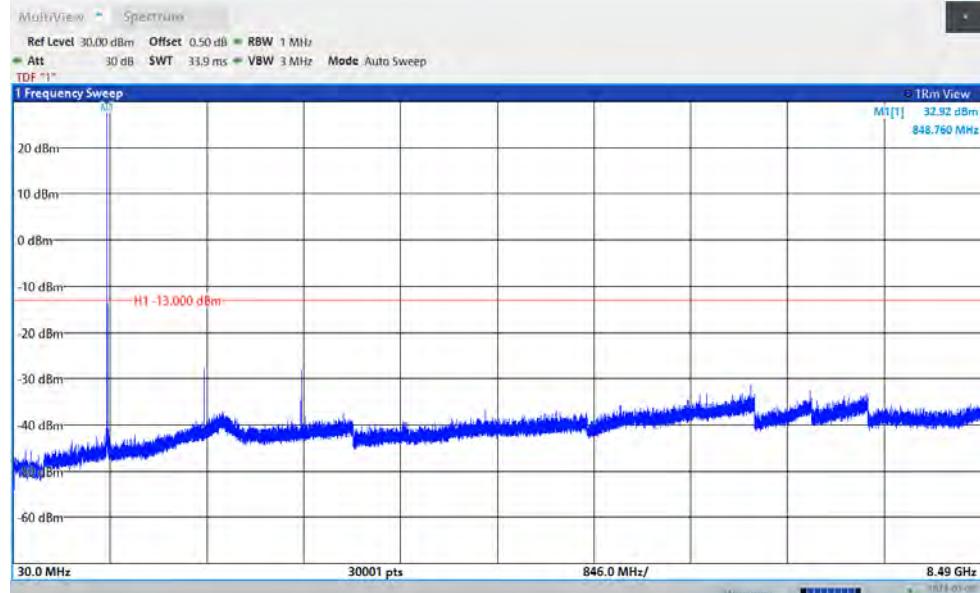

EGPRS850-128-30~10000MHz

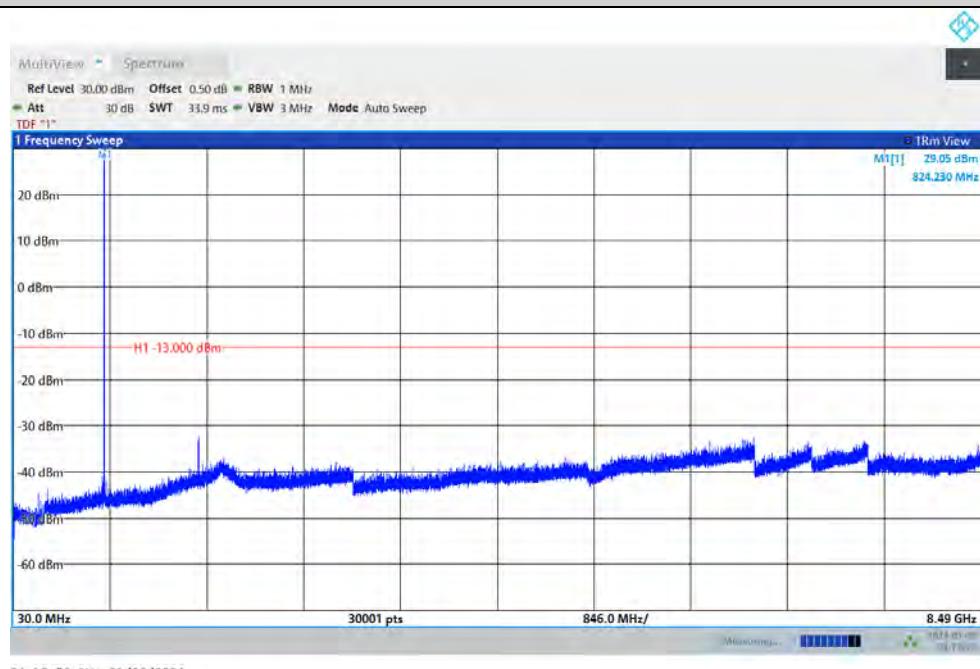


EGPRS850-189-30~10000MHz



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

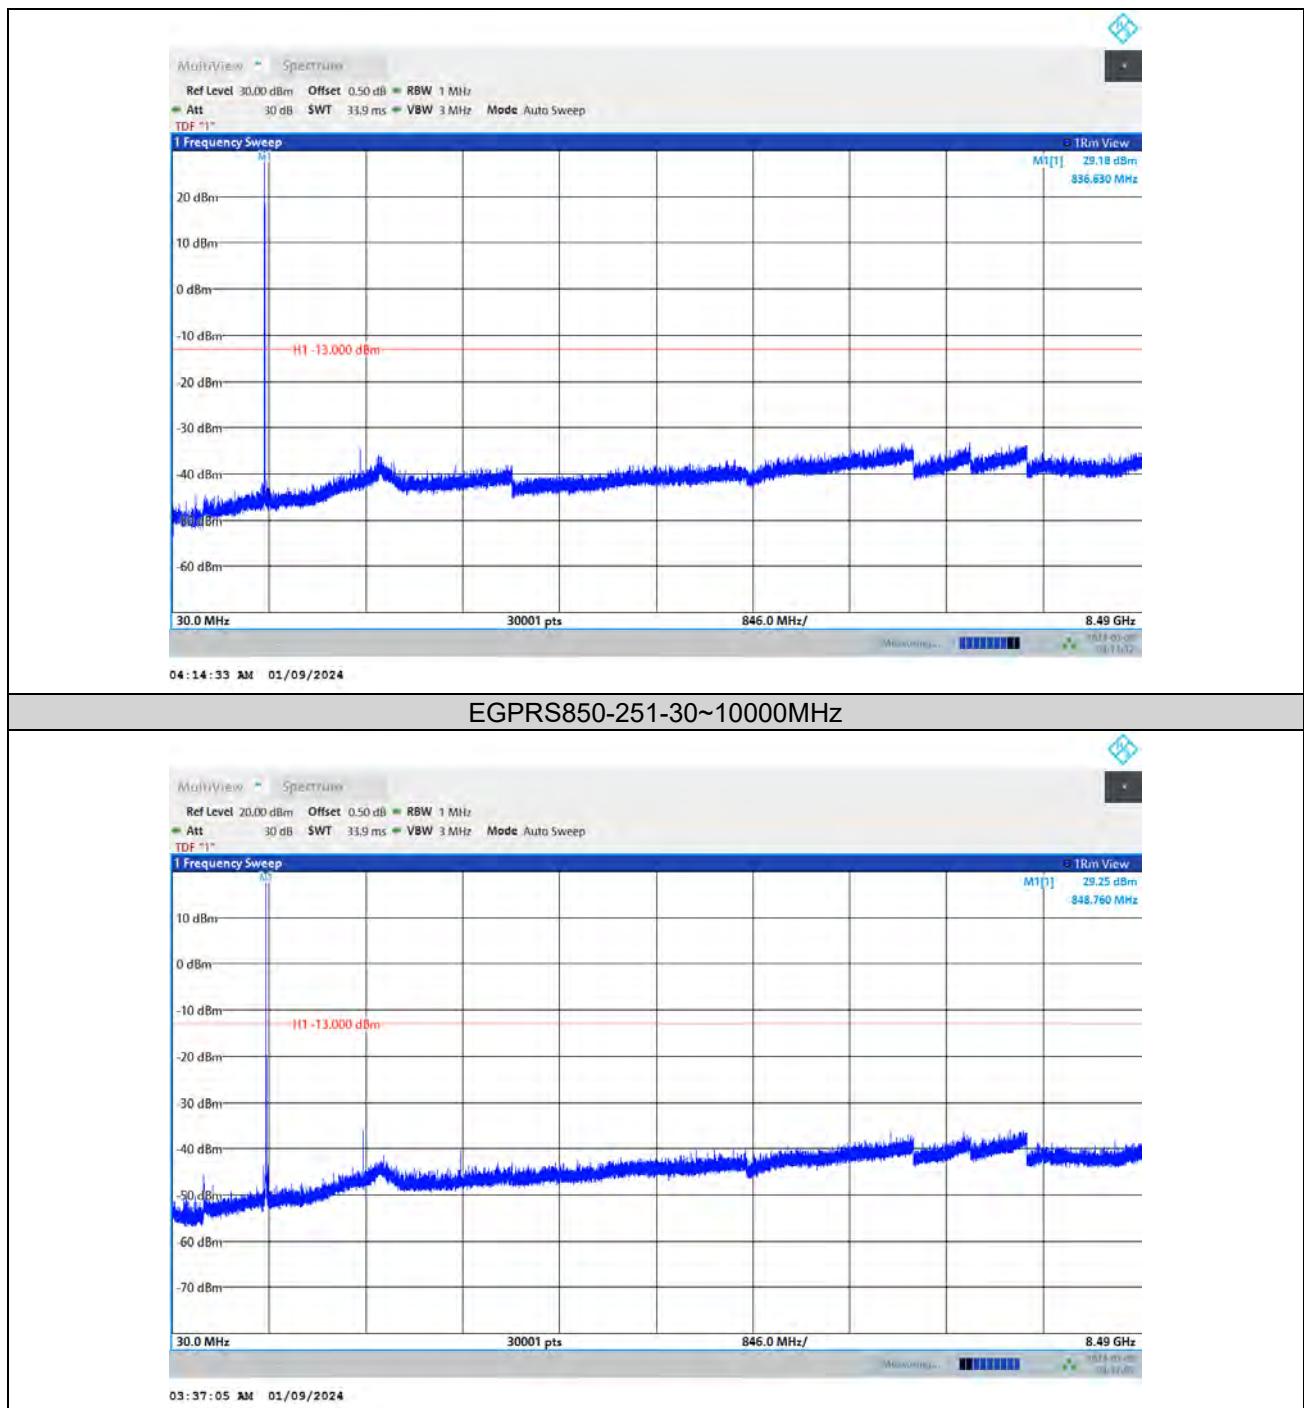



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

FREQUENCY STABILITY

Test Result

Band	Channel	Voltage						Verdict
		Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)		
GSM850	128	VL	NT	5.2	0.006309	±2.5	PASS	
GSM850	128	VN	NT	-2.63	-0.003191	±2.5	PASS	
GSM850	128	VH	NT	4.82	0.005848	±2.5	PASS	
GSM850	189	VL	NT	-9.17	-0.010964	±2.5	PASS	
GSM850	189	VN	NT	-2.16	-0.002582	±2.5	PASS	
GSM850	189	VH	NT	-5.67	-0.006779	±2.5	PASS	
GSM850	251	VL	NT	5.84	0.006880	±2.5	PASS	
GSM850	251	VN	NT	4.43	0.005219	±2.5	PASS	
GSM850	251	VH	NT	-6.44	-0.007587	±2.5	PASS	
EGPRS850	128	VL	NT	-3.89	-0.004720	±2.5	PASS	
EGPRS850	128	VN	NT	-1.01	-0.001225	±2.5	PASS	
EGPRS850	128	VH	NT	8.73	0.010592	±2.5	PASS	
EGPRS850	189	VL	NT	-5.24	-0.006265	±2.5	PASS	
EGPRS850	189	VN	NT	6.03	0.007209	±2.5	PASS	
EGPRS850	189	VH	NT	2.77	0.003312	±2.5	PASS	
EGPRS850	251	VL	NT	1.15	0.001355	±2.5	PASS	
EGPRS850	251	VN	NT	7.28	0.008577	±2.5	PASS	
EGPRS850	251	VH	NT	2.94	0.003464	±2.5	PASS	

Band	Channel	Temperature						Verdict
		Voltage [Vdc]	Temperat ure (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)		
GSM850	128	NV	-30	4.8	0.005824	±2.5	PASS	
GSM850	128	NV	-20	5.27	0.006394	±2.5	PASS	
GSM850	128	NV	-10	3.92	0.004756	±2.5	PASS	
GSM850	128	NV	0	5.99	0.007268	±2.5	PASS	
GSM850	128	NV	10	6.45	0.007826	±2.5	PASS	
GSM850	128	NV	20	4.05	0.004914	±2.5	PASS	
GSM850	128	NV	30	-5.96	-0.007231	±2.5	PASS	
GSM850	128	NV	40	3.92	0.004756	±2.5	PASS	
GSM850	128	NV	50	2.22	0.002694	±2.5	PASS	
GSM850	189	NV	-30	-1.49	-0.001781	±2.5	PASS	
GSM850	189	NV	-20	7.18	0.008584	±2.5	PASS	
GSM850	189	NV	-10	2.88	0.003443	±2.5	PASS	
GSM850	189	NV	0	-0.65	-0.000777	±2.5	PASS	
GSM850	189	NV	10	-8.53	-0.010198	±2.5	PASS	
GSM850	189	NV	20	-5.33	-0.006373	±2.5	PASS	
GSM850	189	NV	30	-9.84	-0.011765	±2.5	PASS	
GSM850	189	NV	40	-6.92	-0.008274	±2.5	PASS	
GSM850	189	NV	50	3.26	0.003898	±2.5	PASS	



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

GSM850	251	NV	-30	-7.26	-0.008553	±2.5	PASS
GSM850	251	NV	-20	-6.72	-0.007917	±2.5	PASS
GSM850	251	NV	-10	-2.9	-0.003417	±2.5	PASS
GSM850	251	NV	0	1.01	0.001190	±2.5	PASS
GSM850	251	NV	10	2.21	0.002604	±2.5	PASS
GSM850	251	NV	20	-0.38	-0.000448	±2.5	PASS
GSM850	251	NV	30	8.45	0.009955	±2.5	PASS
GSM850	251	NV	40	2.6	0.003063	±2.5	PASS
GSM850	251	NV	50	-0.66	-0.000778	±2.5	PASS
EGPRS850	128	NV	-30	6.83	0.003691	±2.5	PASS
EGPRS850	128	NV	-20	3.26	0.001762	±2.5	PASS
EGPRS850	128	NV	-10	-9.2	-0.004972	±2.5	PASS
EGPRS850	128	NV	0	4.25	0.002297	±2.5	PASS
EGPRS850	128	NV	10	0.3	0.000162	±2.5	PASS
EGPRS850	128	NV	20	-8.12	-0.004389	±2.5	PASS
EGPRS850	128	NV	30	7.64	0.004129	±2.5	PASS
EGPRS850	128	NV	40	-6.91	-0.003735	±2.5	PASS
EGPRS850	128	NV	50	3.37	0.001821	±2.5	PASS
EGPRS850	189	NV	-30	-5.53	-0.002941	±2.5	PASS
EGPRS850	189	NV	-20	-2.76	-0.001468	±2.5	PASS
EGPRS850	189	NV	-10	-2.27	-0.001207	±2.5	PASS
EGPRS850	189	NV	0	6.09	0.003239	±2.5	PASS
EGPRS850	189	NV	10	-4.35	-0.002314	±2.5	PASS
EGPRS850	189	NV	20	-2.42	-0.001287	±2.5	PASS
EGPRS850	189	NV	30	-0.03	-0.000016	±2.5	PASS
EGPRS850	189	NV	40	1.72	0.000915	±2.5	PASS
EGPRS850	189	NV	50	-6.88	-0.003660	±2.5	PASS
EGPRS850	251	NV	-30	2.52	0.001320	±2.5	PASS
EGPRS850	251	NV	-20	-1.48	-0.000775	±2.5	PASS
EGPRS850	251	NV	-10	8.03	0.004205	±2.5	PASS
EGPRS850	251	NV	0	1.55	0.000812	±2.5	PASS
EGPRS850	251	NV	10	-8.11	-0.004247	±2.5	PASS
EGPRS850	251	NV	20	2.3	0.001204	±2.5	PASS
EGPRS850	251	NV	30	-0.83	-0.000435	±2.5	PASS
EGPRS850	251	NV	40	8.6	0.004503	±2.5	PASS
EGPRS850	251	NV	50	1.99	0.001042	±2.5	PASS



BUREAU
VERITAS

Test Report No.: PSU-QSU2312200110RF01

CDMA2000 BC0

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Channel	Result(dB)	Limit(dB)	Verdict
CDMA BC0	1013	5.66	13	PASS
CDMA BC0	384	4.93	13	PASS
CDMA BC0	777	5.40	13	PASS