

CETECOM ICT Services is now

**CTC** | advanced  
member of RWTÜV group

## TEST REPORT

Test report no.: 1-2692/16-01-05



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

#### CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

#### FLIR Systems AB

Antennvägen 6

18715 Täby / SWEDEN

Phone: +46 87 53 25 00

Fax: +46 87 53 23 64

Contact: Göran Skedung

e-mail: [goran.skedung@flir.se](mailto:goran.skedung@flir.se)

Phone: +46 87 53 27 59

### Manufacturer

#### FLIR Systems AB

Antennvägen 6

18715 Täby / SWEDEN

### Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 1

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Thermal imaging camera

**Model name:** FLIR-C7200

**FCC ID:** ZLV-FLIRC7200

**IC:** 5306A-FLIRC7200

**Frequency:** UNII band 5150 MHz to 5250 MHz

**Technology tested:** WLAN (OFDM/a- & n HT20-mode)

**Antenna:** Integrated PCB antenna

**Power supply:** 3.7 V DC by Li-Ion battery

**Temperature range:** -20°C to +55°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Andreas Luckenbill  
Lab Manager  
Radio Communications & EMC

### Test performed:

Marco Bertolino  
Lab Manager  
Radio Communications & EMC

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details .....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s and references .....	4
4	Test environment.....	5
5	Test item.....	5
5.1	General description .....	5
5.2	Additional information .....	5
6	Description of the test setup.....	6
6.1	Shielded semi anechoic chamber.....	7
6.2	Shielded fully anechoic chamber .....	8
6.3	Radiated measurements > 18 GHz.....	9
6.4	AC conducted .....	10
6.5	Conducted measurements .....	11
7	Sequence of testing .....	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz.....	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz.....	14
7.4	Sequence of testing radiated spurious above 18 GHz .....	15
8	Measurement uncertainty .....	16
9	Summary of measurement results .....	17
10	Additional comments .....	18
11	Measurement results .....	19
11.1	Identify worst case data rate.....	19
11.2	Gain .....	20
11.3	Duty cycle .....	21
11.4	Maximum output power.....	23
11.4.1	Maximum output power conducted – for FCC requirements .....	23
11.4.2	Maximum output power – for IC requirements.....	29
11.5	Power spectral density.....	35
11.5.1	Power spectral density – for FCC requirements .....	35
11.5.2	Power spectral density – for IC requirements.....	37
11.6	Spectrum bandwidth – 26 dB bandwidth .....	39
11.7	Occupied bandwidth – 99% emission bandwidth.....	44
11.8	Band edge compliance radiated.....	50
11.9	TX spurious emissions radiated.....	52
11.10	RX spurious emissions radiated .....	63
11.11	Spurious emissions radiated < 30 MHz .....	67
11.12	Spurious emissions conducted < 30 MHz.....	70
12	Observations .....	73
Annex A	Document history .....	73
Annex B	Further information.....	73
Annex C	Accreditation Certificate .....	74

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2016-11-24
Date of receipt of test item:	2016-12-06
Start of test:	2016-12-06
End of test:	2016-12-08
Person(s) present during the test:	Mr. Göran Skedung

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
UNII: KDB 789033 D02	v01r03	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices



## 6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

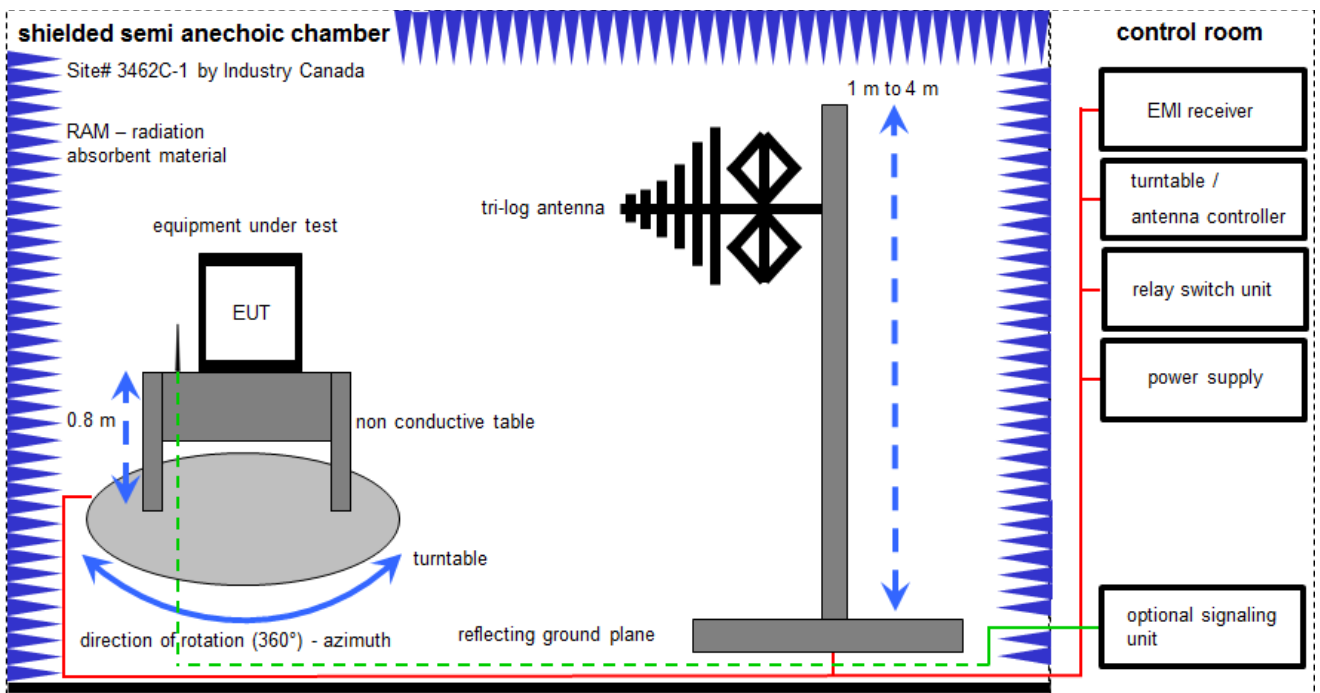

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


*Example calculation:*

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	08.03.2016	08.03.2017
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	25.04.2016	25.04.2018

## 6.2 Shielded fully anechoic chamber

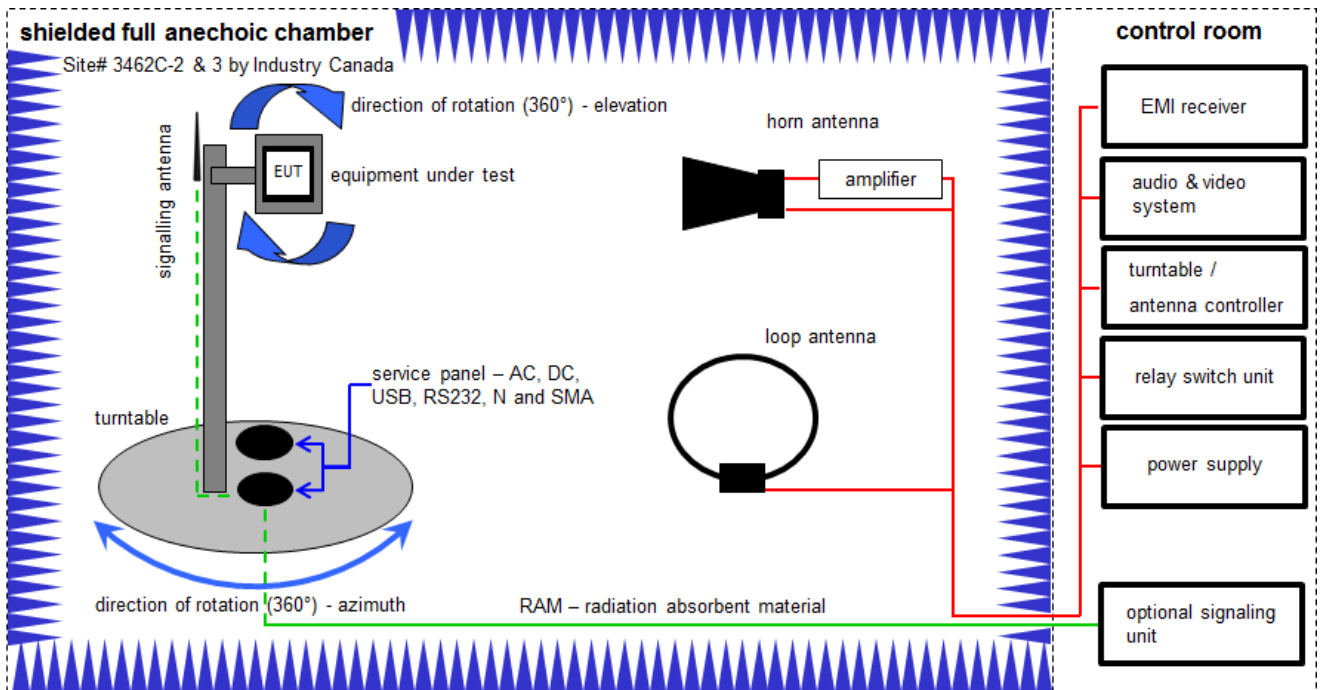

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 10 kHz to 30 MHz	6502	EMCO	2210	300001015	k	20.05.2015	20.05.2017
2	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9709-5290	300000212	k	13.08.2015	13.08.2017
3	A, B	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	02.02.2016	02.02.2017
4	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
5	B	Band Reject Filter	WRCG2400/2483- 2375/2505-50/10SS	Wainwright	26	300003792	ne	-/-	-/-
6	B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22050	300004482	ev	-/-	-/-
7	B	Broadband Amplifier 5-13 GHz	CBLU5135235	CERNEX	22011	300004492	ev	-/-	-/-
8	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
9	A, B	Messrechner und Monitor	Intel Core i3 3220/3,3 GHz, Prozessor	Agilent Technologies	2V2403033A54 21	300004591	ne	-/-	-/-
10	A, B	NEXIO EMV- Software	BAT EMC	EMCO	2V2403033A54 21	300004682	ne	-/-	-/-
11	A, B	Vollabsorberkammer	BAT EMC	TDK	2V2403033A54 21	300003726	ne	-/-	-/-



### 6.3 Radiated measurements > 18 GHz

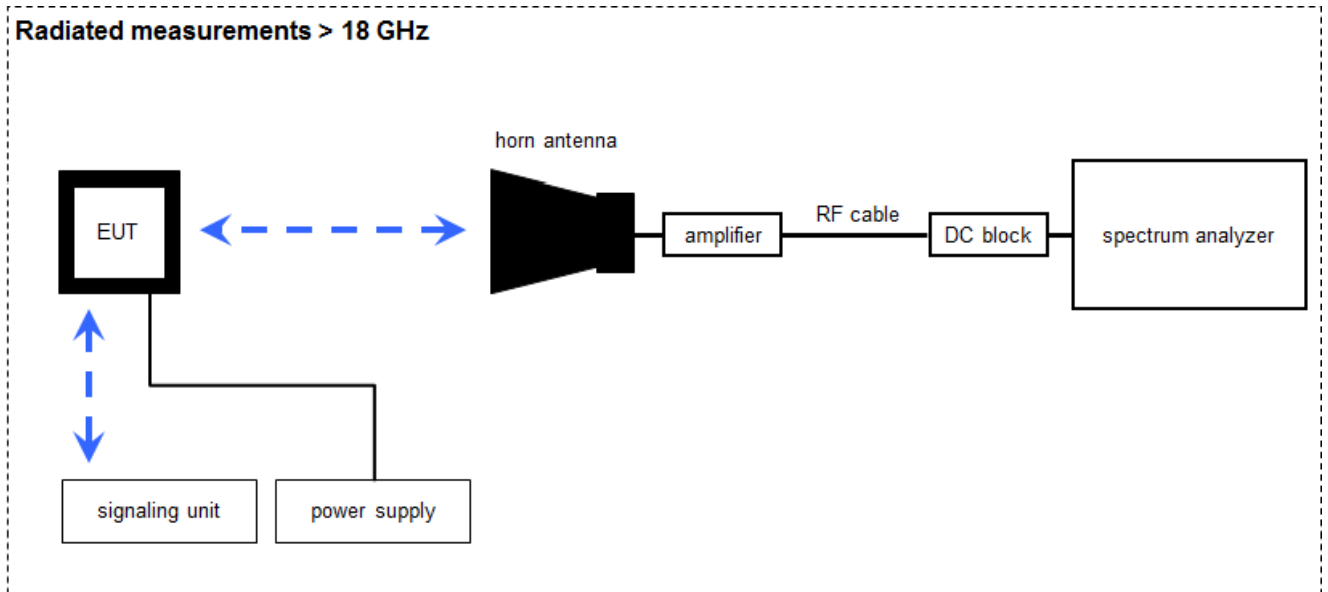

Measurement distance: horn antenna 50 cm

$$FS = U_R + CA + AF$$

(FS-field strength;  $U_R$ -voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
2	A	RF-Cable	ST18/SMAm/SMm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
3	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 127377	400001185	ev	-/-	-/-
5	A	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8402	300000486	k	10.09.2015	10.09.2017
6	A	Std. Gain Horn Antenna 26.5 to 40.0 GHz	V637	Narda	82-16	300000510	k	14.08.2015	14.08.2017

## 6.4 AC conducted

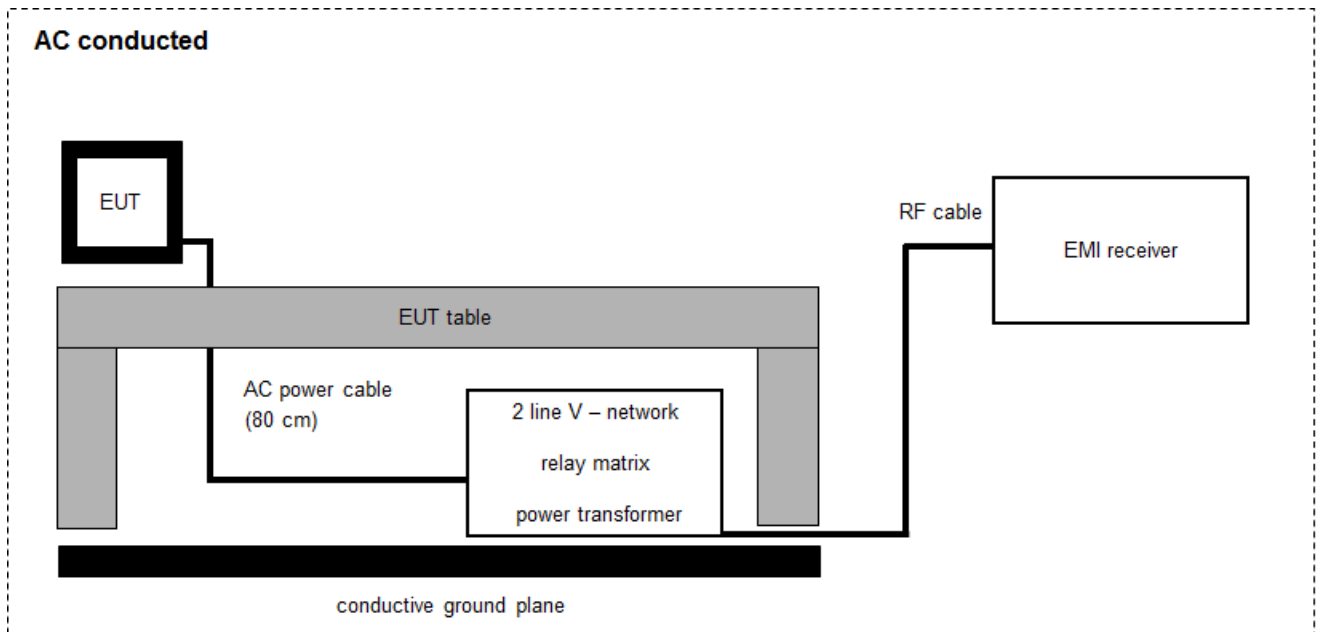

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:


$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	893045/004	300000584	k	02.02.2016	02.02.2017
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	k	27.11.2006	-/-
3	A	AC-Spannungsquelle variabel	MV2616-V	EM-Test	0397-12	300003259	k	11.12.2015	11.12.2017
4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	02.02.2016	02.02.2018
5	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	08.04.2008	-/-
6	A	Power Supply	NGSM 32/10	R&S	3939	400000192	vIK!	22.01.2015	22.01.2017
7	A	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	16.08.2016	16.08.2017

## 6.5 Conducted measurements

### Conducted measurements normal conditions

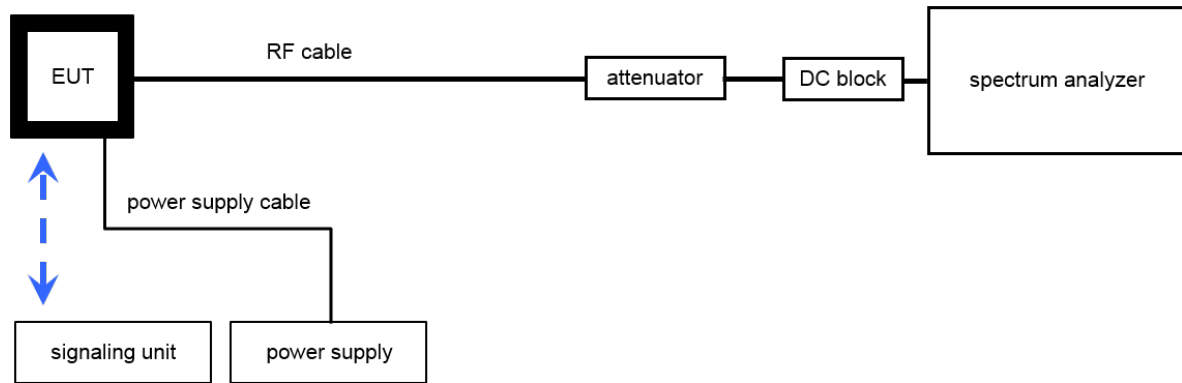

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	2V2403033A4523	300004590	ne	-/-	-/-
2	A	Power Sensor	NRP-Z81	R&S	100010	300003780	k	25.01.2016	25.01.2017
3	A	PowerSplitter/Combiner 150-6000MHz N-Type	ZB3PD-63-N+	Mini-Circuits	100010	400000451	ev	-/-	-/-
4	A	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 127377	400001185	ev	-/-	-/-
6	A	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	Batch no. 127377	400001186	ev	-/-	-/-
7	A	Switch / Control Unit	3488A	HP	2719A15013	300000151	ne	-/-	-/-
8	A	Hygro-Thermometer	-/-, 5-45C, 20-100rF	HP	-/-	400000108	ev	07.09.2015	07.09.2017
9	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2016	21.01.2017

## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

## 7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Power spectral density	± 1.5 dB
Spectrum bandwidth	± 100 kHz (depends on the used RBW)
Occupied bandwidth	± 100 kHz (depends on the used RBW)
Maximum output power	± 1.5 dB
Minimum emissions bandwidth	± 100 kHz (depends on the used RBW)
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB



## 9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 247, Issue 1	see table	2016-12-15	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	C	NC	NA	NP	Remark
-/-	Output power verification (conducted)	Nominal	Nominal	-/-				-/-
-/-	Antenna gain	Nominal	Nominal	-/-				-/-
U-NII Part 15	Duty cycle	Nominal	Nominal	-/-				-/-
§15.407(a) RSS - 247 (6.2.1) (1) RSS - 247 (6.2.2) (1) RSS - 247 (6.2.3) (1) RSS - 247 (6.2.4) (1)	Maximum output power (conducted & radiated)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a) RSS - 247 (6.2.1) (1) RSS - 247 (6.2.2) (1) RSS - 247 (6.2.3) (1) RSS - 247 (6.2.4) (1)	Power spectral density	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS - 247 (6.2.4)	Spectrum bandwidth 6dB bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a)	Spectrum bandwidth 26dB bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	Nominal	Nominal	-/-				-/-
§15.205 RSS - 247 (6.2.1) (2) RSS - 247 (6.2.2) (2) RSS - 247 (6.2.3) (2) RSS - 247 (6.2.4) (2)	Band edge compliance radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(b) RSS - 247 (6.2.1) (2) RSS - 247 (6.2.2) (2) RSS - 247 (6.2.3) (2) RSS - 247 (6.2.4) (2)	TX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407 RSS - 247 (6.3)	DFS	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

## 10 Additional comments

Reference documents: 3-3-TECH-587 930-01 Flir C3 antenna characterization A

Special test descriptions: None

Configuration descriptions: None

Test mode:  No test mode available.  
 lperf was used to ping another device with the largest support packet size

Special software is used.  
 EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

Operating mode 1 (single antenna)

- *Equipment with 1 antenna,*
- *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
- *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*

Operating mode 2 (multiple antennas, no beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*

Operating mode 3 (multiple antennas, with beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming. In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

## 11 Measurement results

### 11.1 Identify worst case data rate

#### Measurement:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

#### Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace mode:	Max hold
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

#### Results:

Modulation  Frequency	Modulation scheme / bandwidth					
	5180 MHz	5320 MHz	5500 MHz	5700 MHz	5745 MHz	5825 MHz
OFDM / a – mode	6 Mbit/s	-/-	-/-	-/-	-/-	-/-
OFDM / n HT20 – mode	MCS0	-/-	-/-	-/-	-/-	-/-

## 11.2 Gain

### Limits:

Antenna Gain
6 dBi / > 6 dBi output power and power density reduction required

### Results:

OFDM	Antenna gain
Band 5150 MHz to 5250 MHz Channel	UNII band 5150 MHz to 5250 MHz
Gain Declared by the customer!*	+3.1

\*see reference document - 3-3-TECH-587 930-01 Flir C3 antenna characterization A

### 11.3 Duty cycle

#### Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.

#### Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 MHz
Video bandwidth:	10 MHz
Span:	Zero
Trace mode:	Video trigger / view / single sweep
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8


#### Results:

##### Duty cycle and correction factor:


OFDM / a – mode:                    98.8 % duty cycle            =>    0.05 dB  
 OFDM / n HT20 – mode:            98.5 % duty cycle            =>    0.07 dB

**Plots: Duty cycle**

**Plot 1:** duty cycle of the transmitter – OFDM / a – mode

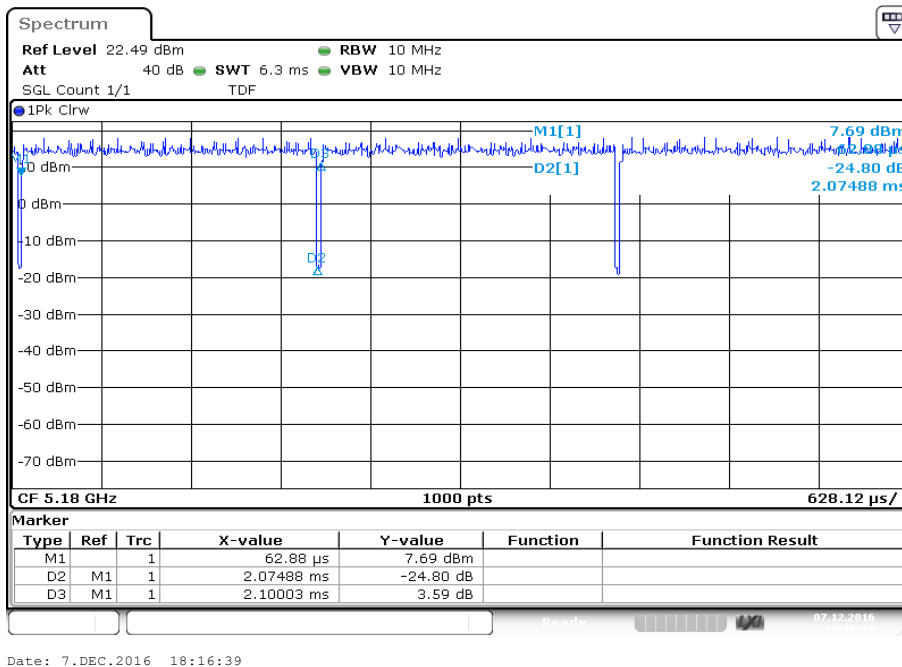

**Plot 2:** duty cycle of the transmitter – OFDM / n HT20 – mode

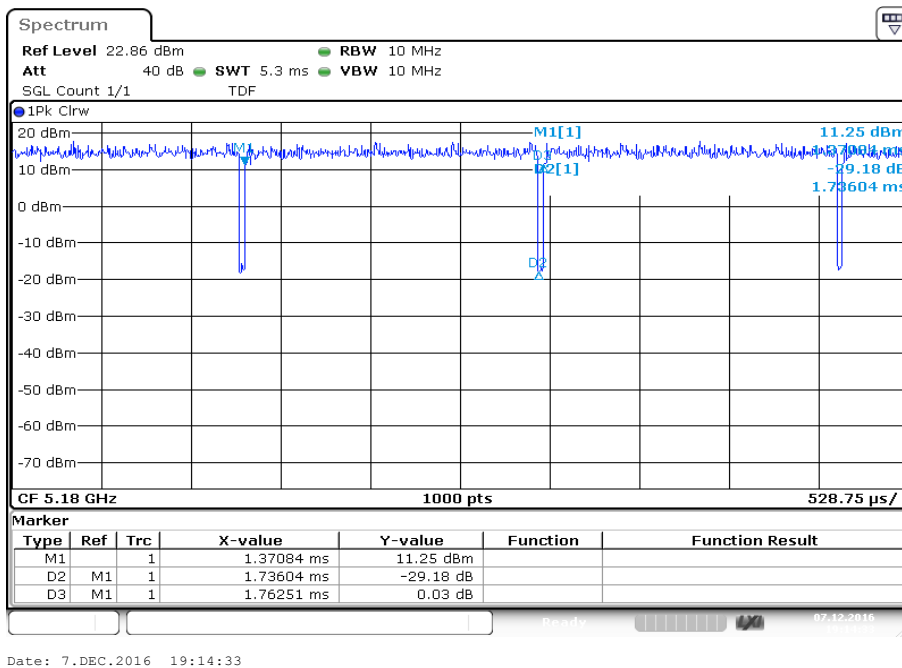

## 11.4 Maximum output power

### 11.4.1 Maximum output power conducted – for FCC requirements

**Description:**

Measurement of the maximum output power conducted

**Measurement:**

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
Detector:	RMS
Sweep time:	$\geq 10 * (\text{swp points}) * (\text{total on/off time})$
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	> EBW
Trace mode:	Max hold
Analyzer function	Band power / channel power Interval > 26 dB EBW
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

**Limits:**

Radiated output power	Conducted output power for mobile equipment
Conducted power + 6 dBi antenna gain	250mW 5.150-5.250 GHz

**Result:** OFDM / a – mode

OFDM / a – mode  Channel	Maximum output power conducted [dBm]			
	5180 MHz	5220 MHz	5240 MHz	-/-
	11.41	11.48	11.53	-/-


**Result:** OFDM / n HT20 – mode

OFDM / n HT20 – mode  Channel	Maximum output power conducted [dBm]			
	5180 MHz	5220 MHz	5240 MHz	-/-
	11.57	13.75	14.19	-/-




**Plots:** OFDM / a – mode


**Plot 1:** 5180 MHz

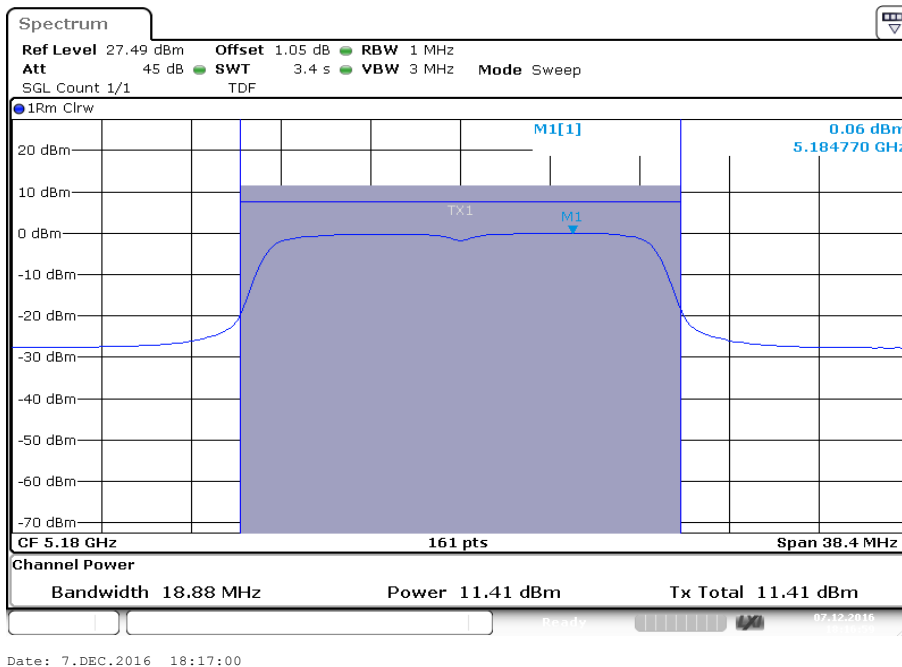

**Plot 2:** 5220 MHz

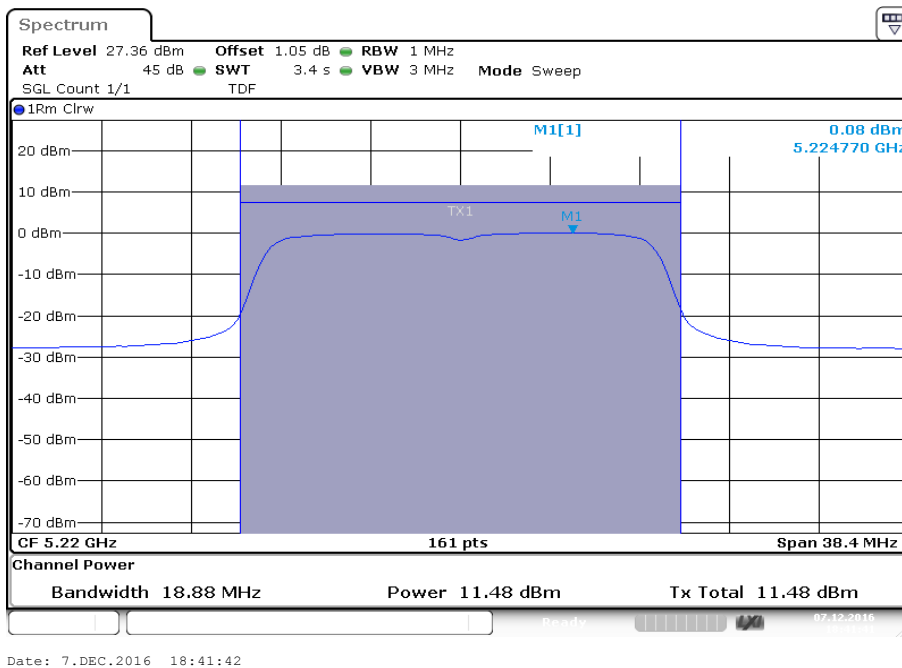


Plot 3: 5240 MHz

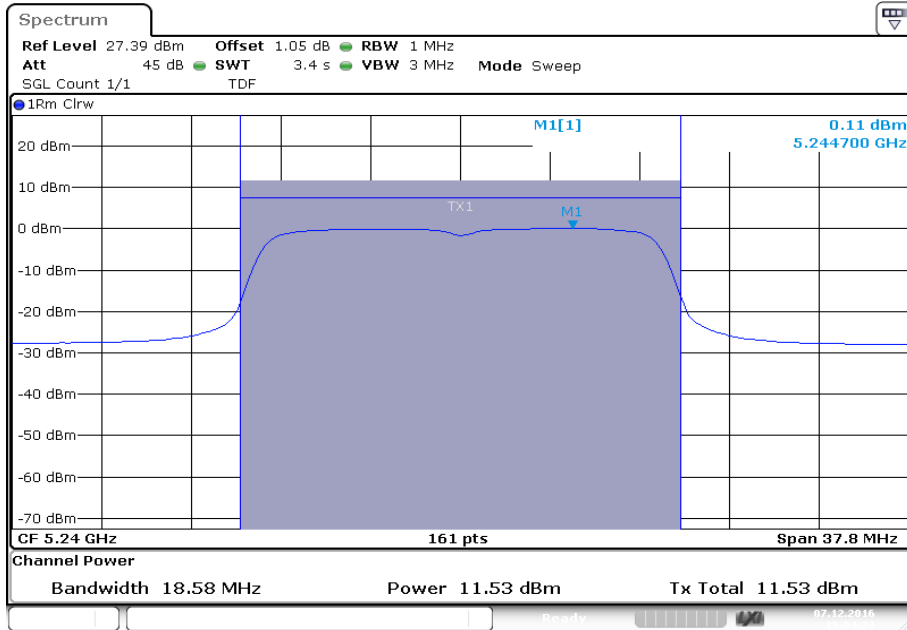


Date: 7. DEC. 2016 19:04:23

**Plots:** OFDM / n HT20 – mode


**Plot 1:** 5180 MHz

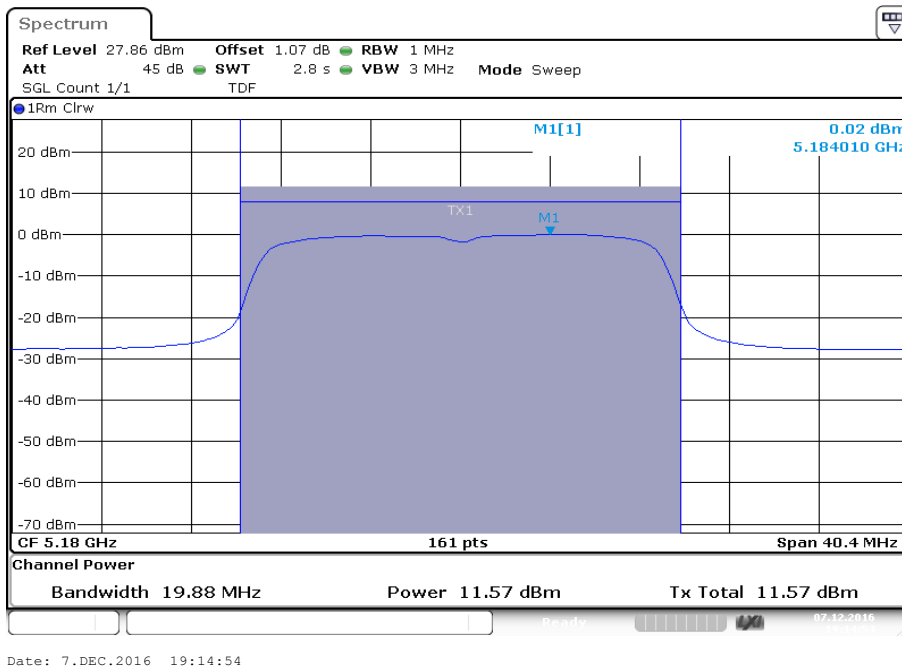

**Plot 2:** 5220 MHz

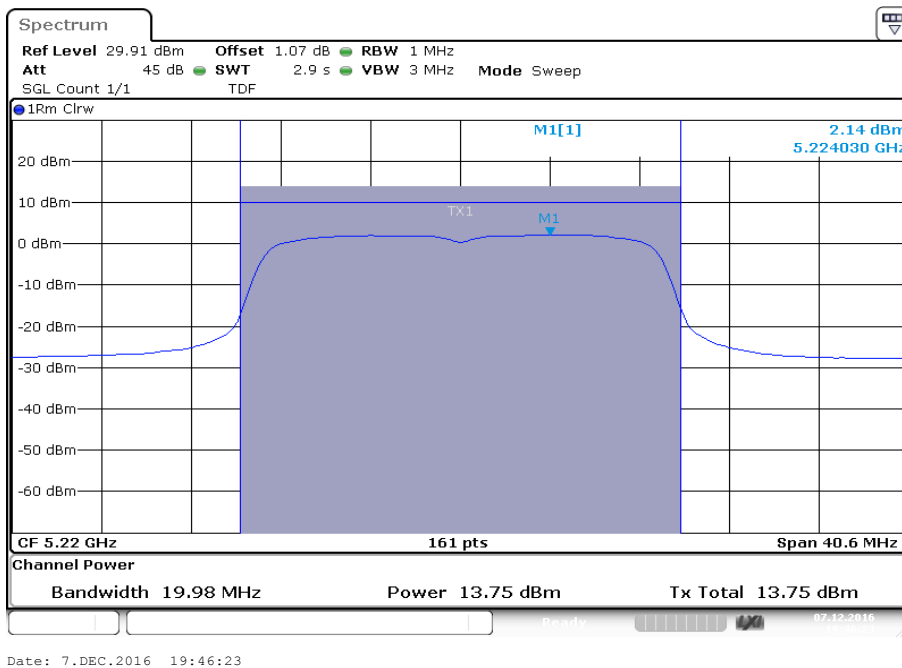

Plot 3: 5240 MHz

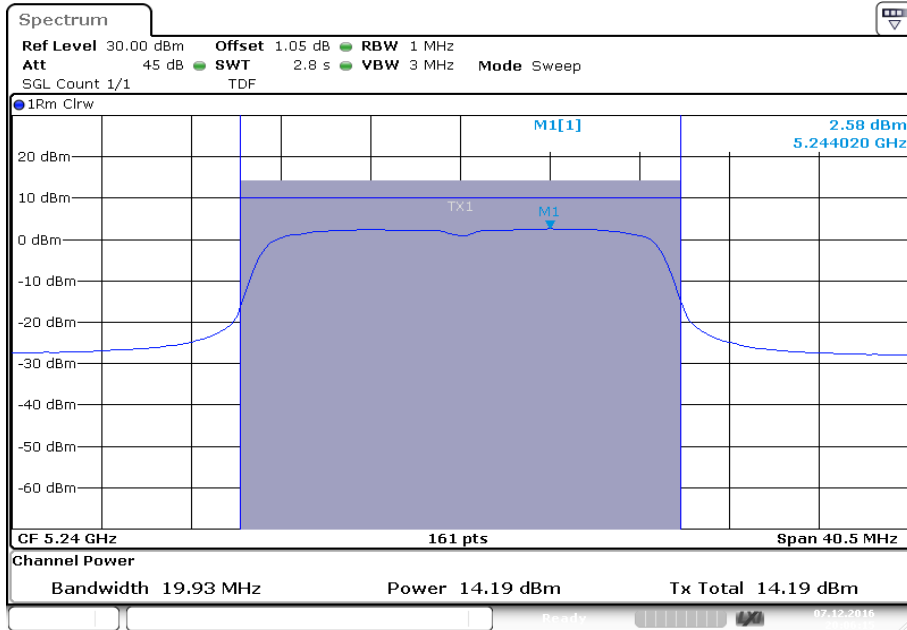

Date: 7.DEC.2016 20:06:15

**11.4.2 Maximum output power – for IC requirements**

**Description:**

Measurement of the maximum output power conducted + radiated

**Measurement:**

Measurement parameter	
Detector:	RMS
Sweep time:	$\geq 10 * (\text{swp points}) * (\text{total on/off time})$
Resolution bandwidth:	1 MHz
Video bandwidth:	$\geq 3$ MHz
Span:	> EBW
Trace mode:	Max hold
Analyzer function	Band power / channel power Interval > 99% OBW
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

**Limits:**

Radiated output power	Conducted output power for mobile equipment
The lesser one of 200 mW or 10 dBm + 10 log Bandwidth 5.150-5.250 GHz 1 W or 17 dBm + 10 log Bandwidth 5.250-5.350 GHz 1 W or 17 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) Conducted power + 6dBi antenna gain 5.725-5.825 GHz	The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) 1W 5.725-5.825 GHz

**Result:** OFDM / a – mode


OFDM / a – mode  Channel	Maximum output power [dBm]			
	5180 MHz	5220 MHz	5240 MHz	-/-
Including duty cycle correction factor	14.45	14.54	14.58	-/-

**Result:** OFDM / n HT20 – mode


OFDM / n HT20 – mode  Channel	Maximum output power [dBm]			
	5180 MHz	5220 MHz	5240 MHz	-/-
Including duty cycle correction factor	14.61	16.81	17.27	-/-

**Plots:** OFDM / a – mode


**Plot 1:** 5180 MHz

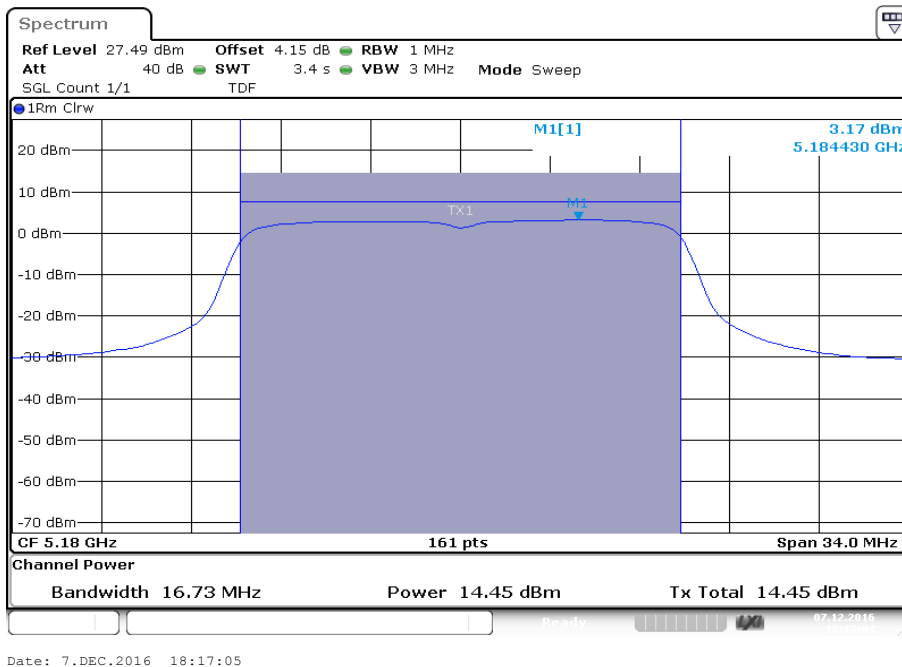

**Plot 2:** 5220 MHz

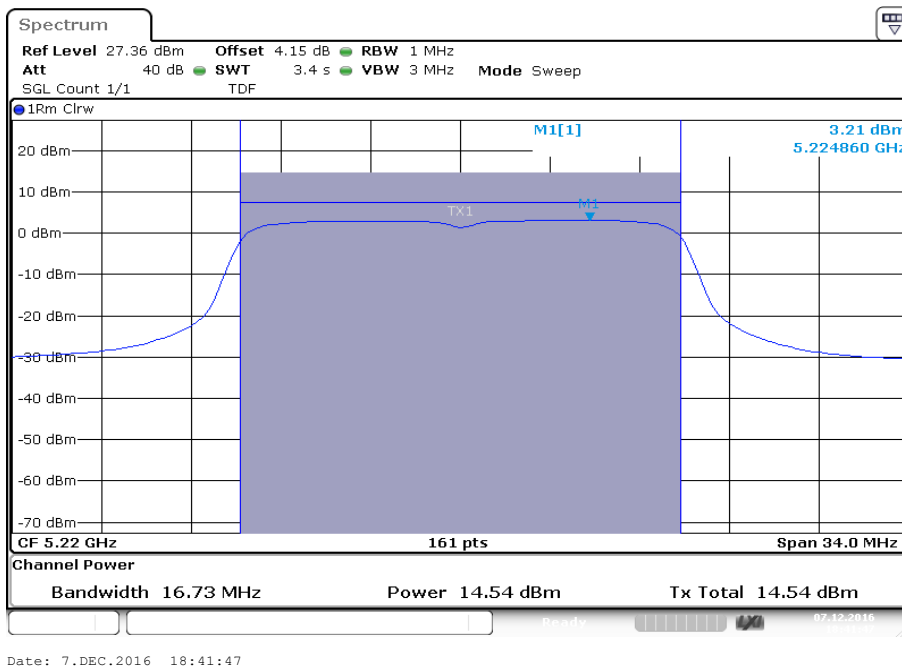

Plot 3: 5240 MHz

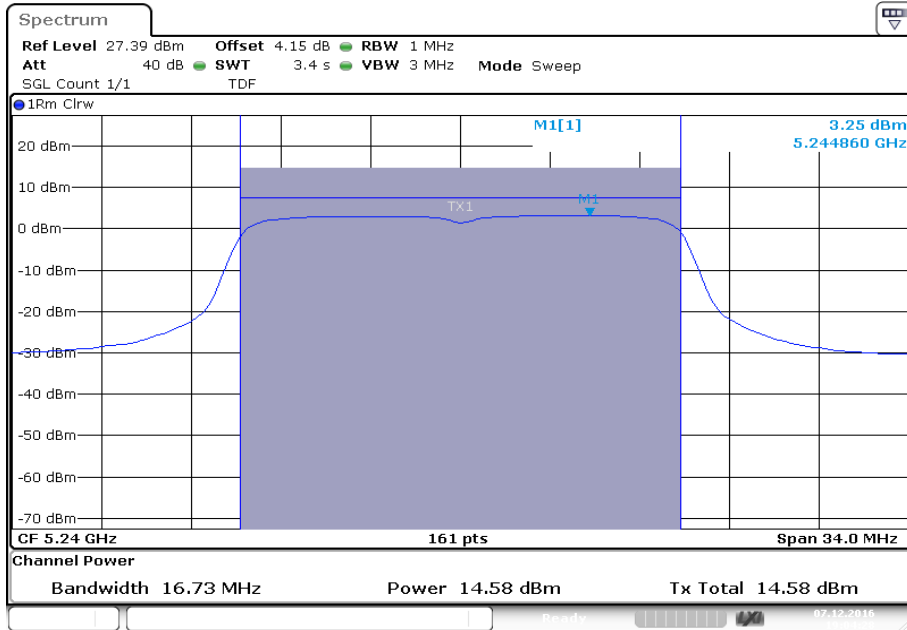


Date: 7. DEC. 2016 19:04:28




**Plots:** OFDM / n HT20 – mode


**Plot 1:** 5180 MHz

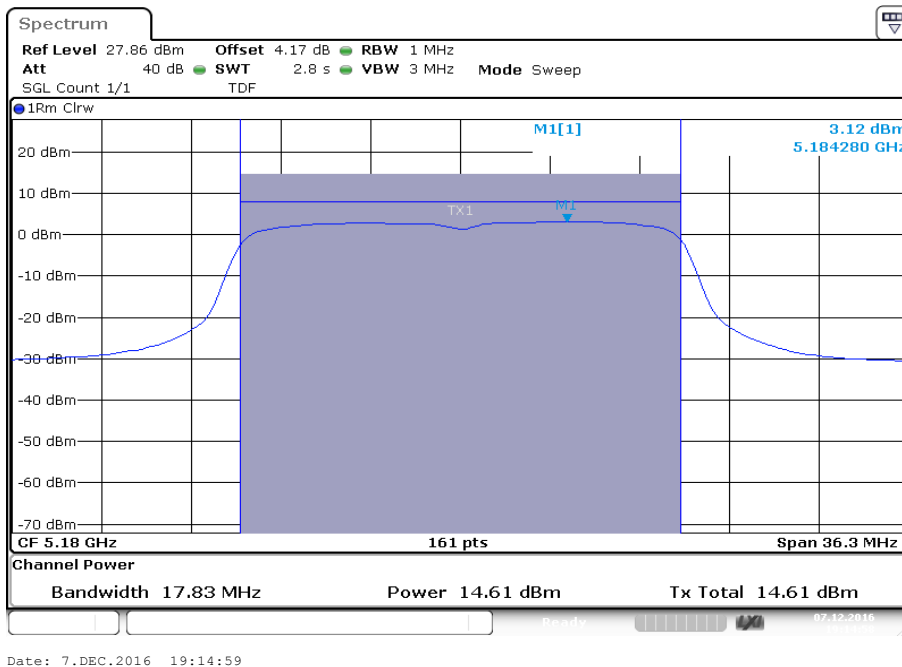

**Plot 2:** 5220 MHz

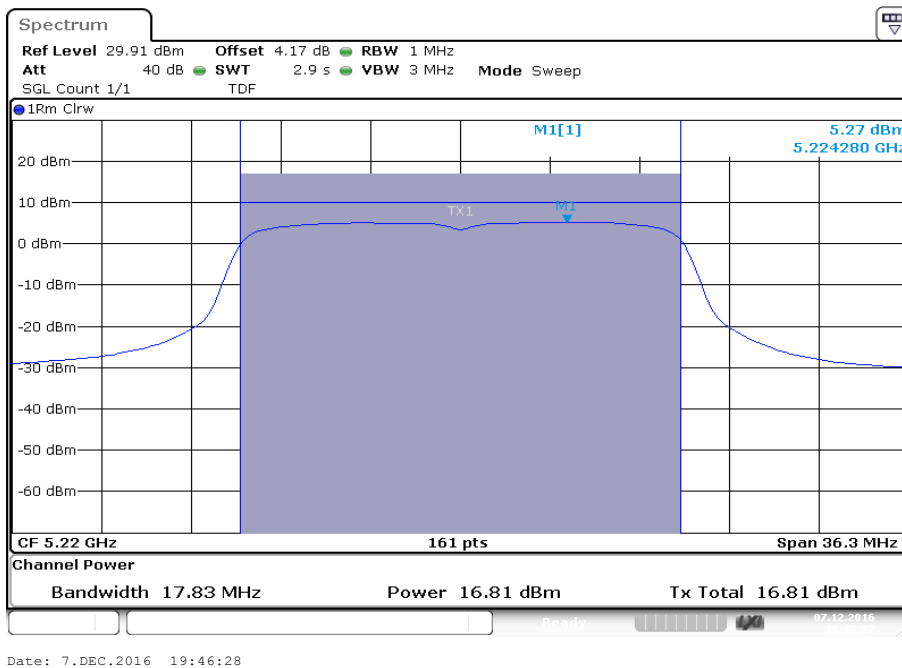

Plot 3: 5240 MHz

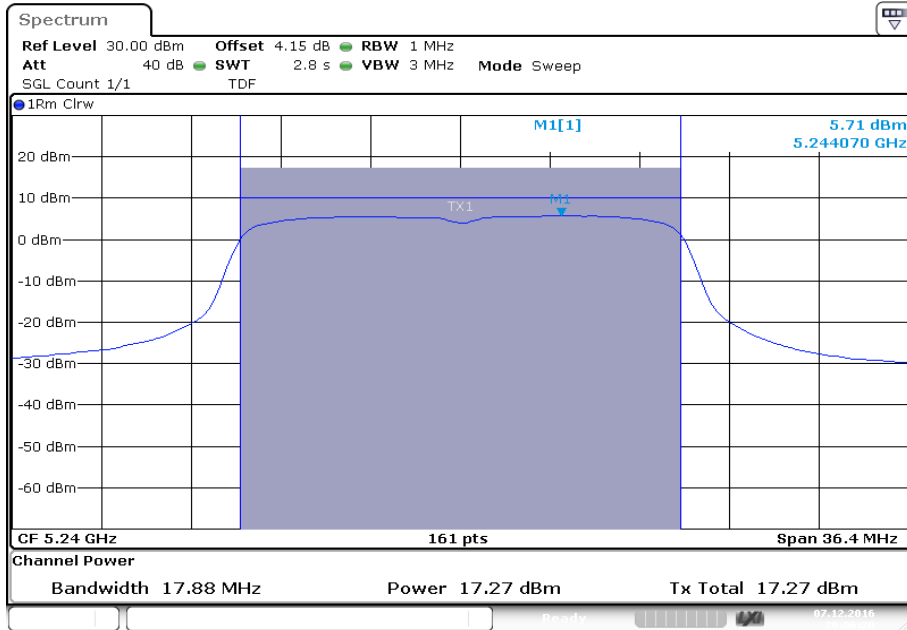

Date: 7, DEC, 2016 20:06:20

## 11.5 Power spectral density

### 11.5.1 Power spectral density – for FCC requirements

**Description:**

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

**Measurement:**

Measurement parameter	
According to: KDB789033 D02, F.	
Detector:	RMS
Sweep time:	$\geq 10 * (\text{swp points}) * (\text{total on/off time})$
Resolution bandwidth:	1 MHz (500 kHz for 5.8 GHz band)
Video bandwidth:	$\geq 3xRBW$
Span:	> EBW
Trace mode:	Max hold
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

**Limits:**

Power Spectral Density
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5150 – 5250 MHz)

**Result:** OFDM / a – mode

OFDM / a – mode Channel	Power spectral density [dBm/MHz]			
	5180 MHz	5200 MHz	5240 MHz	-/-
	0.06	0.08	0.11	-/-

**Result:** OFDM / n HT20 – mode

OFDM / n HT20 – mode Channel	Power spectral density [dBm/MHz]			
	5180 MHz	5200 MHz	5240 MHz	-/-
	0.02	2.14	2.58	-/-

### 11.5.2 Power spectral density – for IC requirements

**Description:**

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

**Measurement:**

Measurement parameter	
Detector:	RMS
Sweep time:	$\geq 10 * (\text{swp points}) * (\text{total on/off time})$
Resolution bandwidth:	1 MHz (500 kHz for 5.8 GHz band)
Video bandwidth:	$\geq 3xRBW$
Span:	$> EBW$
Trace mode:	Max hold
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

**Limits:**

Power Spectral Density
power spectral density e.i.r.p. $\leq 10$ dBm in any 1 MHz band (band 5150 – 5250 MHz)

**Result:** OFDM / a – mode

OFDM / a – mode Channel	Power spectral density [dBm/MHz]			
	5180 MHz	5220 MHz	5240 MHz	-/-
	3.17	3.21	3.25	-/-

**Result:** OFDM / n HT20 – mode

OFDM / n HT20 – mode Channel	Power spectral density [dBm/MHz]			
	5180 MHz	5220 MHz	5240 MHz	-/-
	3.12	5.27	5.71	-/-

## 11.6 Spectrum bandwidth – 26 dB bandwidth

### Description:

Measurement of the 26 dB bandwidth of the modulated signal.

### Measurement:

Measurement parameter	
According to: KDB789033 D02, C.1.	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1% EBW
Video bandwidth:	≥ RBW
Span:	> complete signal!
Trace-Mode:	Max hold
Used test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

### Limits:

Spectrum Bandwidth – 26 dB Bandwidth
-/-


### Result:

OFDM / a – mode	26 dB bandwidth [MHz]			
	5180 MHz	5240 MHz	5260 MHz	-/-
Channel	21.68	21.88	21.78	-/-

OFDM / n HT20 – mode	26 dB bandwidth [MHz]			
	5180 MHz	5240 MHz	5260 MHz	-/-
Channel	22.53	22.68	23.88	-/-


**Plots:** OFDM / a – mode

**Plot 1:** 5180 MHz

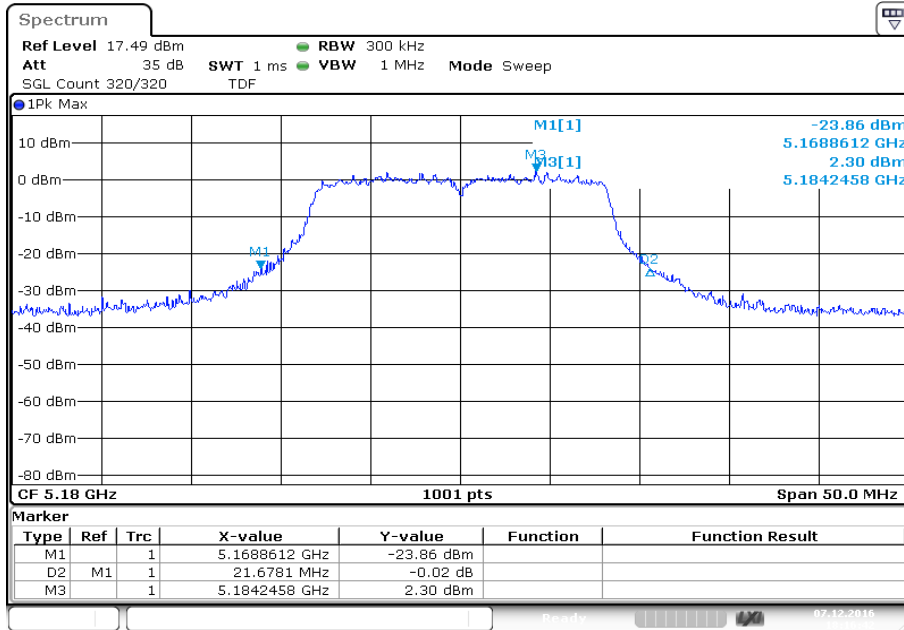

Date: 7.DEC.2016 18:16:42


**Plot 2:** 5220 MHz

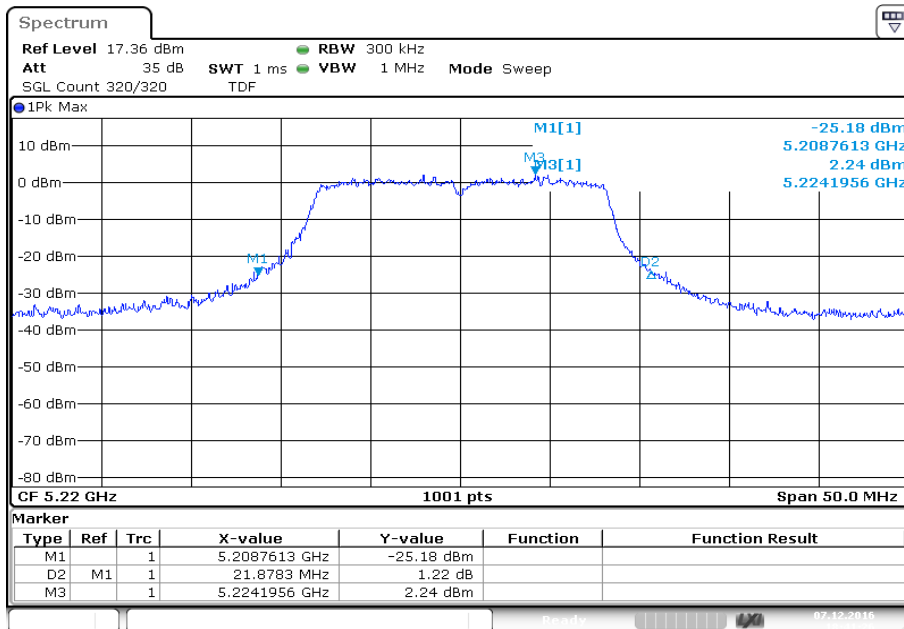

Date: 7.DEC.2016 18:41:27




Plot 3: 5240 MHz

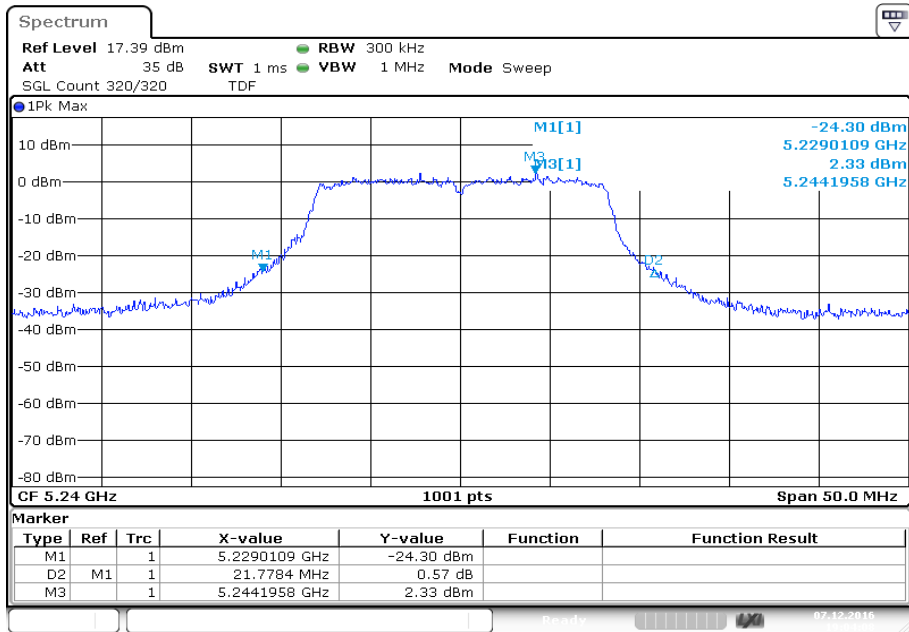


Date: 7. DEC. 2016 19:04:08

**Plots:** OFDM / n HT20 – mode


**Plot 1:** 5180 MHz

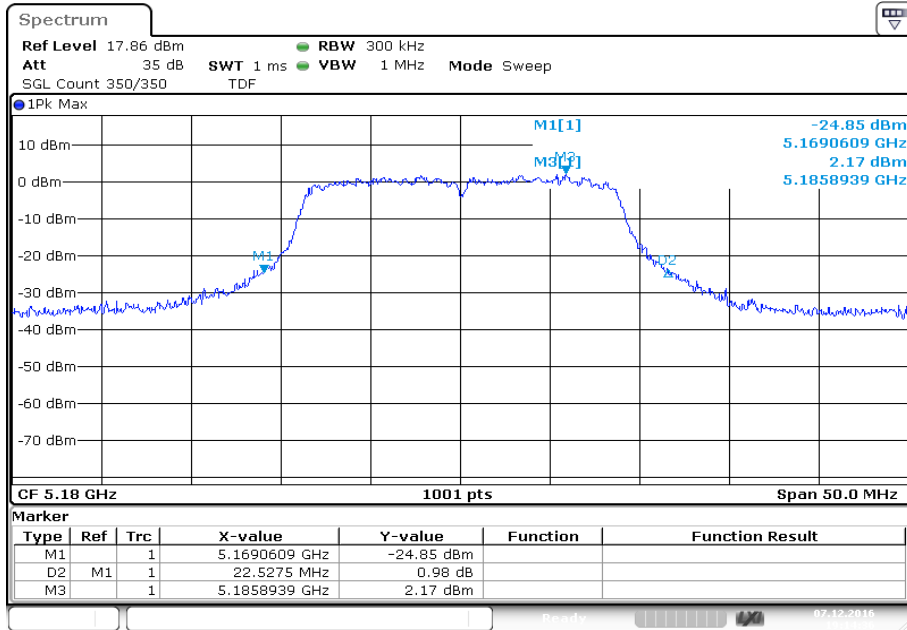

**Plot 2:** 5220 MHz

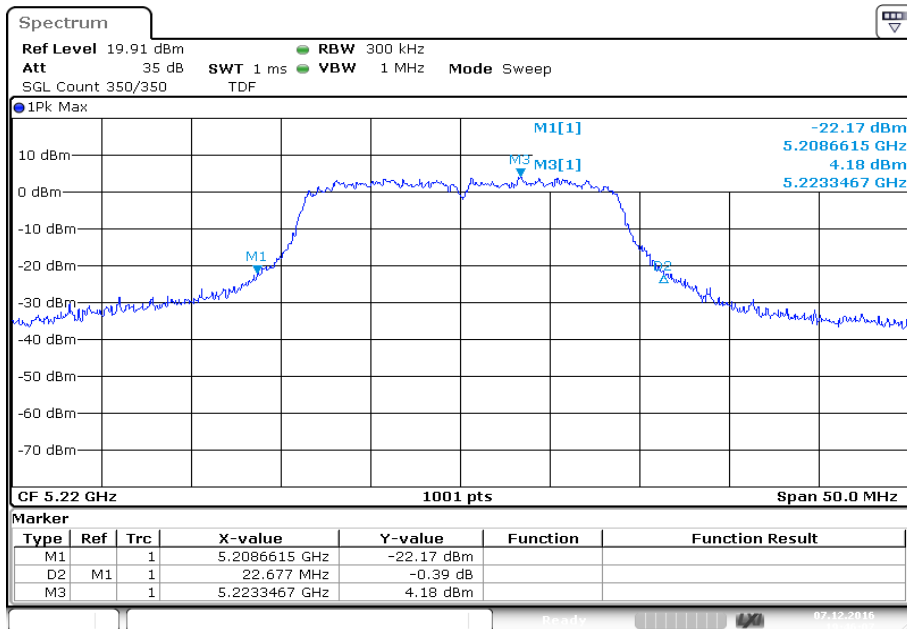

Plot 3: 5240 MHz

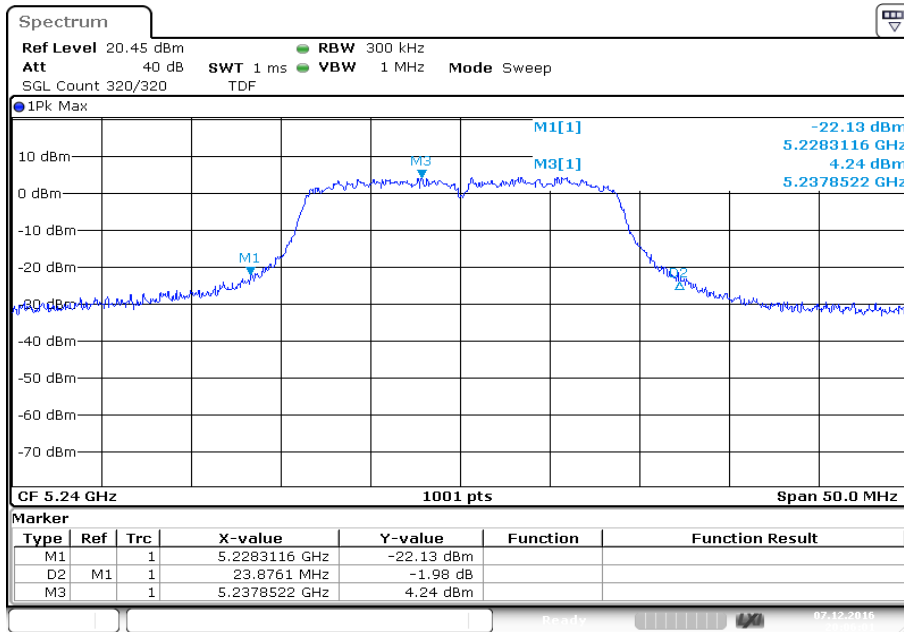

Date: 7. DEC. 2016 20:06:01

### 11.7 Occupied bandwidth – 99% emission bandwidth

**Description:**

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

**Measurement:**

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	300 kHz / 500 kHz
Video bandwidth:	1 MHz / 3 MHz
Span:	50 MHz / 100 MHz
Measurement procedure:	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace – mode:	Max hold (allow trace to stabilize)
Test setup:	See chapter 6.5 A
Measurement uncertainty:	See chapter 8

**Usage:**

-/-	IC
Occupied Bandwidth – 99% emission bandwidth	
OBW is necessary for Emission Designator	

**Result:**


OFDM / a – mode  Channel	99% bandwidth [kHz]			
	5180 MHz	5240 MHz	5260 MHz	-/-
	16733	16733	16733	-/-

**Result:**


OFDM / n HT20 – mode  Channel	99% bandwidth [kHz]			
	5180 MHz	5240 MHz	5260 MHz	-/-
	17832	17832	17882	-/-

**Plots:** OFDM / a – mode


**Plot 1:** 5180 MHz

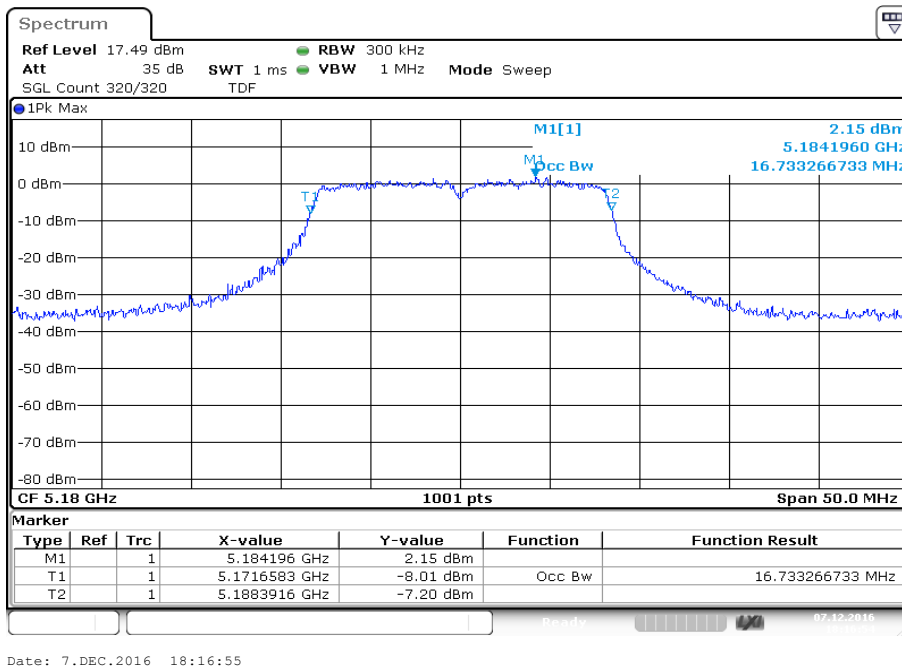

**Plot 2:** 5220 MHz

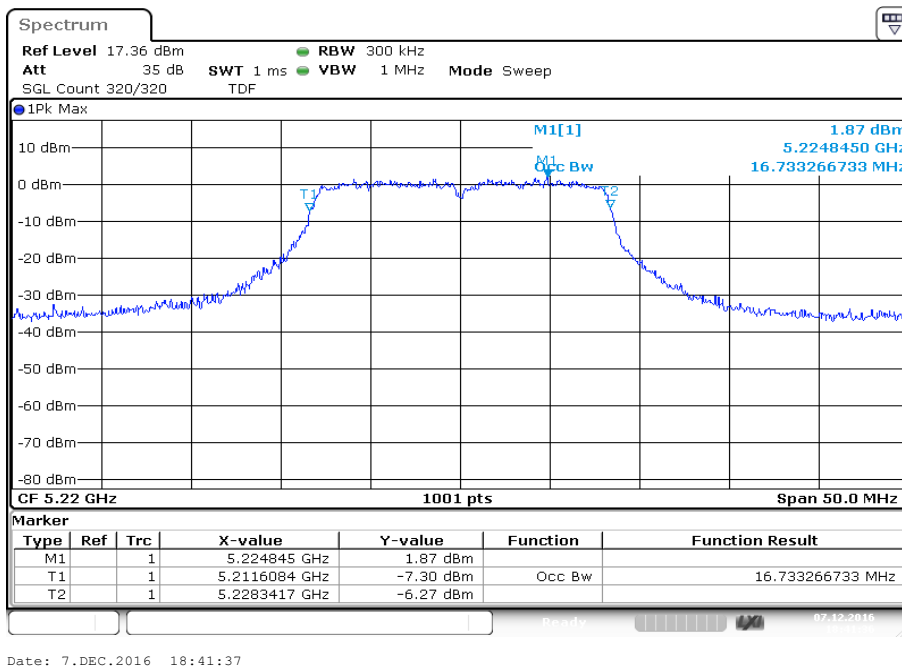


Plot 3: 5240 MHz

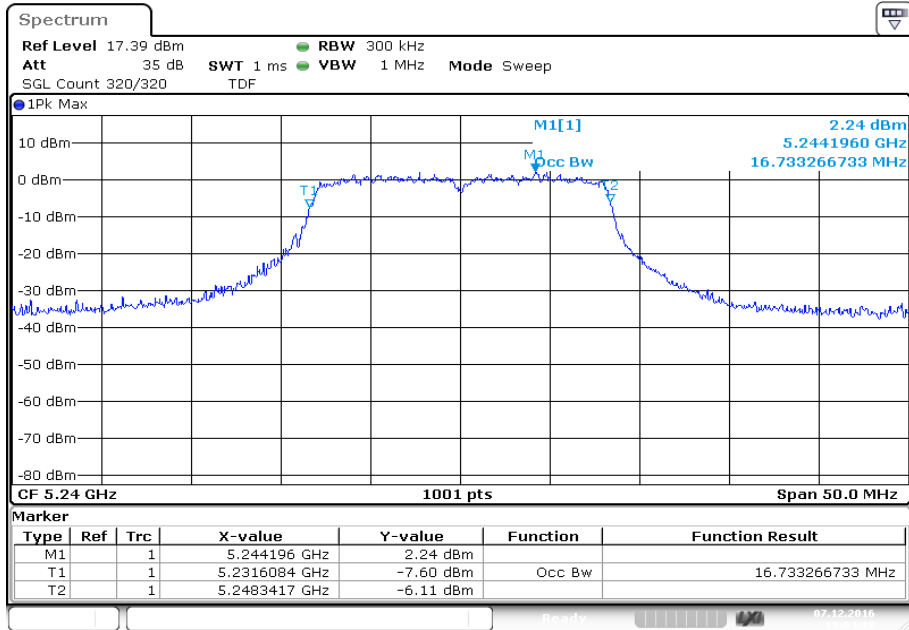


Date: 7. DEC. 2016 19:04:18

**Plots:** OFDM / n HT20 – mode

**Plot 1:** 5180 MHz

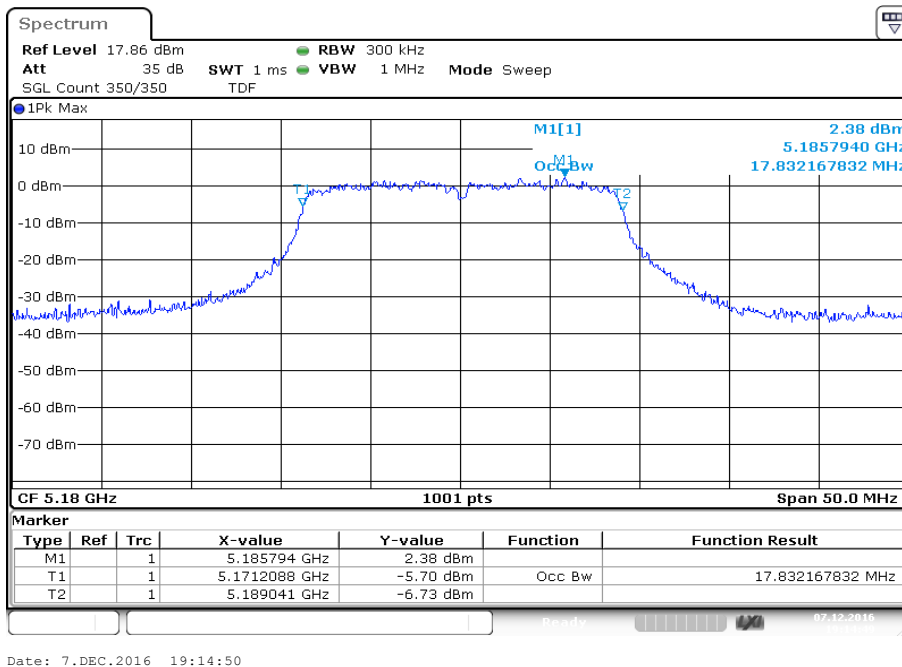


**Plot 2:** 5220 MHz

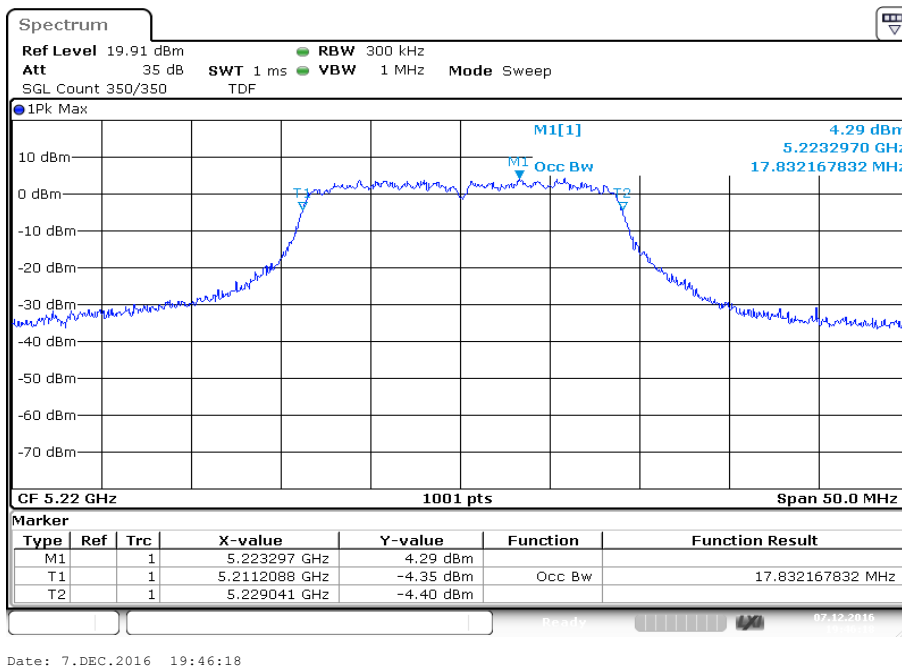



Plot 3: 5240 MHz

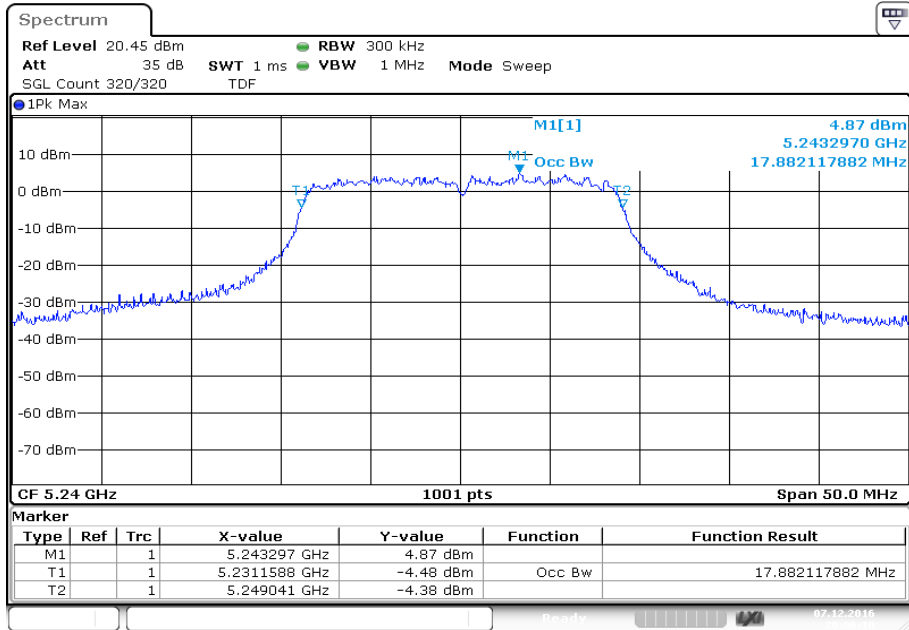

Date: 7. DEC. 2016 20:06:11

## 11.8 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

### Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	≥ 3 x RBW
Span:	See plots!
Trace – mode:	Max Hold
Test setup:	See sub clause 6.2 B
Measurement uncertainty:	See sub clause 8

### Limits:


Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
74 dBµV/m (peak) 54 dBµV/m (average)

### Result:


Scenario	Band Edge Compliance Radiated [dBµV/m]
band edge	62.1 (peak) 47.0 (average)

**Plots:**

**Plot 1:** lower band edge, vertical & horizontal polarization – OFDM 20 MHz, 5180 MHz (a-mode)

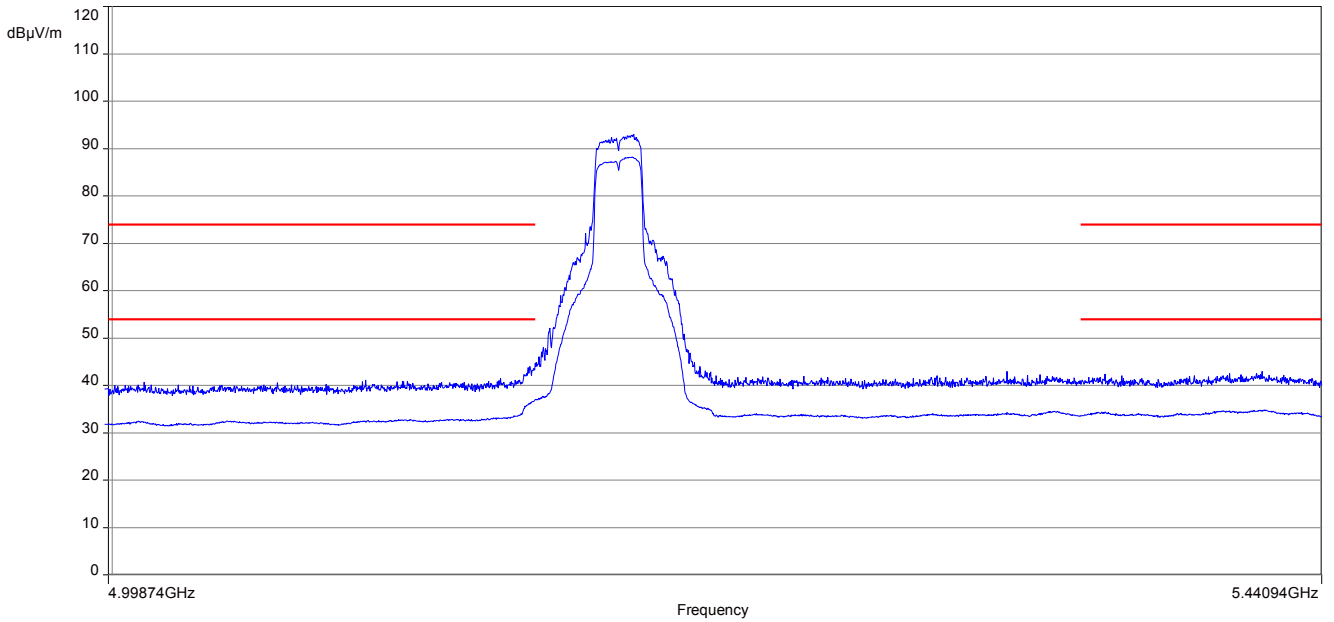

**Plot 2:** lower band edge, vertical & horizontal polarization – OFDM 20 MHz, 5180 MHz (n HT20-mode)

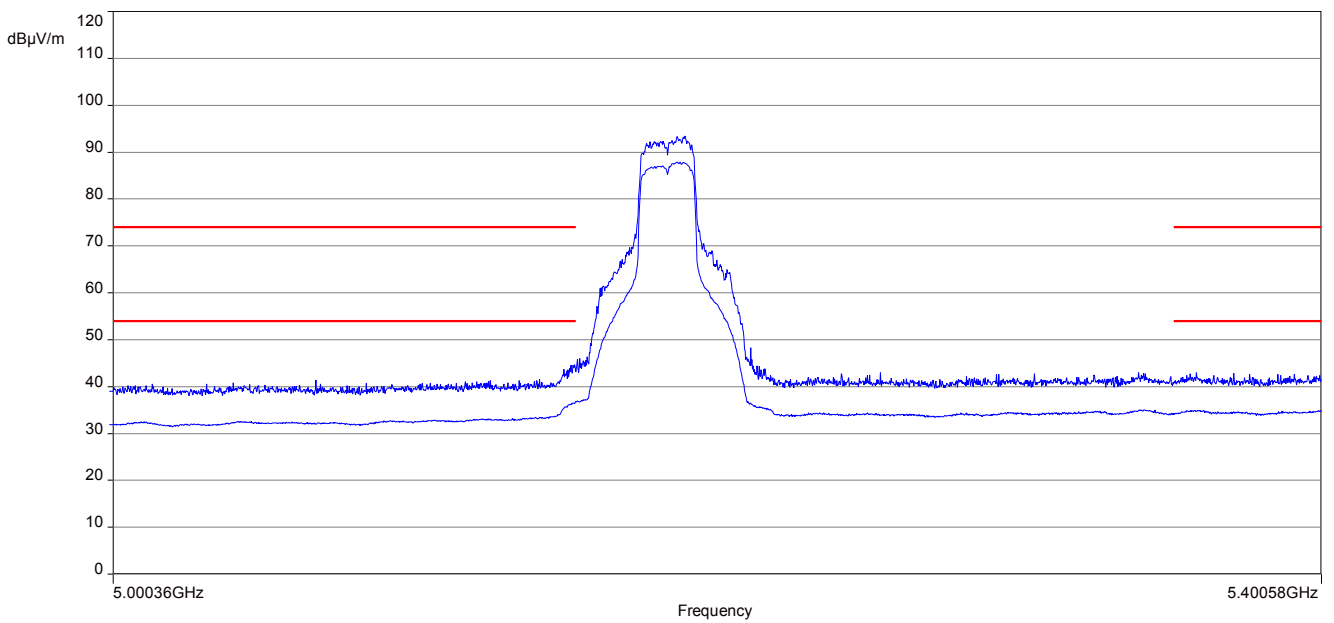

## 11.9 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

### Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak) Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: ≥ 3 MHz / 1 MHz
Span:	30 MHz to 40 GHz
Trace – mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 6.1 A See sub clause 6.2 B See sub clause 6.3 A
Measurement uncertainty:	See sub clause 8

### Limits:


TX Spurious Emissions Radiated		
§15.209		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

**Results:** OFDM (20 MHz bandwidth)

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
Lowest channel 5180 MHz			Middle channel 5220 MHz			Highest channel 5240 MHz		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
For emissions below 1 GHz, please look at the table below the plot.			For emissions below 1 GHz, please look at the table below the plot.			For emissions below 1 GHz, please look at the table below the plot.		
All detected peak emissions between 1 GHz and 18 GHz are below the average limit.			All detected peak emissions between 1 GHz and 18 GHz are below the average limit.			All detected peak emissions between 1 GHz and 18 GHz are below the average limit.		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

**Plots:** OFDM / 20 MHz bandwidth


**Plot 1:** 30 MHz to 1 GHz, 5180 MHz, vertical & horizontal polarization

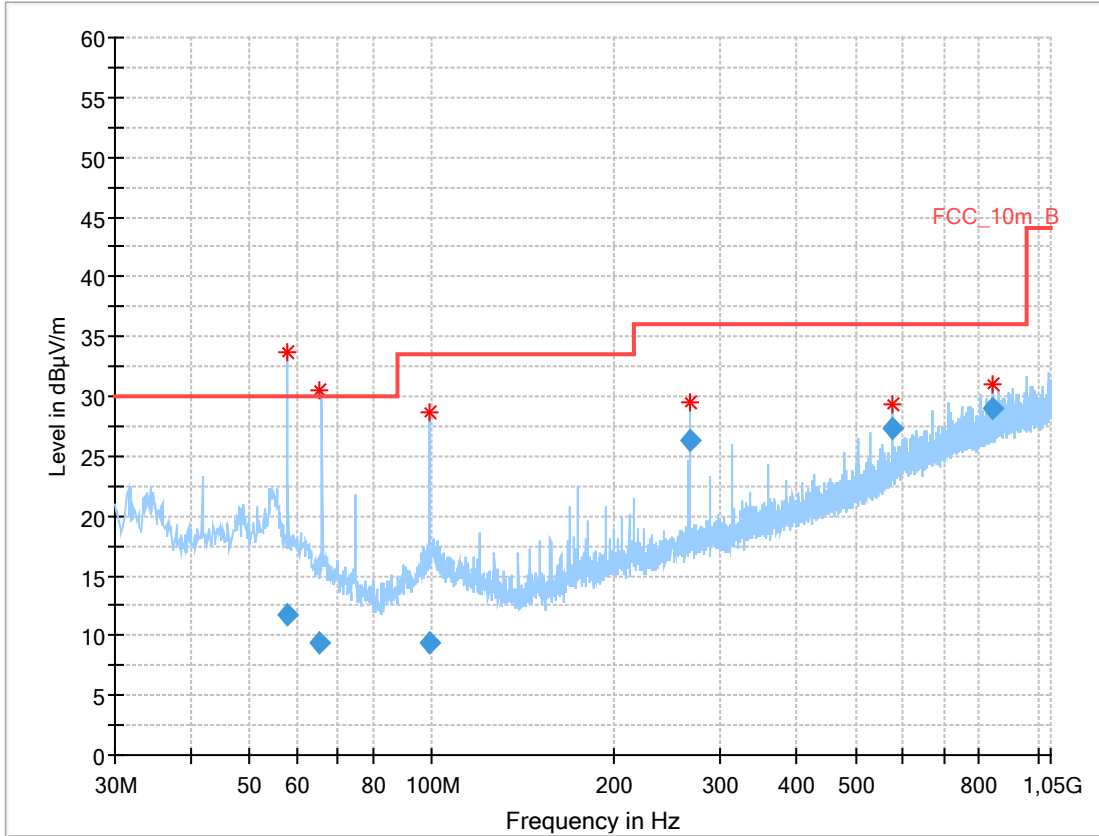


**Final\_Result:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
57.589800	11.68	30.00	18.32	1000.0	120.000	173.0	V	31.0	12.4
65.435850	9.46	30.00	20.54	1000.0	120.000	200.0	V	130.0	10.7
99.453300	9.31	33.50	24.19	1000.0	120.000	103.0	V	141.0	12.0
265.980750	26.32	36.00	9.68	1000.0	120.000	349.0	H	206.0	13.8
576.019650	27.26	36.00	8.74	1000.0	120.000	273.0	V	282.0	20.1
840.000750	29.00	36.00	7.00	1000.0	120.000	100.0	H	187.0	23.4


**Plot 2:** 1 GHz to 18 GHz, 5180 MHz, vertical & horizontal polarization

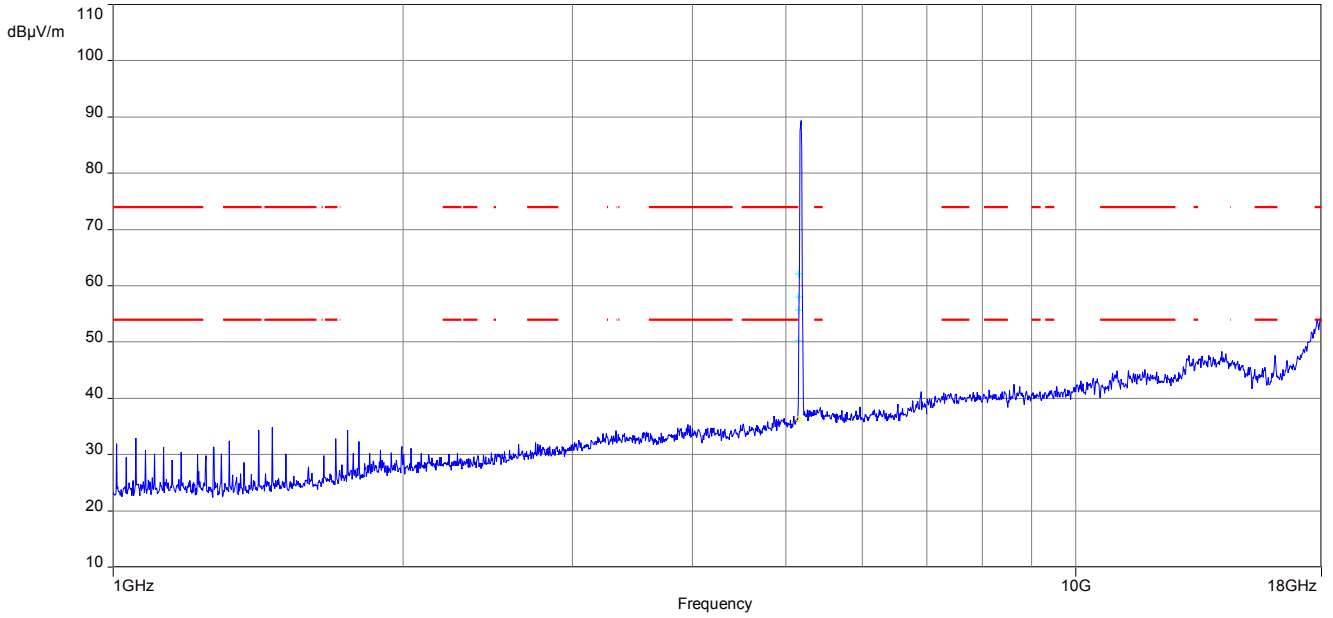


**Plot 3:** 17.7 GHz to 18 GHz, 5180 MHz, vertical & horizontal polarization

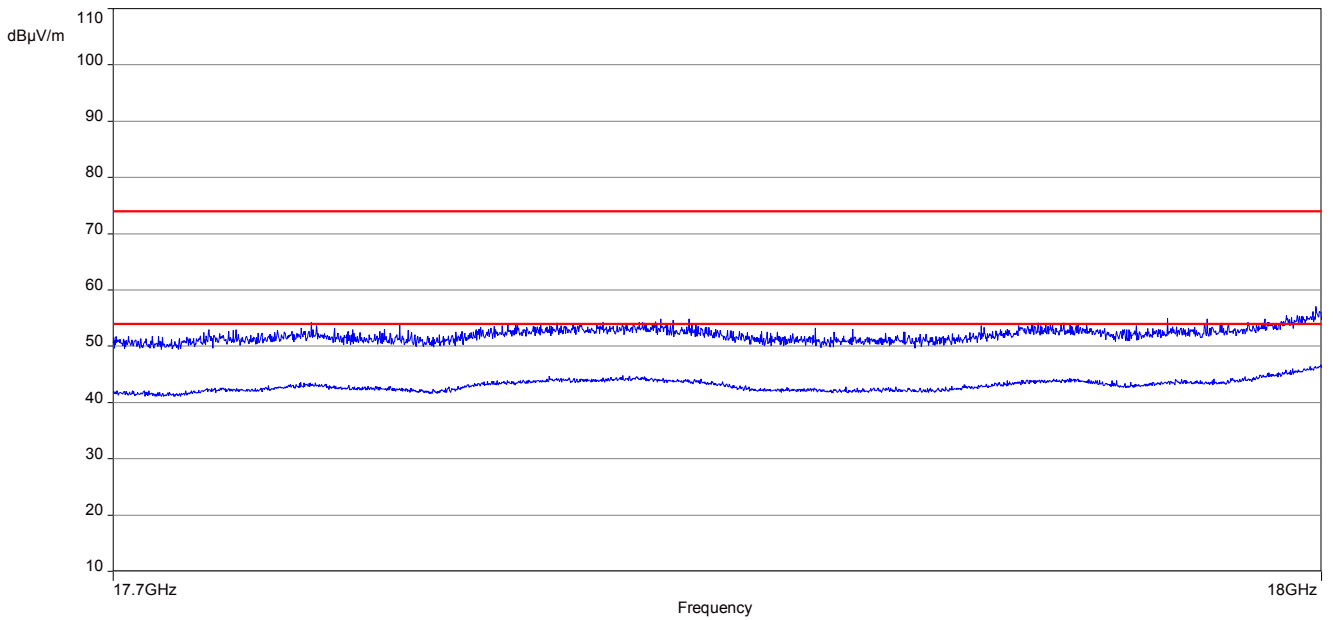

**Plot 4:** 18 GHz to 26 GHz, 5180 MHz, vertical & horizontal polarization

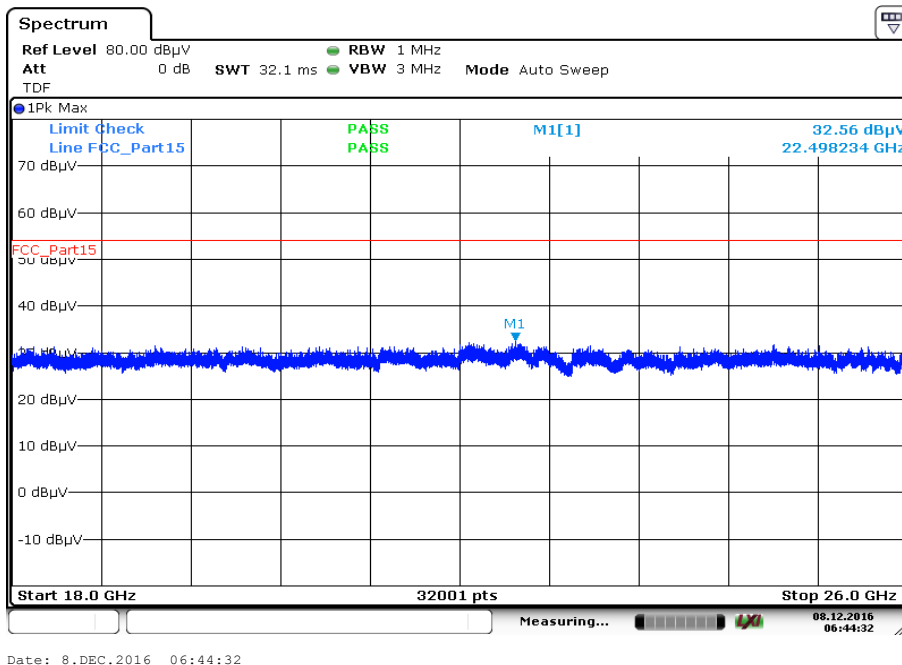


**Plot 5:** 26 GHz to 40 GHz, 5180 MHz, vertical & horizontal polarization

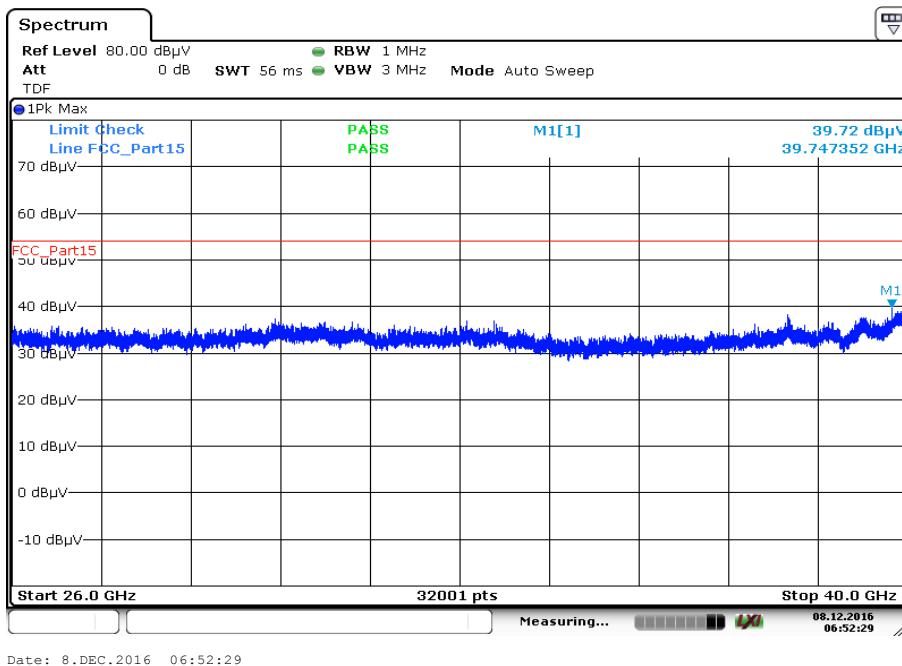




**Plot 6:** 30 MHz to 1 GHz, 5220 MHz, vertical & horizontal polarization

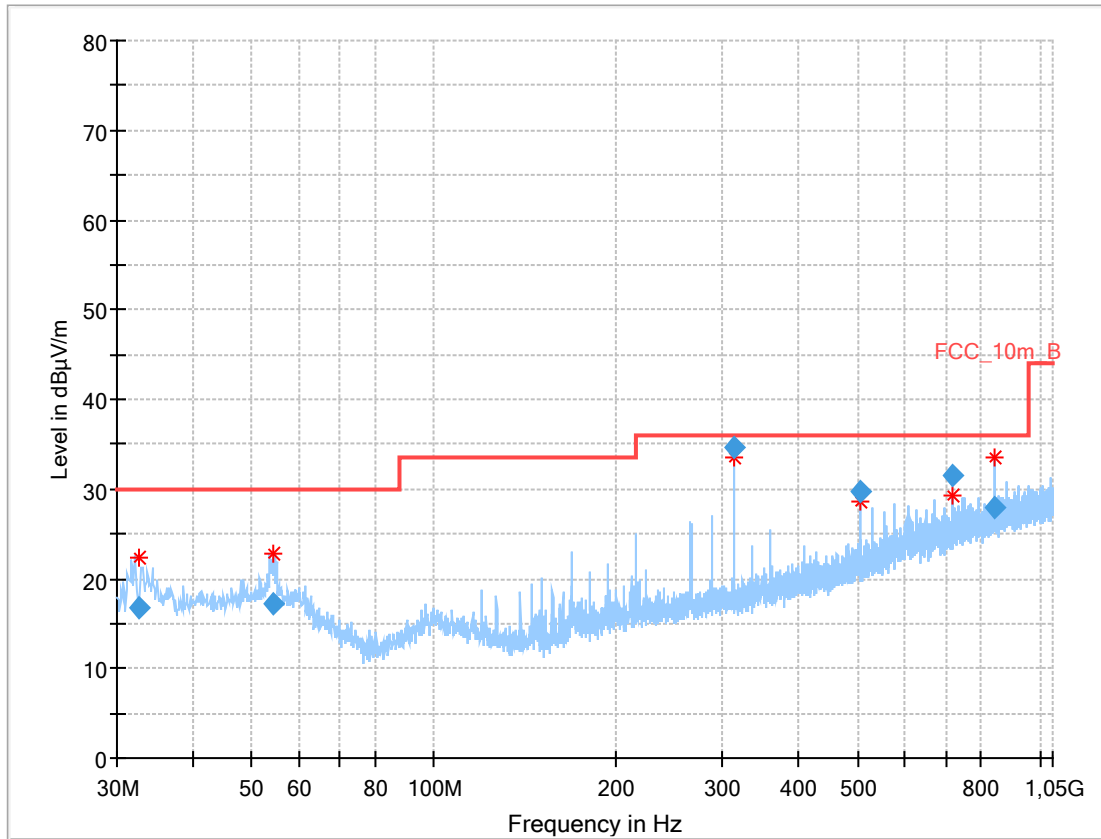


**Final\_Result:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.526000	16.76	30.00	13.24	1000.0	120.000	101.0	V	260.0	12.3
54.131700	17.20	30.00	12.80	1000.0	120.000	98.0	V	190.0	13.2
312.001800	34.65	36.00	1.35	1000.0	120.000	101.0	V	81.0	14.8
504.008100	29.83	36.00	6.17	1000.0	120.000	170.0	H	10.0	18.8
719.995200	31.53	36.00	4.47	1000.0	120.000	101.0	H	-10.0	22.0
839.998500	27.84	36.00	8.16	1000.0	120.000	98.0	H	171.0	23.4


**Plot 7:** 1 GHz to 18 GHz, 5220 MHz, vertical & horizontal polarization

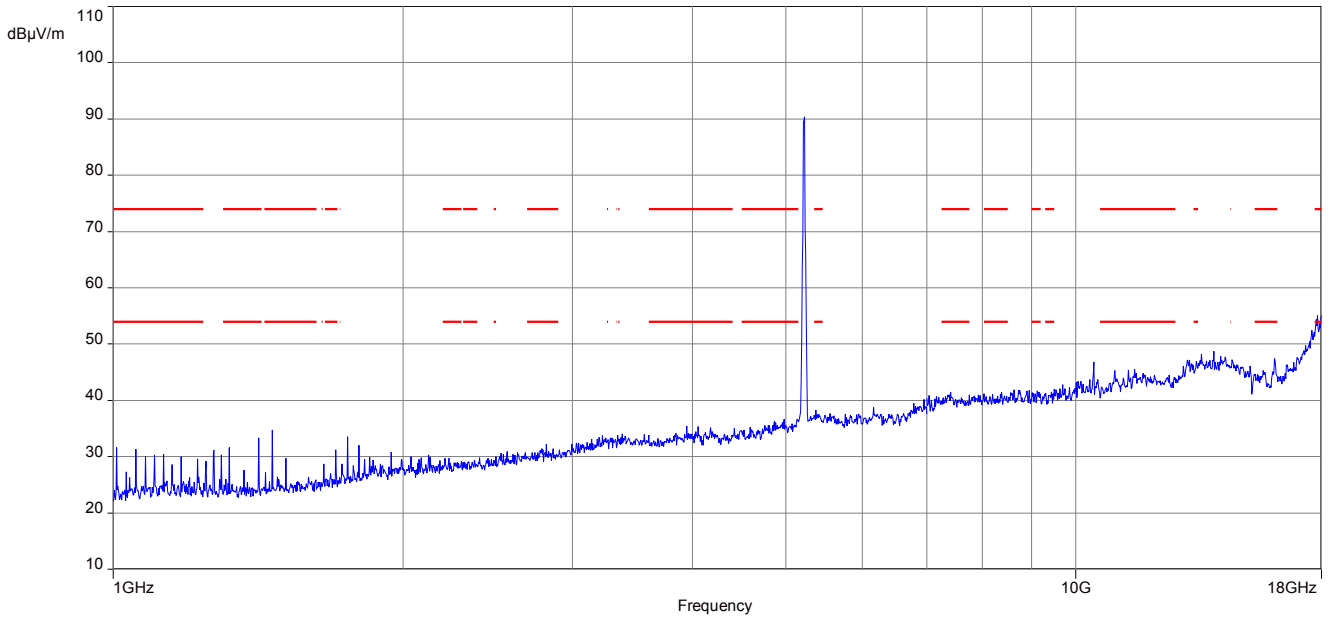


**Plot 8:** 17.7 GHz to 18 GHz, 5220 MHz, vertical & horizontal polarization

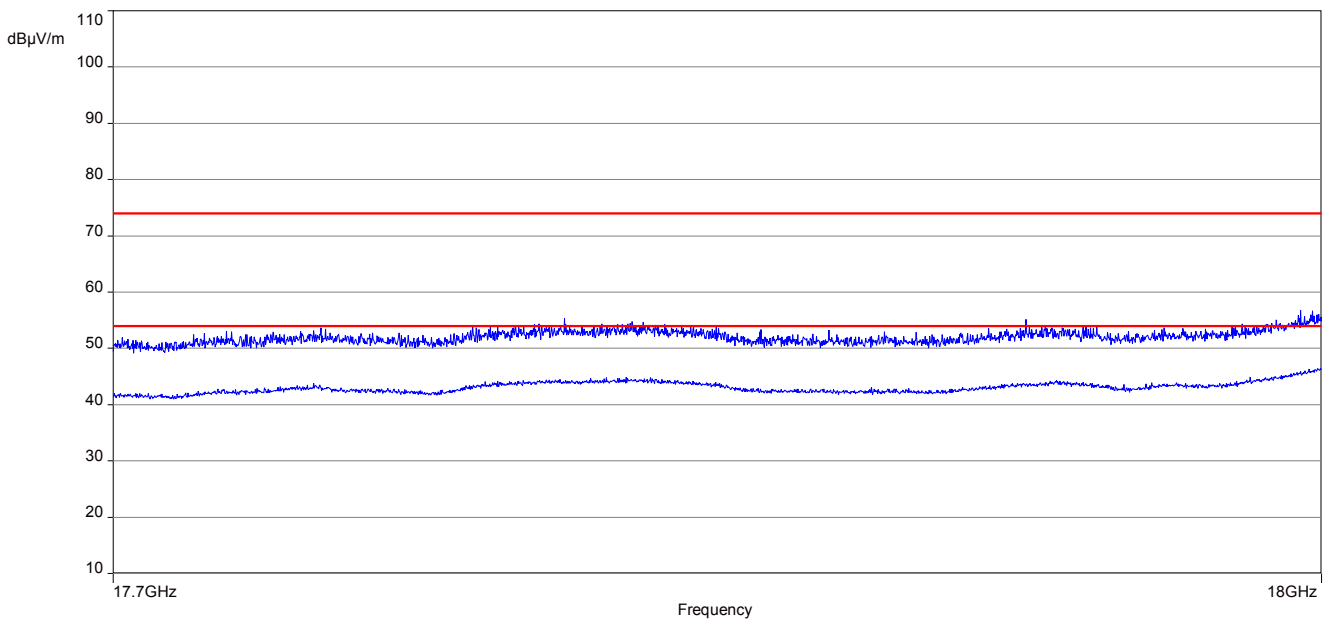


**Plot 9:** 18 GHz to 26 GHz, 5220 MHz, vertical & horizontal polarization

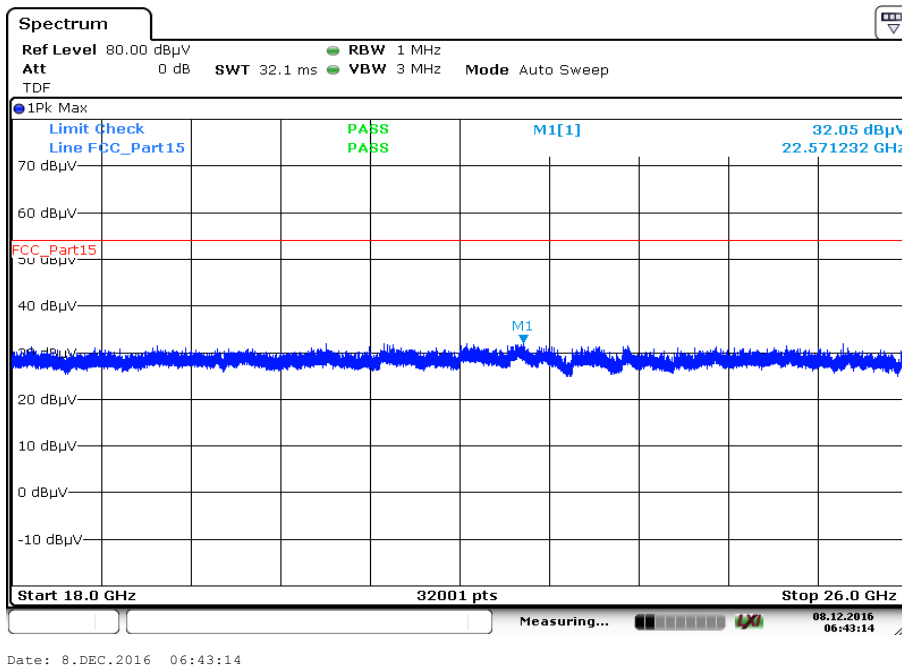

**Plot 10:** 26 GHz to 40 GHz, 5220 MHz, vertical & horizontal polarization

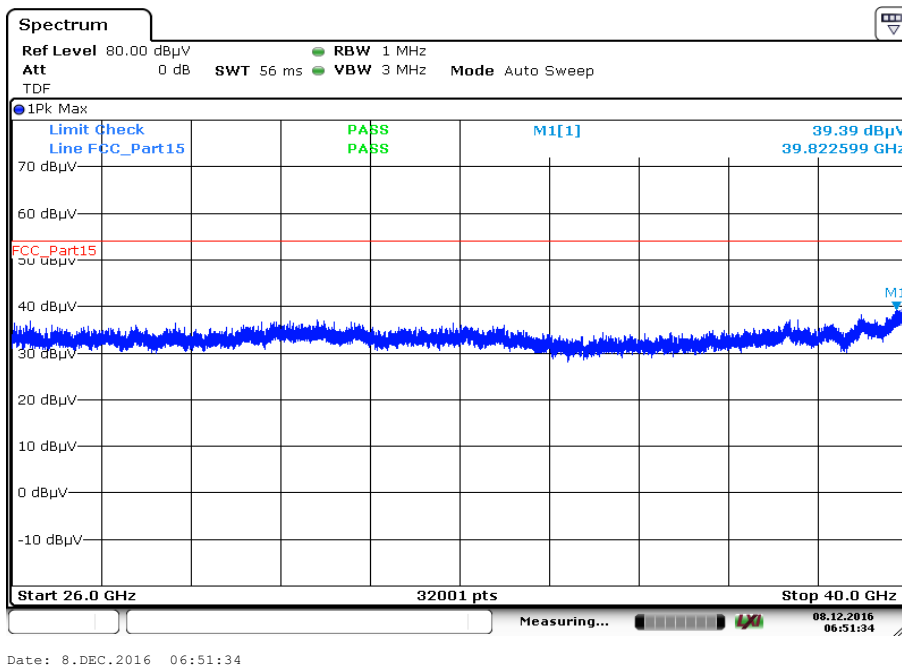


**Plot 11:** 30 MHz to 1 GHz, 5240 MHz, vertical & horizontal polarization

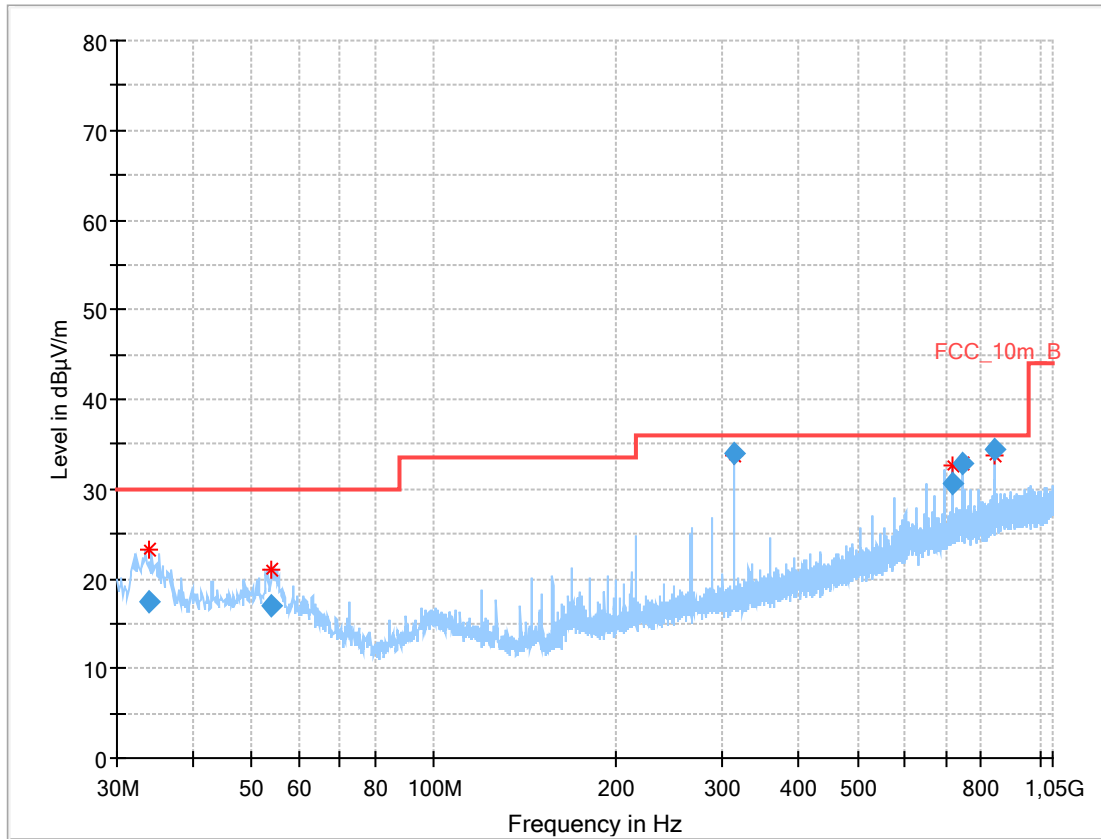


**Final\_Result:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.973350	17.42	30.00	12.58	1000.0	120.000	101.0	V	10.0	12.5
53.752950	17.06	30.00	12.94	1000.0	120.000	98.0	V	170.0	13.3
311.989800	33.87	36.00	2.13	1000.0	120.000	101.0	V	80.0	14.8
719.980650	30.71	36.00	5.29	1000.0	120.000	100.0	H	-10.0	22.0
743.995500	32.77	36.00	3.23	1000.0	120.000	101.0	H	-9.0	22.6
840.009750	34.45	36.00	1.55	1000.0	120.000	98.0	H	171.0	23.4


**Plot 12:** 1 GHz to 18 GHz, 5240 MHz, vertical & horizontal polarization

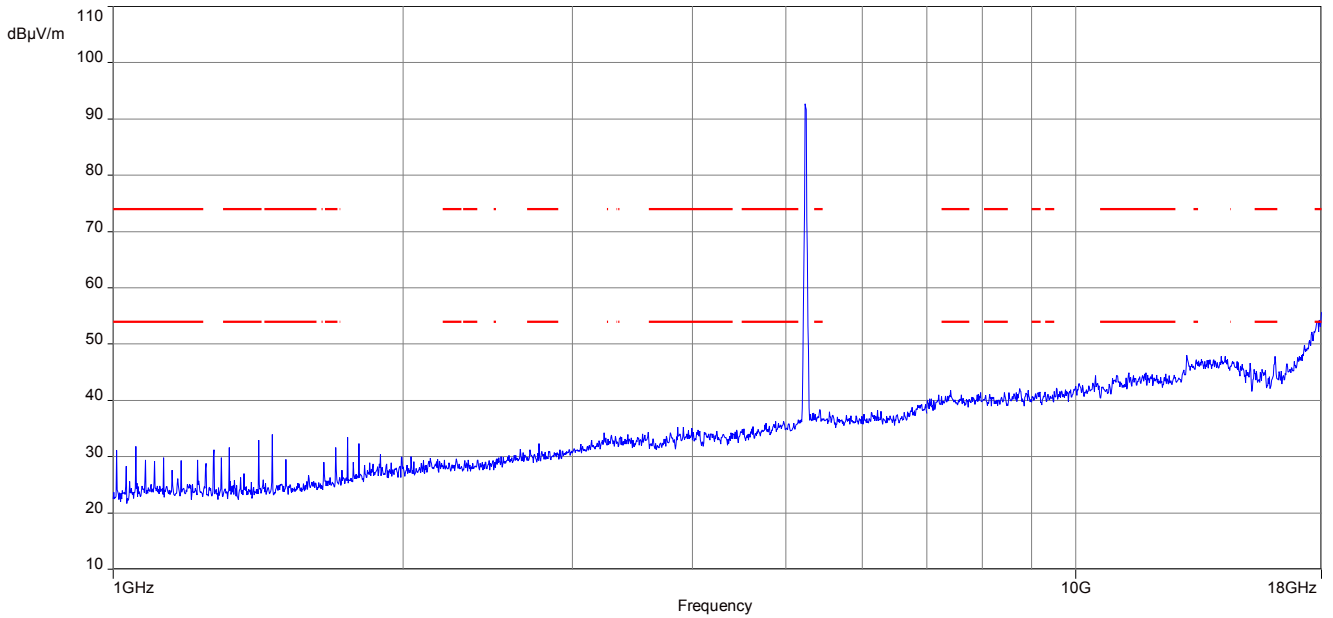


**Plot 13:** 17.7 GHz to 18 GHz, 5240 MHz, vertical & horizontal polarization

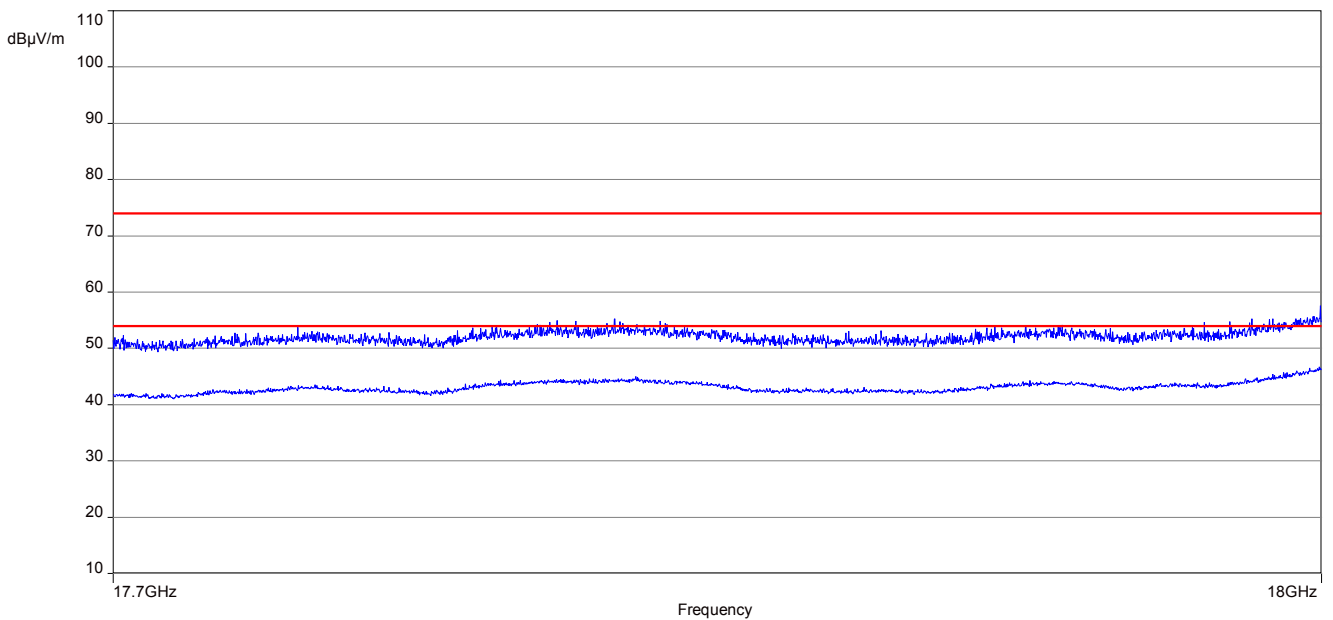

**Plot 14:** 18 GHz to 26 GHz, 5240 MHz, vertical & horizontal polarization

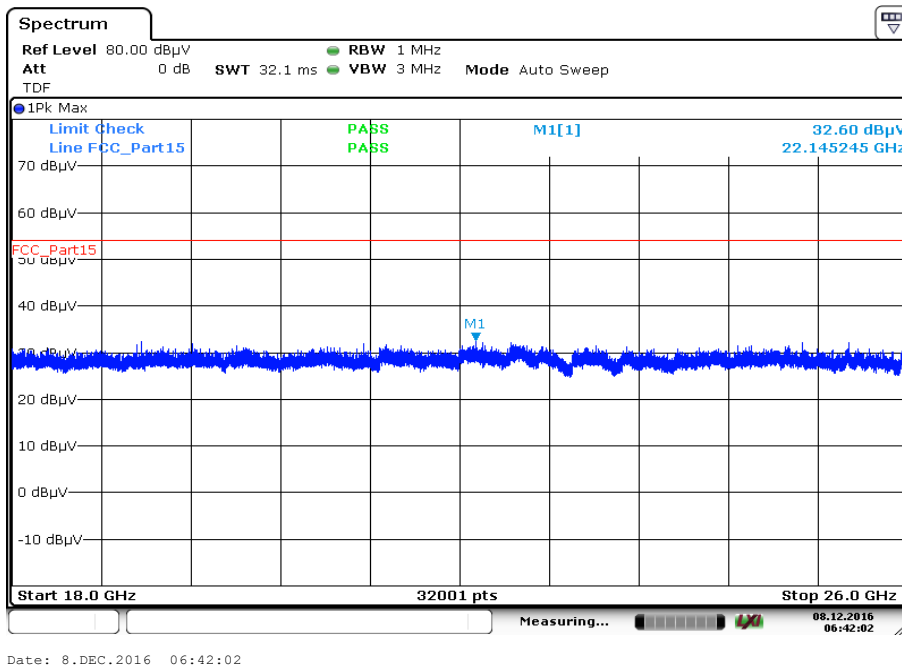

**Plot 15:** 26 GHz to 40 GHz, 5240 MHz, vertical & horizontal polarization

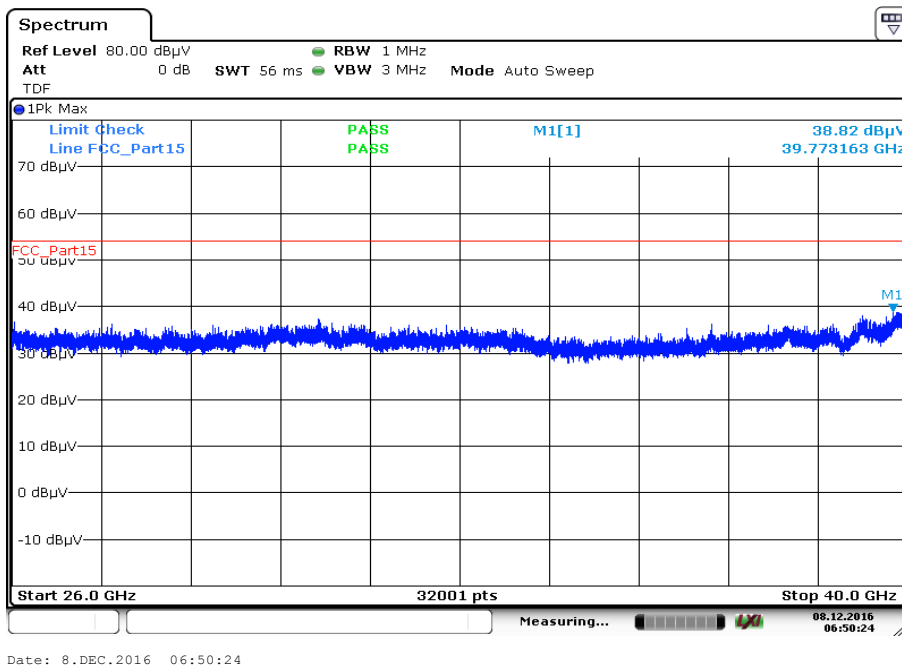

## 11.10 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode.

### Measurement:


Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak)  Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: ≥ 3 MHz
Span:	30 MHz to 40 GHz
Trace – mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 6.2 B See sub clause 6.3 A
Measurement uncertainty:	See sub clause 8

### Limits:

RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

**Plots:**

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization

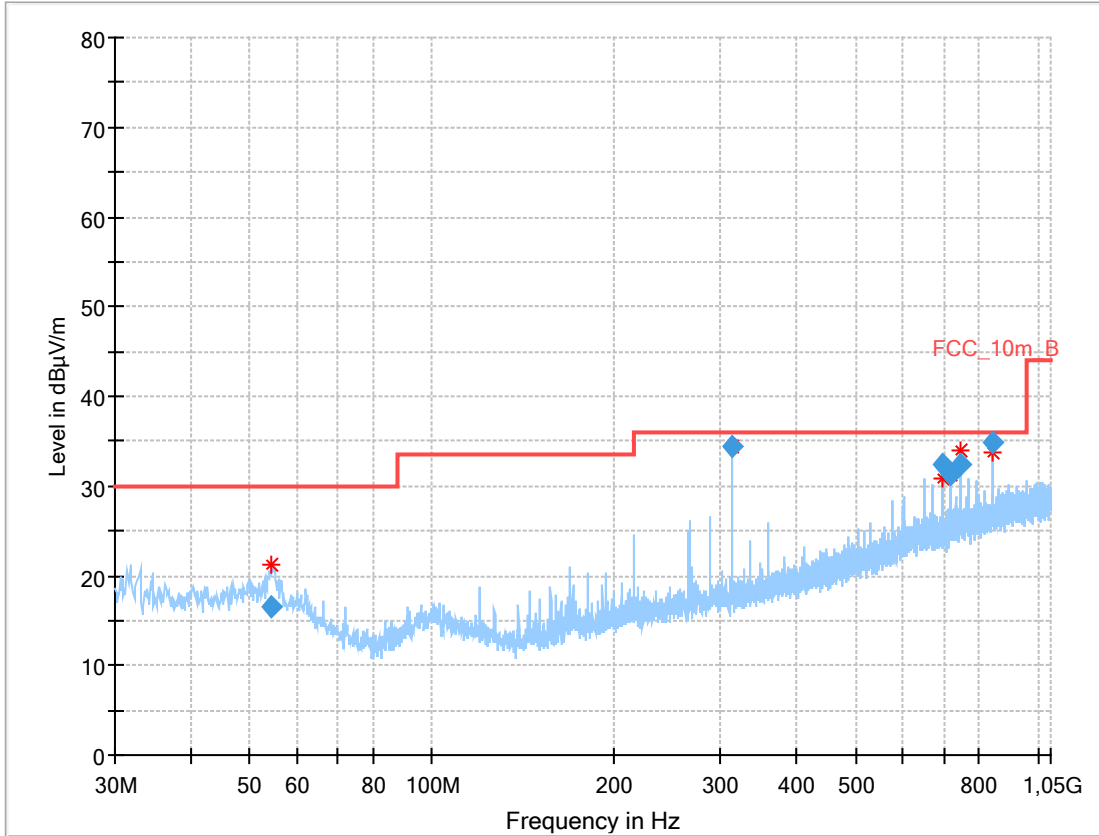


**Final\_Result:**


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
54.426450	16.52	30.00	13.48	1000.0	120.000	98.0	V	100.0	13.2
312.006750	34.50	36.00	1.50	1000.0	120.000	98.0	V	81.0	14.8
696.002850	32.41	36.00	3.59	1000.0	120.000	101.0	H	-10.0	21.5
720.006750	31.22	36.00	4.78	1000.0	120.000	101.0	H	-10.0	22.0
744.002250	32.45	36.00	3.55	1000.0	120.000	98.0	H	-10.0	22.6
840.014700	34.93	36.00	1.07	1000.0	120.000	101.0	H	170.0	23.4




**Plot 2:** 1 GHz to 18 GHz, vertical & horizontal polarization

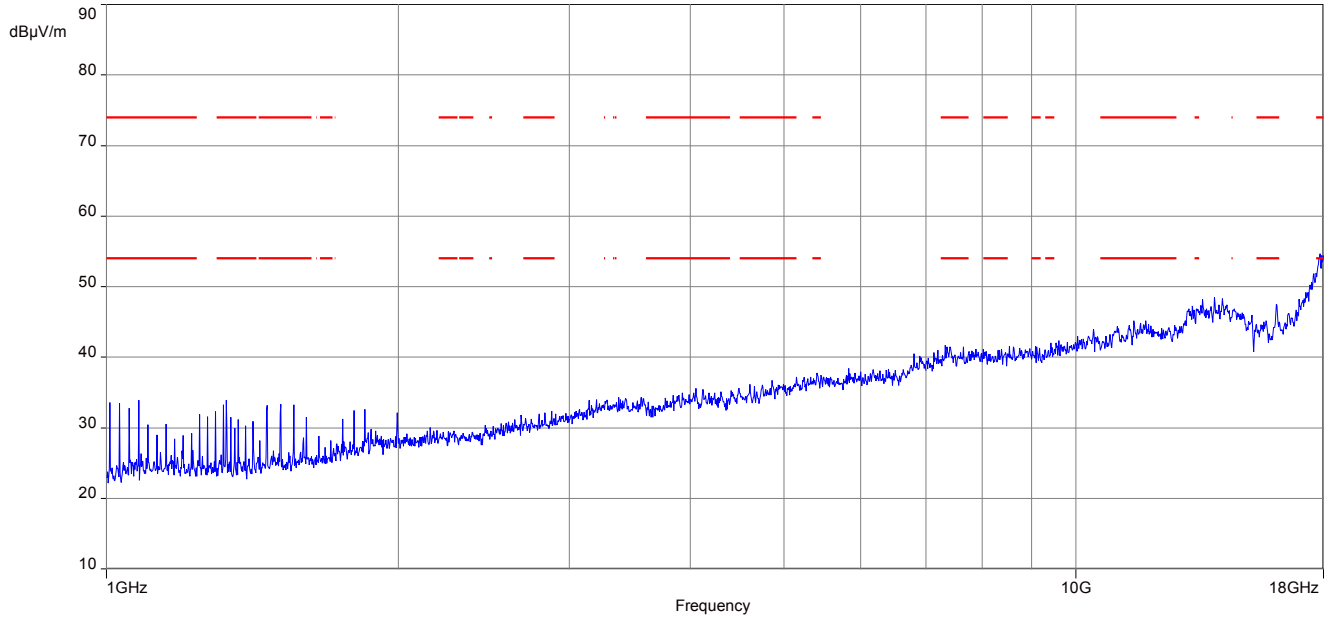


**Plot 3:** 17.7 GHz to 18 GHz, vertical & horizontal polarization

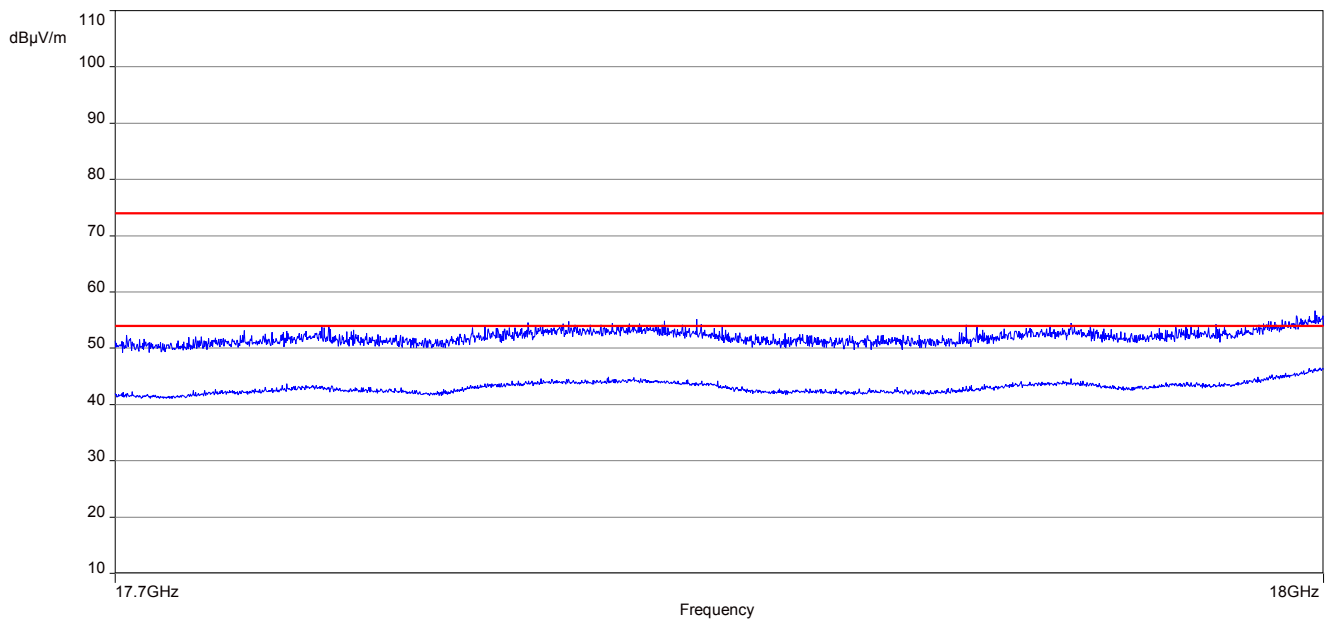

**Plot 4:** 18 GHz to 26 GHz, vertical & horizontal polarization

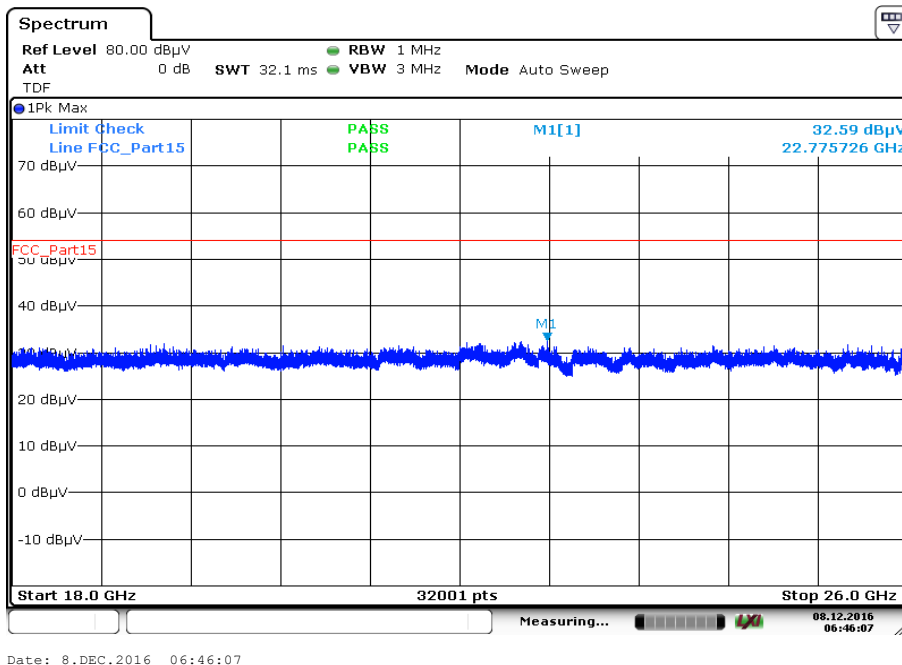

**Plot 5:** 26 GHz to 40 GHz, vertical & horizontal polarization

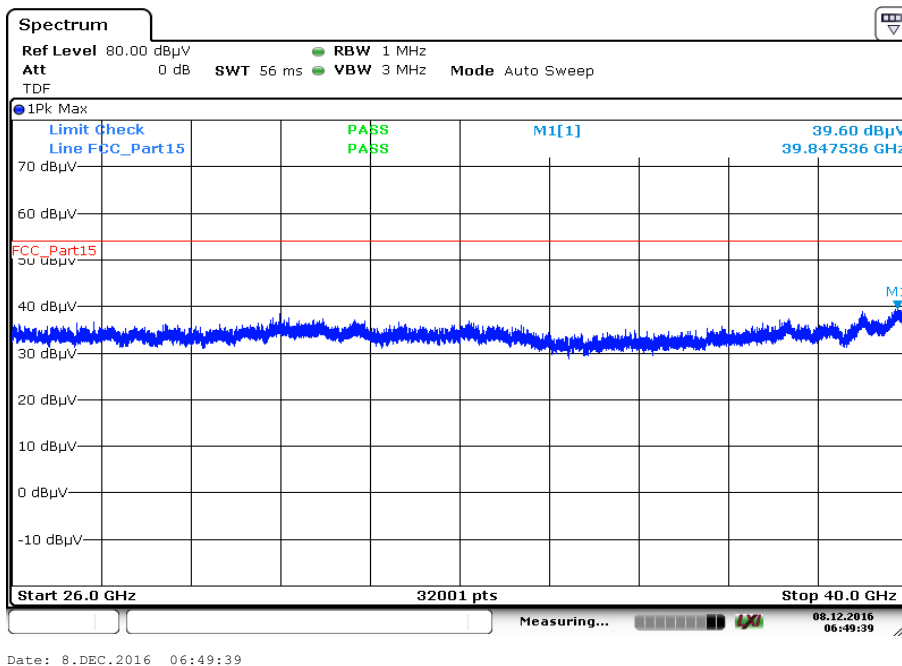

### 11.11 Spurious emissions radiated < 30 MHz

**Description:**

Measurement of the radiated spurious emissions in transmit mode and receive mode below 30 MHz. The EUT is set first to middle channel. This measurement is representative for all channels and modes. If critical peaks are found the lowest channel and the highest channel will be measured too. Then the EUT is set to receive or idle mode. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

**Measurement:**

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace – mode:	Max Hold
Test setup:	See sub clause 6.2 A
Measurement uncertainty:	See sub clause 8

**Limits:**


Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

**Results:**


Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit.		

**Plots:**


**Plot 1:** 9 kHz to 30 MHz, OFDM 20 MHz, 5180 MHz

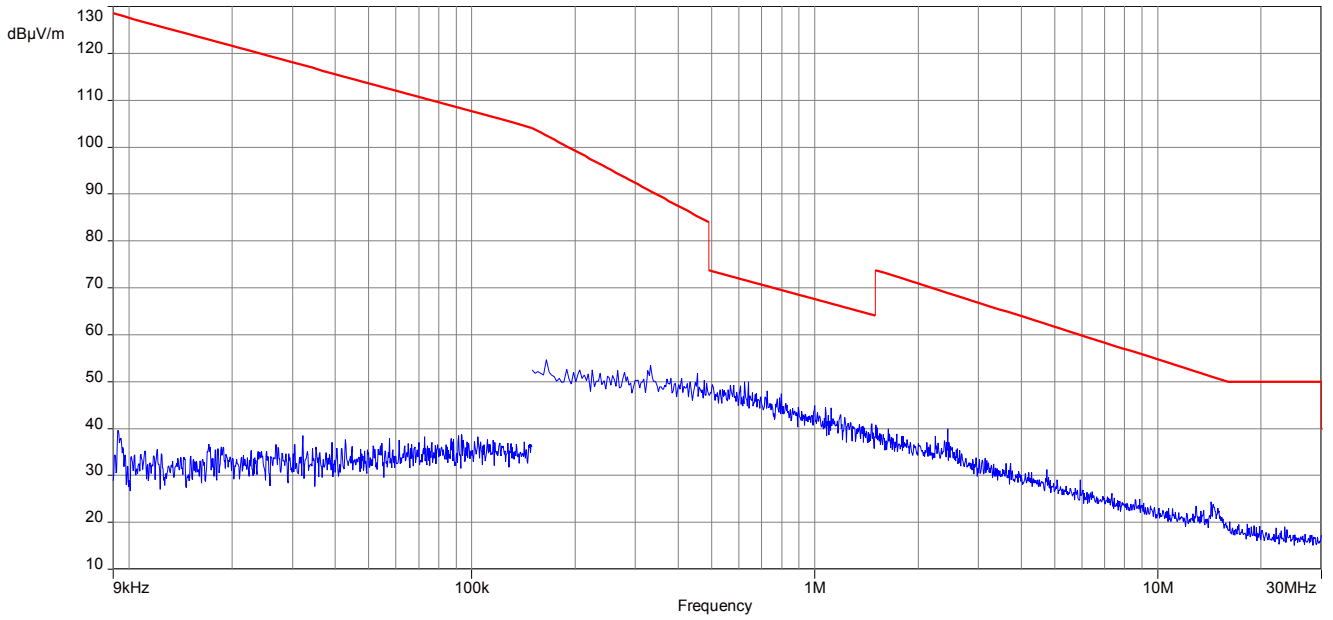

**Plot 2:** 9 kHz to 30 MHz, OFDM 20 MHz, 5220 MHz

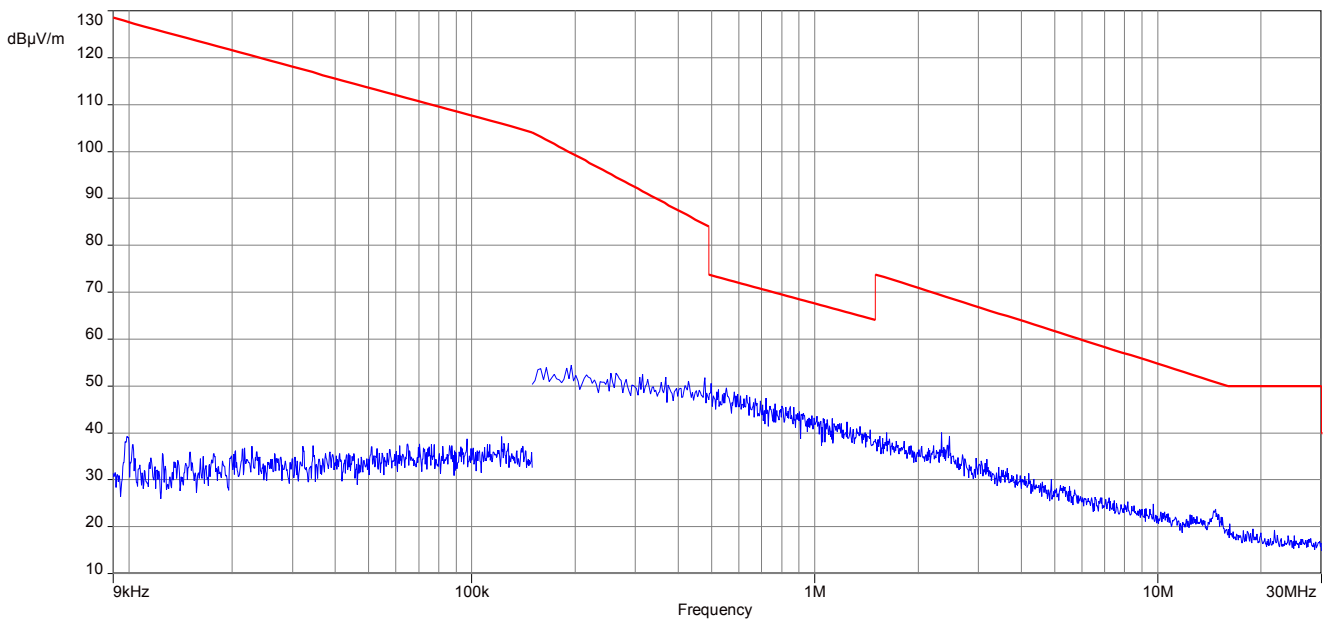

**Plot 3:** 9 kHz to 30 MHz, OFDM 20 MHz, 5240 MHz

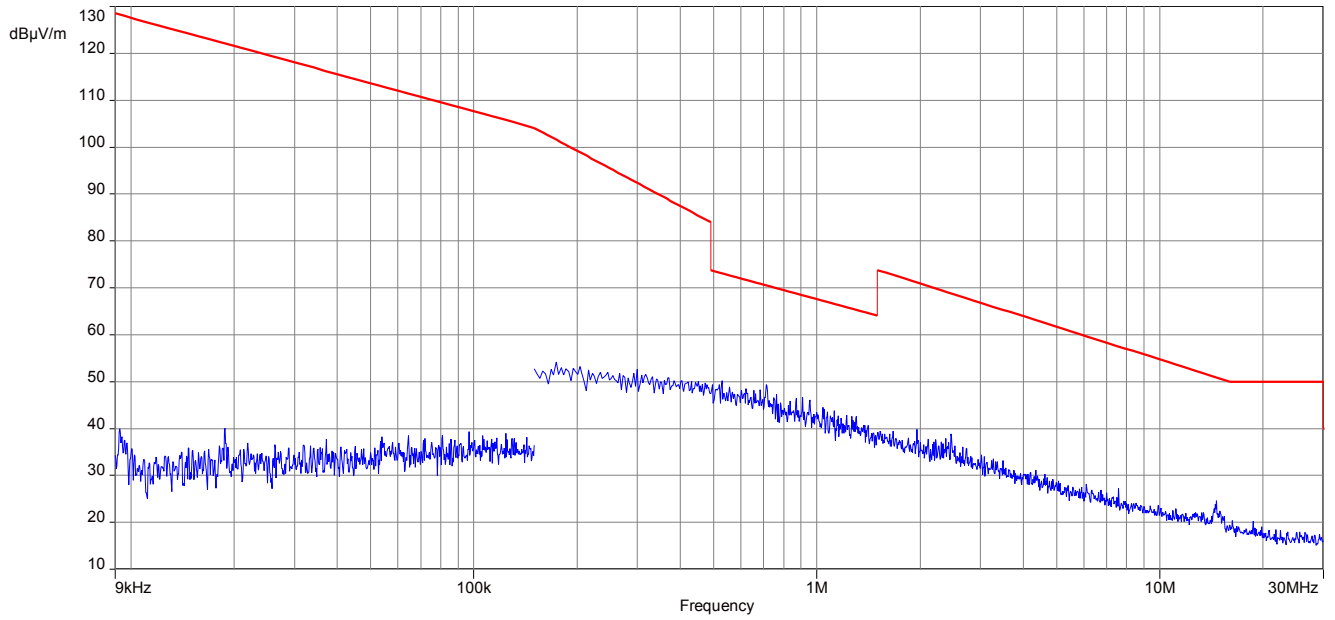

**11.12 Spurious emissions conducted < 30 MHz**

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel. If critical peaks are found the lowest channel and the highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	9 kHz
Resolution bandwidth:	100 kHz
Span:	150 kHz to 30 MHz
Trace – mode:	Max Hold
Test setup:	See sub clause 6.4 A
Measurement uncertainty:	See sub clause 8

**Limits:**

Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


\*Decreases with the logarithm of the frequency

**Results:**

Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
Please look at the table below the plots.		


**Plots:**

**Plot 1:** 150 kHz to 30 MHz, phase line

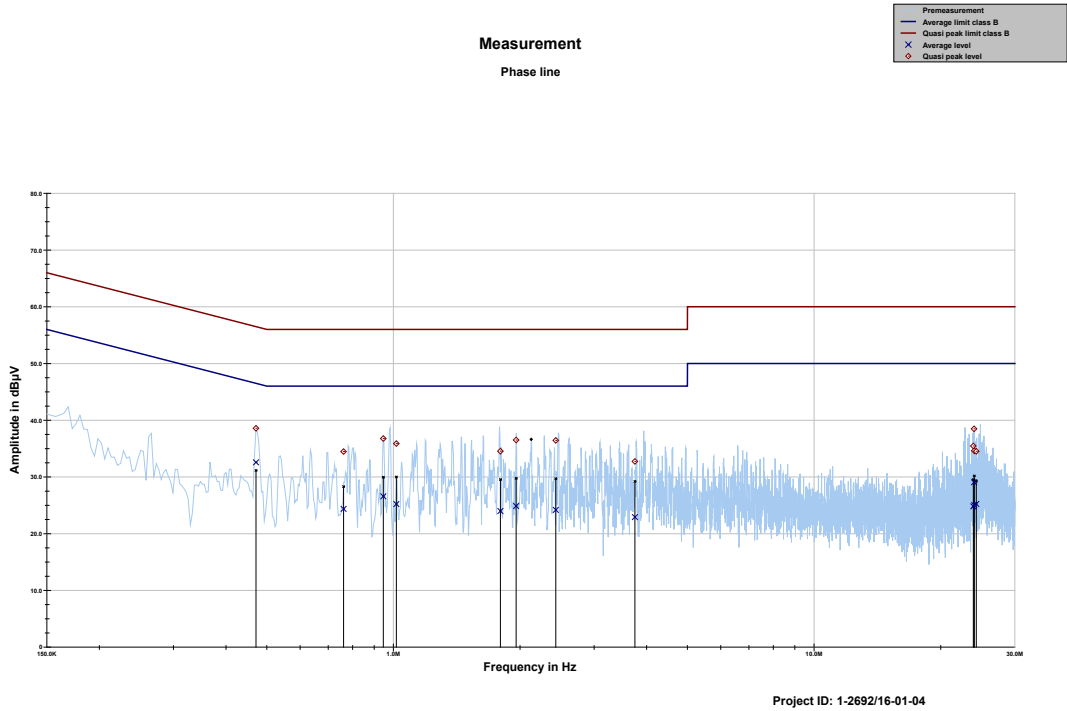

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin average dB	Limit AV dBµV
0.471291	38.58	17.91	56.491	32.56	14.26	46.820
0.761297	34.47	21.53	56.000	24.36	21.64	46.000
0.946151	36.77	19.23	56.000	26.57	19.43	46.000
1.016430	35.88	20.12	56.000	25.21	20.79	46.000
1.796200	34.53	21.47	56.000	23.99	22.01	46.000
1.958057	36.50	19.50	56.000	24.87	21.13	46.000
2.432000	36.45	19.55	56.000	24.17	21.83	46.000
3.750610	32.73	23.27	56.000	22.91	23.09	46.000
23.911526	35.46	24.54	60.000	24.80	25.20	50.000
24.000514	38.48	21.52	60.000	29.05	20.95	50.000
24.035640	34.61	25.39	60.000	25.03	24.97	50.000
24.304134	34.52	25.48	60.000	25.24	24.76	50.000

Plot 2: 150 kHz to 30 MHz, neutral line

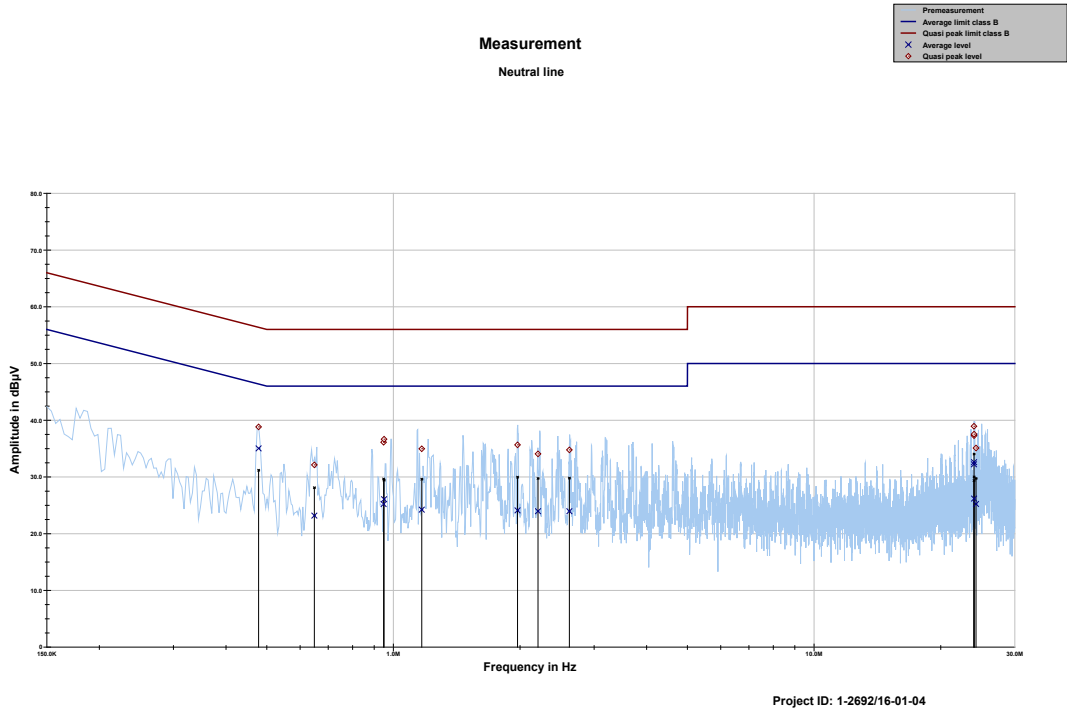

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin average dB	Limit AV dBµV
0.478041	38.82	17.55	56.373	35.03	11.60	46.627
0.648779	32.12	23.88	56.000	23.17	22.83	46.000
0.947564	36.10	19.90	56.000	25.21	20.79	46.000
0.950026	36.65	19.35	56.000	26.07	19.93	46.000
1.167753	34.95	21.05	56.000	24.23	21.77	46.000
1.972456	35.66	20.34	56.000	24.09	21.91	46.000
2.207148	34.06	21.94	56.000	23.95	22.05	46.000
2.620619	34.76	21.24	56.000	23.95	22.05	46.000
23.996157	38.94	21.06	60.000	32.21	17.79	50.000
24.003769	37.28	22.72	60.000	32.61	17.39	50.000
24.006045	37.54	22.46	60.000	26.19	23.81	50.000
24.268139	35.09	24.91	60.000	25.23	24.77	50.000



## 12 Observations

No observations except those reported with the single test cases have been made.

## Annex A Document history

Version	Applied changes	Date of release
	Initial release	2016-12-15

## Annex B Further information

### Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN	-	Product marketing name
HMN	-	Host marketing name
HVIN	-	Hardware version identification number
FVIN	-	Firmware version identification number
OBW		Occupied Bandwidth
OC		Operating Channel
OCW		Operating Channel Bandwidth
OOB		Out Of Band

## Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

**Akkreditierung**



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CTC advanced GmbH**  
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

**Funk**  
Mobilfunk (GSM / DCS) + OTA  
Elektromagnetische Verträglichkeit (EMV)  
**Produktsicherheit**  
SAR / EMF  
Umwelt  
Smart Card Technology  
Bluetooth\*  
Automotive  
Wi-Fi-Services  
Kanadische Anforderungen  
US-Anforderungen  
Akustik  
Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 25.11.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt, 25.11.2016

Siehe Hinweis auf der Rückseite

Im Auftrag Dipl.-Ing. Ralf Eigner  
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Europa-Allee 52  
60327 Frankfurt am Main

Standort Braunschweig  
Bundesallee 100  
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accrreditation.org](http://www.european-accrreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.nu](http://www.iaf.nu)

### Note:

The current certificate including annex can be received from CTC advanced GmbH on request.