

FCC EMC Test Report

Applicant: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.

Address of Applicant: Mindray Building, Keji 12th Road South, High-tech Industrial Park Nanshan, 518057 Shenzhen, PEOPLE'S REPUBLIC OF CHINA

Equipment Under Test (EUT)

Product Name: wireless module

Model No.: WL6PR1101

Trade Mark: mindray

FCC ID: ZLZ-WL6PR

Applicable Standards: FCC CFR Title 47 Part 15B

Date of Sample Receipt: 08 Dec., 2022

Date of Test: 09 Dec., to 23 Dec., 2022

Date of report Issued: 26 Dec., 2022

Test Result: PASS

Tested by: Mike.OU **Date:** 26 Dec., 2022
Test Engineer

Reviewed by: Wenwen Zhang **Date:** 26 Dec., 2022
Project Engineer

Approved by: Mr. Zhang **Date:** 26 Dec., 2022
Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 26 Dec., 2022 | Original |
| | | |
| | | |
| | | |
| | | |

2 Contents

Page

| | |
|--|-----------|
| Cover Page | 1 |
| 1 Version | 2 |
| 2 Contents..... | 3 |
| 3 General Information..... | 4 |
| 3.1 Client Information | 4 |
| 3.2 General Description of E.U.T. | 4 |
| 3.3 Test Mode | 4 |
| 3.4 Description of Test Auxiliary Equipment | 5 |
| 3.5 Description of Cable Used..... | 5 |
| 3.6 Measurement Uncertainty | 5 |
| 3.7 Additions to, Deviations, or Exclusions from the Method..... | 5 |
| 3.8 Laboratory Facility | 5 |
| 3.9 Laboratory Location..... | 5 |
| 3.10 Test Instruments List | 6 |
| 4 Measurement Setup and Procedure | 7 |
| 4.1 Test Setup | 7 |
| 4.2 Test Procedure | 9 |
| 5 Test Results..... | 10 |
| 5.1 Summary | 10 |
| 5.1.1 Clause and data summary | 10 |
| 5.1.2 Test Limit..... | 10 |
| 5.2 Conducted Emission | 11 |
| 5.3 Radiated Emission | 13 |

3 General Information

3.1 Client Information

| | |
|---------------|--|
| Applicant: | Shenzhen Mindray Bio-Medical Electronics Co., Ltd. |
| Address: | Mindray Building, Keji 12th Road South, High-tech Industrial Park Nanshan, 518057 Shenzhen, PEOPLE'S REPUBLIC OF CHINA |
| Manufacturer: | Shenzhen Mindray Bio-Medical Electronics Co., Ltd. |
| Address: | Mindray Building, Keji 12th Road South, High-tech Industrial Park Nanshan, 518057 Shenzhen, PEOPLE'S REPUBLIC OF CHINA |
| Factory: | Shenzhen Mindray Bio-Medical Electronics Co., Ltd. |
| Address: | 1203 Nanhuan Avenue, Guangming District, 518106 Shenzhen, PEOPLE'S REPUBLIC OF CHINA |

3.2 General Description of E.U.T.

| | |
|------------------------|---|
| Product Name: | wireless module |
| Model No.: | WL6PR1101 |
| Power Supply: | DC 3.3V |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

3.3 Test Mode

| Operating Mode | Detail Description |
|--|---|
| Working mode | Keep the EUT in Downloading mode (Worst case) |
| <p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> | |

3.4 Description of Test Auxiliary Equipment

| Manufacturer | Description | Model | S/N | FCC ID/DoC |
|--------------|-------------|--------------------|------------|------------|
| Lenovo | Laptop | ThinkPad T14 Gen 1 | SL10Z47277 | DoC |

3.5 Description of Cable Used

| |
|-----|
| N/A |
|-----|

3.6 Measurement Uncertainty

| Parameter | Expanded Uncertainty (Confidence of 95%(U = 2Uc(y))) |
|---|---|
| Conducted Emission for LISN (9kHz ~ 10MHz) | 1.9 dB |
| Conducted Emission for LISN (10MHz ~ 30MHz) | 2.6 dB |
| Radiated Emission (30MHz ~ 1GHz) (3m SAC) | 3.8 dB |
| Radiated Emission (1GHz ~ 18GHz) (3m SAC) | 3.6 dB |

Note: All the measurement uncertainty value were shown with a coverage $k=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

| |
|----|
| No |
|----|

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.10 Test Instruments List


| Radiated Emission(3m SAC): | | | | | |
|------------------------------|-----------------|-----------------|------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | ETS | 9m*6m*6m | WXJ001-1 | 04-14-2021 | 04-13-2024 |
| BiConiLog Antenna | Schwarzbeck | VULB9163 | WXJ002 | 03-08-2022 | 03-07-2023 |
| Horn Antenna | Schwarzbeck | BBHA9120D | WXJ002-2 | 03-08-2022 | 03-07-2023 |
| Pre-amplifier (30MHz ~ 1GHz) | Schwarzbeck | BBV9743B | WXJ001-2 | 01-20-2022 | 01-19-2023 |
| Pre-amplifier (1GHz ~ 18GHz) | SKET | LNPA_0118G-50 | WXJ001-3 | 01-20-2022 | 01-19-2023 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | WXJ003-1 | 03-05-2022 | 03-04-2023 |
| Spectrum Analyzer | Rohde & Schwarz | FSP 30 | WXJ004 | 01-20-2022 | 01-19-2023 |
| Coaxial Cable (30MHz ~ 1GHz) | JYTSZ | JYT3M-1G-NN-8M | WXG001-4 | 01-20-2022 | 01-19-2023 |
| Coaxial Cable (1GHz ~ 18GHz) | JYTSZ | JYT3M-18G-NN-8M | WXG001-5 | 01-20-2022 | 01-19-2023 |
| Band Reject Filter Group | Tonscend | JS0806-F | WXJ089 | N/A | |
| Test Software | Tonscend | TS+ | Version: 3.0.0.1 | | |

| Conducted Emission: | | | | | |
|-----------------------------------|-----------------|----------------|--------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| EMI Test Receiver | Rohde & Schwarz | ESR3 | WXJ003-2 | 07-12-2022 | 07-11-2023 |
| LISN | Schwarzbeck | NSLK 8127 | QCJ001-13 | 02-24-2022 | 02-23-2023 |
| LISN | Rohde & Schwarz | ESH3-Z5 | WXJ005-1 | 03-30-2022 | 03-29-2023 |
| LISN Coaxial Cable (9kHz ~ 30MHz) | JYTSZ | JYTCE-1G-NN-2M | WXG003-1 | 02-24-2022 | 02-23-2023 |
| RF Switch | TOP PRECISION | RSU0301 | WXG003 | N/A | |
| Test Software | AUDIX | E3 | Version: 6.110919b | | |

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

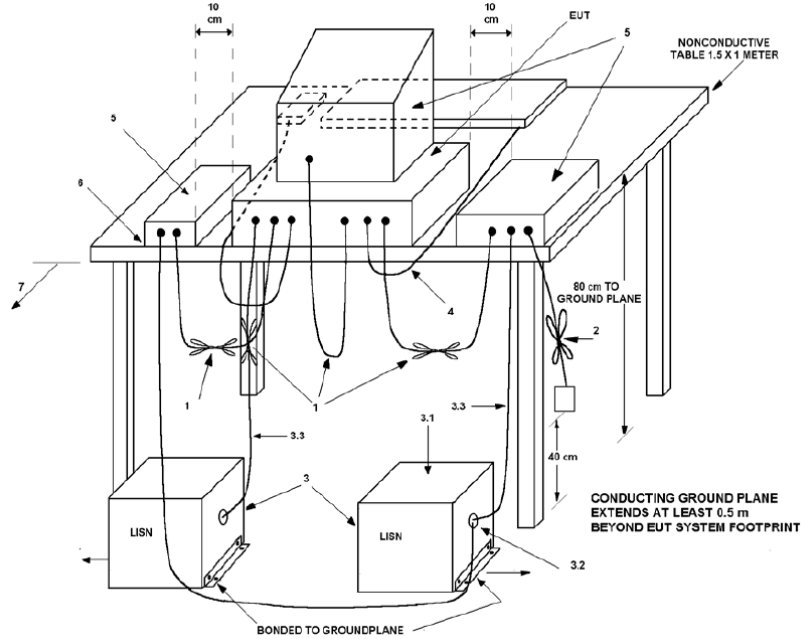


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

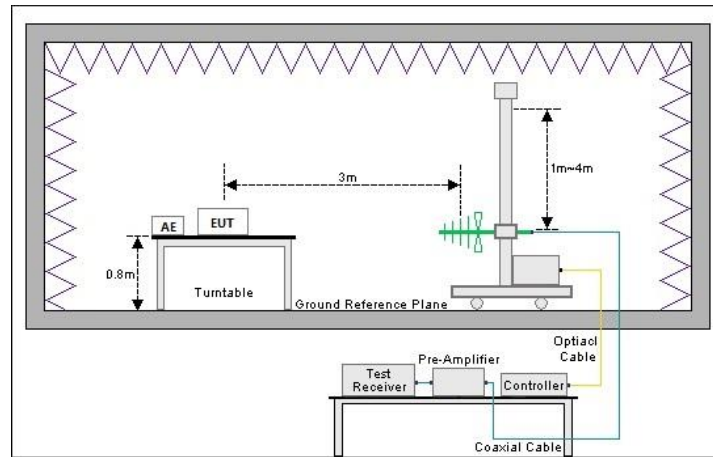

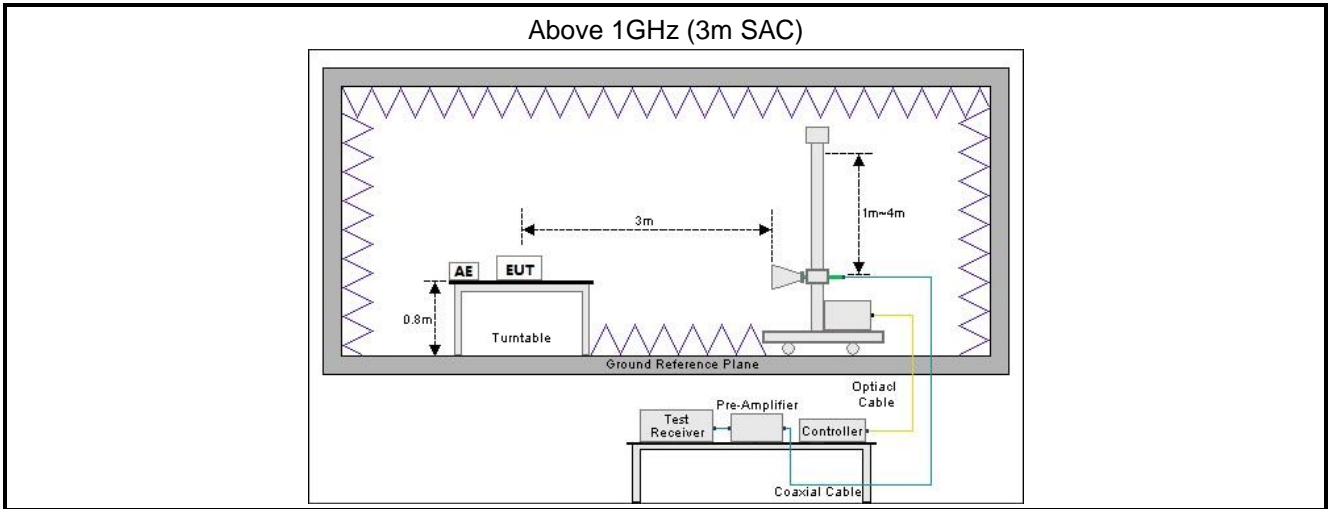

4.2 Test Procedure

| Test method | Test step |
|--------------------|---|
| Conducted emission | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. |
| Radiated emission | <p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. |

5 Test Results

5.1 Summary

5.1.1 Clause and data summary


| Test items | Standard clause | Test data | Result |
|---|-----------------|-----------------|--------|
| Conducted Emission | Part 15.107 | See Section 5.2 | Pass |
| Radiated Emission | Part 15.109 | See Section 5.3 | Pass |
| Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable. | | | |
| Test Method: | ANSI C63.4:2014 | | |

5.1.2 Test Limit

| Test items | Limit | | | | | |
|--|---|-----------------------------------|------------------|-----------------------------------|--------------------------------|--|
| Conducted Emission | Frequency (MHz) | Class A Limit (dB μ V) | | Class B Limit (dB μ V) | | |
| | | Quasi-Peak | Average | Quasi-Peak | Average | |
| | 0.15 – 0.5 | 79 | 66 | 66 to 56 <small>Note 1</small> | 56 to 46 <small>Note 1</small> | |
| | 0.5 – 5 | 73 | 60 | 56 | 46 | |
| | 5 – 30 | 73 | 60 | 60 | 50 | |
| Note 1: The limit level in dB μ V decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies. | | | | | | |
| Radiated Emission | Frequency (MHz) | Class A Limit (dB μ V/m) | | Class B Limit (dB μ V/m) | | |
| | | Quasi-Peak @ 3m | Quasi-Peak @ 10m | Quasi-Peak @ 3m | Quasi-Peak @ 10m | |
| | 30 – 88 | 49.0 | 39.0 | 40.0 | 30.0 | |
| | 88 – 216 | 53.5 | 43.5 | 43.5 | 33.5 | |
| | 216 – 960 | 56.0 | 46.0 | 46.0 | 36.0 | |
| | 960 – 1000 | 60.0 | 50.0 | 54.0 | 44.0 | |
| | Note: The more stringent limit applies at transition frequencies. | | | | | |
| | Frequency | Class A Limit (dB μ V/m) @ 3m | | Class B Limit (dB μ V/m) @ 3m | | |
| | | Average | Peake | Average | Peake | |
| | Above 1 GHz | 60.0 | 80.0 | 54.0 | 74.0 | |
| Note: The measurement bandwidth shall be 1 MHz or greater. | | | | | | |

5.2 Conducted Emission

| | | | |
|-----------------|------------------|----------------|--------------|
| Product name: | wireless module | Product model: | WL6PR1101 |
| Test by: | Mike | Test mode: | Working mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Line |
| Test voltage: | AC 120 V/60 Hz | | |

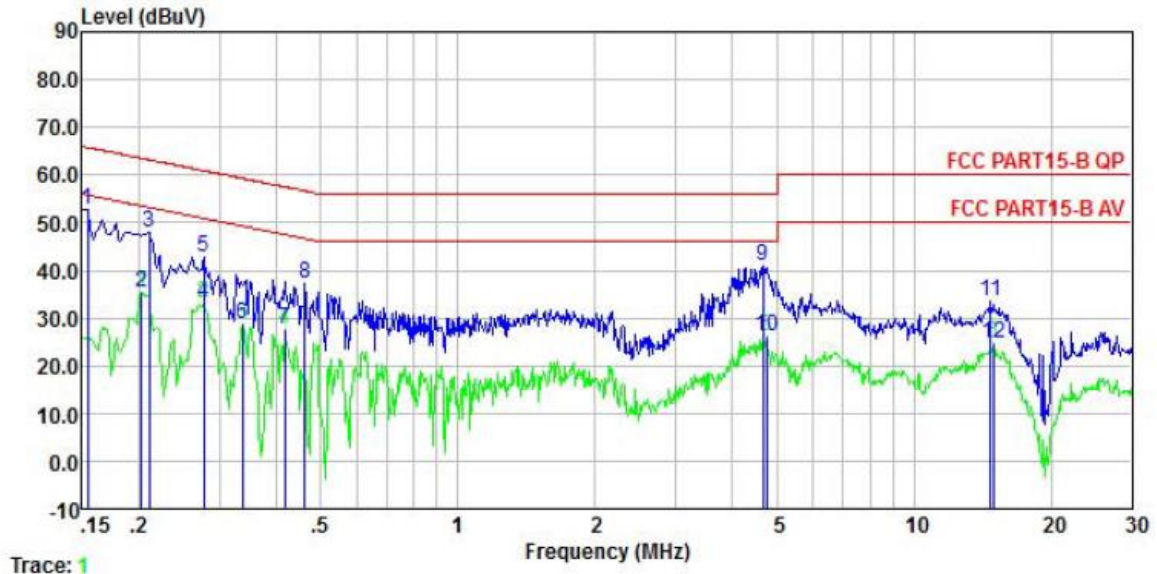


Trace: 1

| | Read Freq | Read Level | LISN Factor | Aux2 Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|-----------|------------|-------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.154 | 42.22 | 0.04 | 10.50 | 0.01 | 52.77 | 65.78 | -13.01 | QP |
| 2 | 0.202 | 24.89 | 0.05 | 10.50 | 0.04 | 35.48 | 53.54 | -18.06 | Average |
| 3 | 0.211 | 37.51 | 0.05 | 10.50 | 0.03 | 48.09 | 63.18 | -15.09 | QP |
| 4 | 0.277 | 22.61 | 0.06 | 10.50 | 0.02 | 33.19 | 50.90 | -17.71 | Average |
| 5 | 0.277 | 32.25 | 0.06 | 10.50 | 0.02 | 42.83 | 60.90 | -18.07 | QP |
| 6 | 0.337 | 18.12 | 0.06 | 10.50 | 0.02 | 28.70 | 49.27 | -20.57 | Average |
| 7 | 0.417 | 17.22 | 0.05 | 10.50 | 0.04 | 27.81 | 47.51 | -19.70 | Average |
| 8 | 0.461 | 26.80 | 0.05 | 10.50 | 0.03 | 37.38 | 56.67 | -19.29 | QP |
| 9 | 4.672 | 30.03 | 0.12 | 10.50 | 0.09 | 40.74 | 56.00 | -15.26 | QP |
| 10 | 4.746 | 15.29 | 0.12 | 10.50 | 0.09 | 26.00 | 46.00 | -20.00 | Average |
| 11 | 14.750 | 22.57 | 0.29 | 10.50 | 0.13 | 33.49 | 60.00 | -26.51 | QP |
| 12 | 14.907 | 13.88 | 0.29 | 10.50 | 0.14 | 24.81 | 50.00 | -25.19 | Average |

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

| | | | |
|------------------------|------------------|-----------------------|--------------|
| Product name: | wireless module | Product model: | WL6PR1101 |
| Test by: | Mike | Test mode: | Working mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Neutral |
| Test voltage: | AC 120 V/60 Hz | | |

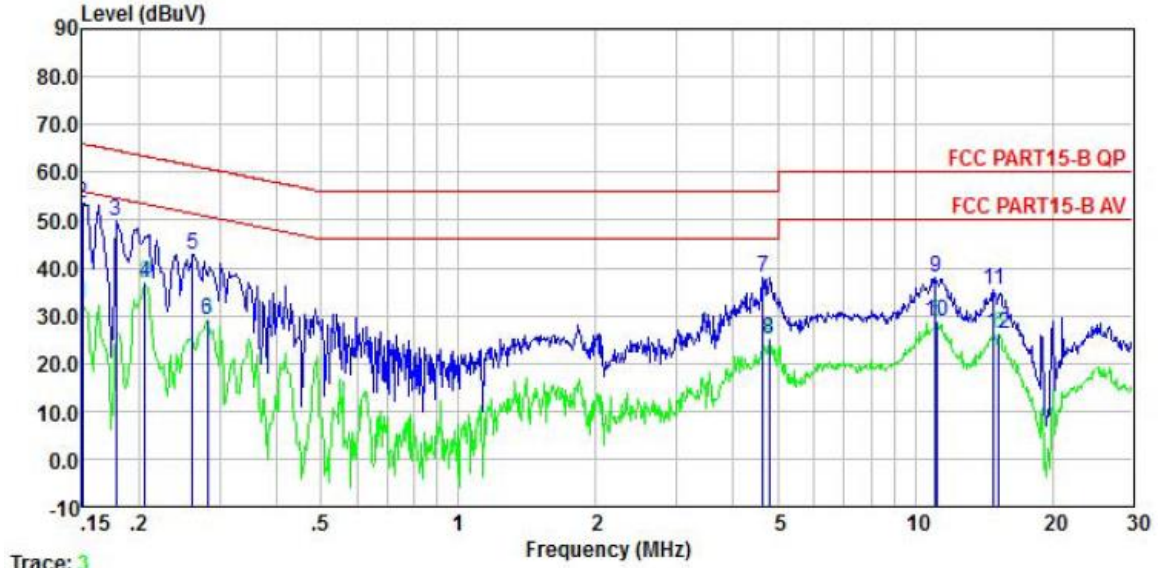

Trace: 3

| | Read Freq | Read Level | LISN Factor | Aux2 Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|-----------|------------|-------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.150 | 21.73 | 0.06 | 10.50 | 0.01 | 32.30 | 56.00 | -23.70 | Average |
| 2 | 0.150 | 42.96 | 0.06 | 10.50 | 0.01 | 53.53 | 66.00 | -12.47 | QP |
| 3 | 0.178 | 39.36 | 0.05 | 10.50 | 0.01 | 49.92 | 64.59 | -14.67 | QP |
| 4 | 0.206 | 26.32 | 0.05 | 10.50 | 0.04 | 36.91 | 53.36 | -16.45 | Average |
| 5 | 0.262 | 32.37 | 0.05 | 10.50 | 0.01 | 42.93 | 61.38 | -18.45 | QP |
| 6 | 0.282 | 18.62 | 0.05 | 10.50 | 0.02 | 29.19 | 50.76 | -21.57 | Average |
| 7 | 4.647 | 27.43 | 0.11 | 10.50 | 0.09 | 38.13 | 56.00 | -17.87 | QP |
| 8 | 4.797 | 14.39 | 0.11 | 10.50 | 0.09 | 25.09 | 46.00 | -20.91 | Average |
| 9 | 11.080 | 27.07 | 0.22 | 10.50 | 0.11 | 37.90 | 60.00 | -22.10 | QP |
| 10 | 11.139 | 17.95 | 0.23 | 10.50 | 0.11 | 28.79 | 50.00 | -21.21 | Average |
| 11 | 14.828 | 24.58 | 0.27 | 10.50 | 0.14 | 35.49 | 60.00 | -24.51 | QP |
| 12 | 15.226 | 15.15 | 0.27 | 10.50 | 0.14 | 26.06 | 50.00 | -23.94 | Average |


Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.3 Radiated Emission

Below 1GHz:

| | | | |
|------------------------|-----------------|-----------------------|--------------|
| Product Name: | wireless module | Product Model: | WL6PR1101 |
| Test By: | Mike | Test mode: | Working mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | DC 3.3V | | |

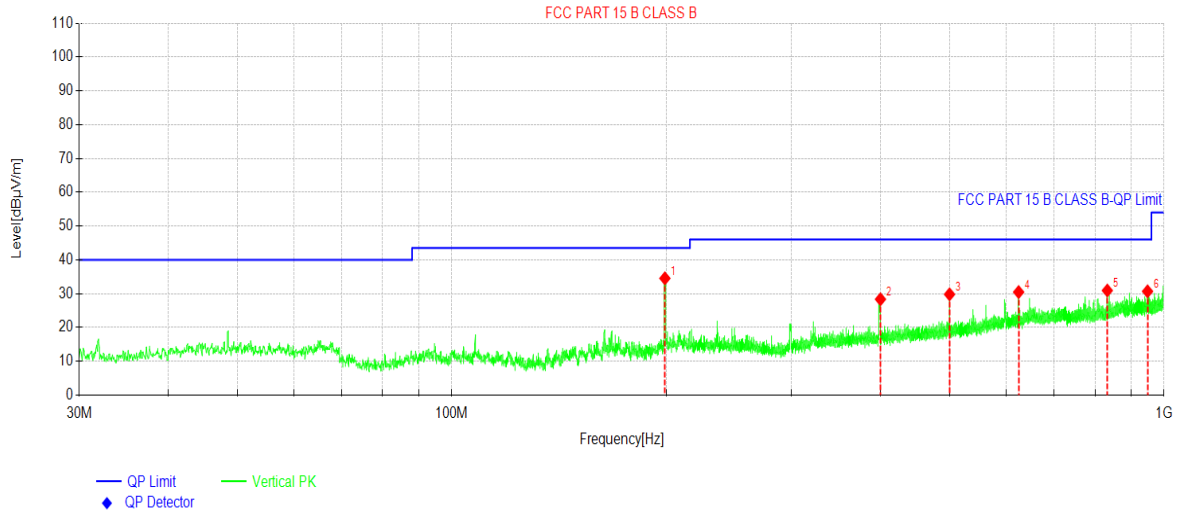


| Suspected Data List | | | | | | | | |
|---------------------|-------------|-----------------|----------------|-------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading[dBµV/m] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 199.216 | 49.69 | 34.54 | -15.15 | 43.50 | 8.96 | PK | Vertical |
| 2 | 399.909 | 39.16 | 28.36 | -10.80 | 46.00 | 17.64 | PK | Vertical |
| 3 | 500.013 | 38.80 | 29.81 | -8.99 | 46.00 | 16.19 | PK | Vertical |
| 4 | 625.046 | 36.80 | 30.48 | -6.32 | 46.00 | 15.52 | PK | Vertical |
| 5 | 832.626 | 34.59 | 30.94 | -3.65 | 46.00 | 15.06 | PK | Vertical |
| 6 | 948.250 | 32.96 | 30.69 | -2.27 | 46.00 | 15.31 | PK | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|------------------------|-----------------|-----------------------|--------------|
| Product Name: | wireless module | Product Model: | WL6PR1101 |
| Test By: | Mike | Test mode: | Working mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 3.3V | | |

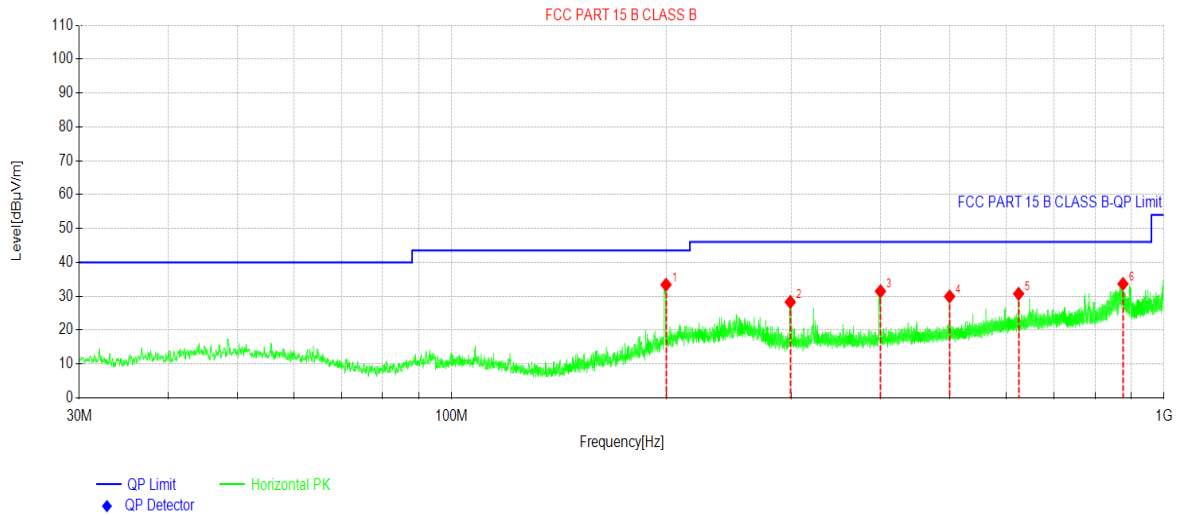

Suspected Data List


| NO. | Freq. [MHz] | Reading[dBµV/m] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
|-----|-------------|-----------------|----------------|-------------|----------------|-------------|-------|------------|
| 1 | 199.944 | 48.50 | 33.40 | -15.10 | 43.50 | 10.10 | PK | Horizontal |
| 2 | 298.787 | 41.39 | 28.30 | -13.09 | 46.00 | 17.70 | PK | Horizontal |
| 3 | 399.909 | 42.29 | 31.49 | -10.80 | 46.00 | 14.51 | PK | Horizontal |
| 4 | 500.013 | 38.93 | 29.94 | -8.99 | 46.00 | 16.06 | PK | Horizontal |
| 5 | 625.046 | 37.06 | 30.74 | -6.32 | 46.00 | 15.26 | PK | Horizontal |
| 6 | 875.840 | 36.68 | 33.66 | -3.02 | 46.00 | 12.34 | PK | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

| | | | |
|------------------------|---------------------|-----------------------|--------------|
| Product Name: | wireless module | Product Model: | WL6PR1101 |
| Test By: | Mike | Test mode: | Working mode |
| Test Frequency: | 1000 MHz ~ 6000 MHz | Polarization: | Vertical |
| Test Voltage: | DC 3.3V | | |

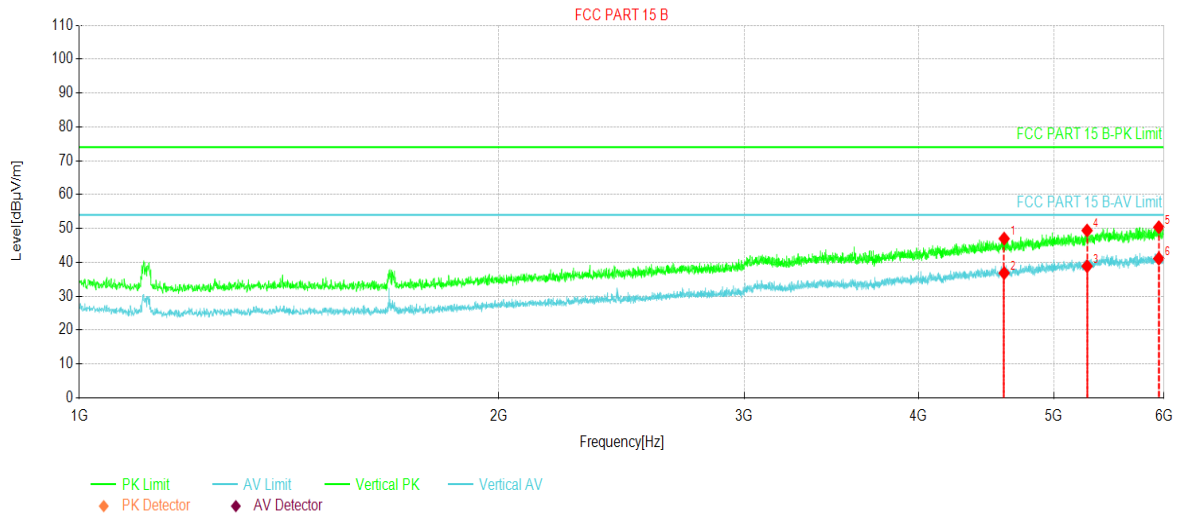


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 4608.12 | 56.67 | -9.67 | 47.00 | 74.00 | 27.00 | PK | Vertical |
| 2 | 4608.12 | 46.52 | -9.67 | 36.85 | 54.00 | 17.15 | AV | Vertical |
| 3 | 5284.37 | 45.52 | -6.65 | 38.87 | 54.00 | 15.13 | AV | Vertical |
| 4 | 5284.37 | 56.05 | -6.65 | 49.40 | 74.00 | 24.60 | PK | Vertical |
| 5 | 5948.75 | 54.66 | -4.29 | 50.37 | 74.00 | 23.63 | PK | Vertical |
| 6 | 5948.75 | 45.41 | -4.29 | 41.12 | 54.00 | 12.88 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|------------------------|---------------------|-----------------------|--------------|
| Product Name: | wireless module | Product Model: | WL6PR1101 |
| Test By: | Mike | Test mode: | Working mode |
| Test Frequency: | 1000 MHz ~ 6000 MHz | Polarization: | Horizontal |
| Test Voltage: | DC 3.3V | | |

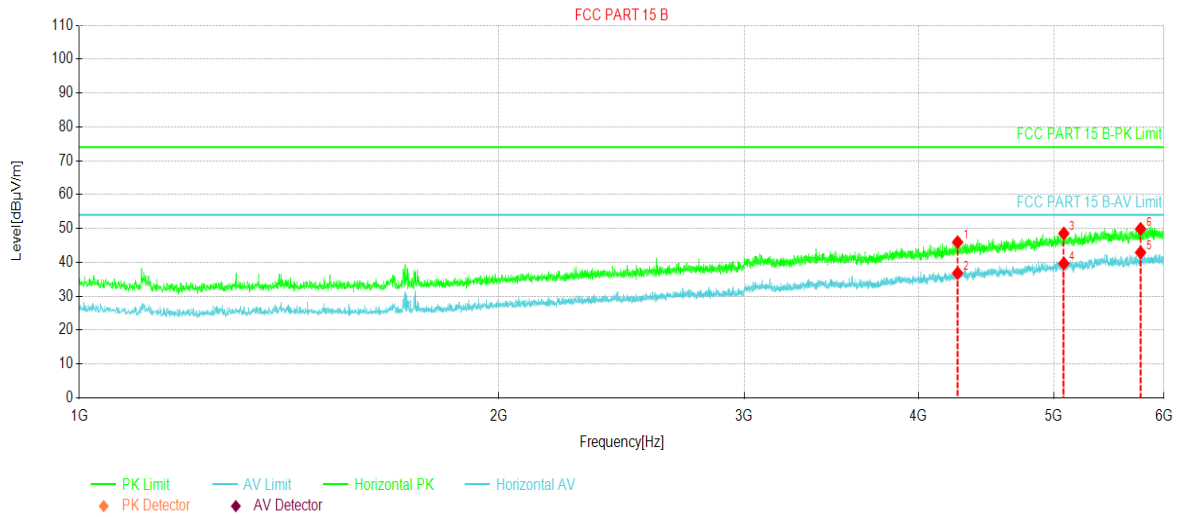

Suspected Data List

| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
|-----|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| 1 | 4266.87 | 57.14 | -11.17 | 45.97 | 74.00 | 28.03 | PK | Horizontal |
| 2 | 4266.87 | 47.98 | -11.17 | 36.81 | 54.00 | 17.19 | AV | Horizontal |
| 3 | 5085.00 | 56.16 | -7.63 | 48.53 | 74.00 | 25.47 | PK | Horizontal |
| 4 | 5085.00 | 47.29 | -7.63 | 39.66 | 54.00 | 14.34 | AV | Horizontal |
| 5 | 5772.50 | 47.78 | -4.87 | 42.91 | 54.00 | 11.09 | AV | Horizontal |
| 6 | 5772.50 | 54.72 | -4.87 | 49.85 | 74.00 | 24.15 | PK | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----