



HCT CO., LTD.

CERTIFICATION DIVISION  
74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA  
TEL: +82 31 645 6300 FAX: +82 31 645 6401

## EMI CERTIFICATION REPORT

**Applicant:**

LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue:** December 17, 2013

**Test Report No.:** HCTE1312FE17

**Test Site:** HCT CO., LTD.  
**HCT FRN:** 0005-8664-21

**FCC ID:**

**ZNFD325F**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B  
Equipment Type : GSMWCDMA Phone with Bluetooth4.0, WIFI802.11 b/g/n(2.4GHz\_ HT20), VoIP, Hotspot support  
Model Name : LG-D325f  
Additional Model Name : LGD325f, D325f  
Port / Connector(s) : USB / Earphone Port  
Date of Test : December 16, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4/2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

  
Report prepared by

: Gu-Cheol Yoon  
Test Engineer of EMC Team

  
Approved by

: Sang-Jun Lee  
Manager of EMC Team

## DOCUMENT HISTORY

---

The revision history for this document is shown in table.

Version	Date	Description
HCTE1312FE17	December 17, 2013	Initial Release

---

## TABLE OF CONTENTS

---

	<b>PAGE</b>
1. GENERAL INFORMATION .....	4
1.1 Product Description .....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description .....	6
1.5 Noise Suppression Parts on Cable. (I/O cable) .....	6
1.6 Test Methodology .....	7
1.7 Test Facility .....	7
1.8 Frequency Range of Radiated Measurements .....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System.....	8
3. PRELIMINARY TEST .....	9
3.1 Conducted Emission Test .....	9
3.2 Radiated Emission Test .....	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY .....	10
4.1 Conducted Emission Test .....	10
4.2 Radiated Emission Test .....	11
5. FIELD STRENGTH CALCULATION .....	17
6. TEST EQUIPMENT.....	18
7. CONCLUSION .....	19

**ATTACHMENT: TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

### 1.1 Product Description

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**  
Its basic purpose is used for communications.

<b>Model Name</b>	LG-D325f
<b>Additional Model</b>	LGD325f, D325f
<b>FCC ID</b>	ZNFD325F
<b>EUT Type</b>	GSM/WCDMA Phone with Bluetooth4.0, WIFI802.11 b/g/n (2.4GHz_HT20), VoIP, Hotspot support
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-D325f	LG	ZNFD325F	Notebook PC Ear-phone
USB cable	EAD62377902	Ningbo Broad Telecommunication Co., Ltd.	-	E.U.T Notebook PC
Ear-phone	EAB62808211	I-SOUND	-	E.U.T
Notebook PC	ProBook6560b	H.P	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	PPP009D	DELTA Electronics (JIANGSU)LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	8 GB	SanDisk	-	EUT

### 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Ear-phone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

\* The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m.

## 1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of C63.4/2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661 (June 21, 2011)
Radiated Field strength measurement facility (10m)	90661 (June 21, 2011)

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System


#### 2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

#### 2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[ Configuration of Tested System ]

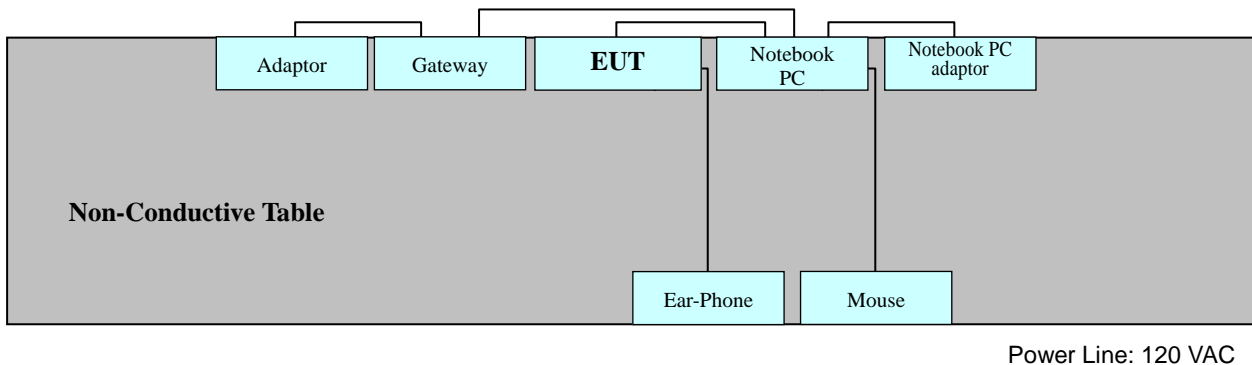



### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

#### **3. 2 Radiated Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
Temperature	: 19.0°C
Humidity Level	: 30.0 %
Test Date	: December 16, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.198	10.0	N	64	47.3	57.3	54	-	-
0.194	9.8	H	64	47.8	57.6	54	26.9	36.7
0.266	9.8	H	61	39.9	49.7	51	20.0	29.8
0.278	10.0	N	61	37.9	47.9	51	-	-
0.282	9.8	H	61	38.6	48.4	51	15.3	25.1
4.656	10.4	N	56	-	-	46	23.8	34.2

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: LG-D325f  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: H  
 Start of Test: 2013-12-16 / 1:12:06오후

**SCAN TABLE: "FCC CLASS B(H)"**

Short Description:			FCC CLASS B(H)				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

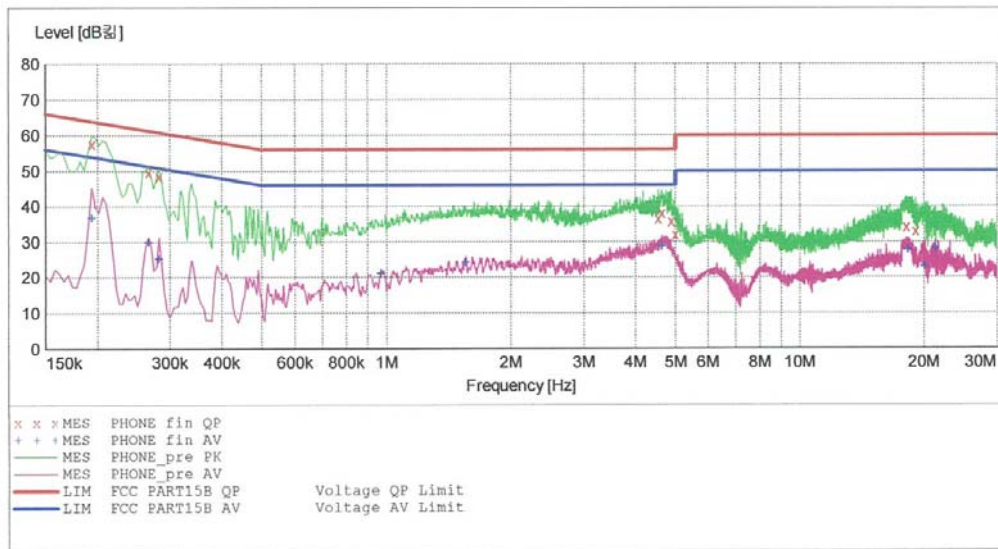

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

2013-12-16 1:14오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194001	57.60	9.8	64	6.3	---	---
0.266001	49.70	9.8	61	11.6	---	---
0.282001	48.40	9.8	61	12.4	---	---
4.548000	36.50	10.2	56	19.5	---	---
4.648000	38.10	10.2	56	17.9	---	---
4.896000	35.80	10.2	56	20.2	---	---
5.000000	32.00	10.2	56	24.0	---	---
18.080000	34.20	10.9	60	25.8	---	---
19.076000	33.10	10.9	60	26.9	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-16 1:14 오후

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.194001	36.70	9.8	54	17.2	---	---
0.266001	29.80	9.8	51	21.4	---	---
0.282001	25.10	9.8	51	25.6	---	---
0.972000	21.10	9.8	46	24.9	---	---
1.556000	24.10	9.9	46	21.9	---	---
4.648000	28.70	10.2	46	17.3	---	---
18.244000	27.90	10.9	50	22.1	---	---
20.028000	22.90	10.9	50	27.1	---	---
21.268000	28.10	11.0	50	21.9	---	---


**HCT**

**EMC**

EUT: LG-D325f  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: N  
 Start of Test: 2013-12-16 / 1:16:19 오후

**SCAN TABLE: "FCC CLASS B(N)"**

Short Description:			FCC CLASS B(N)			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

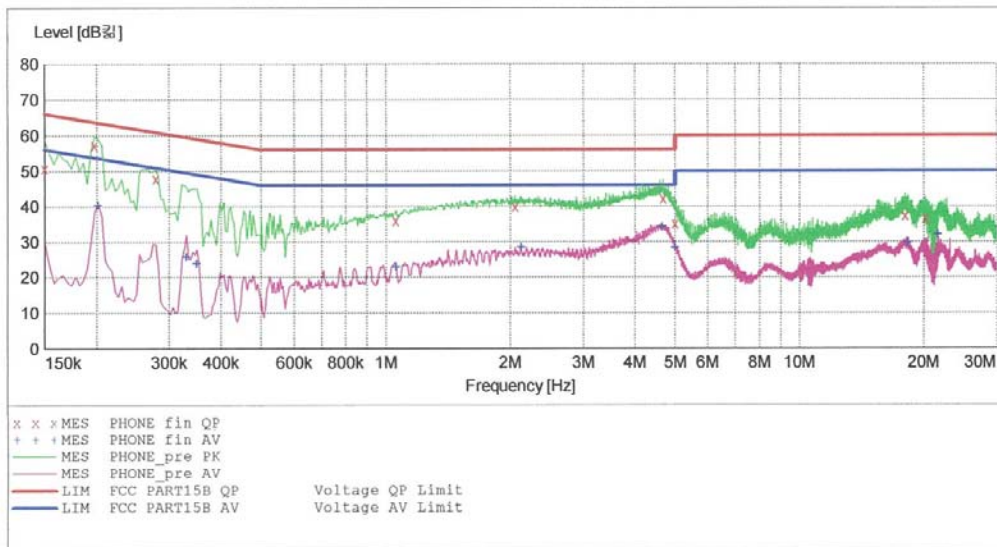

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

2013-12-16 1:19 오후

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150001	50.80	10.0	66	15.2	---	---
0.198001	57.30	10.0	64	6.4	---	---
0.278001	47.90	10.0	61	13.0	---	---
1.056000	36.10	10.1	56	19.9	---	---
2.056000	39.90	10.1	56	16.1	---	---
4.680000	42.10	10.4	56	13.9	---	---
5.000000	35.30	10.4	56	20.7	---	---
17.980000	37.40	11.2	60	22.6	---	---
20.164000	36.70	11.3	60	23.3	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-16 1:19 Ω 辛

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.202001	40.30	10.0	54	13.2	---	---
0.330001	25.80	10.0	50	23.6	---	---
0.350001	23.90	10.0	49	25.1	---	---
1.060000	23.10	10.1	46	22.9	---	---
2.124000	28.50	10.2	46	17.5	---	---
4.656000	34.20	10.4	46	11.8	---	---
5.000000	28.40	10.4	46	17.6	---	---
18.248000	29.60	11.2	50	20.4	---	---
21.664000	32.00	11.3	50	18.0	---	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

### -For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 20.0°C

Humidity Level : 30.4 %

Test Date : December 16, 2013

Frequency (MHz)	Reading (dB $\mu$ V)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dB $\mu$ V/m)	Level (dB $\mu$ V/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
57.9	19.26	V	1.0	11.93	3.53	40.0	34.72	5.28
90.0	22.03	H	1.0	7.47	3.74	43.5	33.24	10.26
132.0	12.83	V	1.0	12.35	3.93	43.5	29.11	14.39
275.0	15.00	H	1.0	12.59	4.45	46.0	32.04	13.96
375.0	15.45	H	1.0	15.08	4.79	46.0	35.32	10.68
625.0	13.78	V	1.0	19.97	5.39	46.0	39.14	6.86

※ **NOTE:** Polarity H = Horizontal, Polarity V = Vertical

**-For measurement above 1 GHz**

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 20.6°C

Humidity Level : 30.4 %

Test Date : December 16, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)		Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1.3305	51.4	74	22.6	V	28.4	54	25.6
1.9954	54.2	74	19.8	V	30.8	54	23.2
2.0794	53.4	74	20.6	V	30.0	54	24.0
2.6662	53.8	74	20.2	V	31.6	54	22.4

**※ NOTE:**

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.



## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
 The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2014.06.23
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03
<b><u>Radiated Emission (30 Mhz to 1 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	2015.04.16
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<b><u>Radiated Emission (1 GHz to 12 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21690	1 year	2014.07.12
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-

## **7. CONCLUSION**

---

The data collected shows that the **EUT type: GSM/WCDMA Phone with Bluetooth4.0, WIFI802.11 b/g/n(2.4GHz\_HT20), VoIP, Hotspot support, FCC ID: ZNFD325F, Model: LG-D325f** complies with §15.107 and §15.109 of the FCC rules.