

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: February 10, 2014
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang- myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCTR1402F007
	HCT FRN: 0005866421

FCC ID : ZNFD400HN

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D400hn
Additional FCC Model(s):	D400hn, D400HN, LGD400hn, LGD400HN, LG-D400HN, D400ARn, D400ARN, LGD400ARn, LGD400ARN, LG-D400ARn, LG-D400ARN
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)
RF Output Field Strength	11.92 dBuV/m
Frequency of Operation:	13.559350 MHz
Modulation type	ASK
FCC Classification:	Low Power Communication Device – Transmitter
FCC Rule Part(s):	FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Jae Chul Shin
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1402F007	February 10, 2014	- First Approval Report



Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	10
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	13
9. EMISSION BANDWIDTH PLOT.....	14
10. FREQUENCY TOLERANCE	15
11. POWERLINE CONDUCTE EMISSIONS.....	16
12. LIST OF TEST EQUIPMENT	25

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD400HN



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFD400HN
EUT: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)
Model name(s): LG-D400hn
Additional Model name(s): D400hn, D400HN, LGD400hn, LGD400HN, LG-D400HN, D400ARn, D400ARN, LGD400ARn, LGD400ARN, LG-D400ARn, LG-D400ARN
Date of Test: January 13, 2014 ~ January 17, 2014
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

Product	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)
FCC Model Name	LG-D400hn
Additional FCC Model Name	D400hn, D400HN, LGD400hn, LGD400HN, LG-D400HN, D400ARn, D400ARN, LGD400ARn, LGD400ARN, LG-D400ARn, LG-D400ARN
Power Supply	DC 3.8 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	13.559350 MHz
Transmit Power	11.92 dBuV/m
Modulation Type	ASK
Antenna Specification	Manufacturer: AT&C Co. LTD. Antenna type: FPCB Antenna

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009).

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN



3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With
FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2009	13.553MHz to 13.567MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2009	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	9kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	30MHz to 1GHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2009	150kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2009	0.01% of nominal
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2009	-



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated June. 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD400HN



7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass



8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.


(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

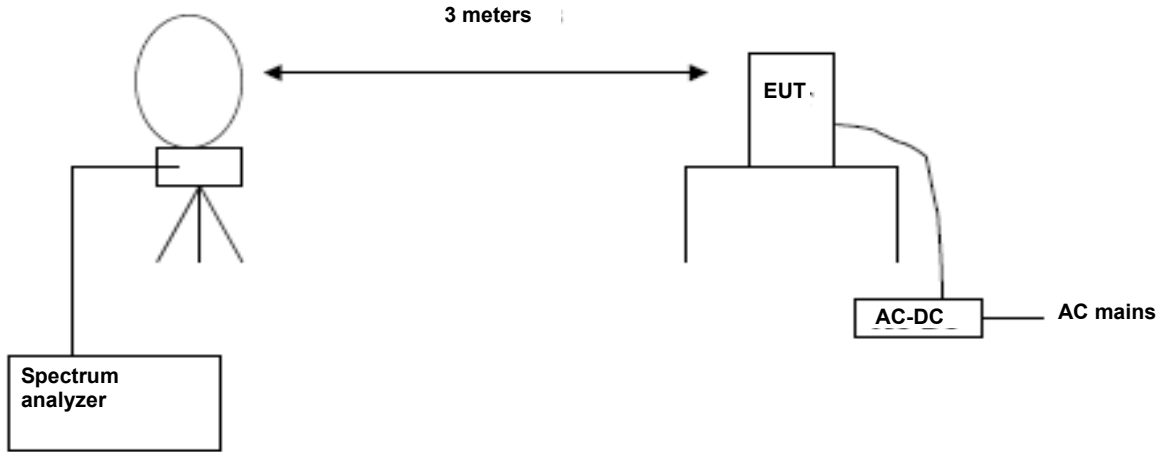

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dB μ V/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD400HN



Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.559350	32.12(H)*	19.80	-40	11.92	84	72.08
13.559350	26.36(V)*	19.80	-40	6.16	84	77.84

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5530	21.52	19.80	-40	1.32	50.47	49.15
13.6656	19.53	19.80	-40	-0.67	50.47	51.14

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3482	18.35	19.80	-40	-1.85	40.51	42.36
13.7718	16.05	19.80	-40	-4.15	40.51	44.66

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.0313	9.47	19.80	-40	-10.73	29.54	40.27
14.0739	5.3	19.80	-40	-14.90	29.54	44.44




Note :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = - 40 \text{ dB}$
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. (H)* and (V)* mean antenna polarization.
6. Worst case of operating mode is type A, analog mode and 106 kbps.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

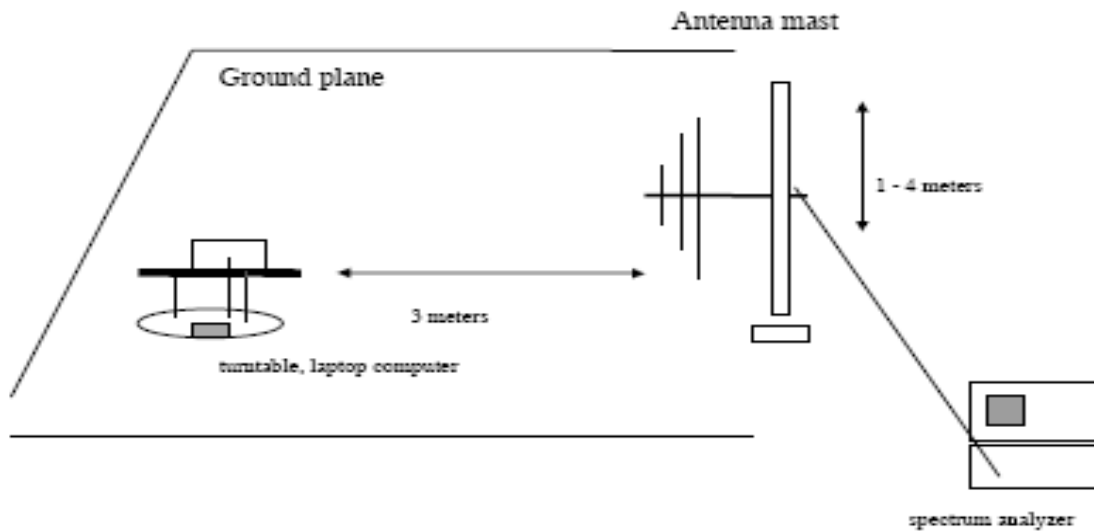

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
Mhz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
421.88	16.78	16.00	1.62	H	34.40	46.00	11.60
249.22	16.61	11.75	1.28	H	29.64	46.00	16.36
978.66	16.21	11.82	2.45	H	30.48	54.00	23.52
30.00	17.30	11.13	0.58	V	29.01	40.00	10.99
914.64	16.62	11.20	2.37	V	30.19	46.00	15.81
639.16	16.11	11.32	1.98	V	29.41	46.00	16.59

Remark


1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

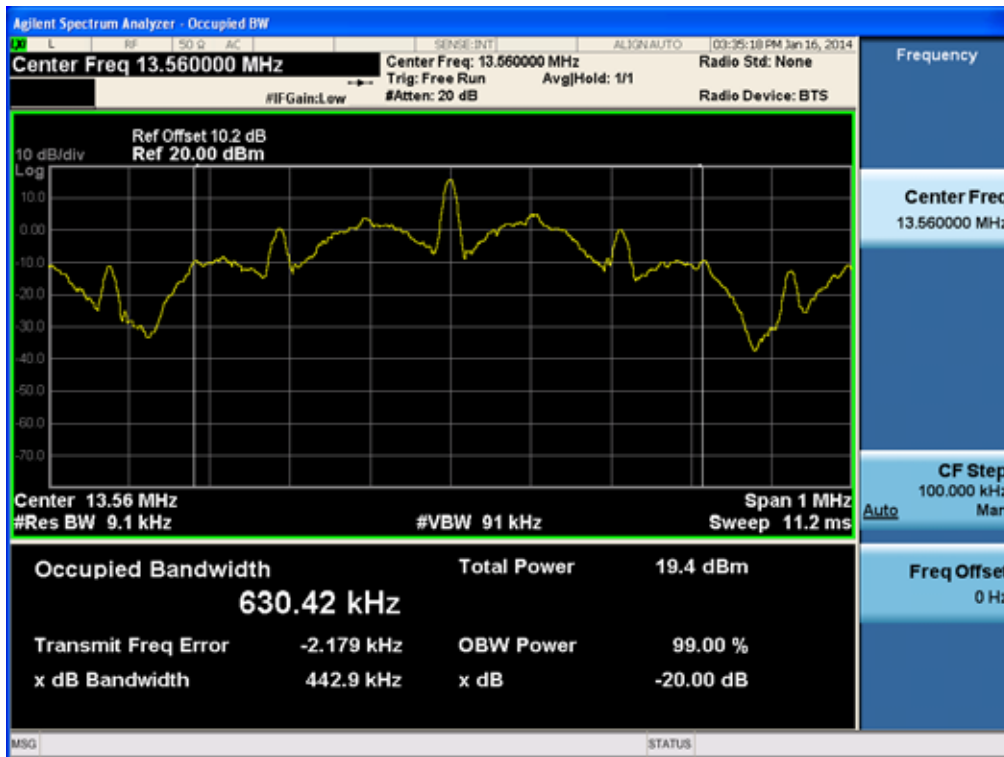

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN



10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE (%)	POWER	Temperature (°C)	Frequency (MHz)	Frequency Error (Hz)
100%	3.8 V	-20	13.559520	170
100%		-10	13.559480	130
100%		0	13.559508	158
100%		10	13.559479	129
100%		20	13.559350	0
100%		30	13.559461	111
100%		40	13.559498	148
100%		50	13.559532	182
115%		4.37	20	13.559478
Batt. Endpoint	3.50	20	13.559532	182

11. POWERLINE CONDUCTE EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.



Test Plots

Unterminate the Antenna

Conducted Emissions (Line 1)

EMI Auto Test(1)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D400HN
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE(UNTERMINATED)
 Operator Name: JC SHIN

FCC CLASS B

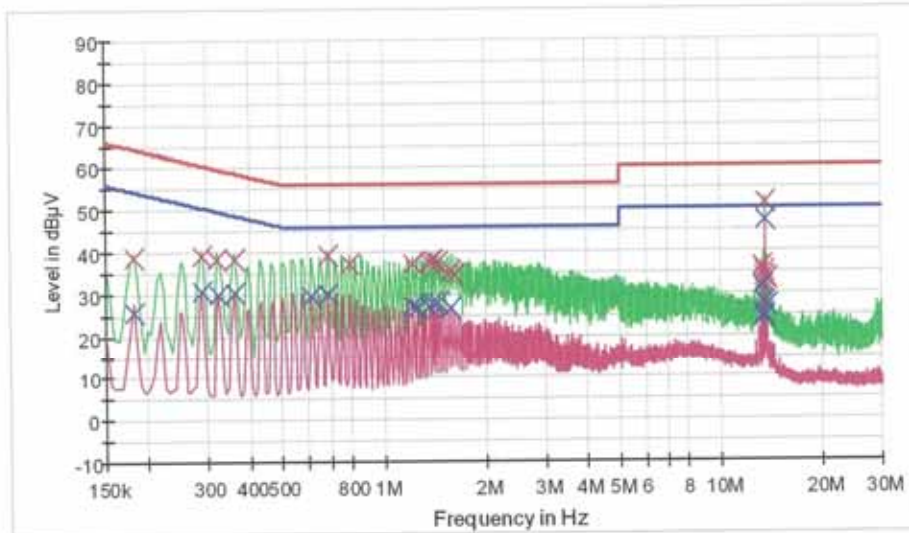

— FCC CLASS B_CQP
 — FCC CLASS B_AV
 — Preview Result 1-FK*
— Preview Result 2-AVG
 X Final Result 1-CFK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	38.7	9.000	Off	L1	9.8	25.7	64.4
0.289500	39.0	9.000	Off	L1	9.8	21.5	60.5
0.321000	38.1	9.000	Off	L1	9.8	21.6	59.7
0.361500	38.3	9.000	Off	L1	9.8	20.4	58.7
0.680000	39.1	9.000	Off	L1	9.8	16.9	56.0
0.788000	37.0	9.000	Off	L1	9.8	19.0	56.0
1.220000	37.3	9.000	Off	L1	9.9	18.8	56.0
1.364000	37.3	9.000	Off	L1	9.9	18.7	56.0
1.400000	37.8	9.000	Off	L1	9.9	18.2	56.0
1.436000	37.7	9.000	Off	L1	9.9	18.3	56.0
1.575500	35.2	9.000	Off	L1	9.9	20.8	56.0
1.611500	34.7	9.000	Off	L1	9.9	21.3	56.0
13.347500	36.1	9.000	Off	L1	10.7	23.9	60.0
13.446500	32.6	9.000	Off	L1	10.7	27.4	60.0
13.455500	35.0	9.000	Off	L1	10.7	25.0	60.0
13.487000	33.8	9.000	Off	L1	10.7	26.2	60.0

1/16/2014

7:54:44

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN

EMI Auto Test(1)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.559000	51.3	9.000	Off	L1	10.7	8.7	60.0
13.662500	33.4	9.000	Off	L1	10.7	26.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	25.9	9.000	Off	L1	9.8	26.5	54.4
0.289500	30.9	9.000	Off	L1	9.8	19.6	50.5
0.325500	29.9	9.000	Off	L1	9.8	19.7	49.6
0.361500	30.5	9.000	Off	L1	9.8	18.2	48.7
0.612500	29.4	9.000	Off	L1	9.8	16.6	46.0
0.684500	29.9	9.000	Off	L1	9.8	16.1	46.0
1.220000	27.1	9.000	Off	L1	9.9	18.9	46.0
1.256000	26.5	9.000	Off	L1	9.9	19.5	46.0
1.364000	27.1	9.000	Off	L1	9.9	18.9	46.0
1.400000	27.9	9.000	Off	L1	9.9	18.1	46.0
1.436000	27.7	9.000	Off	L1	9.9	18.3	46.0
1.580000	26.7	9.000	Off	L1	9.9	19.3	46.0
13.347500	31.7	9.000	Off	L1	10.7	18.3	50.0
13.428500	24.0	9.000	Off	L1	10.7	26.0	50.0
13.455500	27.8	9.000	Off	L1	10.7	22.2	50.0
13.487000	25.0	9.000	Off	L1	10.7	25.0	50.0
13.559000	47.3	9.000	Off	L1	10.7	2.7	50.0
13.667000	26.8	9.000	Off	L1	10.7	23.2	50.0

1/16/2014

7:54:44


Conducted Emissions (Line 2)

HCT TEST Report

Common Information

EUT: LG-D400HN
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE(UNTERMINATED)
 Operator Name: JC SHIN

FCC CLASS B

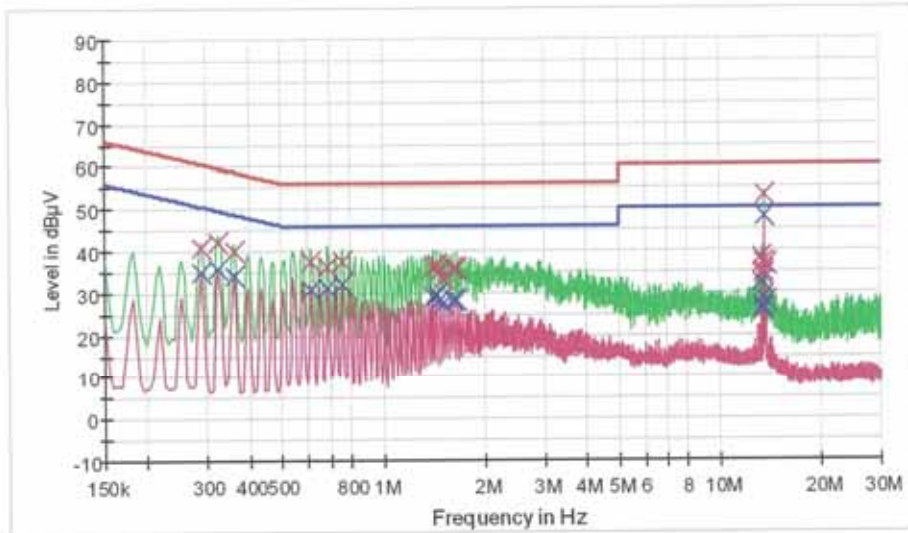

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK*
— Preview Result 2-AVG X Final Result 1-GPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.289500	40.8	9.000	Off	N	10.0	19.7	60.5
0.325500	41.9	9.000	Off	N	10.0	17.7	59.6
0.361500	39.9	9.000	Off	N	10.0	18.8	58.7
0.612500	37.5	9.000	Off	N	10.0	18.5	56.0
0.684500	36.4	9.000	Off	N	10.0	19.6	56.0
0.756500	37.6	9.000	Off	N	10.0	18.4	56.0
1.404500	36.2	9.000	Off	N	10.1	19.8	56.0
1.440500	36.6	9.000	Off	N	10.1	19.4	56.0
1.476500	35.2	9.000	Off	N	10.1	20.8	56.0
1.512500	33.5	9.000	Off	N	10.1	22.5	56.0
1.620500	35.7	9.000	Off	N	10.1	20.3	56.0
1.656500	35.6	9.000	Off	N	10.1	20.4	56.0
13.347500	38.2	9.000	Off	N	10.9	21.8	60.0
13.437500	34.3	9.000	Off	N	10.9	25.7	60.0
13.451000	37.0	9.000	Off	N	10.9	23.0	60.0
13.469000	35.0	9.000	Off	N	10.9	25.0	60.0

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.559000	53.2	9.000	Off	N	10.9	6.8	60.0
13.667000	36.4	9.000	Off	N	11.0	23.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.289500	34.8	9.000	Off	N	10.0	15.7	50.5
0.325500	35.8	9.000	Off	N	10.0	13.8	49.6
0.361500	34.3	9.000	Off	N	10.0	14.4	48.7
0.612500	31.0	9.000	Off	N	10.0	15.0	46.0
0.684500	31.1	9.000	Off	N	10.0	14.9	46.0
0.756500	32.0	9.000	Off	N	10.0	14.0	46.0
1.404500	29.3	9.000	Off	N	10.1	16.7	46.0
1.440500	29.4	9.000	Off	N	10.1	16.6	46.0
1.476500	28.4	9.000	Off	N	10.1	17.6	46.0
1.512500	27.3	9.000	Off	N	10.1	18.7	46.0
1.620500	28.4	9.000	Off	N	10.1	17.6	46.0
1.656500	28.2	9.000	Off	N	10.1	17.8	46.0
13.347500	32.6	9.000	Off	N	10.9	17.4	50.0
13.451000	28.5	9.000	Off	N	10.9	21.5	50.0
13.464500	26.7	9.000	Off	N	10.9	23.3	50.0
13.478000	25.8	9.000	Off	N	10.9	24.2	50.0
13.559000	48.2	9.000	Off	N	10.9	1.8	50.0
13.667000	27.7	9.000	Off	N	11.0	22.3	50.0


**Terminate the Antenna
Conducted Emissions (Line 1)**

HCT TEST Report

Common Information

EUT: LG-D400HN
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE(TERMINATED)
 Operator Name: JC SHIN

FCC CLASS B

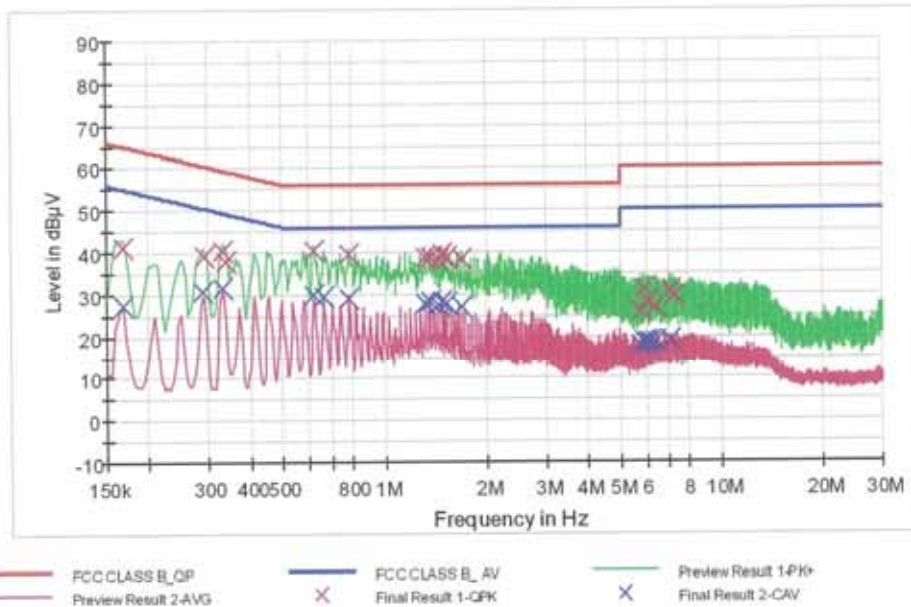

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	41.4	9.000	Off	L1	9.8	23.7	65.1
0.294000	39.1	9.000	Off	L1	9.8	21.3	60.4
0.330000	40.5	9.000	Off	L1	9.8	19.0	59.5
0.339000	38.1	9.000	Off	L1	9.8	21.1	59.2
0.617000	40.6	9.000	Off	L1	9.8	15.4	56.0
0.783500	39.5	9.000	Off	L1	9.8	16.5	56.0
1.319000	38.6	9.000	Off	L1	9.9	17.4	56.0
1.359500	38.8	9.000	Off	L1	9.9	17.2	56.0
1.440500	38.5	9.000	Off	L1	9.9	17.5	56.0
1.481000	39.6	9.000	Off	L1	9.9	16.4	56.0
1.521500	38.8	9.000	Off	L1	9.9	17.2	56.0
1.688000	38.1	9.000	Off	L1	9.9	17.9	56.0
5.769500	25.7	9.000	Off	L1	10.2	34.3	60.0
5.846000	31.3	9.000	Off	L1	10.2	28.7	60.0
6.012500	28.4	9.000	Off	L1	10.2	31.6	60.0
6.341000	27.1	9.000	Off	L1	10.3	32.9	60.0

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.079000	30.6	9.000	Off	L1	10.3	29.4	60.0
7.245500	29.5	9.000	Off	L1	10.3	30.5	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	27.2	9.000	Off	L1	9.8	27.9	55.1
0.289500	30.6	9.000	Off	L1	9.8	19.9	50.5
0.330000	31.8	9.000	Off	L1	9.8	17.7	49.5
0.617000	29.8	9.000	Off	L1	9.8	16.2	46.0
0.657500	29.5	9.000	Off	L1	9.8	16.5	46.0
0.783500	29.1	9.000	Off	L1	9.8	16.9	46.0
1.319000	27.8	9.000	Off	L1	9.9	18.2	46.0
1.359500	28.2	9.000	Off	L1	9.9	17.8	46.0
1.440500	27.3	9.000	Off	L1	9.9	18.7	46.0
1.481000	28.1	9.000	Off	L1	9.9	17.9	46.0
1.521500	27.9	9.000	Off	L1	9.9	18.1	46.0
1.688000	27.0	9.000	Off	L1	9.9	19.0	46.0
5.724500	17.6	9.000	Off	L1	10.2	32.4	50.0
5.846000	18.5	9.000	Off	L1	10.2	31.5	50.0
6.012500	18.7	9.000	Off	L1	10.2	31.3	50.0
6.174500	18.7	9.000	Off	L1	10.2	31.3	50.0
6.341000	18.4	9.000	Off	L1	10.3	31.6	50.0
7.079000	19.2	9.000	Off	L1	10.3	30.8	50.0

Conducted Emissions (Line 2)

EMI Auto Test(1)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D400HN
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE(TERMINATED)
 Operator Name: JC SHIN

FCC CLASS B

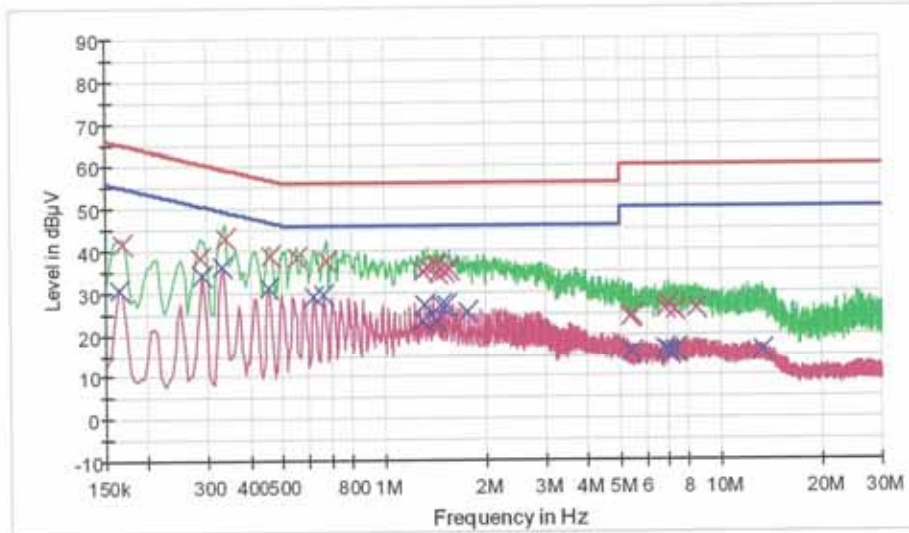

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	41.6	9.000	Off	N	10.0	23.5	65.1
0.285000	38.3	9.000	Off	N	10.0	22.4	60.7
0.339000	42.8	9.000	Off	N	10.0	16.4	59.2
0.460500	38.8	9.000	Off	N	10.0	17.9	56.7
0.549500	38.3	9.000	Off	N	10.0	17.7	56.0
0.675500	37.4	9.000	Off	N	10.0	18.6	56.0
1.310000	34.9	9.000	Off	N	10.1	21.1	56.0
1.350500	35.8	9.000	Off	N	10.1	20.2	56.0
1.422500	36.7	9.000	Off	N	10.1	19.3	56.0
1.436000	34.4	9.000	Off	N	10.1	21.6	56.0
1.517000	35.1	9.000	Off	N	10.1	20.9	56.0
1.562000	35.5	9.000	Off	N	10.1	20.5	56.0
5.348500	24.0	9.000	Off	N	10.4	36.0	60.0
5.427500	24.4	9.000	Off	N	10.4	35.6	60.0
6.831500	26.3	9.000	Off	N	10.5	33.7	60.0
6.993500	27.0	9.000	Off	N	10.5	33.0	60.0

1/16/2014

7:42:00

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFD400HN

EMI Auto Test(1)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.281500	25.7	9.000	Off	N	10.5	34.3	60.0
8.451500	26.1	9.000	Off	N	10.6	33.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.163500	30.7	9.000	Off	N	10.0	24.6	55.3
0.289500	34.1	9.000	Off	N	10.0	16.4	50.5
0.330000	36.4	9.000	Off	N	10.0	13.1	49.5
0.456000	31.0	9.000	Off	N	10.0	15.8	46.8
0.617000	29.3	9.000	Off	N	10.0	16.7	46.0
0.662000	29.4	9.000	Off	N	10.0	16.6	46.0
1.296500	23.0	9.000	Off	N	10.1	23.0	46.0
1.319000	26.8	9.000	Off	N	10.1	19.2	46.0
1.422500	23.1	9.000	Off	N	10.1	22.9	46.0
1.481000	26.8	9.000	Off	N	10.1	19.2	46.0
1.521500	26.8	9.000	Off	N	10.1	19.2	46.0
1.769000	25.5	9.000	Off	N	10.1	20.5	46.0
5.427500	15.7	9.000	Off	N	10.4	34.3	50.0
6.831500	16.4	9.000	Off	N	10.5	33.6	50.0
6.989000	16.0	9.000	Off	N	10.5	34.0	50.0
7.029500	15.4	9.000	Off	N	10.5	34.6	50.0
7.277000	15.9	9.000	Off	N	10.5	34.1	50.0
13.221500	16.1	9.000	Off	N	10.9	33.9	50.0

1/16/2014

7:42:00

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1402F007	Date of Issue: February 10, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN and NFC(Felica)		FCC ID: ZNFD400HN

12. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/06/2014	100073
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/17/2014	3150
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	04/16/2014	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	04/25/2014	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	05/14/2014	MY51110063
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2014	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/08/2014	839117/011
Agilent	N1911A/Power Meter	Annual	01/22/2014	MY45100523
Agilent	N1921A /POWER SENSOR	Annual	07/11/2014	MY45241059
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	Annual	02/08/2014	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	04/16/2014	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	04/16/2014	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	03/19/2014	1
Hewlett Packard	11636B/Power Divider	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	Annual	12/18/2014	3116A03621
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/05/2014	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	04/24/2014	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	04/25/2014	100422
Rohde & Schwarz	LOOP ANTENNA	Biennial	08/14/2014	100179
Agilent	8493C / Attenuator(10 dB)	Annual	07/24/2014	76649
WEINSCHL	2-3 / Attenuator(3 dB)	Annual	10/28/2014	BR0617
CERNEX	CBL06185030 / POWER AMP	Annual	07/24/2014	22965
CERNEX	CBLU1183540 / POWER AMP	Annual	07/24/2014	22964