

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.Date of Issue:
March 14, 2014
Test Site/Location:
HCT CO., LTD., 74, SeoiAddress:HCT CO., LTD., 74, Seoi

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: March 14, 2014 Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majangmyeon, Icheon-si, Gyeonggi-do, Korea Report No.: HCT-R-1403-F022

HCT FRN: 0005866421

FCC ID	: ZNFD625	
APPLICANT	: LG Electronics MobileComm U.S.A., Inc.	
FCC Model(s): Additional FCC Model(s): EUT Type:	LG-D625 LGD625, D625 Cellular/PCS GSM, WCDMA,LTE Phone with Bluetooth/WLAN/NFC	
Max. RF Output Power:	Wi-Fi 802.11b(21.38 dBm) / Wi-Fi 802.11g (20.70 dBm) / Wi-Fi 802.11n (19.31 dBm)	
Frequency Range:	2412 MHz - 2462 MHz (2.4 GHz Band)	
Modulation type	CCK/DSSS/OFDM	
FCC Classification:	Digital Transmission System(DTS)	
FCC Rule Part(s):	Part 15.247	

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by : Kyoung Houn Seo Test engineer of RF Team

Approved by

: Chang Seok Choi Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM, WCDMA, LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1403-F022	March 14,2014	- First Approval Report

TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Table of Contents

1. GENERAL INFORMATION	. 4
2. EUT DESCRIPTION	. 4
3. TEST METHODOLOGY	. 5
3.1 EUT CONFIGURATION	. 5
3.2 EUT EXERCISE	. 5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	. 5
4. INSTRUMENT CALIBRATION	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	. 7
7. SUMMARY TEST OF RESULTS	. 8
8. TEST RESULT	. 9
8.1 DUTY CYCLE	. 9
8.2 6dB BANDWIDTH (802.11b/g/n) 1	1
8.3 OUTPUT POWER (802.11b/g/n) 1	5
8.4 POWER SPECTRAL DENSITY (802.11b/g/n) 2	2
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2	6
8.6 RADIATED MEASUREMENT 3	9
8.6.1 RADIATED SPURIOUS EMISSIONS	9
8.6.2 RADIATED RESTRICTED BAND EDGES 5	1
8.7 POWERLINE CONDUCTED EMISSIONS	3
9. LIST OF TEST EQUIPMENT	8

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr	
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625	
Dage 2 of E9				



Applicant:	LG Electronics MobileComm U.S.A., Inc.
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFD625
EUT Type:	Cellular/PCS GSM, WCDMA, LTE Phone with Bluetooth/WLAN/NFC
Model name(s):	LG-D625
Additional Model name(s):	LGD625,D625
Date(s) of Tests:	February 12, 2014 ~ March 10, 2014
Place of Tests:	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/P	Cellular/PCS GSM, WCDMA, LTE Phone with Bluetooth/WLAN/NFC		
FCC Model Name	LG-D625	LG-D625		
Additional FCC Model Name	LGD625,[LGD625,D625		
Power Supply	DC 3.8 V	DC 3.8 V		
Battery type	Li-ion Bat	Li-ion Battery(Standard)		
Frequency Range	TX: 2412 MHz ~ 2462 MHz			
	RX: 2412 MHz ~ 2462 MHz			
Max. RF Output Power	Peak	Wi-Fi 802.11b(21.38 dBm) / Wi-Fi 802.11g (20.70 dBm) / Wi-Fi 802.11n (19.31 dBm)		
	Average	Wi-Fi 802.11b (15.64 dBm) / Wi-Fi 802.11g (12.51 dBm) / Wi-Fi 802.11n (11.46 dBm)		
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)			
Antenna Specification	Manufacturer: AT&C Co.,LTD.			
	Antenna t	ype: FPCB Antenna		
	Peak Gair	n : -1.11 dBi		

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dago 4 of 58	



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r01 dated April 09, 2013 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247" were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr	
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625	



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
	•	Dega 7 of 59	



7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band	CONDUCTED	PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2	RADIATED	PASS

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dago 9 of 59	




TEST PROCEDURE

According to KDB 558074)6)b), issued 04/09/2013)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T \leq 16.7 microseconds.)

TEST CONFIGURATION

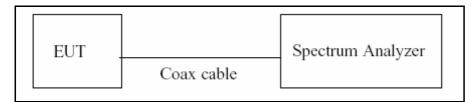

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zerospan measurement method, 6.0)b) in KDB 558074(issued 04/09/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if T \leq 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

- 1. RBW = 8 MHz (the largest available value)
- 2. VBW = 8 MHz (≥ RBW)
- 3. SPAN = 0 Hz
- 4. Detector = Peak
- 5. Number of points in sweep > 100
- 6. Trace mode = Clear write
- 7. Measure $T_{total} and \, T_{on}$
- 8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = 10*log(1/Duty Cycle)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr	
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625	



Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
	1 Mbps	12.390	12.510	0.99040767	0.042
	2 Mbps	6.200	6.320	0.98101266	0.083
b	5.5 Mbps	2.305	2.418	0.95326716	0.208
	11 Mbps	1.203	1.308	0.91972477	0.363
	6 Mbs	2.057	2.170	0.94792627	0.232
	9 Mbs	1.383	1.485	0.93131313	0.309
	12 Mbs	1.041	1.143	0.91076115	0.406
~	18 Mbs	0.702	0.804	0.87313433	0.589
g	24 Mbs	0.530	0.630	0.84126984	0.751
	36 Mbs	0.363	0.463	0.78401728	1.057
	48 Mbs	0.275	0.376	0.73138298	1.359
	54 Mbs	0.247	0.347	0.71181556	1.476
	6.5 Mbs	1.910	2.020	0.94554455	0.243
	13 Mbs	0.970	1.080	0.89814815	0.467
	19.5 Mbs	0.662	0.764	0.86649215	0.622
n	26 Mbs	0.506	0.608	0.83223684	0.798
	39 Mbs	0.350	0.451	0.77605322	1.101
	52 Mbs	0.270	0.372	0.72580645	1.392
	58.5 Mbs	0.246	0.347	0.70893372	1.494
	65 Mbs	0.227	0.328	0.69207317	1.598

Note : Duty Cycle Factor = $10*\log(1/Duty Cycle)$. where, Duty Cycle = T_{on} / T_{total}

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
			· · · · · · · · · · · · · · · · · · ·




8.2 6dB BANDWIDTH (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz VBW 3 x RBW Detector = Peak Trace mode = max hold Sweep = auto couple Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
			, ,



802.11b Mode		Measured Bandwidth	Minimum Bandwidth		
Frequency [MHz]	Channel No.	[MHz]	[MHz]	Pass / Fail	
2412	1	8.58	0.500	Pass	
2437	6	8.12	0.500	Pass	
2462	11	8.12	0.500	Pass	

Conducted 6dB Bandwidth Measurements for 802.11b

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth	Minimum Bandwidth	
Frequency [MHz]	Channel No.	[MHz]	[MHz]	Pass / Fail
2412	1	15.11	0.500	Pass
2437	6	15.11	0.500	Pass
2462	11	14.44	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth	Minimum Bandwidth	
Frequency [MHz]	Channel No.	[MHz]	[MHz]	Pass / Fail
2412	1	15.03	0.500	Pass
2437	6	15.13	0.500	Pass
2462	11	14.07	0.500	Pass

Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



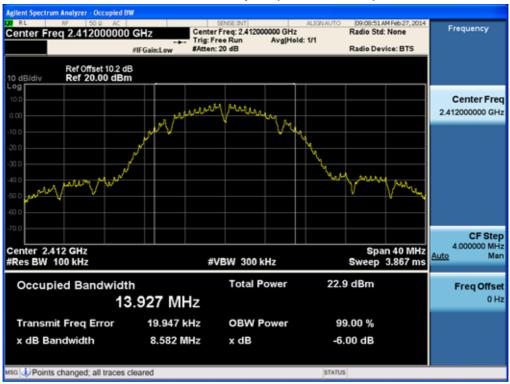


6dB Bandwidth plot (802.11b-CH 1)

6dB Bandwidth plot (802.11g-CH 1)

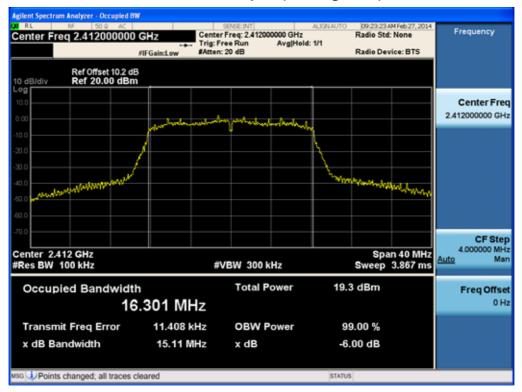

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Daga 1.2 of EQ	



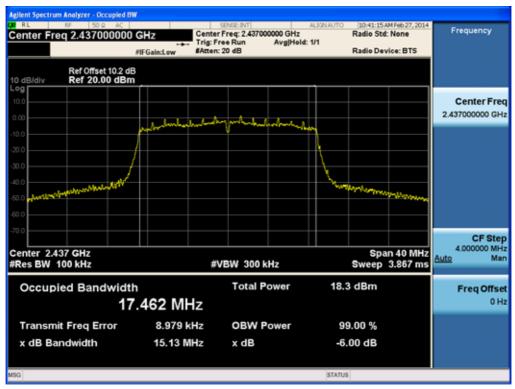

6dB Bandwidth plot (802.11n-CH 6)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625




8.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION



TEST PROCEDURE

- Peak Power (Procedure 9.1.3 in KDB 558074, issued 04/09/2013)
 - 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 04/09/2013)
 - 1. Measure the duty cycle.
 - 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
	2412	10.21
2.4 GHz	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dage 1 F of F9	



TEST RESULTS-Peak

Conducted Output Power Measurements (80	02.11b Mode)
---	--------------

802.11b	Mode	Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
		1 Mbps	17.85	30
2412	1	2 Mbps	18.23	30
2412	1	5.5 Mbps	19.73	30
		11 Mbps	21.38	30
	6	1 Mbps	17.25	30
0407		2 Mbps	17.53	30
2437		5.5 Mbps	18.95	30
		11 Mbps	20.63	30
2462		1 Mbps	16.61	30
		2 Mbps	16.97	30
		5.5 Mbps	18.40	30
		11 Mbps	20.08	30

Test Report No. Date of Issue: EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: HCT-R-1403-F022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
	100111000111101	 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Conducted Out	put Power Me	easurements (8	802.11a Mode)
			··-···

802.11g		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
		6 Mbps	20.07	30
		9 Mbps	20.06	30
2412		12 Mbps	20.12	30
		18 Mbps	19.99	30
	1	24 Mbps	20.53	30
		36 Mbps	20.52	30
		48 Mbps	20.70	30
		54 Mbps	20.61	30
		6 Mbps	20.07	30
2437	6	9 Mbps	20.05	30
		12 Mbps	19.98	30
		18 Mbps	19.92	30
2437		24 Mbps	20.36	30
		36 Mbps	20.42	30
		48 Mbps	20.52	30
		54 Mbps	20.51	30
	11	6 Mbps	19.59	30
		9 Mbps	19.60	30
2462		12 Mbps	19.53	30
		18 Mbps	19.53	30
		24 Mbps	19.90	30
		36 Mbps	19.97	30
		48 Mbps	20.09	30
		54 Mbps	20.06	30

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Conducted Out	put Power	Measurements	(802.11n Mode)
001100000000			

802.11n Mode		Rate	Measured	Limit
Frequency[MHz]	Channel No.	(Mbps)	Power(dBm)	(dBm)
		6.5 Mbps	18.82	30
		13 Mbps	18.82	30
2412		19.5 Mbps	18.87	30
		26 Mbps	19.27	30
	1	39 Mbps	19.27	30
		52 Mbps	19.25	30
		58.5 Mbps	19.31	30
		65 Mbps	19.22	30
		6.5 Mbps	18.70	30
2437	6	13 Mbps	18.63	30
		19.5 Mbps	18.66	30
		26 Mbps	19.20	30
2437		39 Mbps	19.13	30
		52 Mbps	19.07	30
		58.5 Mbps	19.17	30
		65 Mbps	19.04	30
2462	11	6.5 Mbps	18.07	30
		13 Mbps	18.13	30
		19.5 Mbps	18.19	30
		26 Mbps	18.53	30
		39 Mbps	18.54	30
		52 Mbps	18.61	30
		58.5 Mbps	18.63	30
		65 Mbps	18.55	30

Test Report No. Date of Issue: EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



TEST RESULTS-Average

802.11b N				•	Measured	
Frequency [MHz]	Channel No.	Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Power(dBm) + Duty Cycle Factor	Limit (dBm)
		1 Mbps	15.38	0.042	15.42	30
2442		2 Mbps	15.40	0.083	15.48	30
2412	1	5.5 Mbps	15.43	0.208	15.64	30
		11 Mbps	15.20	0.363	15.57	30
2437		1 Mbps	14.87	0.042	14.91	30
	6	2 Mbps	14.90	0.083	14.98	30
2437		5.5 Mbps	14.82	0.208	15.03	30
		11 Mbps	14.68	0.363	15.04	30
2462		1 Mbps	14.40	0.042	14.44	30
	11	2 Mbps	14.29	0.083	14.38	30
		5.5 Mbps	14.28	0.208	14.49	30
		11 Mbps	14.21	0.363	14.57	30

Conducted Output Power Measurements (802.11b Mode)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr				
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625				



Conducted Output Power Measurements (802.11g Mode)

802.11g I	Node	•			Measured	
Frequency [MHz]	Channel No.	Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Power(dBm) + Duty Cycle Factor	Limit (dBm)
		6 Mbps	12.18	0.232	12.41	30
		9 Mbps	12.14	0.309	12.45	30
		12 Mbps	12.05	0.406	12.46	30
2412	1	18 Mbps	11.79	0.589	12.38	30
2412	•	24 Mbps	11.76	0.751	12.51	30
		36 Mbps	11.41	1.057	12.47	30
		48 Mbps	11.07	1.359	12.43	30
		54 Mbps	11.02	1.476	12.50	30
	6	6 Mbps	12.09	0.232	12.33	30
		9 Mbps	12.00	0.309	12.31	30
		12 Mbps	11.95	0.406	12.36	30
2437		18 Mbps	11.73	0.589	12.32	30
2437		24 Mbps	11.58	0.751	12.33	30
		36 Mbps	11.32	1.057	12.37	30
		48 Mbps	11.03	1.359	12.39	30
		54 Mbps	10.82	1.476	12.29	30
		6 Mbps	11.83	0.232	12.06	30
		9 Mbps	11.72	0.309	12.03	30
		12 Mbps	11.67	0.406	12.07	30
2462		18 Mbps	11.47	0.589	12.06	30
	11	24 Mbps	11.33	0.751	12.08	30
		36 Mbps	11.03	1.057	12.08	30
		48 Mbps	10.77	1.359	12.13	30
		54 Mbps	10.69	1.476	12.16	30

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dogo 2.0 of 59	· · · · ·



Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		-		•	Measured	
Frequency [MHz]	Channel No.	Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Power(dBm) + Duty Cycle Factor	Limit (dBm)
		6.5 Mbps	11.06	0.243	11.30	30
		13 Mbps	10.85	0.467	11.32	30
		19.5 Mbps	10.76	0.622	11.38	30
2412	1	26 Mbps	10.50	0.798	11.30	30
2412	•	39 Mbps	10.34	1.101	11.44	30
		52 Mbps	9.94	1.392	11.34	30
		58.5 Mbps	9.90	1.494	11.39	30
		65 Mbps	9.86	1.598	11.46	30
	6	6.5 Mbps	10.79	0.243	11.03	30
		13 Mbps	10.79	0.467	11.26	30
		19.5 Mbps	10.57	0.622	11.19	30
2437		26 Mbps	10.31	0.798	11.11	30
2437		39 Mbps	10.03	1.101	11.13	30
		52 Mbps	9.87	1.392	11.26	30
		58.5 Mbps	9.69	1.494	11.19	30
		65 Mbps	9.58	1.598	11.18	30
		6.5 Mbps	10.84	0.243	11.08	30
		13 Mbps	10.58	0.467	11.04	30
		19.5 Mbps	10.39	0.622	11.01	30
2462	44	26 Mbps	10.23	0.798	11.02	30
2462	11	39 Mbps	10.02	1.101	11.13	30
		52 Mbps	9.75	1.392	11.14	30
		58.5 Mbps	9.65	1.494	11.15	30
		65 Mbps	9.53	1.598	11.13	30

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Decc. 2.1. of 59	




8.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 04/09/2013

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz RBW 100 kHz.

VBW 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

- Note :
- 1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:		
HCT-R-1403-F022	March 14, 2014		ZNFD625		



Band	Frequency(MHz)	Loss(dB)
	2412	10.21
2.4 GHz	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS

Frequency	Frequency Channel		Т	est Result		
Frequency (MHz)	No.	Mode	PSD (dBm)	Limit (dBm)	Pass/Fail	
2412	1		-6.406	8	Pass	
2437	6	802.11b	-7.055	8	Pass	
2462	11		-7.591	8	Pass	
2412	1		-11.002	8	Pass	
2437	6	802.11g	-11.743	8	Pass	
2462	11		-12.728	8	Pass	
2412	1		-13.454	8	Pass	
2437	6	802.11n	-12.481	8	Pass	
2462	11		-13.736	8	Pass	

Conducted Power Density Measurements

Note : In order to simplify the report, attached plots were only the highest PSD channel.


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625		



Center Freq 2		17	ee Run 20 dB	#Avg Typ Avg Hold		09:12:29 AM Feb 27, 2014 TRACE 2 4 1 TYPE 2 4 1 TYPE 2 4 1 TYPE 2 4 1	Frequency
to dB/div Ref	Diffset 10.2 dB 20.00 dBm				Mkr1 2.	411 430 6 GHz -6.406 dBm	
10.0							Center Fred 2.412000000 GH;
10.0	ta la talla chifa ideala		ing land			SGI1	Start Free 2.405563813 GH
	a hit is a said						Stop Free 2.418436187 GH
40.0							CF Step 1.287237 MH Auto Ma
£2.0							Freq Offse 0 H
Center 2.41200		#VBW 9.1 kH	,		Sween	Span 12.87 MHz 1.37 s (5721 pts)	
	iged, all traces clea		2		Sweep	1.57 \$ (5721 pts)	


Power Spectral Density (802.11b-CH 1)

Power Spectral Density (802.11g-CH 1)

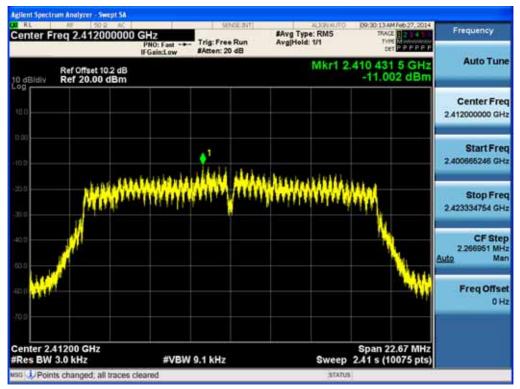

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dama 2.4 of 59	



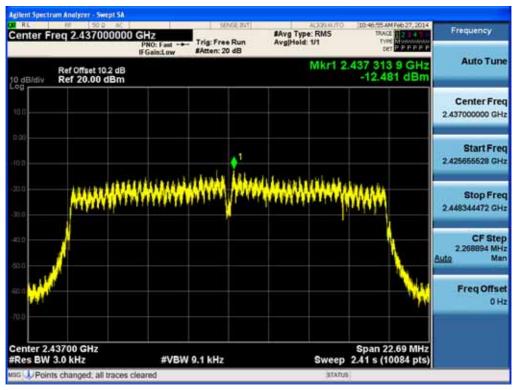

Power Spectral Density (802.11n-CH 6)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT					
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625				




8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.205(c)).

Limit : 20 dBc

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

- 1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Page 2.6 of 58	



offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
	2412	10.21
2.4 GHz	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

4. In case of conducted spurious emissions test, please check factors blow table.

5. In order to simplify the report, attached plots were only the worst case channel.

Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.26
3000	10.27
4000	10.22
5000	10.48
5700*	10.42
5800*	10.48
6000	10.48
7000	10.57
8000	10.45
9000	10.50
10000	10.64
11000	10.69
12000	10.75

FACTORS FOR FREQUENCY

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dega 2.7 of 59	



10.92
11.90
11.00
11.03
10.93
10.96
10.85
12.11
11.17
10.99
11.12
11.10
11.42

Note : 1. '*' is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625





BandEdge (802.11b-CH1)

BandEdge (802.11b-CH11)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Daga 2.0 of EQ	



	Trig: Free Run #Atten: 20 dB	#Avg Type: RMS Avg Hold: 1/1	09:30:33 AM Feb.27, 2014 TRACE 2 4 Type Monoration tot P P F P P P	Frequency
I CAMILOW		Δ1	Wkr1 11.84 MHz 42.014 dB	Auto Tune
		▲1∆2		Center Fred 2.400000000 GH
		New Instruction and grades	Kuludiala	Start Free 2.375000000 GH
	/			Stop Free 2.425000000 GH
all all and a second	Wingshould Harved		<i>j</i> rane	CF Step 5.000000 MH <u>Auto</u> Mar
a that the				Freq Offse 0 H
			Span 50.00 MHz	
	PN0: Fast	D GHZ PRO: Fast +++ IF Gain:Low RAtten: 20 dB	PRO: Fast → Trig: Free Run IFGain:Low Atten: 20 dB Avg[Hold: 1/1 Avg[Hold: 1/1 Avg[H	D GHZ PRO: Fast +++ IFGain:Low Atten: 20 dB Atten: 20

BandEdge (802.11g-CH1)

BandEdge (802.11g-CH11)

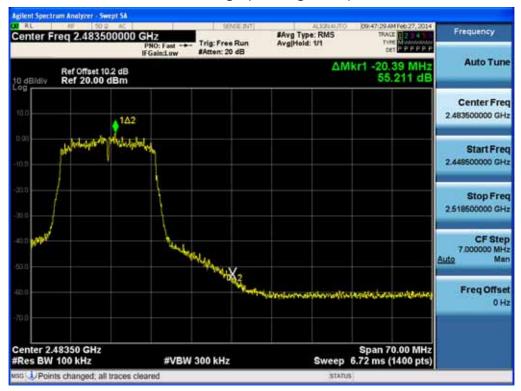


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Band Edge (802.11n-CH1)



Band Edge (802.11n-CH11)

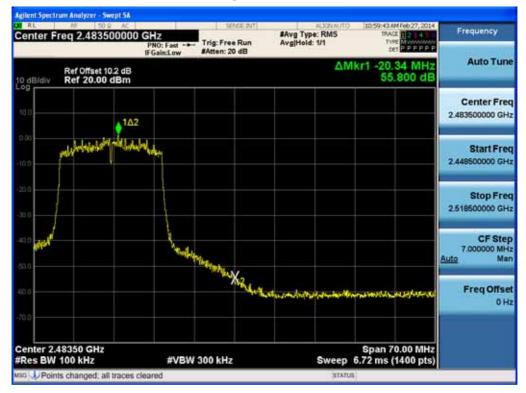

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dogo 2 1 of 59	



30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

Center Freq 515.000000 M	PNO: Fast ++- IFGain:Low Atten: 20 dB	#Avg Type: RMS Avg Hold: 1/1	11:14:54 AM Feb 27, 2014 TRACE 22:14 TRACE 22:14 TRACE 22:14 TRACE 22:14	Frequency
Ref Offset 10.2 dB		Mk	-59.500 dBm	Auto Tune
10 0				Center Fred 515.000000 MHz
10.0			.1331.66	Start Free 30.000000 MHs
m 0				Stop Fred 1.000000000 GH:
40.0				CF Step 97.000000 MH <u>Auto</u> Mar
- Inter and and any second second second				Freq Offset 0 Hz
700 Start 30.0 MHz #Res BW 100 kHz	#VBW 300 kHz		Stop 1.0000 GHz .3 ms (20000 pts)	

1 GHz ~ 3 GHz

Center Freq 2.00000000		#Avg Type: RMS Avg[Hold>1/1	11:14:40 AM Feb 27, 2014 TRACE 2 4 3 TYPE MONOMOUS DET PPPPP	Frequency
Ref Offset 10.2 dB		Mkr	1 2.683 95 GHz -57.653 dBm	Auto Tune
10.0		1		Center Freq 2.000000000 GHz
10.0			.13.01.00%	Start Free 1.00000000 GH
30.0				Stop Free 3.000000000 GH
40.0				CF Step 200.000000 MH <u>Auto</u> Mar
		and the second se		Freq Offse 0 Ha
Start 1.000 GHz #Res BW 100 kHz	#VBW 300 kHz		Stop 3.000 GHz 192 ms (40001 pts)	


Test Report No. Date of Issue: FCC ID: HCT-R-1403-F022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID:	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



gilent Spectrum Analyzer - Swept SA 21 Frequency #Avg Type: RMS Avg[Hold: 1/1 Center Freq 4.000000000 GHz PNO: Fast +--- Trig: Free Run IFGain:Low Atten: 20 dB tet PPPPP Auto Tune Mkr1 4.823 60 GHz -54.840 dBm Ref Offset 10.2 dB Ref 20.00 dBm to dB/d Center Freq 4.00000000 GHz Start Freq 3.00000000 GHz Stop Freq 5.00000000 GHz CF Step 200.000000 MHz to Man Auto 1 **Freq Offset** 0 Hz Stop 5.000 GHz Sweep 192 ms (40001 pts) Start 3.000 GHz #Res BW 100 kHz #VBW 300 kHz Points changed; all traces cleared

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

5 GHz ~ 7 GHz

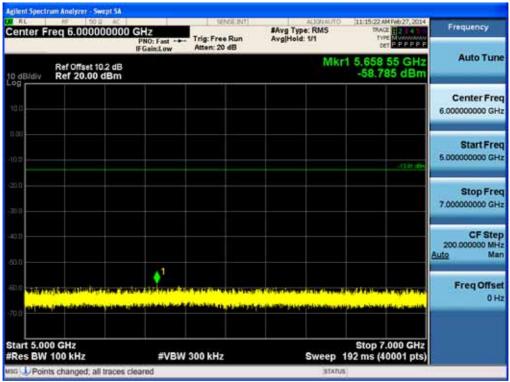

Test Report No. Date of Issue: EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: NFD625 ZNFD625 ZNFD625 ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



0 RL NE 50 2 AC	56M(4) 2017	OTUNICA	11:15:36 AM Feb 27, 2014	Frequency
Center Freq 8.000000000	PNO: Fast Trig: Free Run IFGain:Low Atten: 20 dB	#Avg Type: RMS Avg[Hold: 1/1	TWE NONCONTRACTOR	Prequency
Ref Offset 10.2 dB		Mkr	1 7.051 20 GHz -58.408 dBm	Auto Tune
10.0				Center Fred 8.000000000 GHz
10.0			-13.0(offer	Start Fred 7.000000000 GHz
85 0				Stop Fred 9.000000000 GH:
				CF Step 200.000000 MH Auto Mar
				Freq Offset 0 Hz
Start 7.000 GHz			Stop 9.000 GHz	
(U,U)	#VBW 300 kHz	ning a look a filme a calleda, era ta me	nak program da kaka kaka provinsi Kelopan da kara persekaran da provinsi Kelopan da kara persekaran da persen	CF St 200.000000 M Auto M Freq Off

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

9 GHz ~ 11 GHz

Center Freq 10.0000000		#Avg Type: RMS Avg Hold: 1/1	11:15:50 AM Feb 27, 2014 TRACE 22 C 1	Frequency
	PNO: Fast ++- Trig: Free Run IFGain:Low Atten: 20 dB		type Normany tet PPPPP	Auto Tune
Ref Offset 10.2 dB 0 dB/div Ref 20.00 dBm		Mkr1	10.555 60 GHz -58.931 dBm	Auto Turk
10.0				Center Free 10.000000000 GH
0.0			.11.01.00-	Start Free 9.00000000 GH
85 0				Stop Free 11.000000000 GH
40.0 90.0				CF Ste 200.000000 MH <u>Auto</u> Ma
in other is a supervised by the				Freq Offse 0 H
start 9.000 GHz Res BW 100 kHz	#VBW 300 kHz		Stop 11.000 GHz 92 ms (40001 pts)	

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



Igilent Spectrum Analyzer - Swept SA Center Freq 12.00000000 GHz Free Run IF Gain:Low RL UM Feb 27, 2014 Frequency #Avg Type: RMS Avg[Hold: 1/1 type Monthly tet P P P P P P Auto Tune Mkr1 12.343 55 GHz -56.441 dBm Ref Offset 10.2 dB Ref 20.00 dBm to dB/di Center Freq 12.00000000 GHz Start Freq 11.00000000 GHz Stop Freq 13.00000000 GHz CF Step 200.000000 MHz to Man Auto Freq Offset 0 Hz Stop 13.000 GHz Sweep 192 ms (40001 pts) Start 11.000 GHz #Res BW 100 kHz #VBW 300 kHz Points changed, all traces cleared

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

13 GHz ~ 15 GHz

Center F	reg 14.0000000		SENGLINT	#Avg Type: RM Avg Hold: 1/1		BAM Feb 27, 2014	Frequency
		PNO: Fast ++- IFGain:Low	Atten: 20 dB	Avginoid: D1		DET PPPPP	
0 dB/div	Ref Offset 10.2 dB Ref 20.00 dBm			, N	Akr1 14.84 -56	2 45 GHz 345 dBm	Auto Tune
10.0							Center Free 14.000000000 GH
10.0						.1131.04	Start Fre 13.000000000 GH
200							Stop Fre 15.00000000 GH
10.0 50.0							CF Ste 200.000000 MH Auto Ma
62.0 11.1	i est main alla ber mandet		dan setu dinama na manana dinamana	and and identical states	al en la sel a sel (sel (sel (sel (sel (sel (sel (sel	National Street	Freq Offse 0 H
70.0							
Res BW	100 GHZ	#VBW	300 kHz	Swe	eep 192 ms	15.000 GHz (40001 pts)	


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



gilent Spectrum Analyzer - Swept SA Center Freq 16.00000000 GHz FGain:Low FGain:Low RL Frequency #Avg Type: RMS Avg[Hold: 1/1 DET P P P P P P Auto Tune Mkr1 16.783 10 GHz -53.511 dBm Ref Offset 10.2 dB Ref 20.00 dBm to dB/d Center Freq 16.00000000 GHz Start Freq 15.00000000 GHz Stop Freq 17.00000000 GHz CF Step 200.000000 MHz to Man Auto **Freq Offset** 0 Hz Stop 17.000 GHz Sweep 192 ms (40001 pts) Start 15.000 GHz #Res BW 100 kHz #VBW 300 kHz Points changed; all traces cleared

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

17 GHz ~ 19 GHz

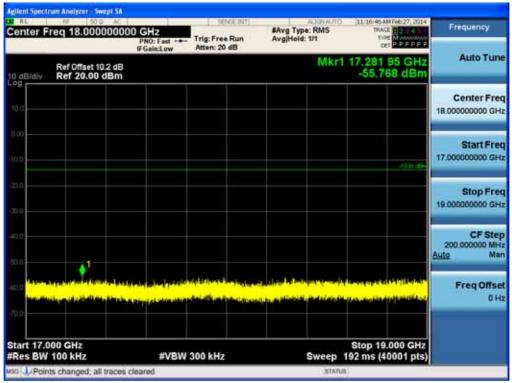

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



RL RF 500 AC		SINGL	117	ALIGNAL/TO	11:17:00 AM Feb 27, 2014	
Center Freq 20.00000000	GHz PNO: Fast ++-	Trig: Free Ru Atten: 20 dB	#Avg Ty n Avg Hol		TWCE	Frequency
Ref Offset 10.2 dB				Mkr1	20.991 65 GHz -52.357 dBm	Auto Tune
10.0						Center Freq 20.000000000 GHz
10.0					-1311-065	Start Freq 19.000000000 GHz
-200 -200						Stop Freq 21.000000000 GHz
40.0					1	CF Step 200.000000 MHz <u>Auto</u> Man
en e <mark>fastilist og bet uterstelle de fastilisten en e</mark>	en in the shirt			i dan kan dit Man kapagai		Freq Offset 0 Hz
Start 19.000 GHz #Res BW 100 kHz	#VBW	300 kHz		Sweep	Stop 21.000 GHz 192 ms (40001 pts)	

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

RL	NF: 50.0 AC		SENGLINT		OTIMICA	11:17:14 AM Feb 27, 2014	Frequency
enter Fre	eq 22.00000000	PNO: Fast +++ IFGain:Low	Trig: Free Run Atten: 20 dB	#Avg Type Avg[Hold:		TWEE 244 TYPE MUNICIPALITY CET PPPPP	data a second
0 dB/div	Ref Offset 10.2 dB Ref 20.00 dBm				Mkr1	22.347 50 GHz -52.045 dBm	Auto Tune
U.0							Center Free 22.000000000 GH
0.0						-13 b1 ofee	Start Free 21.000000000 GH
nia							Stop Fre 23.00000000 GH
0.0 				•1			CF Step 200.000000 MH Auto Ma
		n de la la la desta de la d Provincia de la desta de la d					Freq Offse 0 H
Start 21.00		#VBW	300 kHz		Sweep 1	Stop 23.000 GHz 92 ms (40001 pts)	

Test Report No. Date of Issue: EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: NFD625 ZNFD625 ZNFD625 ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



Igilent Spectrum Analyzer - Swept SA 11:17:28 AM Feb 27, 2014 TRACE DESCRIPTION RL Center Freq 24.00000000 GHz PRO: Fast +++ IFGain:Low Frequency #Avg Type: RMS Avg|Hold: 1/1 THE MULTURE Auto Tune Mkr1 24.830 15 GHz -49.730 dBm Ref Offset 10.2 dB Ref 20.00 dBm t0 dB/div Center Freq 24.00000000 GHz Start Freq 23.00000000 GHz .13.61.6 Stop Freq 25.00000000 GHz CF Step 200.000000 MHz to Man 01 Auto Freq Offset 0 Hz Stop 25.000 GHz Sweep 192 ms (40001 pts) Start 23.000 GHz #Res BW 100 kHz #VBW 300 kHz Directory of the second second

Conducted Spurious Emission (802.11b_ Ch.1_11 Mbps)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Page 3.8 of 58	



8.6 RADIATED MEASUREMENT. 8.6.1 RADIATED SPURIOUS EMISSIONS.


Test Requirements and limit, §15.205, §15.209

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Report No. Date of Issue: HCT-R-1403-F022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	




Below 30 MHz

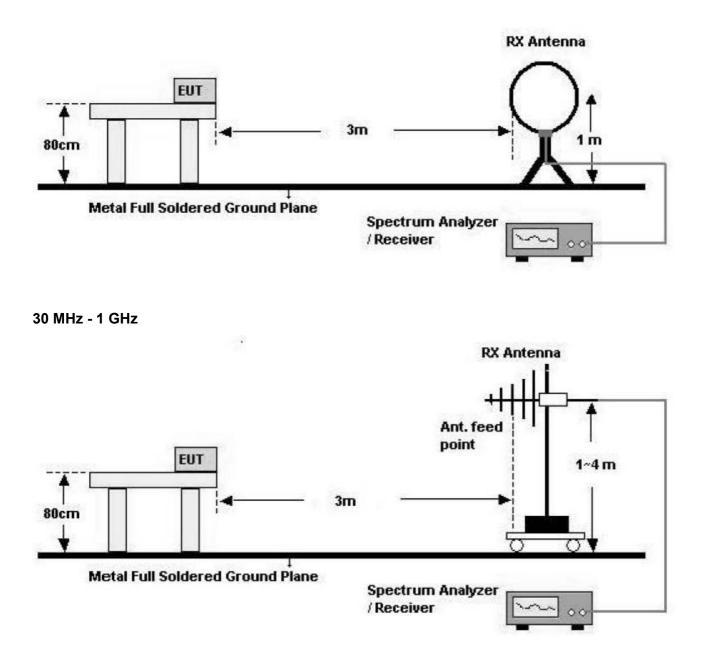

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dage 4.0 of 59	



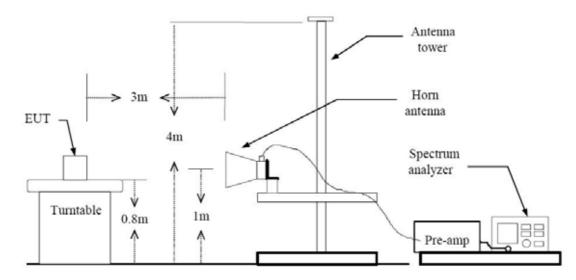

TEST PROCEDURE USED

ANSI C63.4(2003)

Method 12.1 in KDB 558074, issued 04/09/2013

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Table 1 -	-RBW as	a function	of frequency
-----------	---------	------------	--------------

Test Report No. Date of Issue: ELIT Type: Collular/DCS_CSM W/CDMA LTE Dears with Plustooth/M/LAN/NEC. FCC ID:	FCC PT.15.247 TEST REPORT	 FCC CERTIFICATION REPORT	www.hct.co.kr
HCT-R-1403-F022 March 14, 2014 EOT Type. Cellular/PCS GSW, WCDWA, LTE FINIHe with Bidetooti//WLAW/NFC ZNFD625		EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



- Average Set RBW = 1 MHz

Set VBW 1/T.(at least 100 times less than the resolution bandwidth, but no less than 10 Hz.) Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

- 1. We are performed the RSE and radiated band edge using standard radiated method.
- 2. The actual setting value of VBW for 802.11 b/g/n $\,$

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
b	1	12.390	12.510	99.041	81	1000
g	6	2.057	2.170	94.800	486	1000
n	6.5	1.910	2.020	94.554	524	1000

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin	
MHz	dBµV	dB /m	dB	(H/V)	dBµV/m	dBµV/m	dB	
No Critical peaks found								

- 1. Measuring frequencies from 9 kHz to the 30MHz.
- 2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- 4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin	
MHz	dBµV	dB /m	dB	(H/V)	dBµV/m	dBµV/m	dB	
No Critical peaks found								

- 1. Measuring frequencies from 30 MHz to the 1 GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



Operation Mode:	802.11 b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4824	53.59	-1.98	V	51.61	73.98	22.37	PK
4824	47.09	-1.98	V	45.11	53.98	8.87	AV
7236	46.24	7.60	V	53.84	73.98	20.14	PK
7236	33.70	7.60	V	41.30	53.98	12.68	AV
4824	56.08	-1.98	Н	54.10	73.98	19.88	PK
4824	51.05	-1.98	Н	49.07	53.98	4.91	AV
7236	46.29	7.60	Н	53.89	73.98	20.09	PK
7236	33.76	7.60	Н	41.36	53.98	12.62	AV

Operation Mode: Transfer Rate: Operating Frequency

Channel No.

802.11 g	
6 Mbps	
2412	
01 Ch	

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4824	51.45	-1.98	V	49.47	73.98	24.51	PK
4824	37.37	-1.98	V	35.39	53.98	18.59	AV
7236	45.90	7.60	V	53.50	73.98	20.48	PK
7236	32.01	7.60	V	39.61	53.98	14.37	AV
4824	52.89	-1.98	Н	50.91	73.98	23.07	PK
4824	38.14	-1.98	Н	36.16	53.98	17.82	AV
7236	45.70	7.60	Н	53.30	73.98	20.68	PK
7236	32.12	7.60	Н	39.72	53.98	14.26	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr				
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625				
	Deco 4 E of E9						



Operation Mode:	802.11 n
Transfer Rate:	6.5 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4824	50.28	-1.98	V	48.30	73.98	25.68	PK
4824	36.72	-1.98	V	34.74	53.98	19.24	AV
7236	45.49	7.60	V	53.09	73.98	20.89	PK
7236	32.32	7.60	V	39.92	53.98	14.06	AV
4824	51.78	-1.98	Н	49.80	73.98	24.18	PK
4824	37.16	-1.98	Н	35.18	53.98	18.80	AV
7236	45.60	7.60	Н	53.20	73.98	20.78	PK
7236	32.31	7.60	Н	39.91	53.98	14.07	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Test Report No. Date of Issue: EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: HCT-B-1403-E022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID:	FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
		Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Operation Mode:	802.11 b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4874	49.13	-1.92	V	47.21	73.98	26.77	PK
4874	37.80	-1.92	V	35.88	53.98	18.10	AV
7311	46.48	7.38	V	53.86	73.98	20.12	PK
7311	34.53	7.38	V	41.91	53.98	12.07	AV
4874	49.94	-1.92	Н	48.02	73.98	25.96	PK
4874	38.80	-1.92	Н	36.88	53.98	17.10	AV
7311	46.57	7.38	Н	53.95	73.98	20.03	PK
7311	34.50	7.38	Н	41.88	53.98	12.10	AV

Operation Mode:	802.11 g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4874	49.74	-1.92	V	47.82	73.98	26.16	PK
4874	35.81	-1.92	V	33.89	53.98	20.09	AV
7311	46.23	7.38	V	53.61	73.98	20.37	PK
7311	32.84	7.38	V	40.22	53.98	13.76	AV
4874	50.50	-1.92	Н	48.58	73.98	25.40	PK
4874	36.45	-1.92	Н	34.53	53.98	19.45	AV
7311	46.55	7.38	Н	53.93	73.98	20.05	PK
7311	32.91	7.38	Н	40.29	53.98	13.69	AV

Test Report No. Date of Issue: HCT-R-1403-F022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



Operation Mode:	802.11 n
Transfer Rate:	6.5 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4874	50.01	-1.92	V	48.09	73.98	25.89	PK
4874	35.84	-1.92	V	33.92	53.98	20.06	AV
7311	46.24	7.38	V	53.62	73.98	20.36	PK
7311	32.77	7.38	V	40.15	53.98	13.83	AV
4874	50.20	-1.92	Н	48.28	73.98	25.70	PK
4874	36.40	-1.92	Н	34.48	53.98	19.50	AV
7311	46.60	7.38	Н	53.98	73.98	20.00	PK
7311	32.84	7.38	Н	40.22	53.98	13.76	AV

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Operation Mode:	802.11 b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4924	49.26	-1.93	V	47.33	73.98	26.65	PK
4924	40.13	-1.93	V	38.20	53.98	15.78	AV
7386	46.15	7.28	V	53.43	73.98	20.55	PK
7386	34.10	7.28	V	41.38	53.98	12.60	AV
4924	52.10	-1.93	Н	50.17	73.98	23.81	PK
4924	44.50	-1.93	Н	42.57	53.98	11.41	AV
7386	46.18	7.28	Н	53.46	73.98	20.52	PK
7386	34.11	7.28	Н	41.39	53.98	12.59	AV

Operation Mode:	802.11 g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4924	49.35	-1.93	V	47.42	73.98	26.56	PK
4924	35.49	-1.93	V	33.56	53.98	20.42	AV
7386	46.40	7.28	V	53.68	73.98	20.30	PK
7386	32.36	7.28	V	39.64	53.98	14.34	AV
4924	49.75	-1.93	Н	47.82	73.98	26.16	PK
4924	36.21	-1.93	Н	34.28	53.98	19.70	AV
7386	46.26	7.28	Н	53.54	73.98	20.44	PK
7386	32.38	7.28	Н	39.66	53.98	14.32	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
	•	Page 4.0 of 59	



Operation Mode:	802.11 n
Transfer Rate:	6.5 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
4924	49.84	-1.93	V	47.91	73.98	26.07	PK
4924	35.49	-1.93	V	33.56	53.98	20.42	AV
7386	45.63	7.28	V	52.91	73.98	21.07	PK
7386	32.31	7.28	V	39.59	53.98	14.39	AV
4924	50.04	-1.93	Н	48.11	73.98	25.87	PK
4924	36.04	-1.93	Н	34.11	53.98	19.87	AV
7386	45.93	7.28	Н	53.21	73.98	20.77	PK
7386	32.41	7.28	Н	39.69	53.98	14.29	AV

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
	·		



8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	AN.+CL	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
2390.0	26.36	31.47	Н	57.83	73.98	16.15	PK
2390.0	13.10	31.47	Н	44.57	53.98	9.41	AV
2390.0	26.84	31.47	V	58.31	73.98	15.67	PK
2390.0	12.75	31.47	V	44.22	53.98	9.76	AV
2483.5	30.71	31.46	Н	62.17	73.98	11.81	PK
2483.5	13.68	31.46	Н	45.14	53.98	8.84	AV
2483.5	28.19	31.46	V	59.65	73.98	14.33	PK
2483.5	13.10	31.46	V	44.56	53.98	9.42	AV

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	AN.+CL	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
2390.0	25.92	31.47	Н	57.39	73.98	16.59	PK
2390.0	13.77	31.47	Н	45.24	53.98	8.74	AV
2390.0	25.35	31.47	V	56.82	73.98	17.16	PK
2390.0	13.69	31.47	V	45.16	53.98	8.82	AV
2483.5	25.21	31.46	Н	56.67	73.98	17.31	PK
2483.5	13.60	31.46	Н	45.06	53.98	8.92	AV
2483.5	25.30	31.46	V	56.76	73.98	17.22	PK
2483.5	13.54	31.46	V	45.00	53.98	8.98	AV

Operation Mode:	802.11n
Transfer Rate:	6.5 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	AN.+CL	ANT. POL	Total	Limit	Margin	
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Detect
2390.0	25.85	31.47	Н	57.32	73.98	16.66	PK
2390.0	13.19	31.47	Н	44.66	53.98	9.32	AV
2390.0	25.83	31.47	V	57.30	73.98	16.68	PK
2390.0	12.83	31.47	V	44.30	53.98	9.68	AV
2483.5	29.05	31.46	Н	60.51	73.98	13.47	PK
2483.5	13.60	31.46	Н	45.06	53.98	8.92	AV
2483.5	27.96	31.46	V	59.42	73.98	14.56	PK
2483.5	13.10	31.46	V	44.56	53.98	9.42	AV

- 1. Total = Reading Value + Antenna Factor + Cable Loss
- 2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625
		Dago F 2 of F9	



8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

	Limits (dBµV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.
- 5. We are performed the AC Power Line Conducted Emission test for 11 Mbps, Ch.1 and 802.11b. Because 802.11b mode is worst case.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625




HCT TEST Report

Common Information

EUT: Manufacturer: Test Site: Operating Conditions: Operator Name: LG-D625 LG SHIELD ROOM WLAN MODE JC SHIN

FCC CLASS B

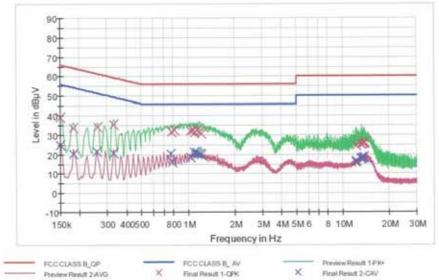

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.0	9,000	Off	N	9.7	27.0	66.0
0.181500	33.7	9,000	Off	N	9.7	30.7	64,4
0.262500	34.0	9.000	Off	N	9.7	27.4	61.4
0.330000	35.6	9,000	Off	N	9.7	23.9	59.5
0,783500	31.5	9,000	Off	N	9.8	24.5	56.0
0.819500	32.3	9,000	Off	N	9.8	23.7	56,0
1.044500	32.2	9,000	Off	N	9.8	23.8	56.0
1.080500	32.6	9,000	Off	N	9.8	23.4	56.0
1.103000	31.3	9.000	011	N	9.8	24.7	56.0
1,152500	32.4	9,000	110	N	9,8	23.6	56.0
1.188500	31.5	9.000	Off	N	9.8	24.5	56.0
1.220000	30.8	9.000	110	N	9,8	25.2	56.0
12.335000	24.3	9.000	110	N	10.5	35.7	60.0
13,176500	25.3	9.000	Off	N	10.5	34.7	60.0
13.325000	25.3	9.000	Off	N	10.5	34.7	60.0
13.518500	25.7	9.000	Off	N	10.6	34.3	60.0

3/10/2014

9:58:21

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625



Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13,712000	25.9	9.000	Ino	N	10.6	34.1	60.0
13.919000	25.9	9.000	Off	N	10.6	34.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	24.7	9.000	Off	N	9.7	31.3	56.0
0.181500	20.2	9.000	Off	N	9.7	34.2	54.4
0.258000	21.5	9,000	011	N	9.7	30.0	51.5
0.330000	20.5	9,000	Off	N	9.7	29.0	49.5
0.774500	20.2	9,000	Off	N	9.8	25.8	46.0
0.792500	16.2	9,000	Off	N	9.8	29.8	46.0
1.044500	18.6	9,000	Off	N	9.8	27.4	46.0
1.103000	21.2	9,000	Off	N	9.8	24.8	46.0
1.143500	21.1	9.000	Off	N	9.8	24.9	46.0
1.152500	20.2	9,000	Off	N	9.8	25.8	46.0
1.193000	20.2	9.000	Off	N	9.8	25.8	46.0
1.220000	19.7	9.000	off	N	9.8	26.3	46.0
12.150500	16.2	9,000	Off	N	10.5	33.8	50.0
12.335000	16.5	9.000	Off	N	10.5	33.5	50.0
13.176500	17.7	9.000	Off	N	10.5	32.3	50.0
13.325000	18.0	9,000	Off	N	10.5	32.0	50.0
13.518500	18.2	9.000	Off	N	10.6	31.8	50.0
13,712000	18.5	9.000	Off	N	10.6	31.5	50.0

3/10/2014

9:58:21

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625




HCT TEST Report

Common Information

EUT: Manufacturer: Test Site: Operating Conditions: Operator Name: LG-D625 LG SHIELD ROOM WLAN MODE JC SHIN

FCC CLASS B

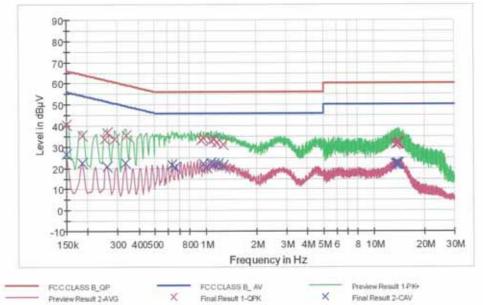

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.6	9.000	Off	L1	9.7	25.4	66.0
0.186000	35.5	9,000	Off	L1	9.7	28.7	64.2
0.253500	33.7	9.000	Off	L1	9.7	27.9	61.6
0.262500	36.6	9.000	Off	L1	9.7	24.8	61.4
0.289500	33.7	9.000	Off	L1	9.7	26.8	60.5
0.339000	35.6	9.000	Off	L1	9.7	23.6	59.2
0.936500	33.3	9.000	Off	L1	9.8	22.7	56.0
0.972500	34.0	9.000	Off	L1	9.8	22.0	56.0
1.080500	32.8	9.000	Off	L1	9.8	23.2	56.0
1.121000	33.6	9,000	Off	L1	9.8	22.4	56.0
1.161500	32.0	9.000	Off	L1	9.8	24.0	56.0
1.274000	31.2	9,000	Off	L1	9.8	24.8	56.0
13.482500	31.3	9.000	off	L1	10.6	28.7	60.0
13.662500	31.4	9.000	MO	L1	10.6	28.6	60.0
13.838000	32.4	9.000	Off	L1	10.6	27.6	60.0
13.923500	32.1	9.000	Off	L1	10.6	27.9	60.0

3/10/2014

9:47:58

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID:
HCT-R-1403-F022	March 14, 2014		ZNFD625



Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13,946000	31.4	9.000	Off	L1	10.6	28.6	60.0
14.022500	32.1	9,000	Off	L1	10.6	27.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	26.5	9,000	Off	L1	9.7	29.5	56.0
0.186000	22.6	9,000	Off	L1	9.7	31.6	54.2
0.262500	20.7	9.000	Off	L1	9.7	30.7	51.4
0.334500	22.5	9,000	Off	L1	9.7	26.8	49.3
0.635000	21.4	9,000	Off	L1	9,8	24.6	46.0
0.662000	20.1	9.000	110	L1	9.8	25,9	46.0
0.972500	21.7	9.000	Off	L1	9.8	24.3	46.0
1.013000	20.2	9.000	110	L1	9.8	25.8	46.0
1.080500	22.5	9.000	Off	L1	9.8	23.5	46.0
1.121000	22.1	9.000	Off	L1	9.8	23.9	46.0
1.197500	21.8	9.000	011	L1	9.8	24.2	46.0
1.274000	21.0	9.000	Off	L1	9.8	25.0	46.0
13.482500	21.8	9.000	Off	L1	10.6	28.2	50.0
13.590500	22.2	9.000	Off	L1	10.6	27.8	50.0
13.662500	22.1	9.000	Off	L1	10.6	27.9	50.0
13.838000	22.3	9.000	Off	L1	10.6	27.7	50.0
13,860500	22.2	9.000	Off	L1	10.6	27.8	50.0
13.946000	22.1	9.000	Off	L1	10.6	27.9	50.0

3/10/2014

9:47:58

Test Report No. Date of Issue: HCT-R-1403-F022 March 14, 2014 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC FCC ID: ZNFD625	FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT	www.hct.co.kr
		 EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	



9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	01/29/2015	100073
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/17/2014	3150
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	04/16/2014	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	04/25/2014	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	05/14/2014	MY51110063
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2014	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	01/24/2015	839117/011
Agilent	N1911A/Power Meter	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	Annual	07/11/2014	MY45241059
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	04/16/2014	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	04/16/2014	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	06/24/2014	1
Hewlett Packard	11636B/Power Divider	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	Annual	05/29/2014	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/05/2014	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	04/24/2014	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	04/25/2014	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/27/2016	9009-2536
Agilent	8493C / Attenuator(10 dB)	Annual	07/24/2014	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	Annual	10/28/2014	BR0617
CERNEX	CBL06185030 / POWER AMP	Annual	07/24/2014	22965

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT	www.hct.co.kr
Test Report No. HCT-R-1403-F022	Date of Issue: March 14, 2014	EUT Type: Cellular/PCS GSM,WCDMA,LTE Phone with Bluetooth/WLAN/NFC	FCC ID: ZNFD625