

# EMC TEST REPORT

Test item : Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN  
Model No. : LG-E400, E400, LGE400  
Order No. : 1111-01610  
Date of receipt : 2011-11-28  
Test duration : 2011-12-06 ~ 2011-12-08  
Use of report : FCC Marking  
Date of Issue : 2011-12-13  
Applicant : LG Electronics MobileComm U.S.A., Inc.  
10101 Old Grove Road., San Diego, CA 92131  
Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4 : 2003  
FCC Part 15 Subpart B  
(Type of Device : Class B Personal Computers and Peripherals (JBP))  
Test environment : Temperature (21 ~ 23) °C,  
Humidity (40 ~ 43) % R.H.  
Test result :  Comply  Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

  
Engineer  
S.H.KIM

Witnessed by:

  
Manager  
M.J.SONG

Reviewed by:

  
General Manager  
C.H.LEE

The above test report is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

**PRESIDENT OF DIGITAL EMC CO., LTD.**

## **CONTENTS**

<b>1. General Remarks .....</b>	3
<b>2. Test Laboratory .....</b>	3
<b>3. General Information of EUT .....</b>	4
3.1 Product Description .....	4
3.2 Product Information .....	4
<b>4. Test Summary .....</b>	5
4.1 Applied standards and test results .....	5
4.2 Test environment and conditions .....	5
4.3 Test result Summary .....	5
<b>5. Test Set-up and operation mode .....</b>	6
5.1 Principle of Configuration Selection.....	6
5.2 Test Operation Mode .....	6
5.3 Support Equipment Used.....	6
<b>6. Test Results : Emission .....</b>	7
6.1 Conducted Disturbance .....	7
6.2 Radiated Disturbance .....	10
<b>Appendix 1.....</b>	18
<b>List of Test and Measurement Instruments.....</b>	18

## 1. General Remarks

This report contains the result of tests performed by:

**DIGITAL EMC CO., LTD.**

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

## 2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1028C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

### 3. General Information of EUT

#### 3.1 Product Description

Equipment Under Test (E.U.T) is Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN Model : LG-E400 manufactured by LG Electronics Inc. Its basic purpose is used for communications.

#### 3.2 Product Information

Model No.	LG-E400
Add Model No.	E400, LGE400
EUT Type	Cellular/PCS GSM/GPRS Phone with Bluetooth and WLAN
Serial No	NONE
FCC ID	ZNFE400
Type of Sample Tested	Pre-Production
High Frequency	800MHz
Supplied Power for Test	AC120V, 60Hz
Applicant	LG Electronics MobileComm U.S.A., Inc. 10101 Old Grove Road., San Diego, CA 92131
TX Frequency	824.20 MHz to 848.80 MHz (GSM850) 1850.20 MHz to 1909.80 MHz (GSM1900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM850) 1930.20 MHz to 1989.80 MHz (GSM1900)
Date of Receipt of Sample	2011-11-28

## 4. Test Summary

### 4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4 : 2003	Comply
Radiated Disturbance	ANSI C63.4 : 2003	Comply

The data in this test report are traceable to the national or international standards.

### 4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp ( )	Humidity (% R.H.)	Pressure (hPa)
Conducted Disturbance	12-06	23	43	-
Radiated Disturbance	12-06 12-08	21 22	41 40	

### 4.3 Test result Summary

#### 1.1 Conducted Emission

Frequency [MHz]	Result [Db $\mu$ V]	Phase	Detector	Limit [Db $\mu$ V]	Margin [Db]
0.150	50.9	N	Quasi-Peak	66.0	15.1
0.151	50.8	L1	Quasi-Peak	65.9	15.1

#### (2) Radiated emission

Frequency [MHz]	Pol.	Reading [Db $\mu$ V]	C.F. [Db/m]	Result [Db( $\mu$ V/m)]	Limit [Db( $\mu$ V/m)]	Margin [Db]
232.485	H	44.2	9.3	34.9	46.0	11.1

- Note) 1. Emission Level = Reading Value + Correction Factor.  
2. Correction Factor = Cable loss – Amp gain + Antenna Factor  
3. Margin = Limit – Emission level

## 5. Test Set-up and operation mode

### 5.1 Principle of Configuration Selection

**Emission :** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 5.2 Test Operation Mode

- The measurement was made of the maximized : LCD Monitor displayed “H” character scroll, Writing, Reading and Removing the “H” pattern in mobile phone memory continually

### 5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
NOTE PC	LGT28	007QTVJ021767	LG	DC IN USB	1.8 1.2	Non-Shield Shield	Plastic Plastic	DOC
ADAPTOR	ADP-65JH AB	672W11A00V8	DELTA ELECREONICS (JIANG SU), LTD	POWER DC OUT	1.8 1.8	Non-Shield Non-Shield	Plastic Plastic	DOC
MICRO SD MEMORY	Micro SD HC	N/A	SanDisk	SD	-	-	-	DOC
LCD MONITOR	W2261VT	905NDFV73203	LG	POWER DSUB	1.8 1.7	Non-Shield Shield	Plastic Plastic	DOC
USB MOUSE	1484	352700021376	MICROSOFT CORP.	USB	1.3	Non-Shield	Plastic	DOC

## 6. Test Results : Emission

### 6.1 Conducted Disturbance

#### 6.1.1 Measurement Procedure

In the range of 0.15MHz to 30MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 0.4m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2<sup>nd</sup> LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

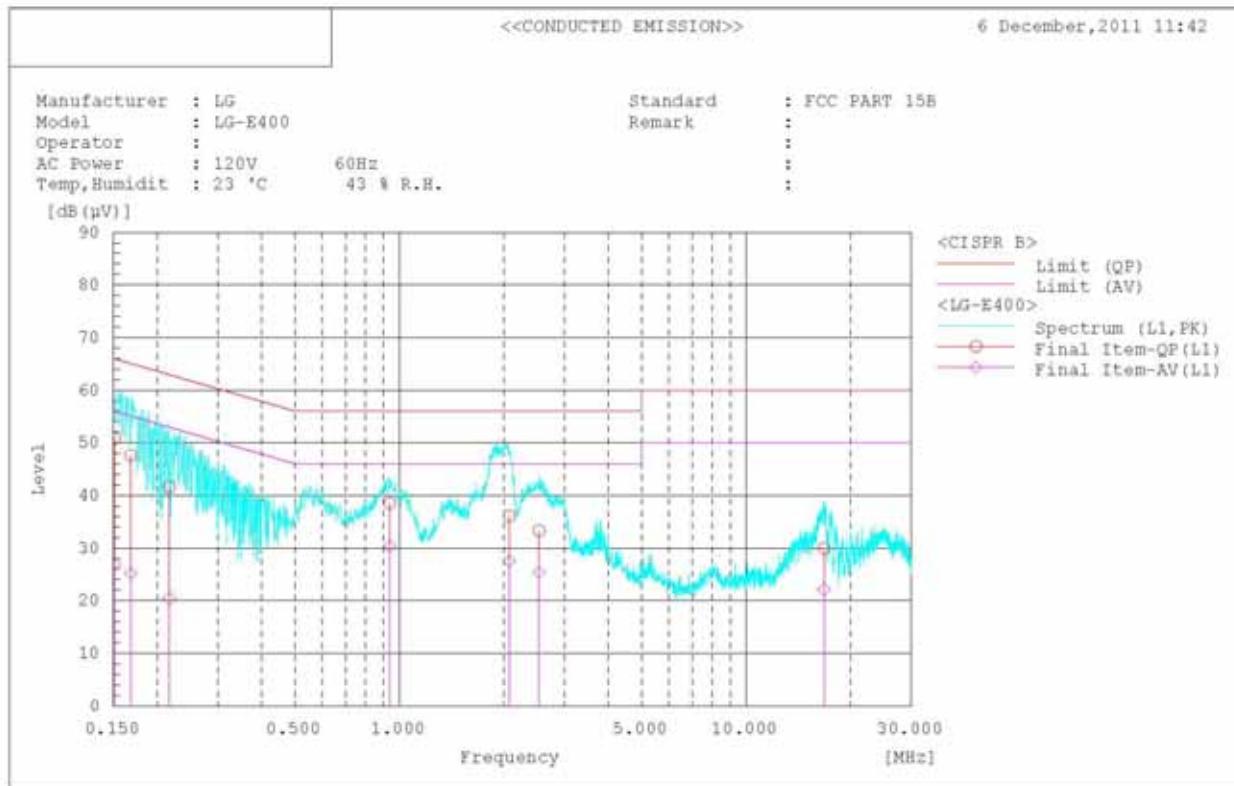
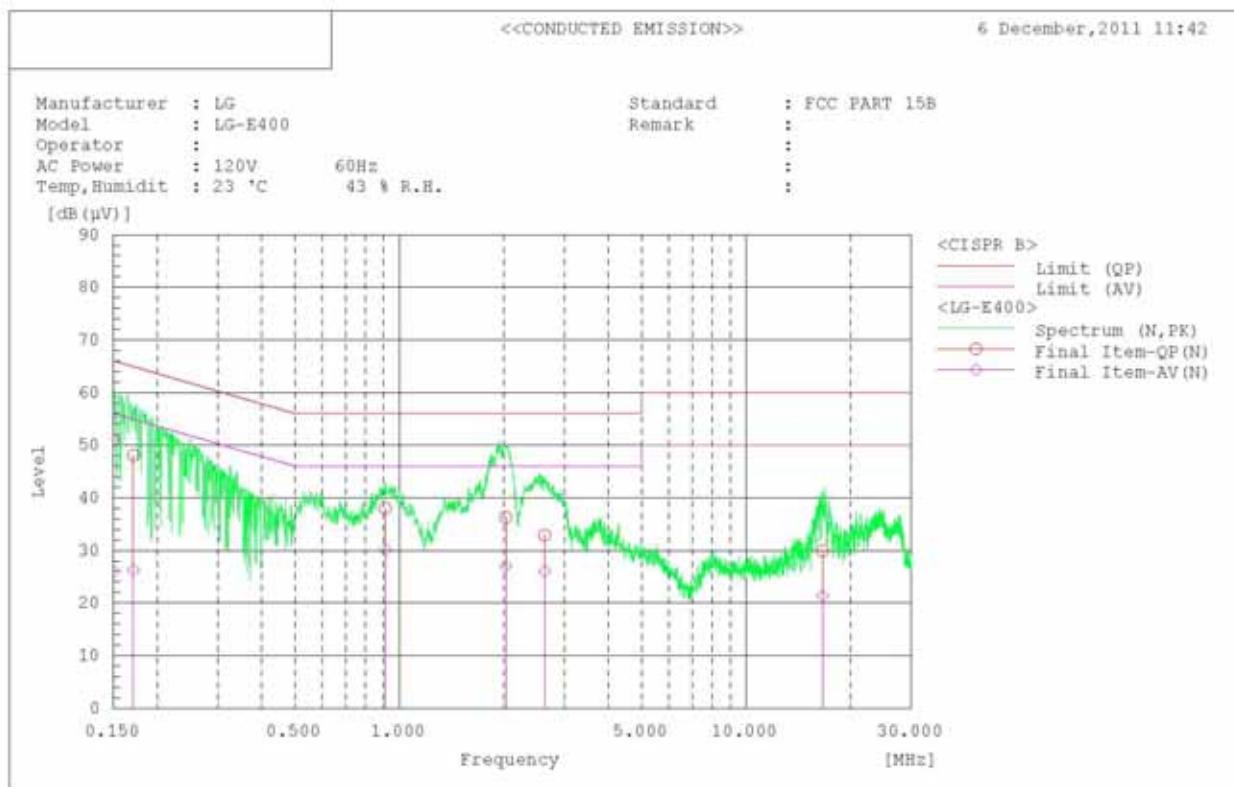
#### 6.1.2 Limit for Conducted Disturbance

##### (1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.  
Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

## Test Result



&lt;&lt;CONDUCTED EMISSION&gt;&gt;

6 December, 2011 11:42

Standard : FCC PART 15B  
 Manufacturer : LG  
 Model : LG-E400  
 Operator :  
 AC Power : 120V 60Hz  
 Temp, Humidit : 23 °C 43 % R.H.  
 Remark :  
 :  
 :  
 :  
 \*\*\*\*\*

**Final Result****-- N Phase --**

No.	Frequency	Reading		c.f.		Result		Result		Limit		Margin		Margin		Remark
		QP	AV	[MHz]	[dB(uV)]	[dB]	[dB(pV)]	[dB(uV)]	[dB(pV)]	QP	AV	[dB(uV)]	[dB(pV)]	QP	AV	
1	0.150	50.8	25.9	0.1	50.9	26.0	66.0	56.0	56.0	15.1	30.0					
2	0.171	48.0	26.2	0.1	48.1	26.3	64.9	54.9	54.9	16.8	28.6					
3	0.911	37.9	30.0	0.1	38.0	30.1	56.0	46.0	46.0	18.0	15.9					
4	2.030	36.1	26.8	0.2	36.3	27.0	56.0	46.0	46.0	19.7	19.0					
5	2.625	32.7	25.8	0.2	32.9	26.0	56.0	46.0	46.0	23.1	20.0					
6	16.625	29.0	20.4	0.9	29.9	21.3	60.0	50.0	50.0	30.1	28.7					

**-- L1 Phase --**

No.	Frequency	Reading		c.f.		Result		Result		Limit		Margin		Margin		Remark
		QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	[dB]	[dB]	QP	AV	
1	0.151	50.6	26.8	0.2	50.8	27.0	65.9	55.9	55.9	15.1	28.9					
2	0.168	47.4	25.0	0.2	47.6	25.2	65.1	55.1	55.1	17.5	29.9					
3	0.217	41.4	20.2	0.2	41.6	20.4	62.9	52.9	52.9	21.3	32.5					
4	0.938	38.3	30.2	0.2	38.5	30.4	56.0	46.0	46.0	17.5	15.6					
5	2.074	35.8	27.2	0.3	36.1	27.5	56.0	46.0	46.0	19.9	18.5					
6	2.528	33.0	25.1	0.3	33.3	25.4	56.0	46.0	46.0	22.7	20.6					
7	16.783	28.9	21.1	1.0	29.9	22.1	60.0	50.0	50.0	30.1	27.9					

## 6.2 Radiated Disturbance

### 6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 3m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1GHz frequency range, Quasi-Peak detector with 120kHz RBW was used.

Also Peak and Average detector with 1MHz RBW were used for above 1GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

### 6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40GHz, whichever is lower

#### (1) Limit for Radiated Emission below 1000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak limits (dB $\mu$ V/m)	Quasi-peak limits (dB $\mu$ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.  
Note 2 Additional provisions may be required for cases where interference occurs.  
Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

30 to 230	40	30
230 to 1000	47	37

#### (2) Limits for Radiated Emission in the frequency range 1000 - 2000MHz at a measuring distance of 10m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
1 to 2	69.5	49.5	63.5	43.5

#### (3) Limits for Radiated Emission above 1000MHz at a measuring distance of 3m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
1 to 40	80	60	74	54

---

**Test Result**

---

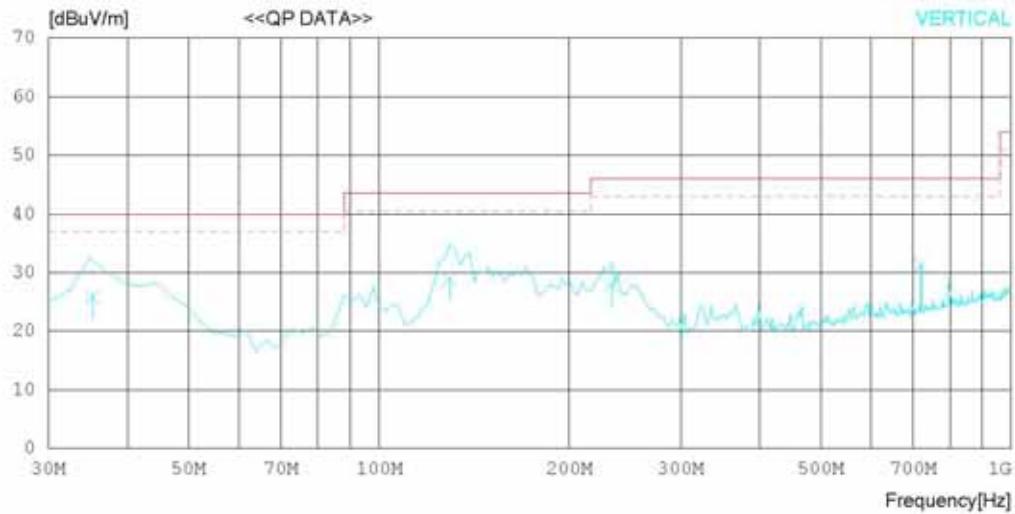
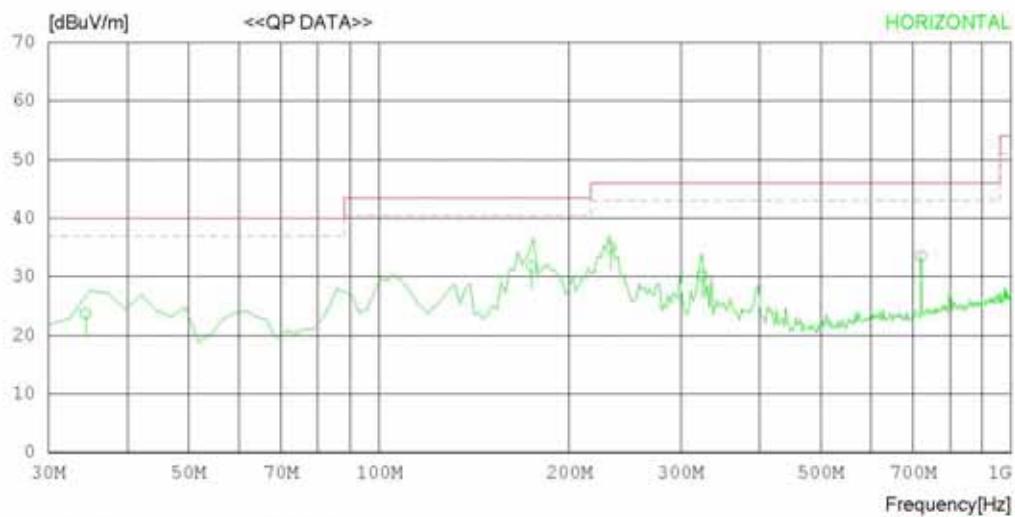
&lt; 30MHz-1GHz &gt;

**RADIATED EMISSION**

Date : 2011-12-06

Model Name	LG-E400	Reference No.	
Model No.		Power Supply	120V 60Hz
Serial No.		Temp/Humi	21 °C 41% R.H.
Test Condition	PC LINK	Operator	

Memo

LIMIT : FCC Part15 Subpart.B Class B (3m)  
MARGIN: 3 dB

## RADIATED EMISSION

Date : 2011-12-06

Model Name : LG-E400      Reference No.  
Model No. :      Power Supply : 120V 60Hz  
Serial No. :      Temp/Humi : 21 °C 41% R.H.  
Test Condition : PC LINK      Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)  
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dBuV/m]	RESULT [dBuV/m]	LIMIT [dB]	MARGIN [cm]	ANTENNA [DEG]	TABLE
<hr/>										
1	34.331	28.6	16.8	0.9	22.6	23.7	40.0	16.3	200	355
2	174.498	43.1	9.9	1.9	23.2	31.7	43.5	11.8	202	331
3	232.485	44.2	11.9	2.2	23.4	34.9	46.0	11.1	104	45
4	324.185	37.1	14.4	2.7	24.0	30.2	46.0	15.8	111	206
5	720.000	34.0	19.2	4.3	24.0	33.5	46.0	12.5	100	290
<hr/>										
6	35.216	31.1	16.6	0.9	22.6	26.0	40.0	14.0	103	215
7	129.414	38.6	11.6	1.6	22.9	28.9	43.5	14.6	211	88
8	233.277	37.2	11.9	2.2	23.4	27.9	46.0	18.1	199	119
9	720.000	31.8	19.2	4.3	24.0	31.3	46.0	14.7	100	358

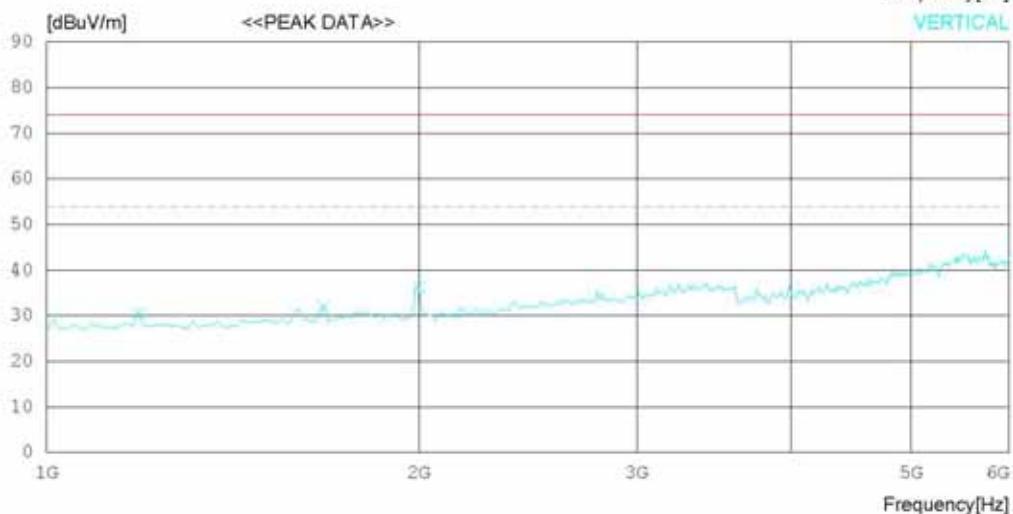
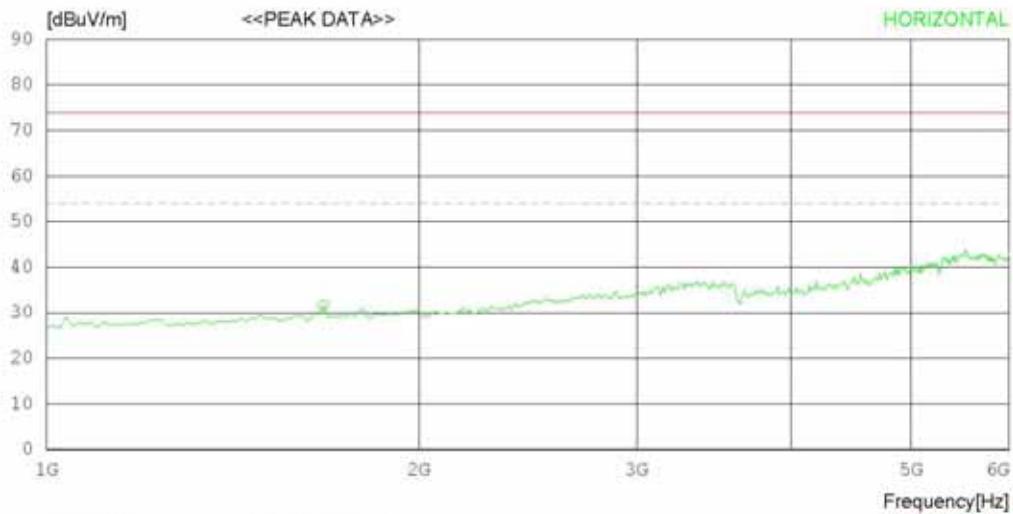
&lt; 1GHz-6GHz\_Peak &gt;

**RADIATED EMISSION**

Date : 2011-12-08

Model Name	:	LG-E400	Reference No.	
Model No.	:		Power Supply	
Serial No.	:		Temp/Humi	
Test Condition	:	PC LINK	Operator	

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)  
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

## RADIATED EMISSION

Date : 2011-12-08

Model Name	:	LG-E400	Reference No.	:
Model No.	:		Power Supply	: 120V 60Hz
Serial No.	:		Temp/Humi	: 22'C 40% R.H.
Test Condition	:	PC LINK	Operator	

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)  
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1675.000	41.6	25.2	6.8	41.9	31.7	74.0	42.3	100	330
----- Vertical -----										
2	1187.500	42.5	24.2	5.7	41.8	30.6	74.0	43.4	100	358
3	1675.000	41.9	25.2	6.8	41.9	32.0	74.0	42	100	358
4	2000.000	45.3	25.2	7.7	42.0	36.2	74.0	37.8	100	153

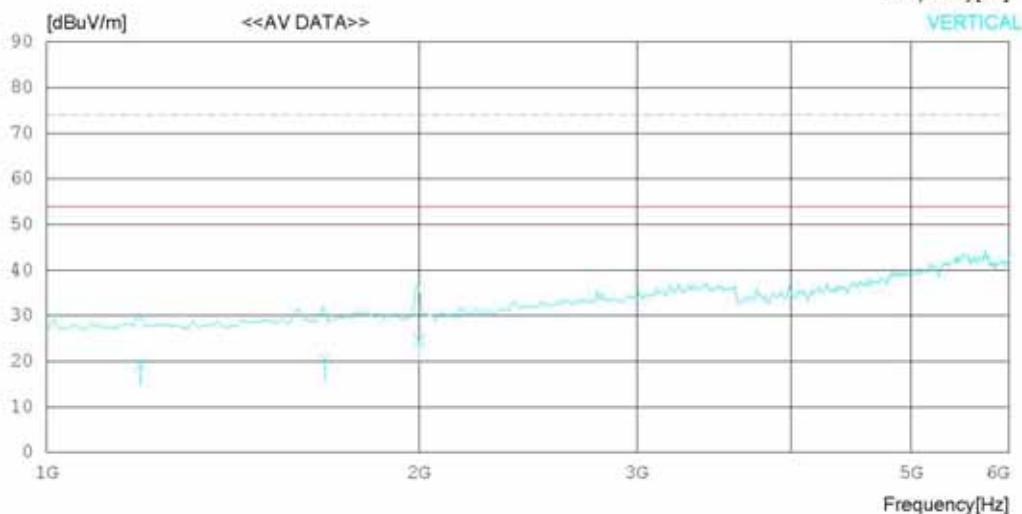
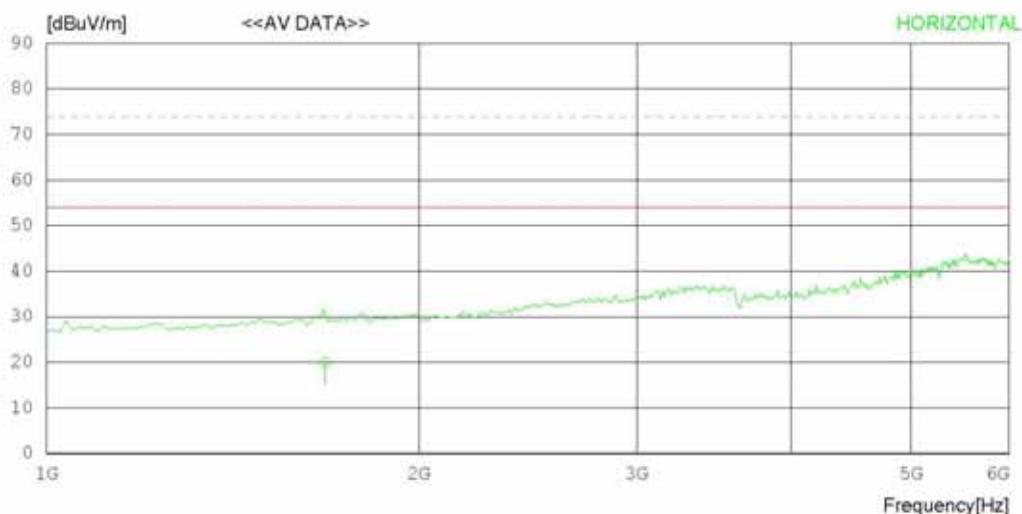
&lt; 1GHz-6GHz\_Average &gt;

**RADIATED EMISSION**

Date : 2011-12-08

Model Name	:	LG-E400	Reference No.	
Model No.	:		Power Supply	
Serial No.	:		Temp/Humi	
Test Condition	:	PC LINK	Operator	

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

## RADIATED EMISSION

Date : 2011-12-08

Model Name : LG-E400      Reference No.  
Model No. :      Power Supply : 120V 60Hz  
Serial No. :      Temp/Humi : 22'C 40% R.H.  
Test Condition : PC LINK      Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING [dBuV]	ANT AV FACTOR	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1680.125	29.8	25.2	6.8	41.9	19.9	54.0	34.1	100	330
----- Vertical -----										
2	1191.240	31.1	24.2	5.7	41.8	19.2	54.0	34.8	100	358
3	1680.050	30.4	25.2	6.8	41.9	20.5	54.0	33.5	100	358
4	2000.000	33.6	25.2	7.7	42.0	24.5	54.0	29.5	100	153

---

---

## Appendix 1

---

---

### List of Test and Measurement Instruments

## 1. Conducted Disturbance

Name of Instrument		Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
<input type="checkbox"/>	EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
<input type="checkbox"/>	LISN	LISN1600	197204	TTI	2011.07.02	2012.07.02
<input type="checkbox"/>	LISN(EUT)	ESH2-Z5	828739/006	R&S	2011.09.30	2012.09.30
<input type="checkbox"/>	50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
<input type="checkbox"/>	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
<input checked="" type="checkbox"/>	Spectrum Analyzer	8591E	3649A05889	H/P	2011.03.07	2012.03.07
<input checked="" type="checkbox"/>	RFI/Field intensity Meter	KNM-2402	4N-170-3	KYORITSU	2011.07.02	2012.07.02
<input checked="" type="checkbox"/>	LISN	KNW-407	8-317-8	KYORITSU	2011.01.11	2012.01.11
<input checked="" type="checkbox"/>	LISN	KNW-242	8-654-15	KYORITSU	2011.07.02	2012.07.02
<input checked="" type="checkbox"/>	50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
<input type="checkbox"/>	ISN	T4A	24869	Teseq GmbH	2011.01.11	2012.01.11
<input type="checkbox"/>	LISN(DC)	NNBM8125	8125-821	SCHWARZBECK	2011.07.01	2012.07.01

## 2. Radiated Disturbance

Name of Instrument		Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU	100014	Rohde & Schwarz	2011.01.20	2012.01.20
<input checked="" type="checkbox"/>	Bilog Antenna	CBL6112B	2737	SCHAFFNER	2010.07.14	2012.07.14
<input checked="" type="checkbox"/>	Horn Antenna	BBHA9120A	322	SCHWARZBECK	2010.04.13	2012.04.13
<input checked="" type="checkbox"/>	Amplifier(22dB)	8447E	2945A02865	H/P	2011.01.11	2012.01.11
<input checked="" type="checkbox"/>	Pre Amplifier	MLA-00108-B02-36	1518831	TSJ	2011.01.11	2012.01.11
<input checked="" type="checkbox"/>	Controller	5905A	N/A	TOKIN	-	-
<input checked="" type="checkbox"/>	ANT.master	N/A	N/A	TOKIN	-	-
<input type="checkbox"/>	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
<input type="checkbox"/>	EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
<input type="checkbox"/>	BICONICAL ANT.	VHA 9103	91031946	SCHWARZBECK	2010.12.21	2012.12.21
<input type="checkbox"/>	LOG-PERIODIC ANT.	UHALP 9108A-A1	1098	SCHWARZBECK	2010.11.29	2012.11.29
<input type="checkbox"/>	Pre Amplifier	MLA-100K01-B01-26	1252741	TSJ	2011.03.07	2012.03.07
<input type="checkbox"/>	Position Controller	5901T	14173	TOKIN	-	-
<input type="checkbox"/>	DRIVER	5902T2	14174	TOKIN	-	-
<input type="checkbox"/>	Spectrum Analyzer	E4411B	US41062735	Agilent	2011.07.01	2012.07.01
<input type="checkbox"/>	Amplifier (25dB)	8447D	2443A03690	Agilent	2011.07.01	2012.07.01
<input type="checkbox"/>	Bilog Antenna	VULB9160	3151	SCHAFFNER	2010.08.25	2012.08.25
<input type="checkbox"/>	Controller	5900	N/A	TOKIN	-	-