




PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 15.247 WLAN 802.11b/g/n/ac

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
8/09/2017-8/30/2017
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
1M1708030234-12.ZNF

FCC ID:	ZNFG011C
APPLICANT:	LG Electronics MobileComm U.S.A

Application Type: Class II Permissive Change
Model: G011C
EUT Type: Portable Handset
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15.247
Test Procedure(s): KDB 558074 D01 v04, KDB 662911 D01 v02r01
Class II Permissive Change: Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President








FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 1 of 60	

TABLE OF CONTENTS

FCC PART 15.247 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 Scope		4
1.2 PCTEST Test Location		4
2.0 PRODUCT INFORMATION		5
2.1 Equipment Description		5
2.2 Device Capabilities		5
2.3 Test Configuration		7
2.4 EMI Suppression Device(s)/Modifications		7
3.0 DESCRIPTION OF TESTS		8
3.1 Evaluation Procedure		8
3.2 Radiated Emissions		8
3.3 Environmental Conditions		8
4.0 ANTENNA REQUIREMENTS		9
5.0 MEASUREMENT UNCERTAINTY		10
6.0 TEST EQUIPMENT CALIBRATION DATA		11
7.0 TEST RESULTS		12
7.1 Summary		12
7.2 Output Power Measurement		13
7.3 Conducted Emissions at the Band Edge		18
7.4 Radiated Spurious Emission Measurements – Above 1 GHz		25
7.4.1 Antenna-1 Radiated Spurious Emission Measurements		28
7.4.2 Antenna-2 Radiated Spurious Emission Measurements		34
7.4.3 Antenna-1 Radiated Restricted Band Edge Measurements		40
7.4.4 Antenna-2 Radiated Restricted Band Edge Measurements		45
7.4.5 MIMO Radiated Restricted Band Edge Measurements		50
7.5 Radiated Spurious Emissions Measurements – Below 1GHz		55
8.0 CONCLUSION		60

FCC ID: ZNFG011C	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 2 of 60	



MEASUREMENT REPORT

FCC Part 15.247



§ 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.247

BASE MODEL: G011C

FCC ID: ZNFG011C

FCC CLASSIFICATION: Digital Transmission System (DTS)


Test Device Serial No.: 35392, 35400, 35319 Production Pre-Production Engineering

DATE(S) OF TEST: 8/09/2017-8/30/2017

TEST REPORT S/N: 1M1708030234-12.ZNF



Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFG011C	 FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 3 of 60

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

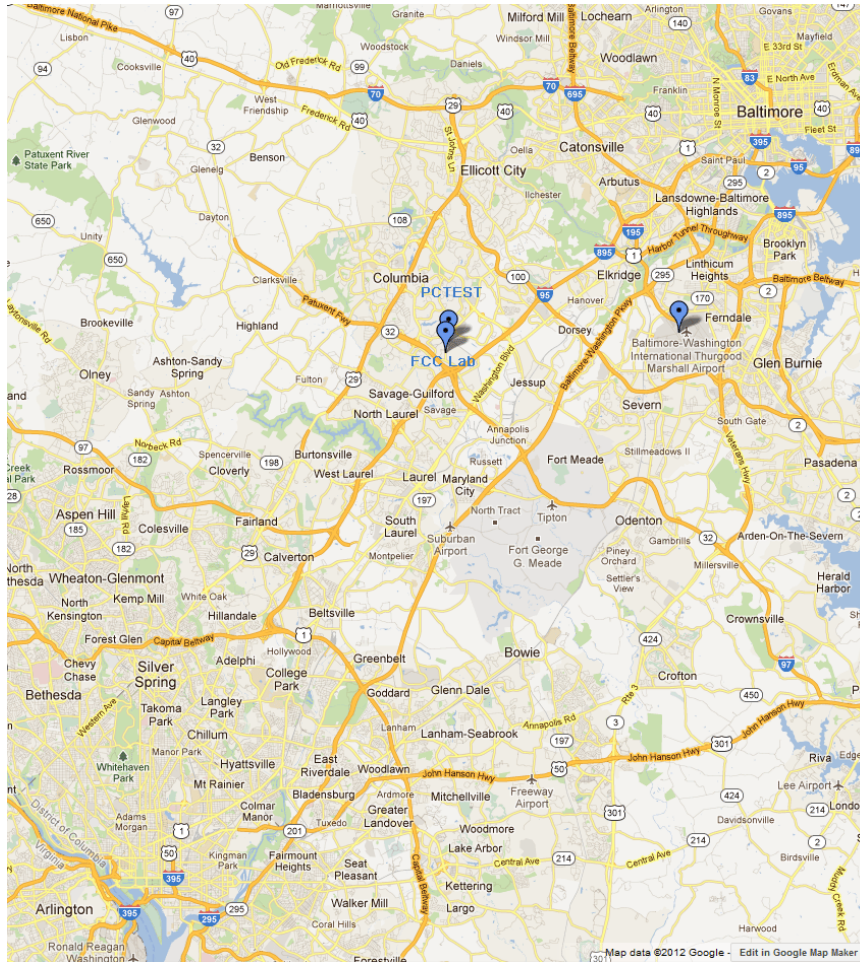




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 4 of 60

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFG011C**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC



Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		ANT1	ANT2	MIMO
2.4GHz	b	99.2	99.3	99.1
	g	95.0	95.1	94.2
	n	94.1	93.7	94.0
	ac	94.1	94.1	94.1

Table 2-2. Measured Duty Cycles

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 5 of 60	

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CCD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✗	✗	✓	✓
	11g	✓	✓	✗	✗	✓	✓
	11n	✓	✓	✓	✓	✓	✓
	11ac	✓	✓	✓	✓	✓	✓

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function



Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in the UNII test report.

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1	165
Operating Frequency (MHz)	2412	5825
Data Rate (Mbps)	1	6
802.11 Mode	b	a

Table 2-4. Config-1 (ANT1 2.4GHz & ANT2 5GHz)



FCC ID: ZNFG011C	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 6 of 60	

2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 7 of 60

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 8 of 60	

4.0 ANTENNA REQUIREMENTS



Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:



The EUT unit complies with the requirement of §15.203.

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 9 of 60	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09



FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 10 of 60	

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/27/2017	Annual	3/27/2018	MY52350166
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	MA2411B	Pulse Power Sensor	10/14/2015	Biennial	10/14/2017	846215
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
Emco	6502	Active Loop Antenna (10k - 30 MHz)	8/9/2016	Biennial	8/9/2018	2936
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	8/28/2016	Biennial	8/28/2018	135427
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM1
-	WL25-1	Conducted Cable Set (25GHz)	6/14/2017	Annual	6/14/2018	WL25-1
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2017	Annual	3/7/2018	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 11 of 60	

7.0 TEST RESULTS

7.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFG011C
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(b)(3)	Transmitter Output Power	< 1 Watt	CONDUCTED	PASS	Sections 7.2
15.247(d)	Band Edge / Out-of-Band Emissions	Conducted \geq 30dBc		PASS	
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 7.4, 7.5

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 12 of 60	

7.2 Output Power Measurement

§15.247(b.3)

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

KDB 558074 D01 v04 – Section 9.1.2 PKPM1 Peak Power Method
 KDB 558074 D01 v04 – Section 9.2.3.2 Method AVGPM-G
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

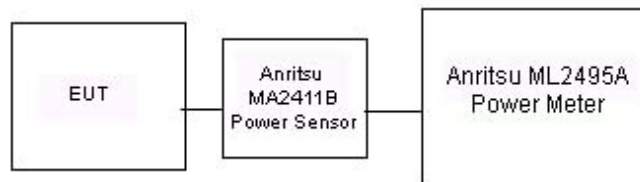




Figure 7-1. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None



FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 13 of 60	

2.4GHz Conducted Power [dBm]						
Freq [MHz]	Channel	Detector	IEEE Transmission Mode			
			802.11b	802.11g	802.11n	802.11ac
2412	1	AVG	18.23	14.92	13.76	14.02
		PEAK	20.53	19.49	18.39	18.84
2417	2	AVG	18.24	15.18	14.05	14.02
		PEAK	20.48	19.59	18.55	18.43
2422	3	AVG	18.29	16.29	16.07	16.08
		PEAK	20.67	22.05	21.90	21.89
2437	6	AVG	18.33	16.10	15.82	15.96
		PEAK	20.56	21.97	21.87	21.83
2452	9	AVG	18.28	15.82	15.70	15.80
		PEAK	20.50	21.93	21.88	21.82
2457	10	AVG	18.24	15.43	14.25	14.14
		PEAK	20.49	20.02	18.99	18.89
2462	11	AVG	18.36	15.40	14.25	14.09
		PEAK	20.79	19.98	19.18	19.04
2467	12	AVG	11.96	7.48	7.44	7.48
		PEAK	14.31	12.20	12.13	12.15
2472	13	AVG	12.09	1.26	0.91	1.31
		PEAK	14.43	6.45	6.42	6.45

Table 7-2. Antenna-1 Conducted Output Power Measurements

2.4GHz Conducted Power [dBm]						
Freq [MHz]	Channel	Detector	IEEE Transmission Mode			
			802.11b	802.11g	802.11n	802.11ac
2412	1	AVG	18.01	14.79	13.67	14.10
		PEAK	20.27	19.44	18.37	18.91
2417	2	AVG	17.89	15.37	14.05	14.10
		PEAK	20.09	19.95	18.68	18.73
2422	3	AVG	17.86	16.47	16.25	16.45
		PEAK	19.97	21.71	21.69	21.65
2437	6	AVG	17.95	16.35	16.92	16.89
		PEAK	20.03	21.51	21.47	21.47
2452	9	AVG	17.90	16.60	16.90	16.88
		PEAK	20.23	21.90	21.85	21.78
2457	10	AVG	18.02	15.42	14.15	14.16
		PEAK	20.13	20.00	19.03	19.06
2462	11	AVG	18.23	15.43	14.13	14.22
		PEAK	20.22	19.91	18.91	19.04
2467	12	AVG	11.75	7.16	7.00	6.92
		PEAK	13.90	11.60	11.56	11.58
2472	13	AVG	11.35	0.90	0.69	0.55
		PEAK	13.77	6.18	5.36	5.20

Table 7-3. Antenna-2 Conducted Output Power Measurements



FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 14 of 60	

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	ANT1	ANT2	MIMO
2412	1	AVG	18.23	18.01	21.13
		PEAK	20.53	20.27	23.41
2417	2	AVG	18.24	17.89	21.08
		PEAK	20.48	20.09	23.30
2422	3	AVG	18.29	17.86	21.09
		PEAK	20.67	19.97	23.34
2437	6	AVG	18.33	17.95	21.15
		PEAK	20.56	20.03	23.31
2452	9	AVG	18.28	17.90	21.10
		PEAK	20.50	20.23	23.38
2457	10	AVG	18.24	18.02	21.14
		PEAK	20.49	20.13	23.32
2462	11	AVG	18.36	18.23	21.31
		PEAK	20.79	20.22	23.52
2467	12	AVG	11.96	11.75	14.87
		PEAK	14.31	13.90	17.12
2472	13	AVG	12.09	11.35	14.75
		PEAK	14.43	13.77	17.12

Table 7-4. CDD b-mode Conducted Output Power Measurements

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	ANT1	ANT2	MIMO
2412	1	dBm	14.92	14.79	17.87
		PEAK	19.49	19.44	22.48
2417	2	dBm	15.18	15.37	18.29
		PEAK	19.59	19.95	22.78
2422	3	dBm	16.29	16.47	19.39
		PEAK	22.05	21.71	24.89
2437	6	dBm	16.10	16.35	19.24
		PEAK	21.97	21.51	24.76
2452	9	dBm	15.82	16.60	19.24
		PEAK	21.93	21.90	24.93
2457	10	dBm	15.43	15.42	18.44
		PEAK	20.02	20.00	23.02
2462	11	dBm	15.40	15.43	18.43
		PEAK	19.98	19.91	22.96
2467	12	dBm	7.48	7.16	10.33
		PEAK	12.20	11.60	14.92
2472	13	dBm	1.26	0.90	4.09
		PEAK	6.45	6.18	9.33

Table 7-5. CDD g-mode Conducted Output Power Measurements



FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 15 of 60

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	ANT1	ANT2	MIMO
2412	1	AVG	13.76	13.67	16.73
		PEAK	18.39	18.37	21.39
2417	2	AVG	14.05	14.05	17.06
		PEAK	18.55	18.68	21.63
2422	3	AVG	16.07	16.25	19.17
		PEAK	21.90	21.69	24.81
2437	6	AVG	15.82	16.92	19.42
		PEAK	21.87	21.47	24.68
2452	9	AVG	15.70	16.90	19.35
		PEAK	21.88	21.85	24.88
2457	10	AVG	14.25	14.15	17.21
		PEAK	18.99	19.03	22.02
2462	11	AVG	14.25	14.13	17.20
		PEAK	19.18	18.91	22.06
2467	12	dBm	7.44	7.00	10.24
		PEAK	12.13	11.56	14.86
2472	13	dBm	0.91	0.69	3.81
		PEAK	6.42	5.36	8.93

Table 7-6. MIMO n-mode Conducted Output Power Measurements

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	ANT1	ANT2	MIMO
2412	1	AVG	14.02	14.10	17.07
		PEAK	18.84	18.91	21.89
2417	2	AVG	14.02	14.10	17.07
		PEAK	18.43	18.73	21.59
2422	3	AVG	16.08	16.45	19.28
		PEAK	21.89	21.65	24.78
2437	6	AVG	15.96	16.89	19.46
		PEAK	21.83	21.47	24.66
2452	9	AVG	15.80	16.88	19.38
		PEAK	21.82	21.78	24.81
2457	10	AVG	14.14	14.16	17.16
		PEAK	18.89	19.06	21.99
2462	11	AVG	14.09	14.22	17.17
		PEAK	19.04	19.04	22.05
2467	12	dBm	7.48	6.92	10.22
		PEAK	12.15	11.58	14.88
2472	13	dBm	1.31	0.55	3.96
		PEAK	6.45	5.20	8.88

Table 7-7. MIMO ac-mode Conducted Output Power Measurement

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 16 of 60

Note:



Per KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2437MHz the average conducted output power was measured to be 16.05 dBm for Antenna-1 and 16.13 dBm for Antenna-2.

$$\text{Antenna 1 + Antenna 2 = MIMO}$$

$$(16.05 \text{ dBm} + 16.13 \text{ dBm}) = (40.27 \text{ mW} + 41.02 \text{ mW}) = 81.29 \text{ mW} = 19.10 \text{ dBm}$$

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 17 of 60	

7.3 Conducted Emissions at the Band Edge

§15.247(d)

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section Error! Reference source not found.).

Test Procedure Used

KDB 558074 D01 v04 – Section 11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.







Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: ZNFG011C	 FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 18 of 60	

Antenna-1 Conducted Emissions at the Band Edge

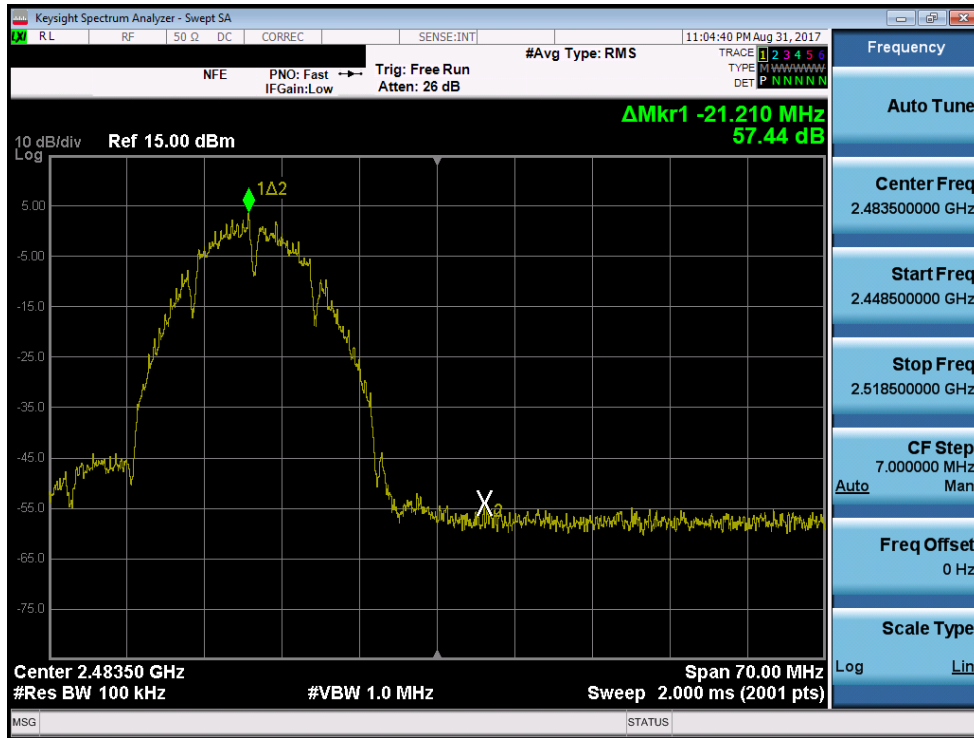


Plot 7-1. Band Edge Plot (802.11b – Ch. 12)

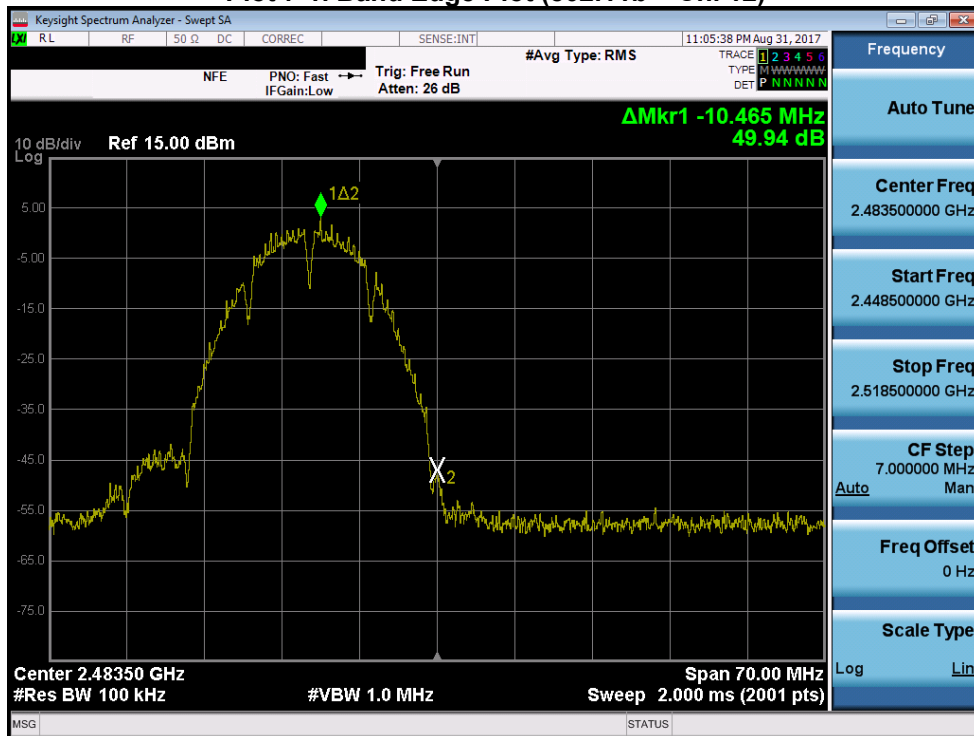


Plot 7-2. Band Edge Plot (802.11b – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 19 of 60

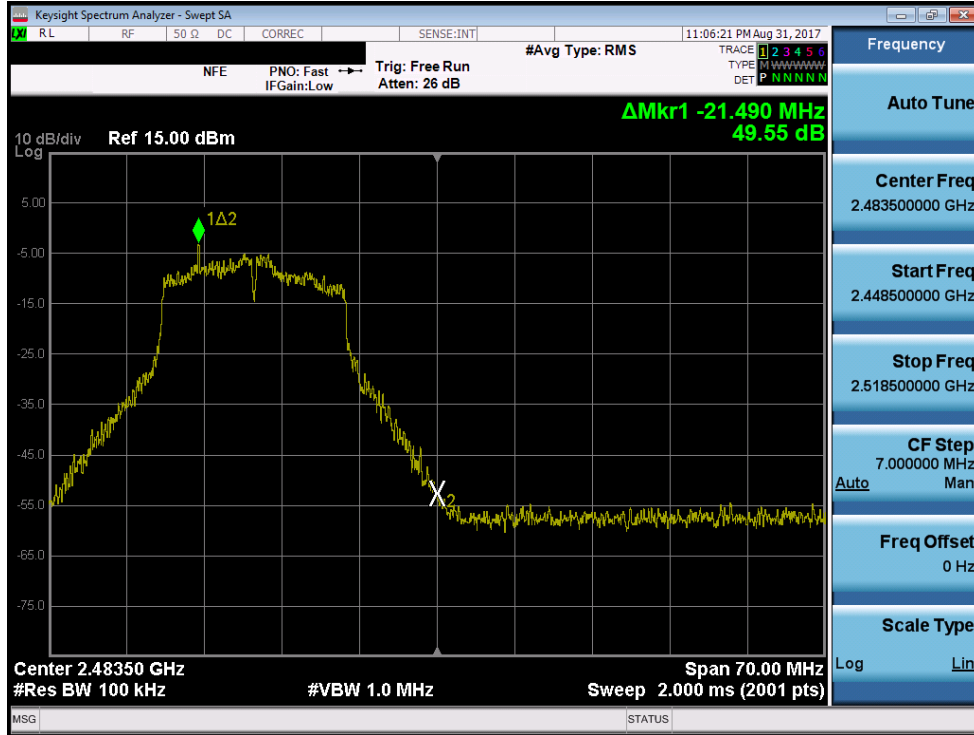


Plot 7-3. Band Edge Plot (802.11g – Ch. 12)

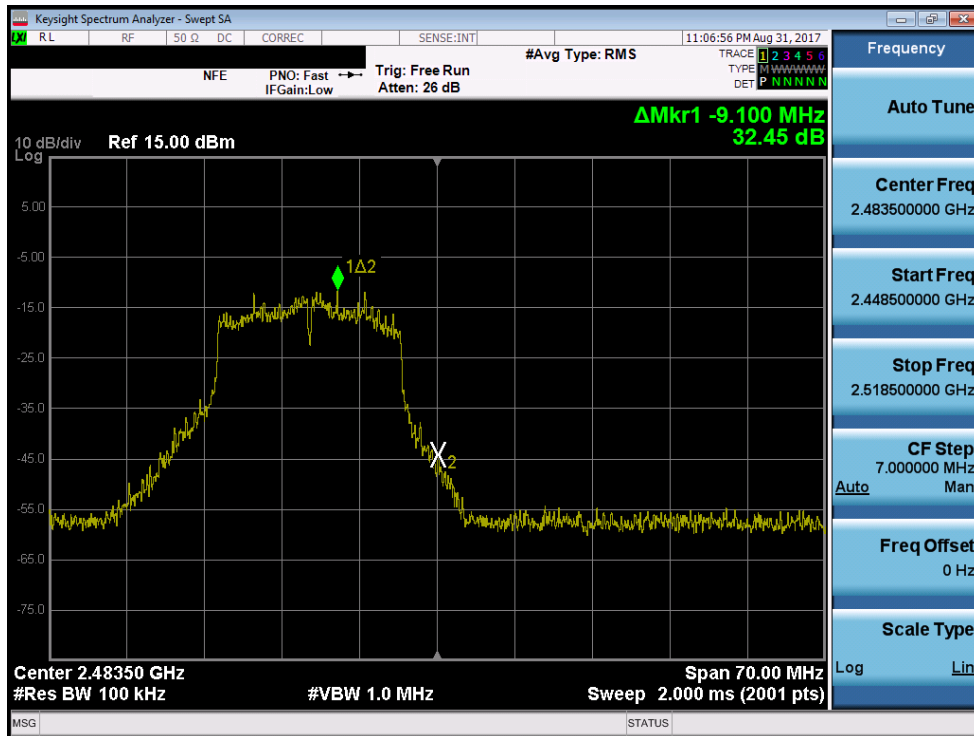


Plot 7-4. Band Edge Plot (802.11g – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 20 of 60

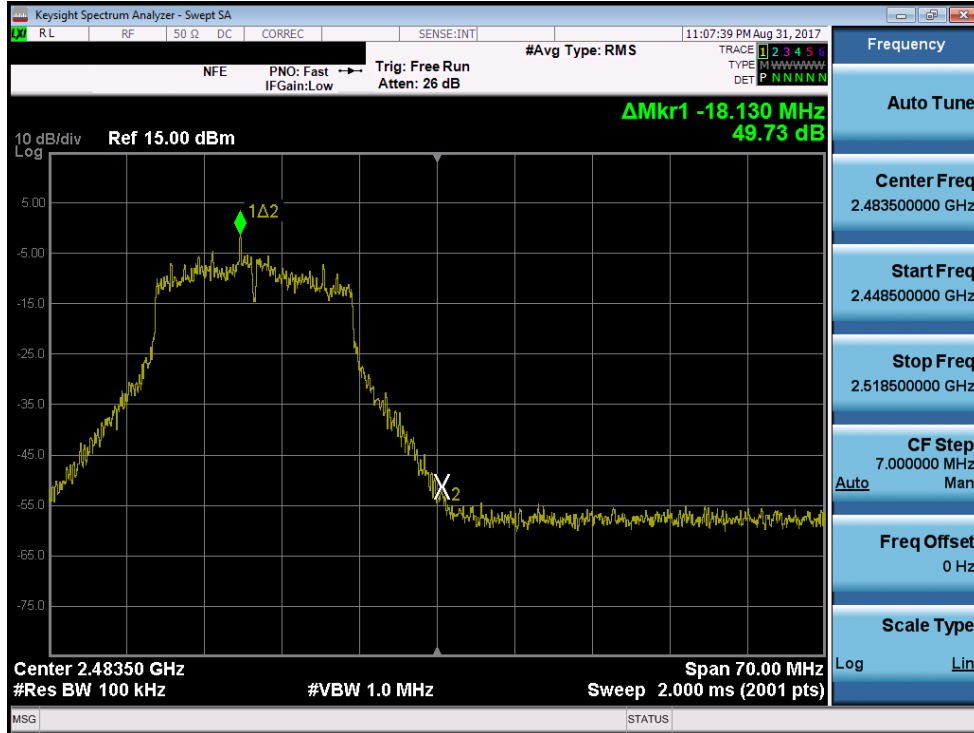


Plot 7-5. Band Edge Plot (802.11n – Ch. 12)

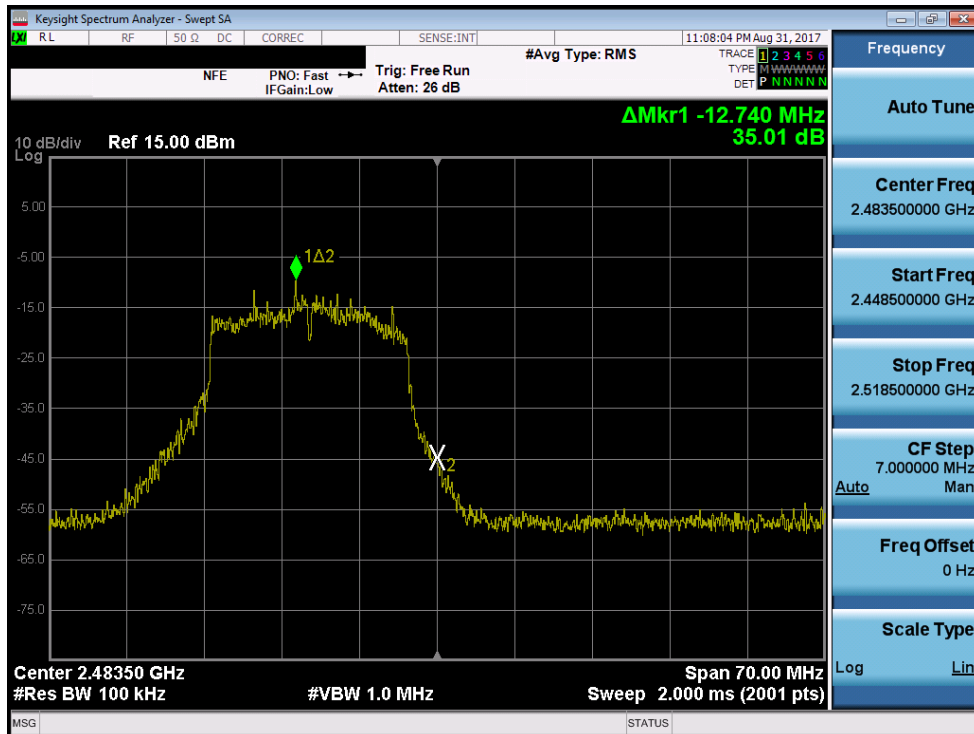


Plot 7-6. Band Edge Plot (802.11n – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 21 of 60

Antenna-2 Conducted Emissions at the Band Edge

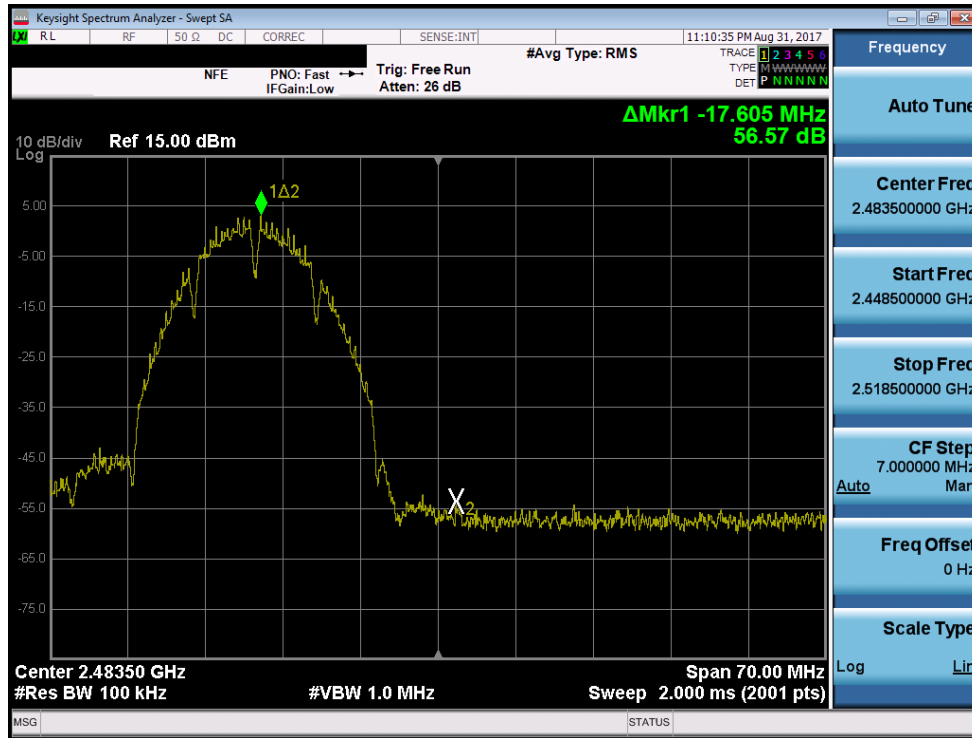

Plot 7-7. Band Edge Plot (802.11b – Ch. 12)

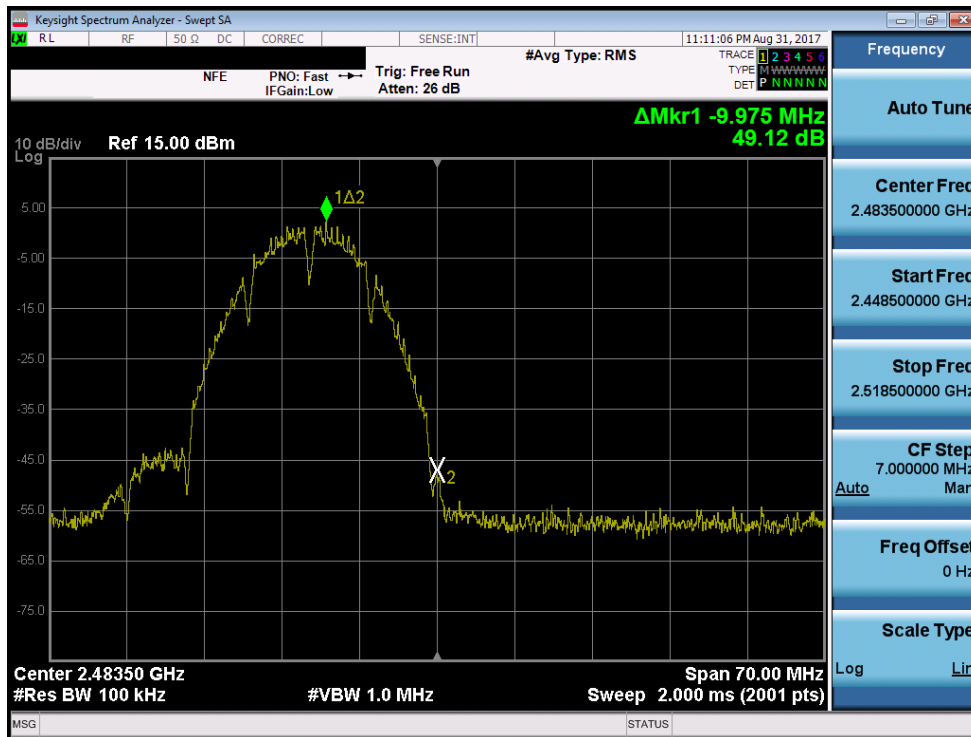

Plot 7-8. Band Edge Plot (802.11b – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 22 of 60



Plot 7-9. Band Edge Plot (802.11g – Ch. 12)




Plot 7-10. Band Edge Plot (802.11g – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 23 of 60



Plot 7-11. Band Edge Plot (802.11n – Ch. 12)

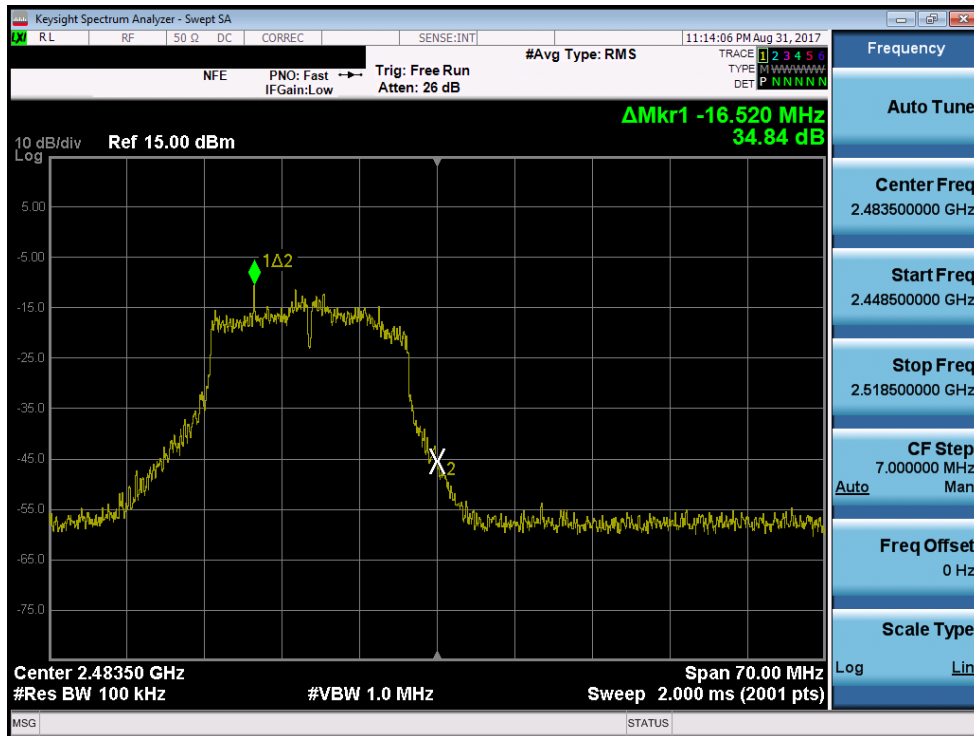

Plot 7-12. Band Edge Plot (802.11n – Ch. 13)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 24 of 60

7.4 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-8 per Section 15.209.

Frequency	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-8. Radiated Limits

Test Procedures Used

KDB 558074 D01 v04 – Section 12.1, 12.2.7



Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 D01 v04

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01 v04

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 25 of 60	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

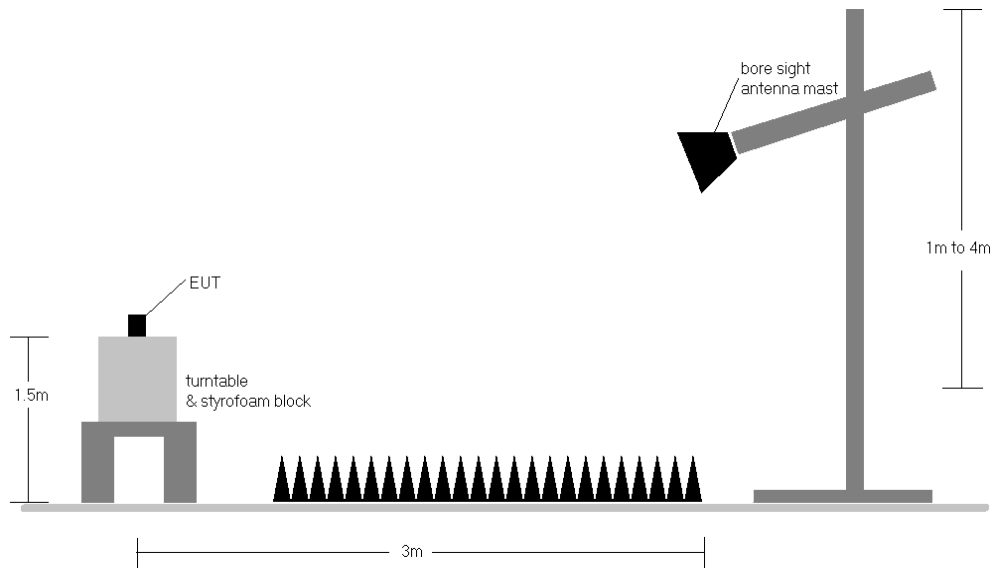




Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v04 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-8.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

FCC ID: ZNFG011C	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 26 of 60	

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.



Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.4 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 27 of 60

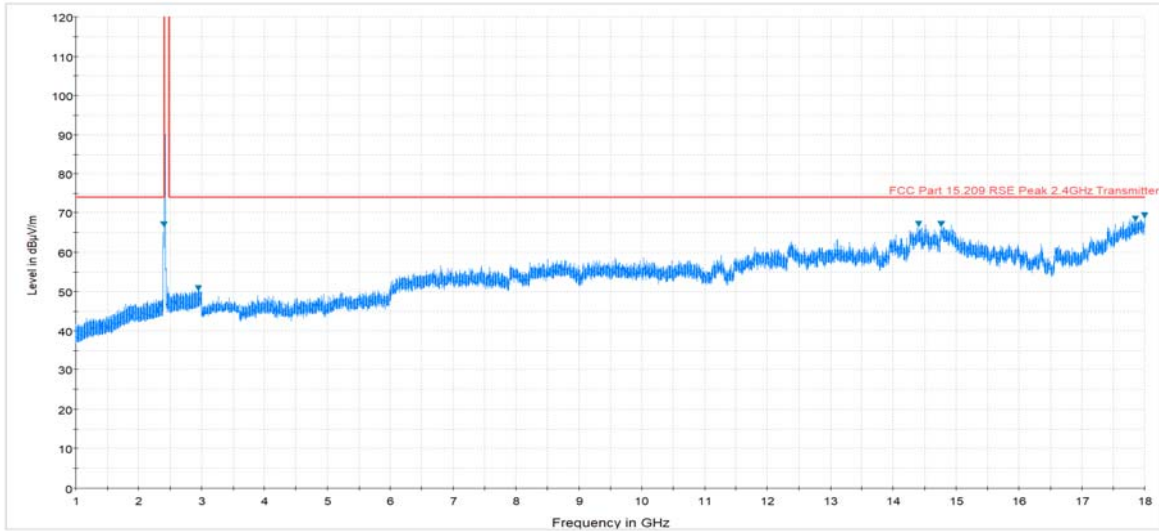

7.4.1 Antenna-1 Radiated Spurious Emission Measurements §15.247(d) §15.205 & §15.209

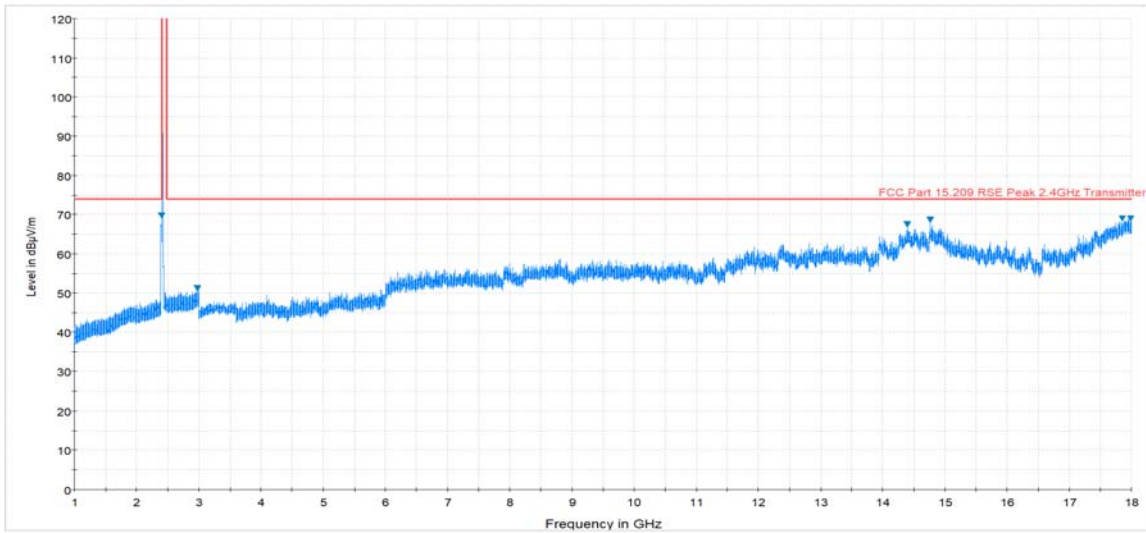


Plot 7-13. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)




Plot 7-14. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

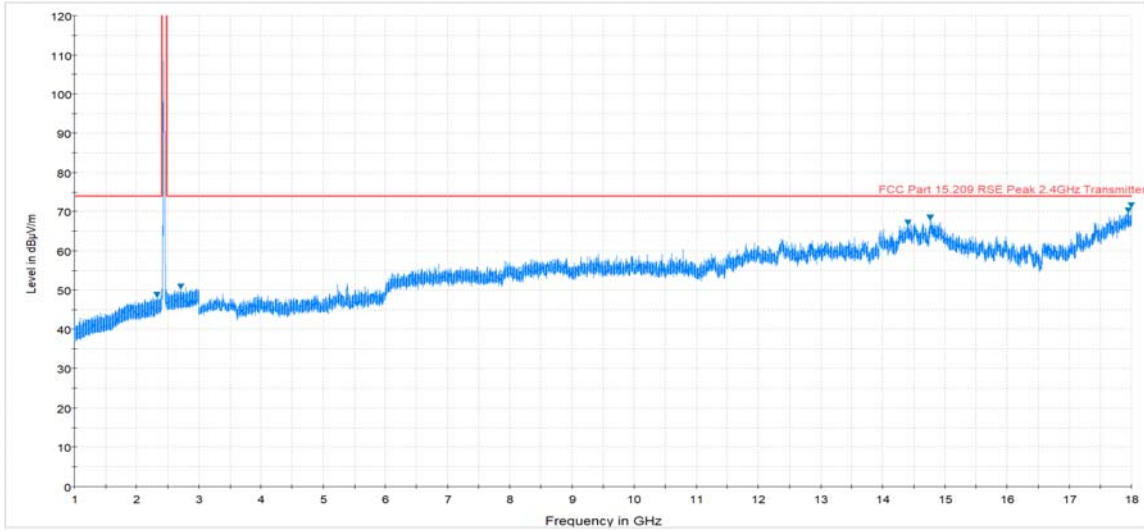

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 28 of 60	

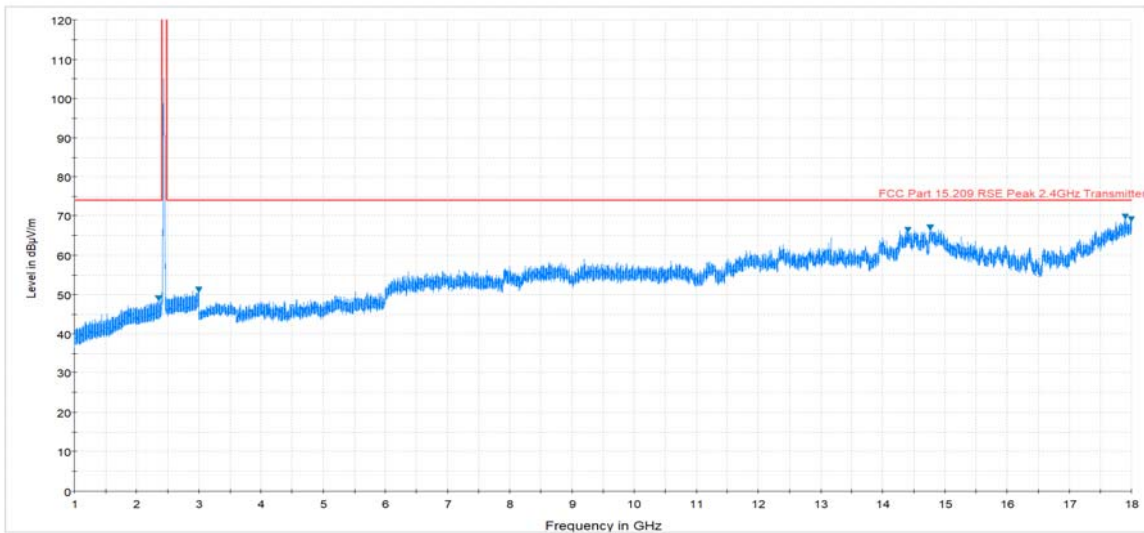


Plot 7-15. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)




Plot 7-16. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)

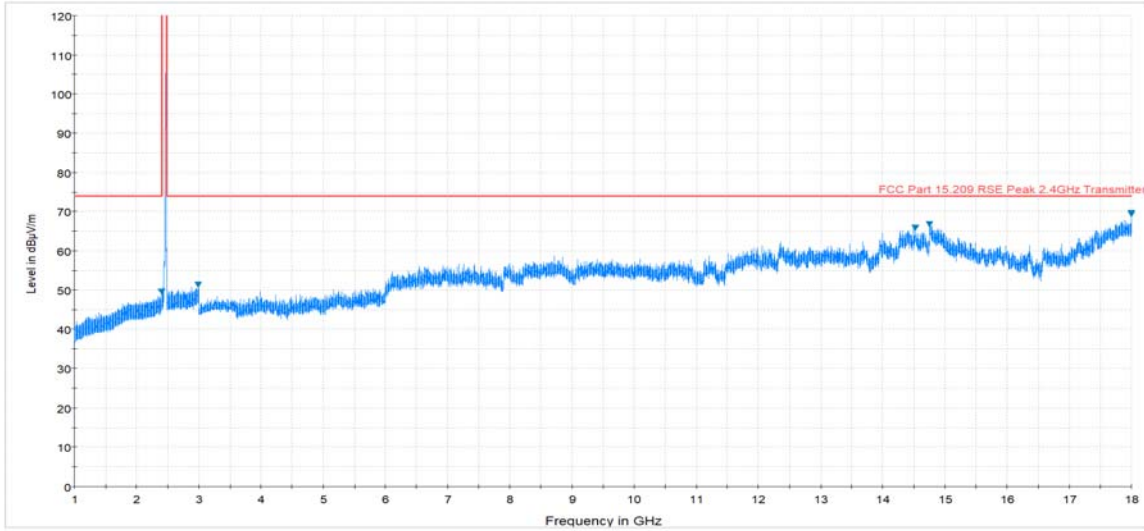

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 29 of 60	

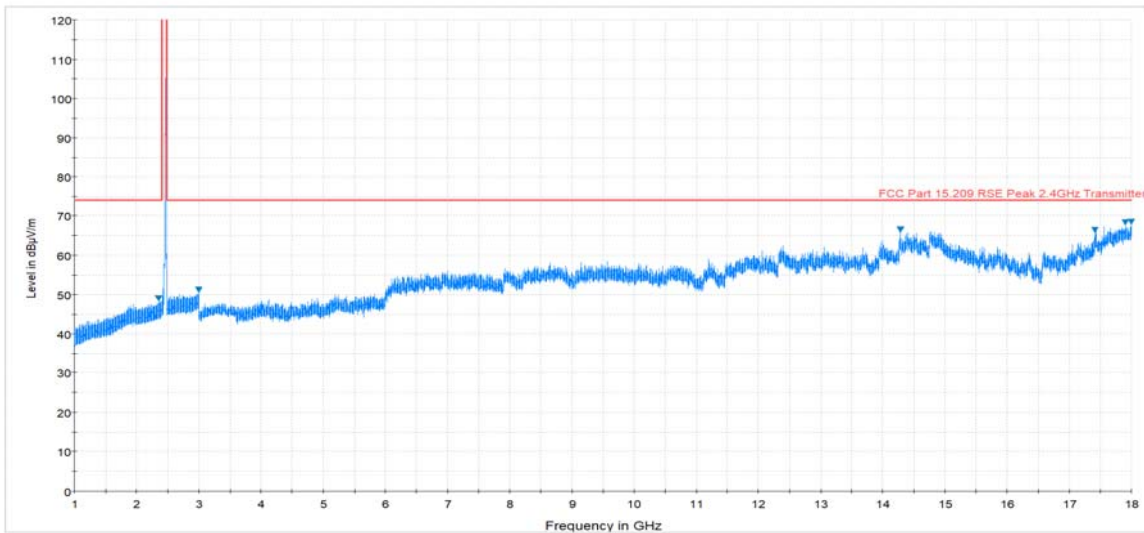

Plot 7-17. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)




Plot 7-18. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 30 of 60	


Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

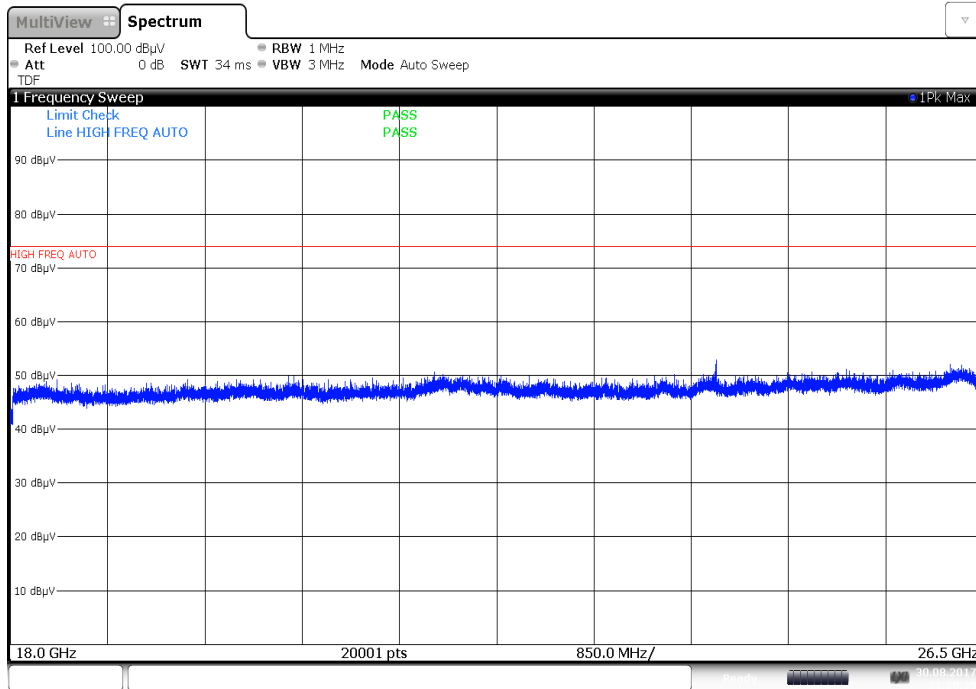

21:29:39 30.08.2017

Plot 7-19. Radiated Spurious Plot above 18GHz (Pol. H)

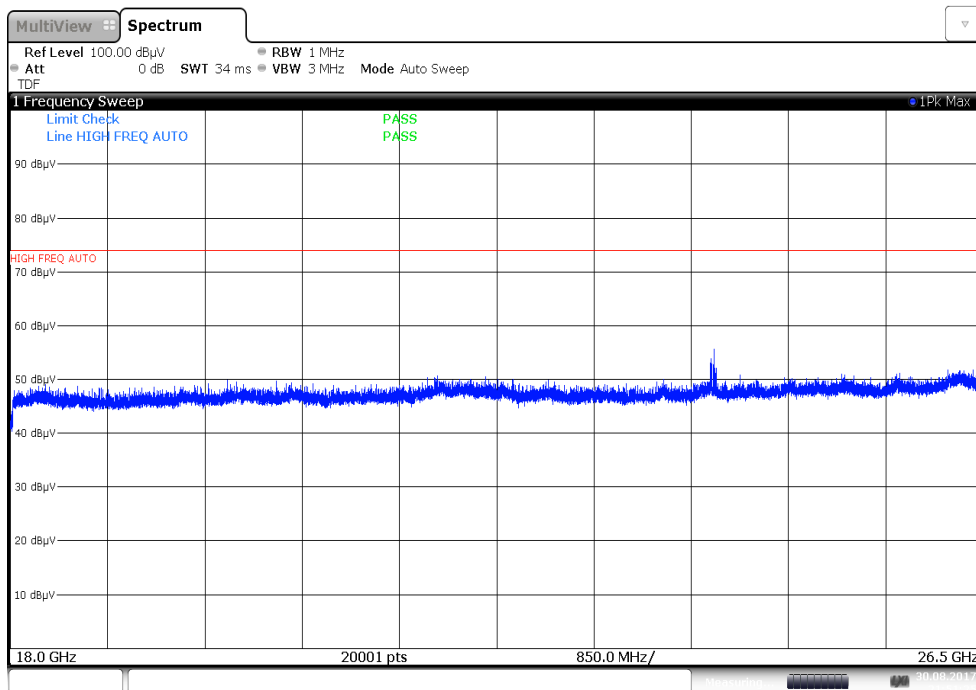

21:51:26 30.08.2017

Plot 7-20. Radiated Spurious Plot above 18GHz (Pol. V)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 31 of 60

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	V	-	-	-71.77	2.14	37.37	53.98	-16.60
4824.00	Peak	V	-	-	-57.46	2.14	51.68	73.98	-22.29
12060.00	Avg	V	-	-	-71.57	14.93	50.36	53.98	-3.62
12060.00	Peak	V	-	-	-57.92	14.93	64.01	73.98	-9.97

Table 7-9. Radiated Measurements

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	V	-	-	-70.95	2.52	38.57	53.98	-15.41
4874.00	Peak	V	-	-	-58.14	2.52	51.38	73.98	-22.60
7311.00	Avg	V	-	-	-72.35	8.94	43.59	53.98	-10.39
7311.00	Peak	V	-	-	-56.37	8.94	59.57	73.98	-14.41
12185.00	Avg	V	-	-	-72.78	15.44	49.66	53.98	-4.32
12185.00	Peak	V	-	-	-57.28	15.44	65.16	73.98	-8.82



Table 7-10. Radiated Measurements

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 32 of 60	

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

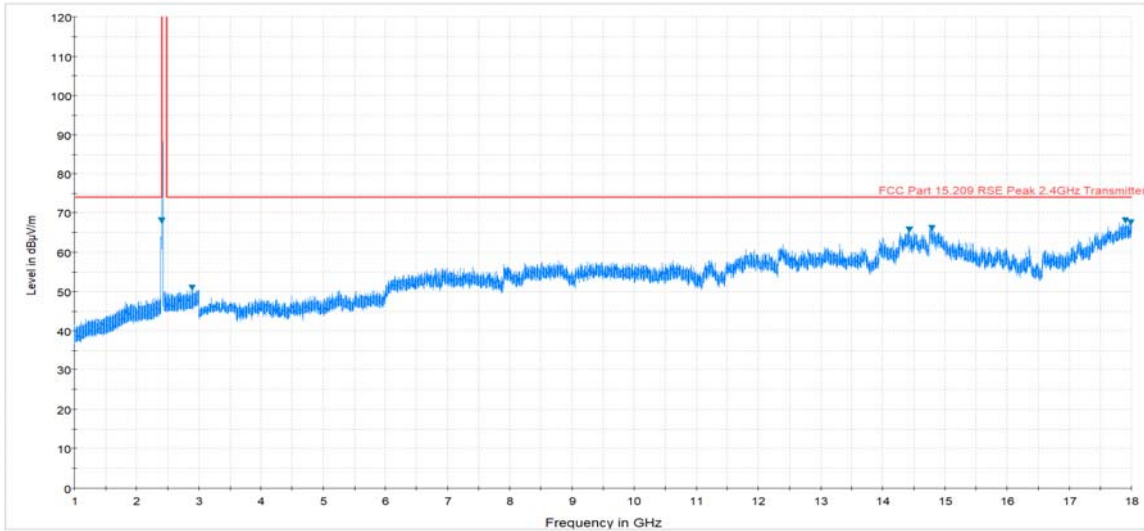
Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-72.34	2.36	37.02	53.98	-16.96
4924.00	Peak	V	-	-	-56.59	2.36	52.77	73.98	-21.21
7386.00	Avg	V	-	-	-70.38	8.91	45.53	53.98	-8.45
7386.00	Peak	V	-	-	-56.87	8.91	59.04	73.98	-14.94
12310.00	Avg	V	-	-	-72.28	15.15	49.87	53.98	-4.11
12310.00	Peak	V	-	-	-56.57	15.15	65.58	73.98	-8.40

Table 7-11. Radiated Measurements


FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 33 of 60	

7.4.2 Antenna-2 Radiated Spurious Emission Measurements



§15.247(d) §15.205 & §15.209

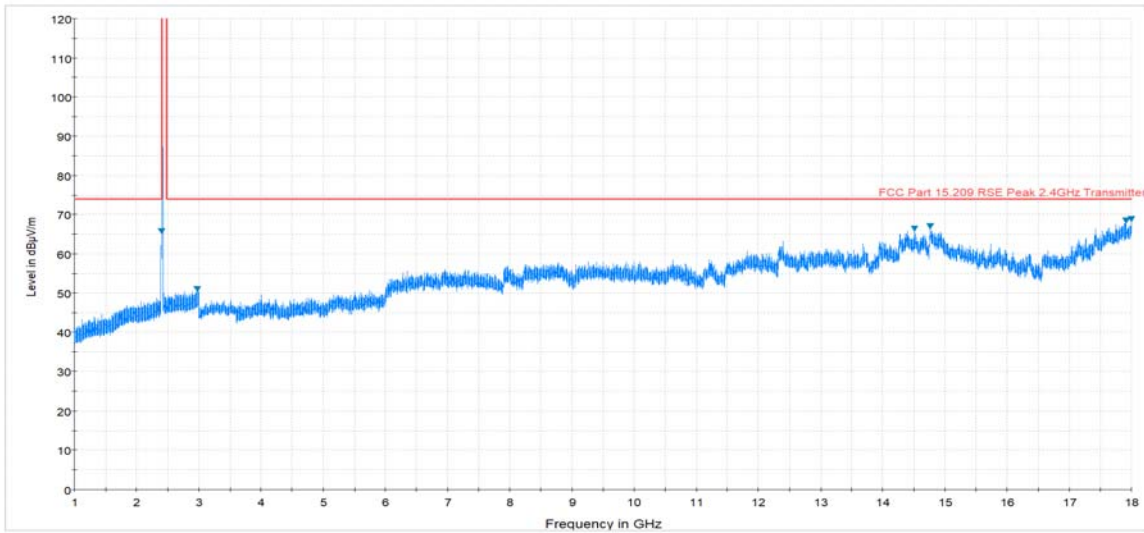


Plot 7-21. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)




Plot 7-22. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

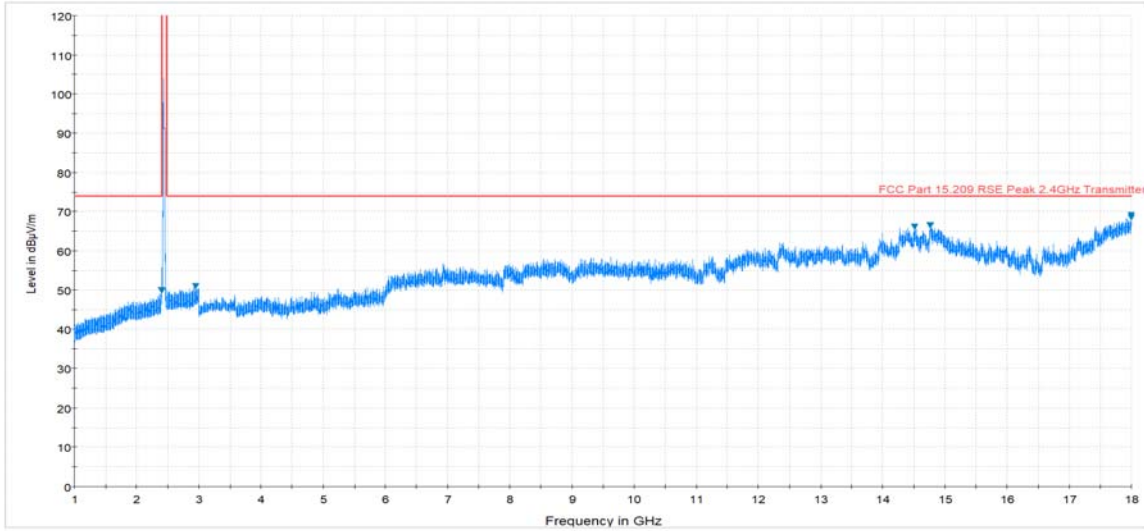

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 34 of 60	

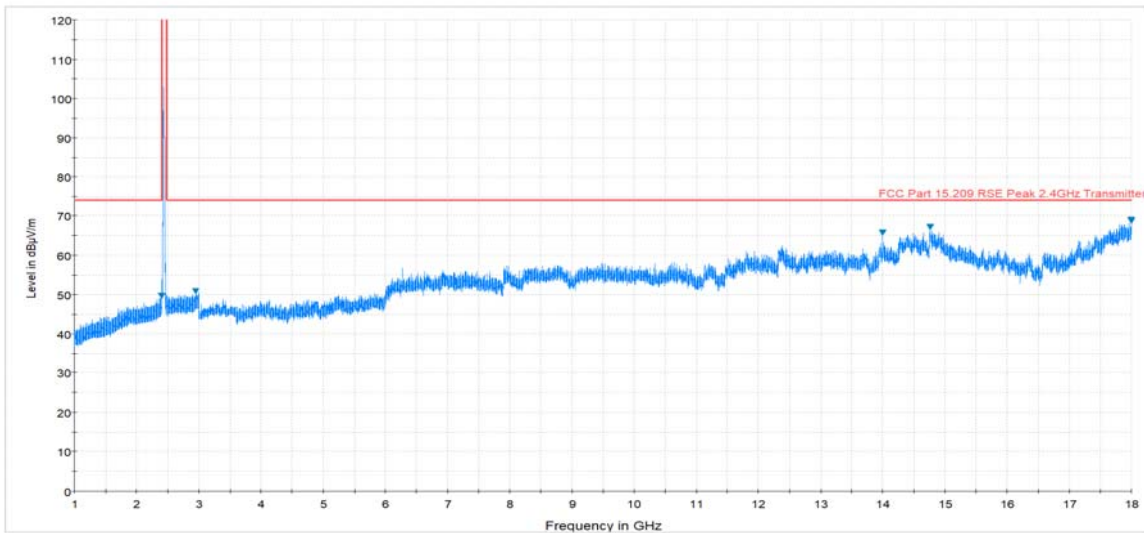


Plot 7-23. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)




Plot 7-24. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)

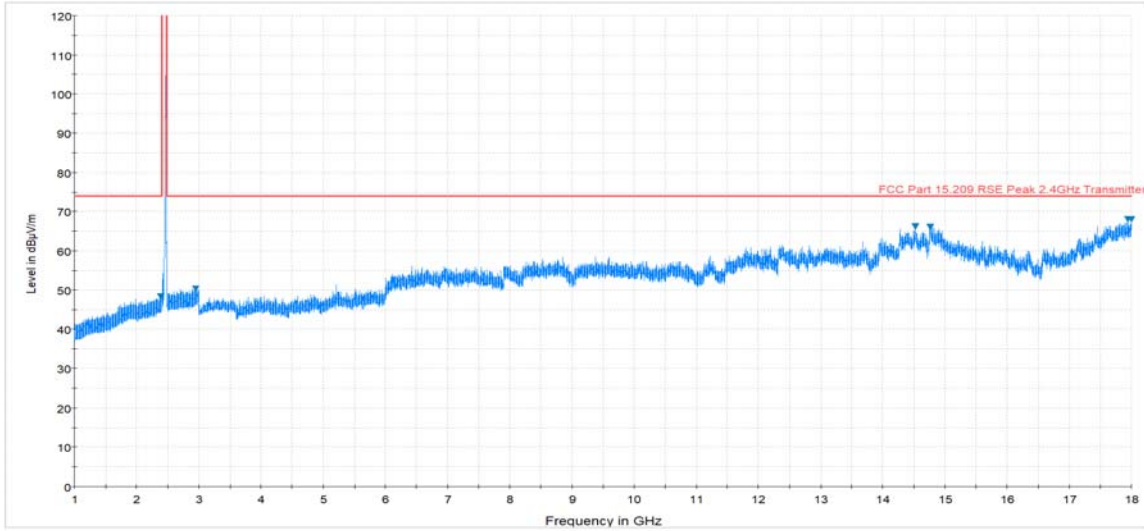

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 35 of 60

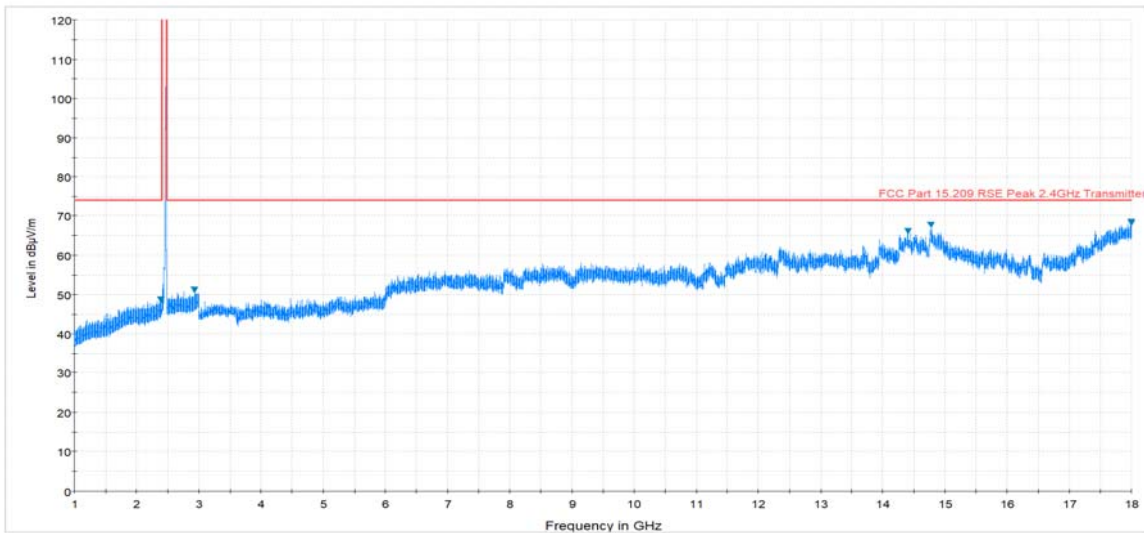

Plot 7-25. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)




Plot 7-26. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 36 of 60	


Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

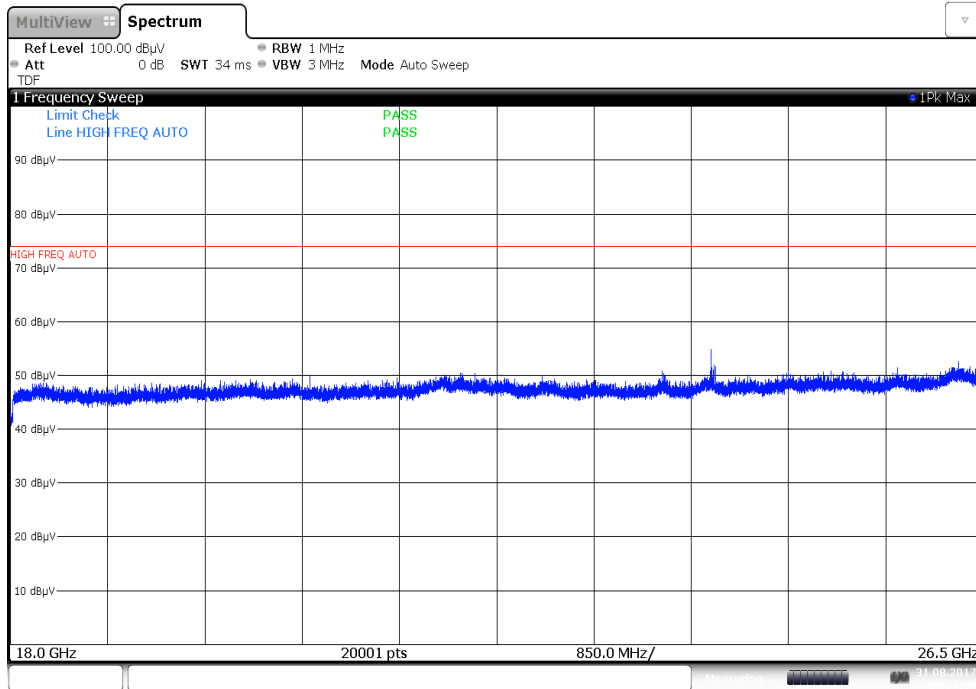

00:38:00 31.08.2017

Plot 7-27. Radiated Spurious Plot above 18GHz (Pol. H)

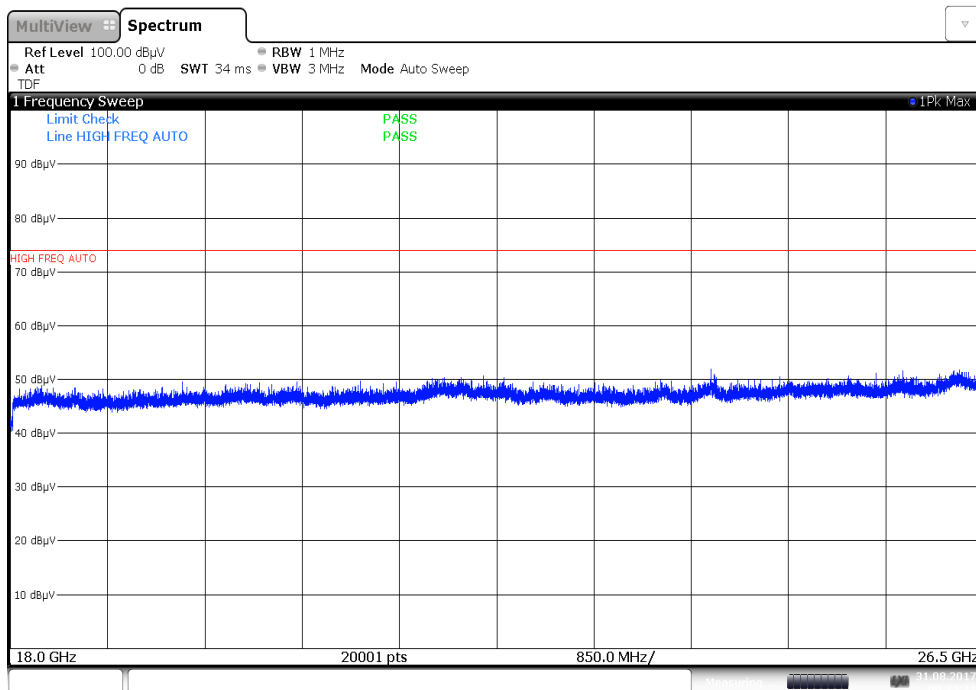

00:35:11 31.08.2017

Plot 7-28. Radiated Spurious Plot above 18GHz (Pol. V)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 37 of 60

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 01



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	398	358	-67.79	2.14	41.35	53.98	-12.62
4824.00	Peak	H	398	358	-57.00	2.14	52.14	73.98	-21.83
12060.00	Avg	H	-	-	-71.49	14.93	50.44	53.98	-3.54
12060.00	Peak	H	-	-	-58.94	14.93	62.99	73.98	-10.99

Table 7-12. Radiated Measurements

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	159	195	-69.02	2.52	40.50	53.98	-13.48
4874.00	Peak	H	159	195	-57.72	2.52	51.80	73.98	-22.18
7311.00	Avg	H	-	-	-71.46	8.94	44.48	53.98	-9.50
7311.00	Peak	H	-	-	-60.24	8.94	55.70	73.98	-18.28
12185.00	Avg	H	-	-	-72.03	15.44	50.41	53.98	-3.57
12185.00	Peak	H	-	-	-59.29	15.44	63.15	73.98	-10.83



Table 7-13. Radiated Measurements

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 38 of 60	

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	168	298	-63.96	2.36	45.40	53.98	-8.58
4924.00	Peak	H	168	298	-55.41	2.36	53.95	73.98	-20.03
7386.00	Avg	H	-	-	-71.45	8.91	44.46	53.98	-9.52
7386.00	Peak	H	-	-	-57.04	8.91	58.87	73.98	-15.11
12310.00	Avg	H	-	-	-71.67	15.15	50.48	53.98	-3.50
12310.00	Peak	H	-	-	-57.34	15.15	64.81	73.98	-9.17


Table 7-14. Radiated Measurements

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 39 of 60	

7.4.3 Antenna-1 Radiated Restricted Band Edge Measurements §15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

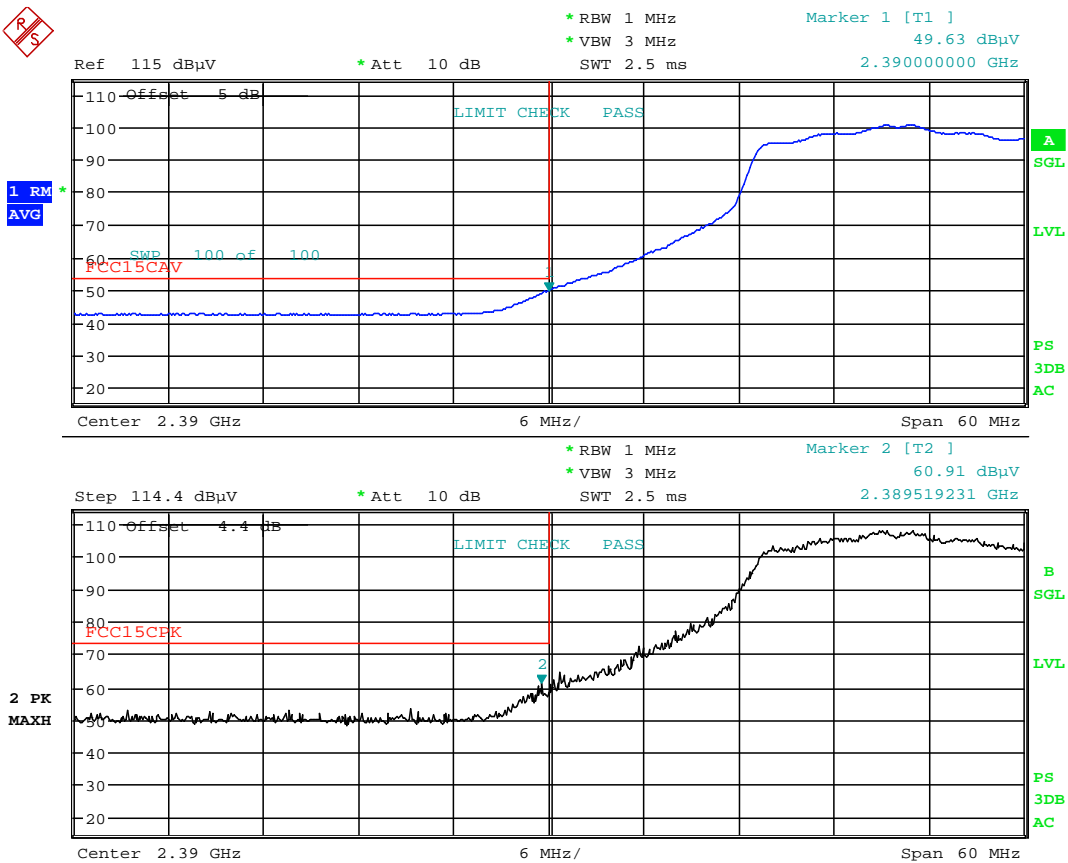

Date: 9.AUG.2017 22:22:45

Plot 7-29. Radiated Restricted Lower Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 40 of 60

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209



Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

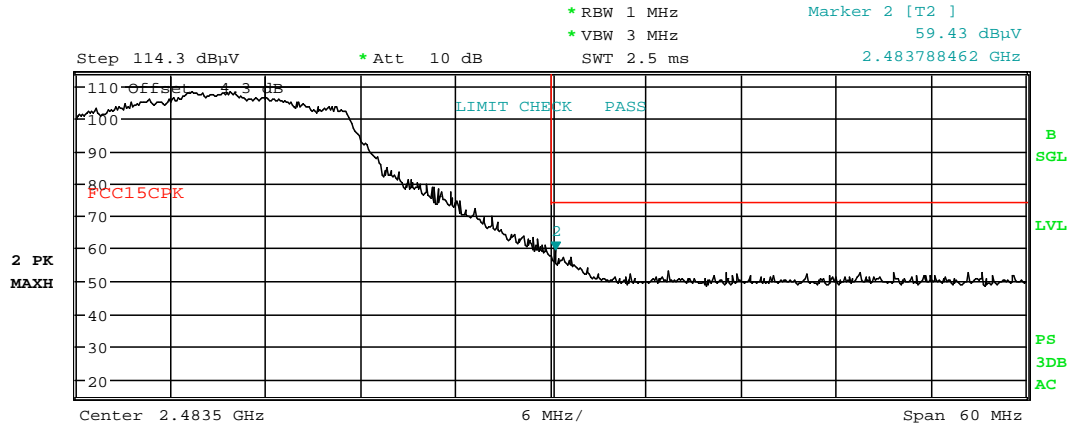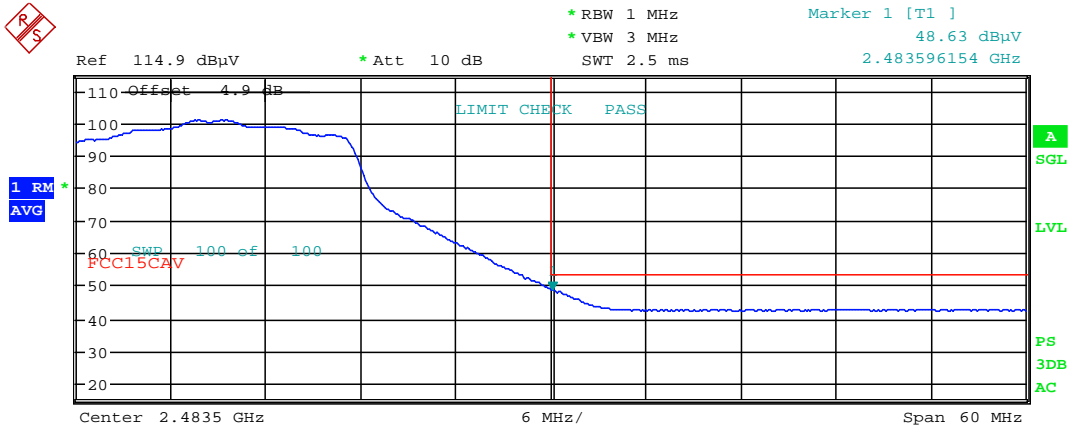

Date: 9.AUG.2017 22:26:50

Plot 7-30. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 41 of 60

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

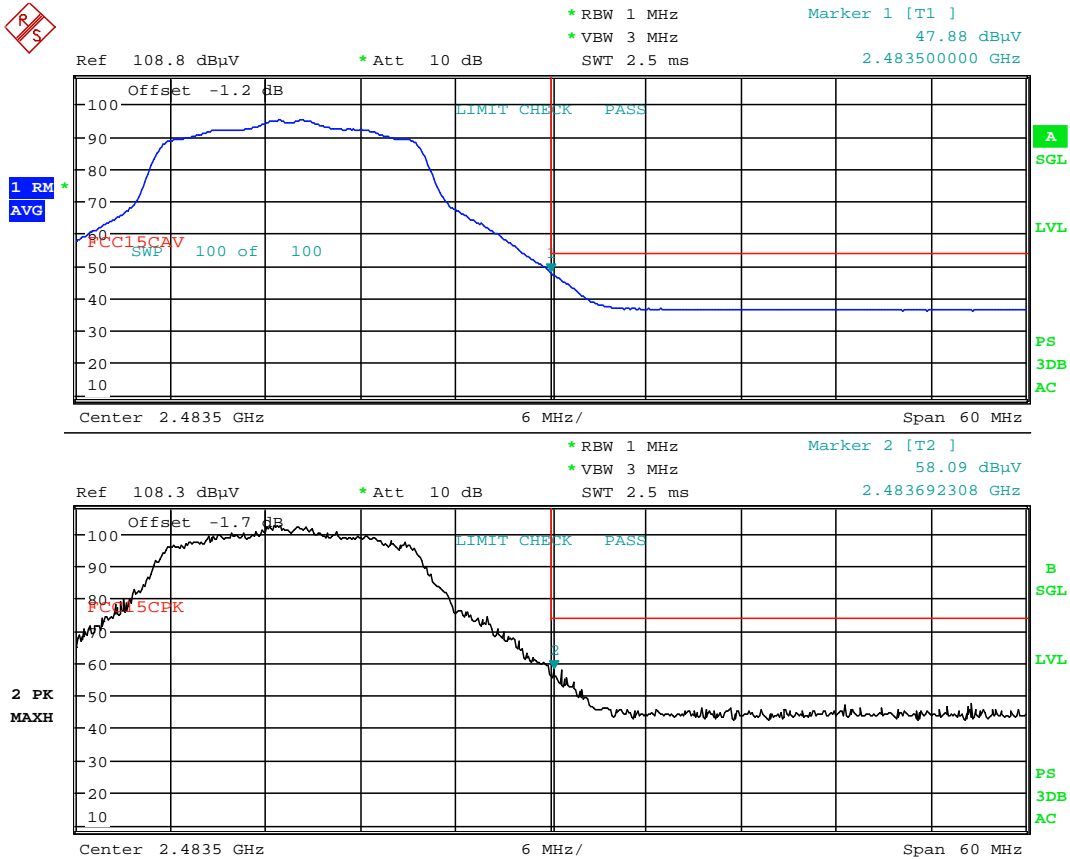

Date: 28.AUG.2017 16:31:14

Plot 7-31. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 42 of 60

Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz


Channel: 13

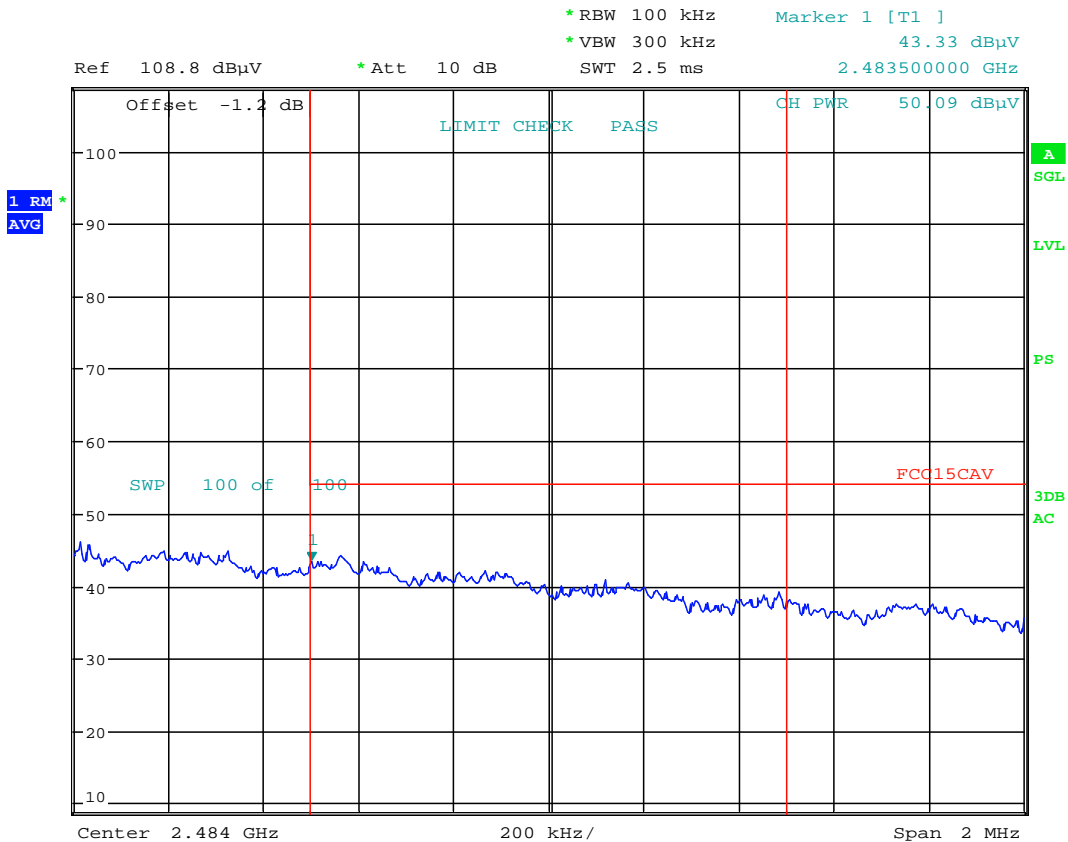

Date: 18.AUG.2017 14:33:51



Plot 7-32. Radiated Restricted Upper Band Edge Measurement (Average)

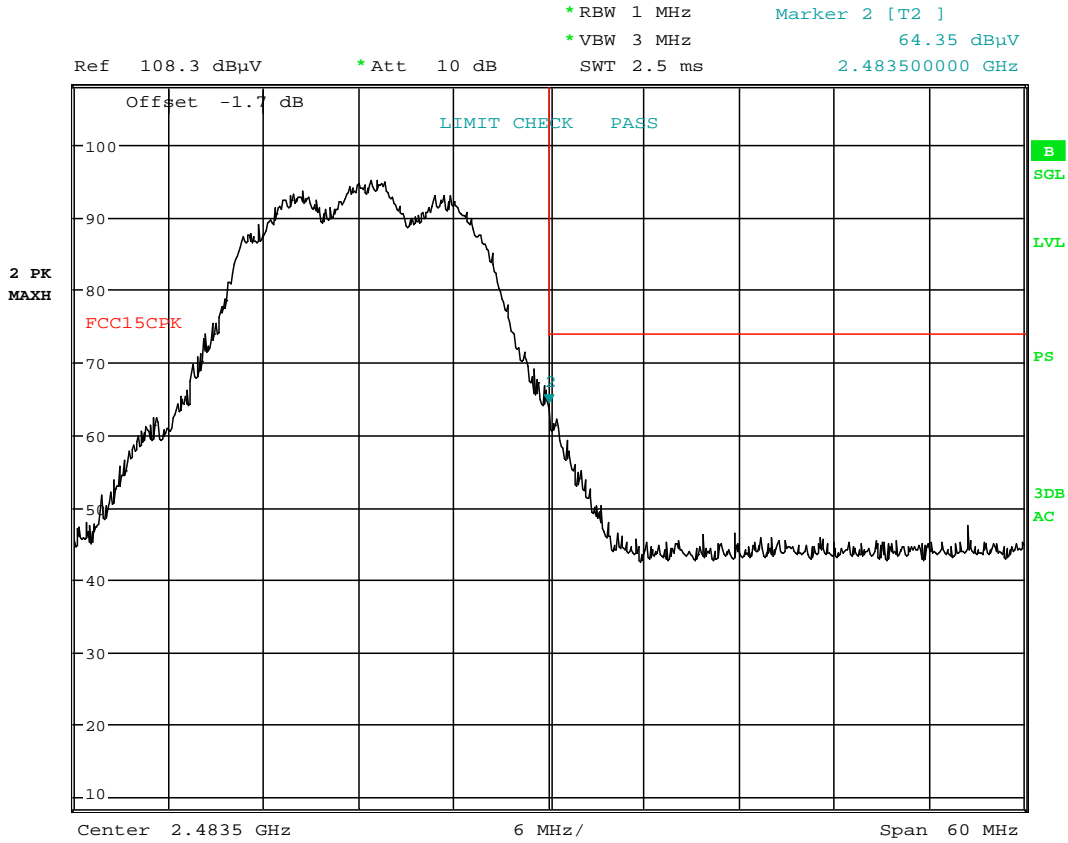FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 43 of 60



Date: 18.AUG.2017 14:37:01


Plot 7-33. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 44 of 60

7.4.4 Antenna-2 Radiated Restricted Band Edge Measurements §15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

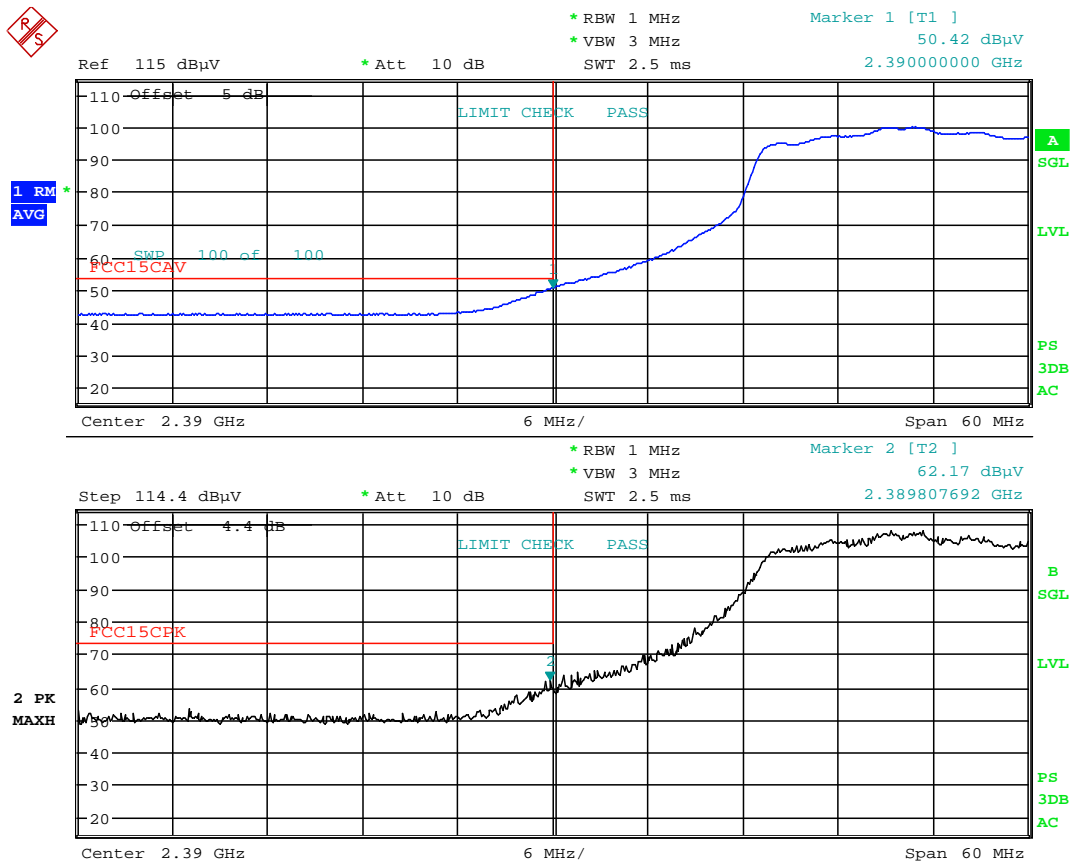

Date: 9.AUG.2017 22:31:27

Plot 7-34. Radiated Restricted Lower Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 45 of 60

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209



Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

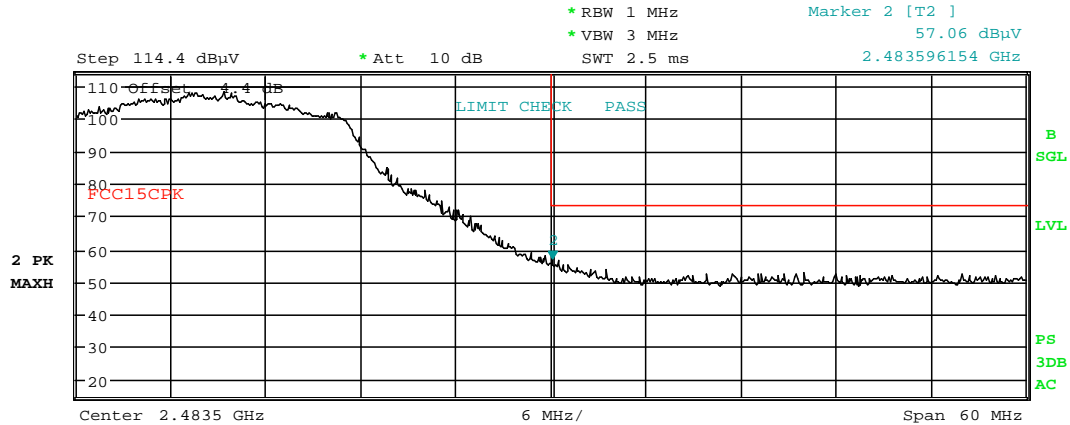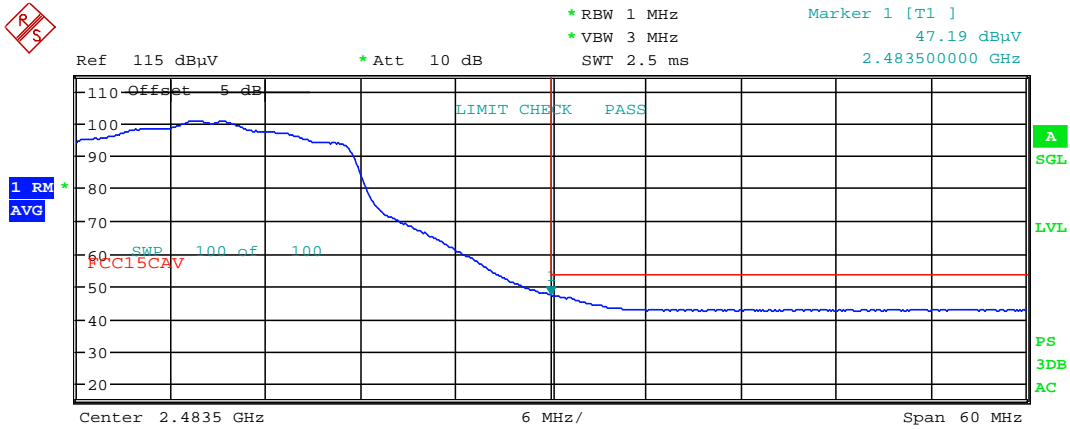

Date: 9.AUG.2017 23:00:45

Plot 7-35. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 46 of 60

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209



Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

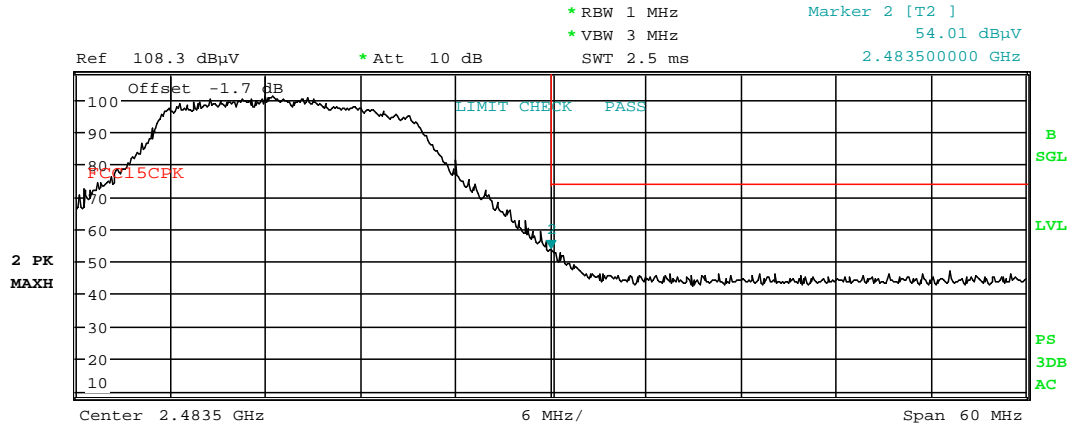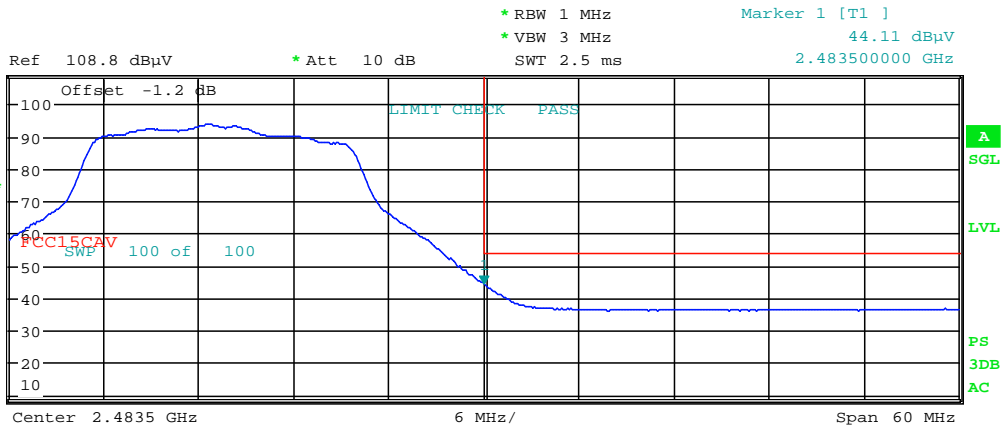

Date: 28.AUG.2017 16:58:09

Plot 7-36. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 47 of 60

Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz


Channel: 13

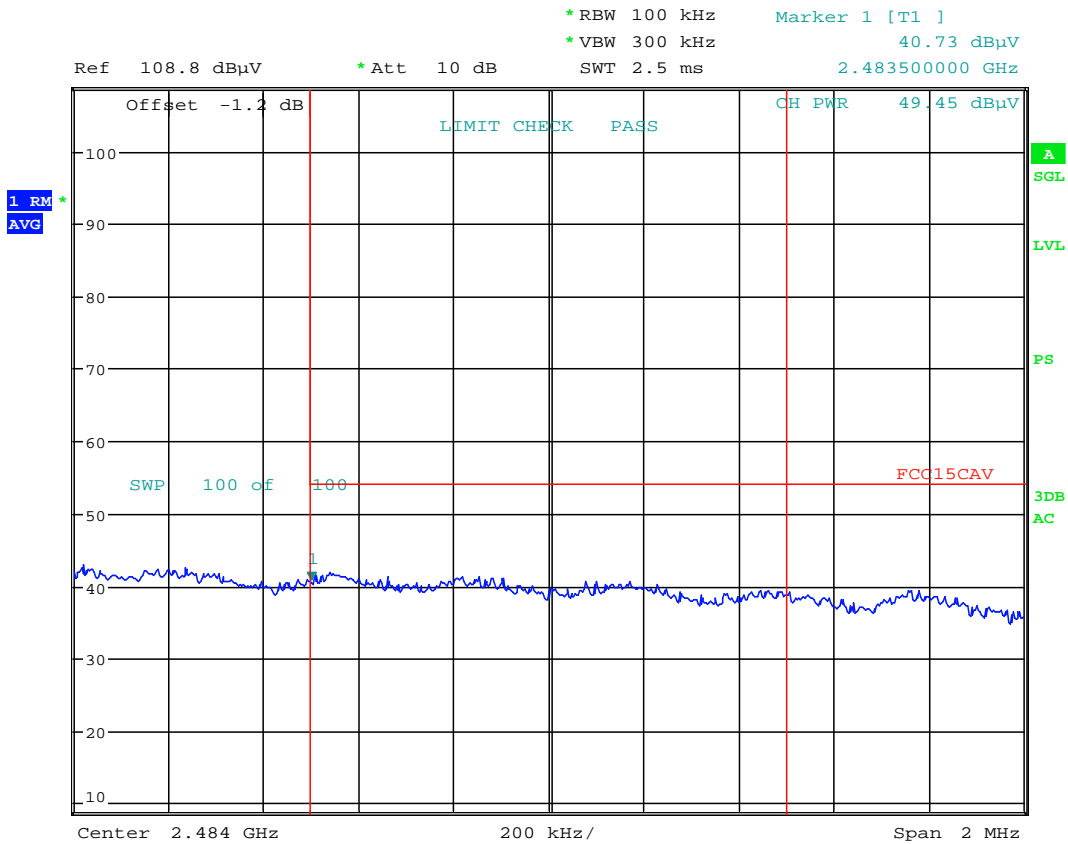

Date: 18.AUG.2017 15:43:13



Plot 7-37. Radiated Restricted Upper Band Edge Measurement (Average)

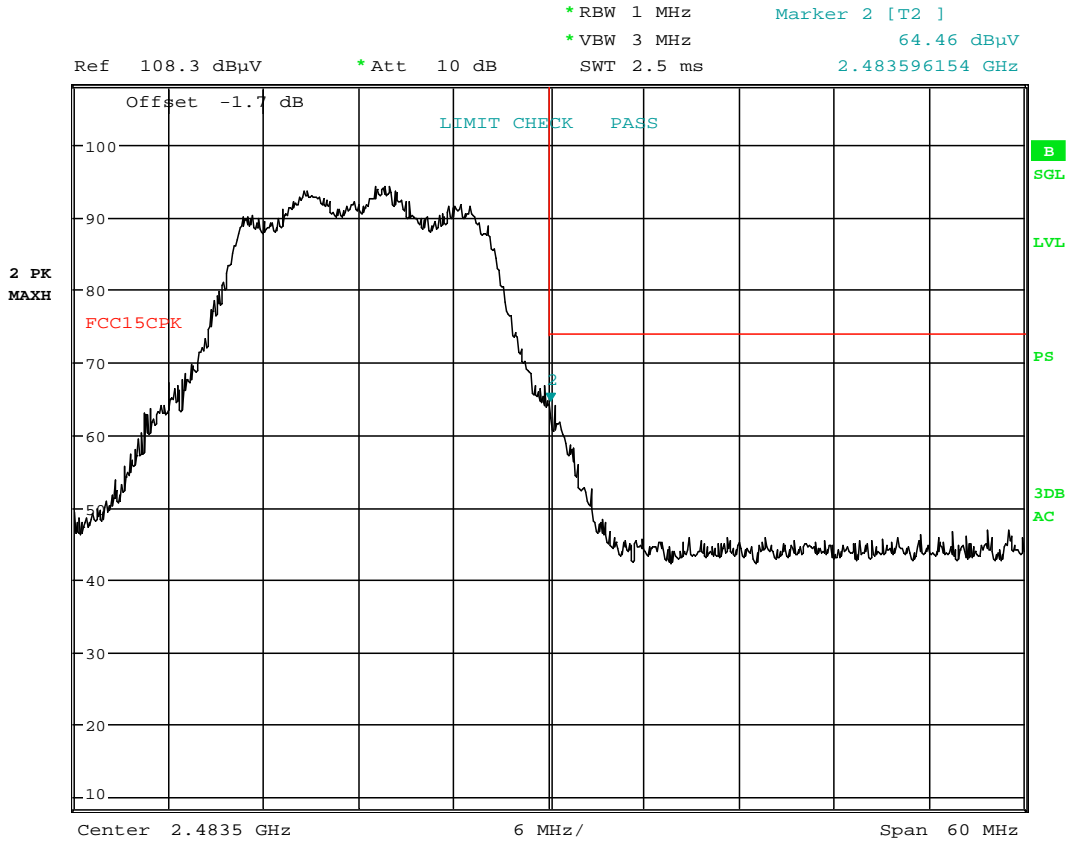FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 48 of 60



Date: 18.AUG.2017 15:36:21


Plot 7-38. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 49 of 60

7.4.5 MIMO Radiated Restricted Band Edge Measurements §15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

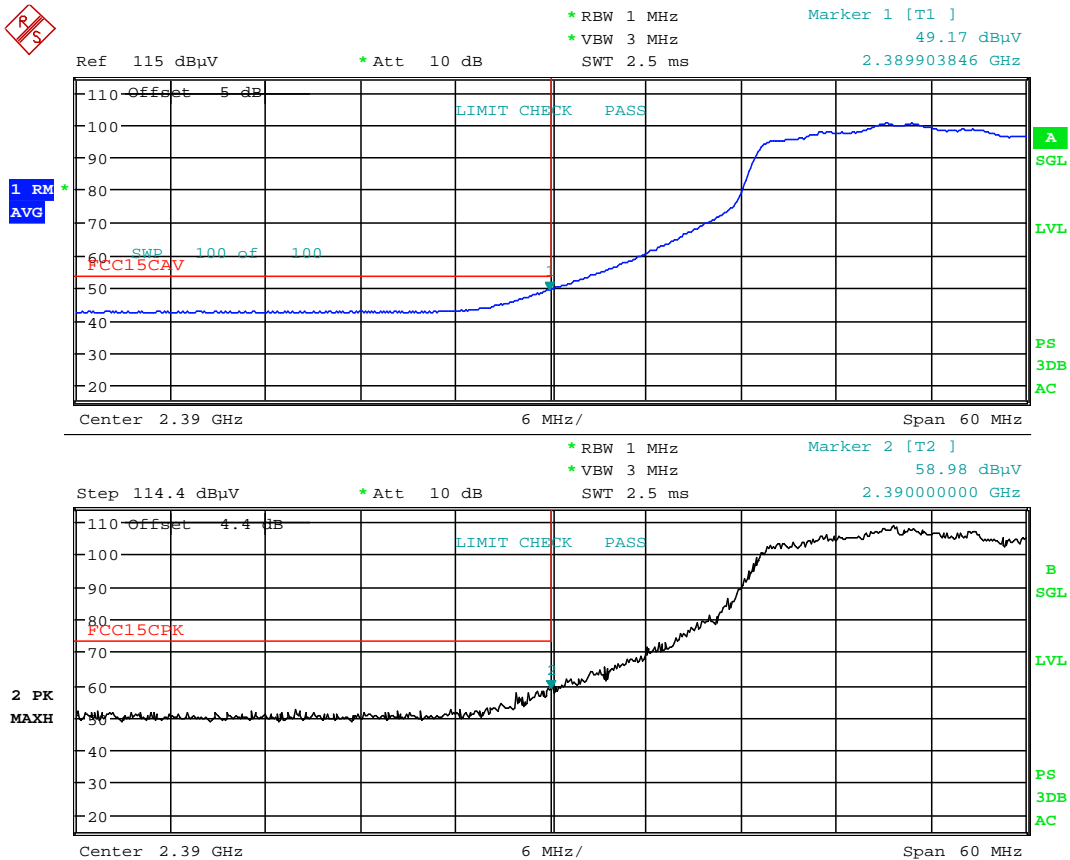

Date: 9.AUG.2017 21:32:53

Plot 7-39. Radiated Restricted Lower Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 50 of 60

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209



Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

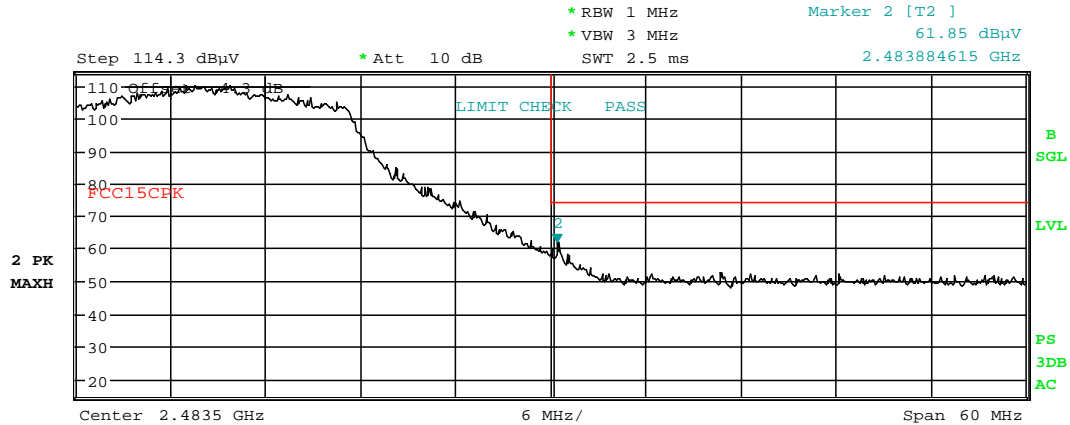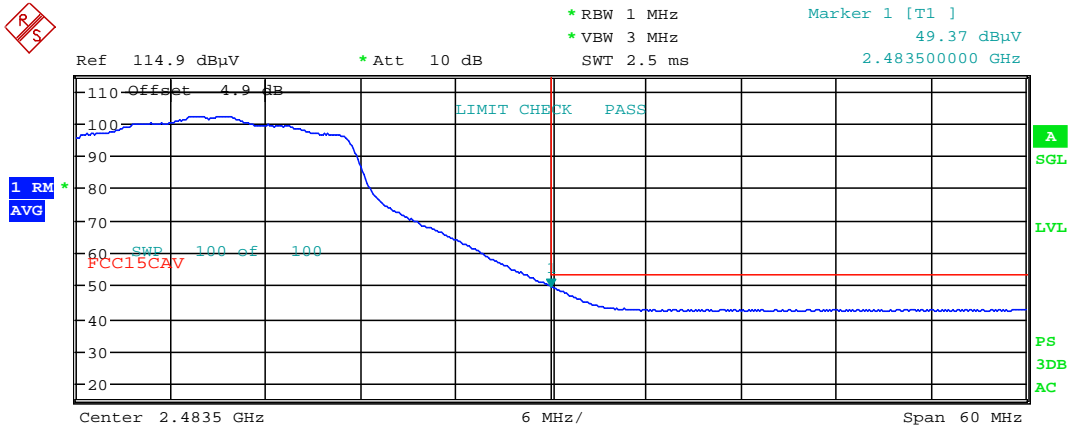

Date: 9.AUG.2017 21:47:14

Plot 7-40. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 51 of 60

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209



Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2467MHz

Channel: 12

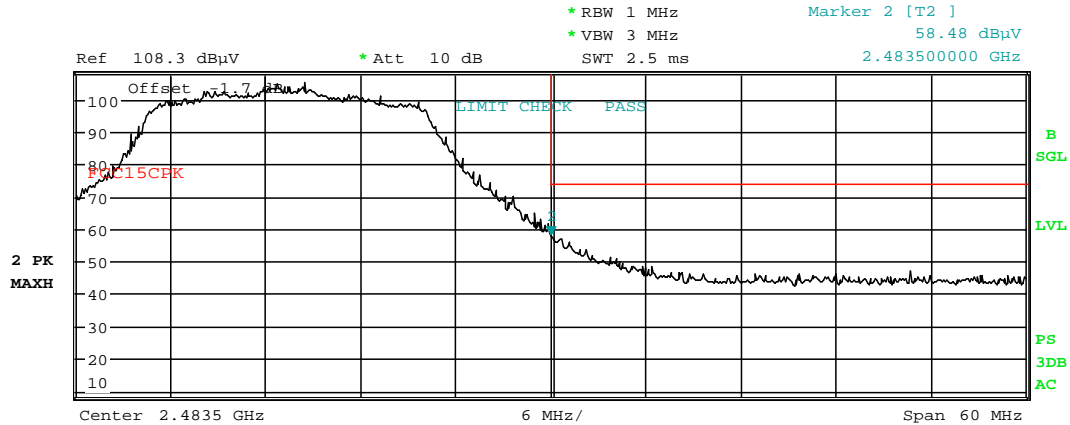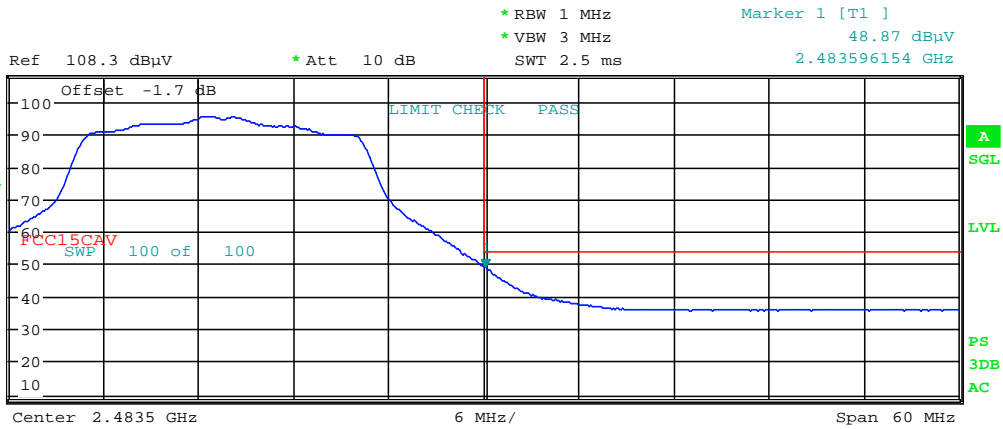

Date: 28.AUG.2017 17:20:58

Plot 7-41. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 52 of 60

MIMO Radiated Restricted Band Edge Measurements

§15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2472MHz


Channel: 13

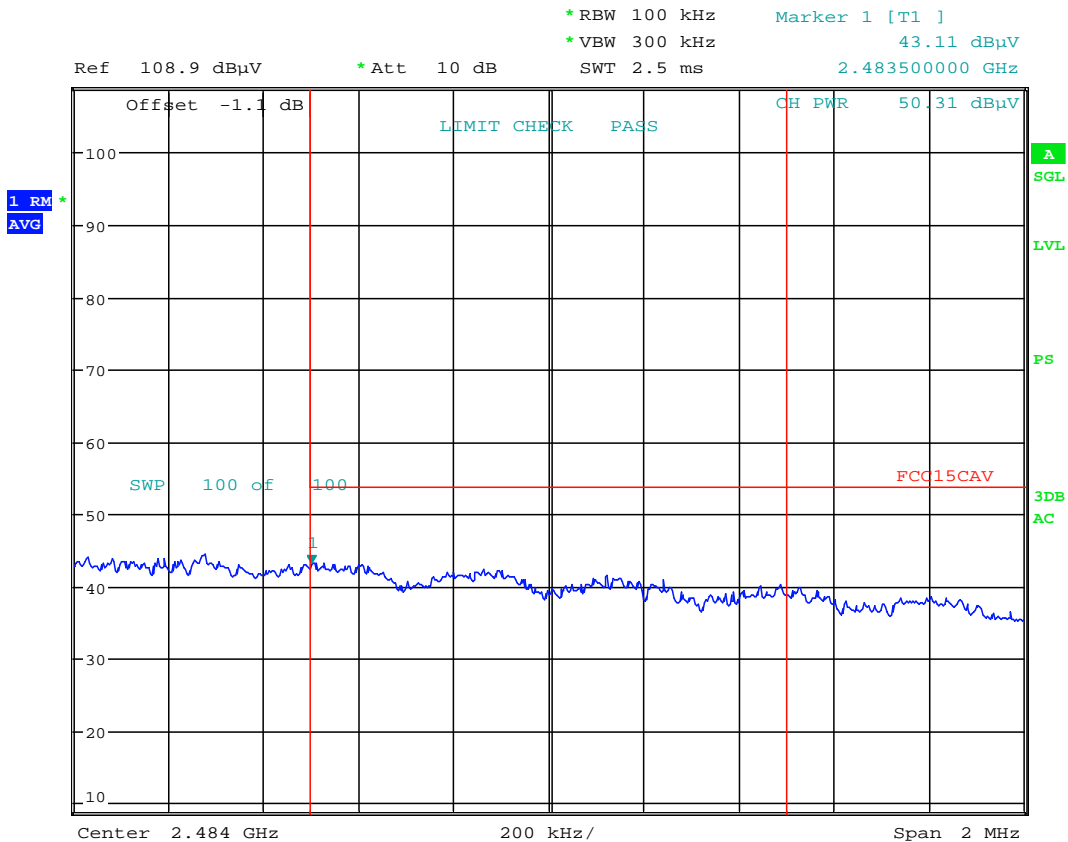

Date: 18.AUG.2017 17:13:41



Plot 7-42. Radiated Restricted Upper Band Edge Measurement (Average)

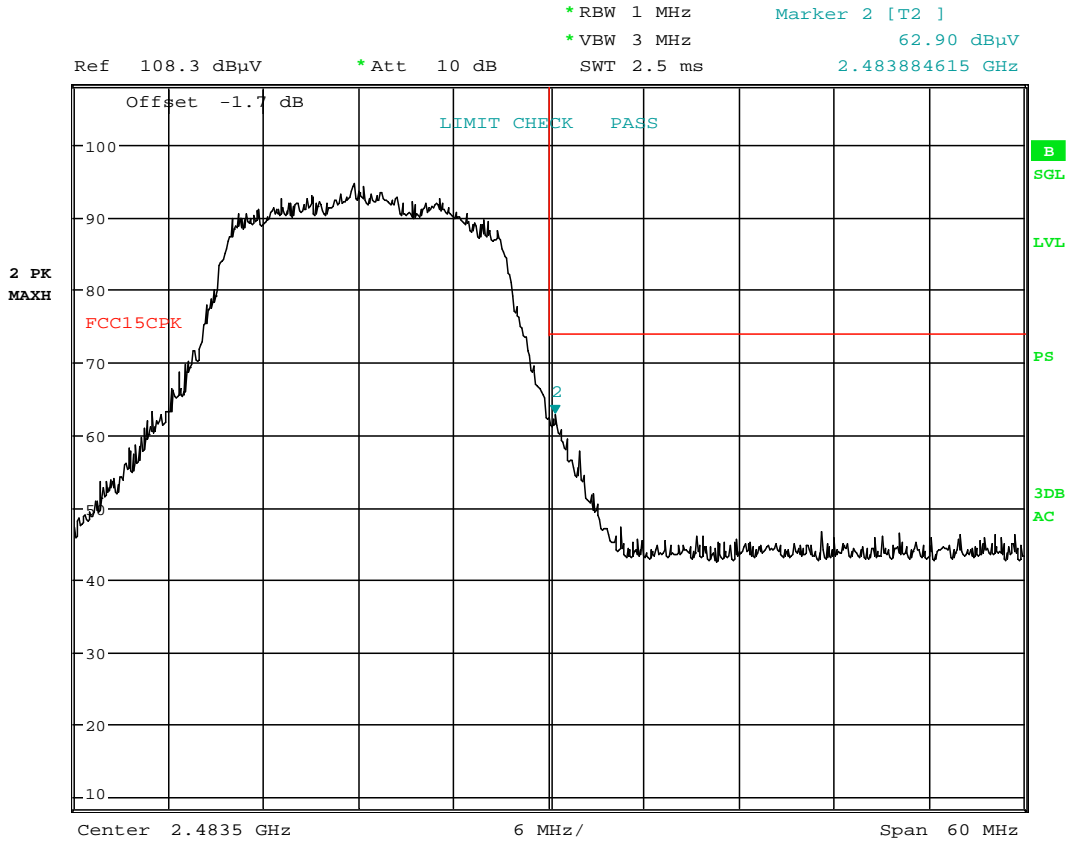FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 53 of 60



Date: 18.AUG.2017 17:14:01

Plot 7-43. Radiated Restricted Upper Band Edge Measurement (Peak)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset		Page 54 of 60

7.5 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-15 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-15. Radiated Limits



Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 55 of 60	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

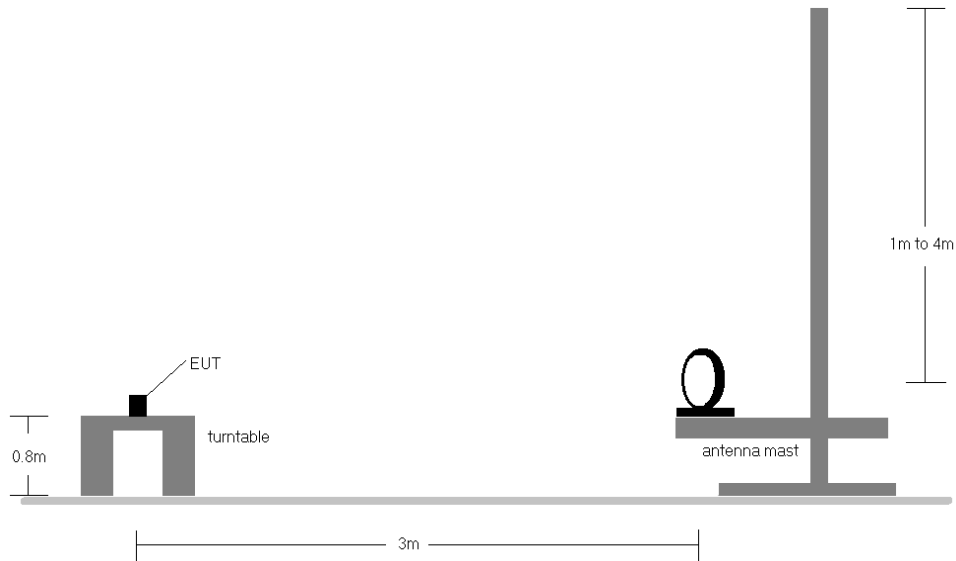


Figure 7-4. Radiated Test Setup < 30Mhz

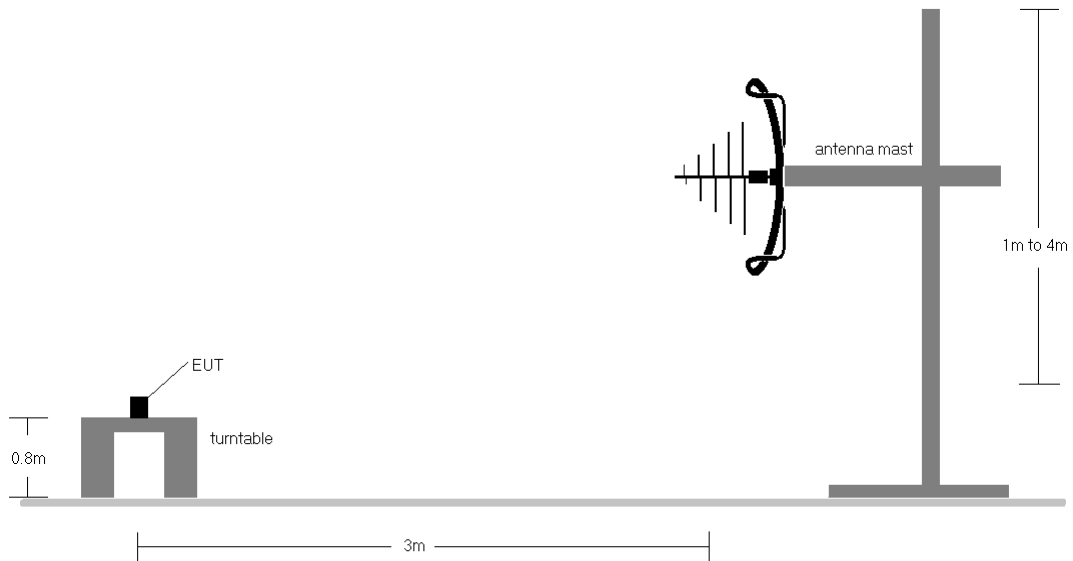






Figure 7-5. Radiated Test Setup < 1GHz

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 56 of 60	


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-15.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 57 of 60	

Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

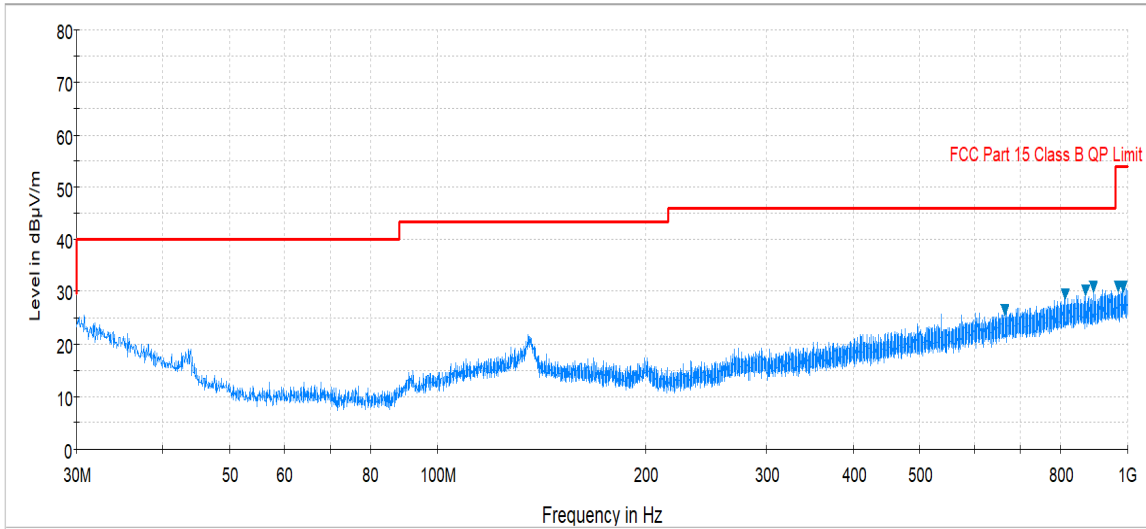

§15.209

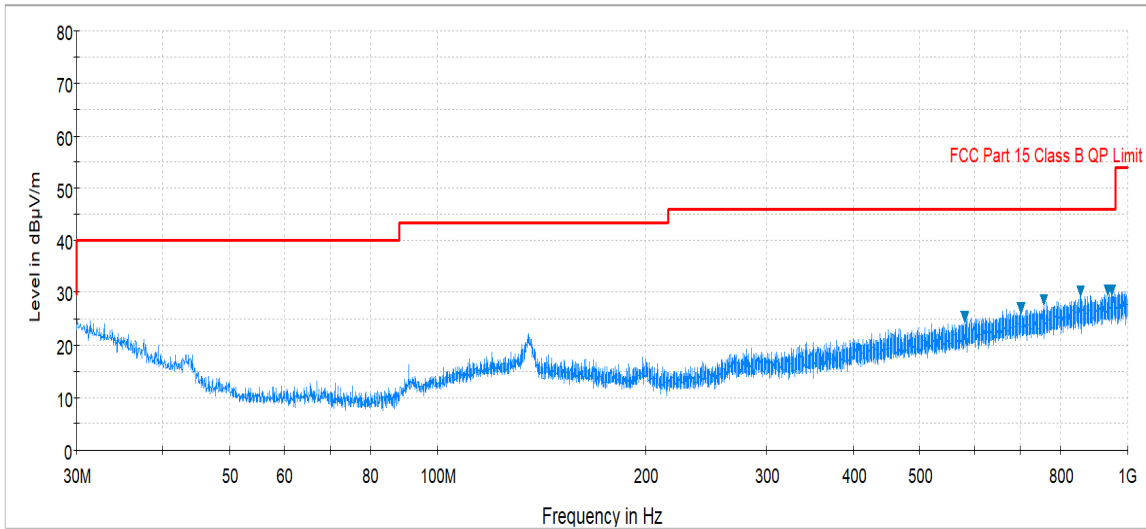

Plot 7-44. Radiated Spurious Plot below 1GHz (Pol. H)




Plot 7-45. Radiated Spurious Plot below 1GHz (Pol. V)


FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 58 of 60

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

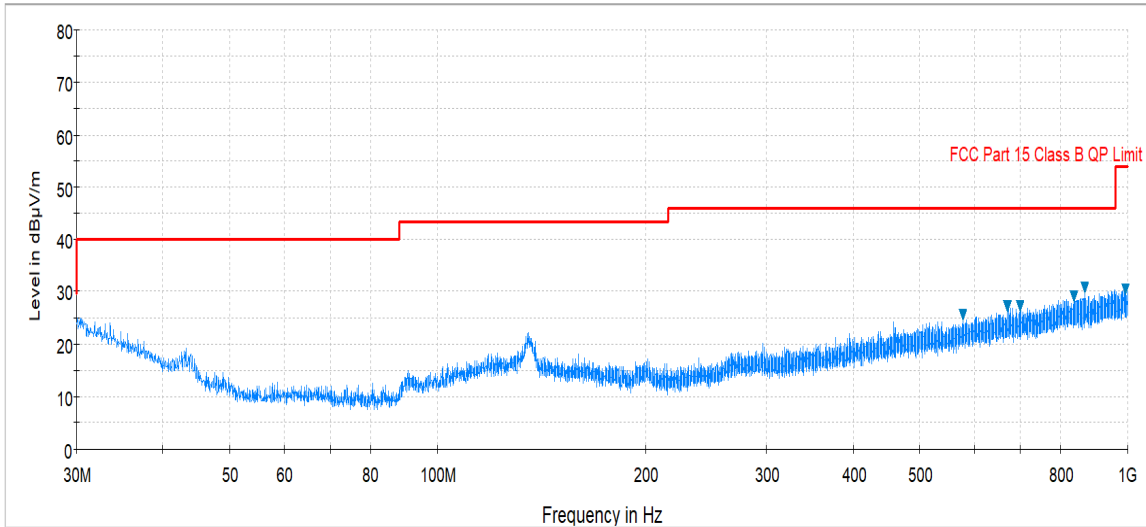

§15.209

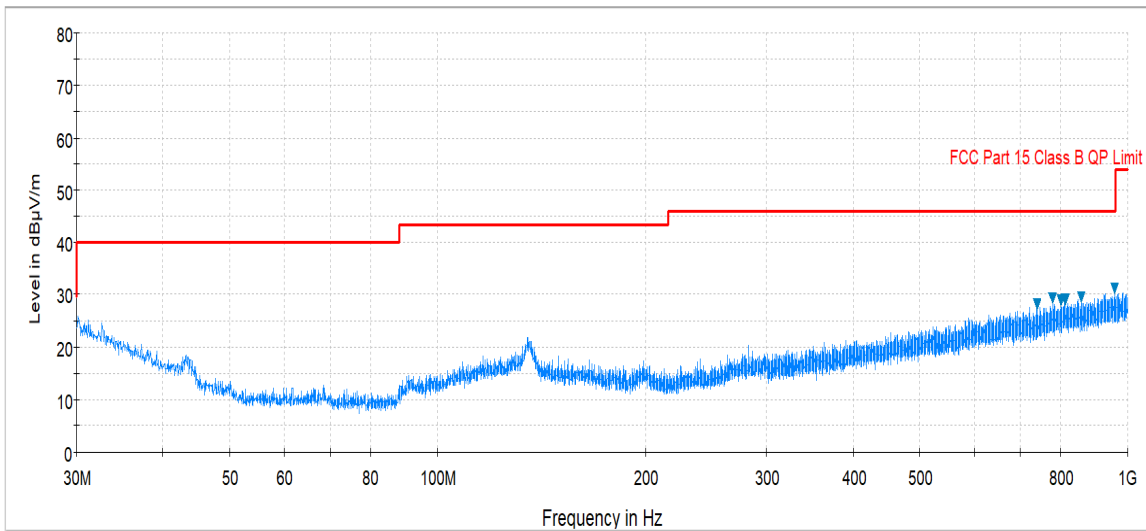

Plot 7-46. Radiated Spurious Plot below 1GHz (Pol. H)





Plot 7-47. Radiated Spurious Plot below 1GHz (Pol. V)

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 59 of 60

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFG011C** is in compliance with Part 15C of the FCC Rules.

FCC ID: ZNFG011C		FCC Pt. 15.247 802.11b/g/n/ac MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1708030234-12.ZNF	Test Dates: 8/09/2017-8/30/2017	EUT Type: Portable Handset	Page 60 of 60	