

## MEASUREMENT REPORT FCC PART 15.407 UNII a/n/ac

**Applicant Name:**  
LG Electronics USA, Inc.  
111 Sylvan Avenue, North Building  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
5/6 - 6/11/2020  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M2004150063-06.ZNF

|                   |                                 |
|-------------------|---------------------------------|
| <b>FCC ID:</b>    | <b>ZNFG900UM</b>                |
| <b>APPLICANT:</b> | <b>LG Electronics USA, Inc.</b> |

**Application Type:** Class II Permissive Change  
**Model:** LM-G900UM  
**Additional Model(s):** LMG900UM, G900UM, LM-G900QM, LMG900QM, G900QM, LM-G901V, LMG901V, G901V  
**EUT Type:** Portable Handset  
**Frequency Range:** 5180 – 5825MHz  
**Modulation Type:** OFDM  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15 Subpart E (15.407)  
**Test Procedure(s):** ANSI C63.10-2013, KDB 789033 D02 v02r01, KDB 662911 D01 v02r01  
**Class II Permissive Change:** Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



|  |   |  |   |  |
|--|---|--|---|--|
| <b>FCC ID:</b> ZNFG900UM                       |  | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020   | <b>EUT Type:</b><br>Portable Handset                       | Page 1 of 46  |  |

## T A B L E O F C O N T E N T S

|     |   |    |
|-----|---|----|
| 1.0 | INTRODUCTION .....  | 3  |
| 1.1 | Scope.....  | 3  |
| 1.2 | PCTEST Test Location.....                                       | 3  |
| 1.3 | Test Facility / Accreditations.....                             | 3  |
| 2.0 | PRODUCT INFORMATION .....                                       | 4  |
| 2.1 | Equipment Description .....                                     | 4  |
| 2.2 | Device Capabilities.....  | 4  |
| 2.3 | Test Configuration.....   | 6  |
| 2.4 | EMI Suppression Device(s)/Modifications.....                    | 6  |
| 3.0 | DESCRIPTION OF TESTS .....                                      | 7  |
| 3.1 | Evaluation Procedure .....                                      | 7  |
| 3.2 | Radiated Emissions.....   | 7  |
| 3.3 | Environmental Conditions.....                                   | 7  |
| 4.0 | ANTENNA REQUIREMENTS .....                                      | 8  |
| 5.0 | MEASUREMENT UNCERTAINTY .....                                   | 9  |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA.....                            | 10 |
| 7.0 | TEST RESULTS .....  | 11 |
| 7.1 | Summary.....  | 11 |
| 7.2 | Radiated Spurious Emission Measurements – Above 1GHz .....      | 12 |
|     | SISO Antenna-1 Radiated Spurious Emission Measurements.....     | 15 |
|     | MIMO Radiated Spurious Emission Measurements.....               | 20 |
|     | Simultaneous Tx Radiated Spurious Emissions Measurements .....  | 27 |
|     | SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) ..... | 27 |
|     | SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) ..... | 29 |
|     | SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) ..... | 31 |
|     | CDD Radiated Band Edge Measurements (20MHz BW) .....            | 33 |
|     | MIMO Radiated Band Edge Measurements (20MHz BW) .....           | 36 |
|     | MIMO Radiated Band Edge Measurements (40MHz BW) .....           | 39 |
|     | MIMO Radiated Band Edge Measurements (80MHz BW) .....           | 42 |
| 8.0 | CONCLUSION.....   | 46 |

|  |  |  |  |  |
|--|--|--|--|--|
| <b>FCC ID:</b> ZNFG900UM                       | <br>Proud to be part of  element | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  LG | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020  | <b>EUT Type:</b><br>Portable Handset                       | Page 2 of 46   |  |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 3 of 46   |                                 |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFG900UM**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

**Test Device Serial No.:** 05407, 05399

### 2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 36     | 5180            | 52      | 5260            | 100     | 5500            | 149    | 5745            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 42     | 5210            | 56      | 5280            | 120     | 5600            | 157    | 5785            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 48     | 5240            | 64      | 5320            | 144     | 5720            | 165    | 5825            |

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 38     | 5190            | 54      | 5270            | 102     | 5510            | 151    | 5755            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 46     | 5230            | 62      | 5310            | 118     | 5590            | 159    | 5795            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 142     | 5710            |        |                 |

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 42     | 5210            | 58      | 5290            | 106     | 5530            | 155    | 5775            |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 138     | 5690            |        |                 |

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      |   | Page 4 of 46                    |

**Notes:**

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles |           |                |      |      |
|--------------------------------|-----------|----------------|------|------|
| 802.11 Mode/Band               |           | Duty Cycle [%] |      |      |
|                                |           | ANT1           | ANT2 | MIMO |
| 5GHz                           | a         | 98.3           | 96.4 | 98.3 |
|                                | n (HT20)  | 98.2           | 98.2 | 98.2 |
|                                | ac (HT20) | 98.2           | 98.2 | 98.1 |
|                                | n (HT40)  | 97.4           | 97.3 | 97.2 |
|                                | ac (HT40) | 97.4           | 97.3 | 97.3 |
|                                | ac (HT80) | 97.1           | 97.1 | 97.0 |

**Table 2-4. Measured Duty Cycles**

- The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations |                | SISO |      | SDM  |      | CDD  |      |
|---------------------|----------------|------|------|------|------|------|------|
|                     |                | ANT1 | ANT2 | ANT1 | ANT2 | ANT1 | ANT2 |
| 5GHz                | 11a            | ✓    | ✓    | ✗    | ✗    | ✓    | ✓    |
|                     | 11n/ac (20MHz) | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |
|                     | 11n/ac (40MHz) | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |
|                     | 11ac (80MHz)   | ✓    | ✓    | ✓    | ✓    | ✓    | ✓    |

**Table 2-5. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

- This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

**Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode**

| Description               | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna                   | 1                | 2              |
| Channel                   | 1                | 149            |
| Operating Frequency (MHz) | 2412             | 5745           |
| Data Rate (Mbps)          | 1Mbps            | 6Mbps          |
| Mode                      | b                | a              |

**Table 2-6. Simultaneous Transmission Config-1**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 5 of 46  |                                 |

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

This device supports dual display capability. Additional radiated emission measurements were performed having the dual display cover (Model: LM-G905N) installed with the EUT while operating under normal conditions in a simulated call or data transmission configuration. The worst-case radiated emissions data is shown in this report.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|  |   |  |   |  |
|--|---|--|---|--|
| FCC ID: ZNFG900UM                              |  | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020   | <b>EUT Type:</b><br>Portable Handset                       | Page 6 of 46  |  |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|  |   |  |   |  |
|--|---|--|---|--|
| FCC ID: ZNFG900UM                              | <br><small>Proud to be part of element</small> | <b>MEASUREMENT REPORT</b><br><b>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020   | <b>EUT Type:</b><br>Portable Handset                             | Page 7 of 46  |  |

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       | <br>Proud to be part of  element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 8 of 46   |                                 |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                  | Expanded Uncertainty ( $\pm$ dB) |
|-------------------------------|----------------------------------|
| Radiated Disturbance (<1GHz)  | 4.98                             |
| Radiated Disturbance (>1GHz)  | 5.07                             |
| Radiated Disturbance (>18GHz) | 5.09                             |

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  <b>PCTEST</b><br>Proud to be part of  element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 9 of 46   |                                 |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer    | Model     | Description                 | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|-----------|-----------------------------|------------|--------------|------------|---------------|
| Agilent         | N9038A    | MXE EMI Receiver            | 7/17/2019  | Annual       | 7/17/2020  | MY51210133    |
| Agilent         | N9030A    | PXA Signal Analyzer (44GHz) | 6/12/2019  | Annual       | 6/12/2020  | MY52350166    |
| Anritsu         | ML2495A   | Power Meter                 | 12/17/2019 | Annual       | 12/17/2020 | 941001        |
| Emco            | 3115      | Horn Antenna (1-18GHz)      | 3/28/2020  | Biennial     | 3/28/2022  | 9704-5182     |
| Emco            | 3116      | Horn Antenna (18 - 40GHz)   | 6/7/2018   | Triennial    | 6/7/2021   | 9203-2178     |
| Rohde & Schwarz | ESU40     | EMI Test Receiver (40GHz)   | 9/23/2019  | Annual       | 9/23/2020  | 100348        |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit        | 7/11/2019  | Annual       | 7/11/2020  | 102134        |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit        | 7/8/2019   | Annual       | 7/8/2020   | 102133        |
| Rohde & Schwarz | TS-PR26   | 18-26.5 GHz Pre-Amplifier   | 11/1/2019  | Annual       | 11/1/2020  | 100040        |
| Rohde & Schwarz | TS-PR40   | 26.5-40 GHz Pre-Amplifier   | 11/1/2019  | Annual       | 11/1/2020  | 100037        |
| Sunol           | DRH-118   | Horn Antenna (1-18GHz)      | 10/3/2019  | Biennial     | 10/3/2021  | A050307       |
| Sunol           | DRH-118   | Horn Antenna (1-18GHz)      | 8/27/2019  | Biennial     | 8/27/2021  | A042511       |

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 10 of 46   |                                 |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFG900UM  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s)                | RSS Section(s) | Test Description  | Test Limit   | Test Condition | Test Result | Reference   |
|------------------------------------|----------------|---|--|----------------|-------------|-------------|
| 15.407(b.1), (2), (3), (4)         | RSS-247 [6.2]  | Undesirable Emissions   | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])               | RADIATED       | PASS        | Section 7.2 |
| 15.205, 15.407(b.1), (4), (5), (6) | RSS-Gen [8.9]  | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) |                | PASS        | Section 7.2 |

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 11 of 46   |                                 |

## 7.2 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-2 per Section 15.209 and RSS-Gen (8.9).**

| Frequency       | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500                                   | 3                             |

Table 7-2. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5  
KDB 789033 D02 v02r01 – Section G

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 12 of 46   |                                 |

### Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

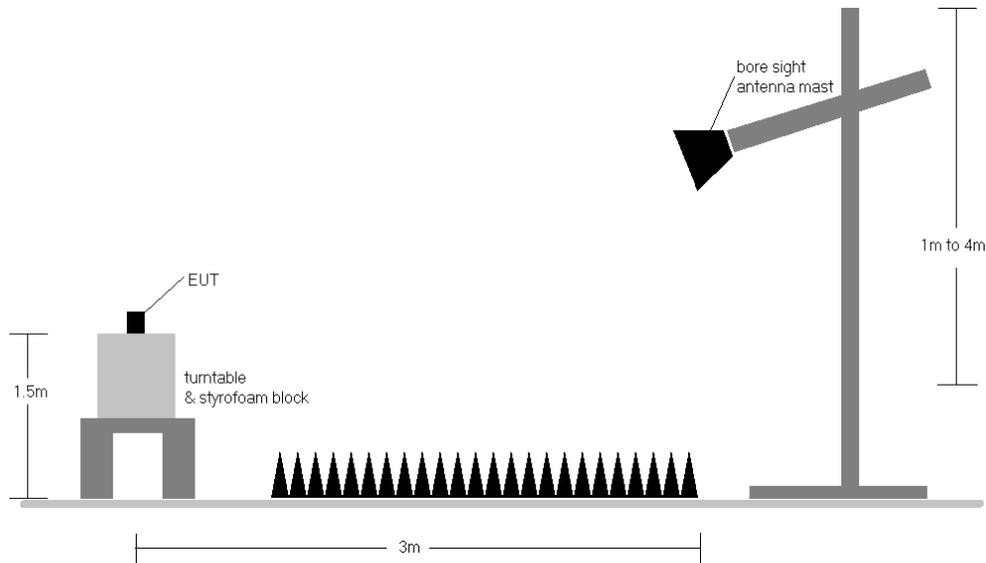

**Figure 7-1. Test Instrument & Measurement Setup**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 13 of 46                   |

## Test Notes

1. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-2.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-2. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       | <br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 14 of 46   |                                 |

## SISO Antenna-1 Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10360.00        | Peak     | H               | -                   | -                          | -68.84               | 11.62       | 0.00                            | 49.78                   | 68.20          | -18.42      |
| * 15540.00      | Average  | H               | -                   | -                          | -79.89               | 12.73       | 0.00                            | 39.84                   | 53.98          | -14.14      |
| * 15540.00      | Peak     | H               | -                   | -                          | -68.82               | 12.73       | 0.00                            | 50.91                   | 73.98          | -23.07      |
| * 20720.00      | Average  | H               | -                   | -                          | -80.28               | 17.97       | -9.54                           | 35.15                   | 53.98          | -18.83      |
| * 20720.00      | Peak     | H               | -                   | -                          | -69.43               | 17.97       | -9.54                           | 46.00                   | 73.98          | -27.98      |
| 25900.00        | Peak     | H               | -                   | -                          | -67.41               | 20.19       | -9.54                           | 50.24                   | 68.20          | -17.96      |

Table 7-3. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | Peak     | H               | -                   | -                          | -68.36               | 11.11       | 0.00                            | 49.75                   | 68.20          | -18.45      |
| * 15600.00      | Average  | H               | -                   | -                          | -80.12               | 13.59       | 0.00                            | 40.47                   | 53.98          | -13.51      |
| * 15600.00      | Peak     | H               | -                   | -                          | -69.66               | 13.59       | 0.00                            | 50.93                   | 73.98          | -23.05      |
| * 20800.00      | Average  | H               | -                   | -                          | -80.39               | 18.41       | -9.54                           | 35.47                   | 53.98          | -18.51      |
| * 20800.00      | Peak     | H               | -                   | -                          | -68.78               | 18.41       | -9.54                           | 47.08                   | 73.98          | -26.90      |
| 26000.00        | Peak     | H               | -                   | -                          | -67.54               | 20.23       | -9.54                           | 50.14                   | 68.20          | -18.06      |

Table 7-4. Radiated Measurements SISO ANT1

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 15 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10480.00        | Peak     | H               | -                   | -                          | -68.49               | 10.89       | 0.00                            | 49.40                   | 68.20          | -18.80      |
| * 15720.00      | Average  | H               | -                   | -                          | -80.19               | 14.74       | 0.00                            | 41.55                   | 53.98          | -12.43      |
| * 15720.00      | Peak     | H               | -                   | -                          | -69.44               | 14.74       | 0.00                            | 52.30                   | 73.98          | -21.68      |
| * 20960.00      | Average  | H               | -                   | -                          | -79.80               | 18.69       | -9.54                           | 36.35                   | 53.98          | -17.63      |
| * 20960.00      | Peak     | H               | -                   | -                          | -69.34               | 18.69       | -9.54                           | 46.81                   | 73.98          | -27.17      |
| 26200.00        | Peak     | H               | -                   | -                          | -67.26               | 20.69       | -9.54                           | 50.89                   | 68.20          | -17.31      |

Table 7-5. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10520.00        | Peak     | H               | -                   | -                          | -68.56               | 11.21       | 0.00                            | 49.65                   | 68.20          | -18.55      |
| * 15780.00      | Average  | H               | -                   | -                          | -80.29               | 14.50       | 0.00                            | 41.21                   | 53.98          | -12.77      |
| * 15780.00      | Peak     | H               | -                   | -                          | -69.40               | 14.50       | 0.00                            | 52.10                   | 73.98          | -21.88      |
| * 21040.00      | Average  | H               | -                   | -                          | -79.98               | 19.25       | -9.54                           | 36.72                   | 53.98          | -17.26      |
| * 21040.00      | Peak     | H               | -                   | -                          | -68.41               | 19.25       | -9.54                           | 48.29                   | 73.98          | -25.69      |
| 26300.00        | Peak     | H               | -                   | -                          | -68.08               | 21.24       | -9.54                           | 50.61                   | 68.20          | -17.59      |

Table 7-6. Radiated Measurements SISO ANT1

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 16 of 46  |                                 |

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5280MHz  
Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | Peak     | H               | -                   | -                          | -68.96               | 12.28       | 0.00                            | 50.32                   | 68.20          | -17.88      |
| * 15840.00      | Average  | H               | -                   | -                          | -80.19               | 13.70       | 0.00                            | 40.51                   | 53.98          | -13.47      |
| * 15840.00      | Peak     | H               | -                   | -                          | -69.74               | 13.70       | 0.00                            | 50.96                   | 73.98          | -23.02      |
| * 21120.00      | Average  | H               | -                   | -                          | -80.12               | 18.74       | -9.54                           | 36.08                   | 53.98          | -17.90      |
| * 21120.00      | Peak     | H               | -                   | -                          | -69.49               | 18.74       | -9.54                           | 46.71                   | 73.98          | -27.27      |
| 26400.00        | Peak     | H               | -                   | -                          | -67.88               | 20.98       | -9.54                           | 50.55                   | 68.20          | -17.65      |

**Table 7-7. Radiated Measurements SISO ANT1**

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5320MHz  
Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 10640.00      | Average  | H               | -                   | -                          | -79.98               | 12.95       | 0.00                            | 39.97                   | 53.98          | -14.01      |
| * 10640.00      | Peak     | H               | -                   | -                          | -68.76               | 12.95       | 0.00                            | 51.19                   | 73.98          | -22.79      |
| * 15960.00      | Average  | H               | -                   | -                          | -80.19               | 12.93       | 0.00                            | 39.74                   | 53.98          | -14.24      |
| * 15960.00      | Peak     | H               | -                   | -                          | -69.90               | 12.93       | 0.00                            | 50.03                   | 73.98          | -23.95      |
| * 21280.00      | Average  | H               | -                   | -                          | -79.87               | 18.82       | -9.54                           | 36.40                   | 53.98          | -17.57      |
| * 21280.00      | Peak     | H               | -                   | -                          | -69.80               | 18.82       | -9.54                           | 46.47                   | 73.98          | -27.50      |
| 26600.00        | Peak     | H               | -                   | -                          | -52.36               | 4.61        | -9.54                           | 49.71                   | 68.20          | -18.49      |

**Table 7-8. Radiated Measurements SISO ANT1**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 17 of 46   |                                 |

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5500MHz  
Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11000.00      | Average  | H               | -                   | -                          | -79.81               | 12.49       | 0.00                            | 39.68                   | 53.98          | -14.30      |
| * 11000.00      | Peak     | H               | -                   | -                          | -69.27               | 12.49       | 0.00                            | 50.22                   | 73.98          | -23.76      |
| 16500.00        | Peak     | H               | -                   | -                          | -69.90               | 14.93       | 0.00                            | 52.03                   | 68.20          | -16.17      |
| 22000.00        | Peak     | H               | -                   | -                          | -67.05               | 19.61       | -9.54                           | 50.02                   | 68.20          | -18.18      |
| 27500.00        | Peak     | H               | -                   | -                          | -50.85               | 4.69        | -9.54                           | 51.29                   | 68.20          | -16.91      |

**Table 7-9. Radiated Measurements SISO ANT1**

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5600MHz  
Channel: 120

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11200.00      | Average  | H               | -                   | -                          | -79.89               | 12.18       | 0.00                            | 39.29                   | 53.98          | -14.69      |
| * 11200.00      | Peak     | H               | -                   | -                          | -68.89               | 12.18       | 0.00                            | 50.29                   | 73.98          | -23.69      |
| 16800.00        | Peak     | H               | -                   | -                          | -69.12               | 16.07       | 0.00                            | 53.95                   | 68.20          | -14.25      |
| * 22400.00      | Average  | H               | -                   | -                          | -80.10               | 20.03       | -9.54                           | 37.39                   | 53.98          | -16.59      |
| * 22400.00      | Peak     | H               | -                   | -                          | -68.27               | 20.03       | -9.54                           | 49.22                   | 73.98          | -24.76      |
| 28000.00        | Peak     | H               | -                   | -                          | -51.23               | 6.43        | -9.54                           | 52.66                   | 68.20          | -15.54      |

**Table 7-10. Radiated Measurements SISO ANT1**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 18 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11440.00      | Average  | H               | -                   | -                          | -79.93               | 12.82       | 0.00                            | 39.89                   | 53.98          | -14.09      |
| * 11440.00      | Peak     | H               | -                   | -                          | -69.19               | 12.82       | 0.00                            | 50.63                   | 73.98          | -23.35      |
| 17160.00        | Peak     | H               | -                   | -                          | -69.55               | 17.60       | 0.00                            | 55.05                   | 68.20          | -13.15      |
| * 22880.00      | Average  | H               | -                   | -                          | -79.25               | 19.61       | -9.54                           | 37.82                   | 53.98          | -16.16      |
| * 22880.00      | Peak     | H               | -                   | -                          | -68.12               | 19.61       | -9.54                           | 48.95                   | 73.98          | -25.03      |
| 28600.00        | Peak     | H               | -                   | -                          | -50.30               | 6.89        | -9.54                           | 54.05                   | 68.20          | -14.15      |

**Table 7-11. Radiated Measurements SISO ANT1**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | H               | -                   | -                          | -80.04               | 12.52       | 0.00                            | 39.48                   | 53.98          | -14.49      |
| * 11490.00      | Peak     | H               | -                   | -                          | -69.55               | 12.52       | 0.00                            | 49.97                   | 73.98          | -24.00      |
| 17235.00        | Peak     | H               | -                   | -                          | -68.76               | 16.58       | 0.00                            | 54.82                   | 68.20          | -13.38      |
| * 22980.00      | Average  | H               | -                   | -                          | -79.75               | 19.47       | -9.54                           | 37.17                   | 53.98          | -16.81      |
| * 22980.00      | Peak     | H               | -                   | -                          | -68.31               | 19.47       | -9.54                           | 48.61                   | 73.98          | -25.37      |
| 28725.00        | Peak     | H               | -                   | -                          | -49.62               | 6.44        | -9.54                           | 54.27                   | 68.20          | -13.93      |

**Table 7-12. Radiated Measurements SISO ANT1**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 19 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | Average  | H               | -                   | -                          | -79.88               | 12.91       | 0.00                            | 40.03                   | 53.98          | -13.95      |
| * 11570.00      | Peak     | H               | -                   | -                          | -68.83               | 12.91       | 0.00                            | 51.08                   | 73.98          | -22.90      |
| 17355.00        | Peak     | H               | -                   | -                          | -69.56               | 19.37       | 0.00                            | 56.81                   | 68.20          | -11.39      |
| 23140.00        | Peak     | H               | -                   | -                          | -67.66               | 19.99       | -9.54                           | 49.78                   | 68.20          | -18.42      |
| 28925.00        | Peak     | H               | -                   | -                          | -52.86               | 7.15        | -9.54                           | 51.75                   | 68.20          | -16.45      |

Table 7-13. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11650.00      | Average  | H               | -                   | -                          | -79.85               | 13.76       | 0.00                            | 40.91                   | 53.98          | -13.07      |
| * 11650.00      | Peak     | H               | -                   | -                          | -69.11               | 13.76       | 0.00                            | 51.65                   | 73.98          | -22.33      |
| 17475.00        | Peak     | H               | -                   | -                          | -69.70               | 19.15       | 0.00                            | 56.45                   | 68.20          | -11.75      |
| 23300.00        | Peak     | H               | -                   | -                          | -67.13               | 19.19       | -9.54                           | 49.51                   | 68.20          | -18.69      |
| 29125.00        | Peak     | H               | -                   | -                          | -50.11               | 5.56        | -9.54                           | 52.91                   | 68.20          | -15.29      |

Table 7-14. Radiated Measurements SISO ANT1

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 20 of 46   |                                 |

## MIMO Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10360.00        | Peak     | H               | -                   | -                          | -69.25               | 11.62       | 0.00                            | 49.37                   | 68.20          | -18.83      |
| * 15540.00      | Average  | H               | -                   | -                          | -82.39               | 12.73       | 0.00                            | 37.34                   | 53.98          | -16.64      |
| * 15540.00      | Peak     | H               | -                   | -                          | -70.63               | 12.73       | 0.00                            | 49.10                   | 73.98          | -24.88      |
| * 20720.00      | Average  | H               | -                   | -                          | -80.25               | 17.97       | -9.54                           | 35.18                   | 53.98          | -18.80      |
| * 20720.00      | Peak     | H               | -                   | -                          | -68.85               | 17.97       | -9.54                           | 46.58                   | 73.98          | -27.40      |
| 25900.00        | Peak     | H               | -                   | -                          | -67.76               | 20.19       | -9.54                           | 49.89                   | 68.20          | -18.31      |

Table 7-15. Radiated Measurements MIMO

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | Peak     | H               | -                   | -                          | -69.94               | 11.11       | 0.00                            | 48.17                   | 68.20          | -20.03      |
| * 15600.00      | Average  | H               | -                   | -                          | -82.82               | 13.59       | 0.00                            | 37.77                   | 53.98          | -16.21      |
| * 15600.00      | Peak     | H               | -                   | -                          | -70.20               | 13.59       | 0.00                            | 50.39                   | 73.98          | -23.59      |
| * 20800.00      | Average  | H               | -                   | -                          | -80.85               | 18.41       | -9.54                           | 35.01                   | 53.98          | -18.97      |
| * 20800.00      | Peak     | H               | -                   | -                          | -68.63               | 18.41       | -9.54                           | 47.23                   | 73.98          | -26.75      |
| 26000.00        | Peak     | H               | -                   | -                          | -66.43               | 20.23       | -9.54                           | 51.25                   | 68.20          | -16.95      |

Table 7-16. Radiated Measurements MIMO

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 21 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10480.00        | Peak     | H               | -                   | -                          | -70.72               | 10.89       | 0.00                            | 47.17                   | 68.20          | -21.03      |
| * 15720.00      | Average  | H               | -                   | -                          | -83.20               | 14.74       | 0.00                            | 38.54                   | 53.98          | -15.44      |
| * 15720.00      | Peak     | H               | -                   | -                          | -71.70               | 14.74       | 0.00                            | 50.04                   | 73.98          | -23.94      |
| * 20960.00      | Average  | H               | -                   | -                          | -79.88               | 18.69       | -9.54                           | 36.27                   | 53.98          | -17.71      |
| * 20960.00      | Peak     | H               | -                   | -                          | -68.75               | 18.69       | -9.54                           | 47.40                   | 73.98          | -26.58      |
| 26200.00        | Peak     | H               | -                   | -                          | -67.27               | 20.69       | -9.54                           | 50.88                   | 68.20          | -17.32      |

**Table 7-17. Radiated Measurements MIMO**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10520.00        | Peak     | H               | -                   | -                          | -70.11               | 11.21       | 0.00                            | 48.10                   | 68.20          | -20.10      |
| * 15780.00      | Average  | H               | -                   | -                          | -83.35               | 14.50       | 0.00                            | 38.15                   | 53.98          | -15.83      |
| * 15780.00      | Peak     | H               | -                   | -                          | -71.31               | 14.50       | 0.00                            | 50.19                   | 73.98          | -23.79      |
| * 21040.00      | Average  | H               | -                   | -                          | -79.81               | 19.25       | -9.54                           | 36.89                   | 53.98          | -17.09      |
| * 21040.00      | Peak     | H               | -                   | -                          | -69.21               | 19.25       | -9.54                           | 47.49                   | 73.98          | -26.49      |
| 26300.00        | Peak     | H               | -                   | -                          | -67.38               | 21.24       | -9.54                           | 51.31                   | 68.20          | -16.89      |

**Table 7-18. Radiated Measurements MIMO**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 22 of 46  |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | Peak     | H               | -                   | -                          | -71.01               | 12.28       | 0.00                            | 48.27                   | 68.20          | -19.93      |
| * 15840.00      | Average  | H               | -                   | -                          | -83.06               | 13.70       | 0.00                            | 37.64                   | 53.98          | -16.34      |
| * 15840.00      | Peak     | H               | -                   | -                          | -69.38               | 13.70       | 0.00                            | 51.32                   | 73.98          | -22.66      |
| * 21120.00      | Average  | H               | -                   | -                          | -80.01               | 18.74       | -9.54                           | 36.19                   | 53.98          | -17.79      |
| * 21120.00      | Peak     | H               | -                   | -                          | -69.98               | 18.74       | -9.54                           | 46.22                   | 73.98          | -27.76      |
| 26400.00        | Peak     | H               | -                   | -                          | -67.67               | 20.98       | -9.54                           | 50.76                   | 68.20          | -17.44      |

**Table 7-19. Radiated Measurements MIMO**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 10640.00      | Average  | H               | -                   | -                          | -82.50               | 12.95       | 0.00                            | 37.45                   | 53.98          | -16.53      |
| * 10640.00      | Peak     | H               | -                   | -                          | -70.58               | 12.95       | 0.00                            | 49.37                   | 73.98          | -24.61      |
| * 15960.00      | Average  | H               | -                   | -                          | -83.08               | 12.93       | 0.00                            | 36.85                   | 53.98          | -17.13      |
| * 15960.00      | Peak     | H               | -                   | -                          | -70.91               | 12.93       | 0.00                            | 49.02                   | 73.98          | -24.96      |
| * 21280.00      | Average  | H               | -                   | -                          | -80.09               | 18.82       | -9.54                           | 36.18                   | 53.98          | -17.79      |
| * 21280.00      | Peak     | H               | -                   | -                          | -69.29               | 18.82       | -9.54                           | 46.98                   | 73.98          | -26.99      |
| 26600.00        | Peak     | H               | -                   | -                          | -52.12               | 4.61        | -9.54                           | 49.95                   | 68.20          | -18.25      |

**Table 7-20. Radiated Measurements MIMO**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 23 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11000.00      | Average  | H               | -                   | -                          | -82.14               | 12.49       | 0.00                            | 37.35                   | 53.98          | -16.63      |
| * 11000.00      | Peak     | H               | -                   | -                          | -70.60               | 12.49       | 0.00                            | 48.89                   | 73.98          | -25.09      |
| 16500.00        | Peak     | H               | -                   | -                          | -70.36               | 14.93       | 0.00                            | 51.57                   | 68.20          | -16.63      |
| 22000.00        | Peak     | H               | -                   | -                          | -68.89               | 19.61       | -9.54                           | 48.18                   | 68.20          | -20.02      |
| 27500.00        | Peak     | H               | -                   | -                          | -50.51               | 4.69        | -9.54                           | 51.63                   | 68.20          | -16.57      |

**Table 7-21. Radiated Measurements MIMO**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11200.00      | Average  | H               | -                   | -                          | -82.32               | 12.18       | 0.00                            | 36.86                   | 53.98          | -17.12      |
| * 11200.00      | Peak     | H               | -                   | -                          | -70.13               | 12.18       | 0.00                            | 49.05                   | 73.98          | -24.93      |
| 16800.00        | Peak     | H               | -                   | -                          | -70.84               | 16.07       | 0.00                            | 52.23                   | 68.20          | -15.97      |
| * 22400.00      | Average  | H               | -                   | -                          | -80.17               | 20.03       | -9.54                           | 37.32                   | 53.98          | -16.66      |
| * 22400.00      | Peak     | H               | -                   | -                          | -68.96               | 20.03       | -9.54                           | 48.53                   | 73.98          | -25.45      |
| 28000.00        | Peak     | H               | -                   | -                          | -51.96               | 6.43        | -9.54                           | 51.93                   | 68.20          | -16.27      |

**Table 7-22. Radiated Measurements MIMO**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 24 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11440.00      | Average  | H               | -                   | -                          | -82.46               | 12.82       | 0.00                            | 37.36                   | 53.98          | -16.62      |
| * 11440.00      | Peak     | H               | -                   | -                          | -71.08               | 12.82       | 0.00                            | 48.74                   | 73.98          | -25.24      |
| 17160.00        | Peak     | H               | -                   | -                          | -71.07               | 17.60       | 0.00                            | 53.53                   | 68.20          | -14.67      |
| * 22880.00      | Average  | H               | -                   | -                          | -79.40               | 19.61       | -9.54                           | 37.67                   | 53.98          | -16.31      |
| * 22880.00      | Peak     | H               | -                   | -                          | -68.45               | 19.61       | -9.54                           | 48.62                   | 73.98          | -25.36      |
| 28600.00        | Peak     | H               | -                   | -                          | -50.40               | 6.89        | -9.54                           | 53.95                   | 68.20          | -14.25      |

**Table 7-23. Radiated Measurements MIMO**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11490.00      | Average  | H               | -                   | -                          | -82.73               | 12.52       | 0.00                            | 36.79                   | 53.98          | -17.18      |
| * 11490.00      | Peak     | H               | -                   | -                          | -70.28               | 12.52       | 0.00                            | 49.24                   | 73.98          | -24.73      |
| 17235.00        | Peak     | H               | -                   | -                          | -70.40               | 16.58       | 0.00                            | 53.18                   | 68.20          | -15.02      |
| * 22980.00      | Average  | H               | -                   | -                          | -79.66               | 19.47       | -9.54                           | 37.26                   | 53.98          | -16.72      |
| * 22980.00      | Peak     | H               | -                   | -                          | -68.69               | 19.47       | -9.54                           | 48.23                   | 73.98          | -25.75      |
| 28725.00        | Peak     | H               | -                   | -                          | -49.40               | 6.44        | -9.54                           | 54.49                   | 69.20          | -14.71      |

**Table 7-24. Radiated Measurements MIMO**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      | Page 25 of 46   |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | Average  | H               | -                   | -                          | -82.35               | 12.91       | 0.00                            | 37.56                   | 53.98          | -16.42      |
| * 11570.00      | Peak     | H               | -                   | -                          | -70.91               | 12.91       | 0.00                            | 49.00                   | 73.98          | -24.98      |
| 17355.00        | Peak     | H               | -                   | -                          | -71.95               | 19.37       | 0.00                            | 54.42                   | 68.20          | -13.78      |
| 23140.00        | Peak     | H               | -                   | -                          | -69.13               | 19.99       | -9.54                           | 48.31                   | 68.20          | -19.89      |
| 28925.00        | Peak     | H               | -                   | -                          | -53.00               | 7.15        | -9.54                           | 51.61                   | 68.20          | -16.59      |

**Table 7-25. Radiated Measurements MIMO**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11650.00      | Average  | H               | -                   | -                          | -82.20               | 13.76       | 0.00                            | 38.56                   | 53.98          | -15.42      |
| * 11650.00      | Peak     | H               | -                   | -                          | -70.69               | 13.76       | 0.00                            | 50.07                   | 73.98          | -23.91      |
| 17475.00        | Peak     | H               | -                   | -                          | -71.39               | 19.15       | 0.00                            | 54.76                   | 68.20          | -13.44      |
| 23300.00        | Peak     | H               | -                   | -                          | -68.21               | 19.19       | -9.54                           | 48.43                   | 68.20          | -19.77      |
| 29125.00        | Peak     | H               | -                   | -                          | -49.07               | 5.56        | -9.54                           | 53.95                   | 68.20          | -14.25      |

**Table 7-26. Radiated Measurements MIMO**

|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 26 of 46   |                                 |

## Simultaneous Tx Radiated Spurious Emissions Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

| Description               | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna                   | 1                | 2              |
| Channel                   | 1                | 149            |
| Operating Frequency (MHz) | 2412             | 5745           |
| Data Rate (Mbps)          | 1Mbps            | 6Mbps          |
| Mode                      | b                | a              |

Table 7-27. Simultaneous Transmission Config-1


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 4254.00       | Average  | H               | -                   | -                          | -80.33               | 2.67        | 29.34                   | 73.98          | -44.64      |
| * 4254.00       | Peak     | H               | -                   | -                          | -69.14               | 2.67        | 40.53                   | 53.98          | -13.45      |
| 7587.00         | Peak     | H               | -                   | -                          | -72.03               | 8.78        | 43.75                   | 73.98          | -30.23      |
| * 9078.00       | Average  | H               | -                   | -                          | -83.09               | 12.33       | 36.24                   | 53.98          | -17.74      |
| * 9078.00       | Peak     | H               | -                   | -                          | -72.38               | 12.33       | 46.95                   | 73.98          | -27.03      |
| * 12411.00      | Average  | H               | -                   | -                          | -83.66               | 13.66       | 37.00                   | 53.98          | -16.98      |
| * 12411.00      | Peak     | H               | -                   | -                          | -72.29               | 13.66       | 48.37                   | 73.98          | -25.61      |
| * 15744.00      | Average  | H               | -                   | -                          | -85.25               | 14.27       | 36.02                   | 73.98          | -37.96      |
| * 15744.00      | Peak     | H               | -                   | -                          | -74.40               | 14.27       | 46.87                   | 53.98          | -7.11       |

Table 7-28. Radiated Measurements (ANT1 2.4GHz – ANT2 5GHz)


|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 27 of 46  |                                 |

## SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

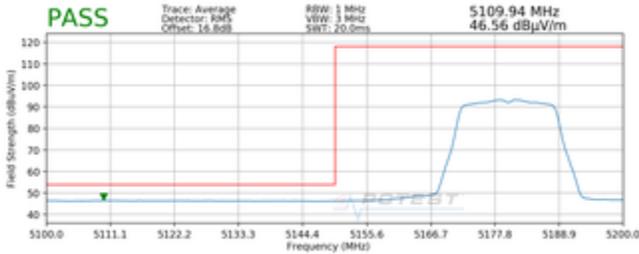


**Plot 7-1. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

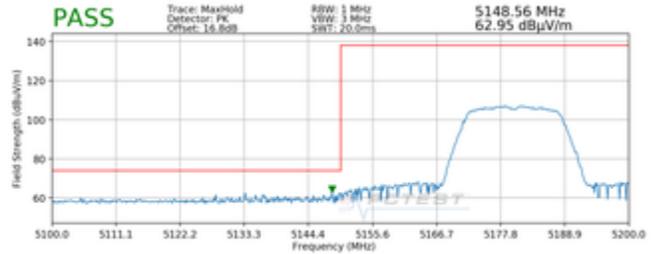


**Plot 7-2. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

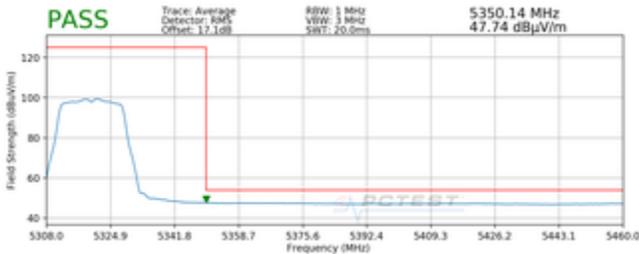

**Plot 7-3. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

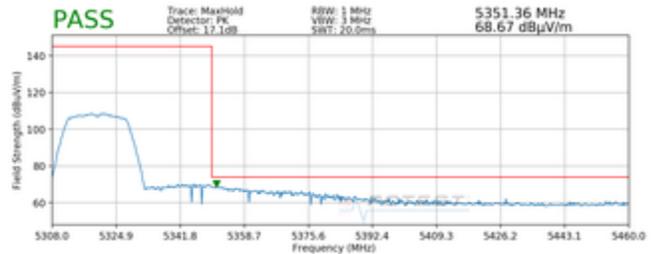


**Plot 7-4. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      |   | Page 28 of 46                   |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100




**Plot 7-5. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

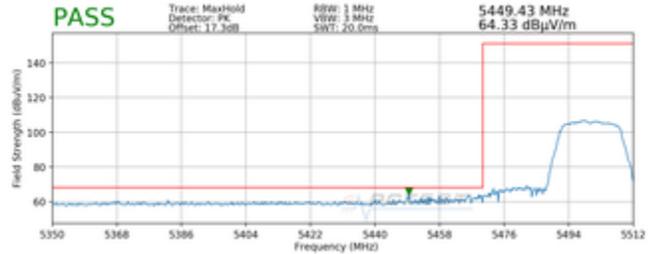

**Plot 7-6. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

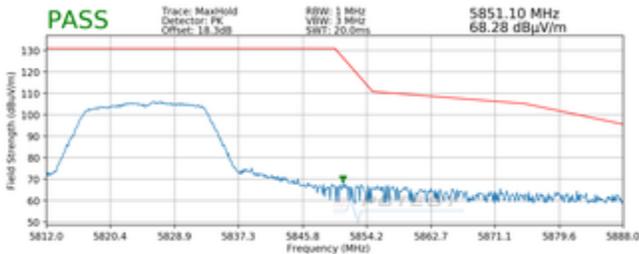


**Plot 7-7. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**


|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |   | Page 29 of 46                   |

## SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

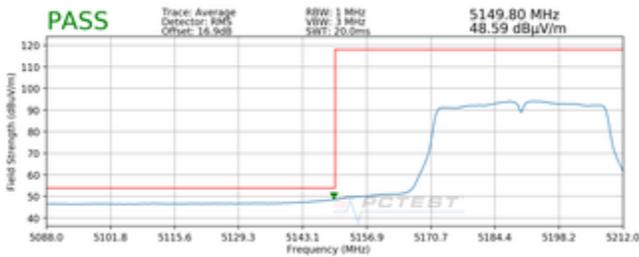


**Plot 7-8. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

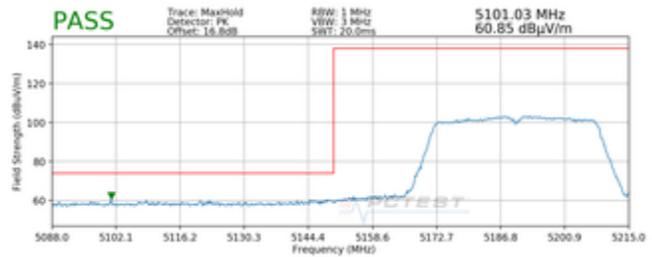


**Plot 7-9. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5310MHz  
 Channel: 62

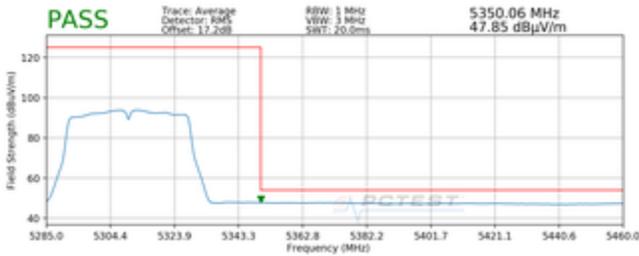


**Plot 7-10. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

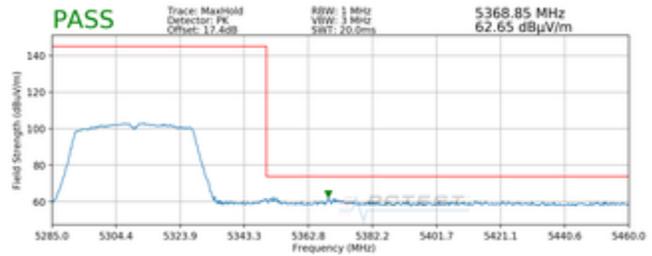


**Plot 7-11. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       | <br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |   | Page 30 of 46                   |

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

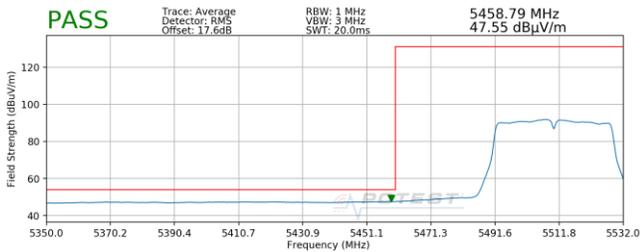


**Plot 7-12. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

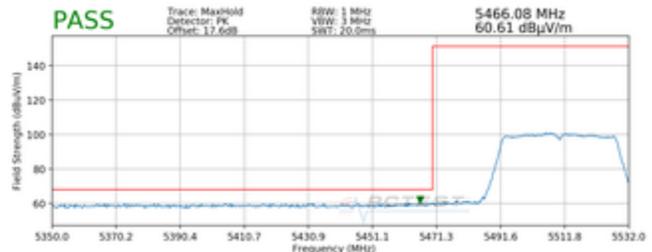

**Plot 7-13. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

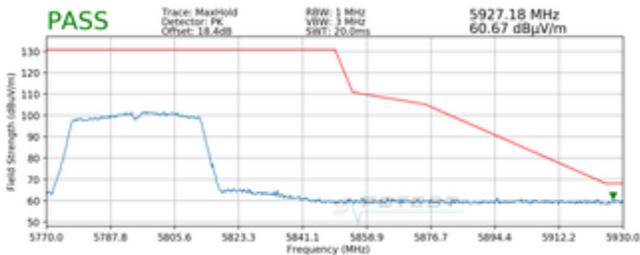


**Plot 7-14. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**


|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 31 of 46  |                                 |

## SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |

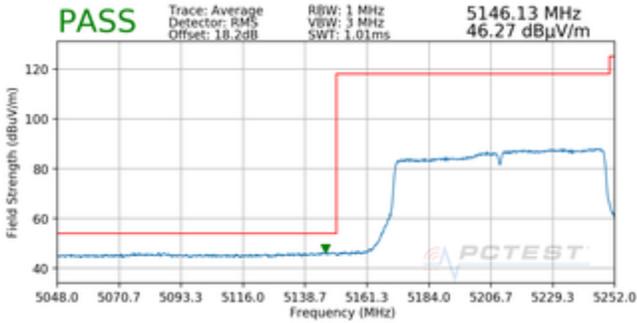


**Plot 7-15. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

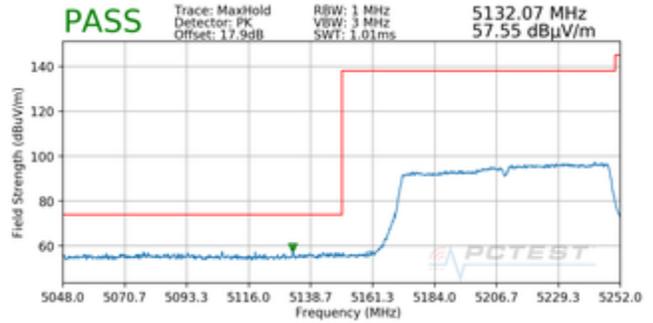


**Plot 7-16. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

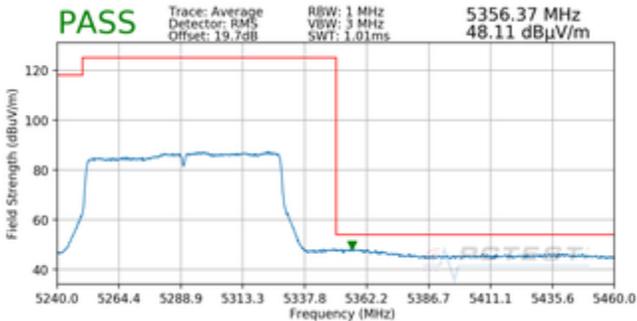


**Plot 7-17. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

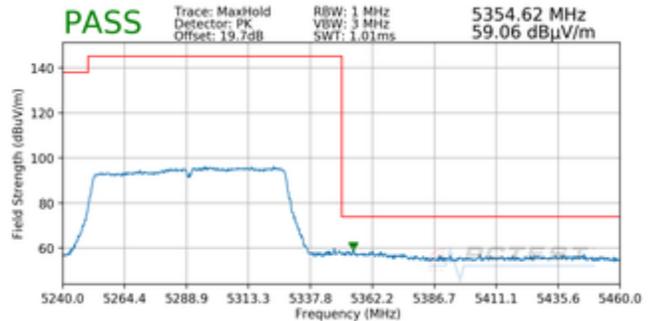


**Plot 7-18. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 32 of 46                   |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

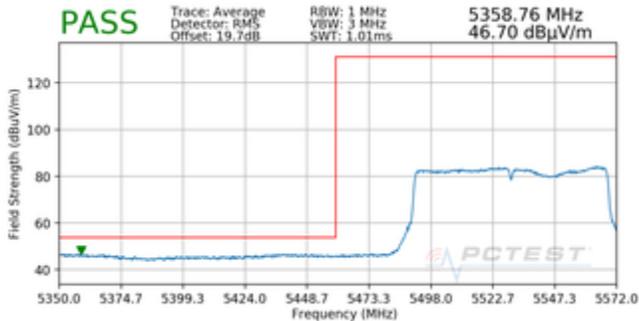


**Plot 7-19. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

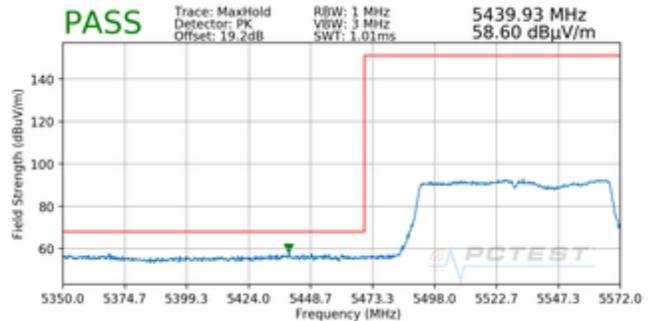

**Plot 7-20. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

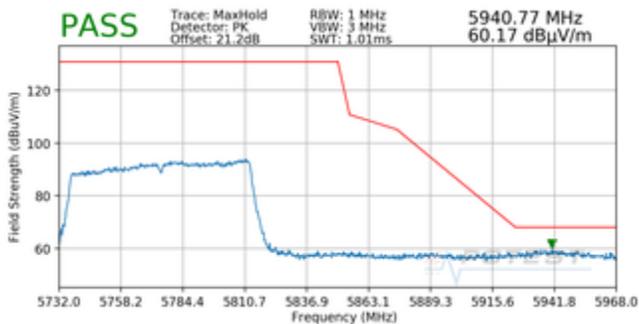


**Plot 7-21. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**


|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 33 of 46                   |

## CDD Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11a  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5180MHz  |
| Channel:                  | 36       |

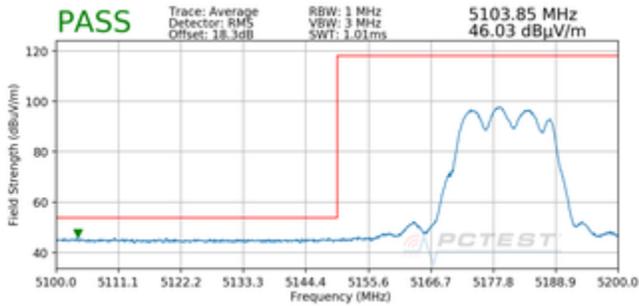


**Plot 7-22. Radiated Lower Band Edge Plot CDD  
 (Average – UNII Band 1)**

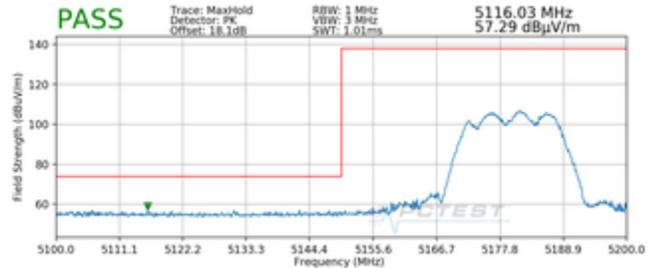


**Plot 7-23. Radiated Lower Band Edge Plot CDD  
 (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11a  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

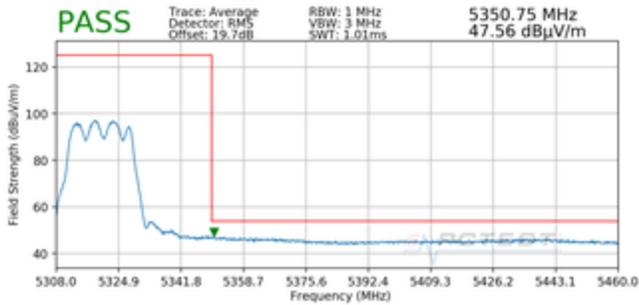


**Plot 7-24. Radiated Upper Band Edge Plot CDD  
 (Average – UNII Band 2A)**

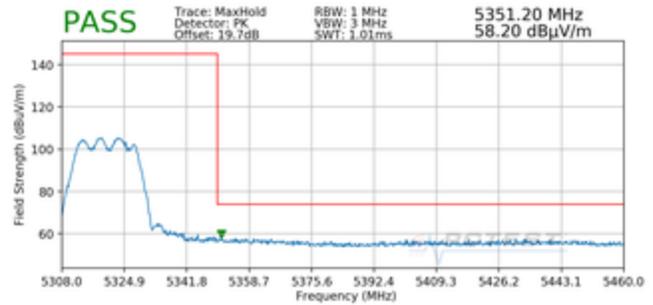


**Plot 7-25. Radiated Upper Band Edge Plot CDD  
 (Peak – UNII Band 2A)**

|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06-ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |   | Page 34 of 46                   |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

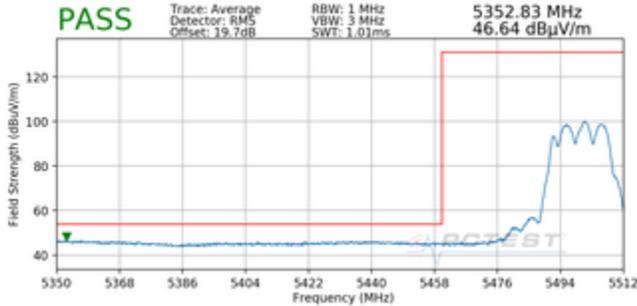


**Plot 7-26. Radiated Lower Band Edge Plot CDD (Average – UNII Band 2C)**

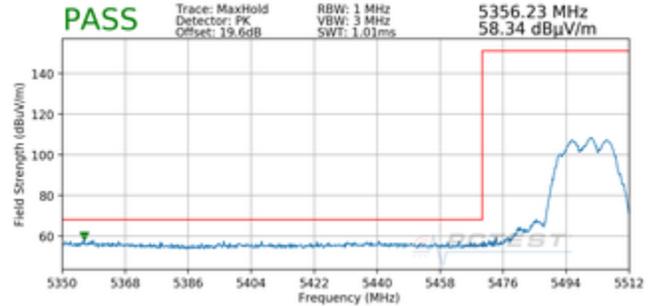

**Plot 7-27. Radiated Lower Band Edge Plot CDD (Peak – UNII Band 2C)**


Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

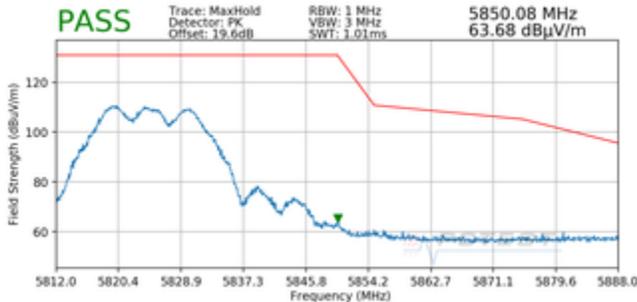


**Plot 7-28. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 3)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 35 of 46  |                                 |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

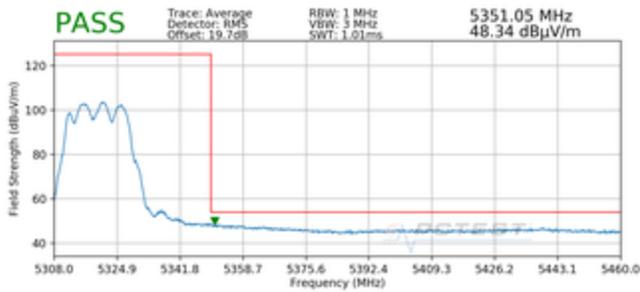

**Plot 7-29. Radiated Upper Band Edge Plot CDD (Average – UNII Band 2A) with Dual Display Cover**

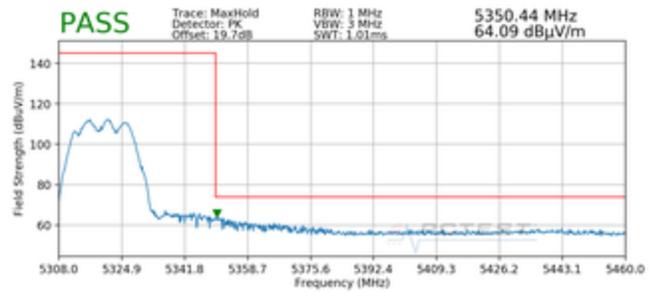


**Plot 7-30. Radiated Upper Band Edge Plot CDD (Peak – UNII Band 2A) Dual Display Cover**


|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 36 of 46                   |

## MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5180MHz  |
| Channel:                  | 36       |

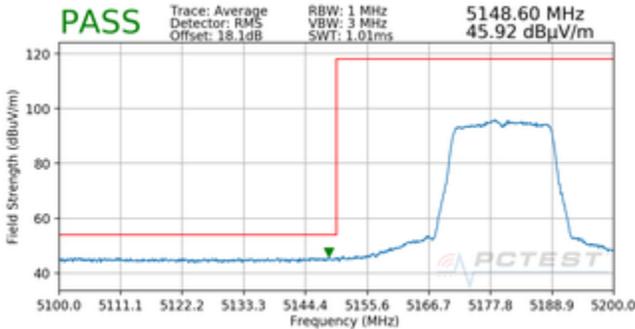


**Plot 7-31. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

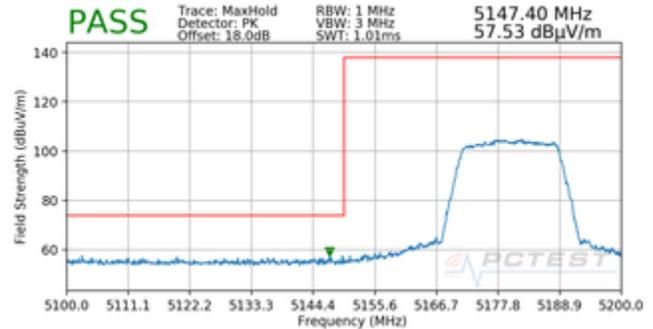


**Plot 7-32. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

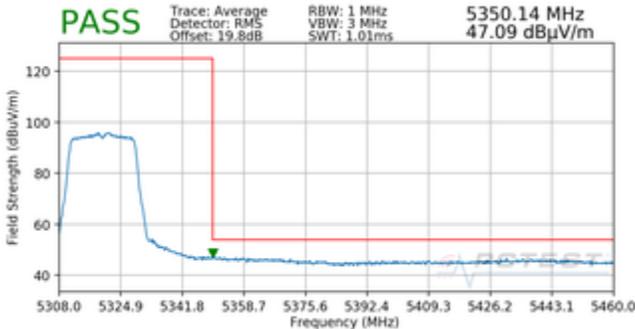


**Plot 7-33. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

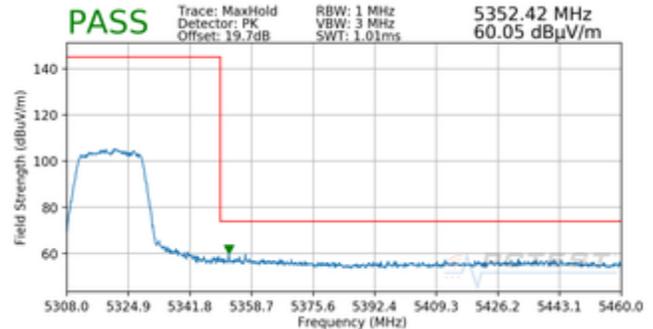


**Plot 7-34. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 37 of 46                   |

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

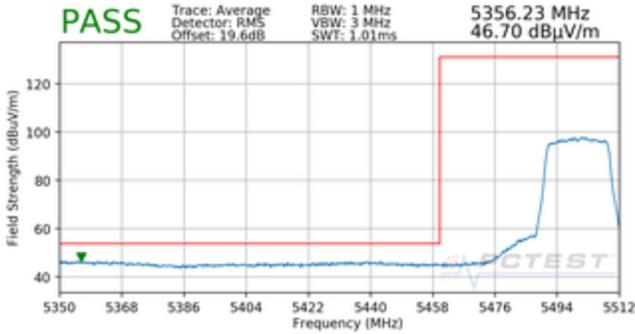


**Plot 7-35. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

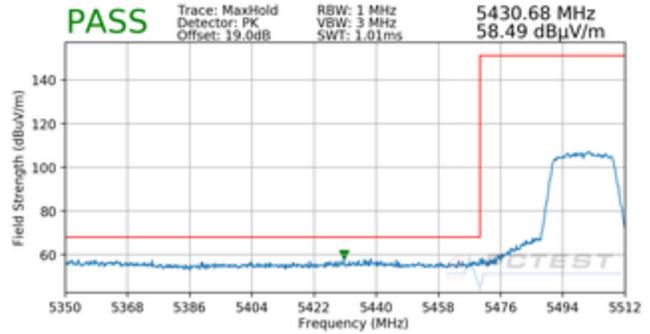

**Plot 7-36. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

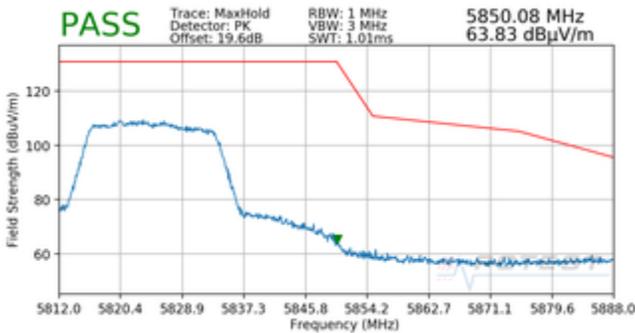


**Plot 7-37. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

|   |   |  |   |                                 |
|---|---|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020  | EUT Type:<br>Portable Handset                      |   | Page 38 of 46                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

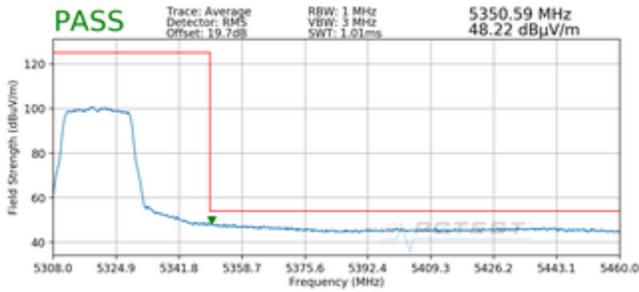

**Plot 7-38. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A) with Dual Display Cover**

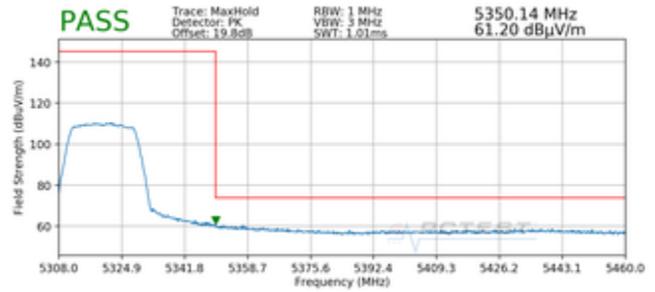


**Plot 7-39. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A) with Dual Display Cover**


|  |  |  |   |  |
|--|--|--|---|--|
| FCC ID: ZNFG900UM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020  | <b>EUT Type:</b><br>Portable Handset                       | Page 39 of 46   |  |

## MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5190MHz  |
| Channel:                  | 38       |

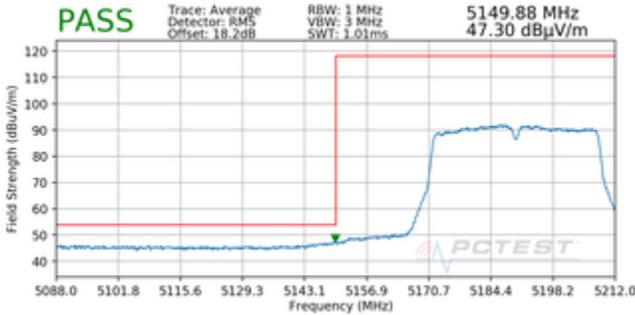


**Plot 7-40. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

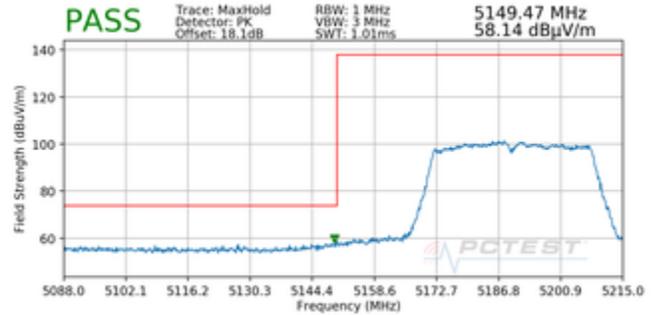


**Plot 7-41. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5310MHz  |
| Channel:                  | 62       |

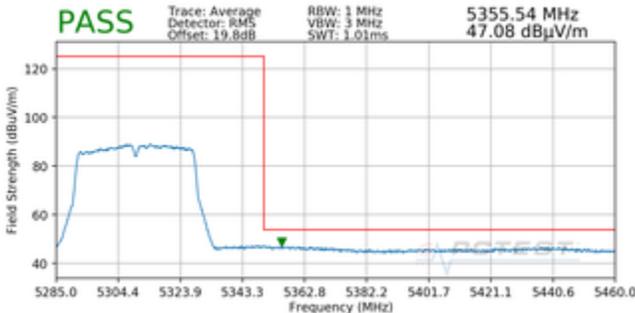


**Plot 7-42. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

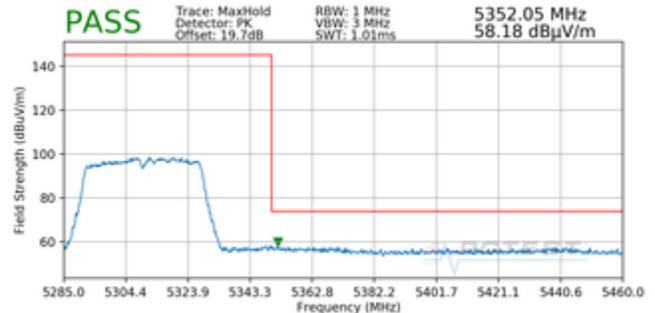


**Plot 7-43. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST <sup>®</sup><br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06-ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 40 of 46                   |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

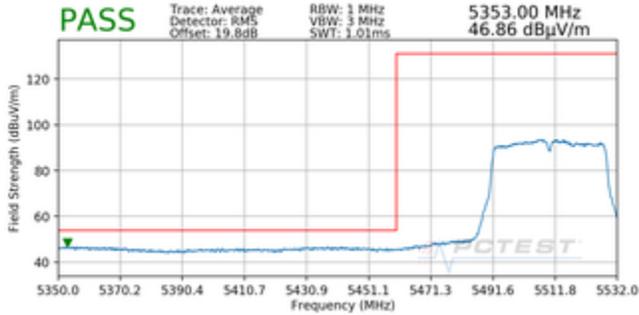


**Plot 7-44. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

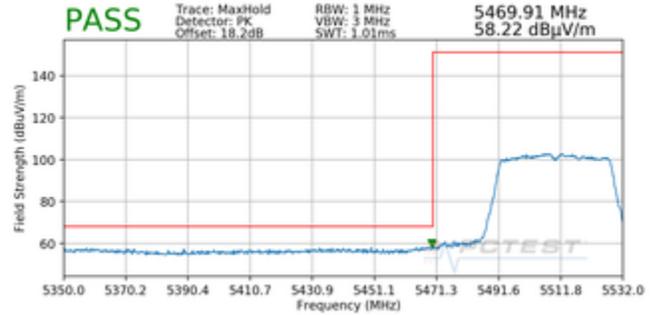

**Plot 7-45. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

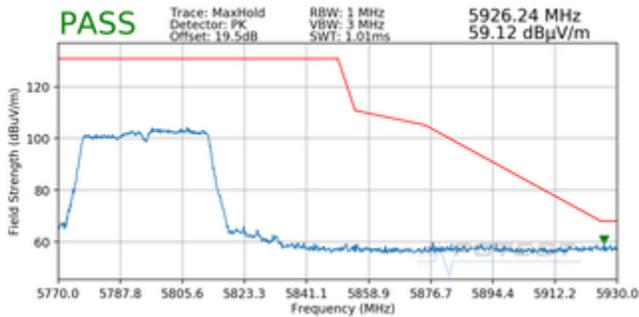


**Plot 7-46. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

|   |  |  |   |                                 |
|---|--|--|---|---------------------------------|
| FCC ID: ZNFG900UM                       | <br>Proud to be part of  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |   | Page 41 of 46                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5310MHz  |
| Channel:                  | 62       |

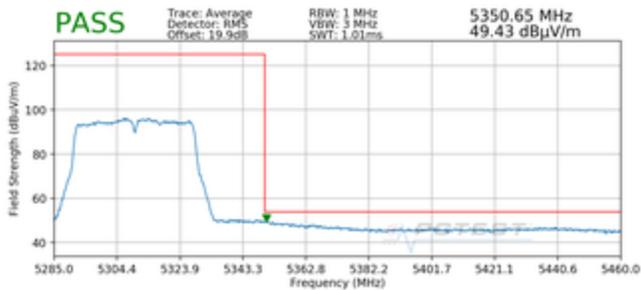

**Plot 7-47. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A) with Dual Display Cover**

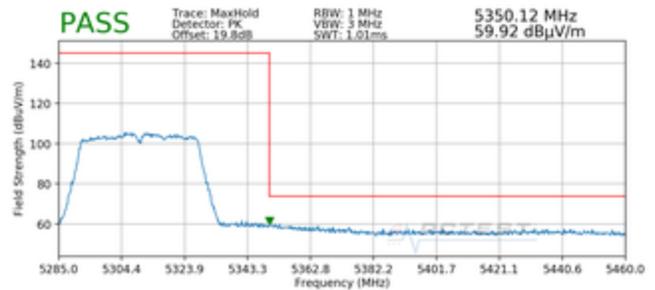

**Plot 7-48. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A) with Dual Display Cover**


|  |  |  |   |  |
|--|--|--|---|--|
| FCC ID: ZNFG900UM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020  | <b>EUT Type:</b><br>Portable Handset                       | Page 42 of 46   |  |

## MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |




**Plot 7-49. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

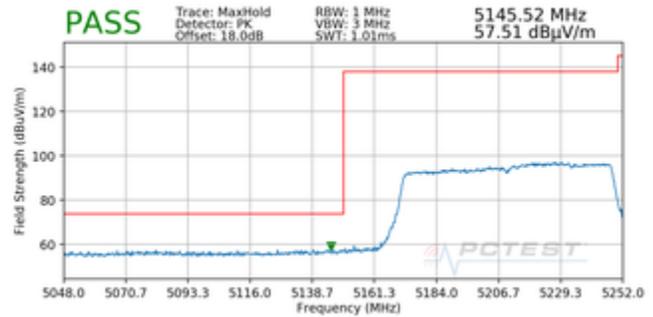


**Plot 7-50. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

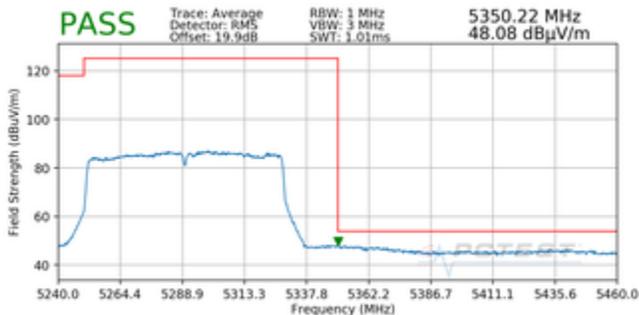


**Plot 7-51. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

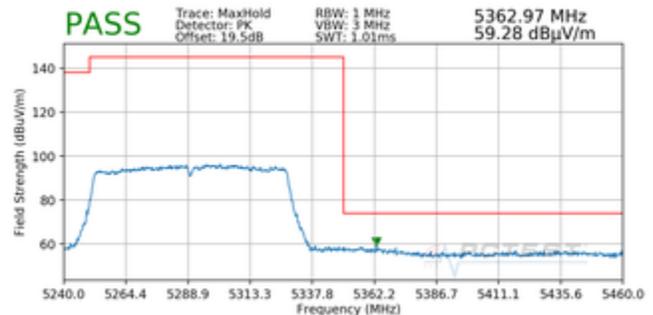


**Plot 7-52. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 43 of 46                   |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

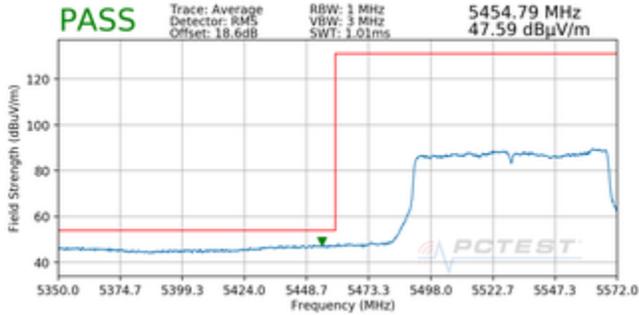


**Plot 7-53. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

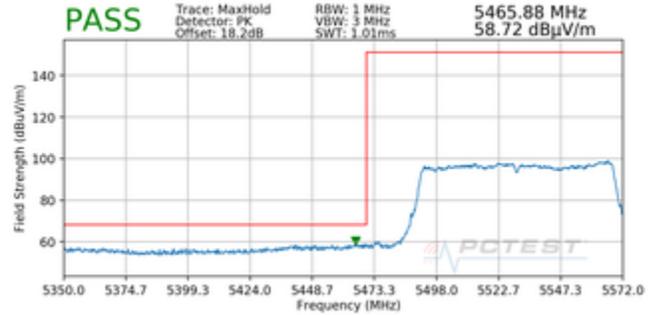

**Plot 7-54. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

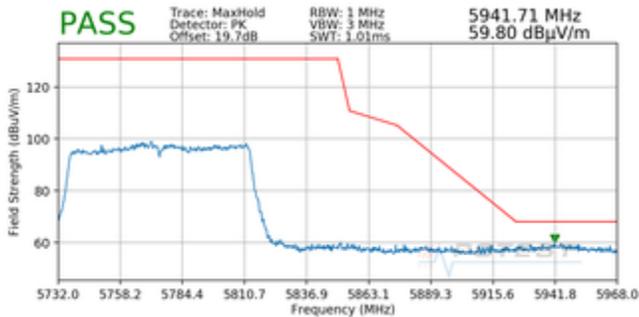


**Plot 7-55. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  PCTEST®<br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      | Page 44 of 46  |                                 |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58

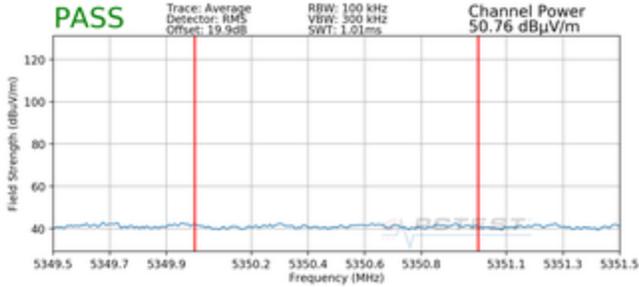

**Plot 7-56. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A) with Dual Display Cover**

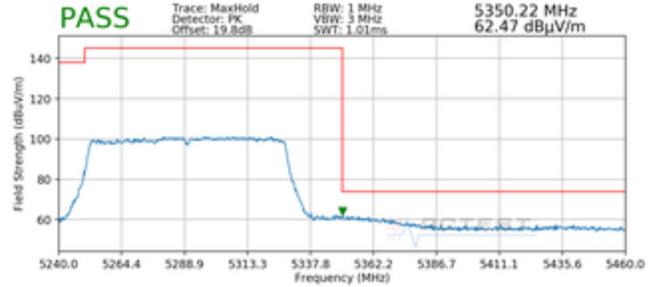

**Plot 7-57. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A) with Dual Display Cover**

|   |  |  |  |                                 |
|---|--|--|--|---------------------------------|
| FCC ID: ZNFG900UM                       |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2004150063-06.ZNF | Test Dates:<br>5/6 - 6/11/2020   | EUT Type:<br>Portable Handset                      |  | Page 45 of 46                   |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFG900UM** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

|  |   |  |   |  |
|--|---|--|---|--|
| <b>FCC ID:</b> ZNFG900UM                       | <br><small>Proud to be part of  element</small> | <b>MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2004150063-06.ZNF | <b>Test Dates:</b><br>5/6 - 6/11/2020   | <b>EUT Type:</b><br>Portable Handset                       |   | Page 46 of 46                          |