



## SAR EVALUATION REPORT

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.  
 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632  
 United States

**Date of Testing:**  
 04/13/15 - 04/20/15  
**Test Site/Location:**  
 PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
 0Y1504130706-R1.ZNF

**FCC ID:** ZNFH810

**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A., INC.

**DUT Type:** Portable Handset  
**Application Type:** Class II Permissive Change  
**FCC Rule Part(s):** CFR §2.1093  
**Model(s):** LG-H810, LGH810, H810, LG-H812, LGH812, H812, LG-H810PR, LGH810PR, H810PR  
**Permissive Change(s):** See FCC change document  
**Date of Original Certification:** 04/30/2015

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	10 gm Extremity (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.61	0.74	0.77	
PCE	UMTS 850	826.40 - 846.60 MHz	0.48	0.55	0.55	
PCE	UMTS 1750	1712.4 - 1752.5 MHz	1.13	0.75	1.00	
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.50	0.31	0.41	
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.87	0.49	0.71	
PCE	LTE Band 12	699.7 - 715.3 MHz	0.25	0.35	0.41	
PCE	LTE Band 13	779.5 - 784.5 MHz	0.46	0.49	0.56	
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.53	0.67	0.67	
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	1.13	0.71	0.75	
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.99	0.55	0.83	
PCE	LTE Band 7	2502.5 - 2567.5 MHz	0.49	0.50	0.51	
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.45	0.18	0.18	
DTS	Bluetooth LE	2402 - 2480 MHz	N/A			
NIJ	U-NII-1	5180 - 5240 MHz	N/A			
NIJ	U-NII-2A	5260 - 5320 MHz	0.35	0.20		0.37
NIJ	U-NII-2C	5500 - 5720 MHz	0.42	0.23		0.44
NIJ	U-NII-3	5745 - 5825 MHz	0.20	0.11	0.14	
DSS	Bluetooth	2402 - 2480 MHz		<0.1		<0.1
<b>Simultaneous SAR per KDB 690783 D01v01r03:</b>			1.58	0.98	1.19	0.44

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

Note: This revised Test Report (S/N: 0Y1504130706-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez  
 President





The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: [sartick@mmfai.info](mailto:sartick@mmfai.info).

<b>FCC ID:</b> ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> 0Y1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 1 of 81	

# T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	9
3	INTRODUCTION .....	10
4	DOSIMETRIC ASSESSMENT .....	11
5	DEFINITION OF REFERENCE POINTS .....	12
6	TEST CONFIGURATION POSITIONS FOR HANDSETS .....	13
7	RF EXPOSURE LIMITS .....	16
8	FCC MEASUREMENT PROCEDURES.....	17
9	RF CONDUCTED POWERS.....	22
10	SYSTEM VERIFICATION.....	53
11	SAR DATA SUMMARY .....	57
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	70
13	SAR MEASUREMENT VARIABILITY .....	75
14	EQUIPMENT LIST.....	76
15	MEASUREMENT UNCERTAINTIES .....	77
16	CONCLUSION.....	79
17	REFERENCES .....	80
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	
APPENDIX D:	SAR TISSUE SPECIFICATIONS	
APPENDIX E:	SAR SYSTEM VALIDATION	
APPENDIX F:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 2 of 81

# 1 DEVICE UNDER TEST

## 1.1 Device Overview



Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
Bluetooth LE	Data	2402 - 2480 MHz
U-NII-1	Data	5180 - 5240 MHz
U-NII-2A	Data	5260 - 5320 MHz
U-NII-2C	Data	5500 - 5720 MHz
U-NII-3	Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

## 1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
			1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots
GSM/GPRS/EDGE 850	Maximum	<b>33.2</b>	<b>33.2</b>	<b>31.2</b>	<b>29.2</b>	<b>28.2</b>	<b>27.2</b>	<b>26.2</b>	<b>25.4</b>	<b>24.2</b>
	Nominal	<b>32.7</b>	<b>32.7</b>	<b>30.7</b>	<b>28.7</b>	<b>27.7</b>	<b>26.7</b>	<b>25.7</b>	<b>24.9</b>	<b>23.7</b>
GSM/GPRS/EDGE 1900	Maximum	<b>30.2</b>	<b>30.2</b>	<b>28.2</b>	<b>26.2</b>	<b>25.2</b>	<b>26.2</b>	<b>25.2</b>	<b>24.4</b>	<b>23.4</b>
	Nominal	<b>29.7</b>	<b>29.7</b>	<b>27.7</b>	<b>25.7</b>	<b>24.7</b>	<b>25.7</b>	<b>24.7</b>	<b>23.9</b>	<b>22.9</b>



Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC-HSDPA Rel 8
UMTS Band 5 (850 MHz)	Maximum	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>
	Nominal	<b>23.2</b>	<b>23.2</b>	<b>23.2</b>	<b>23.2</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>
	Nominal	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>
	Nominal	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 3 of 81	

Mode / Band		Modulated Average (dBm)
LTE Band 12/17	Maximum	<b>24.4</b>
	Nominal	<b>23.9</b>
LTE Band 13	Maximum	<b>24.4</b>
	Nominal	<b>23.9</b>
LTE Band 5 (Cell)	Maximum	<b>24.4</b>
	Nominal	<b>23.9</b>
LTE Band 4 (AWS)	Maximum	<b>24.7</b>
	Nominal	<b>24.2</b>
LTE Band 2 (PCS)	Maximum	<b>24.2</b>
	Nominal	<b>23.7</b>
LTE Band 7	Maximum	<b>23.7</b>
	Nominal	<b>23.2</b>

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	<b>16.0</b>
	Nominal	<b>15.0</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>15.0</b>
	Nominal	<b>14.0</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>14.0</b>
	Nominal	<b>13.0</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth (1 Mbps)	Maximum	<b>10.5</b>
	Nominal	<b>9.5</b>
Bluetooth (2 Mbps)	Maximum	<b>7.5</b>
	Nominal	<b>6.5</b>
Bluetooth (3 Mbps)	Maximum	<b>7.0</b>
	Nominal	<b>6.0</b>
Bluetooth LE	Peak Power	<b>7.0</b>

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	<b>12.0</b>		
	Nominal	<b>11.0</b>		
IEEE 802.11n (5 GHz)	Maximum	<b>11.0</b>	<b>11.0</b>	
	Nominal	<b>10.0</b>	<b>10.0</b>	
IEEE 802.11ac (5 GHz)	Maximum	<b>11.0</b>	<b>11.0</b>	<b>11.0</b>
	Nominal	<b>10.0</b>	<b>10.0</b>	<b>10.0</b>

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 4 of 81

### 1.3 DUT Antenna Locations

1. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions.
2. Since the diagonal dimension of this device is more than 160 mm and less than 200 mm, it is considered a “phablet.”



**Table 1-1  
Sides for SAR Testing**

Mode	Exposure Condition	Back	Front	Top	Bottom	Right	Left
GPRS 850	Hotspot	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Hotspot	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Hotspot	Yes	Yes	No	Yes	No	Yes
GPRS 1900	Hotspot	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Hotspot	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Hotspot	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Hotspot	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 2 (PCS)	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 7	Hotspot	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Hotspot	Yes	Yes	Yes	No	Yes	No
5.8 GHz WLAN	Hotspot	Yes	Yes	Yes	No	Yes	No
5.2 - 5.7 GHz WLAN	Extremity	Yes	Yes	Yes	No	Yes	No
Bluetooth	Extremity	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR or Extremity SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01 guidance, page 2 and FCC KDB 648474 D04v01r01. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, 5.2-5.7 GHz WLAN operations are disabled.

### 1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device. The NFC antenna location diagram can be found in appendix F. The NFC antenna is integrated into the device; therefore all SAR tests were performed with the NFC antenna.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 5 of 81

## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

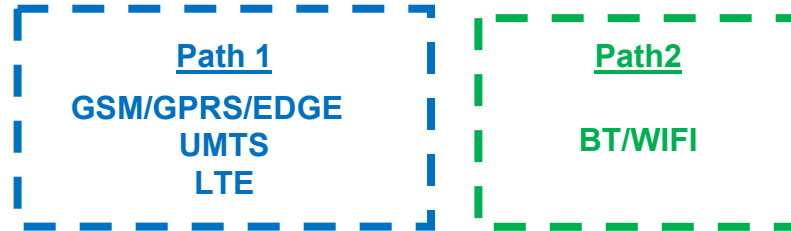


Figure 1-1  
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-2  
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Extremity	Notes
1	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
4	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
5	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
6	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
7	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
8	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
9	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
10	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
11	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	*-Pre-installed VOIP applications are considered.
12	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	Yes	*-Pre-installed VOIP applications are considered.

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI direct are specified above.
- 5 GHz Wireless Router is only supported for the 5.8 GHz Band by S/W, therefore 5.2-5.7 GHz Bands were not evaluated for wireless router conditions.
- 5.8 GHz WIFI supports Hotspot and WIFI-Direct (GO/GC).
- This device supports VoLTE.

FCC ID: ZNFH810	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 6 of 81	

## 1.6 SAR Test Exclusions Applied

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using 5.2-5.7 GHz WIFI, only 2.4 GHz and 5.8 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v01.

This device supports 40 MHz Bandwidth for IEEE 802.11n for 5 GHz WIFI only.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) New 5 GHz channels 138, 142, and 144 are supported

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for 5.2 – 5.7 GHz WLAN, extremity SAR tests were performed. Extremity SAR was not evaluated for 2.4 GHz and 5.8 GHz WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.



This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

This device supports both LTE B12 and LTE B17. Since the supported frequency span for LTE B17 falls completely within the supported frequency span for LTE B12, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B12.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

This device supports inter-band LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC Guidance, LTE CA SAR was not needed for testing since the data sent by uplink on uplink physical channels does not change between Rel 8 and Rel 10.

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 7 of 81	

## 1.7 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.8 Quick Cover

This DUT may be used with a standard battery cover or with an optional quick cover which features an extension to wrap around and protect the front side of the device. Per FCC KDB Publication 648474 D03, SAR was measured using the standard battery cover and then repeated with the quick cover for the configuration with the highest measured SAR for each wireless technology, frequency band, operating mode, and exposure condition. Additional head and extremity tests using the quick cover were performed with the cover extension both open and closed. Additional body-worn and hotspot tests were performed with the cover extension closed because operations near the body with the cover extension open are not expected. Since reported SAR did not exceed 1.2 W/kg, additional testing with the quick cover was not required.



## 1.9 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D06v01r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Phablet Procedures, Wireless Charging Cover)
- April 2013 TCB Workshop Notes (IEEE 802.11ac)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

## 1.10 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number	Extremity Serial Number
GSM/GPRS/EDGE 850	19220	19220	19220	N/A
UMTS 850	19220	19220	19220	N/A
UMTS 1750	19212	19212	19212	N/A
GSM/GPRS/EDGE 1900	19220	19220	19220	N/A
UMTS 1900	19220	19220	19220	N/A
LTE Band 12	19246	19246	19246	N/A
LTE Band 13	19246	19246	19246	N/A
LTE Band 5 (Cell)	19246	19246	19246	N/A
LTE Band 4 (AWS)	19253	19253	19253	N/A
LTE Band 2 (PCS)	19246	19246	19246	N/A
LTE Band 7	19246	19246	19246	N/A
2.4 GHz WLAN	19125	19125	19125	N/A
5.3 - 5.7 GHz WLAN	19125	19125	N/A	19125
5.8 GHz WLAN	19125	19125	19125	N/A
Bluetooth	N/A	19125	N/A	19125

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 8 of 81	



2

LTE INFORMATION

LTE Information			
FCC ID	ZNFH810		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 12 (699.7 - 715.3 MHz)		
	LTE Band 13 (779.5 - 784.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
	LTE Band 7 (2502.5 - 2567.5 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 13: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 17: 5 MHz		
	LTE Band 17: 10 MHz		
	LTE Band 12: 3 MHz		
LTE Band 12: 5 MHz			
LTE Band 12: 10 MHz			
LTE Band 13: 5 MHz			
LTE Band 13: 10 MHz			
LTE Band 5 (Cell): 1.4 MHz			
LTE Band 5 (Cell): 3 MHz			
LTE Band 5 (Cell): 5 MHz			
LTE Band 5 (Cell): 10 MHz			
LTE Band 4 (AWS): 1.4 MHz			
LTE Band 4 (AWS): 3 MHz			
LTE Band 4 (AWS): 5 MHz			
LTE Band 4 (AWS): 10 MHz			
LTE Band 4 (AWS): 15 MHz			
LTE Band 4 (AWS): 20 MHz			
LTE Band 2 (PCS): 1.4 MHz			
LTE Band 2 (PCS): 3 MHz			
LTE Band 2 (PCS): 5 MHz			
LTE Band 2 (PCS): 10 MHz			
LTE Band 2 (PCS): 15 MHz			
LTE Band 2 (PCS): 20 MHz			
LTE Band 7: 5 MHz			
LTE Band 7: 10 MHz			
LTE Band 7: 15 MHz			
LTE Band 7: 20 MHz			
UE Category	6		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		

LTE M1 (PC) + LTE B7 (SC)	LTE B7 (PC) + LTE B4 (SC)	LTE B2 (PC) + LTE B7 (SC)	LTE B7 (PC) + LTE B2 (SC)	LTE B4 (PC) + LTE B2 (SC)	LTE B7 (PC) + LTE B4 (SC)	LTE B2 (PC) + LTE B7 (SC)	LTE B4 (PC) + LTE B7 (SC)	LTE B2 (PC) + LTE B4 (SC)
5MHz (B4) + 5MHz (B7)	5MHz (B7) + 5MHz (B4)	5MHz (B2) + 5MHz (B7)	5MHz (B7) + 5MHz (B2)	5MHz (B4) + 5MHz (B2)	5MHz (B7) + 5MHz (B4)	5MHz (B2) + 5MHz (B7)	5MHz (B4) + 5MHz (B2)	5MHz (B2) + 5MHz (B4)
5MHz (B4) + 10MHz (B7)	10MHz (B7) + 5MHz (B4)	5MHz (B2) + 10MHz (B7)	10MHz (B7) + 5MHz (B2)	5MHz (B4) + 10MHz (B2)	10MHz (B7) + 5MHz (B4)	5MHz (B2) + 10MHz (B7)	10MHz (B4) + 5MHz (B2)	5MHz (B2) + 10MHz (B4)
10MHz (B4) + 5MHz (B7)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 5MHz (B7)	10MHz (B7) + 10MHz (B2)	10MHz (B4) + 10MHz (B2)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B4) + 10MHz (B2)	10MHz (B2) + 10MHz (B4)
10MHz (B4) + 10MHz (B7)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B7) + 10MHz (B2)	10MHz (B4) + 10MHz (B2)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B4) + 10MHz (B2)	10MHz (B2) + 10MHz (B4)
LTE B4 (PC) + LTE B7 (SC)	LTE B7 (PC) + LTE B4 (SC)	LTE B2 (PC) + LTE B7 (SC)	LTE B7 (PC) + LTE B2 (SC)	LTE B4 (PC) + LTE B2 (SC)	LTE B7 (PC) + LTE B4 (SC)	LTE B2 (PC) + LTE B7 (SC)	LTE B4 (PC) + LTE B7 (SC)	LTE B2 (PC) + LTE B4 (SC)
5MHz (B4) + 5MHz (B7)	5MHz (B7) + 5MHz (B4)	5MHz (B2) + 5MHz (B7)	5MHz (B7) + 5MHz (B2)	5MHz (B4) + 5MHz (B2)	5MHz (B7) + 5MHz (B4)	5MHz (B2) + 5MHz (B7)	5MHz (B4) + 5MHz (B2)	5MHz (B2) + 5MHz (B4)
5MHz (B4) + 10MHz (B7)	10MHz (B7) + 5MHz (B4)	5MHz (B2) + 10MHz (B7)	10MHz (B7) + 5MHz (B2)	5MHz (B4) + 10MHz (B2)	10MHz (B7) + 5MHz (B4)	5MHz (B2) + 10MHz (B7)	10MHz (B4) + 5MHz (B2)	5MHz (B2) + 10MHz (B4)
10MHz (B4) + 5MHz (B7)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 5MHz (B7)	10MHz (B7) + 10MHz (B2)	10MHz (B4) + 10MHz (B2)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B4) + 10MHz (B2)	10MHz (B2) + 10MHz (B4)
10MHz (B4) + 10MHz (B7)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B7) + 10MHz (B2)	10MHz (B4) + 10MHz (B2)	10MHz (B7) + 10MHz (B4)	10MHz (B2) + 10MHz (B7)	10MHz (B4) + 10MHz (B2)	10MHz (B2) + 10MHz (B4)
20MHz (B4) + 5MHz (B7)	10MHz (B7) + 20MHz (B4)	20MHz (B2) + 5MHz (B7)	10MHz (B7) + 20MHz (B2)	20MHz (B4) + 5MHz (B2)	10MHz (B7) + 20MHz (B4)	20MHz (B2) + 10MHz (B7)	10MHz (B4) + 20MHz (B2)	20MHz (B2) + 10MHz (B4)
20MHz (B4) + 10MHz (B7)	10MHz (B7) + 20MHz (B4)	20MHz (B2) + 10MHz (B7)	10MHz (B7) + 20MHz (B2)	20MHz (B4) + 10MHz (B2)	10MHz (B7) + 20MHz (B4)	20MHz (B2) + 10MHz (B7)	10MHz (B4) + 20MHz (B2)	20MHz (B2) + 10MHz (B4)
20MHz (B4) + 20MHz (B7)	20MHz (B7) + 20MHz (B4)	20MHz (B2) + 20MHz (B7)	20MHz (B7) + 20MHz (B2)	20MHz (B4) + 20MHz (B2)	20MHz (B7) + 20MHz (B4)	20MHz (B2) + 20MHz (B7)	20MHz (B4) + 20MHz (B2)	20MHz (B2) + 20MHz (B4)

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 9 of 81	

### 3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 10 of 81	

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01\*

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid $\Delta z_{zoom}(n)$	Graded Grid		
				$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

\*Also compliant to IEEE 1528-2013 Table 6


FCC ID: ZNFH810	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 11 of 81

# 5

# DEFINITION OF REFERENCE POINTS

## 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

## 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

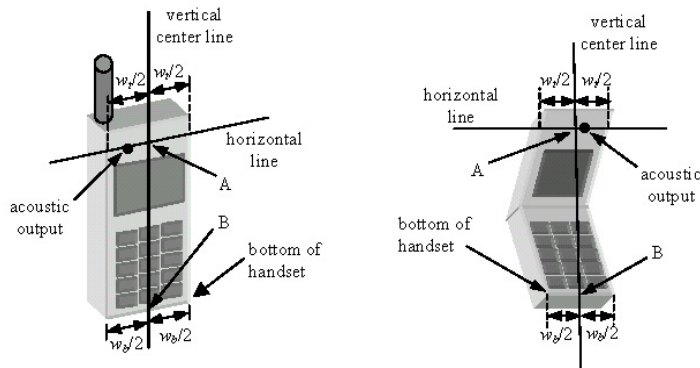

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 12 of 81


## 6 TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

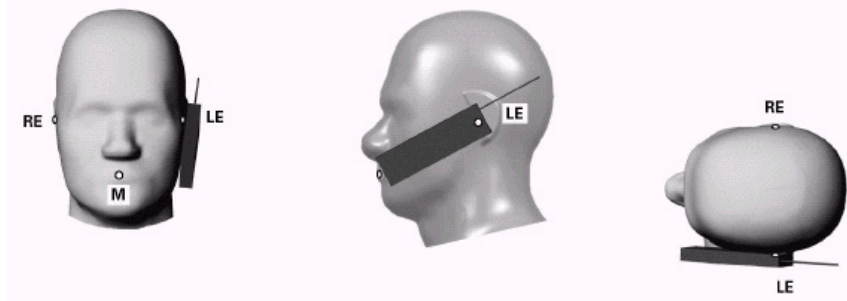



**Figure 6-1 Front, Side and Top View of Cheek Position**


2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 13 of 81

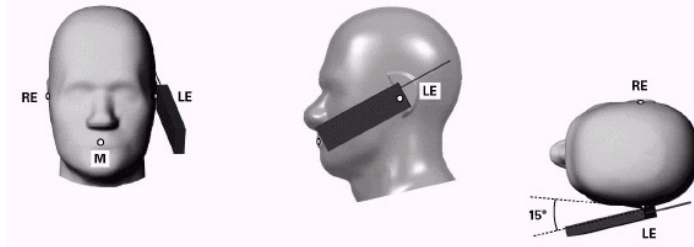


**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**

## 6.4 Body-Worn Accessory Configurations

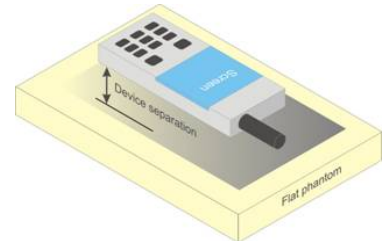

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



**Figure 6-4 Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 14 of 81

## 6.5 Extremity Exposure Configurations



Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC minitables that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r01DR04 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required.

## 6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 15 of 81

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 16 of 81	



### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v02.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR



The following procedures are according to FCC KDB Publication 941225 D01v03 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for UMTS

#### 8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 17 of 81

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

## 8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

## 8.4.4 SAR Measurements for Handsets with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

## 8.4.5 SAR Measurements for Handsets with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.4.6 SAR Measurement Conditions for DC-HSDPA



SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HSDSCH Cell are required to perform the power measurement and for the results to be acceptable.

## 8.5 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 18 of 81	

## 8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

## 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

## 8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

## 8.5.5 Carrier Aggregation

LTE Carrier Aggregation (CA) measurements were made in accordance to 3GPP TS 36.521-1 V10.4.0 (2012-12). The RRC connection is only handled by one cell, the Primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds the Secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. Additional output powers were measured using two carriers in the downlink for the release 8 configurations with the highest output power among all channels, RB configurations and bandwidths for each uplink band. Per FCC Guidance, no SAR measurements were required.

## 8.6 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02 for more details.

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 19 of 81	

### 8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

### 8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.



### 8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.

### 8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 20 of 81

- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



### 8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6)

### 8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power, is  $\leq 1.2$  W/kg, no additional SAR testing for the subsequent test configurations is required.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 21 of 81	

# 9 RF CONDUCTED POWERS


## 9.1 GSM Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.19	33.17	31.19	29.20	<b>28.20</b>	26.62	26.20	25.40	24.07
	190	33.20	33.15	31.12	28.94	<b>27.84</b>	26.47	26.14	25.27	23.85
	251	33.17	33.19	31.05	28.93	<b>27.85</b>	26.44	26.04	25.34	23.83
GSM 1900	512	30.12	30.10	28.01	25.92	<b>24.90</b>	25.98	25.05	23.96	23.09
	661	30.16	30.20	28.11	26.10	<b>25.18</b>	26.00	25.06	24.04	23.16
	810	30.20	30.19	28.19	26.08	<b>25.12</b>	26.03	25.13	24.01	23.24
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.16	24.14	25.17	24.94	<b>25.19</b>	17.59	20.18	21.14	21.06
	190	24.17	24.12	25.10	24.68	<b>24.83</b>	17.44	20.12	21.01	20.84
	251	24.14	24.16	25.03	24.67	<b>24.84</b>	17.41	20.02	21.08	20.82
GSM 1900	512	21.09	21.07	21.99	21.66	<b>21.89</b>	16.95	19.03	19.70	20.08
	661	21.13	21.17	22.09	21.84	<b>22.17</b>	16.97	19.04	19.78	20.15
	810	21.17	21.16	22.17	21.82	<b>22.11</b>	17.00	19.11	19.75	20.23
GSM 850	Frame	23.67	23.67	24.68	24.44	<b>24.69</b>	17.67	19.68	20.64	20.69
GSM 1900	Avg. Targets:	20.67	20.67	21.68	21.44	<b>21.69</b>	16.67	18.68	19.64	19.89

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 12** (Max 4 Tx uplink slots)  
**EDGE Multislot class: 12** (Max 4 Tx uplink slots)  
**DTM Multislot Class: N/A**



**Figure 9-1**  
**Power Measurement Setup**

FCC ID: ZNFH810	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 22 of 81	

## 9.2 UMTS Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.69	23.67	23.70	24.30	24.22	24.15	24.19	24.15	24.10	-
99		12.2 kbps AMR	23.64	23.66	23.68	24.19	24.10	24.06	24.16	24.13	24.07	-
6	HSDPA	Subtest 1	23.62	23.58	23.69	24.32	24.40	24.36	24.04	24.00	24.16	0
6		Subtest 2	23.55	23.61	23.68	24.41	24.46	24.44	24.15	24.19	24.13	0
6		Subtest 3	23.14	23.16	23.20	24.03	23.99	24.07	23.60	23.68	23.67	0.5
6		Subtest 4	23.12	23.07	23.18	23.95	24.02	24.00	23.61	23.70	23.69	0.5
6	HSUPA	Subtest 1	23.06	23.24	23.35	24.13	23.95	23.99	23.48	23.68	23.84	0
6		Subtest 2	21.12	21.61	21.27	22.23	22.30	22.35	21.46	21.80	22.14	2
6		Subtest 3	22.15	22.52	22.55	23.41	23.33	23.39	22.79	22.81	23.20	1
6		Subtest 4	21.92	22.15	22.19	22.50	22.36	22.29	22.61	22.69	23.03	2
6		Subtest 5	22.62	22.58	22.70	24.04	23.99	24.07	22.93	23.05	23.46	0
8	DC-HSDPA	Subtest 1	23.62	23.67	23.63	24.32	24.40	24.43	24.10	24.05	24.11	0
8		Subtest 2	23.59	23.66	23.64	24.26	24.19	24.23	24.02	24.10	24.18	0
8		Subtest 3	23.17	23.14	23.07	23.81	23.69	23.77	23.60	23.64	23.70	0.5
8		Subtest 4	23.11	23.17	23.14	23.74	23.88	23.95	23.70	23.66	23.61	0.5



### DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.10 was used for DC-HSDPA guidance
- H-set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE Category 24 for DC-HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 23 of 81



## 9.3 LTE Conducted Powers

### 9.3.1 LTE Band 12

Table 9-1  
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	707.5	23095	10	QPSK	1	0	<b>24.27</b>	0	0
	707.5	23095	10	QPSK	1	25	24.26	0	0
	707.5	23095	10	QPSK	1	49	24.17	0	0
	707.5	23095	10	QPSK	25	0	<b>23.23</b>	0-1	1
	707.5	23095	10	QPSK	25	12	23.18	0-1	1
	707.5	23095	10	QPSK	25	25	23.21	0-1	1
	707.5	23095	10	QPSK	50	0	23.13	0-1	1
	707.5	23095	10	16QAM	1	0	23.10	0-1	1
	707.5	23095	10	16QAM	1	25	23.06	0-1	1
	707.5	23095	10	16QAM	1	49	22.98	0-1	1
	707.5	23095	10	16QAM	25	0	22.34	0-2	2
	707.5	23095	10	16QAM	25	12	22.25	0-2	2
	707.5	23095	10	16QAM	25	25	22.28	0-2	2
	707.5	23095	10	16QAM	50	0	22.22	0-2	2



Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 24 of 81





**Table 9-2  
LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	701.5	23035	5	QPSK	1	0	24.28	0	0
	701.5	23035	5	QPSK	1	12	24.37	0	0
	701.5	23035	5	QPSK	1	24	24.40	0	0
	701.5	23035	5	QPSK	12	0	23.24	0-1	1
	701.5	23035	5	QPSK	12	6	23.24	0-1	1
	701.5	23035	5	QPSK	12	13	23.30	0-1	1
	701.5	23035	5	QPSK	25	0	23.26	0-1	1
	701.5	23035	5	16-QAM	1	0	23.15	0-1	1
	701.5	23035	5	16-QAM	1	12	23.14	0-1	1
	701.5	23035	5	16-QAM	1	24	23.30	0-1	1
	701.5	23035	5	16-QAM	12	0	22.08	0-2	2
	701.5	23035	5	16-QAM	12	6	22.19	0-2	2
701.5	23035	5	16-QAM	12	13	22.21	0-2	2	
701.5	23035	5	16-QAM	25	0	22.20	0-2	2	
Mid	707.5	23095	5	QPSK	1	0	24.26	0	0
	707.5	23095	5	QPSK	1	12	24.34	0	0
	707.5	23095	5	QPSK	1	24	24.33	0	0
	707.5	23095	5	QPSK	12	0	23.26	0-1	1
	707.5	23095	5	QPSK	12	6	23.17	0-1	1
	707.5	23095	5	QPSK	12	13	23.25	0-1	1
	707.5	23095	5	QPSK	25	0	23.32	0-1	1
	707.5	23095	5	16-QAM	1	0	22.99	0-1	1
	707.5	23095	5	16-QAM	1	12	22.99	0-1	1
	707.5	23095	5	16-QAM	1	24	23.14	0-1	1
	707.5	23095	5	16-QAM	12	0	22.31	0-2	2
	707.5	23095	5	16-QAM	12	6	22.30	0-2	2
707.5	23095	5	16-QAM	12	13	22.28	0-2	2	
707.5	23095	5	16-QAM	25	0	22.32	0-2	2	
High	713.5	23155	5	QPSK	1	0	24.24	0	0
	713.5	23155	5	QPSK	1	12	24.23	0	0
	713.5	23155	5	QPSK	1	24	24.24	0	0
	713.5	23155	5	QPSK	12	0	23.37	0-1	1
	713.5	23155	5	QPSK	12	6	23.30	0-1	1
	713.5	23155	5	QPSK	12	13	23.31	0-1	1
	713.5	23155	5	QPSK	25	0	23.36	0-1	1
	713.5	23155	5	16-QAM	1	0	23.10	0-1	1
	713.5	23155	5	16-QAM	1	12	22.91	0-1	1
	713.5	23155	5	16-QAM	1	24	22.99	0-1	1
	713.5	23155	5	16-QAM	12	0	22.33	0-2	2
	713.5	23155	5	16-QAM	12	6	22.29	0-2	2
713.5	23155	5	16-QAM	12	13	22.31	0-2	2	
713.5	23155	5	16-QAM	25	0	22.22	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 25 of 81	



**Table 9-3  
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	700.5	23025	3	QPSK	1	0	24.37	0	0
	700.5	23025	3	QPSK	1	7	24.33	0	0
	700.5	23025	3	QPSK	1	14	24.34	0	0
	700.5	23025	3	QPSK	8	0	23.14	0-1	1
	700.5	23025	3	QPSK	8	4	23.16	0-1	1
	700.5	23025	3	QPSK	8	7	23.16	0-1	1
	700.5	23025	3	QPSK	15	0	23.09	0-1	1
	700.5	23025	3	16-QAM	1	0	22.96	0-1	1
	700.5	23025	3	16-QAM	1	7	22.94	0-1	1
	700.5	23025	3	16-QAM	1	14	22.92	0-1	1
	700.5	23025	3	16-QAM	8	0	22.12	0-2	2
	700.5	23025	3	16-QAM	8	4	22.12	0-2	2
700.5	23025	3	16-QAM	8	7	22.14	0-2	2	
700.5	23025	3	16-QAM	15	0	22.11	0-2	2	
Mid	707.5	23095	3	QPSK	1	0	24.36	0	0
	707.5	23095	3	QPSK	1	7	24.38	0	0
	707.5	23095	3	QPSK	1	14	24.32	0	0
	707.5	23095	3	QPSK	8	0	23.20	0-1	1
	707.5	23095	3	QPSK	8	4	23.26	0-1	1
	707.5	23095	3	QPSK	8	7	23.27	0-1	1
	707.5	23095	3	QPSK	15	0	23.27	0-1	1
	707.5	23095	3	16-QAM	1	0	23.00	0-1	1
	707.5	23095	3	16-QAM	1	7	22.99	0-1	1
	707.5	23095	3	16-QAM	1	14	22.92	0-1	1
	707.5	23095	3	16-QAM	8	0	22.11	0-2	2
	707.5	23095	3	16-QAM	8	4	22.17	0-2	2
707.5	23095	3	16-QAM	8	7	22.12	0-2	2	
707.5	23095	3	16-QAM	15	0	22.22	0-2	2	
High	714.5	23165	3	QPSK	1	0	24.25	0	0
	714.5	23165	3	QPSK	1	7	24.36	0	0
	714.5	23165	3	QPSK	1	14	24.38	0	0
	714.5	23165	3	QPSK	8	0	23.35	0-1	1
	714.5	23165	3	QPSK	8	4	23.37	0-1	1
	714.5	23165	3	QPSK	8	7	23.38	0-1	1
	714.5	23165	3	QPSK	15	0	23.31	0-1	1
	714.5	23165	3	16-QAM	1	0	23.07	0-1	1
	714.5	23165	3	16-QAM	1	7	23.21	0-1	1
	714.5	23165	3	16-QAM	1	14	23.24	0-1	1
	714.5	23165	3	16-QAM	8	0	22.13	0-2	2
	714.5	23165	3	16-QAM	8	4	22.24	0-2	2
714.5	23165	3	16-QAM	8	7	22.22	0-2	2	
714.5	23165	3	16-QAM	15	0	22.28	0-2	2	

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 26 of 81	

**Table 9-4  
LTE Band 12 Conducted Powers – 1.4 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	699.7	23017	1.4	QPSK	1	0	24.20	0	0
	699.7	23017	1.4	QPSK	1	2	24.22	0	0
	699.7	23017	1.4	QPSK	1	5	24.18	0	0
	699.7	23017	1.4	QPSK	3	0	24.01	0	0
	699.7	23017	1.4	QPSK	3	2	24.08	0	0
	699.7	23017	1.4	QPSK	3	3	24.15	0	0
	699.7	23017	1.4	QPSK	6	0	22.97	0-1	1
	699.7	23017	1.4	16-QAM	1	0	22.90	0-1	1
	699.7	23017	1.4	16-QAM	1	2	22.91	0-1	1
	699.7	23017	1.4	16-QAM	1	5	22.90	0-1	1
	699.7	23017	1.4	16-QAM	3	0	22.93	0-1	1
	699.7	23017	1.4	16-QAM	3	2	22.97	0-1	1
699.7	23017	1.4	16-QAM	3	3	22.90	0-1	1	
699.7	23017	1.4	16-QAM	6	0	22.00	0-2	2	
Mid	707.5	23095	1.4	QPSK	1	0	24.27	0	0
	707.5	23095	1.4	QPSK	1	2	24.34	0	0
	707.5	23095	1.4	QPSK	1	5	24.34	0	0
	707.5	23095	1.4	QPSK	3	0	24.15	0	0
	707.5	23095	1.4	QPSK	3	2	24.22	0	0
	707.5	23095	1.4	QPSK	3	3	24.21	0	0
	707.5	23095	1.4	QPSK	6	0	23.24	0-1	1
	707.5	23095	1.4	16-QAM	1	0	22.93	0-1	1
	707.5	23095	1.4	16-QAM	1	2	22.92	0-1	1
	707.5	23095	1.4	16-QAM	1	5	23.00	0-1	1
	707.5	23095	1.4	16-QAM	3	0	22.99	0-1	1
	707.5	23095	1.4	16-QAM	3	2	23.07	0-1	1
707.5	23095	1.4	16-QAM	3	3	23.10	0-1	1	
707.5	23095	1.4	16-QAM	6	0	22.40	0-2	2	
High	715.3	23173	1.4	QPSK	1	0	24.27	0	0
	715.3	23173	1.4	QPSK	1	2	24.28	0	0
	715.3	23173	1.4	QPSK	1	5	24.40	0	0
	715.3	23173	1.4	QPSK	3	0	24.30	0	0
	715.3	23173	1.4	QPSK	3	2	24.36	0	0
	715.3	23173	1.4	QPSK	3	3	24.30	0	0
	715.3	23173	1.4	QPSK	6	0	23.22	0-1	1
	715.3	23173	1.4	16-QAM	1	0	22.92	0-1	1
	715.3	23173	1.4	16-QAM	1	2	23.00	0-1	1
	715.3	23173	1.4	16-QAM	1	5	23.01	0-1	1
	715.3	23173	1.4	16-QAM	3	0	22.90	0-1	1
	715.3	23173	1.4	16-QAM	3	2	22.95	0-1	1
715.3	23173	1.4	16-QAM	3	3	22.92	0-1	1	
715.3	23173	1.4	16-QAM	6	0	22.10	0-2	2	

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 27 of 81

### 9.3.2

### LTE Band 13



**Table 9-5  
LTE Band 13 Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	10	QPSK	1	0	<b>24.26</b>	0	0
	782.0	23230	10	QPSK	1	25	24.25	0	0
	782.0	23230	10	QPSK	1	49	24.16	0	0
	782.0	23230	10	QPSK	25	0	<b>23.08</b>	0-1	1
	782.0	23230	10	QPSK	25	12	22.95	0-1	1
	782.0	23230	10	QPSK	25	25	22.91	0-1	1
	782.0	23230	10	QPSK	50	0	22.92	0-1	1
	782.0	23230	10	16QAM	1	0	23.10	0-1	1
	782.0	23230	10	16QAM	1	25	22.99	0-1	1
	782.0	23230	10	16QAM	1	49	23.14	0-1	1
	782.0	23230	10	16QAM	25	0	22.10	0-2	2
	782.0	23230	10	16QAM	25	12	21.90	0-2	2
	782.0	23230	10	16QAM	25	25	21.90	0-2	2
782.0	23230	10	16QAM	50	0	21.95	0-2	2	

**Table 9-6  
LTE Band 13 Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	5	QPSK	1	0	24.26	0	0
	782.0	23230	5	QPSK	1	12	24.11	0	0
	782.0	23230	5	QPSK	1	24	24.29	0	0
	782.0	23230	5	QPSK	12	0	22.90	0-1	1
	782.0	23230	5	QPSK	12	6	22.91	0-1	1
	782.0	23230	5	QPSK	12	13	22.92	0-1	1
	782.0	23230	5	QPSK	25	0	22.92	0-1	1
	782.0	23230	5	16-QAM	1	0	22.91	0-1	1
	782.0	23230	5	16-QAM	1	12	22.90	0-1	1
	782.0	23230	5	16-QAM	1	24	23.08	0-1	1
	782.0	23230	5	16-QAM	12	0	21.94	0-2	2
	782.0	23230	5	16-QAM	12	6	21.92	0-2	2
	782.0	23230	5	16-QAM	12	13	21.93	0-2	2
782.0	23230	5	16-QAM	25	0	21.91	0-2	2	

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 28 of 81



### 9.3.3

### LTE Band 5 (Cell)

**Table 9-7**  
**LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth**



	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	24.07	0	0
	836.5	20525	10	QPSK	1	25	<b>24.10</b>	0	0
	836.5	20525	10	QPSK	1	49	24.02	0	0
	836.5	20525	10	QPSK	25	0	<b>23.23</b>	0-1	1
	836.5	20525	10	QPSK	25	12	23.14	0-1	1
	836.5	20525	10	QPSK	25	25	23.13	0-1	1
	836.5	20525	10	QPSK	50	0	23.12	0-1	1
	836.5	20525	10	16QAM	1	0	22.95	0-1	1
	836.5	20525	10	16QAM	1	25	22.91	0-1	1
	836.5	20525	10	16QAM	1	49	22.91	0-1	1
	836.5	20525	10	16QAM	25	0	22.14	0-2	2
	836.5	20525	10	16QAM	25	12	22.09	0-2	2
	836.5	20525	10	16QAM	25	25	22.08	0-2	2
	836.5	20525	10	16QAM	50	0	22.06	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 29 of 81



**Table 9-8  
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	24.12	0	0
	826.5	20425	5	QPSK	1	12	24.09	0	0
	826.5	20425	5	QPSK	1	24	24.07	0	0
	826.5	20425	5	QPSK	12	0	23.18	0-1	1
	826.5	20425	5	QPSK	12	6	23.10	0-1	1
	826.5	20425	5	QPSK	12	13	23.15	0-1	1
	826.5	20425	5	QPSK	25	0	23.14	0-1	1
	826.5	20425	5	16-QAM	1	0	22.93	0-1	1
	826.5	20425	5	16-QAM	1	12	22.90	0-1	1
	826.5	20425	5	16-QAM	1	24	22.91	0-1	1
	826.5	20425	5	16-QAM	12	0	22.04	0-2	2
	826.5	20425	5	16-QAM	12	6	22.08	0-2	2
826.5	20425	5	16-QAM	12	13	22.17	0-2	2	
826.5	20425	5	16-QAM	25	0	22.11	0-2	2	
Mid	836.5	20525	5	QPSK	1	0	24.10	0	0
	836.5	20525	5	QPSK	1	12	24.05	0	0
	836.5	20525	5	QPSK	1	24	24.05	0	0
	836.5	20525	5	QPSK	12	0	23.11	0-1	1
	836.5	20525	5	QPSK	12	6	23.07	0-1	1
	836.5	20525	5	QPSK	12	13	23.08	0-1	1
	836.5	20525	5	QPSK	25	0	23.08	0-1	1
	836.5	20525	5	16-QAM	1	0	22.92	0-1	1
	836.5	20525	5	16-QAM	1	12	22.97	0-1	1
	836.5	20525	5	16-QAM	1	24	22.92	0-1	1
	836.5	20525	5	16-QAM	12	0	22.21	0-2	2
	836.5	20525	5	16-QAM	12	6	22.17	0-2	2
836.5	20525	5	16-QAM	12	13	22.17	0-2	2	
836.5	20525	5	16-QAM	25	0	22.05	0-2	2	
High	846.5	20625	5	QPSK	1	0	24.24	0	0
	846.5	20625	5	QPSK	1	12	24.23	0	0
	846.5	20625	5	QPSK	1	24	24.26	0	0
	846.5	20625	5	QPSK	12	0	23.10	0-1	1
	846.5	20625	5	QPSK	12	6	23.13	0-1	1
	846.5	20625	5	QPSK	12	13	23.14	0-1	1
	846.5	20625	5	QPSK	25	0	23.11	0-1	1
	846.5	20625	5	16-QAM	1	0	23.08	0-1	1
	846.5	20625	5	16-QAM	1	12	23.01	0-1	1
	846.5	20625	5	16-QAM	1	24	23.02	0-1	1
	846.5	20625	5	16-QAM	12	0	22.35	0-2	2
	846.5	20625	5	16-QAM	12	6	22.05	0-2	2
846.5	20625	5	16-QAM	12	13	22.06	0-2	2	
846.5	20625	5	16-QAM	25	0	22.03	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 30 of 81



**Table 9-9  
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	24.10	0	0
	825.5	20415	3	QPSK	1	7	24.11	0	0
	825.5	20415	3	QPSK	1	14	24.15	0	0
	825.5	20415	3	QPSK	8	0	23.04	0-1	1
	825.5	20415	3	QPSK	8	4	23.05	0-1	1
	825.5	20415	3	QPSK	8	7	23.03	0-1	1
	825.5	20415	3	QPSK	15	0	23.05	0-1	1
	825.5	20415	3	16-QAM	1	0	22.91	0-1	1
	825.5	20415	3	16-QAM	1	7	23.01	0-1	1
	825.5	20415	3	16-QAM	1	14	22.93	0-1	1
	825.5	20415	3	16-QAM	8	0	21.93	0-2	2
	825.5	20415	3	16-QAM	8	4	21.90	0-2	2
825.5	20415	3	16-QAM	8	7	21.92	0-2	2	
825.5	20415	3	16-QAM	15	0	22.08	0-2	2	
Mid	836.5	20525	3	QPSK	1	0	24.16	0	0
	836.5	20525	3	QPSK	1	7	24.20	0	0
	836.5	20525	3	QPSK	1	14	24.12	0	0
	836.5	20525	3	QPSK	8	0	22.95	0-1	1
	836.5	20525	3	QPSK	8	4	23.08	0-1	1
	836.5	20525	3	QPSK	8	7	23.07	0-1	1
	836.5	20525	3	QPSK	15	0	23.04	0-1	1
	836.5	20525	3	16-QAM	1	0	22.90	0-1	1
	836.5	20525	3	16-QAM	1	7	23.02	0-1	1
	836.5	20525	3	16-QAM	1	14	22.91	0-1	1
	836.5	20525	3	16-QAM	8	0	21.96	0-2	2
	836.5	20525	3	16-QAM	8	4	22.05	0-2	2
836.5	20525	3	16-QAM	8	7	22.05	0-2	2	
836.5	20525	3	16-QAM	15	0	21.98	0-2	2	
High	847.5	20635	3	QPSK	1	0	24.21	0	0
	847.5	20635	3	QPSK	1	7	24.23	0	0
	847.5	20635	3	QPSK	1	14	24.27	0	0
	847.5	20635	3	QPSK	8	0	23.03	0-1	1
	847.5	20635	3	QPSK	8	4	23.03	0-1	1
	847.5	20635	3	QPSK	8	7	23.09	0-1	1
	847.5	20635	3	QPSK	15	0	23.09	0-1	1
	847.5	20635	3	16-QAM	1	0	22.91	0-1	1
	847.5	20635	3	16-QAM	1	7	23.02	0-1	1
	847.5	20635	3	16-QAM	1	14	22.94	0-1	1
	847.5	20635	3	16-QAM	8	0	22.04	0-2	2
	847.5	20635	3	16-QAM	8	4	22.07	0-2	2
847.5	20635	3	16-QAM	8	7	22.12	0-2	2	
847.5	20635	3	16-QAM	15	0	22.09	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 31 of 81

**Table 9-10**  
**LTE Band 5 (Cell) Conducted Powers – 1.4 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	824.7	20407	1.4	QPSK	1	0	24.18	0	0
	824.7	20407	1.4	QPSK	1	2	24.19	0	0
	824.7	20407	1.4	QPSK	1	5	24.20	0	0
	824.7	20407	1.4	QPSK	3	0	24.05	0	0
	824.7	20407	1.4	QPSK	3	2	24.08	0	0
	824.7	20407	1.4	QPSK	3	3	24.07	0	0
	824.7	20407	1.4	QPSK	6	0	22.96	0-1	1
	824.7	20407	1.4	16-QAM	1	0	22.92	0-1	1
	824.7	20407	1.4	16-QAM	1	2	22.95	0-1	1
	824.7	20407	1.4	16-QAM	1	5	22.93	0-1	1
	824.7	20407	1.4	16-QAM	3	0	22.90	0-1	1
	824.7	20407	1.4	16-QAM	3	2	22.95	0-1	1
824.7	20407	1.4	16-QAM	3	3	22.90	0-1	1	
824.7	20407	1.4	16-QAM	6	0	21.99	0-2	2	
Mid	836.5	20525	1.4	QPSK	1	0	23.97	0	0
	836.5	20525	1.4	QPSK	1	2	24.16	0	0
	836.5	20525	1.4	QPSK	1	5	24.10	0	0
	836.5	20525	1.4	QPSK	3	0	24.09	0	0
	836.5	20525	1.4	QPSK	3	2	24.17	0	0
	836.5	20525	1.4	QPSK	3	3	24.09	0	0
	836.5	20525	1.4	QPSK	6	0	23.06	0-1	1
	836.5	20525	1.4	16-QAM	1	0	22.90	0-1	1
	836.5	20525	1.4	16-QAM	1	2	22.99	0-1	1
	836.5	20525	1.4	16-QAM	1	5	22.96	0-1	1
	836.5	20525	1.4	16-QAM	3	0	22.90	0-1	1
	836.5	20525	1.4	16-QAM	3	2	22.91	0-1	1
836.5	20525	1.4	16-QAM	3	3	22.90	0-1	1	
836.5	20525	1.4	16-QAM	6	0	21.94	0-2	2	
High	848.3	20643	1.4	QPSK	1	0	24.07	0	0
	848.3	20643	1.4	QPSK	1	2	24.18	0	0
	848.3	20643	1.4	QPSK	1	5	24.05	0	0
	848.3	20643	1.4	QPSK	3	0	24.10	0	0
	848.3	20643	1.4	QPSK	3	2	24.10	0	0
	848.3	20643	1.4	QPSK	3	3	24.12	0	0
	848.3	20643	1.4	QPSK	6	0	23.03	0-1	1
	848.3	20643	1.4	16-QAM	1	0	22.95	0-1	1
	848.3	20643	1.4	16-QAM	1	2	22.99	0-1	1
	848.3	20643	1.4	16-QAM	1	5	22.97	0-1	1
	848.3	20643	1.4	16-QAM	3	0	22.90	0-1	1
	848.3	20643	1.4	16-QAM	3	2	22.93	0-1	1
848.3	20643	1.4	16-QAM	3	3	22.91	0-1	1	
848.3	20643	1.4	16-QAM	6	0	21.90	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 32 of 81	



### 9.3.4



### LTE Band 4 (AWS)

Table 9-11

LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth



	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	24.70	0	0
	1732.5	20175	20	QPSK	1	50	24.66	0	0
	1732.5	20175	20	QPSK	1	99	24.34	0	0
	1732.5	20175	20	QPSK	50	0	23.50	0-1	1
	1732.5	20175	20	QPSK	50	25	23.39	0-1	1
	1732.5	20175	20	QPSK	50	50	23.35	0-1	1
	1732.5	20175	20	QPSK	100	0	23.42	0-1	1
	1732.5	20175	20	16QAM	1	0	23.33	0-1	1
	1732.5	20175	20	16QAM	1	50	23.42	0-1	1
	1732.5	20175	20	16QAM	1	99	23.18	0-1	1
	1732.5	20175	20	16QAM	50	0	22.44	0-2	2
	1732.5	20175	20	16QAM	50	25	22.39	0-2	2
	1732.5	20175	20	16QAM	50	50	22.35	0-2	2
1732.5	20175	20	16QAM	100	0	22.36	0-2	2	

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 33 of 81



**Table 9-12**  
**LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	24.57	0	0
	1717.5	20025	15	QPSK	1	36	24.44	0	0
	1717.5	20025	15	QPSK	1	74	24.45	0	0
	1717.5	20025	15	QPSK	36	0	23.30	0-1	1
	1717.5	20025	15	QPSK	36	18	23.18	0-1	1
	1717.5	20025	15	QPSK	36	37	23.34	0-1	1
	1717.5	20025	15	QPSK	75	0	23.30	0-1	1
	1717.5	20025	15	16QAM	1	0	23.50	0-1	1
	1717.5	20025	15	16QAM	1	36	23.43	0-1	1
	1717.5	20025	15	16QAM	1	74	23.36	0-1	1
	1717.5	20025	15	16QAM	36	0	22.32	0-2	2
	1717.5	20025	15	16QAM	36	18	22.35	0-2	2
1717.5	20025	15	16QAM	36	37	22.40	0-2	2	
1717.5	20025	15	16QAM	75	0	22.34	0-2	2	
Mid	1732.5	20175	15	QPSK	1	0	24.56	0	0
	1732.5	20175	15	QPSK	1	36	24.49	0	0
	1732.5	20175	15	QPSK	1	74	24.54	0	0
	1732.5	20175	15	QPSK	36	0	23.31	0-1	1
	1732.5	20175	15	QPSK	36	18	23.22	0-1	1
	1732.5	20175	15	QPSK	36	37	23.26	0-1	1
	1732.5	20175	15	QPSK	75	0	23.24	0-1	1
	1732.5	20175	15	16QAM	1	0	23.45	0-1	1
	1732.5	20175	15	16QAM	1	36	23.40	0-1	1
	1732.5	20175	15	16QAM	1	74	23.41	0-1	1
	1732.5	20175	15	16QAM	36	0	22.37	0-2	2
	1732.5	20175	15	16QAM	36	18	22.26	0-2	2
1732.5	20175	15	16QAM	36	37	22.24	0-2	2	
1732.5	20175	15	16QAM	75	0	22.25	0-2	2	
High	1747.5	20325	15	QPSK	1	0	24.59	0	0
	1747.5	20325	15	QPSK	1	36	24.51	0	0
	1747.5	20325	15	QPSK	1	74	24.38	0	0
	1747.5	20325	15	QPSK	36	0	23.44	0-1	1
	1747.5	20325	15	QPSK	36	18	23.25	0-1	1
	1747.5	20325	15	QPSK	36	37	23.21	0-1	1
	1747.5	20325	15	QPSK	75	0	23.20	0-1	1
	1747.5	20325	15	16QAM	1	0	23.57	0-1	1
	1747.5	20325	15	16QAM	1	36	23.49	0-1	1
	1747.5	20325	15	16QAM	1	74	23.50	0-1	1
	1747.5	20325	15	16QAM	36	0	22.59	0-2	2
	1747.5	20325	15	16QAM	36	18	22.47	0-2	2
1747.5	20325	15	16QAM	36	37	22.38	0-2	2	
1747.5	20325	15	16QAM	75	0	22.44	0-2	2	

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 34 of 81



**Table 9-13**  
**LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	24.26	0	0
	1715	20000	10	QPSK	1	25	24.32	0	0
	1715	20000	10	QPSK	1	49	24.50	0	0
	1715	20000	10	QPSK	25	0	23.37	0-1	1
	1715	20000	10	QPSK	25	12	23.38	0-1	1
	1715	20000	10	QPSK	25	25	23.35	0-1	1
	1715	20000	10	QPSK	50	0	23.32	0-1	1
	1715	20000	10	16QAM	1	0	23.21	0-1	1
	1715	20000	10	16QAM	1	25	23.27	0-1	1
	1715	20000	10	16QAM	1	49	23.25	0-1	1
	1715	20000	10	16QAM	25	0	22.41	0-2	2
	1715	20000	10	16QAM	25	12	22.50	0-2	2
Mid	1715	20000	10	16QAM	25	25	22.34	0-2	2
	1715	20000	10	16QAM	50	0	22.36	0-2	2
	1732.5	20175	10	QPSK	1	0	24.60	0	0
	1732.5	20175	10	QPSK	1	25	24.36	0	0
	1732.5	20175	10	QPSK	1	49	24.38	0	0
	1732.5	20175	10	QPSK	25	0	23.26	0-1	1
	1732.5	20175	10	QPSK	25	12	23.24	0-1	1
	1732.5	20175	10	QPSK	25	25	23.39	0-1	1
	1732.5	20175	10	QPSK	50	0	23.25	0-1	1
	1732.5	20175	10	16QAM	1	0	23.44	0-1	1
	1732.5	20175	10	16QAM	1	25	23.47	0-1	1
	1732.5	20175	10	16QAM	1	49	23.33	0-1	1
High	1732.5	20175	10	16QAM	25	0	22.27	0-2	2
	1732.5	20175	10	16QAM	25	12	22.21	0-2	2
	1732.5	20175	10	16QAM	25	25	22.41	0-2	2
	1732.5	20175	10	16QAM	50	0	22.28	0-2	2
	1750	20350	10	QPSK	1	0	24.56	0	0
	1750	20350	10	QPSK	1	25	24.49	0	0
	1750	20350	10	QPSK	1	49	24.44	0	0
	1750	20350	10	QPSK	25	0	23.31	0-1	1
	1750	20350	10	QPSK	25	12	23.32	0-1	1
	1750	20350	10	QPSK	25	25	23.30	0-1	1
	1750	20350	10	QPSK	50	0	23.40	0-1	1
	1750	20350	10	16QAM	1	0	23.49	0-1	1
1750	20350	10	16QAM	1	25	23.50	0-1	1	
1750	20350	10	16QAM	1	49	23.38	0-1	1	
1750	20350	10	16QAM	25	0	22.47	0-2	2	
1750	20350	10	16QAM	25	12	22.43	0-2	2	
1750	20350	10	16QAM	25	25	22.37	0-2	2	
1750	20350	10	16QAM	50	0	22.60	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 35 of 81



**Table 9-14**  
**LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	24.30	0	0
	1712.5	19975	5	QPSK	1	12	24.39	0	0
	1712.5	19975	5	QPSK	1	24	24.52	0	0
	1712.5	19975	5	QPSK	12	0	23.22	0-1	1
	1712.5	19975	5	QPSK	12	6	23.33	0-1	1
	1712.5	19975	5	QPSK	12	13	23.31	0-1	1
	1712.5	19975	5	QPSK	25	0	23.21	0-1	1
	1712.5	19975	5	16-QAM	1	0	23.60	0-1	1
	1712.5	19975	5	16-QAM	1	12	23.45	0-1	1
	1712.5	19975	5	16-QAM	1	24	23.54	0-1	1
	1712.5	19975	5	16-QAM	12	0	22.41	0-2	2
	1712.5	19975	5	16-QAM	12	6	22.50	0-2	2
1712.5	19975	5	16-QAM	12	13	22.43	0-2	2	
1712.5	19975	5	16-QAM	25	0	22.40	0-2	2	
Mid	1732.5	20175	5	QPSK	1	0	24.30	0	0
	1732.5	20175	5	QPSK	1	12	24.38	0	0
	1732.5	20175	5	QPSK	1	24	24.57	0	0
	1732.5	20175	5	QPSK	12	0	23.26	0-1	1
	1732.5	20175	5	QPSK	12	6	23.31	0-1	1
	1732.5	20175	5	QPSK	12	13	23.36	0-1	1
	1732.5	20175	5	QPSK	25	0	23.20	0-1	1
	1732.5	20175	5	16-QAM	1	0	23.27	0-1	1
	1732.5	20175	5	16-QAM	1	12	23.24	0-1	1
	1732.5	20175	5	16-QAM	1	24	23.26	0-1	1
	1732.5	20175	5	16-QAM	12	0	22.23	0-2	2
	1732.5	20175	5	16-QAM	12	6	22.21	0-2	2
1732.5	20175	5	16-QAM	12	13	22.40	0-2	2	
1732.5	20175	5	16-QAM	25	0	22.26	0-2	2	
High	1752.5	20375	5	QPSK	1	0	24.37	0	0
	1752.5	20375	5	QPSK	1	12	24.52	0	0
	1752.5	20375	5	QPSK	1	24	24.55	0	0
	1752.5	20375	5	QPSK	12	0	23.31	0-1	1
	1752.5	20375	5	QPSK	12	6	23.30	0-1	1
	1752.5	20375	5	QPSK	12	13	23.52	0-1	1
	1752.5	20375	5	QPSK	25	0	23.23	0-1	1
	1752.5	20375	5	16-QAM	1	0	23.30	0-1	1
	1752.5	20375	5	16-QAM	1	12	23.24	0-1	1
	1752.5	20375	5	16-QAM	1	24	23.28	0-1	1
	1752.5	20375	5	16-QAM	12	0	22.53	0-2	2
	1752.5	20375	5	16-QAM	12	6	22.45	0-2	2
1752.5	20375	5	16-QAM	12	13	22.30	0-2	2	
1752.5	20375	5	16-QAM	25	0	22.26	0-2	2	

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 36 of 81	



**Table 9-15**  
**LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	24.34	0	0
	1711.5	19965	3	QPSK	1	7	24.41	0	0
	1711.5	19965	3	QPSK	1	14	24.52	0	0
	1711.5	19965	3	QPSK	8	0	23.49	0-1	1
	1711.5	19965	3	QPSK	8	4	23.45	0-1	1
	1711.5	19965	3	QPSK	8	7	23.42	0-1	1
	1711.5	19965	3	QPSK	15	0	23.36	0-1	1
	1711.5	19965	3	16-QAM	1	0	23.41	0-1	1
	1711.5	19965	3	16-QAM	1	7	23.32	0-1	1
	1711.5	19965	3	16-QAM	1	14	23.33	0-1	1
	1711.5	19965	3	16-QAM	8	0	22.38	0-2	2
	1711.5	19965	3	16-QAM	8	4	22.40	0-2	2
Mid	1711.5	19965	3	16-QAM	8	7	22.37	0-2	2
	1711.5	19965	3	16-QAM	15	0	22.29	0-2	2
	1732.5	20175	3	QPSK	1	0	24.45	0	0
	1732.5	20175	3	QPSK	1	7	24.48	0	0
	1732.5	20175	3	QPSK	1	14	24.34	0	0
	1732.5	20175	3	QPSK	8	0	23.51	0-1	1
	1732.5	20175	3	QPSK	8	4	23.47	0-1	1
	1732.5	20175	3	QPSK	8	7	23.46	0-1	1
	1732.5	20175	3	QPSK	15	0	23.40	0-1	1
	1732.5	20175	3	16-QAM	1	0	23.42	0-1	1
	1732.5	20175	3	16-QAM	1	7	23.31	0-1	1
	1732.5	20175	3	16-QAM	1	14	23.33	0-1	1
High	1732.5	20175	3	16-QAM	8	0	22.39	0-2	2
	1732.5	20175	3	16-QAM	8	4	22.28	0-2	2
	1732.5	20175	3	16-QAM	8	7	22.30	0-2	2
	1732.5	20175	3	16-QAM	15	0	22.26	0-2	2
	1753.5	20385	3	QPSK	1	0	24.45	0	0
	1753.5	20385	3	QPSK	1	7	24.38	0	0
	1753.5	20385	3	QPSK	1	14	24.29	0	0
	1753.5	20385	3	QPSK	8	0	23.51	0-1	1
	1753.5	20385	3	QPSK	8	4	23.44	0-1	1
	1753.5	20385	3	QPSK	8	7	23.37	0-1	1
	1753.5	20385	3	QPSK	15	0	23.48	0-1	1
	1753.5	20385	3	16-QAM	1	0	23.46	0-1	1
1753.5	20385	3	16-QAM	1	7	23.40	0-1	1	
1753.5	20385	3	16-QAM	1	14	23.35	0-1	1	
1753.5	20385	3	16-QAM	8	0	22.30	0-2	2	
1753.5	20385	3	16-QAM	8	4	22.28	0-2	2	
1753.5	20385	3	16-QAM	8	7	22.34	0-2	2	
1753.5	20385	3	16-QAM	15	0	22.29	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 37 of 81	

**Table 9-16  
LTE Band 4 (AWS) Conducted Powers – 1.4 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	24.31	0	0
	1710.7	19957	1.4	QPSK	1	2	24.55	0	0
	1710.7	19957	1.4	QPSK	1	5	24.52	0	0
	1710.7	19957	1.4	QPSK	3	0	24.39	0	0
	1710.7	19957	1.4	QPSK	3	2	24.42	0	0
	1710.7	19957	1.4	QPSK	3	3	24.36	0	0
	1710.7	19957	1.4	QPSK	6	0	23.26	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	23.37	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	23.32	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	23.34	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	23.29	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	23.30	0-1	1
1710.7	19957	1.4	16-QAM	3	3	23.24	0-1	1	
1710.7	19957	1.4	16-QAM	6	0	22.28	0-2	2	
Mid	1732.5	20175	1.4	QPSK	1	0	24.59	0	0
	1732.5	20175	1.4	QPSK	1	2	24.43	0	0
	1732.5	20175	1.4	QPSK	1	5	24.47	0	0
	1732.5	20175	1.4	QPSK	3	0	24.49	0	0
	1732.5	20175	1.4	QPSK	3	2	24.44	0	0
	1732.5	20175	1.4	QPSK	3	3	24.52	0	0
	1732.5	20175	1.4	QPSK	6	0	23.36	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	23.38	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	23.30	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	23.34	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	23.45	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	23.40	0-1	1
1732.5	20175	1.4	16-QAM	3	3	23.39	0-1	1	
1732.5	20175	1.4	16-QAM	6	0	22.32	0-2	2	
High	1754.3	20393	1.4	QPSK	1	0	24.55	0	0
	1754.3	20393	1.4	QPSK	1	2	24.50	0	0
	1754.3	20393	1.4	QPSK	1	5	24.47	0	0
	1754.3	20393	1.4	QPSK	3	0	24.36	0	0
	1754.3	20393	1.4	QPSK	3	2	24.32	0	0
	1754.3	20393	1.4	QPSK	3	3	24.42	0	0
	1754.3	20393	1.4	QPSK	6	0	23.30	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	23.36	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	23.33	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	23.49	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	23.48	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	23.37	0-1	1
1754.3	20393	1.4	16-QAM	3	3	23.29	0-1	1	
1754.3	20393	1.4	16-QAM	6	0	22.34	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 38 of 81



### 9.3.5

### LTE Band 2 (PCS)

Table 9-17



LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	<b>24.20</b>	0	0
	1860	18700	20	QPSK	1	50	23.99	0	0
	1860	18700	20	QPSK	1	99	24.02	0	0
	1860	18700	20	QPSK	50	0	<b>22.86</b>	0-1	1
	1860	18700	20	QPSK	50	25	22.71	0-1	1
	1860	18700	20	QPSK	50	50	22.75	0-1	1
	1860	18700	20	QPSK	100	0	22.74	0-1	1
	1860	18700	20	16QAM	1	0	23.00	0-1	1
	1860	18700	20	16QAM	1	50	22.82	0-1	1
	1860	18700	20	16QAM	1	99	22.72	0-1	1
	1860	18700	20	16QAM	50	0	21.73	0-2	2
	1860	18700	20	16QAM	50	25	21.75	0-2	2
	1860	18700	20	16QAM	50	50	21.76	0-2	2
1860	18700	20	16QAM	100	0	21.76	0-2	2	
Mid	1880.0	18900	20	QPSK	1	0	23.71	0	0
	1880.0	18900	20	QPSK	1	50	23.72	0	0
	1880.0	18900	20	QPSK	1	99	23.73	0	0
	1880.0	18900	20	QPSK	50	0	22.84	0-1	1
	1880.0	18900	20	QPSK	50	25	22.73	0-1	1
	1880.0	18900	20	QPSK	50	50	22.72	0-1	1
	1880.0	18900	20	QPSK	100	0	22.74	0-1	1
	1880.0	18900	20	16QAM	1	0	22.96	0-1	1
	1880.0	18900	20	16QAM	1	50	22.86	0-1	1
	1880.0	18900	20	16QAM	1	99	22.83	0-1	1
	1880.0	18900	20	16QAM	50	0	21.74	0-2	2
	1880.0	18900	20	16QAM	50	25	21.70	0-2	2
	1880.0	18900	20	16QAM	50	50	21.74	0-2	2
1880.0	18900	20	16QAM	100	0	21.71	0-2	2	
High	1900	19100	20	QPSK	1	0	23.89	0	0
	1900	19100	20	QPSK	1	50	23.97	0	0
	1900	19100	20	QPSK	1	99	23.88	0	0
	1900	19100	20	QPSK	50	0	22.83	0-1	1
	1900	19100	20	QPSK	50	25	22.85	0-1	1
	1900	19100	20	QPSK	50	50	22.81	0-1	1
	1900	19100	20	QPSK	100	0	22.84	0-1	1
	1900	19100	20	16QAM	1	0	23.20	0-1	1
	1900	19100	20	16QAM	1	50	23.18	0-1	1
	1900	19100	20	16QAM	1	99	23.13	0-1	1
	1900	19100	20	16QAM	50	0	22.09	0-2	2
	1900	19100	20	16QAM	50	25	21.80	0-2	2
	1900	19100	20	16QAM	50	50	21.78	0-2	2
1900	19100	20	16QAM	100	0	21.75	0-2	2	

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 39 of 81	

**Table 9-18**  
**LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth**



	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	24.15	0	0
	1857.5	18675	15	QPSK	1	36	24.00	0	0
	1857.5	18675	15	QPSK	1	74	23.95	0	0
	1857.5	18675	15	QPSK	36	0	22.83	0-1	1
	1857.5	18675	15	QPSK	36	18	22.80	0-1	1
	1857.5	18675	15	QPSK	36	37	22.70	0-1	1
	1857.5	18675	15	QPSK	75	0	22.73	0-1	1
	1857.5	18675	15	16QAM	1	0	23.20	0-1	1
	1857.5	18675	15	16QAM	1	36	23.10	0-1	1
	1857.5	18675	15	16QAM	1	74	23.18	0-1	1
	1857.5	18675	15	16QAM	36	0	22.00	0-2	2
	1857.5	18675	15	16QAM	36	18	21.80	0-2	2
1857.5	18675	15	16QAM	36	37	21.71	0-2	2	
1857.5	18675	15	16QAM	75	0	21.81	0-2	2	
Mid	1880.0	18900	15	QPSK	1	0	24.17	0	0
	1880.0	18900	15	QPSK	1	36	23.84	0	0
	1880.0	18900	15	QPSK	1	74	23.95	0	0
	1880.0	18900	15	QPSK	36	0	23.12	0-1	1
	1880.0	18900	15	QPSK	36	18	22.72	0-1	1
	1880.0	18900	15	QPSK	36	37	22.79	0-1	1
	1880.0	18900	15	QPSK	75	0	22.71	0-1	1
	1880.0	18900	15	16QAM	1	0	23.04	0-1	1
	1880.0	18900	15	16QAM	1	36	22.79	0-1	1
	1880.0	18900	15	16QAM	1	74	22.72	0-1	1
	1880.0	18900	15	16QAM	36	0	21.73	0-2	2
	1880.0	18900	15	16QAM	36	18	21.71	0-2	2
1880.0	18900	15	16QAM	36	37	21.72	0-2	2	
1880.0	18900	15	16QAM	75	0	21.70	0-2	2	
High	1902.5	19125	15	QPSK	1	0	23.99	0	0
	1902.5	19125	15	QPSK	1	36	23.96	0	0
	1902.5	19125	15	QPSK	1	74	23.95	0	0
	1902.5	19125	15	QPSK	36	0	22.76	0-1	1
	1902.5	19125	15	QPSK	36	18	22.70	0-1	1
	1902.5	19125	15	QPSK	36	37	22.70	0-1	1
	1902.5	19125	15	QPSK	75	0	22.74	0-1	1
	1902.5	19125	15	16QAM	1	0	22.75	0-1	1
	1902.5	19125	15	16QAM	1	36	22.80	0-1	1
	1902.5	19125	15	16QAM	1	74	22.71	0-1	1
	1902.5	19125	15	16QAM	36	0	21.80	0-2	2
	1902.5	19125	15	16QAM	36	18	21.72	0-2	2
1902.5	19125	15	16QAM	36	37	21.70	0-2	2	
1902.5	19125	15	16QAM	75	0	21.76	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 40 of 81





**Table 9-19  
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	23.84	0	0
	1855	18650	10	QPSK	1	25	23.88	0	0
	1855	18650	10	QPSK	1	49	23.87	0	0
	1855	18650	10	QPSK	25	0	23.00	0-1	1
	1855	18650	10	QPSK	25	12	22.74	0-1	1
	1855	18650	10	QPSK	25	25	22.74	0-1	1
	1855	18650	10	QPSK	50	0	22.76	0-1	1
	1855	18650	10	16QAM	1	0	23.00	0-1	1
	1855	18650	10	16QAM	1	25	23.10	0-1	1
	1855	18650	10	16QAM	1	49	23.03	0-1	1
	1855	18650	10	16QAM	25	0	22.16	0-2	2
	1855	18650	10	16QAM	25	12	21.76	0-2	2
1855	18650	10	16QAM	25	25	21.73	0-2	2	
1855	18650	10	16QAM	50	0	21.78	0-2	2	
Mid	1880.0	18900	10	QPSK	1	0	23.94	0	0
	1880.0	18900	10	QPSK	1	25	23.88	0	0
	1880.0	18900	10	QPSK	1	49	24.03	0	0
	1880.0	18900	10	QPSK	25	0	23.00	0-1	1
	1880.0	18900	10	QPSK	25	12	22.75	0-1	1
	1880.0	18900	10	QPSK	25	25	22.70	0-1	1
	1880.0	18900	10	QPSK	50	0	22.71	0-1	1
	1880.0	18900	10	16QAM	1	0	22.80	0-1	1
	1880.0	18900	10	16QAM	1	25	22.72	0-1	1
	1880.0	18900	10	16QAM	1	49	22.74	0-1	1
	1880.0	18900	10	16QAM	25	0	21.74	0-2	2
	1880.0	18900	10	16QAM	25	12	21.75	0-2	2
1880.0	18900	10	16QAM	25	25	21.71	0-2	2	
1880.0	18900	10	16QAM	50	0	21.73	0-2	2	
High	1905	19150	10	QPSK	1	0	23.76	0	0
	1905	19150	10	QPSK	1	25	23.74	0	0
	1905	19150	10	QPSK	1	49	24.00	0	0
	1905	19150	10	QPSK	25	0	22.71	0-1	1
	1905	19150	10	QPSK	25	12	22.70	0-1	1
	1905	19150	10	QPSK	25	25	22.72	0-1	1
	1905	19150	10	QPSK	50	0	22.72	0-1	1
	1905	19150	10	16QAM	1	0	22.70	0-1	1
	1905	19150	10	16QAM	1	25	22.71	0-1	1
	1905	19150	10	16QAM	1	49	22.73	0-1	1
	1905	19150	10	16QAM	25	0	21.70	0-2	2
	1905	19150	10	16QAM	25	12	21.70	0-2	2
1905	19150	10	16QAM	25	25	21.74	0-2	2	
1905	19150	10	16QAM	50	0	21.73	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 41 of 81



**Table 9-20  
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	24.06	0	0
	1852.5	18625	5	QPSK	1	12	24.03	0	0
	1852.5	18625	5	QPSK	1	24	24.00	0	0
	1852.5	18625	5	QPSK	12	0	22.79	0-1	1
	1852.5	18625	5	QPSK	12	6	22.76	0-1	1
	1852.5	18625	5	QPSK	12	13	22.79	0-1	1
	1852.5	18625	5	QPSK	25	0	22.77	0-1	1
	1852.5	18625	5	16-QAM	1	0	23.20	0-1	1
	1852.5	18625	5	16-QAM	1	12	23.00	0-1	1
	1852.5	18625	5	16-QAM	1	24	23.10	0-1	1
	1852.5	18625	5	16-QAM	12	0	21.73	0-2	2
	1852.5	18625	5	16-QAM	12	6	21.70	0-2	2
	1852.5	18625	5	16-QAM	12	13	21.71	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.74	0-2	2
Mid	1880.0	18900	5	QPSK	1	0	23.72	0	0
	1880.0	18900	5	QPSK	1	12	23.73	0	0
	1880.0	18900	5	QPSK	1	24	23.73	0	0
	1880.0	18900	5	QPSK	12	0	22.71	0-1	1
	1880.0	18900	5	QPSK	12	6	22.77	0-1	1
	1880.0	18900	5	QPSK	12	13	22.78	0-1	1
	1880.0	18900	5	QPSK	25	0	22.73	0-1	1
	1880.0	18900	5	16-QAM	1	0	22.85	0-1	1
	1880.0	18900	5	16-QAM	1	12	22.75	0-1	1
	1880.0	18900	5	16-QAM	1	24	22.73	0-1	1
	1880.0	18900	5	16-QAM	12	0	21.75	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.72	0-2	2
	1880.0	18900	5	16-QAM	12	13	21.75	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.70	0-2	2
High	1907.5	19175	5	QPSK	1	0	23.84	0	0
	1907.5	19175	5	QPSK	1	12	23.70	0	0
	1907.5	19175	5	QPSK	1	24	24.06	0	0
	1907.5	19175	5	QPSK	12	0	22.71	0-1	1
	1907.5	19175	5	QPSK	12	6	22.73	0-1	1
	1907.5	19175	5	QPSK	12	13	22.72	0-1	1
	1907.5	19175	5	QPSK	25	0	22.70	0-1	1
	1907.5	19175	5	16-QAM	1	0	22.70	0-1	1
	1907.5	19175	5	16-QAM	1	12	22.72	0-1	1
	1907.5	19175	5	16-QAM	1	24	22.78	0-1	1
	1907.5	19175	5	16-QAM	12	0	21.71	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.75	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.74	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.73	0-2	2

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 42 of 81



**Table 9-21  
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	23.92	0	0
	1851.5	18615	3	QPSK	1	7	23.86	0	0
	1851.5	18615	3	QPSK	1	14	23.88	0	0
	1851.5	18615	3	QPSK	8	0	22.77	0-1	1
	1851.5	18615	3	QPSK	8	4	22.72	0-1	1
	1851.5	18615	3	QPSK	8	7	22.71	0-1	1
	1851.5	18615	3	QPSK	15	0	22.73	0-1	1
	1851.5	18615	3	16-QAM	1	0	22.94	0-1	1
	1851.5	18615	3	16-QAM	1	7	23.06	0-1	1
	1851.5	18615	3	16-QAM	1	14	23.05	0-1	1
	1851.5	18615	3	16-QAM	8	0	21.73	0-2	2
	1851.5	18615	3	16-QAM	8	4	21.71	0-2	2
1851.5	18615	3	16-QAM	8	7	21.73	0-2	2	
1851.5	18615	3	16-QAM	15	0	21.70	0-2	2	
Mid	1880.0	18900	3	QPSK	1	0	23.93	0	0
	1880.0	18900	3	QPSK	1	7	23.84	0	0
	1880.0	18900	3	QPSK	1	14	24.00	0	0
	1880.0	18900	3	QPSK	8	0	22.75	0-1	1
	1880.0	18900	3	QPSK	8	4	22.71	0-1	1
	1880.0	18900	3	QPSK	8	7	22.78	0-1	1
	1880.0	18900	3	QPSK	15	0	22.71	0-1	1
	1880.0	18900	3	16-QAM	1	0	22.72	0-1	1
	1880.0	18900	3	16-QAM	1	7	22.76	0-1	1
	1880.0	18900	3	16-QAM	1	14	22.74	0-1	1
	1880.0	18900	3	16-QAM	8	0	21.72	0-2	2
	1880.0	18900	3	16-QAM	8	4	21.70	0-2	2
1880.0	18900	3	16-QAM	8	7	21.70	0-2	2	
1880.0	18900	3	16-QAM	15	0	21.71	0-2	2	
High	1908.5	19185	3	QPSK	1	0	23.95	0	0
	1908.5	19185	3	QPSK	1	7	23.75	0	0
	1908.5	19185	3	QPSK	1	14	23.85	0	0
	1908.5	19185	3	QPSK	8	0	22.80	0-1	1
	1908.5	19185	3	QPSK	8	4	22.72	0-1	1
	1908.5	19185	3	QPSK	8	7	22.75	0-1	1
	1908.5	19185	3	QPSK	15	0	22.72	0-1	1
	1908.5	19185	3	16-QAM	1	0	22.70	0-1	1
	1908.5	19185	3	16-QAM	1	7	22.72	0-1	1
	1908.5	19185	3	16-QAM	1	14	22.73	0-1	1
	1908.5	19185	3	16-QAM	8	0	21.75	0-2	2
	1908.5	19185	3	16-QAM	8	4	21.78	0-2	2
1908.5	19185	3	16-QAM	8	7	21.71	0-2	2	
1908.5	19185	3	16-QAM	15	0	21.70	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 43 of 81

**Table 9-22  
LTE Band 2 (PCS) Conducted Powers – 1.4 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	24.00	0	0
	1850.7	18607	1.4	QPSK	1	2	23.89	0	0
	1850.7	18607	1.4	QPSK	1	5	23.85	0	0
	1850.7	18607	1.4	QPSK	3	0	23.77	0	0
	1850.7	18607	1.4	QPSK	3	2	23.80	0	0
	1850.7	18607	1.4	QPSK	3	3	23.78	0	0
	1850.7	18607	1.4	QPSK	6	0	22.70	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	22.74	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	22.81	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	22.78	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	22.77	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	22.82	0-1	1
	1850.7	18607	1.4	16-QAM	3	3	22.77	0-1	1
1850.7	18607	1.4	16-QAM	6	0	21.73	0-2	2	
Mid	1880.0	18900	1.4	QPSK	1	0	23.70	0	0
	1880.0	18900	1.4	QPSK	1	2	23.84	0	0
	1880.0	18900	1.4	QPSK	1	5	23.70	0	0
	1880.0	18900	1.4	QPSK	3	0	23.72	0	0
	1880.0	18900	1.4	QPSK	3	2	23.77	0	0
	1880.0	18900	1.4	QPSK	3	3	23.75	0	0
	1880.0	18900	1.4	QPSK	6	0	22.73	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	22.71	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	22.84	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	22.80	0-1	1
	1880.0	18900	1.4	16-QAM	3	0	22.84	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	22.86	0-1	1
	1880.0	18900	1.4	16-QAM	3	3	22.77	0-1	1
1880.0	18900	1.4	16-QAM	6	0	21.70	0-2	2	
High	1909.3	19193	1.4	QPSK	1	0	23.74	0	0
	1909.3	19193	1.4	QPSK	1	2	23.70	0	0
	1909.3	19193	1.4	QPSK	1	5	23.71	0	0
	1909.3	19193	1.4	QPSK	3	0	23.70	0	0
	1909.3	19193	1.4	QPSK	3	2	23.84	0	0
	1909.3	19193	1.4	QPSK	3	3	23.72	0	0
	1909.3	19193	1.4	QPSK	6	0	22.73	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	22.73	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	22.77	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	22.74	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	22.71	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	22.78	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	22.72	0-1	1
1909.3	19193	1.4	16-QAM	6	0	21.71	0-2	2	



FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 44 of 81

### 9.3.6

### LTE Band 7



**Table 9-23**  
**LTE Band 7 Conducted Powers - 20 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2510	20850	20	QPSK	1	0	23.27	0	0
	2510	20850	20	QPSK	1	50	23.25	0	0
	2510	20850	20	QPSK	1	99	23.23	0	0
	2510	20850	20	QPSK	50	0	<b>22.69</b>	0-1	1
	2510	20850	20	QPSK	50	25	22.36	0-1	1
	2510	20850	20	QPSK	50	50	22.37	0-1	1
	2510	20850	20	QPSK	100	0	22.38	0-1	1
	2510	20850	20	16QAM	1	0	22.27	0-1	1
	2510	20850	20	16QAM	1	50	22.25	0-1	1
	2510	20850	20	16QAM	1	99	22.23	0-1	1
	2510	20850	20	16QAM	50	0	21.42	0-2	2
	2510	20850	20	16QAM	50	25	21.28	0-2	2
2510	20850	20	16QAM	50	50	21.33	0-2	2	
2510	20850	20	16QAM	100	0	21.31	0-2	2	
Mid	2535.0	21100	20	QPSK	1	0	<b>23.52</b>	0	0
	2535.0	21100	20	QPSK	1	50	23.49	0	0
	2535.0	21100	20	QPSK	1	99	23.37	0	0
	2535.0	21100	20	QPSK	50	0	22.47	0-1	1
	2535.0	21100	20	QPSK	50	25	22.24	0-1	1
	2535.0	21100	20	QPSK	50	50	22.28	0-1	1
	2535.0	21100	20	QPSK	100	0	22.27	0-1	1
	2535.0	21100	20	16QAM	1	0	22.61	0-1	1
	2535.0	21100	20	16QAM	1	50	22.45	0-1	1
	2535.0	21100	20	16QAM	1	99	22.27	0-1	1
	2535.0	21100	20	16QAM	50	0	21.58	0-2	2
	2535.0	21100	20	16QAM	50	25	21.29	0-2	2
2535.0	21100	20	16QAM	50	50	21.26	0-2	2	
2535.0	21100	20	16QAM	100	0	21.28	0-2	2	
High	2560	21350	20	QPSK	1	0	23.29	0	0
	2560	21350	20	QPSK	1	50	23.46	0	0
	2560	21350	20	QPSK	1	99	23.45	0	0
	2560	21350	20	QPSK	50	0	22.41	0-1	1
	2560	21350	20	QPSK	50	25	22.24	0-1	1
	2560	21350	20	QPSK	50	50	22.27	0-1	1
	2560	21350	20	QPSK	100	0	22.24	0-1	1
	2560	21350	20	16QAM	1	0	22.25	0-1	1
	2560	21350	20	16QAM	1	50	22.28	0-1	1
	2560	21350	20	16QAM	1	99	22.22	0-1	1
	2560	21350	20	16QAM	50	0	21.69	0-2	2
	2560	21350	20	16QAM	50	25	21.22	0-2	2
2560	21350	20	16QAM	50	50	21.25	0-2	2	
2560	21350	20	16QAM	100	0	21.25	0-2	2	

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 45 of 81



**Table 9-24**  
**LTE Band 7 Conducted Powers - 15 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2507.5	20825	15	QPSK	1	0	23.24	0	0
	2507.5	20825	15	QPSK	1	36	23.70	0	0
	2507.5	20825	15	QPSK	1	74	23.66	0	0
	2507.5	20825	15	QPSK	36	0	22.61	0-1	1
	2507.5	20825	15	QPSK	36	18	22.30	0-1	1
	2507.5	20825	15	QPSK	36	37	22.35	0-1	1
	2507.5	20825	15	QPSK	75	0	22.34	0-1	1
	2507.5	20825	15	16QAM	1	0	22.33	0-1	1
	2507.5	20825	15	16QAM	1	36	22.28	0-1	1
	2507.5	20825	15	16QAM	1	74	22.30	0-1	1
	2507.5	20825	15	16QAM	36	0	21.61	0-2	2
	2507.5	20825	15	16QAM	36	18	21.35	0-2	2
2507.5	20825	15	16QAM	36	37	21.41	0-2	2	
2507.5	20825	15	16QAM	75	0	21.43	0-2	2	
Mid	2535.0	21100	15	QPSK	1	0	23.23	0	0
	2535.0	21100	15	QPSK	1	36	23.35	0	0
	2535.0	21100	15	QPSK	1	74	23.42	0	0
	2535.0	21100	15	QPSK	36	0	22.34	0-1	1
	2535.0	21100	15	QPSK	36	18	22.25	0-1	1
	2535.0	21100	15	QPSK	36	37	22.27	0-1	1
	2535.0	21100	15	QPSK	75	0	22.26	0-1	1
	2535.0	21100	15	16QAM	1	0	22.22	0-1	1
	2535.0	21100	15	16QAM	1	36	22.21	0-1	1
	2535.0	21100	15	16QAM	1	74	22.23	0-1	1
	2535.0	21100	15	16QAM	36	0	21.23	0-2	2
	2535.0	21100	15	16QAM	36	18	21.25	0-2	2
2535.0	21100	15	16QAM	36	37	21.22	0-2	2	
2535.0	21100	15	16QAM	75	0	21.21	0-2	2	
High	2562.5	21375	15	QPSK	1	0	23.21	0	0
	2562.5	21375	15	QPSK	1	36	23.41	0	0
	2562.5	21375	15	QPSK	1	74	23.42	0	0
	2562.5	21375	15	QPSK	36	0	22.28	0-1	1
	2562.5	21375	15	QPSK	36	18	22.20	0-1	1
	2562.5	21375	15	QPSK	36	37	22.25	0-1	1
	2562.5	21375	15	QPSK	75	0	22.28	0-1	1
	2562.5	21375	15	16QAM	1	0	22.25	0-1	1
	2562.5	21375	15	16QAM	1	36	22.25	0-1	1
	2562.5	21375	15	16QAM	1	74	22.29	0-1	1
	2562.5	21375	15	16QAM	36	0	21.43	0-2	2
	2562.5	21375	15	16QAM	36	18	21.26	0-2	2
2562.5	21375	15	16QAM	36	37	21.29	0-2	2	
2562.5	21375	15	16QAM	75	0	21.29	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 46 of 81



**Table 9-25  
LTE Band 7 Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2505	20800	10	QPSK	1	0	23.44	0	0
	2505	20800	10	QPSK	1	25	23.47	0	0
	2505	20800	10	QPSK	1	49	23.44	0	0
	2505	20800	10	QPSK	25	0	22.41	0-1	1
	2505	20800	10	QPSK	25	12	22.35	0-1	1
	2505	20800	10	QPSK	25	25	22.39	0-1	1
	2505	20800	10	QPSK	50	0	22.36	0-1	1
	2505	20800	10	16QAM	1	0	22.46	0-1	1
	2505	20800	10	16QAM	1	25	22.41	0-1	1
	2505	20800	10	16QAM	1	49	22.41	0-1	1
	2505	20800	10	16QAM	25	0	21.44	0-2	2
	2505	20800	10	16QAM	25	12	21.38	0-2	2
	2505	20800	10	16QAM	25	25	21.41	0-2	2
2505	20800	10	16QAM	50	0	21.35	0-2	2	
Mid	2535.0	21100	10	QPSK	1	0	23.26	0	0
	2535.0	21100	10	QPSK	1	25	23.33	0	0
	2535.0	21100	10	QPSK	1	49	23.35	0	0
	2535.0	21100	10	QPSK	25	0	22.32	0-1	1
	2535.0	21100	10	QPSK	25	12	22.25	0-1	1
	2535.0	21100	10	QPSK	25	25	22.24	0-1	1
	2535.0	21100	10	QPSK	50	0	22.27	0-1	1
	2535.0	21100	10	16QAM	1	0	22.29	0-1	1
	2535.0	21100	10	16QAM	1	25	22.25	0-1	1
	2535.0	21100	10	16QAM	1	49	22.22	0-1	1
	2535.0	21100	10	16QAM	25	0	21.25	0-2	2
	2535.0	21100	10	16QAM	25	12	21.24	0-2	2
	2535.0	21100	10	16QAM	25	25	21.26	0-2	2
2535.0	21100	10	16QAM	50	0	21.29	0-2	2	
High	2565	21400	10	QPSK	1	0	23.26	0	0
	2565	21400	10	QPSK	1	25	23.33	0	0
	2565	21400	10	QPSK	1	49	23.30	0	0
	2565	21400	10	QPSK	25	0	22.37	0-1	1
	2565	21400	10	QPSK	25	12	22.25	0-1	1
	2565	21400	10	QPSK	25	25	22.28	0-1	1
	2565	21400	10	QPSK	50	0	22.28	0-1	1
	2565	21400	10	16QAM	1	0	22.24	0-1	1
	2565	21400	10	16QAM	1	25	22.24	0-1	1
	2565	21400	10	16QAM	1	49	22.22	0-1	1
	2565	21400	10	16QAM	25	0	21.25	0-2	2
	2565	21400	10	16QAM	25	12	21.24	0-2	2
	2565	21400	10	16QAM	25	25	21.27	0-2	2
2565	21400	10	16QAM	50	0	21.28	0-2	2	

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 47 of 81

**Table 9-26  
LTE Band 7 Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2502.5	20775	5	QPSK	1	0	23.43	0	0
	2502.5	20775	5	QPSK	1	12	23.37	0	0
	2502.5	20775	5	QPSK	1	24	23.48	0	0
	2502.5	20775	5	QPSK	12	0	22.33	0-1	1
	2502.5	20775	5	QPSK	12	6	22.28	0-1	1
	2502.5	20775	5	QPSK	12	13	22.26	0-1	1
	2502.5	20775	5	QPSK	25	0	22.27	0-1	1
	2502.5	20775	5	16-QAM	1	0	22.39	0-1	1
	2502.5	20775	5	16-QAM	1	12	22.32	0-1	1
	2502.5	20775	5	16-QAM	1	24	22.48	0-1	1
	2502.5	20775	5	16-QAM	12	0	21.41	0-2	2
	2502.5	20775	5	16-QAM	12	6	21.31	0-2	2
2502.5	20775	5	16-QAM	12	13	21.32	0-2	2	
2502.5	20775	5	16-QAM	25	0	21.32	0-2	2	
Mid	2535.0	21100	5	QPSK	1	0	23.36	0	0
	2535.0	21100	5	QPSK	1	12	23.31	0	0
	2535.0	21100	5	QPSK	1	24	23.33	0	0
	2535.0	21100	5	QPSK	12	0	22.45	0-1	1
	2535.0	21100	5	QPSK	12	6	22.26	0-1	1
	2535.0	21100	5	QPSK	12	13	22.22	0-1	1
	2535.0	21100	5	QPSK	25	0	22.21	0-1	1
	2535.0	21100	5	16-QAM	1	0	22.21	0-1	1
	2535.0	21100	5	16-QAM	1	12	22.20	0-1	1
	2535.0	21100	5	16-QAM	1	24	22.26	0-1	1
	2535.0	21100	5	16-QAM	12	0	21.23	0-2	2
	2535.0	21100	5	16-QAM	12	6	21.25	0-2	2
	2535.0	21100	5	16-QAM	12	13	21.24	0-2	2
	2535.0	21100	5	16-QAM	25	0	21.21	0-2	2
High	2567.5	21425	5	QPSK	1	0	23.41	0	0
	2567.5	21425	5	QPSK	1	12	23.43	0	0
	2567.5	21425	5	QPSK	1	24	23.39	0	0
	2567.5	21425	5	QPSK	12	0	22.39	0-1	1
	2567.5	21425	5	QPSK	12	6	22.24	0-1	1
	2567.5	21425	5	QPSK	12	13	22.22	0-1	1
	2567.5	21425	5	QPSK	25	0	22.20	0-1	1
	2567.5	21425	5	16-QAM	1	0	22.46	0-1	1
	2567.5	21425	5	16-QAM	1	12	22.38	0-1	1
	2567.5	21425	5	16-QAM	1	24	22.36	0-1	1
	2567.5	21425	5	16-QAM	12	0	21.40	0-2	2
	2567.5	21425	5	16-QAM	12	6	21.20	0-2	2
	2567.5	21425	5	16-QAM	12	13	21.20	0-2	2
	2567.5	21425	5	16-QAM	25	0	21.24	0-2	2

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 48 of 81



## 9.3.7 LTE Carrier Aggregation Conducted Powers

Table 9-27

### LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 10 MHz BW + Band 17 (SCC) 10 MHz BW

Band 4 (PCC) 10 MHz BW + Band 17 (SCC) 10 MHz BW					
1732.5 MHz / ch. 20175 + 740 MHz / ch. 5790	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	0	24.31

Table 9-28

### LTE Carrier Aggregation Conducted Powers – Band 17 (PCC) 10 MHz BW + Band 4 (SCC) 10 MHz BW

Band 17 (PCC) 10 MHz BW + Band 4 (SCC) 10 MHz BW					
710.0 MHz / ch. 23790 + 2132.5 MHz / ch. 2175	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	49	24.24

Table 9-29

### LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 5 MHz BW + Band 17 (SCC) 10 MHz BW

Band 2 (PCC) 5 MHz BW + Band 17 (SCC) 10 MHz BW					
1852.5 MHz / ch.18625 + 740 MHz / ch. 5790	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	0	24.11

Table 9-30

### LTE Carrier Aggregation Conducted Powers – Band 17 (PCC) 10 MHz BW + Band 2 (SCC) 10 MHz BW

Band 17 (PCC) 10 MHz BW + Band 2 (SCC) 10 MHz BW					
710.0 MHz / ch. 23790 + 1960.0 MHz / ch. 900	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	49	24.34

Table 9-31

### LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 10 MHz BW + Band 12 (SCC) 10 MHz BW

Band 4 (PCC) 10 MHz BW + Band 12 (SCC) 10 MHz BW					
1732.5 MHz / ch. 20175 + 737.7 MHz / ch. 5095	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	0	24.29

Table 9-32

### LTE Carrier Aggregation Conducted Powers – Band 12 (PCC) 5 MHz BW + Band 4 (SCC) 10 MHz BW

Band 12 (PCC) 5 MHz BW + Band 4 (SCC) 10 MHz BW					
701.5 MHz / ch.23035 + 2132.5 MHz / ch. 2175	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	24	24.38

Table 9-33

### LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 5 MHz BW + Band 12 (SCC) 10 MHz BW

Band 2 (PCC) 5 MHz BW + Band 12 (SCC) 10 MHz BW					
1852.5 MHz / ch.18625 + 737.7 MHz / ch. 5095	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	0	24.15

Table 9-34

### LTE Carrier Aggregation Conducted Powers – Band 12 (PCC) 5 MHz BW + Band 2 (SCC) 10 MHz BW

Band 12 (PCC) 5 MHz BW + Band 2 (SCC) 10 MHz BW					
701.5 MHz / ch.23035 + 1960.0 MHz / ch. 900	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	24	24.39

Table 9-35



### LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 20 MHz BW + Band 5 (SCC) 10 MHz BW

Band 4 (PCC) 20 MHz BW + Band 5 (SCC) 10 MHz BW					
1732.5 MHz / ch. 20175 + 881.5 MHz / ch. 2525	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	0	24.33

Table 9-36

### LTE Carrier Aggregation Conducted Powers – Band 5 (PCC) 5 MHz BW + Band 4 (SCC) 20 MHz BW

Band 5 (PCC) 5 MHz BW + Band 4 (SCC) 20 MHz BW					
846.5 MHz / ch.20625 + 2132.5 MHz / ch. 2175	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
		QPSK	1	24	24.39

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 49 of 81

**Table 9-37**  
**LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 20 MHz BW + Band 5 (SCC) 10 MHz BW**

Band 2 (PCC) 20 MHz BW + Band 5 (SCC) 10 MHz BW					
1860 MHz / ch.18700 + 881.5 MHz / ch. 2525	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	0	24.01	24.20

**Table 9-38**  
**LTE Carrier Aggregation Conducted Powers – Band 5 (PCC) 5 MHz BW + Band 2 (SCC) 20 MHz BW**

Band 5 (PCC) 5 MHz BW + Band 2 (SCC) 20 MHz BW					
846.5 MHz / ch.20625 + 1960.0 MHz / ch. 900	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	24	24.29	24.26

**Table 9-39**  
**LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 20 MHz BW + Band 29 (SCC) 10 MHz BW**

Band 2 (PCC) 20 MHz BW + Band 29 (SCC) 10 MHz BW					
1860 MHz / ch.18700 + 722.5 MHz / ch. 9715	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	0	24.04	24.20

**Table 9-40**  
**LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 20 MHz BW + Band 29 (SCC) 10 MHz BW**

Band 4 (PCC) 20 MHz BW + Band 29 (SCC) 10 MHz BW					
1732.5 MHz / ch. 20175 + 722.5 MHz / ch. 9715	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	0	24.41	24.70

**Table 9-41**  
**LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW**


Band 2 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW					
1860 MHz / ch.18700 + 2132.5 MHz / ch. 2175	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	0	23.99	24.20

**Table 9-42**  
**LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 20 MHz BW + Band 2 (SCC) 20 MHz BW**



Band 4 (PCC) 20 MHz BW + Band 2 (SCC) 20 MHz BW					
1732.5 MHz / ch. 20175 + 1960.0 MHz / ch. 900	Modulation	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	Rel. 8 Tx.Power (dBm)
	QPSK	1	0	24.33	24.70

**Notes:**

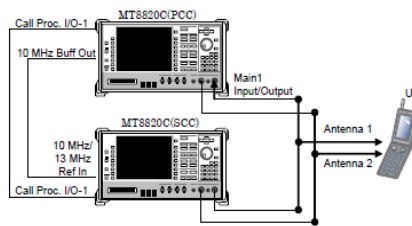1. The device does not support all Rel. 10 Carrier Aggregation features due to modem chipset limitation.
2. The device only supports LTE downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power (across all bandwidths, channels and RB Configurations) for each band
3. This device only supports inter-band CA with 2 carriers (B4+B17, B17+B4, B2+B17, B17+B2, B4+B12, B12+B4, B2+B12, B12+B2, B4+B5, B5+B4, B2+B5, B5+B2, B2+B29, B4+B29, B4+B2, B2+B4).
4. All control and acknowledge data is sent on uplink channels that operate identical to release 8 specifications.



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 50 of 81

## 9.4 WLAN Conducted Powers

**Table 9-43**  
**2.4 GHz Average RF Power**


Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	15.74	14.74
2437	6	15.78	14.72
2462	11	15.75	13.19

**Table 9-44**  
**5 GHz (20 MHz Bandwidth) Average RF Power**



Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]
		IEEE Transmission Mode
		802.11a
5180	36	11.71
5200	40	11.77
5220	44	11.66
5240	48	11.60
5260	52	11.62
5280	56	11.48
5300	60	11.35
5320	64	11.45
5500	100	11.41
5580	116	11.12
5660	132	10.90
5720	144	10.86
5745	149	10.91
5785	157	11.07
5825	165	10.99

Justification for test configurations for WLAN per KDB Publication 248227 D01v02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-3**  
**Power Measurement Setup for Bandwidths < 50 MHz**

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 51 of 81	


## 9.5 Bluetooth Conducted Powers

**Table 9-45**  
**Bluetooth RF Conducted Powers**



Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	10.10	10.236
2441	1.0	39	<b>10.31</b>	10.728
2480	1.0	78	8.20	6.601
2402	2.0	0	6.64	4.608
2441	2.0	39	6.53	4.502
2480	2.0	78	4.07	2.554
2402	3.0	0	6.69	4.671
2441	3.0	39	6.58	4.548
2480	3.0	78	4.14	2.594

**Notes:**

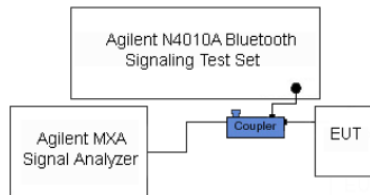- The bolded data rate and channel above were tested for SAR.
- Bluetooth 1g body-worn and 10g extremity SAR was evaluated per manufacturer's request.



**Figure 9-4**  
**Power Measurement Setup**



FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 52 of 81

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Tissue Properties – Head**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
04/20/2015	750H	21.5	695	0.855	41.889	0.889	42.227	-3.82%	-0.80%
			710	0.875	41.608	0.890	42.149	-1.69%	-1.28%
			725	0.885	41.310	0.891	42.071	-0.67%	-1.81%
			740	0.898	41.256	0.893	41.994	0.56%	-1.76%
			755	0.918	41.043	0.894	41.916	2.68%	-2.08%
			770	0.928	40.771	0.895	41.838	3.69%	-2.55%
			785	0.939	40.689	0.896	41.760	4.80%	-2.56%
04/20/2015	835H	22.1	820	0.895	42.065	0.899	41.578	-0.44%	1.17%
			835	0.910	41.874	0.900	41.500	1.11%	0.90%
			850	0.924	41.664	0.916	41.500	0.87%	0.40%
04/14/2015	1750H	21.6	1710	1.353	39.586	1.348	40.142	0.37%	-1.39%
			1750	1.393	39.443	1.371	40.079	1.60%	-1.59%
			1790	1.431	39.231	1.394	40.016	2.65%	-1.96%
04/20/2015	1750H	22.3	1710	1.316	38.424	1.348	40.142	-2.37%	-4.28%
			1750	1.355	38.204	1.371	40.079	-1.17%	-4.68%
			1790	1.392	38.063	1.394	40.016	-0.14%	-4.88%
04/13/2015	1900H	21.8	1850	1.375	39.012	1.400	40.000	-1.79%	-2.47%
			1880	1.406	38.879	1.400	40.000	0.43%	-2.80%
			1910	1.437	38.731	1.400	40.000	2.64%	-3.17%
04/20/2015	1900H	22.0	1850	1.406	41.332	1.400	40.000	0.43%	3.33%
			1880	1.434	41.262	1.400	40.000	2.43%	3.16%
			1910	1.466	41.059	1.400	40.000	4.71%	2.65%
04/15/2015	2450H- 2600H	22.7	2450	1.821	38.065	1.800	39.200	1.17%	-2.90%
			2500	1.872	37.881	1.855	39.136	0.92%	-3.21%
			2550	1.927	37.673	1.909	39.073	0.94%	-3.58%
			2600	1.985	37.486	1.964	39.009	1.07%	-3.90%
04/20/2015	2450H	22.0	2401	1.767	38.332	1.756	39.287	0.63%	-2.43%
			2450	1.822	38.130	1.800	39.200	1.22%	-2.73%
			2499	1.876	37.957	1.853	39.138	1.24%	-3.02%
04/20/2015	5200H-5800H	22.8	5260	4.534	35.874	4.717	35.917	-3.88%	-0.12%
			5300	4.581	35.811	4.758	35.871	-3.72%	-0.17%
			5500	4.791	35.491	4.963	35.643	-3.47%	-0.43%
			5785	5.081	35.129	5.255	35.317	-3.31%	-0.53%
			5800	5.101	35.064	5.270	35.300	-3.21%	-0.67%

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 53 of 81

**Table 10-2  
Measured Tissue Properties – Body**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
04/15/2015	750B	21.8	695	0.919	55.219	0.959	55.745	-4.17%	-0.94%
			710	0.934	55.036	0.960	55.687	-2.71%	-1.17%
			725	0.947	54.896	0.961	55.629	-1.46%	-1.32%
			740	0.962	54.724	0.963	55.570	-0.10%	-1.52%
			755	0.975	54.539	0.964	55.512	1.14%	-1.75%
			770	0.990	54.378	0.965	55.453	2.59%	-1.94%
04/14/2015	835B	22.9	820	0.981	54.076	0.969	55.258	1.24%	-2.14%
			835	0.996	53.917	0.970	55.200	2.68%	-2.32%
			850	1.011	53.765	0.988	55.154	2.33%	-2.52%
04/20/2015	1750B	22.3	1710	1.427	52.930	1.463	53.537	-2.46%	-1.13%
			1750	1.468	52.838	1.488	53.432	-1.34%	-1.11%
			1790	1.520	52.556	1.514	53.326	0.40%	-1.44%
04/13/2015	1900B	22.0	1850	1.469	52.464	1.520	53.300	-3.36%	-1.57%
			1880	1.502	52.342	1.520	53.300	-1.18%	-1.80%
			1910	1.539	52.231	1.520	53.300	1.25%	-2.01%
04/16/2015	1900B	21.7	1850	1.478	52.963	1.520	53.300	-2.76%	-0.63%
			1880	1.510	52.856	1.520	53.300	-0.66%	-0.83%
			1910	1.548	52.755	1.520	53.300	1.84%	-1.02%
04/13/2015	2450B-2600B	22.4	2401	1.979	51.354	1.903	52.765	3.99%	-2.67%
			2450	2.044	51.143	1.950	52.700	4.82%	-2.95%
			2500	2.112	50.940	2.021	52.636	4.50%	-3.22%
			2550	2.184	50.746	2.092	52.573	4.40%	-3.48%
			2600	2.253	50.516	2.163	52.509	4.16%	-3.80%
04/13/2015	5200B-5800B	22.8	5260	5.404	47.002	5.369	48.933	0.65%	-3.95%
			5300	5.464	46.965	5.416	48.879	0.89%	-3.92%
			5500	5.721	46.601	5.650	48.607	1.26%	-4.13%
			5785	6.108	46.224	5.982	48.220	2.11%	-4.14%
			5800	6.122	46.189	6.000	48.200	2.03%	-4.17%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 54 of 81

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


**Table 10-3  
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
G	750	HEAD	04/20/2015	22.3	21.5	0.100	1054	3318	0.816	8.280	8.160	-1.45%
D	835	HEAD	04/20/2015	23.3	22.0	0.100	4d133	3209	0.962	9.200	9.620	4.57%
B	1750	HEAD	04/14/2015	22.7	22.1	0.100	1008	3334	3.840	36.900	38.400	4.07%
B	1750	HEAD	04/20/2015	21.1	21.0	0.100	1008	3334	3.730	36.900	37.300	1.08%
J	1900	HEAD	04/13/2015	21.9	21.8	0.100	5d149	3022	4.300	40.200	43.000	6.97%
K	1900	HEAD	04/20/2015	23.1	22.0	0.100	5d149	3288	4.010	40.200	40.100	-0.25%
H	2450	HEAD	04/15/2015	21.1	22.7	0.100	719	3258	5.570	52.100	55.700	6.91%
H	2450	HEAD	04/20/2015	22.7	22.0	0.100	719	3258	5.320	52.100	53.200	2.11%
H	2600	HEAD	04/15/2015	21.1	22.7	0.100	1071	3258	6.070	57.500	60.700	5.57%
A	5300	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	4.090	85.800	81.800	-4.66%
A	5500	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	4.200	88.600	84.000	-5.19%
A	5800	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	3.970	82.300	79.400	-3.52%
E	750	BODY	04/15/2015	22.1	21.9	0.100	1054	3332	0.857	8.530	8.570	0.47%
D	835	BODY	04/14/2015	23.6	22.9	0.100	4d133	3209	1.010	9.350	10.100	8.02%
J	1750	BODY	04/20/2015	23.0	22.1	0.100	1008	3022	3.720	37.600	37.200	-1.06%
K	1900	BODY	04/13/2015	22.9	22.0	0.100	5d149	3288	4.210	40.400	42.100	4.21%
K	1900	BODY	04/16/2015	22.9	21.7	0.100	5d149	3288	4.010	40.400	40.100	-0.74%
G	2450	BODY	04/13/2015	20.7	21.4	0.100	719	3318	5.460	51.800	54.600	5.41%
G	2600	BODY	04/13/2015	22.7	22.5	0.100	1071	3318	5.320	56.900	53.200	-6.50%
A	5300	BODY	04/13/2015	24.0	22.0	0.050	1191	3914	3.920	79.900	78.400	-1.88%
A	5500	BODY	04/13/2015	24.2	22.1	0.050	1191	3914	3.950	83.100	79.000	-4.93%
A	5800	BODY	04/13/2015	24.3	22.3	0.050	1191	3914	3.860	78.000	77.200	-1.03%

FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 55 of 81

**Table 10-4  
System Verification Results – 10g**

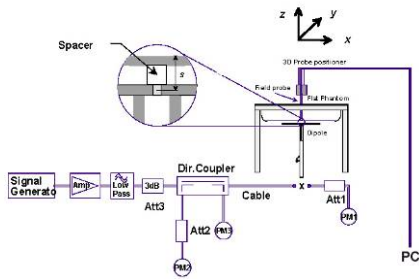

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
G	2450	BODY	04/13/2015	20.7	21.4	0.100	719	3318	2.490	24.000	24.900	3.75%
A	5300	BODY	04/13/2015	24.0	22.0	0.050	1191	3914	1.080	22.300	21.600	-3.14%
A	5500	BODY	04/13/2015	24.2	22.1	0.050	1191	3914	1.090	23.000	21.800	-5.22%



**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 56 of 81



# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

**Table 11-1  
GSM 850 Head SAR**



MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	33.20	-0.02	Right	Cheek	Standard	19220	1	1:8.3	0.470	1.000	0.470	
836.60	190	GSM 850	GSM	33.2	33.20	0.08	Right	Cheek	Quick Cover (Open)	19220	1	1:8.3	0.397	1.000	0.397	
836.60	190	GSM 850	GSM	33.2	33.20	0.04	Right	Cheek	Quick Cover (Closed)	19220	1	1:8.3	0.410	1.000	0.410	
836.60	190	GSM 850	GSM	33.2	33.20	-0.01	Right	Tilt	Standard	19220	1	1:8.3	0.339	1.000	0.339	
836.60	190	GSM 850	GSM	33.2	33.20	0.05	Left	Cheek	Standard	19220	1	1:8.3	0.319	1.000	0.319	
836.60	190	GSM 850	GSM	33.2	33.20	0.03	Left	Tilt	Standard	19220	1	1:8.3	0.229	1.000	0.229	
836.60	190	GSM 850	GPRS	28.2	27.84	0.02	Right	Cheek	Standard	19220	4	1:2.076	0.539	1.086	0.585	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.01	Right	Cheek	Quick Cover (Open)	19220	4	1:2.076	0.558	1.086	0.606	A1
836.60	190	GSM 850	GPRS	28.2	27.84	-0.01	Right	Cheek	Quick Cover (Closed)	19220	4	1:2.076	0.553	1.086	0.601	
836.60	190	GSM 850	GPRS	28.2	27.84	0.02	Right	Tilt	Standard	19220	4	1:2.076	0.398	1.086	0.432	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.02	Left	Cheek	Standard	19220	4	1:2.076	0.393	1.086	0.427	
836.60	190	GSM 850	GPRS	28.2	27.84	0.05	Left	Tilt	Standard	19220	4	1:2.076	0.282	1.086	0.306	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
UMTS 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.00	Right	Cheek	Standard	19220	1:1	0.474	1.007	0.477	A2
836.60	4183	UMTS 850	RMC	23.7	23.67	0.04	Right	Cheek	Quick Cover (Open)	19220	1:1	0.433	1.007	0.436	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.05	Right	Cheek	Quick Cover (Closed)	19220	1:1	0.246	1.007	0.248	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.06	Right	Tilt	Standard	19220	1:1	0.298	1.007	0.300	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.06	Left	Cheek	Standard	19220	1:1	0.316	1.007	0.318	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.03	Left	Tilt	Standard	19220	1:1	0.252	1.007	0.254	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-3  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.02	Right	Cheek	Standard	19212	1:1	0.448	1.117	0.500	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.09	Right	Tilt	Standard	19212	1:1	0.411	1.117	0.459	
1712.40	1312	UMTS 1750	RMC	24.7	24.30	-0.06	Left	Cheek	Standard	19212	1:1	0.869	1.096	0.952	
1712.40	1312	UMTS 1750	RMC	24.7	24.30	-0.14	Left	Cheek	Quick Cover (Open)	19212	1:1	0.909	1.096	0.996	
1712.40	1312	UMTS 1750	RMC	24.7	24.30	-0.15	Left	Cheek	Quick Cover (Closed)	19212	1:1	1.030	1.096	1.129	A3
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.18	Left	Cheek	Standard	19212	1:1	0.781	1.117	0.872	
1752.50	1862	UMTS 1750	RMC	24.7	24.15	-0.13	Left	Cheek	Standard	19212	1:1	0.844	1.135	0.958	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	0.04	Left	Tilt	Standard	19212	1:1	0.382	1.117	0.427	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 57 of 81

**Table 11-4  
GSM 1900 Head SAR**



MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.2	30.16	-0.11	Right	Cheek	Standard	19220	1	1:8.3	0.179	1.009	0.181	
1880.00	661	GSM 1900	GSM	30.2	30.16	-0.03	Right	Tilt	Standard	19220	1	1:8.3	0.162	1.009	0.163	
1880.00	661	GSM 1900	GSM	30.2	30.16	-0.20	Left	Cheek	Standard	19220	1	1:8.3	0.382	1.009	0.385	
1880.00	661	GSM 1900	GSM	30.2	30.16	0.07	Left	Cheek	Quick Cover (Open)	19220	1	1:8.3	0.416	1.009	0.420	
1880.00	661	GSM 1900	GSM	30.2	30.16	0.00	Left	Cheek	Quick Cover (Closed)	19220	1	1:8.3	0.372	1.009	0.375	
1880.00	661	GSM 1900	GSM	30.2	30.16	0.02	Left	Tilt	Standard	19220	1	1:8.3	0.163	1.009	0.164	
1880.00	661	GSM 1900	GPRS	25.2	25.18	0.03	Right	Cheek	Standard	19220	4	1:2.076	0.222	1.005	0.223	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.04	Right	Tilt	Standard	19220	4	1:2.076	0.199	1.005	0.200	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.01	Left	Cheek	Standard	19220	4	1:2.076	0.462	1.005	0.464	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.08	Left	Cheek	Quick Cover (Open)	19220	4	1:2.076	0.500	1.005	0.503	A4
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.04	Left	Cheek	Quick Cover (Closed)	19220	4	1:2.076	0.369	1.005	0.371	
1880.00	661	GSM 1900	GPRS	25.2	25.18	0.07	Left	Tilt	Standard	19220	4	1:2.076	0.188	1.005	0.189	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5  
UMTS 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	0.03	Right	Cheek	Standard	19220	1:1	0.369	1.012	0.373	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.04	Right	Tilt	Standard	19220	1:1	0.326	1.012	0.330	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	0.03	Left	Cheek	Standard	19220	1:1	0.763	1.012	0.772	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	0.01	Left	Cheek	Quick Cover (Open)	19220	1:1	0.855	1.012	0.865	A5
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.19	Left	Cheek	Quick Cover (Closed)	19220	1:1	0.667	1.012	0.675	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	0.04	Left	Tilt	Standard	19220	1:1	0.313	1.012	0.317	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-6  
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	0.20	0	Right	Cheek	QPSK	1	0	19246	1:1	0.208	1.030	0.214	
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Open)	24.4	24.27	0.00	0	Right	Cheek	QPSK	1	0	19246	1:1	0.241	1.030	0.248	A6
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.4	24.27	-0.19	0	Right	Cheek	QPSK	1	0	19246	1:1	0.228	1.030	0.235	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	-0.08	1	Right	Cheek	QPSK	25	0	19246	1:1	0.173	1.040	0.180	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.06	0	Right	Tilt	QPSK	1	0	19246	1:1	0.091	1.030	0.094	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.15	1	Right	Tilt	QPSK	25	0	19246	1:1	0.070	1.040	0.073	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	0.06	0	Left	Cheek	QPSK	1	0	19246	1:1	0.175	1.030	0.180	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.04	1	Left	Cheek	QPSK	25	0	19246	1:1	0.144	1.040	0.150	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	0.07	0	Left	Tilt	QPSK	1	0	19246	1:1	0.117	1.030	0.121	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.09	1	Left	Tilt	QPSK	25	0	19246	1:1	0.103	1.040	0.107	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 58 of 81	

**Table 11-7  
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.00	0	Right	Cheek	QPSK	1	0	19246	1:1	0.368	1.033	0.380	
782.00	23230	Mid	LTE Band 13	10	Quick Cover (Open)	24.4	24.26	0.05	0	Right	Cheek	QPSK	1	0	19246	1:1	0.443	1.033	0.458	A7
782.00	23230	Mid	LTE Band 13	10	Quick Cover (Closed)	24.4	24.26	-0.19	0	Right	Cheek	QPSK	1	0	19246	1:1	0.371	1.033	0.383	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	0.08	1	Right	Cheek	QPSK	25	0	19246	1:1	0.244	1.076	0.263	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.02	0	Right	Tilt	QPSK	1	0	19246	1:1	0.201	1.033	0.208	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	-0.03	1	Right	Tilt	QPSK	25	0	19246	1:1	0.126	1.076	0.136	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.20	0	Left	Cheek	QPSK	1	0	19246	1:1	0.274	1.033	0.283	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	0.13	1	Left	Cheek	QPSK	25	0	19246	1:1	0.195	1.076	0.210	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.03	0	Left	Tilt	QPSK	1	0	19246	1:1	0.208	1.033	0.215	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	0.03	1	Left	Tilt	QPSK	25	0	19246	1:1	0.145	1.076	0.156	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										



**Table 11-8  
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.03	0	Right	Cheek	QPSK	1	25	19246	1:1	0.498	1.072	0.534	A8
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Open)	24.4	24.10	0.03	0	Right	Cheek	QPSK	1	25	19246	1:1	0.460	1.072	0.493	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.4	24.10	0.11	0	Right	Cheek	QPSK	1	25	19246	1:1	0.464	1.072	0.497	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.05	1	Right	Cheek	QPSK	25	0	19246	1:1	0.411	1.040	0.427	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.09	0	Right	Tilt	QPSK	1	25	19246	1:1	0.316	1.072	0.339	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.02	1	Right	Tilt	QPSK	25	0	19246	1:1	0.230	1.040	0.239	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.10	0	Left	Cheek	QPSK	1	25	19246	1:1	0.374	1.072	0.401	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.13	1	Left	Cheek	QPSK	25	0	19246	1:1	0.301	1.040	0.313	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.03	0	Left	Tilt	QPSK	1	25	19246	1:1	0.268	1.072	0.287	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.10	1	Left	Tilt	QPSK	25	0	19246	1:1	0.203	1.040	0.211	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-9  
LTE Band 4 (AWS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.01	0	Right	Cheek	QPSK	1	0	19253	1:1	0.474	1.000	0.474	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.06	1	Right	Cheek	QPSK	50	0	19253	1:1	0.343	1.047	0.359	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	0.15	0	Right	Tilt	QPSK	1	0	19253	1:1	0.457	1.000	0.457	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.05	1	Right	Tilt	QPSK	50	0	19253	1:1	0.322	1.047	0.337	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.09	0	Left	Cheek	QPSK	1	0	19253	1:1	1.080	1.000	1.080	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Open)	24.7	24.70	-0.02	0	Left	Cheek	QPSK	1	0	19253	1:1	0.976	1.000	0.976	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.70	0.10	0	Left	Cheek	QPSK	1	0	19253	1:1	1.130	1.000	1.130	A9
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.04	1	Left	Cheek	QPSK	50	0	19253	1:1	0.734	1.047	0.768	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.42	0.04	1	Left	Cheek	QPSK	100	0	19253	1:1	0.830	1.067	0.886	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	0.18	0	Left	Tilt	QPSK	1	0	19253	1:1	0.443	1.000	0.443	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.12	1	Left	Tilt	QPSK	50	0	19253	1:1	0.330	1.047	0.346	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.70	0.02	0	Left	Cheek	QPSK	1	0	19253	1:1	1.120	1.000	1.120	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry indicates variability measurements.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 59 of 81

**Table 11-10  
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)																		
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.04	0	Right	Cheek	QPSK	1	0	19246	1:1	0.451	1.000	0.451	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	-0.03	1	Right	Cheek	QPSK	50	0	19246	1:1	0.327	1.081	0.353	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.06	0	Right	Tilt	QPSK	1	0	19246	1:1	0.333	1.000	0.333	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	-0.05	1	Right	Tilt	QPSK	50	0	19246	1:1	0.239	1.081	0.258	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.02	0	Left	Cheek	QPSK	1	0	19246	1:1	0.863	1.000	0.863	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Open)	24.2	24.20	0.07	0	Left	Cheek	QPSK	1	0	19246	1:1	0.988	1.000	0.988	A10
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.20	0.10	0	Left	Cheek	QPSK	1	0	19246	1:1	0.941	1.000	0.941	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Standard	24.2	23.73	-0.11	0	Left	Cheek	QPSK	1	99	19246	1:1	0.774	1.114	0.862	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	23.97	0.05	0	Left	Cheek	QPSK	1	50	19246	1:1	0.798	1.054	0.841	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.04	1	Left	Cheek	QPSK	50	0	19246	1:1	0.645	1.081	0.697	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	22.84	0.13	1	Left	Cheek	QPSK	100	0	19246	1:1	0.672	1.086	0.730	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.12	0	Left	Tilt	QPSK	1	0	19246	1:1	0.355	1.000	0.355	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.03	1	Left	Tilt	QPSK	50	0	19246	1:1	0.259	1.081	0.280	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Open)	24.2	24.20	0.08	0	Left	Cheek	QPSK	1	0	19246	1:1	0.889	1.000	0.889	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									



Note: Blue entry indicates variability measurements.

**Table 11-11  
LTE Band 7 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)																		
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.18	0	Right	Cheek	QPSK	1	0	19246	1:1	0.201	1.042	0.209	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.14	1	Right	Cheek	QPSK	50	0	19246	1:1	0.146	1.002	0.146	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.03	0	Right	Tilt	QPSK	1	0	19246	1:1	0.215	1.042	0.224	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.20	1	Right	Tilt	QPSK	50	0	19246	1:1	0.148	1.002	0.148	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.10	0	Left	Cheek	QPSK	1	0	19246	1:1	0.473	1.042	0.493	A11
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Open)	23.7	23.52	0.05	0	Left	Cheek	QPSK	1	0	19246	1:1	0.369	1.042	0.384	
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.52	-0.02	0	Left	Cheek	QPSK	1	0	19246	1:1	0.436	1.042	0.454	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.06	1	Left	Cheek	QPSK	50	0	19246	1:1	0.323	1.002	0.324	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.10	0	Left	Tilt	QPSK	1	0	19246	1:1	0.175	1.042	0.182	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.02	1	Left	Tilt	QPSK	50	0	19246	1:1	0.113	1.002	0.113	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									



**Table 11-12  
DTS Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)																		
2437	6	802.11b	DSSS	22	16.0	15.78	-	Right	Cheek	Standard	19125	1	98.85	0.339	-	1.052	1.012	-		
2437	6	802.11b	DSSS	22	16.0	15.78	-	Right	Tilt	Standard	19125	1	98.85	0.339	-	1.052	1.012	-		
2437	6	802.11b	DSSS	22	16.0	15.78	0.04	Left	Cheek	Standard	19125	1	98.85	0.521	0.421	1.052	1.012	0.448	A12	
2437	6	802.11b	DSSS	22	16.0	15.78	0.19	Left	Cheek	Quick Cover (Open)	19125	1	98.85	0.434	0.410	1.052	1.012	0.436		
2437	6	802.11b	DSSS	22	16.0	15.78	0.13	Left	Cheek	Quick Cover (Closed)	19125	1	98.85	0.327	0.286	1.052	1.012	0.305		
2437	6	802.11b	DSSS	22	16.0	15.78	-0.01	Left	Tilt	Standard	19125	1	98.85	0.429	0.401	1.052	1.012	0.427		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 60 of 81	

**Table 11-13  
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (1g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g) [W/kg]	Plot #
MHz	Ch.																		
5260	52	802.11a	OFDM	20	12.0	11.62	-	Right	Cheek	Standard	19125	6	98.61	0.518	-	1.091	1.014	-	
5260	52	802.11a	OFDM	20	12.0	11.62	-	Right	Tilt	Standard	19125	6	98.61	0.654	-	1.091	1.014	-	
5260	52	802.11a	OFDM	20	12.0	11.62	-	Left	Cheek	Standard	19125	6	98.61	0.618	-	1.091	1.014	-	
5260	52	802.11a	OFDM	20	12.0	11.62	0.05	Left	Tilt	Standard	19125	6	98.61	0.684	0.317	1.091	1.014	0.351	
5500	100	802.11a	OFDM	20	12.0	11.41	-	Right	Cheek	Standard	19125	6	98.61	0.606	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	12.0	11.41	0.11	Right	Tilt	Standard	19125	6	98.61	0.710	0.361	1.146	1.014	0.420	A13
5500	100	802.11a	OFDM	20	12.0	11.41	0.00	Right	Tilt	Quick Cover (Open)	19125	6	98.61	0.489	0.269	1.146	1.014	0.312	
5500	100	802.11a	OFDM	20	12.0	11.41	0.20	Right	Tilt	Quick Cover (Closed)	19125	6	98.61	0.528	0.278	1.146	1.014	0.323	
5500	100	802.11a	OFDM	20	12.0	11.41	-	Left	Cheek	Standard	19125	6	98.61	0.629	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	12.0	11.41	0.02	Left	Tilt	Standard	19125	6	98.61	0.654	0.286	1.146	1.014	0.333	
5785	157	802.11a	OFDM	20	12.0	11.07	-	Right	Cheek	Standard	19125	6	98.61	0.296	-	1.239	1.014	-	
5785	157	802.11a	OFDM	20	12.0	11.07	-	Right	Tilt	Standard	19125	6	98.61	0.377	-	1.239	1.014	-	
5785	157	802.11a	OFDM	20	12.0	11.07	-	Left	Cheek	Standard	19125	6	98.61	0.340	-	1.239	1.014	-	
5785	157	802.11a	OFDM	20	12.0	11.07	0.05	Left	Tilt	Standard	19125	6	98.61	0.403	0.158	1.239	1.014	0.199	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 61 of 81	



## 11.2 Standalone Body-Worn SAR Data

**Table 11-14**  
**GSM/UMTS Body-Worn SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	33.20	0.00	10 mm	Standard	19220	1	1.8.3	back	0.559	1.000	0.559	
836.60	190	GSM 850	GSM	33.2	33.20	0.00	10 mm	Quick Cover (Closed)	19220	1	1.8.3	back	0.447	1.000	0.447	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.06	10 mm	Standard	19220	4	1:2.076	back	0.681	1.086	0.740	A14
836.60	190	GSM 850	GPRS	28.2	27.84	0.02	10 mm	Quick Cover (Closed)	19220	4	1:2.076	back	0.583	1.086	0.633	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.00	10 mm	Standard	19220	N/A	1:1	back	0.550	1.007	0.554	A16
836.60	4183	UMTS 850	RMC	23.7	26.67	0.06	10 mm	Quick Cover (Closed)	19220	N/A	1:1	back	0.429	0.505	0.217	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.08	10 mm	Standard	19212	N/A	1:1	back	0.667	1.117	0.745	A17
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.06	10 mm	Quick Cover (Closed)	19212	N/A	1:1	back	0.611	1.117	0.682	
1880.00	661	GSM 1900	GSM	30.2	30.16	0.13	10 mm	Standard	19220	1	1.8.3	back	0.266	1.009	0.268	
1880.00	661	GSM 1900	GSM	30.2	30.16	-0.02	10 mm	Quick Cover (Closed)	19220	1	1.8.3	back	0.249	1.009	0.251	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.11	10 mm	Standard	19220	4	1:2.076	back	0.310	1.005	0.312	A19
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.15	10 mm	Quick Cover (Closed)	19220	4	1:2.076	back	0.277	1.005	0.278	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.01	10 mm	Standard	19220	N/A	1:1	back	0.482	1.012	0.488	A21
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.20	10 mm	Quick Cover (Closed)	19220	N/A	1:1	back	0.431	1.012	0.436	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-15**  
**LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.03	0	19246	QPSK	1	0	10 mm	back	1:1	0.339	1.030	0.349	A23
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.4	24.27	-0.05	0	19246	QPSK	1	0	10 mm	back	1:1	0.279	1.030	0.287	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	-0.01	1	19246	QPSK	25	0	10 mm	back	1:1	0.263	1.040	0.274	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.14	0	19246	QPSK	1	0	10 mm	back	1:1	0.473	1.033	0.489	A25
782.00	23230	Mid	LTE Band 13	10	Quick Cover (Closed)	24.4	24.26	0.03	0	19246	QPSK	1	0	10 mm	back	1:1	0.428	1.033	0.442	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	-0.02	1	19246	QPSK	25	0	10 mm	back	1:1	0.330	1.076	0.355	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	-0.02	0	19246	QPSK	1	25	10 mm	back	1:1	0.627	1.072	0.672	A27
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.4	24.10	0.02	0	19246	QPSK	1	25	10 mm	back	1:1	0.493	1.072	0.528	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.00	1	19246	QPSK	25	0	10 mm	back	1:1	0.502	1.040	0.522	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.04	0	19253	QPSK	1	0	10 mm	back	1:1	0.710	1.000	0.710	A28
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.70	0.01	0	19253	QPSK	1	0	10 mm	back	1:1	0.681	1.000	0.681	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.18	1	19253	QPSK	50	0	10 mm	back	1:1	0.550	1.047	0.576	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.02	0	19246	QPSK	1	0	10 mm	back	1:1	0.549	1.000	0.549	A30
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.20	-0.19	0	19246	QPSK	1	0	10 mm	back	1:1	0.542	1.000	0.542	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.00	1	19246	QPSK	50	0	10 mm	back	1:1	0.399	1.081	0.431	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.02	0	19246	QPSK	1	0	10 mm	back	1:1	0.459	1.042	0.478	
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.52	-0.04	0	19246	QPSK	1	0	10 mm	back	1:1	0.476	1.042	0.496	A32
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.06	1	19246	QPSK	50	0	10 mm	back	1:1	0.316	1.002	0.317	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 62 of 81

**Table 11-16  
DTS Body-Worn SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)	(W/kg)		
2437	6	802.11b	DSSS	22	16.0	15.78	0.03	10 mm	Standard	19125	1	back	98.85	0.214	0.173	1.052	1.012	0.184	A34
2437	6	802.11b	DSSS	22	16.0	15.78	0.01	10 mm	Quick Cover (Closed)	19125	1	back	98.85	0.121	0.102	1.052	1.012	0.108	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-17  
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)	(W/kg)		
5260	52	802.11a	OFDM	20	12.0	11.62	-0.06	10 mm	Standard	19125	6	back	98.61	0.307	0.180	1.091	1.014	0.199	
5500	100	802.11a	OFDM	20	12.0	11.41	0.03	10 mm	Standard	19125	6	back	98.61	0.386	0.198	1.146	1.014	0.230	A35
5500	100	802.11a	OFDM	20	12.0	11.41	0.01	10 mm	Quick Cover (Closed)	19125	6	back	98.61	0.452	0.198	1.146	1.014	0.230	
5785	157	802.11a	OFDM	20	12.0	11.07	0.09	10 mm	Standard	19125	6	back	98.61	0.172	0.084	1.239	1.014	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-18  
DSS Body-Worn SAR**



MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #		
MHz	Ch.												(W/kg)	(W/kg)	(W/kg)			
2441	39	Bluetooth	FHSS	10.5	10.31	-0.11	10 mm	Standard	19125	1	back	1:1	0.023	1.045	0.024			
2441	39	Bluetooth	FHSS	10.5	10.31	-0.02	10 mm	Quick Cover (Closed)	19125	1	back	1:1	0.030	1.045	0.031	A37		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 63 of 81	

# 11.3 Standalone Wireless Router SAR Data

**Table 11-19  
GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.06	10 mm	Standard	19220	4	1:2.076	back	0.681	1.086	0.740	
836.60	190	GSM 850	GPRS	28.2	27.84	0.00	10 mm	Standard	19220	4	1:2.076	front	0.654	1.086	0.710	
836.60	190	GSM 850	GPRS	28.2	27.84	0.08	10 mm	Standard	19220	4	1:2.076	bottom	0.492	1.086	0.534	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.07	10 mm	Standard	19220	4	1:2.076	right	0.705	1.086	0.766	A15
836.60	190	GSM 850	GPRS	28.2	27.84	-0.03	10 mm	Quick Cover (Closed)	19220	4	1:2.076	right	0.387	1.086	0.420	
836.60	190	GSM 850	GPRS	28.2	27.84	-0.03	10 mm	Standard	19220	4	1:2.076	left	0.207	1.086	0.225	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.00	10 mm	Standard	19220	N/A	1:1	back	0.550	1.007	0.554	A16
836.60	4183	UMTS 850	RMC	23.7	23.67	0.06	10 mm	Quick Cover (Closed)	19220	N/A	1:1	back	0.429	1.007	0.432	
836.60	4183	UMTS 850	RMC	23.7	23.67	-0.08	10 mm	Standard	19220	N/A	1:1	front	0.528	1.007	0.532	
836.60	4183	UMTS 850	RMC	23.7	23.67	-0.13	10 mm	Standard	19220	N/A	1:1	bottom	0.428	1.007	0.431	
836.60	4183	UMTS 850	RMC	23.7	23.67	-0.05	10 mm	Standard	19220	N/A	1:1	right	0.500	1.007	0.504	
836.60	4183	UMTS 850	RMC	23.7	23.67	0.02	10 mm	Standard	19220	N/A	1:1	left	0.371	1.007	0.374	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.08	10 mm	Standard	19212	N/A	1:1	back	0.667	1.117	0.745	
1712.40	1312	UMTS 1750	RMC	24.7	24.30	-0.06	10 mm	Standard	19212	N/A	1:1	front	0.852	1.096	0.934	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	0.14	10 mm	Standard	19212	N/A	1:1	front	0.896	1.117	1.001	A18
1732.40	1412	UMTS 1750	RMC	24.7	24.22	0.19	10 mm	Quick Cover (Closed)	19212	N/A	1:1	front	0.522	1.117	0.583	
1752.50	1862	UMTS 1750	RMC	24.7	24.15	0.05	10 mm	Standard	19212	N/A	1:1	front	0.795	1.135	0.902	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	-0.14	10 mm	Standard	19212	N/A	1:1	bottom	0.626	1.117	0.699	
1732.40	1412	UMTS 1750	RMC	24.7	24.22	0.12	10 mm	Standard	19212	N/A	1:1	left	0.643	1.117	0.718	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.11	10 mm	Standard	19220	4	1:2.076	back	0.310	1.005	0.312	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.13	10 mm	Standard	19220	4	1:2.076	front	0.346	1.005	0.348	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.08	10 mm	Standard	19220	4	1:2.076	bottom	0.227	1.005	0.228	
1880.00	661	GSM 1900	GPRS	25.2	25.18	-0.05	10 mm	Standard	19220	4	1:2.076	left	0.403	1.005	0.405	A20
1880.00	661	GSM 1900	GPRS	25.2	25.18	0.02	10 mm	Quick Cover (Closed)	19220	4	1:2.076	left	0.332	1.005	0.334	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.01	10 mm	Standard	19220	N/A	1:1	back	0.482	1.012	0.488	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.01	10 mm	Standard	19220	N/A	1:1	front	0.608	1.012	0.615	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	0.05	10 mm	Standard	19220	N/A	1:1	bottom	0.406	1.012	0.411	
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.05	10 mm	Standard	19220	N/A	1:1	left	0.699	1.012	0.707	A22
1880.00	9400	UMTS 1900	RMC	24.2	24.15	-0.10	10 mm	Quick Cover (Closed)	19220	N/A	1:1	left	0.677	1.012	0.685	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Body 1.6 W/kg (mW/g) averaged over 1 gram								
Uncontrolled Exposure/General Population																

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 64 of 81



**Table 11-20  
LTE Band 12 Hotspot SAR**



MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.03	0	19246	QPSK	1	0	10 mm	back	1:1	0.339	1.030	0.349	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	-0.01	1	19246	QPSK	25	0	10 mm	back	1:1	0.263	1.040	0.274	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.02	0	19246	QPSK	1	0	10 mm	front	1:1	0.396	1.030	0.408	A24
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.4	24.27	0.02	0	19246	QPSK	1	0	10 mm	front	1:1	0.294	1.030	0.303	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.04	1	19246	QPSK	25	0	10 mm	front	1:1	0.324	1.040	0.337	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.03	0	19246	QPSK	1	0	10 mm	bottom	1:1	0.188	1.030	0.194	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.06	1	19246	QPSK	25	0	10 mm	bottom	1:1	0.157	1.040	0.163	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	-0.03	0	19246	QPSK	1	0	10 mm	right	1:1	0.321	1.030	0.331	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.03	1	19246	QPSK	25	0	10 mm	right	1:1	0.249	1.040	0.259	
707.50	23095	Mid	LTE Band 12	10	Standard	24.4	24.27	0.01	0	19246	QPSK	1	0	10 mm	left	1:1	0.184	1.030	0.190	
707.50	23095	Mid	LTE Band 12	10	Standard	23.4	23.23	0.05	1	19246	QPSK	25	0	10 mm	left	1:1	0.141	1.040	0.147	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-21  
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.14	0	19246	QPSK	1	0	10 mm	back	1:1	0.473	1.033	0.489	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	-0.02	1	19246	QPSK	25	0	10 mm	back	1:1	0.330	1.076	0.355	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.06	0	19246	QPSK	1	0	10 mm	front	1:1	0.542	1.033	0.560	A26
782.00	23230	Mid	LTE Band 13	10	Quick Cover (Closed)	24.4	24.26	0.09	0	19246	QPSK	1	0	10 mm	front	1:1	0.424	1.033	0.438	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	-0.02	1	19246	QPSK	25	0	10 mm	front	1:1	0.372	1.076	0.400	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.20	0	19246	QPSK	1	0	10 mm	bottom	1:1	0.395	1.033	0.408	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	0.06	1	19246	QPSK	25	0	10 mm	bottom	1:1	0.264	1.076	0.284	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	0.04	0	19246	QPSK	1	0	10 mm	right	1:1	0.371	1.033	0.383	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	-0.05	1	19246	QPSK	25	0	10 mm	right	1:1	0.282	1.076	0.303	
782.00	23230	Mid	LTE Band 13	10	Standard	24.4	24.26	-0.05	0	19246	QPSK	1	0	10 mm	left	1:1	0.227	1.033	0.234	
782.00	23230	Mid	LTE Band 13	10	Standard	23.4	23.08	0.03	1	19246	QPSK	25	0	10 mm	left	1:1	0.169	1.076	0.182	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-22  
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	-0.02	0	19246	QPSK	1	25	10 mm	back	1:1	0.627	1.072	0.672	A27
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.4	24.10	0.02	0	19246	QPSK	1	25	10 mm	back	1:1	0.493	1.072	0.528	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.00	1	19246	QPSK	25	0	10 mm	back	1:1	0.502	1.040	0.522	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.02	0	19246	QPSK	1	25	10 mm	front	1:1	0.531	1.072	0.569	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	-0.02	1	19246	QPSK	25	0	10 mm	front	1:1	0.418	1.040	0.435	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	-0.13	0	19246	QPSK	1	25	10 mm	bottom	1:1	0.488	1.072	0.523	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.11	1	19246	QPSK	25	0	10 mm	bottom	1:1	0.373	1.040	0.388	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.05	0	19246	QPSK	1	25	10 mm	right	1:1	0.563	1.072	0.604	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	-0.03	1	19246	QPSK	25	0	10 mm	right	1:1	0.455	1.040	0.473	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.4	24.10	0.15	0	19246	QPSK	1	25	10 mm	left	1:1	0.105	1.072	0.113	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.4	23.23	0.20	1	19246	QPSK	25	0	10 mm	left	1:1	0.064	1.040	0.067	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 65 of 81	

**Table 11-23  
LTE Band 4 (AWS) Hotspot SAR**



MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.04	0	19253	QPSK	1	0	10 mm	back	1:1	0.710	1.000	0.710	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.18	1	19253	QPSK	50	0	10 mm	back	1:1	0.550	1.047	0.576	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.07	0	19253	QPSK	1	0	10 mm	front	1:1	0.749	1.000	0.749	A29
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.70	-0.06	0	19253	QPSK	1	0	10 mm	front	1:1	0.601	1.000	0.601	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.09	1	19253	QPSK	50	0	10 mm	front	1:1	0.530	1.047	0.555	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	0.07	0	19253	QPSK	1	0	10 mm	bottom	1:1	0.655	1.000	0.655	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.04	1	19253	QPSK	50	0	10 mm	bottom	1:1	0.467	1.047	0.489	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.70	-0.05	0	19253	QPSK	1	0	10 mm	left	1:1	0.712	1.000	0.712	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.50	0.07	1	19253	QPSK	50	0	10 mm	left	1:1	0.500	1.047	0.524	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-24  
LTE Band 2 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.02	0	19246	QPSK	1	0	10 mm	back	1:1	0.549	1.000	0.549	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.00	1	19246	QPSK	50	0	10 mm	back	1:1	0.399	1.081	0.431	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.03	0	19246	QPSK	1	0	10 mm	front	1:1	0.728	1.000	0.728	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.00	1	19246	QPSK	50	0	10 mm	front	1:1	0.521	1.081	0.563	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.09	0	19246	QPSK	1	0	10 mm	bottom	1:1	0.543	1.000	0.543	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	-0.04	1	19246	QPSK	50	0	10 mm	bottom	1:1	0.348	1.081	0.376	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.03	0	19246	QPSK	1	0	10 mm	left	1:1	0.811	1.000	0.811	A31
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.20	-0.13	0	19246	QPSK	1	0	10 mm	left	1:1	0.612	1.000	0.612	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Standard	24.2	23.73	-0.08	0	19246	QPSK	1	99	10 mm	left	1:1	0.719	1.114	0.801	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	23.97	0.05	0	19246	QPSK	1	50	10 mm	left	1:1	0.786	1.054	0.828	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	23.2	22.86	0.02	1	19246	QPSK	50	0	10 mm	left	1:1	0.603	1.081	0.652	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	22.84	0.00	1	19246	QPSK	100	0	10 mm	left	1:1	0.621	1.086	0.674	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-25  
LTE Band 7 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	0.02	0	19246	QPSK	1	0	10 mm	back	1:1	0.459	1.042	0.478	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.06	1	19246	QPSK	50	0	10 mm	back	1:1	0.316	1.002	0.317	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	-0.01	0	19246	QPSK	1	0	10 mm	front	1:1	0.487	1.042	0.507	A33
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.52	-0.05	0	19246	QPSK	1	0	10 mm	front	1:1	0.337	1.042	0.351	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	-0.07	1	19246	QPSK	50	0	10 mm	front	1:1	0.333	1.002	0.334	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	-0.02	0	19246	QPSK	1	0	10 mm	bottom	1:1	0.134	1.042	0.140	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	0.05	1	19246	QPSK	50	0	10 mm	bottom	1:1	0.098	1.002	0.098	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.52	-0.01	0	19246	QPSK	1	0	10 mm	left	1:1	0.357	1.042	0.372	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.69	-0.08	1	19246	QPSK	50	0	10 mm	left	1:1	0.243	1.002	0.243	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 66 of 81	

**Table 11-26  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (1g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g) [W/kg]	Plot #
MHz	Ch.																		
2437	6	802.11b	DSSS	22	16.0	15.78	0.03	10 mm	Standard	19125	1	back	98.85	0.214	0.173	1.052	1.012	0.184	A34
2437	6	802.11b	DSSS	22	16.0	15.78	0.01	10 mm	Quick Cover (Closed)	19125	1	back	98.85	0.121	0.102	1.052	1.012	0.108	
2437	6	802.11b	DSSS	22	16.0	15.78	-	10 mm	Standard	19125	1	front	98.85	0.126	-	1.052	1.012	-	
2437	6	802.11b	DSSS	22	16.0	15.78	-	10 mm	Standard	19125	1	top	98.85	0.164	-	1.052	1.012	-	
2437	6	802.11b	DSSS	22	16.0	15.78	-	10 mm	Standard	19125	1	right	98.85	0.061	-	1.052	1.012	-	
5785	157	802.11a	OFDM	20	12.0	11.07	-	10 mm	Standard	19125	6	back	98.61	0.172	-	1.239	1.014	-	
5785	157	802.11a	OFDM	20	12.0	11.07	-	10 mm	Standard	19125	6	front	98.61	0.095	-	1.239	1.014	-	
5785	157	802.11a	OFDM	20	12.0	11.07	0.20	10 mm	Standard	19125	6	top	98.61	0.290	0.115	1.239	1.014	0.144	A36
5785	157	802.11a	OFDM	20	12.0	11.07	0.07	10 mm	Quick Cover (Closed)	19125	6	top	98.61	0.232	0.093	1.239	1.014	0.117	
5785	157	802.11a	OFDM	20	12.0	11.07	-	10 mm	Standard	19125	6	right	98.61	0.023	-	1.239	1.014	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										



**11.4 Standalone Extremity SAR Data**

**Table 11-27  
WLAN Extremity SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan [W/kg]	SAR (10g) [W/kg]	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (10g) [W/kg]	Plot #
MHz	Ch.																		
5260	52	802.11a	OFDM	20	12.0	11.62	-0.04	0 mm	Standard	19125	6	back	98.61	4.202	0.331	1.091	1.014	0.366	
5260	52	802.11a	OFDM	20	12.0	11.62	-	0 mm	Standard	19125	6	front	98.61	0.708	-	1.091	1.014	-	
5260	52	802.11a	OFDM	20	12.0	11.62	-	0 mm	Standard	19125	6	top	98.61	4.086	-	1.091	1.014	-	
5260	52	802.11a	OFDM	20	12.0	11.62	-	0 mm	Standard	19125	6	right	98.61	0.176	-	1.091	1.014	-	
5500	100	802.11a	OFDM	20	12.0	11.41	-0.06	0 mm	Standard	19125	6	back	98.61	5.960	0.380	1.146	1.014	0.441	A38
5500	100	802.11a	OFDM	20	12.0	11.41	0.03	0 mm	Quick Cover (Open)	19125	6	back	98.61	1.632	0.224	1.146	1.014	0.261	
5500	100	802.11a	OFDM	20	12.0	11.41	-0.03	0 mm	Quick Cover (Closed)	19125	6	back	98.61	4.765	0.367	1.146	1.014	0.427	
5500	100	802.11a	OFDM	20	12.0	11.41	-	0 mm	Standard	19125	6	front	98.61	0.691	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	12.0	11.41	-	0 mm	Standard	19125	6	top	98.61	4.329	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	12.0	11.41	-	0 mm	Standard	19125	6	right	98.61	0.129	-	1.146	1.014	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams										

**Table 11-28  
Bluetooth Extremity SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g) [W/kg]	Scaling Factor	Scaled SAR (10g) [W/kg]	Plot #
MHz	Ch.															
2441	39	Bluetooth	FHSS	10.5	10.31	-0.11	0 mm	Standard	19125	1	back	1:1	0.038	1.045	0.040	
2441	39	Bluetooth	FHSS	10.5	10.31	-0.05	0 mm	Quick Cover (Open)	19125	1	back	1:1	0.040	1.045	0.042	
2441	39	Bluetooth	FHSS	10.5	10.31	0.02	0 mm	Quick Cover (Closed)	19125	1	back	1:1	0.053	1.045	0.055	A39
2441	39	Bluetooth	FHSS	10.5	10.31	0.09	0 mm	Standard	19125	1	front	1:1	0.020	1.045	0.021	
2441	39	Bluetooth	FHSS	10.5	10.31	-0.13	0 mm	Standard	19125	1	top	1:1	0.024	1.045	0.025	
2441	39	Bluetooth	FHSS	10.5	10.31	0.13	0 mm	Standard	19125	1	right	1:1	0.007	1.045	0.007	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Extremity 4.0 W/kg (mW/g) averaged over 10 grams							

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 67 of 81



## SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.6 for more details).
9. Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, hand SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
10. Per FCC KDB Publication 648474 D03, SAR was measured using the standard battery cover and then repeated with the quick cover for the configuration with the highest measured SAR for each wireless technology, frequency band, operating mode, and exposure condition. Since reported SAR did not exceed 1.2 W/kg, additional testing with the quick cover was not required.
11. Head and Extremity tests using the quick cover were performed with the cover extension both open and closed. Body-worn and Hotspot tests were performed with the cover extension closed because operations near the body with the cover extension open are not expected.

### GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR. GPRS was additionally evaluated for head and body-worn voice calls to cover VoIP.
2. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 68 of 81	

UMTS Notes:



1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required per the 3G test reduction procedures since the reported SAR for the default mode was < 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is > 1/2 dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC Guidance, LTE CA SAR was not needed for testing since the data sent by uplink on the uplink physical channels does not change between Rel. 8 and Rel. 10.

BT/WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.6.6 for more information.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
6. The channel and data rate with the highest average output power were evaluated for Bluetooth.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 69 of 81

## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction



The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg.

Note:

1. Main Antenna SAR Testing was not required for extremity exposure conditions per FCC KDB 648474. Therefore, no further analysis was required to determine that possible simultaneous scenarios would not exceed the SAR limit.
2. The Highest reported SAR for each exposure condition was used for SAR summation purpose.

FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 70 of 81

## 12.3 Head SAR Simultaneous Transmission Analysis



**Table 12-1**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.470	0.448	0.918
	GPRS 850	0.606	0.448	1.054
	UMTS 850	0.477	0.448	0.925
	UMTS 1750	1.129	0.448	1.577
	GSM 1900	0.420	0.448	0.868
	GPRS 1900	0.503	0.448	0.951
	UMTS 1900	0.865	0.448	1.313
	LTE Band 12	0.248	0.448	0.696
	LTE Band 13	0.458	0.448	0.906
	LTE Band 5 (Cell)	0.534	0.448	0.982
	LTE Band 4 (AWS)	1.130	0.448	<b>1.578</b>
	LTE Band 2 (PCS)	0.988	0.448	0.988
	LTE Band 7	0.493	0.448	0.941

**Table 12-2**  
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.470	0.420	0.890
	GPRS 850	0.606	0.420	1.026
	UMTS 850	0.477	0.420	0.897
	UMTS 1750	1.129	0.420	1.549
	GSM 1900	0.420	0.420	0.840
	GPRS 1900	0.503	0.420	0.923
	UMTS 1900	0.865	0.420	1.285
	LTE Band 12	0.248	0.420	0.668
	LTE Band 13	0.458	0.420	0.878
	LTE Band 5 (Cell)	0.534	0.420	0.954
	LTE Band 4 (AWS)	1.130	0.420	<b>1.550</b>
	LTE Band 2 (PCS)	0.988	0.420	0.988
	LTE Band 7	0.493	0.420	0.913

The worst case 5 GHz WIFI reported SAR for each head configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 71 of 81	

## 12.4 Body-Worn Simultaneous Transmission Analysis



**Table 12-3**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body-Worn	GSM 850	0.559	0.184	0.743
	GPRS 850	0.740	0.184	0.924
	UMTS 850	0.554	0.184	0.738
	UMTS 1750	0.745	0.184	<b>0.929</b>
	GSM 1900	0.268	0.184	0.452
	GPRS 1900	0.312	0.184	0.496
	UMTS 1900	0.488	0.184	0.672
	LTE Band 12	0.349	0.184	0.533
	LTE Band 13	0.489	0.184	0.673
	LTE Band 5 (Cell)	0.672	0.184	0.856
	LTE Band 4 (AWS)	0.710	0.184	0.894
	LTE Band 2 (PCS)	0.549	0.184	0.733
LTE Band 7	0.496	0.184	0.680	

**Table 12-4**  
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
Body-Worn	GSM 850	0.559	0.230	0.789
	GPRS 850	0.740	0.230	0.970
	UMTS 850	0.554	0.230	0.784
	UMTS 1750	0.745	0.230	<b>0.975</b>
	GSM 1900	0.268	0.230	0.498
	GPRS 1900	0.312	0.230	0.542
	UMTS 1900	0.488	0.230	0.718
	LTE Band 12	0.349	0.230	0.579
	LTE Band 13	0.489	0.230	0.719
	LTE Band 5 (Cell)	0.672	0.230	0.902
	LTE Band 4 (AWS)	0.710	0.230	0.940
	LTE Band 2 (PCS)	0.549	0.230	0.779
LTE Band 7	0.496	0.230	0.726	



The worst case 5 GHz WIFI reported SAR for each body-worn configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 72 of 81	



**Table 12-5**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.559	0.031	0.590
	GPRS 850	0.740	0.031	0.771
	UMTS 850	0.554	0.031	0.585
	UMTS 1750	0.745	0.031	<b>0.776</b>
	GSM 1900	0.268	0.031	0.299
	GPRS 1900	0.312	0.031	0.343
	UMTS 1900	0.488	0.031	0.519
	LTE Band 12	0.349	0.031	0.380
	LTE Band 13	0.489	0.031	0.520
	LTE Band 5 (Cell)	0.672	0.031	0.703
	LTE Band 4 (AWS)	0.710	0.031	0.741
	LTE Band 2 (PCS)	0.549	0.031	0.580
	LTE Band 7	0.496	0.031	0.527

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 73 of 81

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

**Table 12-6**  
**Simultaneous Transmission Scenario 2.4 GHz WLAN (Hotspot at 1.0 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.766	0.184	0.950
	UMTS 850	0.554	0.184	0.738
	UMTS 1750	1.001	0.184	<b>1.185</b>
	GPRS 1900	0.405	0.184	0.589
	UMTS 1900	0.707	0.184	0.891
	LTE Band 12	0.408	0.184	0.592
	LTE Band 13	0.560	0.184	0.744
	LTE Band 5 (Cell)	0.672	0.184	0.856
	LTE Band 4 (AWS)	0.749	0.184	0.933
	LTE Band 2 (PCS)	0.828	0.184	1.012
	LTE Band 7	0.507	0.184	0.691

**Table 12-7**  
**Simultaneous Transmission Scenario 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.766	0.144	0.910
	UMTS 850	0.554	0.144	0.698
	UMTS 1750	1.001	0.144	<b>1.145</b>
	GPRS 1900	0.405	0.144	0.549
	UMTS 1900	0.707	0.144	0.851
	LTE Band 12	0.408	0.144	0.552
	LTE Band 13	0.560	0.144	0.704
	LTE Band 5 (Cell)	0.672	0.144	0.816
	LTE Band 4 (AWS)	0.749	0.144	0.893
	LTE Band 2 (PCS)	0.828	0.144	0.972
	LTE Band 7	0.507	0.144	0.651

## 12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: ZNFH810	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 74 of 81

# 13 SAR MEASUREMENT VARIABILITY

## 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) 10g extremity SAR measurement variability analysis applies a factor of 2.5 to the procedures outlined above.

**Table 13-1  
Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS															
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Cover Type	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1732.50	20175	LTE Band 4 (AWS)	QPSK, 1 RB, 0 RB Offset	Left	Cheek	Quick Cover (Closed)	N/A	1.130	1.120	1.01	N/A	N/A	N/A	N/A
1900	1860.00	18700	LTE Band 2 (PCS)	QPSK, 1 RB, 0 RB Offset	Left	Cheek	Quick Cover (Open)	N/A	0.988	0.889	1.11	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram									

## 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.



FCC ID: ZNFH810	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 75 of 81

# 14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2014	Annual	10/30/2015	1833460
Agilent	8753E	(30kHz-6GHz) Network Analyzer	12/30/2014	Annual	12/30/2015	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
SPEAG	D1900V2	1900 MHz SAR Dipole	7/23/2014	Annual	7/23/2015	5d149
SPEAG	D1765V2	1765 MHz SAR Dipole	5/7/2014	Annual	5/7/2015	1008
SPEAG	D2450V2	2450 MHz SAR Dipole	8/11/2014	Annual	8/11/2015	719
SPEAG	D2600V2	2600 MHz SAR Dipole	10/20/2014	Annual	10/20/2015	1071
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
SPEAG	D5GHzV2	5 GHz SAR Dipole	9/25/2014	Annual	9/25/2015	1191
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
SPEAG	D750V3	750 MHz Dipole	3/11/2015	Annual	3/11/2016	1054
SPEAG	D835V2	835 MHz SAR Dipole	7/24/2014	Annual	7/24/2015	4d133
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433977
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433978
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Rohde & Schwarz	CMU200	Base Station Simulator	6/6/2014	Annual	6/6/2015	109892
Rohde & Schwarz	CMU200	Base Station Simulator	12/4/2014	Annual	12/4/2015	833855/0010
Rohde & Schwarz	CMU200	Base Station Simulator	3/23/2015	Annual	3/23/2016	836371/0079
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/12/2014	Annual	8/12/2015	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2014	Annual	9/17/2015	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/18/2014	Annual	9/18/2015	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/31/2014	Annual	10/31/2015	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/12/2014	Annual	12/12/2015	1415
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/14/2015	Annual	1/14/2016	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2015	Annual	2/18/2016	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2015	Annual	3/13/2016	1334
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	10/21/2014	Annual	10/21/2015	1091
Mitutoyo	CD-6°CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264165
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764551
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764558
Control Company	4052	Long Stem Thermometer	9/27/2013	Biennial	9/27/2015	130567447
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/15/2014	Annual	7/15/2015	1039
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Anritsu	ML2495A	Power Meter	7/12/2013	Biennial	7/12/2015	1328004
Anritsu	MA2411B	Pulse Power Sensor	11/17/2014	Annual	11/17/2015	1126066
Anritsu	MT8820C	Radio Communication Analyzer	8/28/2014	Annual	8/28/2015	6201240328
Anritsu	MT8820C	Radio Communication Analyzer	3/10/2015	Annual	3/10/2016	6200901190
Rohde & Schwarz	CMW500	Radio Communication Tester	6/3/2014	Annual	6/3/2015	108843
Rohde & Schwarz	CMW500	Radio Communication Tester	7/9/2014	Annual	7/9/2015	106578
Rohde & Schwarz	CMW500	Radio Communication Tester	7/22/2014	Annual	7/22/2015	116743
SPEAG	ES3DV2	SAR Probe	8/19/2014	Annual	8/19/2015	3022
SPEAG	ES3DV3	SAR Probe	9/18/2014	Annual	9/18/2015	3332
SPEAG	ES3DV3	SAR Probe	9/24/2014	Annual	9/24/2015	3288
SPEAG	ES3DV3	SAR Probe	12/16/2014	Annual	12/16/2015	3334
SPEAG	ES3DV3	SAR Probe	1/23/2015	Annual	1/23/2016	3318
SPEAG	EX3DV4	SAR Probe	2/10/2015	Annual	2/10/2016	3914
SPEAG	ES3DV3	SAR Probe	2/27/2015	Annual	2/27/2016	3258
SPEAG	ES3DV3	SAR Probe	3/19/2015	Annual	3/19/2016	3209
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Agilent	8753ES	S-Parameter Network Analyzer	1/20/2015	Annual	1/20/2016	US39170122
Seekonk	NC-100	Torque Wrench	3/18/2014	Biennial	3/18/2016	N/A
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Gigatronics	8651A	Universal Power Meter	10/30/2014	Annual	10/30/2015	8650319
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1349503
Anritsu	MA24106A	USB Power Sensor	3/3/2015	Annual	3/3/2016	1349501
VWR	36934-158	Wall-Mounted Thermometer	4/29/2014	Biennial	4/29/2016	111859332
Control Company	36934-158	Wall-Mounted Thermometer	4/29/2014	Biennial	4/29/2016	122014488
Agilent	E5515C	Wireless Communications Test Set	11/20/2014	Biennial	11/20/2016	GB44163447
Agilent	E5515C	Wireless Communications Test Set	2/23/2015	Biennial	2/23/2017	GB44450275
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273

Note:

1. All equipment was used solely within its calibration period.
2. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.



FCC ID: ZNFH810		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 76 of 81

# 15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div. Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
<b>Combined Standard Uncertainty (k=1)</b>	RSS						12.1	11.7	299
<b>Expanded Uncertainty (95% CONFIDENCE LEVEL)</b>	k=2						24.2	23.5	



The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 77 of 81	

Applicable for frequencies up to 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h= c x f/e	i= c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
<b>Combined Standard Uncertainty (k=1)</b>				RSS			12.4	12.0	299
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)				k=2			24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003



FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset		Page 78 of 81

## 16 CONCLUSION

### 16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFH810	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1504130706-R1.ZNF	<b>Test Dates:</b> 04/13/15 - 04/20/15	<b>DUT Type:</b> Portable Handset	Page 79 of 81	



## 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFH810		<b>SAR EVALUATION REPORT</b>	 Reviewed by: Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 80 of 81



- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFH810	 <b>SAR EVALUATION REPORT</b> 		<b>Reviewed by:</b> Quality Manager
Document S/N: OY1504130706-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 81 of 81

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.852$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.04, 6.04, 6.04); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Right Head, Cheek, Quick Cover (Open), Mid.ch,4 Tx slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.49 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.558 W/kg**

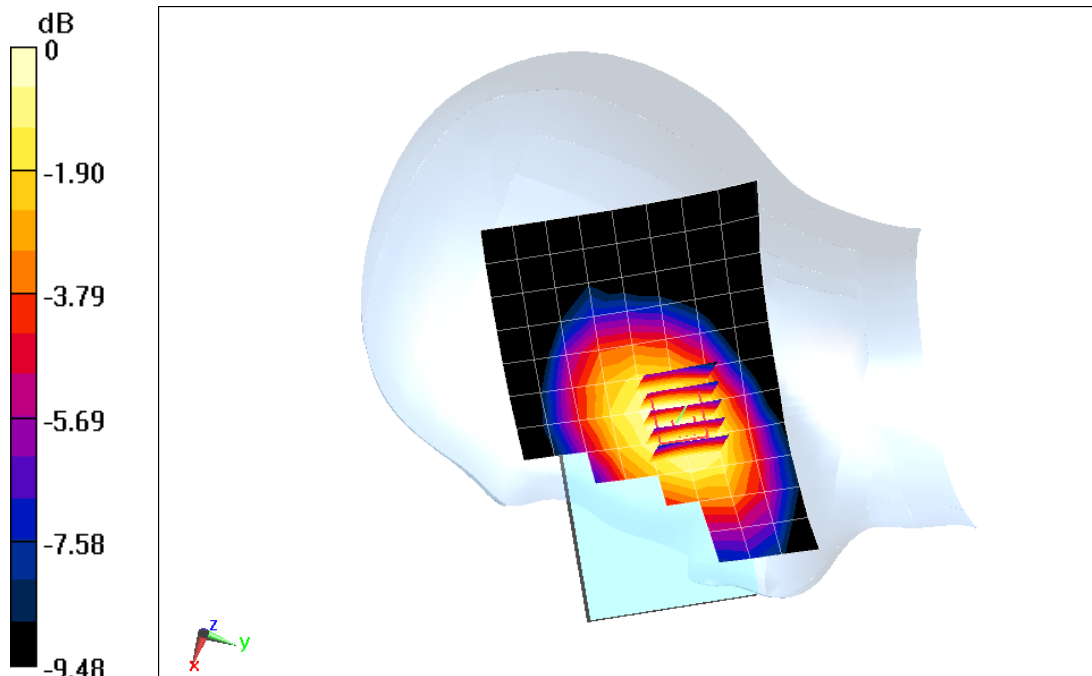

0 dB = 0.604 W/kg = -2.19 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.852$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.04, 6.04, 6.04); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Right Head, Cheek, Standard Cover, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.47 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.612 W/kg

**SAR(1 g) = 0.474 W/kg**

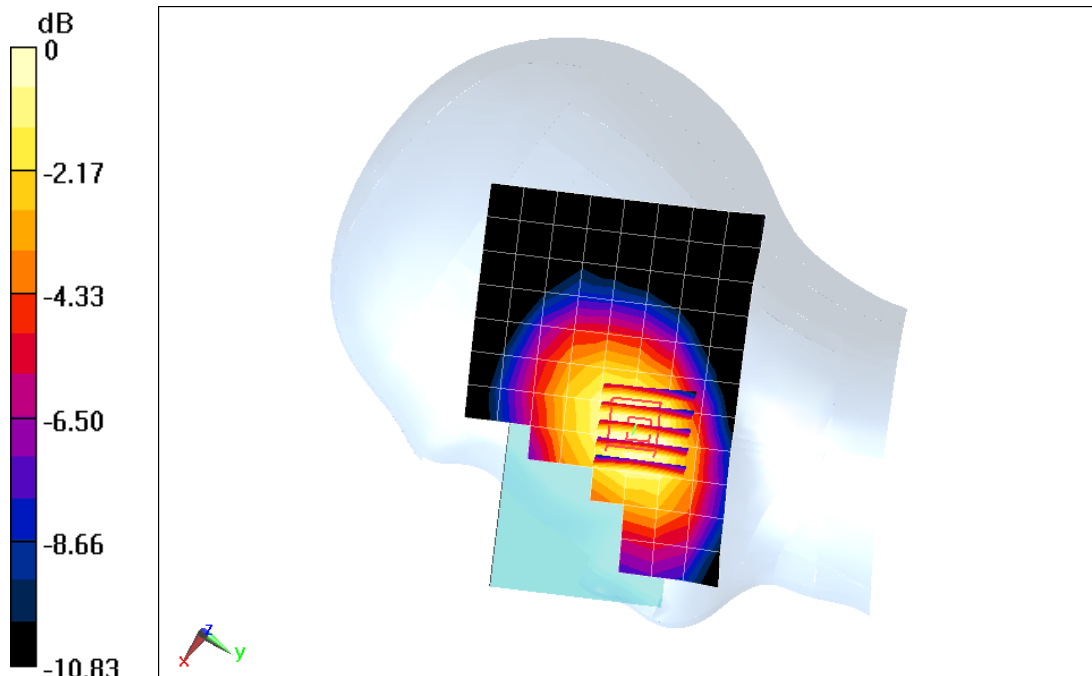

0 dB = 0.514 W/kg = -2.89 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19212**

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.318 \text{ S/m}$ ;  $\epsilon_r = 38.411$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: AWS UMTS, Left Head, Cheek, Quick Cover (Closed), Low.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.55 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 1.03 W/kg**

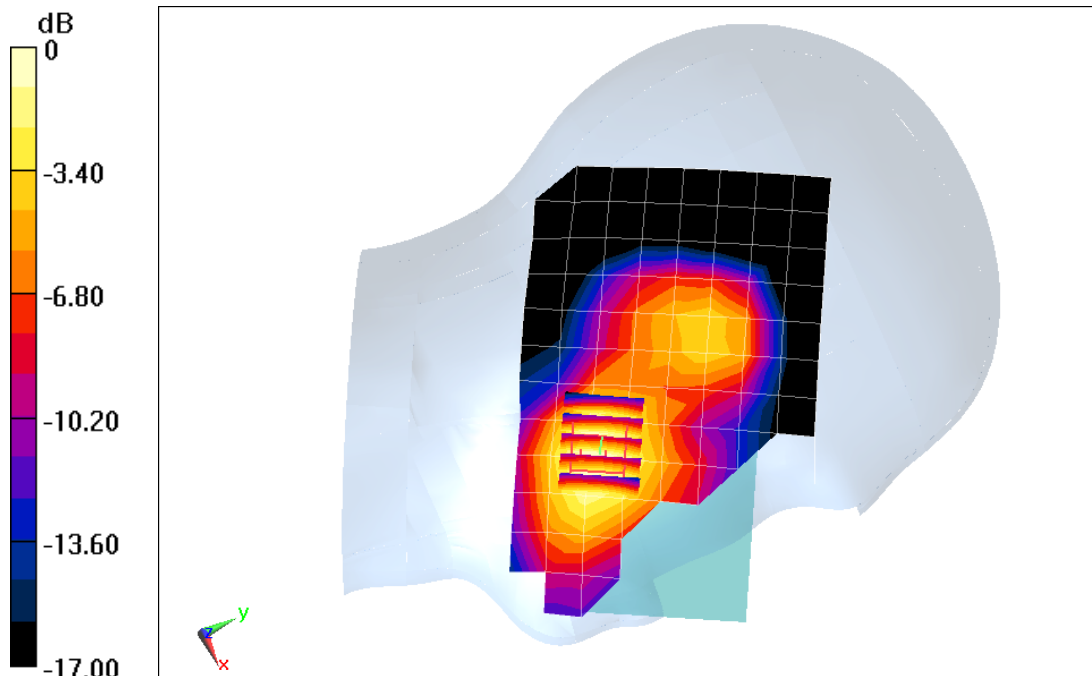

0 dB = 1.17 W/kg = 0.68 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076  
Medium: 1900 Head Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 41.262$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Left Head, Cheek, Quick Cover (Open), Mid.ch, 4 Tx slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.70 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.781 W/kg

**SAR(1 g) = 0.500 W/kg**

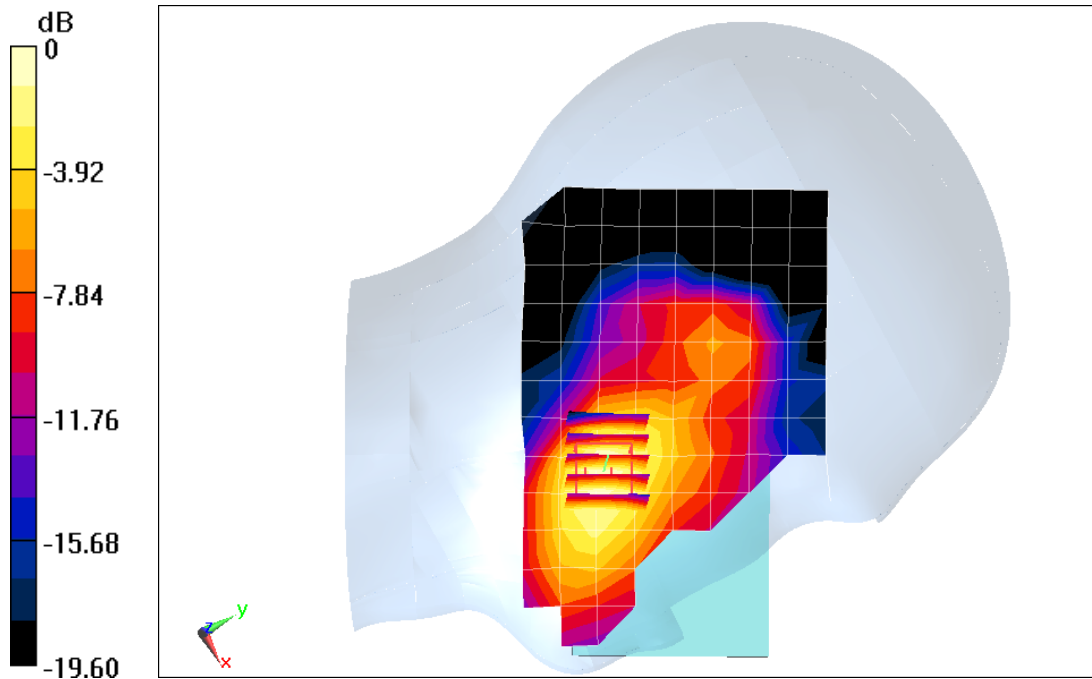

0 dB = 0.575 W/kg = -2.40 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 41.262$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Left Head, Cheek, Quick Cover (Open), Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.92 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.855 W/kg**

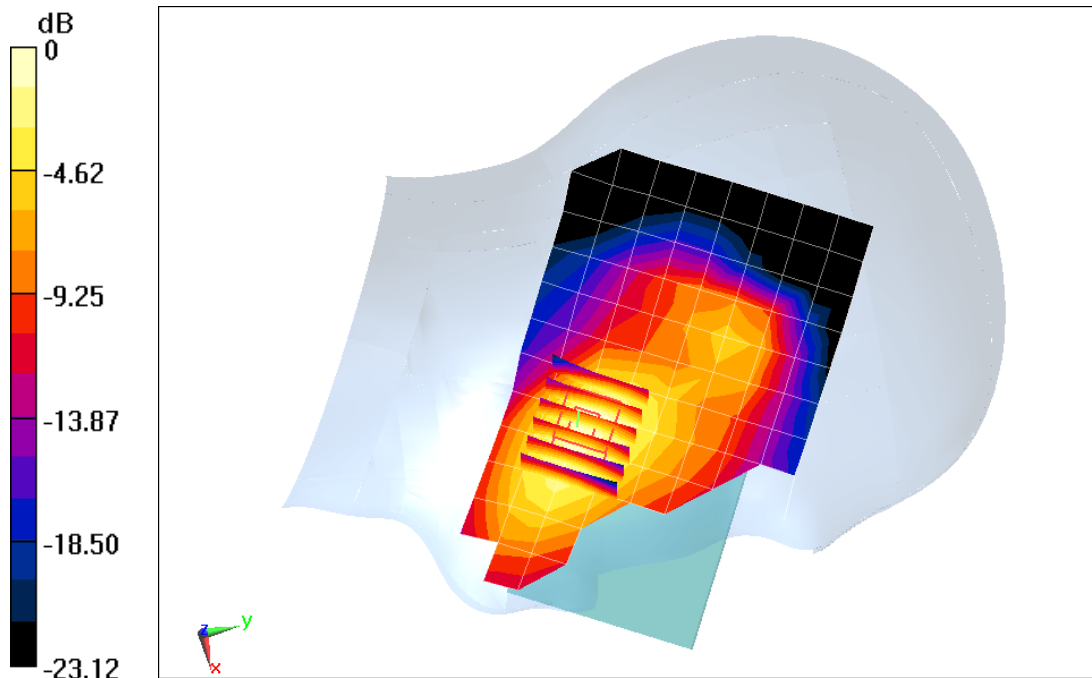

0 dB = 1.01 W/kg = 0.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.872 \text{ S/m}$ ;  $\epsilon_r = 41.655$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.58, 6.58, 6.58); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Right Head, Cheek, Quick Cover (Open),  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 17.25 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.295 W/kg  
**SAR(1 g) = 0.241 W/kg**

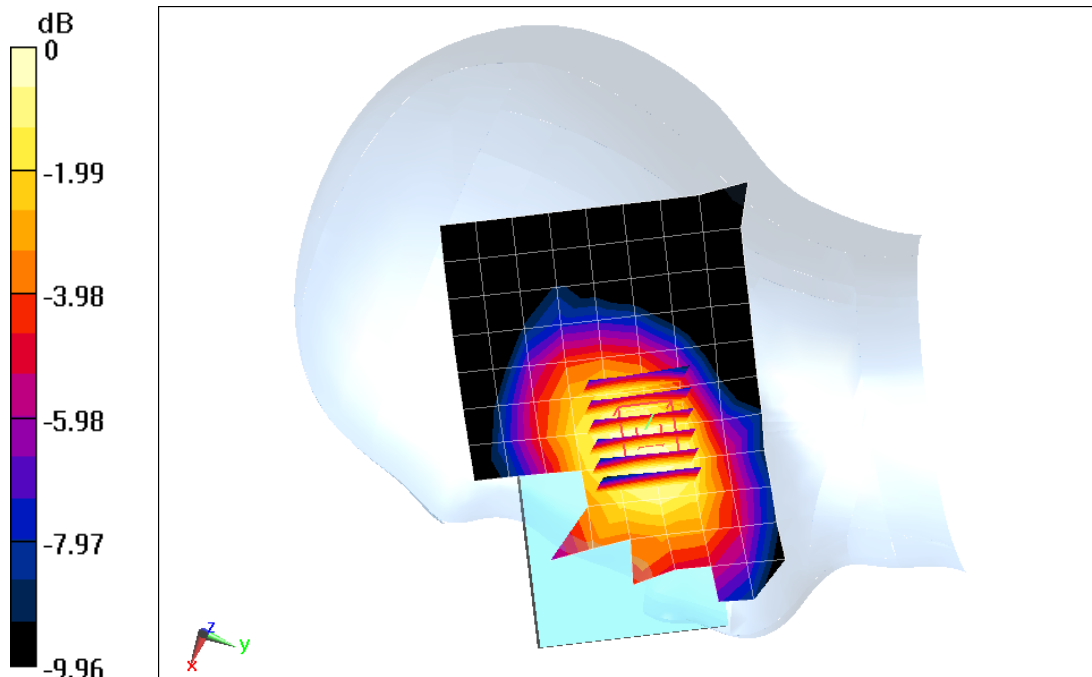

0 dB = 0.262 W/kg = -5.82 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 0.937 \text{ S/m}$ ;  $\epsilon_r = 40.705$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.58, 6.58, 6.58); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Right Head, Cheek, Quick Cover (Open),  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 22.14 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.620 W/kg  
**SAR(1 g) = 0.443 W/kg**

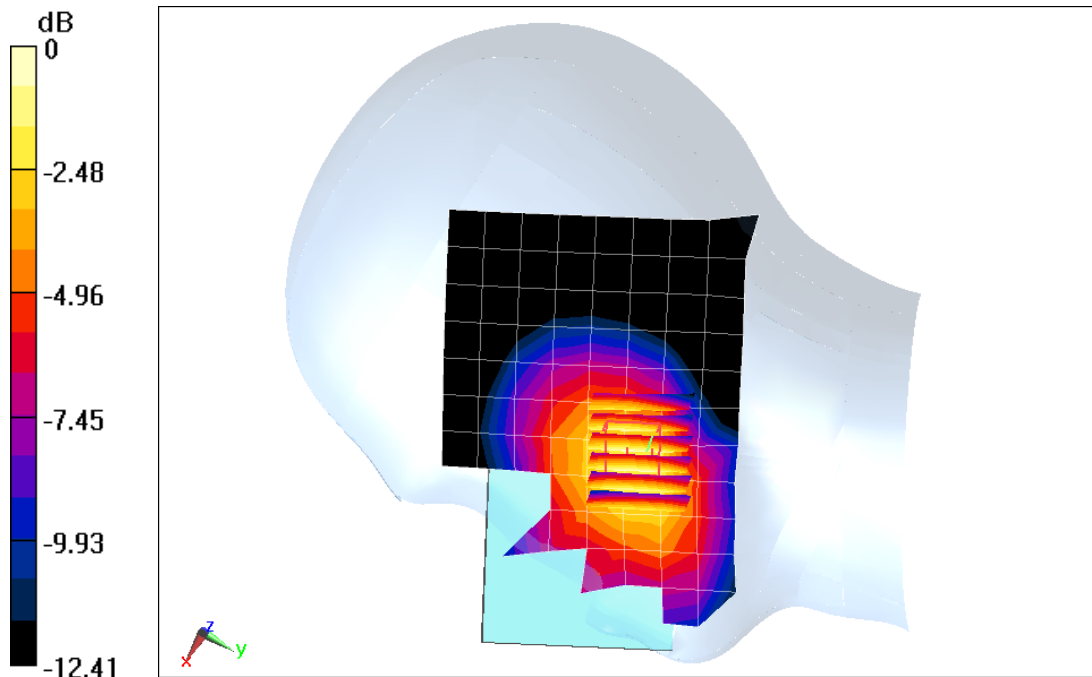

0 dB = 0.496 W/kg = -3.05 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.853$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.04, 6.04, 6.04); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 25.52 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.651 W/kg  
**SAR(1 g) = 0.498 W/kg**

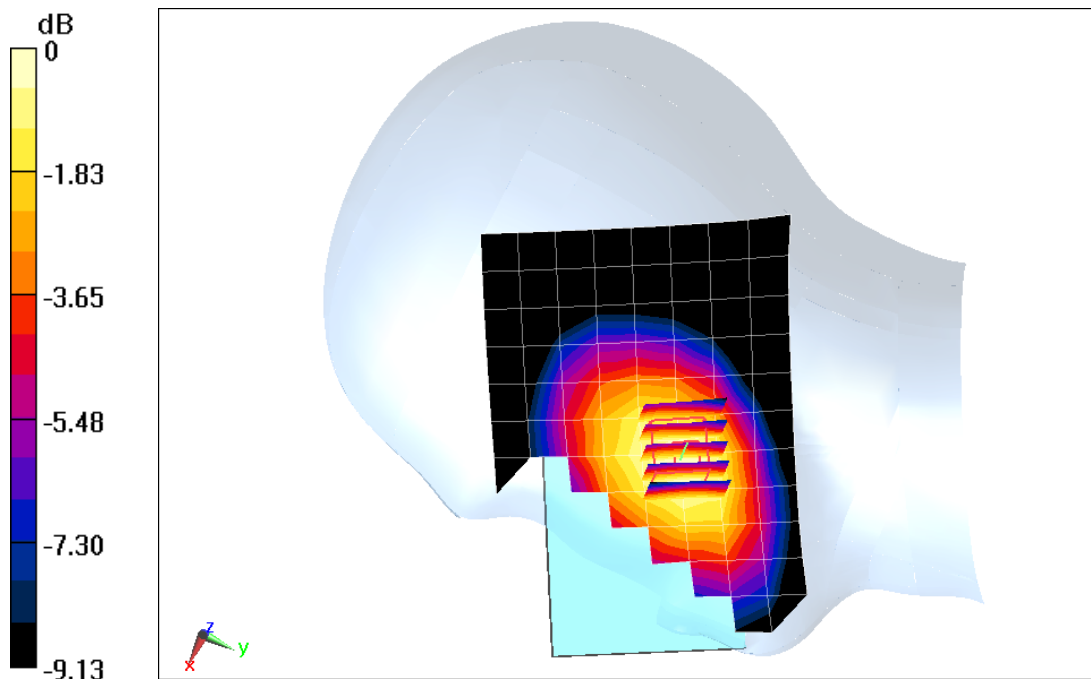

0 dB = 0.545 W/kg = -2.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19253**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1732.5$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 39.506$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Test Date: 04-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Quick Cover (Closed),  
Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.92 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 1.13 W/kg**

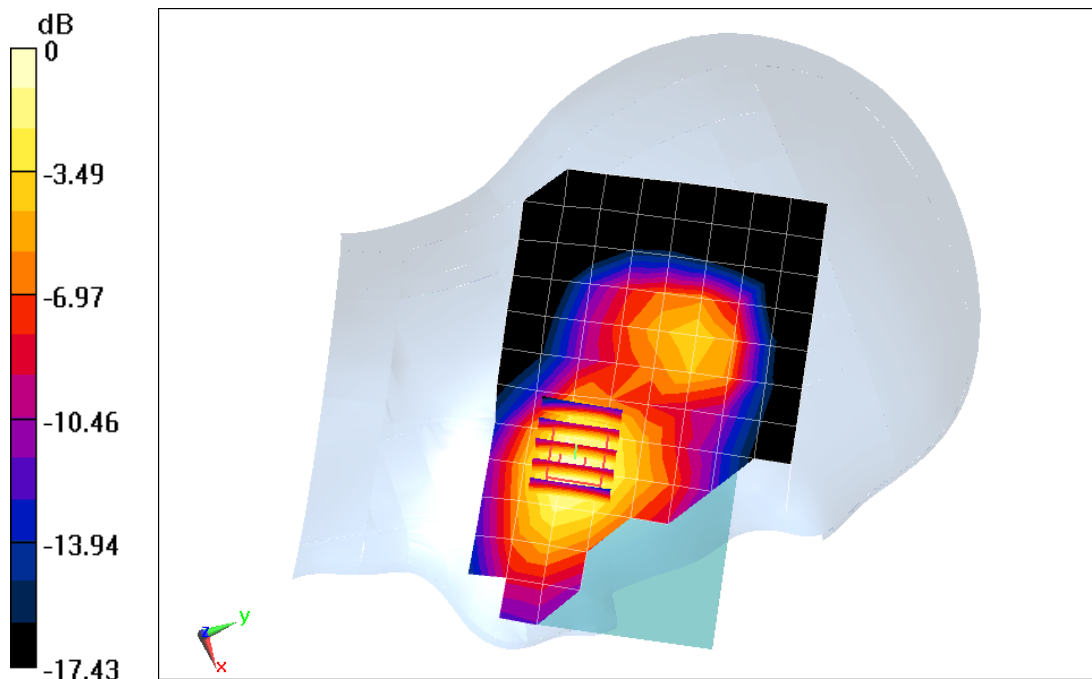

0 dB = 1.31 W/kg = 1.17 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1860 \text{ MHz}$ ;  $\sigma = 1.385 \text{ S/m}$ ;  $\epsilon_r = 38.968$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-13-2015; Ambient Temp: 21.9°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(4.85, 4.85, 4.85); Calibrated: 8/19/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014  
Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, Quick Cover (Open),  
Low.ch, QPSK, 20 MHz Bandwidth, 1 RB, 0 RB Offset**

**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 29.72 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 1.45 W/kg  
**SAR(1 g) = 0.988 W/kg**

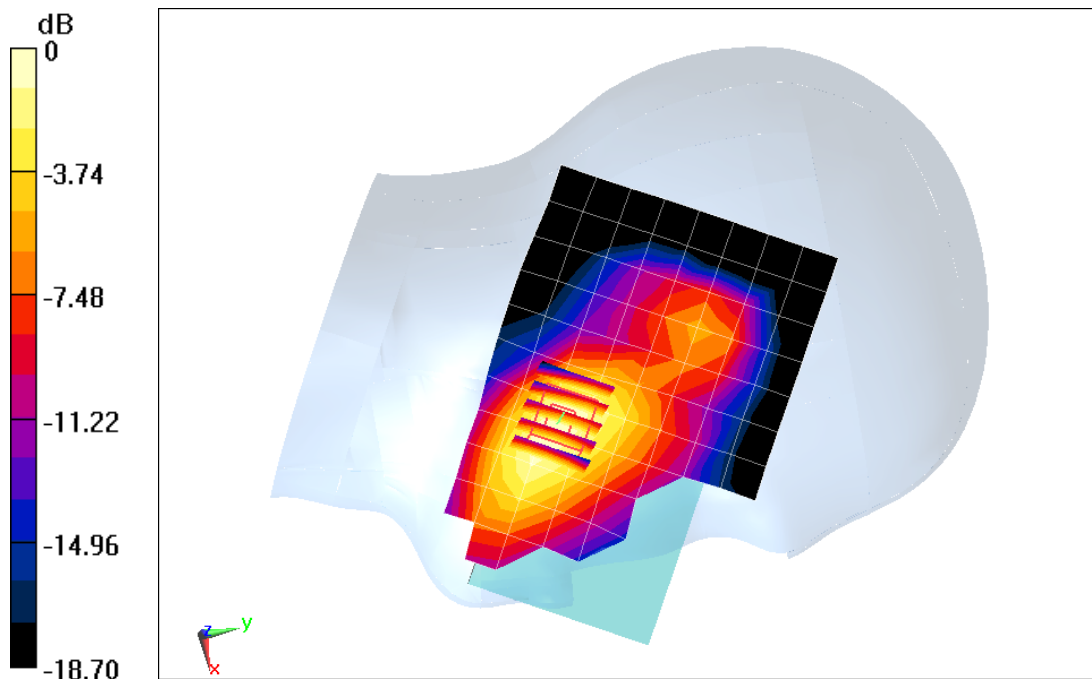

0 dB = 1.15 W/kg = 0.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: 2500 Head Medium parameters used (interpolated):  
 $f = 2535 \text{ MHz}$ ;  $\sigma = 1.911 \text{ S/m}$ ;  $\epsilon_r = 37.735$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-15-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(4.38, 4.38, 4.38); Calibrated: 2/27/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/18/2015  
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 7, Left Head, Cheek, Standard Cover, Mid.ch, QPSK,  
20 MHz Bandwidth, 1 RB, 0 RB Offset**

**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 17.93 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 0.853 W/kg  
**SAR(1 g) = 0.473 W/kg**

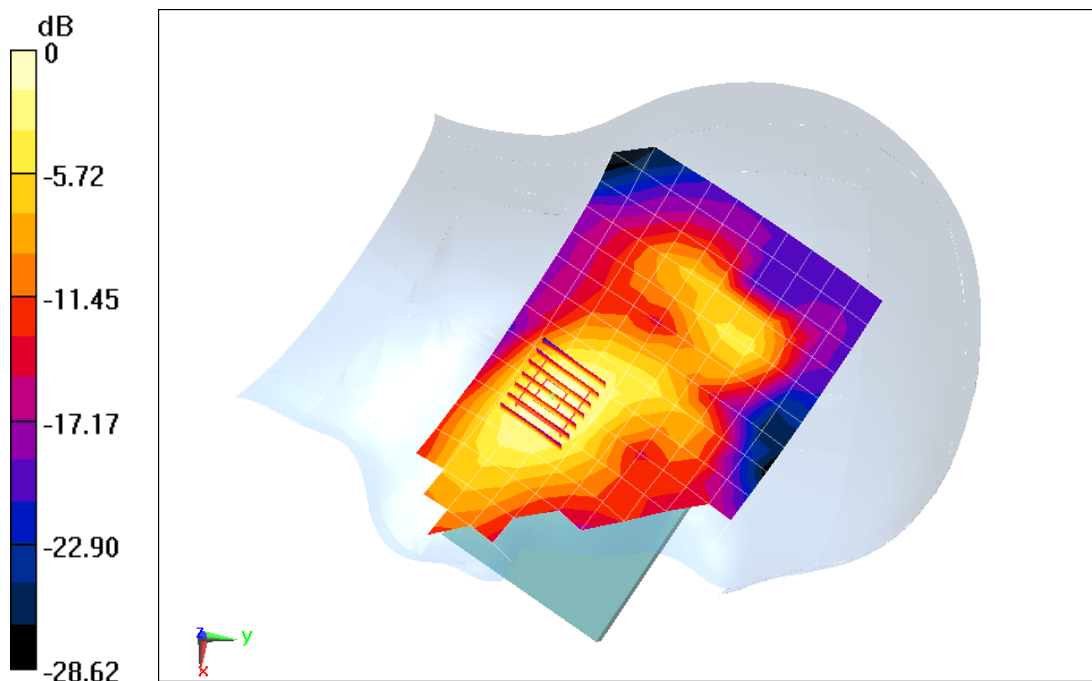

0 dB = 0.580 W/kg = -2.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**


Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Head Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 1.807 \text{ S/m}$ ;  $\epsilon_r = 38.184$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/27/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/18/2015  
Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Left Head,  
Cheek, Standard Cover, Ch 6, 1 Mbps**

**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 15.89 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.948 W/kg  
**SAR(1 g) = 0.421 W/kg**

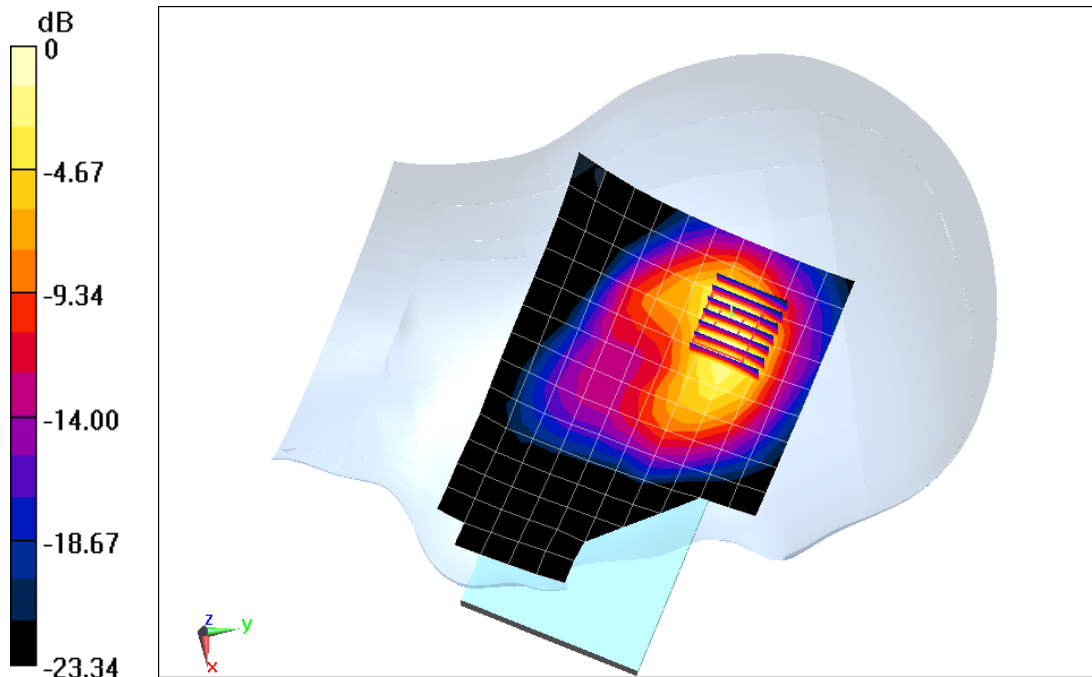

0 dB = 0.546 W/kg = -2.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**

Communication System: UID 0, IEEE 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 4.791 \text{ S/m}$ ;  $\epsilon_r = 35.491$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-20-2014; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.92, 4.92, 4.92); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth, Right Head, Tilt,  
Standard Cover, Ch 100, 6 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.862 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.361 W/kg**

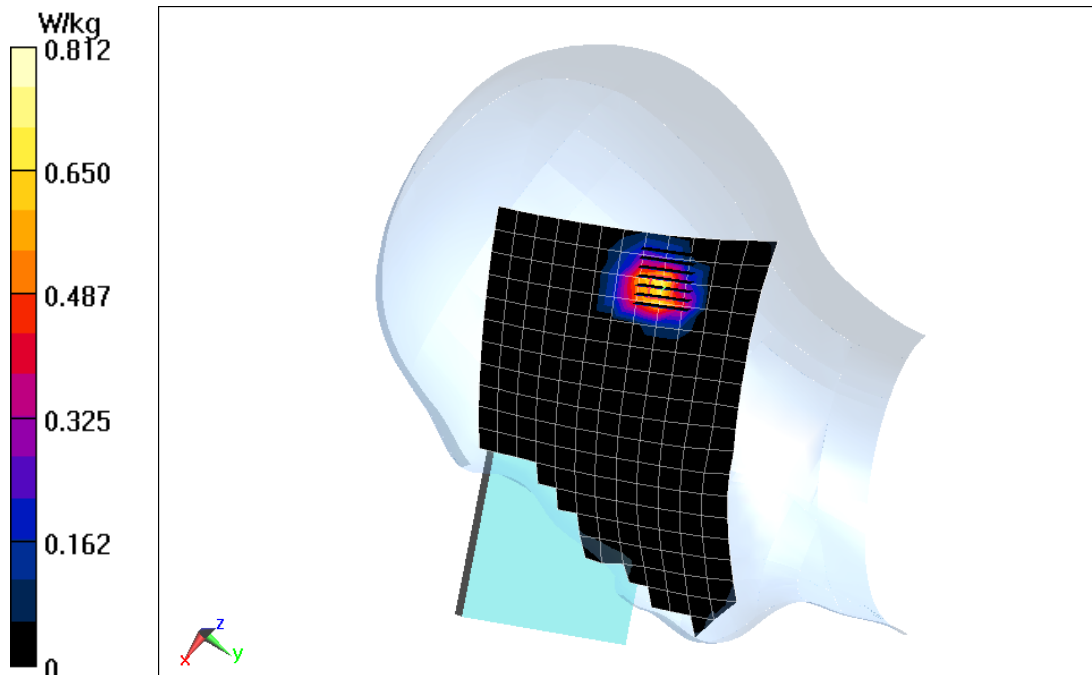

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 53.901$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Body SAR, Back side, Standard Cover, Mid.ch, 4 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.05 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.681 W/kg**

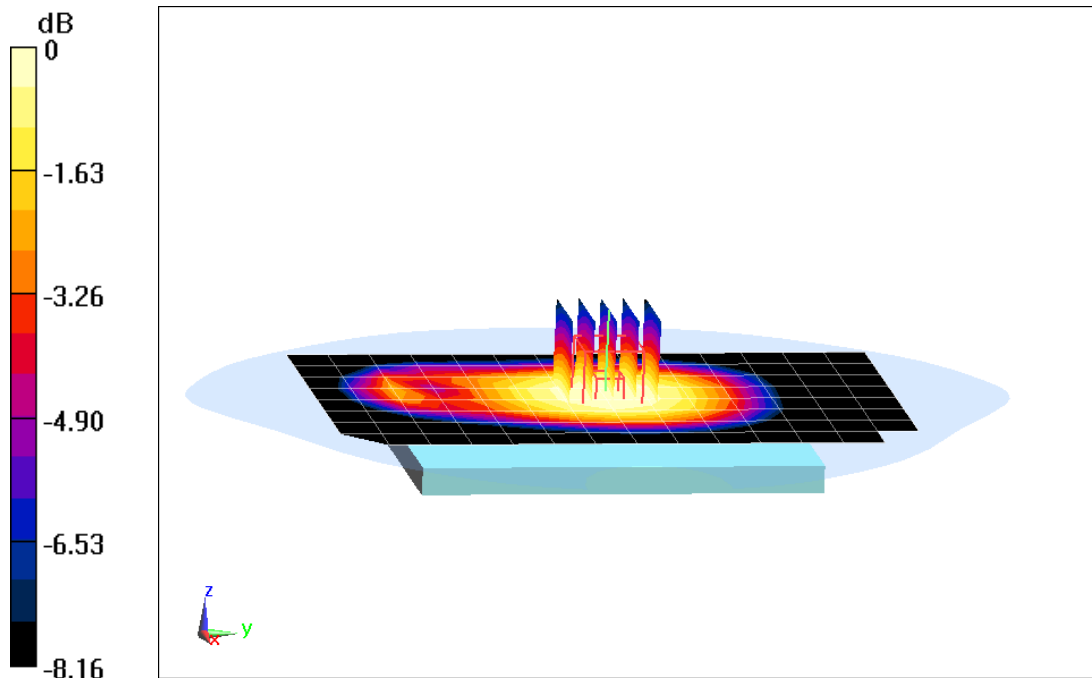

0 dB = 0.743 W/kg = -1.29 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 53.901$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Body SAR, Right Edge, Standard Cover, Mid.ch,4 Tx Slots**


**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.72 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.971 W/kg

**SAR(1 g) = 0.705 W/kg**

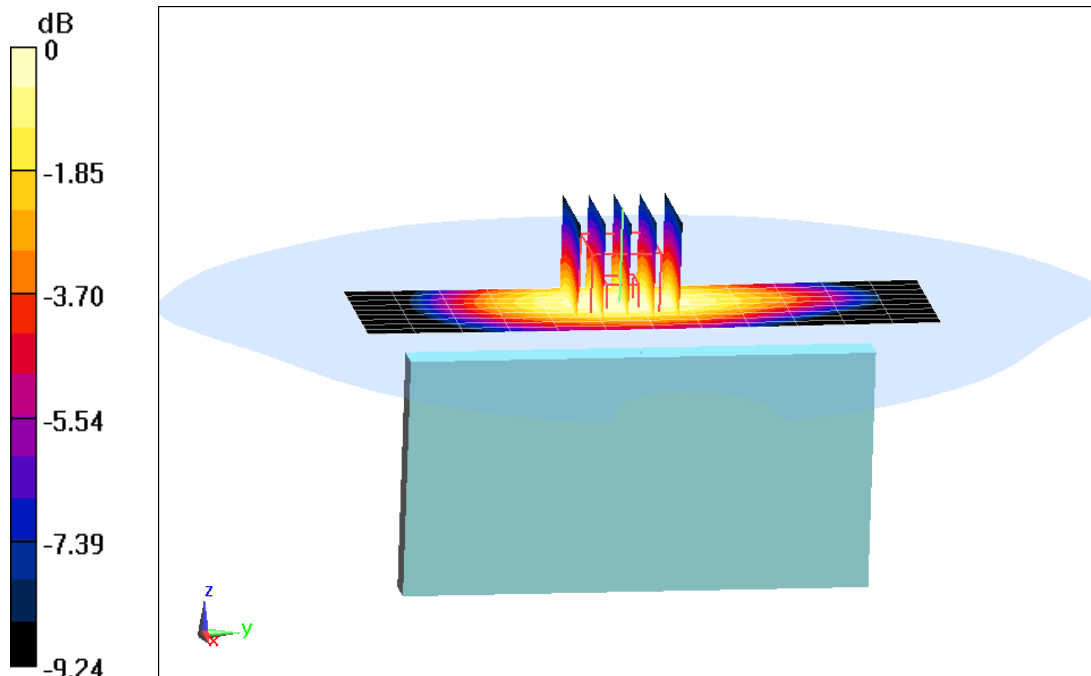

0 dB = 0.804 W/kg = -0.95 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 53.901$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Body SAR, Back side, Standard Cover, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.04 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.697 W/kg

**SAR(1 g) = 0.550 W/kg**

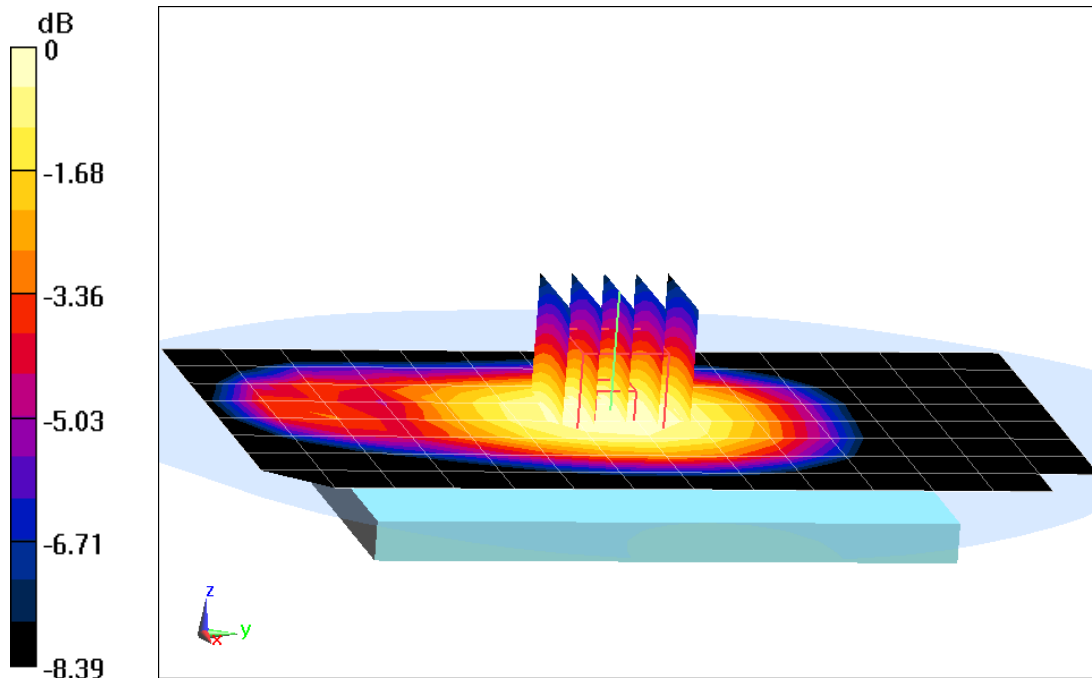

0 dB = 0.605 W/kg = -2.18 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19212**

Communication System: UID 0, UMTS (AWS); Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.45 \text{ S/m}$ ;  $\epsilon_r = 52.878$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: AWS UMTS, Body SAR, Back side, Standard Cover, Mid.ch**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.40 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.996 W/kg

**SAR(1 g) = 0.667 W/kg**

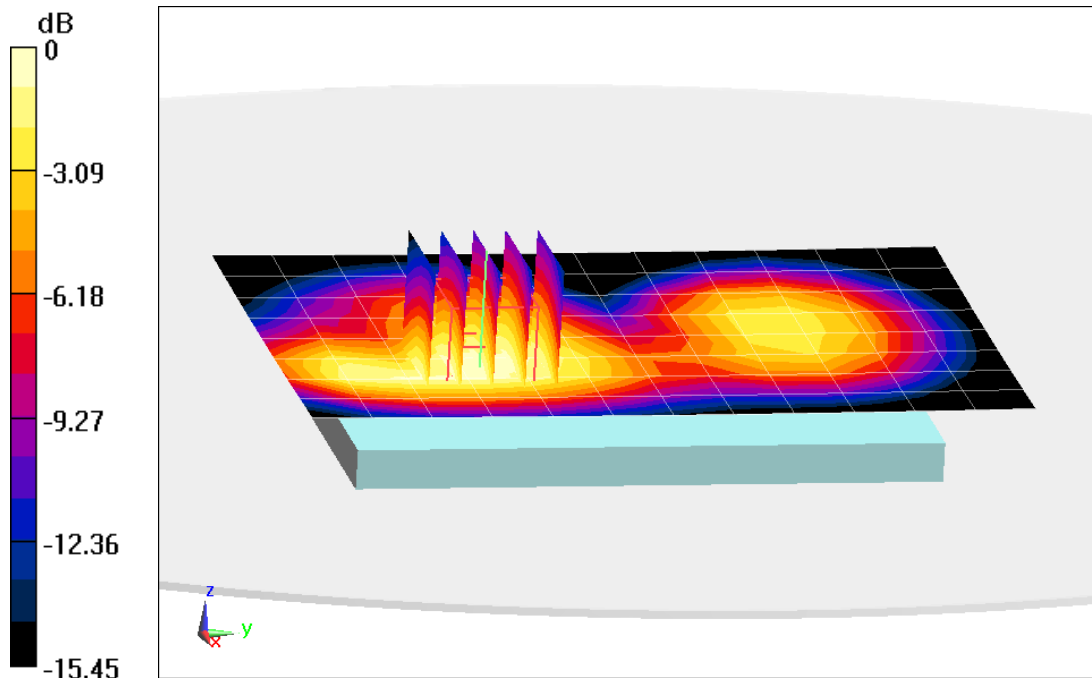

0 dB = 0.769 W/kg = -1.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19212**


Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.45 \text{ S/m}$ ;  $\epsilon_r = 52.878$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: AWS UMTS, Body SAR, Front side, Standard Cover, Mid.ch**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 25.41 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 1.74 W/kg  
**SAR(1 g) = 0.896 W/kg**

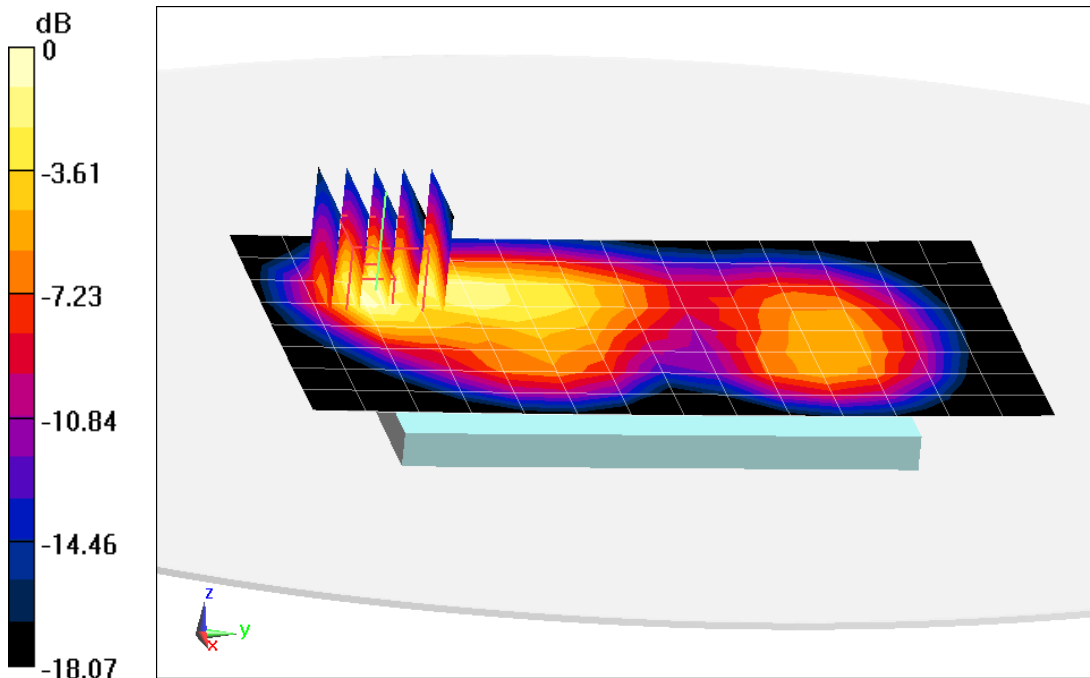

0 dB = 1.15 W/kg = 0.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 52.856$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Body SAR, Back side, Standard Cover, Mid.ch, 4 Tx Slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.34 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.310 W/kg**

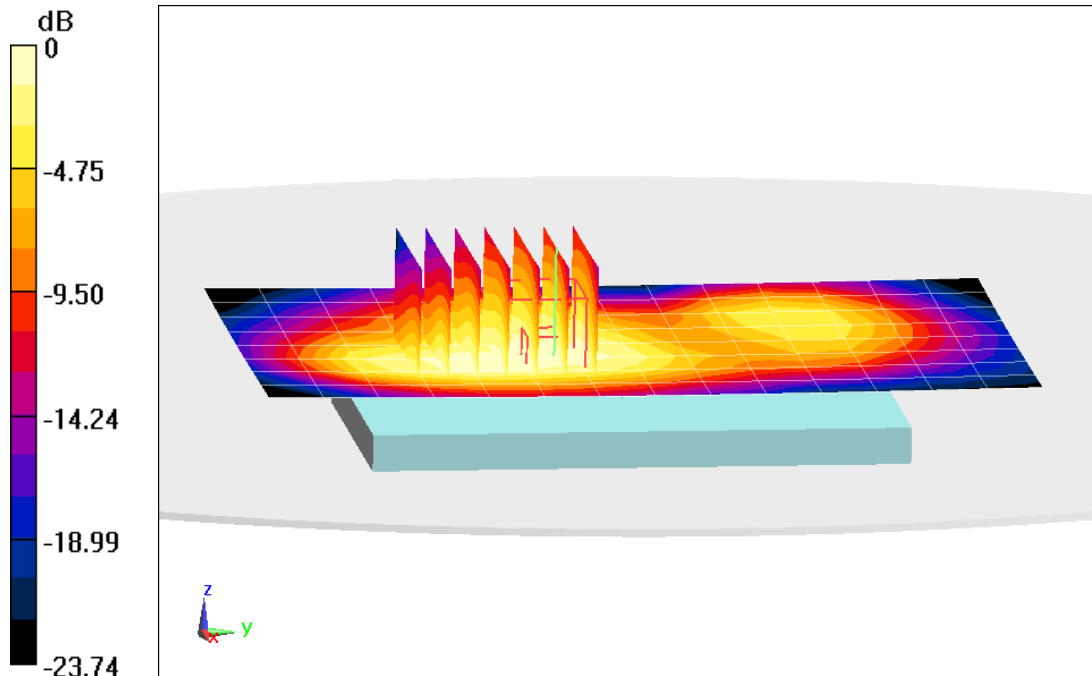

0 dB = 0.355 W/kg = -4.50 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 52.856$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Body SAR, Left Edge, Standard Cover, Mid.ch, 4 Tx Slots**


**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.46 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.641 W/kg

**SAR(1 g) = 0.403 W/kg**

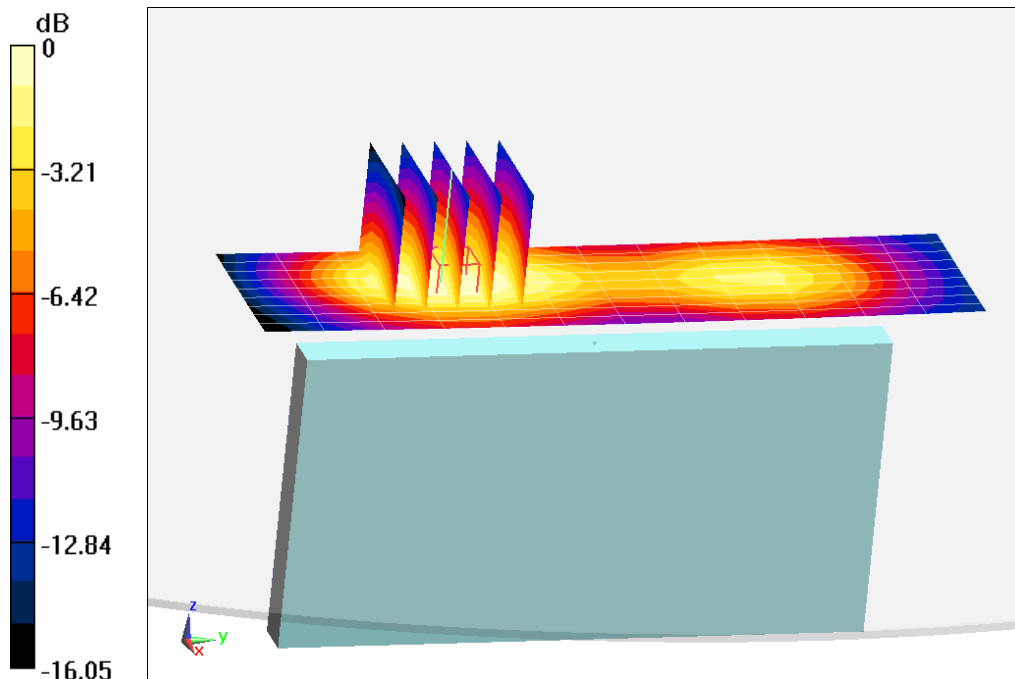

0 dB = 0.485 W/kg = -3.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 52.856$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Back Side, Standard Cover, Mid.ch**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.82 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.710 W/kg  
**SAR(1 g) = 0.482 W/kg**

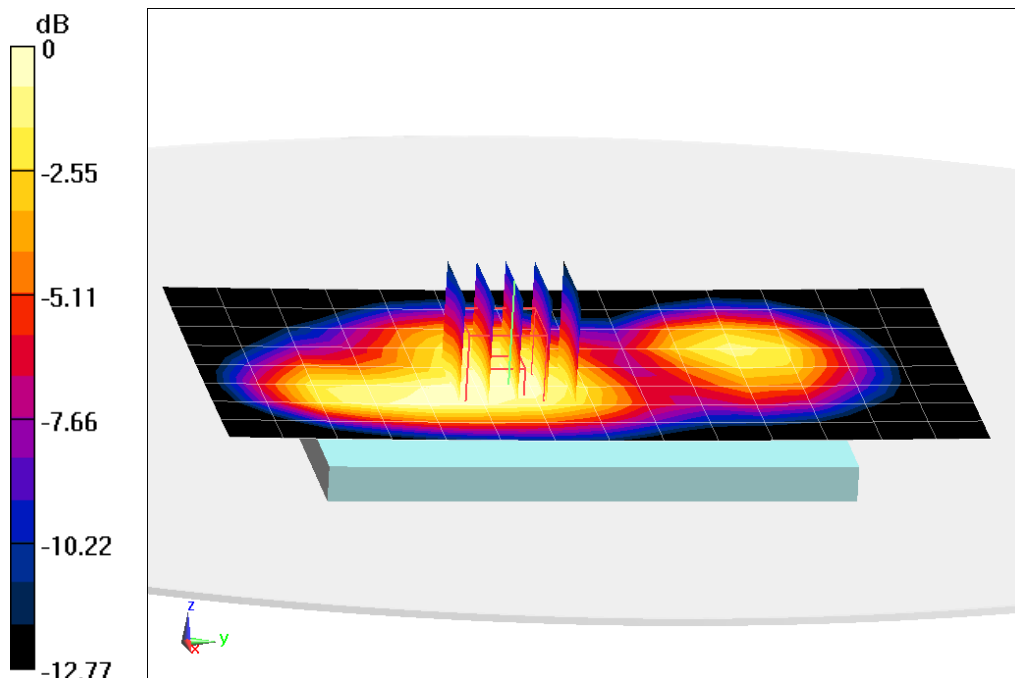

0 dB = 0.555 W/kg = -2.56 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19220**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 52.856$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-16-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Left Edge, Standard Cover, Mid.ch**

**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.94 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.10 W/kg  
**SAR(1 g) = 0.699 W/kg**

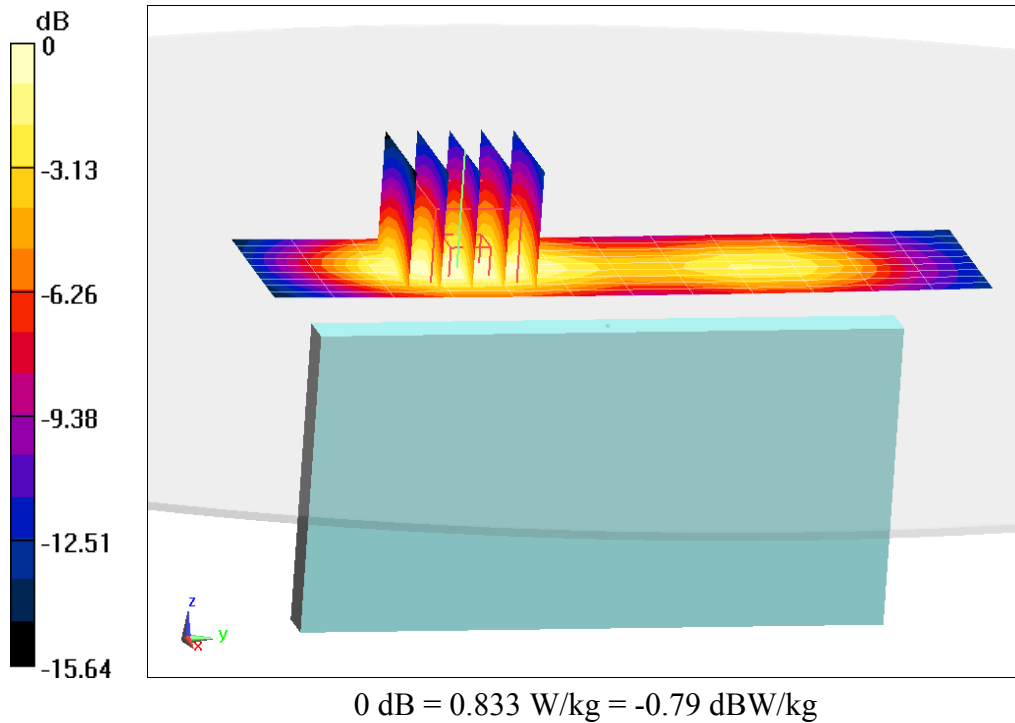



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 707.5$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 55.067$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 9/17/2014  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.58 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.427 W/kg  
**SAR(1 g) = 0.339 W/kg**

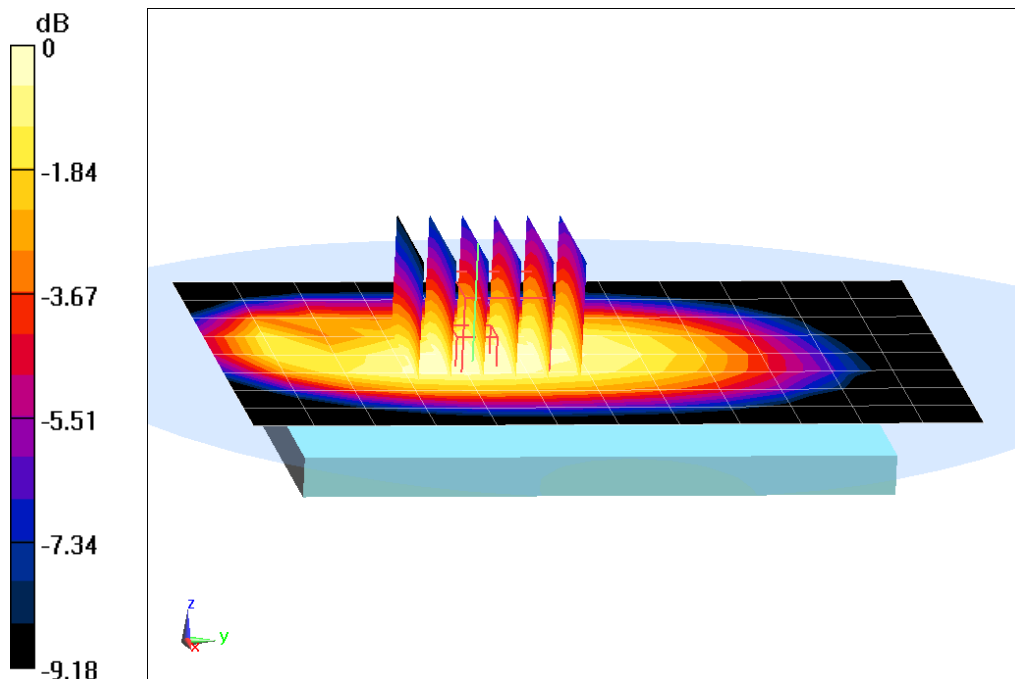

0 dB = 0.371 W/kg = -4.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.931 \text{ S/m}$ ;  $\epsilon_r = 55.067$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 9/17/2014  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Front side, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 21.78 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.700 W/kg  
**SAR(1 g) = 0.396 W/kg**

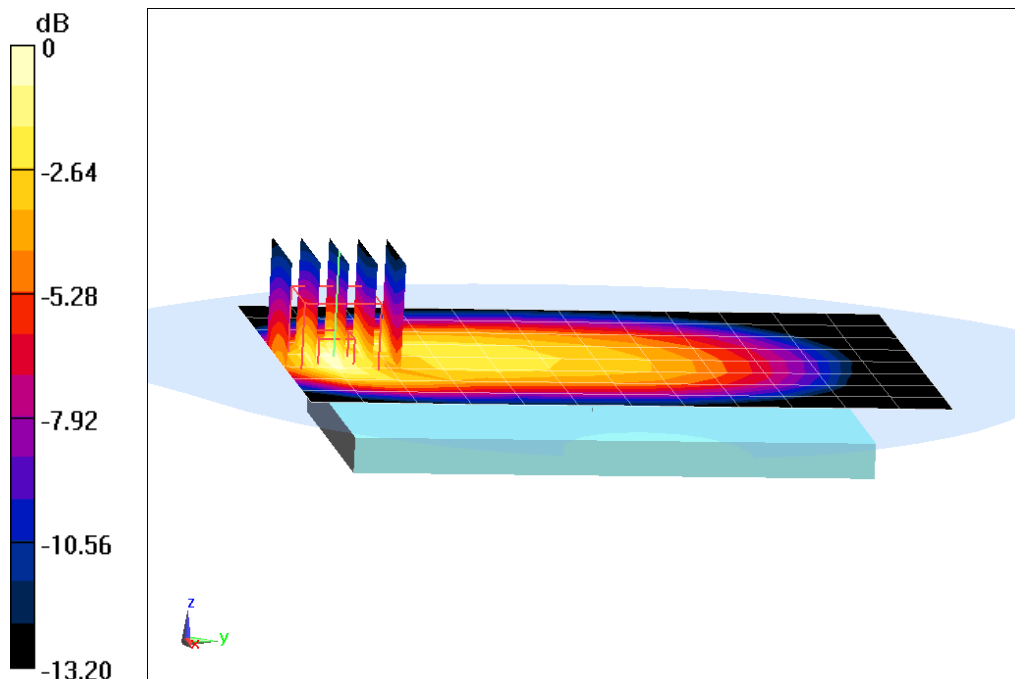

0 dB = 0.492 W/kg = -3.08 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 1.002 \text{ S/m}$ ;  $\epsilon_r = 54.249$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 9/17/2014  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back side, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (6x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 22.04 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.588 W/kg  
**SAR(1 g) = 0.473 W/kg**

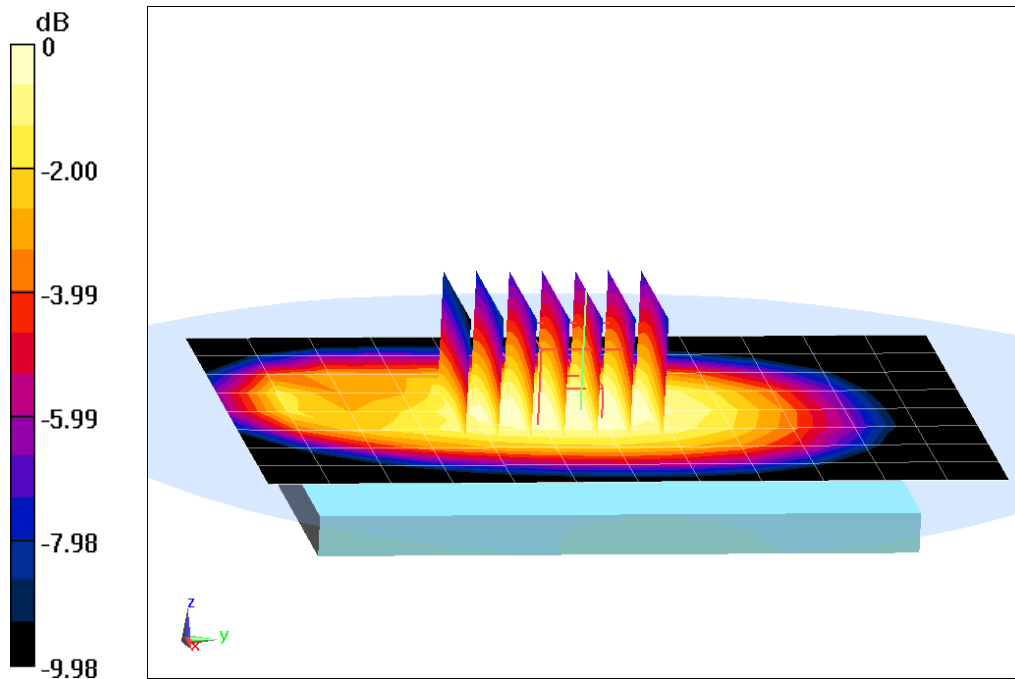

0 dB = 0.519 W/kg = -2.85 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 782 \text{ MHz}$ ;  $\sigma = 1.002 \text{ S/m}$ ;  $\epsilon_r = 54.249$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1323; Calibrated: 9/17/2014  
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Front side, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.24 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.940 W/kg  
**SAR(1 g) = 0.542 W/kg**

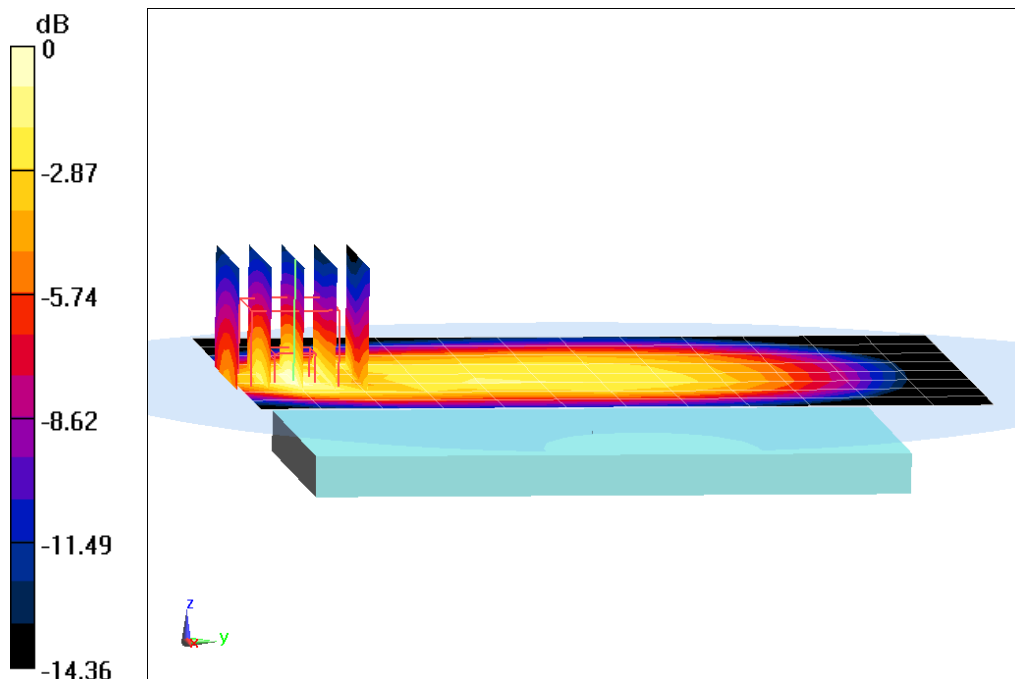

0 dB = 0.670 W/kg = -1.74 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.997 \text{ S/m}$ ;  $\epsilon_r = 53.902$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1334; Calibrated: 3/13/2015  
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Standard Cover,  
Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 26.11 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.783 W/kg  
**SAR(1 g) = 0.627 W/kg**

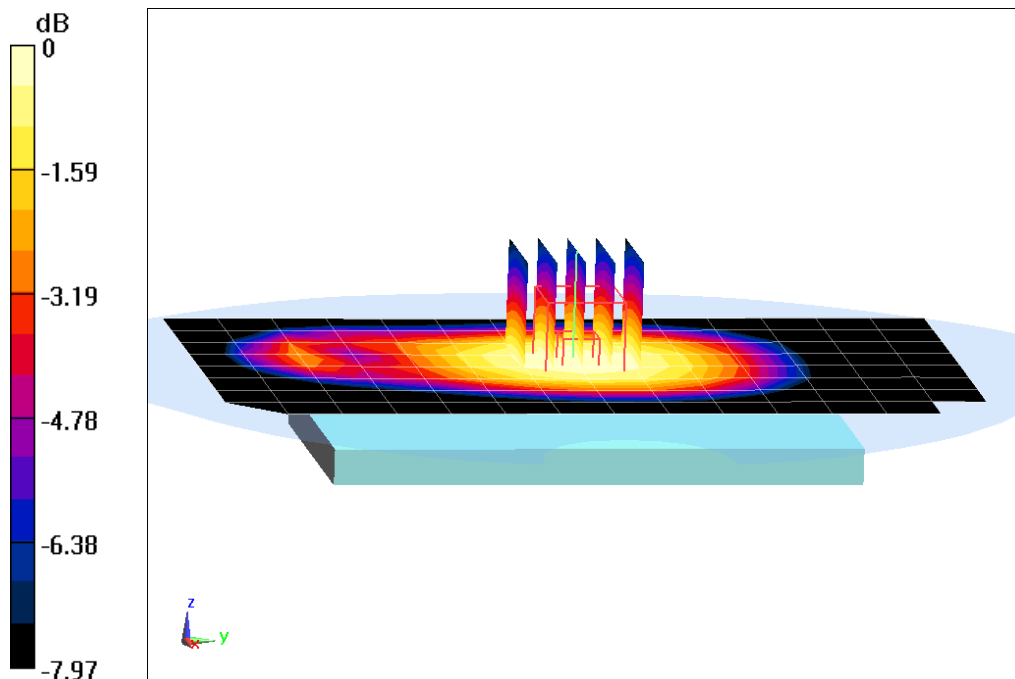

0 dB = 0.685 W/kg = -1.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19253**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.45 \text{ S/m}$ ;  $\epsilon_r = 52.878$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Standard Cover,  
Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.710 W/kg**

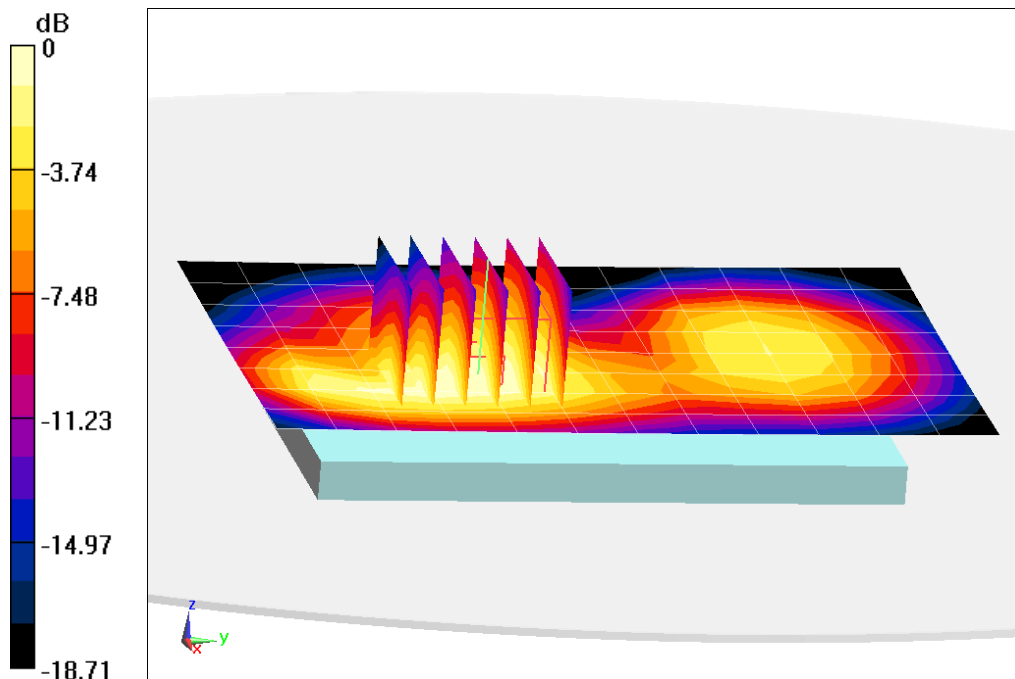

0 dB = 0.824 W/kg = -0.84 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19253**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.45 \text{ S/m}$ ;  $\epsilon_r = 52.878$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1322; Calibrated: 8/12/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Front side, Standard Cover,  
Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB,0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.46 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.749 W/kg**

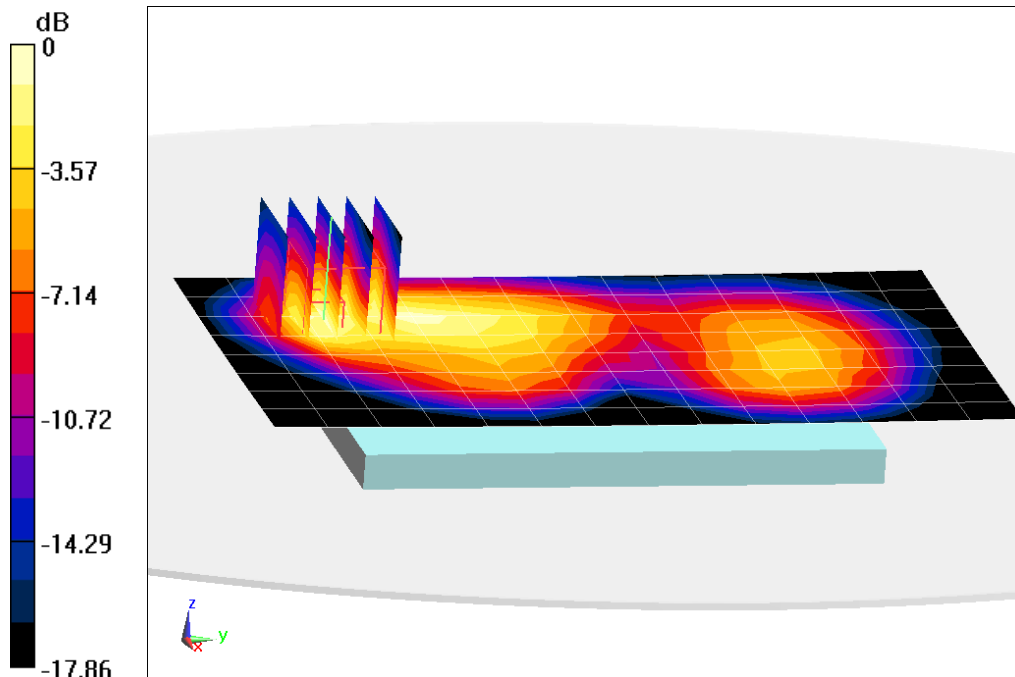

0 dB = 0.984 W/kg = -0.07 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$ ;  $\sigma = 1.48 \text{ S/m}$ ;  $\epsilon_r = 52.423$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Back Side, Standard Cover,  
Low.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.16 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.802 W/kg

**SAR(1 g) = 0.549 W/kg**

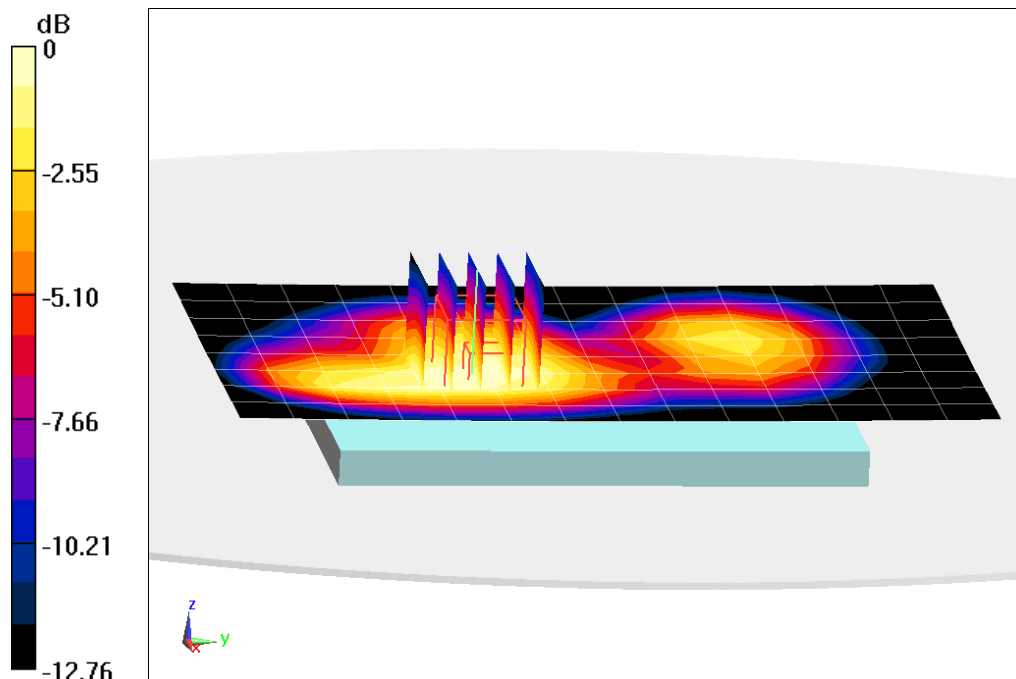

0 dB = 0.628 W/kg = -2.02 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$ ;  $\sigma = 1.48 \text{ S/m}$ ;  $\epsilon_r = 52.423$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Left Edge, Standard Cover,  
Low.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.88 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.811 W/kg**

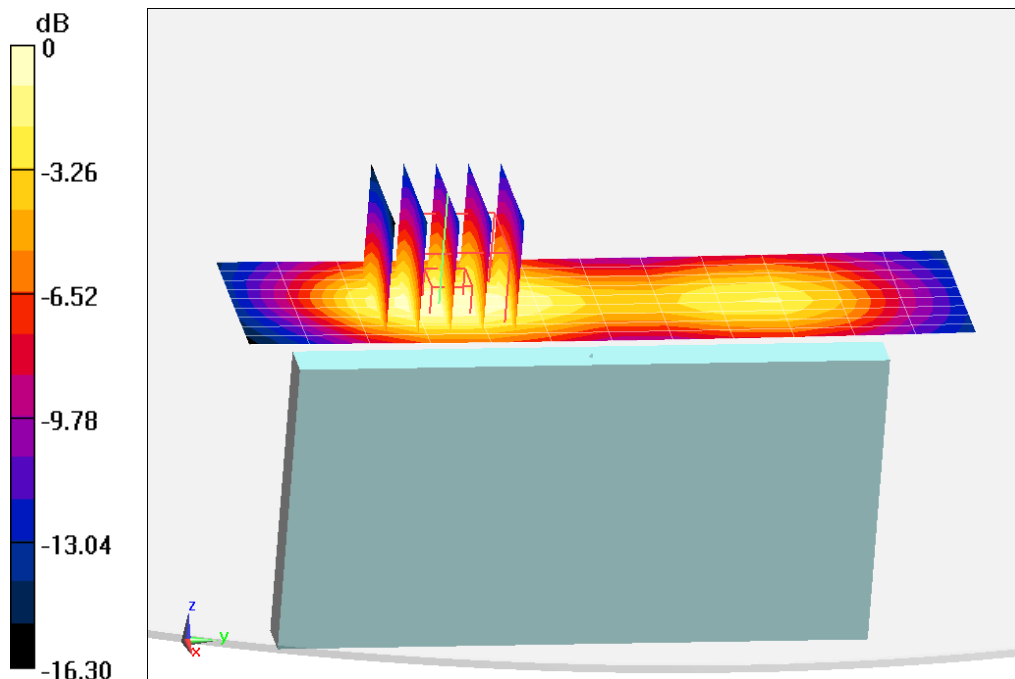

0 dB = 0.980 W/kg = -0.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2535 \text{ MHz}$ ;  $\sigma = 2.162 \text{ S/m}$ ;  $\epsilon_r = 50.804$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3318; ConvF(4.17, 4.17, 4.17); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 7, Body SAR, Back side, Quick Cover (Closed),  
Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 15.49 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.03 W/kg  
**SAR(1 g) = 0.476 W/kg**

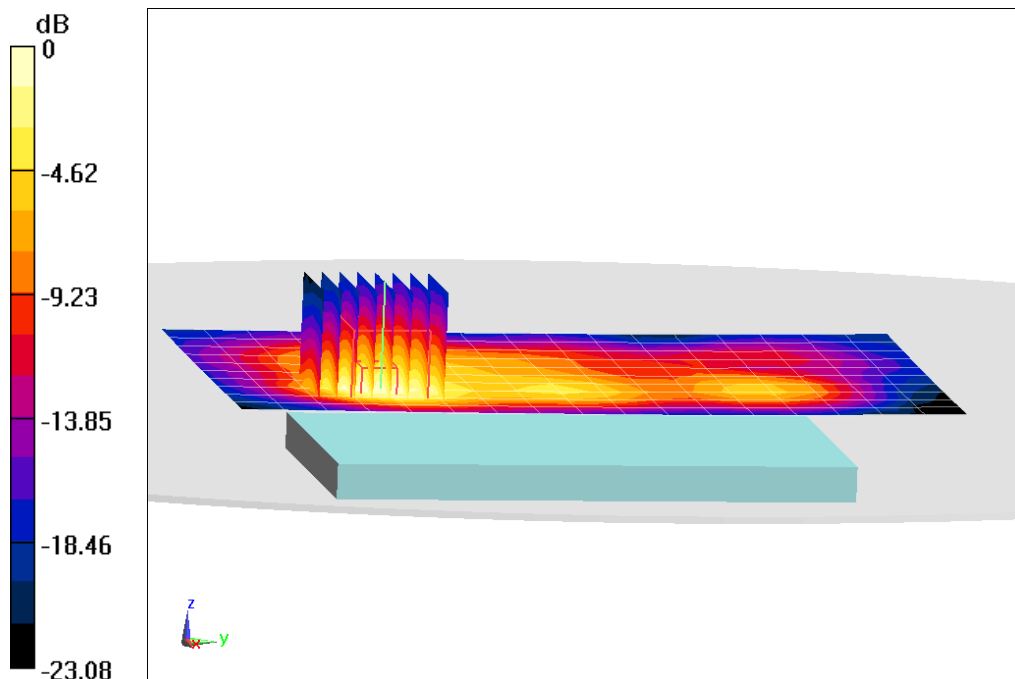

0 dB = 0.601 W/kg = -2.21 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19246**


Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2535 \text{ MHz}$ ;  $\sigma = 2.162 \text{ S/m}$ ;  $\epsilon_r = 50.804$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3318; ConvF(4.17, 4.17, 4.17); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 7, Body SAR, Front side, Standard Cover,  
Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 15.92 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 1.10 W/kg  
**SAR(1 g) = 0.487 W/kg**

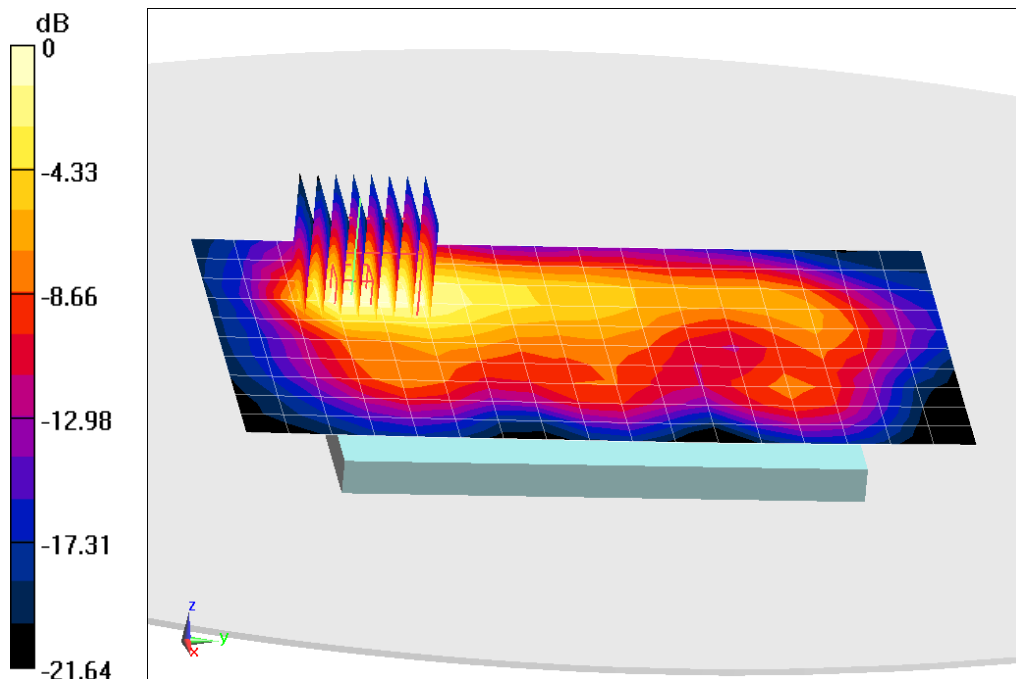

0 dB = 0.627 W/kg = -2.03 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**


Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 2.027 \text{ S/m}$ ;  $\epsilon_r = 51.199$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.37, 4.37, 4.37); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, Body SAR, Ch 6, 1 Mbps, Back Side, Standard Cover**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 9.538 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.359 W/kg  
**SAR(1 g) = 0.173 W/kg**

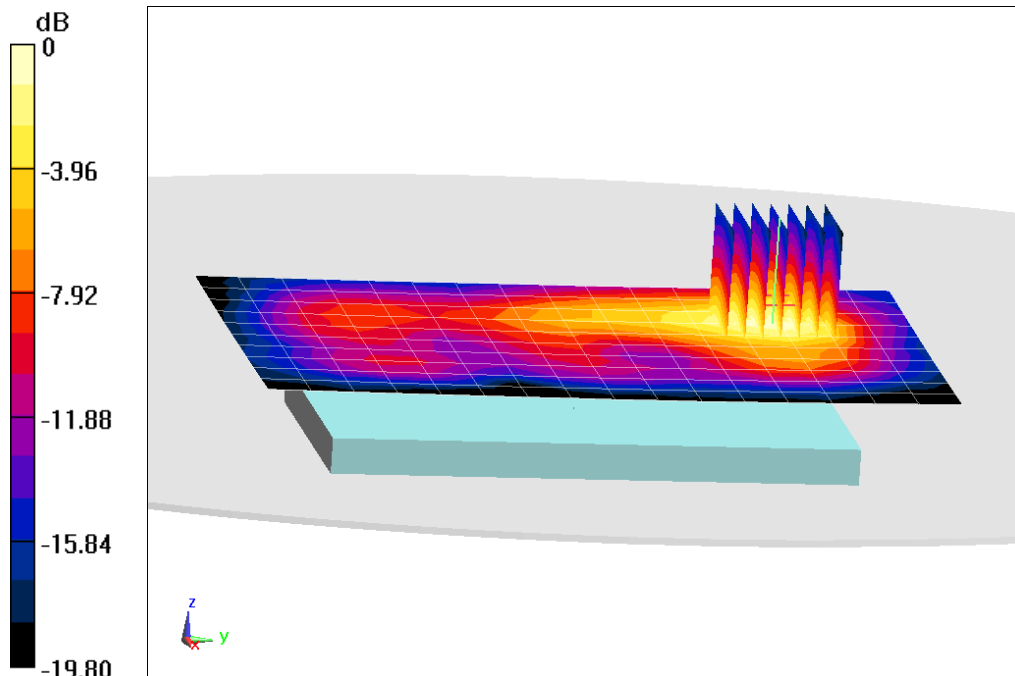

0 dB = 0.221 W/kg = -6.56 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**

Communication System: UID 0, IEEE 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.721 \text{ S/m}$ ;  $\epsilon_r = 46.601$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2C, Body SAR, Ch 100, 6 Mbps,  
Back Side, Standard Cover**


**Area Scan (13x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.133 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.826 W/kg

**SAR(1 g) = 0.198 W/kg**

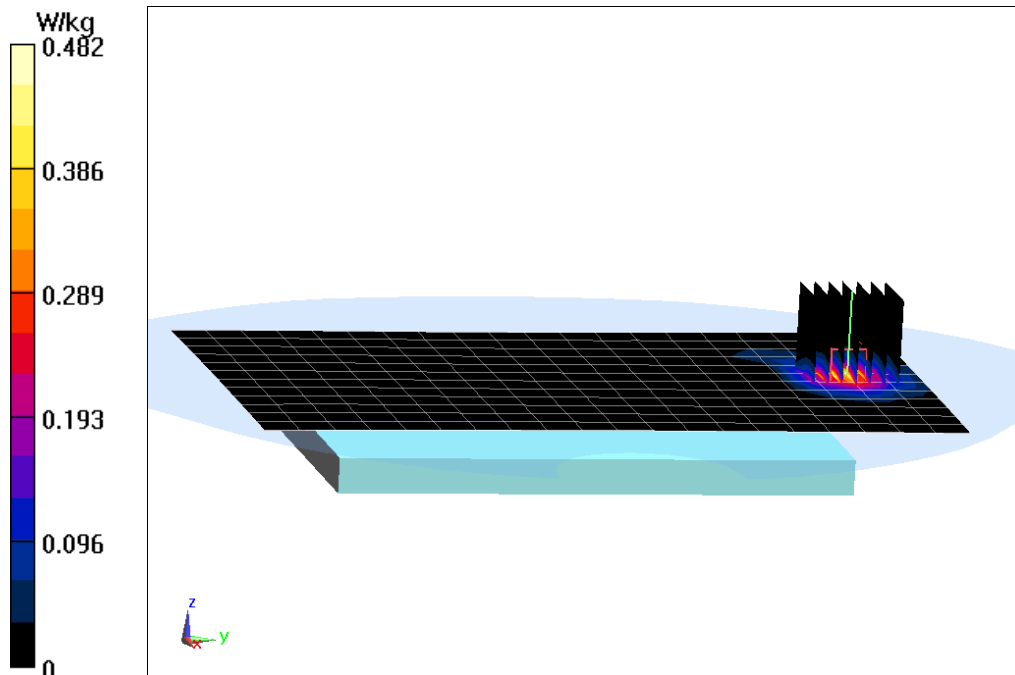

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**

Communication System: UID 0, IEEE 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785 \text{ MHz}$ ;  $\sigma = 6.108 \text{ S/m}$ ;  $\epsilon_r = 46.224$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section: Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-3, Body SAR, Ch 157, 6 Mbps,  
Top Edge, Standard Cover**


**Area Scan (7x17x1):** Measurement grid: dx=5mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.446 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.542 W/kg

**SAR(1 g) = 0.115 W/kg**

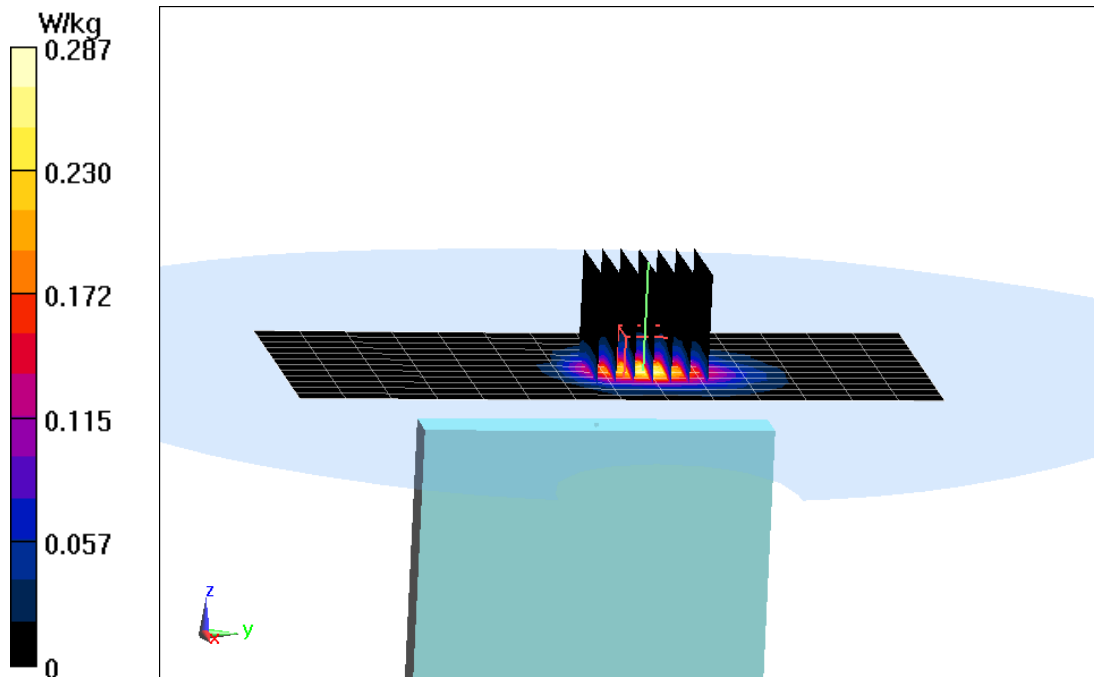

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**


Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2441 \text{ MHz}$ ;  $\sigma = 2.032 \text{ S/m}$ ;  $\epsilon_r = 51.182$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.37, 4.37, 4.37); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side, Quick Cover (Closed)**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.102 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.0580 W/kg  
**SAR(1 g) = 0.030 W/kg**

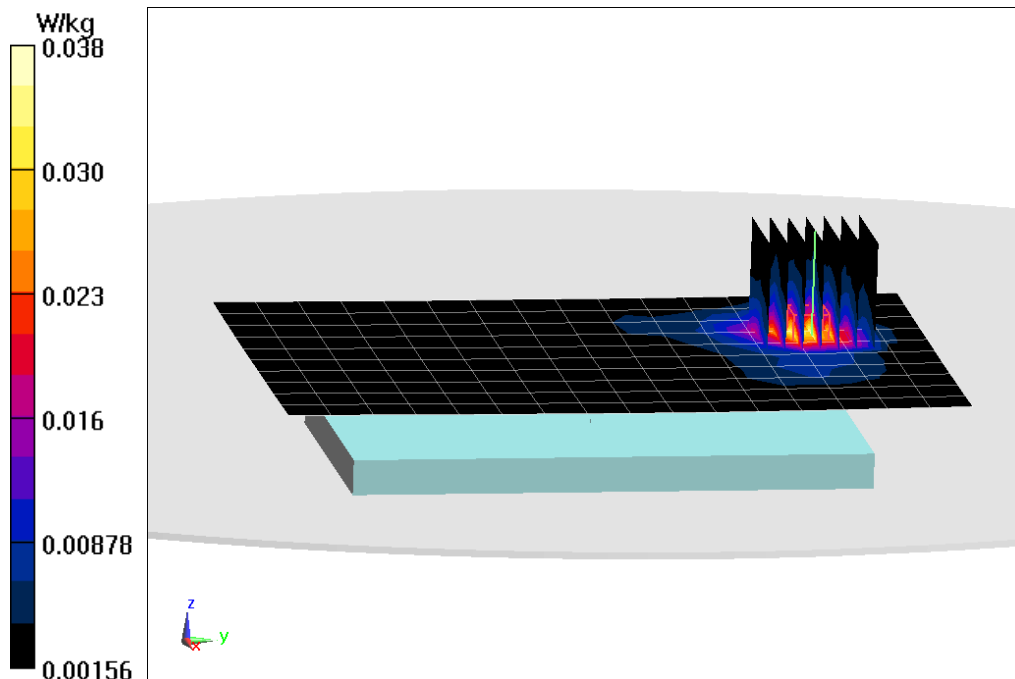

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**

Communication System: UID 0, IEEE 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.721 \text{ S/m}$ ;  $\epsilon_r = 46.601$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2C, Extremity SAR, Ch 100, 6 Mbps,  
Back Side, Standard Cover**


**Area Scan (13x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 21.34 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.6 W/kg

**SAR(10 g) = 0.380 W/kg**

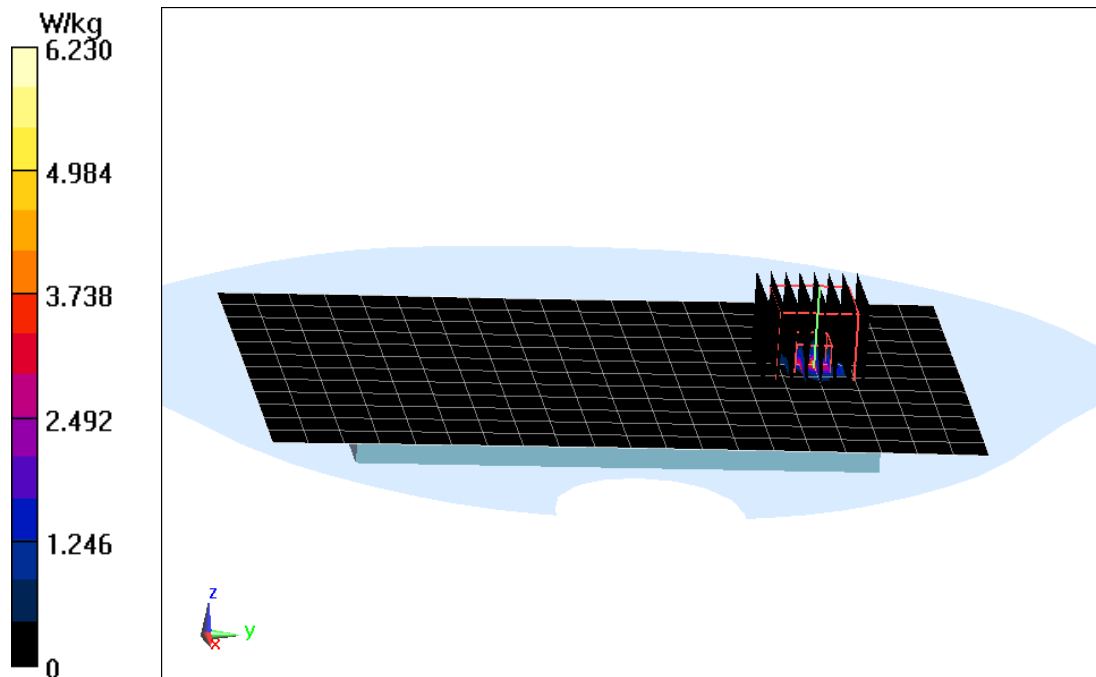

0 dB = 6.23 W/kg = 7.94 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFH810; Type: Portable Handset; Serial: 19125**


Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2441 \text{ MHz}$ ;  $\sigma = 2.032 \text{ S/m}$ ;  $\epsilon_r = 51.182$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-13-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.37, 4.37, 4.37); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth, Extremity SAR, Ch 39, 1 Mbps, Back Side, Quick Cover (Closed)**

**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 9.149 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.414 W/kg  
**SAR(10 g) = 0.053 W/kg**

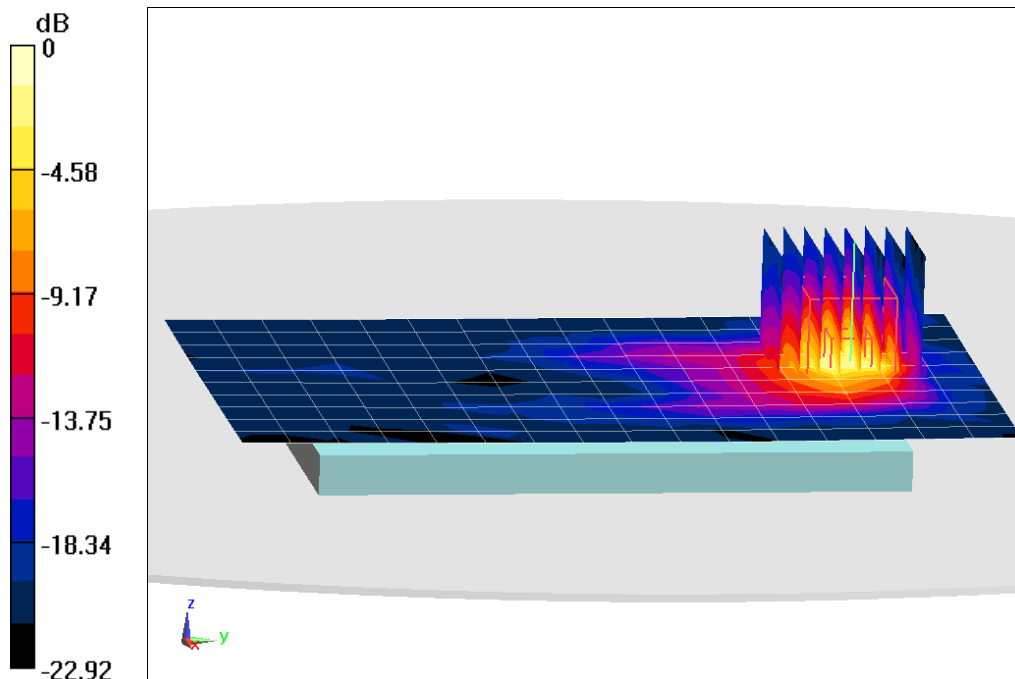

0 dB = 0.206 W/kg = -6.86 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 750 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.114$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-20-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.58, 6.58, 6.58); Calibrated: 1/23/2015;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 1/14/2015  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 750 MHz System Verification

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.816 W/kg**

Deviation = -1.45%

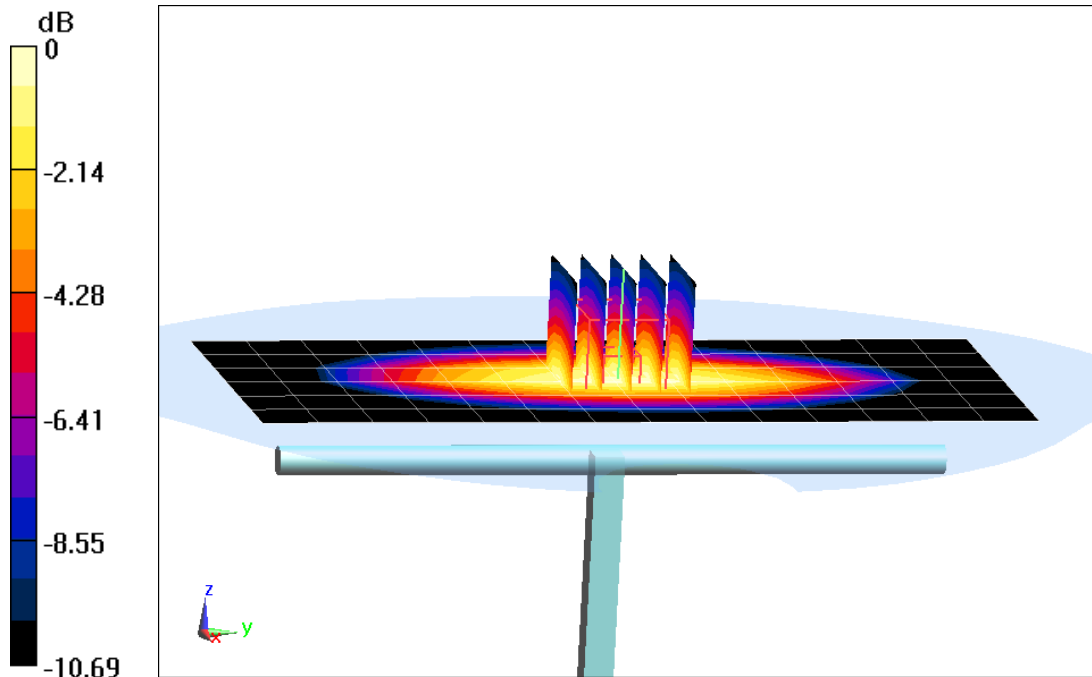

0 dB = 0.960 W/kg = -0.18 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 41.874$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-20-2015; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.04, 6.04, 6.04); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.962 W/kg**

Deviation = 4.57%

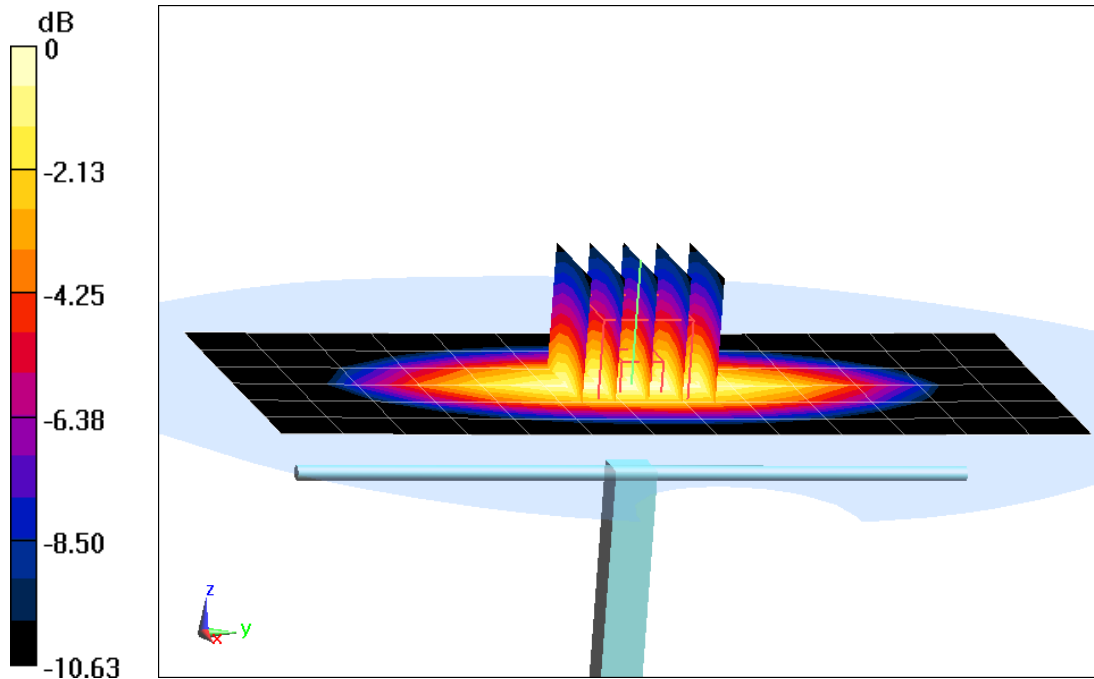

0 dB = 1.13 W/kg = 0.53 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 39.443$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1750 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.92 W/kg

**SAR(1 g) = 3.84 W/kg**

Deviation = 4.07%

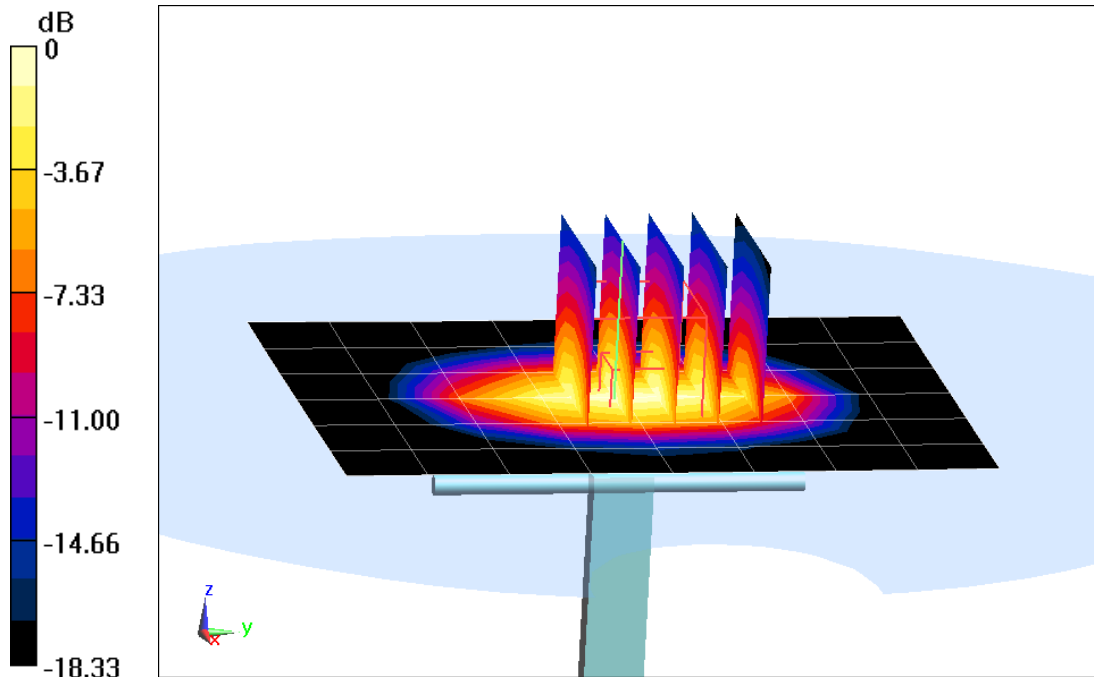

0 dB = 4.80 W/kg = 6.81 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.427 \text{ S/m}$ ;  $\epsilon_r = 38.78$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 21.9°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(4.85, 4.85, 4.85); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.78 W/kg

**SAR(1 g) = 4.3 W/kg**

Deviation = 6.97%

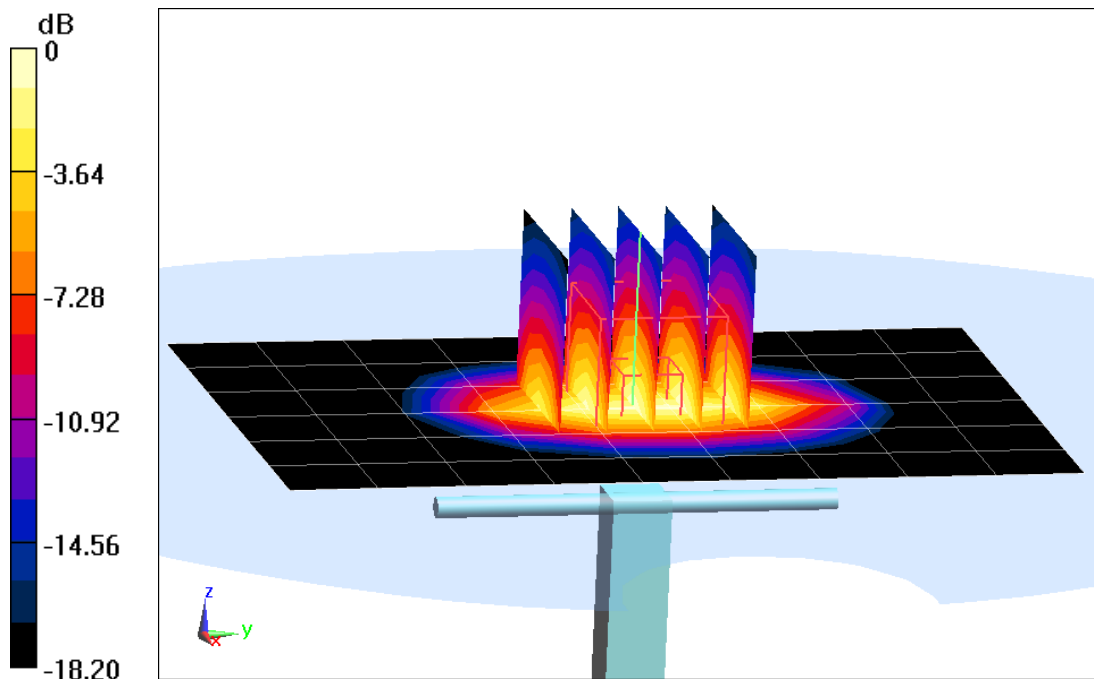

0 dB = 5.39 W/kg = 7.32 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.455 \text{ S/m}$ ;  $\epsilon_r = 41.127$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.45 W/kg

**SAR(1 g) = 4.01 W/kg**

Deviation = -0.25%

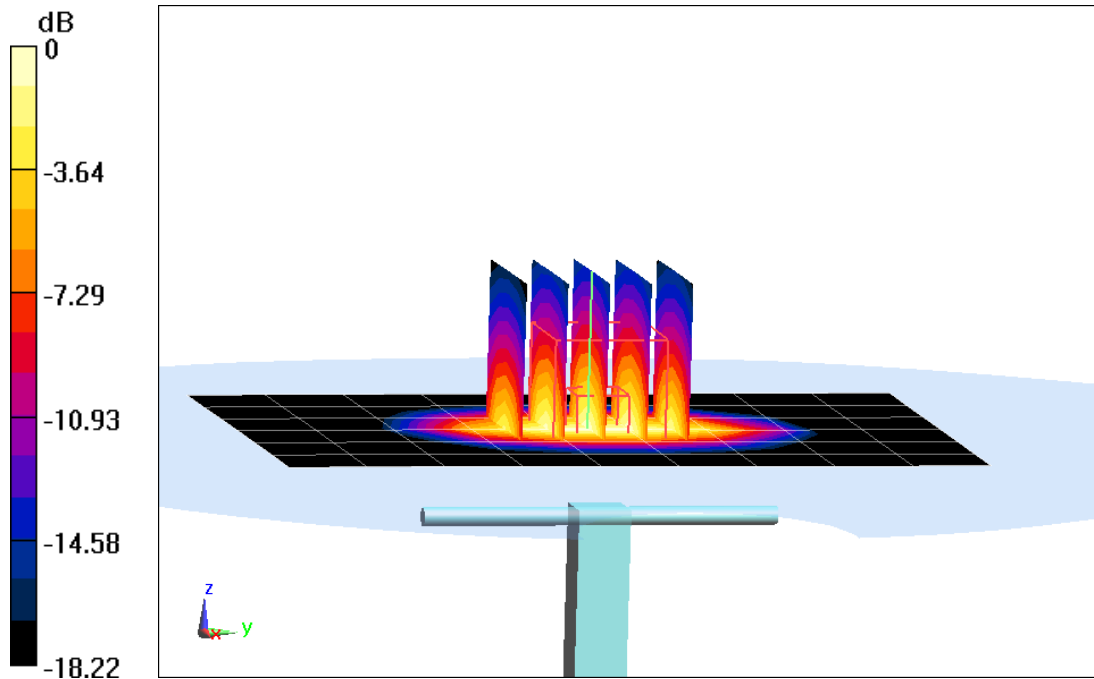

0 dB = 5.10 W/kg = 7.08 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.821 \text{ S/m}$ ;  $\epsilon_r = 38.065$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.5 W/kg

**SAR(1 g) = 5.57 W/kg**

Deviation = 6.91%

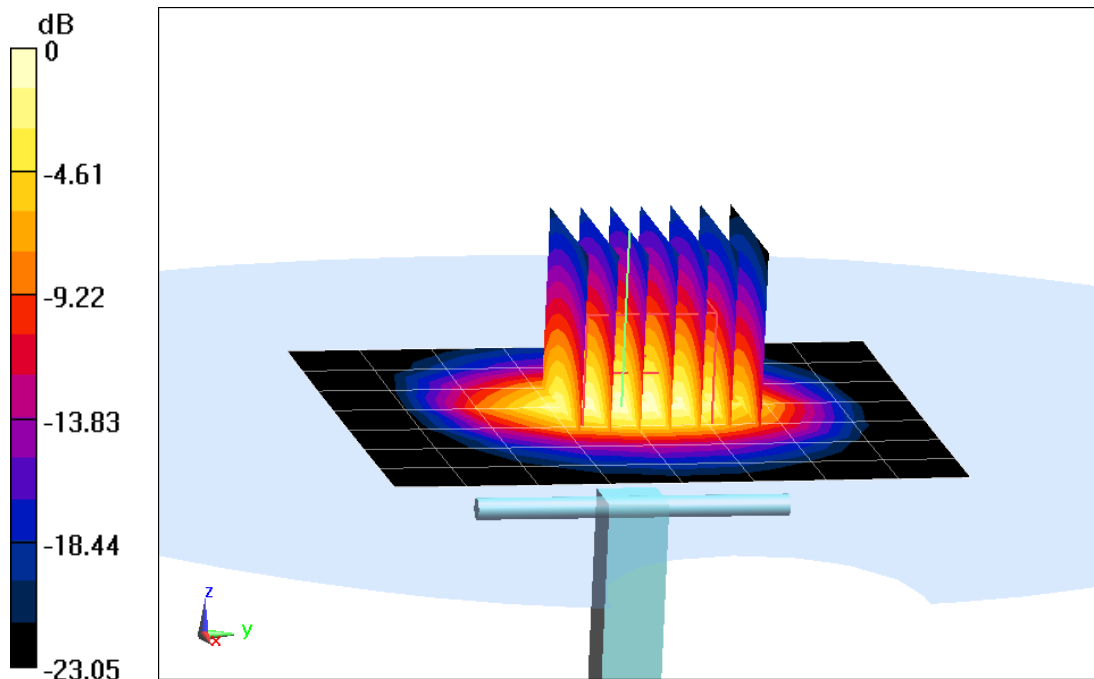

0 dB = 7.27 W/kg = 8.62 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used:

$f = 2600$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 37.486$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(4.38, 4.38, 4.38); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 13.3 W/kg

**SAR(1 g) = 6.07 W/kg**

Deviation = 5.57%

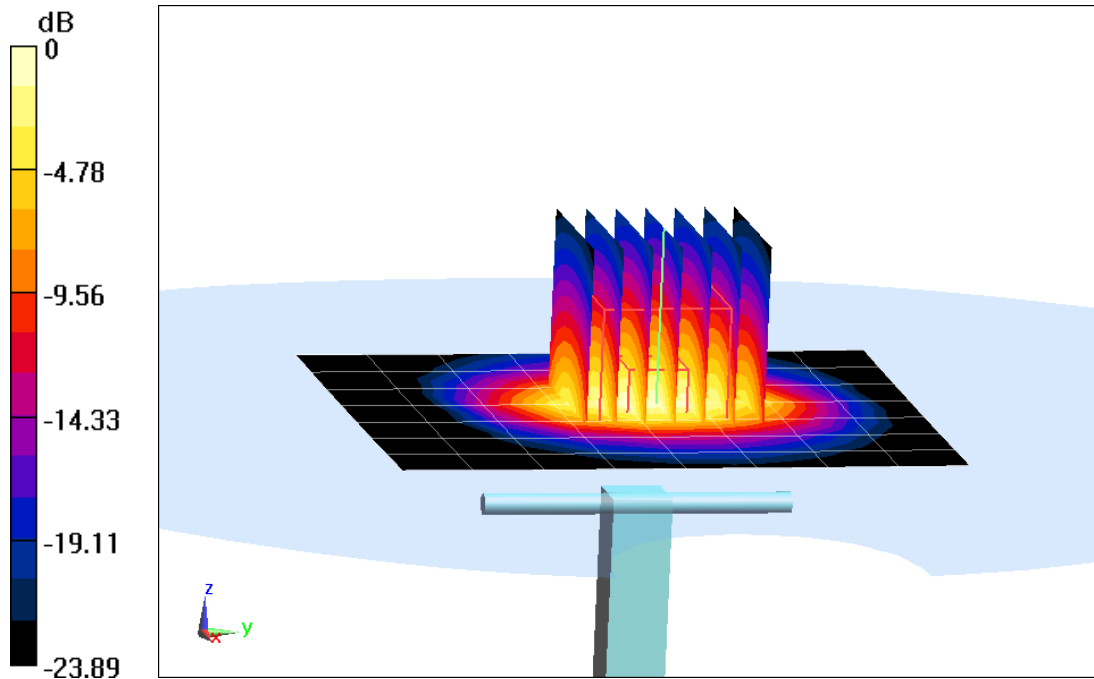

0 dB = 8.19 W/kg = 9.13 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 4.581 \text{ S/m}$ ;  $\epsilon_r = 35.811$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(5.06, 5.06, 5.06); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5300 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.7 W/kg

**SAR(1 g) = 4.09 W/kg**

Deviation = -4.66%

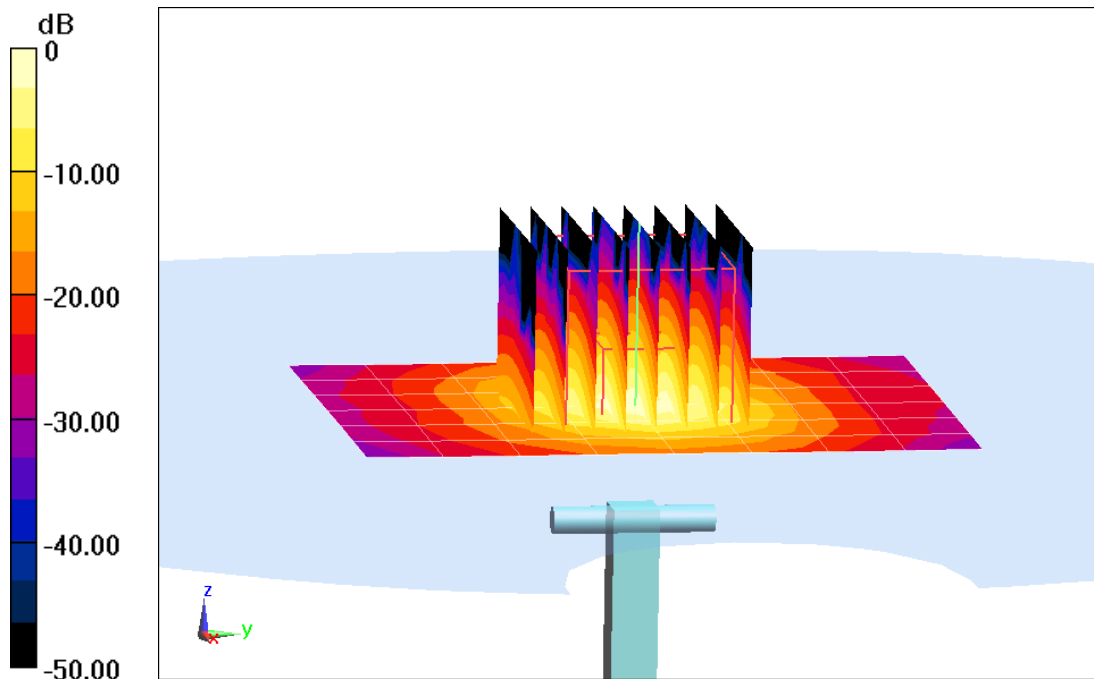

0 dB = 10.5 W/kg = 10.21 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 4.791 \text{ S/m}$ ;  $\epsilon_r = 35.491$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.92, 4.92, 4.92); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5500 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.3 W/kg

**SAR(1 g) = 4.2 W/kg**

Deviation = -5.19%

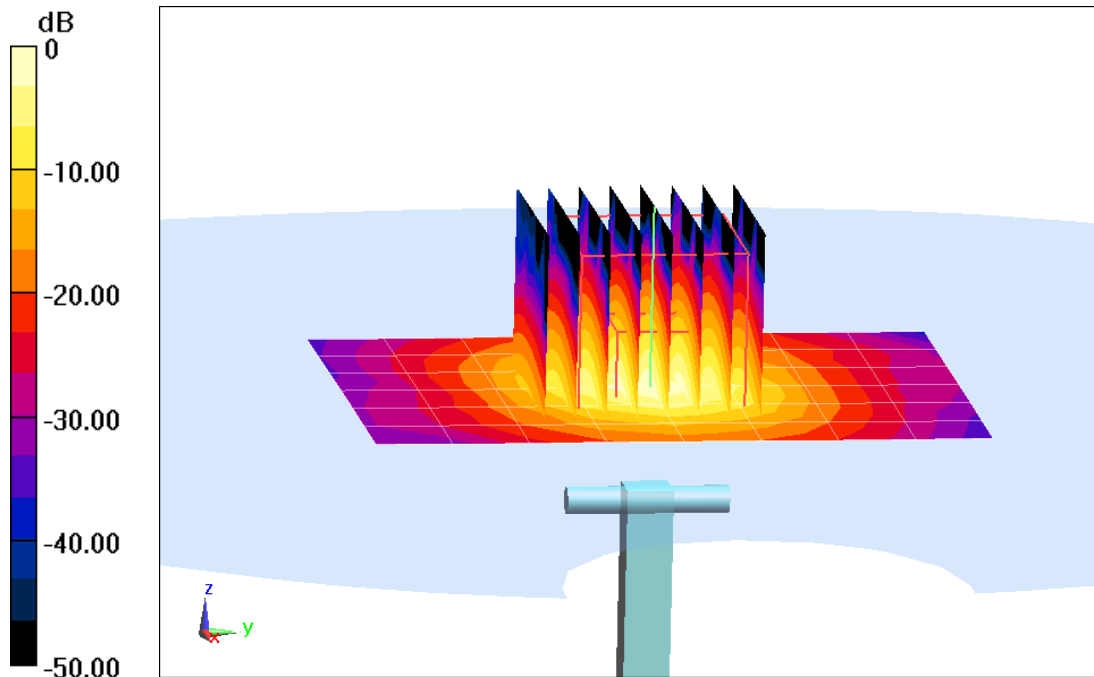

0 dB = 10.9 W/kg = 10.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 5.101 \text{ S/m}$ ;  $\epsilon_r = 35.064$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.67, 4.67, 4.67); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5800 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.5 W/kg

**SAR(1 g) = 3.97 W/kg**

Deviation = -3.52%

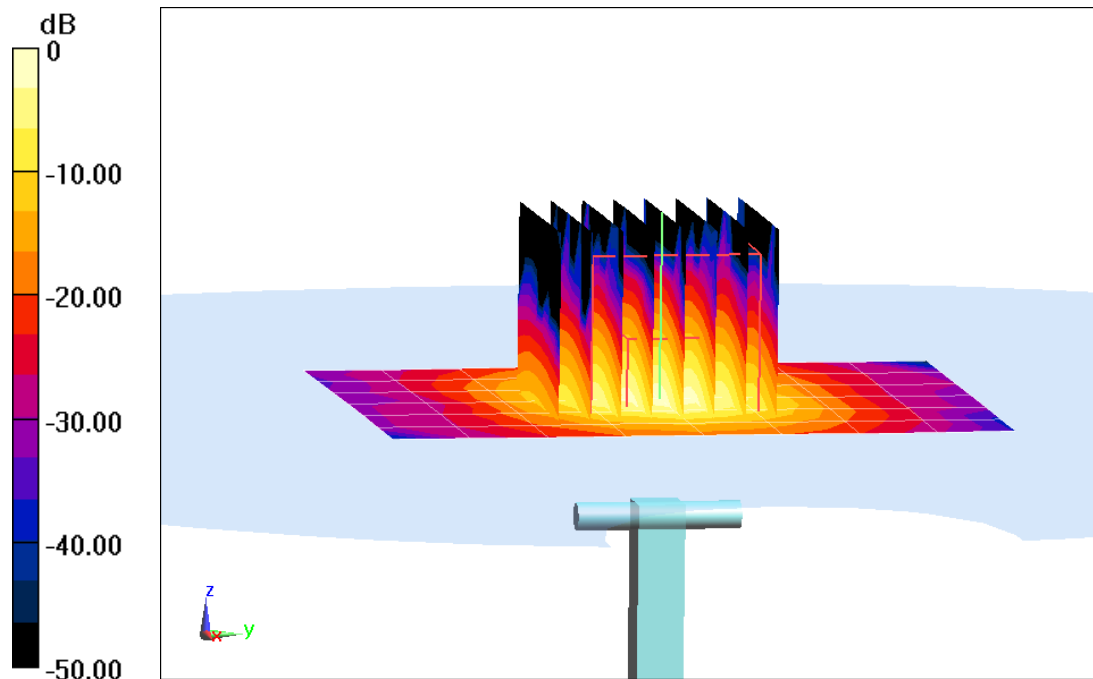

0 dB = 10.6 W/kg = 10.25 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.971 \text{ S/m}$ ;  $\epsilon_r = 54.601$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 750 MHz System Verification

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.857 W/kg**

Deviation = 0.47%

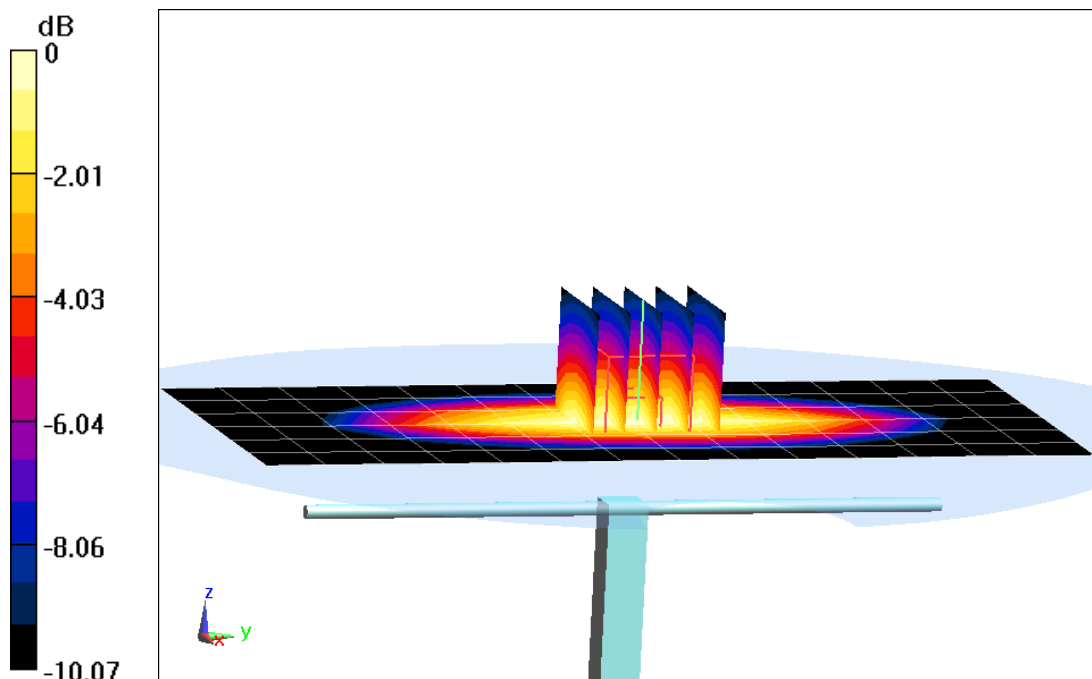

0 dB = 0.996 W/kg = -0.02 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.996 \text{ S/m}$ ;  $\epsilon_r = 53.917$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 1.01 W/kg**

Deviation = 8.02%

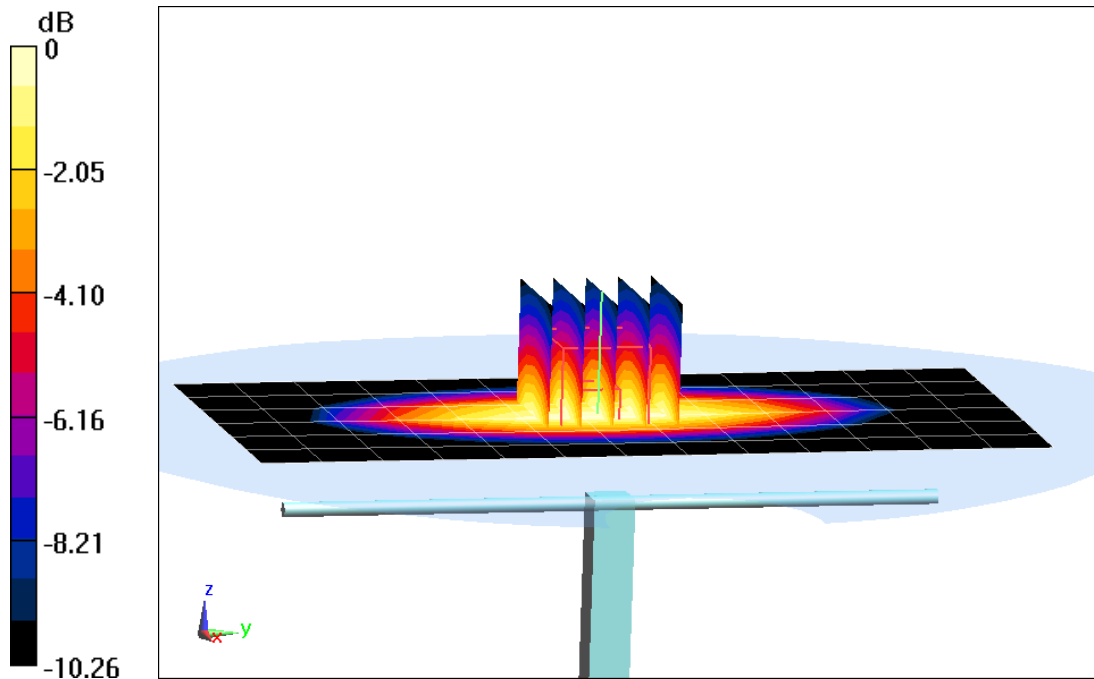

0 dB = 1.17 W/kg = 0.68 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.468 \text{ S/m}$ ;  $\epsilon_r = 52.838$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1750 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.45 W/kg

**SAR(1 g) = 3.72 W/kg**

Deviation = -1.06%

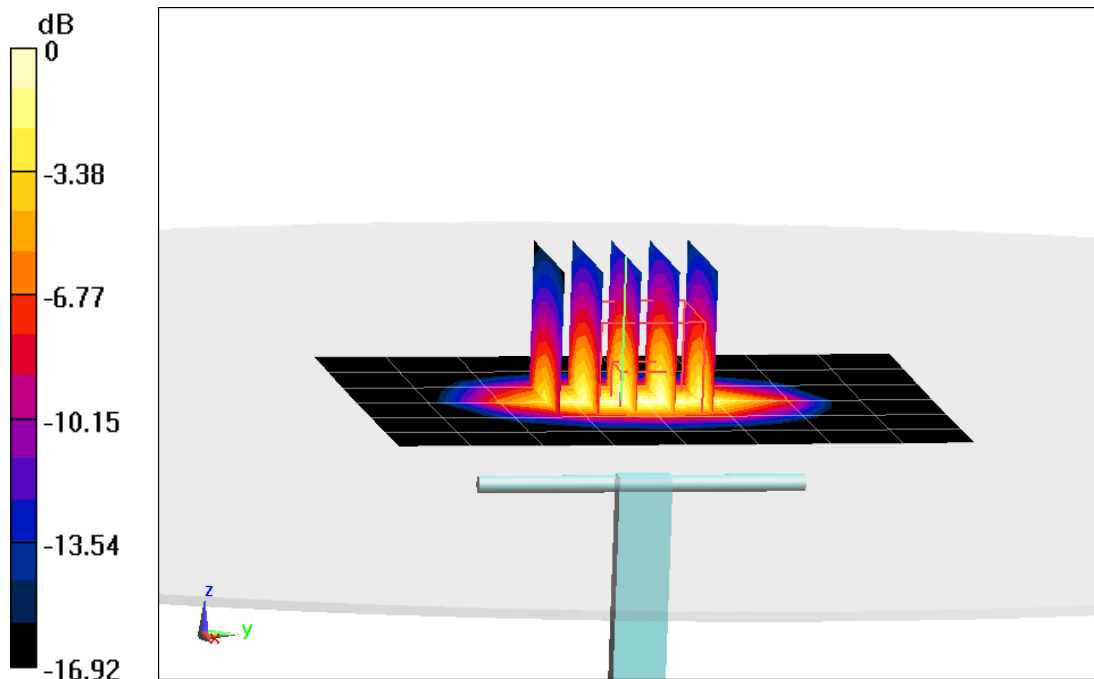

0 dB = 4.58 W/kg = 6.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.527 \text{ S/m}$ ;  $\epsilon_r = 52.268$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 9/18/2014  
Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.44 W/kg

**SAR(1 g) = 4.21 W/kg**

Deviation = 4.21%

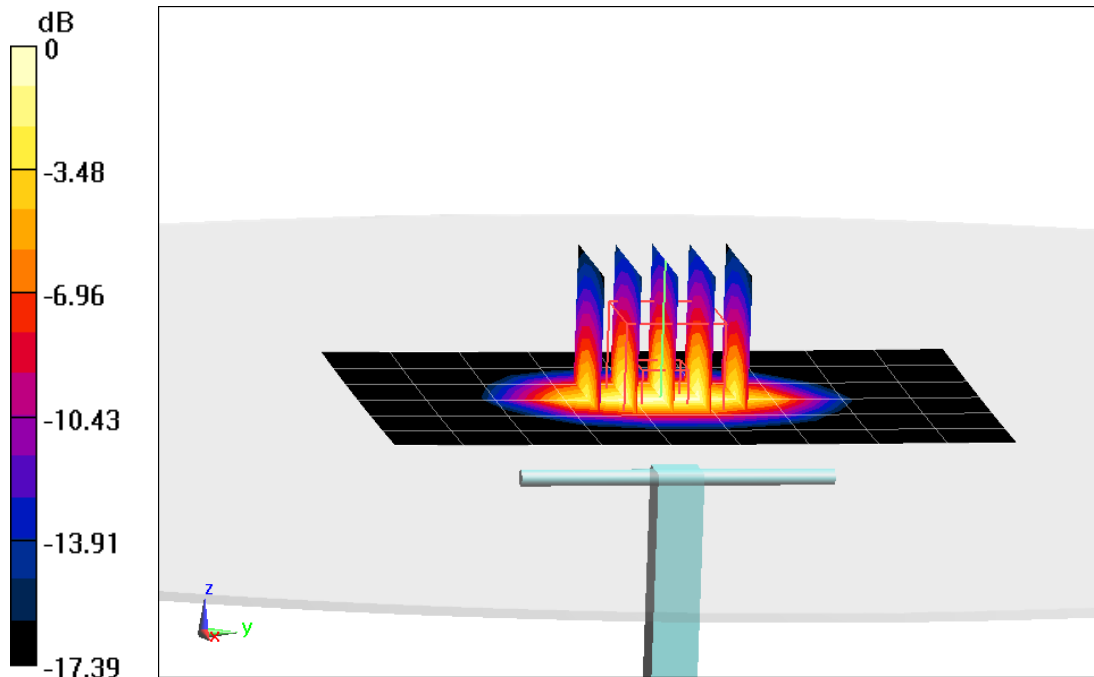

0 dB = 5.33 W/kg = 7.27 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.044$  S/m;  $\epsilon_r = 51.143$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 20.7°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(4.37, 4.37, 4.37); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 5.46 W/kg; SAR(10 g) = 2.49 W/kg**

Deviation (1g) = 5.41%; Deviation (10g) = 3.75%

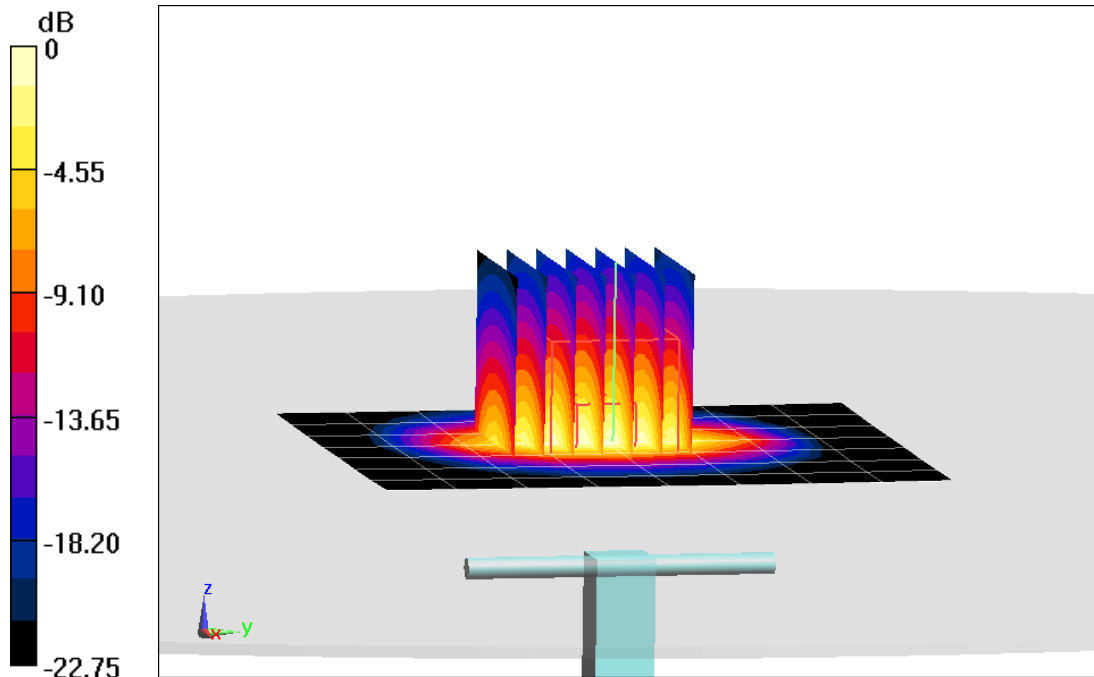

0 dB = 7.22 W/kg = 8.59 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.253$  S/m;  $\epsilon_r = 50.516$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3318; ConvF(4.17, 4.17, 4.17); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 12.4 W/kg

**SAR(1 g) = 5.32 W/kg**

Deviation = -6.50%

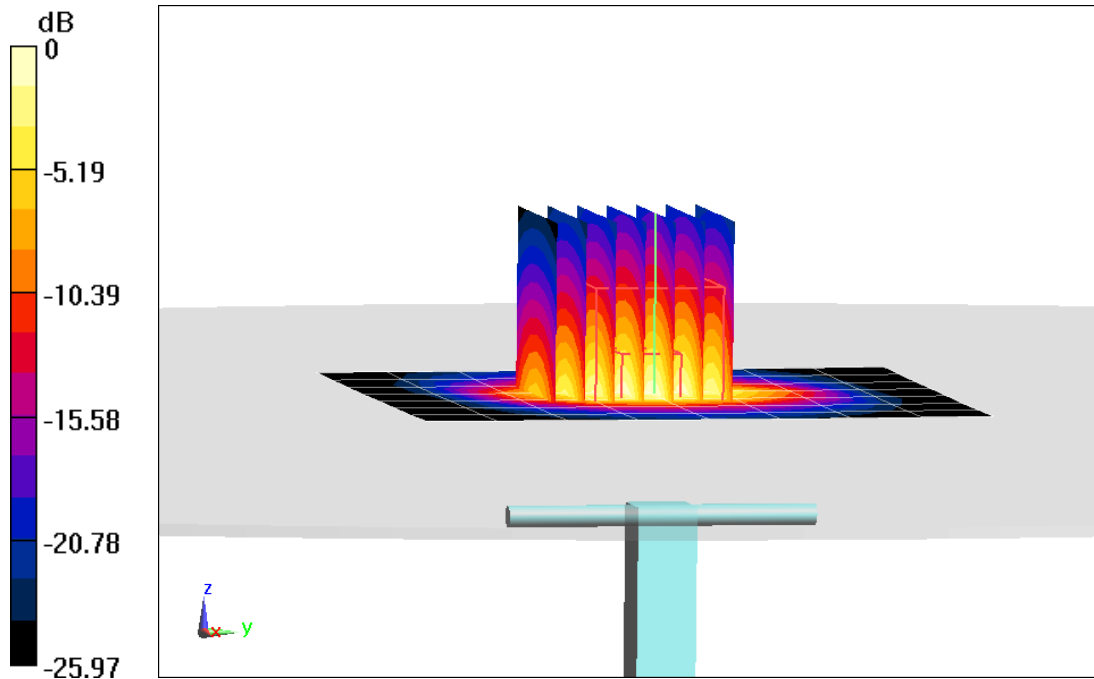

0 dB = 7.19 W/kg = 8.57 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 5.464 \text{ S/m}$ ;  $\epsilon_r = 46.965$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5300 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.08 W/kg**

Deviation (1g) = -1.88%; Deviation (10g) = -3.14%

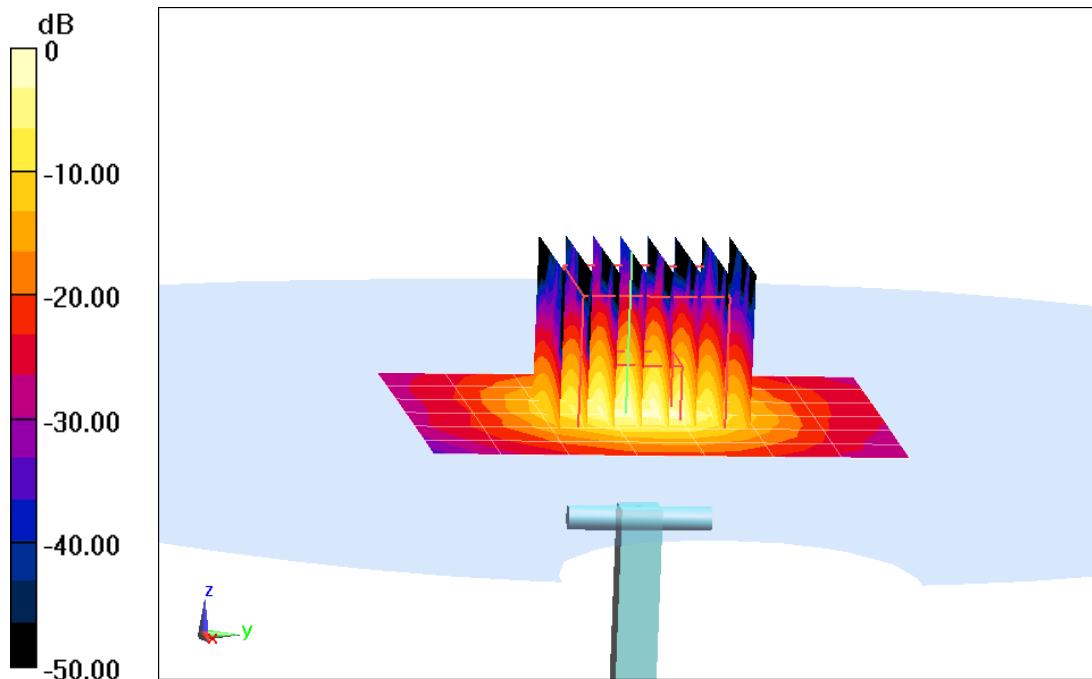

0 dB = 9.18 W/kg = 9.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.721 \text{ S/m}$ ;  $\epsilon_r = 46.601$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5500 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 3.95 W/kg; SAR(10 g) = 1.09 W/kg**

Deviation (1g) = -4.93%; Deviation (10g) = -5.22%

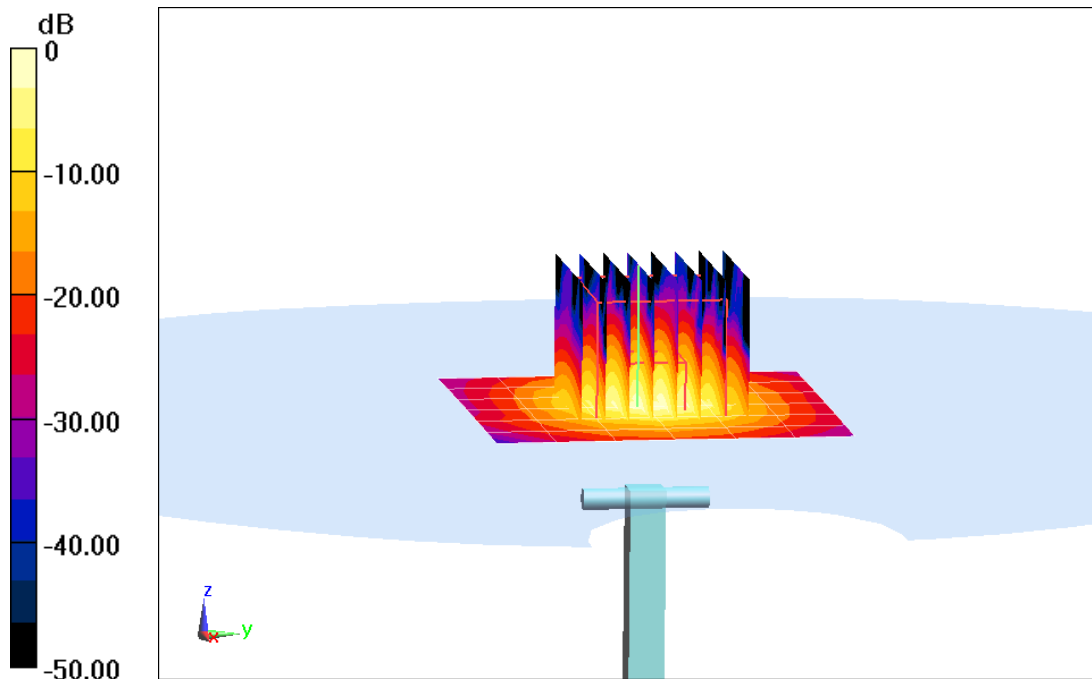

0 dB = 9.74 W/kg = 9.89 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 6.122 \text{ S/m}$ ;  $\epsilon_r = 46.189$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5800 MHz System Verification

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 3.86 W/kg**

Deviation = -1.03%

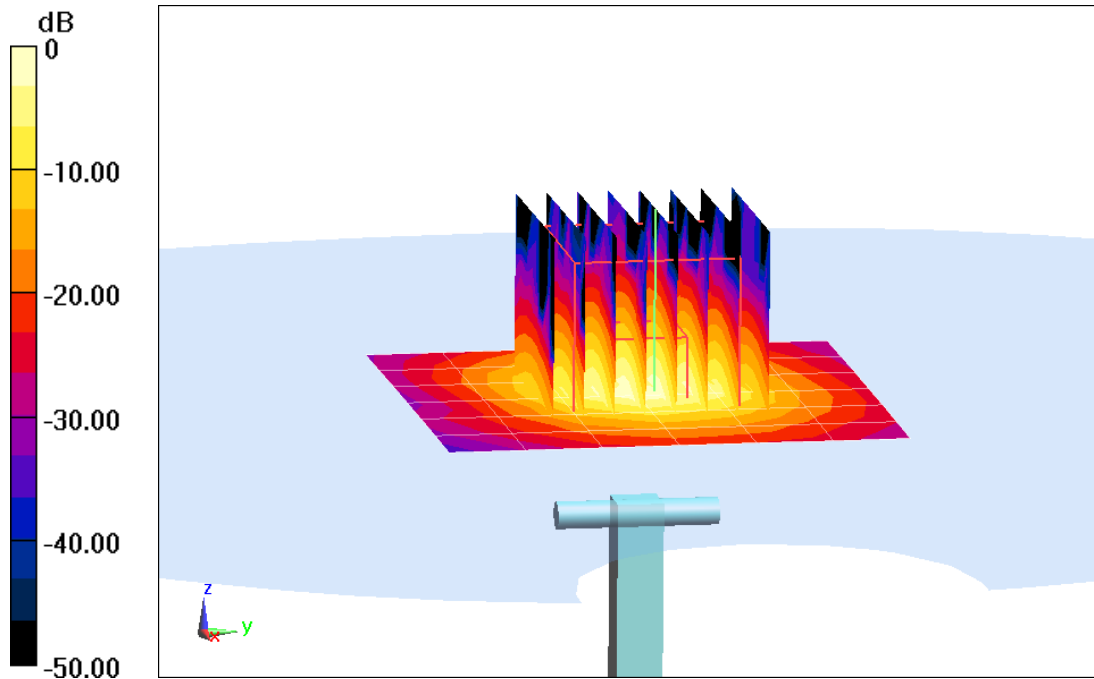

0 dB = 9.32 W/kg = 9.69 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D750V3-1054\_Mar15**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1054**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

*CCV  
3/26/15*

Calibration date: **March 11, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Function** Technical Manager

Issued: March 11, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.8.8
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.28 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.42 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	55.5	0.96 mho/m
<b>Measured Body TSL parameters</b>	(22.0 $\pm$ 0.2) °C	54.7 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
<b>Body TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	Condition	
SAR measured	250 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>8.53 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	250 mW input power	1.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>5.68 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.8 $\Omega$ - 0.6 j $\Omega$
Return Loss	- 26.7 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8 $\Omega$ - 2.6 j $\Omega$
Return Loss	- 30.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

## DASY5 Validation Report for Head TSL

Date: 11.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.46 W/kg

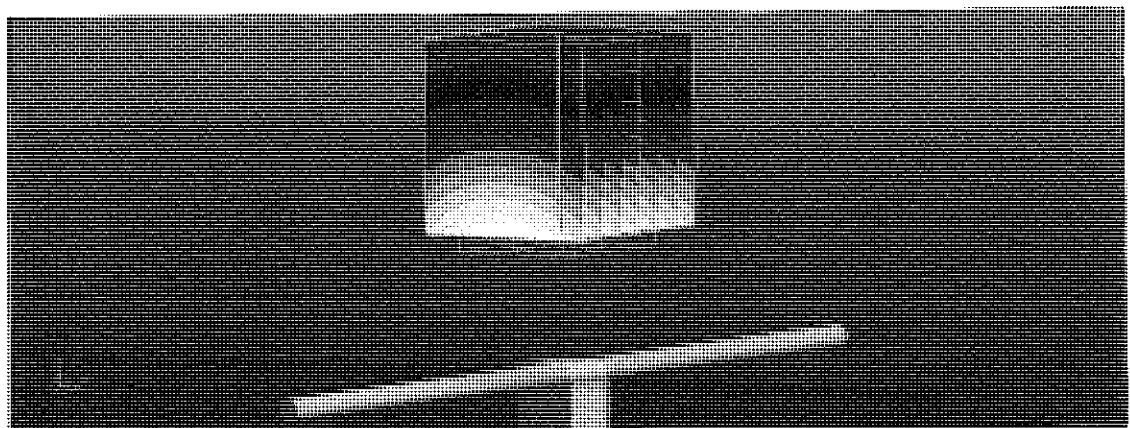


0 dB = 2.46 W/kg = 3.91 dBW/kg

# Impedance Measurement Plot for Head TSL

11 Mar 2015 12:42:05


CH1 S11 1 U FS 1: 54.844  $\Omega$  -552.73 m $\Omega$  383.92 pF 750.000 000 MHz

\*  
Del  
CA  
Avg  
16  
H1d

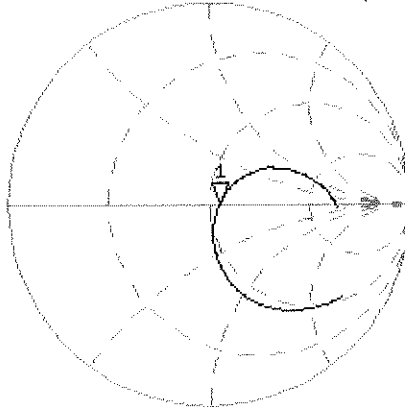

CH2 S11 LOG 5 dB/REF -20 dB 1: -26.654 dB 750.000 000 MHz

Del  
CA  
Avg  
16  
H1d

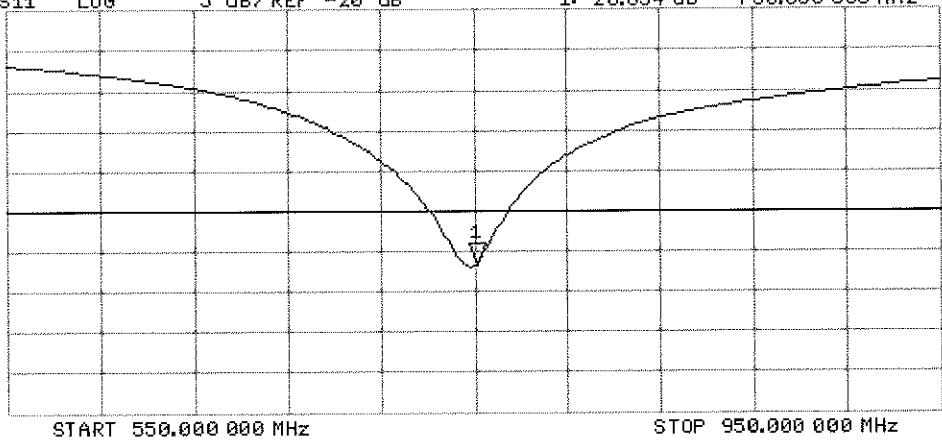

# DASY5 Validation Report for Body TSL

Date: 11.03.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.35 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.20 W/kg

**SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.45 W/kg**

Maximum value of SAR (measured) = 2.54 W/kg


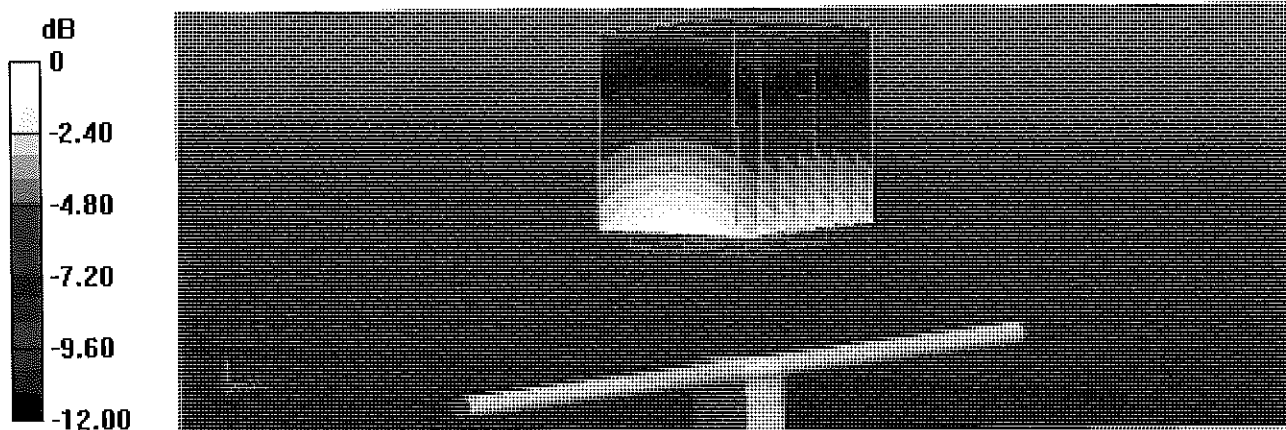


0 dB = 2.54 W/kg = 4.05 dBW/kg

# Impedance Measurement Plot for Body TSL

11 Mar 2015 11:49:08  
[CH1] S11 1 U FS 1: 48.779  $\Omega$  -2.6426  $\Omega$  80.303 pF 750.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

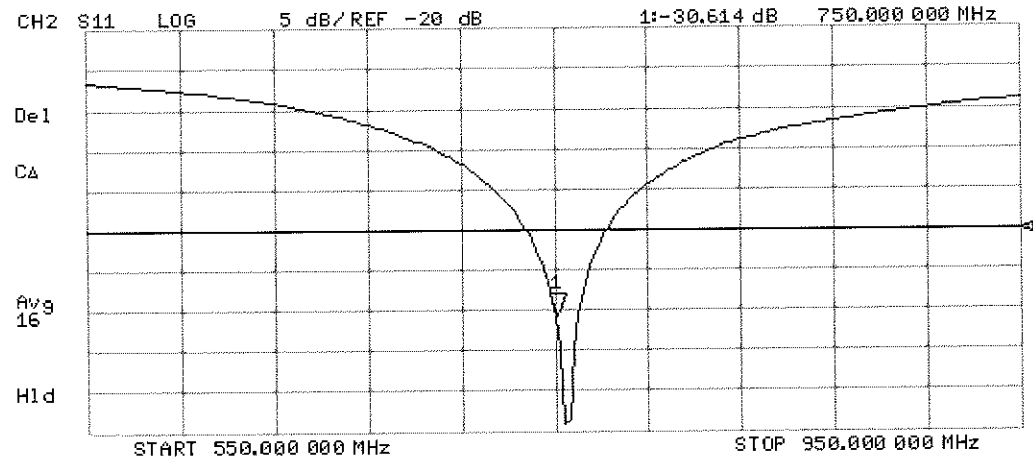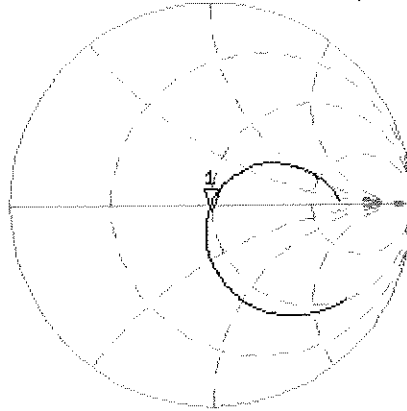

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d133\_Jul14**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d133**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

CC  
W/G/M

Calibration date: **July 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8763E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Jeton Kastrali** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: July 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.1 ± 6 %	0.94 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.20 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.96 W/kg ± 16.5 % (k=2)

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.8 ± 6 %	1.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.35 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.15 W/kg ± 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.6 $\Omega$ - 1.0 $j\Omega$
Return Loss	- 34.7 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 $\Omega$ - 3.3 $j\Omega$
Return Loss	- 27.8 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.395 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

## DASY5 Validation Report for Head TSL

Date: 24.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 41.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.58 W/kg

**SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.53 W/kg**

Maximum value of SAR (measured) = 2.79 W/kg

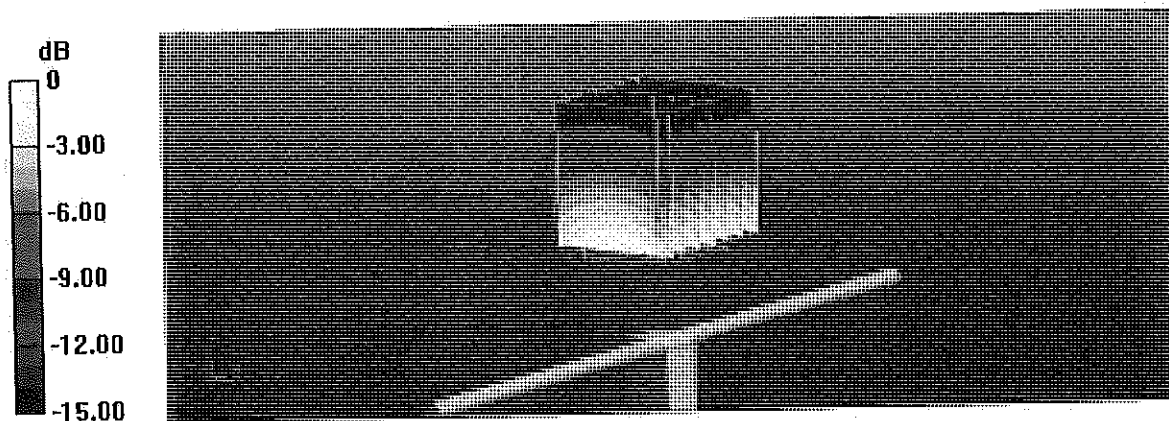

0 dB = 2.79 W/kg = 4.46 dBW/kg

# Impedance Measurement Plot for Head TSL

24 Jul 2014 11:33:11

[CHI] S11 1 U FS



Z: 51.553  $\Omega$  -1.0293  $\Omega$  105.19 pF 835.000 000 MHz

#  
De1

CA

Avg  
16

H1d

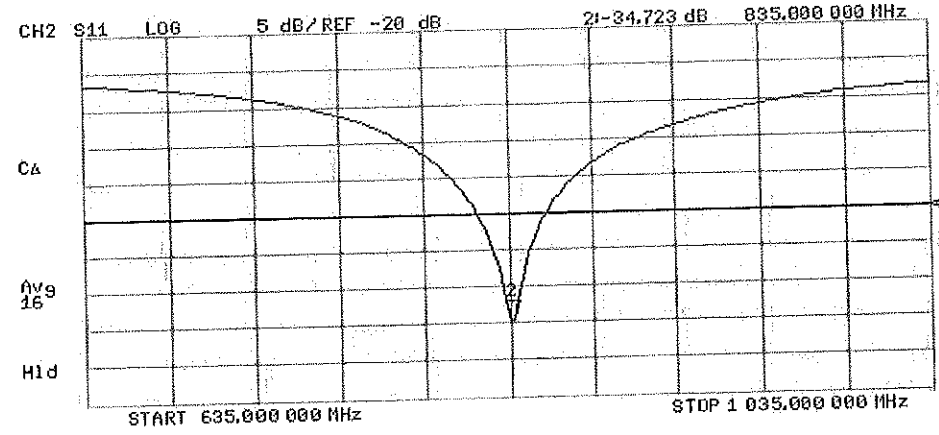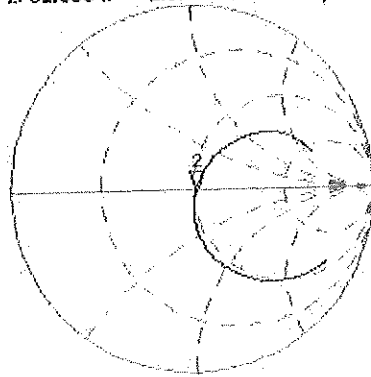

## DASY5 Validation Report for Body TSL

Date: 17.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133**


Communication System: UID 0 - CW; Frequency: 835 MHz  
Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.02$  S/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.61 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.59 W/kg  
**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg**  
Maximum value of SAR (measured) = 2.84 W/kg

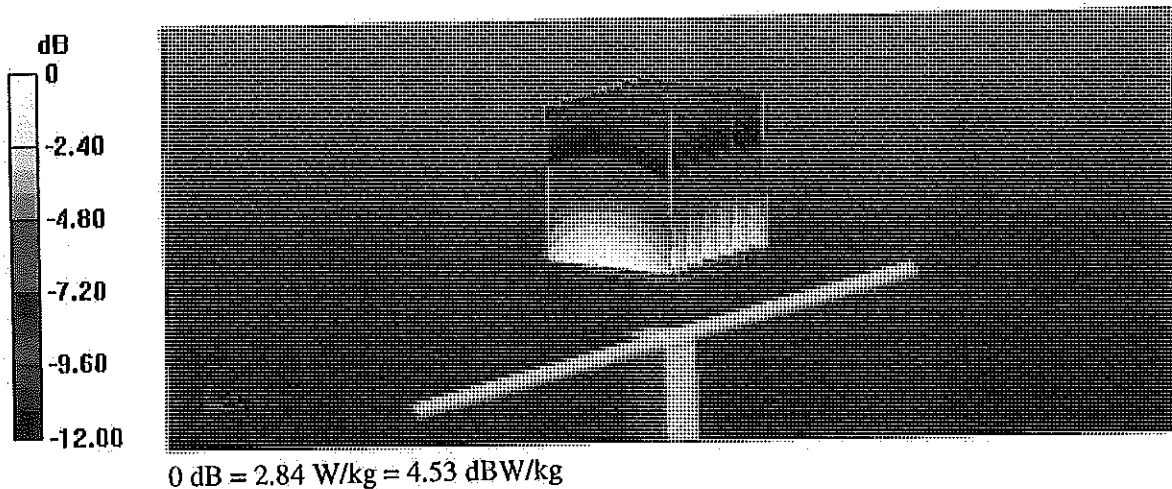

# Impedance Measurement Plot for Body TSL


17 Jul 2014 13:43:24

CH1 S11 1 U F8

1: 47.799  $\Omega$  -3.3184  $\Omega$  57.439 pF


835.000 000 MHz

\*  
De1  
CA

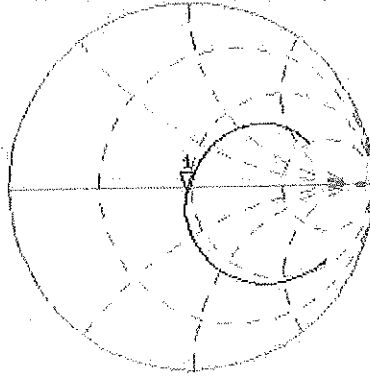

Avg  
16

H1d

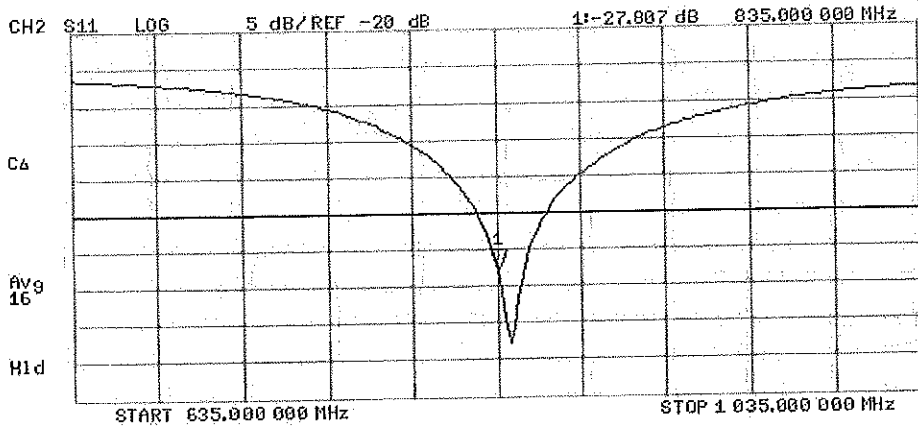



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1765V2-1008\_May14**

**CALIBRATION CERTIFICATE**

Object **D1765V2 - SN: 1008**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

*CCV  
6/2/14*

Calibration date: **May 07, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** Jeton Kastrati **Function** Laboratory Technician **Signature** *[Signature]*

Approved by: **Name** Katja Pokovic **Technical Manager** *[Signature]*

Issued: May 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.0 $\pm$ 6 %	1.36 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>36.9 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>19.5 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.2 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>37.6 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>20.1 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.7 $\Omega$ - 6.1 j $\Omega$
Return Loss	- 23.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	43.7 $\Omega$ - 6.4 j $\Omega$
Return Loss	- 20.4 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.211 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2005

## DASY5 Validation Report for Head TSL

Date: 07.05.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.23, 5.23, 5.23); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.06 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.7 W/kg

**SAR(1 g) = 9.23 W/kg; SAR(10 g) = 4.87 W/kg**

Maximum value of SAR (measured) = 11.7 W/kg

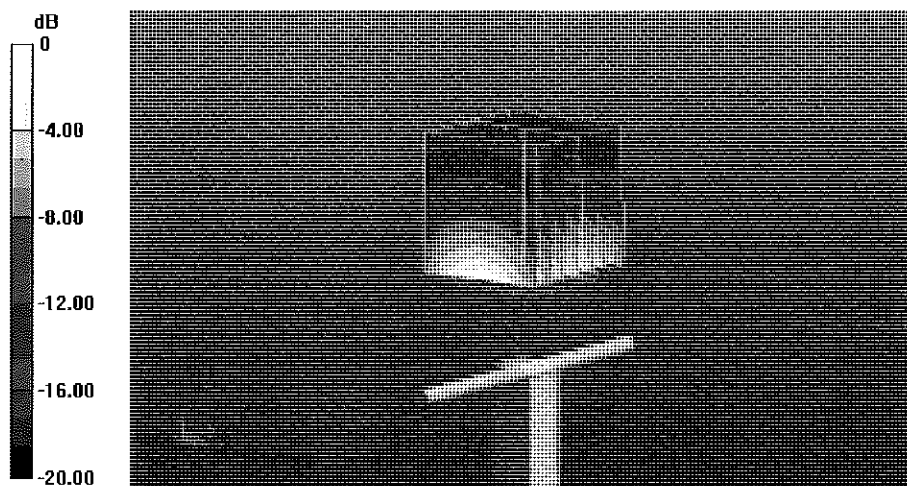


0 dB = 11.7 W/kg = 10.68 dBW/kg

# Impedance Measurement Plot for Head TSL

7 May 2014 09:22:35


CH1 S11 1 U FS 1: 47.709  $\Omega$  -6.0566  $\Omega$  15.016 pF 1 750.000 000 MHz

\*  
De1  
C $\Delta$   
Avg  
16  
H1 d

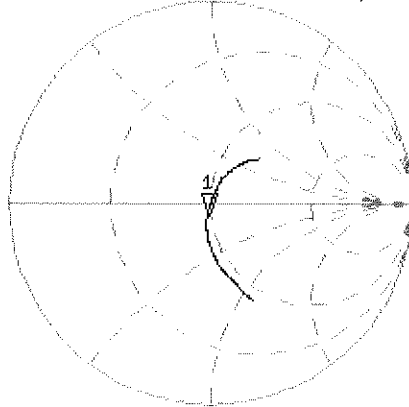

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.588 dB 1 750.000 000 MHz

C $\Delta$   
Avg  
16  
H1 d

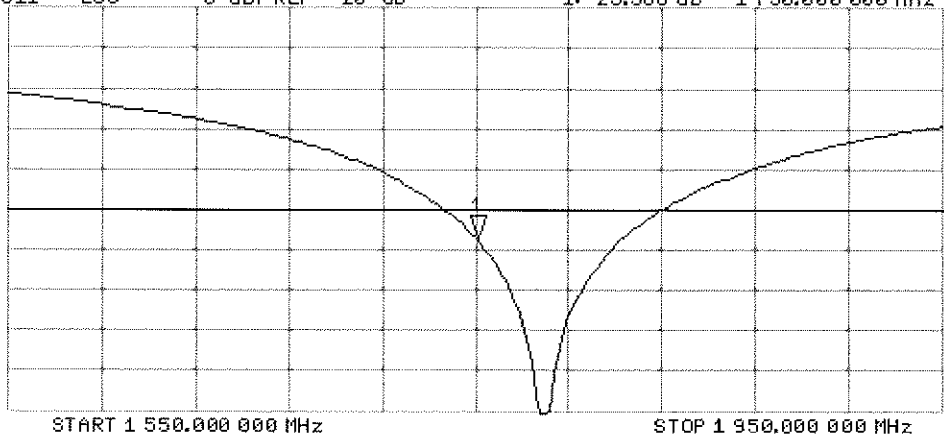

## DASY5 Validation Report for Body TSL

Date: 07.05.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.89, 4.89, 4.89); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.01 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 9.41 W/kg; SAR(10 g) = 5.02 W/kg**

Maximum value of SAR (measured) = 11.8 W/kg

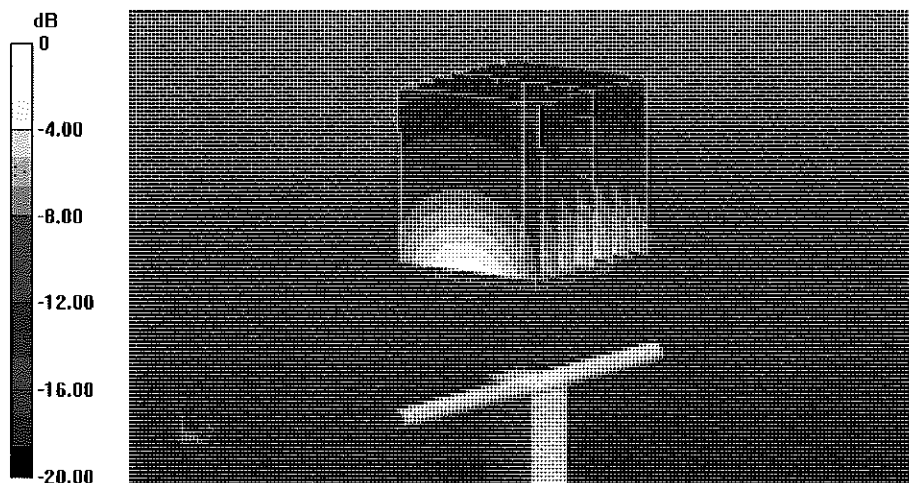

0 dB = 11.8 W/kg = 10.72 dBW/kg

# Impedance Measurement Plot for Body TSL

7 May 2014 09:21:55


CH1 S11 1 U FS 1: 43.727  $\angle$  -6.3691  $\angle$  14.279 pF 1 750.000 000 MHz

\*  
De1

CA

Avg  
16

H1d

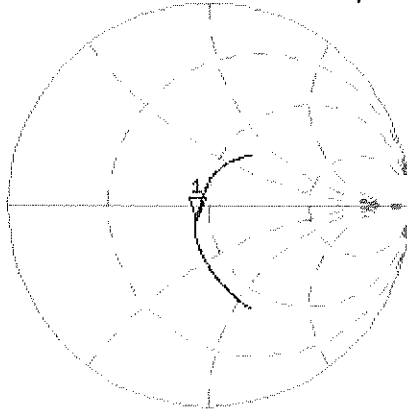


CH2 S11 LOG 5 dB/REF -20 dB 1:-20.428 dB 1 750.000 000 MHz

CA

Avg  
16

H1d

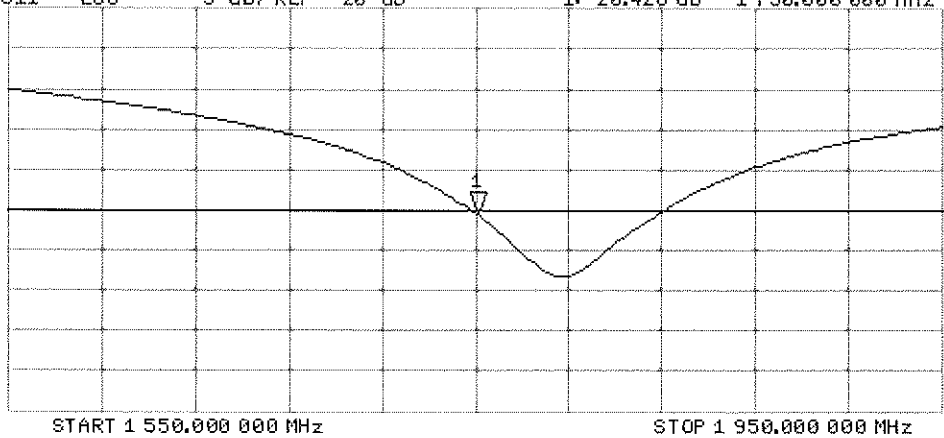

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d149\_Jul14**

**CALIBRATION CERTIFICATE**

Object **D1900V2 - SN: 5d149**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

CC  
11/5/14

Calibration date: **July 23, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (In house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	in house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	in house check: Oct-14

Calibrated by: **Jeton Kastrati**      Function: **Laboratory Technician**      Signature:

Approved by: **Katja Pokovic**      Technical Manager      Signature:

Issued: July 23, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.38 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.0 W/kg ± 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	1.51 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.33 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.6 $\Omega$ + 5.5 j $\Omega$
Return Loss	- 24.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8 $\Omega$ + 6.1 j $\Omega$
Return Loss	- 24.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

# DASY5 Validation Report for Head TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.06, 5.06, 5.06); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 100I
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

## Dipole Calibration for Head Tissue/ $P_{in}=250 \text{ mW}$ , $d=10\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 98.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 10 W/kg; SAR(10 g) = 5.24 W/kg**

Maximum value of SAR (measured) = 12.8 W/kg

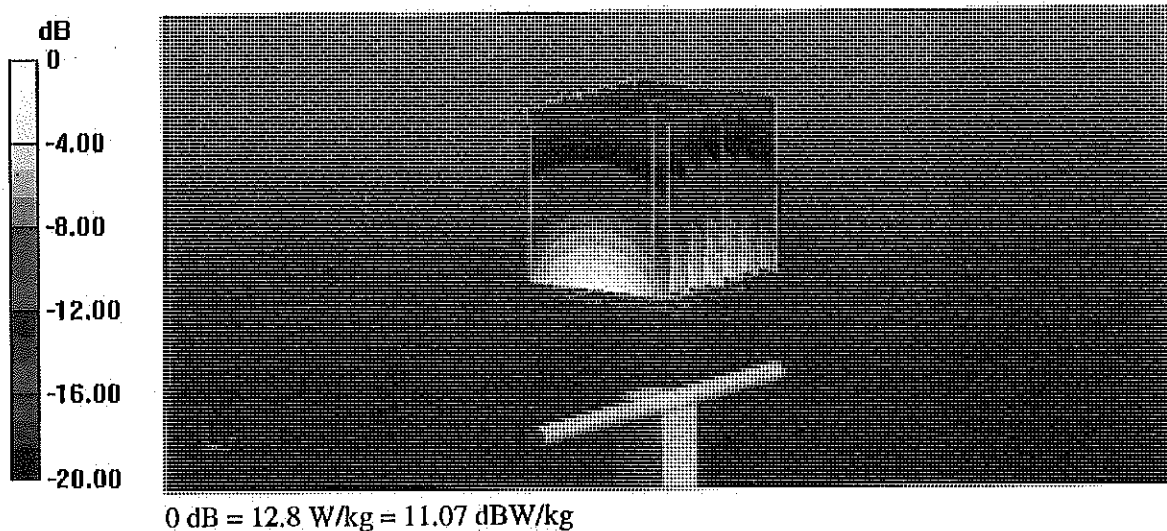


# Impedance Measurement Plot for Head TSL

23 Jul 2014 10:46:05

CH1 S11 1 U FS 1: 52.600  $\Omega$  5.4570  $\Omega$  457.11 pH 1 900.000 000 MHz

\*  
Del  
Cor

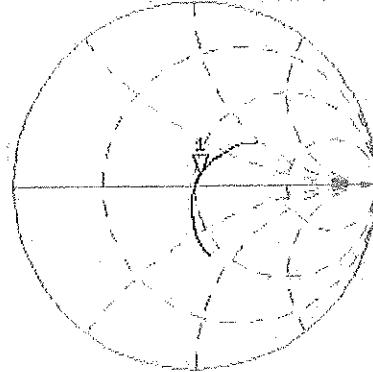

avg  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.600 dB 1 900.000 000 MHz

Cor

avg  
16

H1d

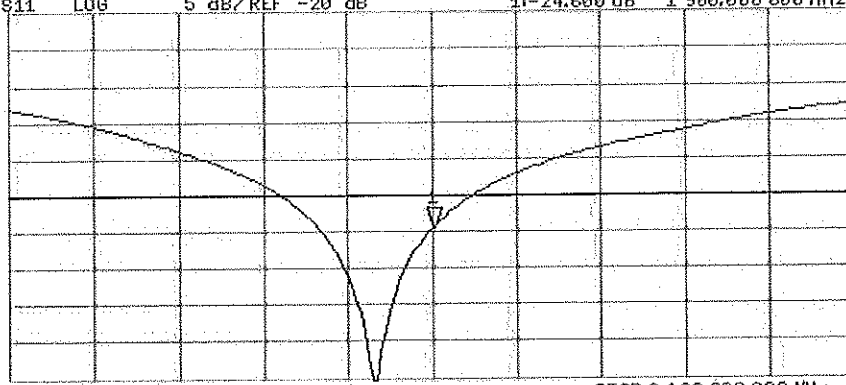

## DASY5 Validation Report for Body TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg**

Maximum value of SAR (measured) = 12.8 W/kg

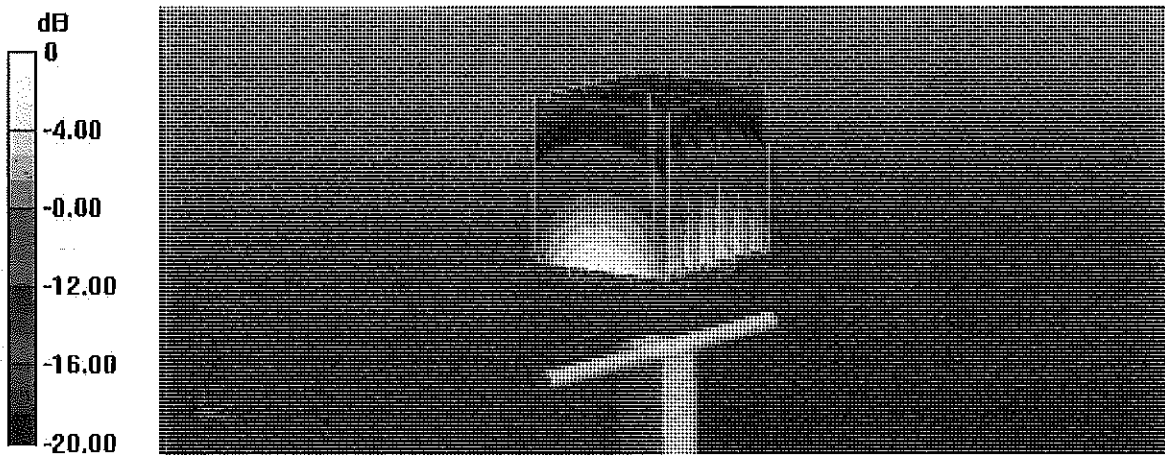


0 dB = 12.8 W/kg = 11.07 dBW/kg

# Impedance Measurement Plot for Body TSL

23 Jul 2014 10:45:45

CH1 S11 1 U FS 1: 48.789  $\Omega$  6.1426  $\Omega$  514.54 pF 1 900.000 000 MHz


\*  
Del  
Cor

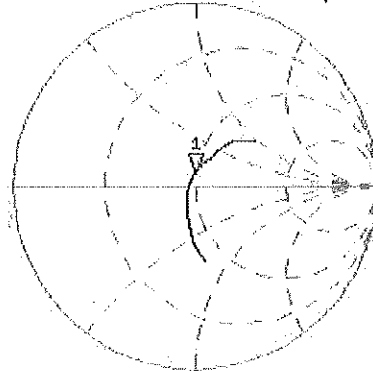

Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.974 dB 1 900.000 000 MHz

Cor  
Avg  
16  
H1d

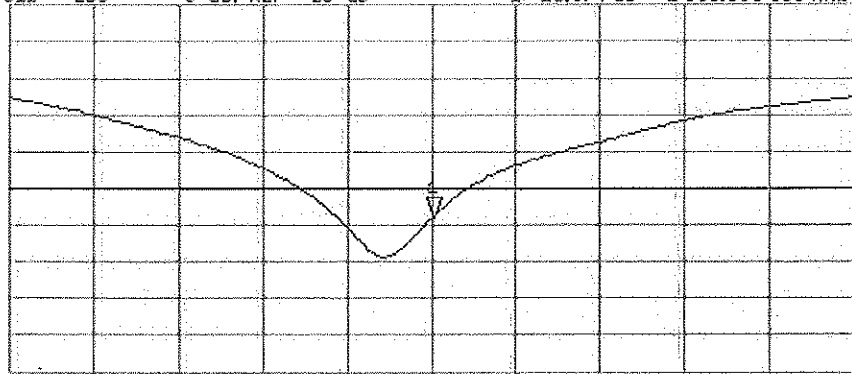

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-719\_Aug14**

**CALIBRATION CERTIFICATE**

Object **D2450V2 - SN: 719**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 11, 2014**

*✓ KOK 9/8/14*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Michael Weber**      Function: **Laboratory Technician**      Signature: *M. Weber*

Approved by: **Katja Pokovic**      Technical Manager      *Katja Pokovic*

Issued: August 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.0 $\pm$ 6 %	1.82 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>52.1 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.2 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.5 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>51.8 W/kg <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	<b>24.0 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.9 $\Omega$ + 3.0 j $\Omega$
Return Loss	- 25.2 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.9 $\Omega$ + 5.8 j $\Omega$
Return Loss	- 24.7 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 10, 2002

## DASY5 Validation Report for Head TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

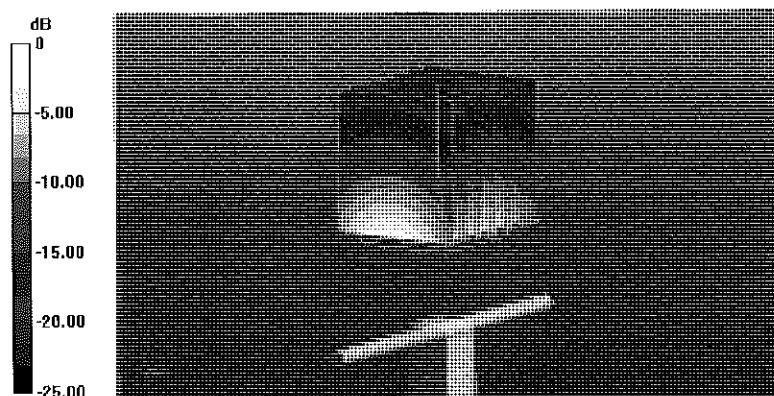

0 dB = 17.4 W/kg = 12.41 dBW/kg

# Impedance Measurement Plot for Head TSL


11 Aug 2014 11:49:06

CH1 S11 1 U FS

1: 54.887  $\Omega$  3.0391  $\Omega$  197.42 pF

2 450.000 000 MHz

#  
Del  
C $\Delta$

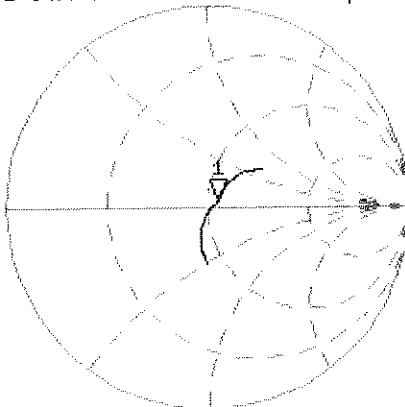

Avg  
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.212 dB 2 450.000 000 MHz

C $\Delta$

Avg  
16

H1 d

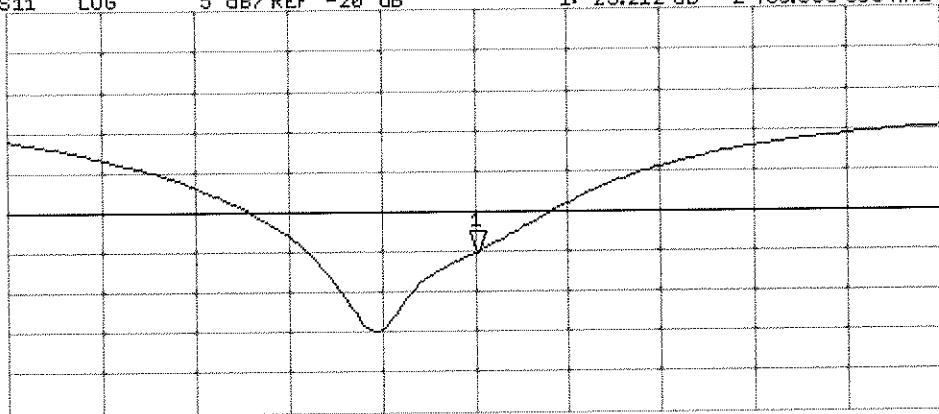

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.08 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 27.9 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.1 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

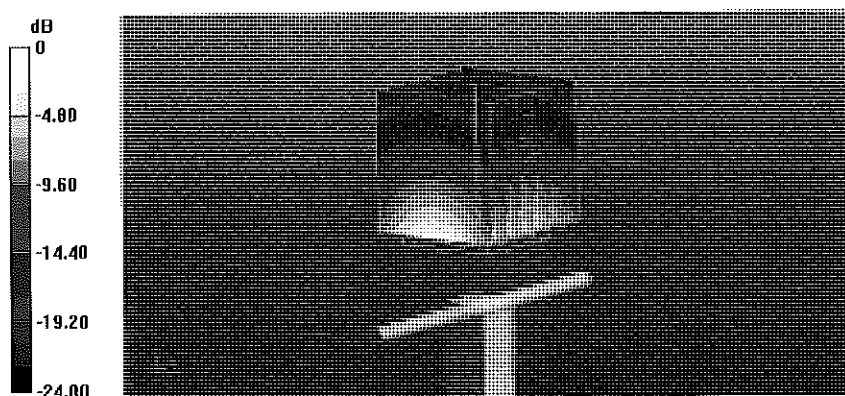


0 dB = 17.6 W/kg = 12.46 dBW/kg

# Impedance Measurement Plot for Body TSL

11 Aug 2014 11:48:32

CH1 S11 1 U FS 1: 50.928  $\Delta$  5.8223  $\Delta$  378.22 pF 2 450.000 000 MHz


\*  
De1  
CA

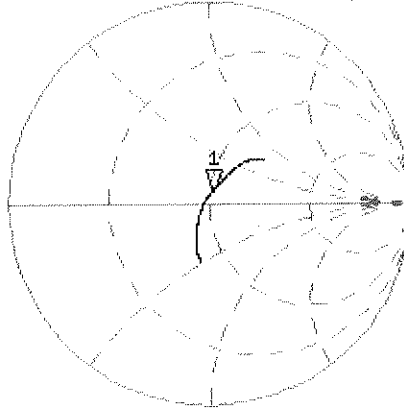

Avg  
1E  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-24.679 dB 2 450.000 000 MHz

CA  
Avg  
1E  
H1d

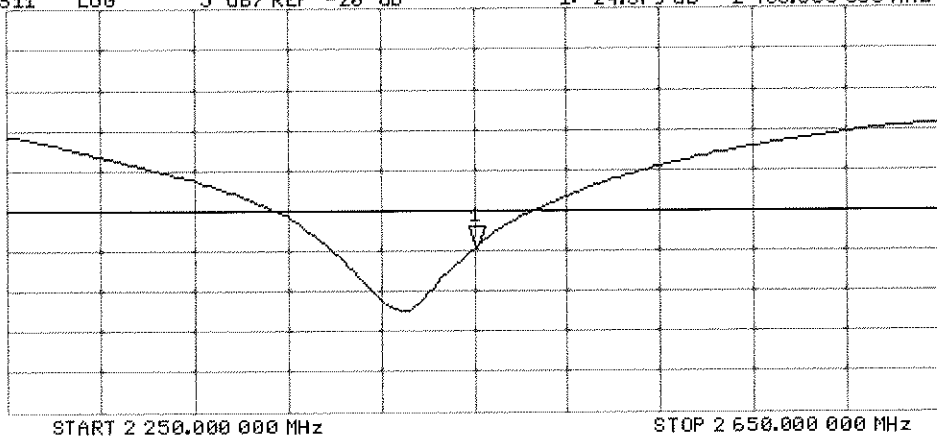

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2600V2-1071\_Oct14**

**CALIBRATION CERTIFICATE**

Object **D2600V2 - SN: 1071**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

CC  
11/11/14

Calibration date: **October 20, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Michael Weber**      Function: **Laboratory Technician**      Signature: *M. Weber*

Approved by: **Katja Pokovic**      Technical Manager      *[Signature]*

Issued: October 20, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.8 $\pm$ 6 %	2.03 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.7 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	57.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW Input power	6.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.9 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.8 $\pm$ 6 %	2.22 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW Input power	14.5 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	56.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	6.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	25.4 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.7 $\Omega$ - 5.2 j $\Omega$
Return Loss	- 25.3 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.9 $\Omega$ - 4.2 j $\Omega$
Return Loss	- 24.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.153 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 17, 2013

## DASY5 Validation Report for Head TSL

Date: 20.10.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.03$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.46, 4.46, 4.46); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.3 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 31.0 W/kg

**SAR(1 g) = 14.7 W/kg; SAR(10 g) = 6.57 W/kg**

Maximum value of SAR (measured) = 19.7 W/kg

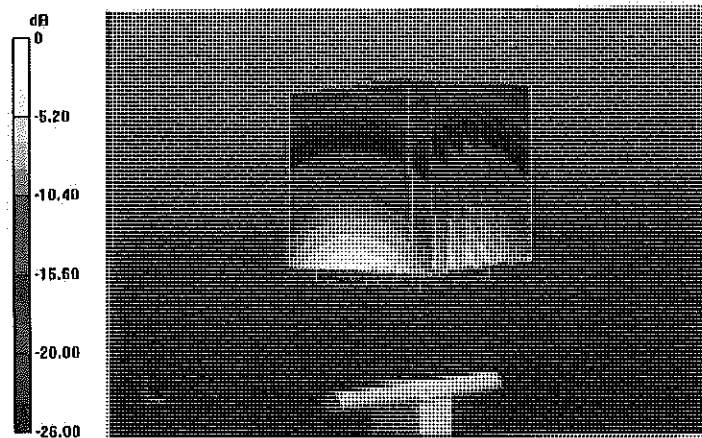


0 dB = 19.7 W/kg = 12.94 dBW/kg

# Impedance Measurement Plot for Head TSL

20 Oct 2014 11:58:04

CH1 S11 1 U.FS 1: 48.721  $\Omega$  -5.2461  $\Omega$  11.668 pF 2 600.000 000 MHz

\*  
De1  
CA

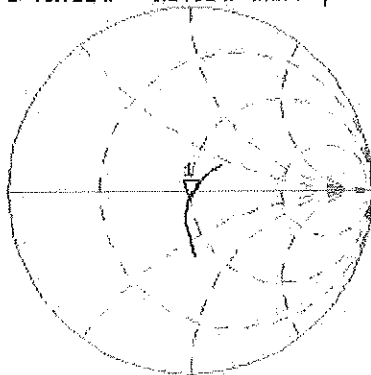

AVG  
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.254 dB 2 600.000 000 MHz

CA

AVG  
16

H1d

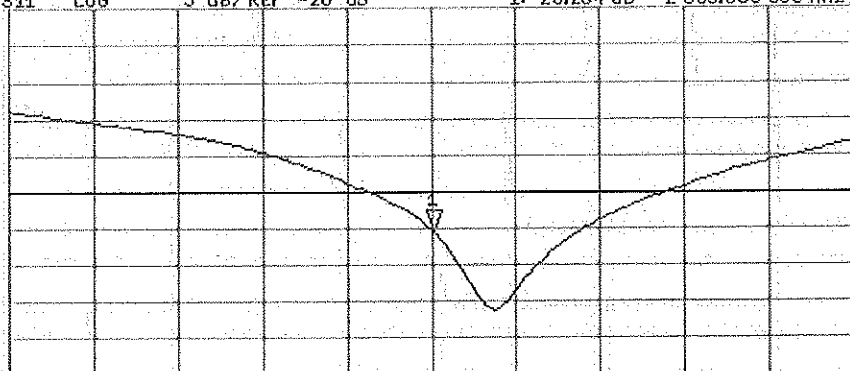

START 2 400.000 000 MHz

STOP 2 800.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 20.10.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.24, 4.24, 4.24); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 97.02 V/m; Power Drift = 0,00 dB

Peak SAR (extrapolated) = 31.0 W/kg



**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.43 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg

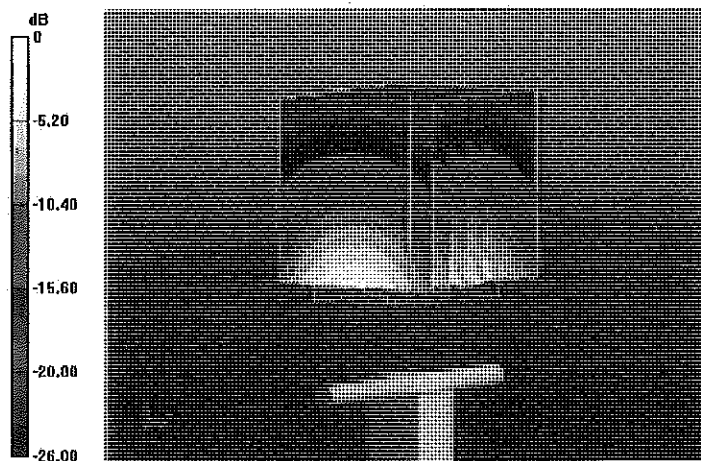

0 dB = 19.3 W/kg = 12.86 dBW/kg

# Impedance Measurement Plot for Body TSL

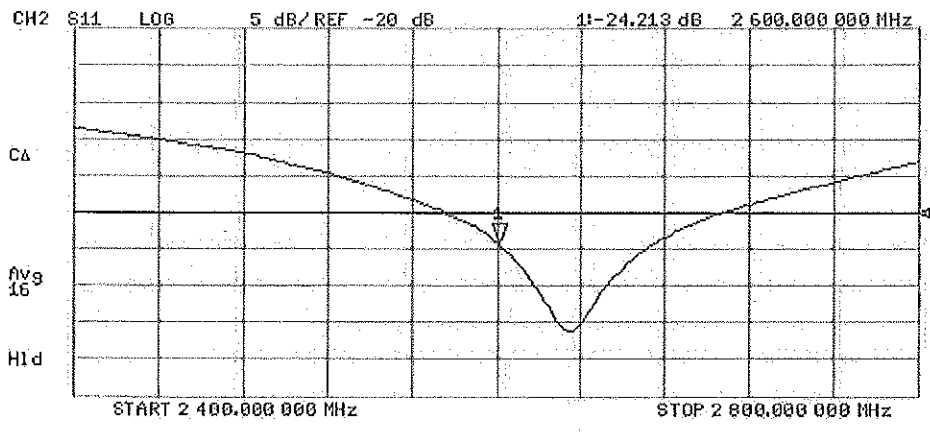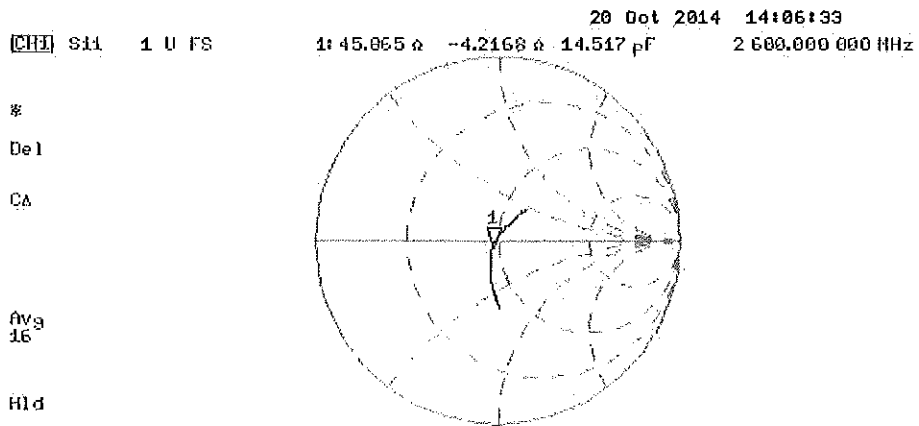



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1191\_Sep14**

**CALIBRATION CERTIFICATE**

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v2  
Calibration procedure for dipole validation kits between 3-6 GHz**

*CC  
11/14*

Calibration date: **September 25, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe EX3DV4	SN: 3503	30-Dec-13 (No. EX3-3503_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Claudio Leubler**      Name: Claudio Leubler      Function: Laboratory Technician

Signature

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Technical Manager

Issued: September 25, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accreditation No.: **SCS 108**

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.9 ± 6 %	4.54 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>81.1 W/kg ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>23.1 W/kg ± 19.5 % (k=2)</b>

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.64 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.8 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.83 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	88.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.2 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.93 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	86.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.49 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 19.5 % (k=2)

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	5.14 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	82.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.1 ± 6 %	5.40 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.84 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.53 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.79 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	83.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.93 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.48 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	84.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.1 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	51.8 $\Omega$ - 9.9 j $\Omega$
Return Loss	- 20.1 dB

### Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	54.5 $\Omega$ - 1.5 j $\Omega$
Return Loss	- 26.8 dB

### Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	49.6 $\Omega$ - 2.0 j $\Omega$
Return Loss	- 33.9 dB

### Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.5 $\Omega$ - 4.4 j $\Omega$
Return Loss	- 22.7 dB

### Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.6 $\Omega$ + 4.4 j $\Omega$
Return Loss	- 22.6 dB

### Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	51.9 $\Omega$ - 8.1 j $\Omega$
Return Loss	- 21.8 dB

### Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	54.5 $\Omega$ + 0.1 j $\Omega$
Return Loss	- 27.3 dB

### Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	50.2 $\Omega$ - 0.6 j $\Omega$
Return Loss	- 43.8 dB

### Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	57.5 $\Omega$ - 3.2 j $\Omega$
Return Loss	- 22.4 dB

### Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	57.2 $\Omega$ + 5.2 j $\Omega$
Return Loss	- 21.7 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 01, 2014



## DASY5 Validation Report for Head TSL

Date: 25.09.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.54$  S/m;  $\epsilon_r = 34.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.64$  S/m;  $\epsilon_r = 34.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.83$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.93$  S/m;  $\epsilon_r = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.14$  S/m;  $\epsilon_r = 34.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IBEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.52, 5.52, 5.52); Calibrated: 30.12.2013, ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2013, ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.86, 4.86, 4.86); Calibrated: 30.12.2013, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.20 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.0 W/kg

**SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.90 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.64 W/kg; SAR(10 g) = 2.47 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.91 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 35.3 W/kg

**SAR(1 g) = 8.93 W/kg; SAR(10 g) = 2.54 W/kg**

Maximum value of SAR (measured) = 20.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.29 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 34.8 W/kg

**SAR(1 g) = 8.76 W/kg; SAR(10 g) = 2.49 W/kg**


Maximum value of SAR (measured) = 20.7 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.74 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg

**SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.35 W/kg**

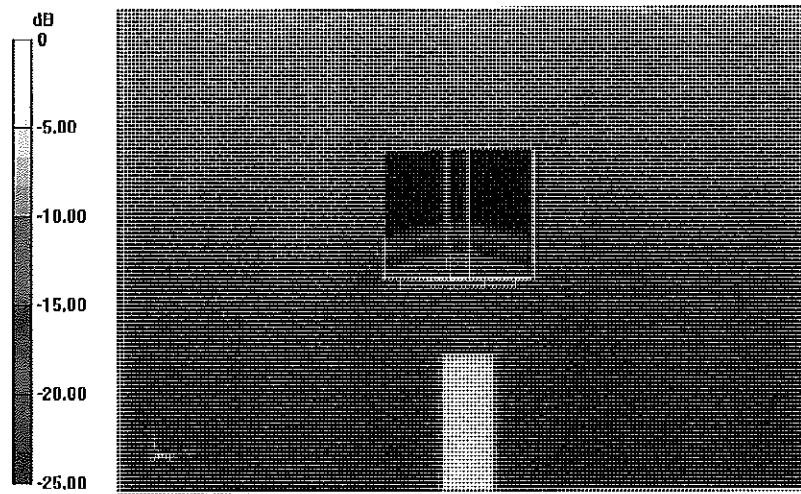


0 dB = 19.8 W/kg = 12.97 dBW/kg

# Impedance Measurement Plot for Head TSL

25 Sep 2014 11:07:52

CH1 S11 1 U FS 1: 51.911  $\Omega$  -9.9180  $\Omega$  3.0860 pF 5 200.000 000 MHz

\*  
Del  
Cor  
Avg  
0  
H1d

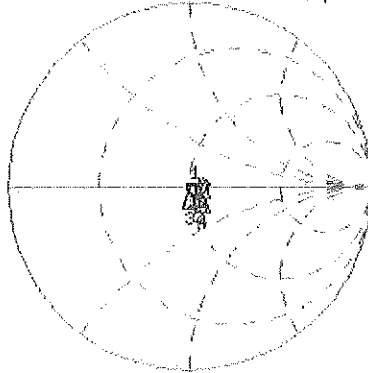


CH1 Markers

2: 54.518  $\Omega$   
-1.5078  $\Omega$   
5.30000 GHz  
3: 49.566  $\Omega$   
-1.9707  $\Omega$   
5.50000 GHz  
4: 56.516  $\Omega$   
-4.3633  $\Omega$   
5.60000 GHz  
5: 56.555  $\Omega$   
4.3904  $\Omega$   
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.126 dB 5 200.000 000 MHz

Cor  
Avg  
0  
H1d

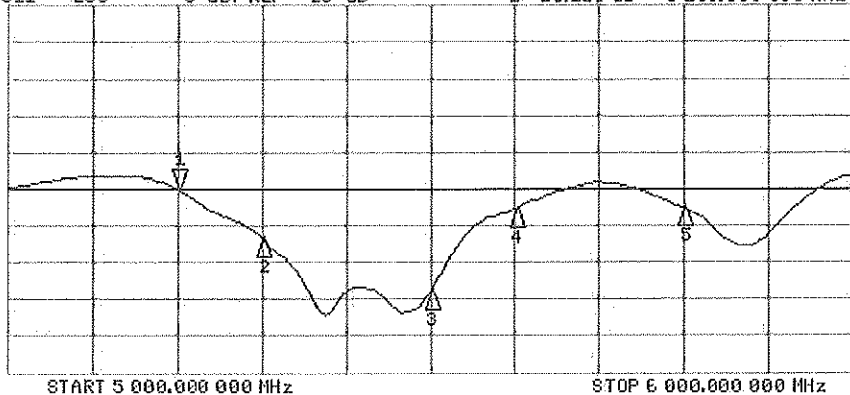

CH2 Markers

2: -26.825 dB  
5.30000 GHz  
3: -33.870 dB  
5.50000 GHz  
4: -22.660 dB  
5.60000 GHz  
5: -22.611 dB  
5.80000 GHz

## DASY5 Validation Report for Body TSL

Date: 24.09.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.4$  S/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.53$  S/m;  $\epsilon_r = 46.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.79$  S/m;  $\epsilon_r = 46.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.93$  S/m;  $\epsilon_r = 46.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEBE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013, ConvF(4.52, 4.52, 4.52); Calibrated: 30.12.2013, ConvF(4.3, 4.3, 4.3); Calibrated: 30.12.2013, ConvF(4.47, 4.47, 4.47); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.46 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.42 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 32.1 W/kg

**SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 19.1 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.44 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 35.8 W/kg

**SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.32 W/kg**

Maximum value of SAR (measured) = 20.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 60.44 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 37.0 W/kg  
SAR(1 g) = 8.48 W/kg; SAR(10 g) = 2.35 W/kg  
Maximum value of SAR (measured) = 20.9 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 56.69 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 36.4 W/kg  
SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.17 W/kg  
Maximum value of SAR (measured) = 19.7 W/kg

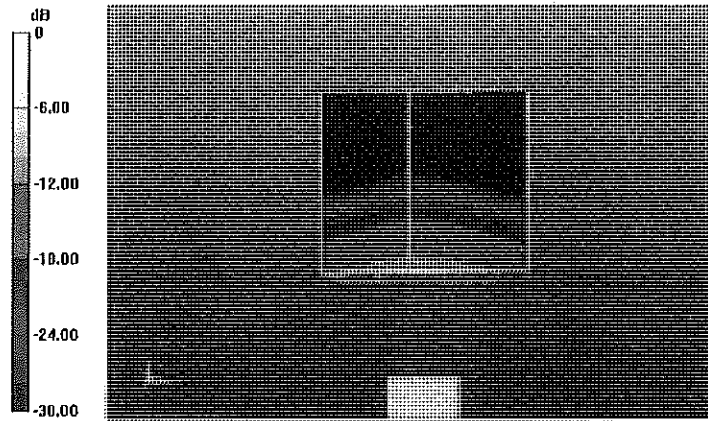


0 dB = 19.7 W/kg = 12.94 dBW/kg

# Impedance Measurement Plot for Body TSL

24 Sep 2014 11:05:50

[CH1] S11 1 U FS 1: 51.867  $\Omega$  -8.0566  $\Omega$  3.7989 pF 5 200.000 000 MHz

#  
Del  
Cor  
Avg  
16  
H1d

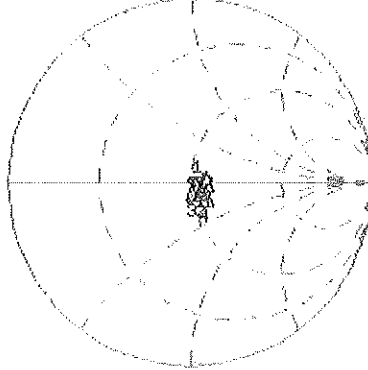


CH1 Markers

- 2: 54.531  $\Omega$   
0.1015  $\Omega$   
5.30000 GHz
- 3: 50.207  $\Omega$   
-613.28 pF  
5.50000 GHz
- 4: 57.480  $\Omega$   
-3.1563  $\Omega$   
5.60000 GHz
- 5: 57.150  $\Omega$   
5.1934  $\Omega$   
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.835 dB 5 200.000 000 MHz

Cor  
Avg  
16  
H1d

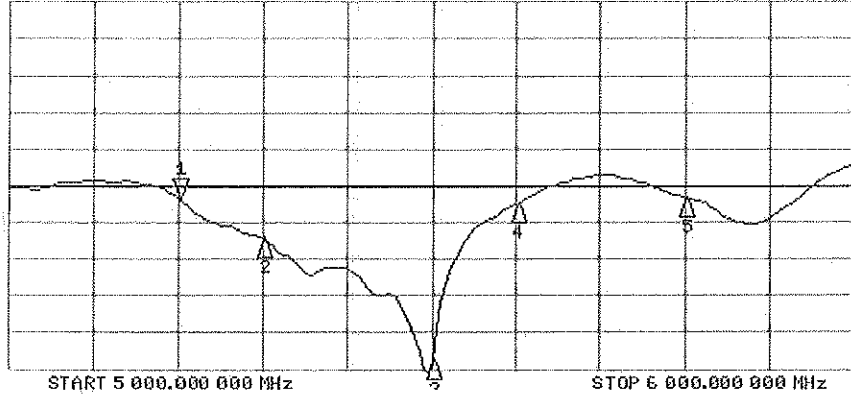

CH2 Markers

- 2: -27.251 dB  
5.30000 GHz
- 3: -43.776 dB  
5.50000 GHz
- 4: -22.442 dB  
5.60000 GHz
- 5: -21.682 dB  
5.80000 GHz