

FCC LTE REPORT

FCC Certification

| | |
|--|--|
| Applicant Name: LG Electronics MobileComm U.S.A., Inc. Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632 | Date of Issue: October 14, 2015 Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA Report No.: HCT-R-1510-F007 HCT FRN: 0005866421 |
|--|--|

| | |
|----------------|------------------|
| FCC ID: | ZNFH815PX |
|----------------|------------------|

| | |
|-------------------|---|
| APPLICANT: | LG Electronics MobileComm U.S.A., Inc. |
|-------------------|---|

FCC Model(s): LG-H815PX

Additional FCC Model(s): LGH815PX, H815PX, LG-H815Px, LGH815Px, H815Px, LG-H815pX, LGH815pX, H815pX, LG-H815px, LGH815px, H815px

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §27, §2

Standalone with normal cover

| Mode (MHz) | Tx Frequency (MHz) | Emission Designator | Modulation | EIRP | |
|------------------|--------------------|---------------------|------------|----------------|------------------|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band7 (5) | 2502.5 – 2567.5 | 4M50G7D | QPSK | 0.184 | 22.66 |
| | | 4M50W7D | 16QAM | 0.139 | 21.44 |
| LTE – Band7 (10) | 2505.0 – 2565.0 | 9M00G7D | QPSK | 0.196 | 22.92 |
| | | 8M95W7D | 16QAM | 0.148 | 21.69 |
| LTE – Band7 (15) | 2507.5 – 2562.5 | 13M5G7D | QPSK | 0.208 | 23.18 |
| | | 13M5W7D | 16QAM | 0.153 | 21.83 |
| LTE – Band7 (20) | 2510.0 – 2560.0 | 18M0G7D | QPSK | 0.182 | 22.59 |
| | | 18M0W7D | 16QAM | 0.144 | 21.58 |

Standalone with wireless charging cover (close)

| Mode (MHz) | Tx Frequency (MHz) | Modulation | EIRP | |
|------------------|--------------------|------------|----------------|------------------|
| | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band7 (5) | 2502.5 – 2567.5 | QPSK | 0.095 | 19.79 |
| | | 16QAM | 0.071 | 18.50 |
| LTE – Band7 (10) | 2505.0 – 2565.0 | QPSK | 0.098 | 19.89 |
| | | 16QAM | 0.075 | 18.76 |
| LTE – Band7 (15) | 2507.5 – 2562.5 | QPSK | 0.098 | 19.93 |
| | | 16QAM | 0.076 | 18.80 |
| LTE – Band7 (20) | 2510.0 – 2560.0 | QPSK | 0.097 | 19.85 |
| | | 16QAM | 0.072 | 18.54 |

With wireless charging pad

| Mode (MHz) | Tx Frequency (MHz) | Modulation | EIRP | |
|------------------|--------------------|------------|----------------|------------------|
| | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band7 (5) | 2502.5 – 2567.5 | QPSK | 0.055 | 17.43 |
| | | 16QAM | 0.042 | 16.20 |
| LTE – Band7 (10) | 2505.0 – 2565.0 | QPSK | 0.059 | 17.74 |
| | | 16QAM | 0.045 | 16.55 |
| LTE – Band7 (15) | 2507.5 – 2562.5 | QPSK | 0.063 | 17.97 |
| | | 16QAM | 0.045 | 16.54 |
| LTE – Band7 (20) | 2510.0 – 2560.0 | QPSK | 0.062 | 17.95 |
| | | 16QAM | 0.048 | 16.80 |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Jeong Ho Kim
Test engineer of RF Team



Approved by
: Yong Hyun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

| TEST REPORT NO. | DATE | DESCRIPTION |
|-----------------|------------------|-------------------------|
| HCT-R-1510-F007 | October 14, 2015 | - First Approval Report |
| | | |
| | | |
| | | |
| | | |

Table of Contents

| | |
|--|----|
| 1. GENERAL INFORMATION | 6 |
| 2. INTRODUCTION | 8 |
| 2.1. EUT DESCRIPTION..... | 8 |
| 2.2. MEASURING INSTRUMENT CALIBRATION..... | 8 |
| 2.3. TEST FACILITY | 8 |
| 3. DESCRIPTION OF TESTS | 9 |
| 3.1 EIRP AND RADIATED SPURIOUS EMISSIONS..... | 9 |
| 3.2 PEAK-AVERAGE RATIO. | 10 |
| 3.3 OCCUPIED BANDWIDTH. | 11 |
| 3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL..... | 12 |
| 3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 13 |
| 4. LIST OF TEST EQUIPMENT | 14 |
| 5. SUMMARY OF TEST RESULTS | 15 |
| 6. SAMPLE CALCULATION..... | 16 |
| 7. TEST DATA | 17 |
| 7.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _ Standalone with normal cover | 17 |
| 7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _ Standalone with wireless charging cover (close) | 20 |
| 7.3 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _With wireless charging pad | 23 |
| 7.4 RADIATED SPURIOUS EMISSIONS_ Standalone with normal cover with normal cover | 26 |
| 7.4.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE) | 26 |
| 7.4.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE) | 27 |
| 7.4.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE) | 28 |
| 7.4.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE) | 29 |
| 7.5 RADIATED SPURIOUS EMISSIONS_ with wireless charging cover (close)..... | 30 |
| 7.5.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE) | 30 |
| 7.5.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE) | 31 |
| 7.5.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE) | 32 |
| 7.5.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE) | 33 |
| 7.6 RADIATED SPURIOUS EMISSIONS__ With wireless charging pad..... | 34 |
| 7.6.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE) | 34 |
| 7.6.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE) | 35 |
| 7.6.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE) | 36 |
| 7.6.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE) | 37 |
| 7.7 PEAK-TO-AVERAGE RATIO | 38 |

7.8 OCCUPIED BANDWIDTH 38

7.9 CONDUCTED SPURIOUS EMISSIONS 39

7.9.1 BAND EDGE..... 39

7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 40

7.10.1 FREQUENCY STABILITY (5 MHz Band 7 LTE) 40

7.10.2 FREQUENCY STABILITY (10 MHz Band 7 LTE) 41

7.10.3 FREQUENCY STABILITY (15 MHz Band 7 LTE) 42

7.10.4 FREQUENCY STABILITY (20 MHz Band 7 LTE) 43

8. TEST PLOTS..... 44

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFH815PX

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Model(s): LG-H815PX

Additional FCC Model(s): LGH815PX, H815PX, LG-H815Px, LGH815Px, H815Px, LG-H815pX, LGH815pX, H815pX, LG-H815px, LGH815px, H815px

Tx Frequency: 2502.5 MHz – 2567.5 MHz (LTE – Band 7): 5 MHz
2505.0 MHz – 2565.0 MHz (LTE – Band 7): 10 MHz
2507.5 MHz – 2562.5 MHz (LTE – Band 7): 15 MHz
2510.0 MHz – 2560.0 MHz (LTE – Band 7): 20 MHz

Max. RF Output Power: **Standalone with normal cover:**

| | |
|-------------------|--|
| Band 7 (5 MHz) : | 0.184 W (QPSK) (22.66 dBm) 0.139 W (16-QAM) (21.44 dBm) |
| Band 7 (10 MHz) : | 0.196 W (QPSK) (22.92 dBm) 0.148 W (16-QAM) (21.69 dBm) |
| Band 7 (15 MHz) : | 0.208 W (QPSK) (23.18 dBm) 0.153 W (16-QAM) (21.83 dBm) |
| Band 7 (20 MHz) : | 0.182 W (QPSK) (22.59 dBm) 0.144 W (16-QAM) (21.58 dBm) |

Standalone with wireless charging cover (close) :

| | |
|-------------------|--|
| Band 7 (5 MHz) : | 0.095 W (QPSK) (19.79 dBm) 0.071 W (16-QAM) (18.50 dBm) |
| Band 7 (10 MHz) : | 0.098 W (QPSK) (19.89 dBm) 0.075 W (16-QAM) (18.76 dBm) |
| Band 7 (15 MHz) : | 0.098 W (QPSK) (19.93 dBm) 0.076 W (16-QAM) (18.80 dBm) |
| Band 7 (20 MHz) : | 0.097 W (QPSK) (19.85 dBm) 0.072 W (16-QAM) (18.54 dBm) |

With wireless charging pad:

| | |
|-------------------|--|
| Band 7 (5 MHz) : | 0.055 W (QPSK) (17.43 dBm) 0.042 W (16-QAM) (16.20 dBm) |
| Band 7 (10 MHz) : | 0.059 W (QPSK) (17.74 dBm) 0.045 W (16-QAM) (16.55 dBm) |
| Band 7 (15 MHz) : | 0.063 W (QPSK) (17.97 dBm) 0.045 W (16-QAM) (16.54 dBm) |
| Band 7 (20 MHz) : | 0.062 W (QPSK) (17.95 dBm) 0.048 W (16-QAM) (16.80 dBm) |

| | | |
|--------------------------------|-------------------|-----------------------------------|
| Emission Designator(s): | Band 7 (5 MHz) : | 4M50G7D (QPSK) / 4M50W7D (16-QAM) |
| | Band 7 (10 MHz) : | 9M00G7D (QPSK) / 8M95W7D (16-QAM) |
| | Band 7 (15 MHz) : | 13M5G7D (QPSK) / 13M5W7D (16-QAM) |
| | Band 7 (20 MHz) : | 18M0G7D (QPSK) / 18M0W7D (16-QAM) |

Date(s) of Tests: March 21, 2015 ~ April 14, 2015

Antenna Specification
Manufacturer: Ace Technology
Antenna type: PIFA Antenna (Planar Inverted F)
Peak Gain: Band 7 : -0.24 dBi

Note: The device, LG-H815PX (FCC ID: ZNFH815PX) is electrically identical compare to LG-H815 (FCC ID: ZNFH815), and There is no Hardware Change. Simply enable software to WCDMA Band4. So, we reuse the test data of model LG-H815 (FCC ID: ZNFH815). But WCDMA B4 was Test.

2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-H815PX Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of LTE 7.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 EIRP AND RADIATED SPURIOUS EMISSIONS

Note: EIRP(Equivalent Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.
2. Measured distance : 30 MHz ~ 11 GHz at 3 m
11 GHz ~ 26 GHz at 1m
3. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 26.5 GHz. And limit is -25 dBm. The high, low and a middle channel were tested for out of band measurements.

3.2 PEAK-AVERAGE RATIO.

Test Procedure


Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

3.3 OCCUPIED BANDWIDTH.

Test set-up

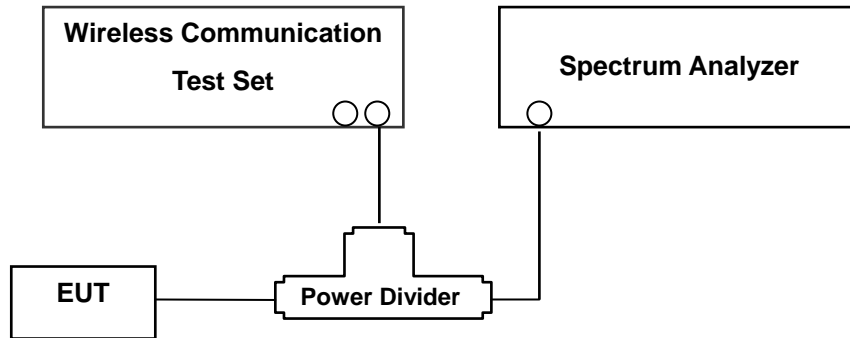

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2..

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. And limit is -25 dBm. The high, low and a middle channel were tested for out of band measurements.


- Channel Edge Requirement : In the 1 MHz bands immediately outside and adjacent to the channel, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 7, total offset 27.5 dBm = 20 dBm attenuator + 6 dBm Divider + 1.5 dBm RF cables.

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

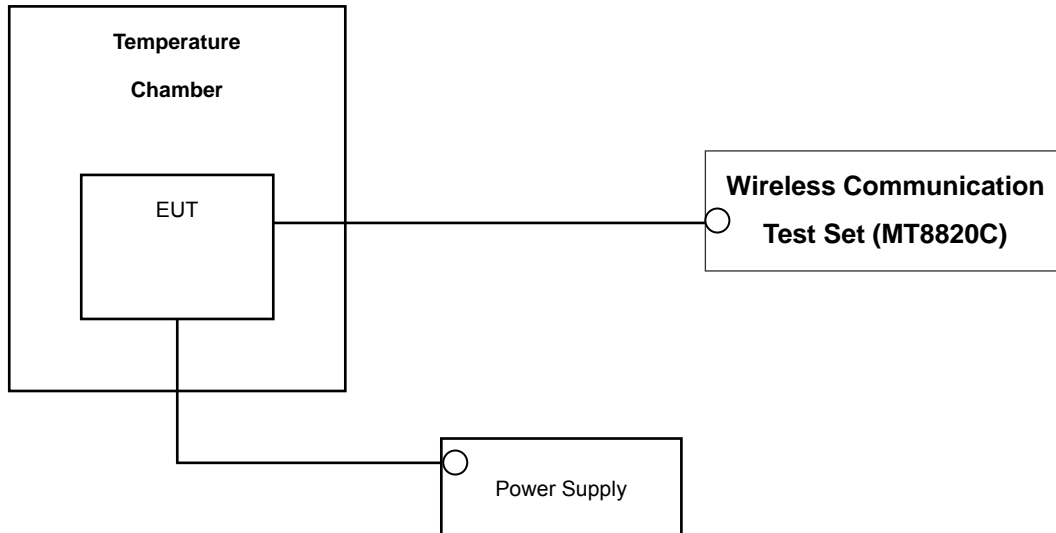

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(LTE Band7).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

| Manufacture | Model/ Equipment | Serial Number | Calibration Interval | Calibration Due |
|-------------------|---|------------------------|----------------------|-----------------|
| LG innotek CHINA | WCD-110/WCP | LF1NA625283010191(1.1) | | |
| Agilent | N1921A/ Power Sensor | MY45241059 | Annual | 07/09/2015 |
| Agilent | N1911A/ Power Meter | MY45100523 | Annual | 01/15/2016 |
| MITEQ | AMF-6D-001180-35-20P/AMP | 1081666 | Annual | 09/04/2015 |
| Wainwright | WHK1.2/15G-10EF/H.P.F | 4 | Annual | 06/17/2015 |
| Wainwright | WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F. | 1 | Annual | 06/17/2015 |
| Wainwright | WHK3.3/18G-10EF/H.P.F | 2 | Annual | 06/17/2015 |
| Hewlett Packard | 11667B / Power Splitter | 10545 | Annual | 02/22/2016 |
| Hewlett Packard | 11667B / Power Splitter | 11275 | Annual | 05/19/2015 |
| Digital | EP-3010/ Power Supply | 3110117 | Annual | 10/29/2015 |
| Schwarzbeck | UHAP/ Dipole Antenna | 1104 | Biennial | 04/24/2015 |
| Schwarzbeck | UHAP/ Dipole Antenna | 986 | Biennial | 04/24/2015 |
| Korea Engineering | KR-1005L / Chamber | KRAC05063-3CH | Annual | 10/29/2015 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | 147 | Biennial | 09/01/2016 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | 1151 | Biennial | 10/05/2015 |
| Schwarzbeck | BBHA 9170/ Horn Antenna(15~40GHz) | BBHA9170541 | Biennial | 07/05/2015 |
| Agilent | E4440A/Spectrum Analyzer | US45303008 | Annual | 03/18/2016 |
| WEINSCHTEL | ATTENUATOR | BR0592 | Annual | 10/22/2015 |
| REOHDE&SCHWARZ | FSV40/Spectrum Analyzer | 1307.9002K40-100931-NK | Annual | 06/09/2015 |
| Agilent | 8960 (E5515C)/ Base Station | MY48360222 | Annual | 08/26/2015 |
| Anritsu Corp. | MT8820C/Wideband Radio Communication Tester | 6200863156 | Annual | 03/24/2016 |

5. SUMMARY OF TEST RESULTS

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result |
|------------------------|---|---|----------------|-------------|
| 2.1049 | Occupied Bandwidth | N/A | CONDUCTED | PASS |
| 2.1051, 27.53(m)(4) | Band Edge / Conducted Spurious Emissions. | < 40 + 10log10 (P[Watts]) at Channel edges < 43 + 10log10 (P[Watts]) between 5 and X MHz from Channel edges < 55 + 10log10 (P[Watts]) beyond X MHz beyond from Channel edges | | PASS |
| 27.50(d)(5) | Peak-Average Ratio | < 13 dB | | PASS |
| * 2.1046 | Conducted Output Power | N/A | | PASS |
| 2.1055, 27.54 | Frequency stability | Emission must remain in band | | PASS |
| 27.50(h)(2) | Equivalent Isotropic Radiated Power | < 2 Watts max. EIRP | RADIATED | PASS |
| 2.1053, 27.53(m)(4) | Undesirable Emissions | < 40 + 10log10 (P[Watts]) at Channel edges < 43 + 10log10 (P[Watts]) between 5 and X MHz from Channel edges < 55 + 10log10 (P[Watts]) beyond X MHz beyond from Channel edges | | PASS |

*See SAR Report

6. SAMPLE CALCULATION

A. EIRP Sample Calculation

| Mode | Ch./ Freq. | | Measured Level(dBm) | Substitute LEVEL(dBm) | Ant. Gain (dBi) | C.L | Pol. | EIRP | |
|--------------|------------|------------|---------------------|-----------------------|-----------------|------|------|------|-------|
| | channel | Freq.(MHz) | | | | | | W | dBm |
| LTE Band7 | 21100 | 2,535.00 | -15.36 | 19.46 | 10.72 | 1.78 | V | 0.69 | 28.40 |

EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of Equivalent Isotropic Radiated Power (**EIRP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _ Standalone with normal cover

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2502.5 | 5 MHz | QPSK | -21.72 | 13.63 | 10.63 | 1.60 | H | 0.184 | 22.66 |
| | | 16-QAM | -22.94 | 12.41 | 10.63 | 1.60 | H | 0.139 | 21.44 |
| 2535.0 | | QPSK | -22.17 | 13.43 | 10.70 | 1.63 | H | 0.178 | 22.50 |
| | | 16-QAM | -23.37 | 12.23 | 10.70 | 1.63 | H | 0.135 | 21.30 |
| 2567.5 | | QPSK | -22.58 | 13.18 | 10.73 | 1.64 | H | 0.169 | 22.27 |
| | | 16-QAM | -23.85 | 11.91 | 10.73 | 1.64 | H | 0.126 | 21.00 |

Equivalent Isotropic Radiated Power Data (5 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2505.0 | 10 MHz | QPSK | -21.71 | 13.64 | 10.64 | 1.61 | H | 0.185 | 22.67 |
| | | 16-QAM | -22.83 | 12.52 | 10.64 | 1.61 | H | 0.143 | 21.55 |
| 2535.0 | | QPSK | -21.75 | 13.85 | 10.70 | 1.63 | H | 0.196 | 22.92 |
| | | 16-QAM | -22.98 | 12.62 | 10.70 | 1.63 | H | 0.148 | 21.69 |
| 2565.0 | | QPSK | -22.26 | 13.46 | 10.73 | 1.63 | H | 0.180 | 22.56 |
| | | 16-QAM | -23.58 | 12.14 | 10.73 | 1.63 | H | 0.133 | 21.24 |

Equivalent Isotropic Radiated Power Data (10 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2507.5 | 15 MHz | QPSK | -21.59 | 13.76 | 10.64 | 1.61 | H | 0.190 | 22.79 |
| | | 16-QAM | -22.89 | 12.46 | 10.64 | 1.61 | H | 0.141 | 21.49 |
| 2535.0 | | QPSK | -21.49 | 14.11 | 10.70 | 1.63 | H | 0.208 | 23.18 |
| | | 16-QAM | -22.84 | 12.76 | 10.70 | 1.63 | H | 0.153 | 21.83 |
| 2562.5 | | QPSK | -22.38 | 13.31 | 10.73 | 1.62 | H | 0.175 | 22.42 |
| | | 16-QAM | -23.63 | 12.06 | 10.73 | 1.62 | H | 0.131 | 21.17 |

Equivalent Isotropic Radiated Power Data (15 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2510.0 | 20 MHz | QPSK | -21.85 | 13.49 | 10.65 | 1.61 | H | 0.179 | 22.53 |
| | | 16-QAM | -22.80 | 12.54 | 10.65 | 1.61 | H | 0.144 | 21.58 |
| 2535.0 | | QPSK | -22.08 | 13.52 | 10.70 | 1.63 | H | 0.182 | 22.59 |
| | | 16-QAM | -23.12 | 12.48 | 10.70 | 1.63 | H | 0.143 | 21.55 |
| 2560.0 | | QPSK | -22.39 | 13.28 | 10.73 | 1.62 | H | 0.173 | 22.39 |
| | | 16-QAM | -23.50 | 12.17 | 10.73 | 1.62 | H | 0.134 | 21.28 |

Equivalent Isotropic Radiated Power Data (20 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 5 MHz, 10MHz BW signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW ≥ 3 x RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _ Standalone with wireless charging cover (close)

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2502.5 | 5 MHz | QPSK | -25.12 | 10.23 | 10.63 | 1.60 | H | 0.084 | 19.26 |
| | | 16-QAM | -26.21 | 9.14 | 10.63 | 1.60 | H | 0.066 | 18.17 |
| 2535.0 | | QPSK | -25.26 | 10.34 | 10.70 | 1.63 | H | 0.087 | 19.41 |
| | | 16-QAM | -26.29 | 9.31 | 10.70 | 1.63 | H | 0.069 | 18.38 |
| 2567.5 | | QPSK | -25.06 | 10.70 | 10.73 | 1.64 | H | 0.095 | 19.79 |
| | | 16-QAM | -26.35 | 9.41 | 10.73 | 1.64 | H | 0.071 | 18.50 |

Equivalent Isotropic Radiated Power Data (5 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2505.0 | 10 MHz | QPSK | -24.64 | 10.71 | 10.64 | 1.61 | H | 0.094 | 19.74 |
| | | 16-QAM | -26.00 | 9.35 | 10.64 | 1.61 | H | 0.069 | 18.38 |
| 2535.0 | | QPSK | -24.78 | 10.82 | 10.70 | 1.63 | H | 0.098 | 19.89 |
| | | 16-QAM | -25.91 | 9.69 | 10.70 | 1.63 | H | 0.075 | 18.76 |
| 2565.0 | | QPSK | -25.23 | 10.49 | 10.73 | 1.63 | H | 0.091 | 19.59 |
| | | 16-QAM | -26.42 | 9.30 | 10.73 | 1.63 | H | 0.069 | 18.40 |

Equivalent Isotropic Radiated Power Data (10 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2507.5 | 15 MHz | QPSK | -24.90 | 10.45 | 10.64 | 1.61 | H | 0.089 | 19.48 |
| | | 16-QAM | -26.29 | 9.06 | 10.64 | 1.61 | H | 0.064 | 18.09 |
| 2535.0 | | QPSK | -24.74 | 10.86 | 10.70 | 1.63 | H | 0.098 | 19.93 |
| | | 16-QAM | -25.87 | 9.73 | 10.70 | 1.63 | H | 0.076 | 18.80 |
| 2562.5 | | QPSK | -25.07 | 10.62 | 10.73 | 1.62 | H | 0.094 | 19.73 |
| | | 16-QAM | -26.08 | 9.61 | 10.73 | 1.62 | H | 0.075 | 18.72 |

Equivalent Isotropic Radiated Power Data (15 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2510.0 | 20 MHz | QPSK | -25.06 | 10.28 | 10.65 | 1.61 | H | 0.085 | 19.32 |
| | | 16-QAM | -26.20 | 9.14 | 10.65 | 1.61 | H | 0.066 | 18.18 |
| 2535.0 | | QPSK | -24.94 | 10.66 | 10.70 | 1.63 | H | 0.094 | 19.73 |
| | | 16-QAM | -26.13 | 9.47 | 10.70 | 1.63 | H | 0.072 | 18.54 |
| 2560.0 | | QPSK | -24.93 | 10.74 | 10.73 | 1.62 | H | 0.097 | 19.85 |
| | | 16-QAM | -26.25 | 9.42 | 10.73 | 1.62 | H | 0.071 | 18.53 |

Equivalent Isotropic Radiated Power Data (20 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 5 MHz, 10MHz BW signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW ≥ 3 x RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.3 EQUIVALENT ISOTROPIC RADIATED POWER (Band 7) _With wireless charging pad

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2502.5 | 5 MHz | QPSK | -27.06 | 8.29 | 10.63 | 1.60 | V | 0.054 | 17.32 |
| | | 16-QAM | -28.18 | 7.17 | 10.63 | 1.60 | V | 0.042 | 16.20 |
| 2535.0 | | QPSK | -27.24 | 8.36 | 10.70 | 1.63 | V | 0.055 | 17.43 |
| | | 16-QAM | -28.51 | 7.09 | 10.70 | 1.63 | V | 0.041 | 16.16 |
| 2567.5 | | QPSK | -28.04 | 7.72 | 10.73 | 1.64 | V | 0.048 | 16.81 |
| | | 16-QAM | -29.32 | 6.44 | 10.73 | 1.64 | V | 0.036 | 15.53 |

Equivalent Isotropic Radiated Power Data (5 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2505.0 | 10 MHz | QPSK | -26.87 | 8.48 | 10.64 | 1.61 | V | 0.056 | 17.51 |
| | | 16-QAM | -28.05 | 7.30 | 10.64 | 1.61 | V | 0.043 | 16.33 |
| 2535.0 | | QPSK | -26.93 | 8.67 | 10.70 | 1.63 | V | 0.059 | 17.74 |
| | | 16-QAM | -28.12 | 7.48 | 10.70 | 1.63 | V | 0.045 | 16.55 |
| 2565.0 | | QPSK | -28.18 | 7.54 | 10.73 | 1.63 | V | 0.046 | 16.64 |
| | | 16-QAM | -29.40 | 6.32 | 10.73 | 1.63 | V | 0.035 | 15.42 |

Equivalent Isotropic Radiated Power Data (10 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2507.5 | 15 MHz | QPSK | -26.79 | 8.56 | 10.64 | 1.61 | V | 0.057 | 17.59 |
| | | 16-QAM | -28.21 | 7.14 | 10.64 | 1.61 | V | 0.041 | 16.17 |
| 2535.0 | | QPSK | -26.70 | 8.90 | 10.70 | 1.63 | V | 0.063 | 17.97 |
| | | 16-QAM | -28.13 | 7.47 | 10.70 | 1.63 | V | 0.045 | 16.54 |
| 2562.5 | | QPSK | -27.66 | 8.03 | 10.73 | 1.62 | V | 0.052 | 17.14 |
| | | 16-QAM | -28.94 | 6.75 | 10.73 | 1.62 | V | 0.039 | 15.86 |

Equivalent Isotropic Radiated Power Data (15 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain(dBi) | C.L | Pol | EIRP | |
|------------|-----------|------------|----------------------|------------------------|----------------|------|-----|-------|-------|
| | | | | | | | | W | dBm |
| 2510.0 | 20 MHz | QPSK | -26.89 | 8.45 | 10.65 | 1.61 | V | 0.056 | 17.49 |
| | | 16-QAM | -28.02 | 7.32 | 10.65 | 1.61 | V | 0.043 | 16.36 |
| 2535.0 | | QPSK | -26.72 | 8.88 | 10.70 | 1.63 | V | 0.062 | 17.95 |
| | | 16-QAM | -27.87 | 7.73 | 10.70 | 1.63 | V | 0.048 | 16.80 |
| 2560.0 | | QPSK | -27.74 | 7.93 | 10.73 | 1.62 | V | 0.051 | 17.04 |
| | | 16-QAM | -28.84 | 6.83 | 10.73 | 1.62 | V | 0.039 | 15.94 |

Equivalent Isotropic Radiated Power Data (20 MHz Band 7 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 5 MHz, 10MHz BW signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW ≥ 3 x RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.4 RADIATED SPURIOUS EMISSIONS_ Standalone with normal cover with normal cover

7.4.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE)

- ▣ OPERATING FREQUENCY : 2502.50 MHz
- ▣ MEASURED OUTPUT POWER: 22.66 dBm = 0.184 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.66 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20775 (2502.5) | 5,005.00 | -48.85 | 12.40 | -47.78 | 2.40 | V | -37.78 | 60.44 |
| | 7,507.50 | -56.73 | 11.06 | -47.66 | 2.97 | H | -39.57 | 62.23 |
| | 10,010.00 | -56.18 | 11.68 | -41.37 | 3.70 | H | -33.39 | 56.05 |
| 21100 (2535.0) | 5,070.00 | -53.75 | 12.30 | -52.27 | 2.39 | V | -42.36 | 65.02 |
| | 7,605.00 | -57.11 | 11.30 | -47.92 | 3.07 | H | -39.69 | 62.35 |
| | 10,140.00 | -57.53 | 11.59 | -43.41 | 3.66 | H | -35.48 | 58.14 |
| 21425 (2567.5) | 5,135.00 | -46.22 | 12.35 | -44.21 | 2.38 | H | -34.24 | 56.90 |
| | 7,702.50 | -56.56 | 11.45 | -46.94 | 3.10 | H | -38.59 | 61.25 |
| | 10,270.00 | -55.94 | 11.40 | -41.98 | 3.61 | H | -34.19 | 56.85 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.4.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE)

- ▣ OPERATING FREQUENCY : 2535.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.92 dBm = 0.196 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.92 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20800 (2505.0) | 5,010.00 | -48.03 | 12.39 | -46.79 | 2.38 | H | -36.78 | 59.70 |
| | 7,515.00 | -55.81 | 11.08 | -46.87 | 3.00 | V | -38.79 | 61.71 |
| | 10,020.00 | -55.19 | 11.69 | -40.38 | 3.83 | V | -32.52 | 55.44 |
| 21100 (2535.0) | 5,070.00 | -50.15 | 12.30 | -48.67 | 2.39 | V | -38.76 | 61.68 |
| | 7,605.00 | -56.91 | 11.30 | -47.72 | 3.07 | H | -39.49 | 62.41 |
| | 10,140.00 | -57.08 | 11.59 | -42.96 | 3.66 | V | -35.03 | 57.95 |
| 21400 (2565.0) | 5,130.00 | -46.64 | 12.34 | -44.79 | 2.37 | V | -34.82 | 57.74 |
| | 7,695.00 | -56.79 | 11.45 | -47.25 | 3.10 | H | -38.90 | 61.82 |
| | 10,260.00 | -55.93 | 11.41 | -41.35 | 3.69 | H | -33.63 | 56.55 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.4.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 23.18 dBm = 0.208 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 48.18 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20825 (2507.5) | 5,015.00 | -49.29 | 12.39 | -48.11 | 2.39 | V | -38.11 | 61.29 |
| | 7,522.50 | -56.89 | 11.10 | -47.99 | 3.03 | H | -39.92 | 63.10 |
| | 10,030.00 | -56.62 | 11.69 | -41.63 | 3.79 | H | -33.73 | 56.91 |
| 21100 (2535.0) | 5,070.00 | -47.90 | 12.30 | -46.42 | 2.39 | H | -36.51 | 59.69 |
| | 7,605.00 | -57.54 | 11.30 | -48.35 | 3.07 | H | -40.12 | 63.30 |
| | 10,140.00 | -57.56 | 11.59 | -43.44 | 3.66 | H | -35.51 | 58.69 |
| 21375 (2562.5) | 5,125.00 | -45.81 | 12.33 | -43.99 | 2.41 | V | -34.07 | 57.25 |
| | 7,687.50 | -56.95 | 11.44 | -47.40 | 3.12 | H | -39.08 | 62.26 |
| | 10,250.00 | -55.66 | 11.42 | -41.50 | 3.70 | H | -33.78 | 56.96 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.4.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 22.59 dBm = 0.182 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 47.59 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20850 (2510.0) | 5,020.00 | -48.60 | 12.38 | -47.49 | 2.39 | V | -37.50 | 60.09 |
| | 7,530.00 | -55.78 | 11.12 | -46.69 | 3.03 | H | -38.60 | 61.19 |
| | 10,040.00 | -56.01 | 11.70 | -40.77 | 3.84 | H | -32.91 | 55.50 |
| 21100 (2535.0) | 5,070.00 | -51.74 | 12.30 | -50.26 | 2.39 | V | -40.35 | 62.94 |
| | 7,605.00 | -56.69 | 11.30 | -47.50 | 3.07 | H | -39.27 | 61.86 |
| | 10,140.00 | -56.81 | 11.59 | -42.69 | 3.66 | V | -34.76 | 57.35 |
| 21350 (2560.0) | 5,120.00 | -48.71 | 12.31 | -46.91 | 2.45 | H | -37.05 | 59.64 |
| | 7,680.00 | -56.16 | 11.43 | -46.46 | 3.12 | H | -38.15 | 60.74 |
| | 10,240.00 | -55.97 | 11.44 | -41.91 | 3.67 | H | -34.14 | 56.73 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.5 RADIATED SPURIOUS EMISSIONS_ with wireless charging cover (close)

7.5.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE)

- ▣ OPERATING FREQUENCY : 2567.50 MHz
- ▣ MEASURED OUTPUT POWER: 19.79 dBm = 0.095 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 44.79 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20775 (2502.5) | 5,005.00 | -46.63 | 12.40 | -45.56 | 2.40 | H | -35.56 | 55.35 |
| | 7,507.50 | -57.95 | 11.06 | -48.88 | 2.97 | V | -40.79 | 60.58 |
| | 10,010.00 | -56.54 | 11.68 | -41.73 | 3.70 | H | -33.75 | 53.54 |
| 21100 (2535.0) | 5,070.00 | -48.65 | 12.30 | -47.17 | 2.39 | V | -37.26 | 57.05 |
| | 7,605.00 | -58.51 | 11.30 | -49.32 | 3.07 | V | -41.09 | 60.88 |
| | 10,140.00 | -58.44 | 11.59 | -44.32 | 3.66 | H | -36.39 | 56.18 |
| 21425 (2567.5) | 5,135.00 | -47.35 | 12.35 | -45.34 | 2.38 | H | -35.37 | 55.16 |
| | 7,702.50 | -59.31 | 11.45 | -49.69 | 3.10 | V | -41.34 | 61.13 |
| | 10,270.00 | -56.78 | 11.40 | -42.82 | 3.61 | H | -35.03 | 54.82 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.5.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 19.89 dBm = 0.098 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 44.89 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20800 (2505.0) | 5,010.00 | -45.47 | 12.39 | -44.23 | 2.38 | H | -34.22 | 54.11 |
| | 7,515.00 | -58.36 | 11.08 | -49.42 | 3.00 | H | -41.34 | 61.23 |
| | 10,020.00 | -56.38 | 11.69 | -41.57 | 3.83 | H | -33.71 | 53.60 |
| 21100 (2535.0) | 5,070.00 | -49.74 | 12.30 | -48.26 | 2.39 | H | -38.35 | 58.24 |
| | 7,605.00 | -58.87 | 11.30 | -49.68 | 3.07 | V | -41.45 | 61.34 |
| | 10,140.00 | -58.00 | 11.59 | -43.88 | 3.66 | V | -35.95 | 55.84 |
| 21400 (2565.0) | 5,130.00 | -50.96 | 12.34 | -49.11 | 2.37 | H | -39.14 | 59.03 |
| | 7,695.00 | -58.95 | 11.45 | -49.41 | 3.10 | H | -41.06 | 60.95 |
| | 10,260.00 | -57.10 | 11.41 | -42.52 | 3.69 | H | -34.80 | 54.69 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.5.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 19.93 dBm = 0.098 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 44.93 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20825 (2507.5) | 5,015.00 | -45.06 | 12.39 | -43.88 | 2.39 | H | -33.88 | 53.81 |
| | 7,522.50 | -58.73 | 11.10 | -49.83 | 3.03 | H | -41.76 | 61.69 |
| | 10,030.00 | -55.55 | 11.69 | -40.56 | 3.79 | H | -32.66 | 52.59 |
| 21100 (2535.0) | 5,070.00 | -48.37 | 12.30 | -46.89 | 2.39 | H | -36.98 | 56.91 |
| | 7,605.00 | -58.54 | 11.30 | -49.35 | 3.07 | H | -41.12 | 61.05 |
| | 10,140.00 | -59.47 | 11.59 | -45.35 | 3.66 | H | -37.42 | 57.35 |
| 21375 (2562.5) | 5,125.00 | -49.58 | 12.33 | -47.76 | 2.41 | H | -37.84 | 57.77 |
| | 7,687.50 | -56.07 | 11.44 | -46.52 | 3.12 | V | -38.20 | 58.13 |
| | 10,250.00 | -56.49 | 11.42 | -42.33 | 3.70 | H | -34.61 | 54.54 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.5.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2560.00 MHz
- MEASURED OUTPUT POWER: 19.85 dBm = 0.097 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 44.85 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20850 (2510.0) | 5,020.00 | -45.94 | 12.38 | -44.83 | 2.39 | V | -34.84 | 54.69 |
| | 7,530.00 | -56.65 | 11.12 | -47.56 | 3.03 | V | -39.47 | 59.32 |
| | 10,040.00 | -55.30 | 11.70 | -40.06 | 3.84 | V | -32.20 | 52.05 |
| 21100 (2535.0) | 5,070.00 | -49.46 | 12.30 | -47.98 | 2.39 | V | -38.07 | 57.92 |
| | 7,605.00 | -57.14 | 11.30 | -47.95 | 3.07 | V | -39.72 | 59.57 |
| | 10,140.00 | -56.95 | 11.59 | -42.83 | 3.66 | V | -34.90 | 54.75 |
| 21350 (2560.0) | 5,120.00 | -50.08 | 12.31 | -48.28 | 2.45 | V | -38.42 | 58.27 |
| | 7,680.00 | -55.58 | 11.43 | -45.88 | 3.12 | V | -37.57 | 57.42 |
| | 10,240.00 | -55.21 | 11.44 | -41.15 | 3.67 | H | -33.38 | 53.23 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.6 RADIATED SPURIOUS EMISSIONS__ With wireless charging pad

7.6.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 7 LTE)

| | |
|-----------------------------------|----------------------------|
| ▣ OPERATING FREQUENCY : | <u>2535.00 MHz</u> |
| ▣ MEASURED OUTPUT POWER: | <u>17.43 dBm = 0.055 W</u> |
| ▣ MODULATION SIGNAL: | <u>5 MHz QPSK</u> |
| ▣ DISTANCE: | <u>3 meters</u> |
| ▣ LIMIT: $55 + 10 \log_{10}(W) =$ | <u>42.43 dBc</u> |

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20775 (2502.5) | 5,005.00 | -47.48 | 12.40 | -46.41 | 2.40 | V | -36.41 | 53.84 |
| | 7,507.50 | -56.04 | 11.06 | -46.97 | 2.97 | H | -38.88 | 56.31 |
| | 10,010.00 | -55.12 | 11.68 | -40.31 | 3.70 | V | -32.33 | 49.76 |
| 21100 (2535.0) | 5,070.00 | -51.05 | 12.30 | -49.57 | 2.39 | V | -39.66 | 57.09 |
| | 7,605.00 | -55.90 | 11.30 | -46.71 | 3.07 | V | -38.48 | 55.91 |
| | 10,140.00 | -56.62 | 11.59 | -42.50 | 3.66 | H | -34.57 | 52.00 |
| 21425 (2567.5) | 5,135.00 | -48.40 | 12.35 | -46.39 | 2.38 | V | -36.42 | 53.85 |
| | 7,702.50 | -56.35 | 11.45 | -46.73 | 3.10 | V | -38.38 | 55.81 |
| | 10,270.00 | -55.11 | 11.40 | -41.15 | 3.61 | H | -33.36 | 50.79 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.6.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 17.74 dBm = 0.059 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 42.74 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20800 (2505.0) | 5,010.00 | -48.71 | 12.39 | -47.47 | 2.38 | H | -37.46 | 55.20 |
| | 7,515.00 | -56.44 | 11.08 | -47.50 | 3.00 | V | -39.42 | 57.16 |
| | 10,020.00 | -56.49 | 11.69 | -41.68 | 3.83 | H | -33.82 | 51.56 |
| 21100 (2535.0) | 5,070.00 | -51.06 | 12.30 | -49.58 | 2.39 | V | -39.67 | 57.41 |
| | 7,605.00 | -55.85 | 11.30 | -46.66 | 3.07 | V | -38.43 | 56.17 |
| | 10,140.00 | -56.60 | 11.59 | -42.48 | 3.66 | H | -34.55 | 52.29 |
| 21400 (2565.0) | 5,130.00 | -48.13 | 12.34 | -46.28 | 2.37 | V | -36.31 | 54.05 |
| | 7,695.00 | -56.96 | 11.45 | -47.42 | 3.10 | H | -39.07 | 56.81 |
| | 10,260.00 | -55.08 | 11.41 | -40.50 | 3.69 | H | -32.78 | 50.52 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.6.3 RADIATED SPURIOUS EMISSIONS (15 MHz Band 7 LTE)

| | | |
|-----------------------------------|-------|---------------------|
| ■ OPERATING FREQUENCY : | _____ | 2535.00 MHz |
| ■ MEASURED OUTPUT POWER: | _____ | 17.97 dBm = 0.063 W |
| ■ MODULATION SIGNAL: | _____ | 15 MHz QPSK |
| ■ DISTANCE: | _____ | 3 meters |
| ■ LIMIT: $55 + 10 \log_{10}(W) =$ | _____ | 42.97 dBc |

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20825 (2507.5) | 5,015.00 | -48.92 | 12.39 | -47.74 | 2.39 | V | -37.74 | 55.71 |
| | 7,522.50 | -56.98 | 11.10 | -48.08 | 3.03 | V | -40.01 | 57.98 |
| | 10,030.00 | -56.24 | 11.69 | -41.25 | 3.79 | H | -33.35 | 51.32 |
| 21100 (2535.0) | 5,070.00 | -50.74 | 12.30 | -49.26 | 2.39 | H | -39.35 | 57.32 |
| | 7,605.00 | -56.99 | 11.30 | -47.80 | 3.07 | V | -39.57 | 57.54 |
| | 10,140.00 | -56.39 | 11.59 | -42.27 | 3.66 | V | -34.34 | 52.31 |
| 21375 (2562.5) | 5,125.00 | -47.67 | 12.33 | -45.85 | 2.41 | V | -35.93 | 53.90 |
| | 7,687.50 | -56.99 | 11.44 | -47.44 | 3.12 | V | -39.12 | 57.09 |
| | 10,250.00 | -55.44 | 11.42 | -41.28 | 3.70 | V | -33.56 | 51.53 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.6.4 RADIATED SPURIOUS EMISSIONS (20 MHz Band 7 LTE)

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 17.95 dBm = 0.062 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $55 + 10 \log_{10}(W) =$ 42.95 dBc

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | EIRP (dBm) | dBc |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|------------|-------|
| 20850 (2510.0) | 5,020.00 | -49.59 | 12.38 | -48.48 | 2.39 | H | -38.49 | 56.44 |
| | 7,530.00 | -56.68 | 11.12 | -47.59 | 3.03 | V | -39.50 | 57.45 |
| | 10,040.00 | -55.46 | 11.70 | -40.22 | 3.84 | H | -32.36 | 50.31 |
| 21100 (2535.0) | 5,070.00 | -51.78 | 12.30 | -50.30 | 2.39 | V | -40.39 | 58.34 |
| | 7,605.00 | -55.77 | 11.30 | -46.58 | 3.07 | H | -38.35 | 56.30 |
| | 10,140.00 | -55.88 | 11.59 | -41.76 | 3.66 | H | -33.83 | 51.78 |
| 21350 (2560.0) | 5,120.00 | -48.89 | 12.31 | -47.09 | 2.45 | V | -37.23 | 55.18 |
| | 7,680.00 | -56.14 | 11.43 | -46.44 | 3.12 | H | -38.13 | 56.08 |
| | 10,240.00 | -55.87 | 11.44 | -41.81 | 3.67 | H | -34.04 | 51.99 |

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.
 6. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.7 PEAK-TO-AVERAGE RATIO

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (dB) |
|--------|------------|-----------------|------------|---------------------|-----------------------|-------------|
| Band 7 | 5 MHz | 2535.0 | QPSK | 25 | 0 | 5.16 |
| | | | 16-QAM | 25 | 0 | 5.94 |
| | 10 MHz | | QPSK | 50 | 0 | 5.14 |
| | | | 16-QAM | 50 | 0 | 5.92 |
| | 15 MHz | | QPSK | 75 | 0 | 4.99 |
| | | | 16-QAM | 75 | 0 | 5.81 |
| | 20 MHz | | QPSK | 100 | 0 | 4.94 |
| | | | 16-QAM | 100 | 0 | 5.83 |

- Plots of the EUT's Peak- to- Average Ratio are shown Page 49 ~ 52.

7.8 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (dB) |
|--------|------------|-----------------|------------|---------------------|-----------------------|-------------|
| Band 7 | 5 MHz | 2535.0 | QPSK | 25 | 0 | 4.4993 |
| | | | 16-QAM | 25 | 0 | 4.4974 |
| | 10 MHz | | QPSK | 50 | 0 | 8.9999 |
| | | | 16-QAM | 50 | 0 | 8.9527 |
| | 15 MHz | | QPSK | 75 | 0 | 13.4870 |
| | | | 16-QAM | 75 | 0 | 13.4710 |
| | 20 MHz | | QPSK | 100 | 0 | 17.9500 |
| | | | 16-QAM | 100 | 0 | 17.9700 |

- Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 48.

7.9 CONDUCTED SPURIOUS EMISSIONS

- Plots of the EUT's Conducted Spurious Emissions are shown Page 59 ~ 70.

7.9.1 BAND EDGE

| Band | Band Width (MHz) | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Channel Edge Data [dBm] | | | | | |
|--------|------------------|-----------------|------------|---------------------|-----------------------|------------------------------|--------|---|--------|---|--------|
| | | | | | | Channel Edge (Limit: -10dBm) | | 5 MHz ~ X MHz from the Channel Edge (Limit: -13dBm) | | X MHz ~ from the Channel Edge (Limit: -25dBm) | |
| | | | | | | Lower | Upper | Lower | Upper | Lower | Upper |
| Band 7 | 5 | 2,502.5 | QPSK | 25 | 0 | -15.28 | -16.58 | -33.92 | -32.96 | -36.05 | -34.60 |
| | | 2,535.0 | | 25 | 0 | -16.22 | -17.82 | -34.45 | -34.90 | -36.00 | -36.36 |
| | | 2,567.5 | | 25 | 0 | -15.78 | -18.05 | -33.57 | -36.24 | -35.84 | -38.21 |
| | 10 | 2,505.0 | | 50 | 0 | -18.90 | -21.09 | -24.50 | -24.90 | -38.42 | -35.50 |
| | | 2,535.0 | | 50 | 0 | -19.33 | -23.71 | -23.92 | -27.48 | -36.79 | -38.07 |
| | | 2,565.0 | | 50 | 0 | -20.93 | -23.09 | -25.05 | -27.98 | -36.13 | -39.58 |
| | 15 | 2,507.5 | | 75 | 0 | -20.15 | -22.32 | -24.62 | -24.75 | -42.41 | -36.81 |
| | | 2,535.0 | | 75 | 0 | -20.56 | -24.37 | -23.59 | -26.73 | -38.24 | -38.68 |
| | | 2,562.5 | | 75 | 0 | -21.79 | -23.09 | -25.34 | -26.85 | -36.47 | -40.62 |
| | 20 | 2,510.0 | | 100 | 0 | -21.46 | -23.24 | -25.24 | -25.40 | -43.55 | -37.50 |
| | | 2,535.0 | | 100 | 0 | -21.66 | -24.72 | -24.26 | -26.79 | -39.37 | -38.76 |
| | | 2,560.0 | | 100 | 0 | -23.16 | -23.92 | -25.64 | -27.28 | -37.78 | -42.78 |


- Plots of the EUT's Band Edge are shown Page 53 ~ 58.

7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.10.1 FREQUENCY STABILITY (5 MHz Band 7 LTE)

- OPERATING FREQUENCY: 2535.000,000 Hz
- CHANNEL: 21100 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: -


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100% | 3.85 | +20(Ref) | 2535 000 006 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 2535 000 015 | 9.0 | 0.000 000 | 0.004 |
| 100% | | -20 | 2535 000 016 | 9.9 | 0.000 000 | 0.004 |
| 100% | | -10 | 2535 000 019 | 12.9 | 0.000 001 | 0.005 |
| 100% | | 0 | 2535 000 016 | 9.8 | 0.000 000 | 0.004 |
| 100% | | +10 | 2535 000 019 | 12.8 | 0.000 001 | 0.005 |
| 100% | | +30 | 2535 000 019 | 13.5 | 0.000 001 | 0.005 |
| 100% | | +40 | 2534 999 997 | -9.3 | 0.000 000 | -0.004 |
| 100% | | +50 | 2535 000 020 | 13.8 | 0.000 001 | 0.005 |
| Batt. Endpoint | 3.27 | +20 | 2535 000 013 | 7.0 | 0.000 000 | 0.003 |

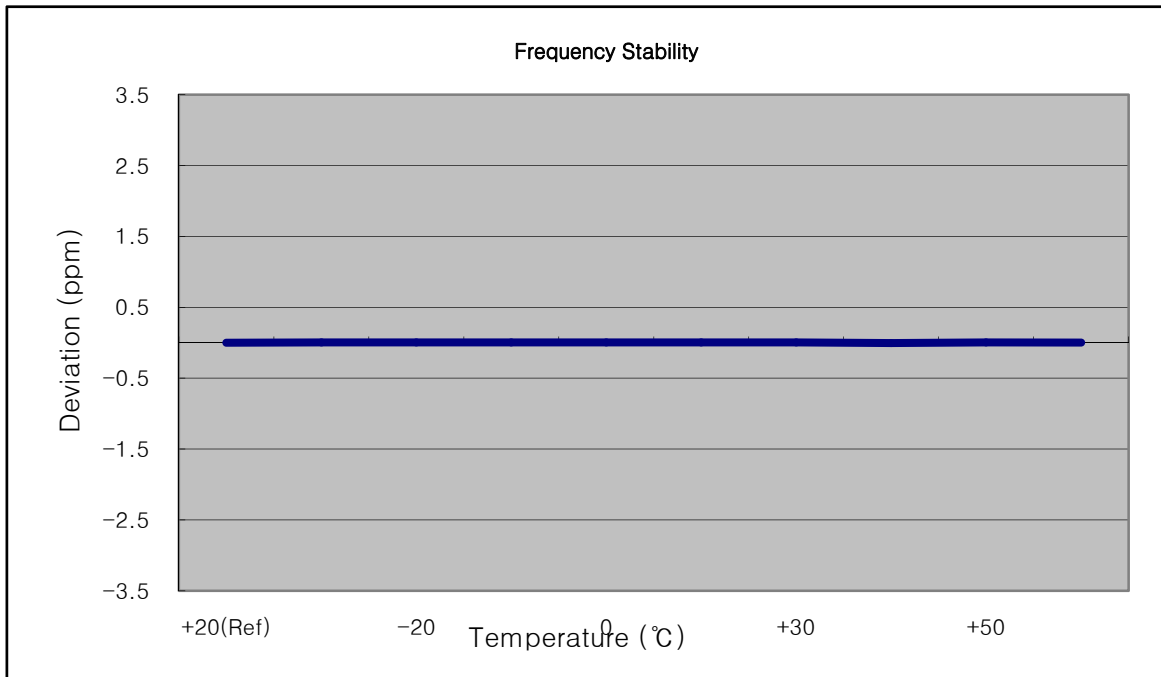

7.10.2 FREQUENCY STABILITY (10 MHz Band 7 LTE)

- ▣ OPERATING FREQUENCY: 2535.000,000 Hz
- ▣ CHANNEL: 21100 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|-----------|
| 100% | 3.85 | +20(Ref) | 2534 999 992 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 2535 000 001 | 9.1 | 0.000 000 | 0.004 |
| 100% | | -20 | 2535 000 001 | 8.9 | 0.000 000 | 0.004 |
| 100% | | -10 | 2535 000 002 | 10.4 | 0.000 000 | 0.004 |
| 100% | | 0 | 2535 000 001 | 9.3 | 0.000 000 | 0.004 |
| 100% | | +10 | 2535 000 008 | 15.7 | 0.000 001 | 0.006 |
| 100% | | +30 | 2535 000 001 | 9.5 | 0.000 000 | 0.004 |
| 100% | | +40 | 2535 000 003 | 10.8 | 0.000 000 | 0.004 |
| 100% | | +50 | 2535 000 002 | 9.6 | 0.000 000 | 0.004 |
| Batt. Endpoint | | 3.27 | +20 | 2535 000 000 | 8.2 | 0.000 000 |

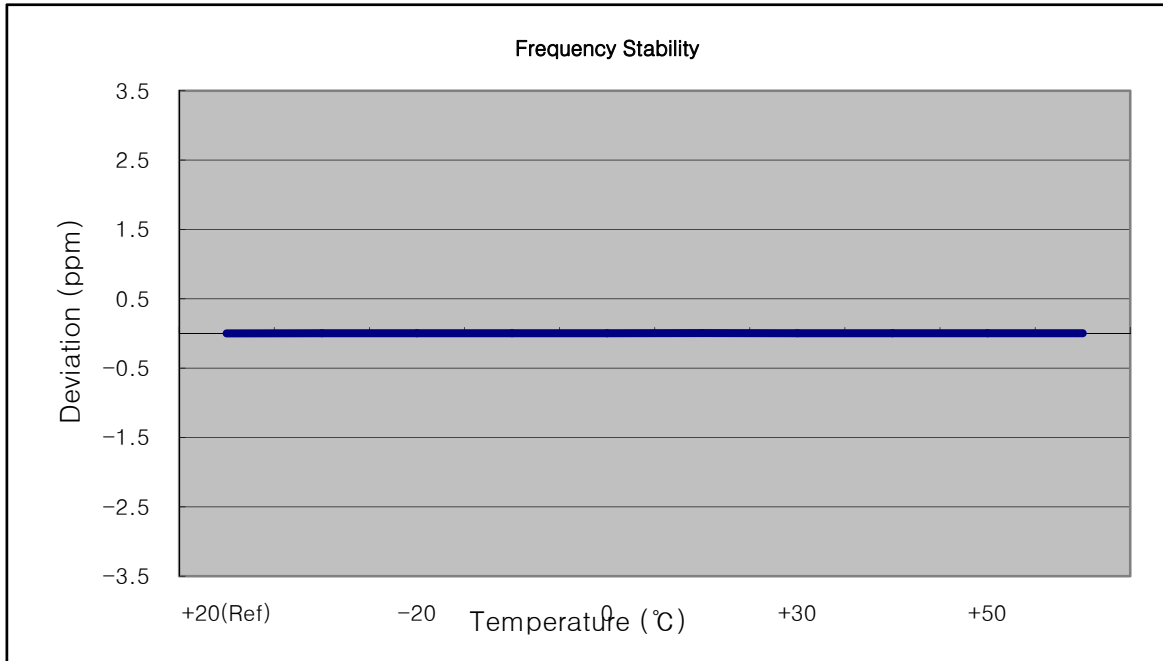

7.10.3 FREQUENCY STABILITY (15 MHz Band 7 LTE)

- ▣ OPERATING FREQUENCY: 2535.000,000 Hz
- ▣ CHANNEL: 21100 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|-----------|
| 100% | 3.85 | +20(Ref) | 2534 999 994 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 2535 000 005 | 11.1 | 0.000 000 | 0.004 |
| 100% | | -20 | 2535 000 009 | 15.6 | 0.000 001 | 0.006 |
| 100% | | -10 | 2535 000 007 | 13.3 | 0.000 001 | 0.005 |
| 100% | | 0 | 2534 999 987 | -7.0 | 0.000 000 | -0.003 |
| 100% | | +10 | 2535 000 005 | 11.5 | 0.000 000 | 0.005 |
| 100% | | +30 | 2534 999 986 | -7.4 | 0.000 000 | -0.003 |
| 100% | | +40 | 2535 000 002 | 8.4 | 0.000 000 | 0.003 |
| 100% | | +50 | 2534 999 987 | -6.7 | 0.000 000 | -0.003 |
| Batt. Endpoint | | 3.27 | +20 | 2534 999 989 | -4.8 | 0.000 000 |

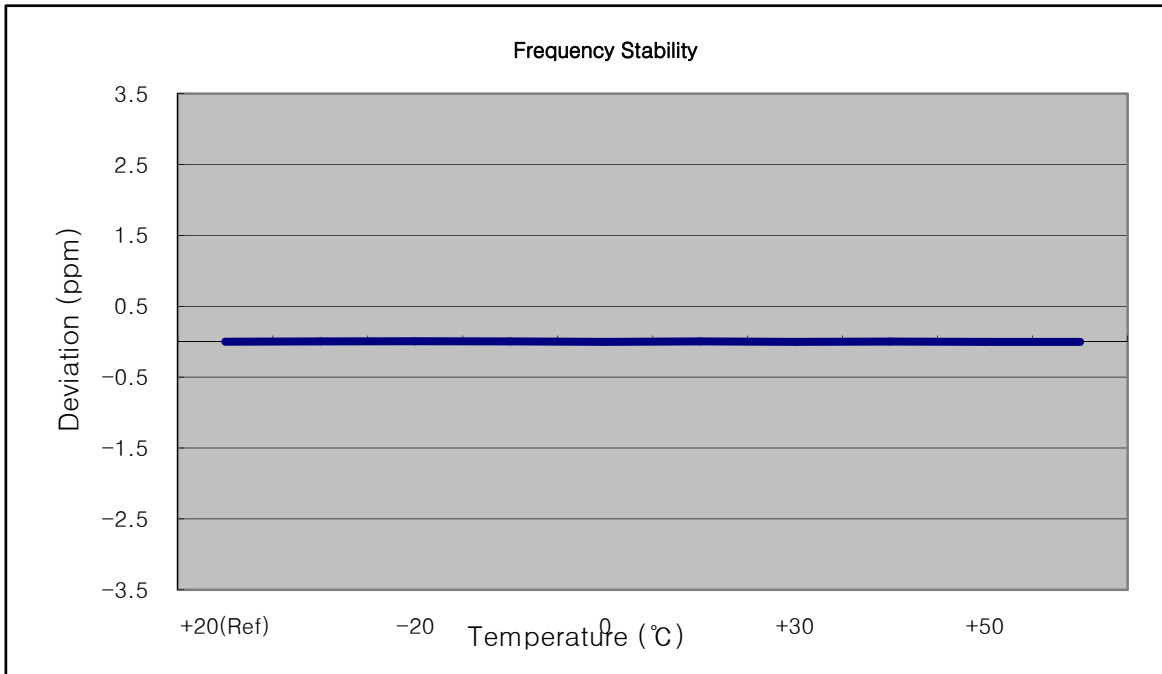

7.10.4 FREQUENCY STABILITY (20 MHz Band 7 LTE)


- ▣ OPERATING FREQUENCY: 2535.000,000 Hz
- ▣ CHANNEL: 21100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|-----------|
| 100% | 3.85 | +20(Ref) | 2535 000 008 | 0 | 0.000 000 | 0.000 |
| 100% | | -30 | 2535 000 016 | 8.1 | 0.000 000 | 0.003 |
| 100% | | -20 | 2535 000 020 | 12.1 | 0.000 000 | 0.005 |
| 100% | | -10 | 2535 000 000 | -7.4 | 0.000 000 | -0.003 |
| 100% | | 0 | 2535 000 018 | 10.7 | 0.000 000 | 0.004 |
| 100% | | +10 | 2534 999 999 | -8.8 | 0.000 000 | -0.003 |
| 100% | | +30 | 2535 000 014 | 6.4 | 0.000 000 | 0.003 |
| 100% | | +40 | 2535 000 000 | -7.8 | 0.000 000 | -0.003 |
| 100% | | +50 | 2535 000 000 | -7.5 | 0.000 000 | -0.003 |
| Batt. Endpoint | | 3.27 | +20 | 2535 000 018 | 9.8 | 0.000 000 |

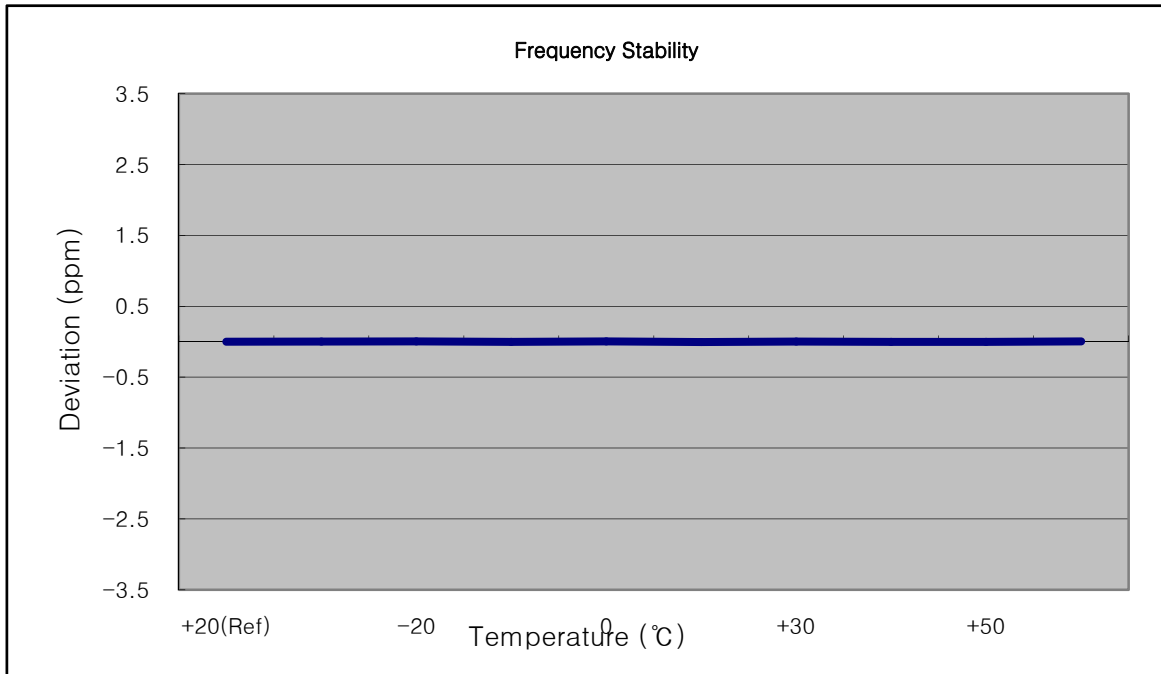


8. TEST PLOTS


BAND7. Occupied Bandwidth Plot (5MHz Ch.21100 QPSK RB 25)

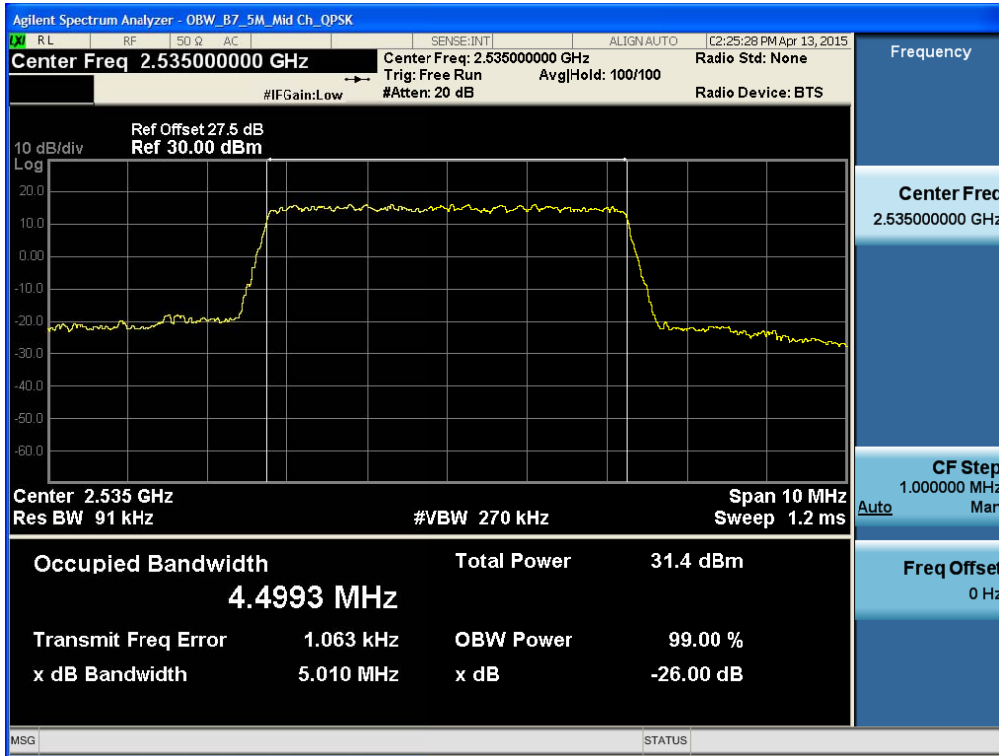


BAND7. Occupied Bandwidth Plot (5MHz Ch.21100 16-QAM RB 25)

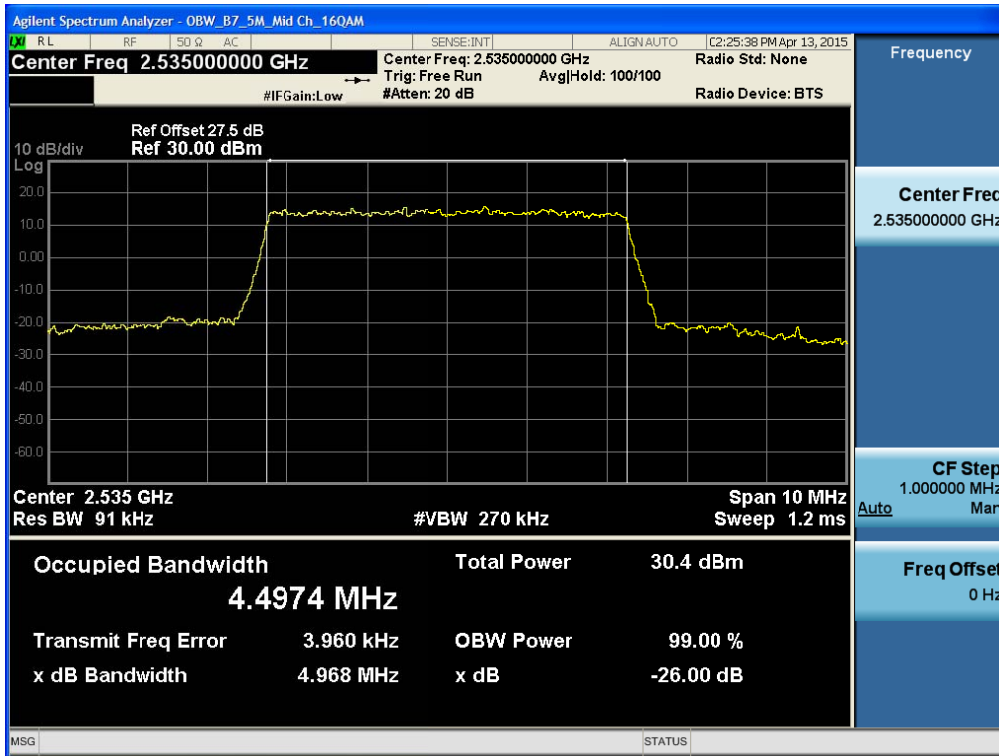


BAND7. Occupied Bandwidth Plot (10MHz Ch.21100 QPSK RB 50)

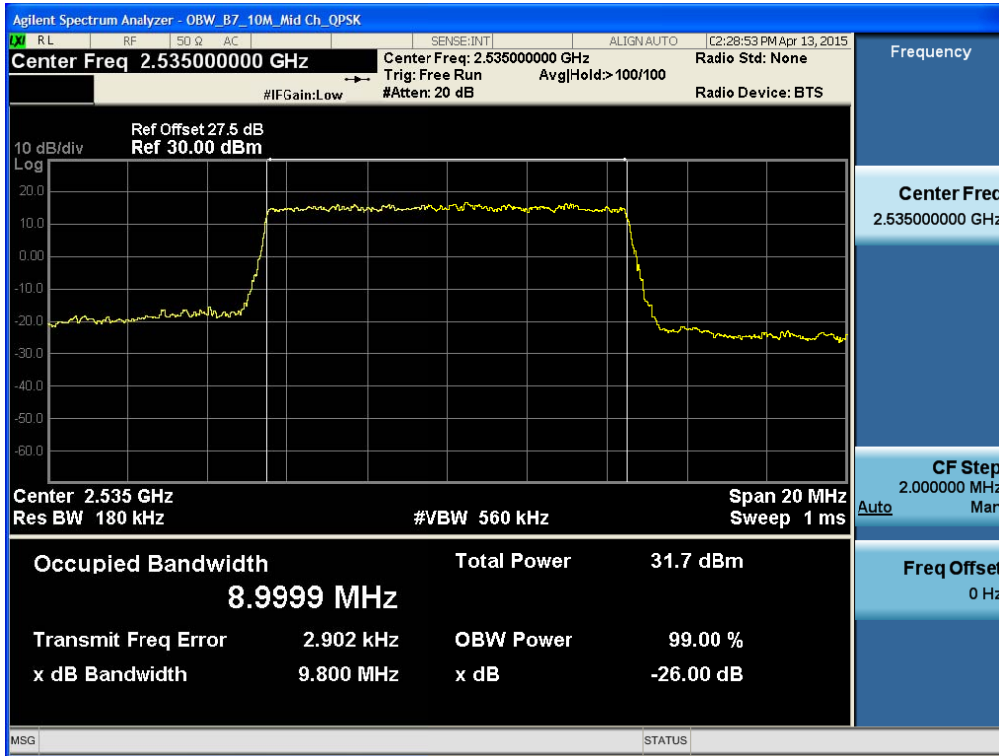


BAND7. Occupied Bandwidth Plot (10MHz Ch.21100 16-QAM RB 50)

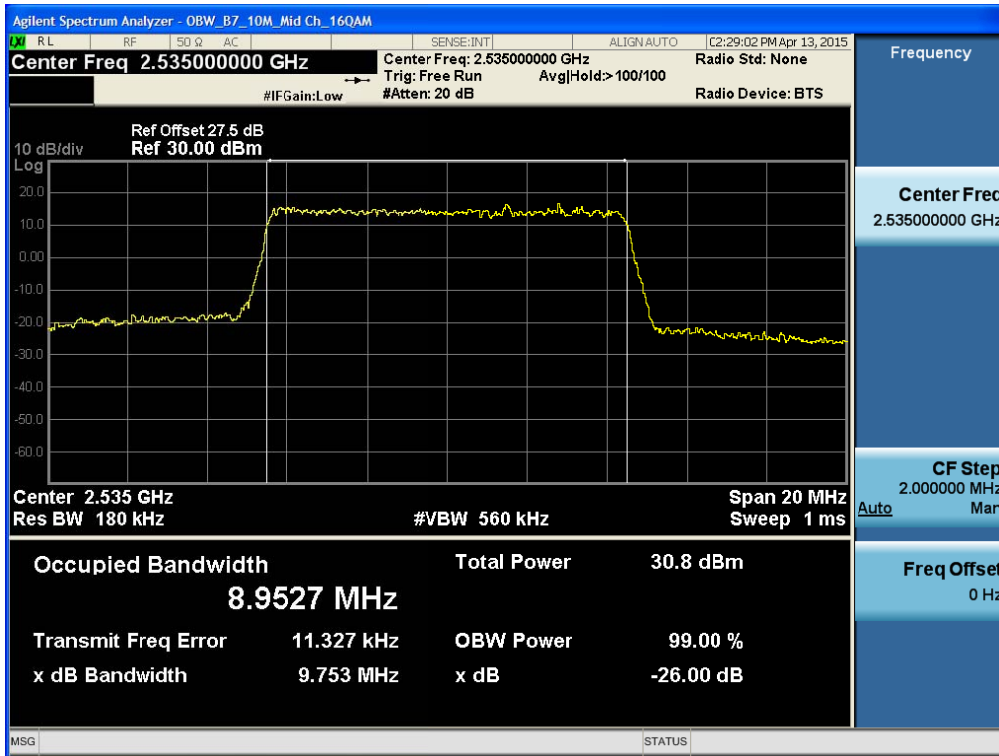


BAND7. Occupied Bandwidth Plot (15MHz Ch.21100 QPSK RB 75)

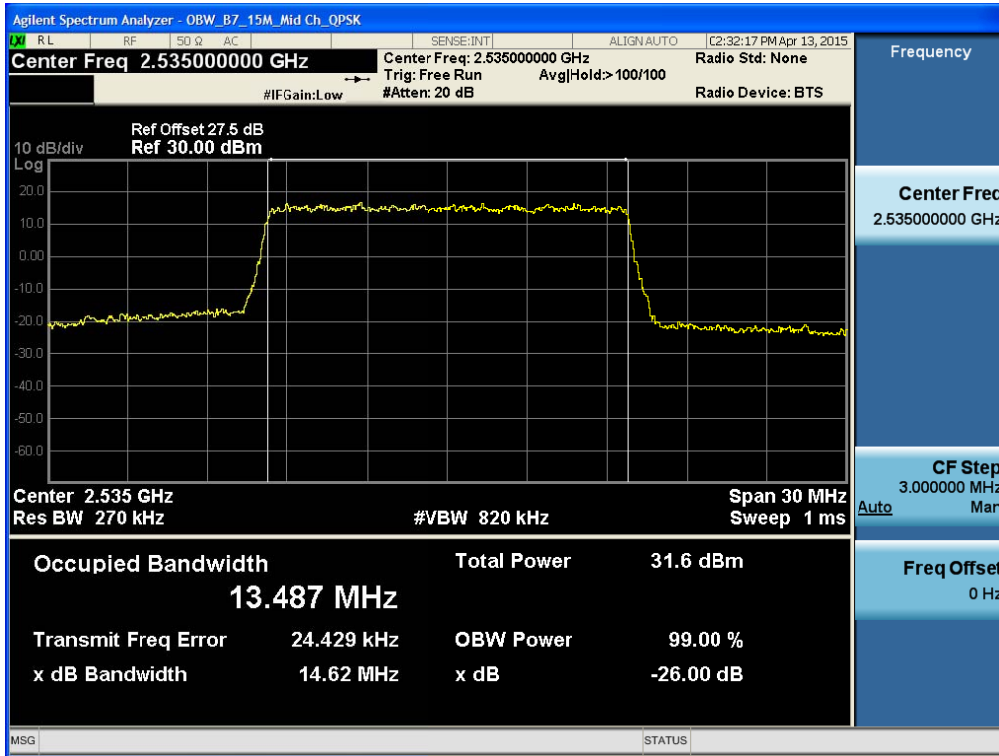


BAND7. Occupied Bandwidth Plot (15MHz Ch.21100 16-QAM RB 75)

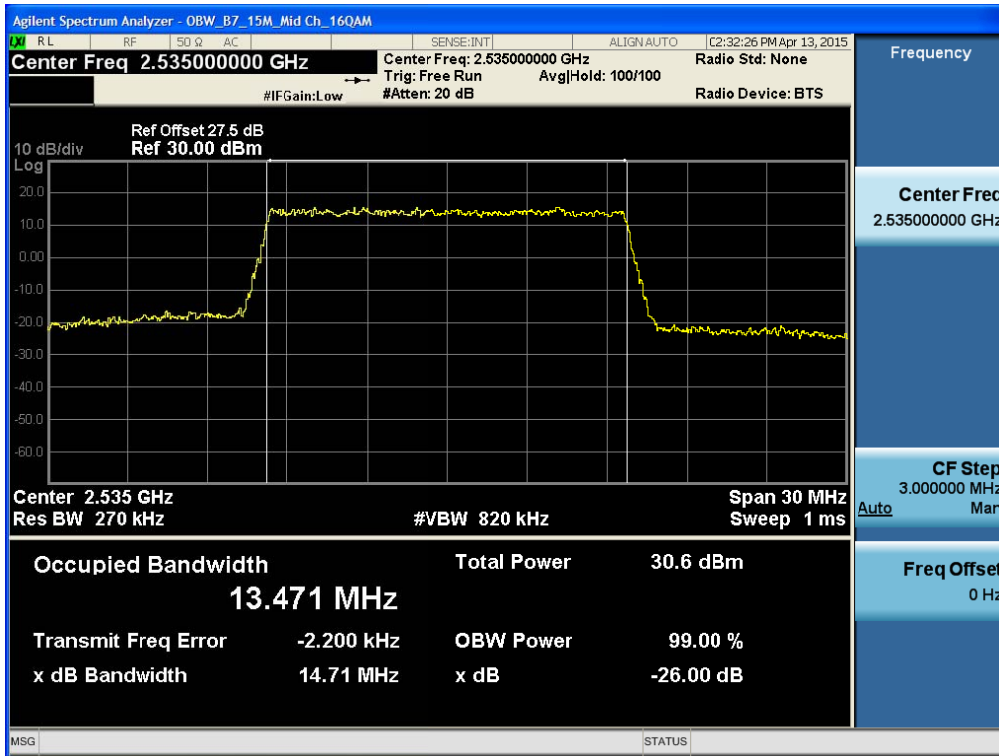


BAND7. Occupied Bandwidth Plot (20MHz Ch.21100 QPSK RB 100)

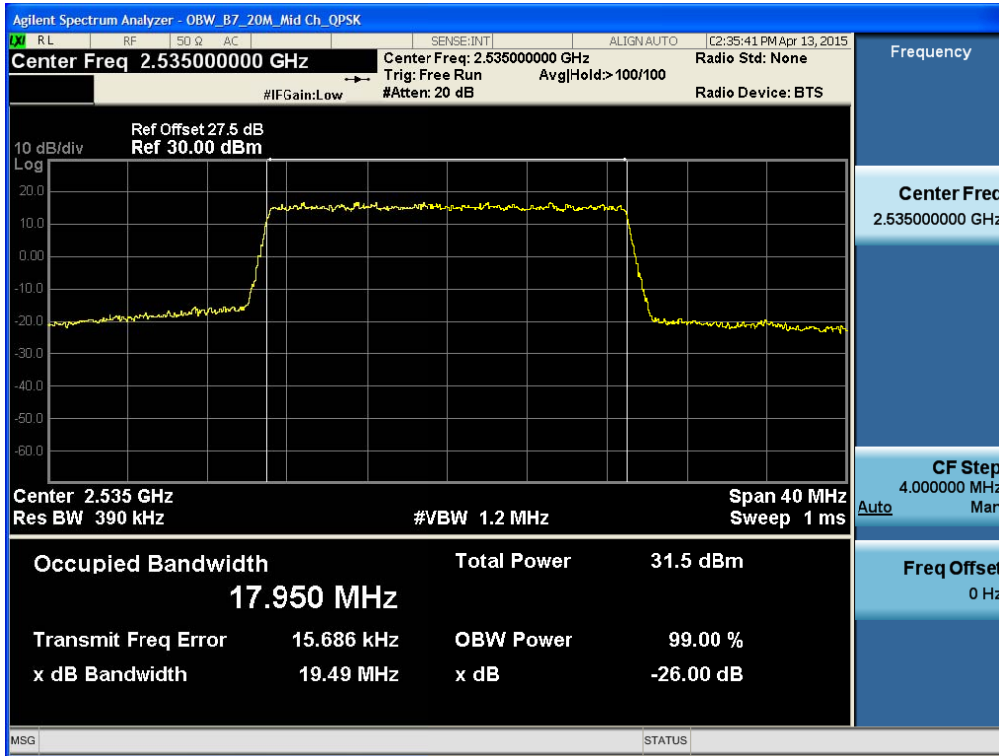


BAND7. Occupied Bandwidth Plot (20MHz Ch.21100 16-QAM RB 100)

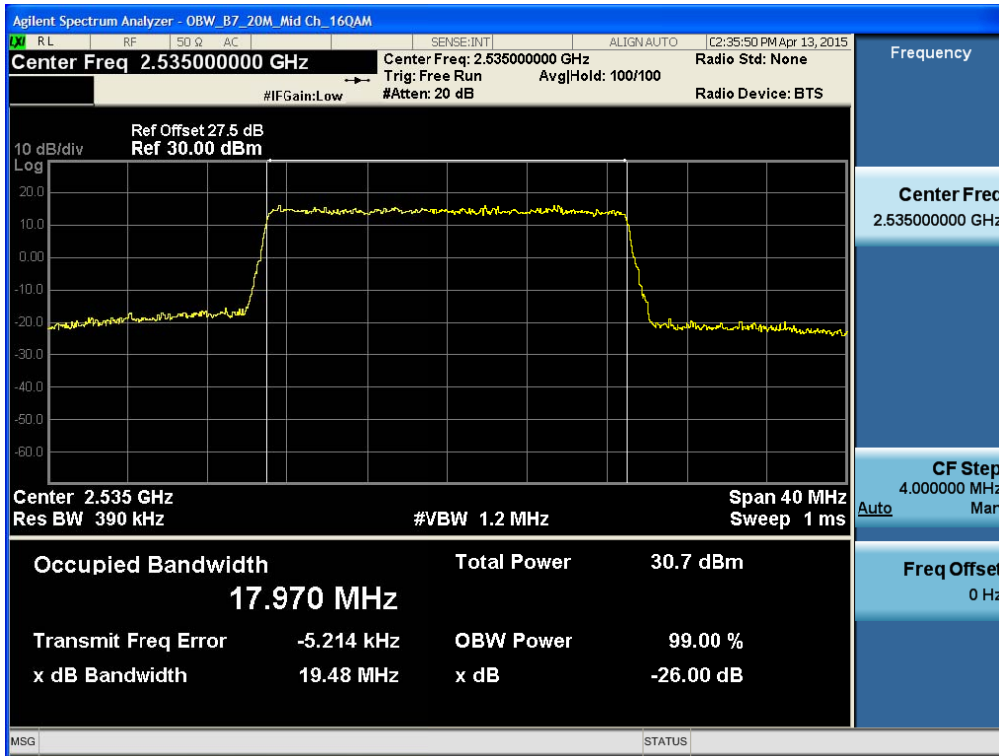


BAND7. Peak to Average Ratio Plot (5MHz Ch.21100 QPSK RB 25)

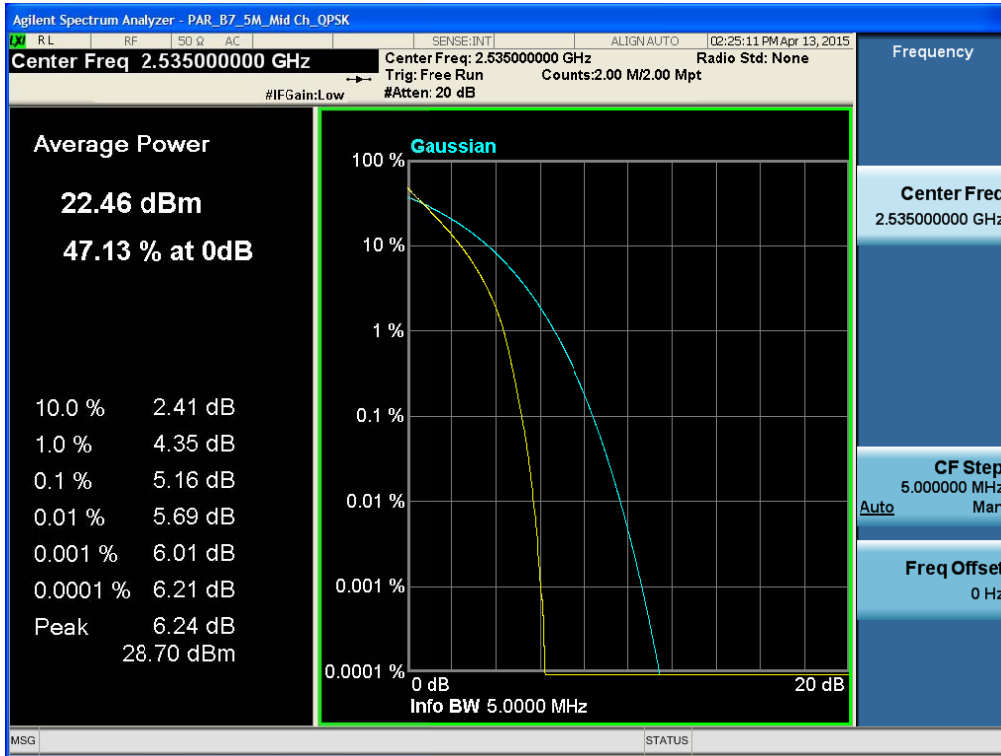


BAND7. Peak to Average Ratio Plot (5MHz Ch.21100 16-QAM RB 25)

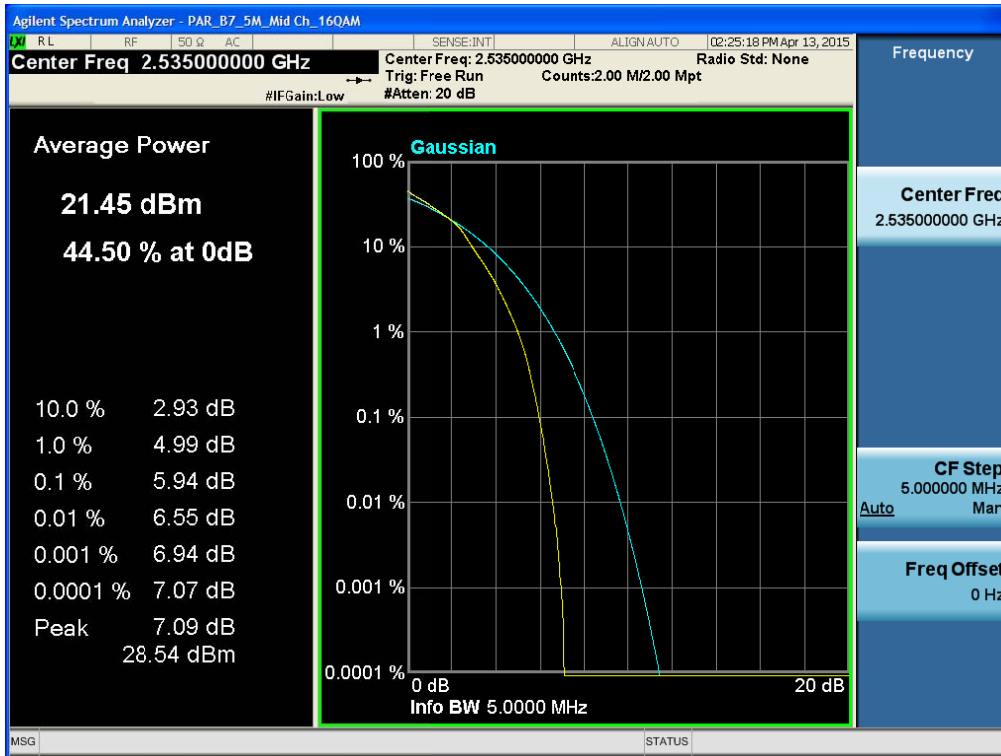


BAND7. Peak to Average Ratio Plot (10MHz Ch.21100 QPSK RB 50)

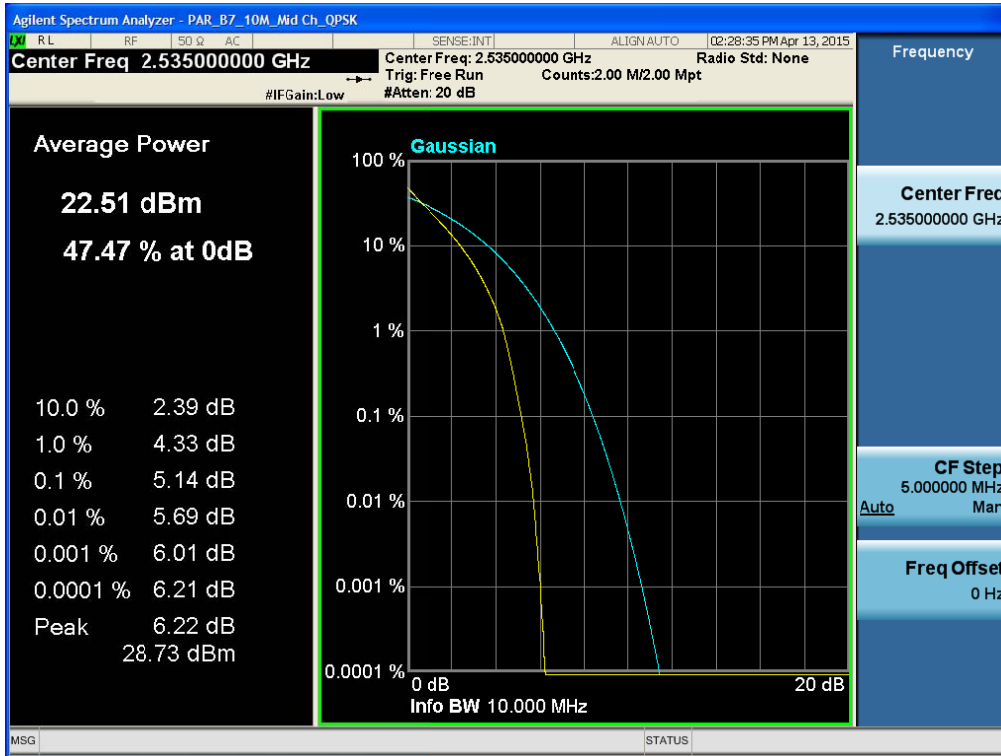


BAND7. Peak to Average Ratio Plot (10MHz Ch.21100 16-QAM RB 50)

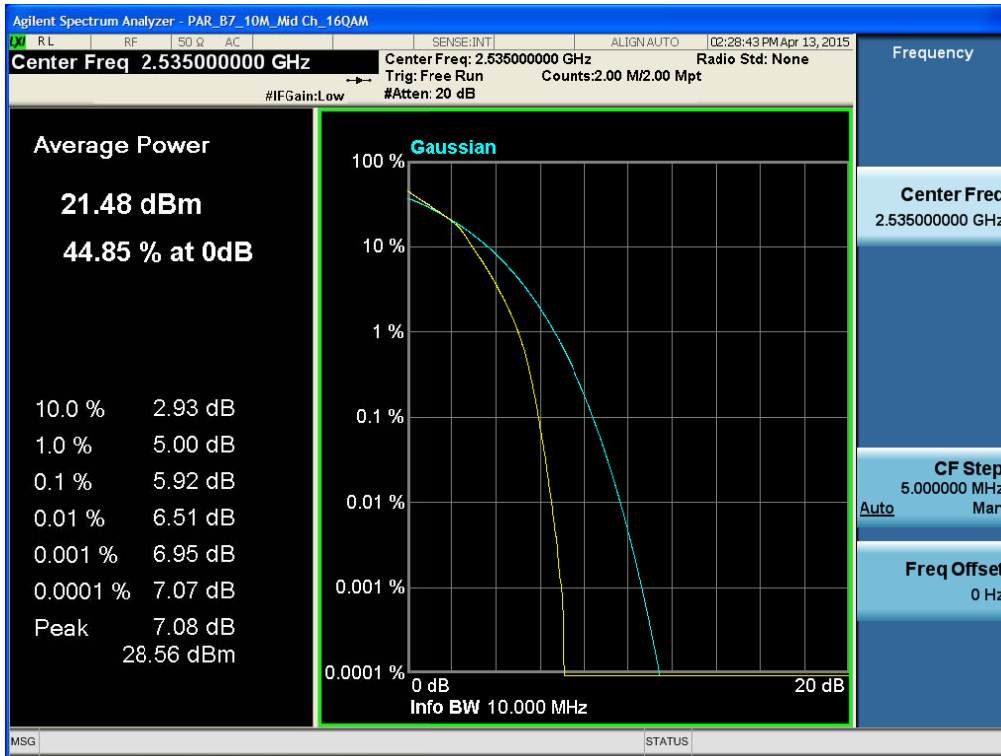


BAND7. Peak to Average Ratio Plot (15MHz Ch.21100 QPSK RB 75)

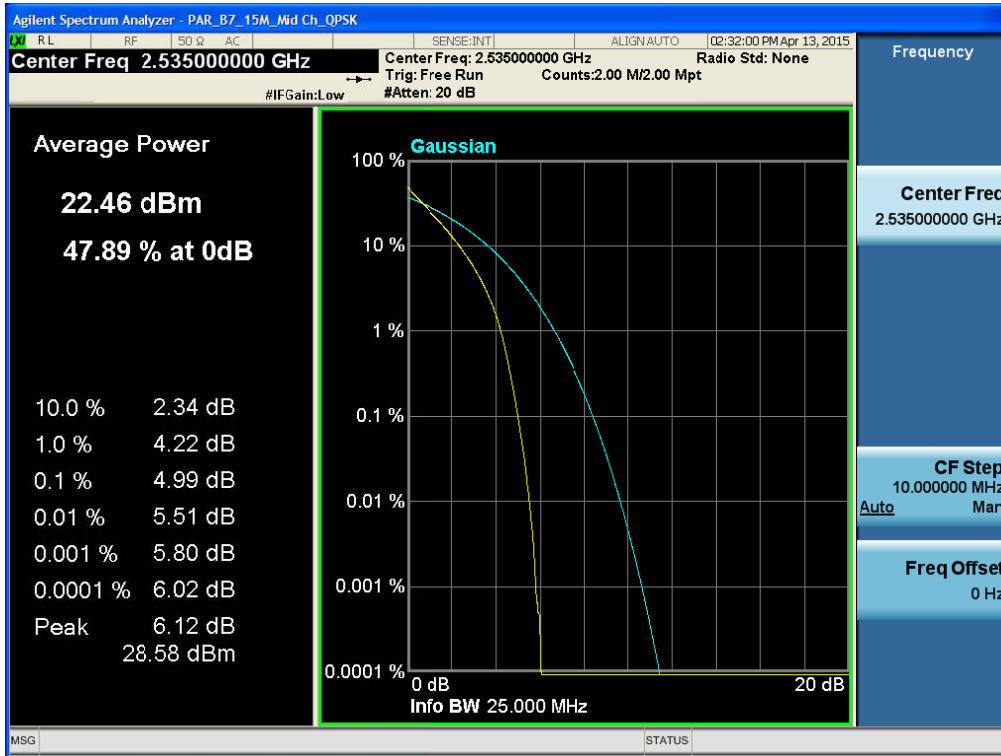


BAND7. Peak to Average Ratio Plot (15MHz Ch.21100 16-QAM RB 75)

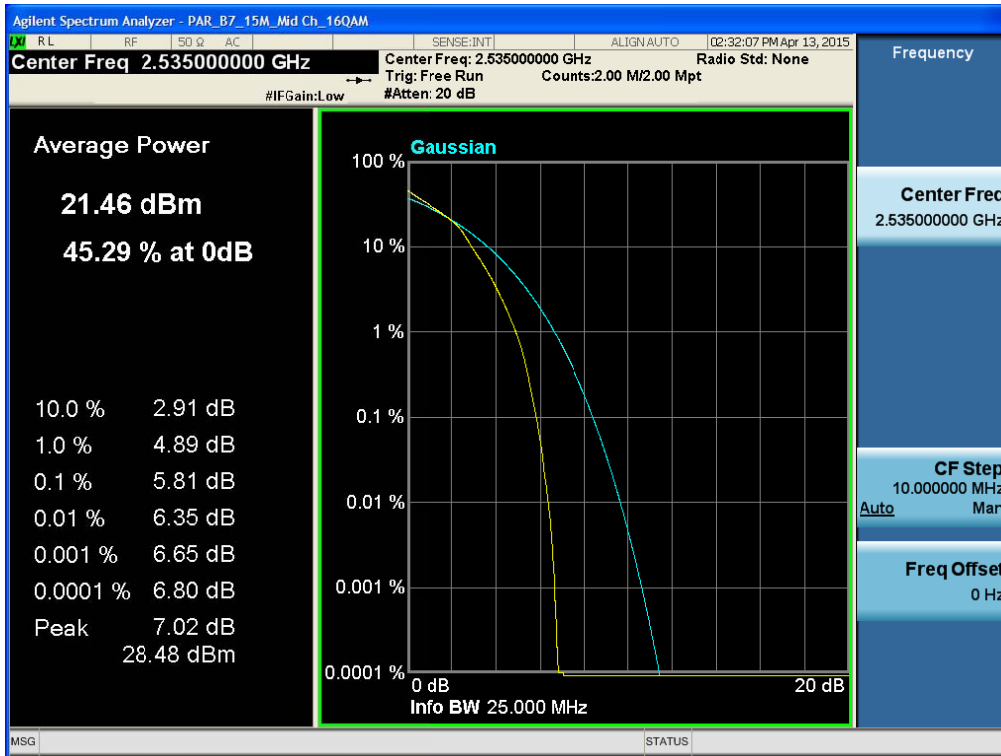


BAND7. Peak to Average Ratio Plot (20MHz Ch.21100 QPSK RB 100)

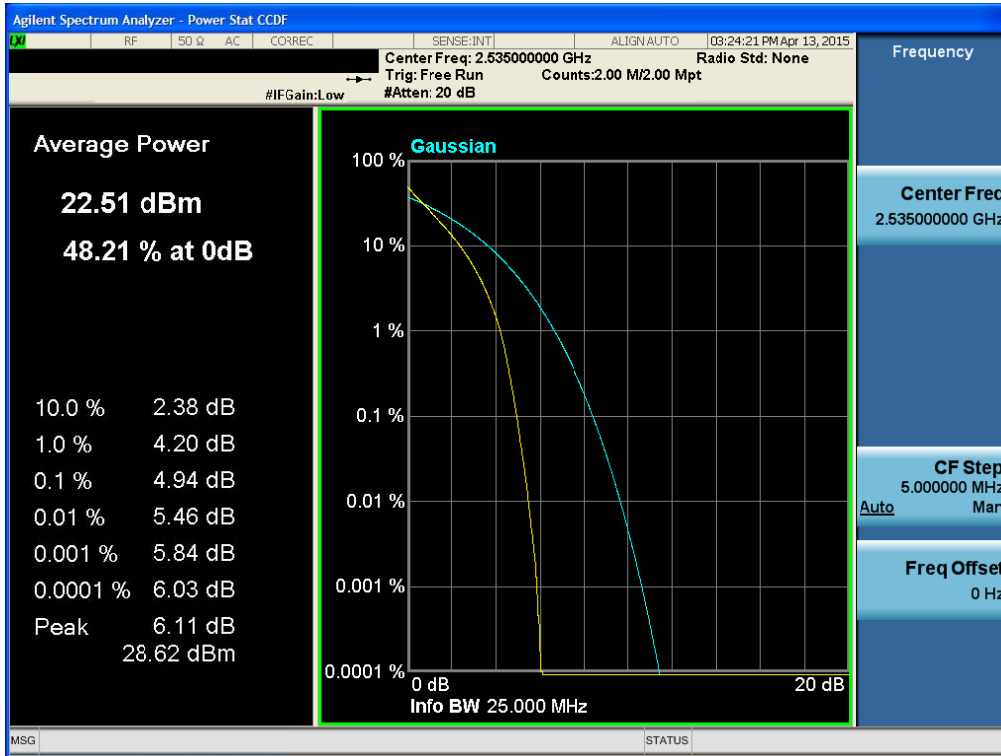


BAND7. Peak to Average Ratio Plot (20MHz Ch.21100 16-QAM RB 100)

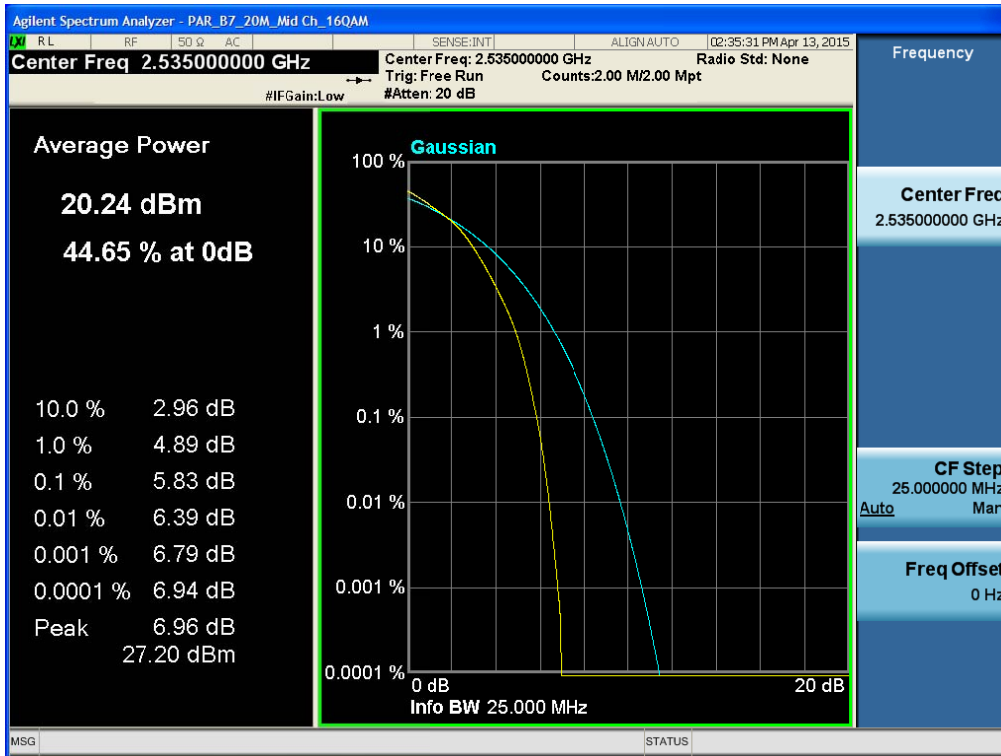


BAND7. Low Channel Edge Plot (5MHz Ch.20775 QPSK RB 25)

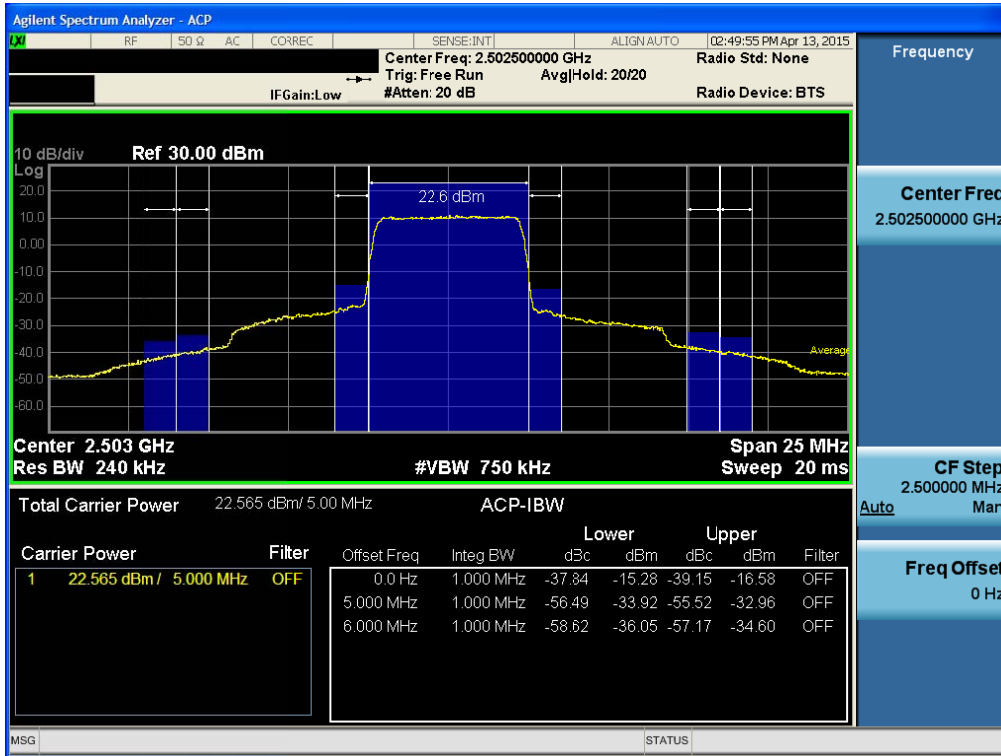


BAND7. Mid Channel Edge Plot (5MHz Ch.21100 QPSK RB 25)

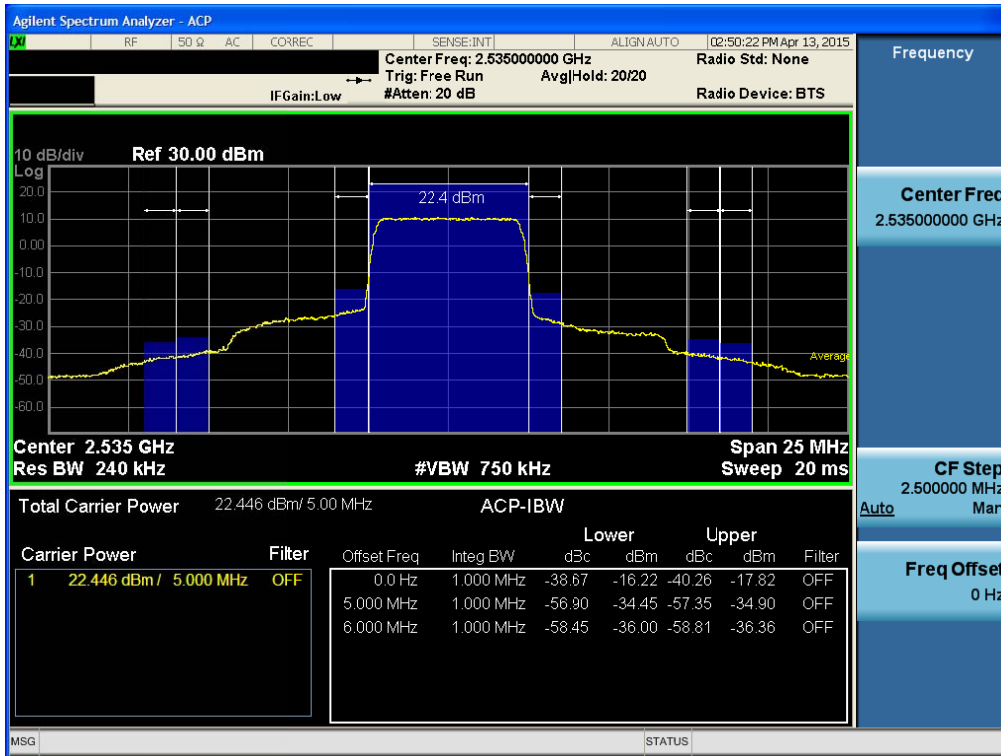


BAND7. High Channel Edge Plot (5MHz Ch.21425 QPSK RB 25)

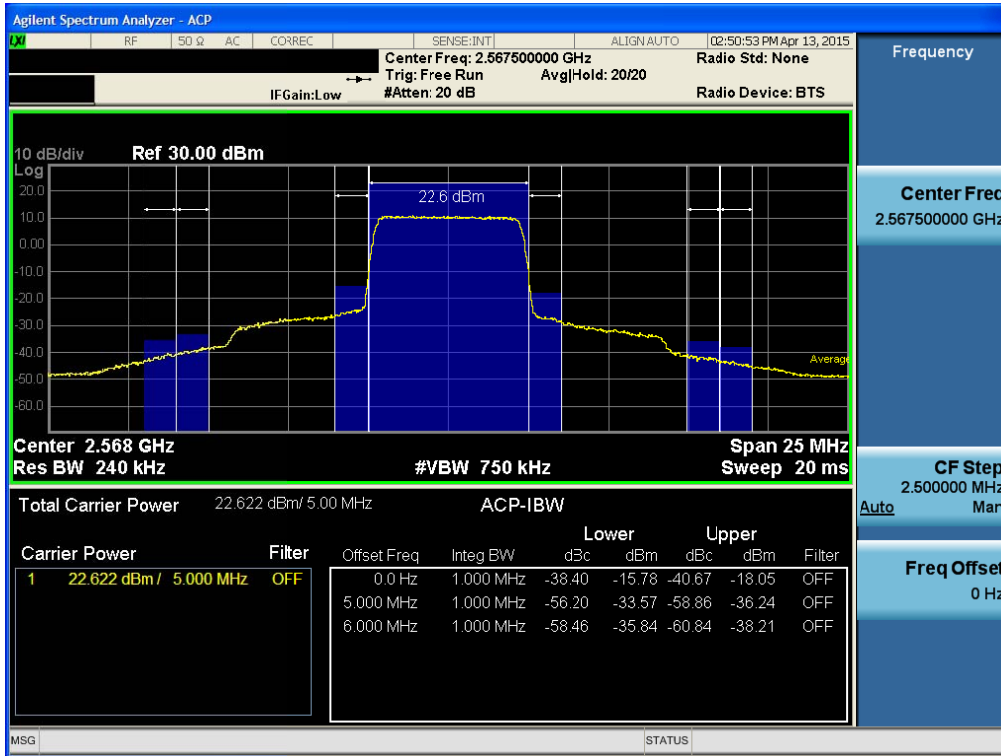


BAND7. Low Channel Edge Plot (10MHz Ch.20800 QPSK RB 50)

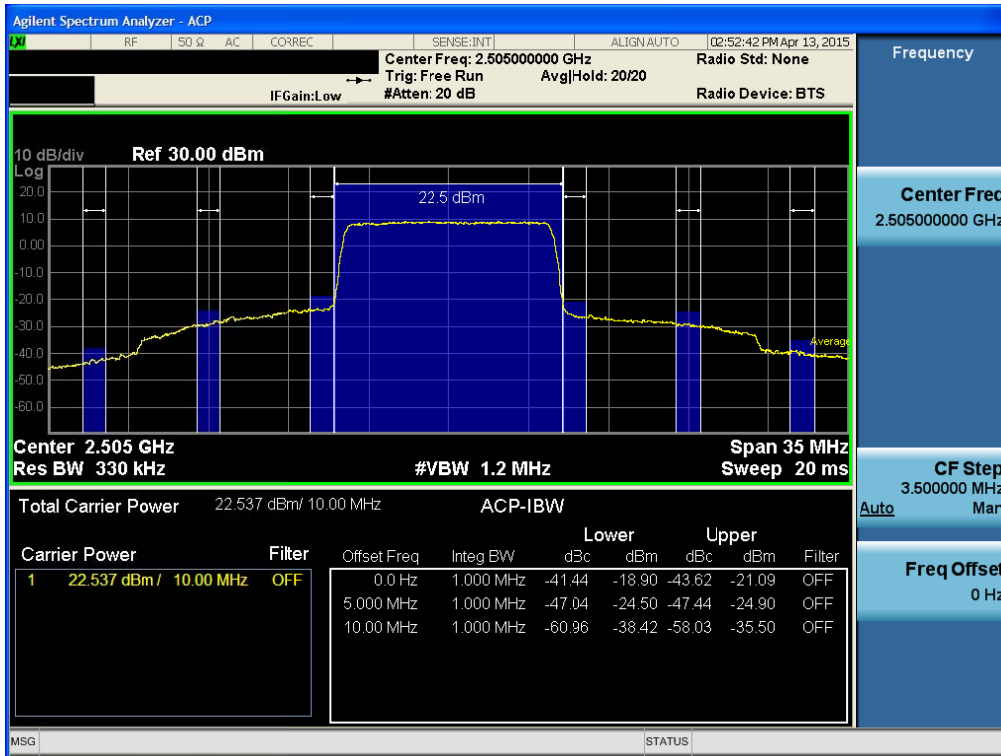


BAND7. Mid Channel Edge Plot (10MHz Ch.21100 QPSK RB 50)

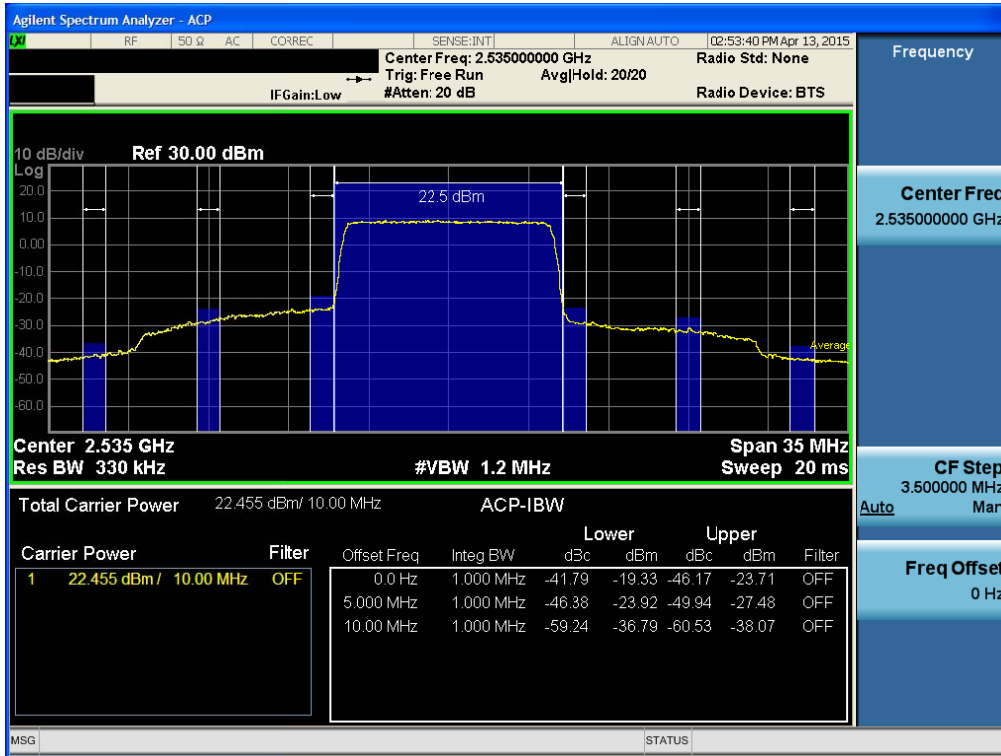


BAND7. High Channel Edge Plot (10MHz Ch.21400 QPSK RB 50)

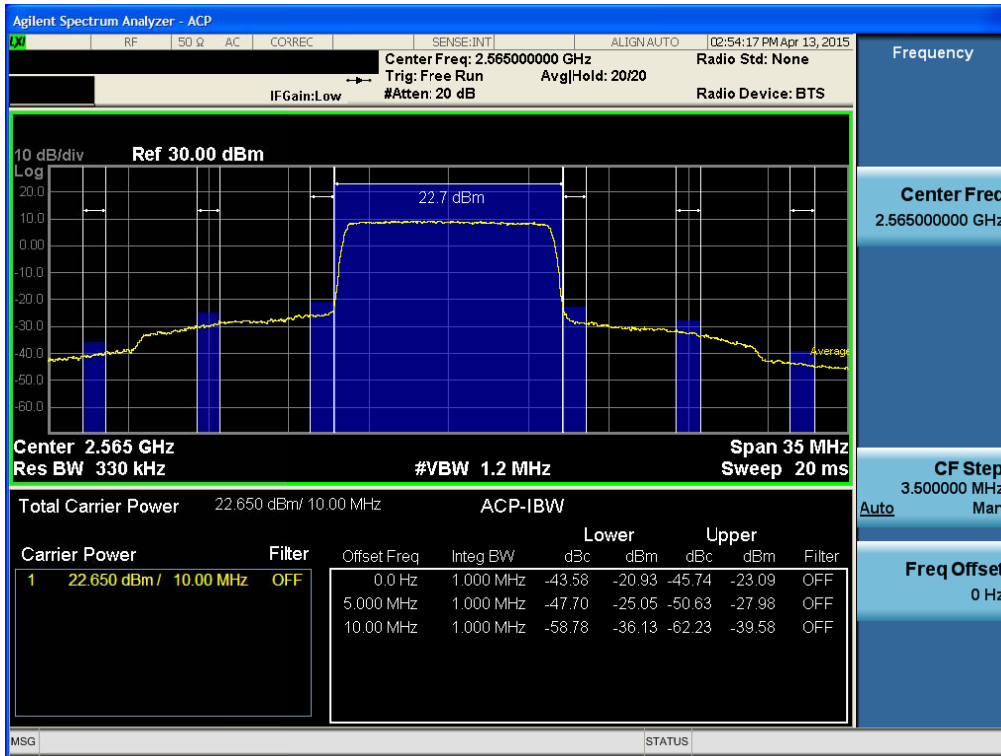


BAND7. Low Channel Edge Plot (15MHz Ch.20825 QPSK RB 75)

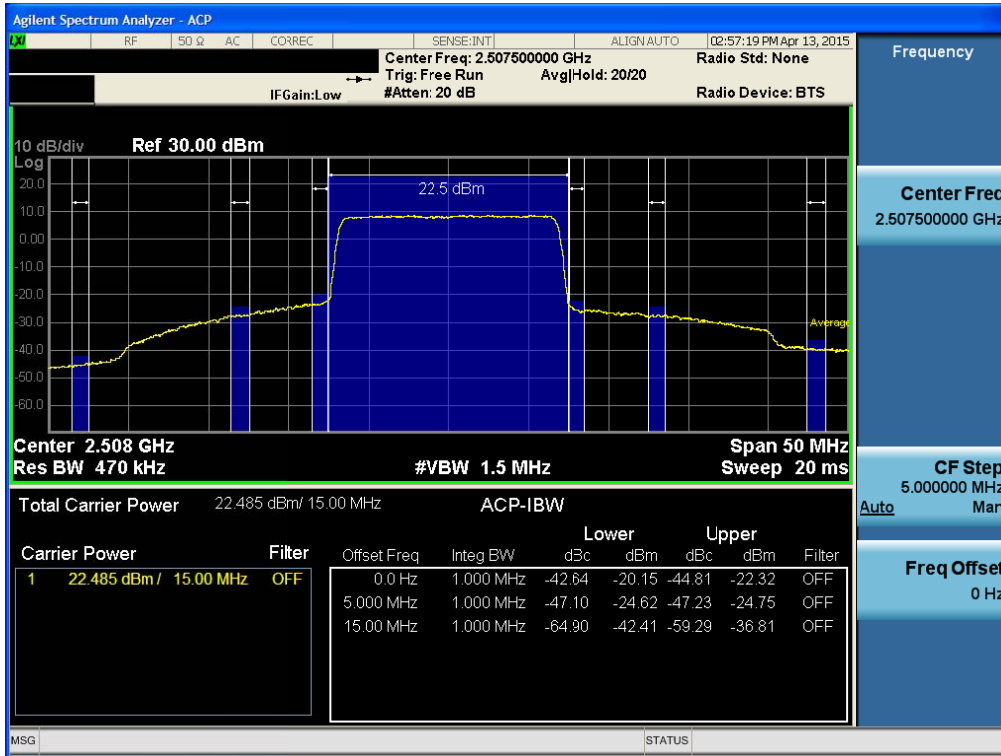


BAND7. Mid Channel Edge Plot (15MHz Ch.21100 QPSK RB 75)

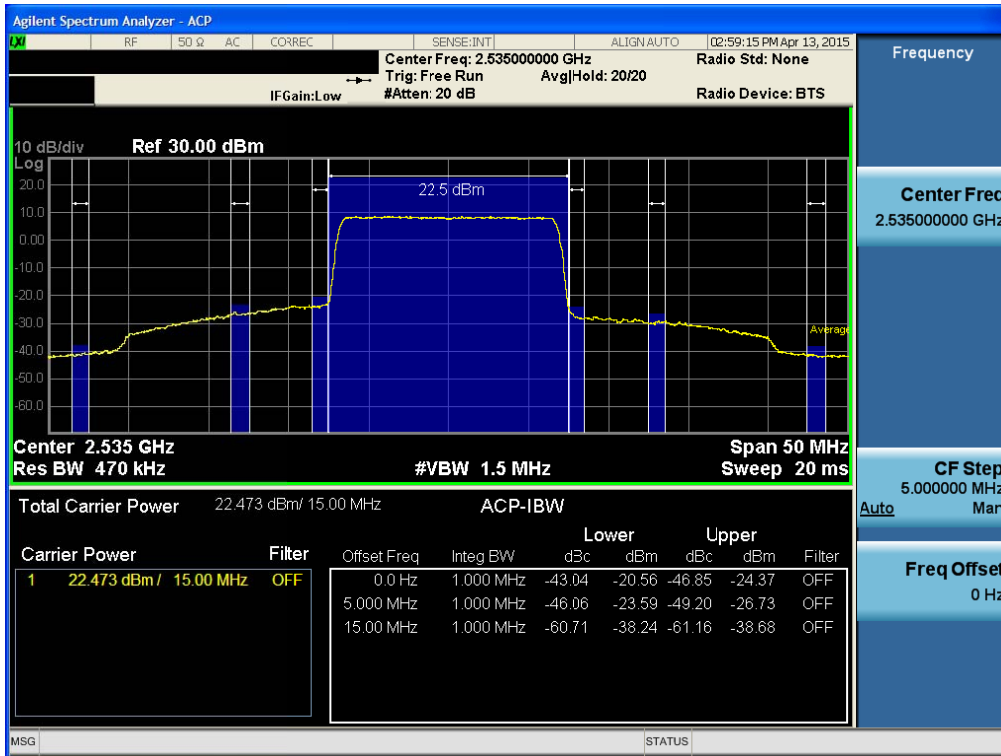


BAND7. High Channel Edge Plot (15MHz Ch.21375 QPSK RB 75)

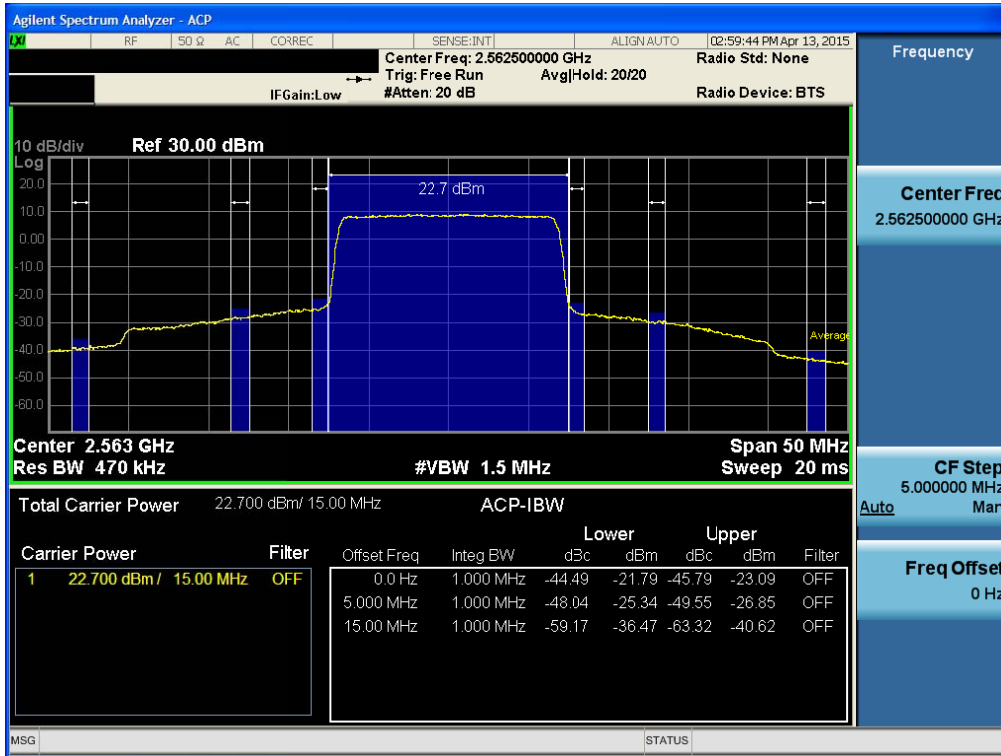


BAND7. Low Channel Edge Plot (20MHz Ch.20850 QPSK RB 100)

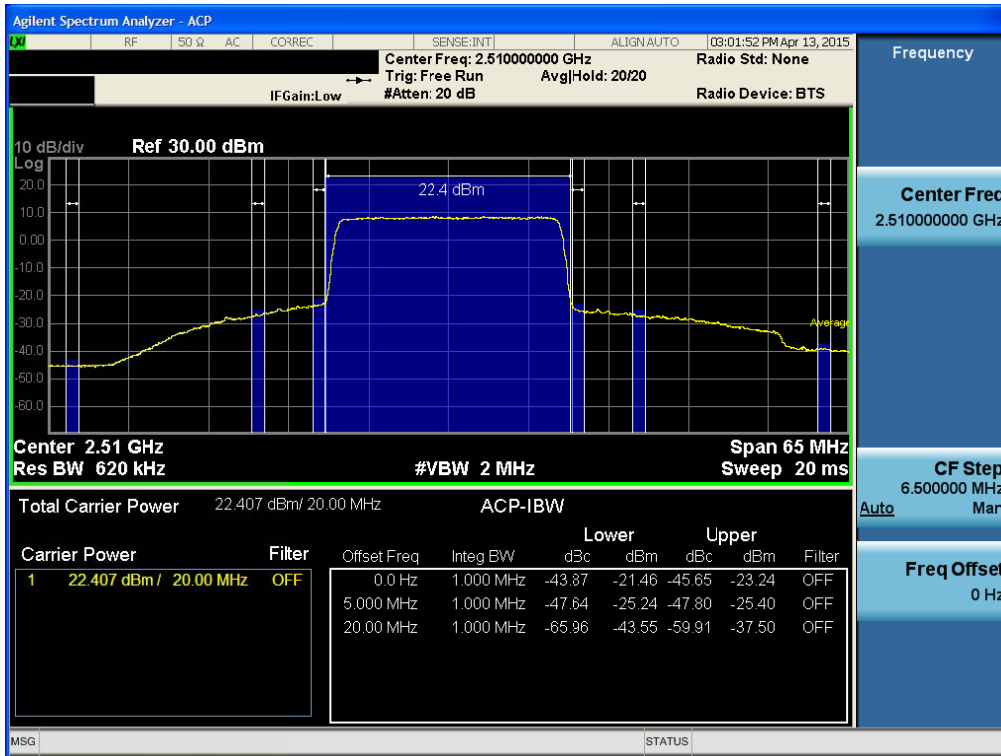


BAND7. Mid Channel Edge Plot (20MHz Ch.21100 QPSK RB 100)

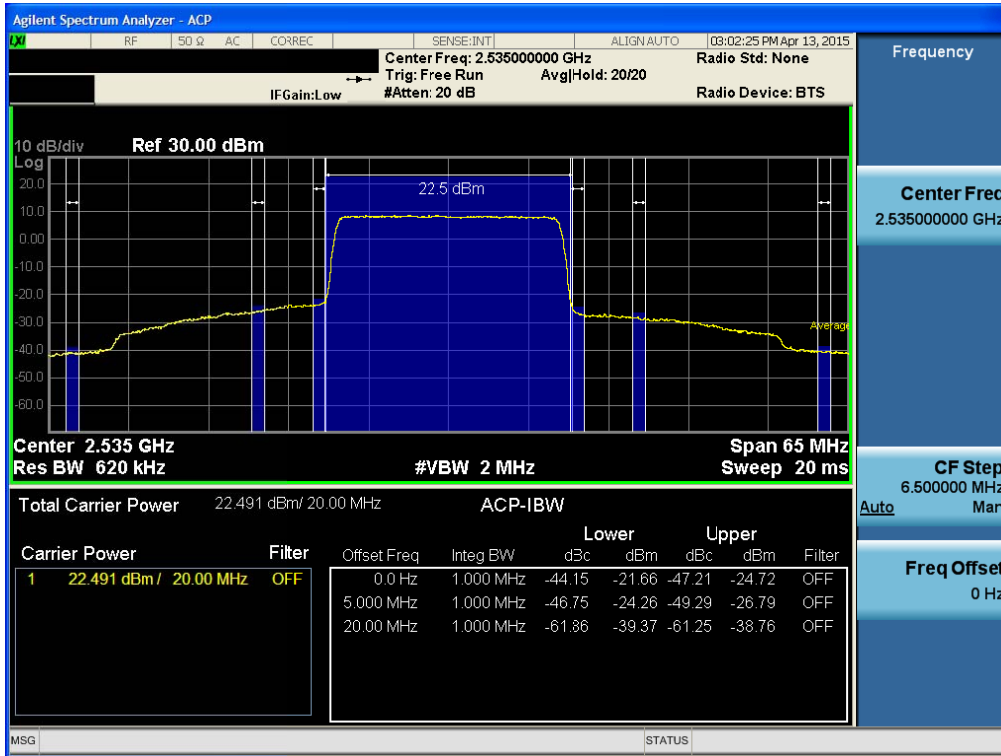


BAND7. High Channel Edge Plot (20MHz Ch.21350 QPSK RB 100)

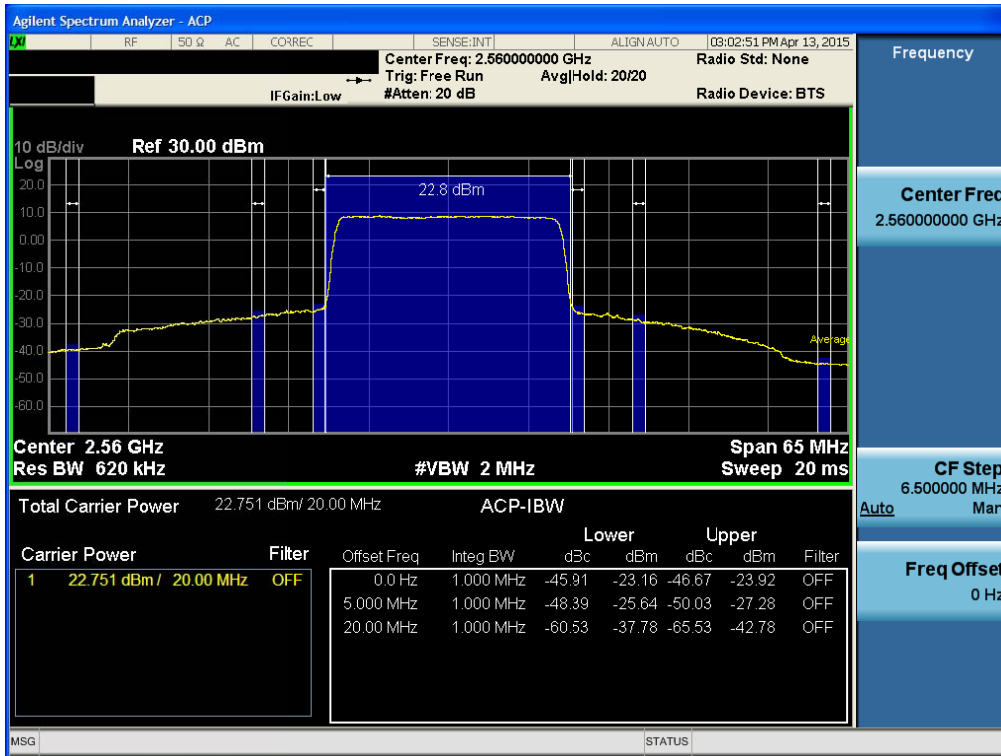


BAND7. Conducted Spurious Plot 1 (5MHz Ch.20775 QPSK RB 1, Offset 0)

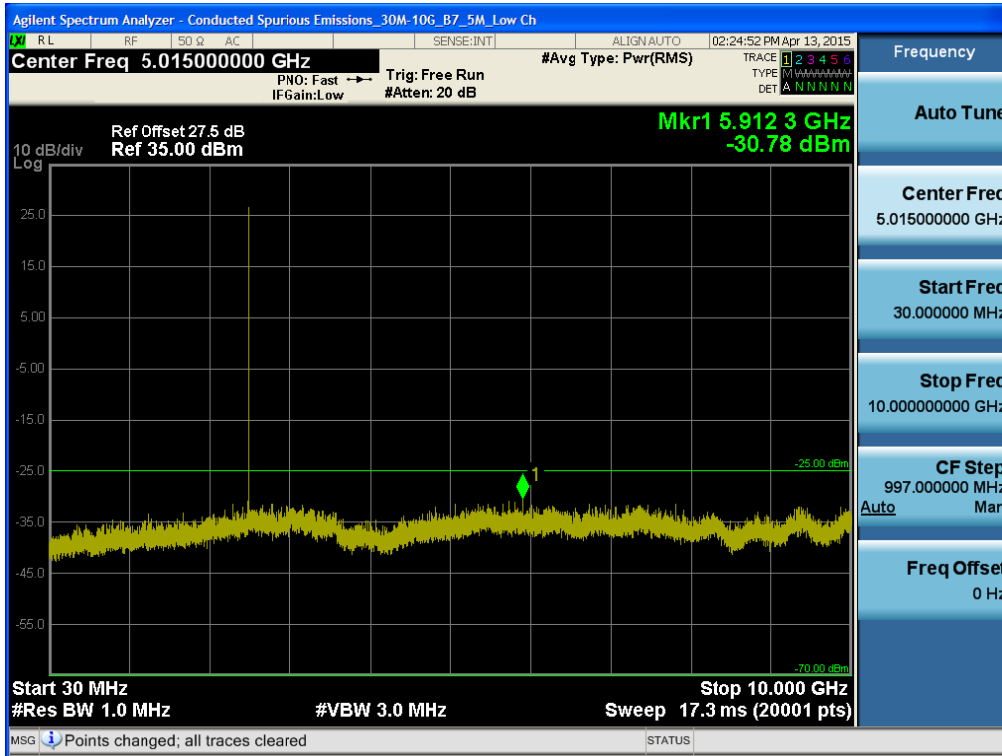


BAND7. Conducted Spurious Plot 2 (5MHz Ch.20775 QPSK RB 1, Offset 0)

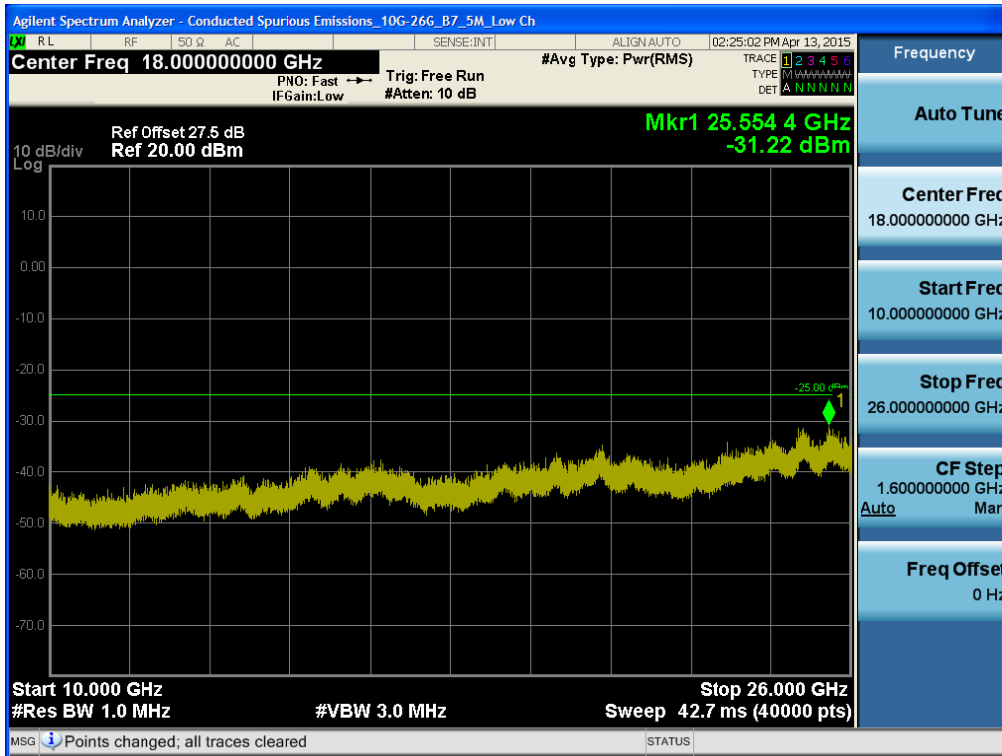


BAND7. Conducted Spurious Plot 1 (5MHz Ch.21100 QPSK RB 1, Offset 0)

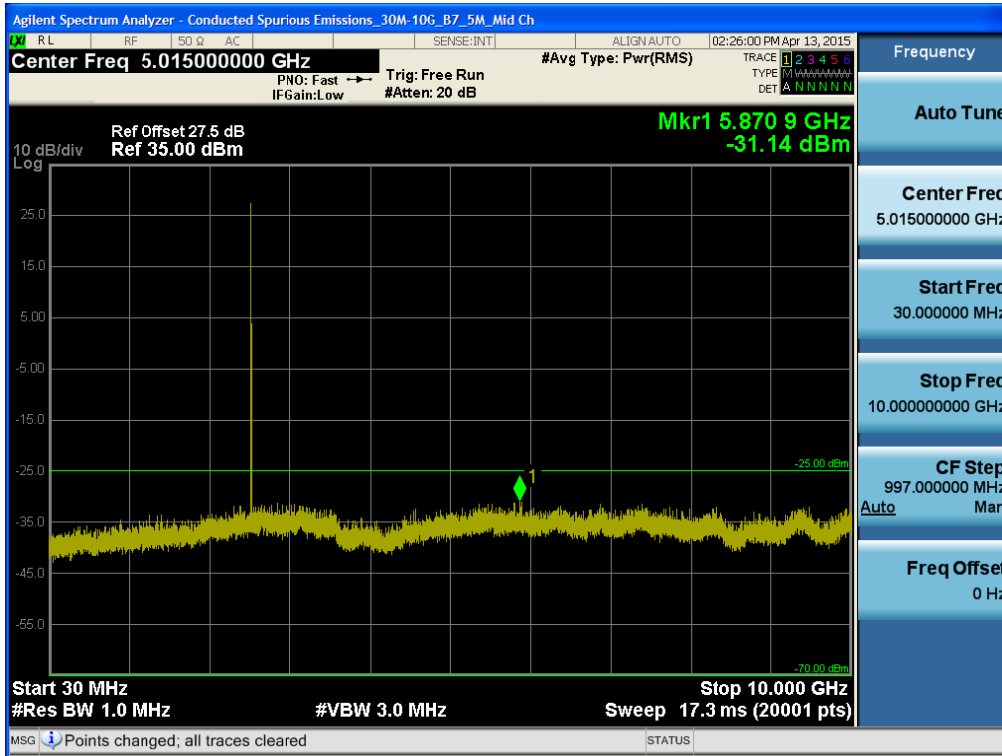


BAND7. Conducted Spurious Plot 2 (5MHz Ch.21100 QPSK RB 1, Offset 0)

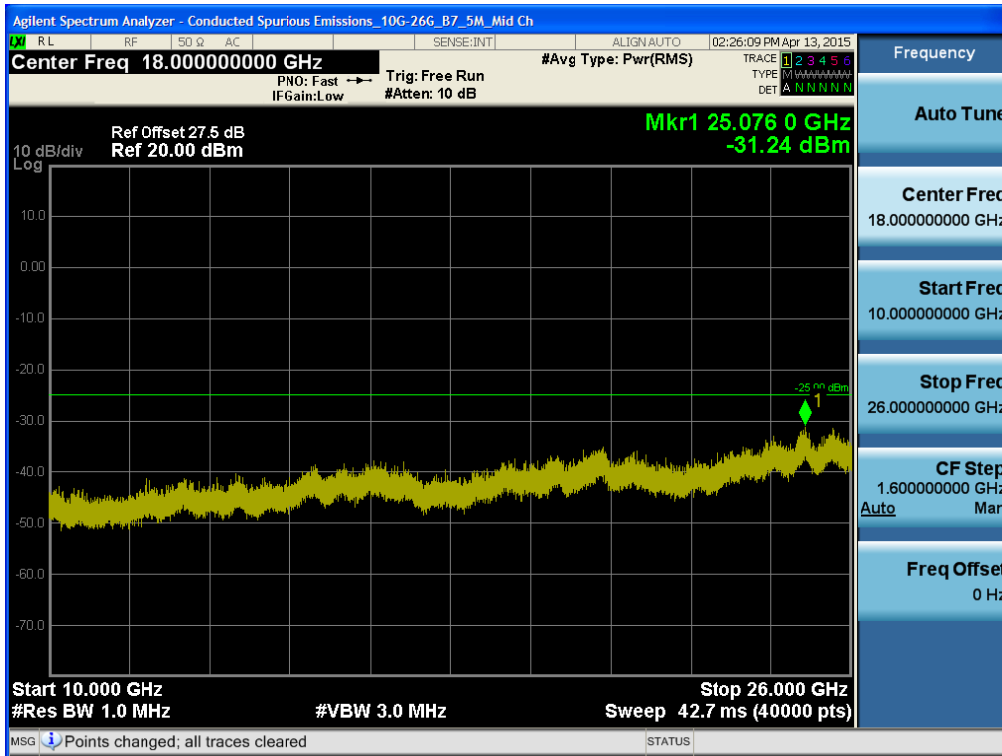


BAND7. Conducted Spurious Plot 1 (5MHz Ch.21425 QPSK RB 1, Offset 0)

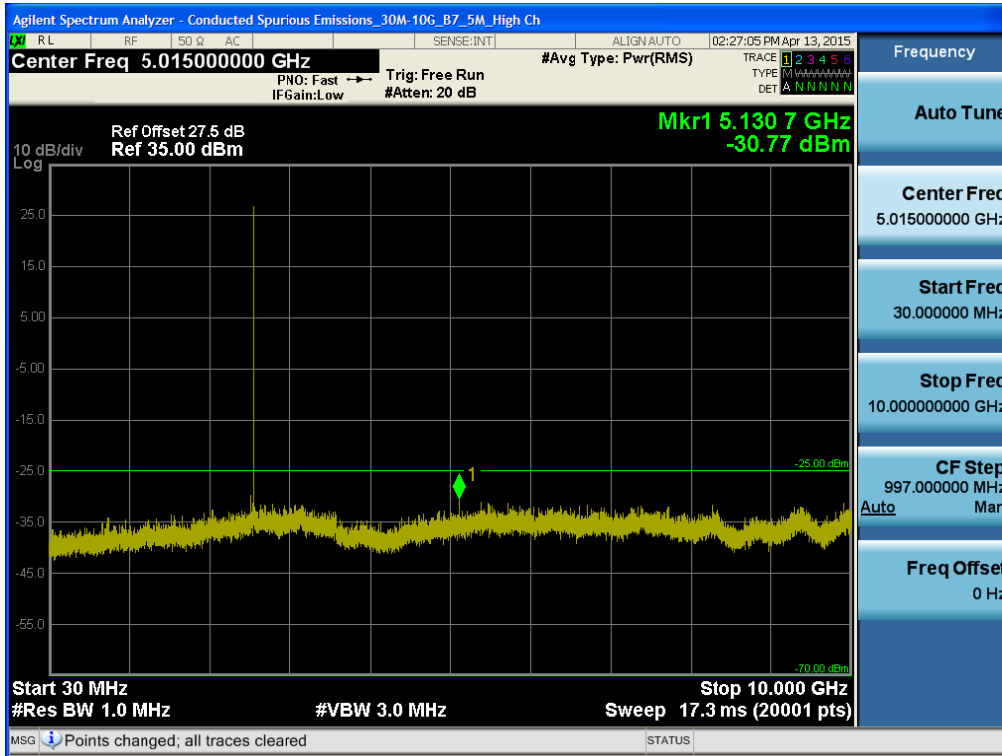


BAND7. Conducted Spurious Plot 2 (5MHz Ch.21425 QPSK RB 1, Offset 0)

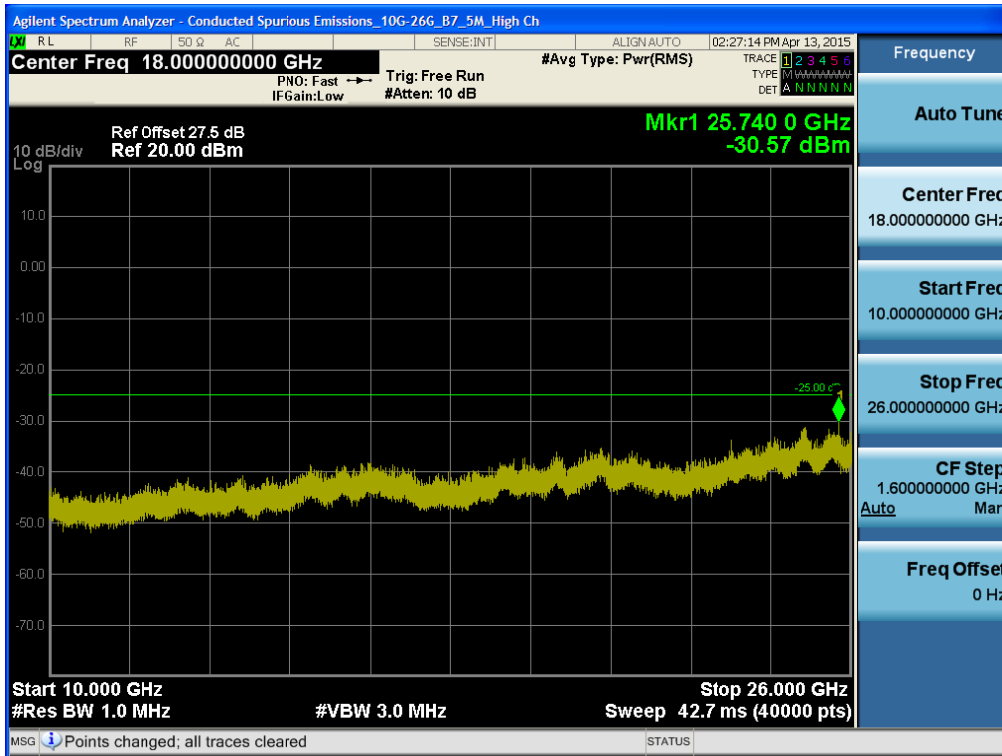


BAND7. Conducted Spurious Plot 1 (10MHz Ch.20800 QPSK RB 1, Offset 0)

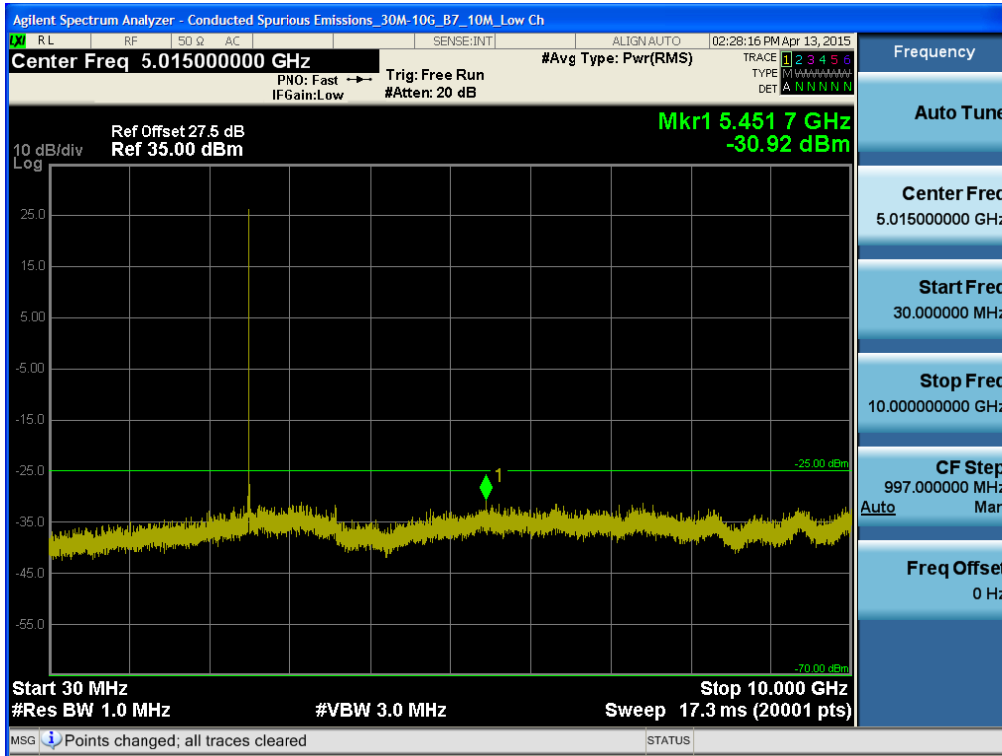


BAND7. Conducted Spurious Plot 2 (10MHz Ch.20800 QPSK RB 1, Offset 0)

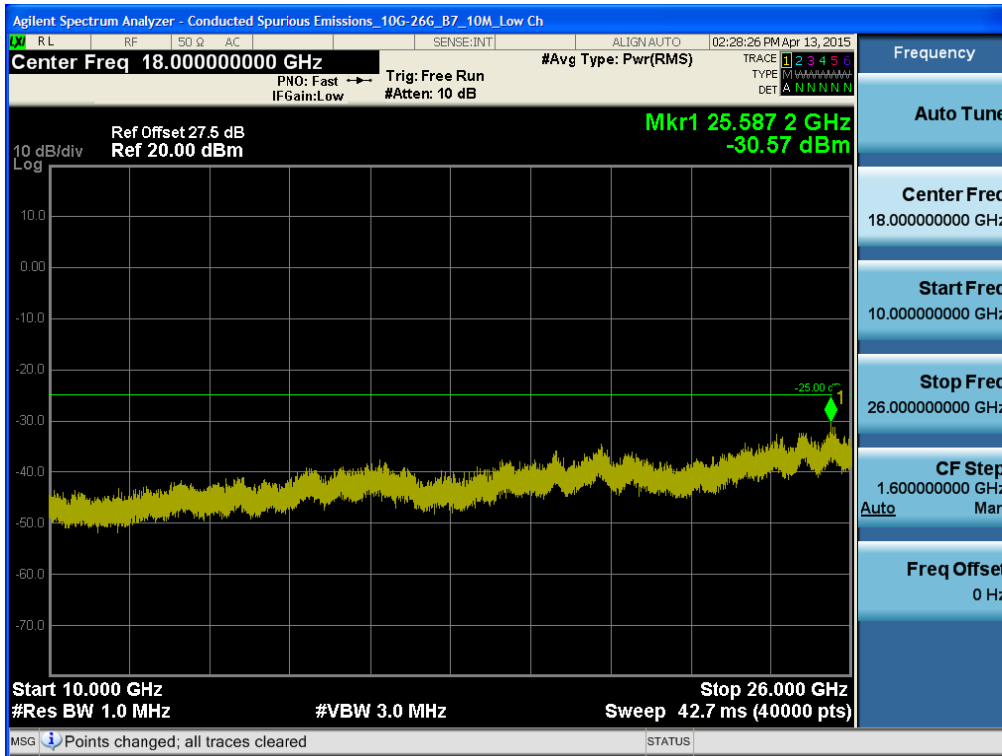


BAND7. Conducted Spurious Plot 1 (10MHz Ch.21100 QPSK RB 1, Offset 0)

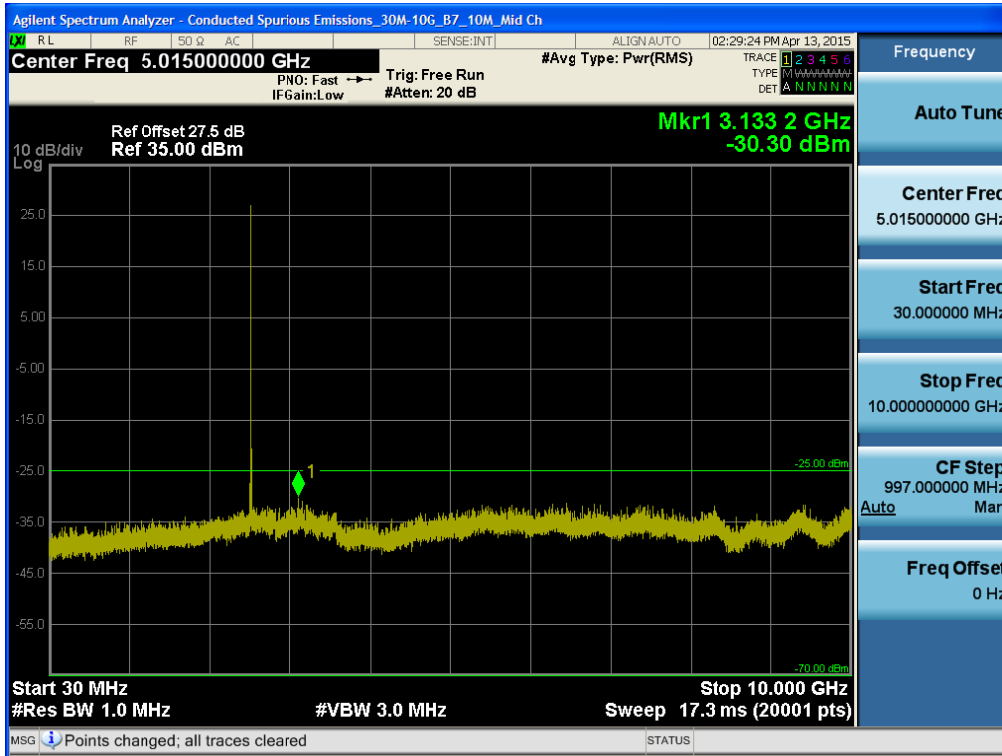


BAND7. Conducted Spurious Plot 2 (10MHz Ch.21100 QPSK RB 1, Offset 0)

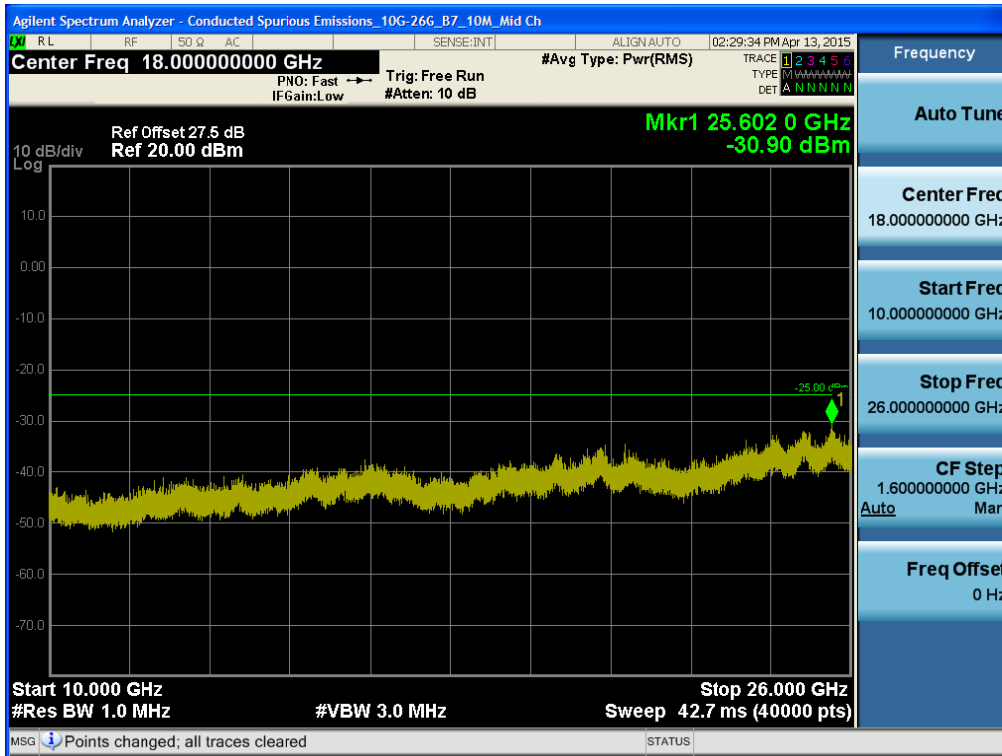


BAND7. Conducted Spurious Plot 1 (10MHz Ch.21400 QPSK RB 1, Offset 0)

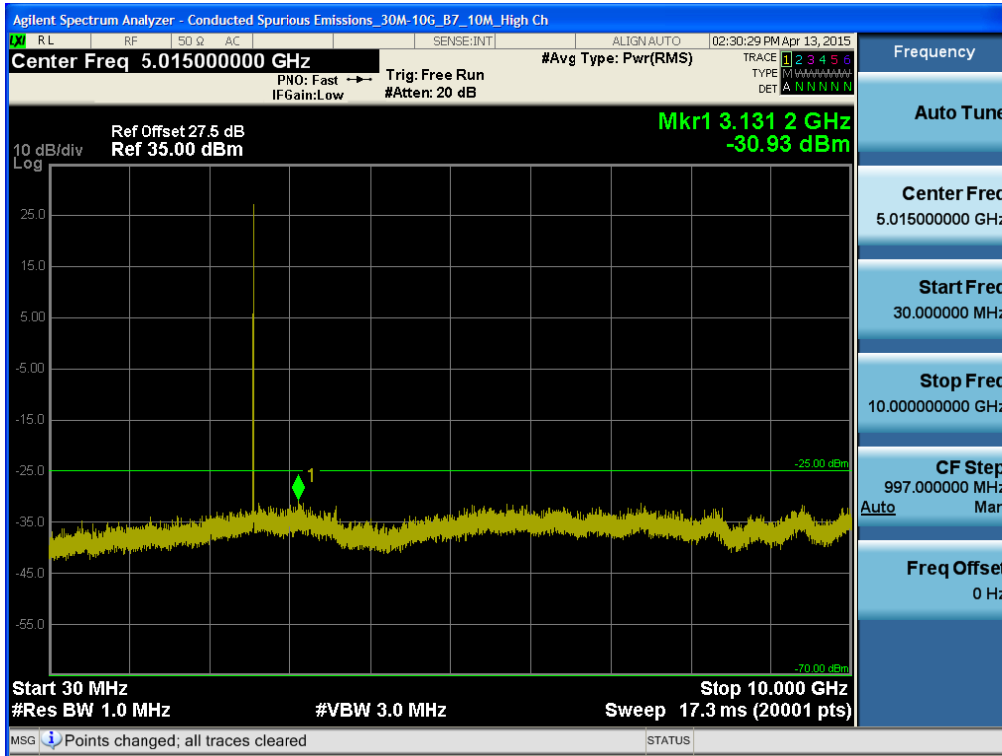


BAND7. Conducted Spurious Plot 2 (10MHz Ch.21400 QPSK RB 1, Offset 0)

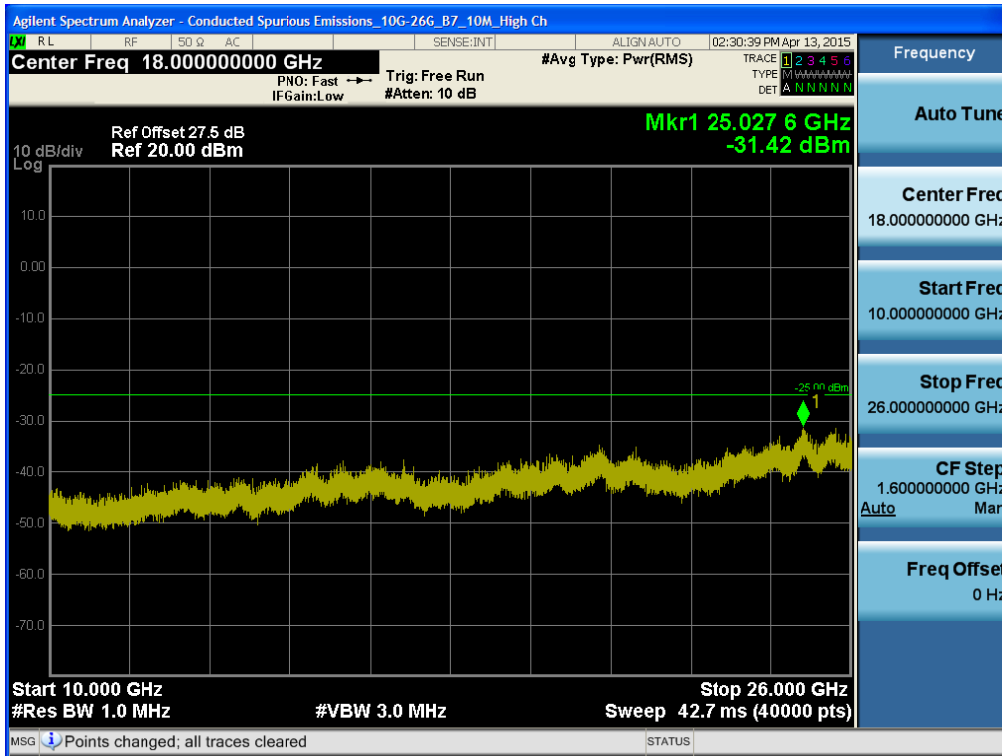


BAND7. Conducted Spurious Plot 1 (15MHz Ch.20825 QPSK RB 1, Offset 0)

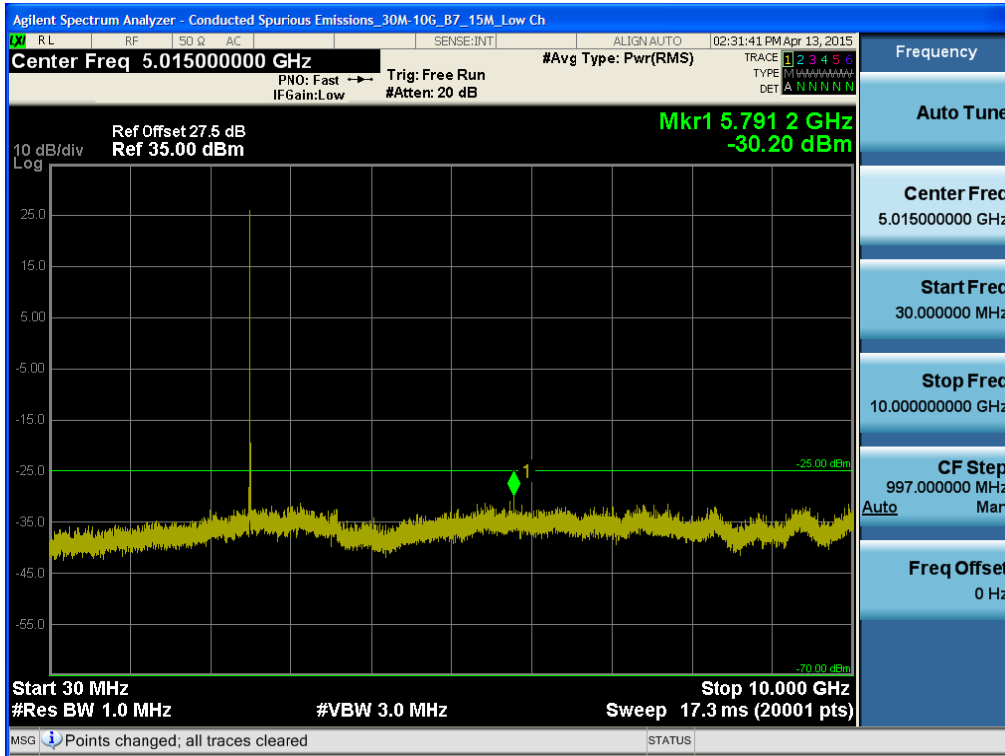


BAND7. Conducted Spurious Plot 2 (15MHz Ch.20825 QPSK RB 1, Offset 0)

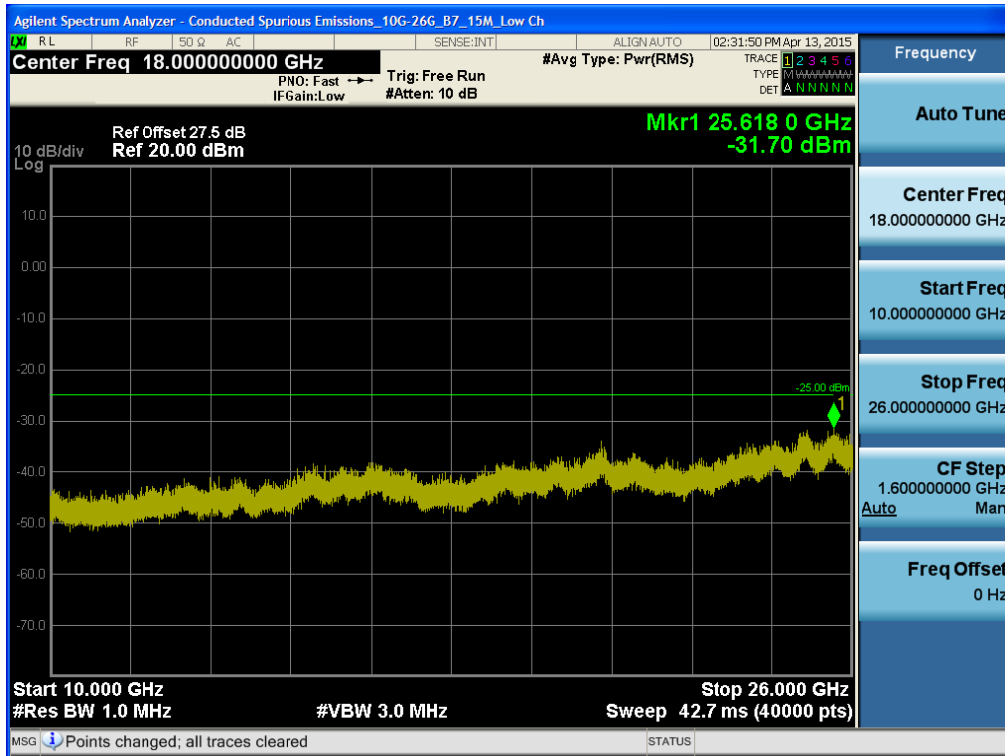


BAND7. Conducted Spurious Plot 1 (15MHz Ch.21100 QPSK RB 1, Offset 0)

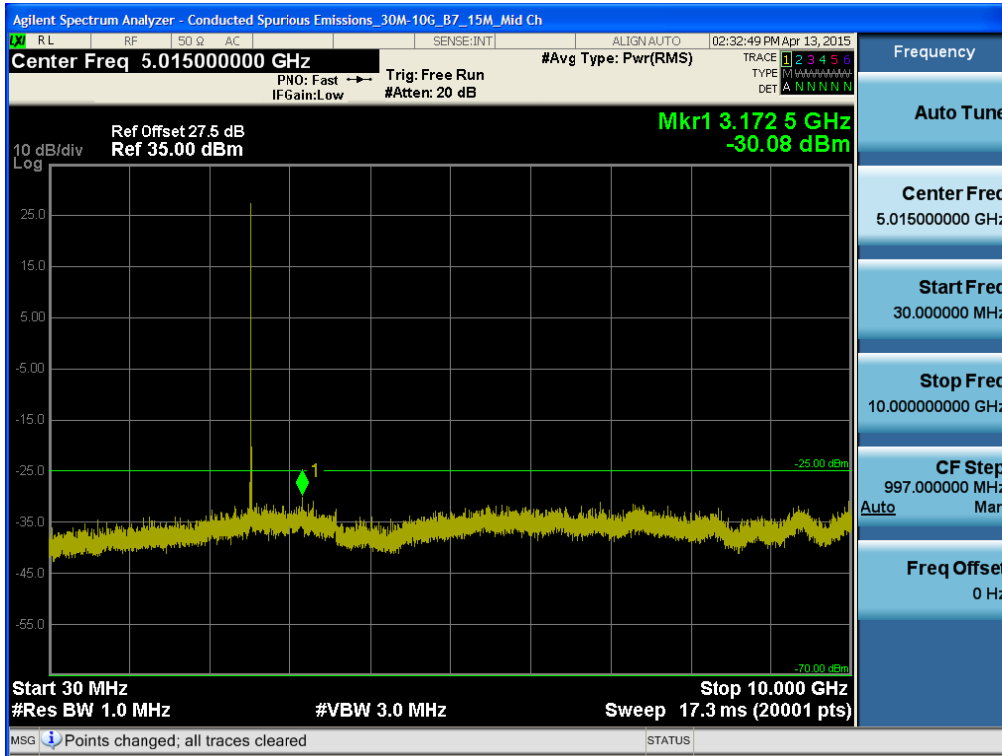


BAND7. Conducted Spurious Plot 2 (15MHz Ch.21100 QPSK RB 1, Offset 0)

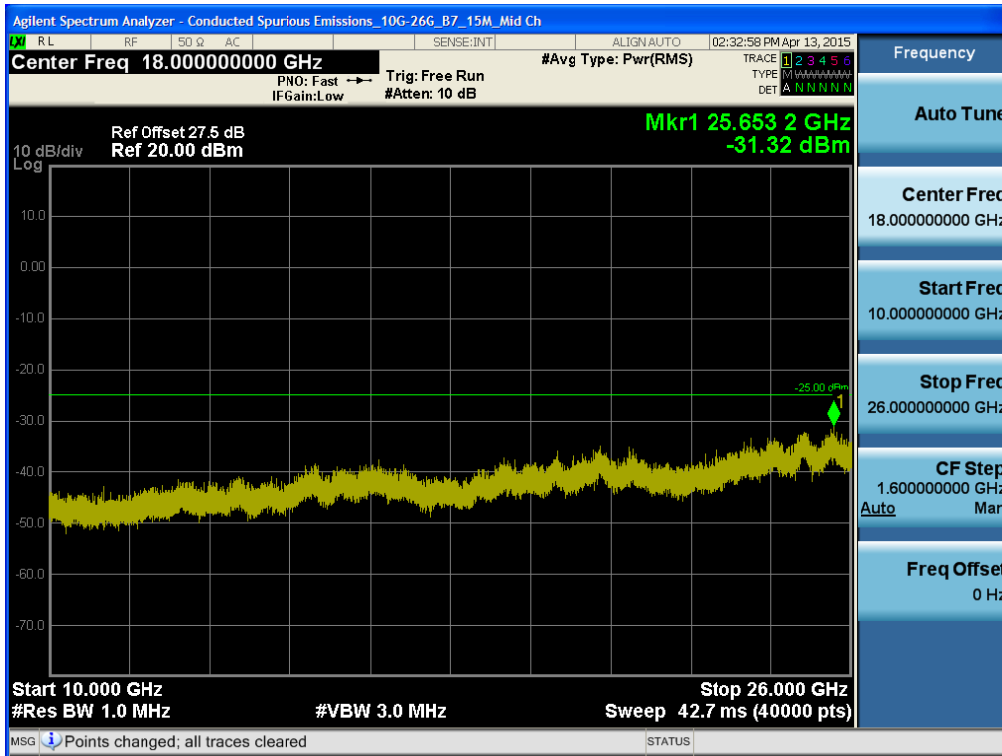


BAND7. Conducted Spurious Plot 1 (15MHz Ch.21375 QPSK RB 1, Offset 0)

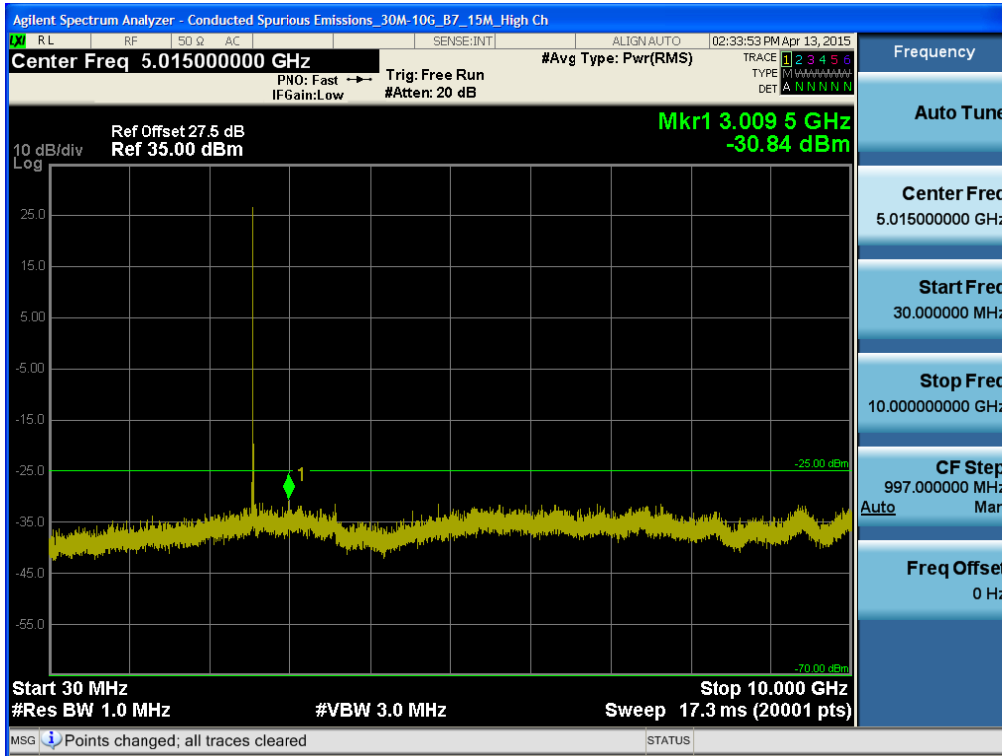


BAND7. Conducted Spurious Plot 2 (15MHz Ch.21375 QPSK RB 1, Offset 0)

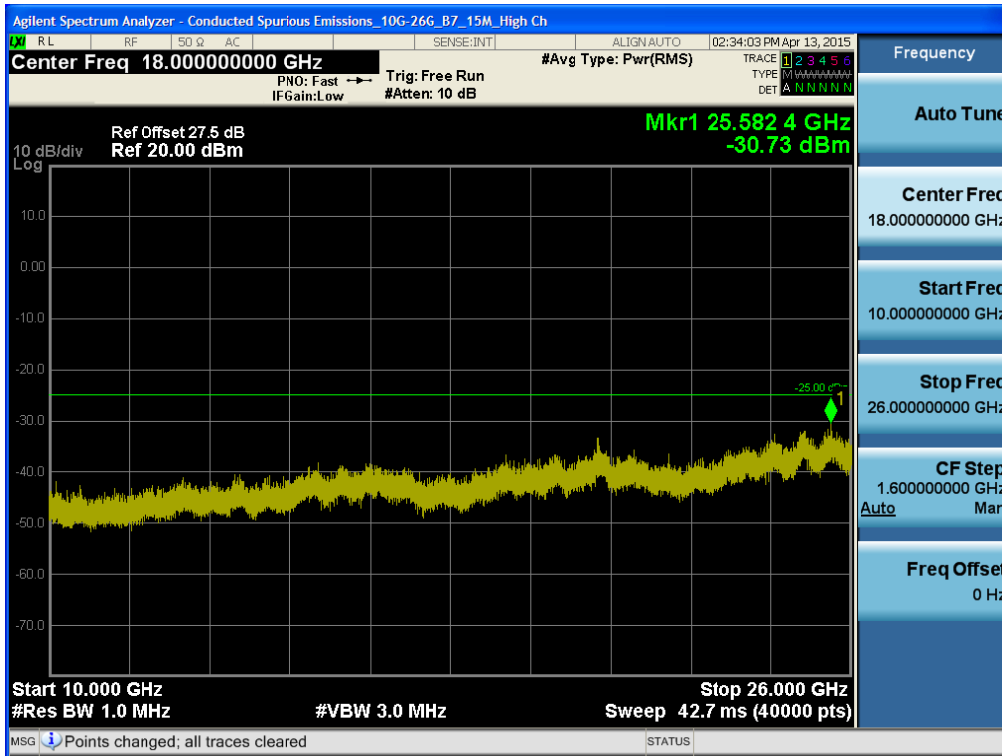


BAND7. Conducted Spurious Plot 1 (20MHz Ch.20850 QPSK RB 1, Offset 0)

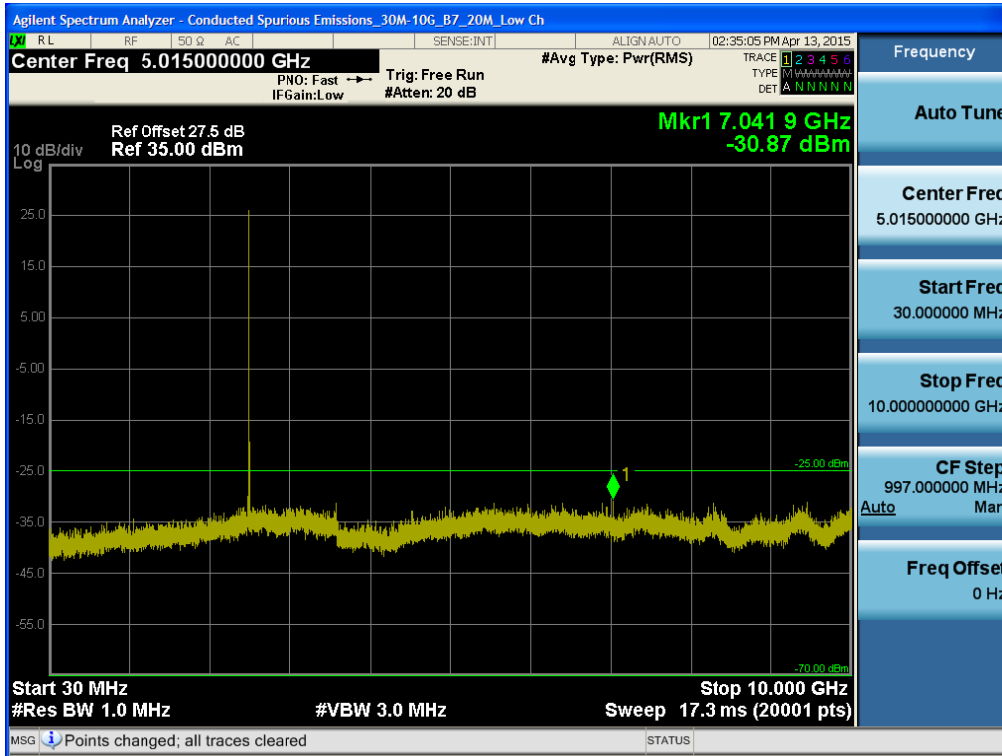


BAND7. Conducted Spurious Plot 2 (20MHz Ch.20850 QPSK RB 1, Offset 0)

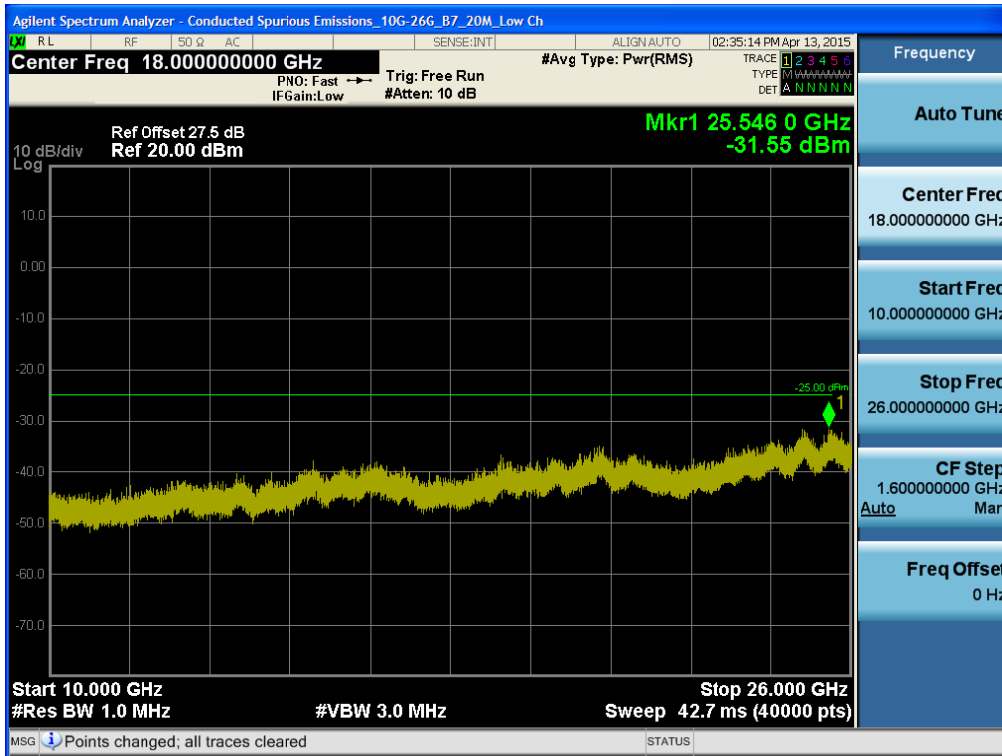


BAND7. Conducted Spurious Plot 1 (20MHz Ch.21100 QPSK RB 1, Offset 0)

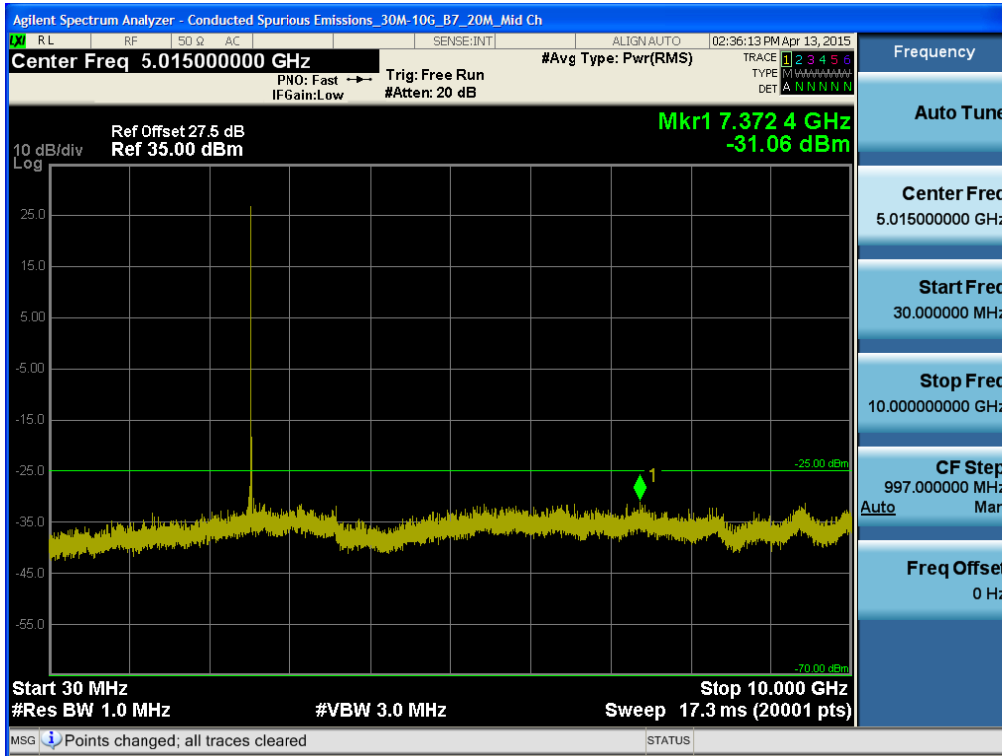

BAND7. Conducted Spurious Plot 2 (20MHz Ch.21100 QPSK RB 1, Offset 0)

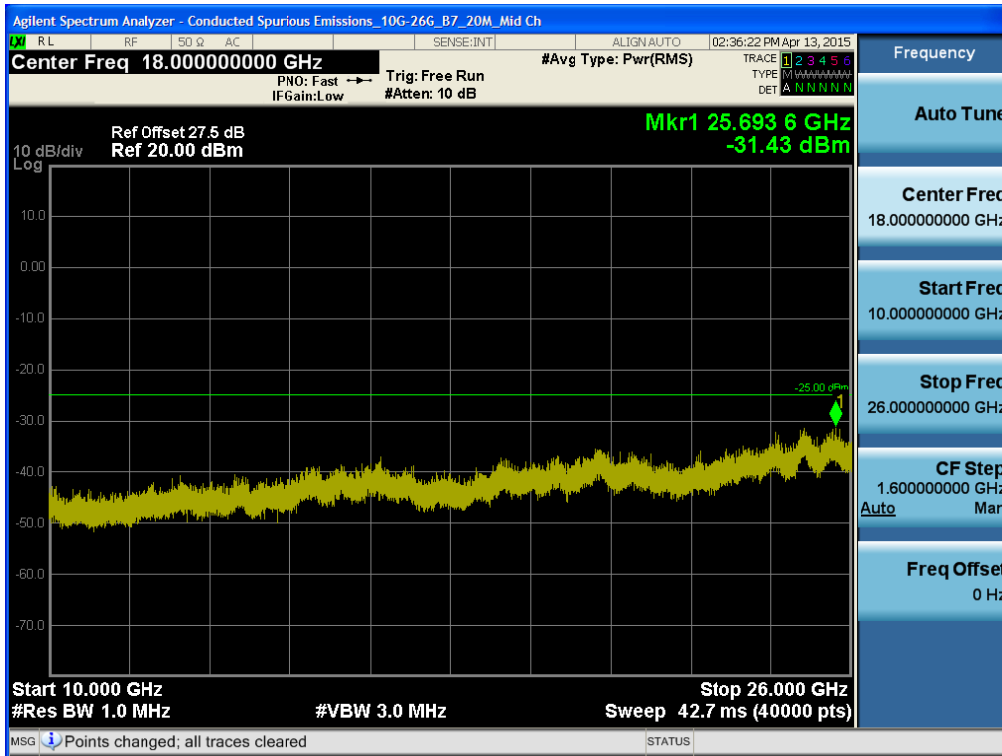

BAND7. Conducted Spurious Plot 1 (20MHz Ch.21350 QPSK RB 1, Offset 0)

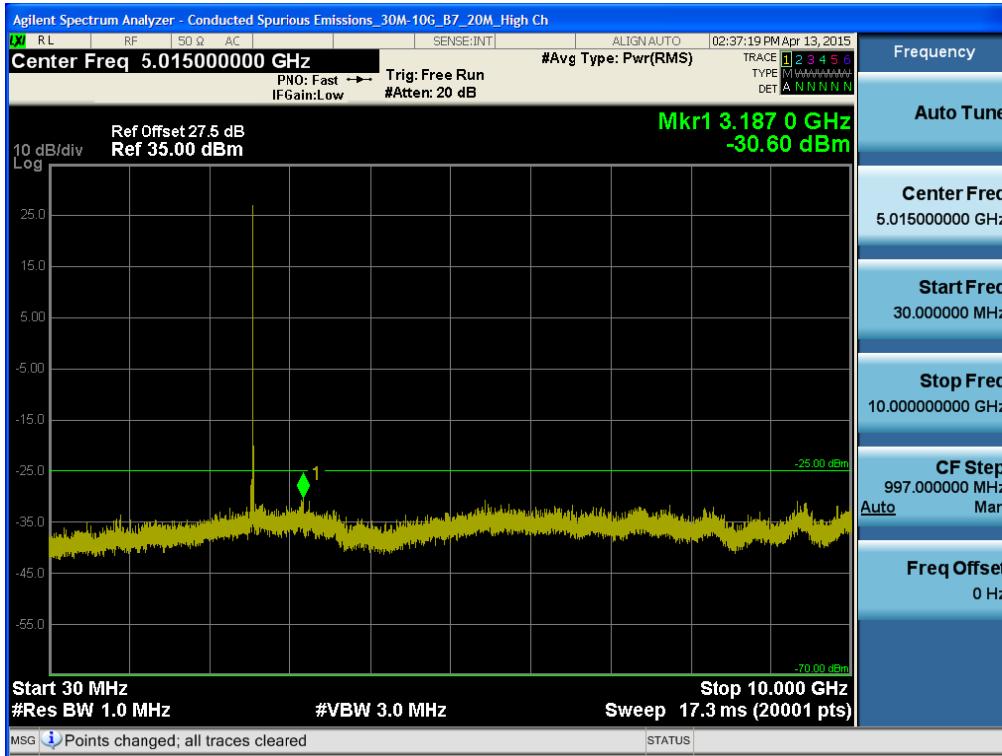

BAND7. Conducted Spurious Plot 2 (20MHz Ch.21350 QPSK RB 1, Offset 0)

