

EMI TEST REPORT FCC CERTIFICATION

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: July 11, 2017

Date of Issue: August 25, 2017

Test Report No. HCT-E-1707-F040-4

FCC ID :

ZNFH932

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B

FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)

EUT Type: Multi-band GSM/EDGE/WCDMA/LTE phone with WLAN, Bluetooth and RFID

Model Name: LG-H932

Additional Model Name: LGH932, H932, LG-H932PR, LGH932PR, H932PR

Date of Test: July 19, 2017 – July 26, 2017

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By



Dong-Hwan Seo
Test Engineer
EMC Team
Certification Division

Reviewed By



Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1707-F040	July 28, 2017	Initial Release
HCT-E-1707-F040-1	August 04, 2017	Revision of Additional Model Name
HCT-E-1707-F040-2	August 08, 2017	Revision of USB Cable's manufacturer
HCT-E-1707-F040-3	August 24, 2017	Added TX frequency of LTE B41 and B46
HCT-E-1707-F040-4	August 25, 2017	Deleted TX frequency of LTE B46



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	5
1.3 Test Facility	5
1.4 Calibration of Measuring Instrument	5
1.5 Tested System Details.....	6
1.6 Cable Description	7
1.7 Noise Suppression Parts on Cable. (I/O Cable)	7
2. MEASUREMENT UNCERTAINTY	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission.....	9
3.2 Measurement of Radiated Measurements	10
4. PRELIMINARY TEST	12
4.1 Conducted Emission Test	12
4. 2 Radiated Emission Test	12
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
5.1 Conducted Emission Test	13
5.2 Radiated Emission Test	20
6. LIST OF TEST EQUIPMENT	22
7. CONCLUSION	23

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Its basic purpose is used for communications.

FCC ID	ZNFH932
Model	LG-H932
Additional Model	LGH932, H932, LG-H932PR, LGH932PR, H932PR
EUT Type	Multi-band GSM/EDGE/WCDMA/LTE phone with WLAN, Bluetooth and RFID
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 2 496 MHz to 2 690 MHz (LTE B41) 1 710 MHz to 1 780 MHz (LTE B66) 663 MHz to 698 MHz (LTE B71) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3) 13.56 MHz (RFID)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 2 496 MHz to 2 690 MHz (LTE B41) 5 150 MHz to 5 925 MHz (LTE B46) 2 110 MHz to 2 200 MHz (LTE B66) 617 MHz to 652 MHz (LTE B71) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3) 13.56 MHz (RFID)



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

Measurement Facilities	Registration Number
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	90661 (July 07, 2015)
Radiated Field strength measurement facility 10 m Semi Anechoic chamber	

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer	FCC ID / DoC
EUT	LG-H932	-	LG	ZNFH932
USB Cable	EAD63849231	-	Ningbo	-
USB Cable	EAD63849232	-	CRESYN	-
USB Cable	EAD63849233	-	KSD	-
USB Cable	EAD63849220	-	Luxshare	-
Earphone	EAB62910502		CRESYN	-
Notebook PC	ProBook6560b	5CB2053MXF	HP	DoC
Notebook PC adaptor	Series PPP009L-E	-	LITE-On Technology	-
Gateway	TL-WR747N	-	TP-LINK	-
Gateway adaptor	T120150-2H1	-	TP-LINK	-
Serial mouse	Serial 2 button mouse	02031069	Radio shack	FSUGMZE3
RJ45 cable	-	-	-	-
Micro SD card	256 GB EVD+UHS -1 microSDXC UI	-	SAMSUNG	-



1.6 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB type C	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.6
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked “(D)” means the data cable and “(P)” means the power cable.

1.7 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB type C	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	1.82 dB ($k = 2$)
Radiated Emissions (30 MHz to 1 GHz)	5.20 dB ($k = 2$)
Radiated Emissions (1 GHz to 18 GHz)	5.24 dB ($k = 2$)
Radiated Emissions (18 GHz to 40 GHz)	5.40 dB ($k = 2$)



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54




3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System

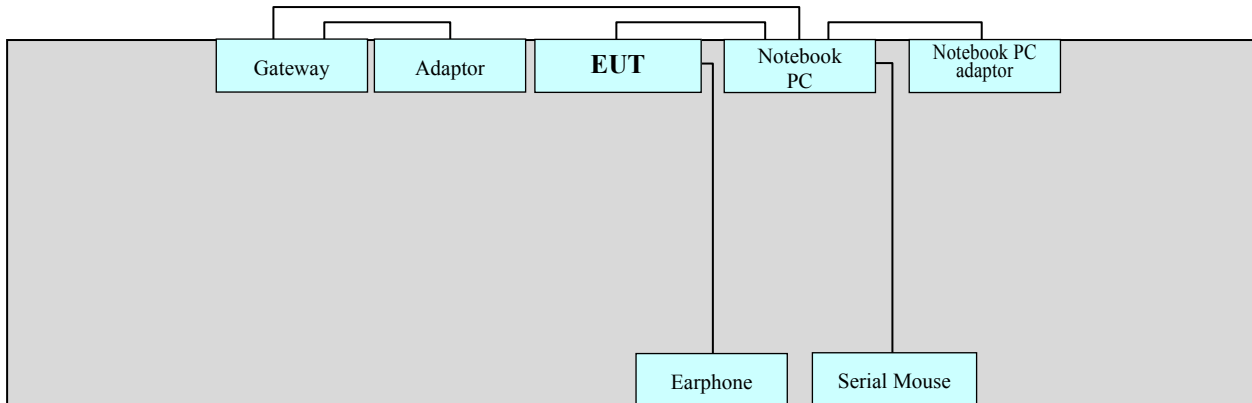

Non-Conductive Table
Power Line: 120 VAC, 60 Hz



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

4.2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:


Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Case of USB Cable	Luxshare (EAD63849220)
Kind of Test Site	Shielded Room
Temperature	23.9 °C
Relative Humidity	54.1 %
Test Date	July 26, 2017

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



Figure 1: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)

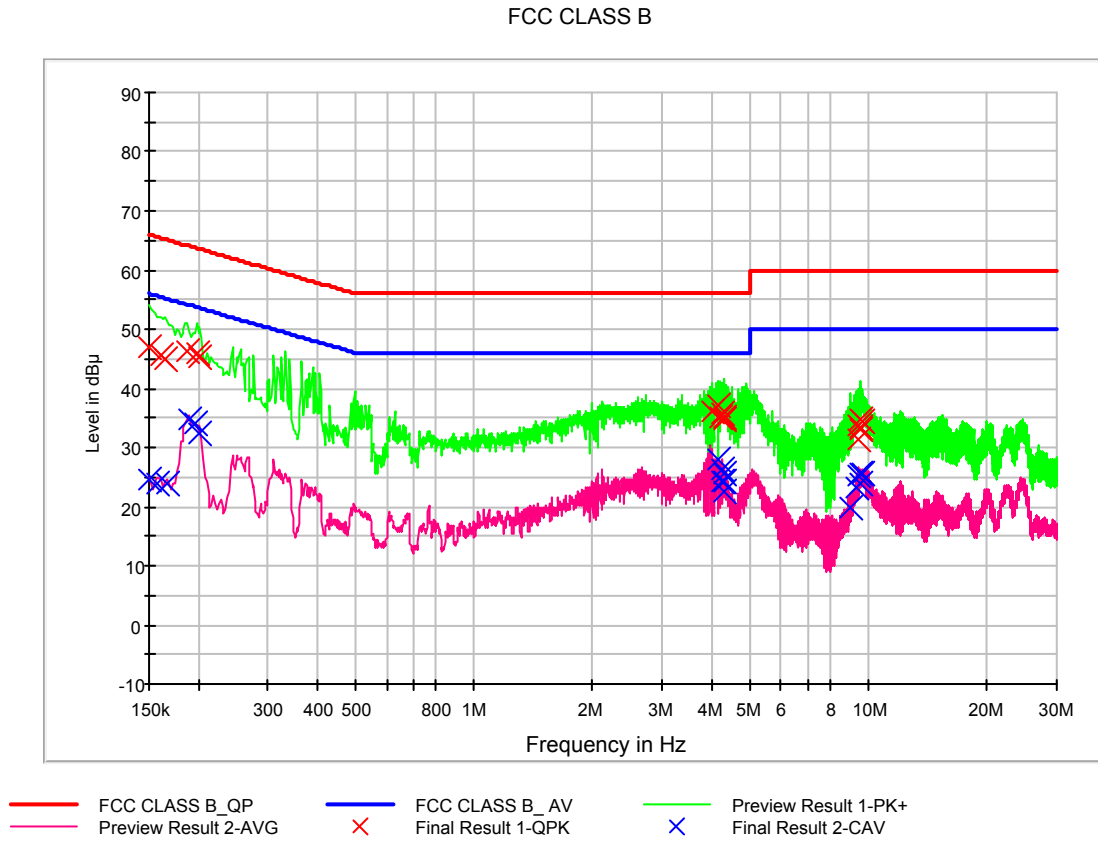



QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.1	9.000	L1	9.6	18.9	66.0
0.160000	45.6	9.000	L1	9.6	19.9	65.5
0.164000	44.8	9.000	L1	9.6	20.4	65.3
0.188000	46.2	9.000	L1	9.6	17.9	64.1
0.198000	46.0	9.000	L1	9.6	17.7	63.7
0.202000	45.4	9.000	L1	9.6	18.1	63.5
4.032000	36.2	9.000	L1	9.9	19.8	56.0
4.172000	37.1	9.000	L1	9.9	18.9	56.0
4.182000	35.2	9.000	L1	9.9	20.8	56.0
4.242000	35.7	9.000	L1	9.9	20.3	56.0
4.290000	34.6	9.000	L1	9.9	21.4	56.0
4.310000	34.9	9.000	L1	9.9	21.1	56.0
9.468000	33.7	9.000	L1	10.1	26.3	60.0
9.474000	31.5	9.000	L1	10.1	28.5	60.0
9.490000	34.6	9.000	L1	10.1	25.4	60.0
9.510000	33.2	9.000	L1	10.1	26.8	60.0
9.524000	33.4	9.000	L1	10.1	26.6	60.0
9.672000	34.6	9.000	L1	10.1	25.4	60.0




CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	24.5	9.000	L1	9.6	31.5	56.0
0.158000	23.9	9.000	L1	9.6	31.7	55.6
0.166000	23.9	9.000	L1	9.6	31.2	55.2
0.190000	34.7	9.000	L1	9.6	19.4	54.0
0.196000	34.1	9.000	L1	9.6	19.7	53.8
0.202000	32.5	9.000	L1	9.6	21.1	53.5
4.172000	28.0	9.000	L1	9.9	18.0	46.0
4.240000	26.4	9.000	L1	9.9	19.6	46.0
4.254000	24.2	9.000	L1	9.9	21.8	46.0
4.290000	25.7	9.000	L1	9.9	20.4	46.0
4.310000	24.2	9.000	L1	9.9	21.8	46.0
4.326000	22.5	9.000	L1	9.9	23.5	46.0
8.988000	19.9	9.000	L1	10.1	30.1	50.0
9.310000	23.2	9.000	L1	10.1	26.8	50.0
9.468000	25.2	9.000	L1	10.1	24.8	50.0
9.496000	25.6	9.000	L1	10.1	24.4	50.0
9.510000	24.0	9.000	L1	10.1	26.0	50.0
9.654000	25.6	9.000	L1	10.1	24.4	50.0



Figure 2: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)

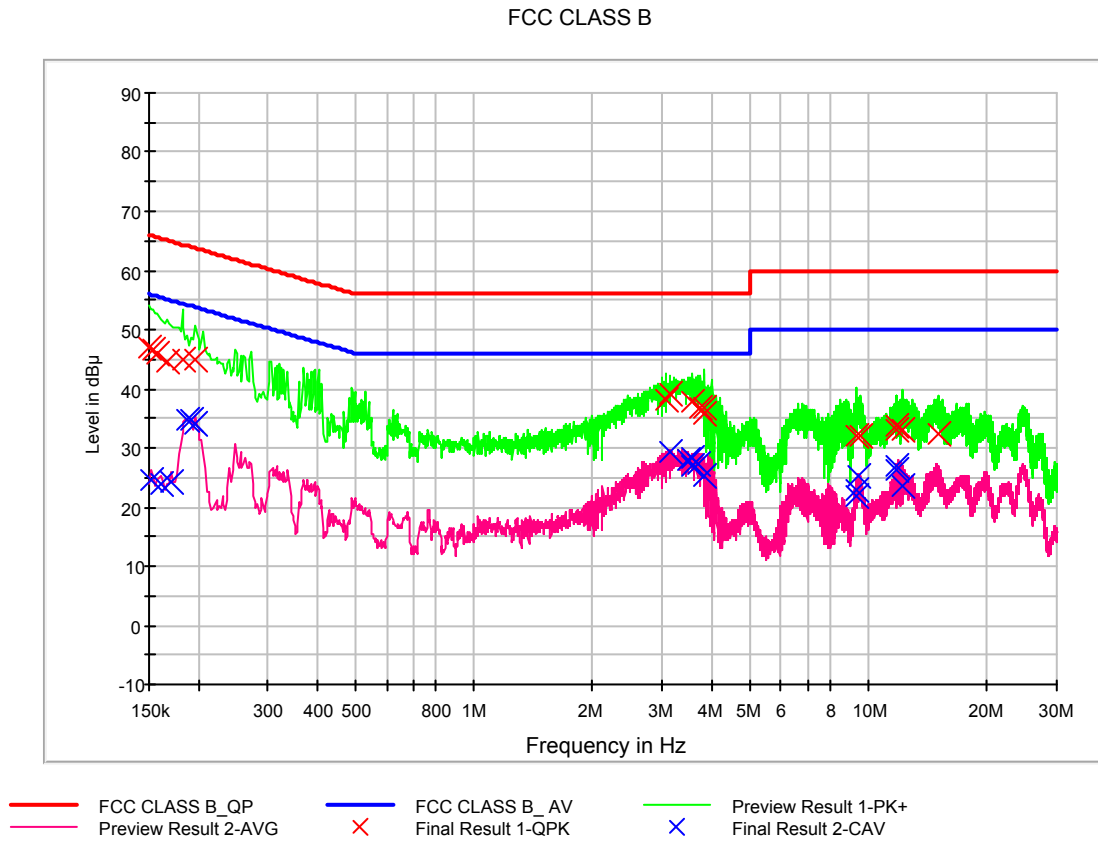



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.1	9.000	N	9.6	18.9	66.0
0.154000	46.4	9.000	N	9.6	19.3	65.8
0.158000	45.8	9.000	N	9.6	19.8	65.6
0.166000	44.6	9.000	N	9.6	20.5	65.2
0.182000	45.0	9.000	N	9.6	19.4	64.4
0.196000	45.0	9.000	N	9.6	18.8	63.8
3.078000	38.0	9.000	N	9.8	18.0	56.0
3.146000	39.1	9.000	N	9.8	16.9	56.0
3.556000	37.8	9.000	N	9.8	18.2	56.0
3.748000	36.8	9.000	N	9.8	19.2	56.0
3.826000	35.9	9.000	N	9.8	20.1	56.0
3.830000	36.9	9.000	N	9.8	19.1	56.0
9.274000	32.2	9.000	N	10.1	27.8	60.0
9.510000	32.1	9.000	N	10.1	27.9	60.0
11.766000	33.1	9.000	N	10.2	26.9	60.0
11.832000	33.8	9.000	N	10.2	26.2	60.0
12.242000	33.1	9.000	N	10.2	26.9	60.0
14.976000	32.4	9.000	N	10.3	27.6	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	24.7	9.000	N	9.6	31.2	55.9
0.160000	24.0	9.000	N	9.6	31.5	55.5
0.170000	24.3	9.000	N	9.6	30.7	55.0
0.188000	34.8	9.000	N	9.6	19.3	54.1
0.192000	34.6	9.000	N	9.6	19.4	53.9
0.196000	34.2	9.000	N	9.6	19.6	53.8
3.146000	29.4	9.000	N	9.8	16.6	46.0
3.488000	28.1	9.000	N	9.8	17.9	46.0
3.556000	27.0	9.000	N	9.8	19.0	46.0
3.586000	28.4	9.000	N	9.8	17.6	46.0
3.688000	27.3	9.000	N	9.8	18.7	46.0
3.826000	25.1	9.000	N	9.8	20.9	46.0
9.274000	22.9	9.000	N	10.1	27.1	50.0
9.318000	21.9	9.000	N	10.1	28.1	50.0
9.432000	25.1	9.000	N	10.1	24.9	50.0
11.766000	26.2	9.000	N	10.2	23.8	50.0
11.832000	27.1	9.000	N	10.2	22.9	50.0
12.242000	23.5	9.000	N	10.2	26.5	50.0



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Case of USB Cable	Luxshare (EAD63849220)
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.7 / 23.4 °C
Relative Humidity	51.0 / 50.8 %
Test Date	July 19 / July 20, 2017

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
85.155200	32.4	310.0	H	257.0	18.1	7.6	40.0
154.200800	32.6	210.0	H	231.0	23.3	10.9	43.5
199.908000	27.0	100.0	V	4.0	20.1	16.5	43.5
240.336000	27.8	100.0	V	-1.0	21.8	18.2	46.0
265.552000	32.3	183.0	H	144.0	22.8	13.7	46.0
479.992800	41.3	200.0	H	287.0	28.4	4.7	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	5 825 MHz
Upper Frequency of Measurement Range	1 GHz to 29.125 GHz
Operation Mode	Data Communication mode
Worst Case of USB Cable	Luxshare (EAD63849220)
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.4 / 23.2 °C
Relative Humidity	50.8 / 51.1 %
Test Date	July 20 / July 21, 2017

Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1400.040000	47.7	400.0	H	131.0	-12.9	26.3	74.0
1799.895000	47.5	99.9	H	23.0	-12.1	26.5	74.0
2028.550000	47.0	110.5	V	38.0	-11.7	27.0	74.0
2599.015000	49.7	399.8	V	352.0	-9.5	24.3	74.0
3327.195000	39.1	348.6	V	1.0	-8.5	34.9	74.0
5990.935000	45.5	349.3	V	10.0	-2.2	28.5	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1400.040000	45.0	400.0	H	131.0	-12.9	9.0	54.0
1799.895000	39.4	99.9	H	23.0	-12.1	14.6	54.0
2028.550000	32.8	110.5	V	38.0	-11.7	21.2	54.0
2599.015000	31.0	399.8	V	352.0	-9.5	23.0	54.0
3327.195000	24.7	348.6	V	1.0	-8.5	29.3	54.0
5990.935000	30.4	349.3	V	10.0	-2.2	23.6	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss – Amplifier Gain
4. Margin = Limit - Peak or CAverage



6. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	12.23.2016
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	12.23.2016
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	05.22.2017
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER 8.54.0	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	11.04.2016
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	04.05.2017
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	760	2 year	04.06.2017
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.16.2017
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER 8.40.0	-	-	-
-For measurement above 1 GHz					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	11.04.2016
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	04.05.2017
<input type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Antenna master	INNCO Systems	MA4000-XP-ET	48709515	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	INNCO Systems	CO 3000	CO 3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.01.2017
<input type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21691	1 year	06.28.2017
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.12.2016
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170541	2 year	09.03.2015
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBL18265035	21873	1 year	01.19.2017
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBL26405040	19660	1 year	07.11.2017
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	1300	2 year	08.25.2016
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.16.2017
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32 VER 8.40.0	-	-	-



7. CONCLUSION

The data collected shows that the **EUT Type: Multi-band GSM/EDGE/WCDMA/LTE phone with WLAN, Bluetooth and RFID, Model: LG-H932, FCC ID: ZNFH932** complies with §15.107 and §15.109 of the FCC rules.