

# REPORT

## FCC Certification

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.

**Address:**  
 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue:**  
 January 15, 2015

**Test Site/Location:**  
 HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1501-F014

**HCT FRN:** 0005866421

**FCC ID : ZNFH955**  
**APPLICANT : LG Electronics MobileComm U.S.A., Inc.**

**FCC Model(s):** LG-H955

**Additional Model(s):** LGH955, H955

**EUT Type:** Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC

**Modulation type** OFDM

**FCC Classification:** Unlicensed National Information Infrastructure(UNII)

**FCC Rule Part(s):** Part 15.407

Band	Mode	Channel Bandwidth (MHz)	Frequency Range (MHz)	Power (dBm)	Power (W)
UNII1	802.11a	20	5180 – 5240	13.31	0.0214
	802.11n	20	5180 – 5240	12.33	0.0171
	802.11n	40	5190 – 5230	11.87	0.0154
	802.11ac	20	5180 – 5240	11.56	0.0143
	802.11ac	40	5190 – 5230	11.16	0.0131
UNII2A	802.11ac	80	5210	10.36	0.0109
	802.11a	20	5260 – 5320	13.05	0.0202
	802.11n	20	5260 – 5320	12.36	0.0172
	802.11n	40	5270 – 5310	11.07	0.0128
	802.11ac	20	5260 – 5320	11.08	0.0128
UNII2C	802.11ac	40	5270 – 5310	11.22	0.0132
	802.11ac	80	5290	11.42	0.0139
	802.11a	20	5500 – 5720	13.74	0.0237
	802.11n	20	5500 – 5720	12.94	0.0197
	802.11n	40	5510 – 5710	11.18	0.0131
UNII3	802.11ac	20	5500 – 5720	12.00	0.0159
	802.11ac	40	5510 – 5710	11.95	0.0157
	802.11ac	80	5530 – 5690	11.53	0.0142
	802.11a	20	5745 – 5825	13.46	0.0222
	802.11n	20	5745 – 5825	12.34	0.0171
UNII3	802.11n	40	5755 – 5795	11.31	0.0135
	802.11ac	20	5745 – 5825	11.20	0.0132
	802.11ac	40	5755 – 5795	11.41	0.0138
	802.11ac	80	5775	11.18	0.0131

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



**Report prepared by**  
**: Jong Seok Lee**  
**Test engineer of RF Team**



**Approved by**  
**: Kyoung Houn Seo**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1501-F014	January 15, 2015	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	5
2. EUT DESCRIPTION .....	5
3. TEST METHODOLOGY .....	6
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE .....	6
3.3 GENERAL TEST PROCEDURES .....	6
3.4 DESCRIPTION OF TEST MODES .....	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS .....	7
5.1 FACILITIES .....	7
5.2 EQUIPMENT .....	7
6. ANTENNA REQUIREMENTS .....	7
7. SUMMARY OF TEST RESULTS .....	8
8. TEST RESULT .....	9
8.1 DUTY CYCLE.....	9
8.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT .....	1 2
8.3 OUTPUT POWER MEASUREMENT.....	3 7
8.4 POWER SPECTRAL DENSITY .....	6 9
8.5 FREQUENCY STABILITY. ....	8 7
8.6 RADIATED MEASUREMENT.....	9 9
8.6.1 RADIATED SPURIOUS EMISSIONS.....	9 9
8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....	1 6 4
8.7 POWERLINE CONDUCTED EMISSIONS .....	1 7 6
9. LIST OF TEST EQUIPMENT .....	1 8 1
9.1 LIST OF TEST EQUIPMENT(Conducted Test) .....	1 8 1
9.2 LIST OF TEST EQUIPMENT(Radiated Test).....	1 8 2

## 1. GENERAL INFORMATION

<b>Applicant:</b>	LG Electronics MobileComm U.S.A., Inc.
<b>Address:</b>	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
<b>FCC ID:</b>	ZNFH955
<b>EUT Type:</b>	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC
<b>Model name(s):</b>	LG-H955
<b>Additional Model name(s):</b>	LGH955, H955
<b>Date(s) of Tests:</b>	December 18, 2014 ~ January 16, 2015
<b>Place of Tests:</b>	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>FCC Model Name</b>	LG-H955	
<b>Additional Name</b>	LGH955, H955	
<b>EUT Type</b>	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth, WLAN, NFC	
<b>Power Supply</b>	DC 3.8 V	
<b>Battery type</b>	Li-ion Battery(Standard)	
<b>Frequency Range</b>	TX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2A)/ 5500 MHz - 5720 MHz (UNII 2C)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2A)/ 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2A)/ 5530 MHz - 5690 MHz(UNII 2C)/ 5775 MHz (UNII 3)
	RX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2A)/ 5500 MHz - 5720 MHz (UNII 2C)/ 5745 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2A)/ 5510 MHz - 5710 MHz (UNII 2C) / 5755 MHz - 5795 MHz (UNII 3)
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2A)/ 5530 MHz - 5690 MHz(UNII 2C)/ 5775 MHz (UNII 3)
<b>Max. RF Output Power:</b>	TX_20 MHz BW:	5180 MHz - 5240 MHz (802.11a) (13.31dBm) / 5260 MHz - 5320 MHz (802.11a) (13.05 dBm)/ 5500 MHz - 5720 MHz (802.11a) (13.74 dBm)/ 5745 MHz - 5825 MHz (802.11a) (13.46 dBm) 5180 MHz - 5240 MHz (802.11n) (12.33dBm) / 5260 MHz - 5320 MHz (802.11n) (12.36 dBm)/ 5500 MHz - 5720 MHz (802.11n) (12.94 dBm)/ 5745 MHz - 5825 MHz (802.11n) (12.34 dBm) 5180 MHz - 5240 MHz (802.11ac) (11.56dBm) / 5260 MHz - 5320 MHz (802.11ac) (12.36 dBm)/ 5500 MHz - 5720 MHz (802.11ac) (12.00 dBm)/ 5745 MHz - 5825 MHz (802.11ac) (12.34 dBm)
	40 MHz BW:	5190 MHz - 5230 MHz (802.11n) (11.87 dBm)/ 5270 MHz - 5310 MHz ((802.11n) (11.07 dBm))/ 5510 MHz - 5710 MHz (802.11n) (11.18 dBm) / 5755 MHz - 5795 MHz (802.11n) (11.31dBm) 5190 MHz - 5230 MHz (802.11ac) (11.16dBm)/ 5270 MHz - 5310 MHz ((802.11ac) (11.22dBm))/ 5510 MHz - 5710 MHz (802.11ac) (11.95 dBm) / 5755 MHz - 5795 MHz (802.11ac) (11.41 dBm)
	80 MHz BW:	5210 MHz(UNII 1) (10.36dBm)/ 5290 MHz(UNII 2A) (11.42 dBm) / 5530 MHz - 5690 MHz(UNII 2C) (11.53 dBm) /5775 MHz (UNII 3) (11.18 dBm)
<b>Modulation Type</b>	OFDM(802.11a, 802.11n, 802.11ac)	
<b>Antenna Specification</b>	Manufacturer: AT&C Co.LTD. Antenna type:INTERNAL Antenna Peak Gain : -6.54 dBi (5180~5240 UNII1 BAND)/-4.8 dBi (5260~5320 UNII2A BAND) -2.18 dBi (5500~5720 UNII2C BAND)/-4.08 dBi (5745~5825 UNII3 BAND)	

### **3. TEST METHODOLOGY**

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v01 dated June 06, 2014 entitled “ Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) were used in the measurement. For 802.11ac, KDB644545 D03 v01 dated August 14, 2014

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

##### **Conducted Antenna Terminal**

See Section from 8.1 to 8.4.(KDB 789033)

#### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203,§15.407,

## 7. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
<b>TRANSMITTER MODE(TX)</b>				
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	CONDUCTED	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW (5150-5250 MHz) < 250 mW (5250-5350 MHz) < 250 mW (5470-5725 MHz) < 1 W (5725-5850 MHz) Whichever power is less		PASS
Peak Power Spectral Density	§15.407(a)(1), (5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g)	NA		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)(1), (2), (3)	<-27 dBm/ MHz EIRP (5150-5250 MHz, 5470-5725 MHz) <-17 dBm/MHz EIRP within 5715-5725 MHz and 5850-5860 MHz, <-27 dBm/MHz EIRP outside 5715-5850 MHz(UNII3)		RADIATED
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(1), (5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS	




## 8. TEST RESULT

### 8.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq EBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where  $T$  is defined in section B)1)a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### ■ TEST CONFIGURATION

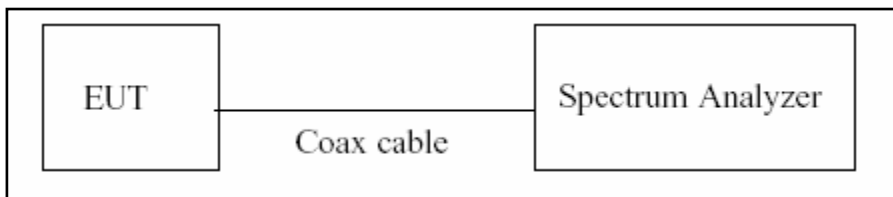

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, (B.2 in KDB 789033 D02, issued 06/06/2014)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	2.055	2.156	0.95315399	0.208
	9	1.379	1.491	0.92488263	0.339
	12	1.040	1.153	0.90199480	0.448
	18	0.697	0.808	0.86262376	0.642
	24	0.522	0.633	0.82464455	0.837
	36	0.357	0.466	0.76609442	1.157
	48	0.268	0.380	0.70526316	1.516
	54	0.241	0.350	0.68857143	1.621
802.11n_20 MHz BW	6.5	1.918	2.030	0.94482759	0.246
	13	0.970	1.085	0.89400922	0.487
	19.5	0.655	0.765	0.85620915	0.674
	26	0.500	0.610	0.81967213	0.864
	39	0.342	0.453	0.75496689	1.221
	52	0.264	0.375	0.70400000	1.524
	58.5	0.241	0.350	0.68857143	1.621
	65	0.220	0.329	0.66869301	1.748
802.11n_40 MHz BW	13.5	0.920	1.030	0.89320388	0.490
	27	0.475	0.600	0.79166667	1.015
	40.5	0.340	0.440	0.77272727	1.120
	54	0.258	0.365	0.70684932	1.507
	81	0.188	0.290	0.64827586	1.882
	108	0.153	0.253	0.60474308	2.184
	121.5	0.140	0.240	0.58333333	2.341
	135	0.127	0.228	0.55701754	2.541


Mode	Data Rate	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ac_20 MHz BW	6.5	2.050	2.158	0.94995366	0.223
	13	0.975	1.083	0.90027701	0.456
	19.5	0.663	0.767	0.86440678	0.633
	26	0.507	0.617	0.82171799	0.853
	39	0.347	0.456	0.76096491	1.186
	52	0.272	0.380	0.71578947	1.452
	58.5	0.245	0.353	0.69405099	1.586
	65	0.223	0.333	0.66966967	1.741
	78	0.192	0.300	0.64000000	1.938
5.8 GHz Band 802.11ac_40 MHz BW	13.5	0.947	1.053	0.89933523	0.461
	27	0.489	0.590	0.82881356	0.815
	40.5	0.343	0.443	0.77426637	1.111
	54	0.268	0.368	0.72826087	1.377
	81	0.191	0.293	0.65187713	1.858
	108	0.157	0.256	0.61328125	2.123
	121.5	0.144	0.244	0.59016393	2.290
	135	0.132	0.232	0.56896552	2.449
	162	0.116	0.217	0.53456221	2.720
5.8 GHz Band 802.11ac_80 MHz BW	180	0.112	0.213	0.52582160	2.792
	29.3	0.450	0.560	0.80357143	0.950
	58.5	0.243	0.353	0.68838527	1.622
	87.8	0.173	0.280	0.61785714	2.091
	117	0.148	0.248	0.59677419	2.242
	175.5	0.113	0.213	0.53051643	2.753
	234	0.095	0.196	0.48469388	3.145
	263.3	0.087	0.189	0.46031746	3.369
	292.5	0.083	0.185	0.44864865	3.481
351	0.076	0.176	0.43181818	3.647	
390	0.072	0.172	0.41860465	3.782	

## 8.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033 D02(issued 06/06/2014), at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

### ■ TEST CONFIGURATION

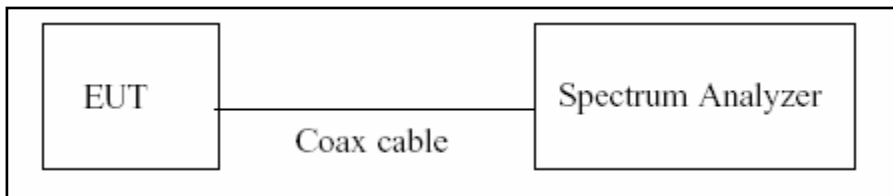

### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to ( C.1 in KDB 789033 D02, issued 06/06/2014)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note : We tested 26 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 26 dB.

**■ TEST RESULTS**

**20 MHz BW**

**Conducted 26 dB Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.438	N/A	Pass
5200	40	21.635	N/A	Pass
5240	48	21.574	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.627	N/A	Pass
5300	60	21.320	N/A	Pass
5320	64	21.644	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.489	N/A	Pass
5600	120	21.749	N/A	Pass
5720	144	21.639	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.63	N/A	Pass
5785	157	21.49	N/A	Pass
5825	165	21.47	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n 20M BW**

802.11n(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.746	N/A	Pass
5200	40	21.801	N/A	Pass
5240	48	21.910	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n 20M BW**

802.11n(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.834	N/A	Pass
5300	60	21.699	N/A	Pass
5320	64	21.852	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n 20M BW**

802.11n(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.720	N/A	Pass
5600	120	21.799	N/A	Pass
5720	144	21.819	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n 20M BW**

802.11n(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.75	N/A	Pass
5785	157	21.81	N/A	Pass
5825	165	21.75	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac 20M BW**

802.11ac(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.729	N/A	Pass
5200	40	21.831	N/A	Pass
5240	48	21.612	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac 20M BW**

802.11ac(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.553	N/A	Pass
5300	60	21.706	N/A	Pass
5320	64	21.750	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac 20M BW**

802.11ac(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.734	N/A	Pass
5600	120	21.619	N/A	Pass
5720	144	21.852	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac 20M BW**

802.11ac(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	21.89	N/A	Pass
5785	157	21.65	N/A	Pass
5825	165	21.71	N/A	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.390	0.5	Pass
5785	157	16.383	0.5	Pass
5825	165	16.385	0.5	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11n 20M BW**

802.11n(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.601	0.5	Pass
5785	157	17.650	0.5	Pass
5825	165	17.608	0.5	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11ac 20M BW**

802.11ac(20MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.647	0.5	Pass
5785	157	17.602	0.5	Pass
5825	165	17.608	0.5	Pass



**40 MHz BW**

**Conducted 26 dB Bandwidth Measurements for 802.11n\_40 M BW**

802.11n(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.913	N/A	Pass
5230	46	39.973	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n\_40 M BW**

802.11n(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	40.328	N/A	Pass
5310	62	40.102	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n\_40 M BW**

802.11n(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	39.866	N/A	Pass
5550	110	39.674	N/A	Pass
5710	142	39.639	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11n\_40 M BW**

802.11n(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	39.83	N/A	Pass
5795	159	40.07	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_40 M BW**

802.11ac(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	40.214	N/A	Pass
5230	46	39.804	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_40 M BW**

802.11ac(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	39.642	N/A	Pass
5310	62	39.906	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_40 M BW**

802.11ac(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	40.026	N/A	Pass
5550	110	39.831	N/A	Pass
5710	142	40.100	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_40 M BW**

802.11ac(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	40.25	N/A	Pass
5795	159	40.09	N/A	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11n 40M BW**

802.11n(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.413	0.5	Pass
5795	159	36.411	0.5	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11ac 40M BW**

802.11ac(40MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.325	0.5	Pass
5795	159	36.394	0.5	Pass

**80 MHz BW**

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_80M BW**

802.11ac(80M) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	81.566	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_80M BW**

802.11ac(80M) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5290	58	82.380	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_80M BW**

802.11ac(80M) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5530	106	81.425	N/A	Pass
5690	138	81.655	N/A	Pass

**Conducted 26 dB Bandwidth Measurements for 802.11ac\_80M BW**

802.11ac(80M) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	81.88	N/A	Pass

**Conducted 6 dB Bandwidth Measurements for 802.11ac 80M BW**

802.11ac(80MHz) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.739	0.5	Pass


**Note :**

1. In order to simplify the report, attached plots were only the most wide channel.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.


RESULT PLOTS

20 MHz BW


26 dB Bandwidth plot (802.11a-CH 40)

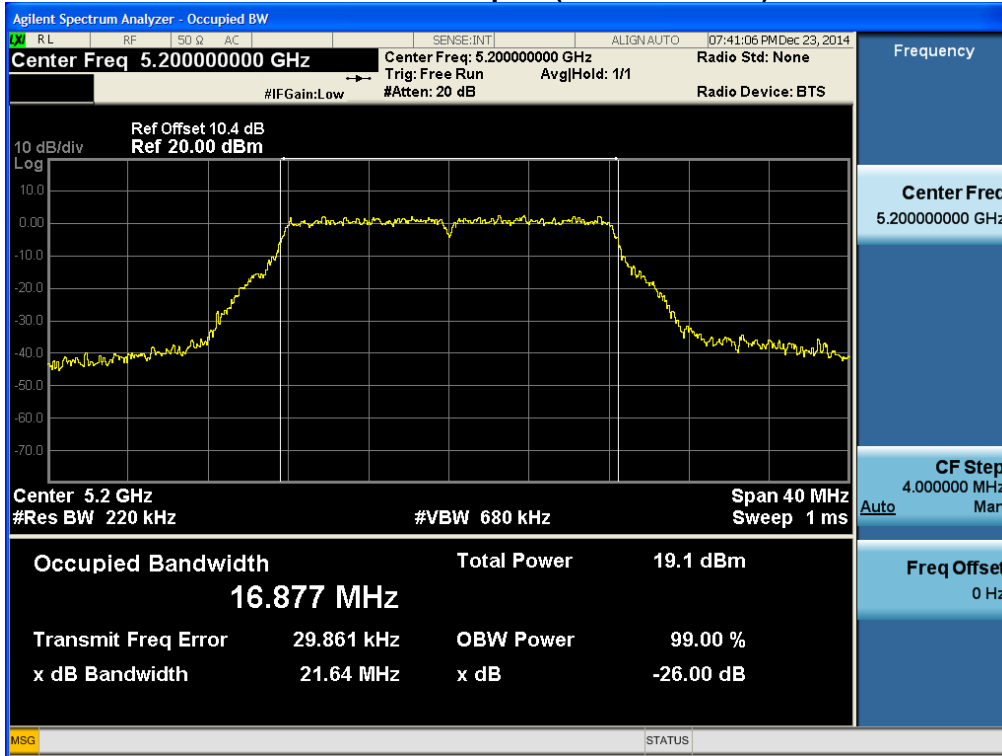


26 dB Bandwidth plot (802.11a-CH 64)

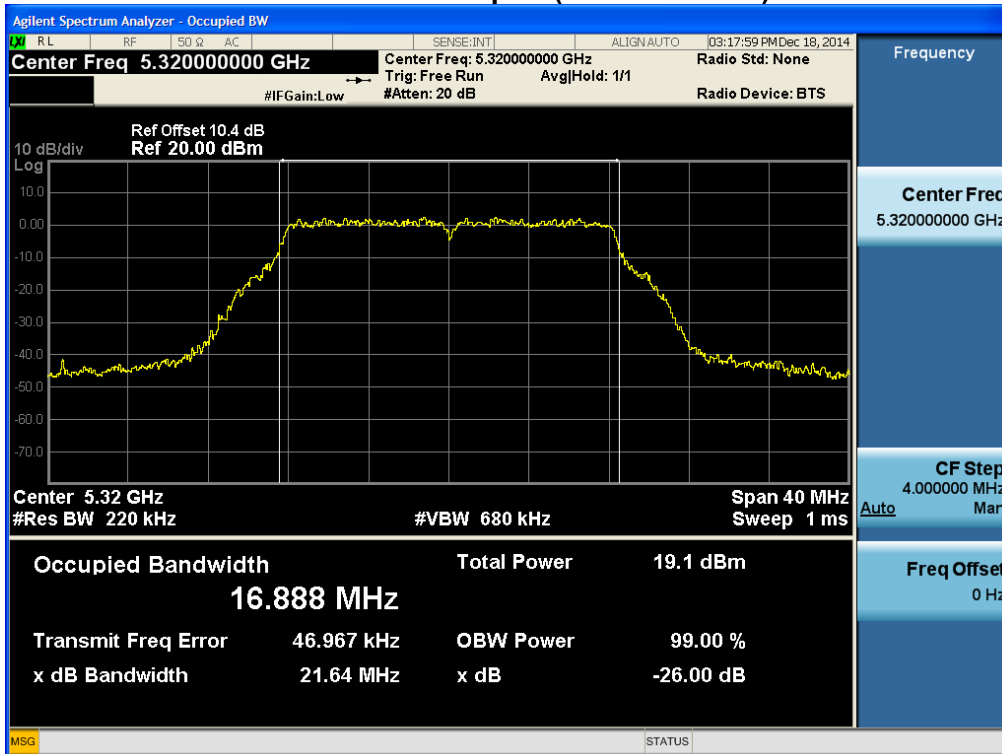


**26 dB Bandwidth plot (802.11a-CH 120)**

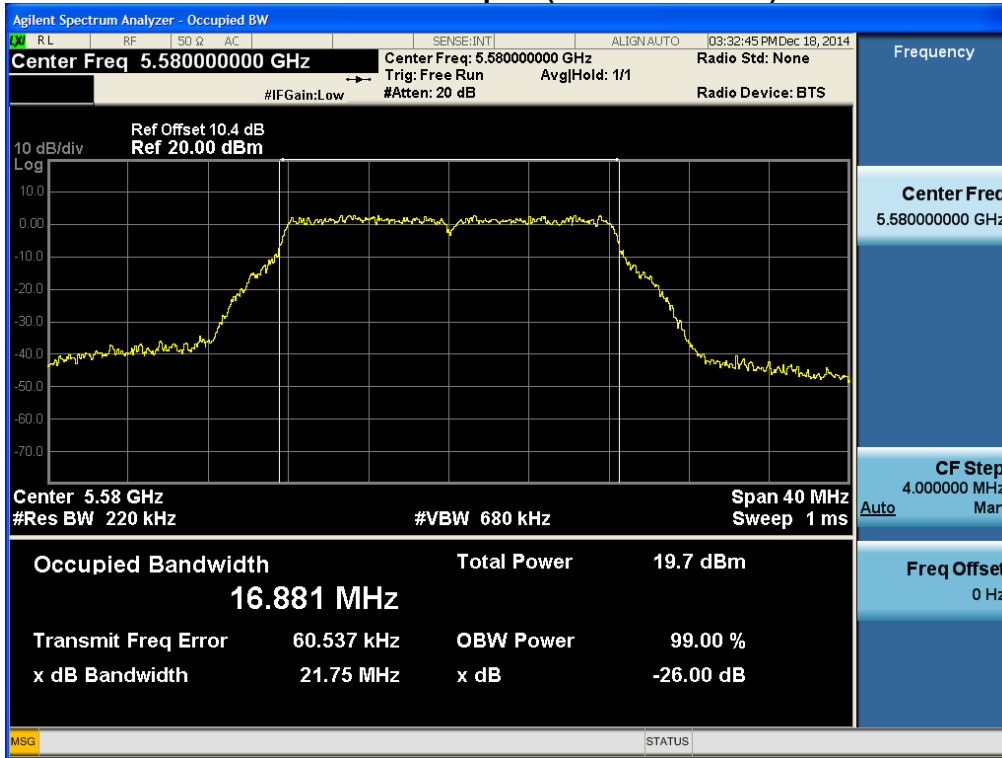


**26 dB Bandwidth plot (802.11a-CH 149)**

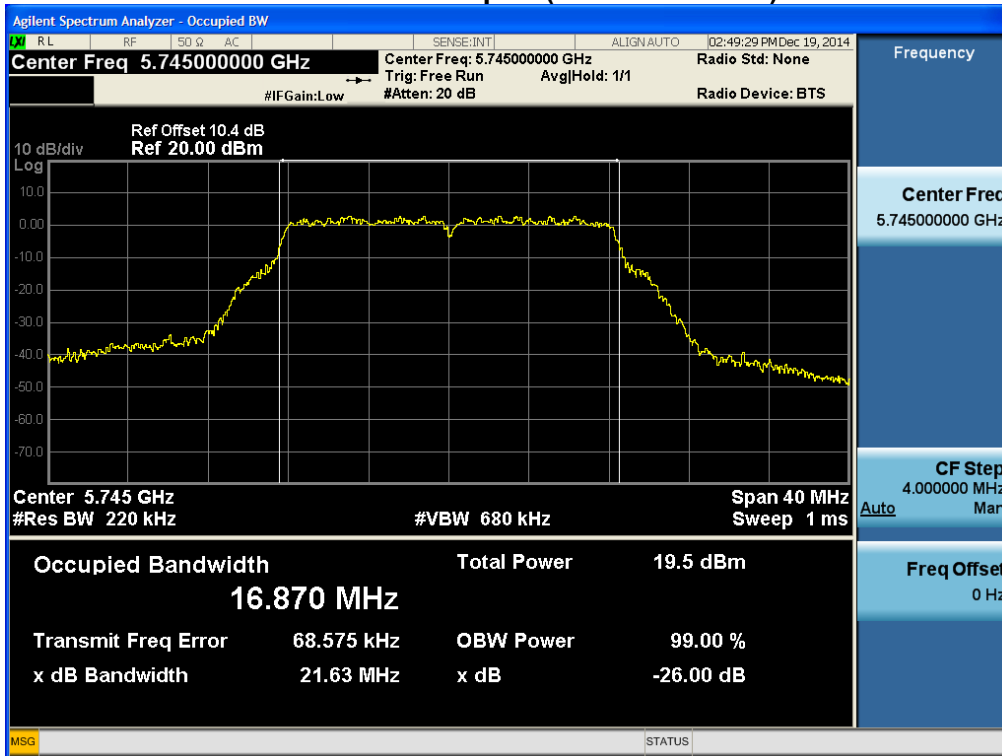


**26 dB Bandwidth plot (802.11n\_20M BW-CH 48)**

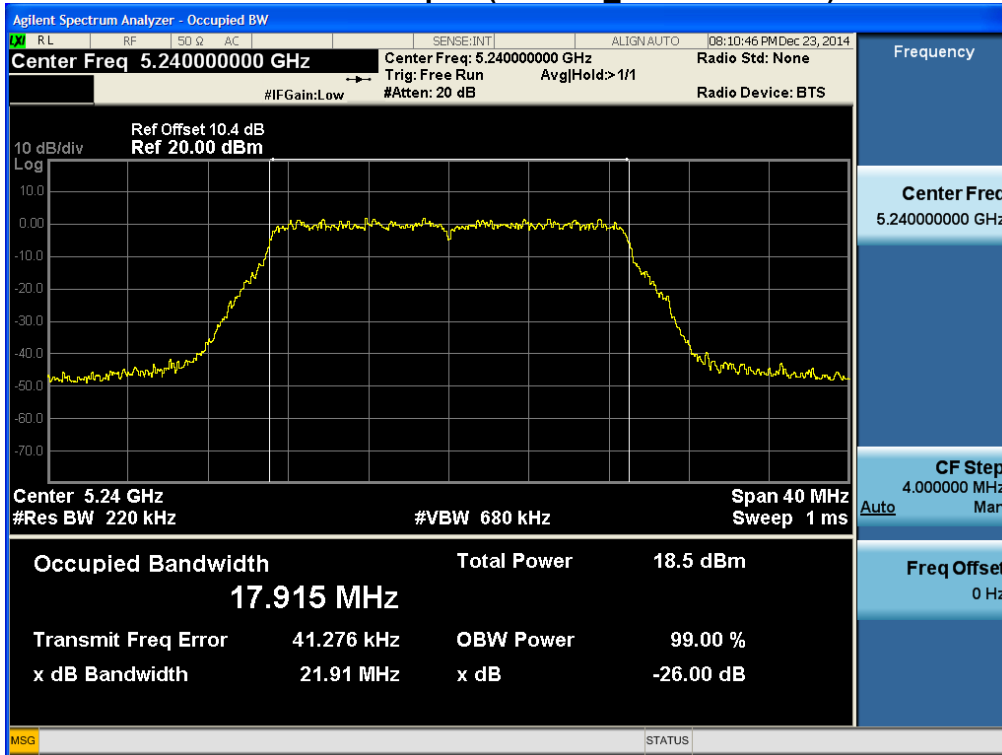


**26 dB Bandwidth plot (802.11n\_20M BW-CH 64)**

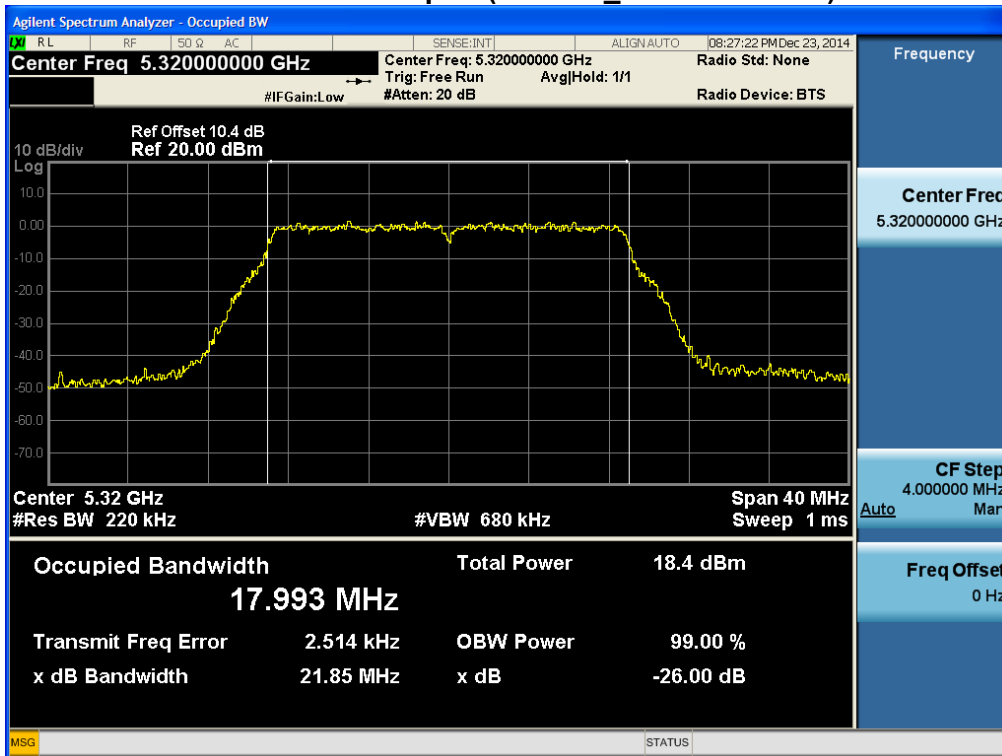

**26 dB Bandwidth plot (802.11n\_20M BW-CH 144)**

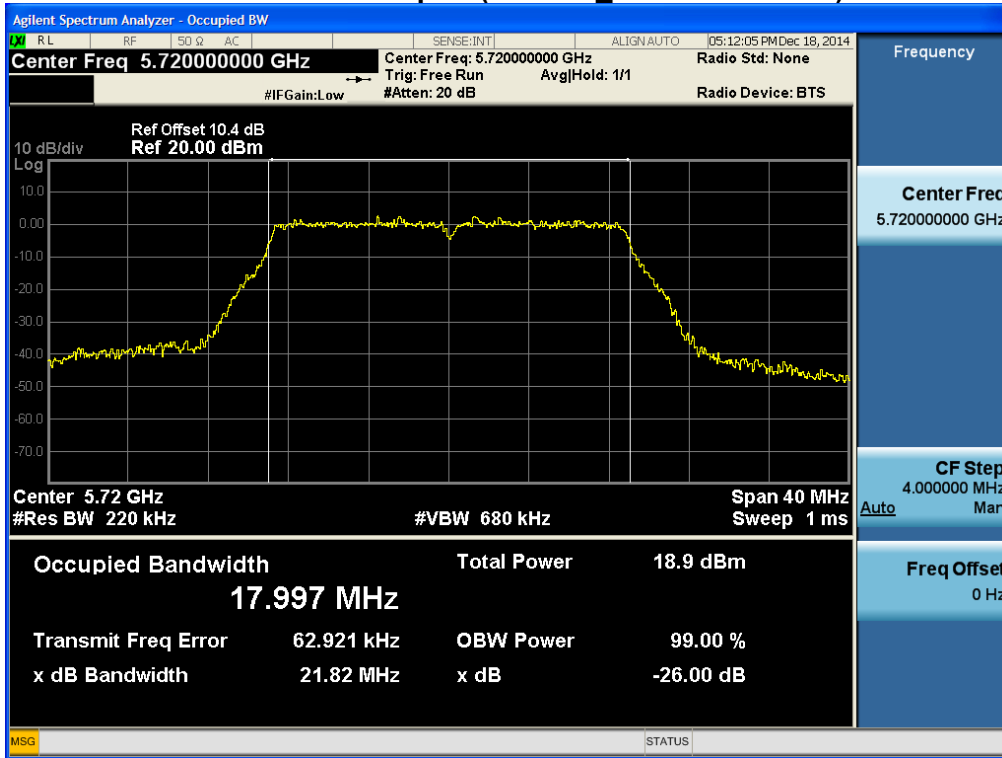


**26 dB Bandwidth plot (802.11n\_20M BW-CH 157)**

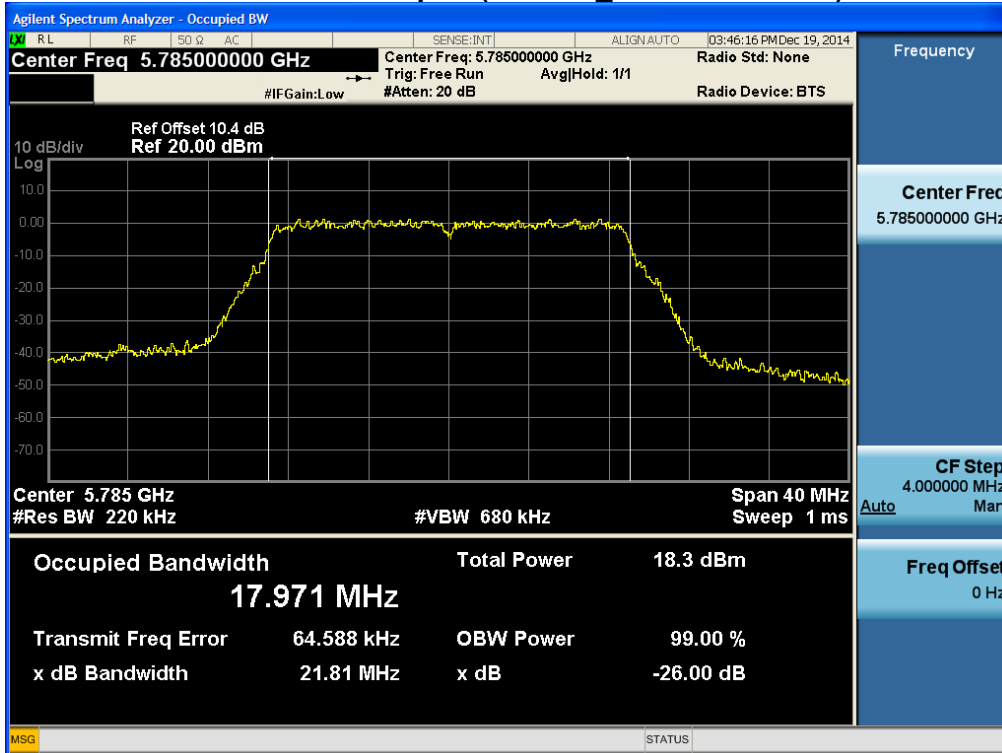





**26 dB Bandwidth plot (802.11ac\_20M BW-CH 40)**

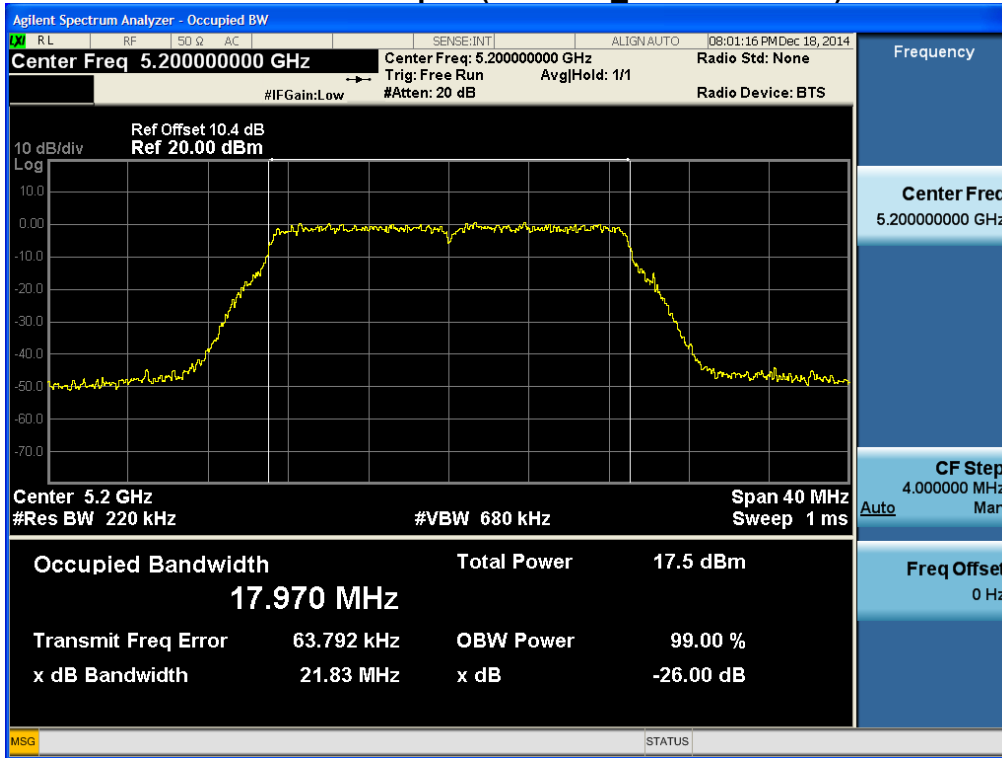


**26 dB Bandwidth plot (802.11ac\_20M BW-CH 64)**

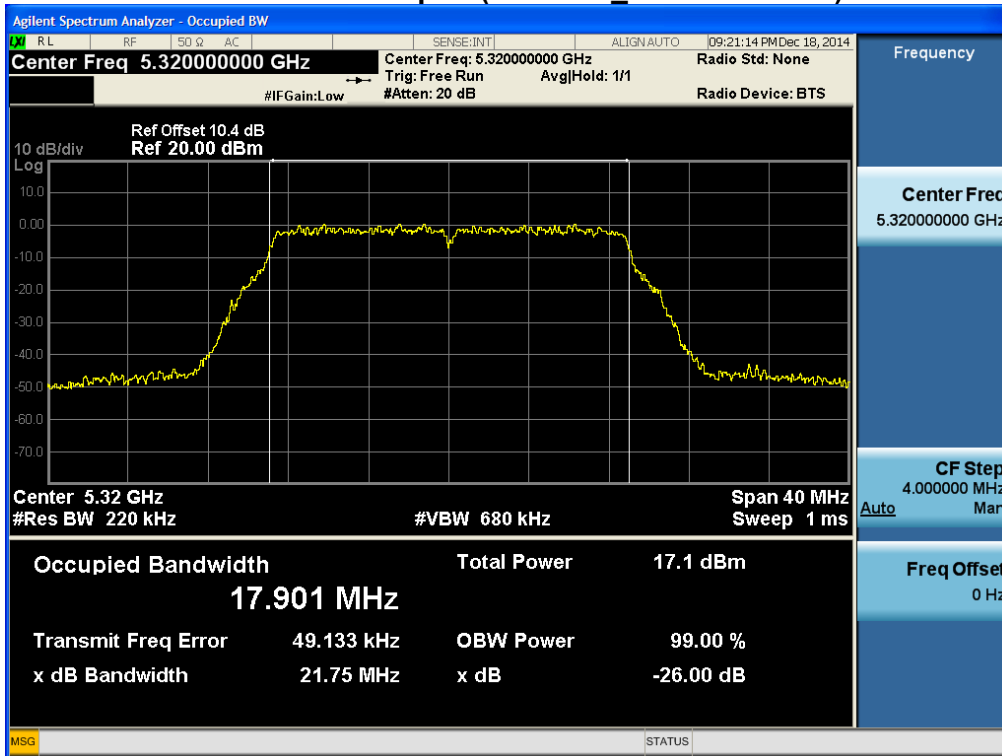


**26 dB Bandwidth plot (802.11ac\_20M BW-CH 144)**

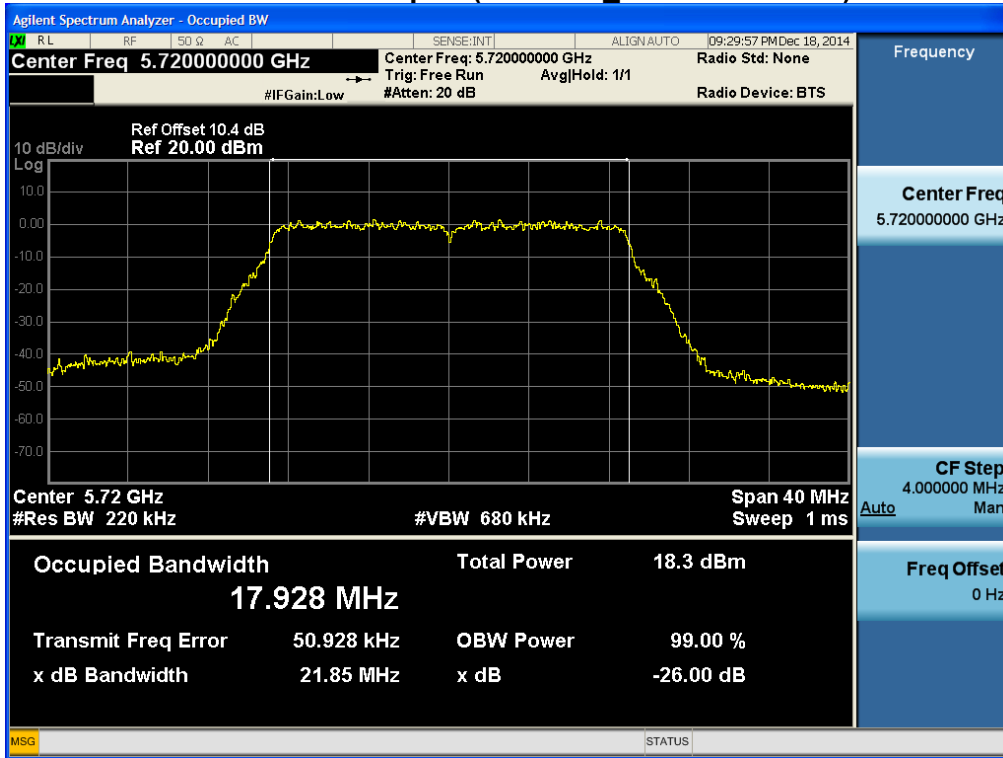


**26 dB Bandwidth plot (802.11ac\_20M BW-CH 149)**

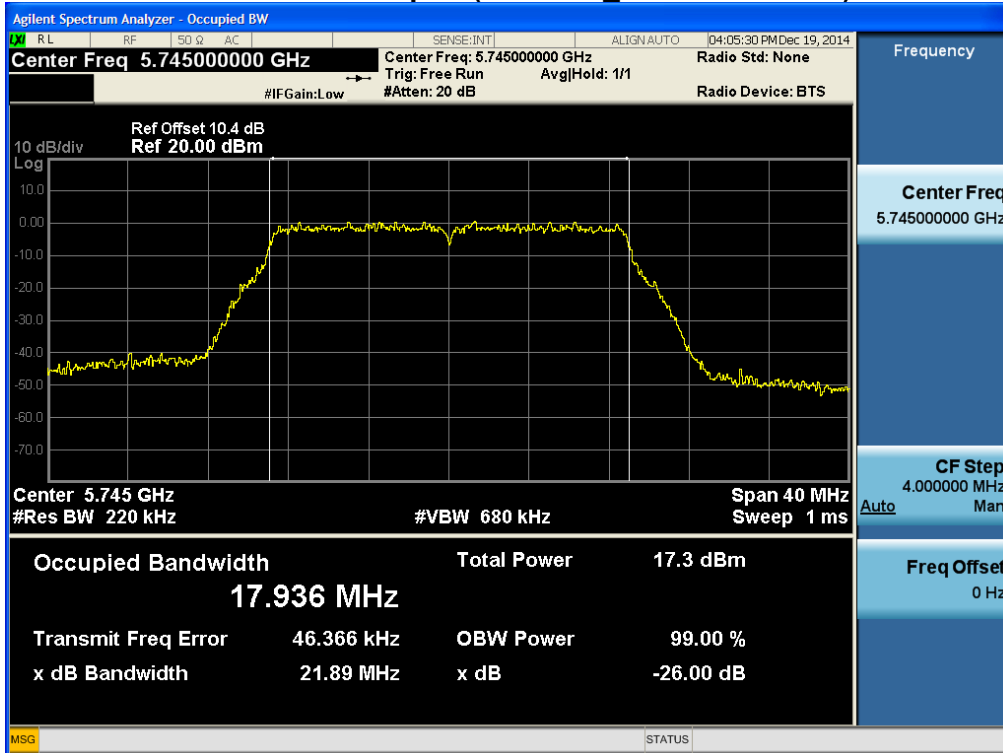


**6 dB Bandwidth plot (802.11a-CH 149)**

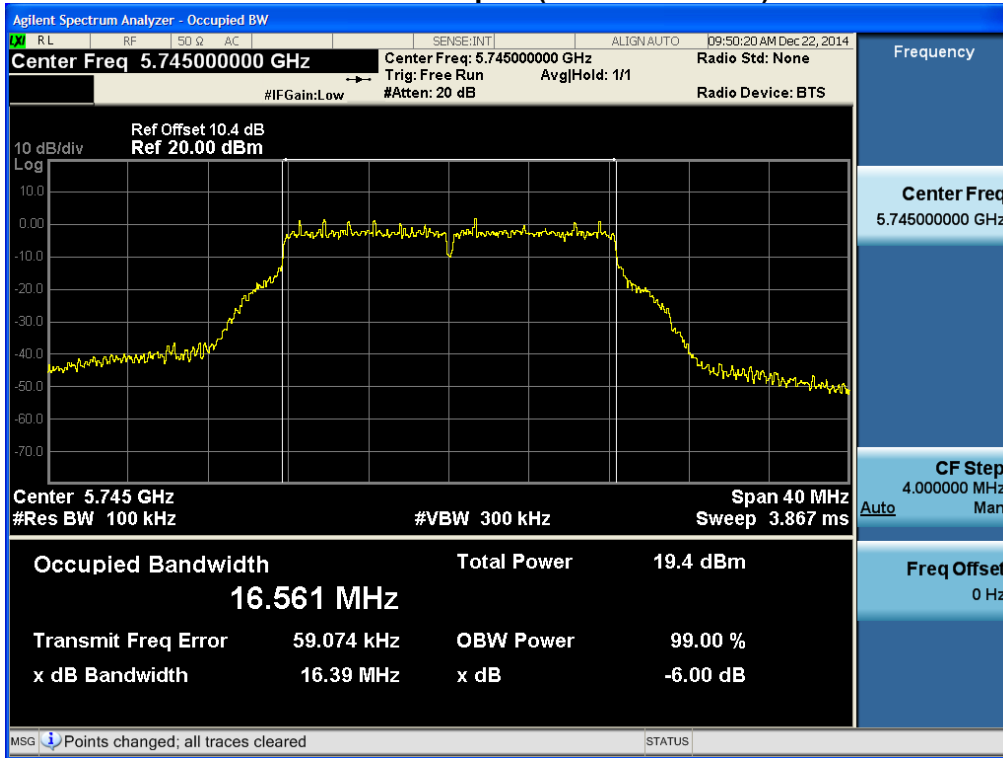

**6 dB Bandwidth plot (802.11n\_20M BW-CH 157)**

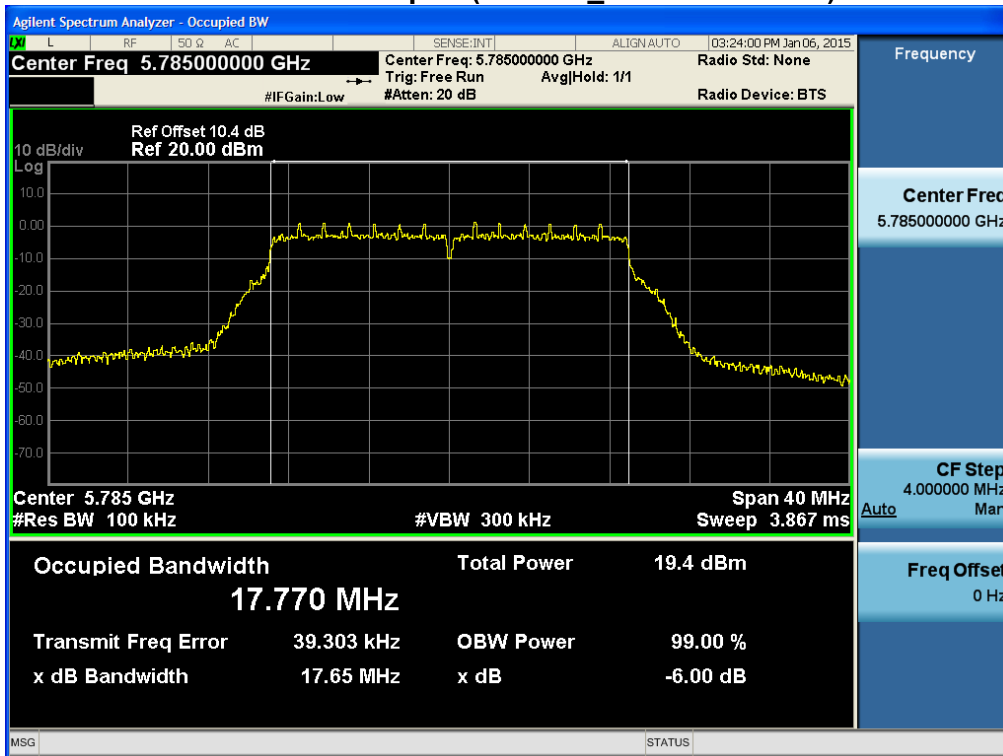


**6 dB Bandwidth plot (802.11ac\_20M BW-CH 149)**

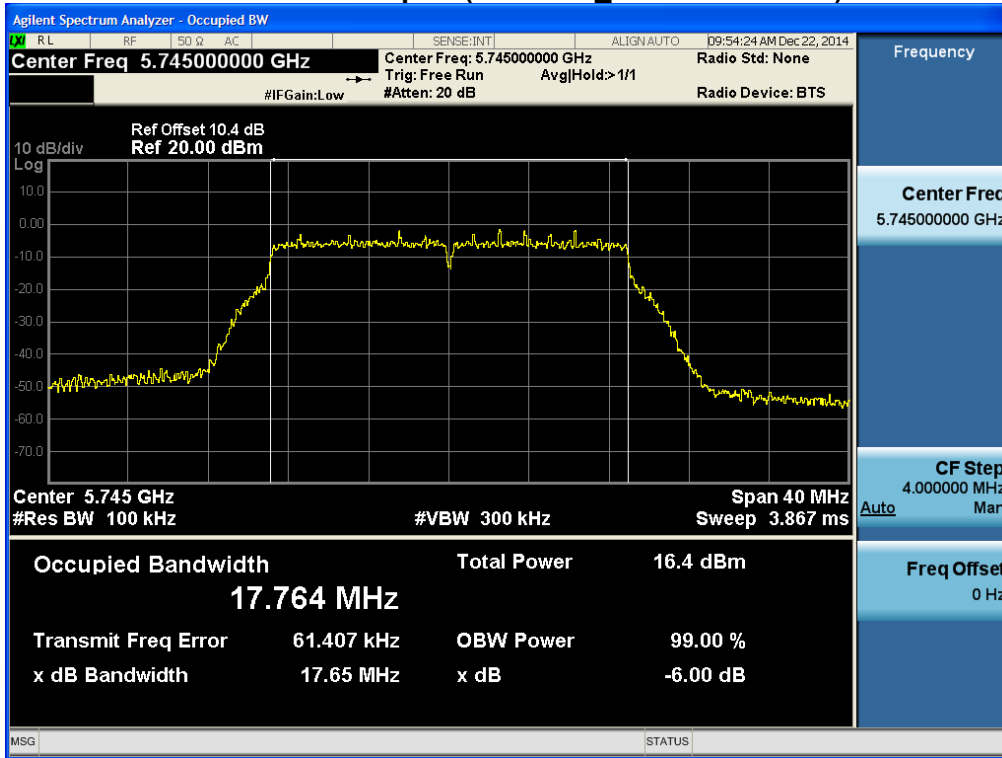


**40 MHz BW**


**26 dB Bandwidth plot (802.11n\_40M BW-CH 46)**

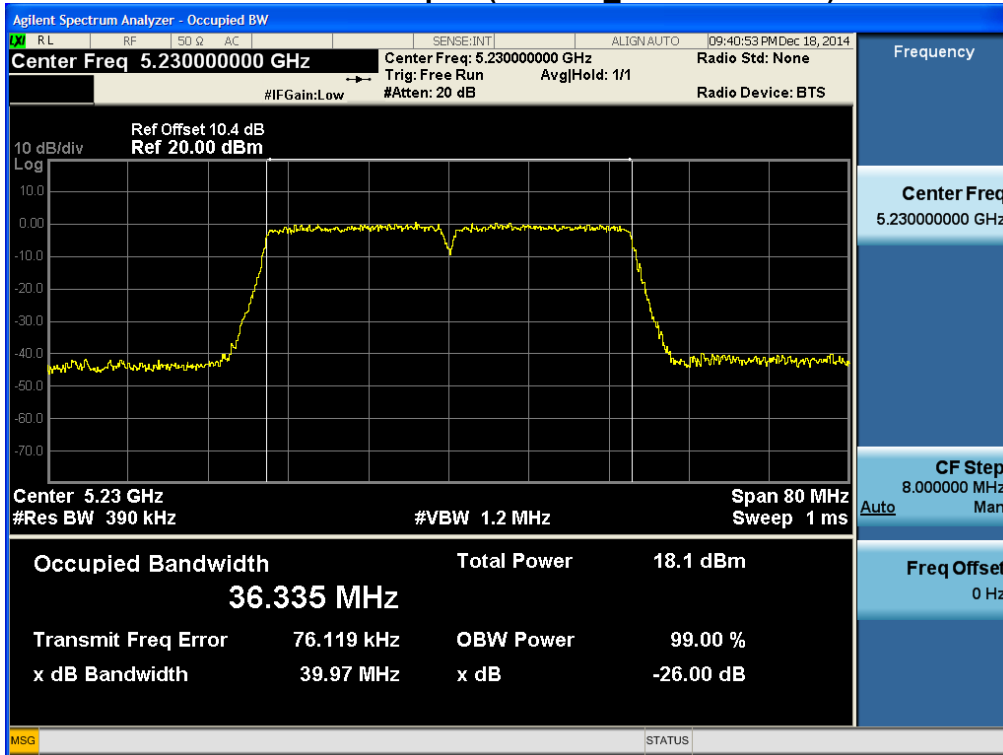


**26 dB Bandwidth plot (802.11n-40M BW-CH 54)**

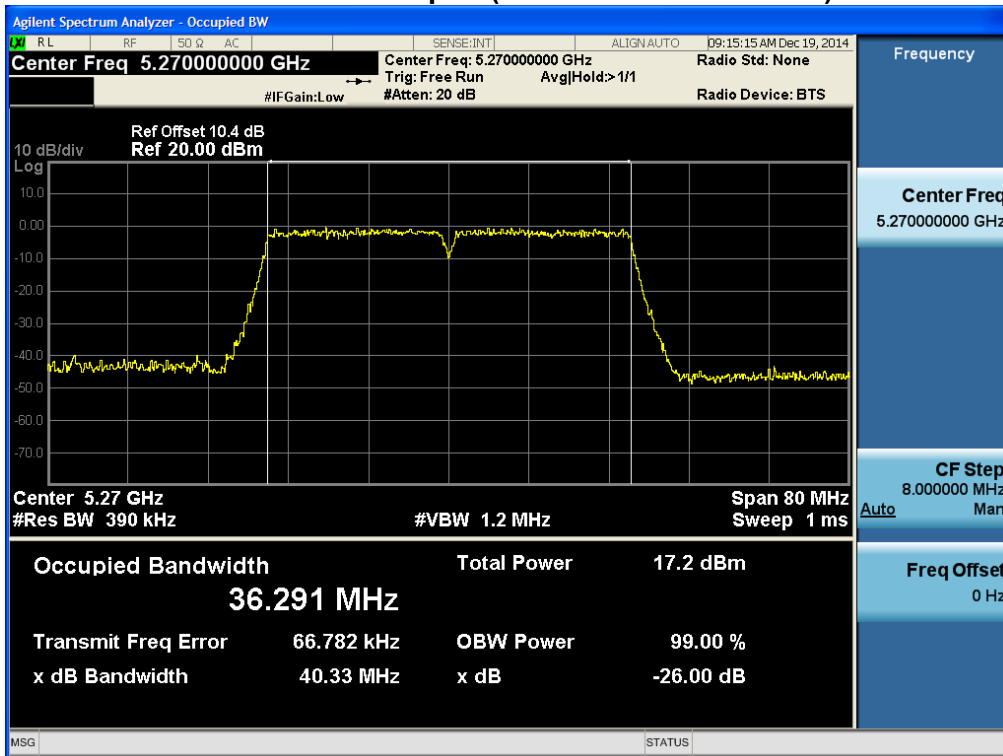


**26 dB Bandwidth plot (802.11n\_40M BW-CH 102)**

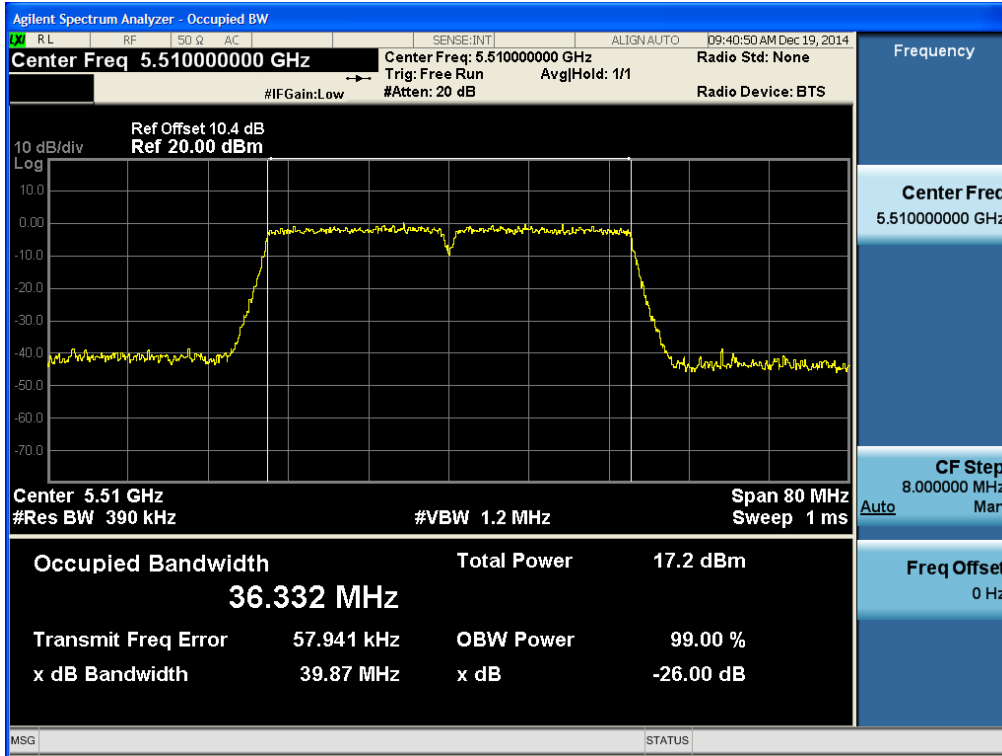


**26 dB Bandwidth plot (802.11n\_40M BW-CH 159)**

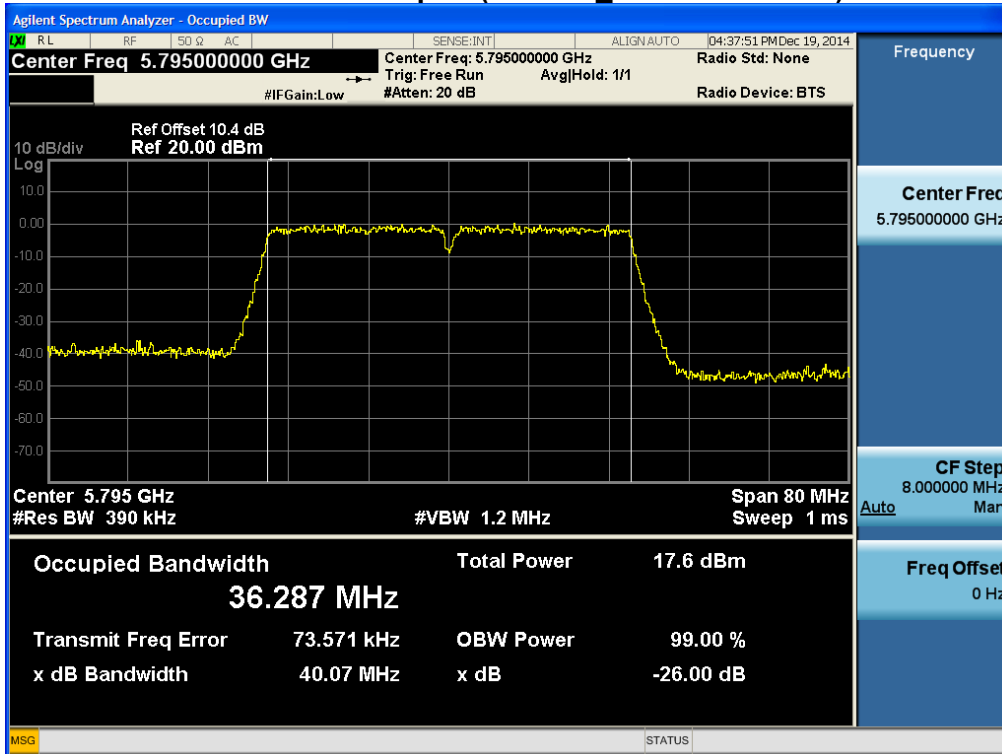


**26 dB Bandwidth plot (802.11ac\_40M BW -CH 38)**

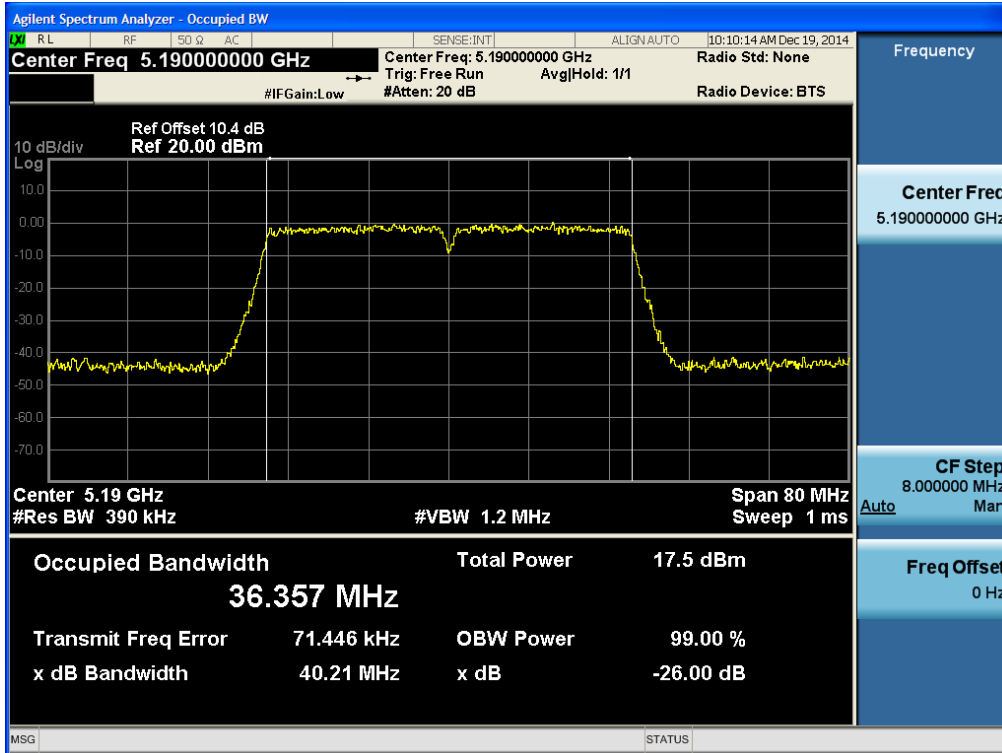


**26 dB Bandwidth plot (802.11ac\_40M BW-CH 62)**

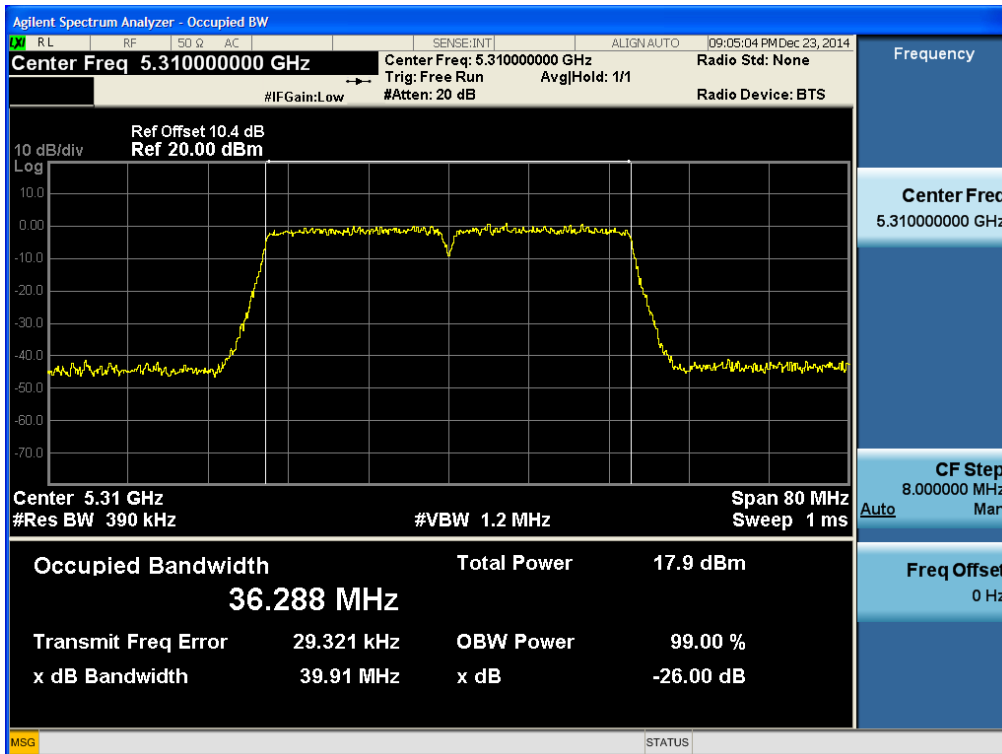

**26 dB Bandwidth plot (802.11ac\_40M BW -CH 142)**

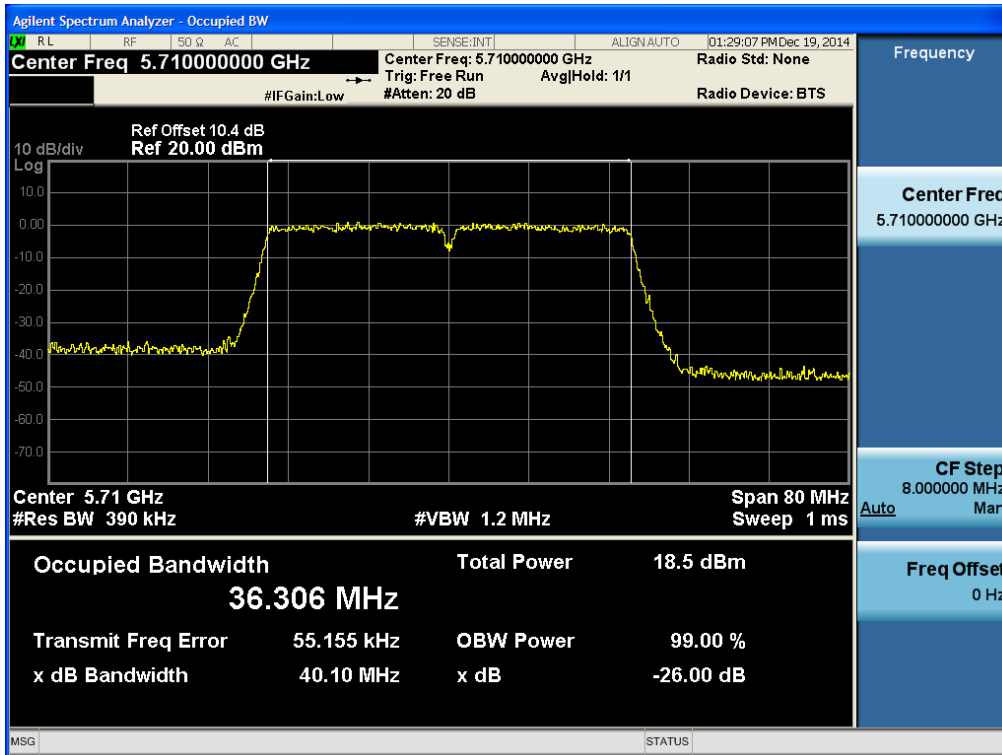


**26 dB Bandwidth plot (802.11ac\_40M BW -CH 151)**

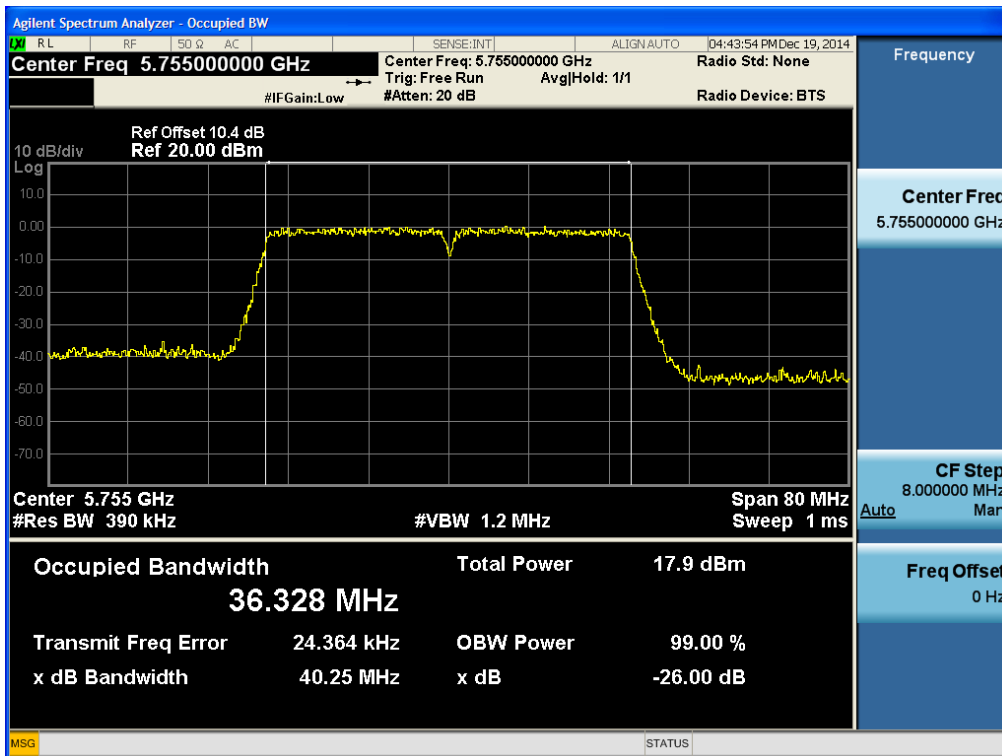




**6 dB Bandwidth plot (802.11n\_40M BW-CH 151)**

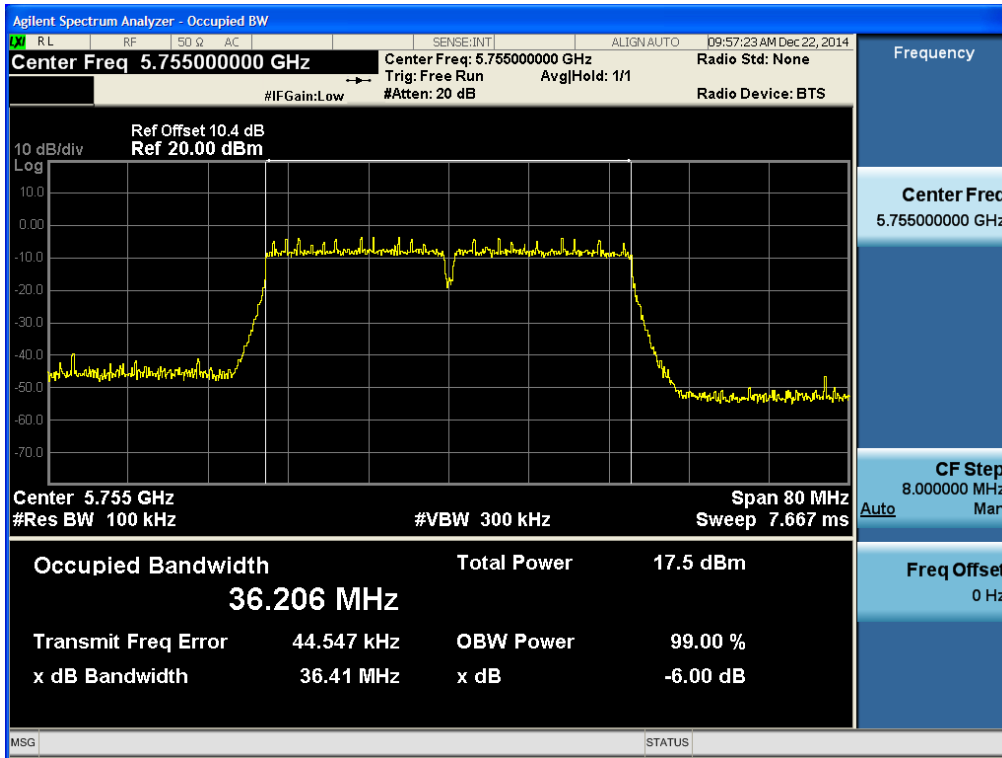


**6 dB Bandwidth plot (802.11ac\_40M BW -CH 159)**

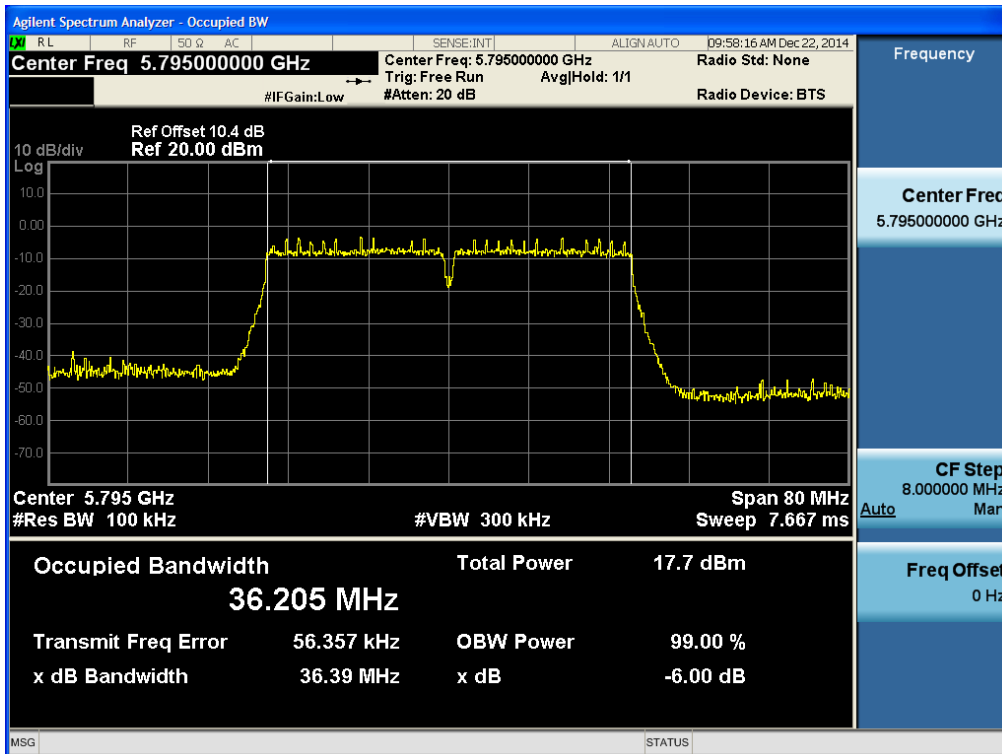


**80 MHz BW**


**26 dB Bandwidth plot (802.11ac\_80M BW-CH 42)**

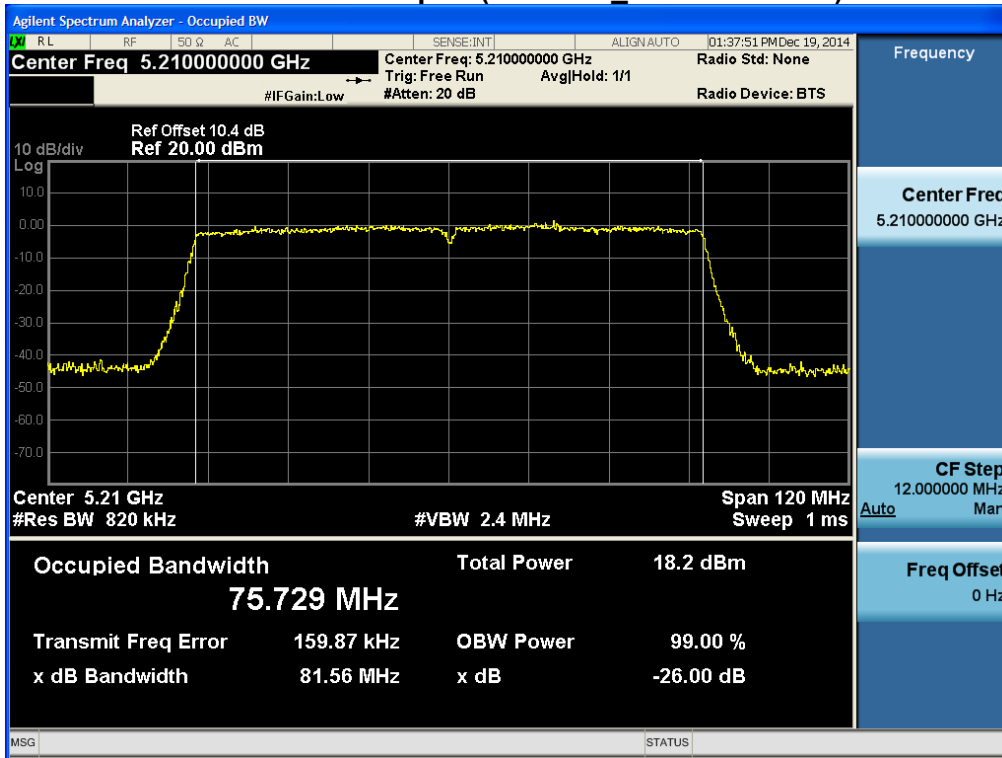


**26 dB Bandwidth plot (802.11ac\_80M BW -CH 58)**

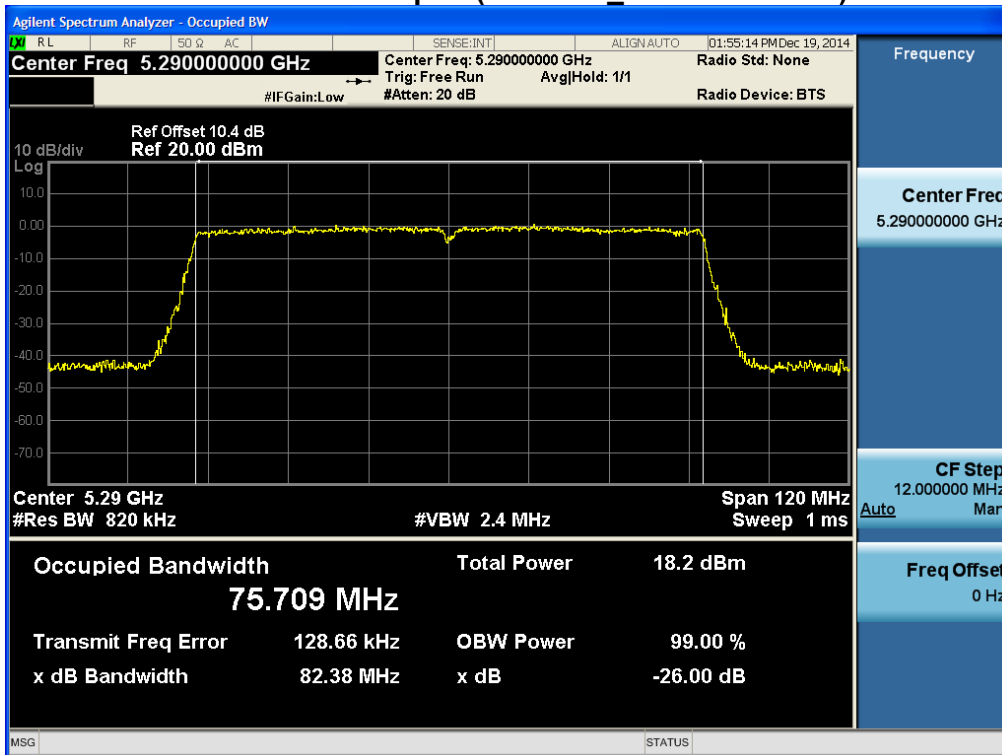


**26 dB Bandwidth plot (802.11ac\_80M BW -CH 138)**

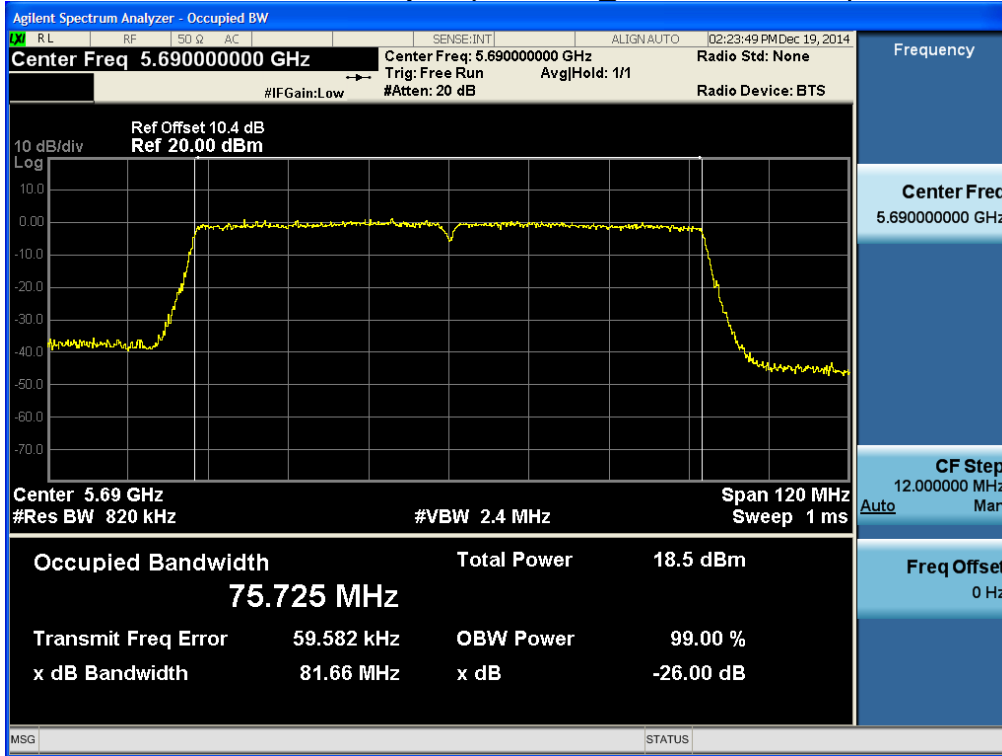

**26 dB Bandwidth plot (802.11ac\_80M BW -CH 155)**

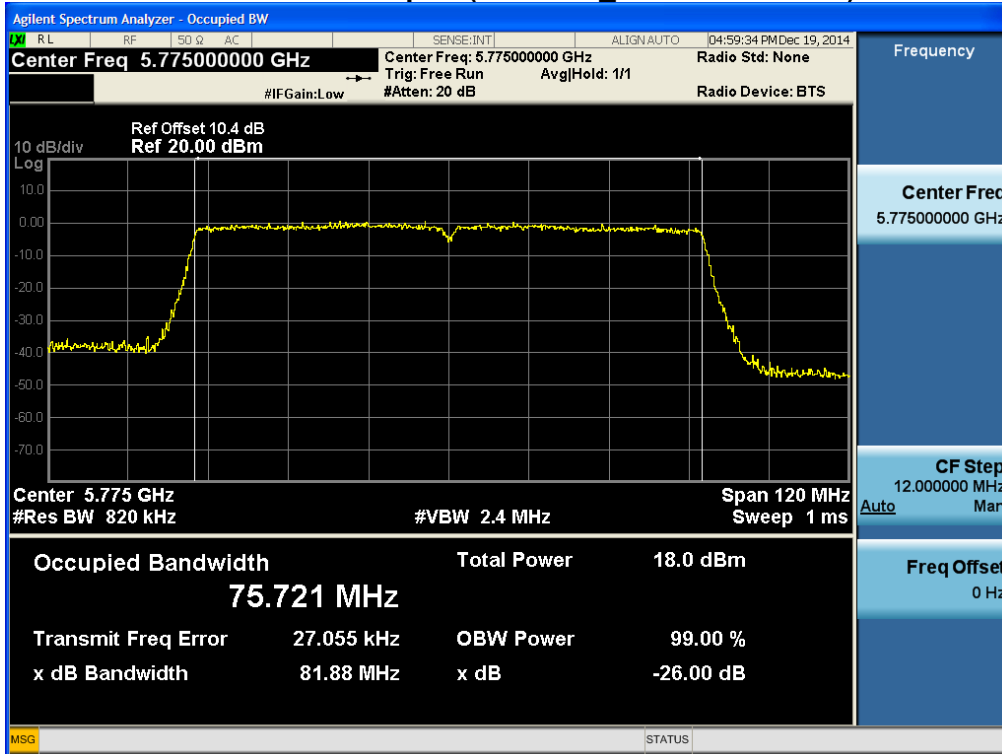

**6 dB Bandwidth plot (802.11ac\_80M BW -CH 155)**

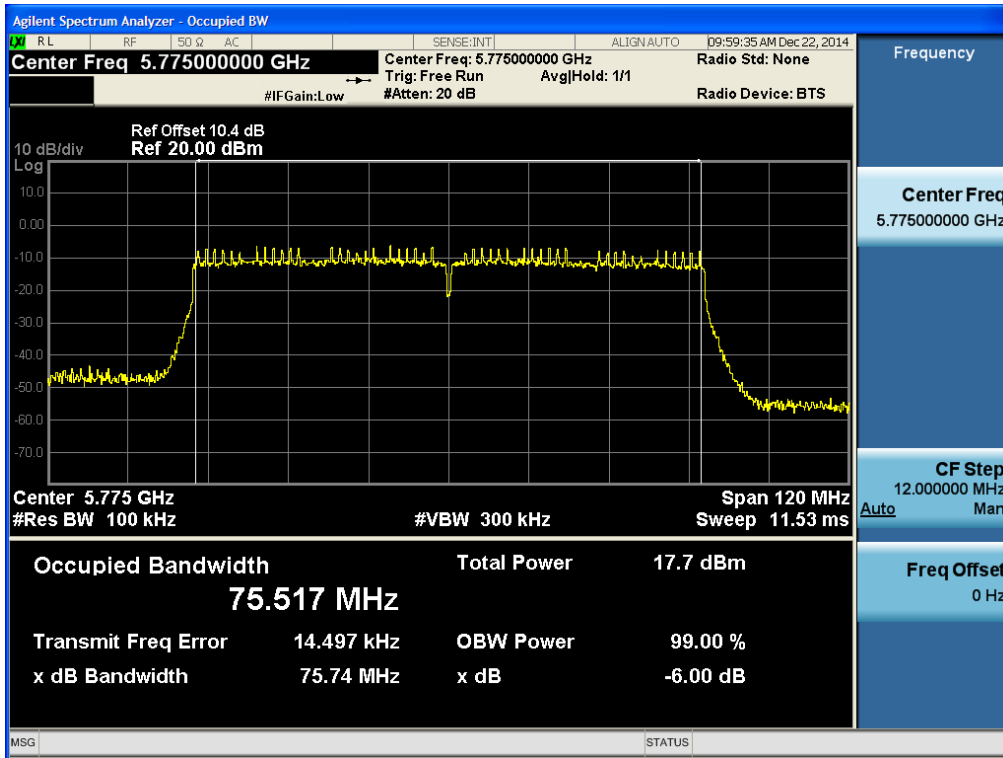

### 8.3 OUTPUT POWER MEASUREMENT

#### Test Requirements and limit, §15.407(a)(1)


A transmitter antenna terminal of EUT is connected to the input of a Power meter or Spectrum Analyzer .Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

#### ■ Limit

1. Maximum Conducted Output Power :

Band	Mode	Limit (dBm)
UNII 1, 2A, 2C	802.11a,n	23.98
UNII 3	802.11a,n	30.00

■ **TEST CONFIGURATION(20 MHz BW)**

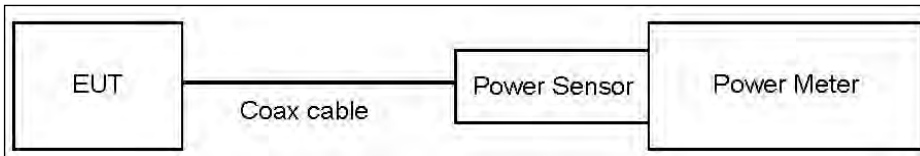

■ **TEST PROCEDURE(20 MHz BW)**

- Average Power (Procedure E.3.a in KDB 789033, issued 06/06/2014).
  1. Measure the duty cycle.
  2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  3. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A, 2C, 3	10.4

(Actual value of loss for the attenuator and cable combination)

■ **TEST CONFIGURATION(40 MHz BW & 80 MHz BW)**

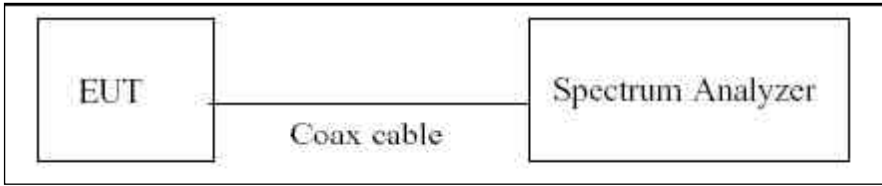

■ **TEST PROCEDURE(40 MHz BW & 80 MHz BW)**

▪ Average Power

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033(issued 06/06/2014).

The Spectrum Analyzer is set to

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW ≥ 3 MHz.
5. Number of points in sweep ≥ 2\*span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add 10log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ **Sample Calculation (Conducted)**

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

■ **Sample Calculation (EIRP)**

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor + Ant gain

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 2A, 2C, 3	10.4

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS

20MHz BW

Conducted Output Power Measurements (802.11a\_20M BW Mode: 5180~5240)

802.11a(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	12.80	0.208	13.01	23.98
		9	12.64	0.339	12.98	23.98
		12	12.48	0.448	12.93	23.98
		18	11.95	0.642	12.59	23.98
		24	11.97	0.837	12.81	23.98
		36	11.85	1.157	13.01	23.98
		48	11.71	1.516	13.22	23.98
		54	11.33	1.621	12.95	23.98
5200	40	6	12.78	0.208	12.99	23.98
		9	12.39	0.339	12.73	23.98
		12	12.37	0.448	12.82	23.98
		18	12.35	0.642	12.99	23.98
		24	12.32	0.837	13.16	23.98
		36	11.95	1.157	13.11	23.98
		48	11.69	1.516	13.21	23.98
		54	11.45	1.621	13.07	23.98
5240	48	6	12.88	0.208	13.09	23.98
		9	12.32	0.339	12.66	23.98
		12	12.21	0.448	12.66	23.98
		18	11.94	0.642	12.58	23.98
		24	12.31	0.837	13.14	23.98
		36	11.91	1.157	13.06	23.98
		48	11.80	1.516	13.31	23.98
		54	11.50	1.621	13.12	23.98



**Conducted Output Power Measurements (802.11a\_20M Mode: 5260~5320)**

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6	12.72	0.208	12.93	23.98
		9	12.42	0.339	12.76	23.98
		12	12.08	0.448	12.53	23.98
		18	12.01	0.642	12.66	23.98
		24	12.11	0.837	12.95	23.98
		36	11.73	1.157	12.89	23.98
		48	11.48	1.516	12.99	23.98
		54	11.20	1.621	12.82	23.98
5300	60	6	12.53	0.208	12.74	23.98
		9	12.25	0.339	12.59	23.98
		12	12.06	0.448	12.50	23.98
		18	11.90	0.642	12.54	23.98
		24	11.91	0.837	12.75	23.98
		36	11.62	1.157	12.77	23.98
		48	11.43	1.516	12.95	23.98
		54	11.20	1.621	12.82	23.98
5320	64	6	12.75	0.208	12.96	23.98
		9	12.40	0.339	12.73	23.98
		12	12.29	0.448	12.73	23.98
		18	11.98	0.642	12.62	23.98
		24	12.02	0.837	12.86	23.98
		36	11.77	1.157	12.92	23.98
		48	11.54	1.516	13.05	23.98
		54	11.34	1.621	12.96	23.98

**Conducted Output Power Measurements (802.11a\_20M Mode: 5500~5720)**

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6	13.22	0.208	13.43	23.98
		9	12.42	0.339	12.76	23.98
		12	12.14	0.448	12.58	23.98
		18	12.72	0.642	13.36	23.98
		24	12.83	0.837	13.67	23.98
		36	12.51	1.157	13.67	23.98
		48	11.88	1.516	13.40	23.98
		54	11.49	1.621	13.11	23.98
5600	120	6	13.21	0.208	13.41	23.98
		9	12.69	0.339	13.03	23.98
		12	12.49	0.448	12.94	23.98
		18	12.22	0.642	12.86	23.98
		24	12.35	0.837	13.19	23.98
		36	12.26	1.157	13.42	23.98
		48	11.90	1.516	13.42	23.98
		54	11.57	1.621	13.19	23.98
5720	144	6	13.37	0.208	13.58	23.98
		9	12.88	0.339	13.22	23.98
		12	12.85	0.448	13.30	23.98
		18	12.63	0.642	13.28	23.98
		24	12.81	0.837	13.64	23.98
		36	12.30	1.157	13.46	23.98
		48	12.22	1.516	13.74	23.98
		54	11.93	1.621	13.55	23.98

**Conducted Output Power Measurements (802.11a\_20M BW Mode: 5745~5825)**

802.11a (20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6	13.02	0.208	13.23	30
		9	12.58	0.339	12.92	30
		12	12.45	0.448	12.90	30
		18	12.41	0.642	13.06	30
		24	12.41	0.837	13.24	30
		36	12.18	1.157	13.33	30
		48	11.72	1.516	13.24	30
		54	11.84	1.621	13.46	30
5785	157	6	12.75	0.208	12.96	30
		9	12.69	0.339	13.02	30
		12	12.58	0.448	13.03	30
		18	12.14	0.642	12.78	30
		24	12.15	0.837	12.98	30
		36	11.92	1.157	13.07	30
		48	11.55	1.516	13.07	30
		54	11.35	1.621	12.97	30
5825	165	6	12.88	0.208	13.09	30
		9	12.34	0.339	12.68	30
		12	12.29	0.448	12.73	30
		18	11.96	0.642	12.60	30
		24	12.06	0.837	12.90	30
		36	12.04	1.157	13.20	30
		48	11.78	1.516	13.30	30
		54	11.59	1.621	13.21	30

**Conducted Output Power Measurements (802.11n\_20M BW Mode: 5180~5240)**

802.11n(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	11.26	0.246	11.51	23.98
		13	11.17	0.487	11.66	23.98
		19.5	10.93	0.674	11.61	23.98
		26	10.99	0.864	11.85	23.98
		39	10.90	1.221	12.12	23.98
		52	10.65	1.524	12.18	23.98
		58.5	10.56	1.621	12.18	23.98
		65	10.26	1.748	12.01	23.98
5200	40	6.5	11.43	0.246	11.68	23.98
		13	11.12	0.487	11.61	23.98
		19.5	11.00	0.674	11.67	23.98
		26	11.28	0.864	12.14	23.98
		39	10.97	1.221	12.19	23.98
		52	10.74	1.524	12.27	23.98
		58.5	10.61	1.621	12.23	23.98
		65	10.35	1.748	12.09	23.98
5240	48	6.5	11.59	0.246	11.84	23.98
		13	11.30	0.487	11.79	23.98
		19.5	11.21	0.674	11.88	23.98
		26	11.26	0.864	12.12	23.98
		39	10.86	1.221	12.09	23.98
		52	10.80	1.524	12.33	23.98
		58.5	10.52	1.621	12.14	23.98
		65	10.38	1.748	12.13	23.98

**Conducted Output Power Measurements (802.11n\_20M BW Mode: 5260~5320)**

802.11n(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6.5	11.34	0.246	11.59	23.98
		13	11.17	0.487	11.66	23.98
		19.5	11.02	0.674	11.69	23.98
		26	10.73	0.864	11.60	23.98
		39	10.94	1.221	12.16	23.98
		52	10.14	1.524	11.67	23.98
		58.5	10.13	1.621	11.75	23.98
		65	10.07	1.748	11.82	23.98
5300	60	6.5	11.47	0.246	11.72	23.98
		13	11.26	0.487	11.74	23.98
		19.5	11.09	0.674	11.77	23.98
		26	11.25	0.864	12.11	23.98
		39	11.01	1.221	12.23	23.98
		52	10.69	1.524	12.21	23.98
		58.5	10.51	1.621	12.13	23.98
		65	10.48	1.748	12.22	23.98
5320	64	6.5	11.60	0.246	11.85	23.98
		13	11.36	0.487	11.84	23.98
		19.5	11.07	0.674	11.74	23.98
		26	11.23	0.864	12.09	23.98
		39	11.01	1.221	12.23	23.98
		52	10.84	1.524	12.36	23.98
		58.5	10.66	1.621	12.28	23.98
		65	10.38	1.748	12.12	23.98

**Conducted Output Power Measurements (802.11n\_20M BW Mode: 5500~5700)**

802.11n(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6.5	12.25	0.246	12.50	23.98
		13	11.91	0.487	12.39	23.98
		19.5	11.71	0.674	12.38	23.98
		26	11.90	0.864	12.77	23.98
		39	11.57	1.221	12.79	23.98
		52	11.42	1.524	12.94	23.98
		58.5	11.19	1.621	12.81	23.98
		65	11.06	1.748	12.81	23.98
5600	120	6.5	11.89	0.246	12.14	23.98
		13	11.70	0.487	12.19	23.98
		19.5	11.50	0.674	12.18	23.98
		26	11.73	0.864	12.60	23.98
		39	11.39	1.221	12.61	23.98
		52	11.16	1.524	12.68	23.98
		58.5	10.97	1.621	12.59	23.98
		65	10.87	1.748	12.62	23.98
5720	144	6.5	12.13	0.246	12.38	23.98
		13	11.95	0.487	12.43	23.98
		19.5	11.61	0.674	12.28	23.98
		26	12.02	0.864	12.88	23.98
		39	11.59	1.221	12.81	23.98
		52	11.31	1.524	12.84	23.98
		58.5	11.23	1.621	12.85	23.98
		65	11.16	1.748	12.91	23.98

**Conducted Output Power Measurements (802.11n\_20M BW Mode: 5745~5825)**

802.11n(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5	11.52	0.246	11.76	30
		13	11.34	0.487	11.82	30
		19.5	11.24	0.674	11.91	30
		26	11.47	0.864	12.33	30
		39	11.12	1.221	12.34	30
		52	10.71	1.524	12.23	30
		58.5	10.65	1.621	12.27	30
		65	10.53	1.748	12.28	30
5785	157	6.5	11.42	0.246	11.66	30
		13	11.27	0.487	11.76	30
		19.5	11.09	0.674	11.76	30
		26	11.18	0.864	12.05	30
		39	10.97	1.221	12.19	30
		52	10.58	1.524	12.10	30
		58.5	10.57	1.621	12.19	30
		65	10.32	1.748	12.07	30
5825	165	6.5	11.42	0.246	11.67	30
		13	11.10	0.487	11.58	30
		19.5	11.07	0.674	11.74	30
		26	11.23	0.864	12.09	30
		39	10.83	1.221	12.05	30
		52	10.61	1.524	12.14	30
		58.5	10.42	1.621	12.04	30
		65	10.40	1.748	12.15	30

**Conducted Output Power Measurements (802.11ac\_20M BW Mode: 5180~5240)**

802.11ac(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	10.62	0.223	10.84	23.98
		13	10.34	0.456	10.79	23.98
		19.5	10.22	0.633	10.85	23.98
		26	10.40	0.853	11.25	23.98
		39	10.11	1.186	11.30	23.98
		52	9.78	1.452	11.23	23.98
		58.5	9.77	1.586	11.36	23.98
		65	9.63	1.741	11.38	23.98
		78	9.35	1.938	11.29	23.98
5200	40	6.5	10.66	0.223	10.88	23.98
		13	10.53	0.456	10.99	23.98
		19.5	10.23	0.633	10.86	23.98
		26	10.36	0.853	11.21	23.98
		39	10.13	1.186	11.32	23.98
		52	9.88	1.452	11.33	23.98
		58.5	9.67	1.586	11.26	23.98
		65	9.53	1.741	11.27	23.98
		78	9.28	1.938	11.22	23.98
5240	48	6.5	10.82	0.223	11.05	23.98
		13	10.59	0.456	11.04	23.98
		19.5	10.38	0.633	11.01	23.98
		26	10.57	0.853	11.43	23.98
		39	10.25	1.186	11.43	23.98
		52	10.07	1.452	11.52	23.98
		58.5	9.95	1.586	11.54	23.98
		65	9.81	1.741	11.56	23.98
		78	9.52	1.938	11.46	23.98



**Conducted Output Power Measurements (802.11ac\_20M BW Mode: 5260~5320)**

802.11ac(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6.5	10.53	0.223	10.75	23.98
		13	10.37	0.456	10.83	23.98
		19.5	10.14	0.633	10.77	23.98
		26	9.85	0.853	10.70	23.98
		39	9.62	1.186	10.80	23.98
		52	9.40	1.452	10.85	23.98
		58.5	9.31	1.586	10.90	23.98
		65	9.34	1.741	11.08	23.98
		78	9.05	1.938	10.98	23.98
5300	60	6.5	10.45	0.223	10.67	23.98
		13	10.14	0.456	10.60	23.98
		19.5	10.02	0.633	10.65	23.98
		26	10.18	0.853	11.04	23.98
		39	9.79	1.186	10.98	23.98
		52	9.52	1.452	10.97	23.98
		58.5	9.37	1.586	10.95	23.98
		65	9.29	1.741	11.03	23.98
		78	9.08	1.938	11.02	23.98
5320	64	6.5	10.64	0.223	10.86	23.98
		13	10.05	0.456	10.50	23.98
		19.5	9.92	0.633	10.55	23.98
		26	10.04	0.853	10.89	23.98
		39	9.70	1.186	10.89	23.98
		52	9.45	1.452	10.91	23.98
		58.5	9.29	1.586	10.88	23.98
		65	9.13	1.741	10.87	23.98
		78	8.80	1.938	10.74	23.98

**Conducted Output Power Measurements (802.11ac\_20M BW Mode: 5500~5720)**

802.11ac(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6.5	10.77	0.223	10.99	23.98
		13	10.43	0.456	10.89	23.98
		19.5	10.17	0.633	10.80	23.98
		26	10.33	0.853	11.18	23.98
		39	10.07	1.186	11.26	23.98
		52	9.90	1.452	11.36	23.98
		58.5	9.75	1.586	11.34	23.98
		65	9.68	1.741	11.42	23.98
		78	9.45	1.938	11.38	23.98
5580	116	6.5	11.09	0.223	11.32	23.98
		13	10.74	0.456	11.20	23.98
		19.5	10.64	0.633	11.27	23.98
		26	10.87	0.853	11.72	23.98
		39	10.45	1.186	11.64	23.98
		52	10.23	1.452	11.68	23.98
		58.5	10.06	1.586	11.64	23.98
		65	10.08	1.741	11.82	23.98
		78	9.85	1.938	11.78	23.98
5720	144	6.5	11.31	0.223	11.53	23.98
		13	11.03	0.456	11.48	23.98
		19.5	11.02	0.633	11.66	23.98
		26	11.14	0.853	11.99	23.98
		39	10.81	1.186	12.00	23.98
		52	10.42	1.452	11.88	23.98
		58.5	10.34	1.586	11.92	23.98
		65	10.19	1.741	11.93	23.98
		78	10.02	1.938	11.95	23.98

**Conducted Output Power Measurements (802.11ac\_20M BW Mode: 5745~5825)**

802.11ac(20MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5	10.34	0.223	10.57	30
		13	10.19	0.456	10.65	30
		19.5	9.90	0.633	10.53	30
		26	10.23	0.853	11.08	30
		39	9.85	1.186	11.04	30
		52	9.65	1.452	11.11	30
		58.5	9.56	1.586	11.14	30
		65	9.46	1.741	11.20	30
		78	9.26	1.938	11.20	30
5785	157	6.5	10.39	0.223	10.61	30
		13	10.22	0.456	10.68	30
		19.5	10.05	0.633	10.69	30
		26	10.19	0.853	11.05	30
		39	9.79	1.186	10.97	30
		52	9.53	1.452	10.98	30
		58.5	9.35	1.586	10.93	30
		65	9.27	1.741	11.01	30
		78	9.07	1.938	11.01	30
5825	165	6.5	10.44	0.223	10.66	30
		13	9.97	0.456	10.42	30
		19.5	10.02	0.633	10.65	30
		26	10.11	0.853	10.96	30
		39	9.79	1.186	10.97	30
		52	9.47	1.452	10.92	30
		58.5	9.45	1.586	11.03	30
		65	9.32	1.741	11.06	30
		78	9.21	1.938	11.15	30

**40MHz BW**

**Conducted Output Power Measurements (802.11n\_40M BW Mode: 5190~5230)**

802.11n(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	8.77	0.490	9.26	23.98
		27	8.47	1.015	9.49	23.98
		40.5	8.01	1.120	9.13	23.98
		54	7.81	1.507	9.32	23.98
		81	7.41	1.882	9.30	23.98
		108	7.11	2.184	9.29	23.98
		121.5	6.98	2.341	9.32	23.98
		135	6.81	2.541	9.35	23.98
5230	46	13.5	11.04	0.490	11.53	23.98
		27	10.70	1.015	11.71	23.98
		40.5	10.21	1.120	11.33	23.98
		54	10.34	1.507	11.84	23.98
		81	9.93	1.882	11.81	23.98
		108	9.56	2.184	11.75	23.98
		121.5	9.47	2.341	11.81	23.98
		135	9.33	2.541	11.87	23.98

**Conducted Output Power Measurements (802.11n\_40M BW Mode: 5270~5310)**

<b>802.11n(40MHz) Mode</b>		<b>Rate (Mbps)</b>	<b>Measured Power (dBm)</b>	<b>Duty Cycle Factor (dB)</b>	<b>Measured Power(dBm) + Duty Cycle Factor(dB)</b>	<b>Limit (dBm)</b>
<b>Frequency [MHz]</b>	<b>Channel No.</b>					
<b>5270</b>	<b>54</b>	<b>13.5</b>	<b>10.12</b>	<b>0.490</b>	<b>10.61</b>	<b>23.98</b>
		<b>27</b>	<b>9.82</b>	<b>1.015</b>	<b>10.83</b>	<b>23.98</b>
		<b>40.5</b>	<b>9.40</b>	<b>1.120</b>	<b>10.52</b>	<b>23.98</b>
		<b>54</b>	<b>9.36</b>	<b>1.507</b>	<b>10.87</b>	<b>23.98</b>
		<b>81</b>	<b>8.87</b>	<b>1.882</b>	<b>10.75</b>	<b>23.98</b>
		<b>108</b>	<b>8.46</b>	<b>2.184</b>	<b>10.64</b>	<b>23.98</b>
		<b>121.5</b>	<b>8.33</b>	<b>2.341</b>	<b>10.67</b>	<b>23.98</b>
		<b>135</b>	<b>8.08</b>	<b>2.541</b>	<b>10.62</b>	<b>23.98</b>
<b>5310</b>	<b>62</b>	<b>13.5</b>	<b>10.06</b>	<b>0.490</b>	<b>10.55</b>	<b>23.98</b>
		<b>27</b>	<b>9.61</b>	<b>1.015</b>	<b>10.63</b>	<b>23.98</b>
		<b>40.5</b>	<b>9.95</b>	<b>1.120</b>	<b>11.07</b>	<b>23.98</b>
		<b>54</b>	<b>9.22</b>	<b>1.507</b>	<b>10.73</b>	<b>23.98</b>
		<b>81</b>	<b>8.79</b>	<b>1.882</b>	<b>10.67</b>	<b>23.98</b>
		<b>108</b>	<b>8.45</b>	<b>2.184</b>	<b>10.63</b>	<b>23.98</b>
		<b>121.5</b>	<b>8.16</b>	<b>2.341</b>	<b>10.51</b>	<b>23.98</b>
		<b>135</b>	<b>8.52</b>	<b>2.541</b>	<b>11.06</b>	<b>23.98</b>

**Conducted Output Power Measurements (802.11n\_40M BW Mode: 5510~5670)**

<b>802.11n(40MHz) Mode</b>		<b>Rate (Mbps)</b>	<b>Measured Power (dBm)</b>	<b>Duty Cycle Factor (dB)</b>	<b>Measured Power(dBm) + Duty Cycle Factor(dB)</b>	<b>Limit (dBm)</b>
<b>Frequency [MHz]</b>	<b>Channel No.</b>					
<b>5510</b>	<b>102</b>	<b>13.5</b>	<b>10.32</b>	<b>0.490</b>	<b>10.81</b>	<b>23.98</b>
		<b>27</b>	<b>9.71</b>	<b>1.015</b>	<b>10.73</b>	<b>23.98</b>
		<b>40.5</b>	<b>9.46</b>	<b>1.120</b>	<b>10.58</b>	<b>23.98</b>
		<b>54</b>	<b>9.33</b>	<b>1.507</b>	<b>10.84</b>	<b>23.98</b>
		<b>81</b>	<b>8.93</b>	<b>1.882</b>	<b>10.81</b>	<b>23.98</b>
		<b>108</b>	<b>8.52</b>	<b>2.184</b>	<b>10.71</b>	<b>23.98</b>
		<b>121.5</b>	<b>8.44</b>	<b>2.341</b>	<b>10.78</b>	<b>23.98</b>
		<b>135</b>	<b>8.29</b>	<b>2.541</b>	<b>10.84</b>	<b>23.98</b>
<b>5550</b>	<b>110</b>	<b>13.5</b>	<b>10.31</b>	<b>0.490</b>	<b>10.80</b>	<b>23.98</b>
		<b>27</b>	<b>9.95</b>	<b>1.015</b>	<b>10.97</b>	<b>23.98</b>
		<b>40.5</b>	<b>9.71</b>	<b>1.120</b>	<b>10.83</b>	<b>23.98</b>
		<b>54</b>	<b>9.68</b>	<b>1.507</b>	<b>11.18</b>	<b>23.98</b>
		<b>81</b>	<b>8.95</b>	<b>1.882</b>	<b>10.83</b>	<b>23.98</b>
		<b>108</b>	<b>8.82</b>	<b>2.184</b>	<b>11.01</b>	<b>23.98</b>
		<b>121.5</b>	<b>8.50</b>	<b>2.341</b>	<b>10.84</b>	<b>23.98</b>
		<b>135</b>	<b>8.56</b>	<b>2.541</b>	<b>11.10</b>	<b>23.98</b>
<b>5710</b>	<b>142</b>	<b>13.5</b>	<b>10.54</b>	<b>0.490</b>	<b>11.03</b>	<b>23.98</b>
		<b>27</b>	<b>10.00</b>	<b>1.015</b>	<b>11.02</b>	<b>23.98</b>
		<b>40.5</b>	<b>9.72</b>	<b>1.120</b>	<b>10.84</b>	<b>23.98</b>
		<b>54</b>	<b>9.64</b>	<b>1.507</b>	<b>11.14</b>	<b>23.98</b>
		<b>81</b>	<b>9.16</b>	<b>1.882</b>	<b>11.04</b>	<b>23.98</b>
		<b>108</b>	<b>8.82</b>	<b>2.184</b>	<b>11.00</b>	<b>23.98</b>
		<b>121.5</b>	<b>8.65</b>	<b>2.341</b>	<b>10.99</b>	<b>23.98</b>
		<b>135</b>	<b>8.31</b>	<b>2.541</b>	<b>10.85</b>	<b>23.98</b>

**Conducted Output Power Measurements (802.11n\_40M BW Mode: 5755~5795)**

802.11n(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5	10.55	0.490	11.04	30
		27	10.24	1.015	11.25	30
		40.5	9.91	1.120	11.03	30
		54	9.74	1.507	11.25	30
		81	9.32	1.882	11.20	30
		108	9.05	2.184	11.24	30
		121.5	8.94	2.341	11.28	30
		135	8.77	2.541	11.31	30
5795	159	13.5	10.45	0.490	10.94	30
		27	10.08	1.015	11.10	30
		40.5	9.78	1.120	10.90	30
		54	9.71	1.507	11.21	30
		81	9.33	1.882	11.22	30
		108	8.97	2.184	11.16	30
		121.5	8.88	2.341	11.22	30
		135	8.58	2.541	11.12	30

**Conducted Output Power Measurements (802.11ac\_40M BW Mode: 5190~5230)**

802.11ac(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	8.72	0.461	9.18	30
		27	8.40	0.815	9.21	30
		40.5	8.10	1.111	9.21	30
		54	7.83	1.377	9.21	30
		81	7.37	1.858	9.23	30
		108	7.17	2.123	9.29	30
		121.5	6.95	2.290	9.24	30
		135	6.81	2.449	9.26	30
		162	6.58	2.720	9.30	30
		180	6.50	2.792	9.29	30
5230	46	13.5	10.66	0.461	11.12	30
		27	10.22	0.815	11.03	30
		40.5	9.96	1.111	11.07	30
		54	9.77	1.377	11.14	30
		81	9.29	1.858	11.14	30
		108	8.99	2.123	11.11	30
		121.5	8.81	2.290	11.10	30
		135	8.65	2.449	11.10	30
		162	8.44	2.720	11.16	30
		180	8.32	2.792	11.11	30



**Conducted Output Power Measurements (802.11ac\_40M BW Mode: 5270~5310)**

802.11ac(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	13.5	10.67	0.461	11.13	30
		27	10.23	0.815	11.05	30
		40.5	9.91	1.111	11.02	30
		54	9.84	1.377	11.22	30
		81	9.34	1.858	11.20	30
		108	8.96	2.123	11.09	30
		121.5	8.72	2.290	11.01	30
		135	8.67	2.449	11.12	30
		162	8.39	2.720	11.11	30
		180	8.26	2.792	11.06	30
5310	62	13.5	10.73	0.461	11.19	30
		27	10.34	0.815	11.16	30
		40.5	9.92	1.111	11.03	30
		54	9.79	1.377	11.17	30
		81	9.36	1.858	11.21	30
		108	9.02	2.123	11.15	30
		121.5	8.82	2.290	11.11	30
		135	8.70	2.449	11.15	30
		162	8.38	2.720	11.10	30
		180	8.38	2.792	11.17	30

**Conducted Output Power Measurements (802.11ac\_40M BW Mode: 5510~5710)**

802.11ac(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	13.5	10.05	0.461	10.51	30
		27	9.71	0.815	10.52	30
		40.5	9.40	1.111	10.51	30
		54	9.36	1.377	10.74	30
		81	8.93	1.858	10.79	30
		108	8.73	2.123	10.85	30
		121.5	8.57	2.290	10.86	30
		135	8.30	2.449	10.75	30
		162	7.95	2.720	10.67	30
		180	7.90	2.792	10.70	30
5550	110	13.5	11.37	0.461	11.83	30
		27	10.81	0.815	11.63	30
		40.5	10.53	1.111	11.64	30
		54	10.54	1.377	11.91	30
		81	9.99	1.858	11.85	30
		108	9.70	2.123	11.83	30
		121.5	9.54	2.290	11.83	30
		135	9.40	2.449	11.85	30
		162	9.19	2.720	11.91	30
		180	9.09	2.792	11.88	30
5710	142	13.5	11.42	0.461	11.88	30
		27	11.05	0.815	11.86	30
		40.5	10.66	1.111	11.77	30
		54	10.57	1.377	11.95	30
		81	10.10	1.858	11.96	30
		108	9.81	2.123	11.93	30
		121.5	9.61	2.290	11.90	30
		135	9.51	2.449	11.96	30
		162	9.25	2.720	11.97	30
		180	9.16	2.792	11.95	30

**Conducted Output Power Measurements (802.11ac\_40M BW Mode: 5755~5795)**

802.11ac(40MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5	10.75	0.461	11.21	30
		27	10.26	0.815	11.08	30
		40.5	10.01	1.111	11.12	30
		54	10.03	1.377	11.41	30
		81	9.45	1.858	11.31	30
		108	9.15	2.123	11.28	30
		121.5	9.07	2.290	11.36	30
		135	8.91	2.449	11.35	30
		162	8.64	2.720	11.36	30
		180	8.55	2.792	11.34	30
5795	159	13.5	10.74	0.461	11.20	30
		27	10.22	0.815	11.04	30
		40.5	9.85	1.111	10.96	30
		54	9.77	1.377	11.15	30
		81	9.38	1.858	11.24	30
		108	9.03	2.123	11.15	30
		121.5	8.95	2.290	11.24	30
		135	8.72	2.449	11.17	30
		162	8.41	2.720	11.13	30
		180	8.52	2.792	11.32	30

**80MHz BW**

**Conducted Output Power Measurements (802.11ac\_80M BW Mode: 5210)**

802.11ac(80MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	29.3	9.14	0.950	10.09	23.98
		58.5	8.61	1.622	10.23	23.98
		87.8	8.10	2.091	10.19	23.98
		117	8.12	2.242	10.36	23.98
		175.5	7.51	2.753	10.26	23.98
		234	7.21	3.145	10.36	23.98
		263.3	6.99	3.369	10.35	23.98
		292.5	6.82	3.481	10.30	23.98
		351	6.57	3.647	10.22	23.98
		390	6.53	3.782	10.31	23.98

**Conducted Output Power Measurements (802.11ac\_80M BW Mode: 5290)**

802.11ac (80MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5290	58	29.3	10.24	0.950	11.19	23.98
		58.5	9.43	1.622	11.05	23.98
		87.8	9.08	2.091	11.17	23.98
		117	9.02	2.242	11.26	23.98
		175.5	8.50	2.753	11.25	23.98
		234	8.22	3.145	11.37	23.98
		263.3	7.90	3.369	11.27	23.98
		292.5	7.94	3.481	11.42	23.98
		351	7.61	3.647	11.25	23.98
		390	7.21	3.782	11.00	23.98

**Conducted Output Power Measurements (802.11ac\_80M BW Mode: 5530~5690)**

802.11ac(80MHz) Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5530	106	29.3	9.96	0.950	10.91	23.98
		58.5	9.30	1.622	10.92	23.98
		87.8	8.75	2.091	10.84	23.98
		117	8.74	2.242	10.99	23.98
		175.5	8.20	2.753	10.96	23.98
		234	7.97	3.145	11.11	23.98
		263.3	7.65	3.369	11.02	23.98
		292.5	7.56	3.481	11.04	23.98
		351	7.44	3.647	11.09	23.98
		390	7.27	3.782	11.05	23.98
5690	138	29.3	10.35	0.950	11.30	23.98
		58.5	9.64	1.622	11.26	23.98
		87.8	9.25	2.091	11.34	23.98
		117	9.27	2.242	11.51	23.98
		175.5	8.74	2.753	11.50	23.98
		234	8.39	3.145	11.53	23.98
		263.3	8.13	3.369	11.50	23.98
		292.5	8.00	3.481	11.48	23.98
		351	7.75	3.647	11.40	23.98
		390	7.52	3.782	11.30	23.98


**Conducted Output Power Measurements (802.11ac\_80M BW Mode: 5775)**

<b>802.11ac(80MHz) Mode</b>		<b>Rate (Mbps)</b>	<b>Measured Power (dBm)</b>	<b>Duty Cycle Factor (dB)</b>	<b>Measured Power(dBm) + Duty Cycle Factor(dB)</b>	<b>Limit (dBm)</b>
<b>Frequency [MHz]</b>	<b>Channel No.</b>					
<b>5775</b>	<b>155</b>	<b>29.3</b>	<b>10.01</b>	<b>0.950</b>	<b>10.96</b>	<b>30</b>
		<b>58.5</b>	<b>9.31</b>	<b>1.622</b>	<b>10.93</b>	<b>30</b>
		<b>87.8</b>	<b>8.88</b>	<b>2.091</b>	<b>10.98</b>	<b>30</b>
		<b>117</b>	<b>8.88</b>	<b>2.242</b>	<b>11.12</b>	<b>30</b>
		<b>175.5</b>	<b>8.29</b>	<b>2.753</b>	<b>11.04</b>	<b>30</b>
		<b>234</b>	<b>7.92</b>	<b>3.145</b>	<b>11.06</b>	<b>30</b>
		<b>263.3</b>	<b>7.81</b>	<b>3.369</b>	<b>11.18</b>	<b>30</b>
		<b>292.5</b>	<b>7.63</b>	<b>3.481</b>	<b>11.12</b>	<b>30</b>
		<b>351</b>	<b>7.44</b>	<b>3.647</b>	<b>11.09</b>	<b>30</b>
		<b>930</b>	<b>7.30</b>	<b>3.782</b>	<b>11.08</b>	<b>30</b>

**40 MHz BW**


**RESULT PLOTS (5190 MHz ~5230 MHz)**

**Conducted Output Power (802.11n\_40M BW-CH 46) 135 Mbps**

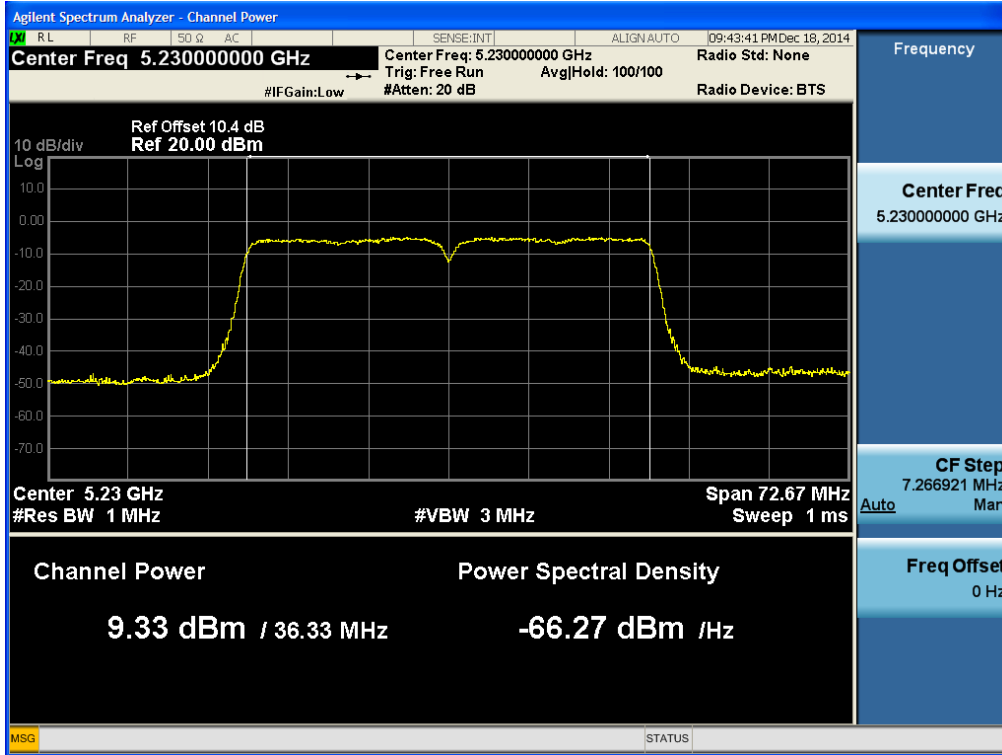


**RESULT PLOTS (5270 MHz ~5310 MHz)**

**Conducted Output Power (802.11n\_40M BW-CH 62) 40.5 Mbps**

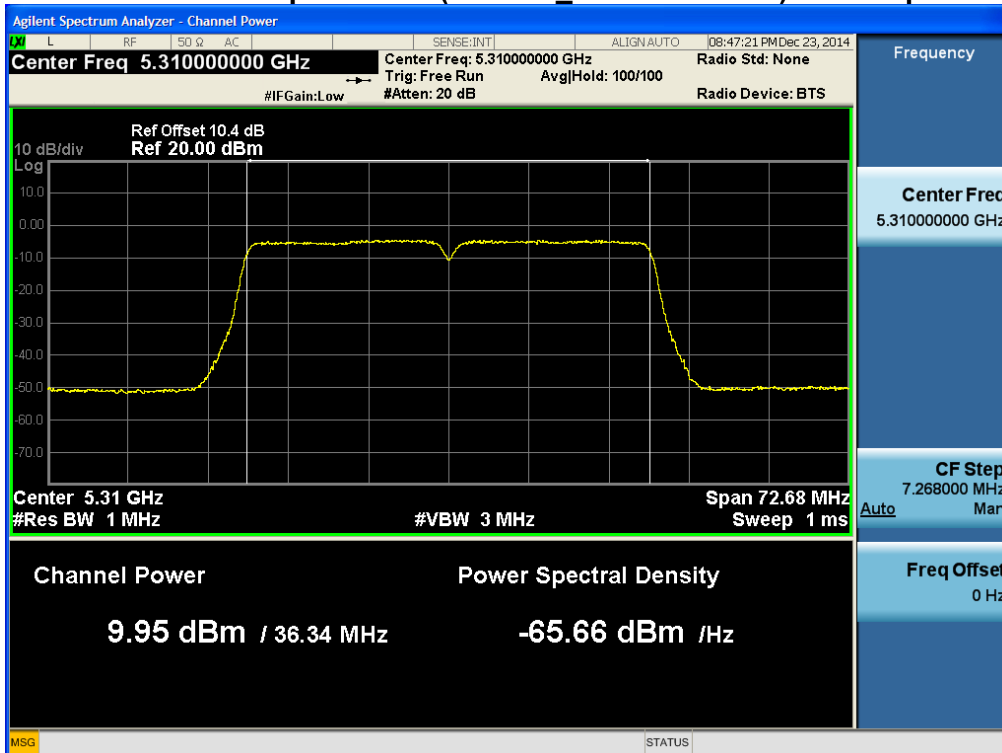


▣ RESULT PLOTS (5510 MHz ~5670 MHz)

**Conducted Output Power (802.11n\_40M BW-CH 110) 54 Mbps**

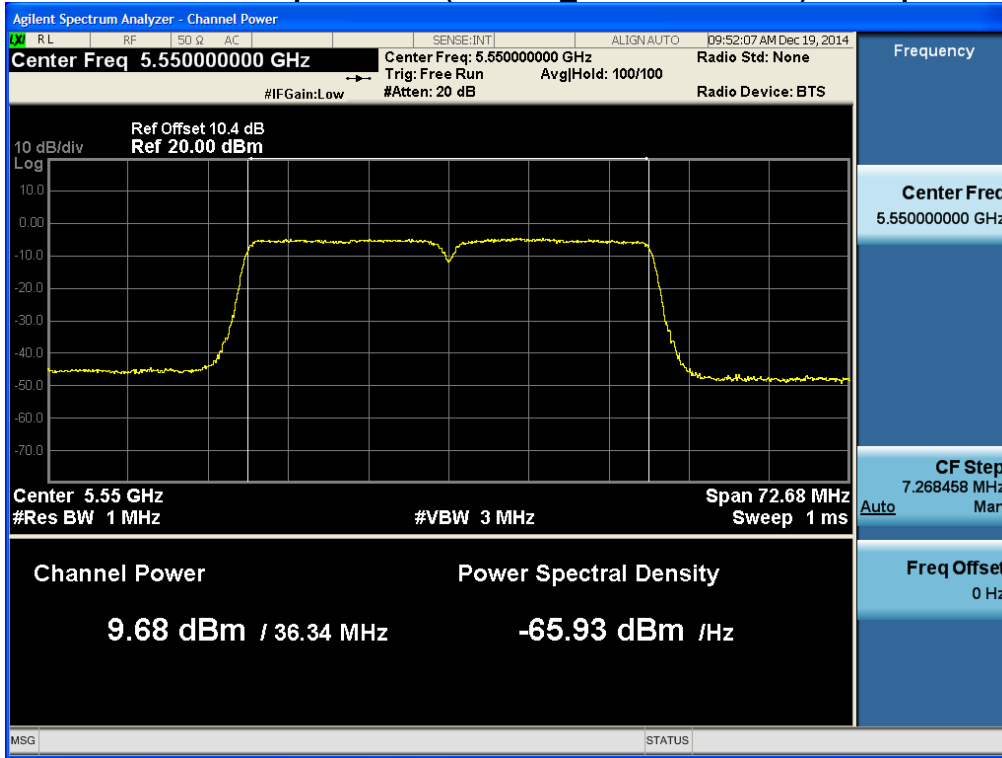

▣ RESULT PLOTS (5755 MHz ~5795 MHz)


**Conducted Output Power (802.11n\_40M BW-CH 151) 135 Mbps**

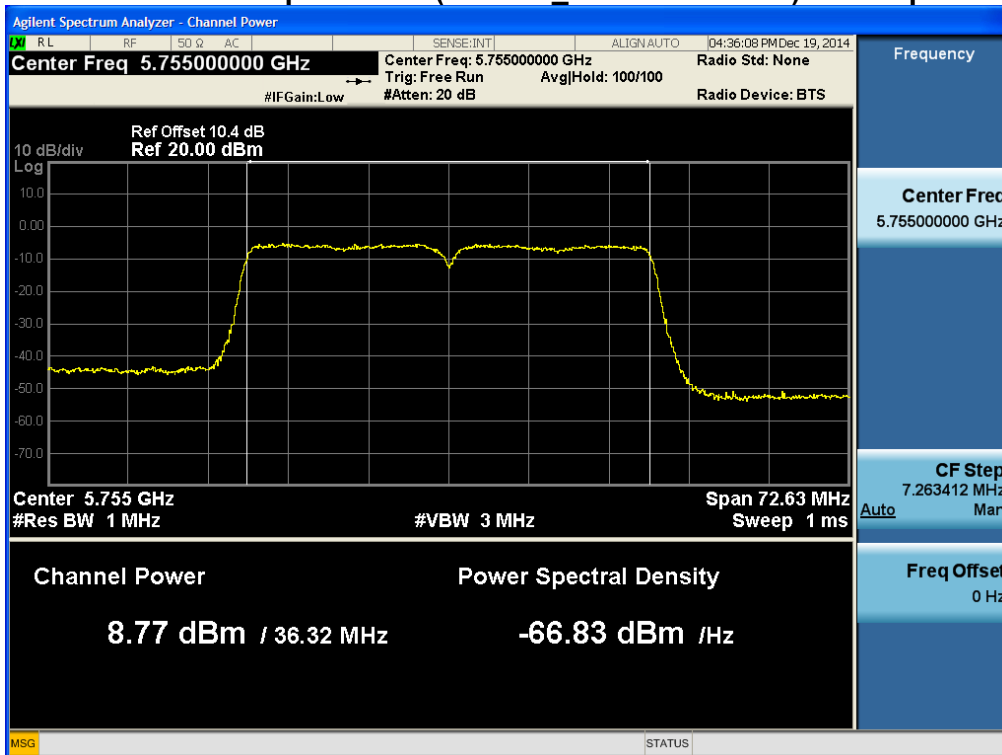




RESULT PLOTS (5190 ~ 5230 MHz)

Conducted Output Power (802.11ac\_40M -CH 46) 162 Mbps

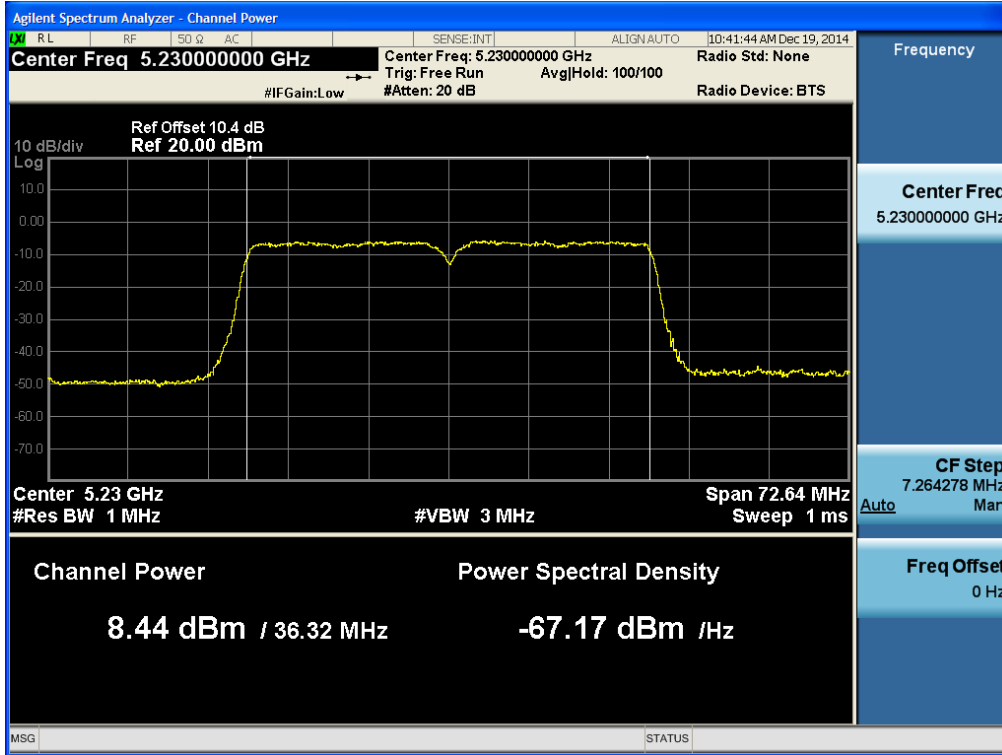


RESULT PLOTS (5270 ~ 5310 MHz)

Conducted Output Power (802.11ac\_40M -CH 54) 54 Mbps

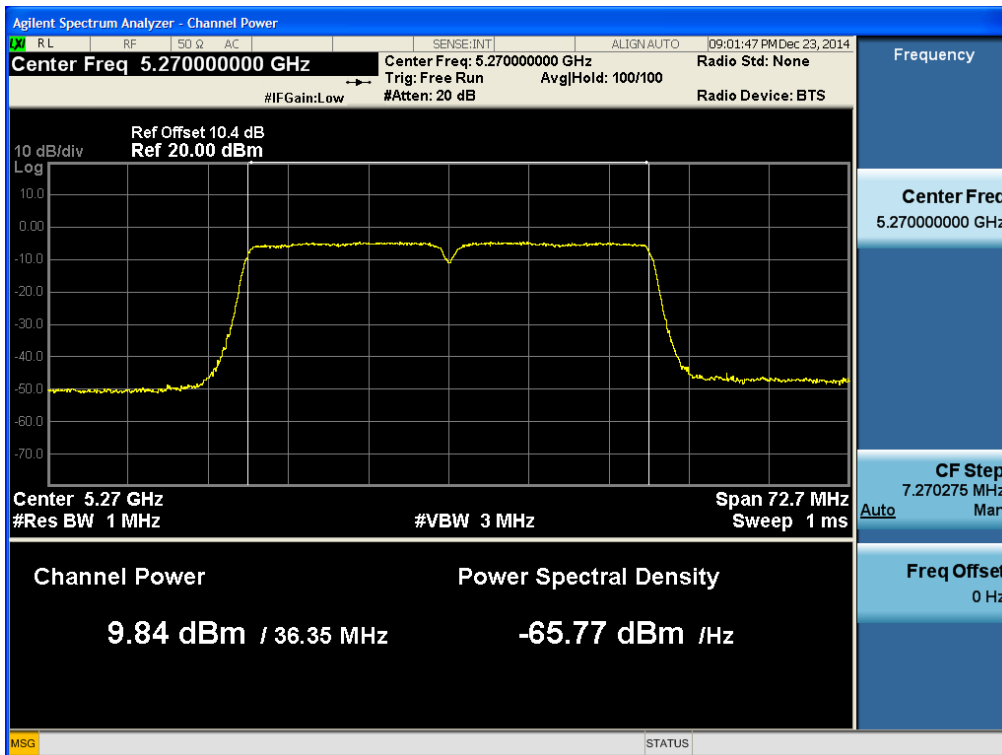


▣ RESULT PLOTS (5510 ~ 5710 MHz)

Conducted Output Power (802.11ac\_40M -CH 142) 81 Mbps

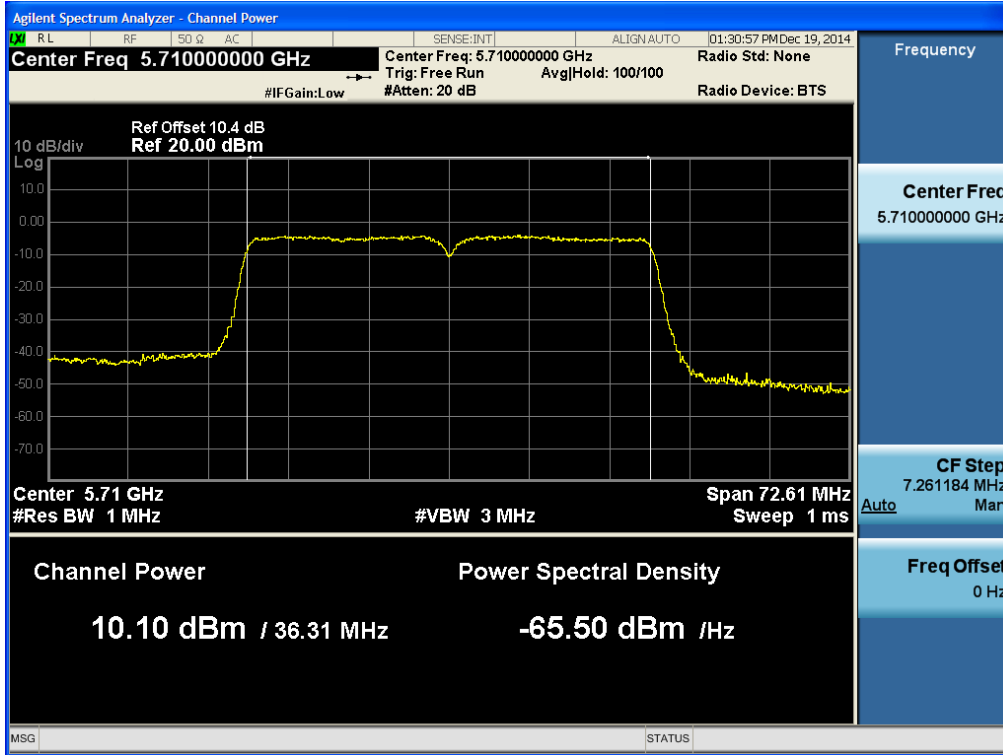

▣ RESULT PLOTS (5755 ~ 5795 MHz)


Conducted Output Power (802.11ac\_40M -CH 151) 54 Mbps

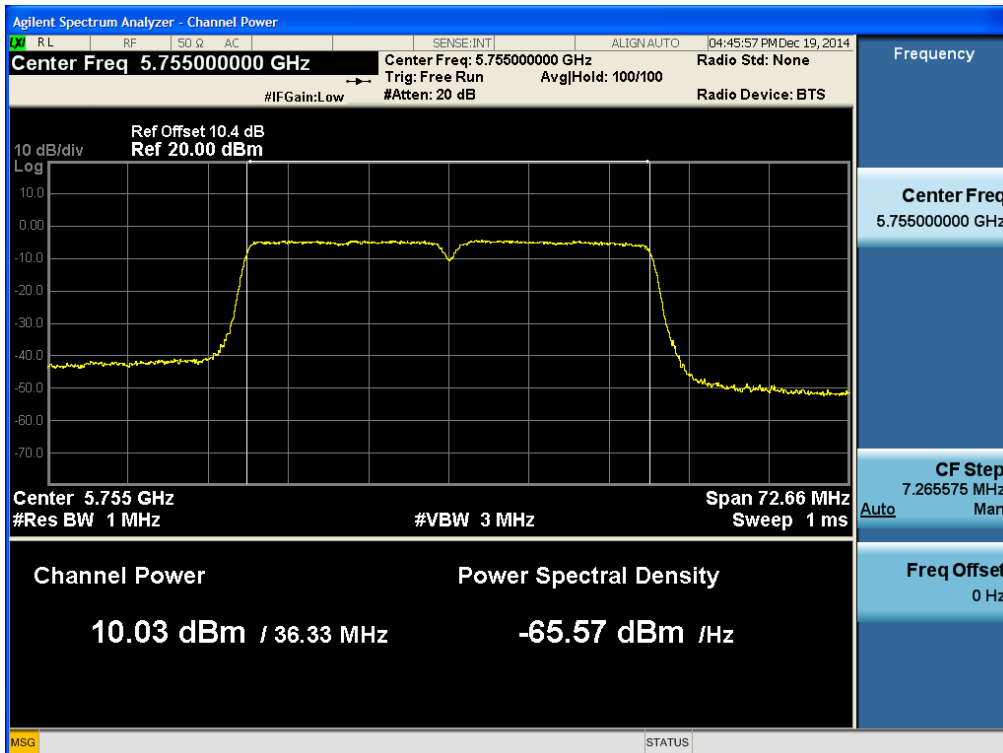

**80 MHz BW**


**RESULT PLOTS (5210 MHz)**

**Conducted Output Power (802.11ac\_80M BW-CH 42) 117 Mbps**

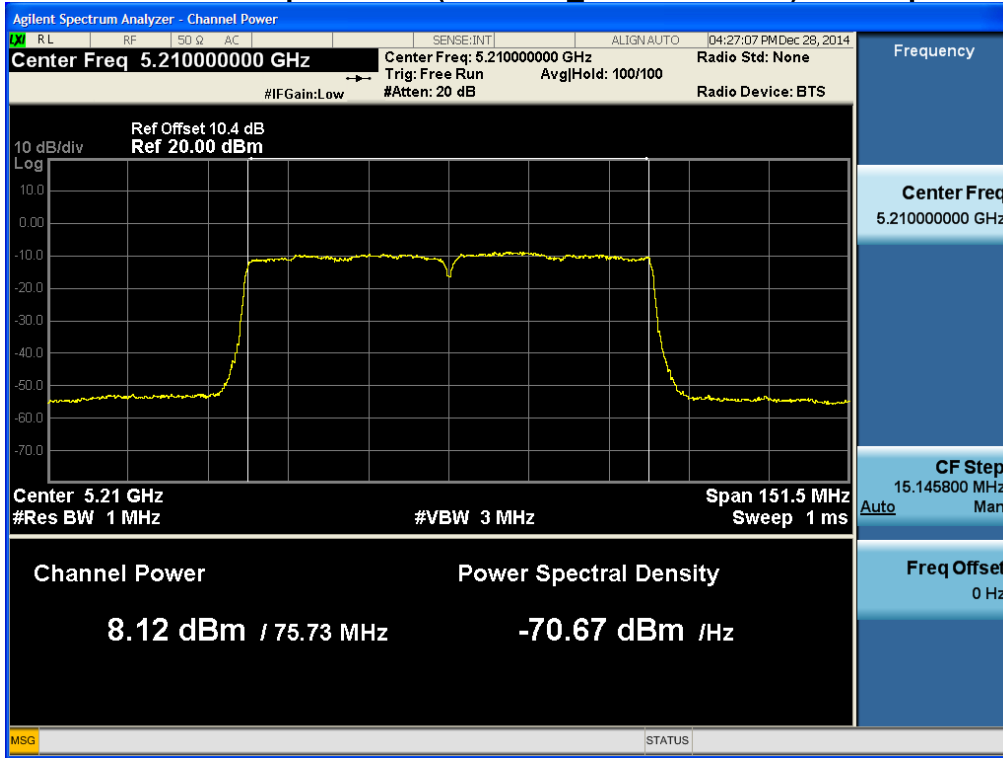


**RESULT PLOTS (5290 MHz)**

**Conducted Output Power (802.11ac\_80M BW -CH 58) 292.5 Mbps**

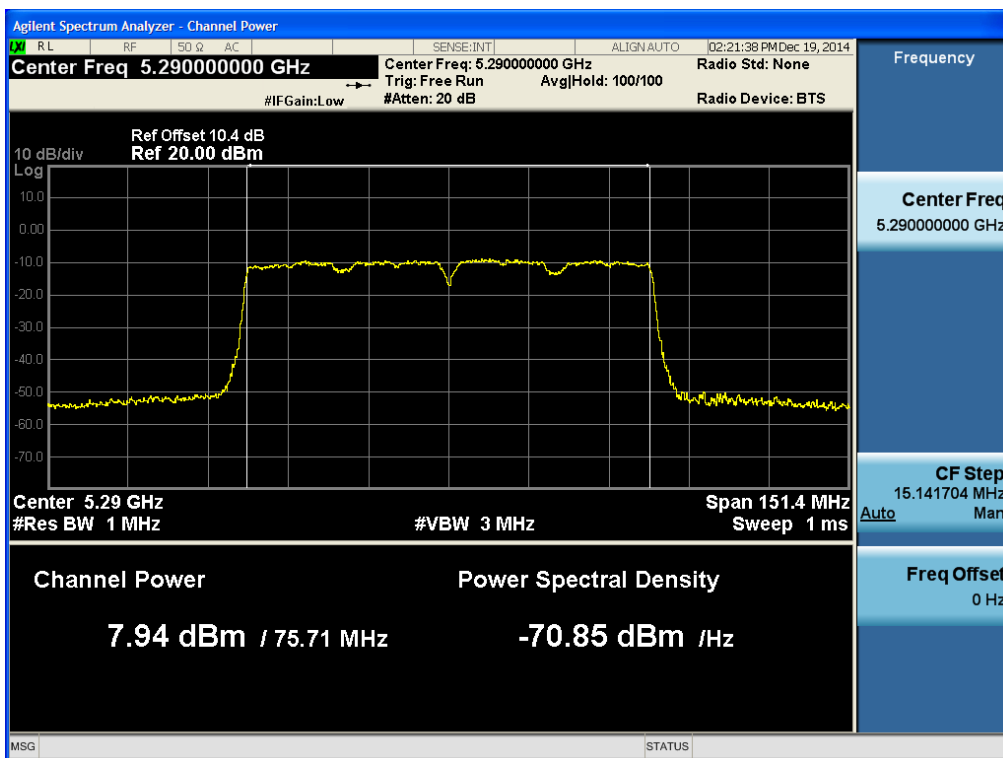


▣ RESULT PLOTS (5530 MHz ~ 5690 MHz)

Conducted Output Power (802.11ac\_80M BW-CH 138) 234 Mbps

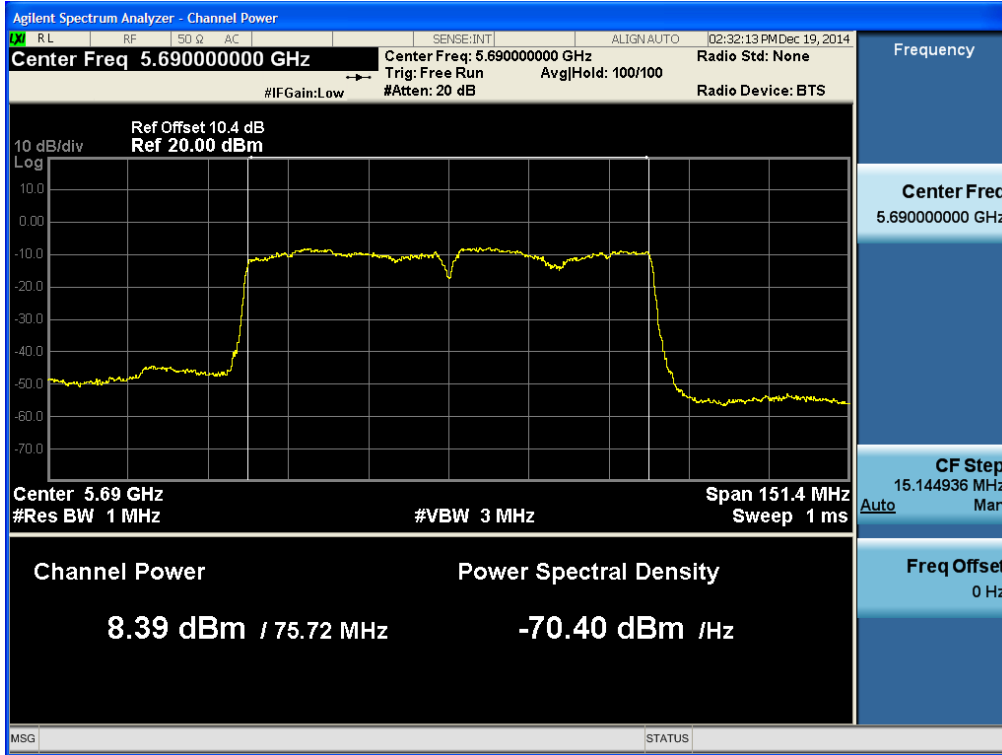

▣ RESULT PLOTS (5775 MHz)


Conducted Output Power (802.11ac\_80M BW-CH 155) 263.3Mbps

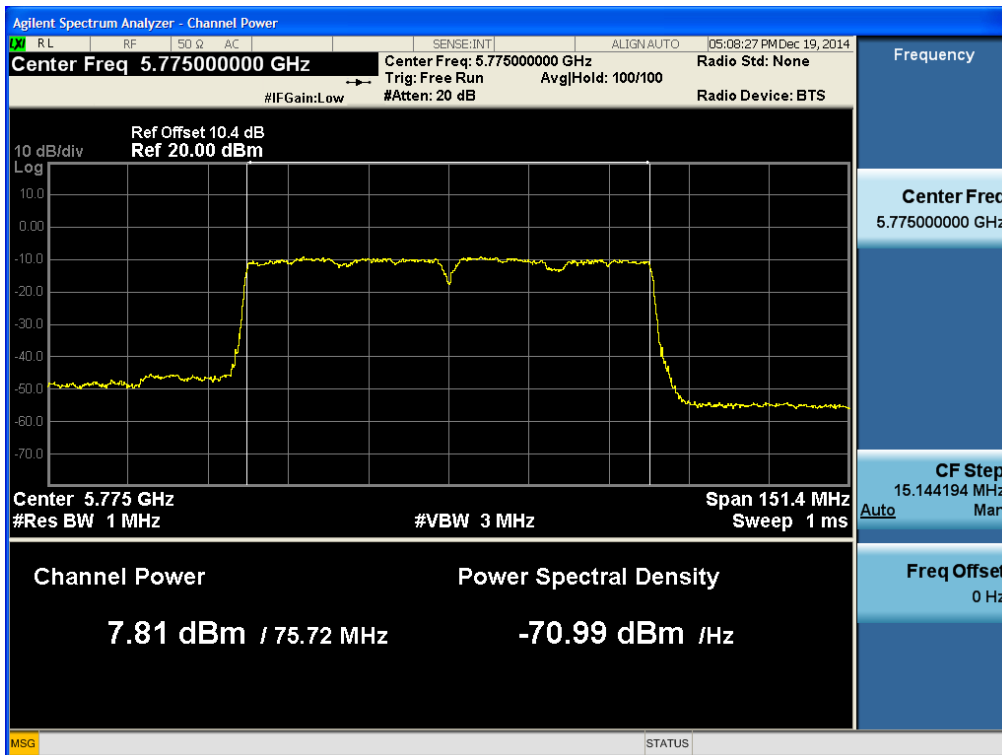

## 8.4 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 11 dBm/ MHz for UNII 1,2A, 2C and 30 dBm/500 kHz for UNII 3.

### ■ TEST CONFIGURATION

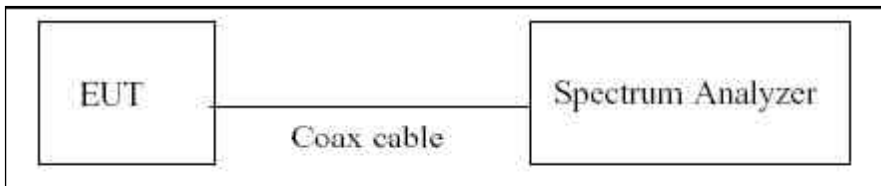

### ■ TEST PROCEDURE

We tested according to Method in KDB 789033(issued 06/06/2014).

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2\*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to "free run".
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

### ■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = -5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

<b>Band</b>	<b>Loss(dB)</b>
UNII 1, 2A , 2C, 3	10.4

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	0.810	1.51649	2.326	11	Pass
5200	40		1.082	1.51649	2.598	11	Pass
5240	48		1.239	1.51649	2.755	11	Pass
5260	52		0.877	1.51649	2.393	11	Pass
5300	60		0.661	1.51649	2.177	11	Pass
5320	64		0.655	1.51649	2.171	11	Pass
5500	100		1.461	0.83733	2.298	11	Pass
5600	120		1.006	1.15718	2.163	11	Pass
5720	144		1.403	1.51649	2.919	11	Pass
5745	149		7.457	1.51649	8.973	30	Pass
5785	157		7.798	1.15718	8.955	30	Pass
5825	165		7.470	1.51649	8.986	30	Pass
5180	36	802.11n 20M BW	-0.611	1.62051	1.010	11	Pass
5200	40		-0.256	1.52427	1.268	11	Pass
5240	48		-0.595	1.52427	0.929	11	Pass
5260	52		-0.457	1.22072	0.764	11	Pass
5300	60		-0.313	1.22072	0.908	11	Pass
5320	64		-0.273	1.52427	1.251	11	Pass
5500	100		0.180	1.52427	1.704	11	Pass
5600	120		-0.094	1.52427	1.430	11	Pass
5720	144		-0.096	1.74773	1.652	11	Pass
5745	149		7.353	0.86360	8.217	30	Pass
5785	157		7.150	1.62051	8.771	30	Pass
5825	165		7.609	1.74773	9.357	30	Pass

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11ac 20M BW	-1.451	1.74139	0.290	11	Pass
5200	40		-1.362	1.45215	0.090	11	Pass
5240	48		-1.305	1.74139	0.436	11	Pass
5260	52		-1.588	1.74139	0.153	11	Pass
5300	60		-0.888	0.85277	-0.035	11	Pass
5320	64		-1.795	1.45215	-0.343	11	Pass
5500	100		-1.606	1.74139	0.135	11	Pass
5600	120		-1.504	1.74139	0.237	11	Pass
5720	144		-0.419	1.18635	0.767	11	Pass
5745	149		5.841	1.58609	7.427	30	Pass
5785	157		6.238	1.58609	7.824	30	Pass
5825	165		5.849	1.58609	7.435	30	Pass
5190	38		802.11n 40M BW	-4.567	1.01458	-3.552	11
5230	46	-5.009		2.54131	-2.468	11	Pass
5270	54	-5.570		1.50673	-4.063	11	Pass
5310	62	-5.023		1.11974	-3.903	11	Pass
5510	102	-4.417		1.50673	-2.910	11	Pass
5590	118	-4.458		1.50673	-2.951	11	Pass
5710	142	-4.255		1.50673	-2.748	11	Pass
5755	151	3.872		2.18429	6.056	30	Pass
5795	159	3.258		1.50673	4.765	30	Pass
5190	38	802.11ac 40M BW	-4.432	2.72002	-1.712	11	Pass
5230	46		-5.509	2.72002	-2.789	11	Pass
5270	54		-3.992	1.37713	-2.615	11	Pass
5310	62		-4.502	1.85834	-2.644	11	Pass
5510	102		-4.786	2.29027	-2.496	11	Pass
5550	110		-3.450	1.37713	-2.073	11	Pass
5710	142		-3.602	1.37713	-2.225	11	Pass
5755	151		3.256	1.37713	4.633	30	Pass
5795	159		3.907	1.37713	5.284	30	Pass




Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5210	42	802.11ac 80M BW	-9.085	2.24190	-6.843	11	Pass
5290	58		-9.015	3.48094	-5.534	11	Pass
5530	106		-8.901	3.14532	-5.756	11	Pass
5690	138		-8.447	3.14532	-5.302	11	Pass
5775	155		-0.063	2.24190	2.179	30	Pass


RESULT PLOTS

20 MHz BW


Power Spectral Density (802.11a-CH 48)

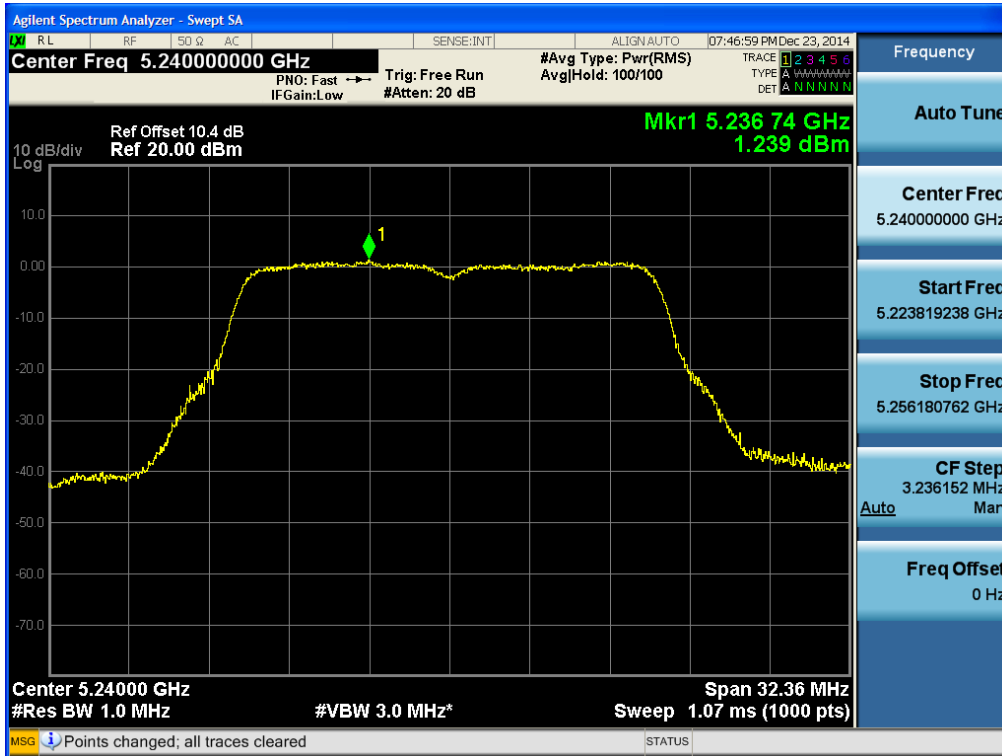


Power Spectral Density (802.11a-CH 52)

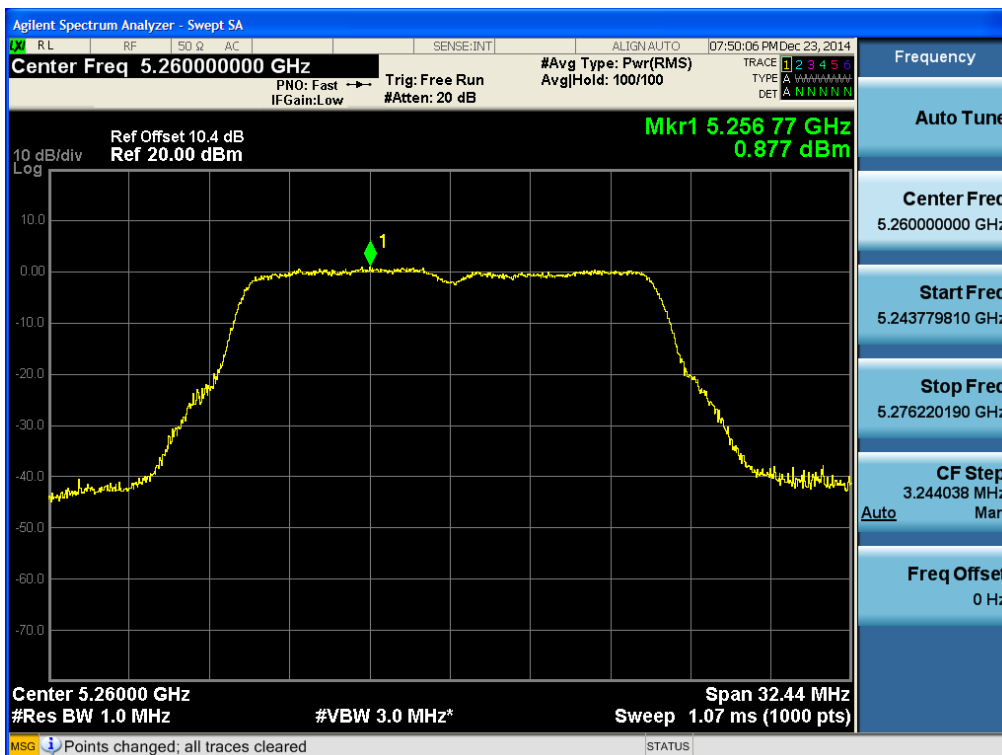


**Power Spectral Density (802.11a-CH 144)**

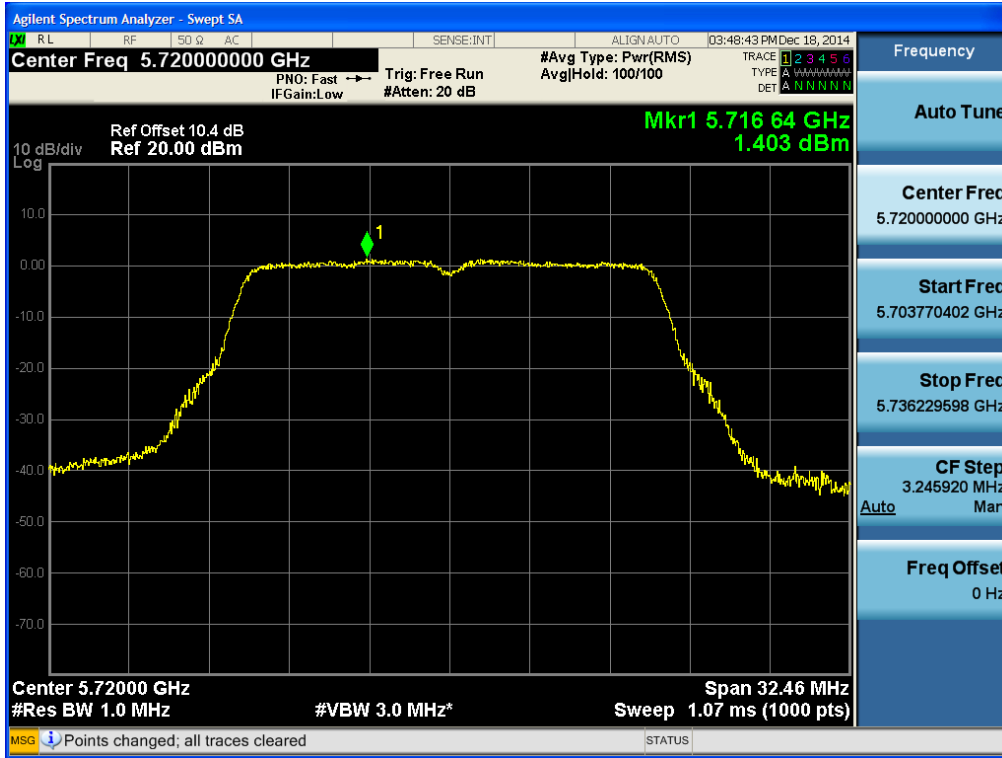


**Power Spectral Density (802.11 a-CH 165)**

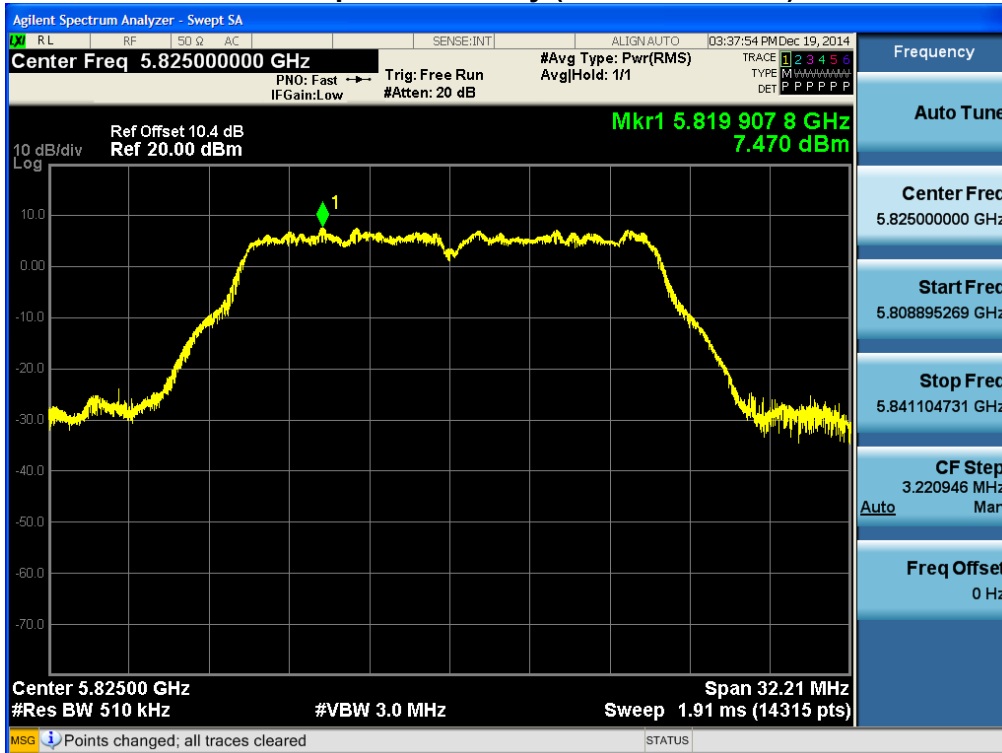


**Power Spectral Density (802.11n\_20M BW-CH 40)**

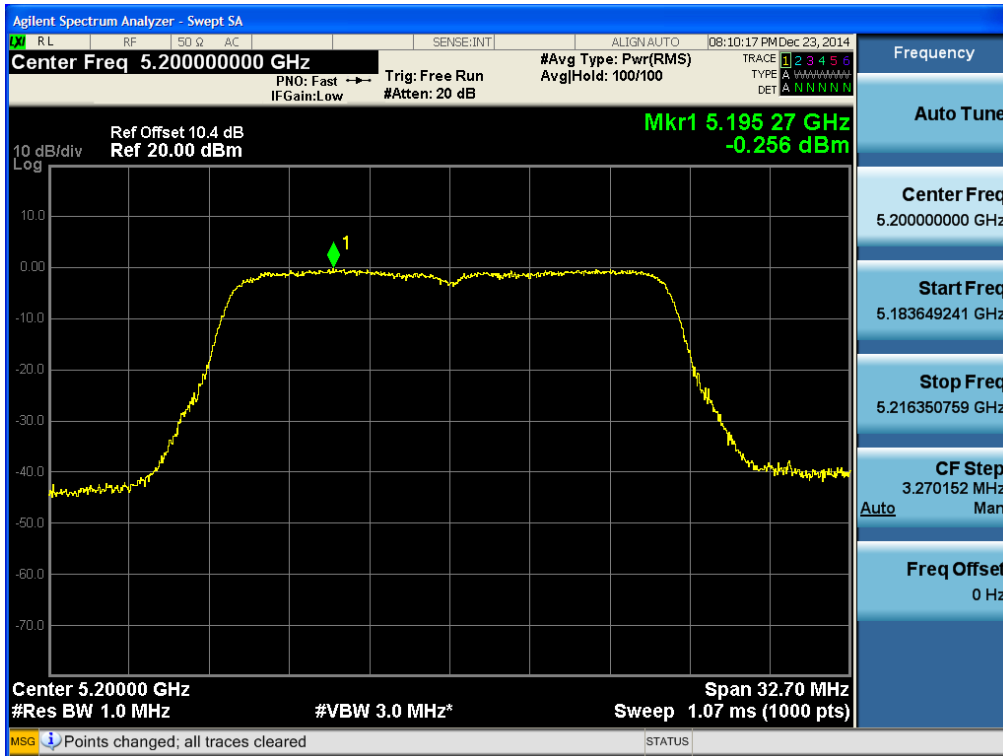


**Power Spectral Density (802.11n\_20M BW -CH 64)**

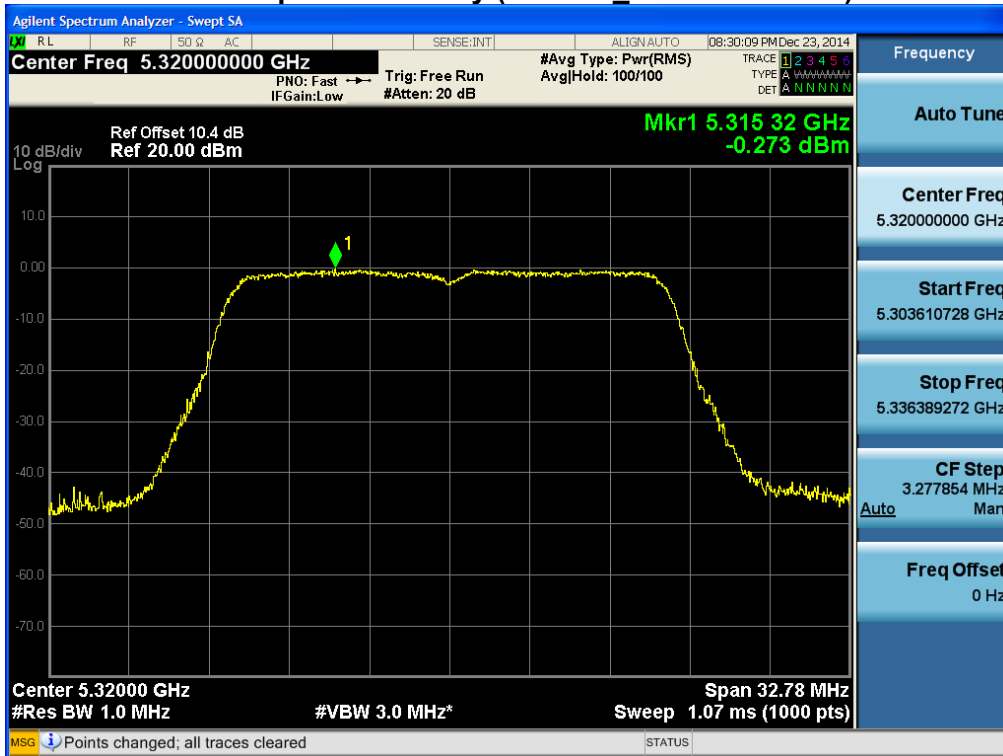


**Power Spectral Density (802.11n\_20M BW-CH 100)**

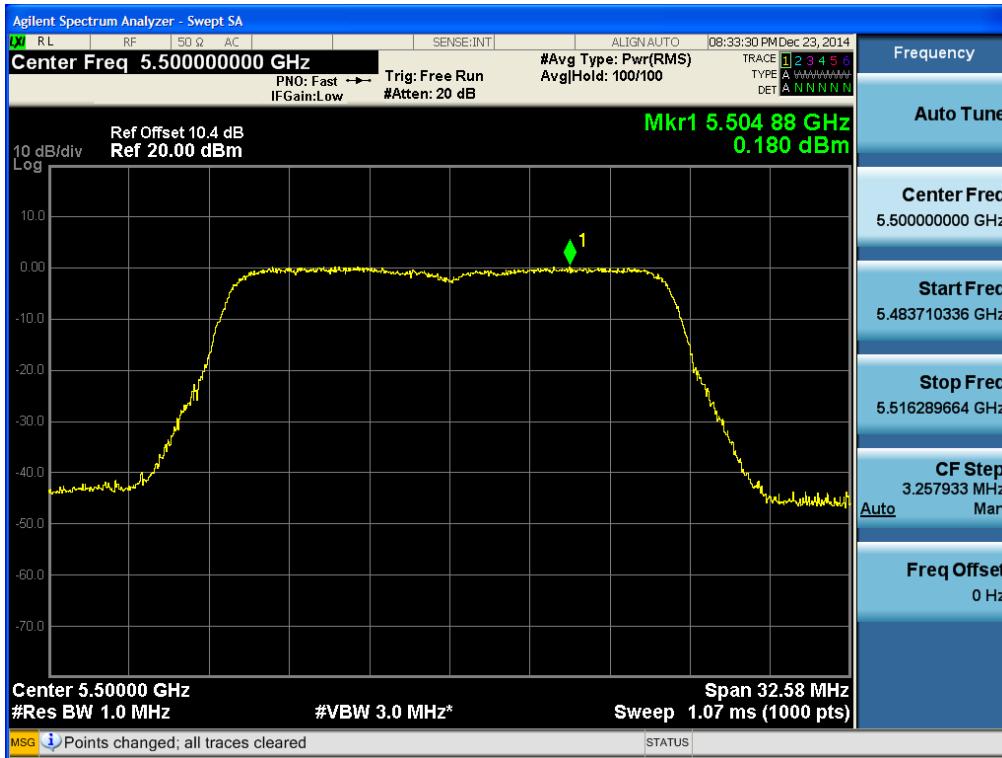


**Power Spectral Density (802.11 n\_20M BW -CH 165)**

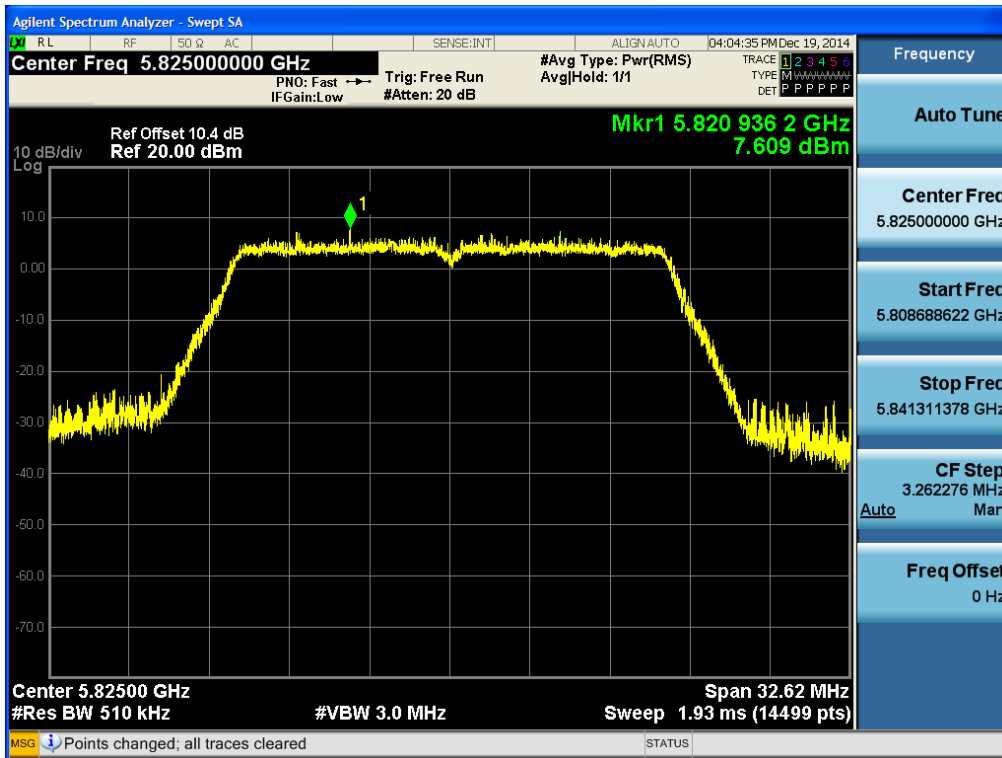


**Power Spectral Density (802.11ac\_20M BW-CH 48)**

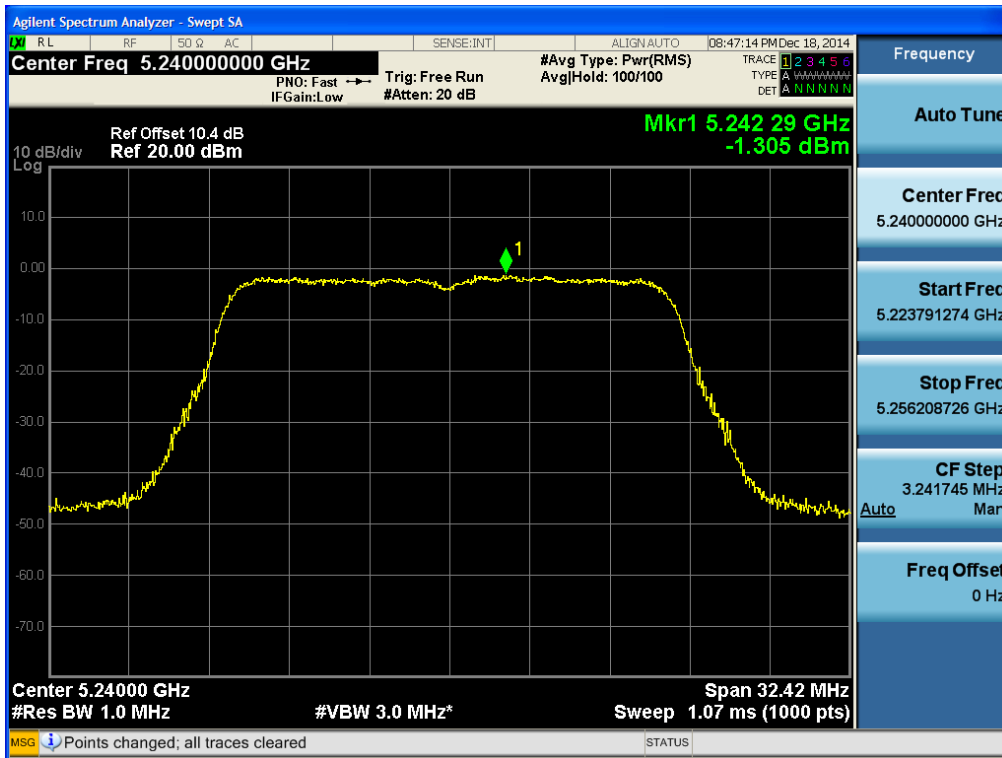


**Power Spectral Density (802.11 ac\_20M BW -CH 52)**

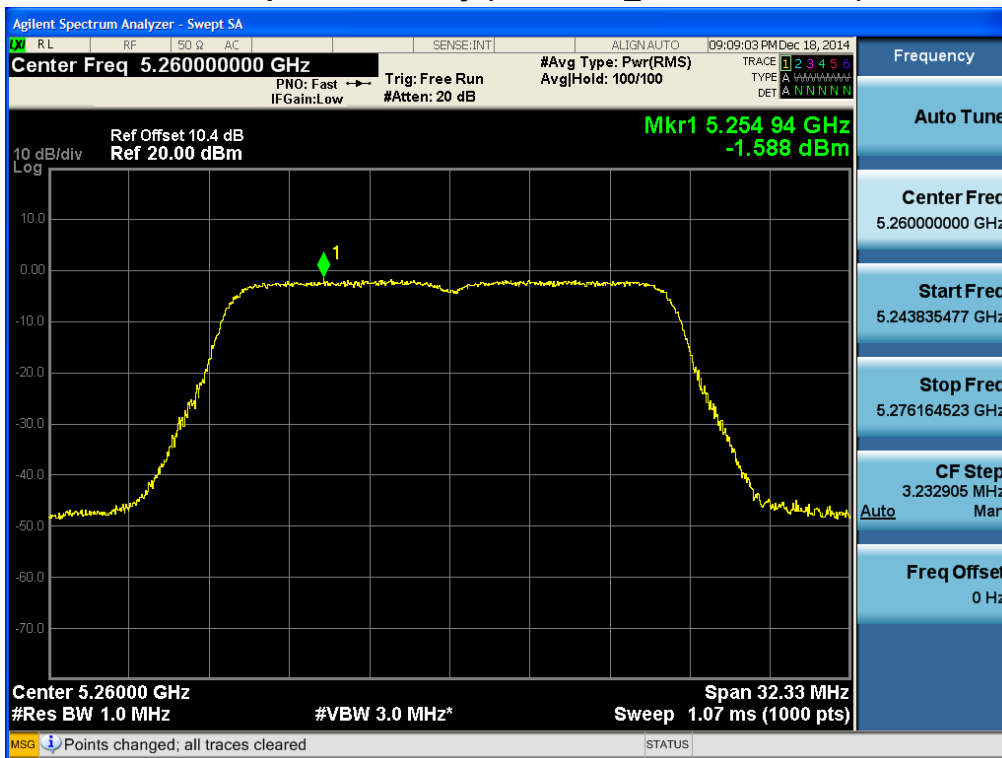

**Power Spectral Density (802.11ac\_20M BW-CH 144)**

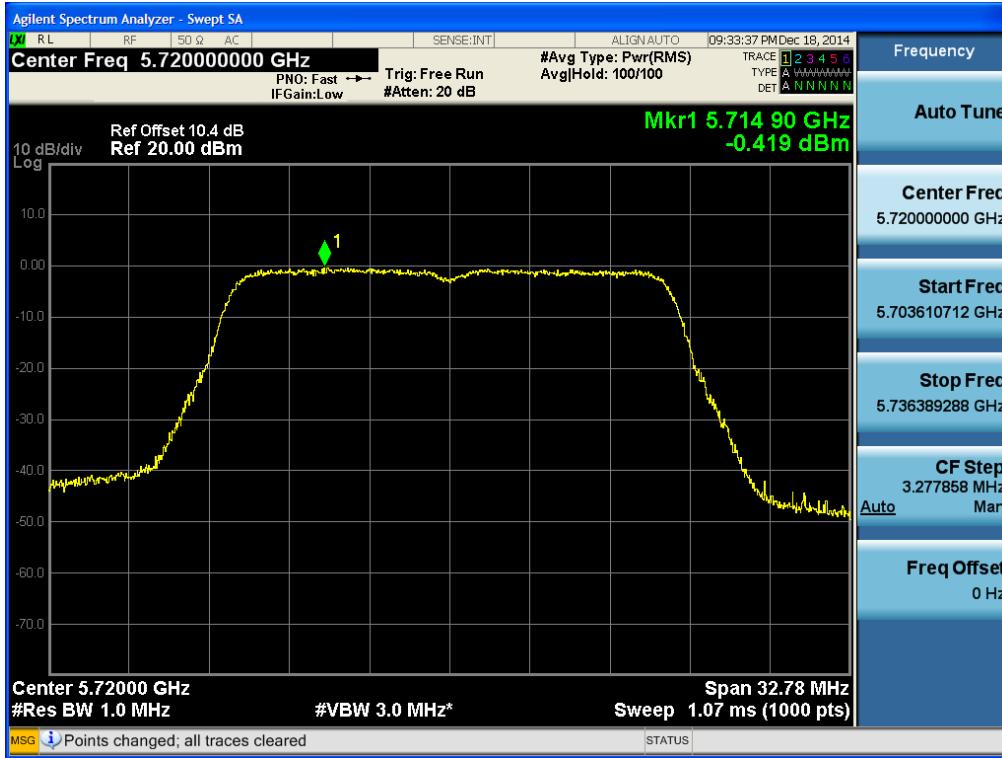


**Power Spectral Density (802.11 ac\_20M BW -CH 157)**

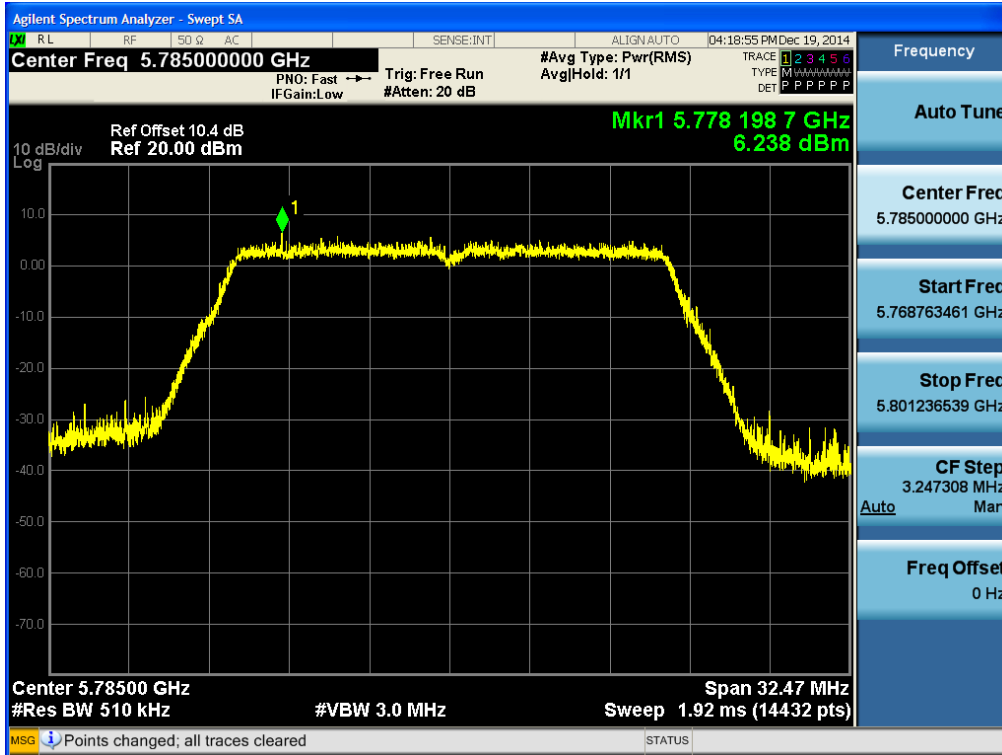


40 MHz BW

Power Spectral Density (802.11n\_40M BW-CH 46)

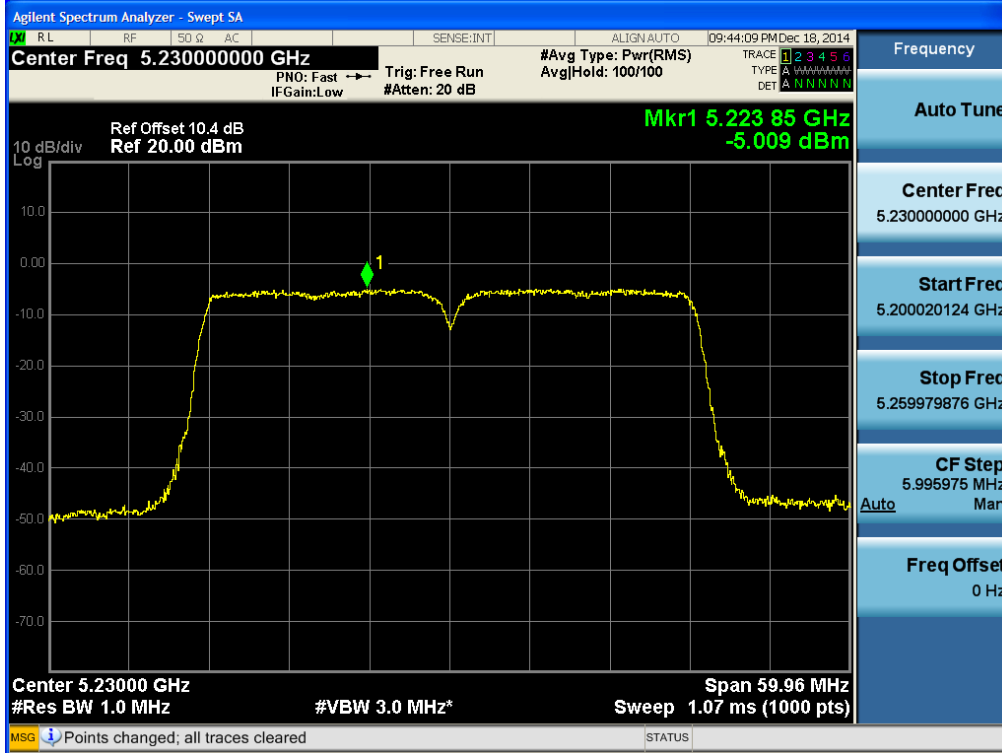


Power Spectral Density (802.11n\_40M BW- CH 62)

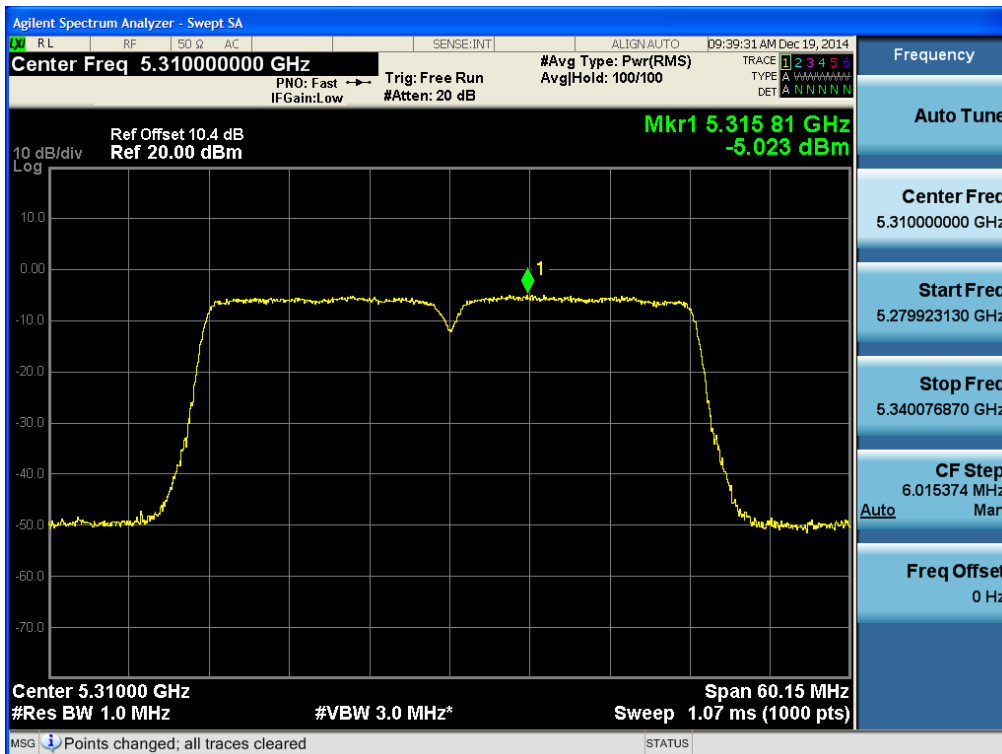





**Power Spectral Density (802.11n\_40M BW-CH 142)**

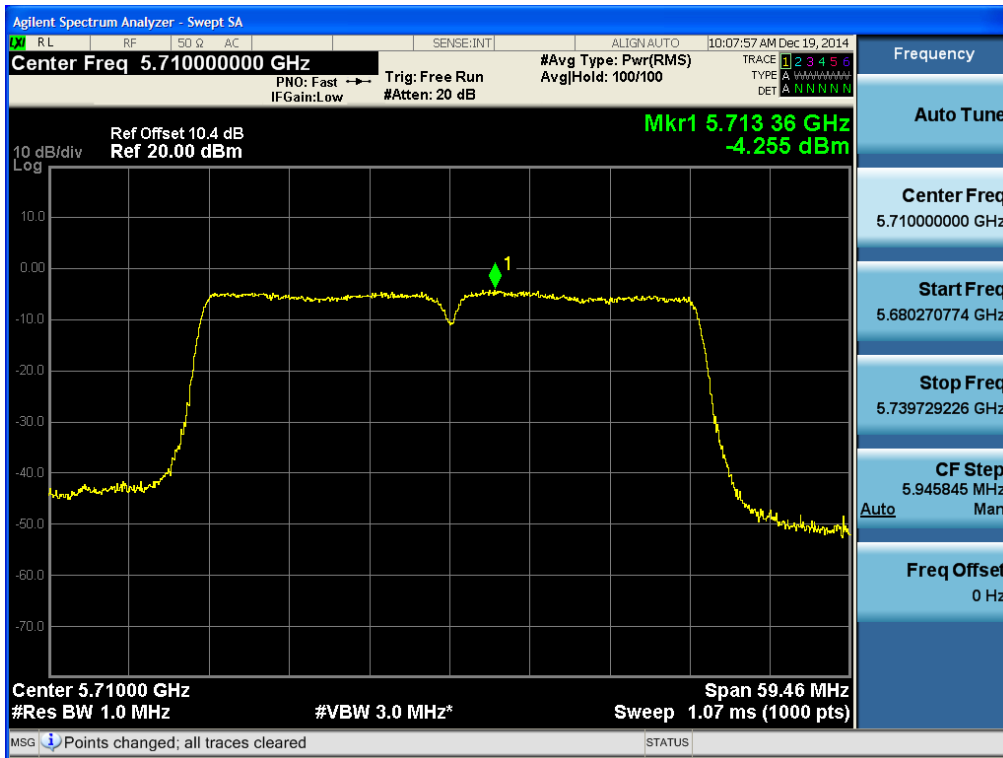


**Power Spectral Density (802.11n\_40M BW- CH 151)**

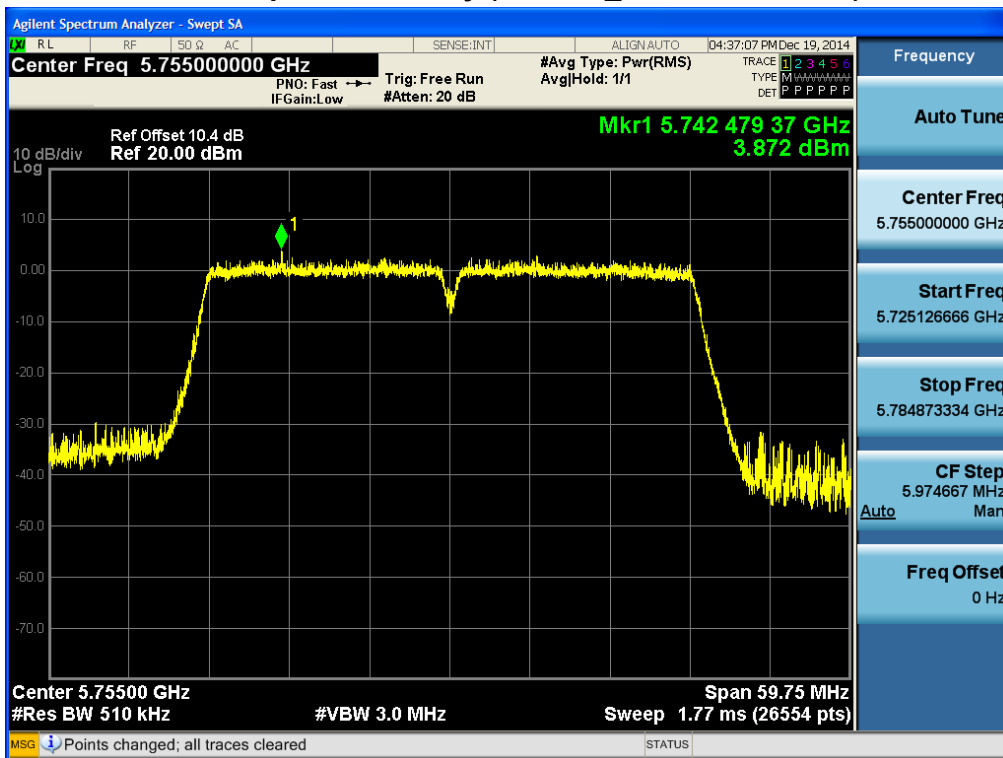


**Power Spectral Density (802.11ac\_40M BW-CH 38)**

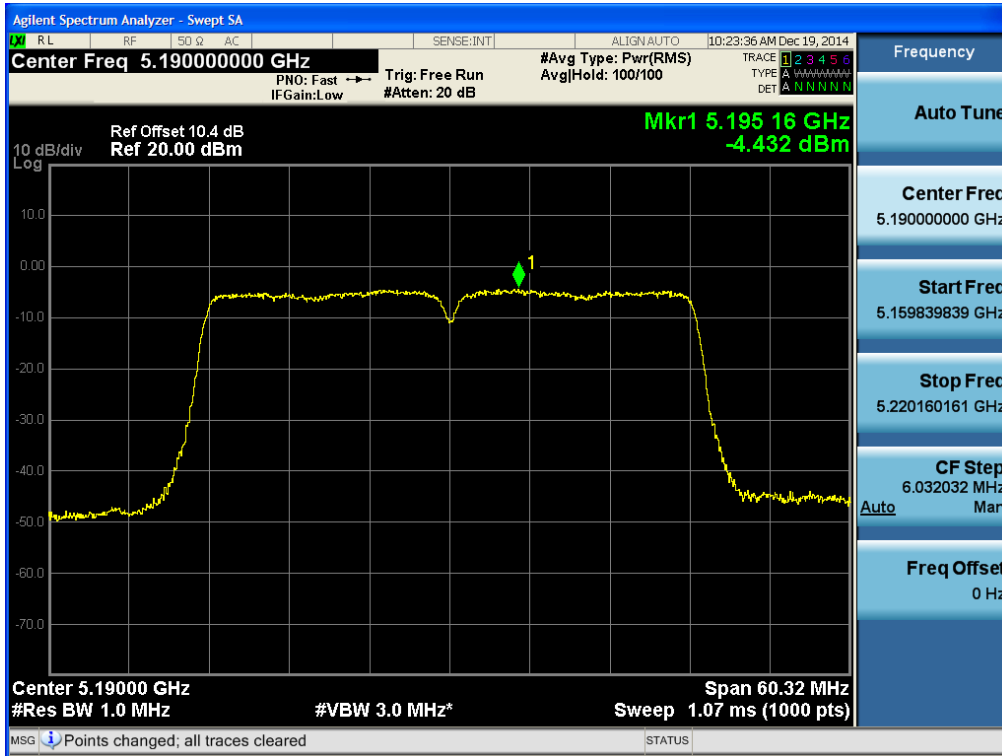


**Power Spectral Density (802.11ac\_40M BW- CH 54)**

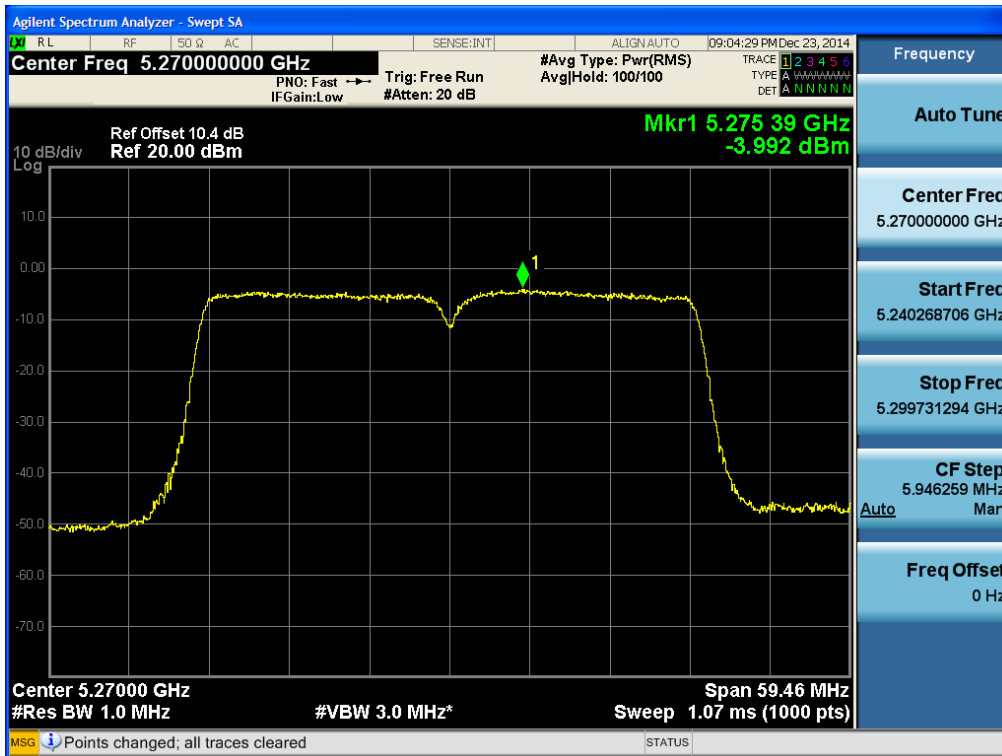

**Power Spectral Density (802.11ac\_40M BW-CH 110)**

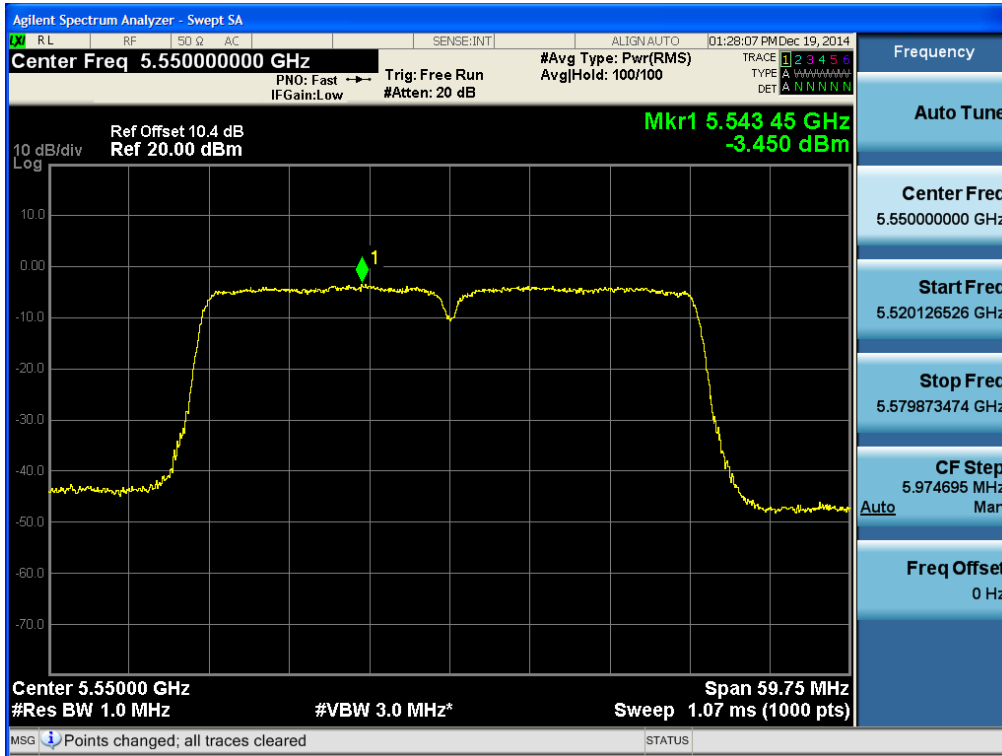


**Power Spectral Density (802.11ac\_40M BW- CH 159)**

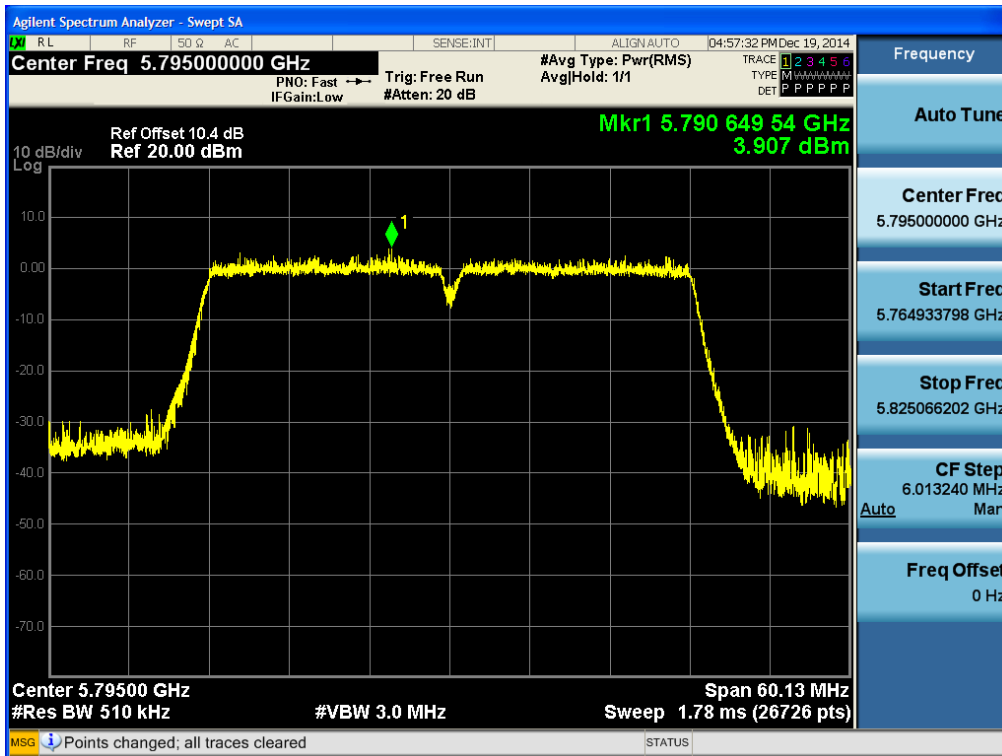


80 MHz BW


Power Spectral Density (802.11ac\_80M BW -CH 42)

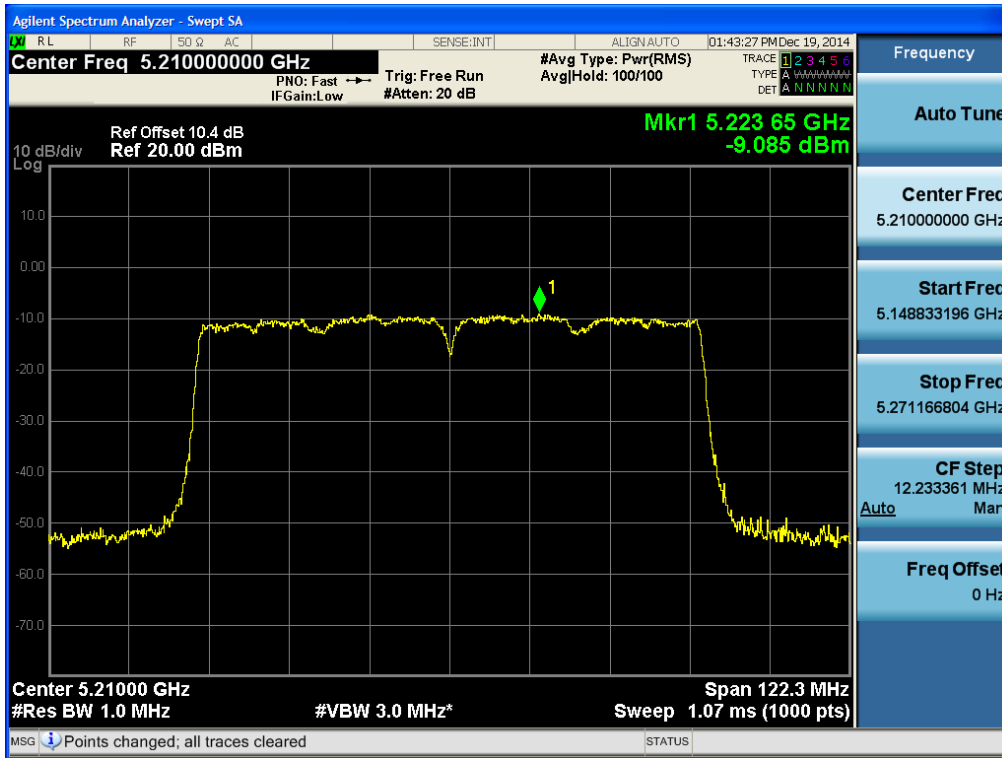


Power Spectral Density (802.11ac\_80M BW-CH 58)

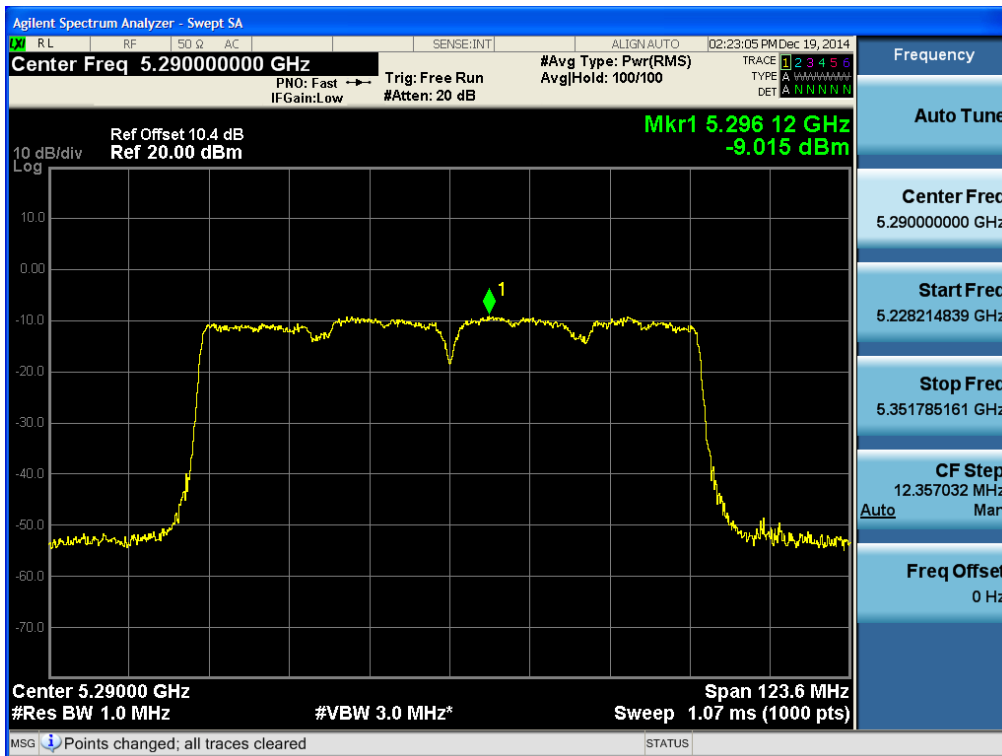


**Power Spectral Density (802.11ac\_80M BW-CH 106)**

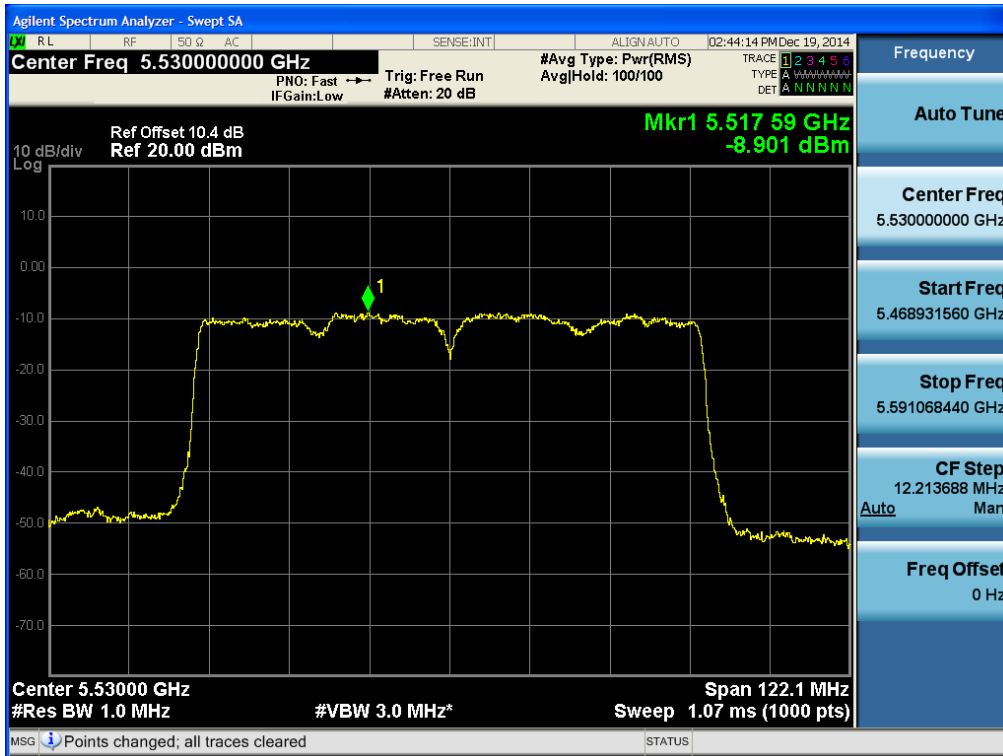

**Power Spectral Density (802.11ac\_80M BW-CH 138)**

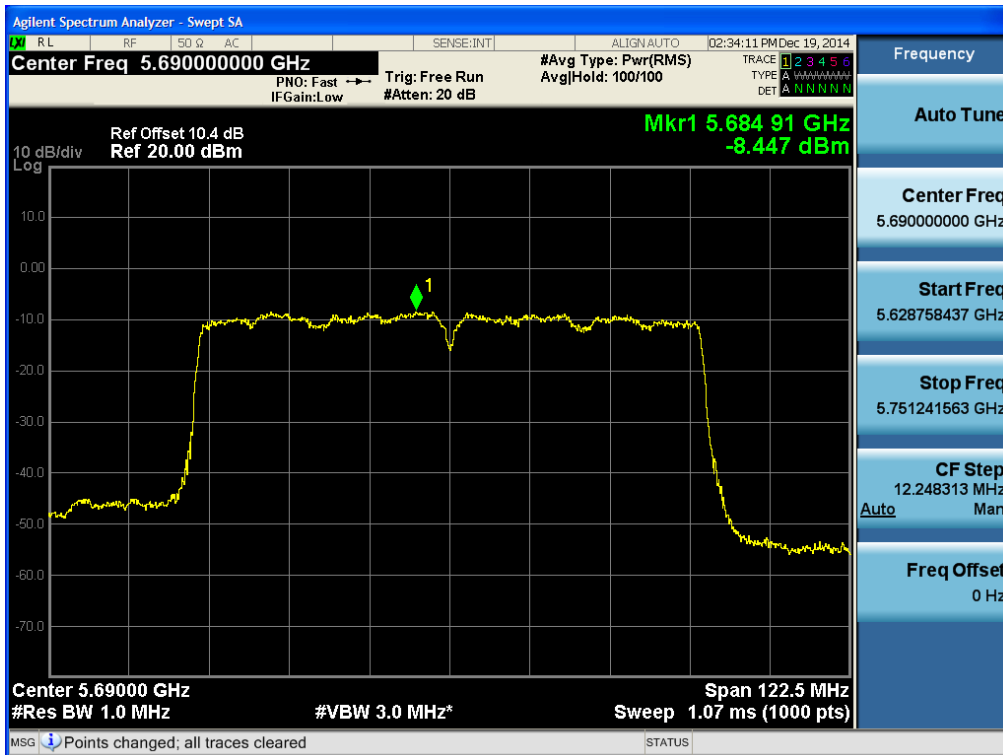

**Power Spectral Density (802.11ac\_80M BW-CH 155)**

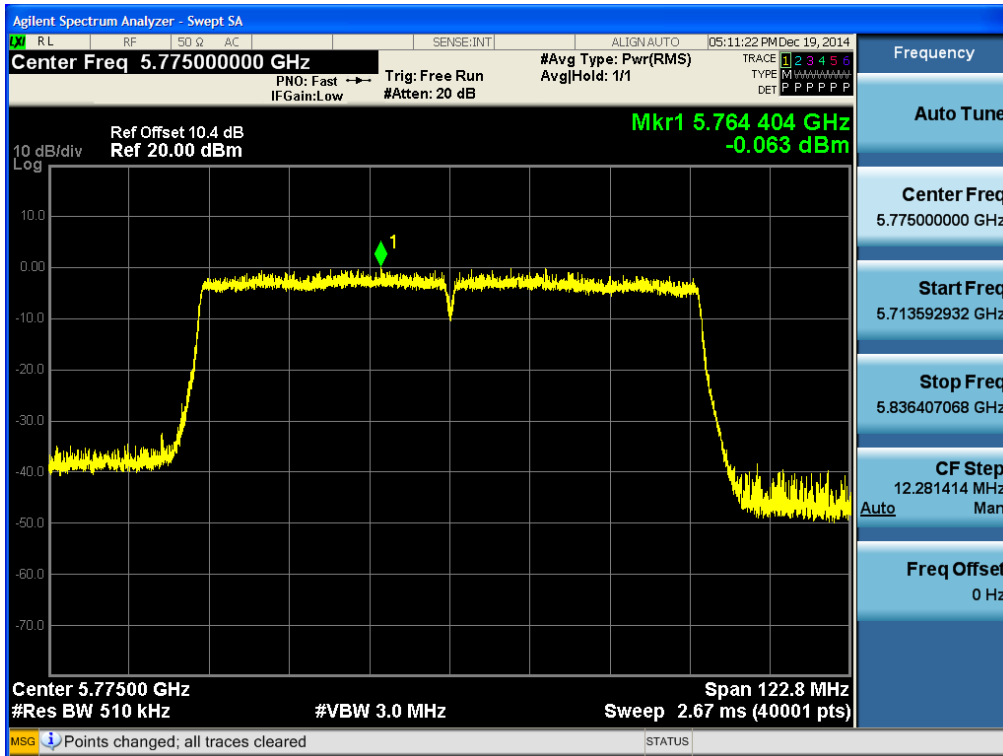

## 8.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

### 20 MHz BW

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5180042.84	42.84
100%		-30	5180030.70	30.70
100%		-20	5180033.10	33.10
100%		-10	5180035.40	35.40
100%		0	5180037.80	37.80
100%		+10	5180040.10	40.10
100%		+30	5180044.60	44.60
100%		+40	5180046.90	46.90
100%		+50	5180049.00	49.00
115%	4.35	+20	5180045.00	45.00
Batt. Endpoint	3.0	+20	5180040.00	40.00

### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,260,000,000 Hz  
 CHANNEL: 52  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5260043.17	43.17
100%		-30	5260036.20	31.80
100%		-20	5260038.90	34.1
100%		-10	5260041.80	36.20
100%		0	#REF!	38.9
100%		+10	#REF!	41.8
100%		+30	5260045.40	45.4
100%		+40	5260047.90	47.9
100%		+50	5260050.10	50.10
115%	4.35	+20	5260045.20	45.2
Batt. Endpoint	3.00	+20	5260041.70	41.7

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,500,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5500045.33	45.33
100%		-30	5500033.40	33.40
100%		-20	5500035.90	35.9
100%		-10	5500038.40	38.4
100%		0	5500040.70	40.7
100%		+10	5500043.10	43.1
100%		+30	5500047.60	47.6
100%		+40	5500049.80	49.8
100%		+50	5500052.10	52.10
115%	4.35	+20	5500047.40	47.4
Batt. Endpoint	3.00	+20	5500043.10	43.1

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,745,000,000 Hz  
 CHANNEL: 149  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5745045.33	45.33
100%		-30	5745034.80	34.80
100%		-20	5745037.30	37.3
100%		-10	5745039.60	39.6
100%		0	5745041.70	41.7
100%		+10	5745043.20	43.2
100%		+30	5745047.50	47.5
100%		+40	5745049.80	49.8
100%		+50	5745052.10	52.10
115%	4.35	+20	5745047.60	47.6
Batt. Endpoint	3.0	+20	5745043.00	43

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**40 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,190,000,000 Hz  
 CHANNEL: 38  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5190043.91	43.91
100%		-30	5190032.80	32.80
100%		-20	5190035.00	35.00
100%		-10	5190037.30	37.30
100%		0	5190039.60	39.60
100%		+10	5190041.70	41.70
100%		+30	5190045.67	45.67
100%		+40	5190047.50	47.50
100%		+50	5190050.10	50.10
115%	4.35	+20	5190045.70	45.70
Batt. Endpoint	3.0	+20	5190041.60	41.60

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,270,000,000 Hz  
 CHANNEL: 54  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5270043.95	43.95
100%		-30	5270032.70	32.70
100%		-20	5270035.10	35.1
100%		-10	5270037.40	37.4
100%		0	5270039.80	39.8
100%		+10	5270041.60	41.6
100%		+30	5270045.70	45.7
100%		+40	5270047.60	47.6
100%		+50	5270050.20	50.20
115%	4.35	+20	5270045.70	45.7
Batt. Endpoint	3.0	+20	5270041.80	41.8

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,510,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5510046.45	46.45
100%		-30	5510035.40	35.40
100%		-20	5510037.50	37.5
100%		-10	5510039.90	39.9
100%		0	5510042.00	42
100%		+10	5510044.20	44.2
100%		+30	5510048.60	48.6
100%		+40	5510050.40	50.4
100%		+50	5510052.80	52.80
115%	4.35	+20	5510048.70	48.7
Batt. Endpoint	3.0	+20	5510044.30	44.3

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,755,000,000 Hz  
 CHANNEL: 151  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5755047.20	47.20
100%		-30	5755037.10	37.10
100%		-20	5755038.60	38.6
100%		-10	5755040.90	40.9
100%		0	5755043.20	43.2
100%		+10	5755045.10	45.1
100%		+30	5755048.70	48.7
100%		+40	5755049.90	49.9
100%		+50	5755053.10	53.10
115%	4.35	+20	5755049.60	49.6
Batt. Endpoint	3.0	+20	5755045.10	45.1

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**80 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5210043.40	43.40
100%		-30	5210033.00	33.00
100%		-20	5210035.10	35.10
100%		-10	5210037.40	37.40
100%		0	5210039.90	39.90
100%		+10	5210041.80	41.80
100%		+30	5210045.60	45.60
100%		+40	5210047.90	47.90
100%		+50	5210050.30	50.30
115%	4.35	+20	5210045.70	45.70
Batt. Endpoint	3.0	+20	5210041.60	41.60

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5290046.08	46.08
100%		-30	5290036.10	36.10
100%		-20	5290038.70	38.7
100%		-10	5290040.90	40.9
100%		0	5290042.60	42.6
100%		+10	5290044.20	44.2
100%		+30	5290048.20	48.2
100%		+40	5290050.10	50.1
100%		+50	5290052.60	52.60
115%	4.35	+20	5290048.10	48.1
Batt. Endpoint	3.0	+20	5290044.50	44.5

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5530045.82	45.82
100%		-30	5530034.10	34.10
100%		-20	5530036.30	36.3
100%		-10	5530038.90	38.9
100%		0	5530041.50	41.5
100%		+10	5530043.60	43.6
100%		+30	5530047.90	47.9
100%		+40	5530050.30	50.3
100%		+50	5530052.71	52.71
115%	4.35	+20	5530047.70	47.7
Batt. Endpoint	3.0	+20	5530043.90	43.9

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.8	+20(Ref)	5775047.35	47.35
100%		-30	5775036.80	36.80
100%		-20	5775038.60	38.6
100%		-10	5775040.90	40.9
100%		0	5775042.80	42.8
100%		+10	5775045.10	45.1
100%		+30	5775049.40	49.4
100%		+40	5775051.60	51.6
100%		+50	5775053.50	53.50
115%	4.35	+20	5775049.90	49.9
Batt. Endpoint	3.0	+20	5775045.51	45.51

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 8.6 RADIATED MEASUREMENT

### 8.6.1 RADIATED SPURIOUS EMISSIONS.

#### Test Requirements and limit, §15.205, §15.209, §15.407


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### ■ §15.407, KDB 789033 D02


All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBµV/m. Especially, for transmitter operating in the 5725 Mhz – 5850 MHz : all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequency 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


### Test Configuration

#### Below 30 MHz

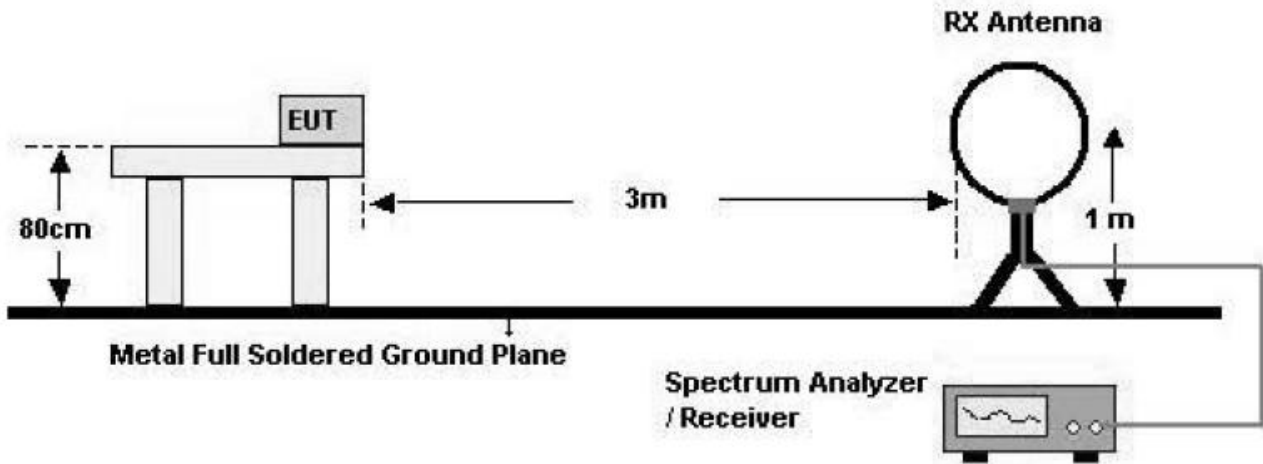

#### 30 MHz - 1 GHz

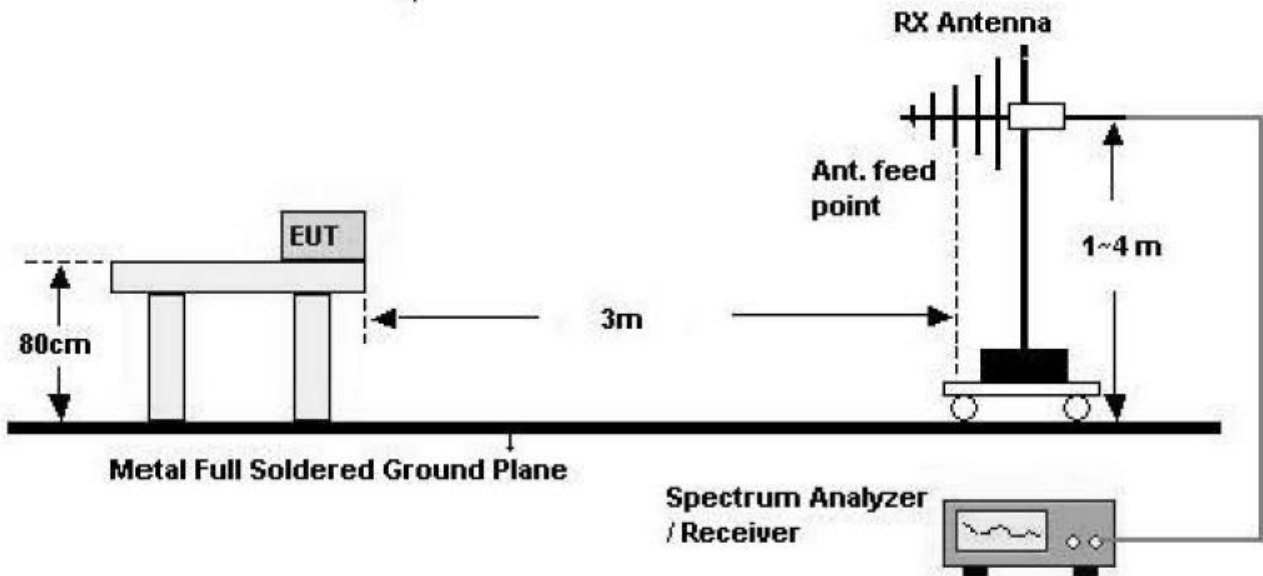

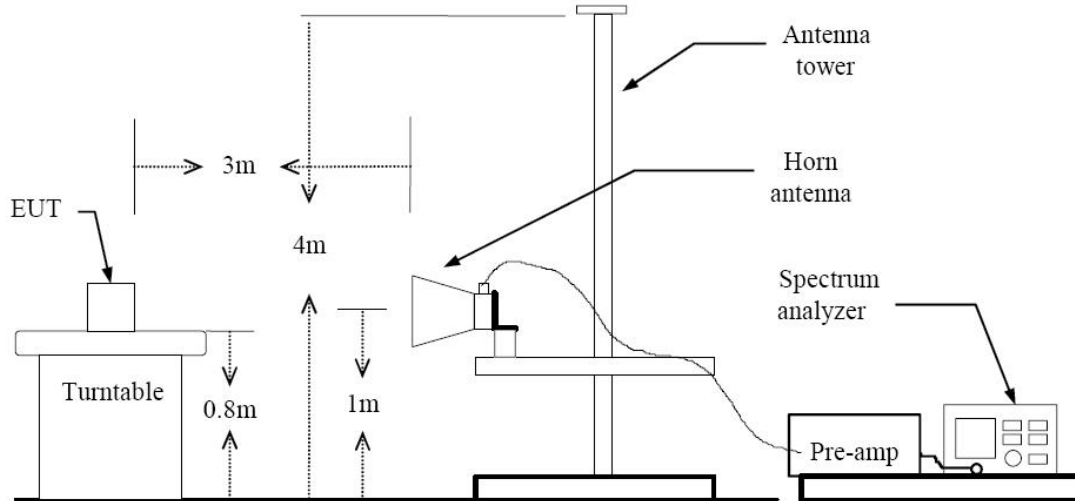**Above 1 GHz****TEST PROCEDURE USED**

ANSI C63.4(2003)

Method H)5) in KDB 789033, issued 06/06/2014 (Peak)

Method H)6)d) in KDB 789033, issued 06/06/2014 (Average)

**. Spectrum setting:****- Peak.**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Sweep Time = auto
5. Trace mode = max hold
6. Allow sweeps to continue until the trace stabilizes.
7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

**- Average ( Method VB :Averaging using reduced video bandwidth)**

1. RBW = 1 MHz
2. VBW
  - 2.1. If the EUT is configured to transmit with duty cycle  $\geq$  98 percent, set  $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
  - 2.2. If the EUT duty cycle is  $<$  98 percent, set  $VBW \geq 1/T$ , where T is the minimum transmission duration.

3. The analyzer is set to linear detector mode.
4. Detector = Peak.
5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

**Note :**

1. We used the case 2 for 802.11a/g/n/ac\_20/n/ac\_40\_80 mode to perform the average field strength measurements.
2. The actual setting value of VBW for 802.11a/g/n/ac\_20/n/ac\_40\_80

Mode	Worst Data rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
<b>a</b>	<b>6</b>	<b>2.055</b>	<b>2.156</b>	<b>95.32</b>	<b>487</b>	<b>3000</b>
<b>n_20</b>	<b>6.5</b>	<b>1.918</b>	<b>2.030</b>	<b>94.48</b>	<b>521</b>	<b>3000</b>
<b>n_40</b>	<b>13.5</b>	<b>0.920</b>	<b>1.030</b>	<b>89.32</b>	<b>1087</b>	<b>3000</b>
<b>ac_20</b>	<b>6.5</b>	<b>2.050</b>	<b>2.158</b>	<b>95.00</b>	<b>488</b>	<b>3000</b>
<b>ac_40</b>	<b>13.5</b>	<b>0.947</b>	<b>1.053</b>	<b>89.93</b>	<b>1056</b>	<b>3000</b>
<b>ac_80</b>	<b>29.3</b>	<b>0.450</b>	<b>0.560</b>	<b>80.36</b>	<b>2222</b>	<b>3000</b>

**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## TEST RESULTS

### Below 1 GHz

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}_{\mu\text{V}}$	$\text{dB /m}$	$\text{dB}$	(H/V)	$\text{dB}_{\mu\text{V/m}}$	$\text{dB}_{\mu\text{V/m}}$	$\text{dB}$
No Critical peaks found							

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



**Above 1 GHz**

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	62.61	-6.51	V	56.10	68.20	12.10	PK
15540	64.17	-6.42	V	57.75	73.98	16.23	PK
15540	49.88	-6.42	V	43.46	53.98	10.52	AV
10360	62.72	-6.51	H	56.21	68.20	11.99	PK
15540	64.22	-6.42	H	57.80	73.98	16.18	PK
15540	49.90	-6.42	H	43.48	53.98	10.50	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	63.05	-6.49	V	56.56	68.20	11.64	PK
15600	63.28	-7.15	V	56.13	73.98	17.85	PK
15600	49.81	-7.15	V	42.66	53.98	11.32	AV
10400	63.75	-6.49	H	57.26	68.20	10.94	PK
15600	63.47	-7.15	H	56.32	73.98	17.66	PK
15600	49.82	-7.15	H	42.67	53.98	11.31	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	63.60	-6.96	V	56.64	68.20	11.56	PK
15720	64.18	-6.62	V	57.56	73.98	16.42	PK
15720	50.15	-6.62	V	43.53	53.98	10.45	AV
10480	63.82	-6.96	H	56.86	68.20	11.34	PK
15720	64.67	-6.96	H	57.71	73.98	16.27	PK
15720	50.17	-6.62	H	43.55	53.98	10.43	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	62.18	-6.51	V	55.67	68.20	12.53	PK
15540	64.20	-6.42	V	57.78	73.98	16.20	PK
15540	49.82	-6.42	V	43.40	53.98	10.58	AV
10360	62.46	-6.51	H	55.95	68.20	12.25	PK
15540	64.30	-6.42	H	57.88	73.98	16.10	PK
15540	49.89	-6.42	H	43.47	53.98	10.51	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	62.91	-6.49	V	56.42	68.20	11.78	PK
15600	63.74	-7.15	V	56.59	73.98	17.39	PK
15600	49.78	-7.15	V	42.63	53.98	11.35	AV
10400	63.10	-6.49	H	56.61	68.20	11.59	PK
15600	63.97	-7.15	H	56.82	73.98	17.16	PK
15600	49.82	-7.15	H	42.67	53.98	11.31	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	62.95	-6.96	V	55.99	68.20	12.21	PK
15720	64.17	-6.62	V	57.55	73.98	16.43	PK
15720	50.16	-6.62	V	43.54	53.98	10.44	AV
10480	63.17	-6.96	H	56.21	68.20	11.99	PK
15720	64.79	-6.96	H	57.83	73.98	16.15	PK
15720	50.18	-6.62	H	43.56	53.98	10.42	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	62.39	-6.51	V	55.88	68.20	12.32	PK
15540	64.08	-6.42	V	57.66	73.98	16.32	PK
15540	49.88	-6.42	V	43.46	53.98	10.52	AV
10360	62.59	-6.51	H	56.08	68.20	12.12	PK
15540	64.26	-6.42	H	57.84	73.98	16.14	PK
15540	49.91	-6.42	H	43.49	53.98	10.49	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	63.35	-6.49	V	56.86	68.20	11.34	PK
15600	63.81	-7.15	V	56.66	73.98	17.32	PK
15600	49.74	-7.15	V	42.59	53.98	11.39	AV
10400	63.59	-6.49	H	57.10	68.20	11.10	PK
15600	63.86	-7.15	H	56.71	73.98	17.27	PK
15600	49.75	-7.15	H	42.60	53.98	11.38	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	63.46	-6.96	V	56.50	68.20	11.70	PK
15720	64.16	-6.62	V	57.54	73.98	16.44	PK
15720	50.11	-6.62	V	43.49	53.98	10.49	AV
10480	63.62	-6.96	H	56.66	68.20	11.54	PK
15720	64.37	-6.96	H	57.41	73.98	16.57	PK
15720	50.15	-6.62	H	43.53	53.98	10.45	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	62.86	-5.38	V	57.48	68.20	10.72	PK
15570	64.65	-6.41	V	58.24	73.98	15.74	PK
15570	49.86	-6.41	V	43.45	53.98	10.53	AV
10380	62.97	-5.38	H	57.59	68.20	10.61	PK
15570	64.72	-6.41	H	58.31	73.98	15.67	PK
15570	49.88	-6.41	H	43.47	53.98	10.51	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	62.90	-6.88	V	56.02	68.20	12.18	PK
15690	63.53	-6.64	V	56.89	73.98	17.09	PK
15690	50.16	-6.64	V	43.52	53.98	10.46	AV
10460	63.23	-6.88	H	56.35	68.20	11.85	PK
15690	64.04	-6.64	H	57.40	73.98	16.58	PK
15690	50.22	-6.64	H	43.58	53.98	10.40	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	62.97	-5.38	V	57.59	68.20	10.61	PK
15570	64.35	-6.41	V	57.94	73.98	16.04	PK
15570	49.78	-6.41	V	43.37	53.98	10.61	AV
10380	63.11	-5.38	H	57.73	68.20	10.47	PK
15570	64.54	-6.41	H	58.13	73.98	15.85	PK
15570	49.83	-6.41	H	43.42	53.98	10.56	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	63.58	-6.88	V	56.70	68.20	11.50	PK
15690	63.91	-6.64	V	57.27	73.98	16.71	PK
15690	50.09	-6.64	V	43.45	53.98	10.53	AV
10460	64.02	-6.88	H	57.14	68.20	11.06	PK
15690	64.30	-6.64	H	57.66	73.98	16.32	PK
15690	50.15	-6.64	H	43.51	53.98	10.47	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 1
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	62.70	-6.32	V	56.38	68.20	11.82	PK
15630	63.87	-7.14	V	56.73	73.98	17.25	PK
15630	50.19	-7.14	V	43.05	53.98	10.93	AV
10420	62.87	-6.32	H	56.55	68.20	11.65	PK
15630	64.61	-7.14	H	57.47	73.98	16.51	PK
15630	50.20	-7.14	H	43.06	53.98	10.92	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	63.02	-6.52	V	56.50	68.20	11.70	PK
15780	64.02	-6.67	V	57.35	73.98	16.63	PK
15780	49.91	-6.67	V	43.24	53.98	10.74	AV
10520	63.17	-6.52	H	56.65	68.20	11.55	PK
15780	64.33	-6.67	H	57.66	73.98	16.32	PK
15780	49.93	-6.67	H	43.26	53.98	10.72	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	63.58	-6.72	V	56.86	73.98	17.12	PK
10600	49.57	-6.72	V	42.85	53.98	11.13	AV
15900	63.58	-7.00	V	56.58	73.98	17.40	PK
15900	49.80	-7.00	V	42.80	53.98	11.18	AV
10600	64.21	-6.72	H	57.49	73.98	16.49	PK
10600	49.64	-6.72	H	42.92	53.98	11.06	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	62.39	-6.43	V	55.96	73.98	18.02	PK
10640	49.12	-6.43	V	42.69	53.98	11.29	AV
15960	63.66	-6.93	V	56.73	73.98	17.25	PK
15960	49.85	-6.93	V	42.92	53.98	11.06	AV
10640	62.99	-6.43	H	56.56	73.98	17.42	PK
10640	49.19	-6.43	H	42.76	53.98	11.22	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 2A
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	62.95	-6.52	V	56.43	68.20	11.77	PK
15780	64.17	-6.67	V	57.50	73.98	16.48	PK
15780	49.90	-6.67	V	43.23	53.98	10.75	AV
10520	63.33	-6.52	H	56.81	68.20	11.39	PK
15780	64.25	-6.67	H	57.58	73.98	16.40	PK
15780	49.91	-6.67	H	43.24	53.98	10.74	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	63.14	-6.72	V	56.42	73.98	17.56	PK
10600	49.43	-6.72	V	42.71	53.98	11.27	AV
15900	63.60	-7.00	V	56.60	73.98	17.38	PK
15900	49.85	-7.00	V	42.85	53.98	11.13	AV
10600	63.32	-6.72	H	56.60	73.98	17.38	PK
10600	49.46	-6.72	H	42.74	53.98	11.24	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	63.50	-6.43	V	57.07	73.98	16.91	PK
10640	49.14	-6.43	V	42.71	53.98	11.27	AV
15960	63.33	-6.93	V	56.40	73.98	17.58	PK
15960	49.91	-6.93	V	42.98	53.98	11.00	AV
10640	63.68	-6.43	H	57.25	73.98	16.73	PK
10640	49.20	-6.43	H	42.77	53.98	11.21	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5260MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	63.27	-6.52	V	56.75	68.20	11.45	PK
15780	63.71	-6.67	V	57.04	73.98	16.94	PK
15780	49.95	-6.67	V	43.28	53.98	10.70	AV
10520	63.56	-6.52	H	57.04	68.20	11.16	PK
15780	63.89	-6.67	H	57.22	73.98	16.76	PK
15780	50.00	-6.67	H	43.33	53.98	10.65	AV

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	64.05	-6.72	V	57.33	73.98	16.65	PK
10600	49.42	-6.72	V	42.70	53.98	11.28	AV
15900	63.92	-7.00	V	56.92	73.98	17.06	PK
15900	49.87	-7.00	V	42.87	53.98	11.11	AV
10600	64.23	-6.72	H	57.51	73.98	16.47	PK
10600	49.46	-6.72	H	42.74	53.98	11.24	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	63.27	-6.43	V	56.84	73.98	17.14	PK
10640	49.19	-6.43	V	42.76	53.98	11.22	AV
15960	63.39	-6.93	V	56.46	73.98	17.52	PK
15960	49.82	-6.93	V	42.89	53.98	11.09	AV
10640	64.07	-6.43	H	57.64	73.98	16.34	PK
10640	49.23	-6.43	H	42.80	53.98	11.18	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	63.26	-5.77	V	57.49	68.20	10.71	PK
15810	63.91	-7.47	V	56.44	73.98	17.54	PK
15810	49.77	-7.47	V	42.30	53.98	11.68	AV
10540	63.38	-5.77	H	57.61	68.20	10.59	PK
15810	64.01	-7.47	H	56.54	73.98	17.44	PK
15810	49.78	-7.47	H	42.31	53.98	11.67	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 2A
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	64.23	-6.36	V	57.87	73.98	16.11	PK
10620	49.54	-6.36	V	43.18	53.98	10.80	AV
15930	63.48	-6.77	V	56.71	73.98	17.27	PK
15930	49.62	-6.77	V	42.85	53.98	11.13	AV
10620	64.38	-6.36	H	58.02	73.98	15.96	PK
10620	49.56	-6.36	H	43.20	53.98	10.78	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	62.56	-5.77	V	56.79	68.20	11.41	PK
15810	63.96	-7.47	V	56.49	73.98	17.49	PK
15810	49.81	-7.47	V	42.34	53.98	11.64	AV
10540	62.86	-5.77	H	57.09	68.20	11.11	PK
15810	64.37	-7.47	H	56.90	73.98	17.08	PK
15810	49.86	-7.47	H	42.39	53.98	11.59	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2A
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	63.75	-6.36	V	57.39	73.98	16.59	PK
10620	49.49	-6.36	V	43.13	53.98	10.85	AV
15930	63.55	-6.77	V	56.78	73.98	17.20	PK
15930	49.60	-6.77	V	42.83	53.98	11.15	AV
10620	63.78	-6.36	H	57.42	73.98	16.56	PK
10620	49.51	-6.36	H	43.15	53.98	10.83	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 2A
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10580	63.27	-5.70	V	57.57	68.20	10.63	PK
15870	64.85	-7.27	V	57.58	73.98	16.40	PK
15870	50.33	-7.27	V	43.06	53.98	10.92	AV
10580	63.57	-5.70	H	57.87	68.20	10.33	PK
15870	65.08	-7.27	H	57.81	73.98	16.17	PK
15870	50.34	-7.27	H	43.07	53.98	10.91	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	63.18	-5.06	V	58.12	73.98	15.86	PK
11000	49.94	-5.06	V	44.88	53.98	9.10	AV
16500	63.65	-4.35	V	59.30	68.20	8.90	PK
11000	63.56	-5.06	H	58.50	73.98	15.48	PK
11000	49.98	-5.06	H	44.92	53.98	9.06	AV
16500	64.04	-4.35	H	59.69	68.20	8.51	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5600 MHz
Channel No.	120 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11200	62.71	-6.05	V	56.66	73.98	17.32	PK
11200	49.28	-6.05	V	43.23	53.98	10.75	AV
16800	63.69	-2.56	V	61.13	68.20	7.07	PK
11200	63.14	-6.05	H	57.09	73.98	16.89	PK
11200	49.34	-6.05	H	43.29	53.98	10.69	AV
16800	63.78	-2.56	H	61.22	68.20	6.98	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	63.21	-6.08	V	57.13	73.98	16.85	PK
11400	48.69	-6.08	V	42.61	53.98	11.37	AV
17100	62.82	-0.85	V	61.97	68.20	6.23	PK
11400	63.36	-6.08	H	57.28	73.98	16.70	PK
11400	48.78	-6.08	H	42.70	53.98	11.28	AV
17100	63.01	-0.85	H	62.16	68.20	6.04	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 2C
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	62.80	-5.06	V	57.74	73.98	16.24	PK
11000	49.94	-5.06	V	44.88	53.98	9.10	AV
16500	63.88	-4.35	V	59.53	68.20	8.67	PK
11000	63.58	-5.06	H	58.52	73.98	15.46	PK
11000	48.97	-5.06	H	43.91	53.98	10.07	AV
16500	64.19	-4.35	H	59.84	68.20	8.36	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 2C
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5600 MHz
Channel No.	120 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11200	62.60	-6.05	V	56.55	73.98	17.43	PK
11200	49.27	-6.05	V	43.22	53.98	10.76	AV
16800	63.65	-2.56	V	61.09	68.20	7.11	PK
11200	62.78	-6.05	H	56.73	73.98	17.25	PK
11200	49.29	-6.05	H	43.24	53.98	10.74	AV
16800	63.94	-2.56	H	61.38	68.20	6.82	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	63.15	-6.08	V	57.07	73.98	16.91	PK
11400	48.82	-6.08	V	42.74	53.98	11.24	AV
17100	62.51	-0.85	V	61.66	68.20	6.54	PK
11400	63.24	-6.08	H	57.16	73.98	16.82	PK
11400	48.83	-6.08	H	42.75	53.98	11.23	AV
17100	63.06	-0.85	H	62.21	68.20	5.99	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	63.07	-5.06	V	58.01	73.98	15.97	PK
11000	48.84	-5.06	V	43.78	53.98	10.20	AV
16500	63.55	-4.35	V	59.20	68.20	9.00	PK
11000	63.27	-5.06	H	58.21	73.98	15.77	PK
11000	48.91	-5.06	H	43.85	53.98	10.13	AV
16500	63.68	-4.35	H	59.33	68.20	8.87	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5600 MHz
Channel No.	120 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11200	62.68	-6.05	V	56.63	73.98	17.35	PK
11200	49.18	-6.05	V	43.13	53.98	10.85	AV
16800	63.48	-2.56	V	60.92	68.20	7.28	PK
11200	63.04	-6.05	H	56.99	73.98	16.99	PK
11200	49.22	-6.05	H	43.17	53.98	10.81	AV
16800	63.72	-2.56	H	61.16	68.20	7.04	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	62.96	-6.08	V	56.88	73.98	17.10	PK
11400	48.82	-6.08	V	42.74	53.98	11.24	AV
17100	63.02	-0.85	V	62.17	68.20	6.03	PK
11400	63.35	-6.08	H	57.27	73.98	16.71	PK
11400	48.86	-6.08	H	42.78	53.98	11.20	AV
17100	63.36	-0.85	H	62.51	68.20	5.69	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	62.68	-5.86	V	56.82	73.98	17.16	PK
11020	48.93	-5.86	V	43.07	53.98	10.91	AV
16530	63.15	-3.75	V	59.40	68.20	8.80	PK
11020	63.02	-5.86	H	57.16	73.98	16.82	PK
11020	48.94	-5.86	H	43.08	53.98	10.90	AV
16530	63.36	-3.75	H	59.61	68.20	8.59	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	63.36	-6.14	V	57.22	73.98	16.76	PK
11180	49.15	-6.14	V	43.01	53.98	10.97	AV
16770	63.19	-3.11	V	60.08	68.20	8.12	PK
11180	63.63	-6.14	H	57.49	73.98	16.49	PK
11180	49.18	-6.14	H	43.04	53.98	10.94	AV
16770	63.35	-3.11	H	60.24	68.20	7.96	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5670 MHz
Channel No.	134 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11340	62.94	-5.10	V	57.84	73.98	16.14	PK
11340	49.09	-5.10	V	43.99	53.98	9.99	AV
17010	63.13	-1.27	V	61.86	68.20	6.34	PK
11340	63.47	-5.10	H	58.37	73.98	15.61	PK
11340	49.11	-5.10	H	44.01	53.98	9.97	AV
17010	63.40	-1.27	H	62.13	68.20	6.07	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 2C
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	62.51	-5.86	V	56.65	73.98	17.33	PK
11020	48.90	-5.86	V	43.04	53.98	10.94	AV
16530	63.22	-3.75	V	59.47	68.20	8.73	PK
11020	62.76	-5.86	H	56.90	73.98	17.08	PK
11020	48.93	-5.86	H	43.07	53.98	10.91	AV
16530	63.41	-3.75	H	59.66	68.20	8.54	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	63.51	-6.14	V	57.37	73.98	16.61	PK
11180	49.18	-6.14	V	43.04	53.98	10.94	AV
16770	63.05	-3.11	V	59.94	68.20	8.26	PK
11180	63.63	-6.14	H	57.49	73.98	16.49	PK
11180	49.19	-6.14	H	43.05	53.98	10.93	AV
16770	63.24	-3.11	H	60.13	68.20	8.07	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 2C
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	62.97	-6.07	V	56.90	73.98	17.08	PK
11420	49.07	-6.07	V	43.00	53.98	10.98	AV
17130	63.21	-0.81	V	62.40	68.20	5.80	PK
11420	63.44	-6.07	H	57.37	73.98	16.61	PK
11420	49.08	-6.07	H	43.01	53.98	10.97	AV
17130	63.65	-0.81	H	62.84	68.20	5.36	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 2C
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11060	62.36	-6.21	V	56.15	73.98	17.83	PK
11060	48.47	-6.21	V	42.26	53.98	11.72	AV
16590	62.85	-3.20	V	59.65	68.20	8.55	PK
11060	62.96	-6.21	H	56.75	73.98	17.23	PK
11060	48.49	-6.21	H	42.28	53.98	11.70	AV
16590	63.10	-3.20	H	59.90	68.20	8.30	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2C
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5690 MHz
Channel No.	138 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11380	62.62	-5.59	V	57.03	73.98	16.95	PK
11380	48.75	-5.59	V	43.16	53.98	10.82	AV
17070	62.41	-1.32	V	61.09	68.20	7.11	PK
11380	62.91	-5.59	H	57.32	73.98	16.66	PK
11380	48.77	-5.59	H	43.18	53.98	10.80	AV
17070	62.78	-1.32	H	61.46	68.20	6.74	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	63.06	-6.10	V	56.96	73.98	17.02	PK
11490	49.69	-6.10	V	43.59	53.98	10.39	AV
17295	63.61	-1.35	V	62.26	68.2	5.94	PK
11490	63.33	-6.10	H	57.23	73.98	16.75	PK
11490	49.73	-6.10	H	43.63	53.98	10.35	AV
17295	63.75	-1.35	H	62.4	68.2	5.80	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	63.26	-5.57	V	57.69	73.98	16.29	PK
11570	49.21	-5.57	V	43.64	53.98	10.34	AV
17355	63.55	-0.39	V	63.16	68.2	5.04	PK
11570	63.93	-5.57	H	58.36	73.98	15.62	PK
11570	49.26	-5.57	H	43.69	53.98	10.29	AV
17355	63.67	-0.39	H	63.28	68.2	4.92	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	63.60	-6.63	V	56.97	73.98	17.01	PK
11650	49.40	-6.63	V	42.77	53.98	11.21	AV
17475	62.15	0.29	V	62.44	68.2	5.76	PK
11650	64.13	-6.63	H	57.50	73.98	16.48	PK
11650	49.42	-6.63	H	42.79	53.98	11.19	AV
17475	62.6	0.29	H	62.89	68.2	5.31	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna



Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	63.57	-6.10	V	57.47	73.98	16.51	PK
11490	49.63	-6.10	V	43.53	53.98	10.45	AV
17235	63.29	-1.35	V	61.94	68.2	6.26	PK
11490	63.88	-6.10	H	57.78	73.98	16.20	PK
11490	49.74	-6.10	H	43.64	53.98	10.34	AV
17235	63.67	-1.35	H	62.32	68.2	5.88	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	62.57	-5.57	V	57.00	73.98	16.98	PK
11570	49.16	-5.57	V	43.59	53.98	10.39	AV
17355	63.59	-0.39	V	63.20	68.2	5.00	PK
11570	62.98	-5.57	H	57.41	73.98	16.57	PK
11570	49.16	-5.57	H	43.59	53.98	10.39	AV
17355	63.67	-0.39	H	63.28	68.2	4.92	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	63.77	-6.63	V	57.14	73.98	16.84	PK
11650	49.41	-6.63	V	42.78	53.98	11.20	AV
17475	62.60	0.29	V	62.89	68.2	5.31	PK
11650	63.91	-6.63	H	57.28	73.98	16.7	PK
11650	49.41	-6.63	H	42.78	53.98	11.2	AV
17475	62.73	0.29	H	63.02	68.2	5.18	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW. Worst case is 6.5 Mbps in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5745 MHz
Channel No.	149 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11490	63.71	-6.10	V	57.61	73.98	16.37	PK
11490	49.57	-6.10	V	43.47	53.98	10.51	AV
17235	63.55	-1.35	V	62.20	68.2	6.00	PK
11490	64.95	-6.10	H	58.85	73.98	15.13	PK
11490	49.58	-6.10	H	43.48	53.98	10.5	AV
17235	63.64	-1.35	H	62.29	68.2	5.91	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	62.88	-5.57	V	57.31	73.98	16.67	PK
11570	49.16	-5.57	V	43.59	53.98	10.39	AV
17355	62.61	-0.39	V	62.22	68.2	5.98	PK
11570	63.47	-5.57	H	57.9	73.98	16.08	PK
11570	49.20	-5.57	H	43.63	53.98	10.35	AV
17355	63.25	-0.39	H	62.86	68.2	5.34	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	62.96	-6.63	V	56.33	73.98	17.65	PK
11650	49.39	-6.63	V	42.76	53.98	11.22	AV
17475	62.68	0.29	V	62.97	68.2	5.23	PK
11650	63.58	-6.63	H	56.95	73.98	17.03	PK
11650	49.39	-6.63	H	42.76	53.98	11.22	AV
17475	62.95	0.29	H	63.24	68.2	4.96	PK

#### Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	63.47	-6.26	V	57.21	73.98	16.77	PK
11510	49.69	-6.26	V	43.43	53.98	10.55	AV
17265	62.38	-1.1	V	61.28	68.2	6.92	PK
11510	63.61	-6.26	H	57.35	73.98	16.63	PK
11510	49.69	-6.26	H	43.43	53.98	10.55	AV
17265	62.51	-1.1	H	61.41	68.2	6.79	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	63.27	-5.92	V	57.35	73.98	16.63	PK
11590	49.21	-5.92	V	43.29	53.98	10.69	AV
17385	62.26	-0.24	V	62.02	68.2	6.18	PK
11590	63.39	-5.92	H	57.47	73.98	16.51	PK
11590	49.23	-5.92	H	43.31	53.98	10.67	AV
17385	62.52	-0.24	V	62.28	68.2	5.92	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_40 MHz BW. Worst case is 13.5 Mbps in 802.11n\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band :	UNII 3
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5755 MHz
Channel No.	151 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11510	63.63	-6.26	V	57.37	73.98	16.61	PK
11510	49.67	-6.26	V	43.41	53.98	10.57	AV
17265	63.09	-1.10	V	61.99	68.2	6.21	PK
11510	63.8	-6.26	H	57.54	73.98	16.44	PK
11510	49.69	-6.26	H	43.43	53.98	10.55	AV
17265	63.11	-1.10	H	62.01	68.2	6.19	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	63.07	-5.92	V	57.15	73.98	16.83	PK
11590	49.15	-5.92	V	43.23	53.98	10.75	AV
17385	61.97	-0.24	V	61.73	68.2	6.47	PK
11590	63.42	-5.92	H	57.5	73.98	16.48	PK
11590	49.22	-5.92	H	43.3	53.98	10.68	AV
17385	62.4	-0.24	H	62.16	68.2	6.04	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac\_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Band :	UNII 3
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5775 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11550	63.05	-5.97	V	57.08	73.98	16.90	PK
11550	49.24	-5.97	V	43.27	53.98	10.71	AV
17325	63.27	-1.06	V	62.21	68.2	5.99	PK
11550	63.23	-5.97	H	57.26	73.98	16.72	PK
11550	49.30	-5.97	H	43.33	53.98	10.65	AV
17325	63.51	-1.06	H	62.45	68.2	5.75	PK

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.55	8.79	H	64.34	73.98	9.64	PK
5150	40.50	8.79	H	49.29	53.98	4.69	AV
5150	54.10	8.79	V	62.89	73.98	11.09	PK
5150	39.40	8.79	V	48.19	53.98	5.79	AV

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	50.62	8.79	H	59.41	73.98	14.57	PK
5150	36.89	8.79	H	45.68	53.98	8.30	AV
5150	50.25	8.79	V	59.04	73.98	14.94	PK
5150	36.83	8.79	V	45.62	53.98	8.36	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_20Mz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	50.38	8.79	H	59.17	73.98	14.81	PK
5150	36.81	8.79	H	45.6	53.98	8.38	AV
5150	49.95	8.79	V	58.74	73.98	15.24	PK
5150	36.75	8.79	V	45.54	53.98	8.44	AV

Band : UNII 1  
 Operation Mode: 802.11 n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	57.57	8.79	H	66.36	73.98	7.62	PK
5150	41.96	8.79	H	50.75	53.98	3.23	AV
5150	50.49	8.79	V	59.28	73.98	14.70	PK
5150	37.36	8.79	V	46.15	53.98	7.83	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	58.08	8.79	H	66.87	73.98	7.11	PK
5150	41.80	8.79	H	50.59	53.98	3.39	AV
5150	50.65	8.79	V	59.44	73.98	14.54	PK
5150	37.31	8.79	V	46.1	53.98	7.88	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_80 MHz BW  
 Transfer Rate: 29.3 Mbps  
 Operating Frequency 5210 MHz  
 Channel No. 42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.98	8.79	H	64.77	73.98	9.21	PK
5150	41.56	8.79	H	50.35	53.98	3.63	AV
5150	50.91	8.79	V	59.70	73.98	14.28	PK
5150	38.46	8.79	V	47.25	53.98	6.73	AV

Band : UNII 2A  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	53.27	9.28	H	62.55	73.98	11.43	PK
5350	38.81	9.28	H	48.09	53.98	5.89	AV
5350	49.73	9.28	V	59.01	73.98	14.97	PK
5350	36.28	9.28	V	45.56	53.98	8.42	AV

Band : UNII 2A  
 Operation Mode: 802.11 n\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	49.73	9.28	H	59.01	73.98	14.97	PK
5350	36.30	9.28	H	45.58	53.98	8.40	AV
5350	49.52	9.28	V	58.8	73.98	15.18	PK
5350	36.12	9.28	V	45.4	53.98	8.58	AV

Band : UNII 2A  
 Operation Mode: 802.11 ac\_20Mz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5320 MHz  
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	49.93	9.28	H	59.21	73.98	14.77	PK
5350	36.26	9.28	H	45.54	53.98	8.44	AV
5350	49.76	9.28	V	59.04	73.98	14.94	PK
5350	36.10	9.28	V	45.38	53.98	8.60	AV

Band : UNII 2A  
 Operation Mode: 802.11 n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5310 MHz  
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.65	9.28	H	63.93	73.98	10.05	PK
5350	39.27	9.28	H	48.55	53.98	5.43	AV
5350	49.97	9.28	V	59.25	73.98	14.73	PK
5350	37.32	9.28	V	46.60	53.98	7.38	AV



Band : UNII 2A  
 Operation Mode: 802.11 ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5310 MHz  
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	55.65	9.28	H	64.93	73.98	9.05	PK
5350	40.65	9.28	H	49.93	53.98	4.05	AV
5350	50.36	9.28	V	59.64	73.98	14.34	PK
5350	37.51	9.28	V	46.79	53.98	7.19	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_80 MHz BW  
 Transfer Rate: 29.3 Mbps  
 Operating Frequency 5290 MHz  
 Channel No. 58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	52.25	9.28	H	61.53	73.98	12.45	PK
5350	38.66	9.28	H	47.94	53.98	6.04	AV
5350	49.51	9.28	V	58.79	73.98	15.19	PK
5350	38.33	9.28	V	47.61	53.98	6.37	AV

Band : UNII 2C  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	49.48	10.08	H	59.56	73.98	14.42	PK
5460	36.44	10.08	H	46.52	53.98	7.46	AV
*5470	51.20	9.95	H	61.15	68.20	7.05	PK
5460	49.27	10.08	V	59.35	73.98	14.63	PK
5460	36.12	10.08	V	46.2	53.98	7.78	AV
*5470	48.95	9.95	V	58.9	68.20	9.30	PK

Band : UNII 2C  
 Operation Mode: 802.11 n\_20MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	49.60	10.08	H	59.68	73.98	14.30	PK
5460	36.12	10.08	H	46.2	53.98	7.78	AV
*5470	49.58	9.95	H	59.53	68.20	8.67	PK
5460	49.48	10.08	V	59.56	73.98	14.42	PK
5460	36.01	10.08	V	46.09	53.98	7.89	AV
*5470	49.39	9.95	V	59.34	68.20	8.86	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5500 MHz  
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	49.57	10.08	H	59.65	73.98	14.33	PK
5460	36.13	10.08	H	46.21	53.98	7.77	AV
*5470	49.03	9.95	H	58.98	68.20	9.22	PK
5460	49.20	10.08	V	59.28	73.98	14.70	PK
5460	36.03	10.08	V	46.11	53.98	7.87	AV
*5470	48.94	9.95	V	58.89	68.20	9.31	PK

Band : UNII 2C  
 Operation Mode: 802.11 n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5510 MHz  
 Channel No. 102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	52.36	10.08	H	62.44	73.98	11.54	PK
5460	36.76	10.08	H	46.84	53.98	7.14	AV
*5470	54.83	9.95	H	64.78	68.20	3.42	PK
5460	49.33	10.08	V	59.41	73.98	14.57	PK
5460	36.38	10.08	V	46.46	53.98	7.52	AV
*5470	52.49	9.95	V	62.44	68.20	5.76	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5510 MHz  
 Channel No. 102 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	53.69	10.08	H	63.77	73.98	10.21	PK
5460	36.83	10.08	H	46.91	53.98	7.07	AV
*5470	54.63	9.95	H	64.58	68.20	3.62	PK
5460	49.43	10.08	V	59.51	73.98	14.47	PK
5460	36.75	10.08	V	46.83	53.98	7.15	AV
*5470	52.91	9.95	V	62.86	68.20	5.34	PK

Band : UNII 2C  
 Operation Mode: 802.11 ac\_80 MHz BW  
 Transfer Rate: 29.3 Mbps  
 Operating Frequency 5530 MHz  
 Channel No. 106 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.21	10.08	H	64.29	73.98	9.69	PK
5460	39.80	10.08	H	49.88	53.98	4.10	AV
*5470	54.76	9.95	H	64.71	68.20	3.49	PK
5460	50.18	10.08	V	60.26	73.98	13.72	PK
5460	37.97	10.08	V	48.05	53.98	5.93	AV
*5470	50.61	9.95	V	60.56	68.20	7.64	PK

Band : UNII 3  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5825 MHz  
 Channel No. 165 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	50.11	11.37	H	61.48	78.20	16.72	PK
*5850	48.08	11.37	V	59.45	78.20	18.75	PK
*5860	48.84	11.37	H	60.21	68.20	7.99	PK
*5860	48.03	11.37	V	59.40	68.20	8.80	PK

Band : UNII 3  
 Operation Mode: 802.11 n\_20MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5825 MHz  
 Channel No. 165 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	48.24	11.37	H	59.61	78.20	18.59	PK
*5850	47.88	11.37	V	59.25	78.20	18.95	PK
*5860	47.69	11.37	H	59.06	68.20	9.14	PK
*5860	47.59	11.37	V	58.96	68.20	9.24	PK

Band : UNII 3  
 Operation Mode: 802.11 ac\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5825 MHz  
 Channel No. 165 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	48.32	11.37	H	59.69	78.20	18.51	PK
*5850	48.12	11.37	V	59.49	78.20	18.71	AV
*5860	48.60	11.37	H	59.97	68.20	8.23	PK
*5860	48.21	11.37	V	59.58	68.20	8.62	AV

Band : UNII 3  
 Operation Mode: 802.11 n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5795 MHz  
 Channel No. 159 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	49.09	11.37	H	60.46	78.20	17.74	PK
*5850	48.06	11.37	V	59.43	78.20	18.77	PK
*5860	49.14	11.37	H	60.51	68.20	7.69	PK
*5860	47.36	11.37	V	58.73	68.20	9.47	PK

Band :	UNII 3
Operation Mode:	802.11 ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	49.64	11.37	H	61.01	78.20	17.19	PK
*5850	47.86	11.37	V	59.23	78.20	18.97	AV
*5860	49.88	11.37	H	61.25	68.20	6.95	PK
*5860	47.52	11.37	V	58.89	68.20	9.31	AV

Band :	UNII 3
Operation Mode:	802.11 ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5755 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5850	48.21	11.37	H	59.58	78.20	18.62	PK
*5850	48.67	11.37	V	60.04	78.20	18.16	PK
*5860	48.28	11.37	H	59.65	68.20	8.55	PK
*5860	48.11	11.37	V	59.48	68.20	8.72	PK

**Notes:**

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “\*” is radiated band edge test frequency.(not restricted band emissions)

## 8.7 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 48 Mbps, Ch.144 and 802.11a mode in UNII 2C. Because 802.11a mode in UNII 2C is worst case.



■ **RESULT PLOTS**

**Conducted Emissions (Line 1)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-H955  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE\_(5G)  
 Operator Name: JS LEE

FCC CLASS B

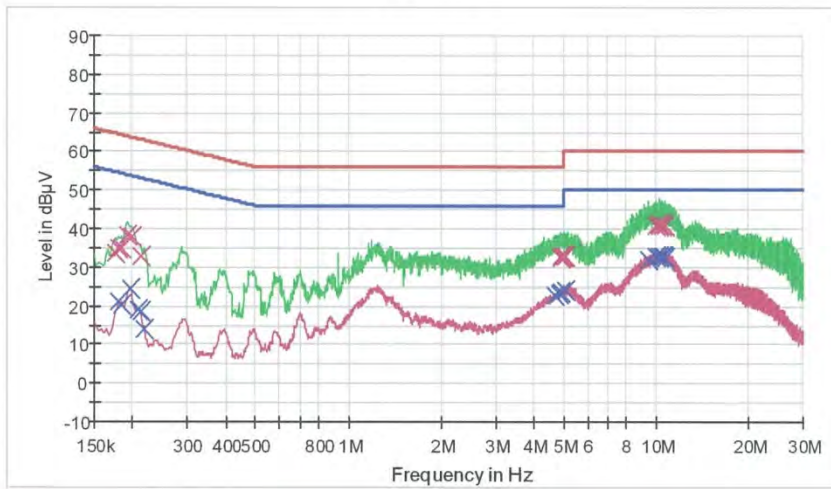

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
— Preview Result 2-AVG      X Final Result 1-QPK      X Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.176000	33.8	9.000	Off	L1	9.6	30.9	64.7
0.180000	34.9	9.000	Off	L1	9.6	29.6	64.5
0.184000	34.9	9.000	Off	L1	9.6	29.4	64.3
0.192000	38.5	9.000	Off	L1	9.6	25.4	63.9
0.200000	37.9	9.000	Off	L1	9.6	25.7	63.6
0.212000	32.9	9.000	Off	L1	9.6	30.2	63.1
4.894000	32.6	9.000	Off	L1	9.9	23.4	56.0
4.908000	32.7	9.000	Off	L1	9.9	23.3	56.0
4.974000	32.7	9.000	Off	L1	9.9	23.3	56.0
4.992000	33.0	9.000	Off	L1	9.9	23.0	56.0
4.998000	33.0	9.000	Off	L1	9.9	23.0	56.0
5.064000	33.0	9.000	Off	L1	9.9	27.0	60.0
9.986000	40.8	9.000	Off	L1	10.1	19.2	60.0
9.996000	40.9	9.000	Off	L1	10.1	19.1	60.0
10.220000	41.0	9.000	Off	L1	10.1	19.0	60.0
10.226000	41.1	9.000	Off	L1	10.1	18.9	60.0

12/19/2014

9:45:44

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
10.450000	41.0	9.000	Off	L1	10.1	19.0	60.0
10.704000	40.8	9.000	Off	L1	10.1	19.2	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.180000	21.0	9.000	Off	L1	9.6	33.5	54.5
0.184000	20.4	9.000	Off	L1	9.6	33.9	54.3
0.196000	24.5	9.000	Off	L1	9.6	29.3	53.8
0.208000	18.8	9.000	Off	L1	9.6	34.5	53.3
0.212000	18.6	9.000	Off	L1	9.6	34.5	53.1
0.218000	14.1	9.000	Off	L1	9.6	38.8	52.9
4.682000	22.8	9.000	Off	L1	9.9	23.2	46.0
4.844000	23.2	9.000	Off	L1	9.9	22.8	46.0
4.894000	23.6	9.000	Off	L1	9.9	22.4	46.0
4.908000	23.6	9.000	Off	L1	9.9	22.4	46.0
5.064000	24.2	9.000	Off	L1	9.9	25.8	50.0
5.088000	24.2	9.000	Off	L1	9.9	25.8	50.0
9.406000	31.9	9.000	Off	L1	10.1	18.1	50.0
9.996000	32.9	9.000	Off	L1	10.1	17.1	50.0
10.220000	33.0	9.000	Off	L1	10.1	17.0	50.0
10.450000	32.8	9.000	Off	L1	10.1	17.2	50.0
10.612000	32.7	9.000	Off	L1	10.1	17.4	50.0
10.704000	32.6	9.000	Off	L1	10.1	17.4	50.0

12/19/2014

9:45:44

**Conducted Emissions (Line 2)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-H955  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE\_(5G)  
 Operator Name: JS LEE

FCC CLASS B

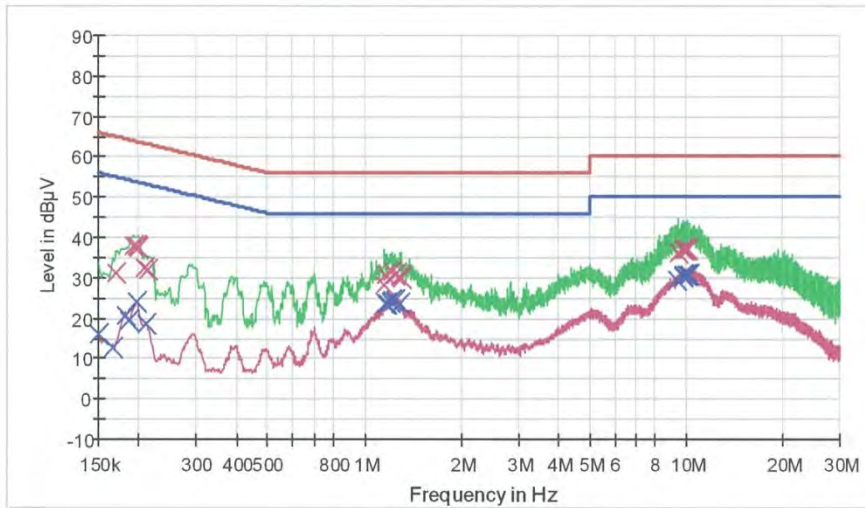

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.170000	31.3	9.000	Off	N	9.7	33.7	65.0
0.192000	38.1	9.000	Off	N	9.7	25.8	63.9
0.196000	38.0	9.000	Off	N	9.7	25.8	63.8
0.200000	37.6	9.000	Off	N	9.7	26.0	63.6
0.208000	32.6	9.000	Off	N	9.7	30.7	63.3
0.214000	32.2	9.000	Off	N	9.7	30.8	63.0
1.150000	28.4	9.000	Off	N	9.7	27.6	56.0
1.164000	30.9	9.000	Off	N	9.7	25.1	56.0
1.212000	31.7	9.000	Off	N	9.7	24.3	56.0
1.242000	30.7	9.000	Off	N	9.7	25.3	56.0
1.284000	30.3	9.000	Off	N	9.8	25.7	56.0
1.298000	29.9	9.000	Off	N	9.8	26.1	56.0
9.478000	36.4	9.000	Off	N	10.0	23.6	60.0
9.768000	37.0	9.000	Off	N	10.0	23.0	60.0
9.828000	37.0	9.000	Off	N	10.0	23.0	60.0
9.914000	37.0	9.000	Off	N	10.0	23.0	60.0

12/19/2014

9:38:18

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
9.996000	37.3	9.000	Off	N	10.0	22.7	60.0
10.168000	37.0	9.000	Off	N	10.0	23.0	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	16.3	9.000	Off	N	9.6	39.7	56.0
0.166000	12.7	9.000	Off	N	9.6	42.5	55.2
0.182000	20.8	9.000	Off	N	9.7	33.6	54.4
0.186000	19.6	9.000	Off	N	9.7	34.6	54.2
0.196000	24.0	9.000	Off	N	9.7	29.8	53.8
0.210000	18.4	9.000	Off	N	9.7	34.8	53.2
1.164000	23.7	9.000	Off	N	9.7	22.3	46.0
1.180000	23.8	9.000	Off	N	9.7	22.2	46.0
1.198000	24.1	9.000	Off	N	9.7	21.9	46.0
1.212000	24.6	9.000	Off	N	9.7	21.4	46.0
1.242000	24.6	9.000	Off	N	9.7	21.4	46.0
1.284000	23.8	9.000	Off	N	9.8	22.2	46.0
9.332000	29.6	9.000	Off	N	10.0	20.4	50.0
9.768000	30.5	9.000	Off	N	10.0	19.5	50.0
9.828000	30.7	9.000	Off	N	10.0	19.3	50.0
10.006000	30.7	9.000	Off	N	10.0	19.3	50.0
10.168000	30.8	9.000	Off	N	10.0	19.2	50.0
10.180000	30.9	9.000	Off	N	10.0	19.1	50.0

12/19/2014

9:38:18

## 9. LIST OF TEST EQUIPMENT

### 9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2014	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/08/2014	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	01/27/2014	Annual	10545
ITECH	IT6720 / DC POWER SUPPLY	11/04/2014	Annual	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2014	Annual	76649

## 9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/04/2014	Annual	10094
CERNEX	CBL18265035 / POWER AMP	07/23/2014	Annual	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	07/05/2013	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/17/2014	Annual	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2014	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2014	Annual	22964