

FCC BT LE REPORT

FCC Certification

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.

Date of Issue:

September 08, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Address:

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Report No.: HCT-R-1509-F018

HCT FRN: 0005866421

FCC ID : ZNFH960

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):

LG-H960

Additional Model(s):

LGH960, H960, LG-H960P, LGH960P, H960P, LG-H960AR, LGH960AR, H960AR, LG-H960YK, LGH960YK, H960YK

EUT Type:

Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC

Peak RF Output Power:

7.714 dBm (5.907mW)

Frequency Range:

2402 MHz -2480 MHz

Modulation type

GFSK

FCC Classification:

Digital Transmission System(DTS)

FCC Rule Part(s):

Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



**Report prepared by
: Kyung Soo Kang**

Test Engineer of RF Team



**Approved by
: Sang Jun Lee**

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1509-F018	September 08, 2015	- First Approval Report

Table of Contents

1. GENERAL INFORMATION.....	4
2. EUT DESCRIPTION.....	4
3. TEST METHODOLOGY.....	5
3.1 EUT CONFIGURATION.....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 DESCRIPTION OF TEST MODES.....	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS.....	6
5.1 FACILITIES.....	6
5.2 EQUIPMENT.....	6
6. ANTENNA REQUIREMENTS.....	6
7. SUMMARY TEST OF RESULTS.....	7
8. TEST RESULT.....	8
8.1 DUTY CYCLE.....	8
8.2 6dB BANDWIDTH MEASUREMENT.....	10
8.3 OUTPUT POWER MEASUREMENT.....	13
8.4 POWER SPECTRAL DENSITY.....	20
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	24
8.6 RADIATED MEASUREMENT.....	35
8.6.1 RADIATED SPURIOUS EMISSIONS.....	35
8.6.2 RADIATED RESTRICTED BAND EDGES.....	57
8.7 POWERLINE CONDUCTED EMISSIONS.....	69
9. LIST OF TEST EQUIPMENT.....	86
9.1 LIST OF TEST EQUIPMENT(Conducted Test).....	86
9.2 LIST OF TEST EQUIPMENT(Radiated Test).....	87

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFH960
EUT Type: Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC
Model name(s): LG-H960
Additional Model(s): LGH960, H960, LG-H960P, LGH960P, H960P, LG-H960AR, LGH960AR, H960AR, LG-H960YK, LGH960YK, H960YK
Date(s) of Tests: August 12, 2015 ~ September 8, 2015
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

FCC Model Name	LG-H960	
Additional Model(s):	LGH960, H960, LG-H960P, LGH960P, H960P, LG-H960AR, LGH960AR, H960AR, LG-H960YK, LGH960YK, H960YK	
EUT Type	Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC	
Power Supply	DC 3.85 V	
Battery Information	Model: BL-45B1F Type: Li-ion Battery(Standard)	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Max. RF Output Power	Peak	7.714 dBm (5.907 mW)
	Average	7.434 dBm (5.539 mW)
BT Operating Mode	BT _Low Energy Mode	
Modulation Type	GFSK	
Number of Channels	40 Channels	
Antenna Specification	Manufacturer: LS Mtron Co. Ltd. Antenna type: INTERNAL ANTENNA Peak Gain : -6.39 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r03 dated June 09, 2015 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS


8. TEST RESULT

8.1 DUTY CYCLE

■ TEST PROCEDURE

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

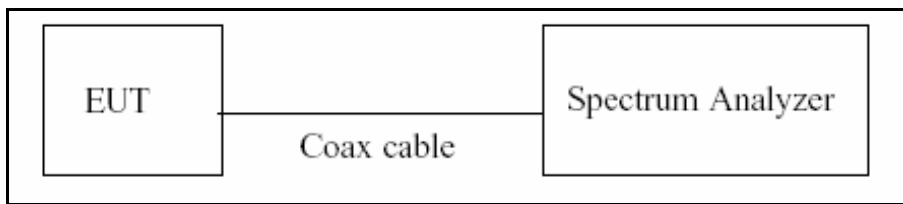

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)


The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 * \log(1/Duty\ Cycle)$

LE Mode	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor
	0.3910	0.6256	0.6250	2.04

▣ RESULT PLOTS

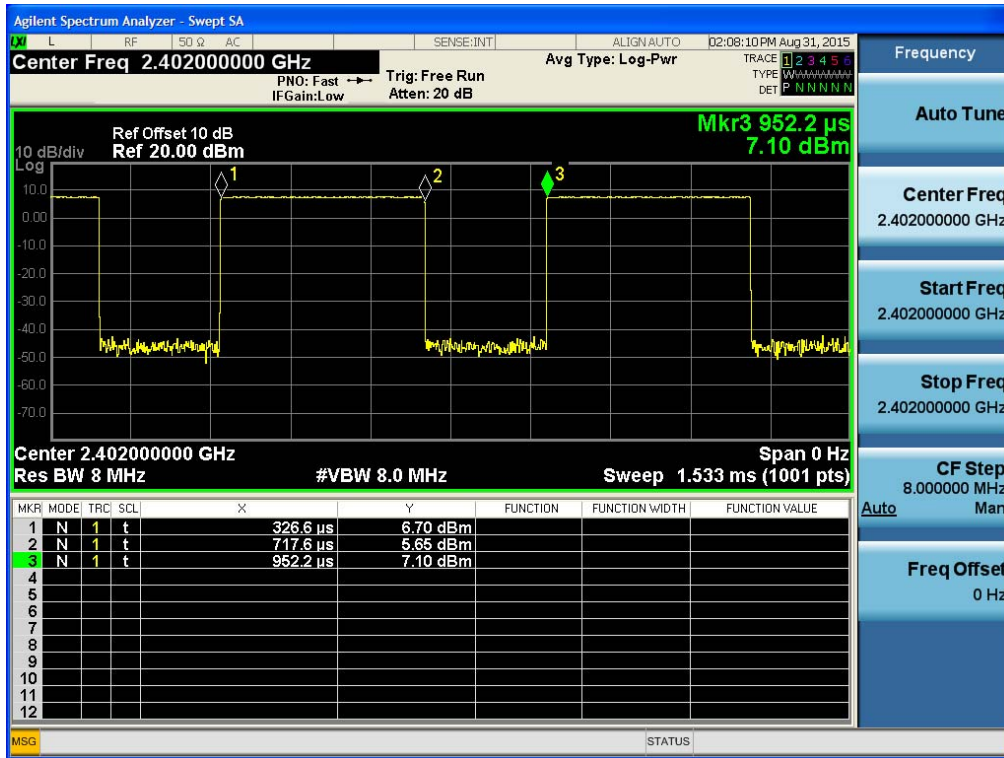


8.2 6dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074, issued 06/09/2015)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold


Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

RESULT PLOTS

6dB Bandwidth plot (Low-CH 0)

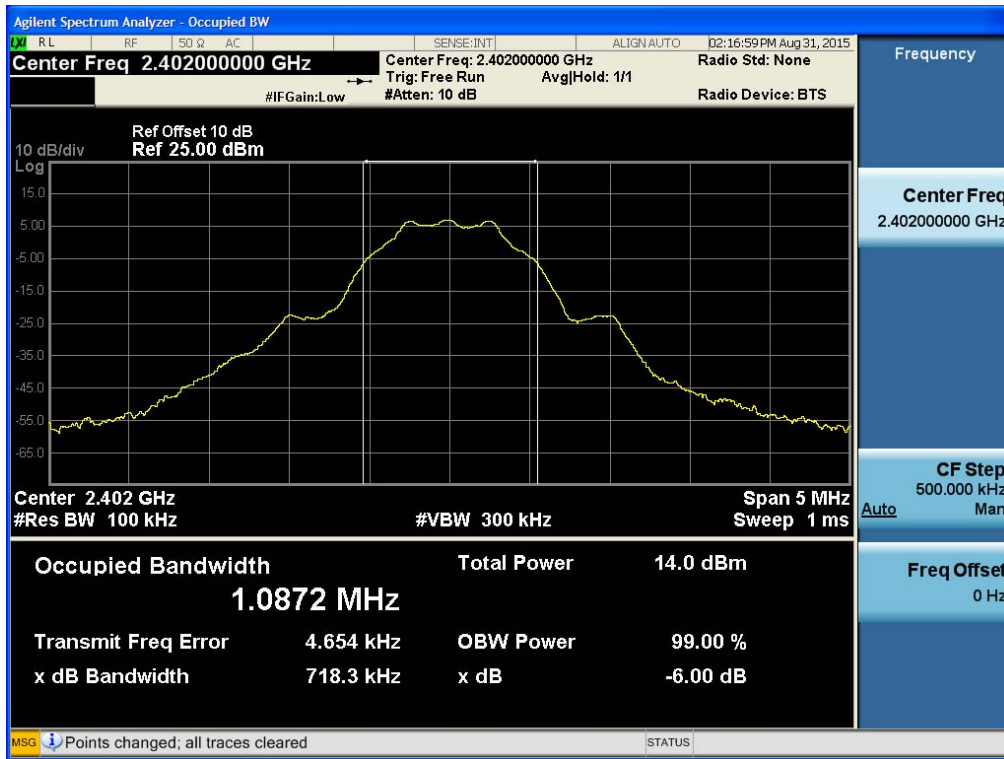

6dB Bandwidth plot (Mid-CH 19)



6dB Bandwidth plot (High-CH 39)




8.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.1 in KDB 558074, issued 06/09/2015)
 - RBW \geq DTS Bandwidth
 - VBW \geq 3 x RBW
 - SPAN \geq 3 x RBW
 - Detector Mode = Peak
 - Sweep = auto couple
 - Trace Mode = max hold
 - Allow trace to fully stabilize.
 - Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/09/2015)
 - Measure the duty cycle
 - Set span to at least 1.5 times the OBW
 - RBW = 1-5 % of the OBW, not to exceed 1 MHz.
 - VBW \geq 3 x RBW.
 - Number of points in sweep \geq 2 x span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
 - Sweep time = auto.
 - Detector = RMS(i.e., power averaging)
 - Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

■ TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	7.507	30
2440	19	7.714	30
2480	39	5.902	30


■ TEST RESULTS-Average

Conducted Output Power Measurements


LE Mode		Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency[MHz]	Channel No.				
2402	0	5.155	2.04	7.196	30
2440	19	5.392	2.04	7.434	30
2480	39	3.492	2.04	5.533	30

▣ RESULT PLOTS-Peak

Conducted Output Power (Low-CH 0)

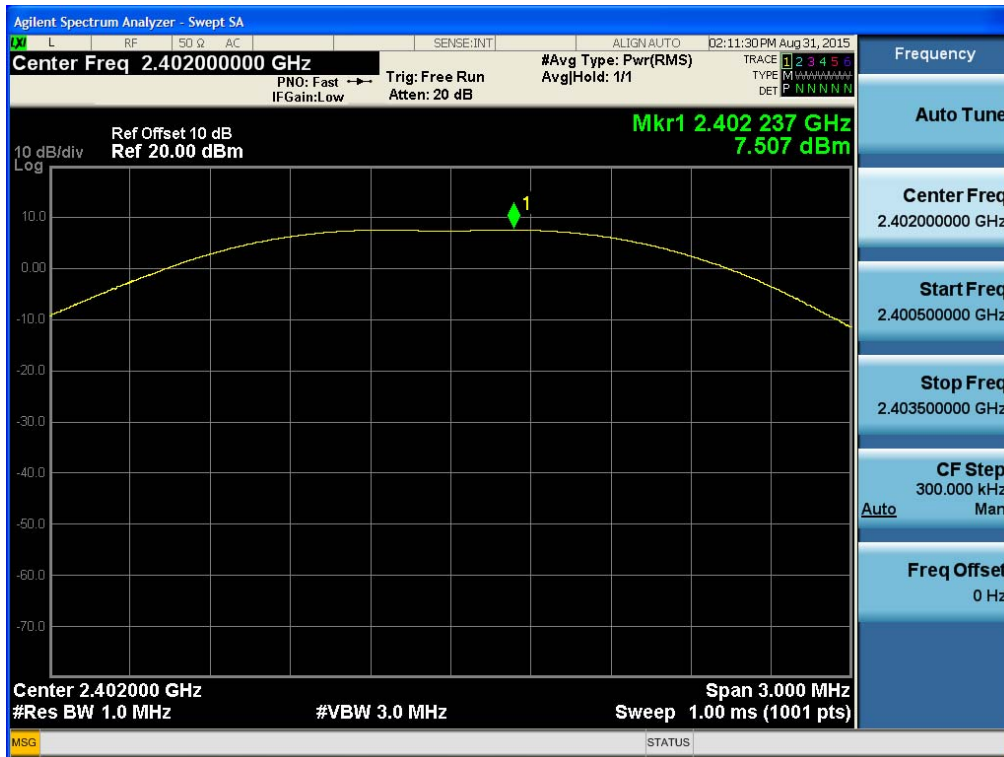

Conducted Output Power (Mid-CH 19)

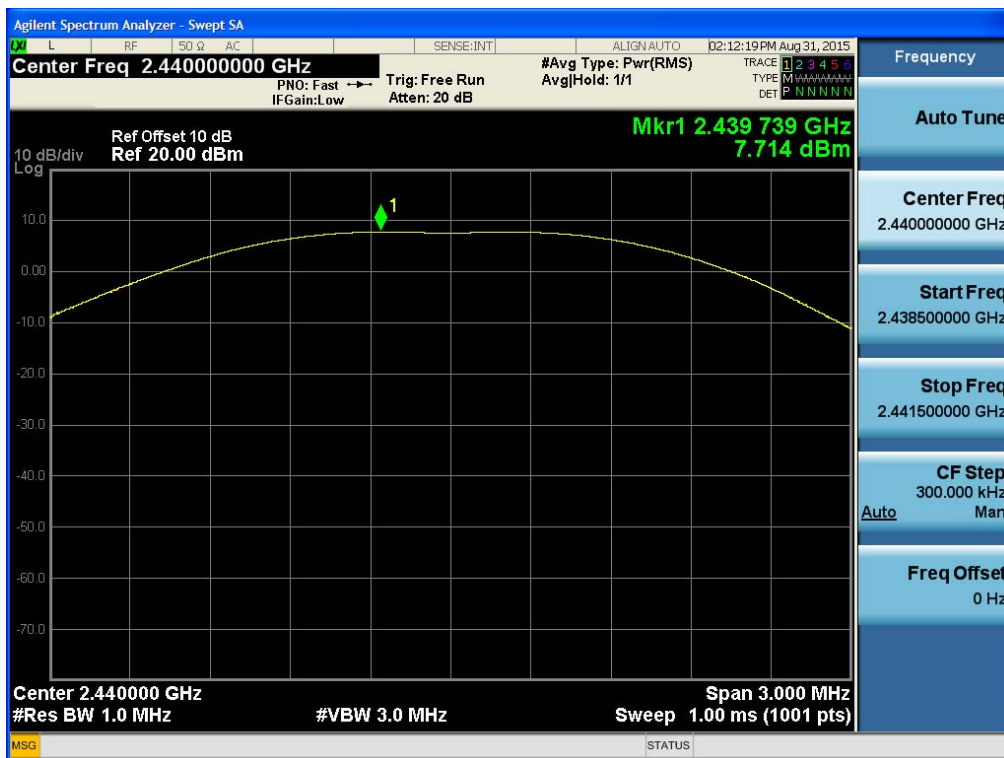


Conducted Output Power (High-CH 39)



RESULT PLOTS-Average


Conducted Output Power (Low-CH 0)

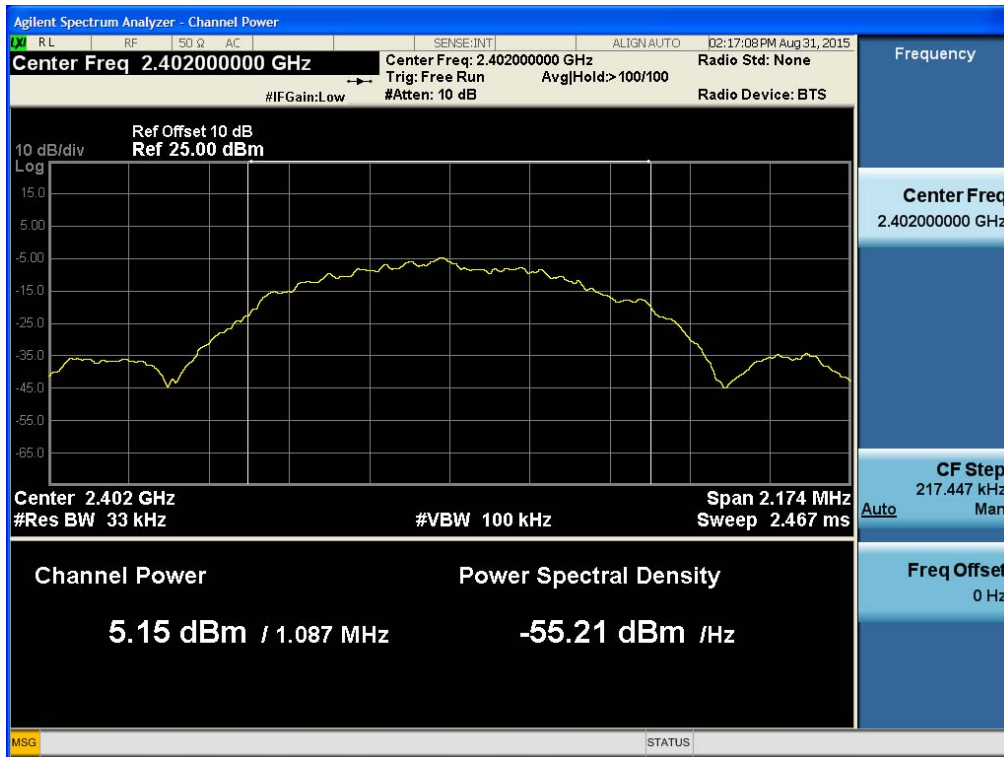

Conducted Output Power (Mid-CH 19)



Conducted Output Power (High-CH 39)

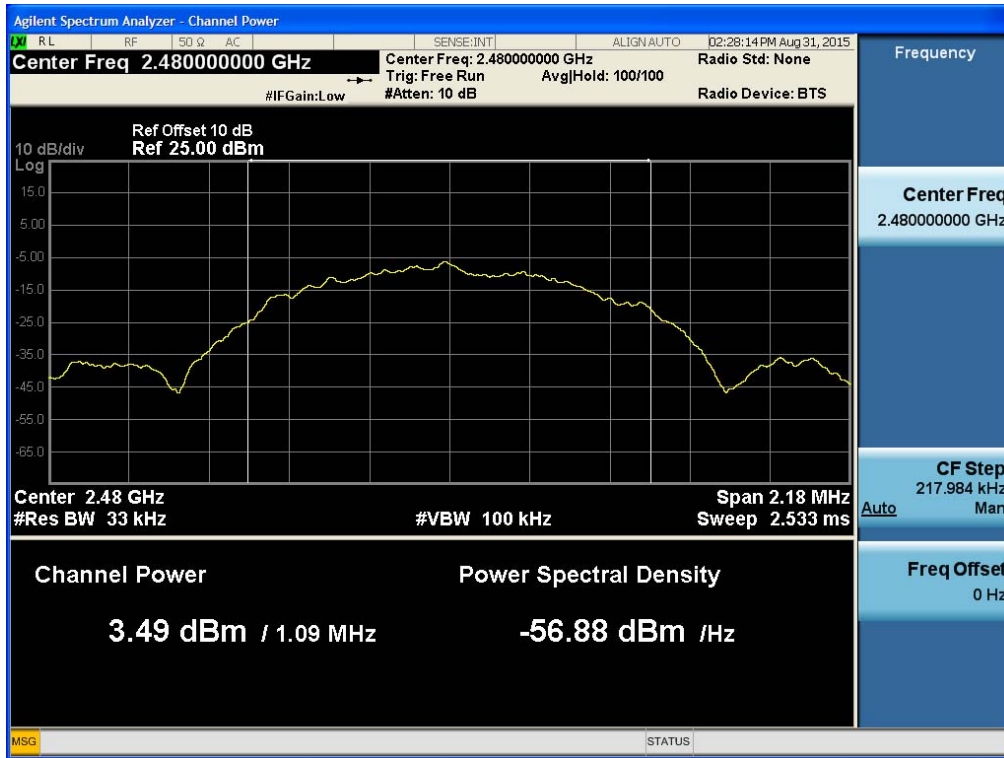


8.4 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

■ TEST CONFIGURATION



■ TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 06/09/2015

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :


1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

■ TEST RESULTS**Conducted Power Density Measurements**

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/ Fail
2402	0	LE	-6.578	8	Pass
2440	19		-6.927	8	Pass
2480	39		-8.131	8	Pass

▣ RESULT PLOTS


Power Spectral Density (Low-CH 0)

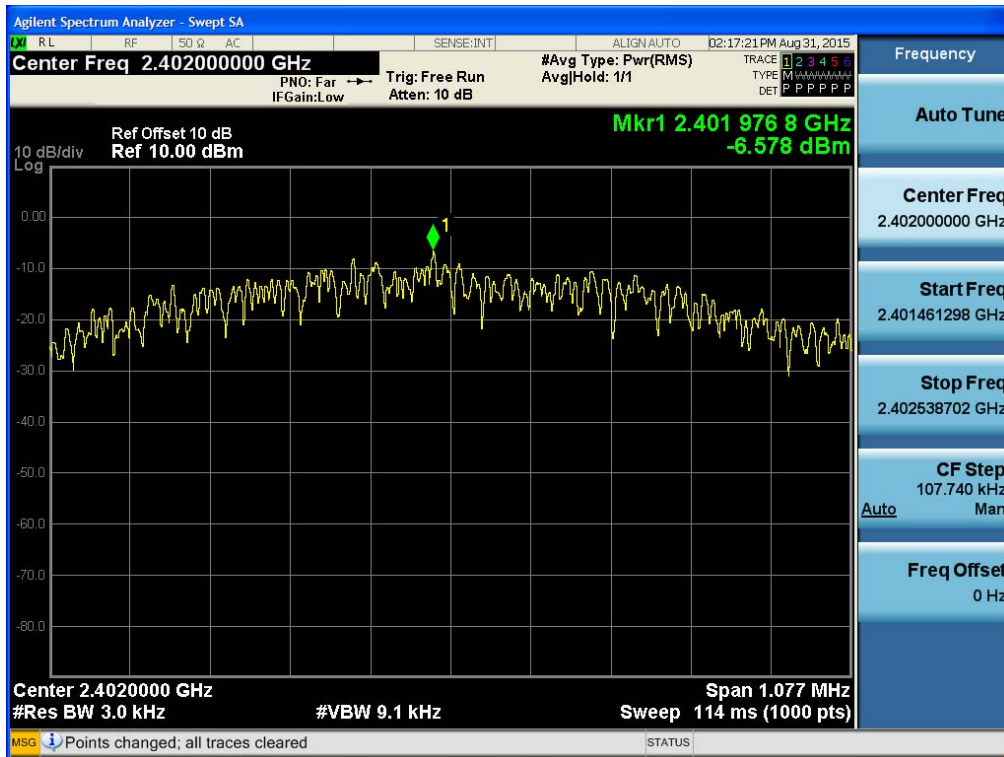

Power Spectral Density (Mid-CH 19)




Power Spectral Density (High-CH 39)

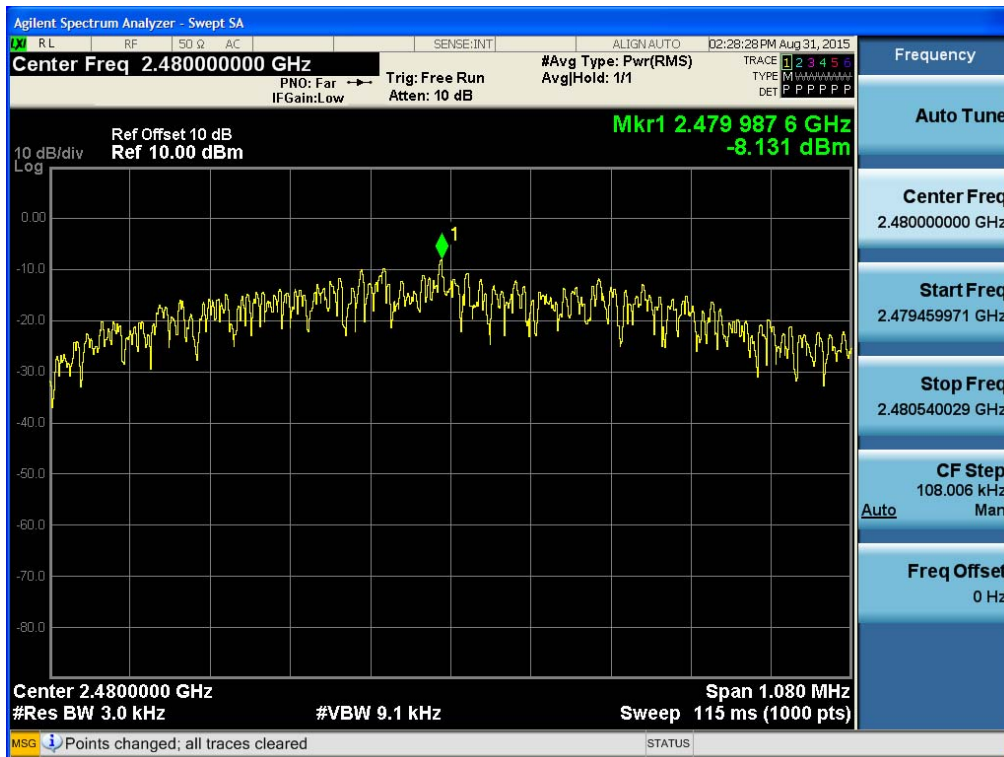

8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**Test Requirements and limit, §15.247(d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc**■ TEST CONFIGURATION****■ TEST PROCEDURE**

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/09/2015)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points $\geq 2 \times$ Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.
4. In case of conducted spurious emissions test, please check factors blow table.
5. In order to simplify the report, attached plots were only the worst case channel and data rate.

■ FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.24
3000	10.27
4000	10.22
5000	10.48
6000	10.48
7000	10.57
8000	10.45
9000	10.50
10000	10.64
11000	10.69
12000	10.75
13000	10.92
14000	11.90
15000	11.00
16000	11.03


17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42

Note : 1. ** is fundamental frequency range.


2. Factor = Cable loss + Attenuator loss

▣ RESULT PLOTS

BandEdge (Low-CH 0)

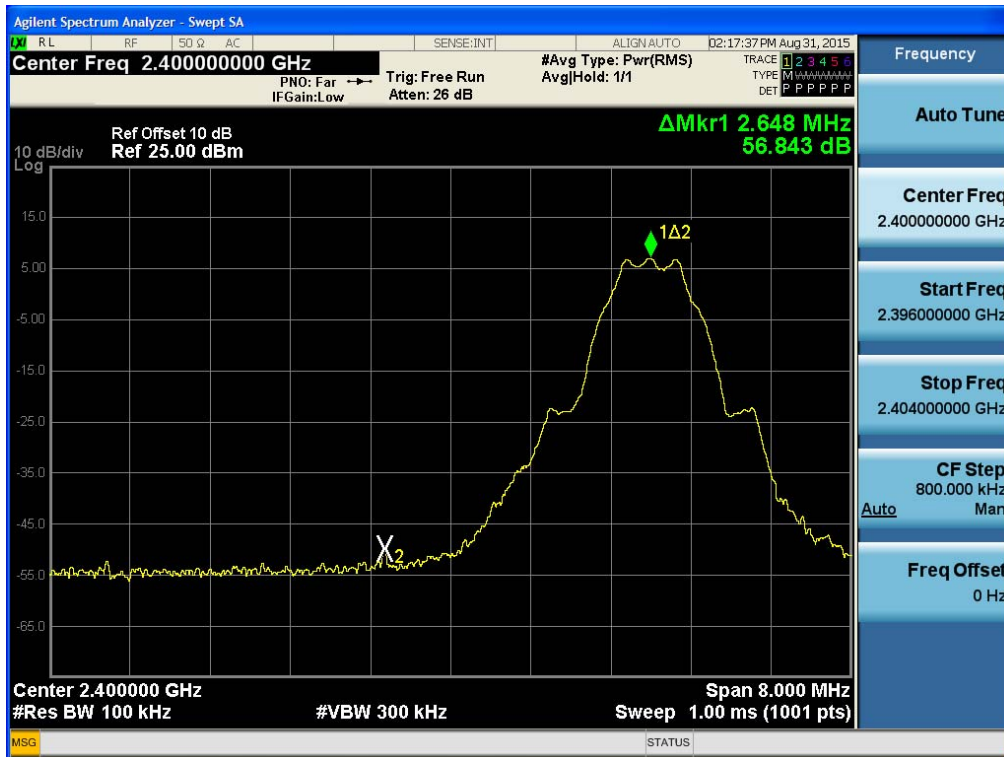


BandEdge (High-CH 39)

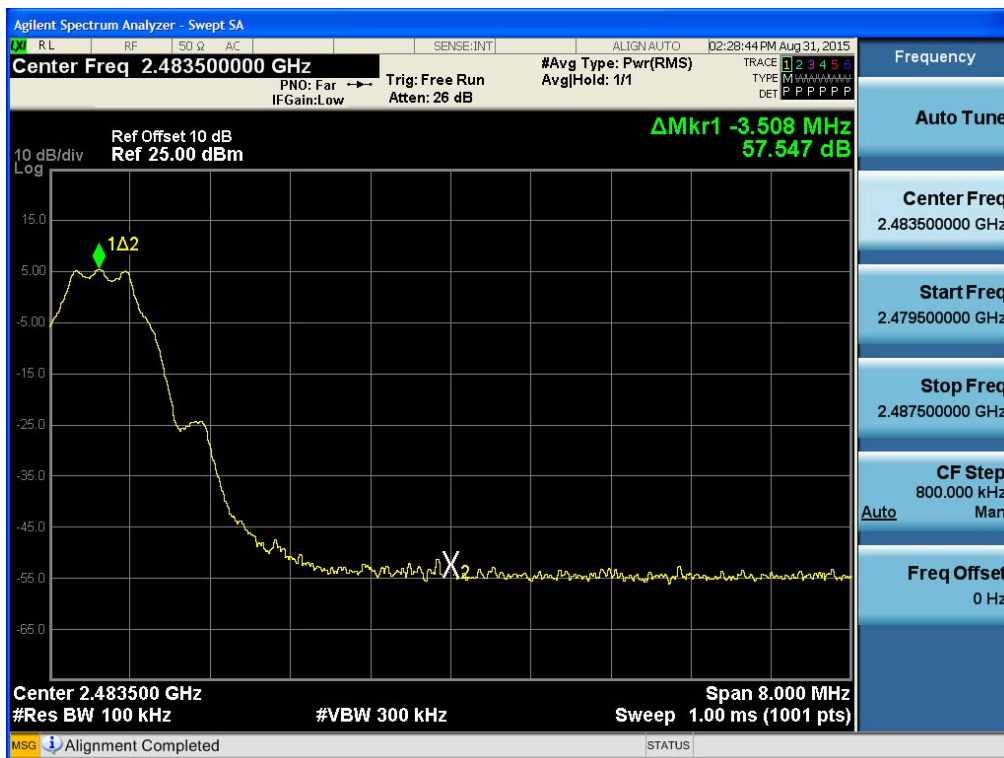


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

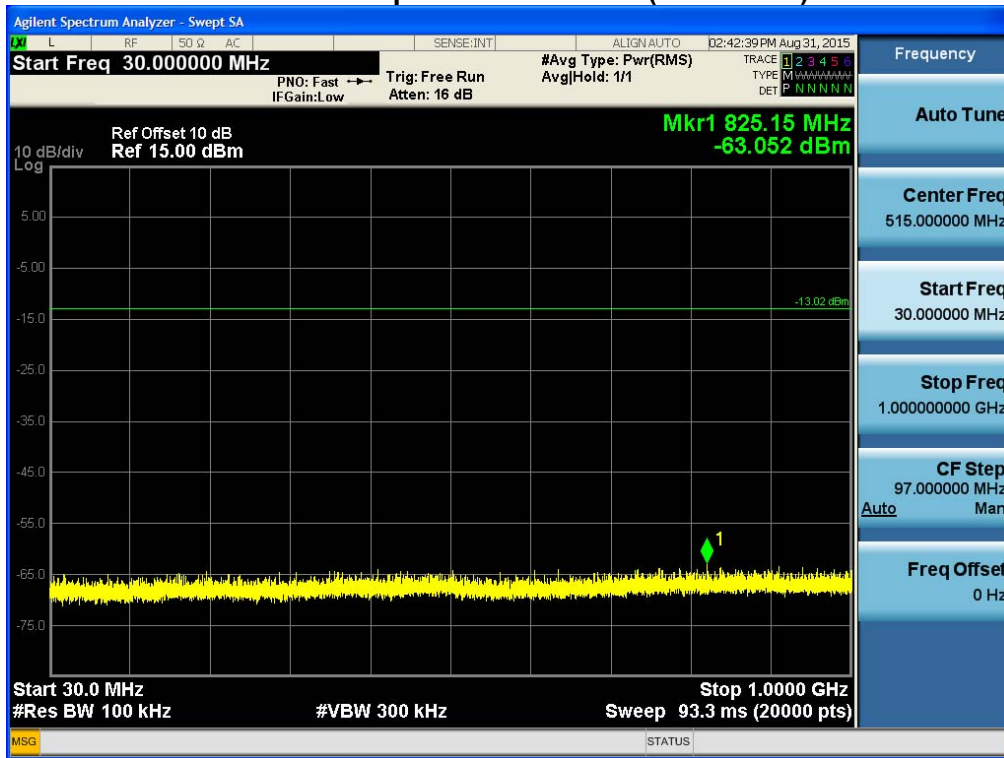


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

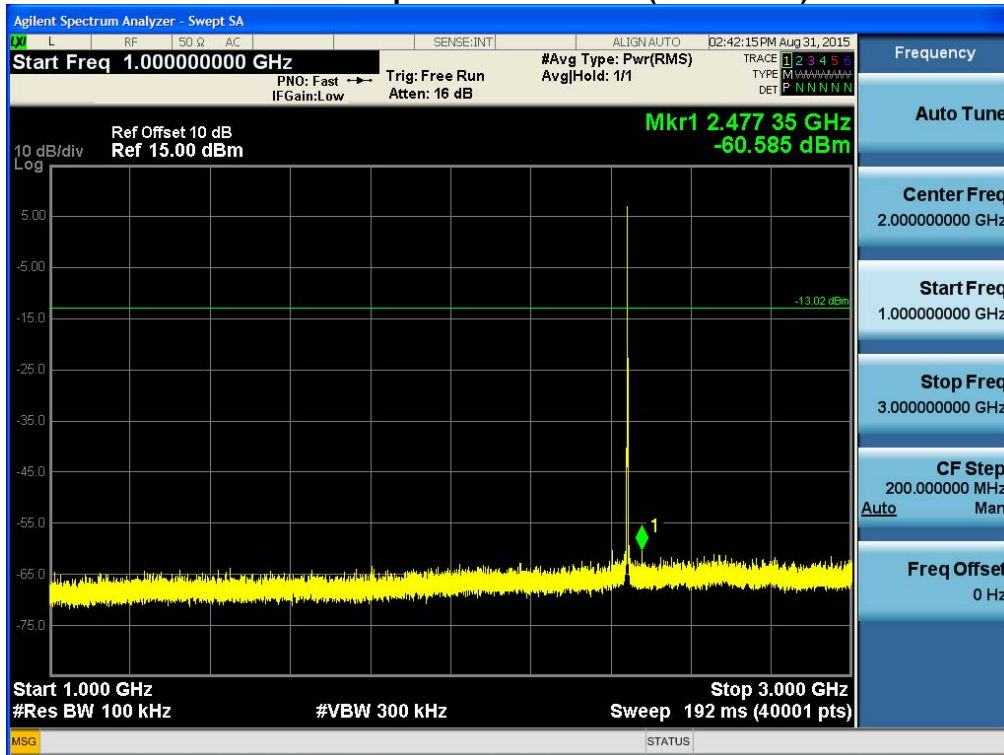


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

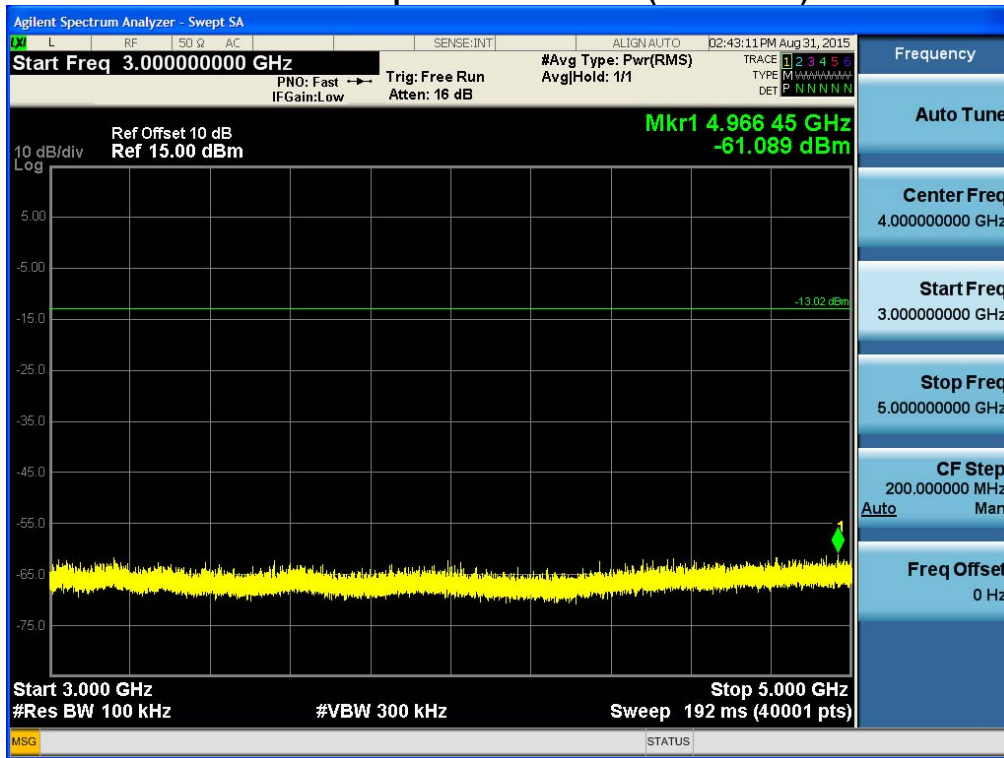


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

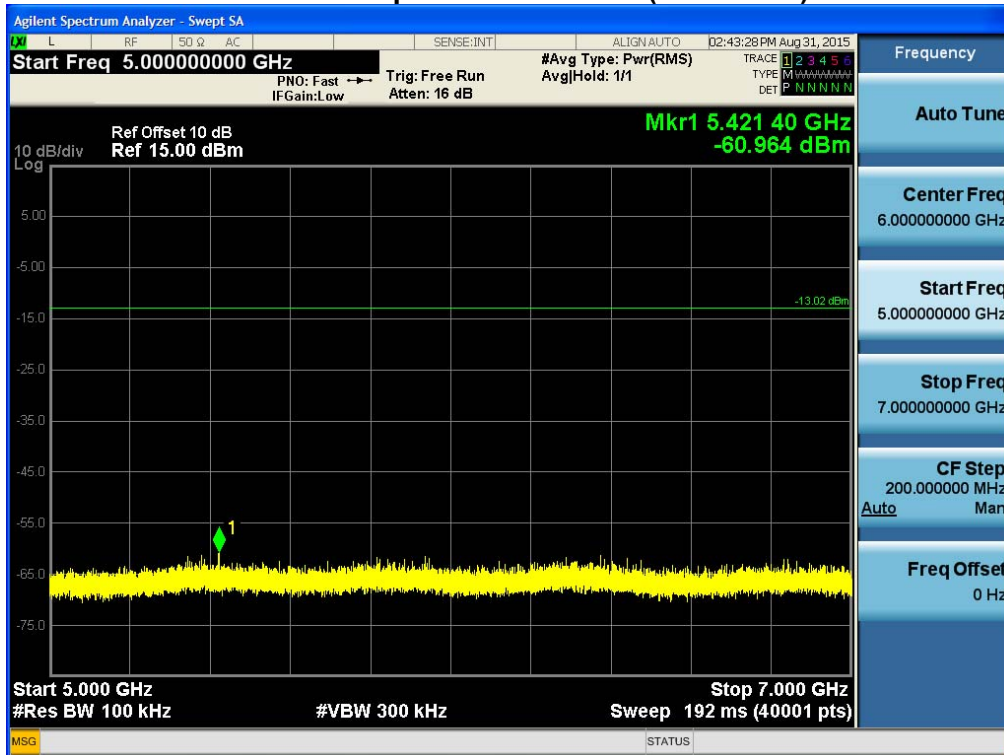


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

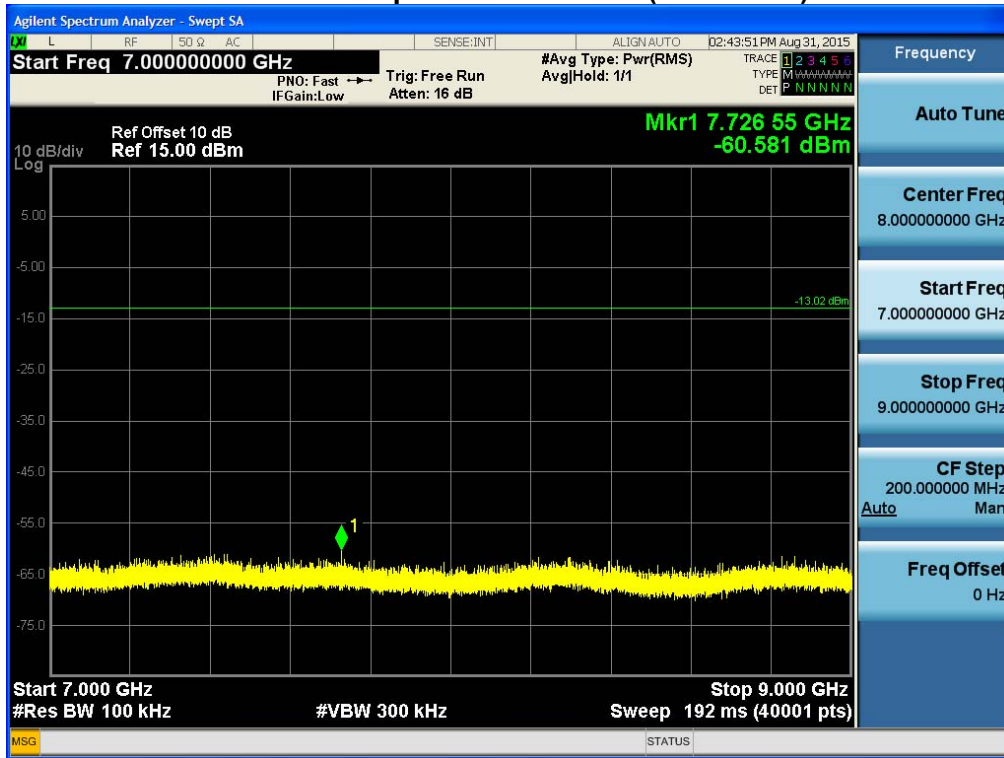


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

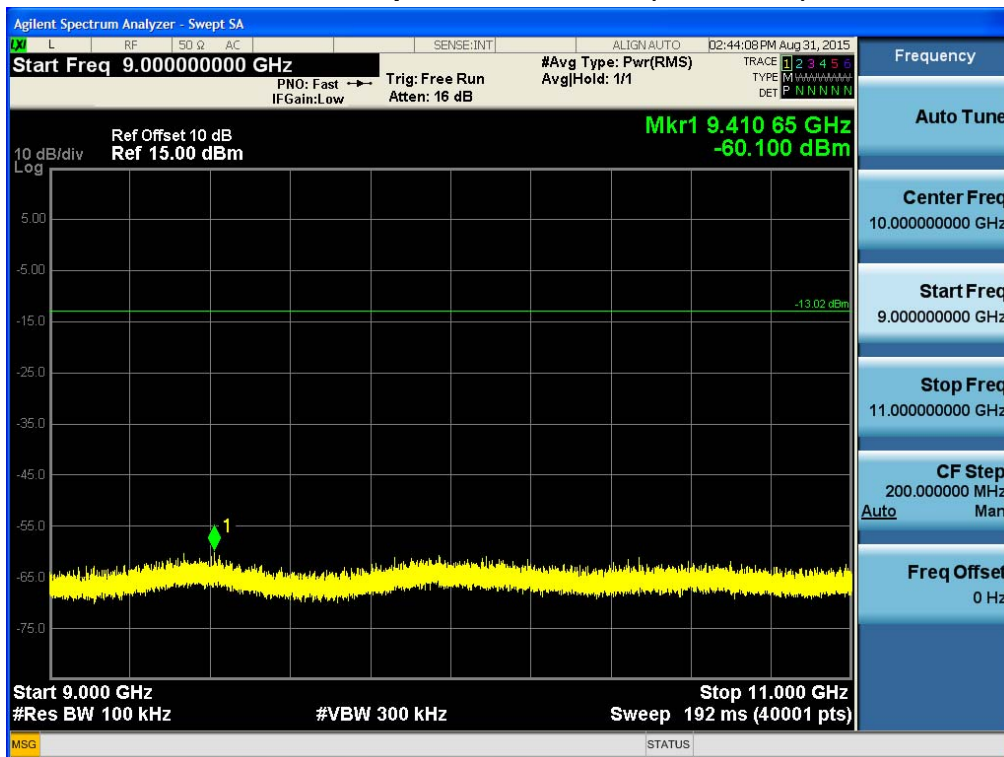


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

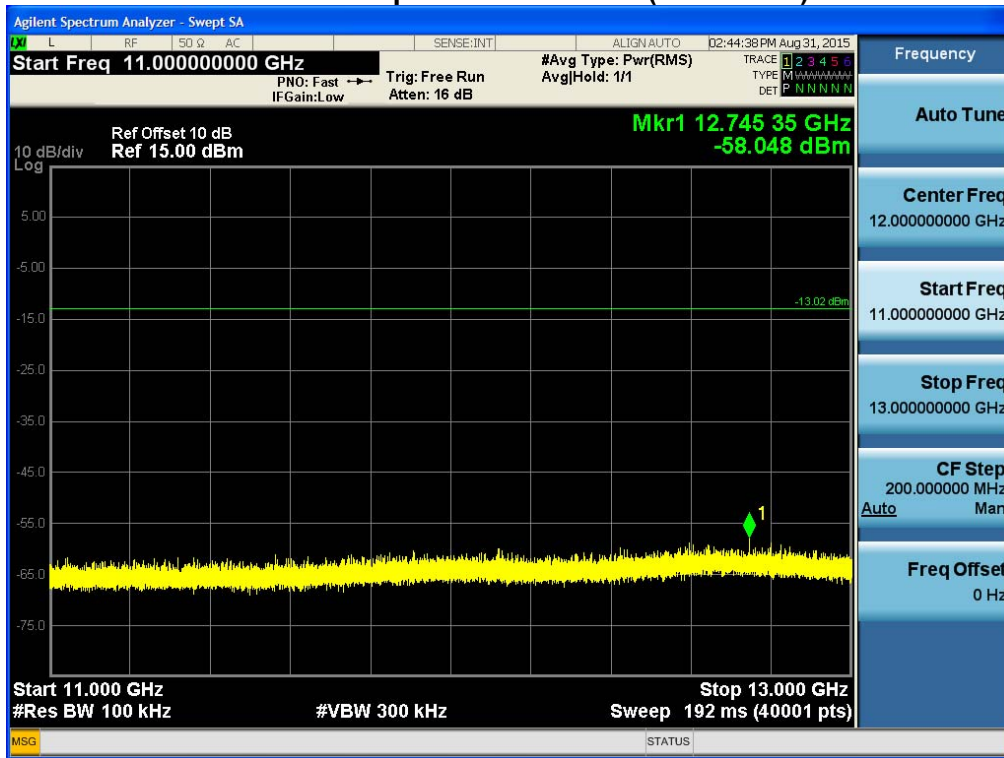


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

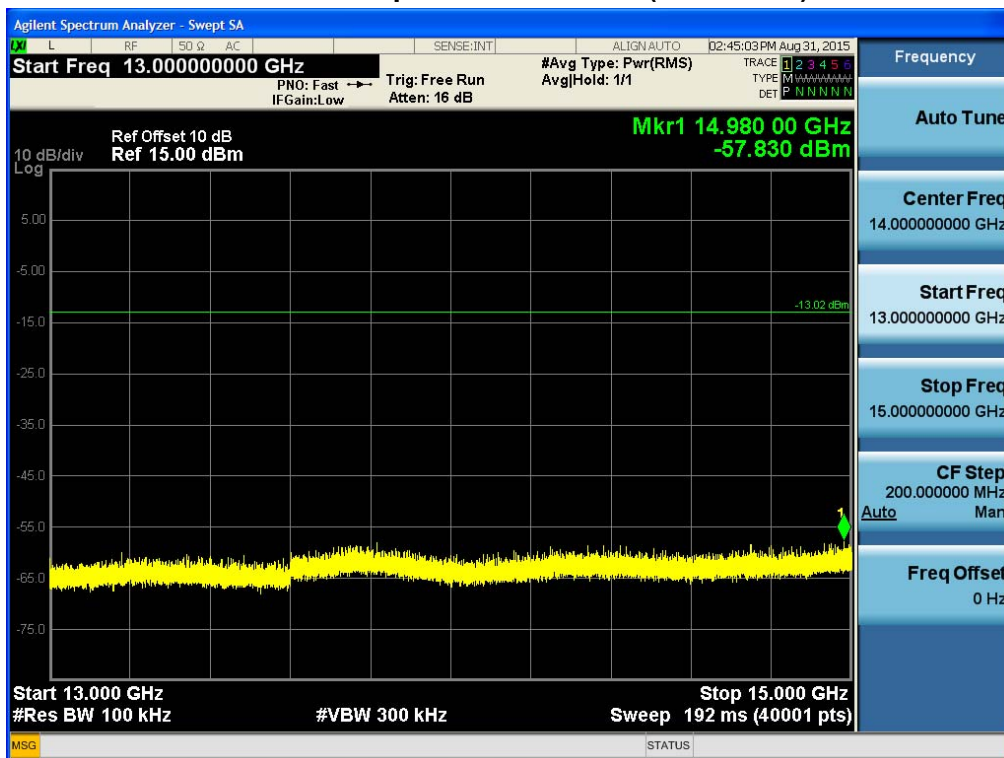


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

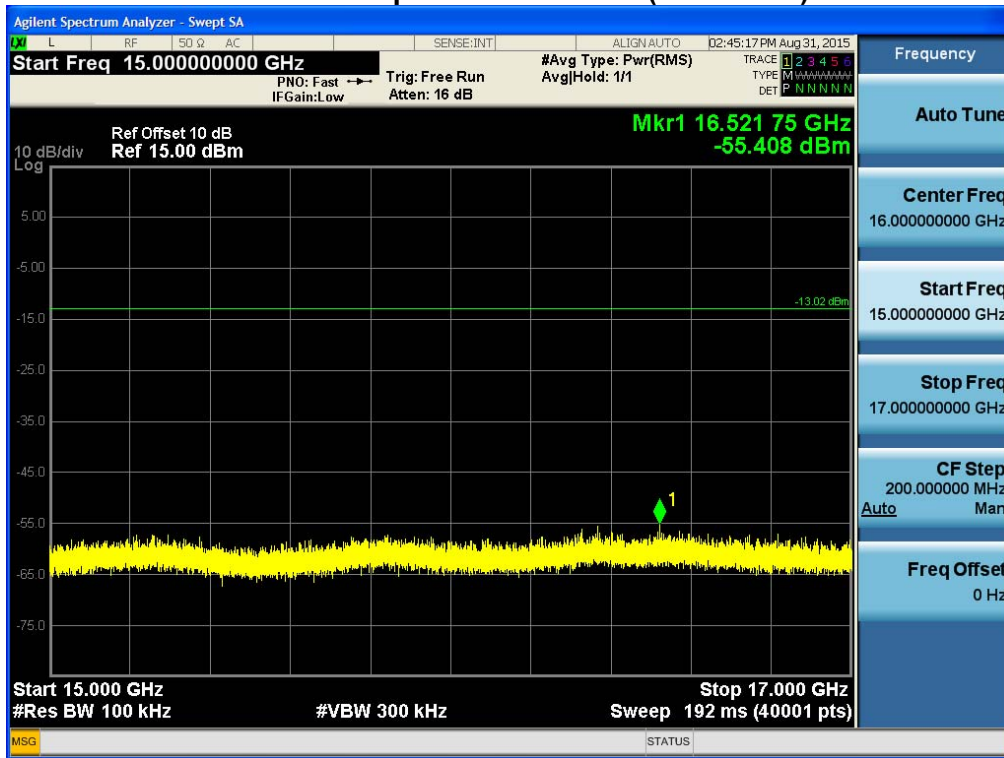


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

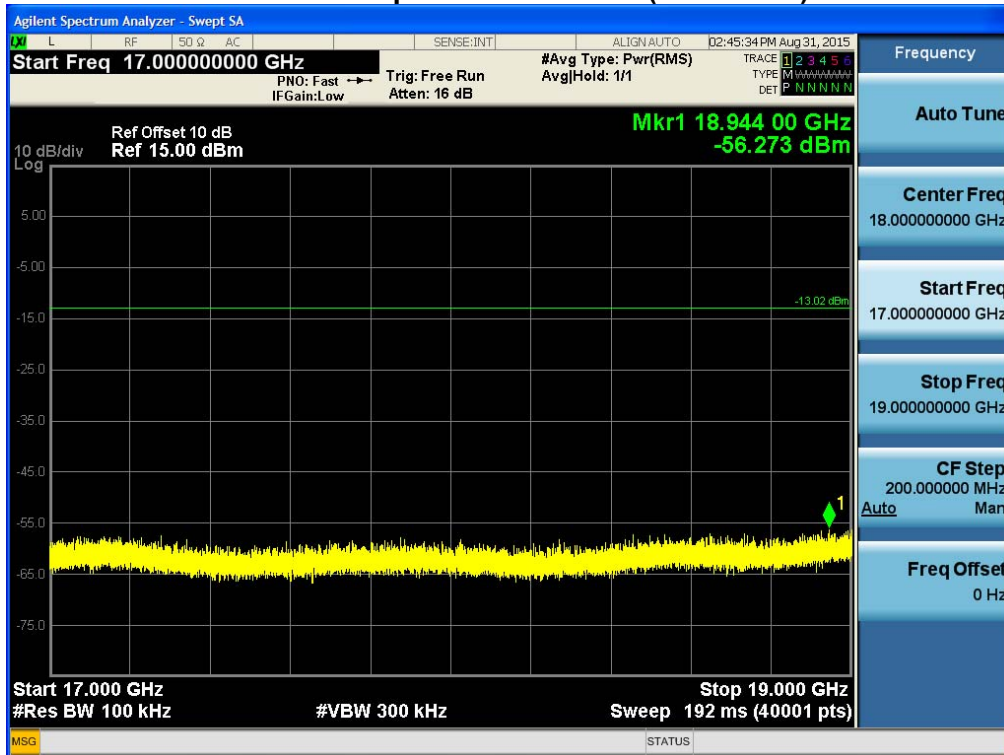


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

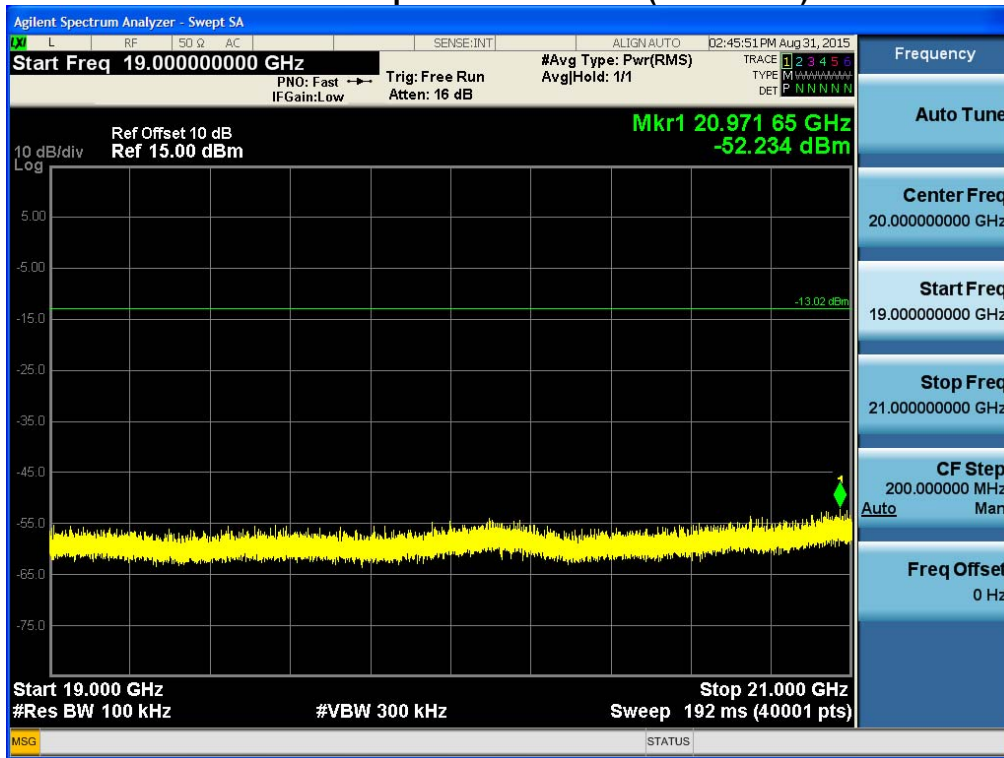


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

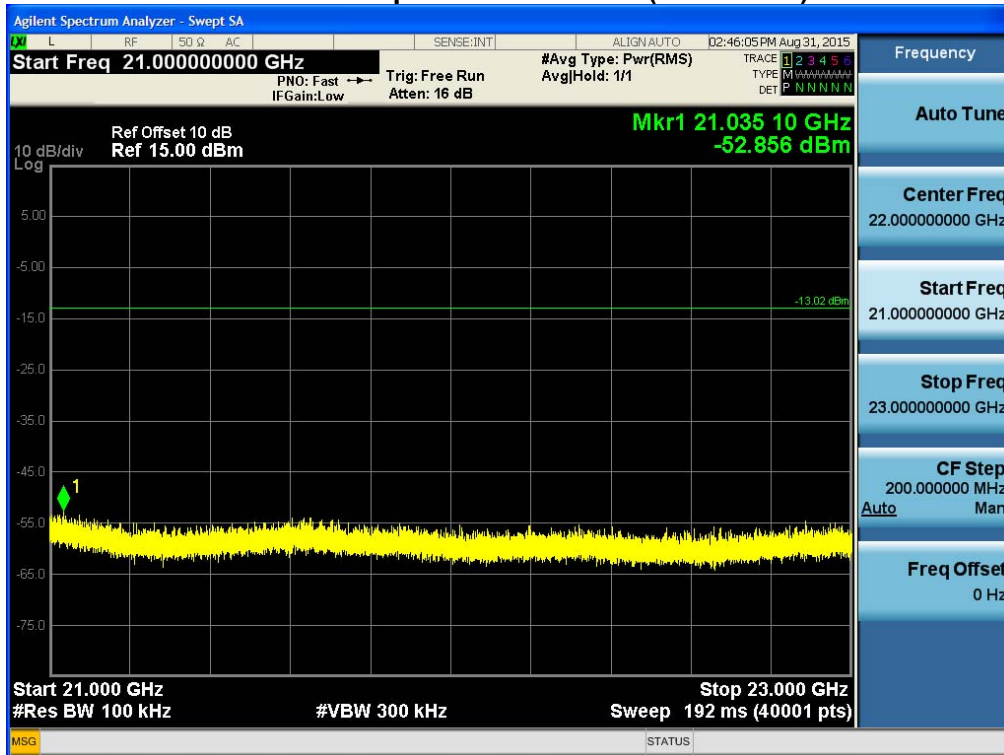

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

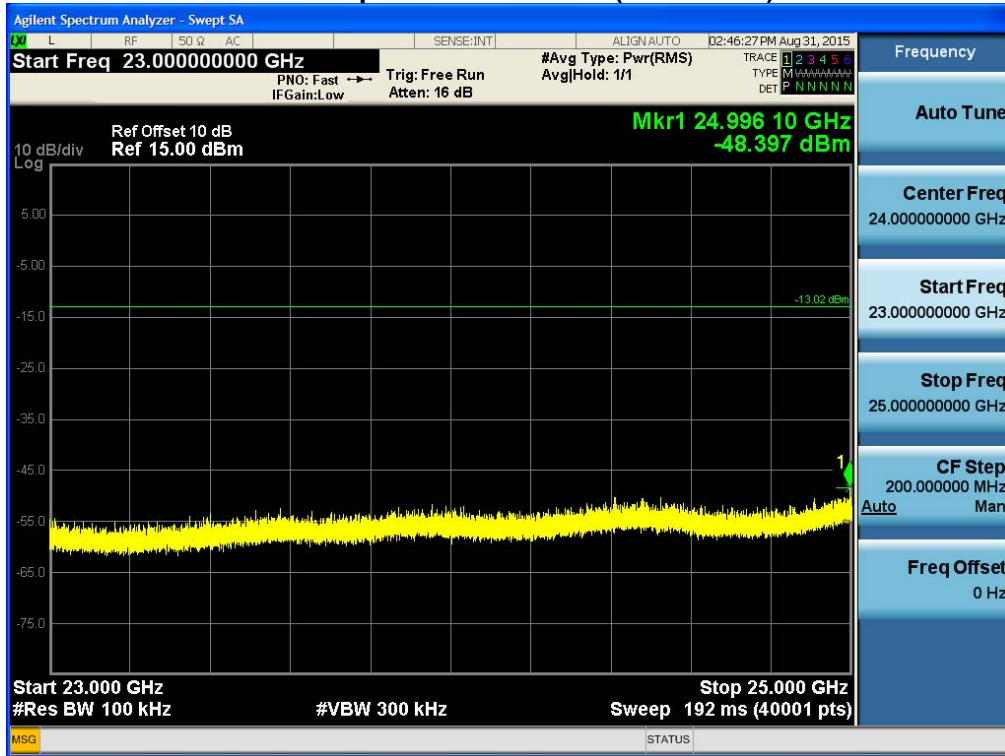

8.6 RADIATED MEASUREMENT.**8.6.1 RADIATED SPURIOUS EMISSIONS.**

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Mode


- Standalone with normal cover
- Standalone with wireless charging cover
- With wireless charging pad(WCD-110)
- With wireless charging pad(CT 06801)

Test Configuration


Below 30 MHz

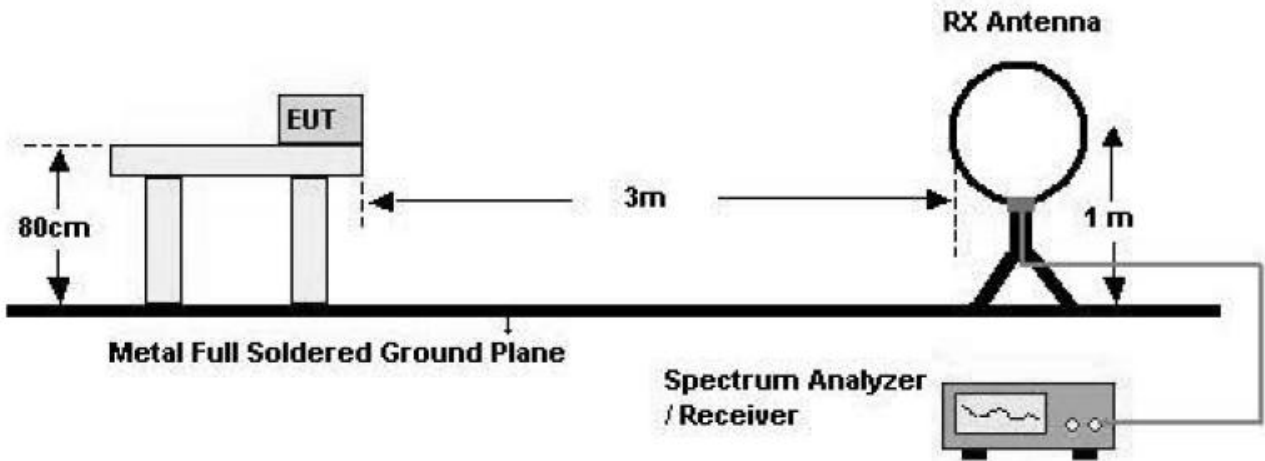

30 MHz - 1 GHz

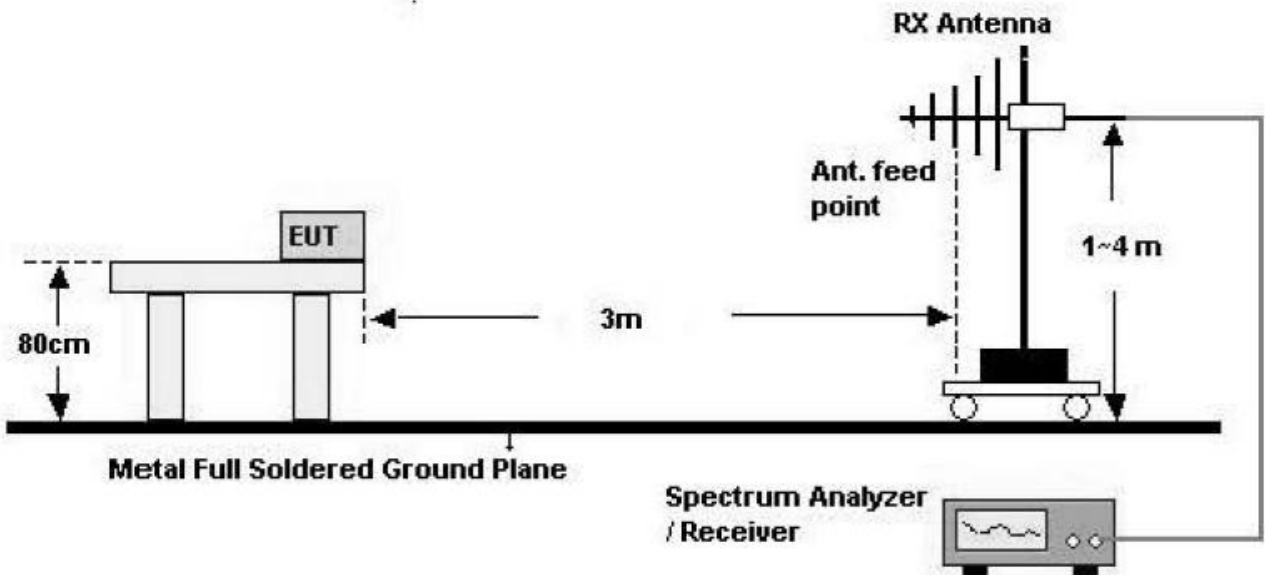

Above 1 GHz

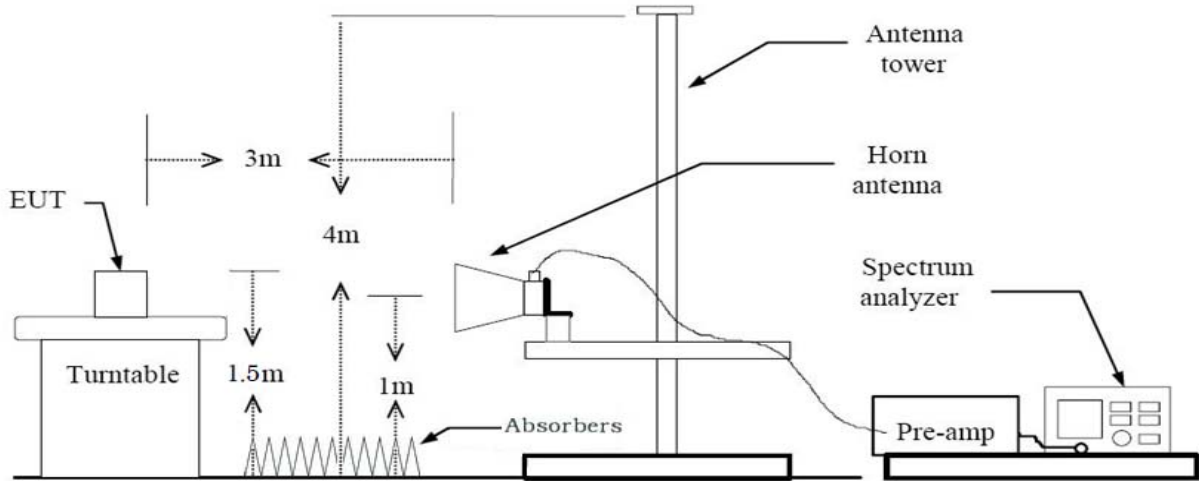

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/09/2015

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW $\geq 3 \times$ RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average (duty cycle \geq 98%)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS.

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Average (duty cycle < 98%)

Set RBW = 1 MHz

Set VBW \geq 1/T. (at least 100 times less than the resolution bandwidth, but no less than 10 Hz.)

Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.
2. The duty cycle factor for BT LE mode.

BT LE Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	Duty Cycle Factor	VBW(1/T) (Hz)
	0.3910	0.6256	62.50	2.04	2558

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm /m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}/\text{m}$	dBm/m	dBm	(H/V)	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Standalone with normal cover

Above 1 GHz

Operation Mode: CH Low(LE Mode)

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.96	-2.16	V	46.80	73.98	27.18	PK
4804	35.36	-2.16	V	33.20	53.98	20.78	AV
7206	45.99	7.31	V	53.30	73.98	20.68	PK
7206	32.50	7.31	V	39.81	53.98	14.17	AV
4804	49.15	-2.16	H	46.99	73.98	26.99	PK
4804	35.46	-2.16	H	33.30	53.98	20.68	AV
7206	46.14	7.31	H	53.45	73.98	20.53	PK
7206	32.58	7.31	H	39.89	53.98	14.09	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. The Reading values are already added value of the duty cycle factor.
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH Mid(LE Mode)

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	49.66	-1.87	V	47.79	73.98	26.19	PK
4880	35.92	-1.87	V	34.05	53.98	19.93	AV
7320	46.05	7.35	V	53.40	73.98	20.58	PK
7320	32.69	7.35	V	40.04	53.98	13.94	AV
4880	49.85	-1.87	H	47.98	73.98	26.00	PK
4880	36.00	-1.87	H	34.13	53.98	19.85	AV
7320	46.61	7.35	H	53.96	73.98	20.02	PK
7320	32.81	7.35	H	40.16	53.98	13.82	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. The Reading values are already added value of the duty cycle factor.
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.