

On your side

**HCT**

# TEST REPORT

EMI Test for FCC Certification of LM-K300AM Model

APPLICANT

LG Electronics USA, Inc.

REPORT NO.

HCT-EM-2003-FC003

DATE OF ISSUE

March 10, 2020

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401



REPORT NO.  
HCT-EM-2003-FC003

DATE OF ISSUE  
March 10, 2020

FCC ID  
ZNFK300AM

Applicant LG Electronics USA, Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632 United States

Product Name Multi-band GSM/WCDMA/LTE Phone with WLAN, Bluetooth  
Model Name LM-K300AM  
Series Model Name Refer to the clause 1.1 Description of EUT

Travel Adaptor Information Model name: MCS-V01WA  
Manufacturer: AOHAI

Date of Test March 02, 2020 to March 06, 2020

Test Standard Used FCC CFR 47 PART 15 Subpart B Class B  
ANSI C63.4-2014

Test Results Refer to the present document

Manufacturer LG Electronics Inc.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Tested by  
Ki-Min Lee

Technical Manager  
Jeong-Hyun Choi

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	March 10, 2020	Initial Release

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)  
I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.  
HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

This Test Report is not related to the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

## CONTENTS

1. GENERAL INFORMATION	5
1.1 Description of EUT	5
1.2 Tested System Details	5
1.3 Cable Description	6
1.4 Noise Suppression Parts on Cable. (I/O Cable)	6
1.5 Test Facility	7
1.6 Calibration of Measuring Instrument	7
1.7 Measurement Uncertainty	7
2. DESCRIPTION OF TEST	8
2.1 Measurement of Conducted Emission	8
2.2 Measurement of Radiated Emission	9
2.3 Configuration of Tested System	10
3. PRELIMINARY TEST	11
3.1 Conducted Emission	11
3.2 Radiated Emission	11
4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY	12
4.1 Conducted Emission	12
4.2 Radiated Emission Below 1 GHz	19
4.3 Radiated Emission Above 1 GHz	21
5. CONCLUSION	24
6. APPENDIX A. TEST SETUP PHOTO	25

## 1. GENERAL INFORMATION

### 1.1 Description of EUT

<b>FCC ID</b>	ZNFK300AM
<b>Model Name</b>	LM-K300AM
<b>Series Model Name</b>	LM-K300CMR, LMK300AM, LMK300CMR, K300AM, K300CMR
<b>Product Name</b>	Multi-band GSM/WCDMA/LTE Phone with WLAN, Bluetooth
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 788 MHz to 798 MHz (LTE B14) 2 305 MHz to 2 315 MHz (LTE B30) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 758 MHz to 768 MHz (LTE B14) 717 MHz to 728 MHz (LTE B29) 2 350 MHz to 2 360 MHz (LTE B30) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)

## 1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
EUT	LM-K300AM	-	LG
Travel Adaptor	MCS-V01WA	-	AOHAI
Data Cable	EAD62377922	-	KSD
Earphone	EAB64468444	-	CRESYN
Micro SD Card	Extreme MicroSDHC UHS-I CLASS 10 (32 GB)	-	SANDISK

## 1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	N/A	(P) 1.0
	Earphone	N/A	N	(D) 1.2

NOTE. The marked "(D)" means the data cable and "(P)" means the power cable.

## 1.4 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End

### 1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

Measurement Facilities	Designation No.
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	KR0032
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #1	
Radiated Field strength measurement facility 10 m Semi Anechoic chamber #2	

### 1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

### 1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Conducted Emission (0.15 MHz to 30 MHz)	1.8 dB
3 m Radiated Emissions (30 MHz to 1 GHz)	4.8 dB
3 m Radiated Emissions (1 GHz to 18 GHz)	5.4 dB
3 m Radiated Emissions (18 GHz to 40 GHz)	5.7 dB

## 2. DESCRIPTION OF TEST

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)	Quasi-Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
(1 GHz to 40 GHz)

### Radiated Emission Limits


Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength ( $\mu\text{V}/\text{m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Antenna Distance (m)	Field Strength ( $\mu\text{V}/\text{m}$ )	Quasi-Peak ( $\text{dB}\mu\text{V}/\text{m}$ )
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Average ( $\text{dB}\mu\text{V}/\text{m}$ )	Peak ( $\text{dB}\mu\text{V}/\text{m}$ )	Average ( $\text{dB}\mu\text{V}/\text{m}$ )	
Above 1 000	3	80	60	74	54	

### 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

### 2.3 Configuration of Tested System

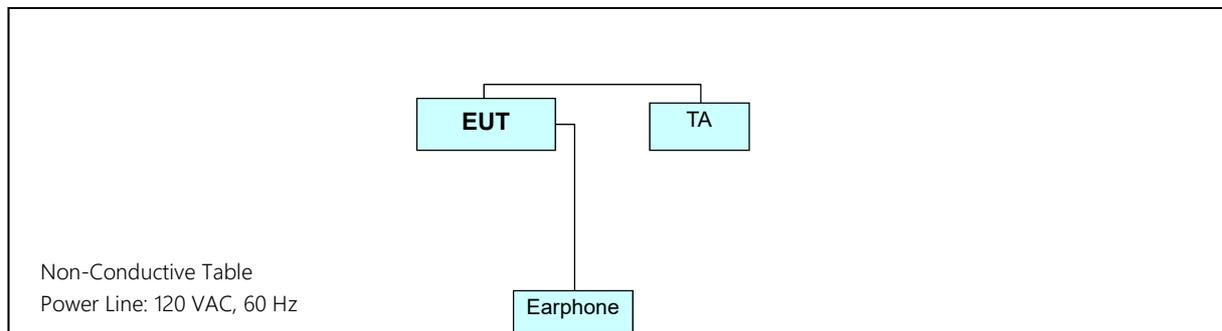

### 3. PRELIMINARY TEST

#### 3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:** FRONT CAMERA & MP3 mode

REAR CAMERA & FM RADIO mode

IDLE mode

NOTE. The worst-case emissions are reported.

#### 3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:** FRONT CAMERA & MP3 mode

REAR CAMERA & FM RADIO mode

IDLE mode

NOTE. The worst-case emissions are reported.

## 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission

#### 4.1.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	06.18.2019
<input checked="" type="checkbox"/>	LISN	Rohde & Schwarz	ENV216	102245	1 year	09.11..2019
<input checked="" type="checkbox"/>	Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.20.2019
<input checked="" type="checkbox"/>	Antenna (for Communication)	USLP9142	Schwarzbeck	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:


<b>Test Standard Used</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Frequency Range</b>	150 kHz to 30 MHz
<b>Detector</b>	Quasi-Peak, CISPR-Average
<b>Bandwidth</b>	9 kHz (6 dB)
<b>Worst Case of Operating Mode</b>	REAR CAMERA & FM RADIO mode
<b>Kind of Test Site</b>	EMI Shielded Room
<b>Temperature</b>	24.1 °C
<b>Relative Humidity</b>	42.3 %
<b>Test Date</b>	March 03, 2020

#### Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

4.1.3 Measuring Data

Figure 1: Conducted Emission (150 kHz to 30 MHz), Line (L1)

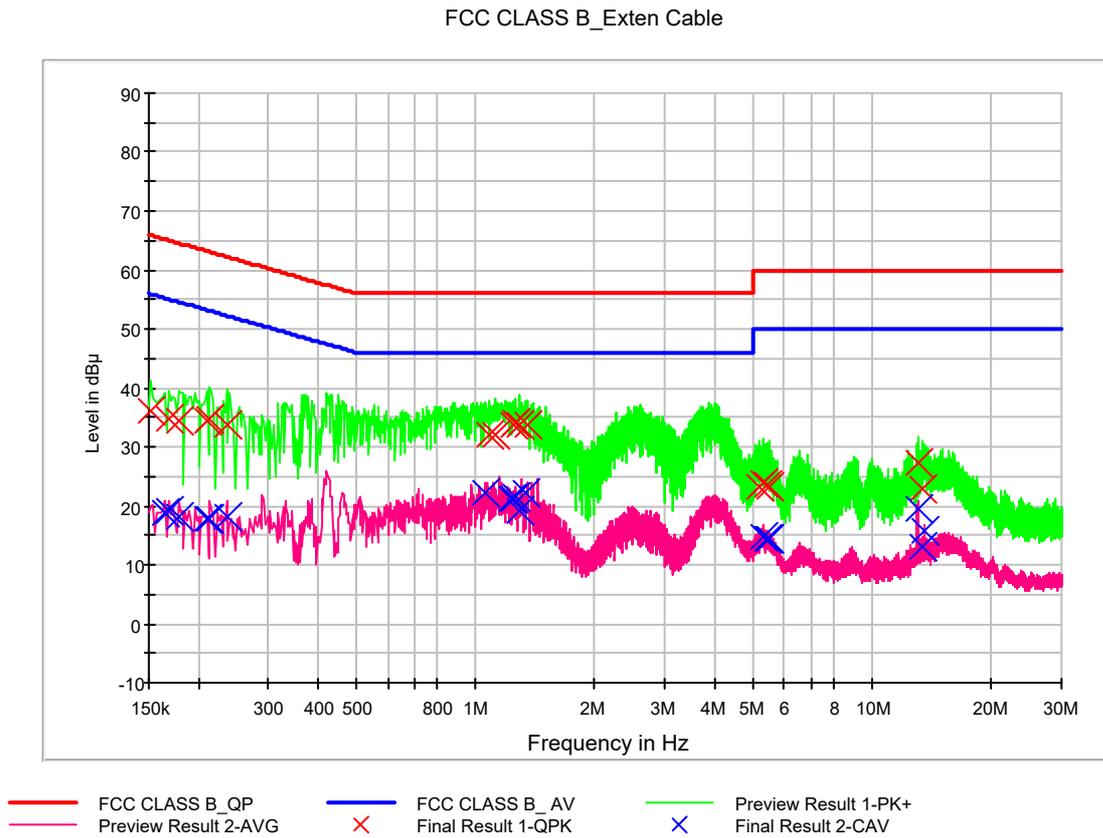


## QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.152000	36.0	9.000	L1	9.8	29.9	65.9
0.168000	34.8	9.000	L1	9.8	30.3	65.1
0.178000	34.4	9.000	L1	9.8	30.1	64.6
0.210000	34.3	9.000	L1	9.8	28.9	63.2
0.214000	34.6	9.000	L1	9.8	28.4	63.0
0.236000	33.7	9.000	L1	9.8	28.6	62.2
1.084000	32.1	9.000	L1	9.8	23.9	56.0
1.126000	32.1	9.000	L1	9.8	23.9	56.0
1.252000	33.7	9.000	L1	9.9	22.4	56.0
1.262000	34.0	9.000	L1	9.9	22.0	56.0
1.288000	33.7	9.000	L1	9.9	22.3	56.0
1.354000	33.6	9.000	L1	9.9	22.4	56.0
5.186000	23.3	9.000	L1	10.0	36.7	60.0
5.314000	23.9	9.000	L1	10.0	36.1	60.0
5.408000	23.6	9.000	L1	10.0	36.4	60.0
5.490000	23.4	9.000	L1	10.0	36.6	60.0
13.002000	27.4	9.000	L1	10.3	32.6	60.0
13.440000	22.7	9.000	L1	10.3	37.3	60.0

## CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.164000	18.6	9.000	L1	9.8	36.6	55.3
0.168000	19.1	9.000	L1	9.8	36.0	55.1
0.178000	18.2	9.000	L1	9.8	36.4	54.6
0.210000	17.9	9.000	L1	9.8	35.3	53.2
0.214000	17.7	9.000	L1	9.8	35.3	53.0
0.236000	18.1	9.000	L1	9.8	34.1	52.2
1.060000	22.3	9.000	L1	9.8	23.7	46.0
1.226000	21.2	9.000	L1	9.8	24.8	46.0
1.252000	21.0	9.000	L1	9.9	25.0	46.0
1.262000	21.6	9.000	L1	9.9	24.4	46.0
1.286000	19.2	9.000	L1	9.9	26.8	46.0
1.344000	22.2	9.000	L1	9.9	23.8	46.0
5.314000	14.7	9.000	L1	10.0	35.3	50.0
5.408000	14.4	9.000	L1	10.0	35.6	50.0
5.490000	14.4	9.000	L1	10.0	35.6	50.0
13.002000	19.5	9.000	L1	10.3	30.5	50.0
13.440000	13.1	9.000	L1	10.3	36.9	50.0
13.562000	15.8	9.000	L1	10.3	34.2	50.0

Figure 2: Conducted Emission (150 kHz to 30 MHz), Line (N)

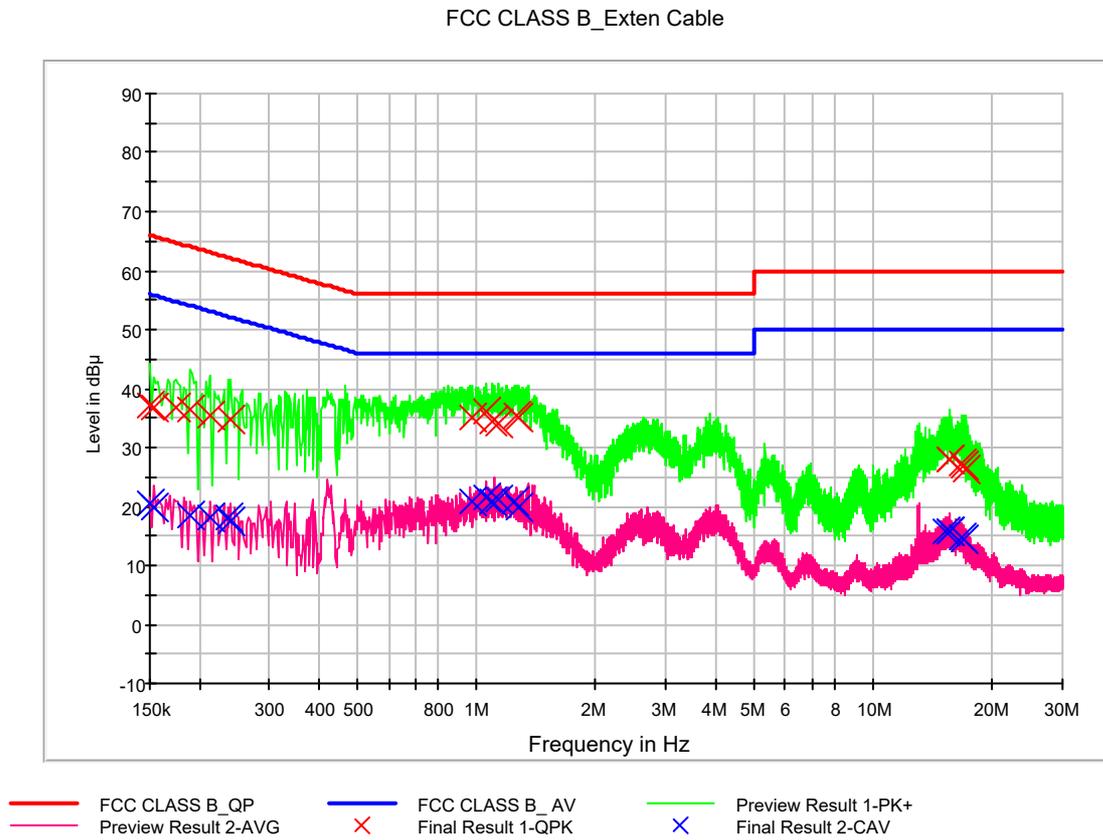

## QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	37.2	9.000	N	9.8	28.8	66.0
0.154000	36.7	9.000	N	9.8	29.1	65.8
0.174000	36.8	9.000	N	9.8	27.9	64.8
0.190000	36.5	9.000	N	9.8	27.6	64.0
0.212000	35.5	9.000	N	9.8	27.6	63.1
0.240000	34.8	9.000	N	9.8	27.3	62.1
0.970000	35.2	9.000	N	9.8	20.8	56.0
1.058000	35.9	9.000	N	9.8	20.1	56.0
1.094000	34.4	9.000	N	9.8	21.6	56.0
1.138000	34.0	9.000	N	9.8	22.0	56.0
1.266000	35.4	9.000	N	9.8	20.6	56.0
1.274000	35.1	9.000	N	9.8	20.9	56.0
15.564000	28.0	9.000	N	10.5	32.0	60.0
15.610000	28.1	9.000	N	10.5	31.9	60.0
15.620000	27.9	9.000	N	10.5	32.1	60.0
16.730000	27.2	9.000	N	10.5	32.8	60.0
16.854000	27.0	9.000	N	10.5	33.0	60.0
17.136000	26.3	9.000	N	10.5	33.7	60.0

## CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	20.6	9.000	N	9.8	35.4	56.0
0.154000	19.8	9.000	N	9.8	36.0	55.8
0.190000	18.4	9.000	N	9.8	35.7	54.0
0.214000	18.1	9.000	N	9.8	34.9	53.0
0.236000	18.0	9.000	N	9.8	34.2	52.2
0.240000	17.6	9.000	N	9.8	34.5	52.1
0.970000	20.7	9.000	N	9.8	25.3	46.0
1.058000	21.6	9.000	N	9.8	24.4	46.0
1.094000	21.0	9.000	N	9.8	25.0	46.0
1.138000	21.1	9.000	N	9.8	24.9	46.0
1.252000	21.0	9.000	N	9.8	25.0	46.0
1.274000	19.9	9.000	N	9.8	26.1	46.0
15.266000	15.9	9.000	N	10.5	34.1	50.0
15.518000	15.7	9.000	N	10.5	34.3	50.0
15.610000	15.6	9.000	N	10.5	34.4	50.0
15.636000	15.7	9.000	N	10.5	34.3	50.0
16.730000	14.7	9.000	N	10.5	35.3	50.0
16.854000	14.5	9.000	N	10.5	35.5	50.0

## 4.2 Radiated Emission Below 1 GHz

### 4.2.1 Measuring instruments

Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/> EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/> Bi-Log antenna	Schwarzbeck	VULB 9168	255	2 year	03.26.2019
<input checked="" type="checkbox"/> Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	INNCO Systems	CO 3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/> Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/> Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.20.2019
<input checked="" type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	VSLP 9142-200	-	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-

### 4.2.2 Operating Condition

The test results of radiated emission provide the following information:

Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
Frequency Range	30 MHz to 1 000 MHz
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Worst Case of Operating Mode	REAR CAMERA & FM RADIO mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.3 °C
Relative Humidity	42.2 %
Test Date	March 02, 2020

## 4.2.3 Measuring Data

Frequency (MHz)	Quasi Peak (dB $\mu$ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
32.499000	18.6	174.9	V	28.0	18.5	21.4	40.0
62.044600	16.8	191.8	V	268.0	19.1	23.2	40.0
91.822600	14.7	174.9	H	107.0	14.4	28.8	43.5
114.566800	20.9	174.8	V	74.0	16.8	22.6	43.5
382.163200	20.9	400.2	H	61.0	22.5	25.1	46.0
683.028400	28.4	325.1	V	275.0	28.6	17.6	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

### 4.3 Radiated Emission Above 1 GHz

#### 4.3.1 Measuring instruments

	Type	Manufacturer	Model Name	Serial Number	Calibration Cycle	Calibration Date
<input checked="" type="checkbox"/>	EMI test receiver	Rohde & Schwarz	ESU40	100524	1 year	05.17.2019
<input checked="" type="checkbox"/>	Antenna master	INNCO Systems	MA4640-XP-ET	-	N/A	-
<input checked="" type="checkbox"/>	Antenna master controller	INNCO Systems	CO3000	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/>	Turn table	INNCO Systems	1060	-	N/A	-
<input checked="" type="checkbox"/>	Turn table controller	INNCO Systems	CO2000	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/>	Low Noise amplifier	TESTEK	TK-PA18H	170034-L	1 year	03.03.2020
<input type="checkbox"/>	Low Noise amplifier	TESTEK	TK-PA1840H	170030-L	1 year	02.13.2020
<input checked="" type="checkbox"/>	Horn antenna	Schwarzbeck	BBHA 9120D	01836	1 year	07.19.2019
<input type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170#786	1 year	12.03.2019
<input checked="" type="checkbox"/>	Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.20.2019
<input checked="" type="checkbox"/>	Antenna (for Communication)	USLP9142	Schwarzbeck	VSLP 9142-200	-	-
<input checked="" type="checkbox"/>	Software	Rohde & Schwarz	EMC32	-	-	-

#### 4.3.2 Operating Condition

The test results of radiated emission provide the following information:

<b>Used Test Standard</b>	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014
<b>Detector</b>	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
<b>Highest Frequency</b>	2 480 MHz
<b>Tested Frequency Range</b>	1 GHz to 18 GHz
<b>Worst Case of Operating Mode</b>	REAR CAMERA & FM RADIO mode
<b>Kind of Test Site</b>	3 m semi anechoic chamber
<b>Temperature</b>	24.3 °C
<b>Relative Humidity</b>	42.9 %
<b>Test Date</b>	March 06, 2020

## 4.3.3 Measuring Data

Frequency (MHz)	Peak (dB $\mu$ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
1163.760000	35.1	229.4	V	205.0	-29.0	38.9	74.0
2034.455000	31.1	350.0	V	187.0	-26.5	42.9	74.0
4029.100000	35.1	100.0	H	288.0	-20.4	38.9	74.0
4932.140000	37.6	100.0	H	262.0	-18.0	36.4	74.0
7435.070000	42.0	150.0	H	190.0	-12.3	32.0	74.0
9809.725000	43.7	150.0	V	30.0	-9.3	30.3	74.0

Frequency (MHz)	CAverage (dB $\mu$ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
1163.760000	25.4	229.4	V	205.0	-29.0	28.6	54.0
2034.455000	18.6	350.0	V	187.0	-26.5	35.4	54.0
4029.100000	22.6	100.0	H	288.0	-20.4	31.4	54.0
4932.140000	24.4	100.0	H	262.0	-18.0	29.6	54.0
7435.070000	29.0	150.0	H	190.0	-12.3	25.0	54.0
9809.725000	30.8	150.0	V	30.0	-9.3	23.2	54.0

## - Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage

## 5. CONCLUSION

The data collected shows that the **Product Name: Multi-band GSM/WCDMA/LTE Phone with WLAN, Bluetooth and Model Name: LM-K300AM** complies with §15.107 and §15.109 of the FCC rules.

## 6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2003-FC003-P	March 10, 2020	Initial Release

End of report