



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Date of Issue:
September 22, 2011

Address:
10101 Old Grove Road, San Diego, CA 92131

Test Site/Location:
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si,
Kyunggi-Do, Korea

Test Report No.: HCTR1109FR18-1
HCT FRN: 0005866421

FCC ID : ZNFL01D

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

Model(s): L-01D
EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)
RF Output Field Strength 12.47 dBuV/m
Frequency of Operation: 13.56047 MHz
Modulation type ASK
FCC Classification: Low Power Communication Device – Transmitter
FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by

: Jone Seok Lee

Test engineer of RF Team

Approved by

: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 1 of 25

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1109FR18	September 19, 2011	First Approval Report
HCTR1109FR18-1	September 22, 2011	Change of the EUT Type

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. TEST SUMMARY	8
8. RADIATED EMISSION MEASUREMENT	9
8.1. RADIATED EMISSION 9 kHz – 30 MHz	1 0
8.2. RADIATED EMISSION 30 MHz – 1000 MHz	1 3
9. EMISSION BANDWIDTH PLOT.....	1 4
10. FREQUENCY TOLERANCE	1 5
11. POWERLINE CONDUCTE EMISSIONS.....	1 6
12. LIST OF TEST EQUIPMENT	2 5



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.

Address: 10101 Old Grove Road, San Diego, CA 92131

FCC ID: ZNFL01D

EUT: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)

Model: L-01D

Date of Test: September 05, 2011 ~ September 10, 2011

Contact person: Name: Hee Ju An
Tel/ Fax: Phone #: +82-2-2033-1123

Place of Tests: HCT Co., Ltd.
105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

Product	PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)
Model Name	L-01D
Power Supply	DC 3.7 V
Battery Type	Li-ion Battery(Standard)
Frequency of Operation	13.56305 MHz
Transmit Power	12.47 dBuV/m
Modulation Type	ASK

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 5 of 25

3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With
FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.4:2003	13.553MHz to 13.567MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.4:2003	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	9kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.209	ANSI C63.4:2003	30MHz to 1GHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.207	ANSI C63.4:2003	150kHz to 30MHz
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.4:2003	0.01% of nominal
Title 47 of the CFR:2005, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.4:2003	-



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 7 of 25

7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	N/A
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2009, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

8. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15. 209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.


(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 9 of 25

8.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

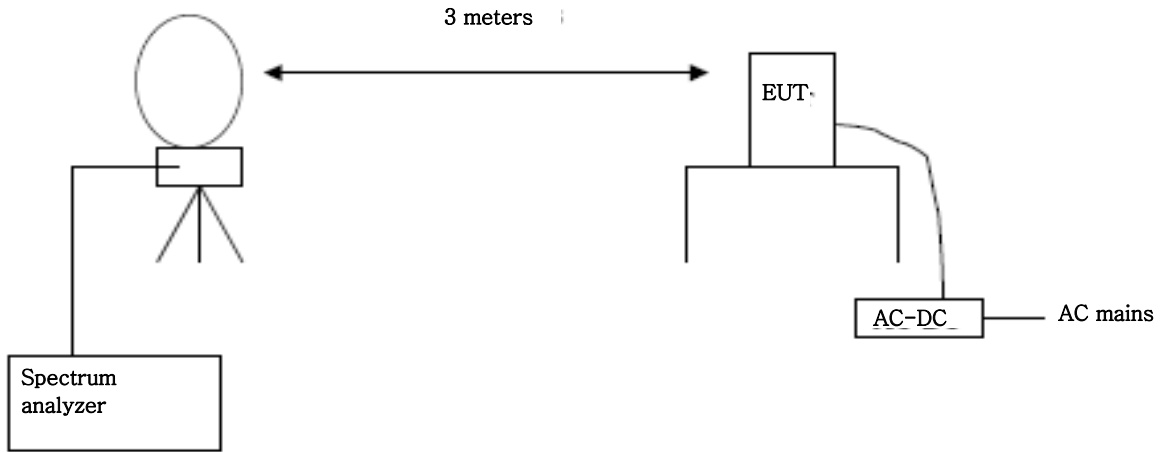

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dB μ V/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

Test Results

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.56000	41.97	10.5	-40	12.47	84	71.53
13.56000	37.76	10.5	-40	8.26	84	75.74

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.55270	24.15	10.5	-40	-5.35	50.47	55.82
13.55270	29.78	10.5	-40	0.28	50.47	50.19
13.56700	27.74	10.5	-40	-1.76	50.47	52.23
13.56700	32.42	10.5	-40	2.92	50.47	47.55

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.16448	20.32	10.5	-40	-9.18	40.51	49.69
13.77180	13.65	10.5	-40	-15.85	40.51	56.36
13.77300	15.50	10.5	-40	-14.00	40.51	54.51

9 kHz-30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.15084	19.76	10.5	-40	-9.74	29.54	39.28
28.52892	24.91	7.8	-40	-7.29	29.54	36.83
28.52892	25.01	7.8	-40	-7.19	29.54	36.73




Remark :

1. Distance Correction Below 30MHz = $40\log(3m/30m) = - 40$ dB
Measurement Distance : 3 m (Below 30MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 1 2 of 25

8.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

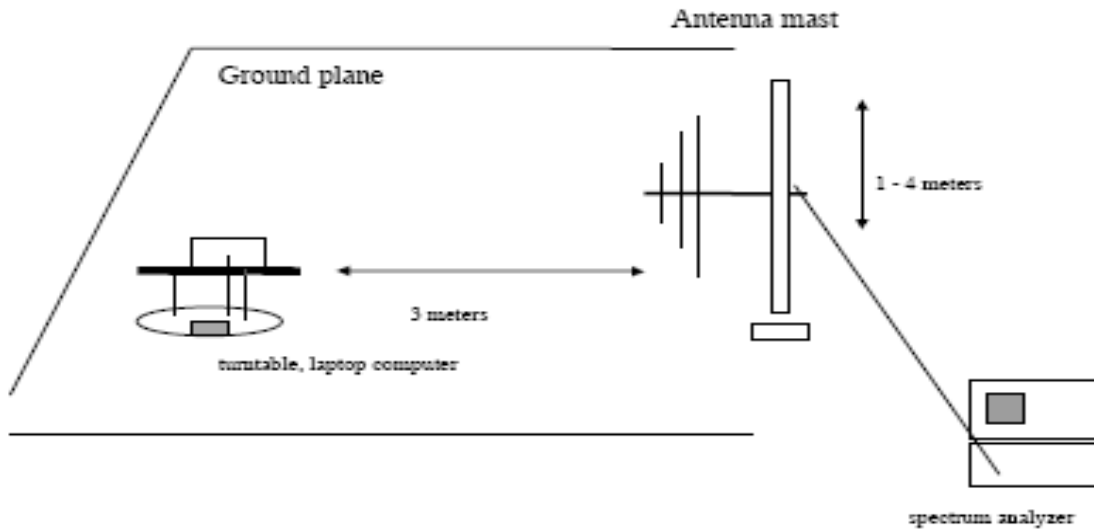

Test Procedures: Radiated emissions were measured according to ANSI C63.4.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
35.82	14.8	12.5	0.5	V	27.83	40.0	12.2
39.70	21.0	13.0	0.6	V	34.57	40.0	5.4
49.40	10.8	13.7	0.6	V	25.04	40.0	15.0
61.04	10.6	13.0	0.7	H	24.31	40.0	15.7
64.92	10.2	12.4	0.8	H	23.40	40.0	16.6
95.96	17.9	8.3	1.0	V	27.20	43.5	16.3
107.60	12.5	9.8	1.1	H	23.42	43.5	20.1
134.76	8.7	12.2	1.2	H	22.07	43.5	21.4

Remark


1. Result Level = Read Level + (ANT+ CL Factor)
2. Margin = Limit – Result Level

9. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20dB bandwidth was measured by using a spectrum analyzer.

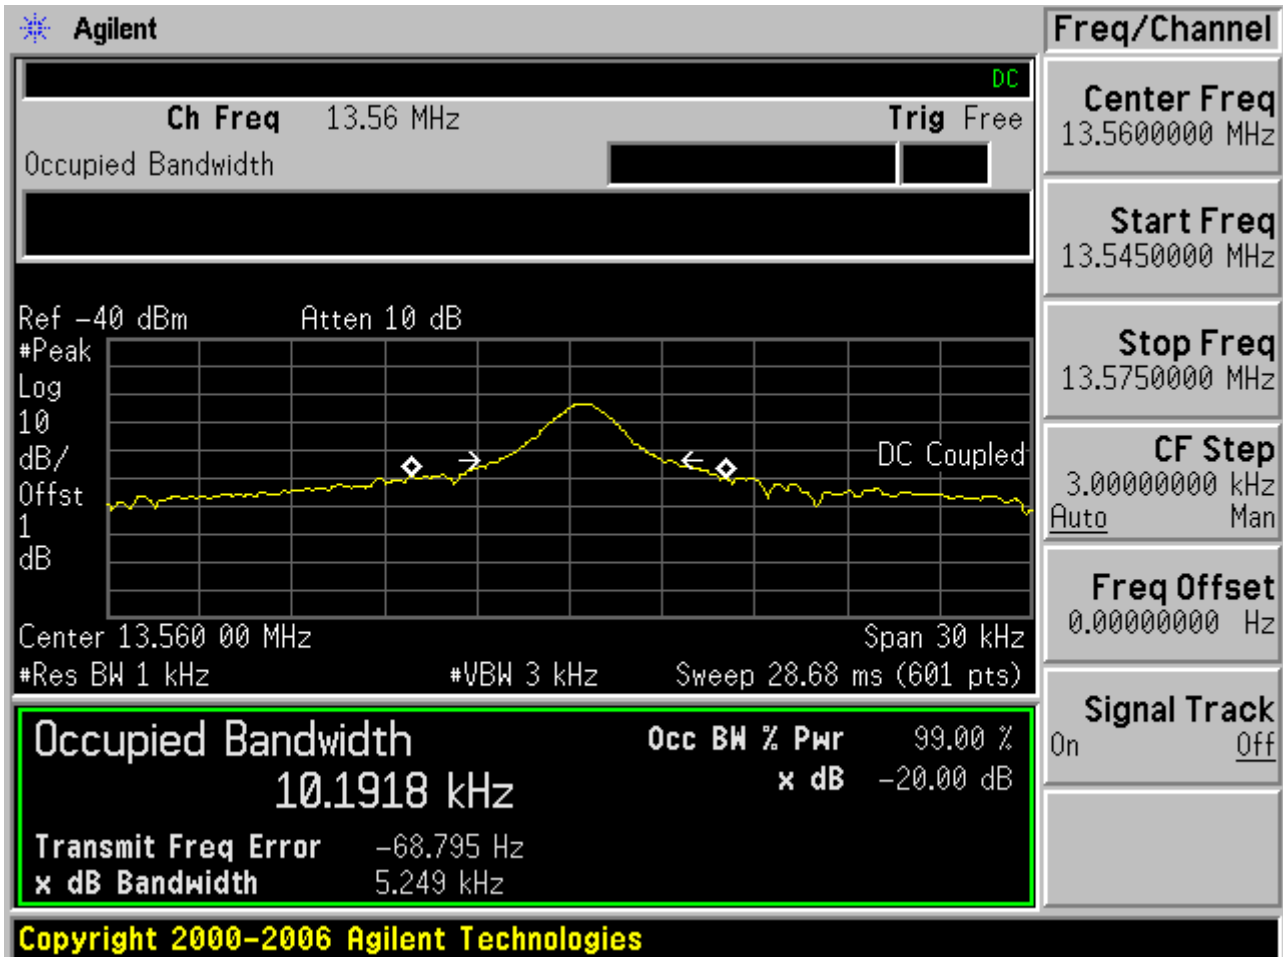

10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.4

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE (%)	POWER	Temperature (°C)	Frequency (MHz)	Frequency Error
100%	6 V	-20	13.56060	-0.00013
100%		-10	13.56059	-0.00012
100%		0	13.56058	-0.00011
100%		10	13.56050	-0.00003
100%		20	13.56047	0.00000
100%		30	13.56042	0.00005
100%		40	13.56046	0.00001
100%		50	13.56033	0.00014

Notes:

1. The EUT is supplied with the fully re-charged battery.

11. POWERLINE CONDUCTE EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.



Test Plots

Unterminate the Antenna

Conducted Emissions (Line 1)


HCT

EMC

EUT: L-01D
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS Lee
 Test Specification: FCC PART15 CLASS B
 Comment: N (NFC ON)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:		FCC PART 15 CLASS B					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

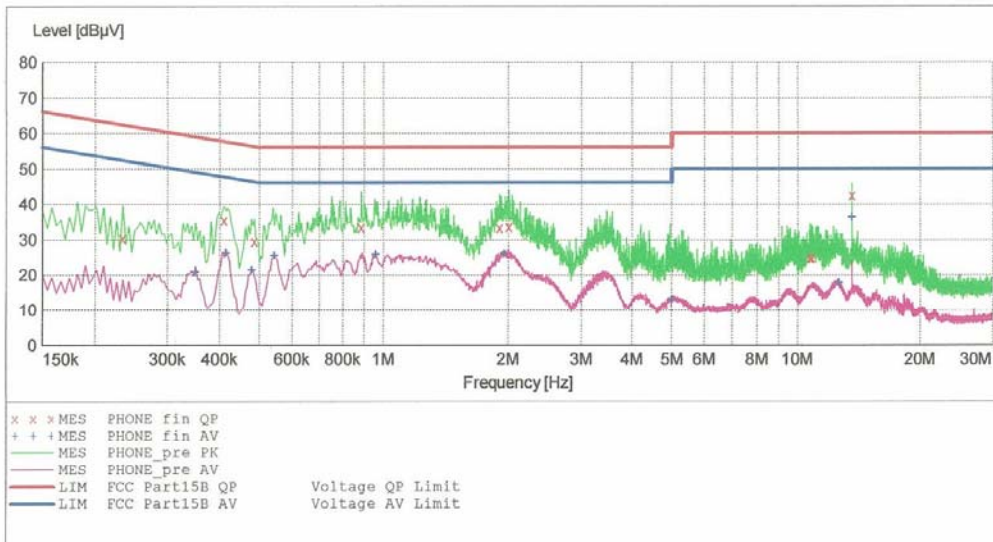

MEASUREMENT RESULT: "PHONE_fin QP"

9/10/2011 2:51AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.234010	30.30	10.3	62	32.0	---	---
0.410010	35.50	10.3	58	22.2	---	---
0.486010	29.50	10.3	56	26.7	---	---
0.888000	33.50	10.4	56	22.5	---	---
1.908000	33.30	10.4	56	22.7	---	---
2.008000	33.60	10.4	56	22.4	---	---
10.740000	24.90	11.1	60	35.1	---	---
10.816000	24.90	11.1	60	35.1	---	---
13.564000	42.60	11.3	60	17.4	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 17 of 25



MEASUREMENT RESULT: "PHONE_fin AV"

9/10/2011 2:51AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.350010	20.80	10.3	49	28.1	---	---
0.414010	26.20	10.3	48	21.4	---	---
0.478010	21.40	10.3	46	25.0	---	---
0.544000	25.40	10.3	46	20.6	---	---
0.960000	25.80	10.4	46	20.2	---	---
1.956000	25.90	10.4	46	20.1	---	---
5.000000	12.90	10.7	46	33.1	---	---
12.640000	17.70	11.2	50	32.3	---	---
13.564000	36.30	11.3	50	13.7	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 18 of 25



Conducted Emissions (Line 2)


HCT

EMC

EUT: L-01D
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: H (NFC ON)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

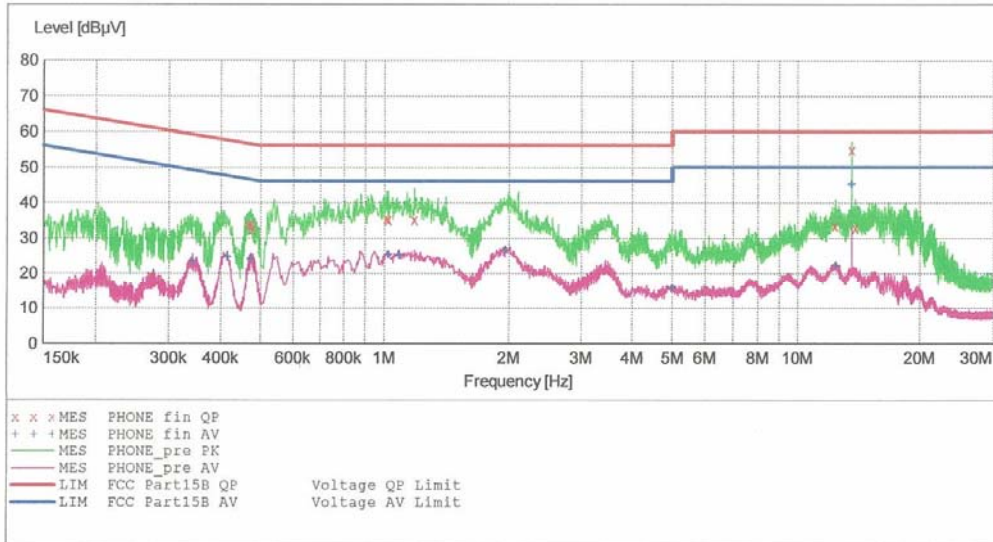

MEASUREMENT RESULT: "PHONE_fin QP"

9/10/2011 2:59AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.467010	33.80	10.1	57	22.8	---	---
0.473010	33.90	10.1	57	22.6	---	---
0.478010	32.50	10.1	56	23.9	---	---
1.016000	35.50	10.1	56	20.5	---	---
1.024000	35.30	10.1	56	20.7	---	---
1.184000	35.20	10.2	56	20.8	---	---
12.360000	33.50	11.1	60	26.5	---	---
13.560000	54.90	11.3	60	5.1	---	---
13.856000	33.00	11.3	60	27.0	---	---

FCC PT.15.225 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 19 of 25



MEASUREMENT RESULT: "PHONE_fin AV"

9/10/2011 2:59AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.341010	23.40	10.1	49	25.8	---	---
0.414010	24.70	10.1	48	22.9	---	---
0.473010	24.10	10.1	47	22.3	---	---
1.024000	25.30	10.1	46	20.7	---	---
1.088000	25.10	10.1	46	20.9	---	---
1.960000	26.70	10.2	46	19.3	---	---
5.000000	15.80	10.5	46	30.2	---	---
12.376000	22.20	11.1	50	27.8	---	---
13.560000	45.10	11.3	50	4.9	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 20 of 25



**Terminate the Antenna
Conducted Emissions (Line 1)**


HCT

EMC

EUT: L-01D
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: H (NFC OFF)

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

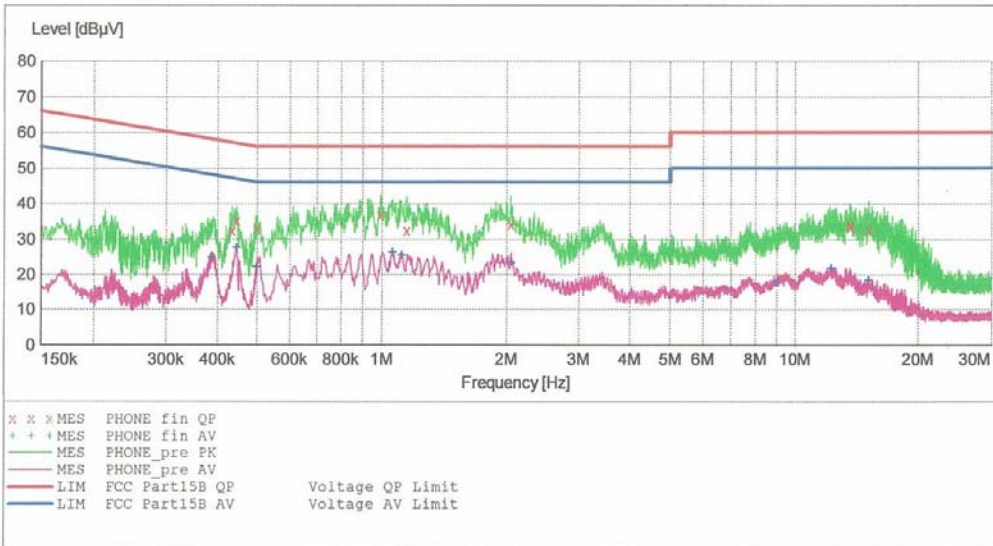

MEASUREMENT RESULT: "PHONE_fin QP"

9/10/2011 3:09AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.434010	32.40	10.1	57	24.8	---	---
0.445010	35.20	10.1	57	21.8	---	---
0.498010	33.40	10.1	56	22.7	---	---
0.996000	37.00	10.1	56	19.0	---	---
1.148000	32.40	10.1	56	23.6	---	---
2.048000	34.20	10.2	56	21.8	---	---
13.604000	34.10	11.3	60	25.9	---	---
13.652000	33.50	11.3	60	26.5	---	---
15.132000	32.80	11.4	60	27.2	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/10/2011 3:09AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.387010	24.90	10.1	48	23.2	---	---
0.445010	27.60	10.1	47	19.4	---	---
0.498010	22.20	10.1	46	23.8	---	---
1.064000	26.30	10.1	46	19.7	---	---
1.120000	25.50	10.1	46	20.5	---	---
2.056000	23.50	10.2	46	22.5	---	---
9.028000	17.70	10.9	50	32.3	---	---
12.260000	21.90	11.1	50	28.1	---	---
15.128000	18.50	11.4	50	31.5	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 2 2 of 25

Conducted Emissions (Line 2)


HCT

EMC

EUT: L-01D
 Manufacturer: LGE
 Operating Condition: NFC MODE
 Test Site: SHIELD ROOM
 Operator: JS Lee
 Test Specification: FCC PART15 CLASS B
 Comment: N (NFC OFF)

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

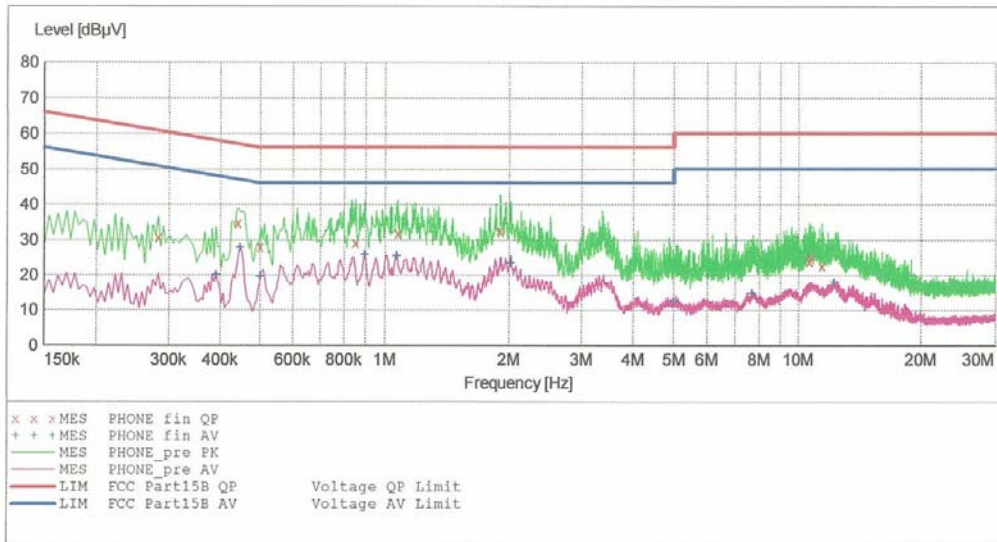

MEASUREMENT RESULT: "PHONE_fin_QP"

9/10/2011 3:12AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.282010	30.80	10.3	61	30.0	---	---
0.442010	34.80	10.3	57	22.2	---	---
0.500000	28.10	10.3	56	27.9	---	---
0.852000	29.20	10.4	56	26.8	---	---
1.076000	31.90	10.4	56	24.1	---	---
1.904000	32.50	10.4	56	23.5	---	---
10.652000	24.00	11.1	60	36.0	---	---
10.736000	24.80	11.1	60	35.2	---	---
11.440000	22.60	11.1	60	37.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/10/2011 3:12AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.390010	20.10	10.3	48	28.0	---	---
0.446010	27.80	10.3	47	19.2	---	---
0.500000	19.60	10.3	46	26.4	---	---
0.896000	25.80	10.4	46	20.2	---	---
1.068000	25.40	10.4	46	20.6	---	---
2.024000	23.40	10.4	46	22.6	---	---
5.000000	12.30	10.7	46	33.7	---	---
7.700000	14.60	11.0	50	35.4	---	---
12.256000	17.90	11.2	50	32.1	---	---

FCC PT.15.225 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1109FR18-1	Date of Issue: September 22, 2011	EUT Type: PCS GSM/GPRS Phone with Bluetooth, WLAN and NFC(Felica)	FCC ID: ZNFL01D	Page 24 of 25

12. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/01/2012	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/25/2011	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/29/2011	10094
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	03/23/2012	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	01/04/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	12/29/2011	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/08/2011	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/04/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2011	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	04/01/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536