



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR**

GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n

MODEL NUMBER: LGL31L, L31L, LG-L31L

FCC ID: ZNFL31L

REPORT NUMBER: 13U16673-4 REV A

ISSUE DATE: January 27, 2014

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/13/14	Initial Issue	P. Kim
A	1/27/14	Updated antenna information	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>MAXIMUM OUTPUT POWER</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY TABLE	11
8. ANTENNA PORT TEST RESULTS	12
8.1. <i>20 dB AND 99% BANDWIDTH</i>	12
8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i>	12
8.1.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	12
8.2. <i>HOPPING FREQUENCY SEPARATION</i>	21
8.3. <i>NUMBER OF HOPPING CHANNELS</i>	23
8.4. <i>AVERAGE TIME OF OCCUPANCY</i>	26
8.5. <i>OUTPUT POWER</i>	30
8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i>	30
8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	30
8.6. <i>AVERAGE POWER</i>	35
8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i>	35
8.6.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	35
8.7. <i>CONDUCTED SPURIOUS EMISSIONS</i>	36
8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i>	37
8.7.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i>	41
9. RADIATED TEST RESULTS	45
9.1. <i>LIMITS AND PROCEDURE</i>	45
9.2. <i>TRANSMITTER ABOVE 1 GHz</i>	46
9.2.1. <i>BASIC DATA RATE GFSK MODULATION</i>	46

9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	60
9.3.	WORST-CASE BELOW 1 GHz	74
10.	AC POWER LINE CONDUCTED EMISSIONS	77
11.	SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n
MODEL: LGL31L, L31L, LG-L31L
SERIAL NUMBER: 1792208-VS
DATE TESTED: December 13, 2013 – January 13, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WISE PROGRAM MANAGER
UL Verification Services Inc.

STEVEN TRAN
WISE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	11.34	13.61
2402 - 2480	Enhanced 8PSK	11.73	14.89

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 0.1 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	L31L	N/A	N/A
Earphone	LG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

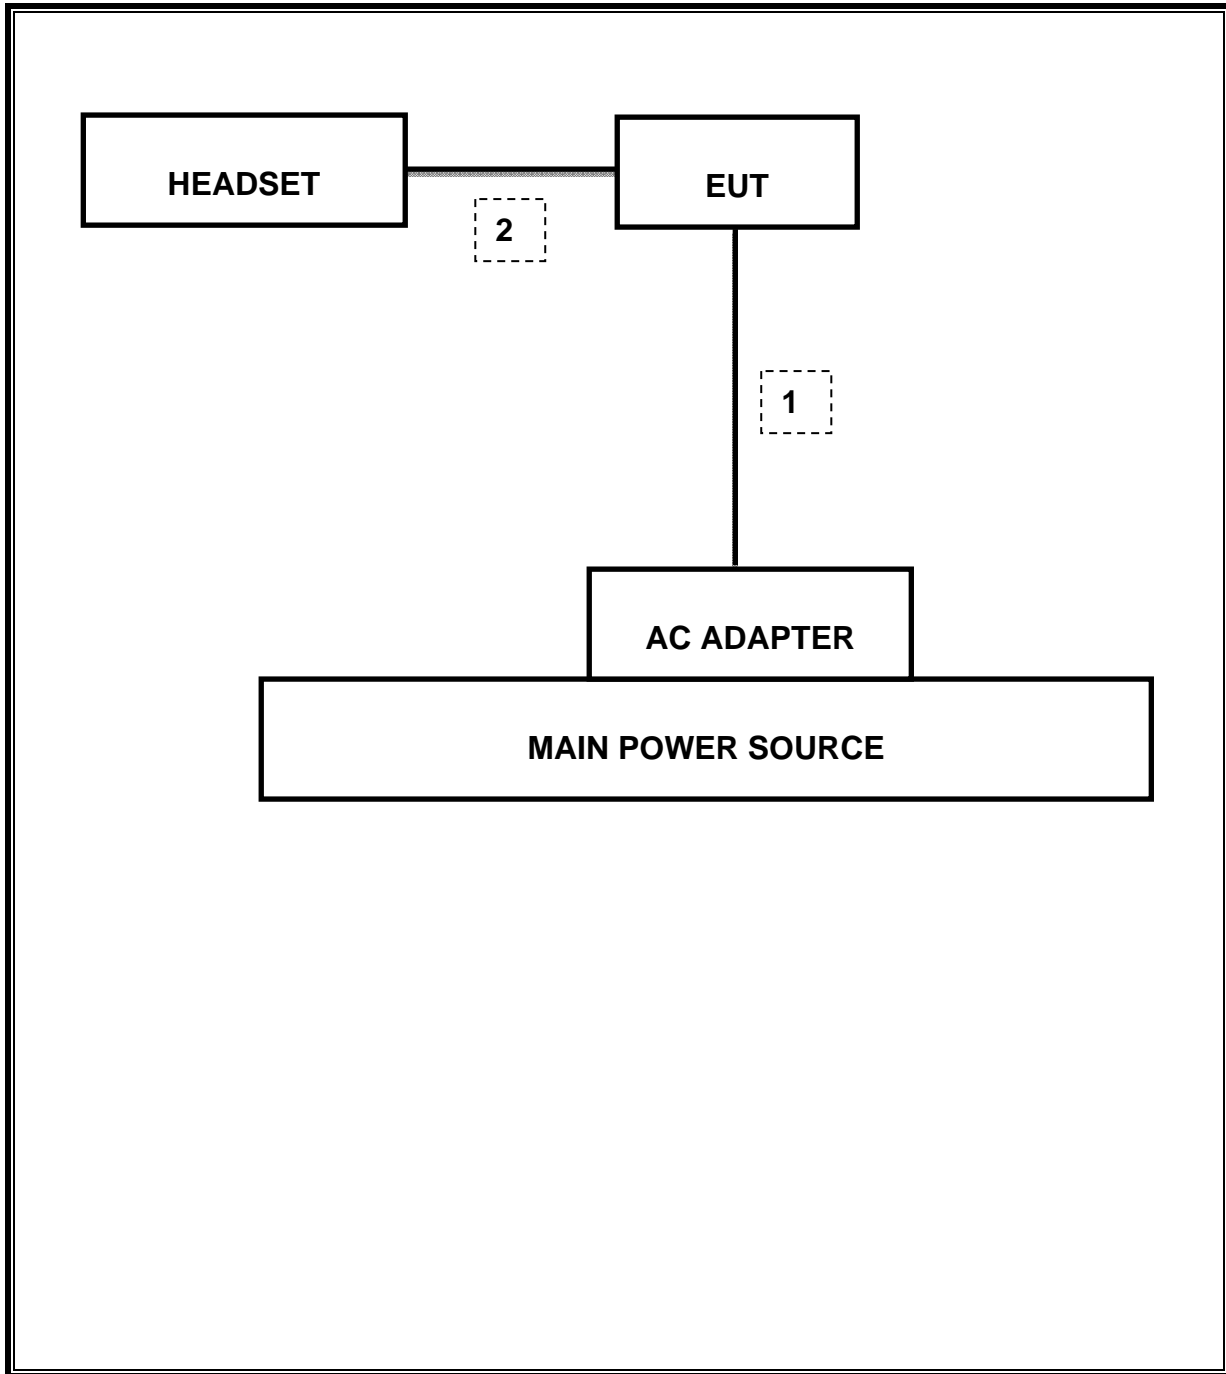

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	03/23/13	02/13/14
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/13	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/13	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/13	01/28/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/13	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/13	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/13	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/13	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/13	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/13	01/14/14
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR	CNR

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.214 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-44.32 dBc
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	11.73 dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	.283 s
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10		Radiated	Pass
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m	Pass		41.36dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.021	0.9047
Middle	2441	0.9243	0.9159
High	2480	0.9252	0.9601
Worst		1.021	0.9601

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.256	1.1542
Middle	2441	1.26	1.1325
High	2480	1.266	1.214
Worst		1.266	1.214


GFSK 20 dB BANDWIDTH

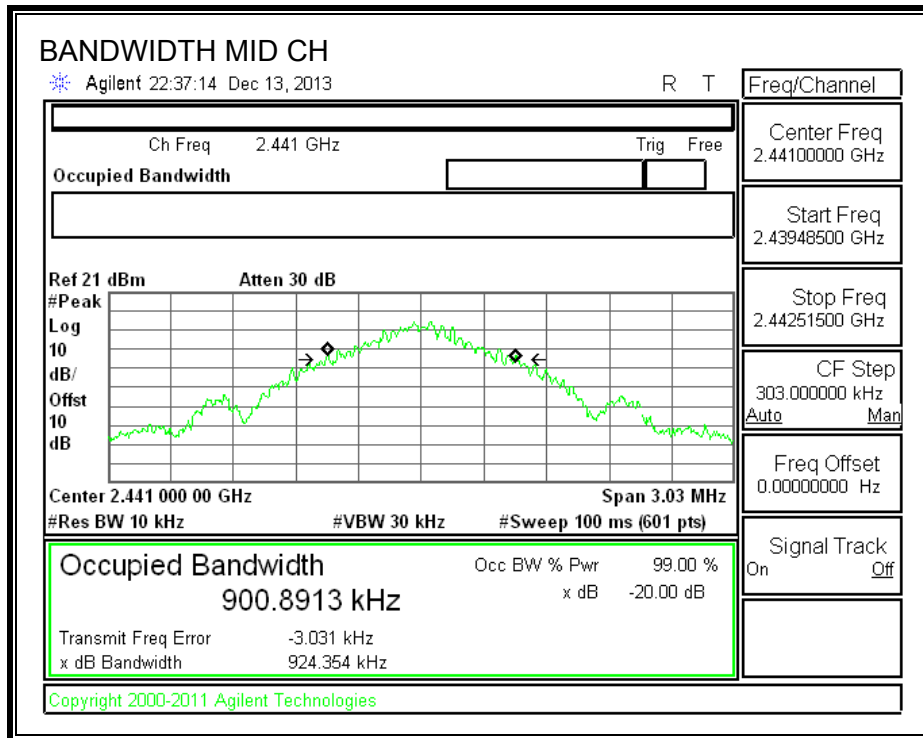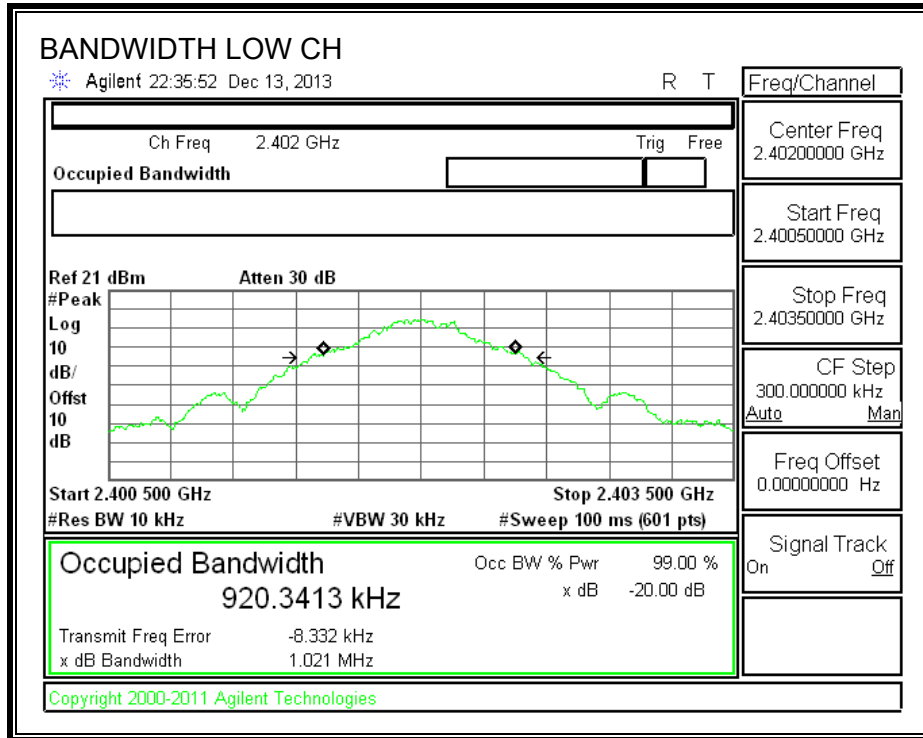


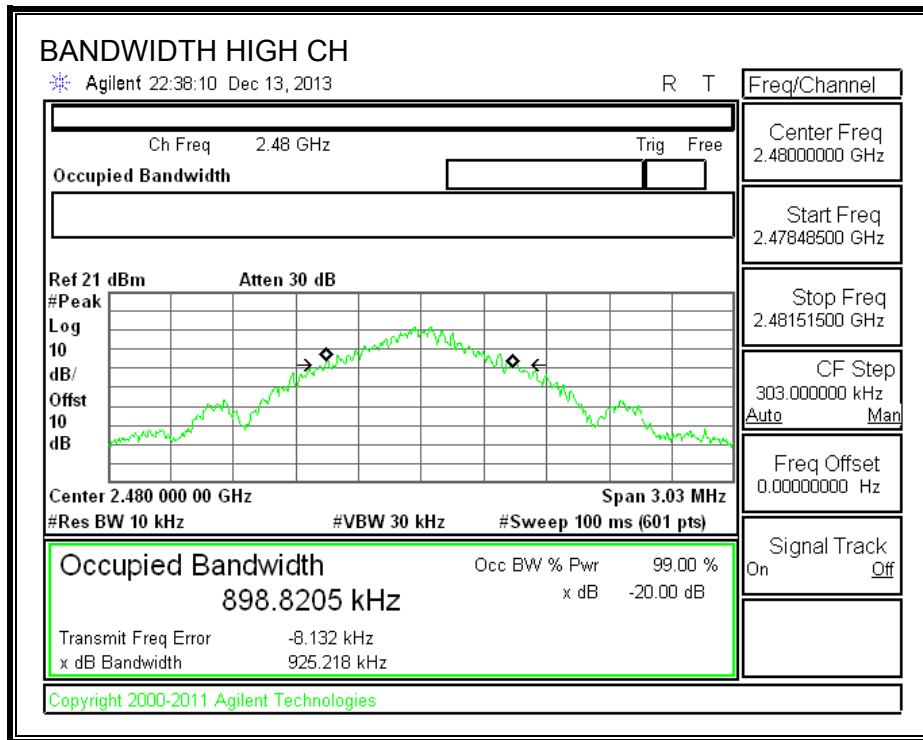



GFSK 99% BANDWIDTH

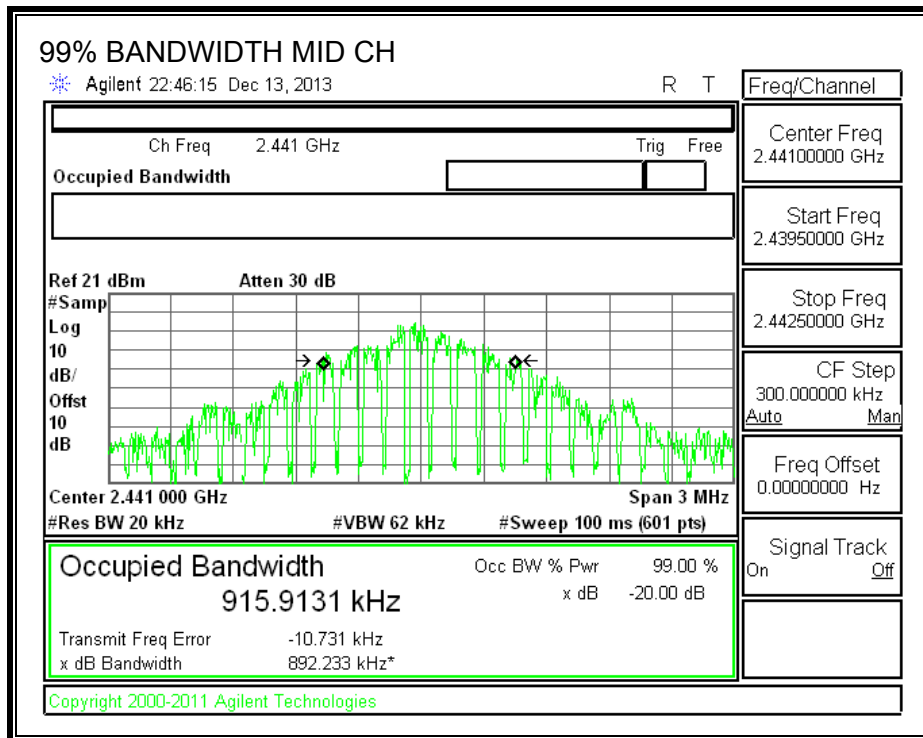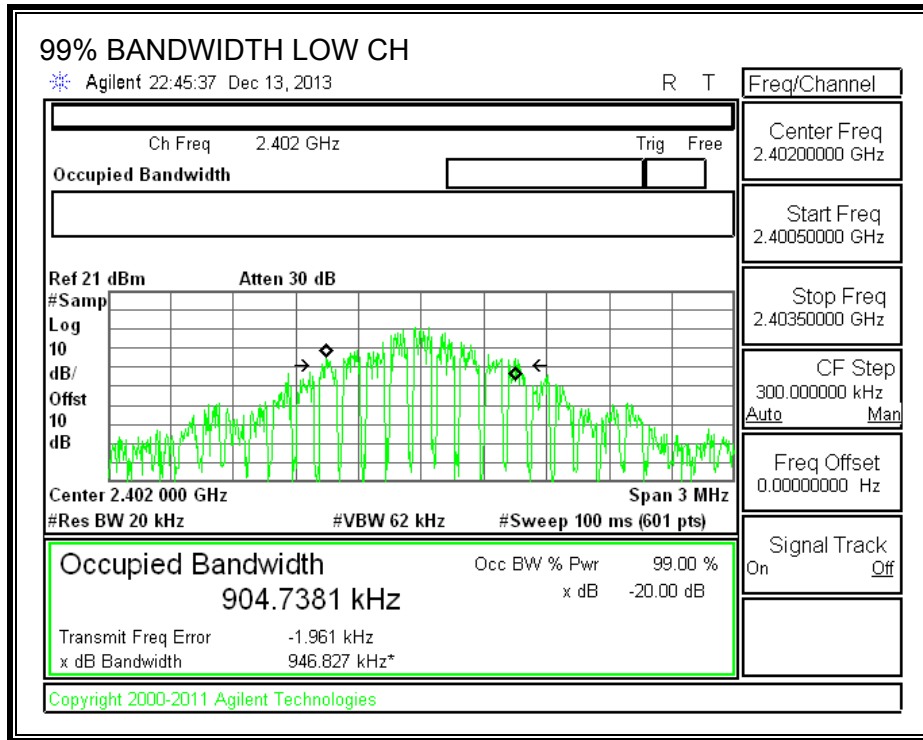


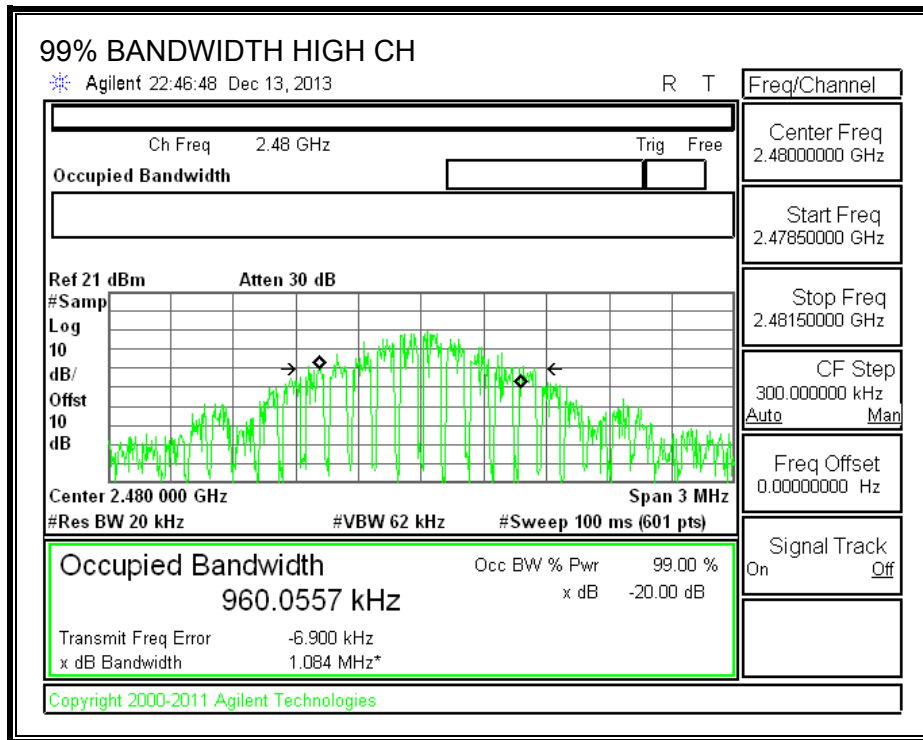



8PSK 20 dB BANDWIDTH

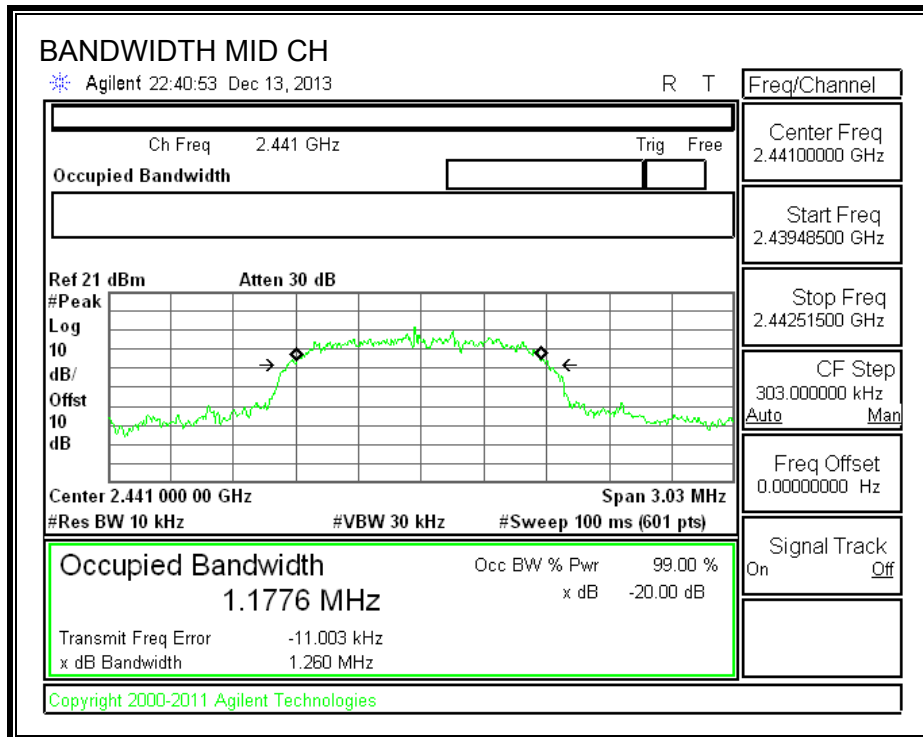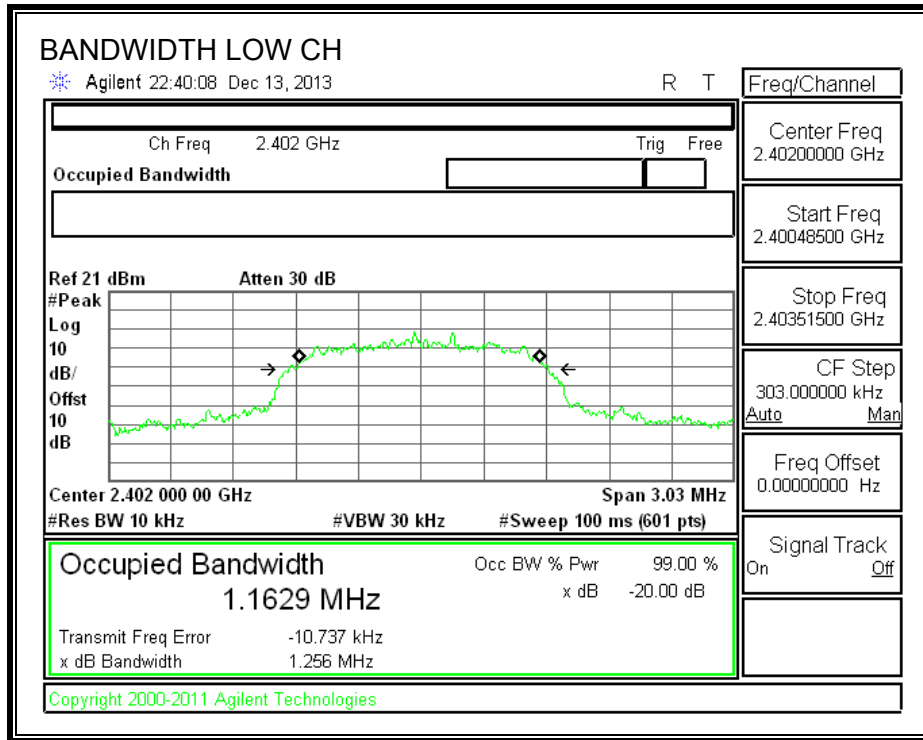

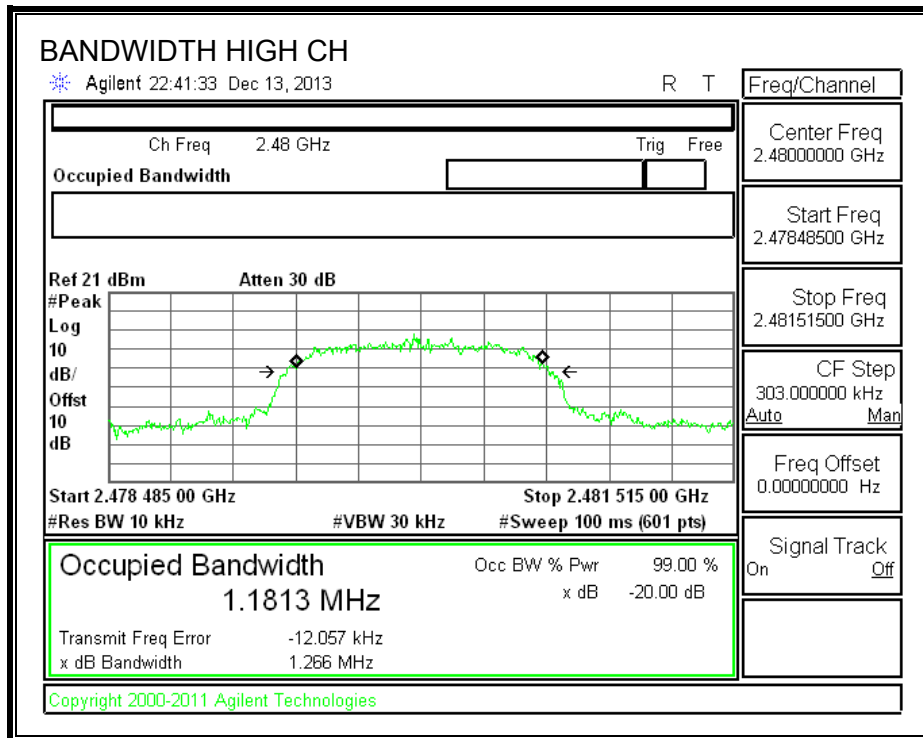

8PSK 99% BANDWIDTH

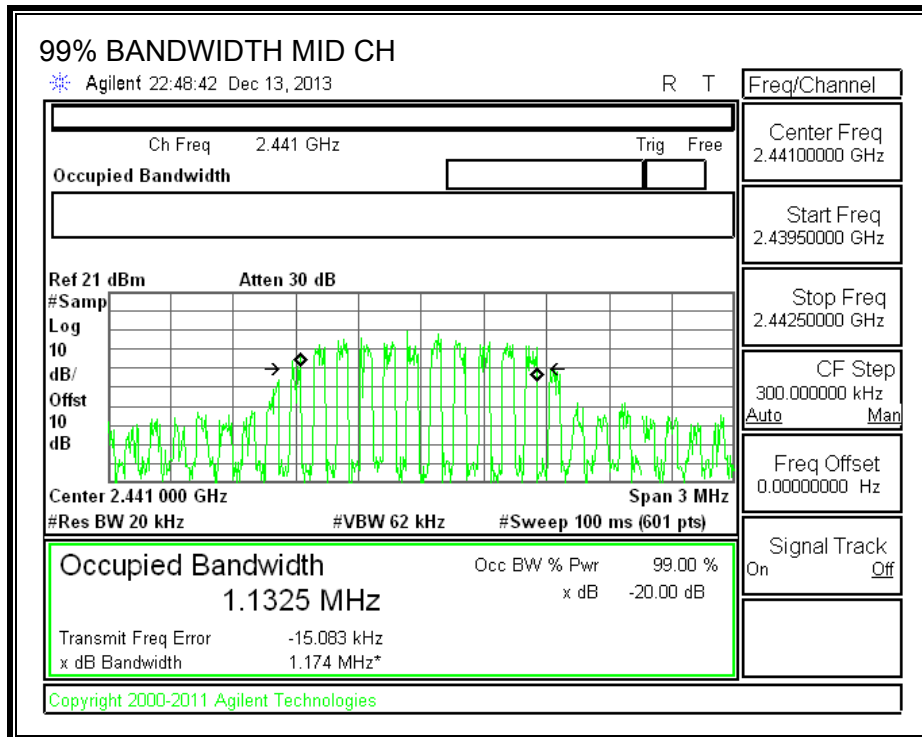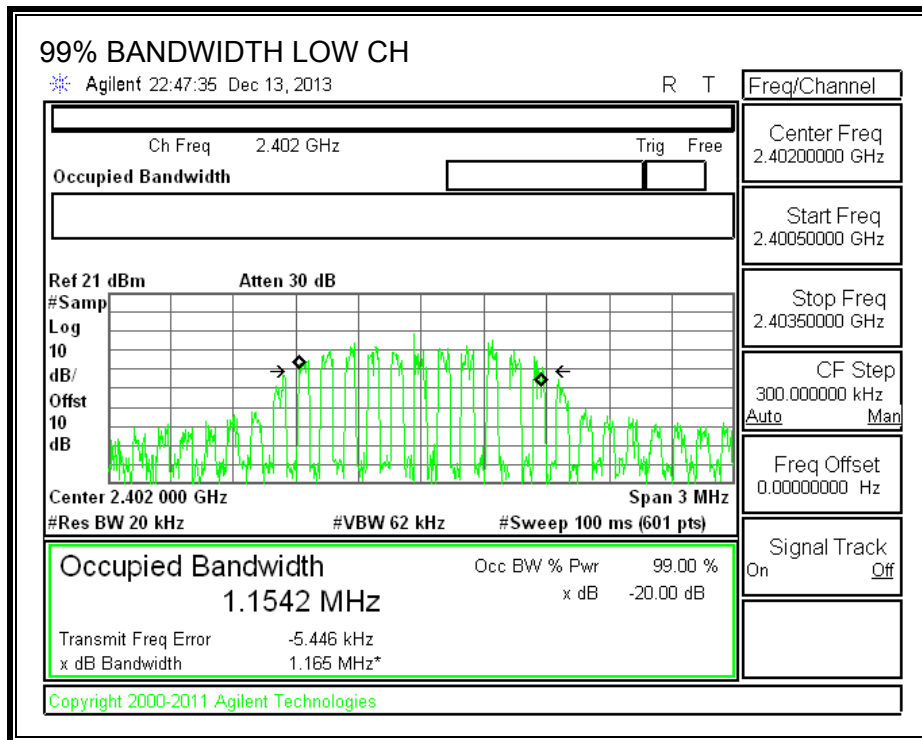

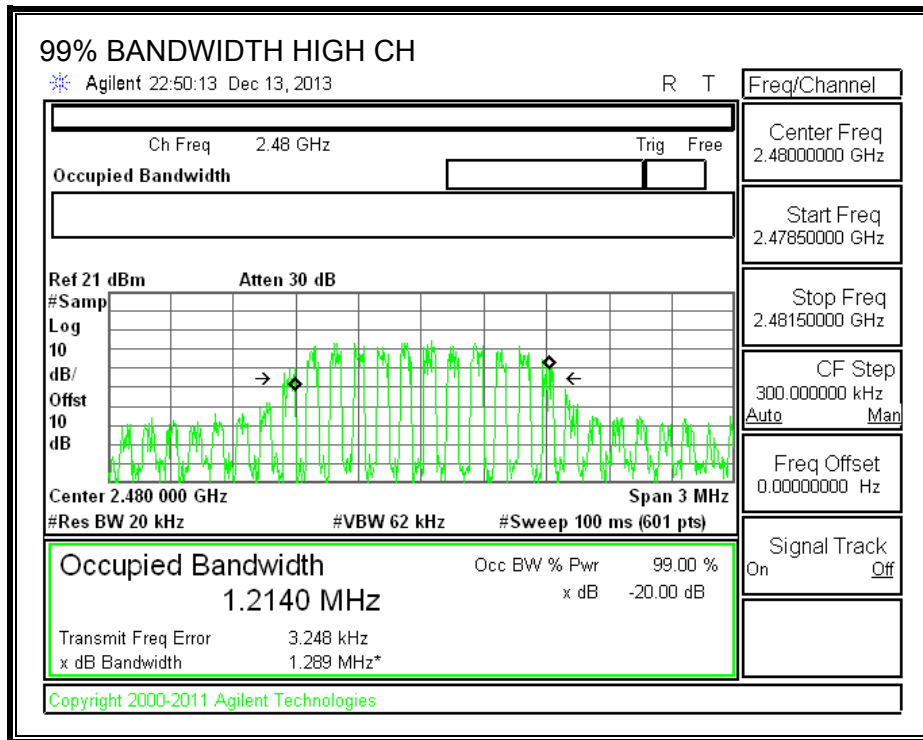

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

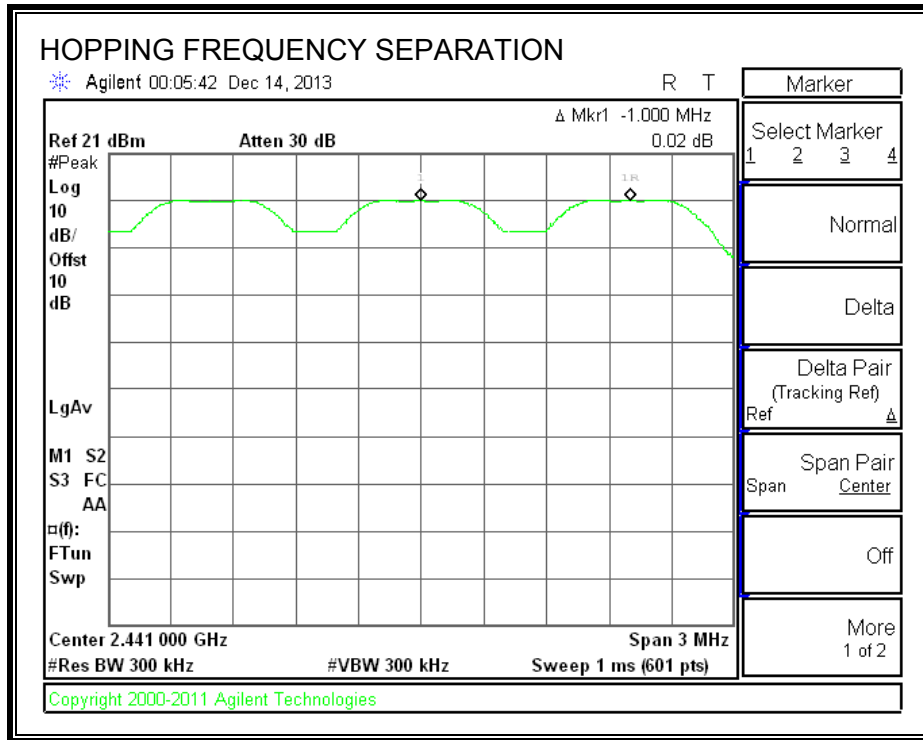

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

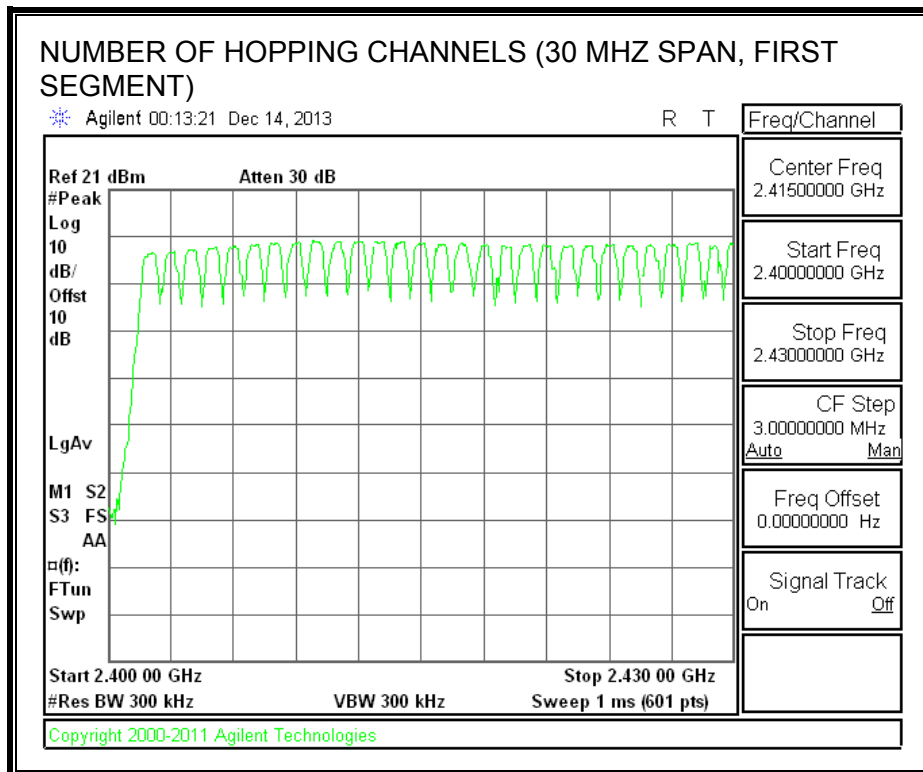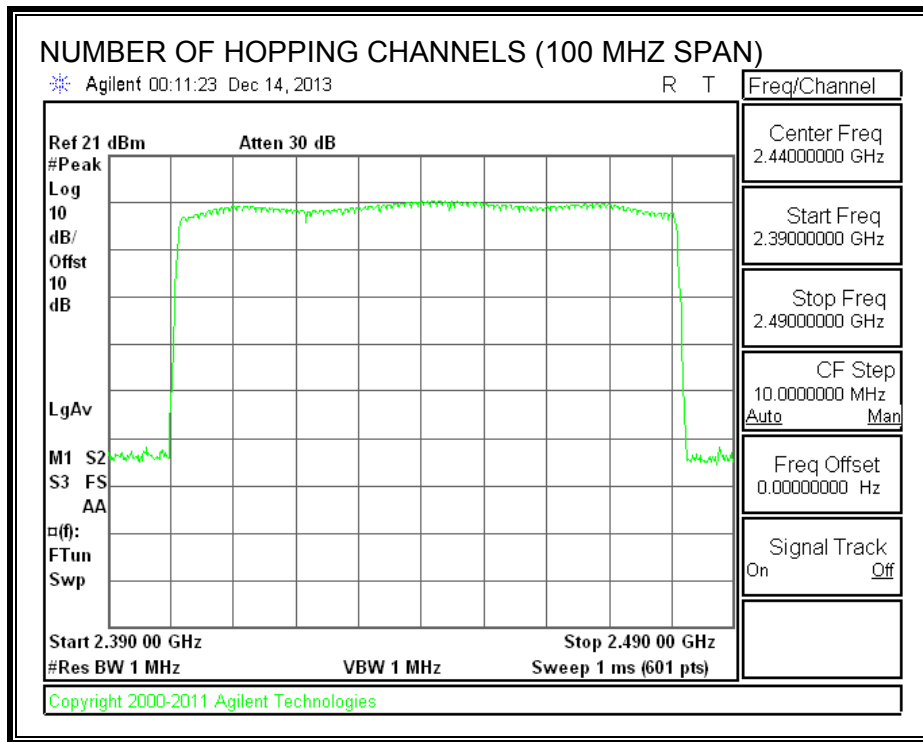

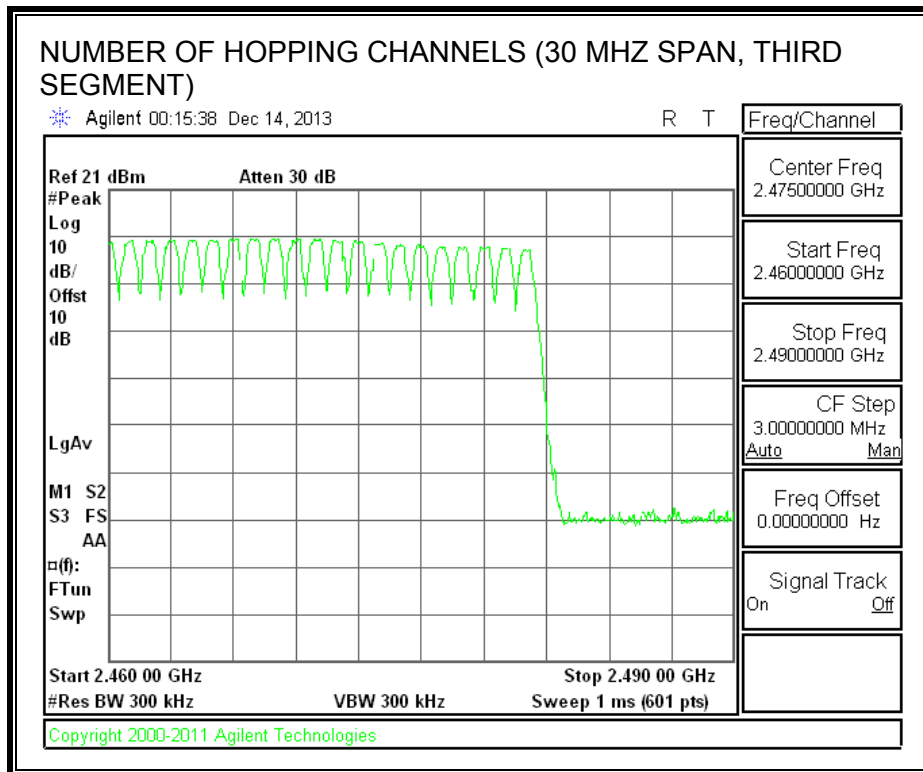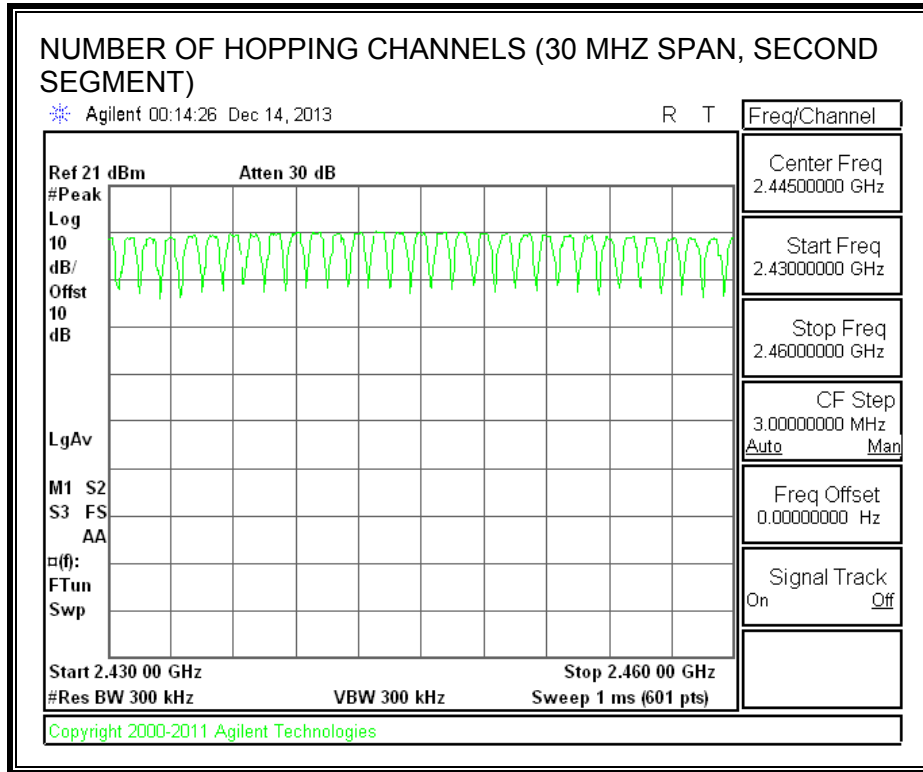

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

RESULTS


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.3517	29	0.102	0.4	-0.298
DH3	1.607	16	0.257	0.4	-0.143
DH5	2.83	10	0.283	0.4	-0.117
GFSK AFH Mode					
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.3517	8	0.028	0.4	-0.372
DH3	1.607	4	0.064	0.4	-0.336
DH5	2.83	3	0.085	0.4	-0.315

Note: 8PSK mode is using the same packet timing and data same as GFSK.


PULSE WIDTH - DH1

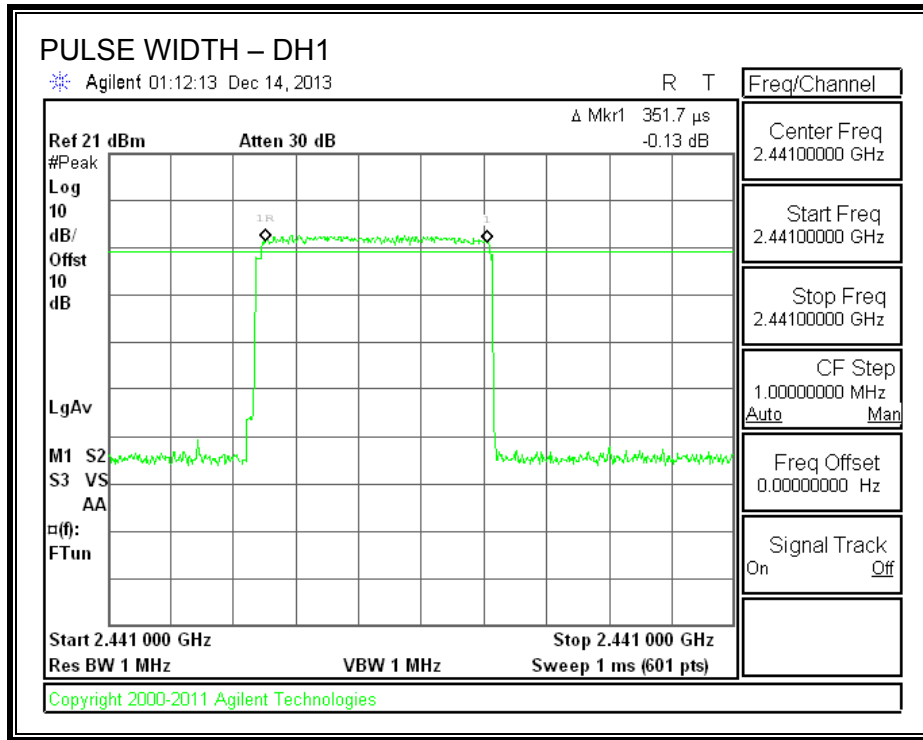


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

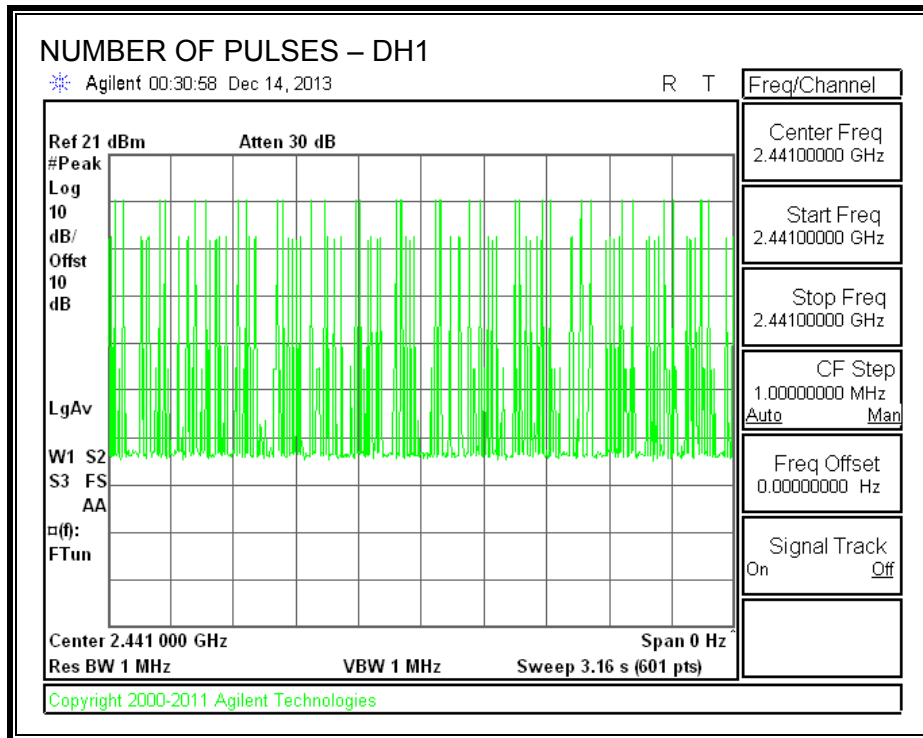


PULSE WIDTH – DH3

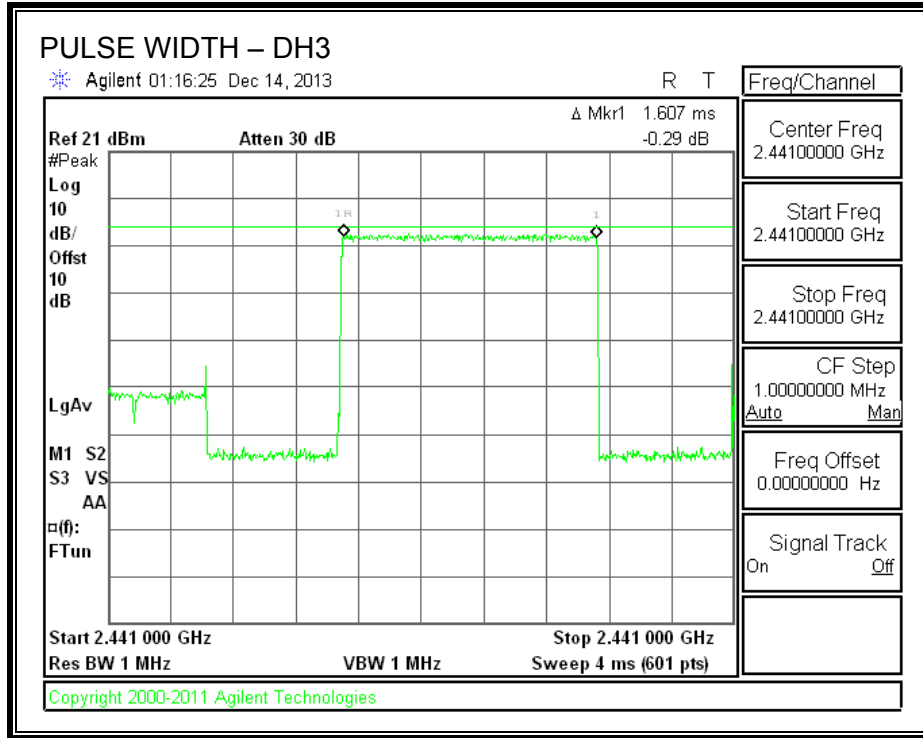


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

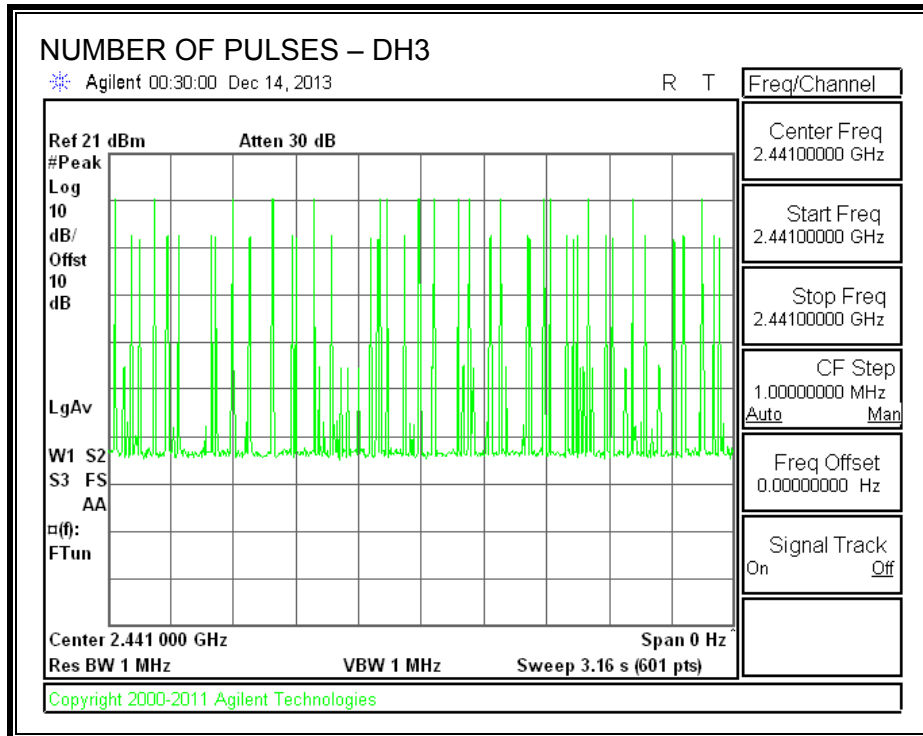

PULSE WIDTH – DH5

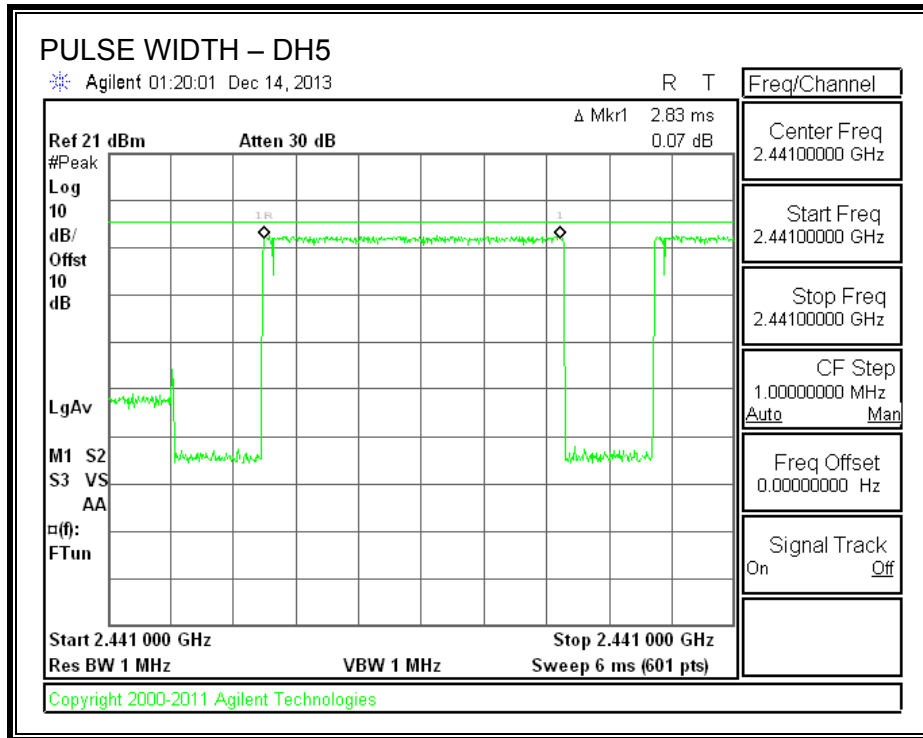

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

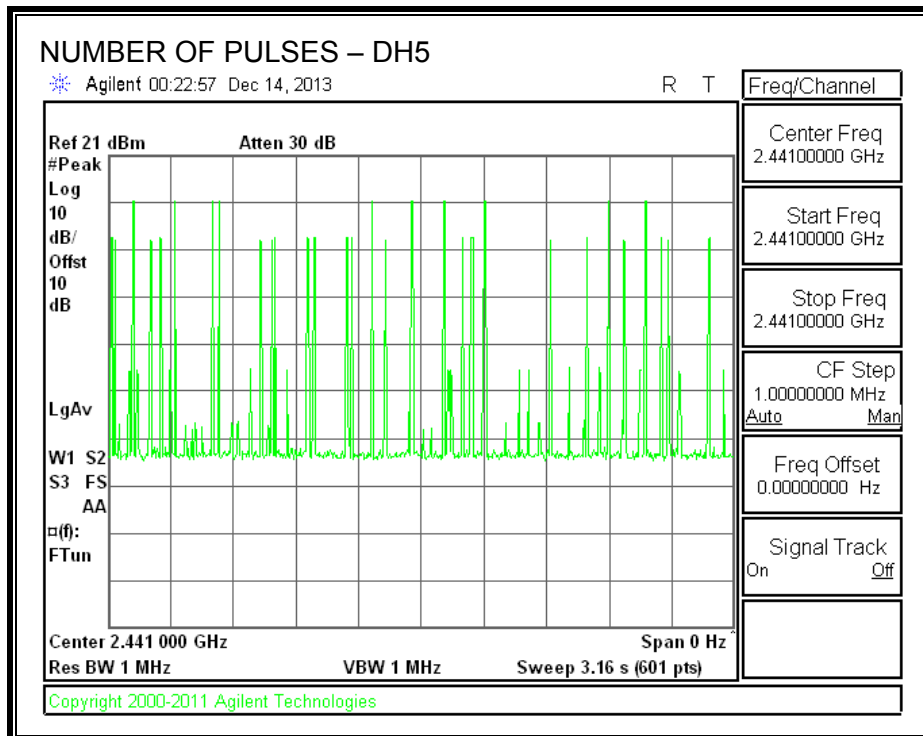

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	7.90	21	-13.10
Middle	2441	11.34	21	-9.66
High	2480	8.74	21	-12.26
Worst		11.34		-9.66

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.24	21	-12.76
Middle	2441	11.73	21	-9.27
High	2480	9.14	21	-11.86
Worst		11.73		-9.27


GFSK OUTPUT POWER

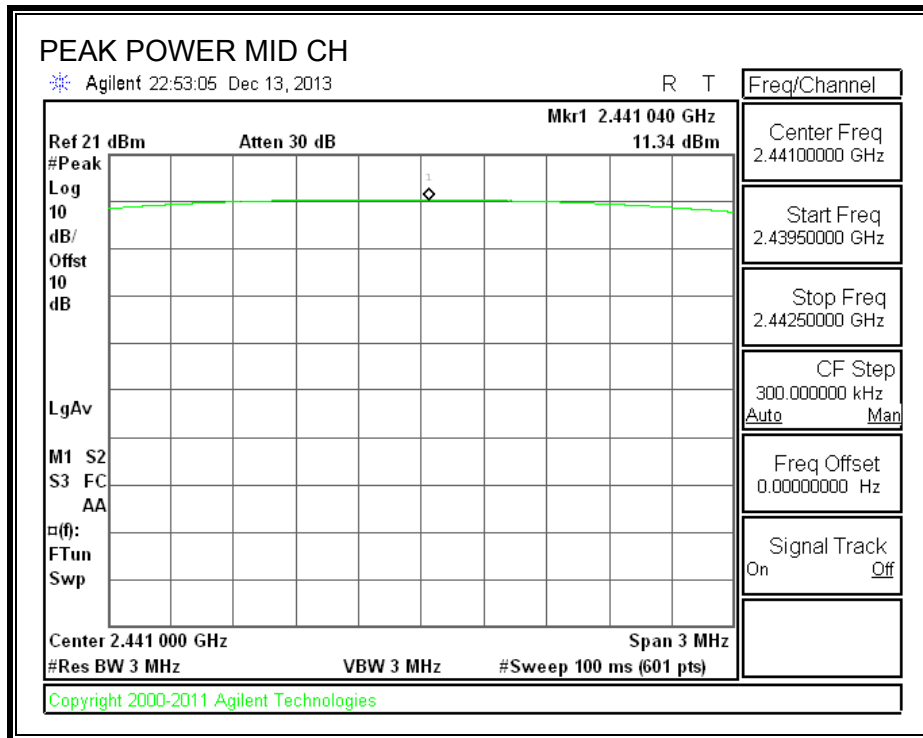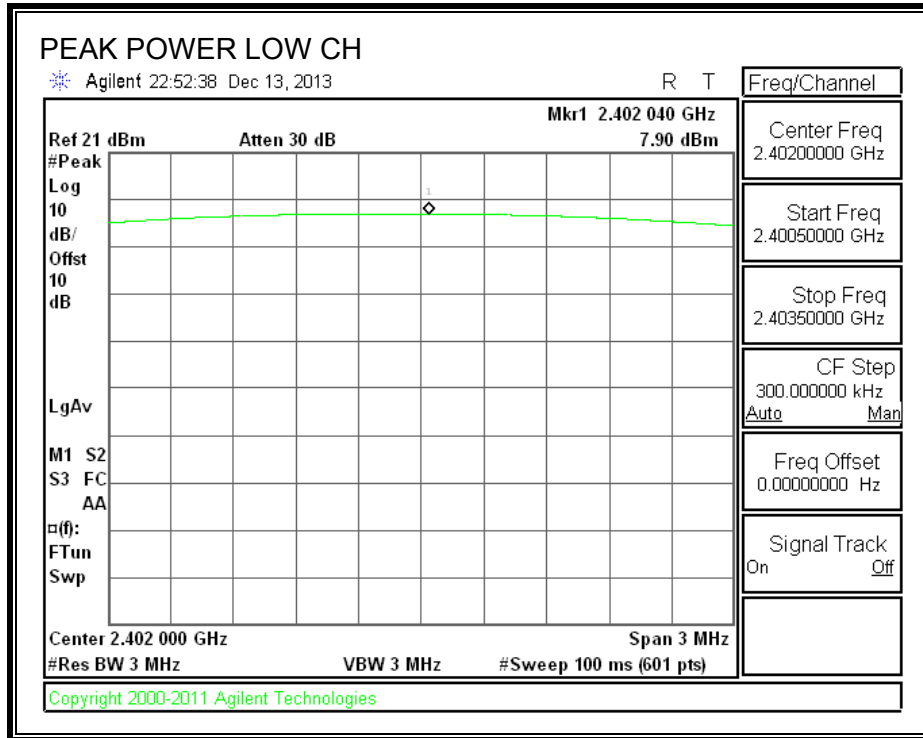

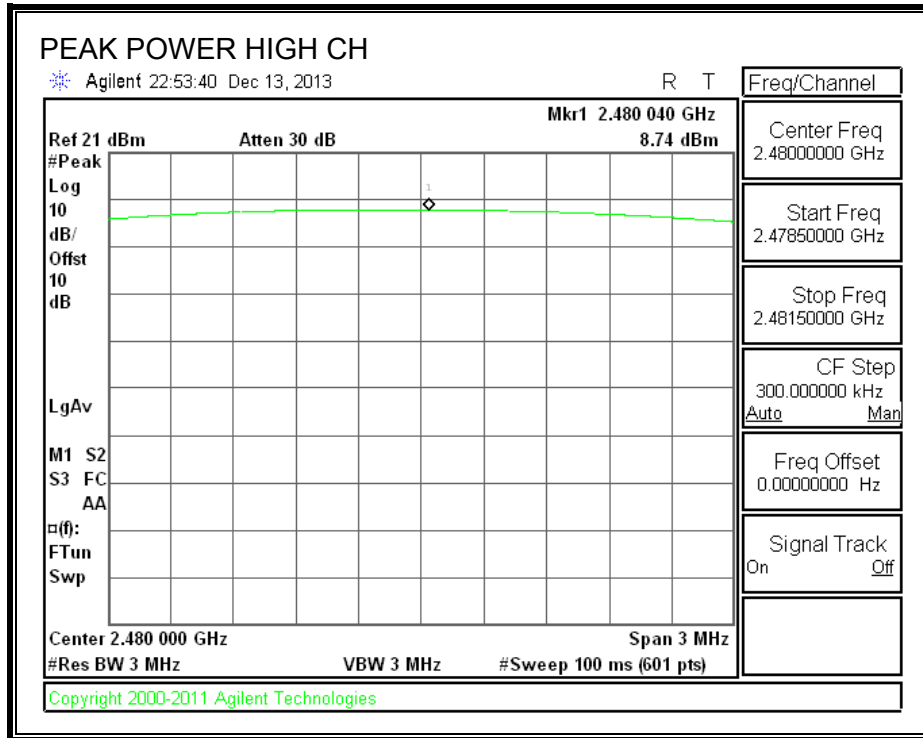

8PSK OUTPUT POWER

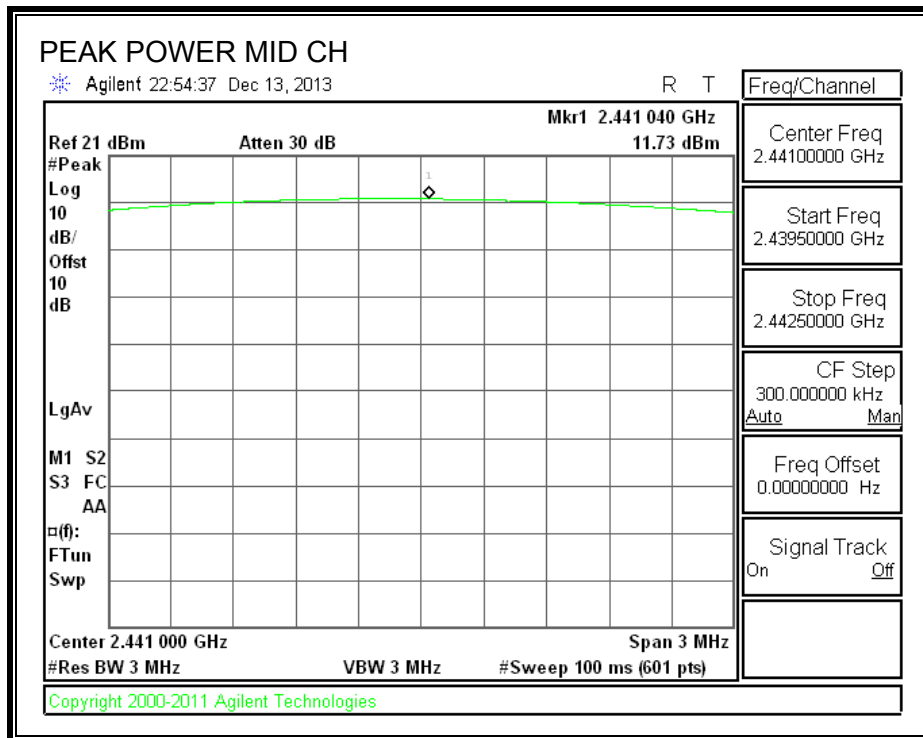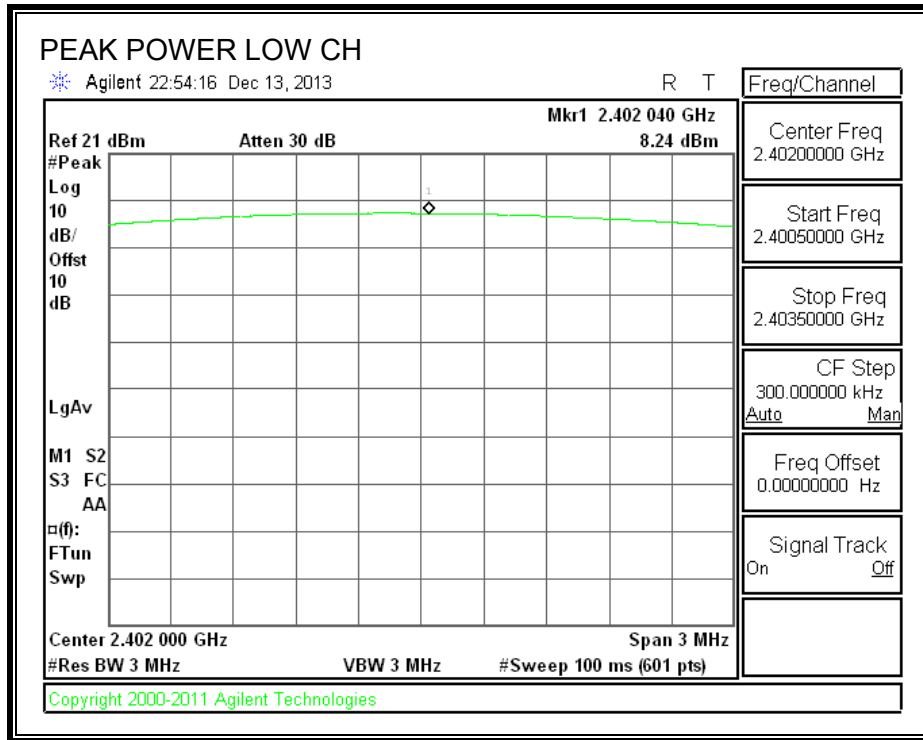

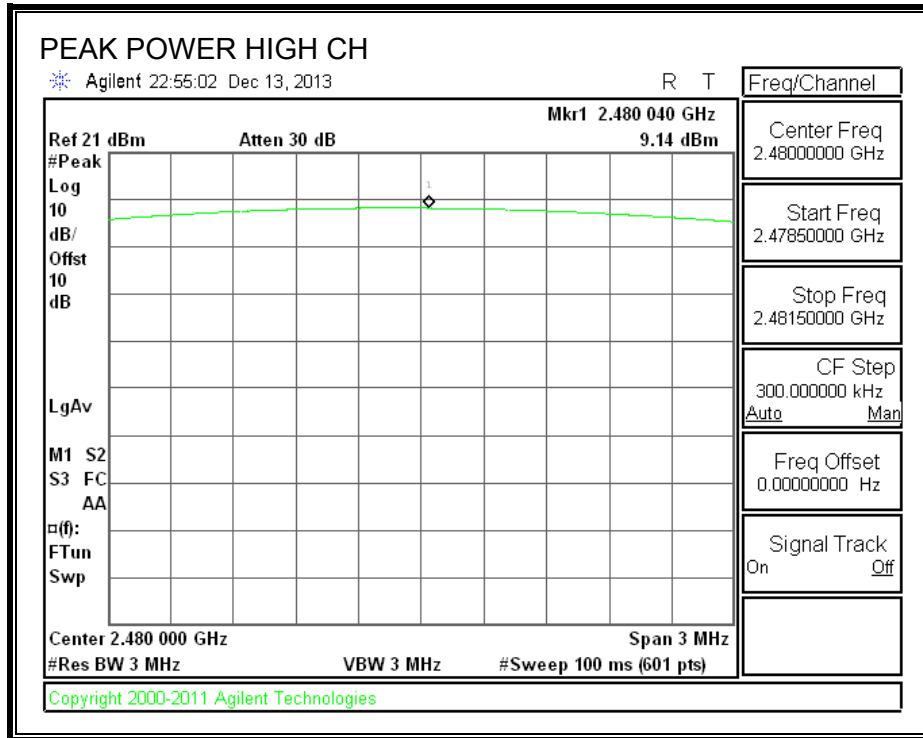

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.10
Middle	2441	11.10
High	2480	8.20
Worst		11.10

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.80
Middle	2441	8.70
High	2480	5.90
Worst		8.70

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

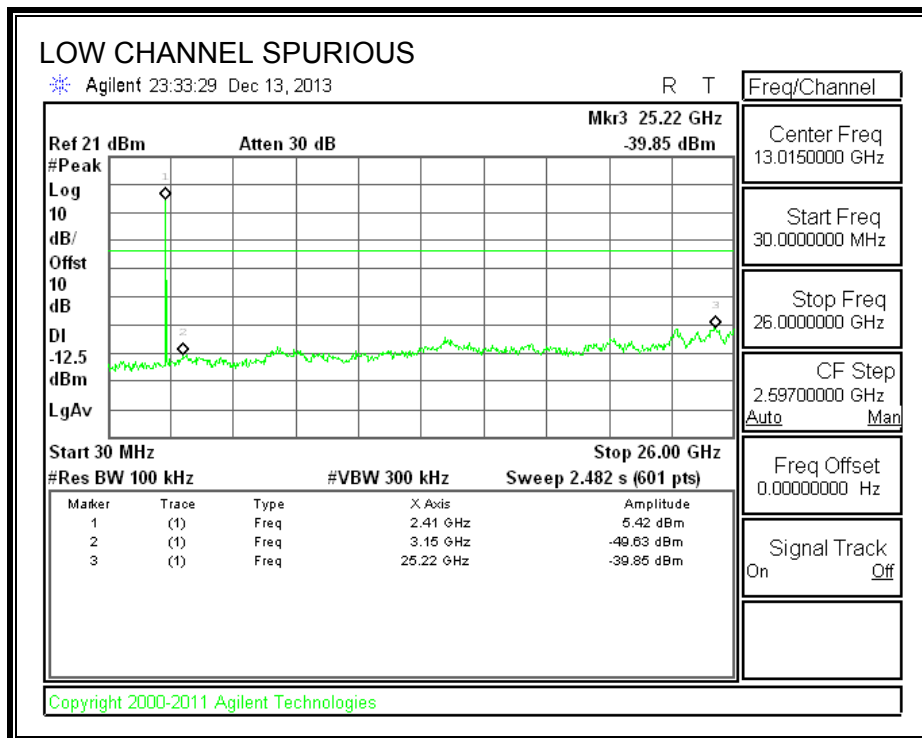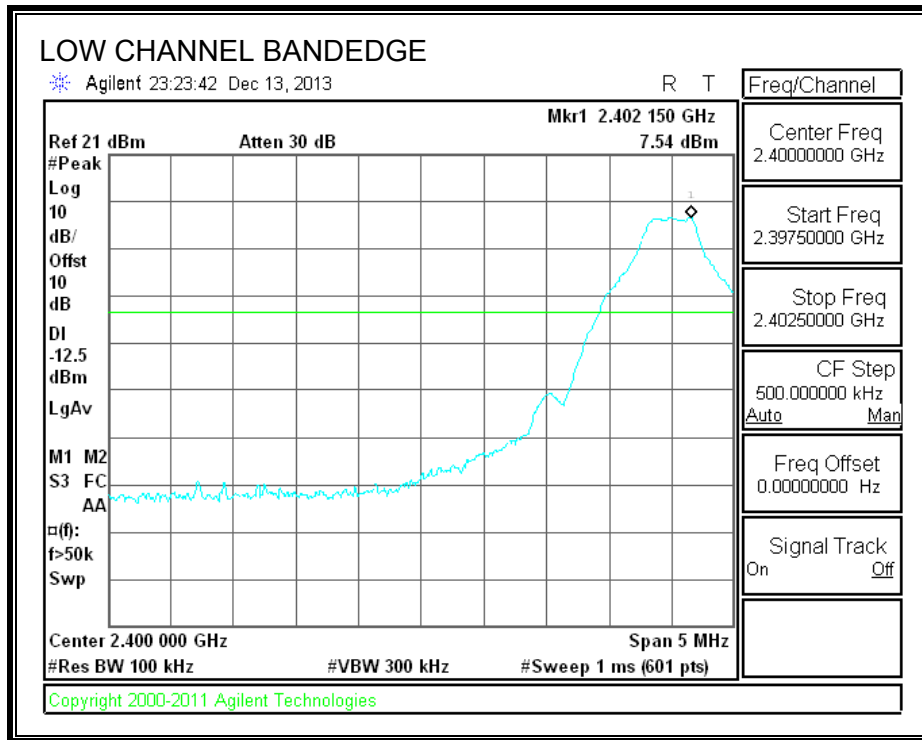



SPURIOUS EMISSIONS, MID CHANNEL

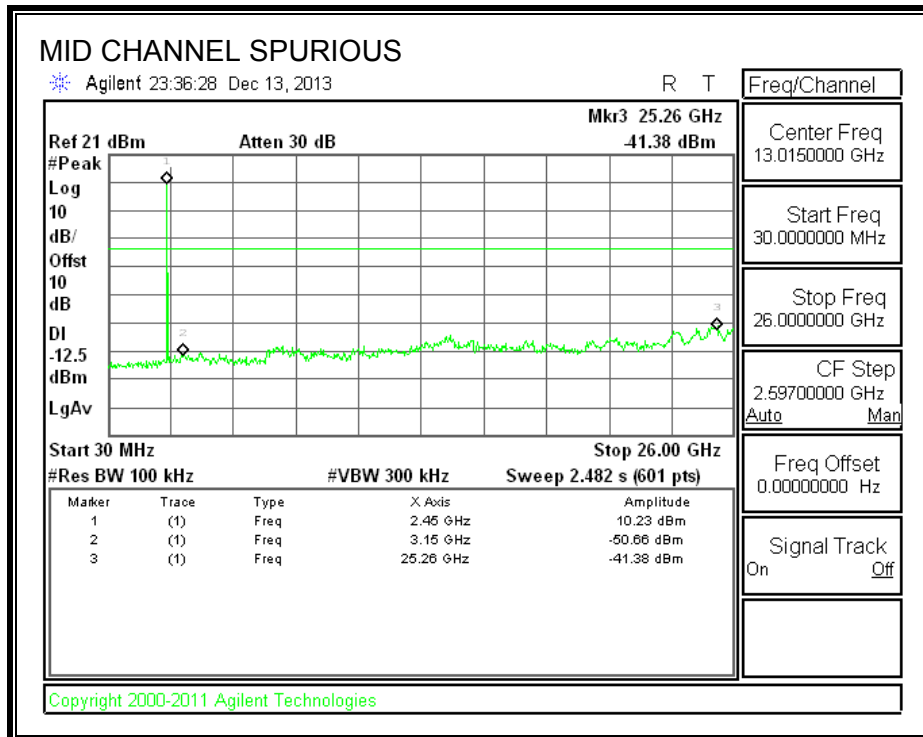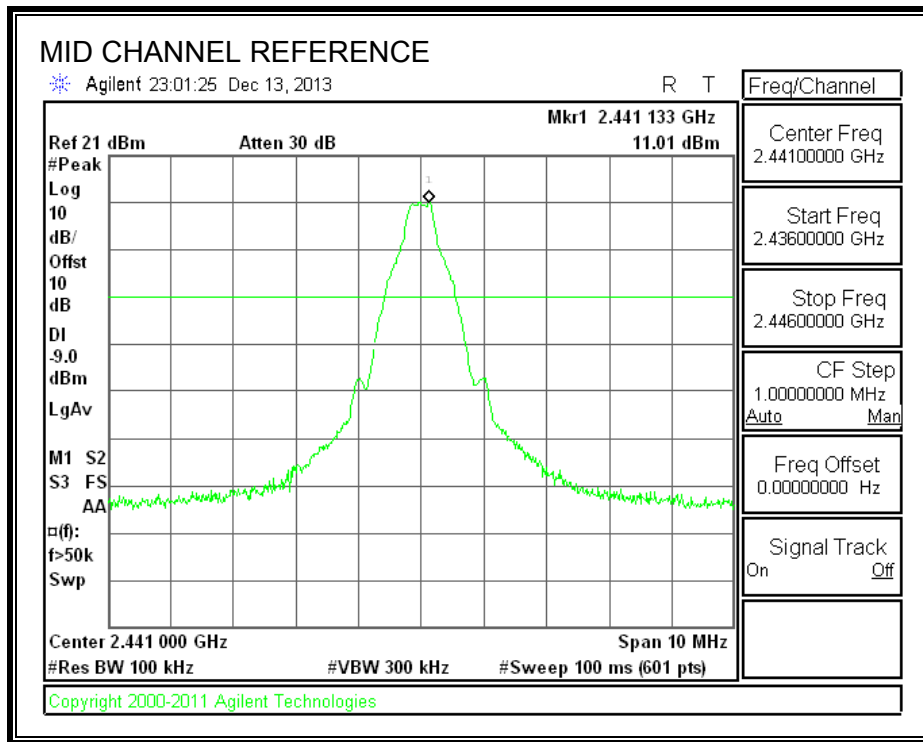

SPURIOUS EMISSIONS, HIGH CHANNEL

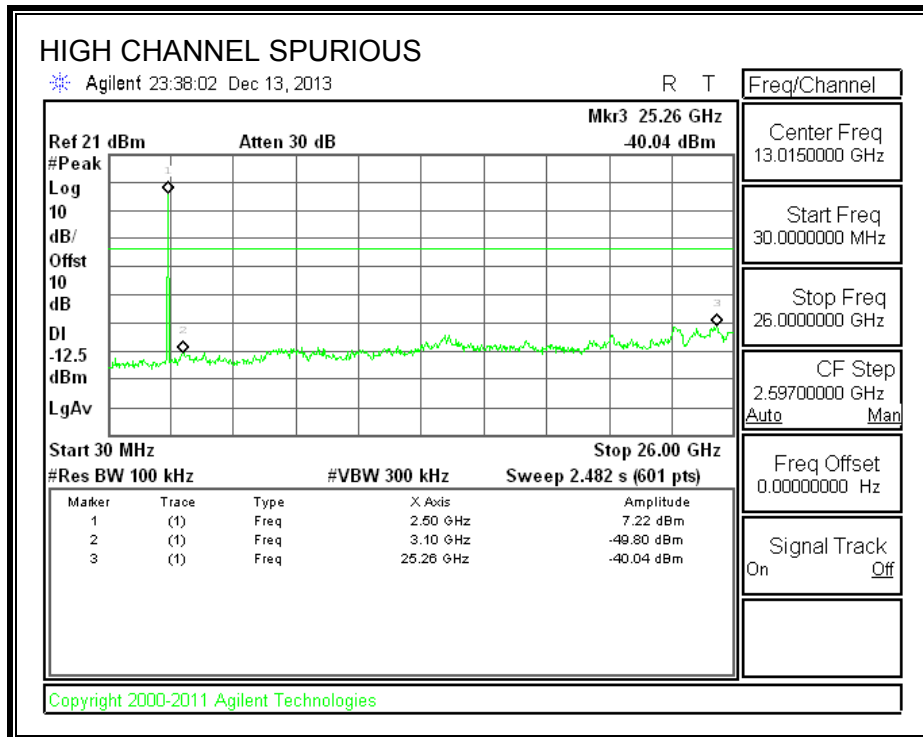
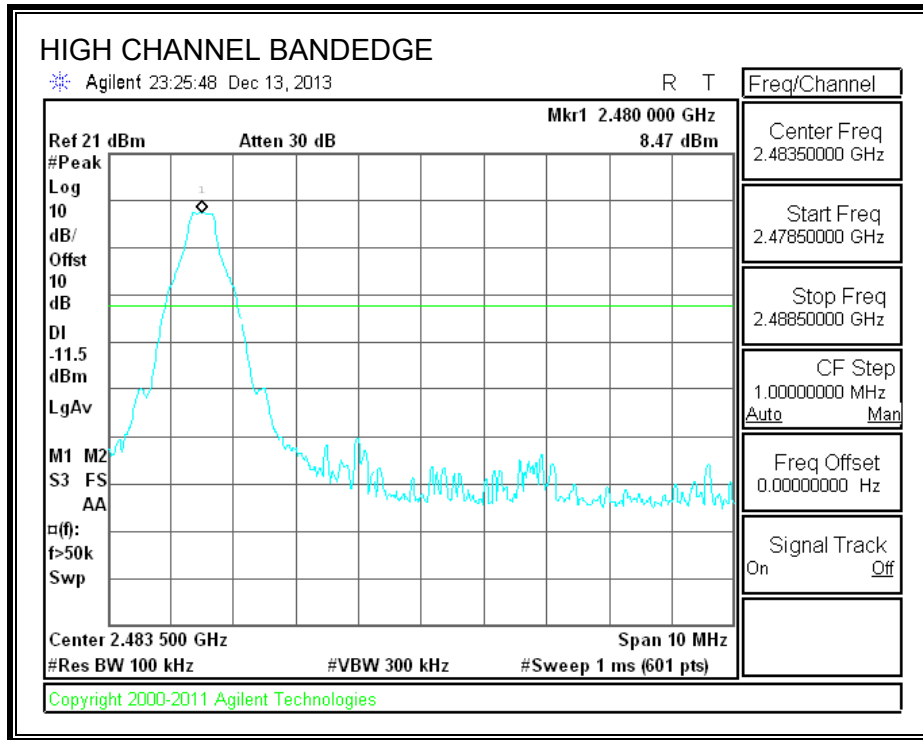


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

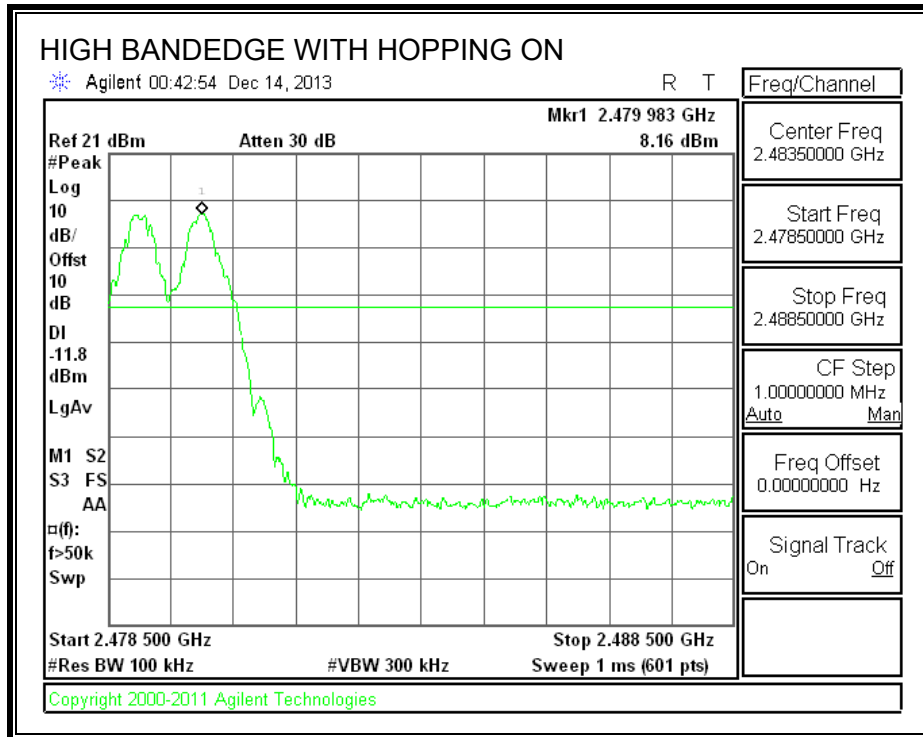
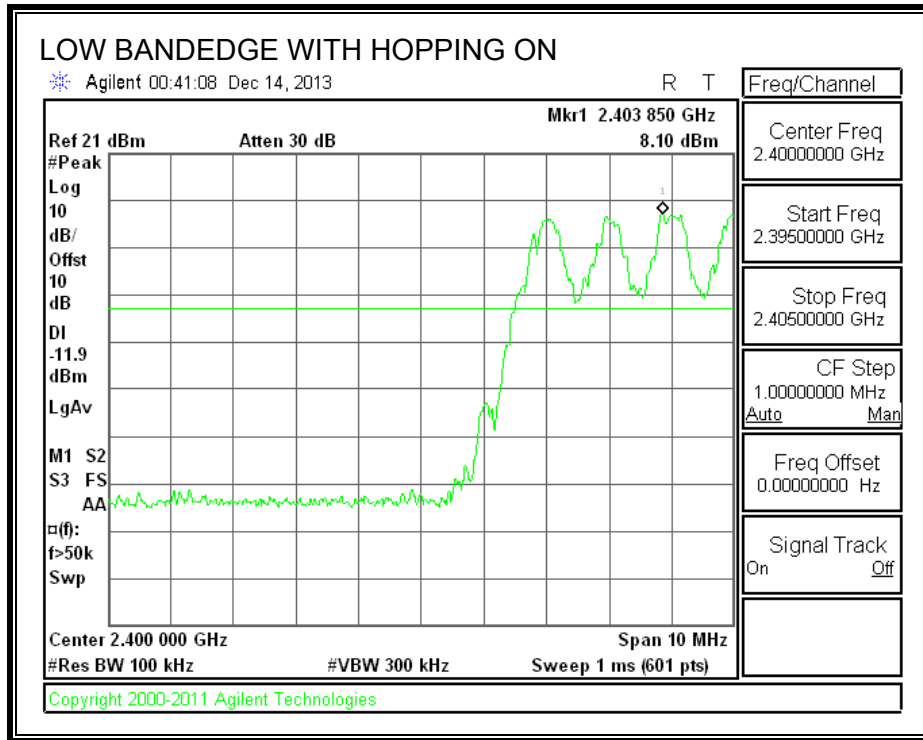


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

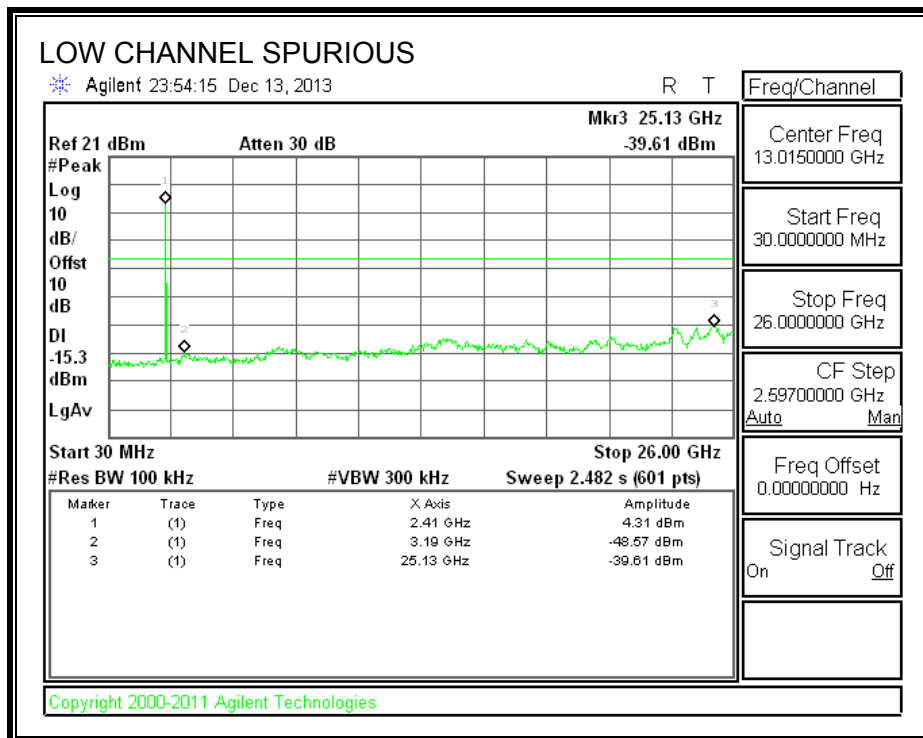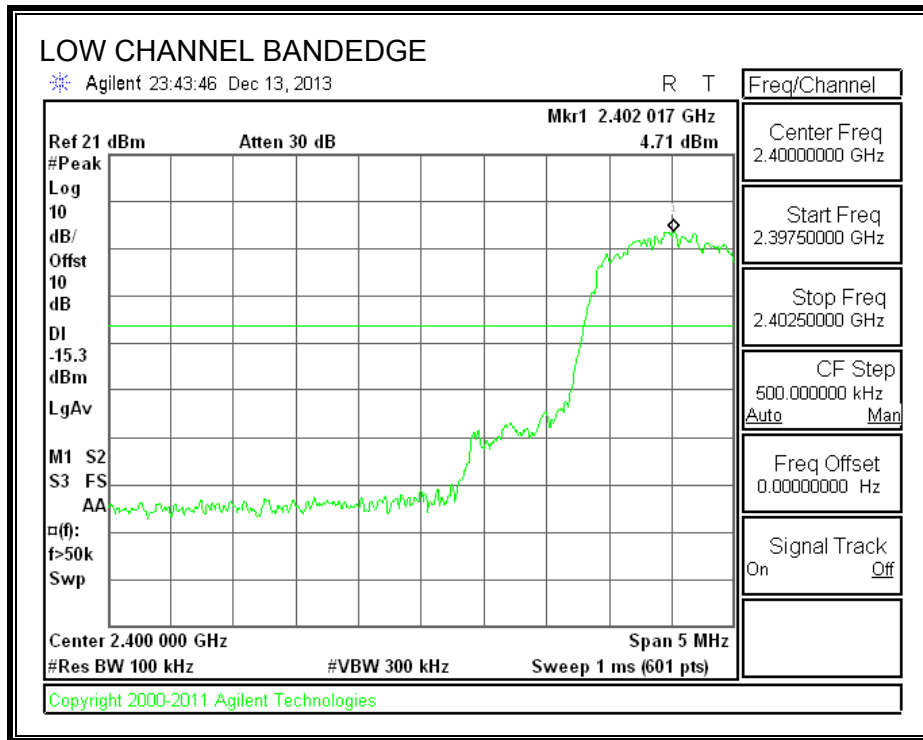



SPURIOUS EMISSIONS, MID CHANNEL

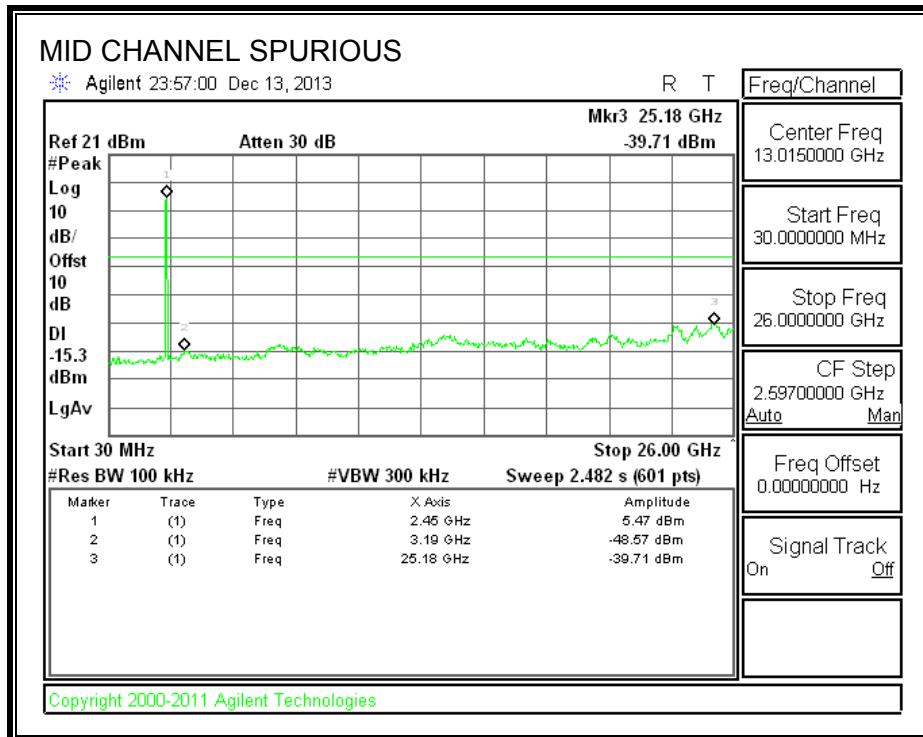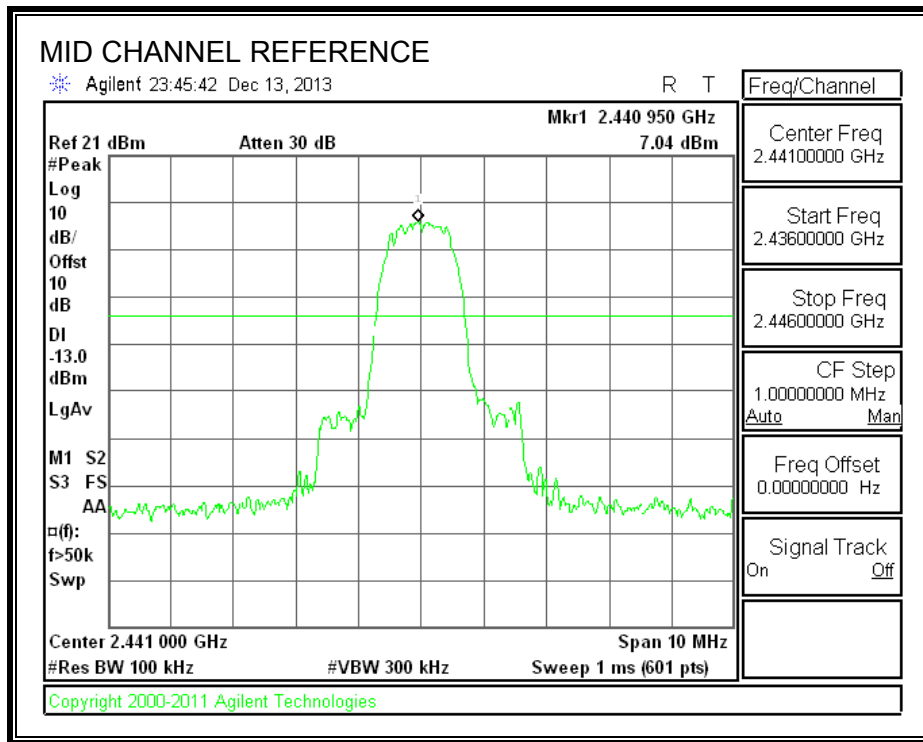

SPURIOUS EMISSIONS, HIGH CHANNEL

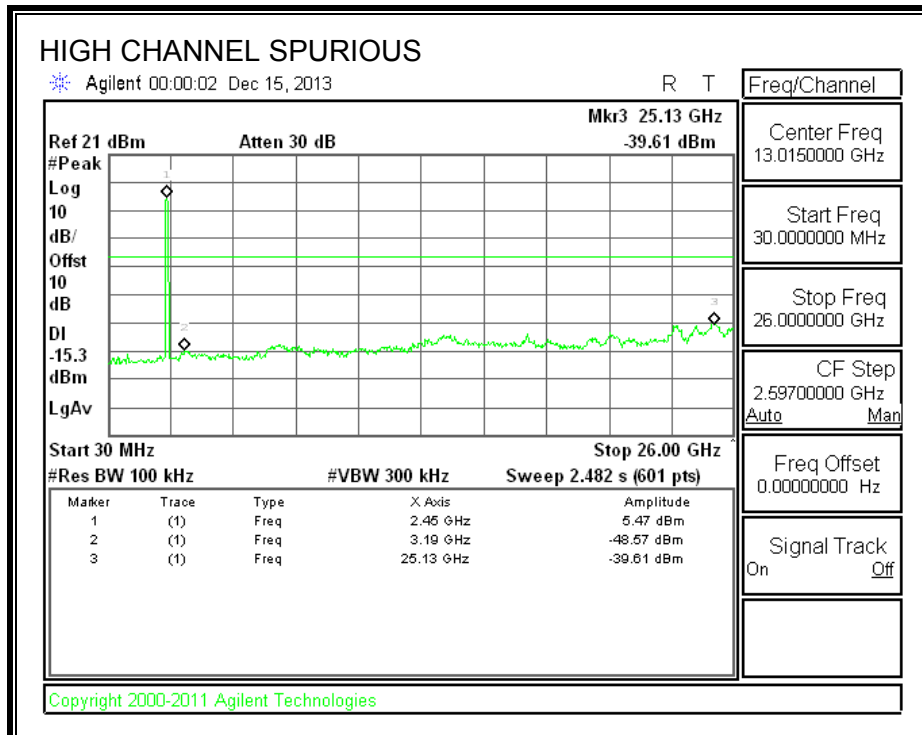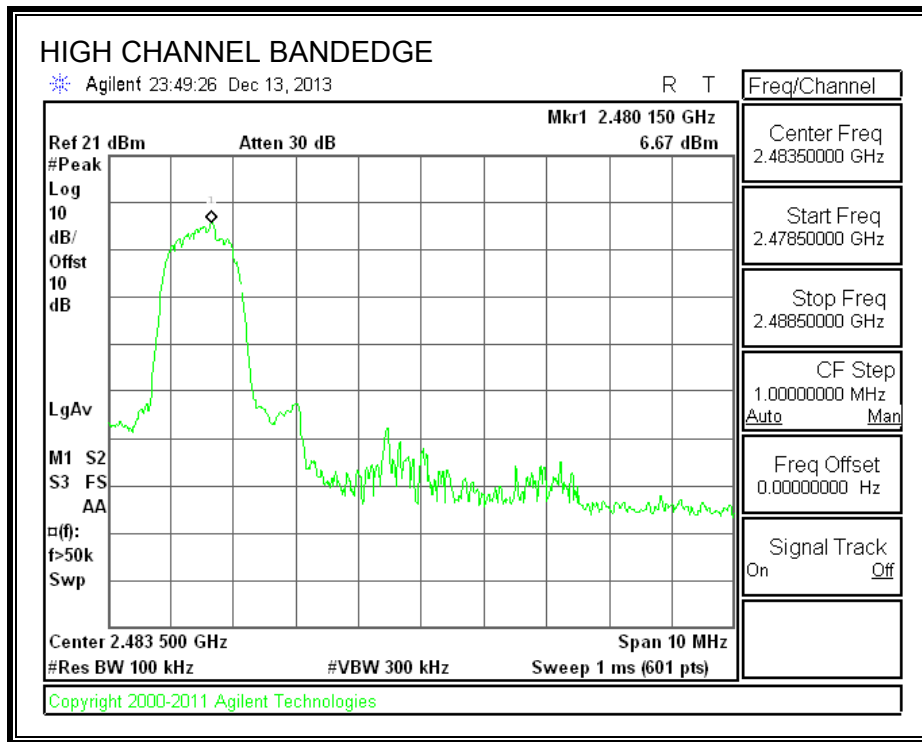

8PSK SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

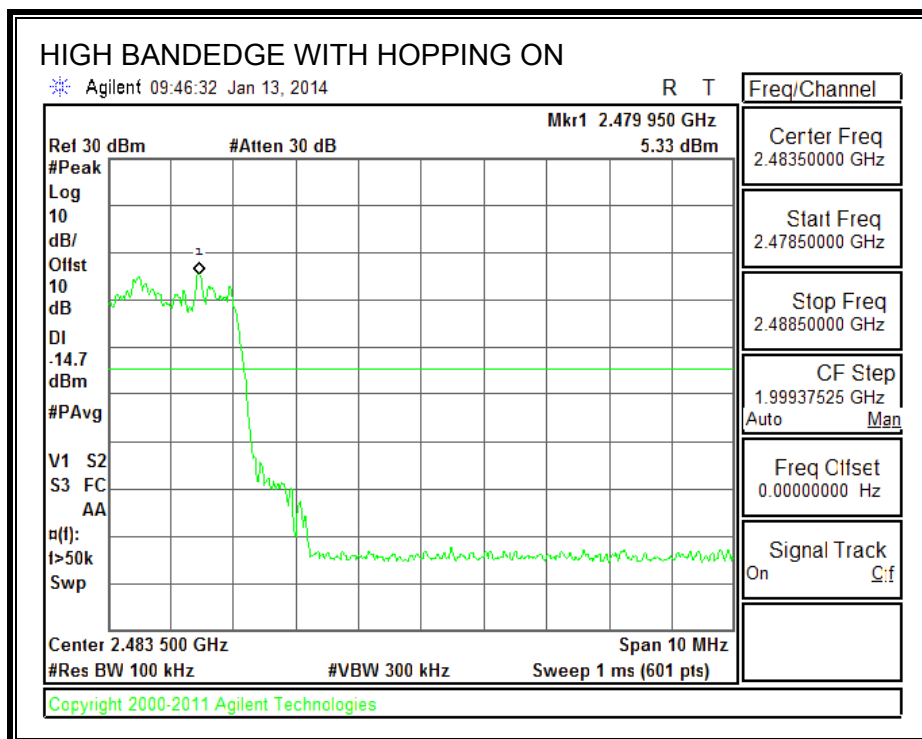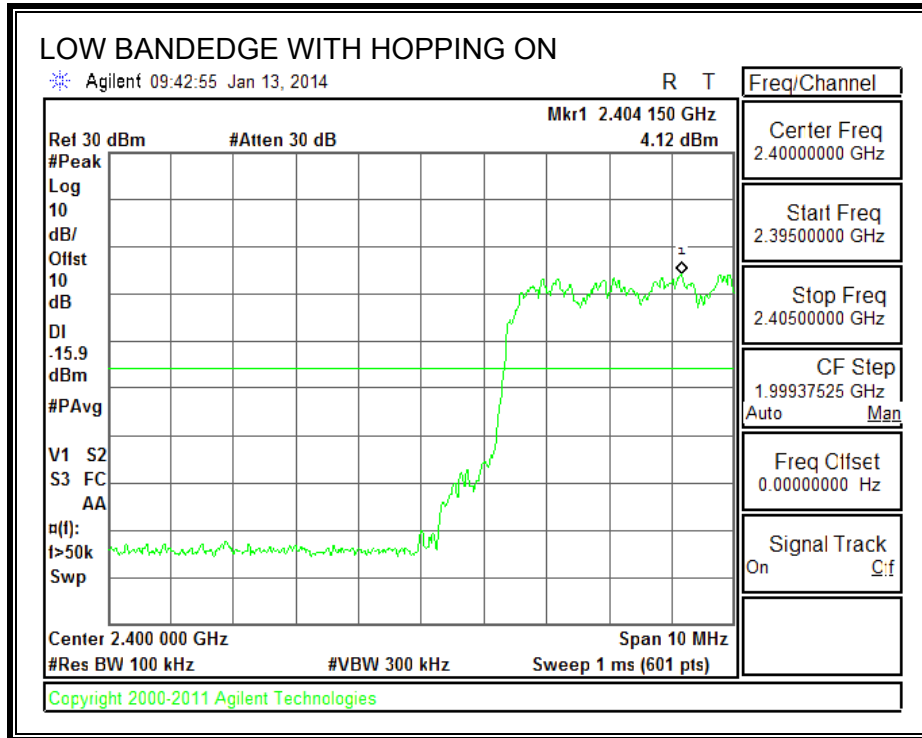

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK = 1/T = 360Hz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz


9.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

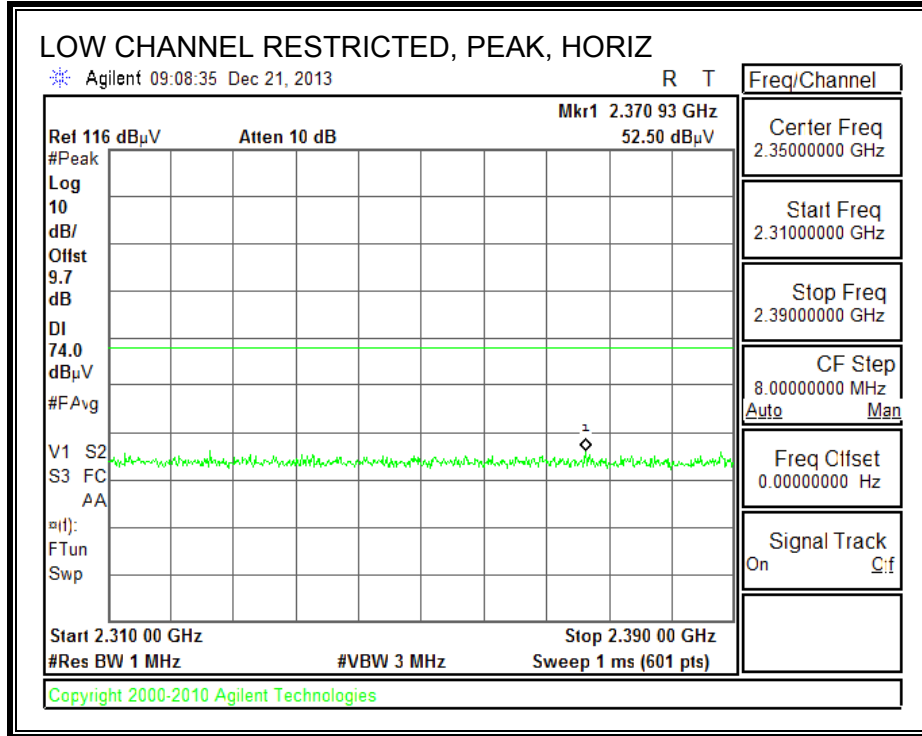

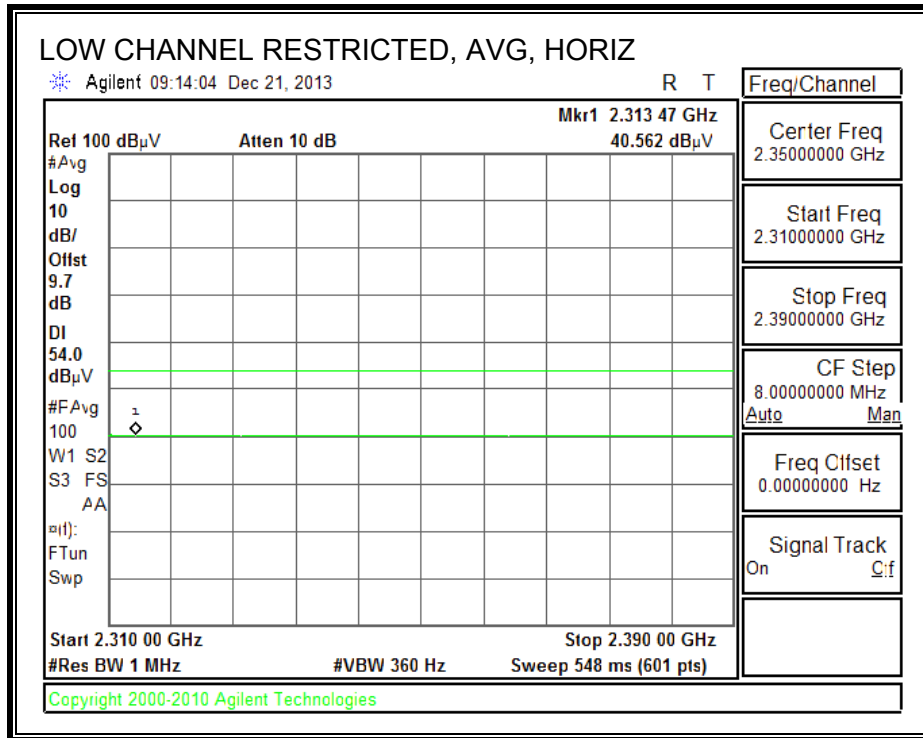



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

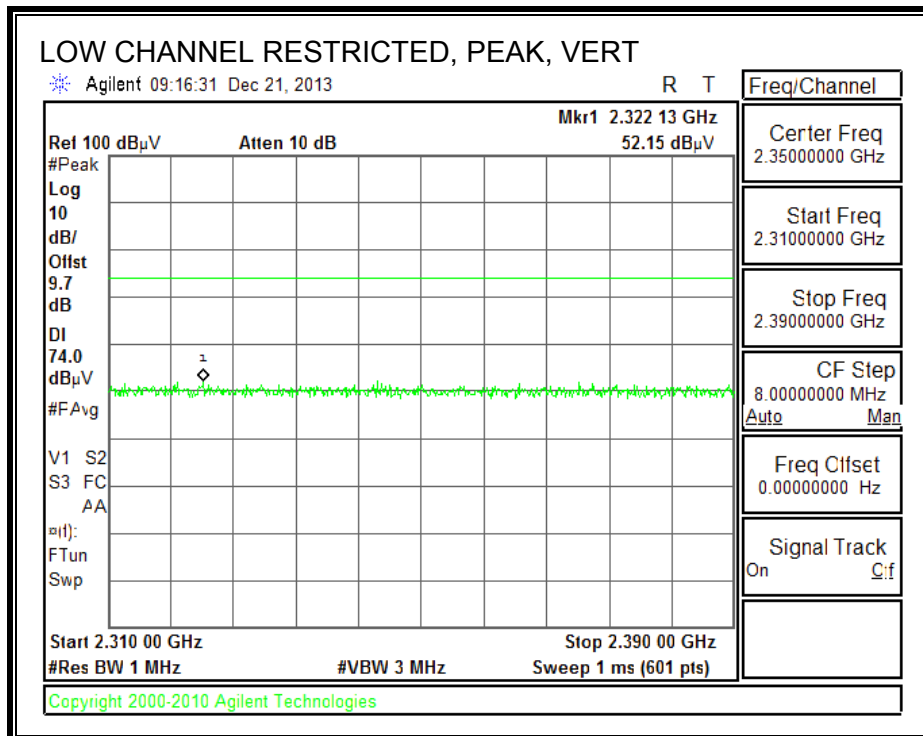

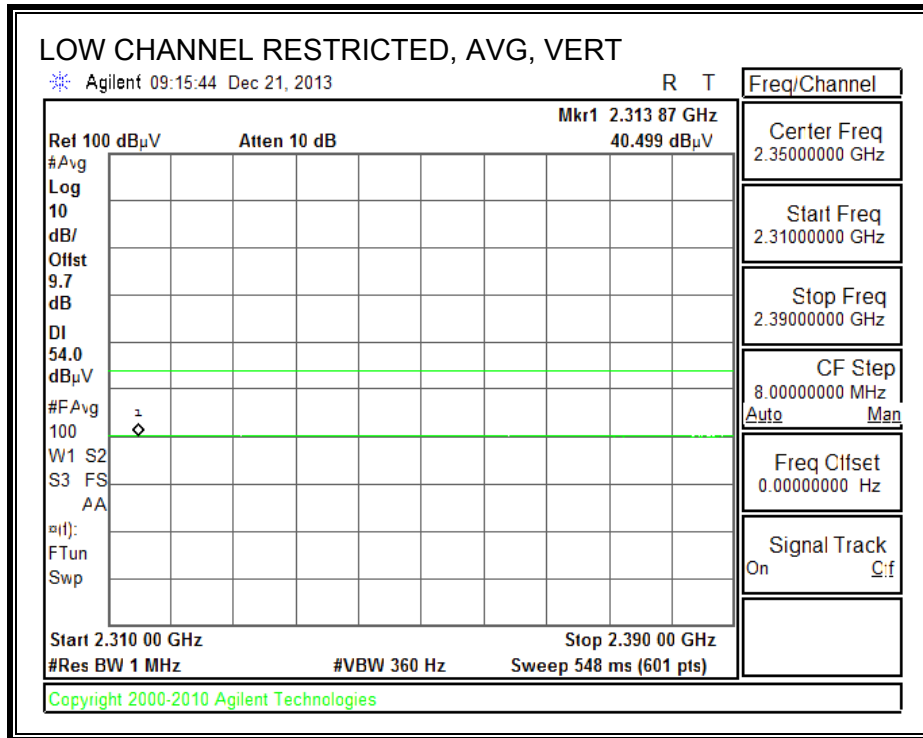


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

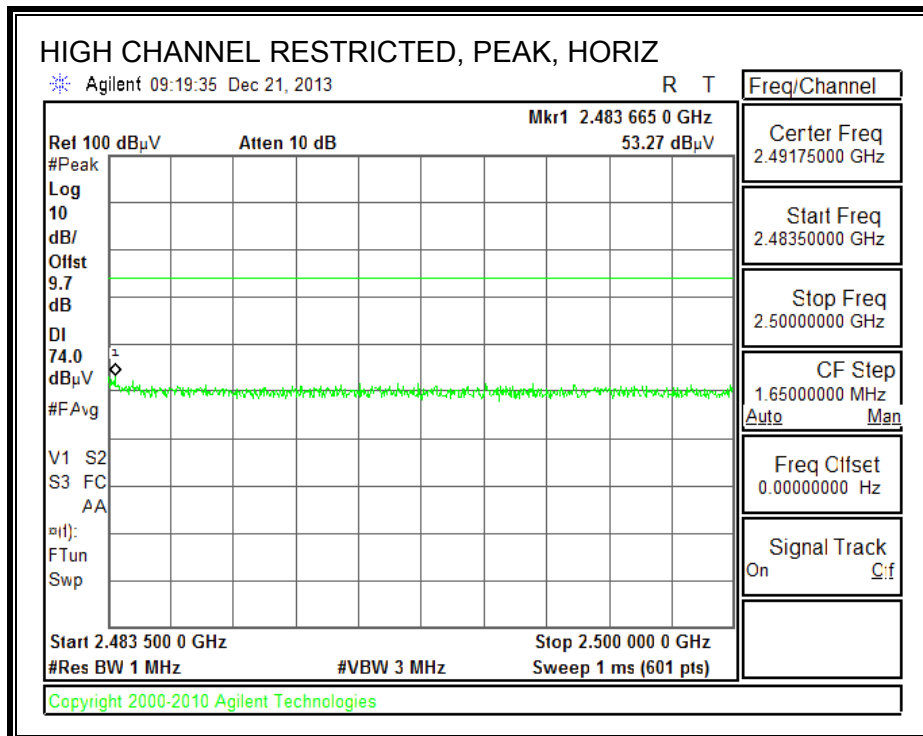

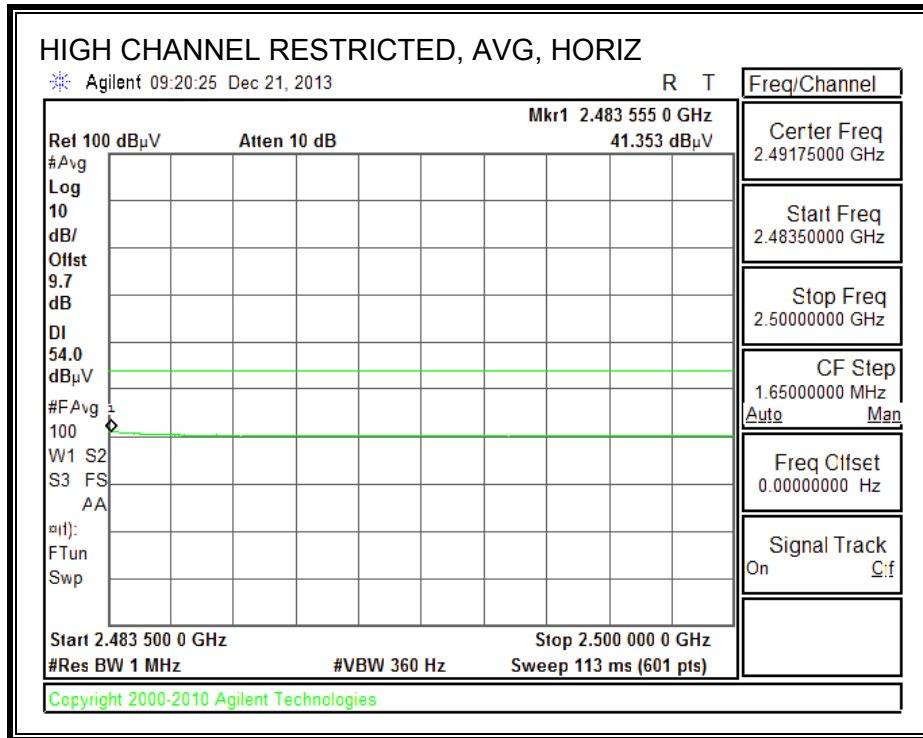


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

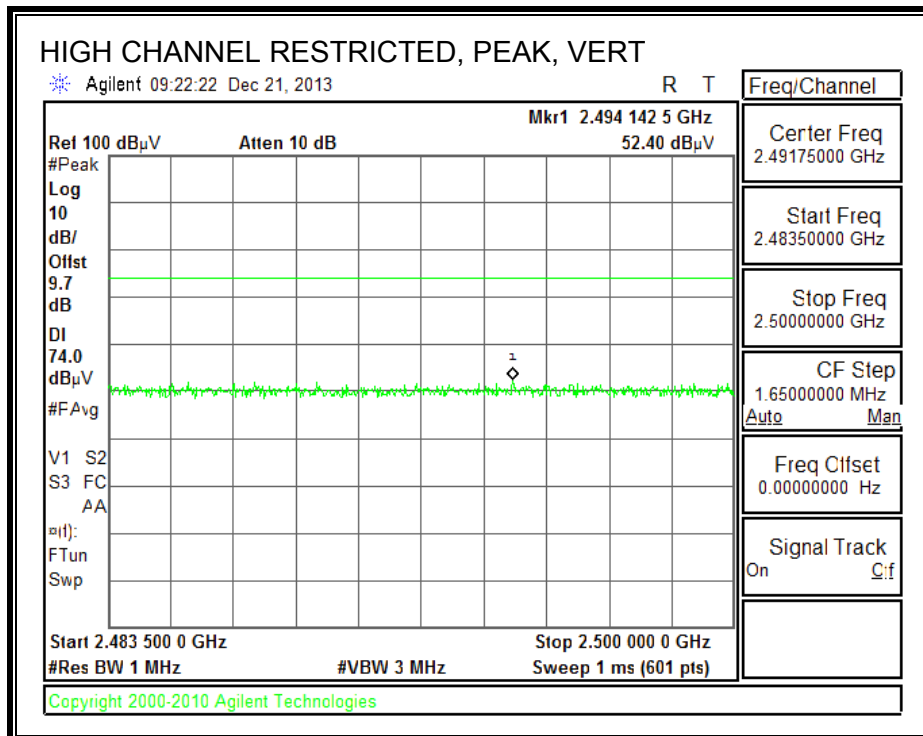


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

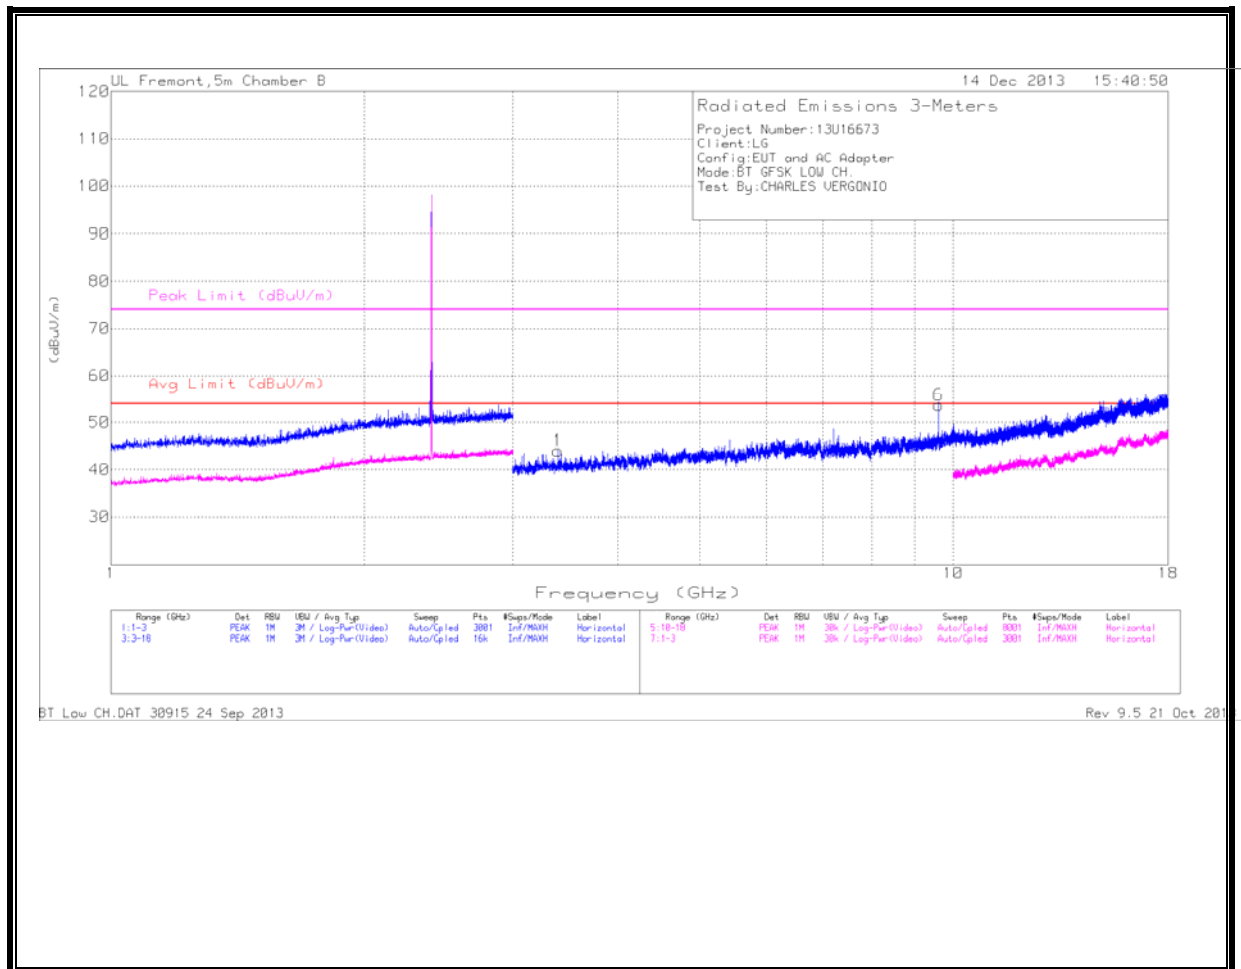

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

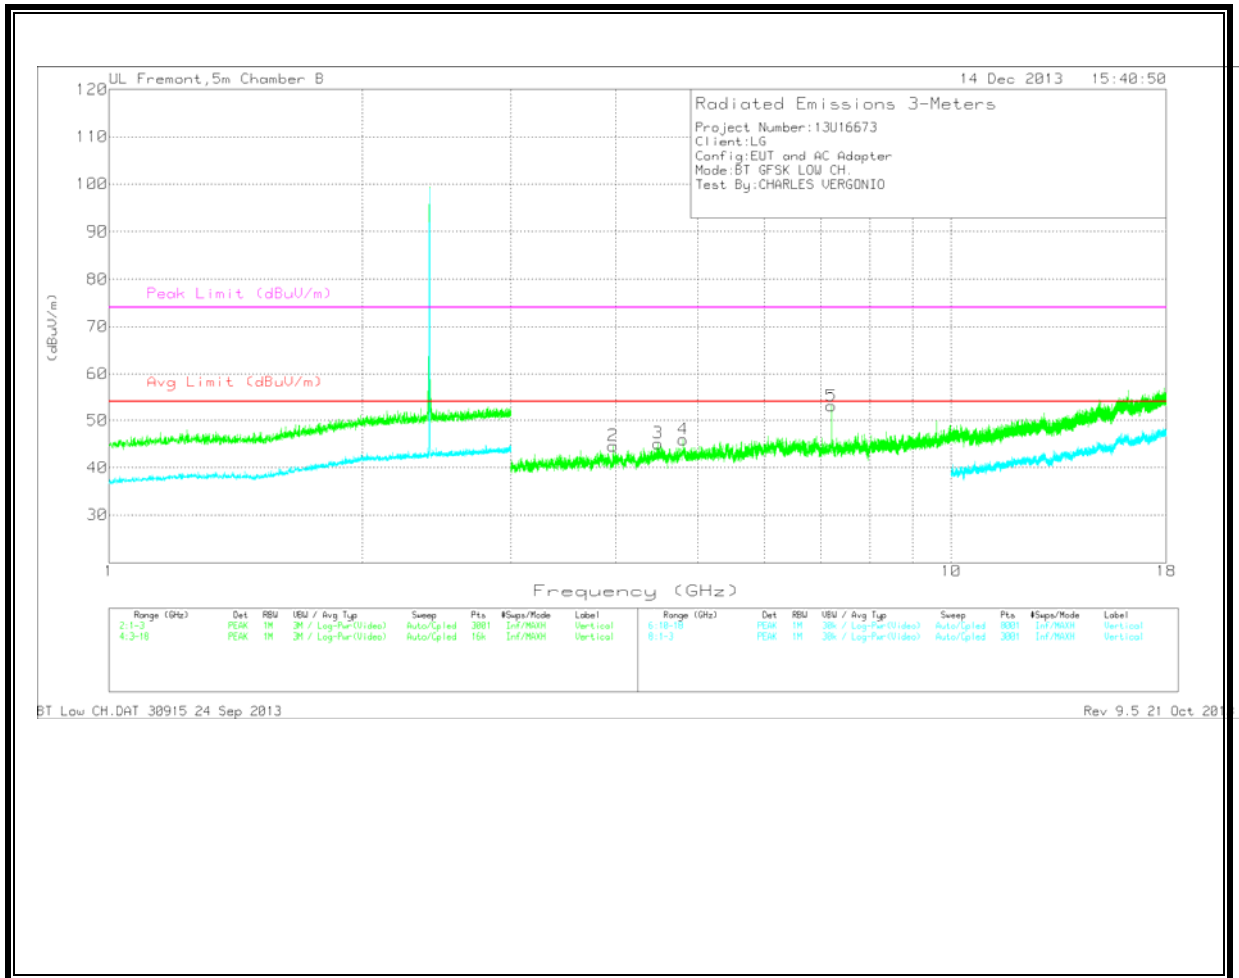

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.394	41.97	PK	33.2	-31.2	43.97	53.97	-10	74	-30.03	0-360	99	H
2	3.967	41.61	PK	33.9	-30.9	44.61	53.97	-9.36	74	-29.39	0-360	99	V
3	4.484	39.83	PK	34.5	-29.2	45.13	53.97	-8.84	74	-28.87	0-360	201	V
4	4.804	40.05	PK	34.7	-28.8	45.95	53.97	-8.02	74	-28.05	0-360	201	V
5	7.206	44.18	PK	35.8	-26.9	53.08	53.97	-8.89	74	-20.92	0-360	99	V
6	9.608	40.47	PK	37.3	-24.1	53.67	53.97	-3.3	74	-20.33	0-360	201	H


PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.206	40.01	MAV1	35.8	-27	48.81	53.97	-5.16	74	-25.19	202	102	V
9.608	37.76	MAV1	37.3	-24.1	50.96	53.97	-3.01	74	-23.04	210	240	H

MAV1 - KDB558074 Option 1 Maximum RMS Average
 BT Low CH.DAT 30915 24 Sep 2013 Rev 9.5 21 Oct 2013

MID CHANNEL
HORIZONTAL

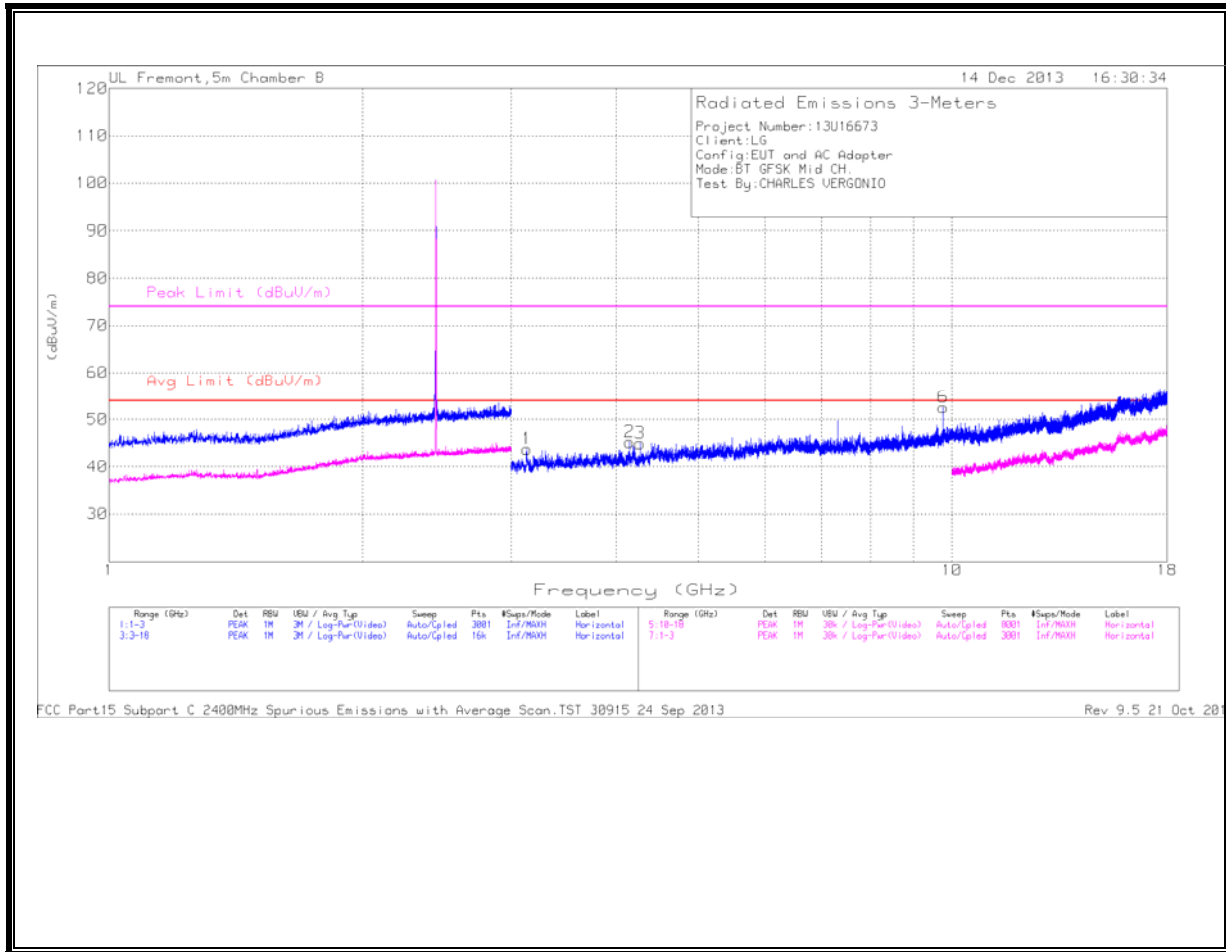

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

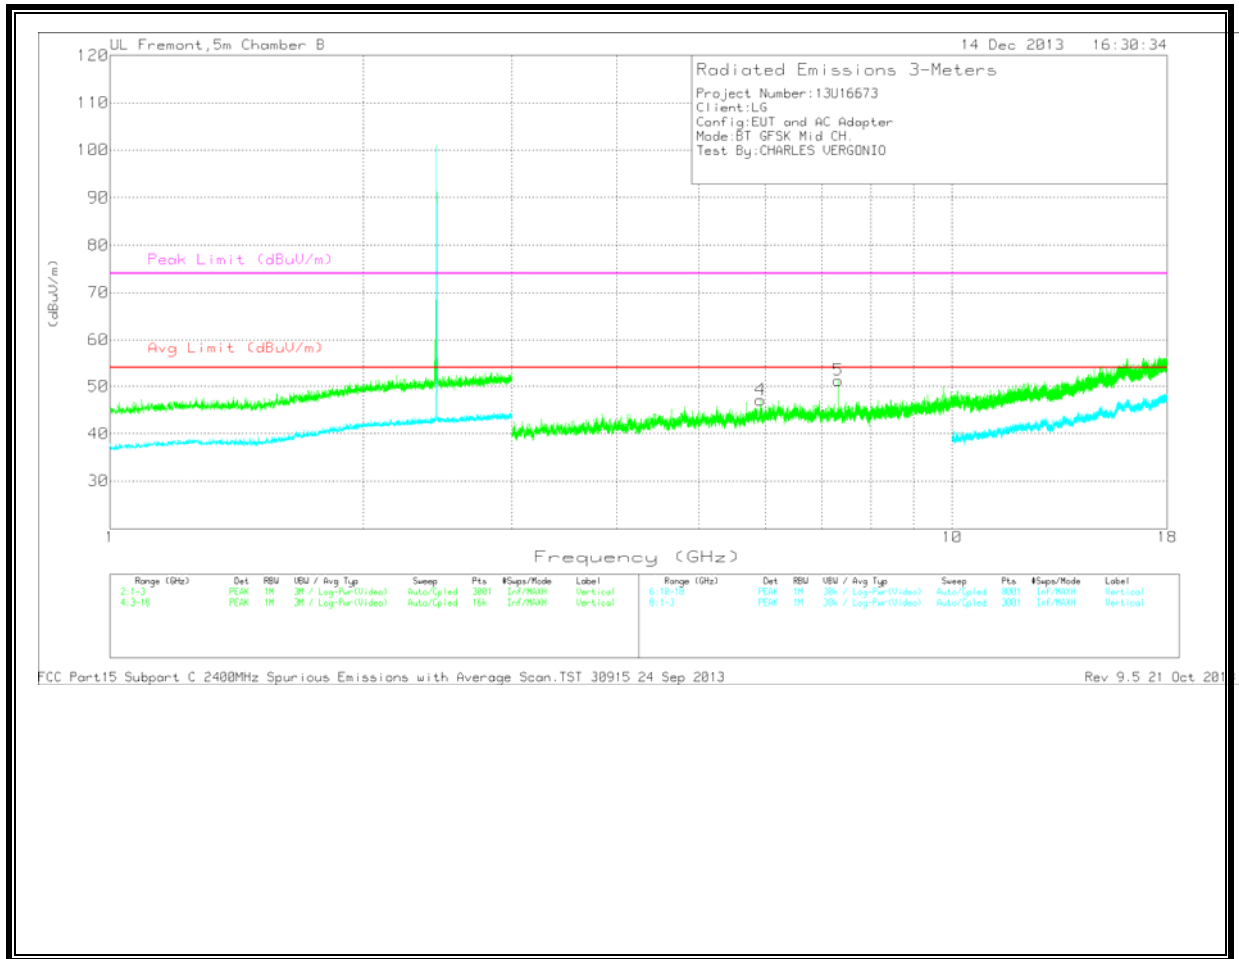

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.132	41.92	PK	33.2	-31.4	43.72	53.97	-10.25	74	-30.28	0-360	99	H
2	4.144	40.89	PK	34	-29.7	45.19	53.97	-8.78	74	-28.81	0-360	201	H
3	4.265	41.71	PK	34.1	-30.9	44.91	53.97	-9.06	74	-29.09	0-360	201	H
4	5.921	39.8	PK	35.7	-28.4	47.1	53.97	-6.87	74	-26.9	0-360	202	V
5	7.323	43.14	PK	35.9	-27.8	51.24	53.97	-2.73	74	-22.76	0-360	99	V
6	9.764	39.27	PK	37.5	-24.2	52.57	53.97	-1.4	74	-21.43	0-360	201	H


PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.323	39.31	MAV1	35.9	-27.8	47.41	53.97	-6.56	74	-26.59	212	138	V
9.764	34.22	MAV1	37.5	-24.2	47.52	53.97	-6.45	74	-26.48	200	224	H

MAV1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 21 Oct 2013

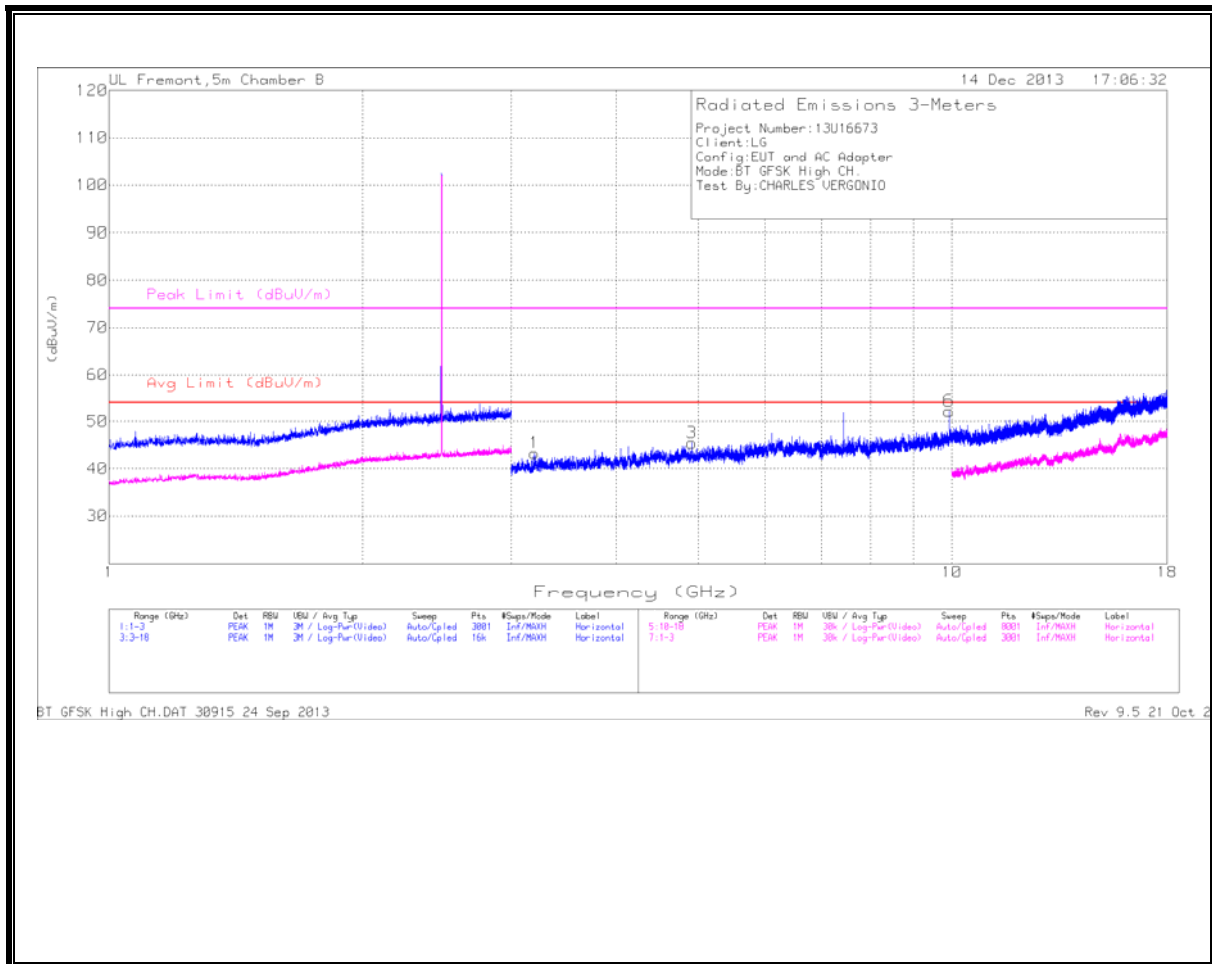

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

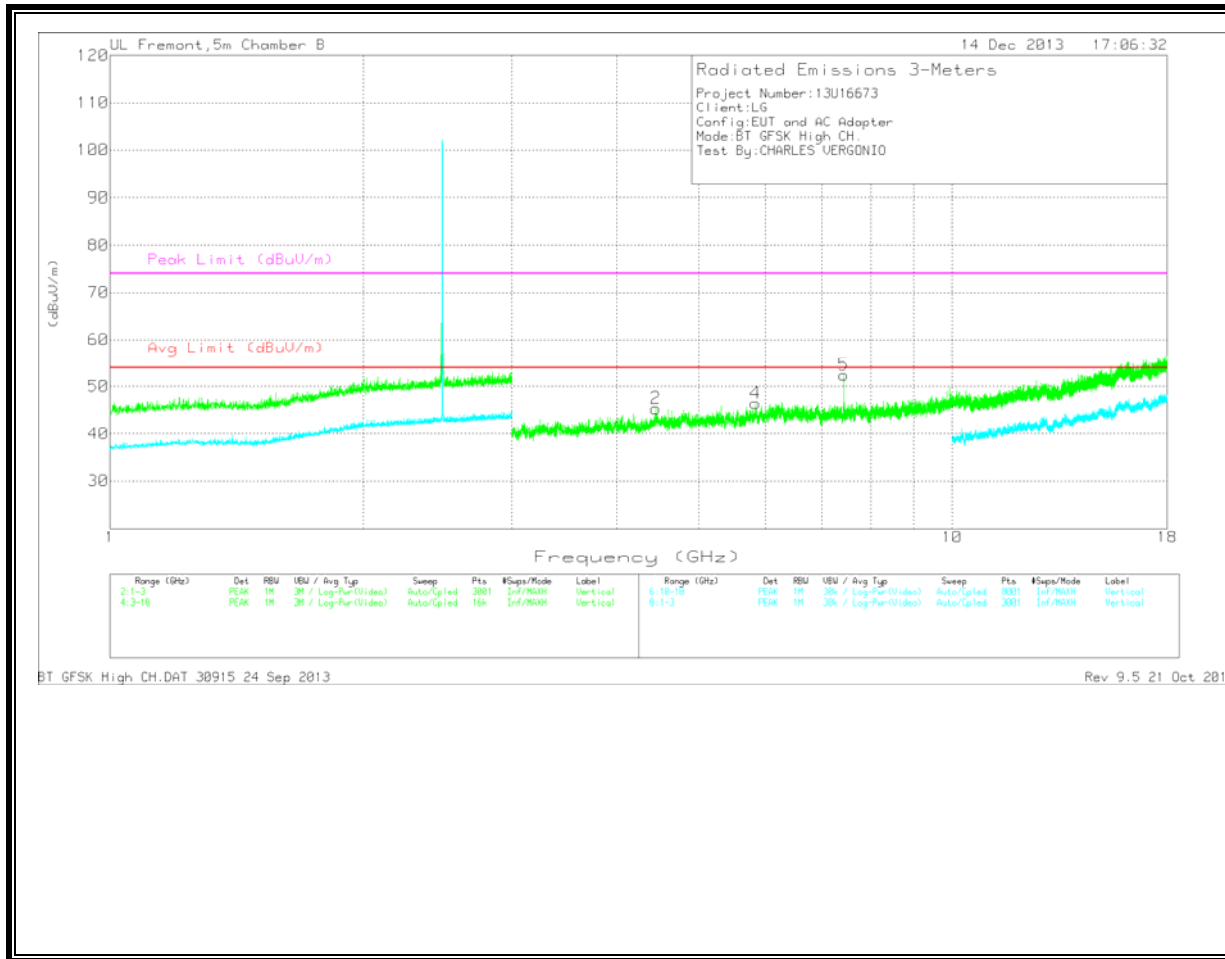

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/I/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.198	41.17	PK	33.3	-31.2	43.27	53.97	-10.7	74	-30.73	0-360	99	H
2	4.448	39.9	PK	34.4	-29	45.3	53.97	-8.67	74	-28.7	0-360	202	V
3	4.913	41.53	PK	34.6	-30.7	45.43	53.97	-8.54	74	-28.57	0-360	99	H
4	5.842	40.1	PK	35.5	-29.2	46.4	53.97	-7.57	74	-27.6	0-360	202	V
5	7.44	43.21	PK	36	-26.8	52.41	53.97	-1.56	74	-21.59	0-360	99	V
6	9.919	38.44	PK	37.7	-24	52.14	53.97	-1.83	74	-21.86	0-360	99	H

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/I/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.44	37	MAV1	36	-26.8	46.2	53.97	-7.77	74	-27.8	200	133	V
9.92	33.94	MAV1	37.7	-24	47.64	53.97	-6.33	74	-26.36	208	140	H


MAV1 - KDB558074 Option 1 Maximum RMS Average

BT GFSK High CH.DAT 30915 24 Sep 2013 Rev 9.5 21 Oct 2013


9.2.2. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

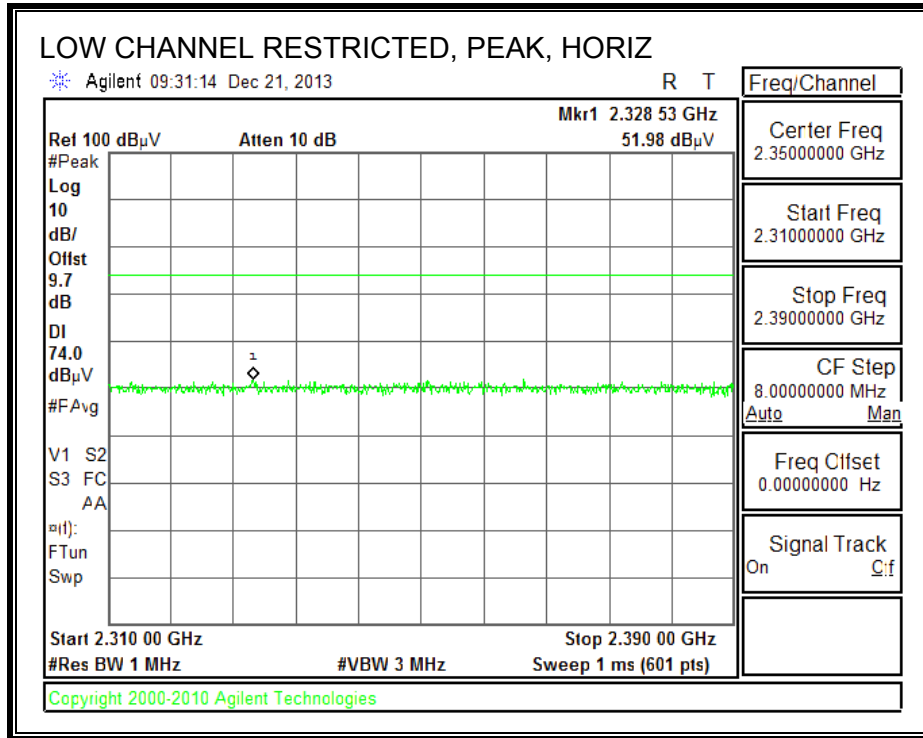

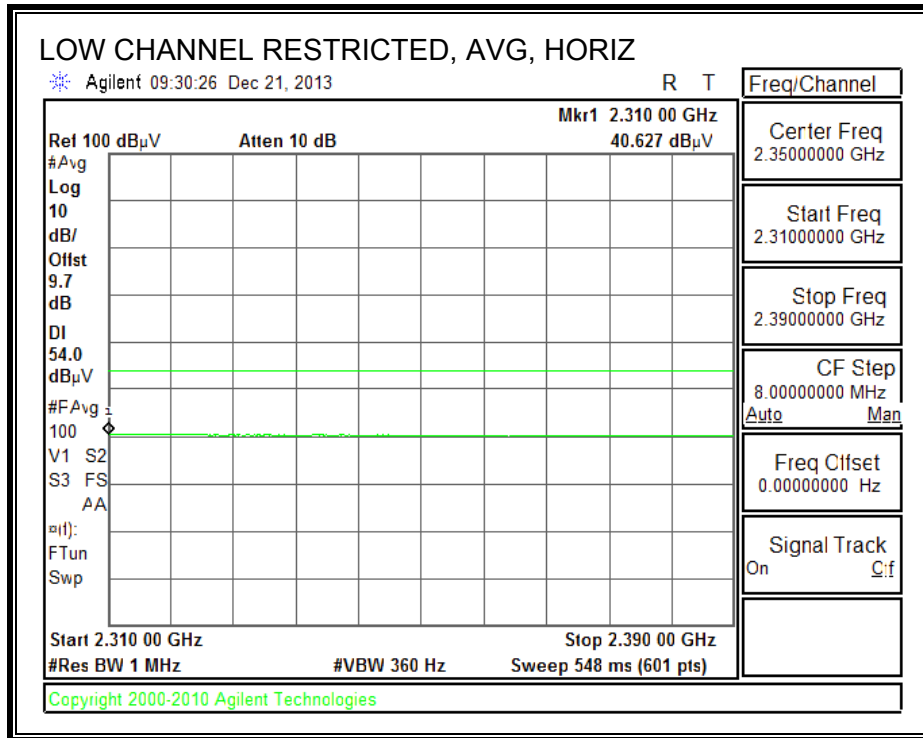



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

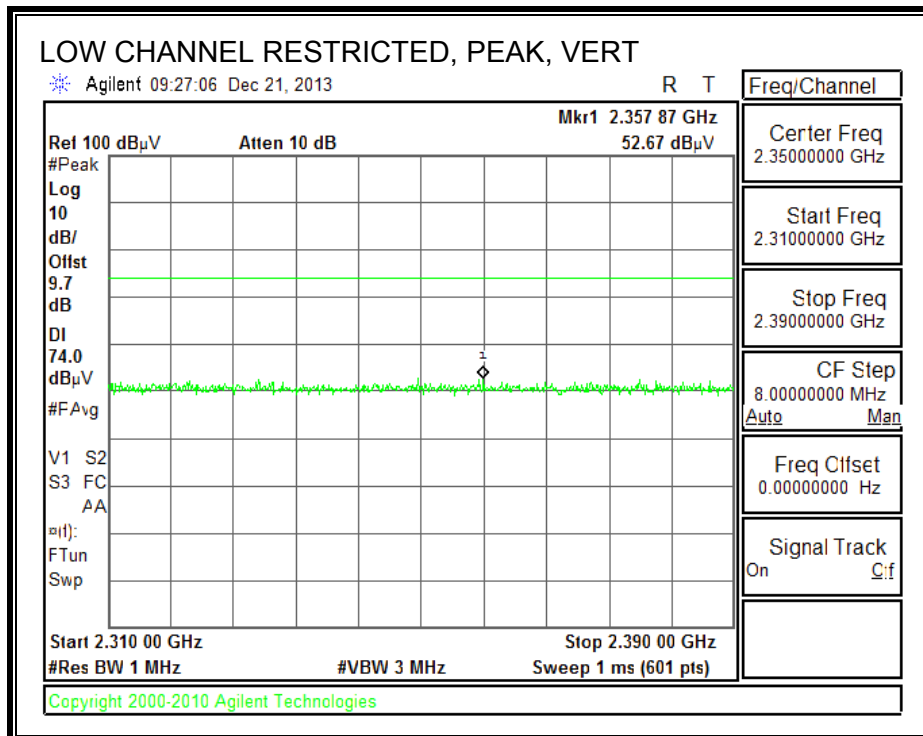

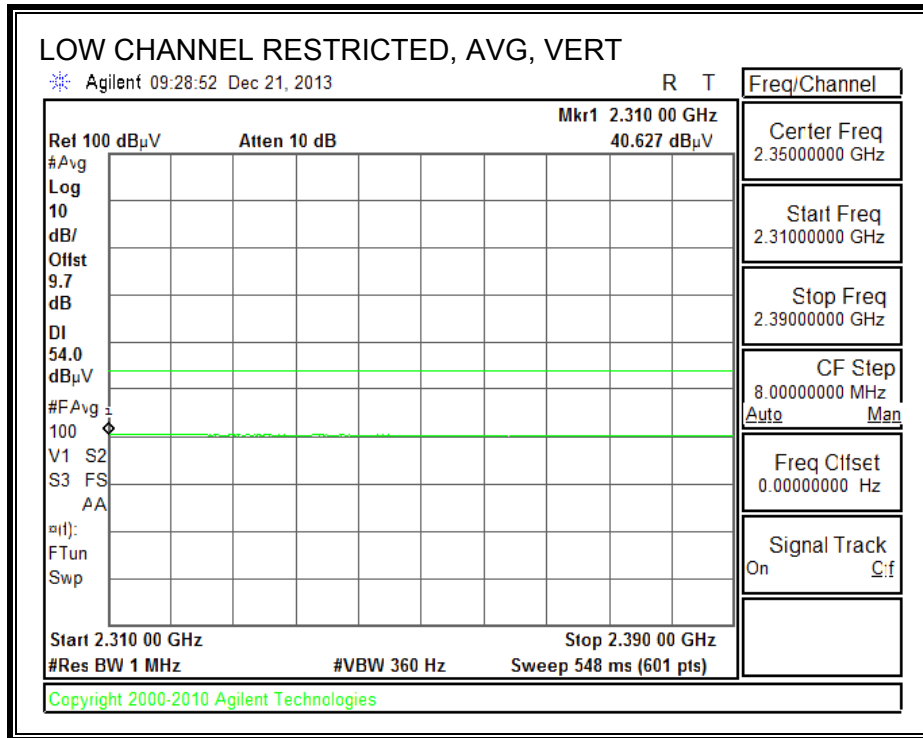



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

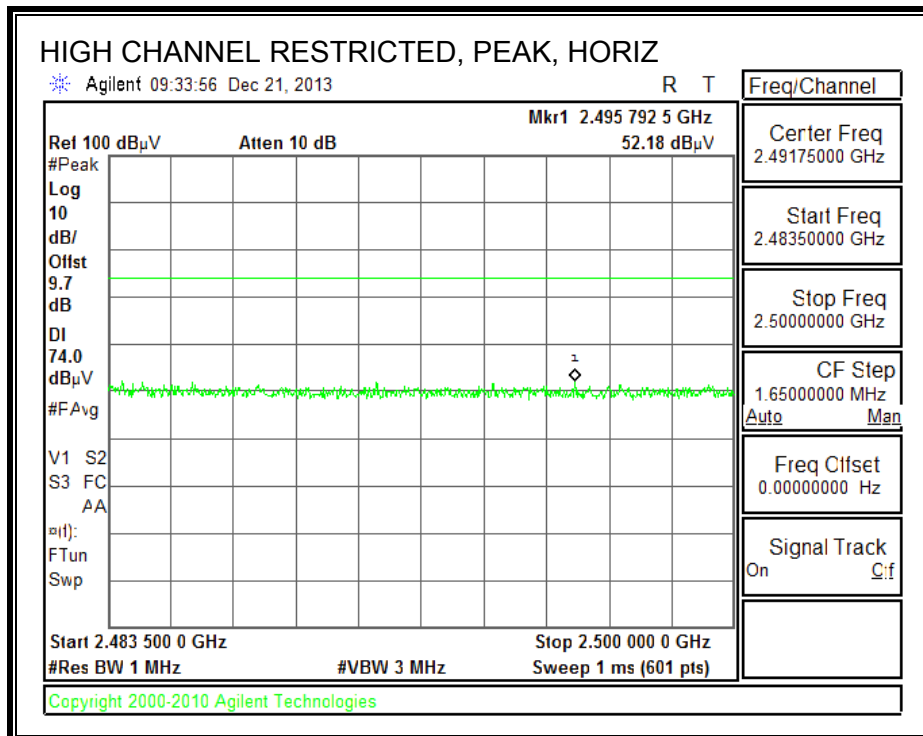

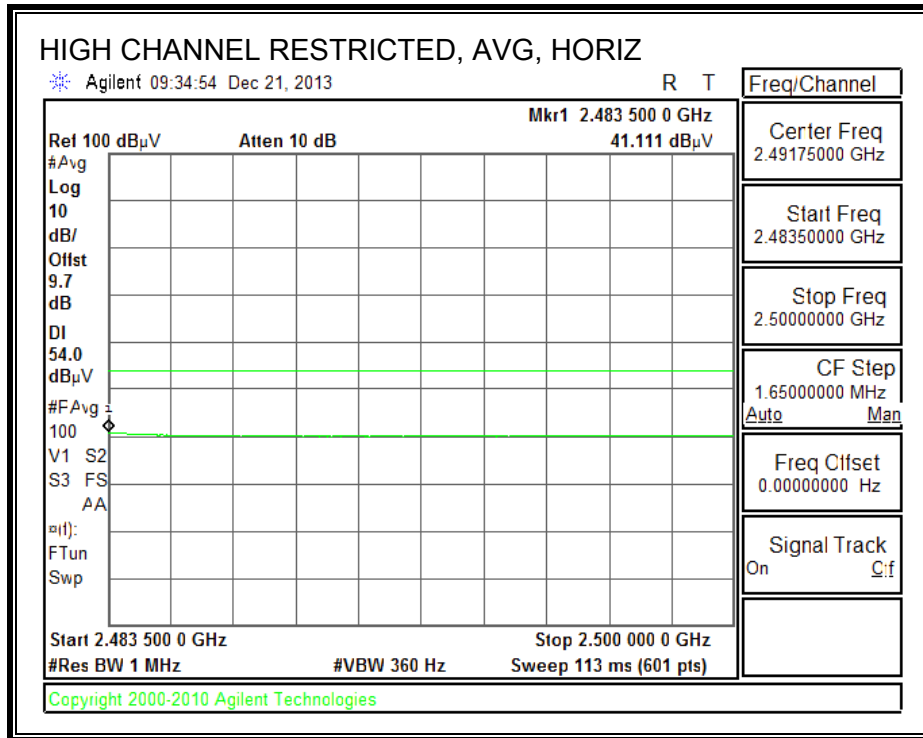


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

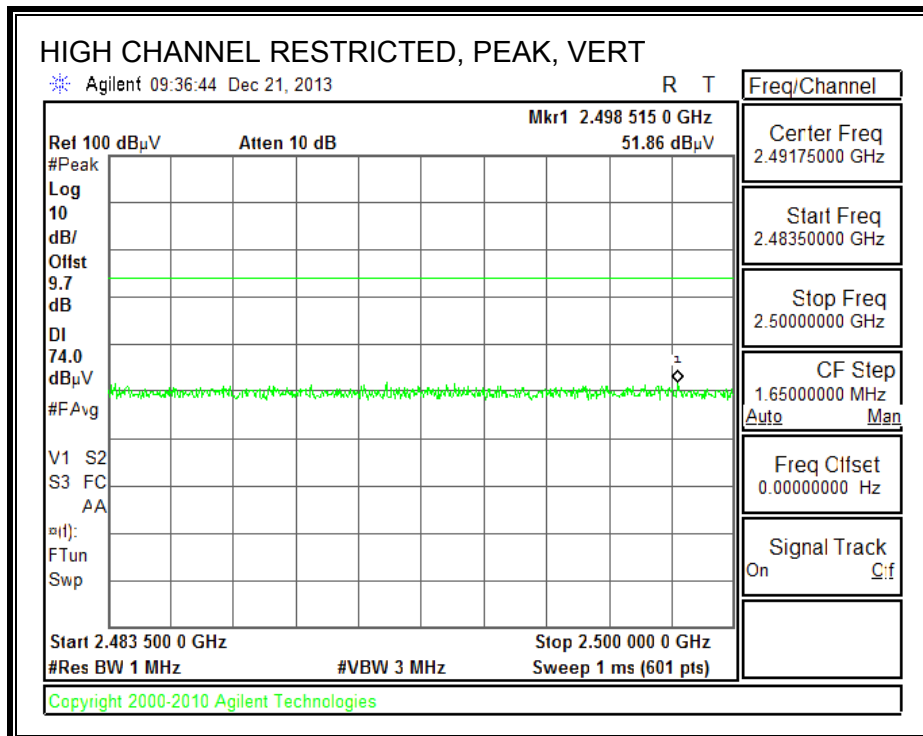

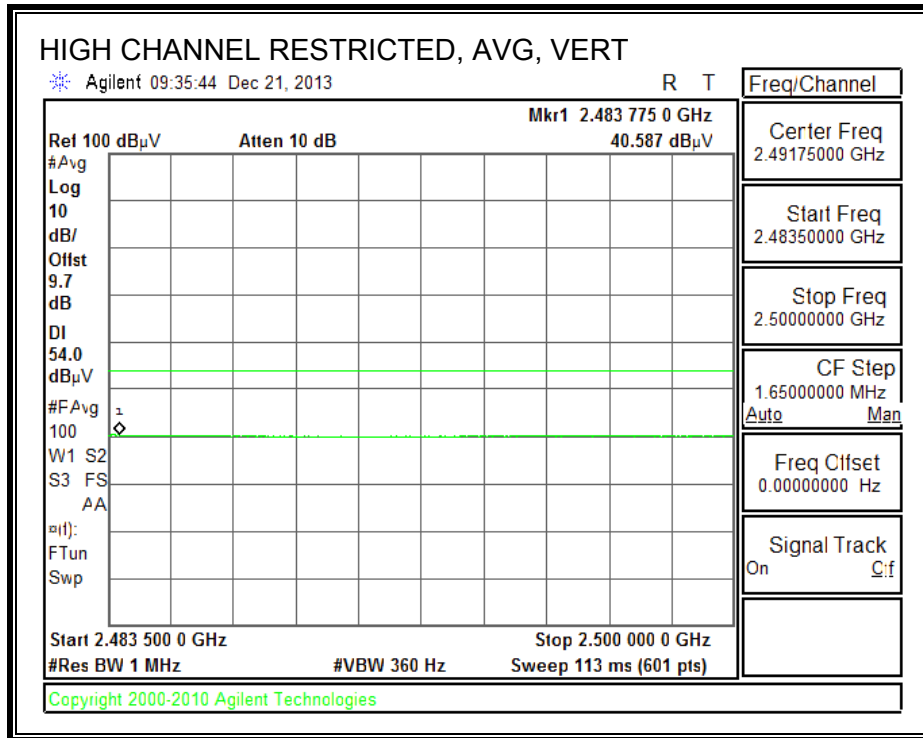


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

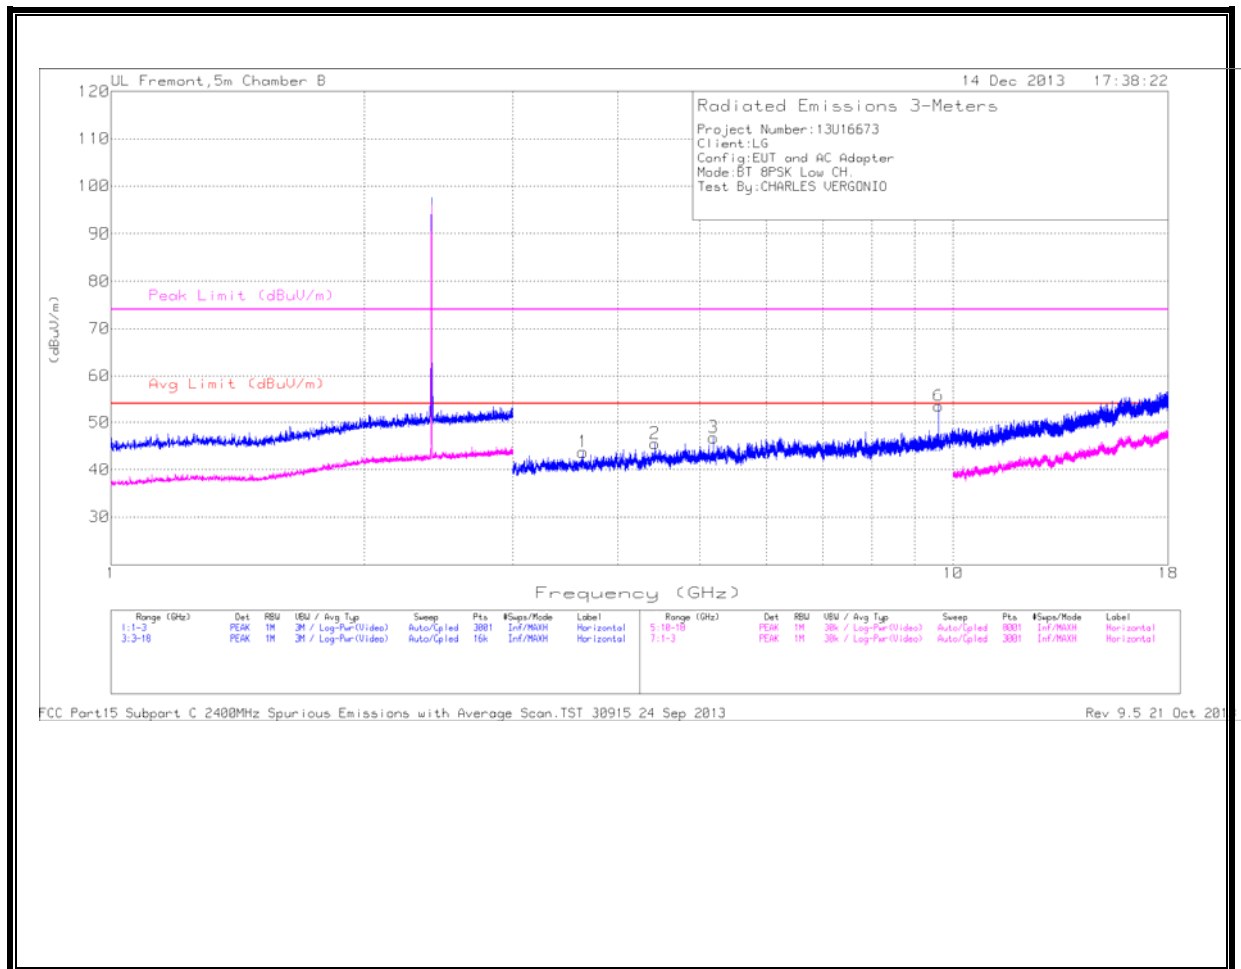

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

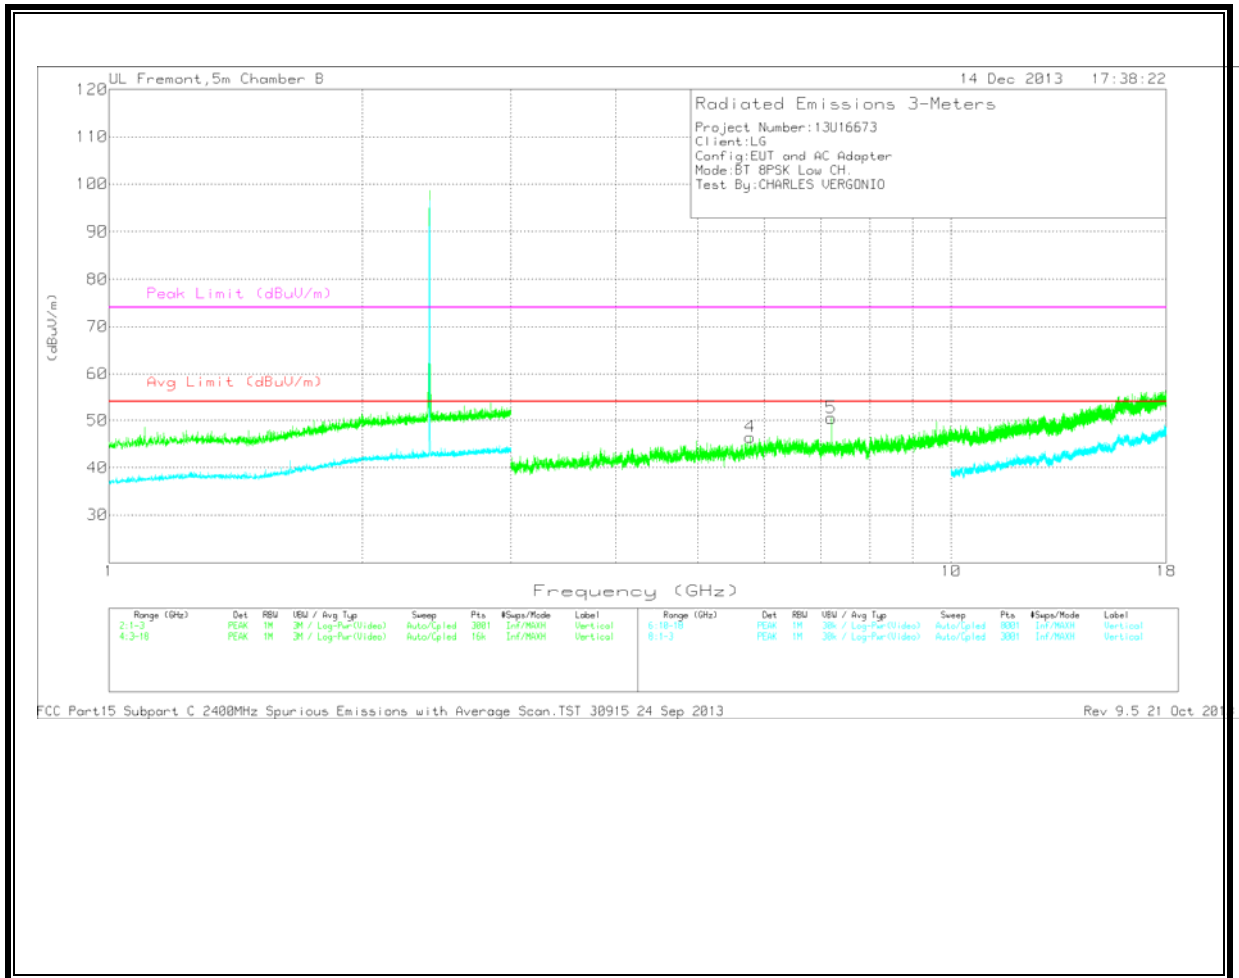

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA
 Trace Markers


Marker	Frequen cy (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb l/Fitr/Pa d (dB)	Correct ed Reading (dBuV/ m)	Avg Limit (dBuV/ m)	Margin (dB)	Peak Limit (dBuV/ m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.635	41.31	PK	33.5	-31.1	43.71	53.97	-10.26	74	-30.29	0-360	99	H
2	4.426	40.37	PK	34.4	-29.3	45.47	53.97	-8.5	74	-28.53	0-360	99	H
3	5.193	42.28	PK	34.8	-30.3	46.78	53.97	-7.19	74	-27.22	0-360	99	H
4	5.771	40.56	PK	35.3	-29.4	46.46	53.97	-7.51	74	-27.54	0-360	202	V
5	7.205	41.69	PK	35.8	-27	50.49	53.97	-3.48	74	-23.51	0-360	99	V
6	9.607	40.31	PK	37.3	-24.1	53.51	53.97	-4.6	74	-20.49	0-360	201	H

PK - Peak detector
 Radiated Emissions

Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.206	34.41	MAv1	35.8	-26.9	43.31	53.97	-10.66	74	-30.69	200	104	V
9.608	35.13	MAv1	37.3	-24.1	48.33	53.97	-5.64	74	-25.67	230	164	H


MAv1 - KDB558074 Option 1 Maximum RMS Average
 FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep
 2013 Rev 9.5 21 Oct 2013

MID CHANNEL
HORIZONTAL

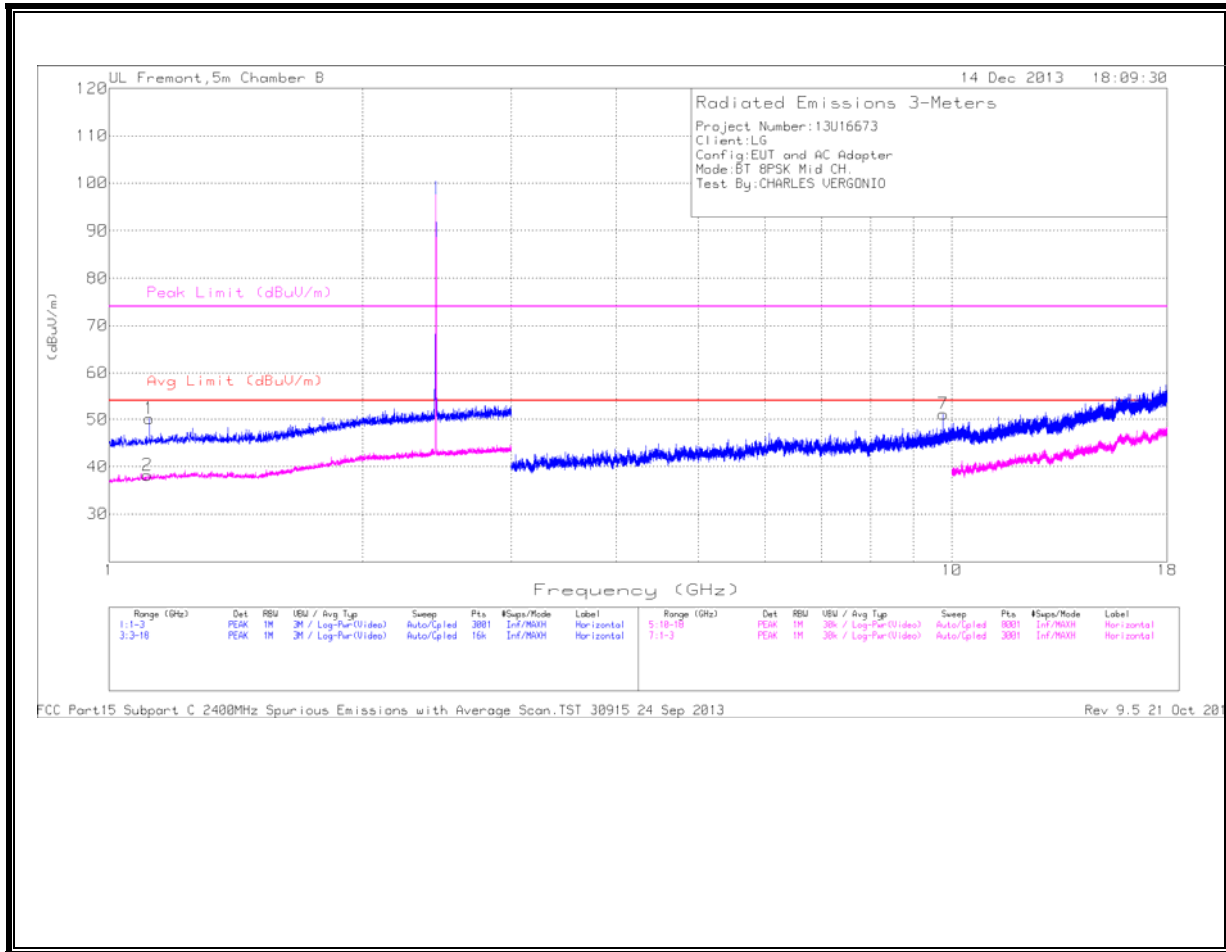

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

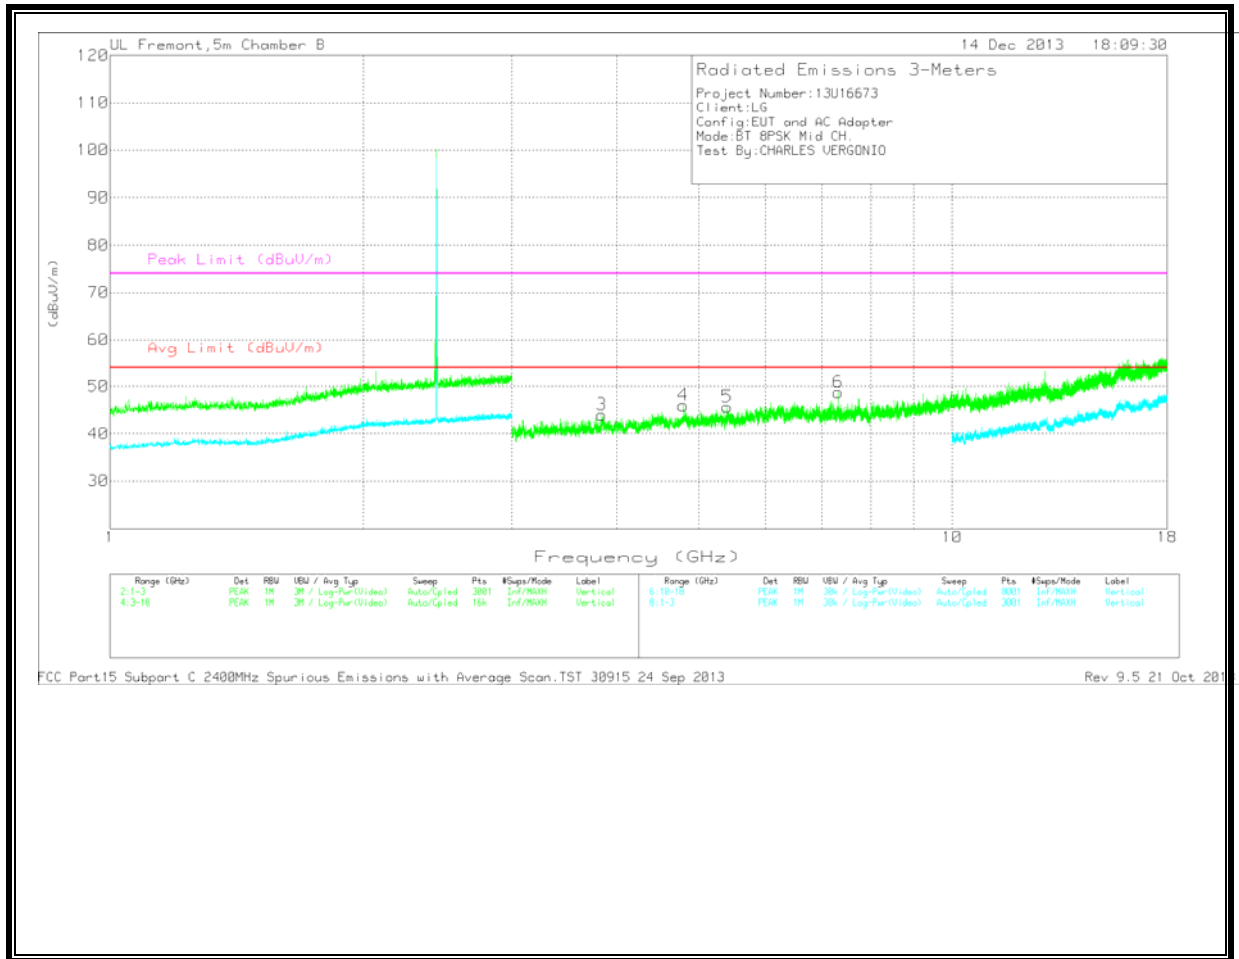

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.111	35.06	Avg	27.9	-24.8	38.16	53.97	-15.81	74	-35.84	0-360	99	H
1	1.116	46.85	PK	28	-24.7	50.15	53.97	-3.82	74	-23.85	0-360	201	H
3	3.837	40.38	PK	33.8	-30.2	43.98	53.97	-9.99	74	-30.02	0-360	99	V
4	4.794	40.08	PK	34.7	-28.8	45.98	53.97	-7.99	74	-28.02	0-360	99	V
5	5.405	39.62	PK	34.9	-28.9	45.62	53.97	-8.35	74	-28.38	0-360	202	V
6	7.323	40.65	PK	35.9	-27.8	48.75	53.97	-5.22	74	-25.25	0-360	99	V
7	9.764	37.81	PK	37.5	-24.2	51.11	53.97	-2.86	74	-22.89	0-360	99	H

PK - Peak detector


Avg - Video bandwidth < Resolution bandwidth

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.764	35.18	MAV1	37.5	-24.2	48.48	53.97	-5.49	74	-25.52	212	247	H

MAV1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 21 Oct 2013

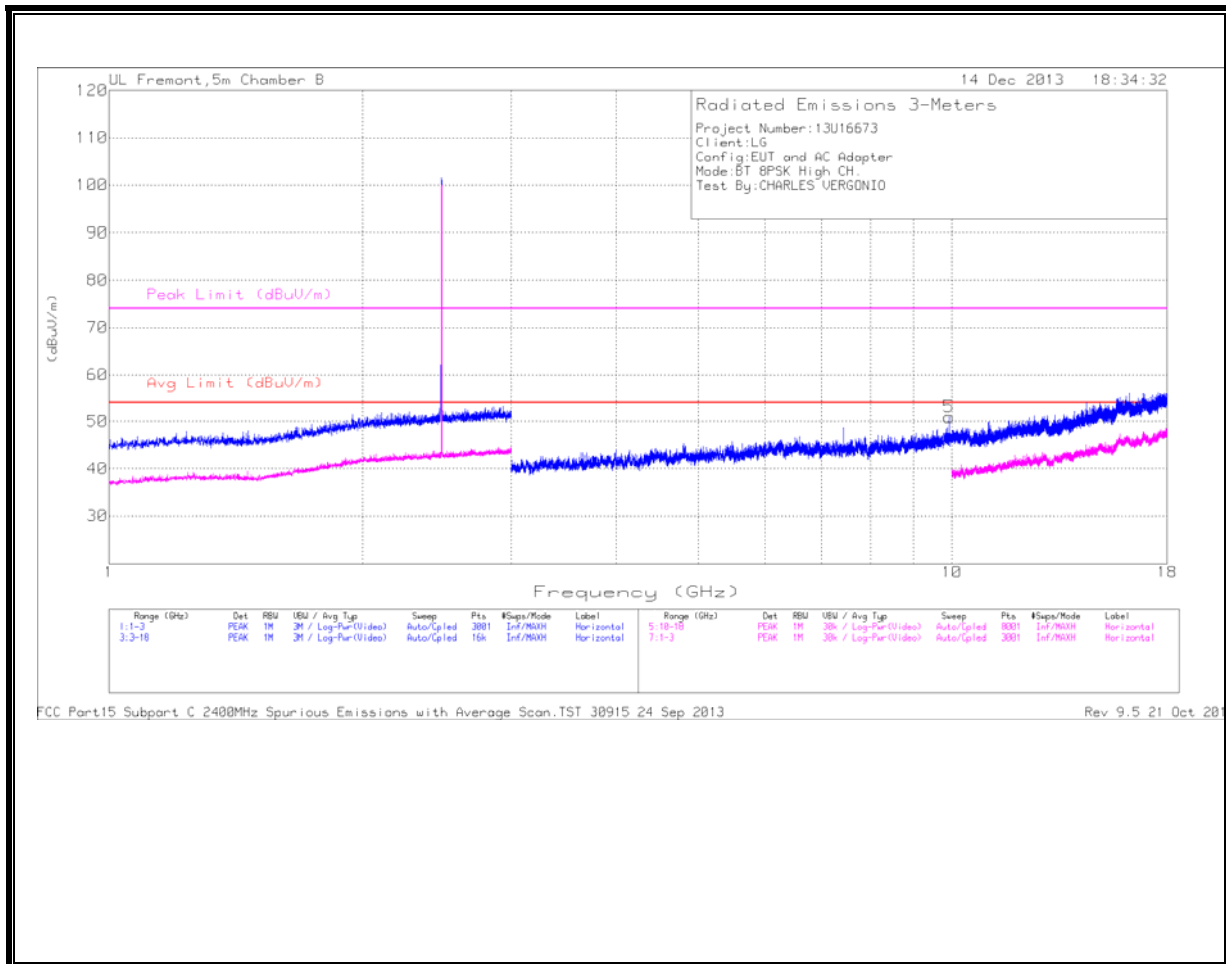

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

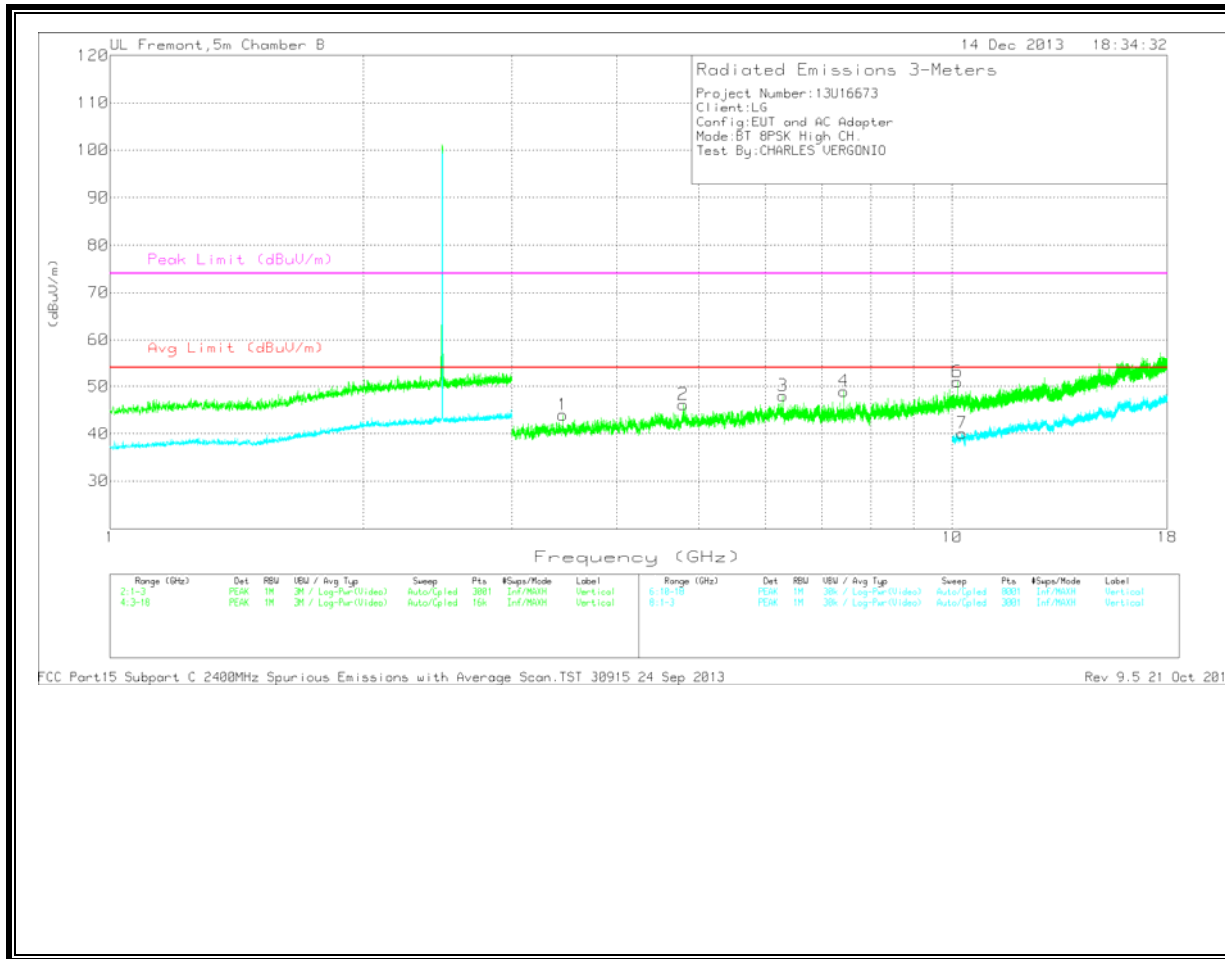

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.449	41.86	PK	33.2	-31.1	43.96	53.97	-10.01	74	-30.04	0-360	202	V
2	4.792	40.28	PK	34.7	-28.8	46.18	53.97	-7.79	74	-27.82	0-360	99	V
3	6.294	39.99	PK	36	-28	47.99	53.97	-5.98	74	-26.01	0-360	99	V
4	7.44	39.76	PK	36	-26.8	48.96	53.97	-5.01	74	-25.04	0-360	99	V
5	9.919	37.2	PK	37.7	-24	50.9	53.97	-3.07	74	-23.1	0-360	99	H
6	10.146	37.04	PK	37.9	-24	50.94	53.97	-3.03	74	-23.06	0-360	99	V
7	10.273	25.7	Avg	38	-23.6	40.1	-	-	-	-	0-360	99	V

PK - Peak detector

Avg - Video bandwidth < Resolution bandwidth

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb I/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.44	34.84	MAv1	36	-26.8	44.04	53.97	-9.93	74	-29.96	200	100	V
9.92	34.25	MAv1	37.7	-24	47.95	53.97	-6.02	74	-26.05	207	173	H


MAv1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 30915 24 Sep 2013 Rev 9.5 21 Oct 2013

9.3. WORST-CASE BELOW 1 GHz

GFASK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

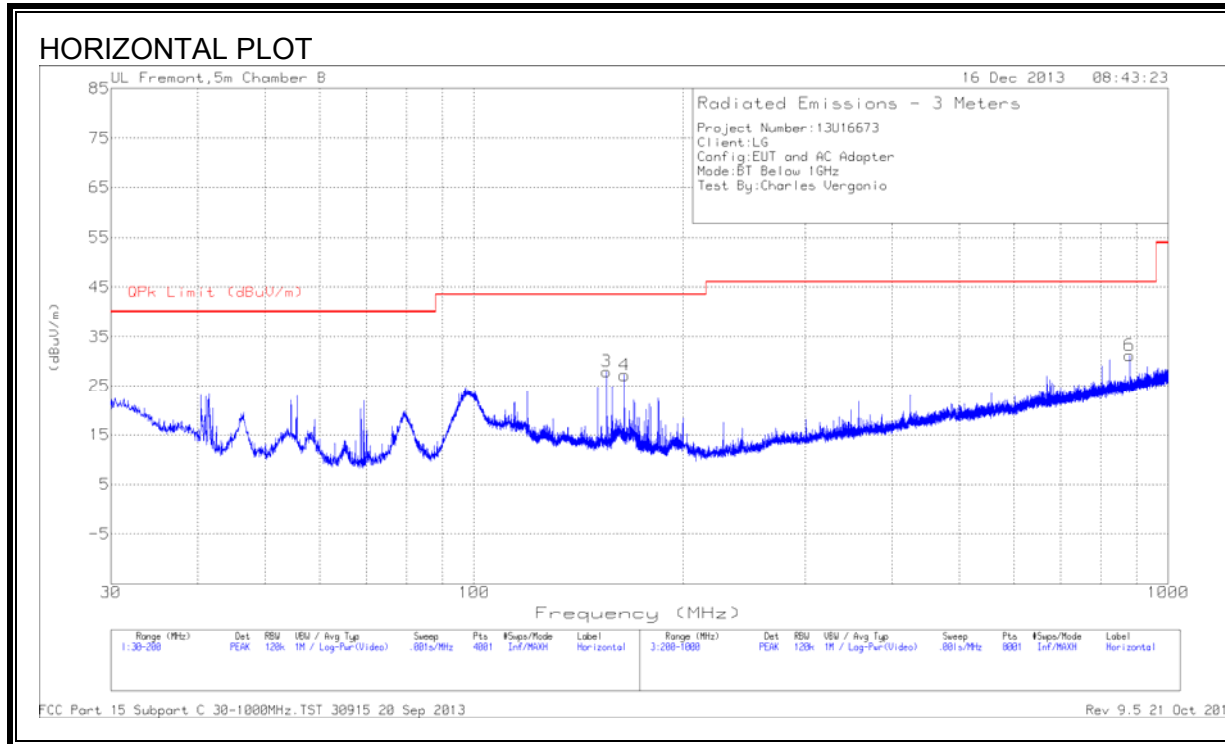

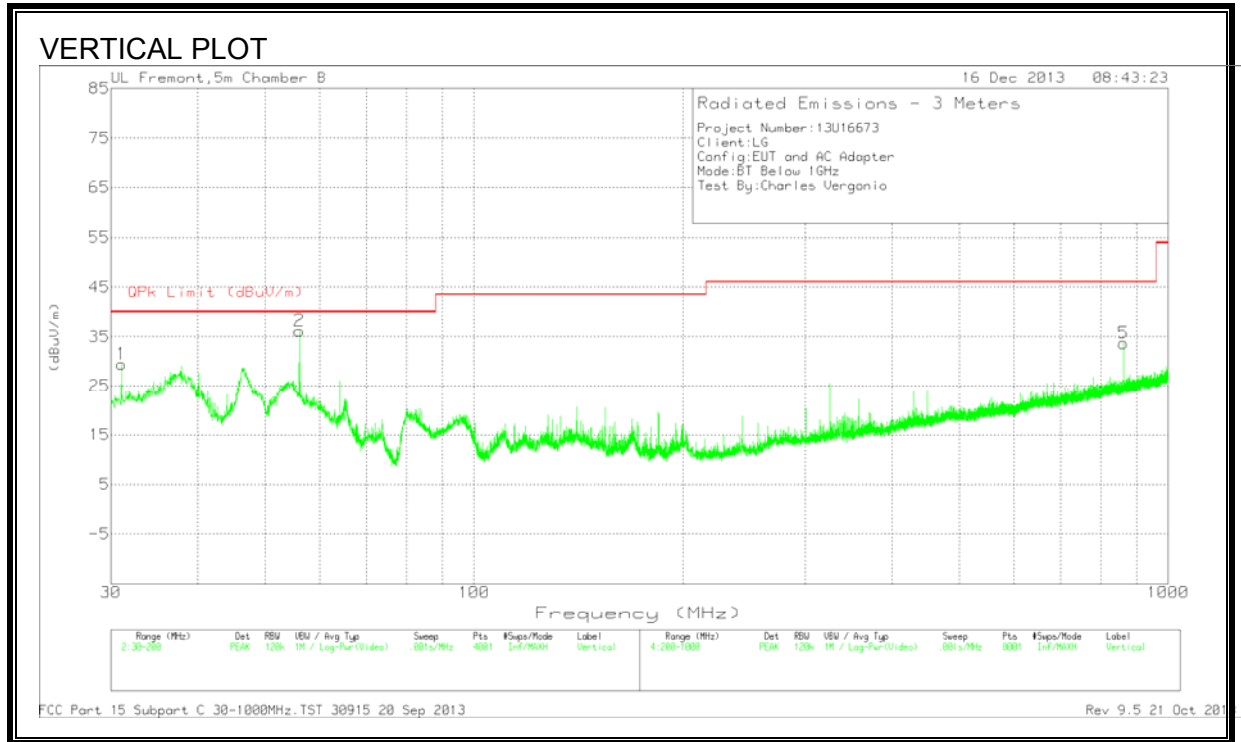

DATA
 Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.0625	38.04	PK	20.3	-28.9	29.44	40	-10.56	0-360	100	V
2	56.0525	57.87	PK	6.9	-28.6	36.17	40	-3.83	0-360	100	V
3	155.205	43.16	PK	12.2	-27.4	27.96	43.52	-15.56	0-360	400	H
4	164.6825	42.72	PK	11.8	-27.3	27.22	43.52	-16.3	0-360	400	H
5	862.6	35.39	PK	21.7	-23.4	33.69	46.02	-12.33	0-360	100	V
6	879.6	32.52	PK	22	-23.3	31.22	46.02	-14.8	0-360	100	H

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.5388	41.78	QP	6.8	-28.6	19.98	40	-20.02	246	141	V

QP - Quasi-Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 20 Sep 2013 Rev 9.5 21 Oct 2013

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*}Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
3	.3435	40.05	PK	.1	0	40.15	59.1	-18.95	-	-
4	.3435	23.05	Av	.1	0	23.15	-	-	49.1	-25.95
5	1.1895	41.85	PK	.1	.1	42.05	56	-13.95	-	-
6	1.1895	22.41	Av	.1	.1	22.61	-	-	46	-23.39
9	14.5275	39.97	PK	.2	.2	40.37	60	-19.63	-	-
10	14.5275	17.51	Av	.2	.2	17.91	-	-	50	-32.09


Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.2895	40.67	PK	.1	0	40.77	60.5	-19.73	-	-
2	.2895	27	Av	.1	0	27.1	-	-	50.5	-23.4
7	3.066	39	PK	.1	.1	39.2	56	-16.8	-	-
8	3.066	20.64	Av	.1	.1	20.84	-	-	46	-25.16
11	16.2285	38.87	PK	.2	.2	39.27	60	-20.73	-	-
12	16.2285	18.34	Av	.2	.2	18.74	-	-	50	-31.26

PK - Peak detector
 Av - average detection

LINE 1 RESULTS

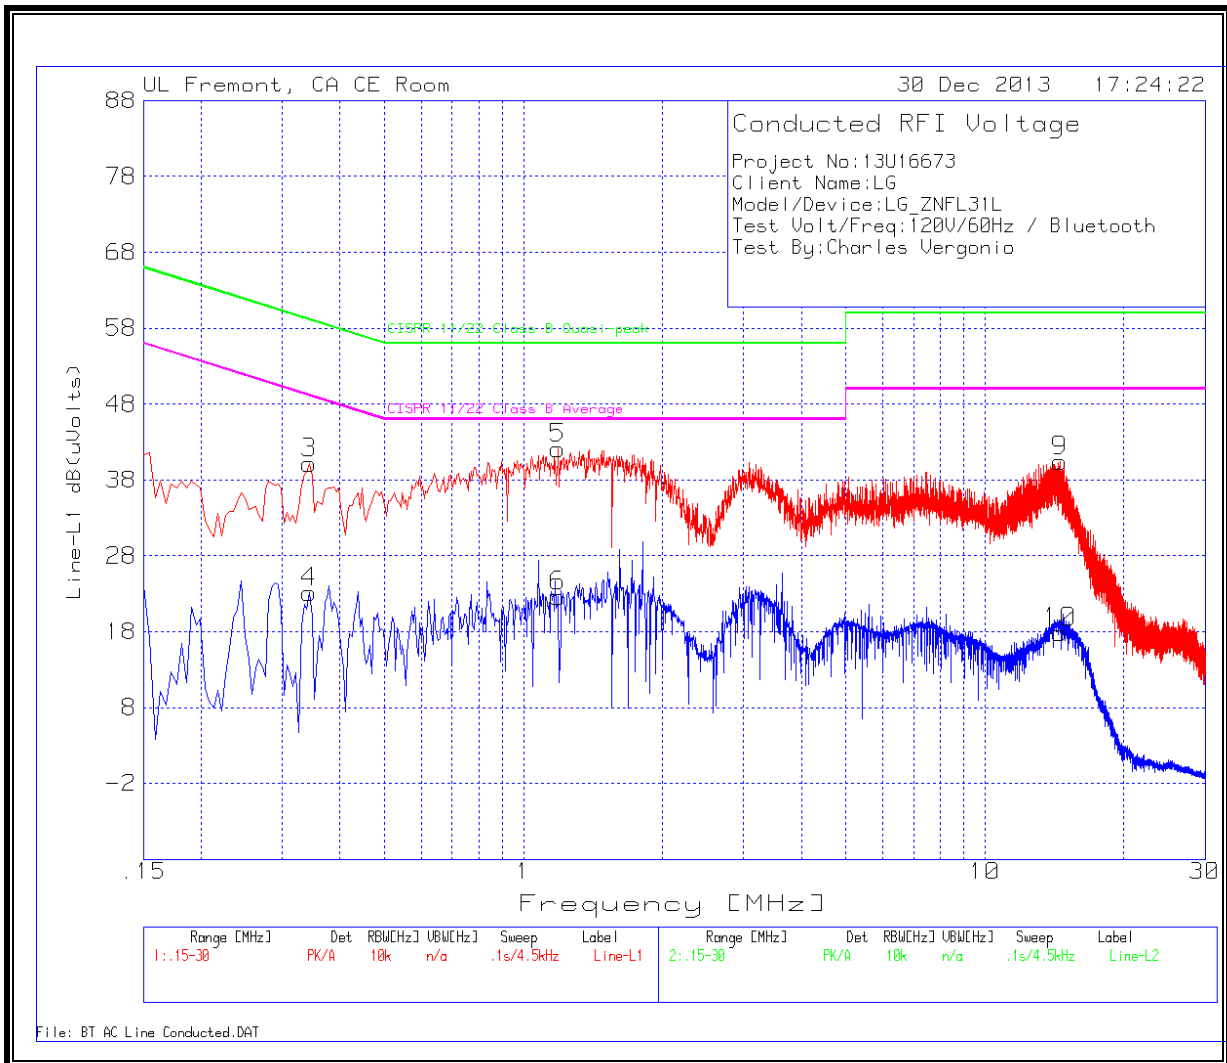

LINE 2 RESULTS

