



PART 22 MEASUREMENT REPORT

Applicant Name:

LG Electronics USA, Inc.
111 Sylvan Avenue, North Building
Englewood Cliffs, NJ 07632
United States

Date of Testing:

4/26 - 5/19/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2004220073-02-R1.ZNF

FCC ID:

ZNFL355DL

Applicant Name:

LG Electronics USA, Inc.

Application Type:

Certification

Model:

LM-K300QM

Additional Model(s):

LG-L355DL, LMK300QM, LGL355DL, K300QM, L355DL,
LG L355DL

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

22

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168
D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised test report (S/N: 1M2004220073-02-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President


FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 1 of 70	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Cellular - Base Frequency Blocks	6
3.3	Cellular - Mobile Frequency Blocks	6
3.4	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	25
7.4	Band Edge Emissions at Antenna Terminal	46
7.5	Radiated Power (ERP)	55
7.6	Radiated Spurious Emissions Measurements	58
7.7	Frequency Stability / Temperature Variation	65
8.0	CONCLUSION.....	70


FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 2 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	824.2 - 848.8	0.468	26.70	0.767	28.85	245KGXW
EDGE		8-PSK	824.2 - 848.8	0.136	21.32	0.222	23.47	247KG7W
WCDMA	N/A	Spread Spectrum	826.4 - 846.6	0.053	17.23	0.087	19.38	4M18F9W
CDMA	N/A	Spread Spectrum	824.70 - 848.31	0.149	21.72	0.244	23.87	1M28F9W
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.048	16.86	0.080	19.01	13M5G7D
		16QAM	831.5 - 841.5	0.040	16.05	0.066	18.20	13M5W7D
		64QAM	831.5 - 841.5	0.032	15.04	0.052	17.19	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.048	16.80	0.078	18.95	9M02G7D
		16QAM	829.0 - 844.0	0.040	15.98	0.065	18.13	9M05W7D
		64QAM	829.0 - 844.0	0.031	14.89	0.051	17.04	9M04W7D
	5 MHz	QPSK	826.5 - 846.5	0.048	16.83	0.079	18.98	4M56G7D
		16QAM	826.5 - 846.5	0.040	16.04	0.066	18.19	4M53W7D
		64QAM	826.5 - 846.5	0.031	14.95	0.051	17.10	4M52W7D
	3 MHz	QPSK	825.5 - 847.5	0.047	16.72	0.077	18.87	2M70G7D
		16QAM	825.5 - 847.5	0.039	15.95	0.065	18.10	2M70W7D
		64QAM	825.5 - 847.5	0.031	14.85	0.050	17.00	2M71W7D
	1.4 MHz	QPSK	824.7 - 848.3	0.047	16.76	0.078	18.91	1M10G7D
		16QAM	824.7 - 848.3	0.040	16.04	0.066	18.19	1M10W7D
		64QAM	824.7 - 848.3	0.030	14.76	0.049	16.91	1M10W7D

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 3 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 4 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID:ZNFL355DL**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

Test Device Serial No.: 09870, 02440, 09979

2.2 Device Capabilities

This device contains the following capabilities:

CDMA, GSM/GPRS/EDGE, WCDMA/HSPA, LTE, WLAN, Bluetooth (1x, EDR, LE)

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	 LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 5 of 70	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

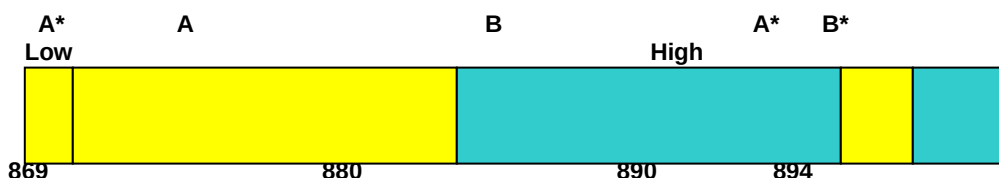


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

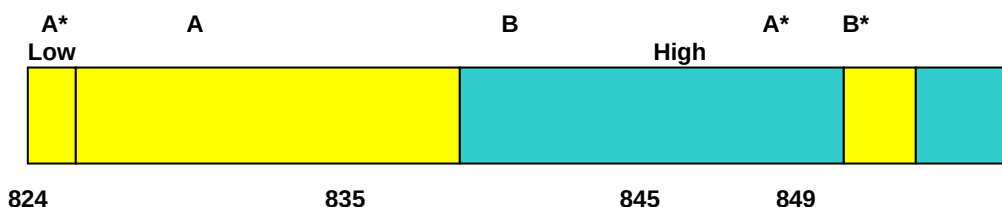

BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 6 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFL355DL	 PART 22 MEASUREMENT REPORT 	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 8 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Espec	ESX-2CA	Environmental Chamber	6/13/2019	Annual	6/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Annual	10/3/2020	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	5/19/2018	Biennial	5/19/2020	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFL355DL		PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 9 of 70	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 10 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 11 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFL355DL
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/WCDMA/CDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-139(2.3)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 12 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

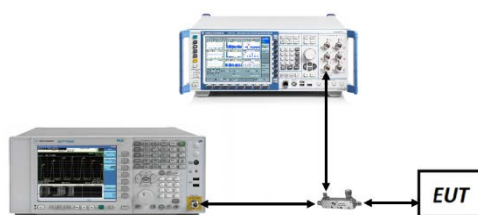


Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 13 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

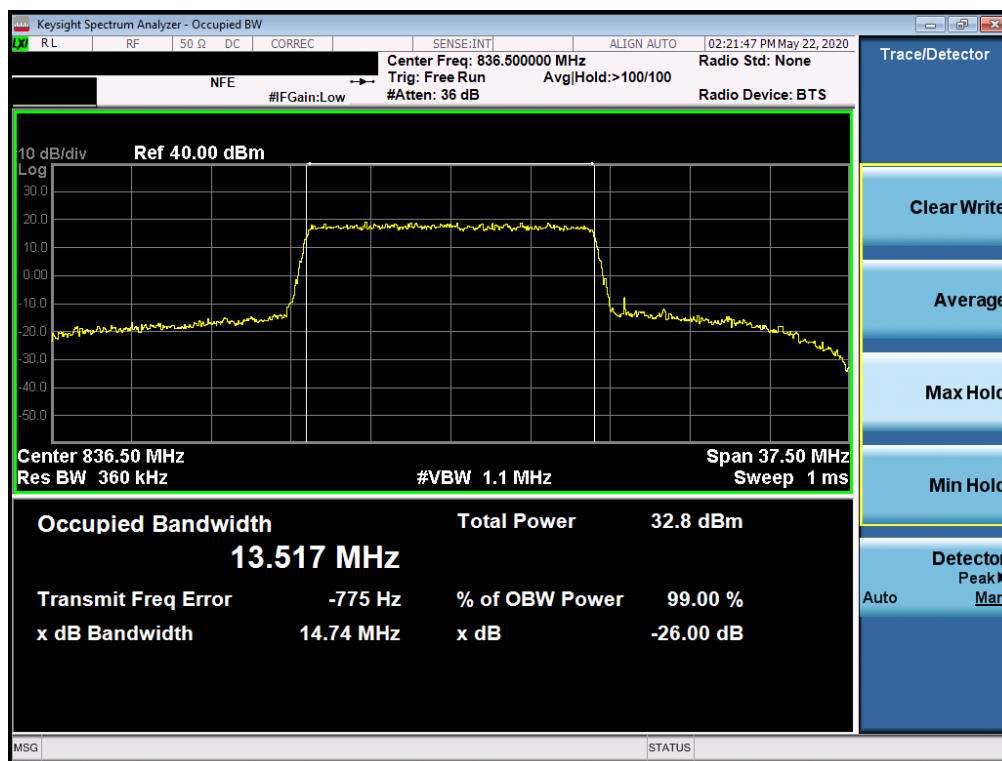

Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration)



Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 14 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 64-QAM - Full RB Configuration)




Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 15 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

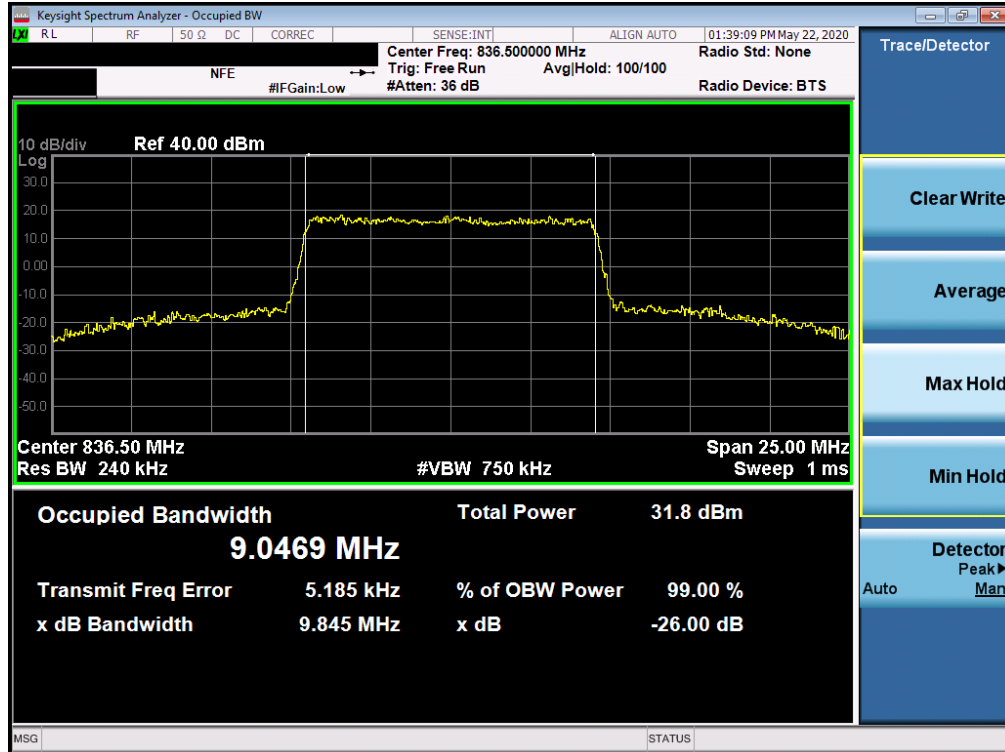

Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB Configuration)

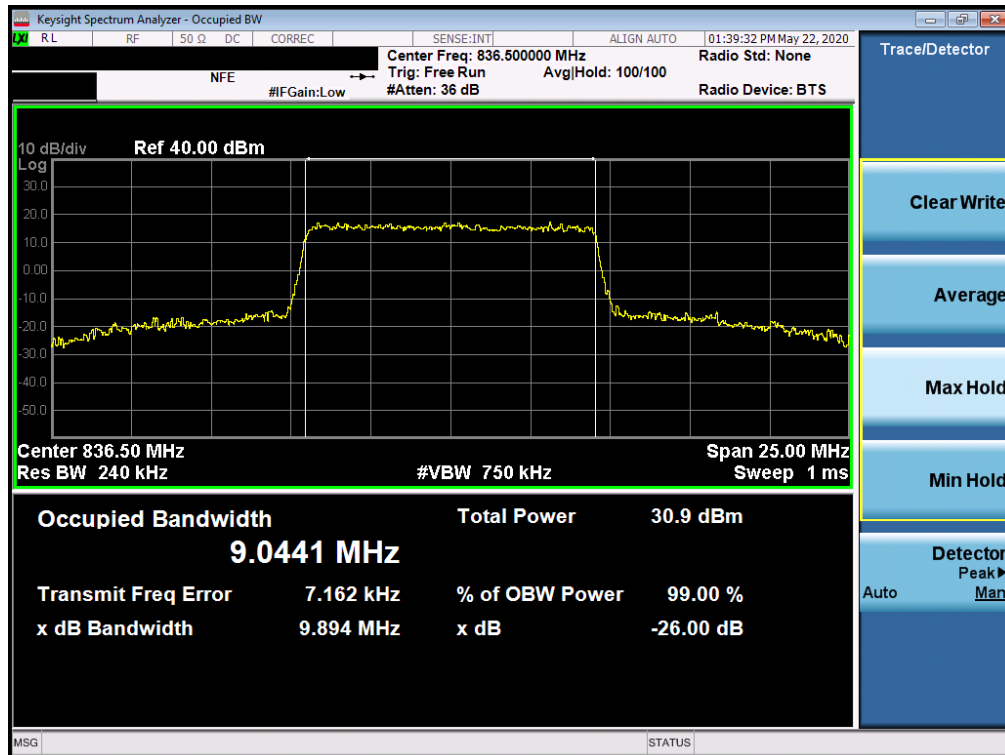

Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 16 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)



Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 17 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 64-QAM - Full RB Configuration)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 18 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

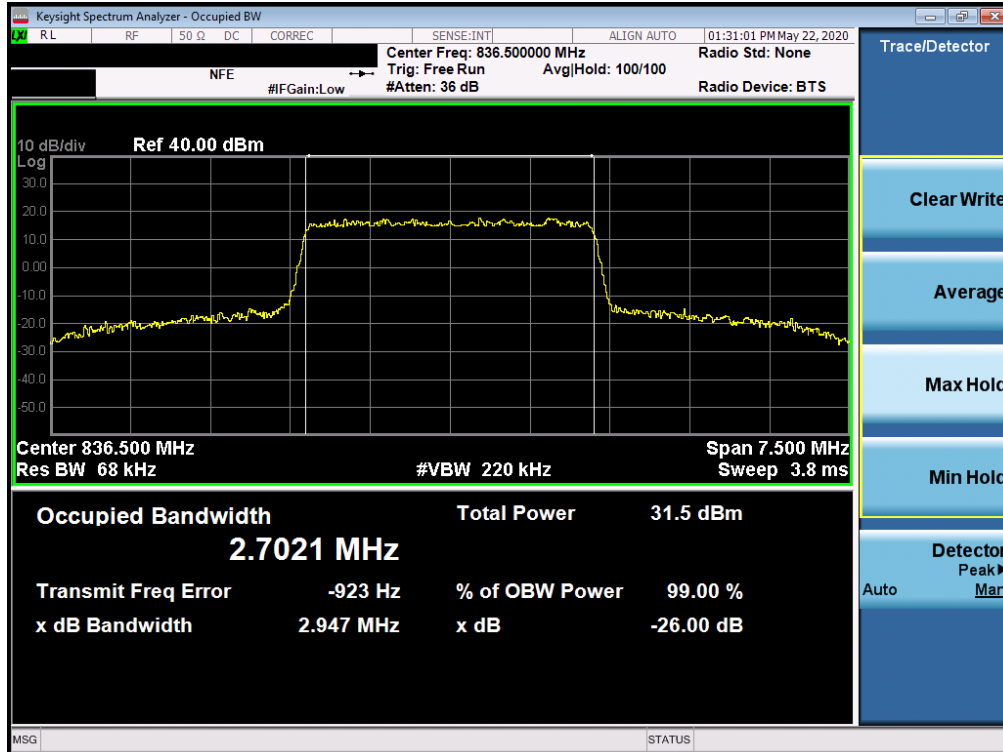


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB Configuration)

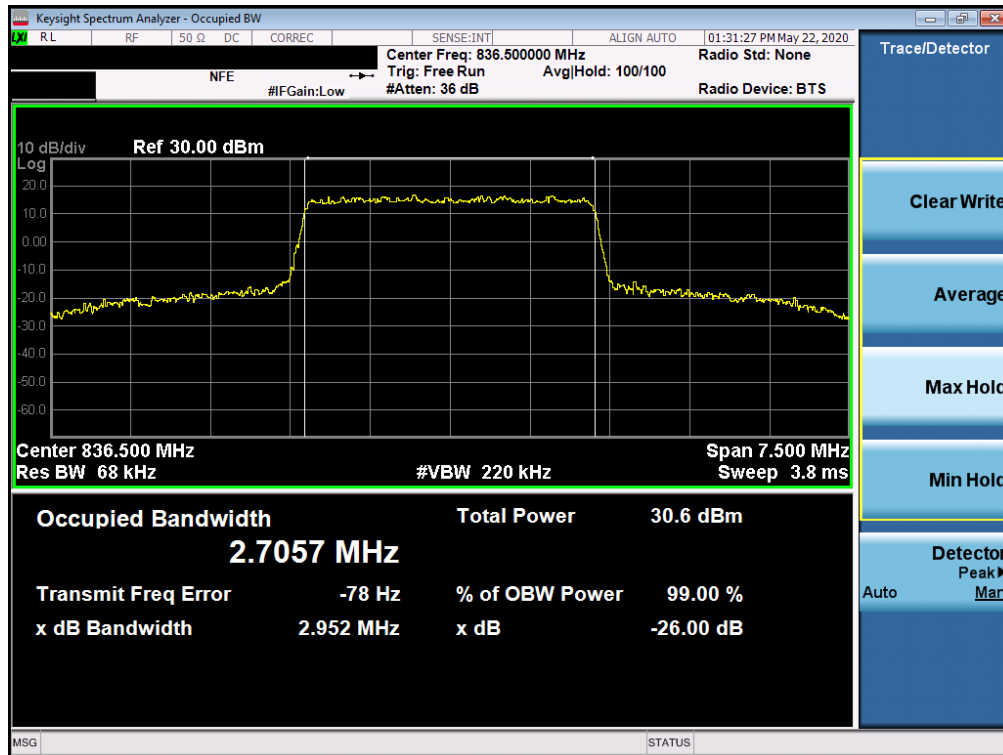


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 19 of 70

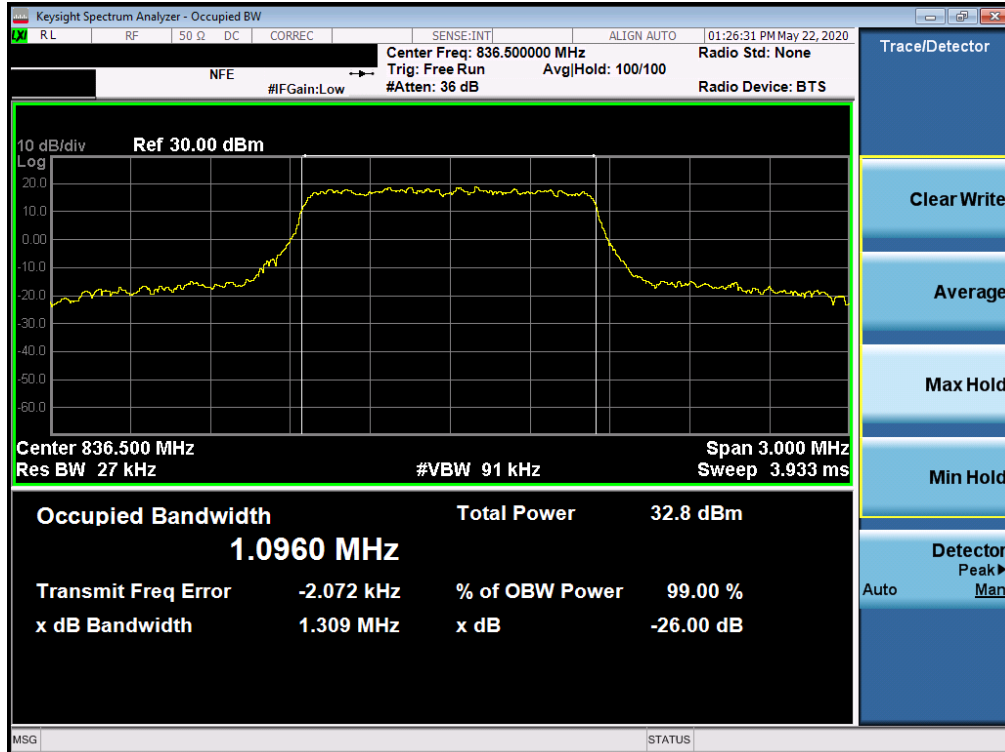

Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

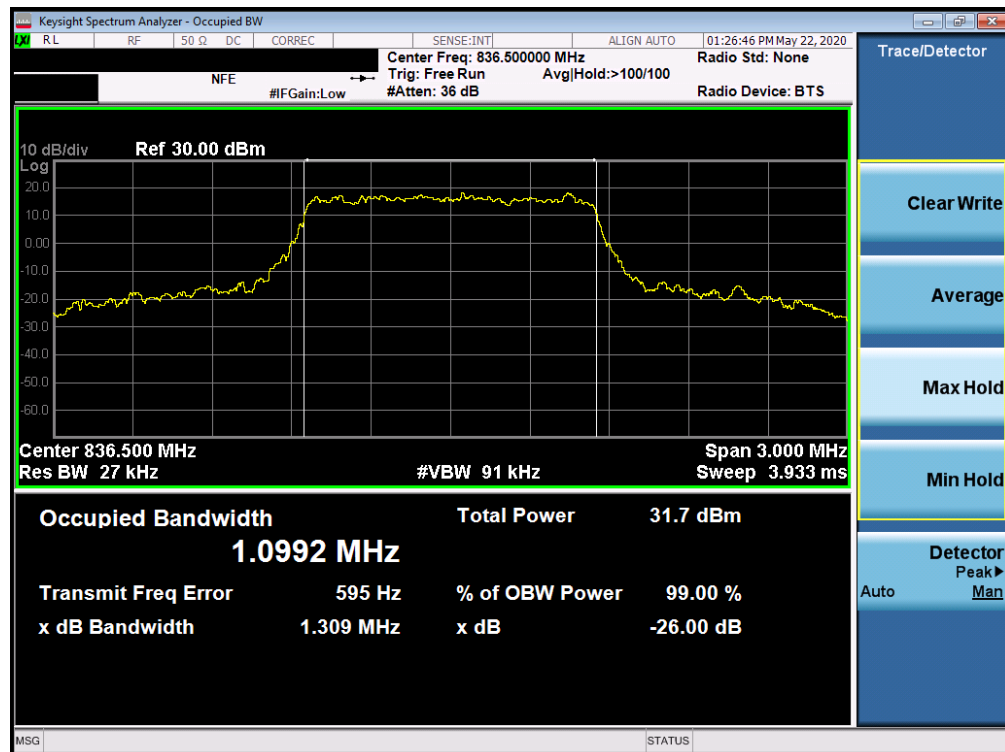

Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 20 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Plot 7-15. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 21 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GPRS Cell

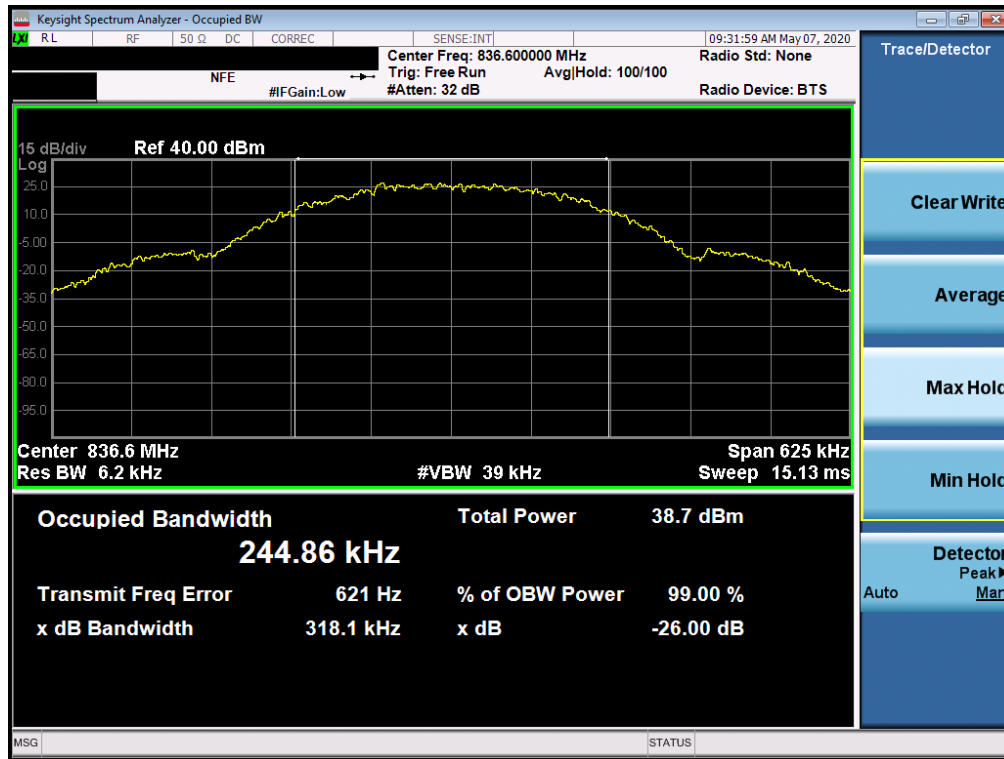

Plot 7-16. Occupied Bandwidth Plot (GPRS, Ch. 190)

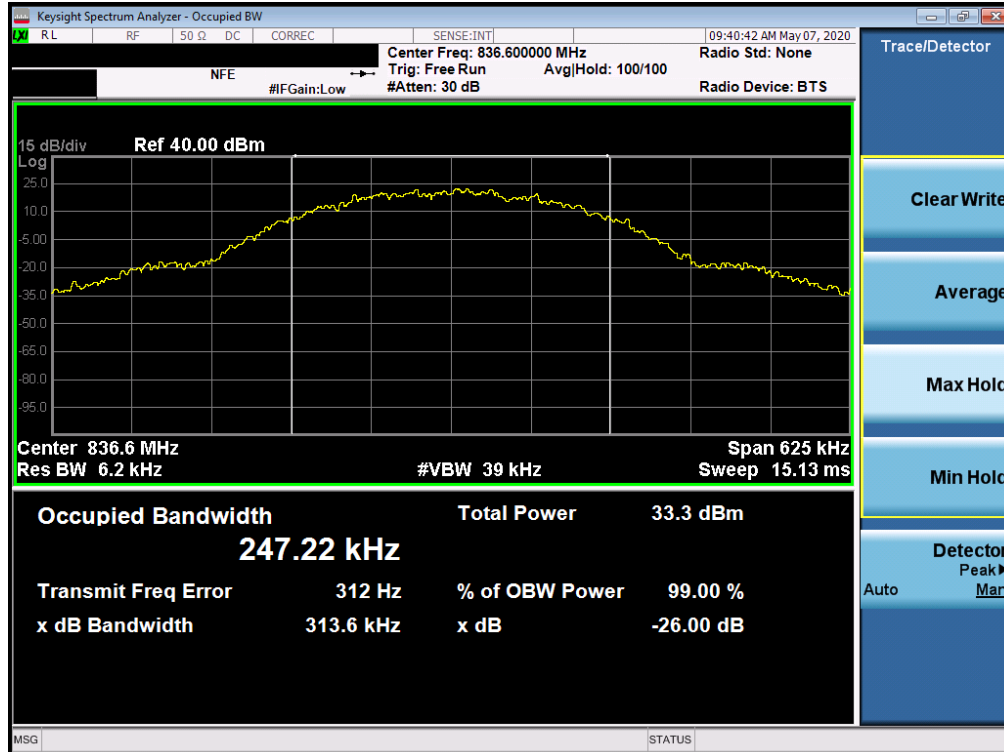


Plot 7-17. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 22 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

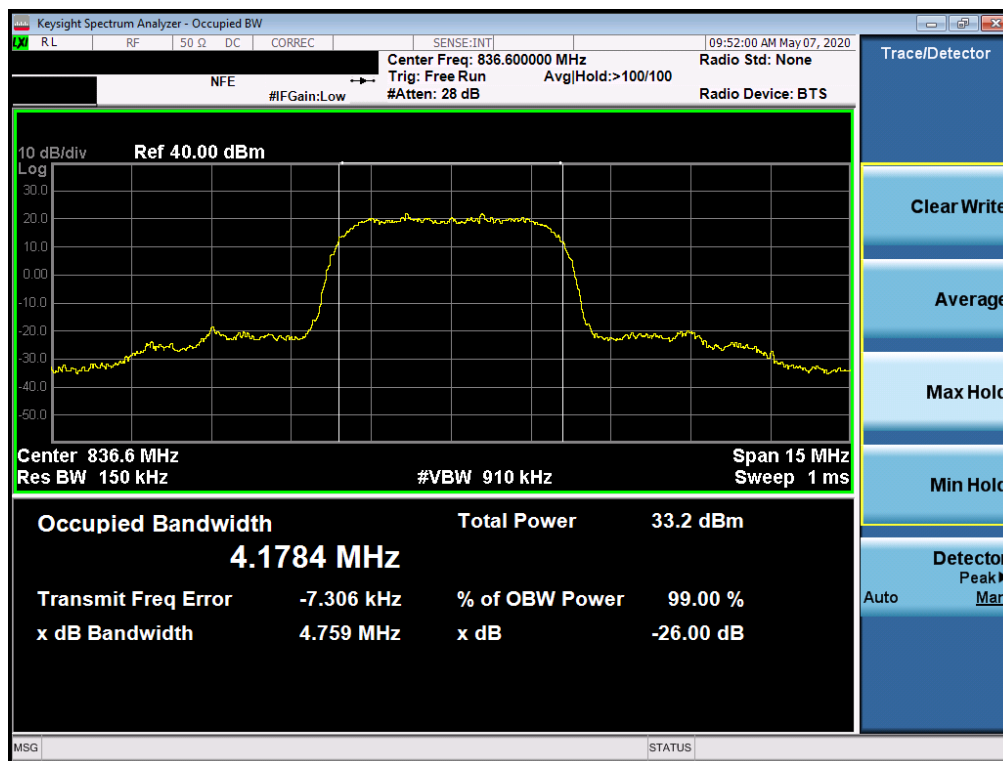

Plot 7-18. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 23 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

CDMA Cell



Plot 7-19. Occupied Bandwidth Plot (CDMA, Ch. 384)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 24 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

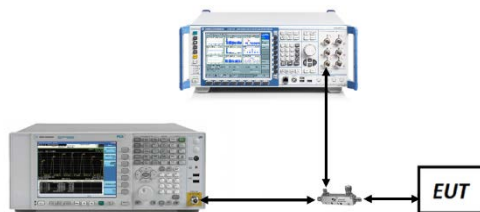


Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 25 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

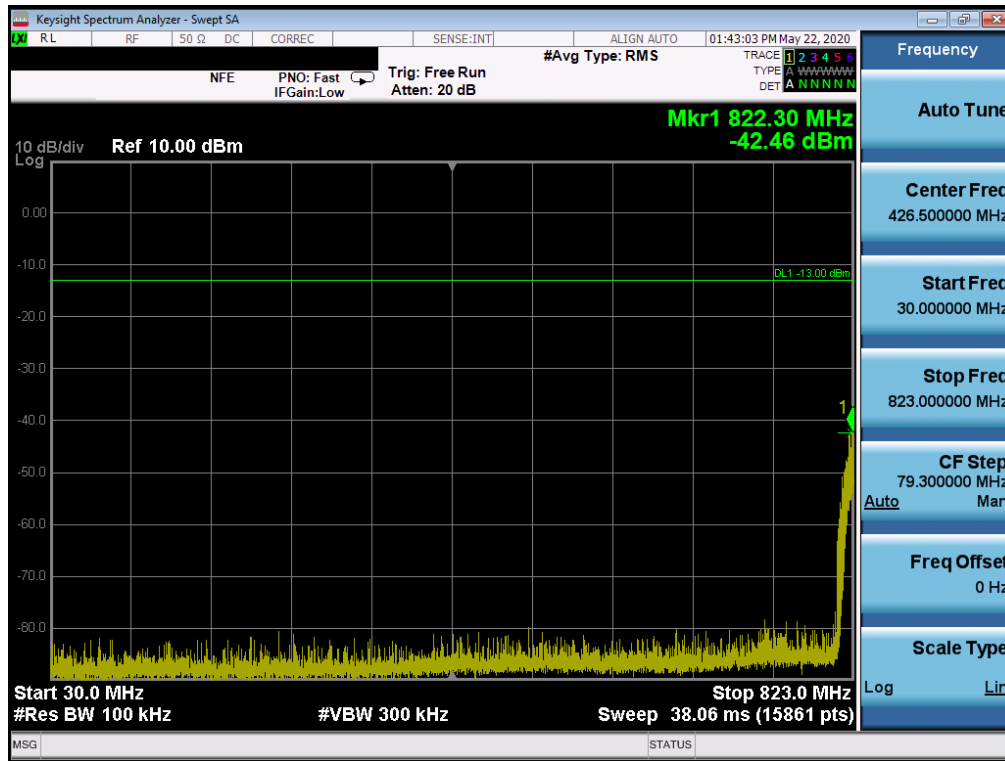

Plot 7-20. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

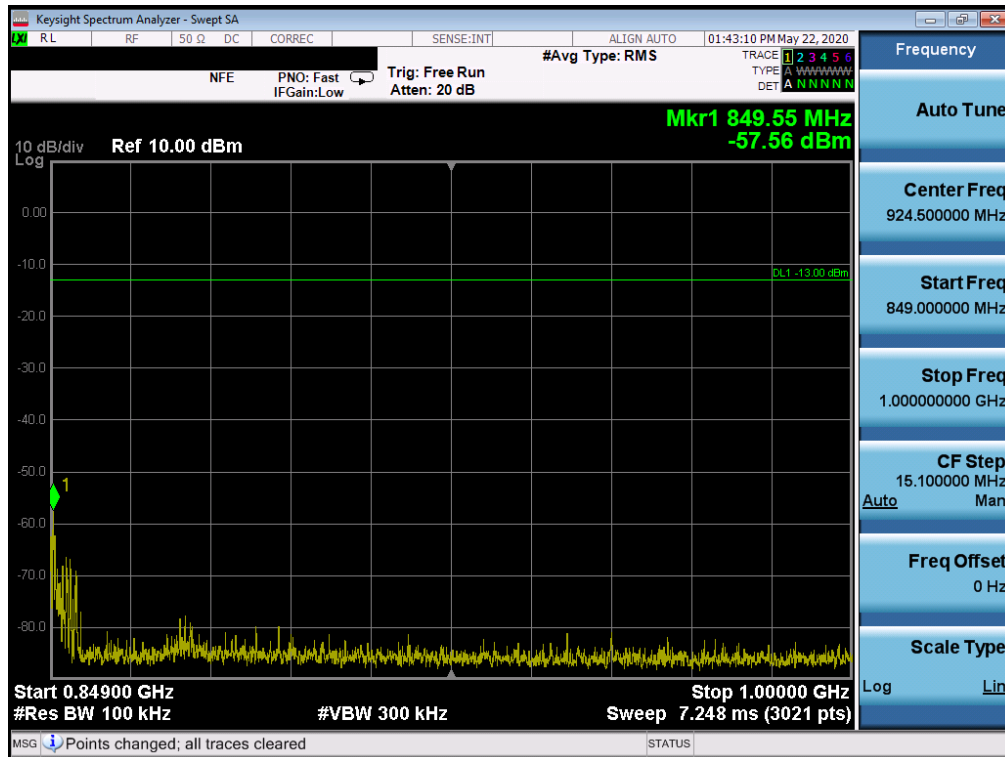


Plot 7-21. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 26 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

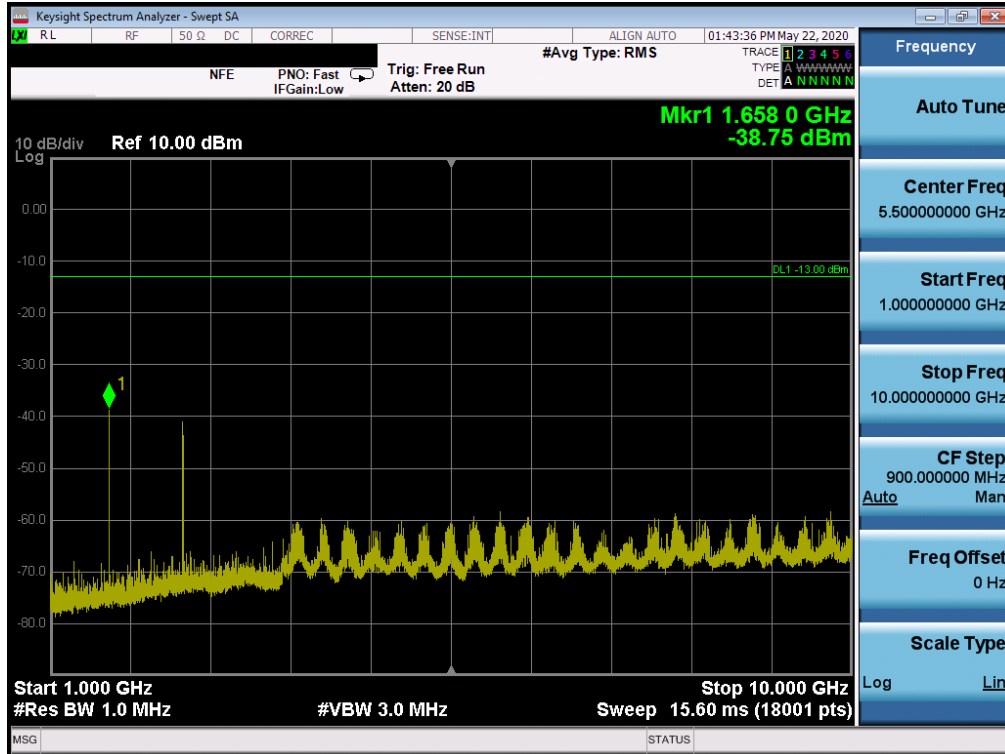

Plot 7-22. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

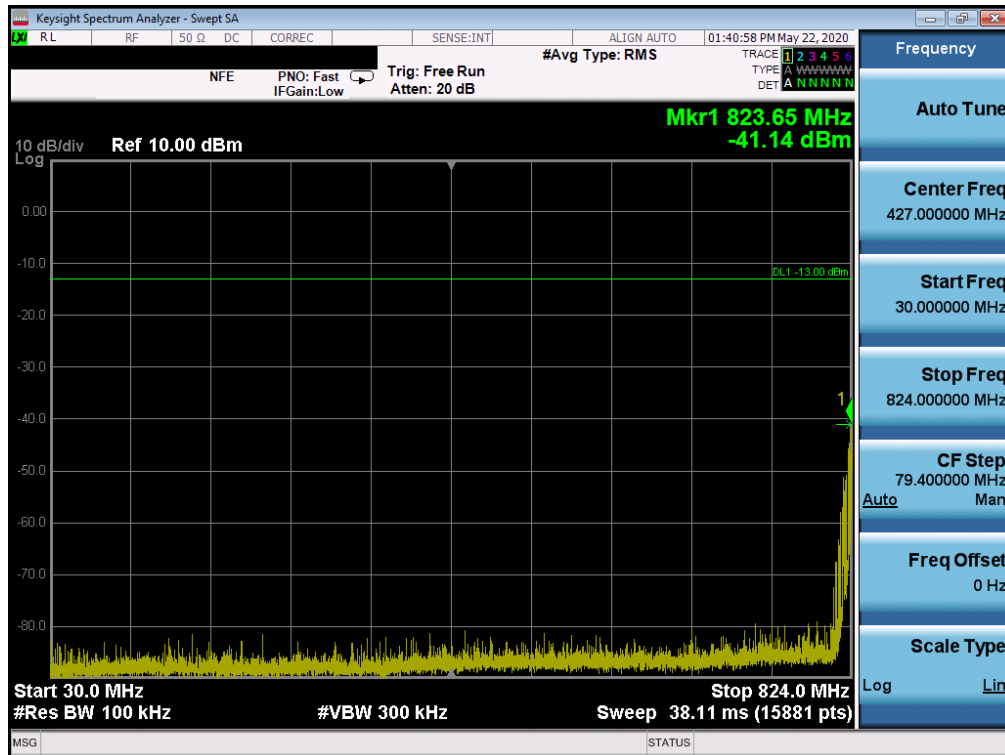


Plot 7-23. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 27 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

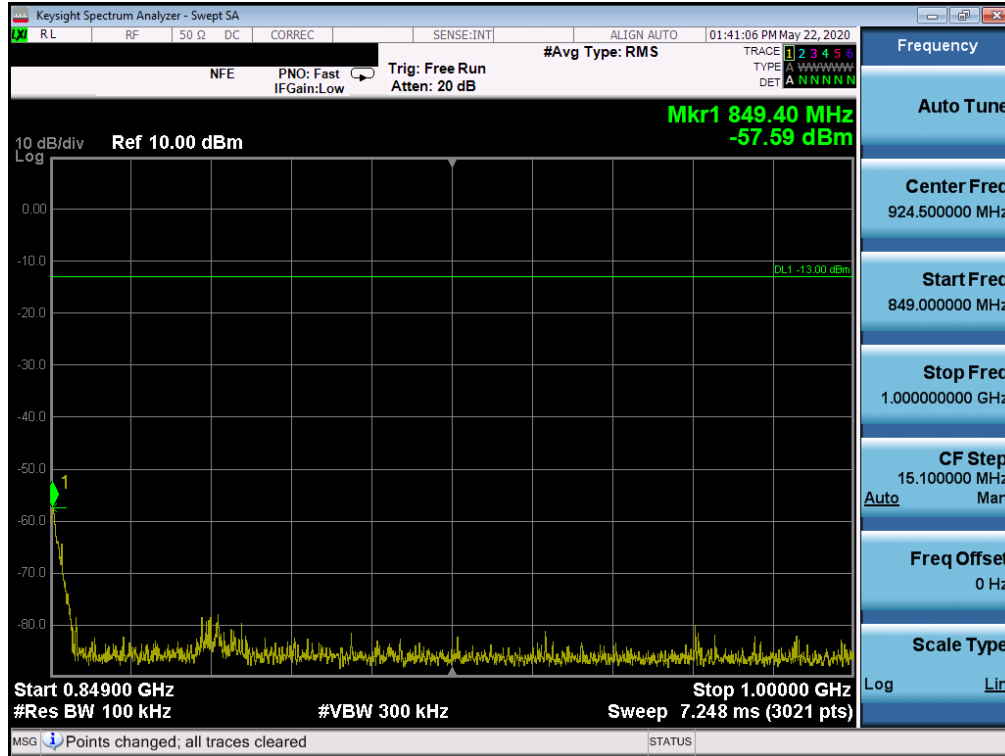

Plot 7-24. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

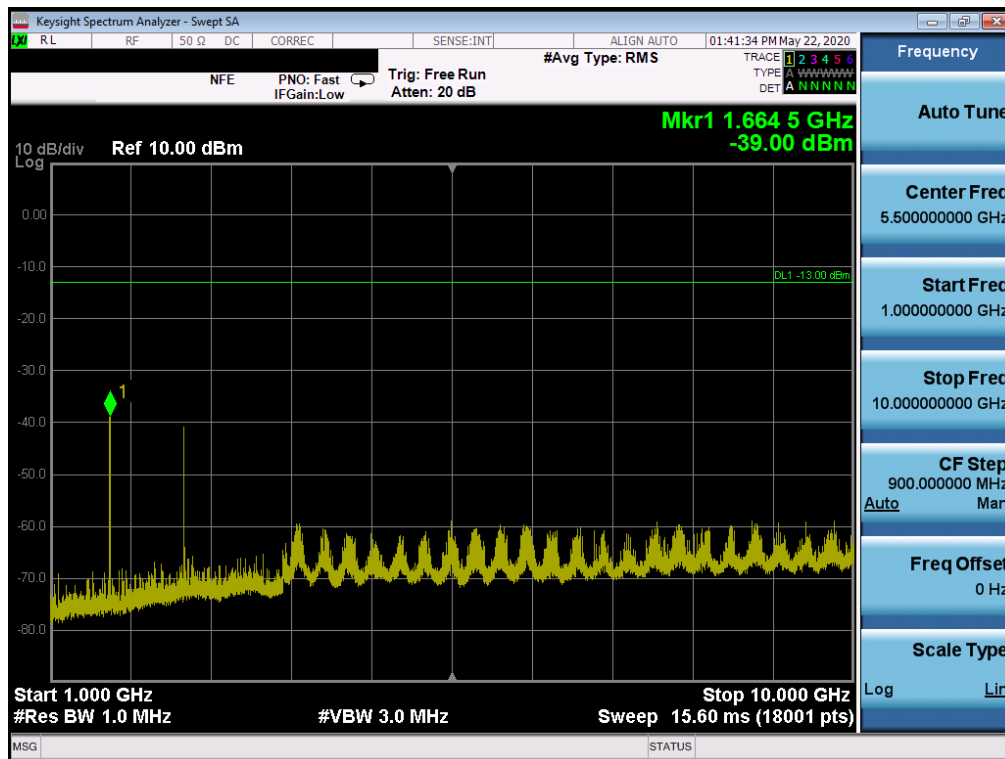


Plot 7-25. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 28 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

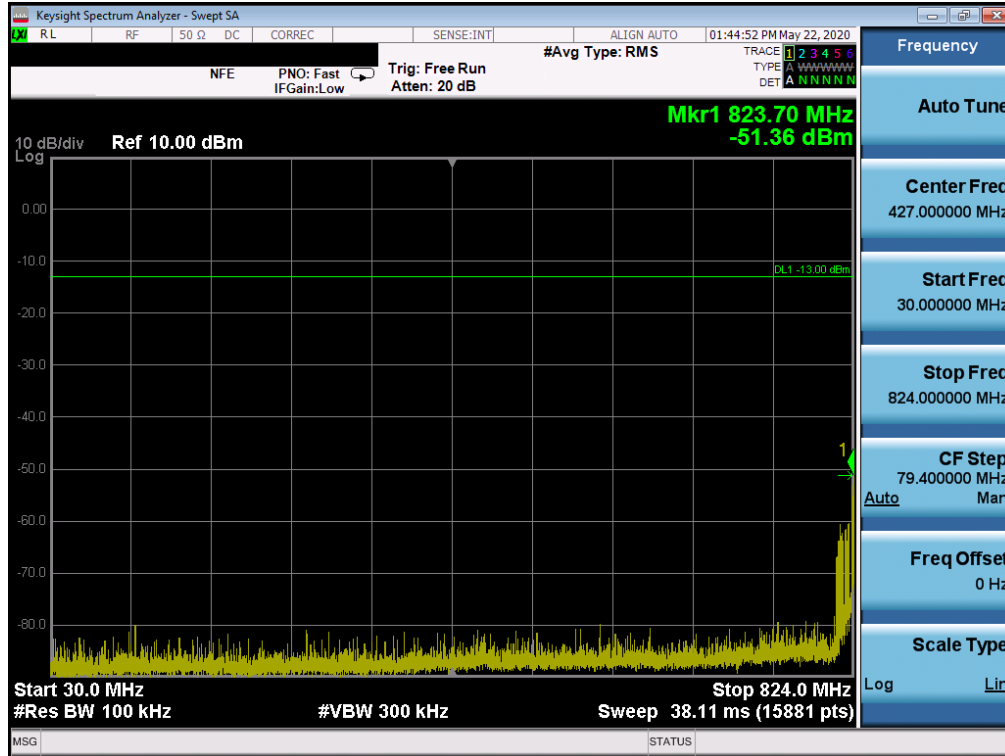

Plot 7-26. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

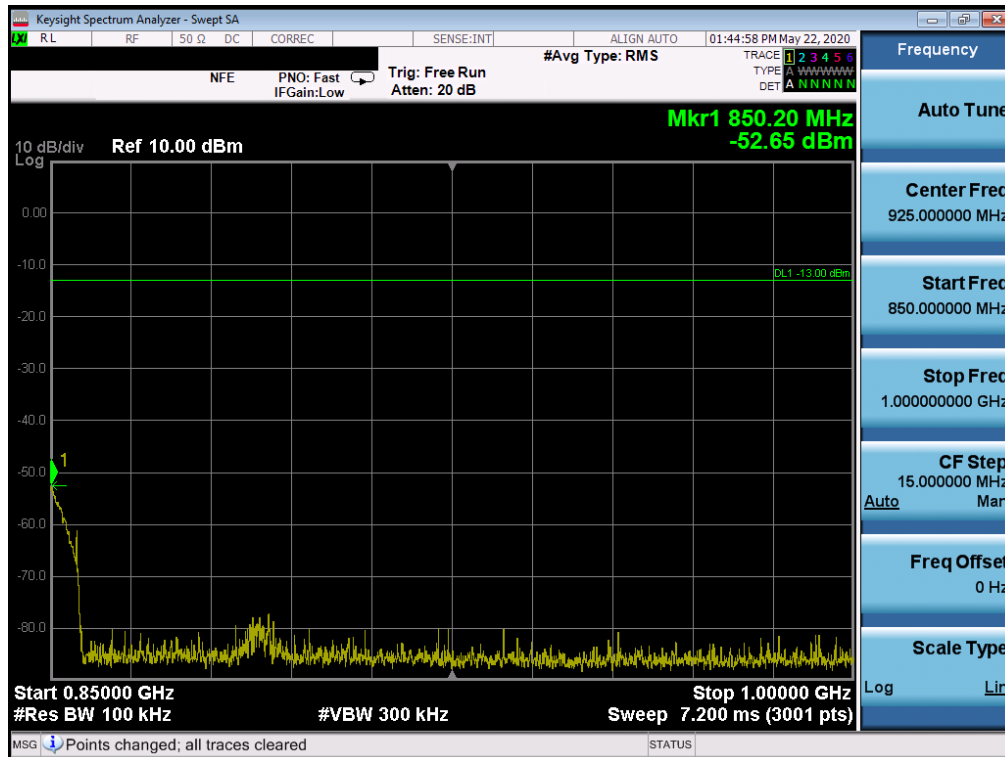


Plot 7-27. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 29 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

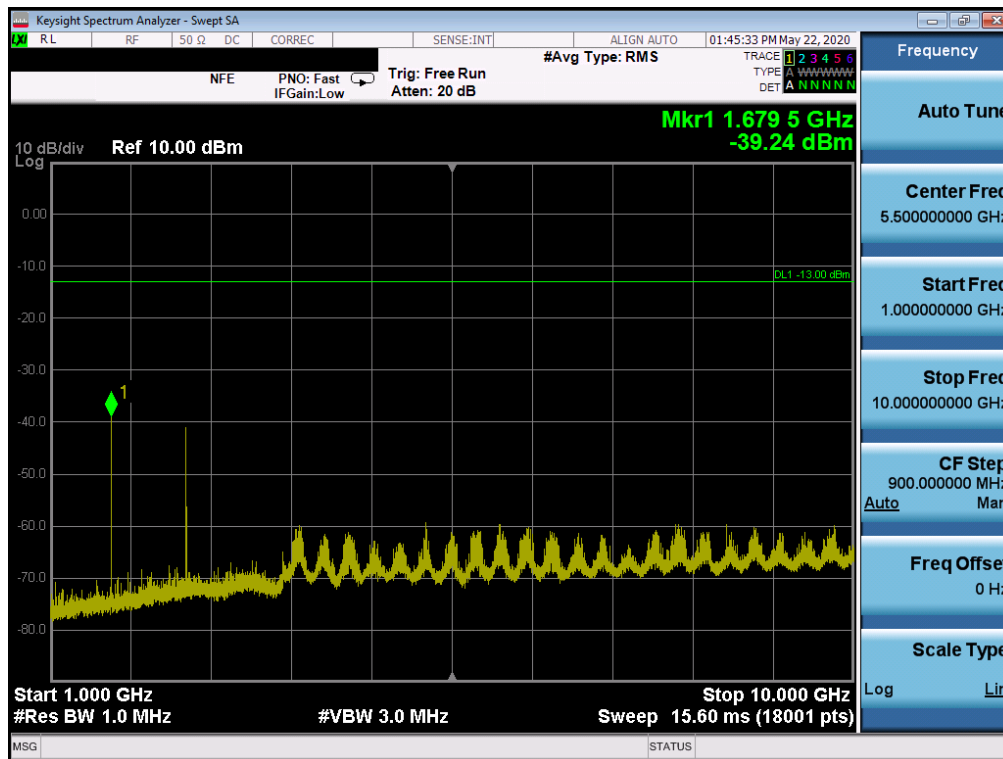


Plot 7-28. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 30 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GSM/GPRS Cell

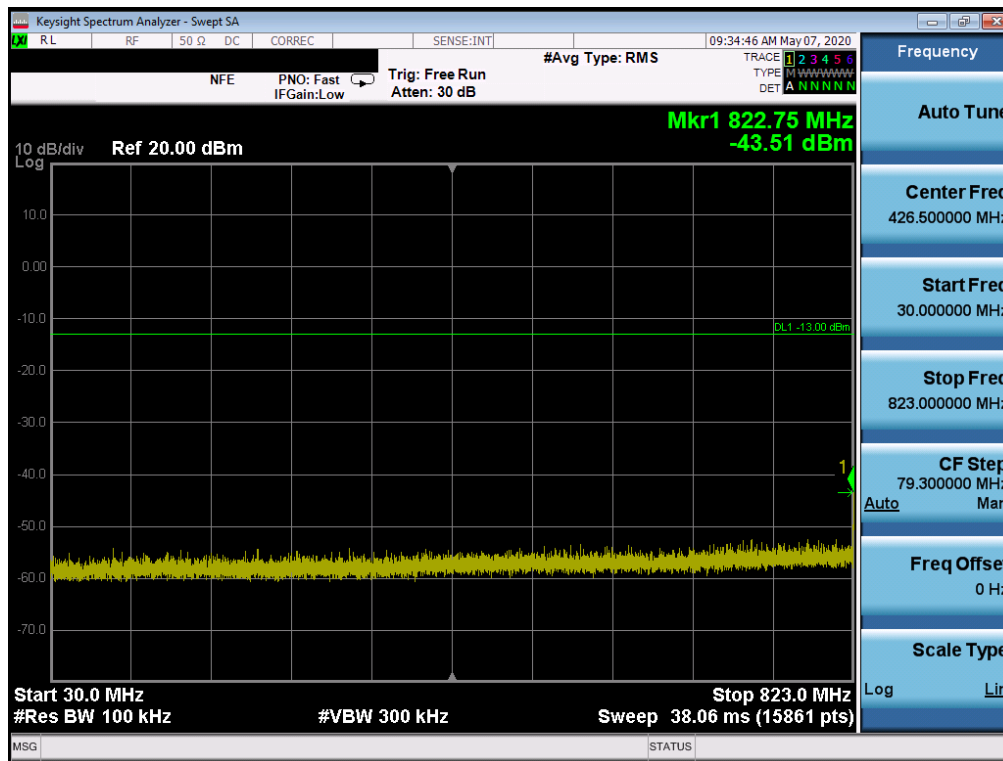

Plot 7-31. Conducted Spurious Plot (GPRS Ch. 128)

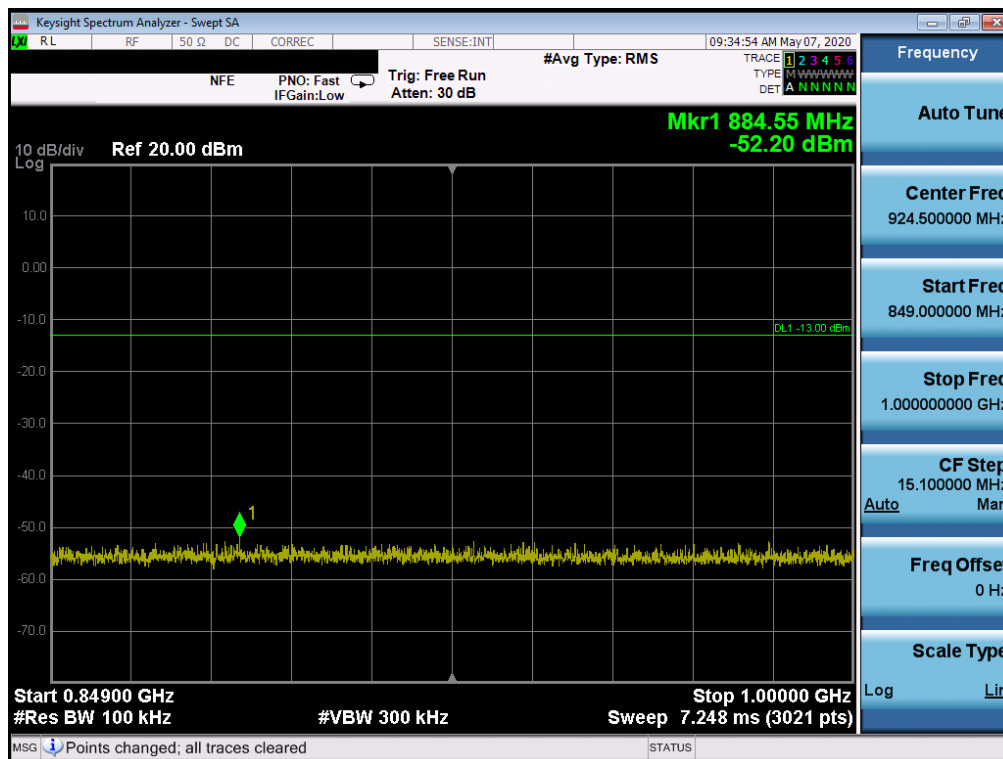


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 128)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 31 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

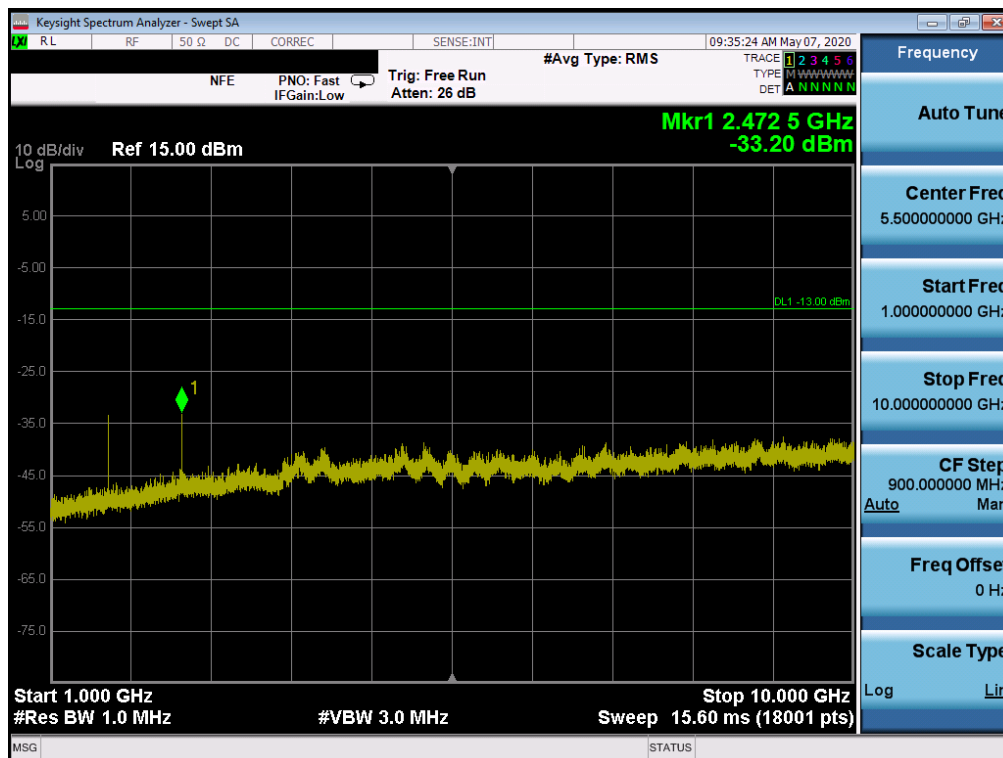

Plot 7-31. Conducted Spurious Plot (GPRS Ch. 128)

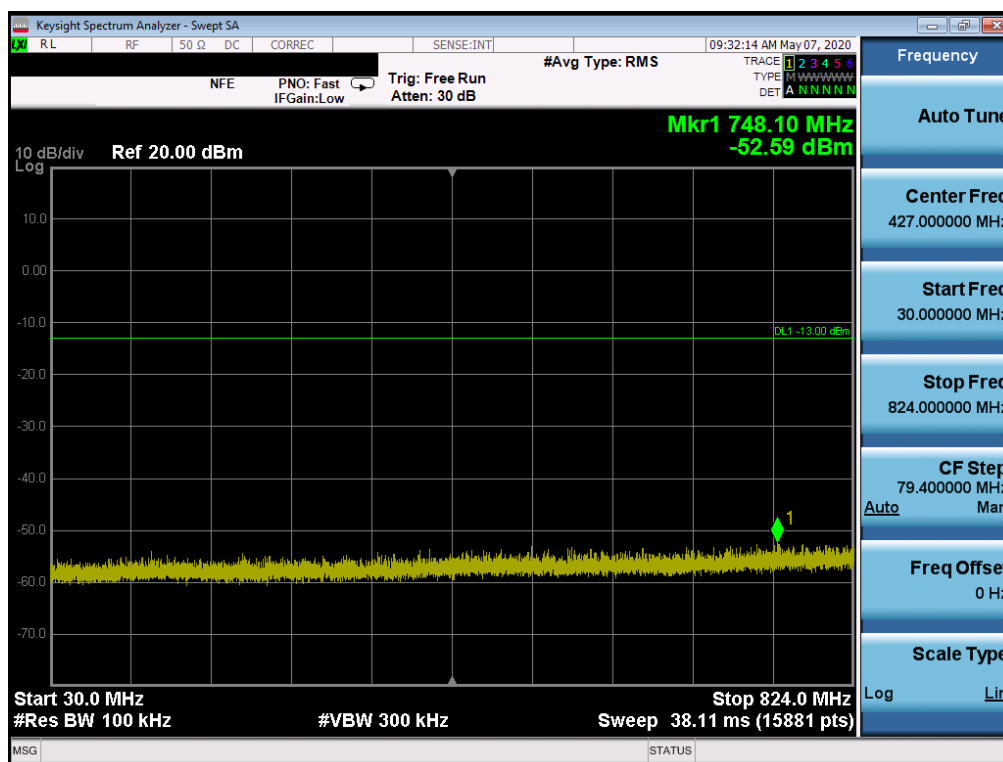


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 190)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 32 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

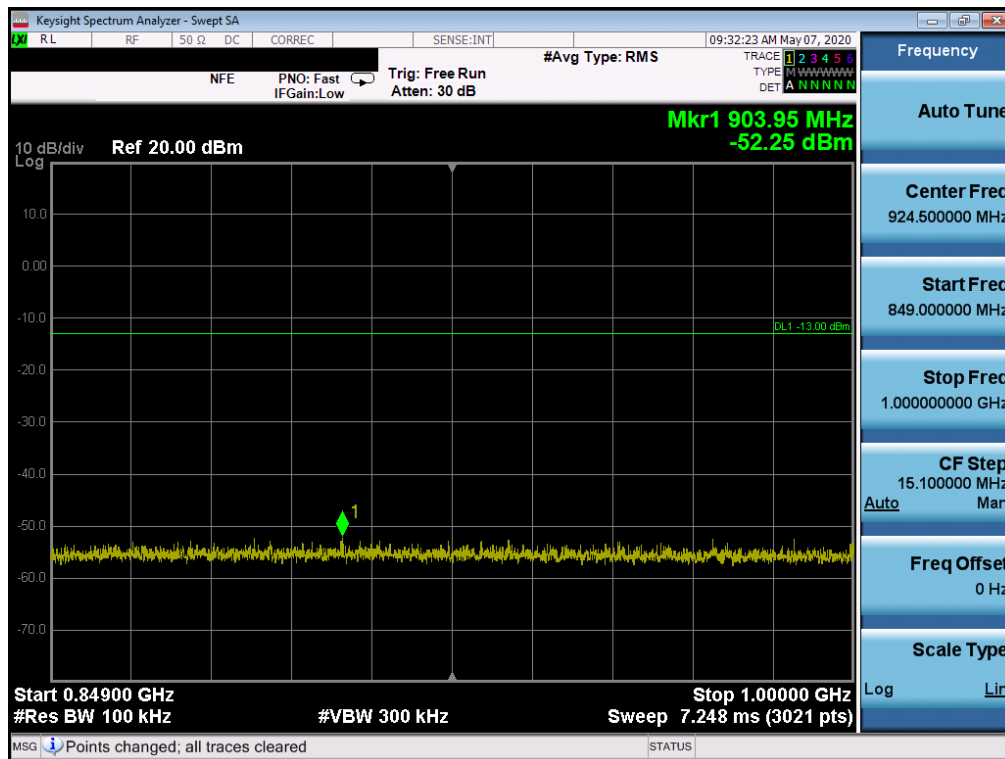


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 190)

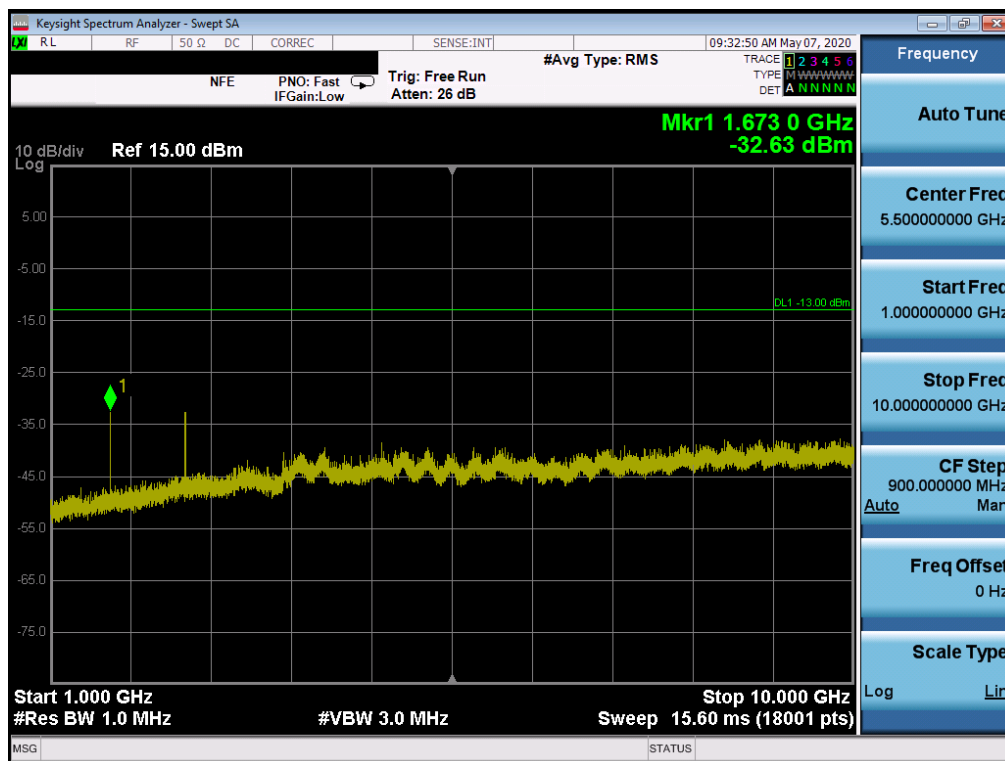


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 190)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 33 of 70

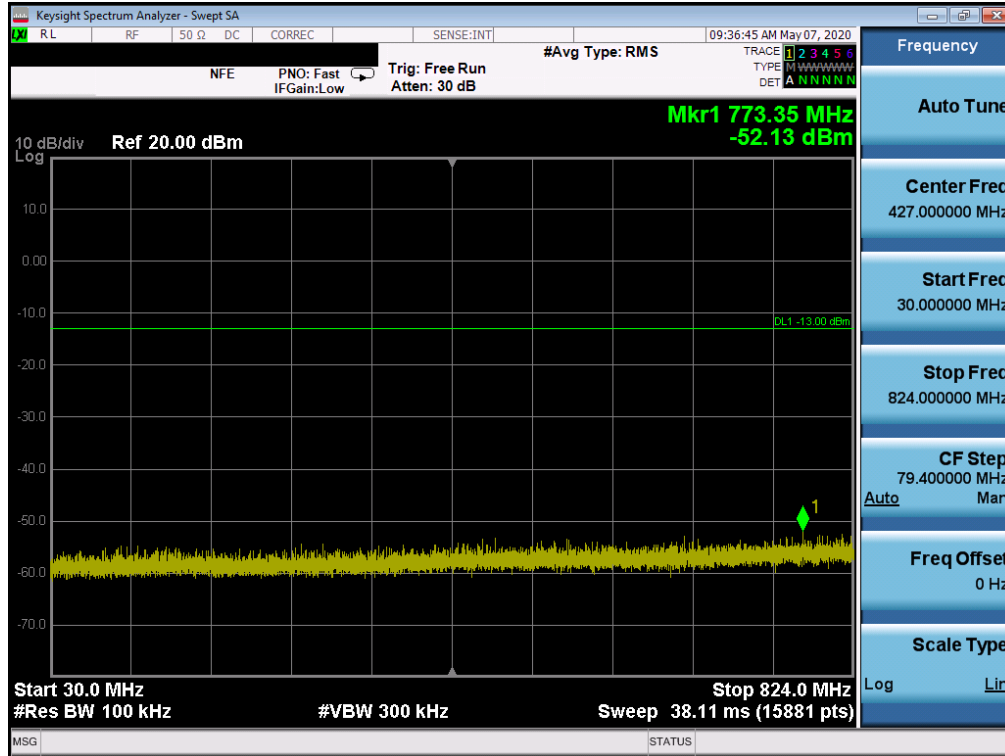

Plot 7-31. Conducted Spurious Plot (GPRS Ch. 251)

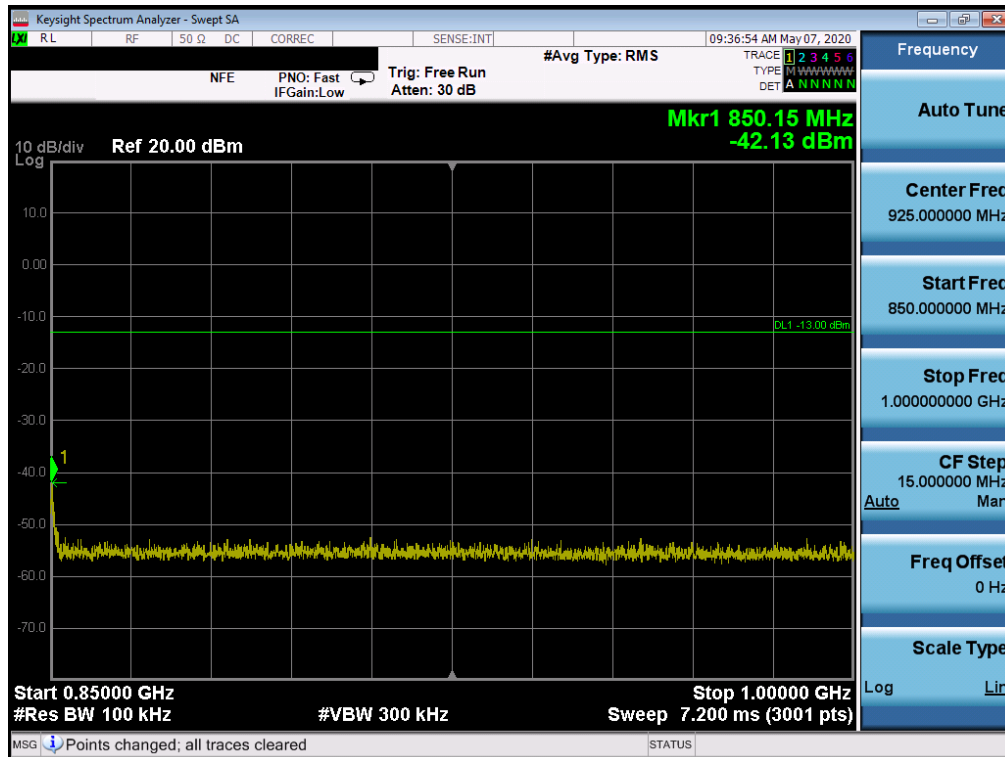


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 34 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

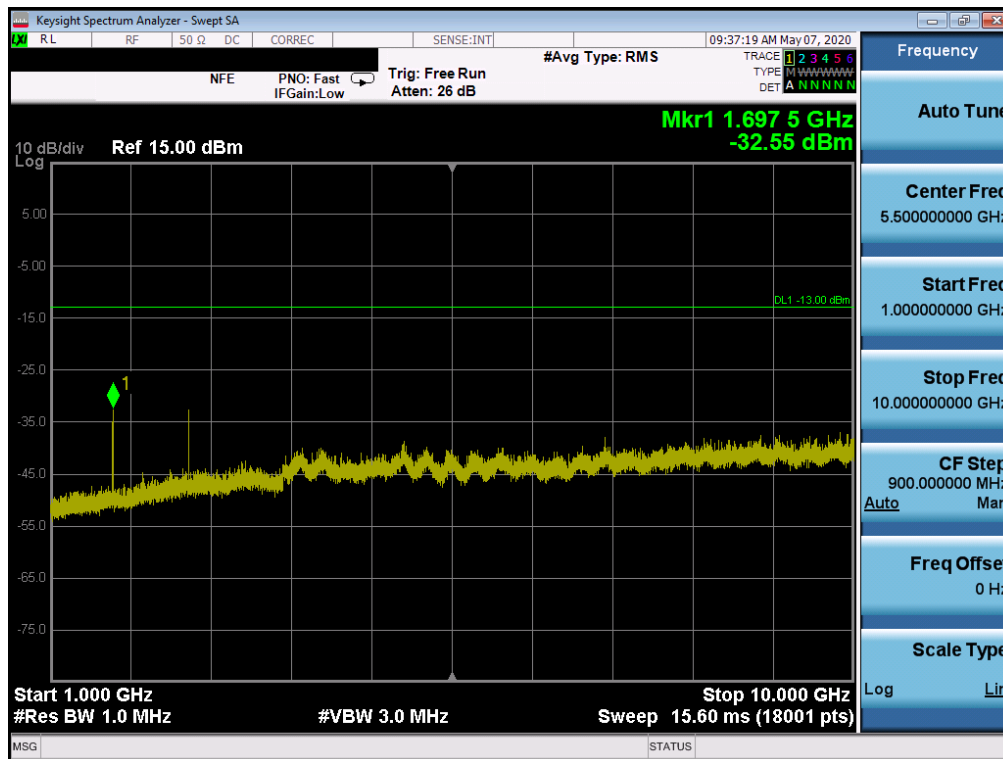


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 35 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

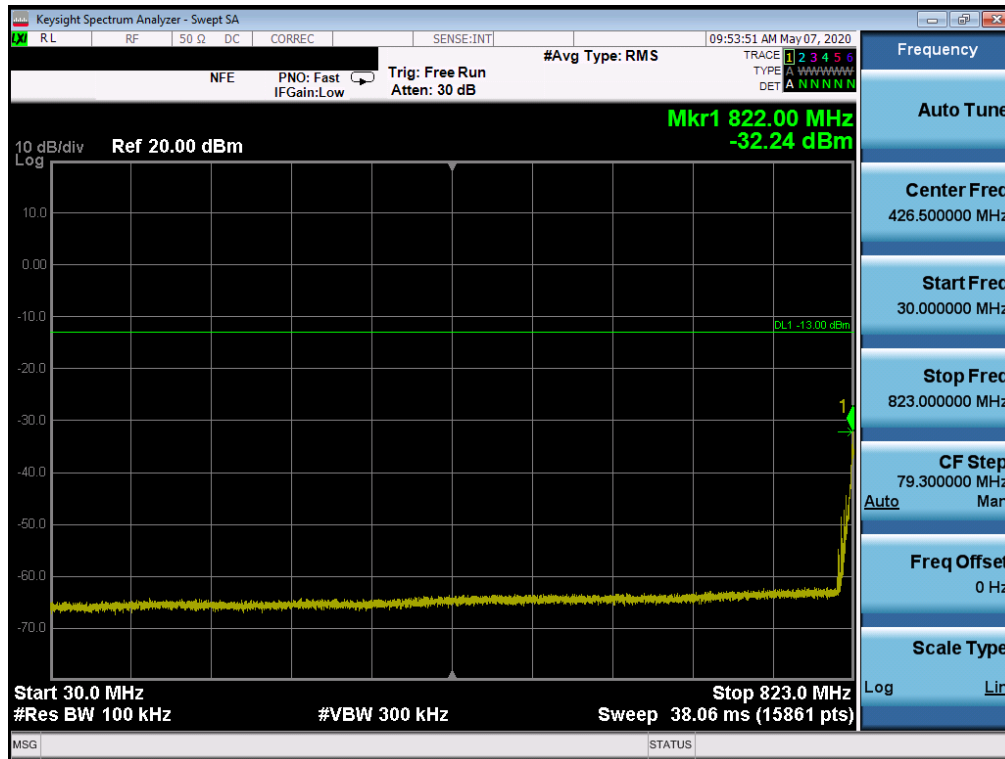

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4132)

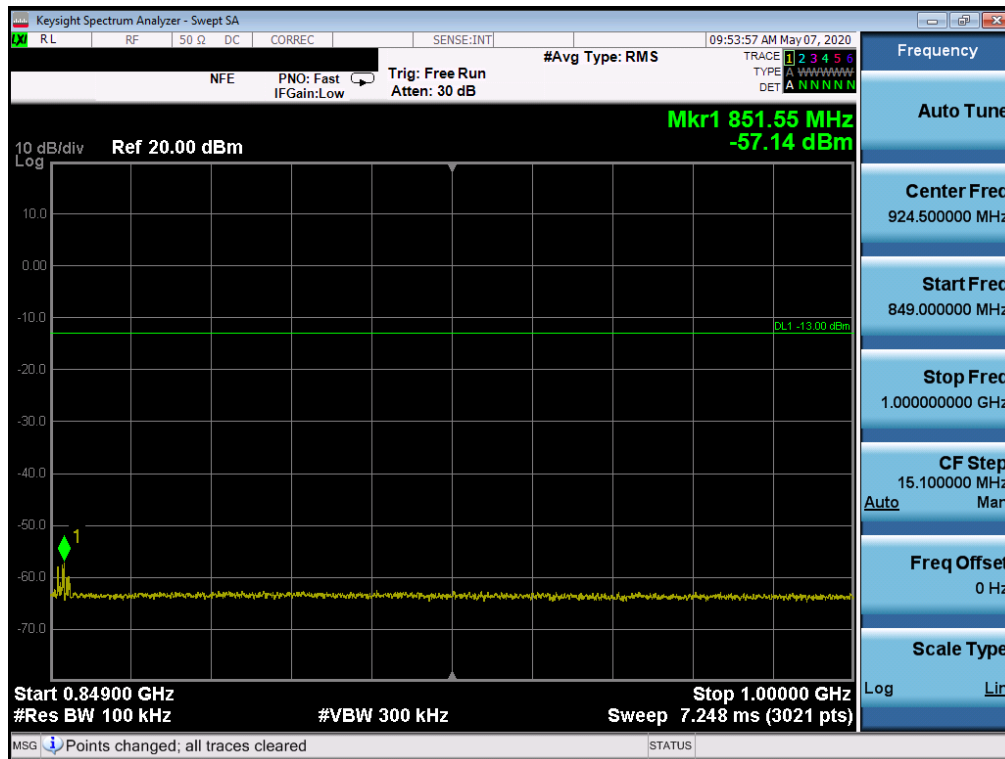


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4132)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 36 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

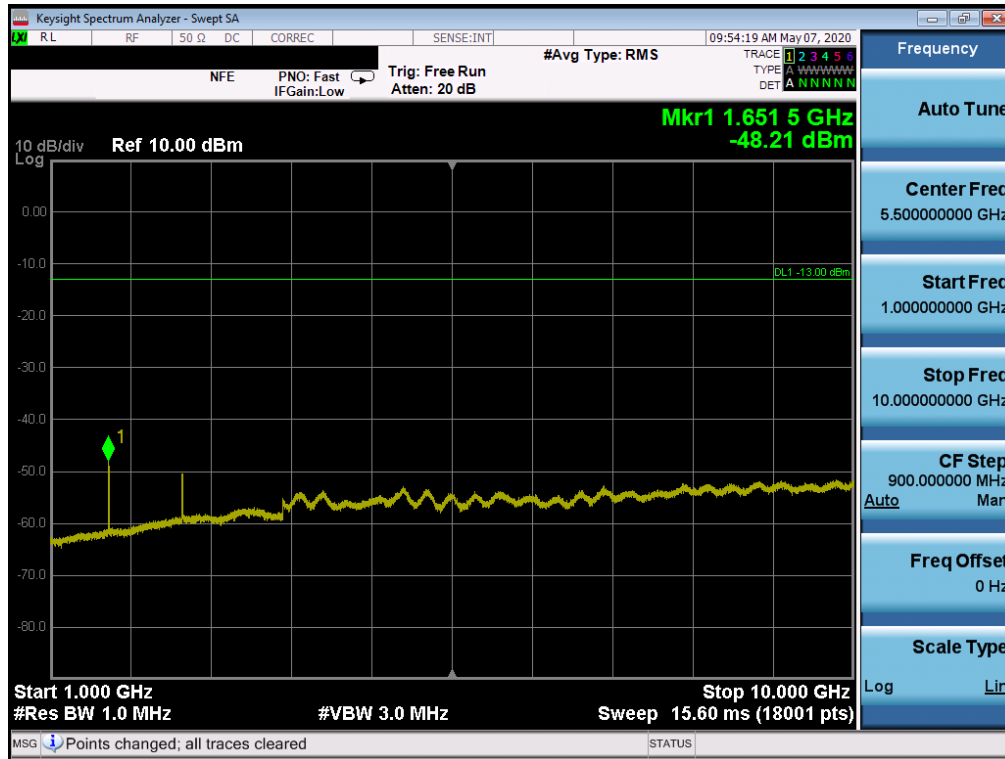

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4132)

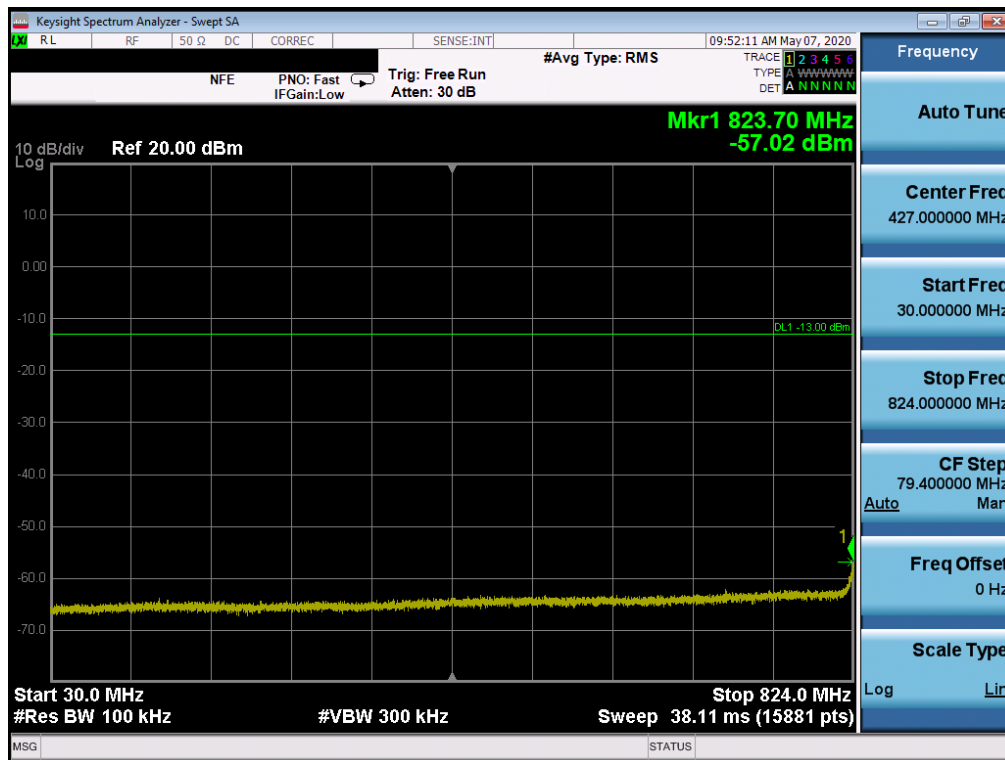


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4183)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 37 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

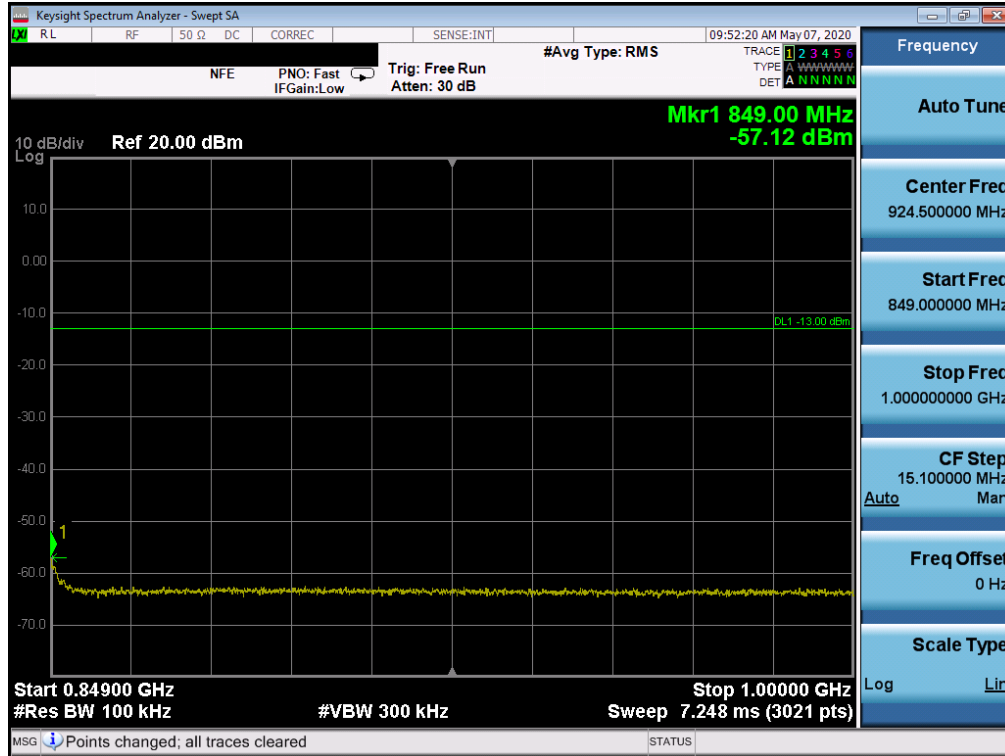

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4183)

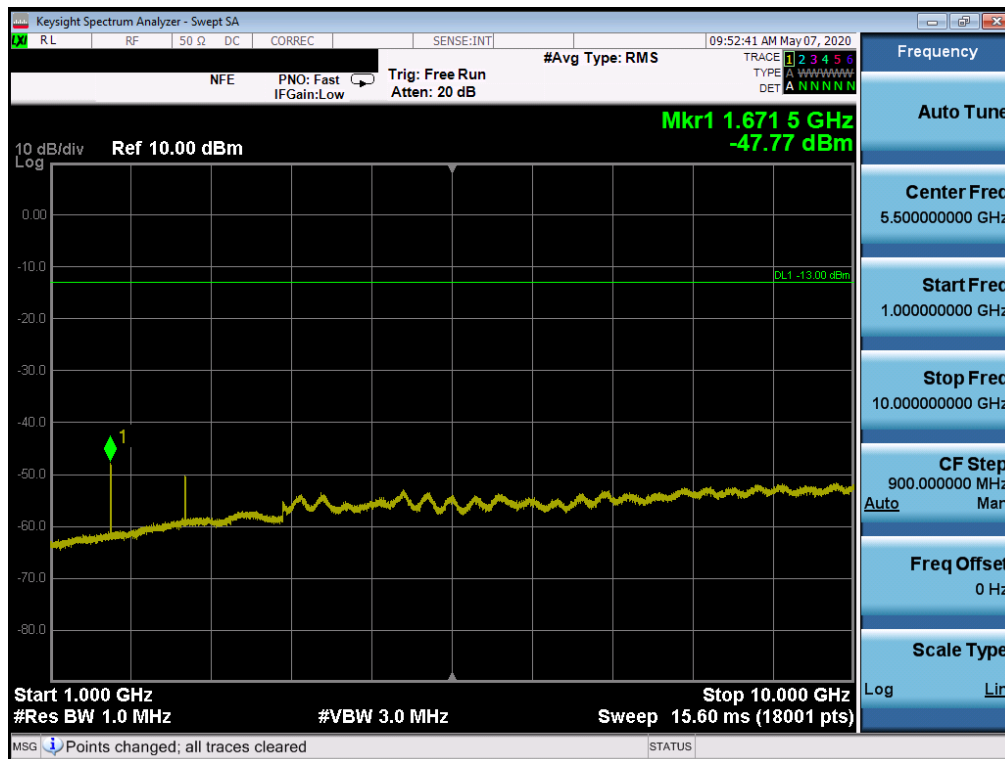


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4183)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 38 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

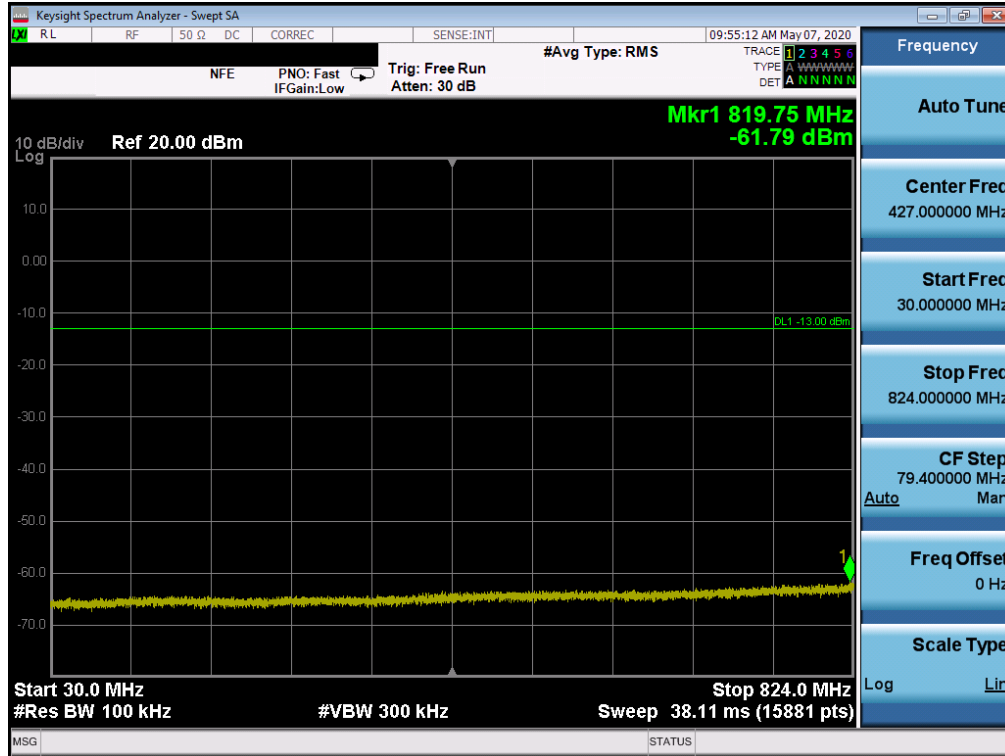

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4233)

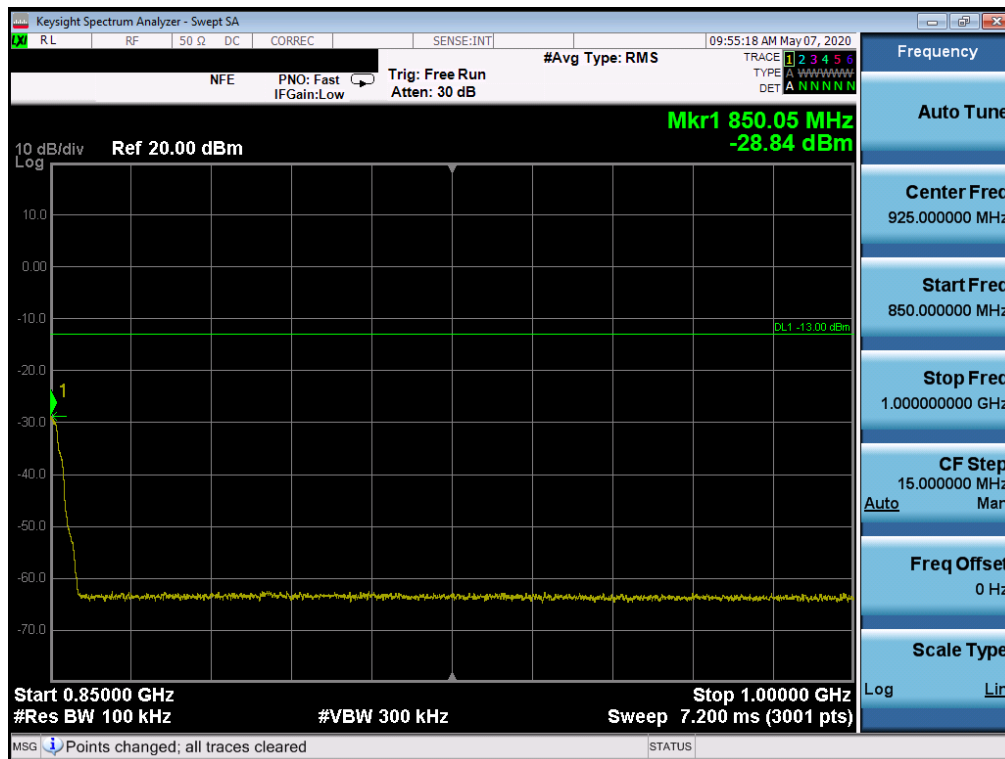


Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 39 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

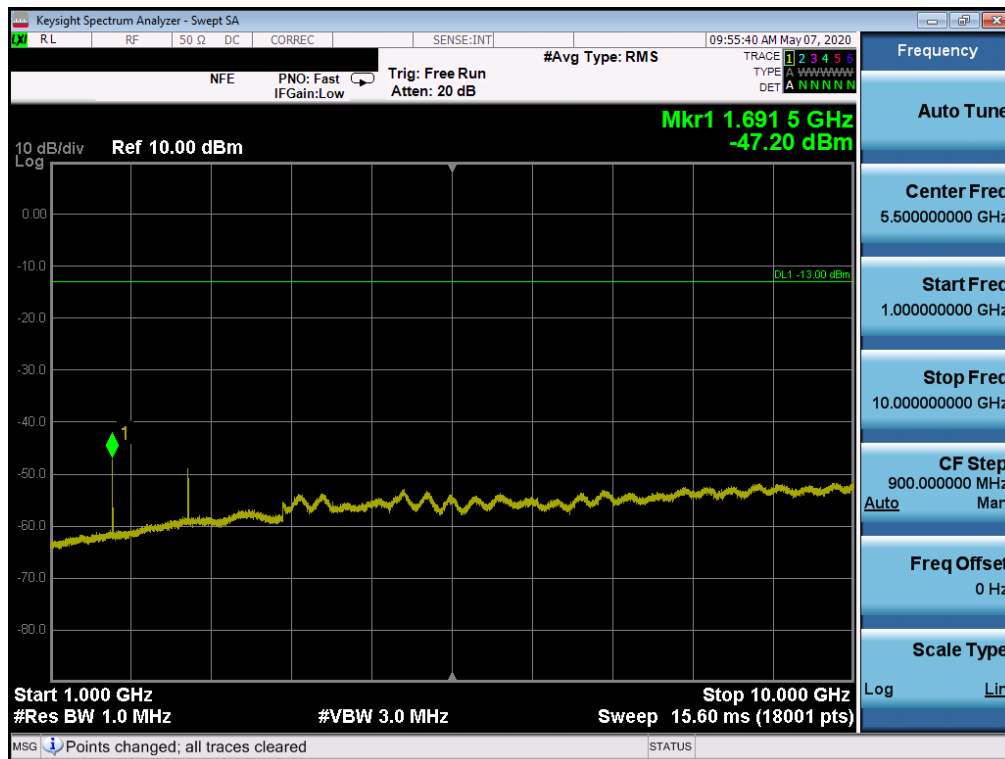



Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 40 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


CDMA Cell

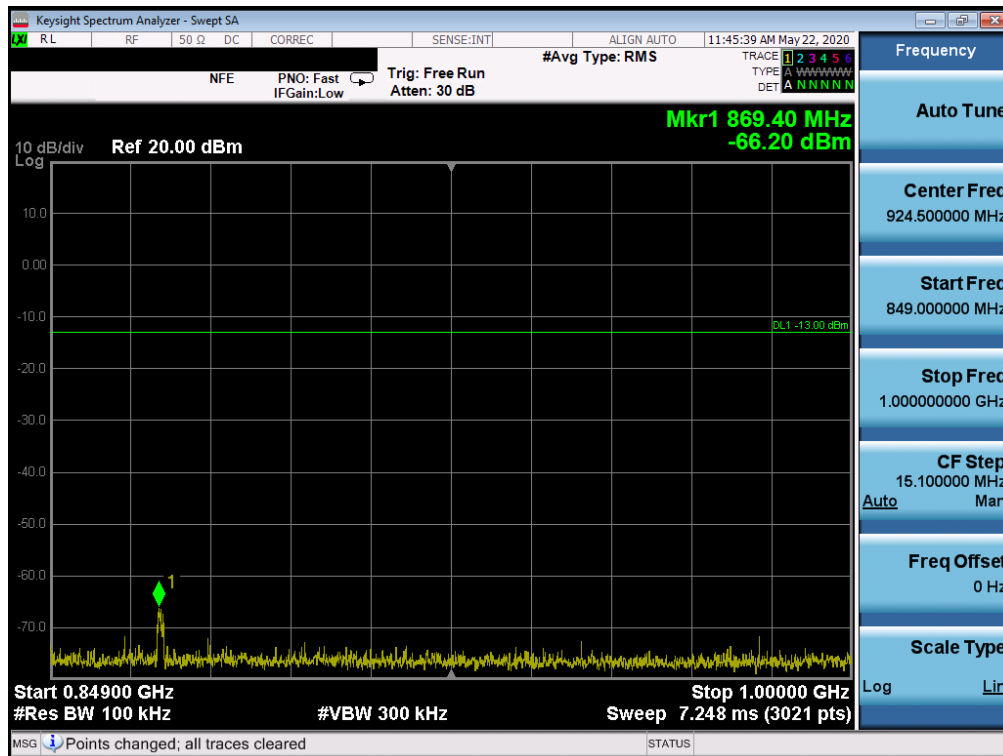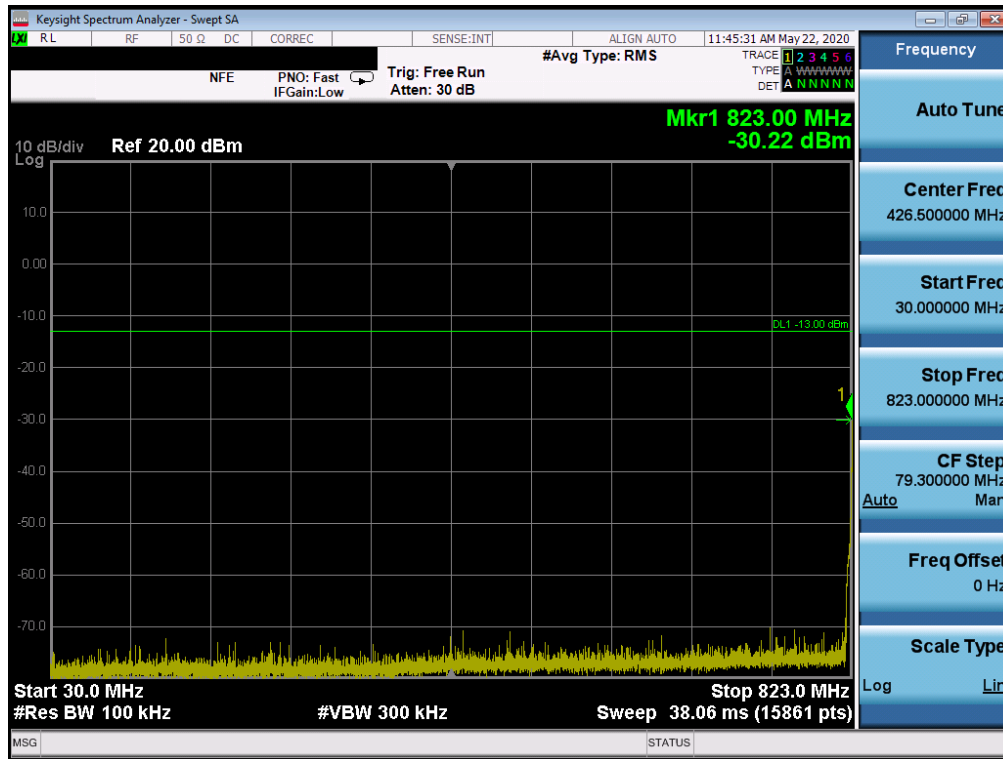


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 41 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

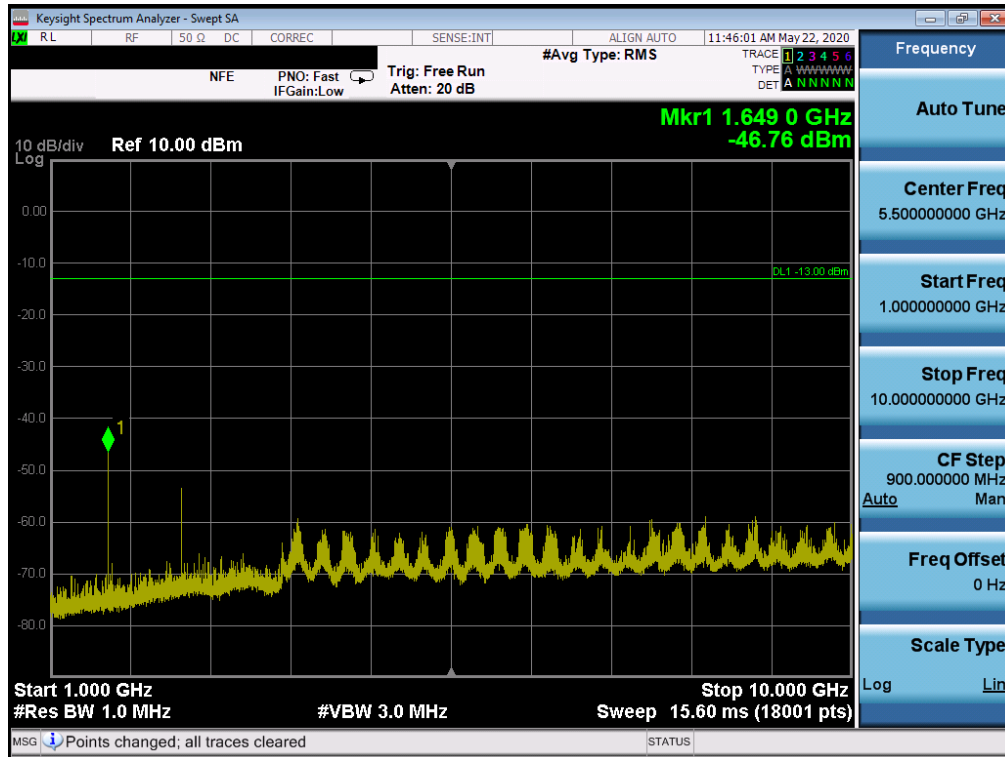

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 1013)

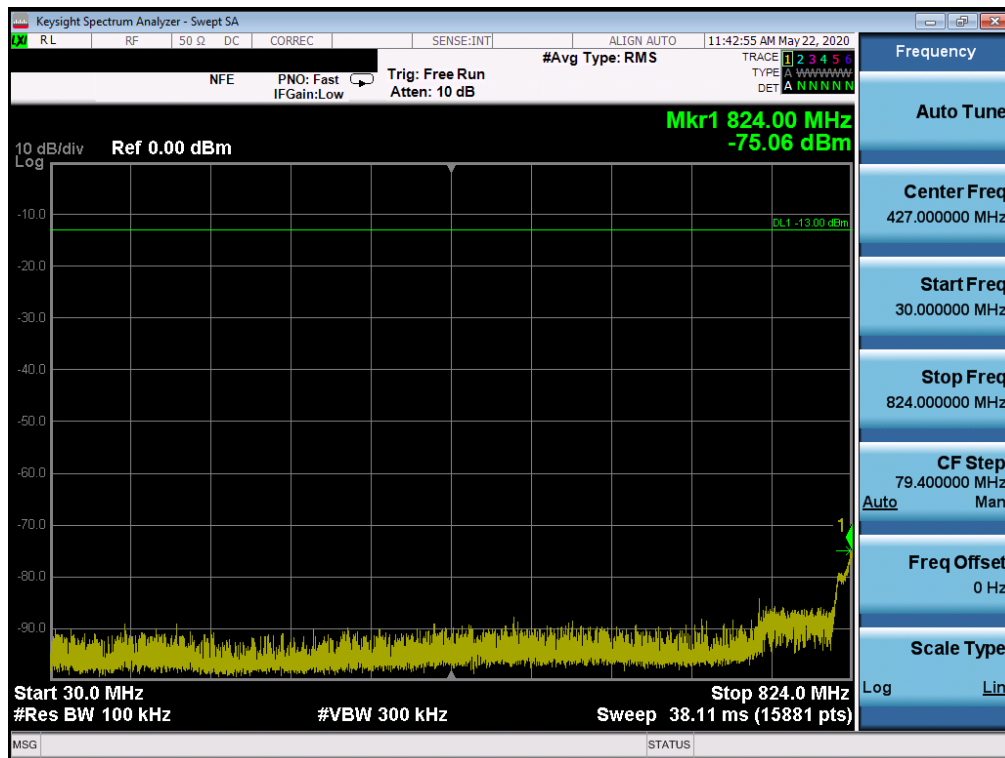


Plot 7-31. Conducted Spurious Plot (CDMA Ch. 384)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 42 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

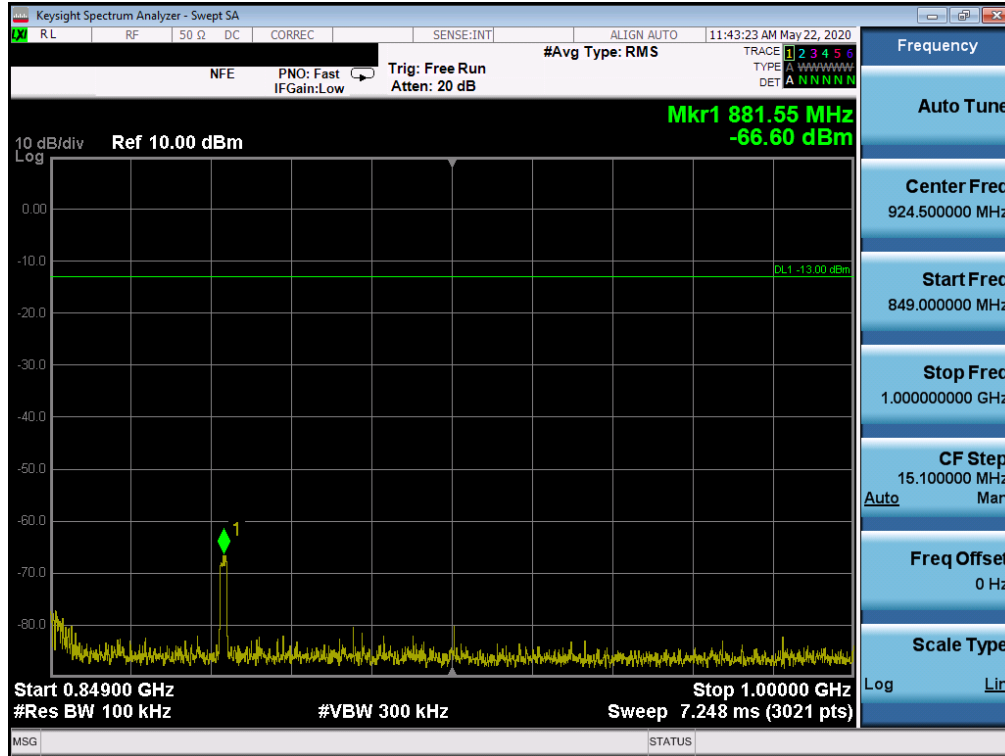

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 384)

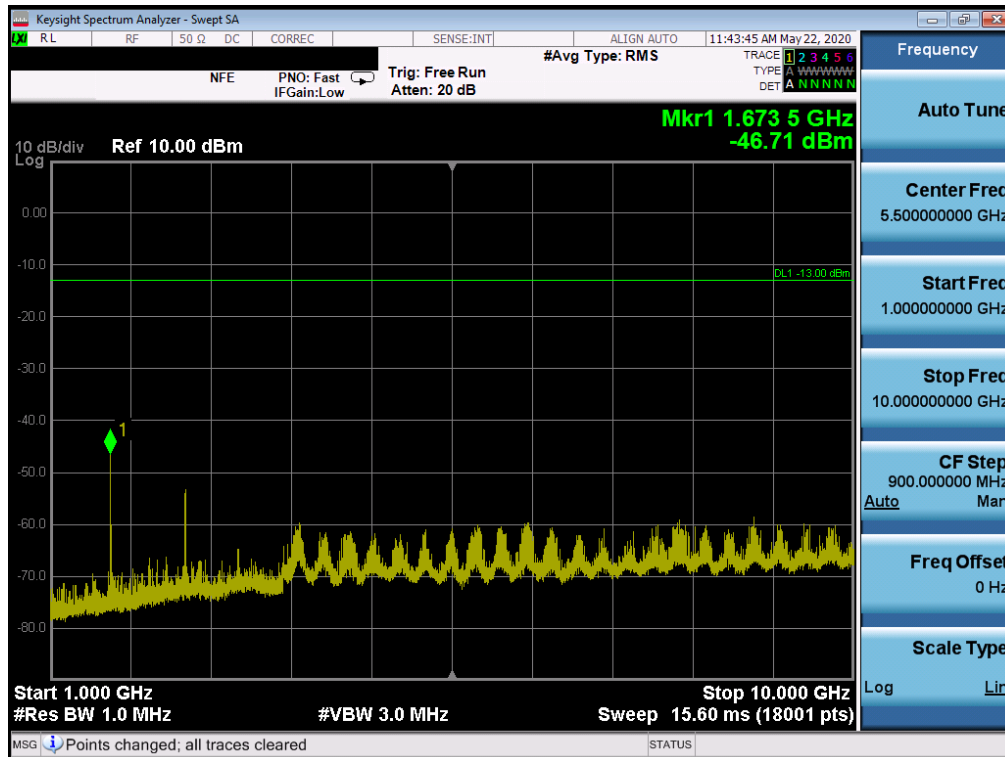


Plot 7-31. Conducted Spurious Plot (CDMA Ch. 384)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 43 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

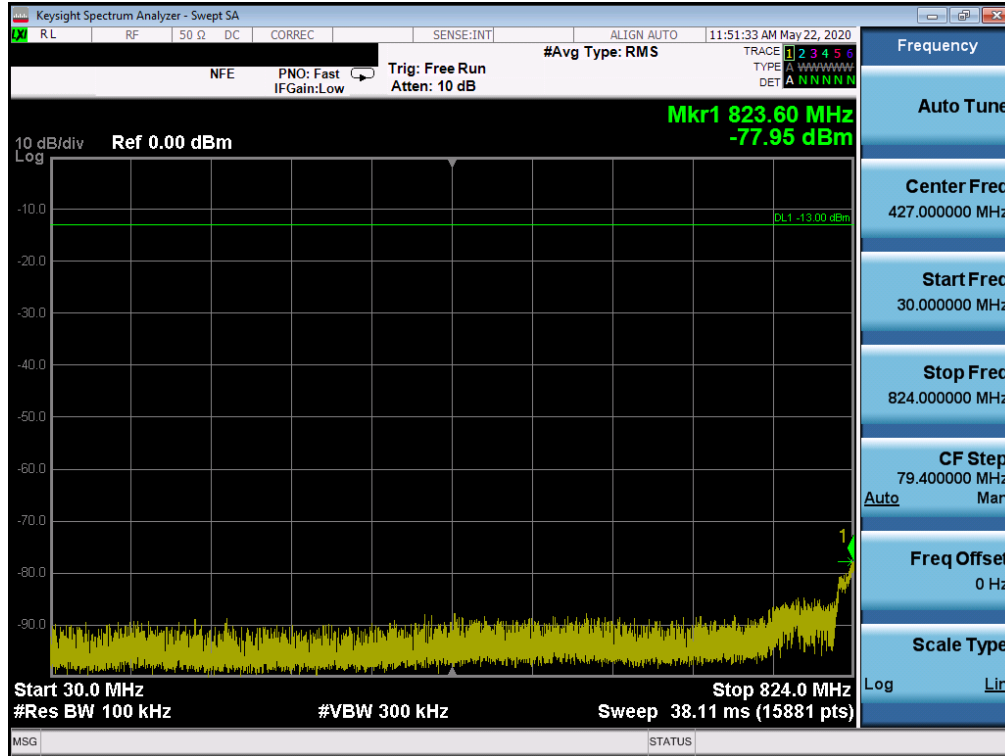

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 777)

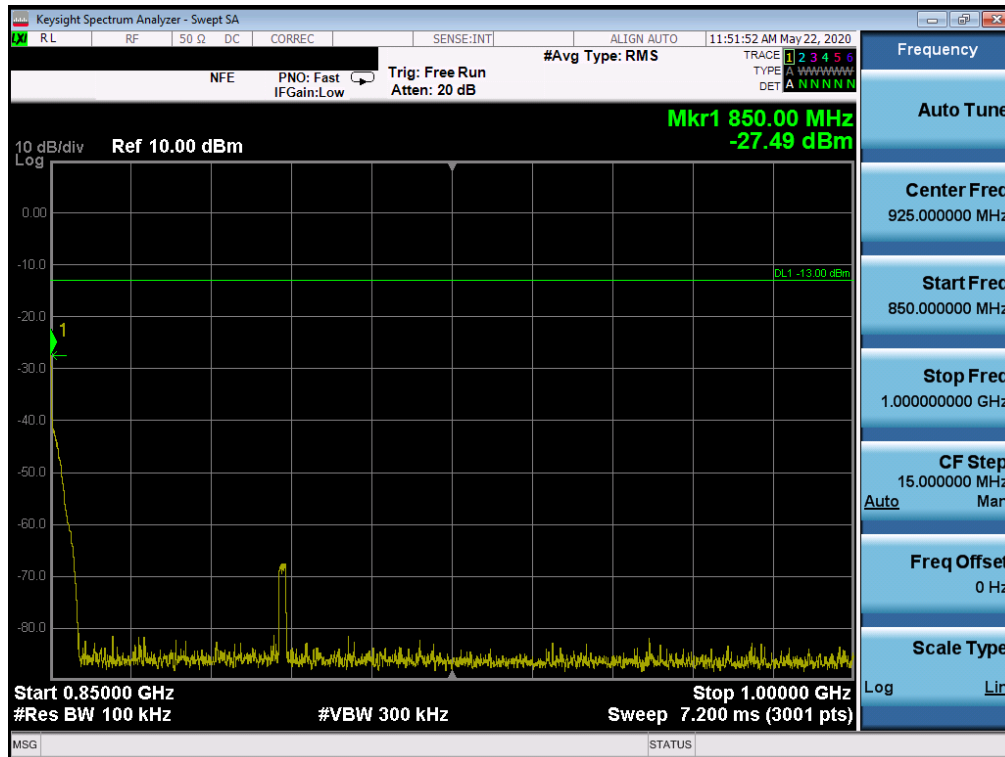


Plot 7-31. Conducted Spurious Plot (CDMA Ch. 777)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 44 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

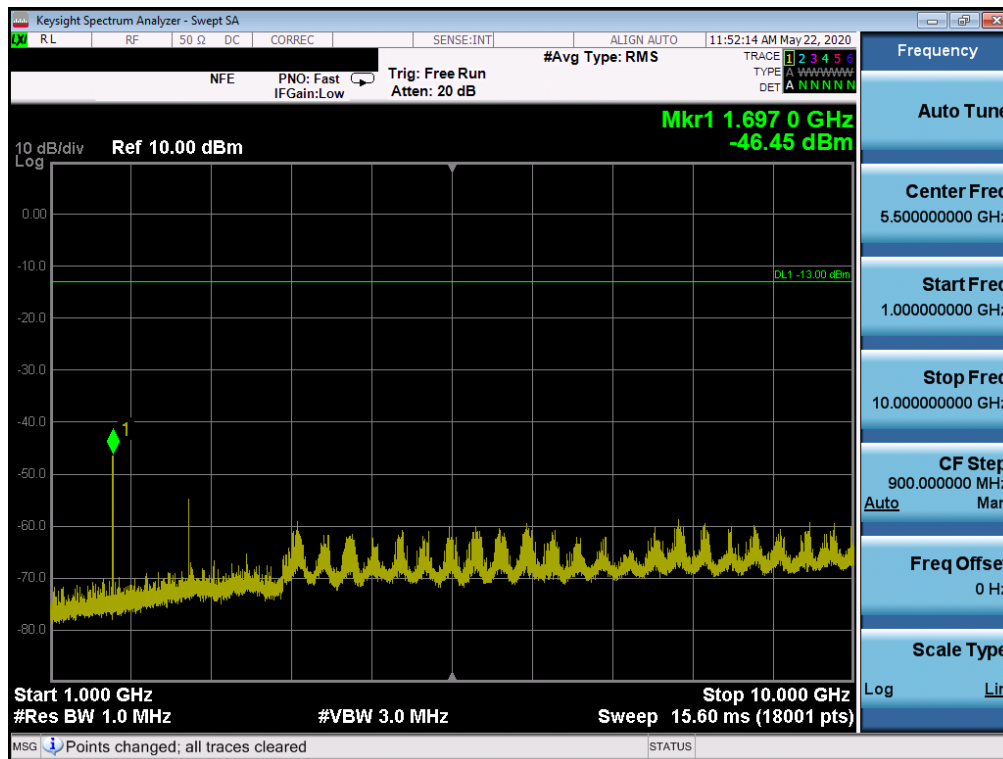

Plot 7-31. Conducted Spurious Plot (CDMA Ch. 777)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 45 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

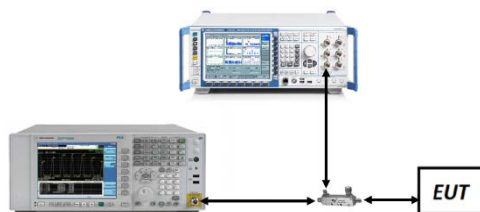


Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 46 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

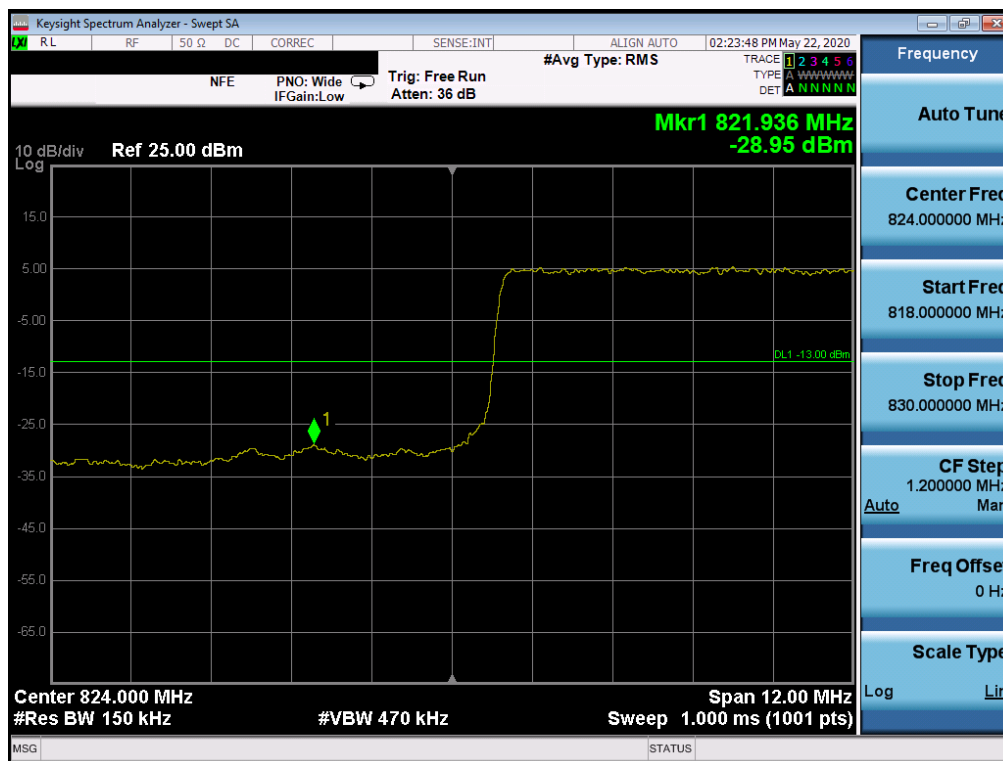

Plot 7-29. Lower Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB Configuration)

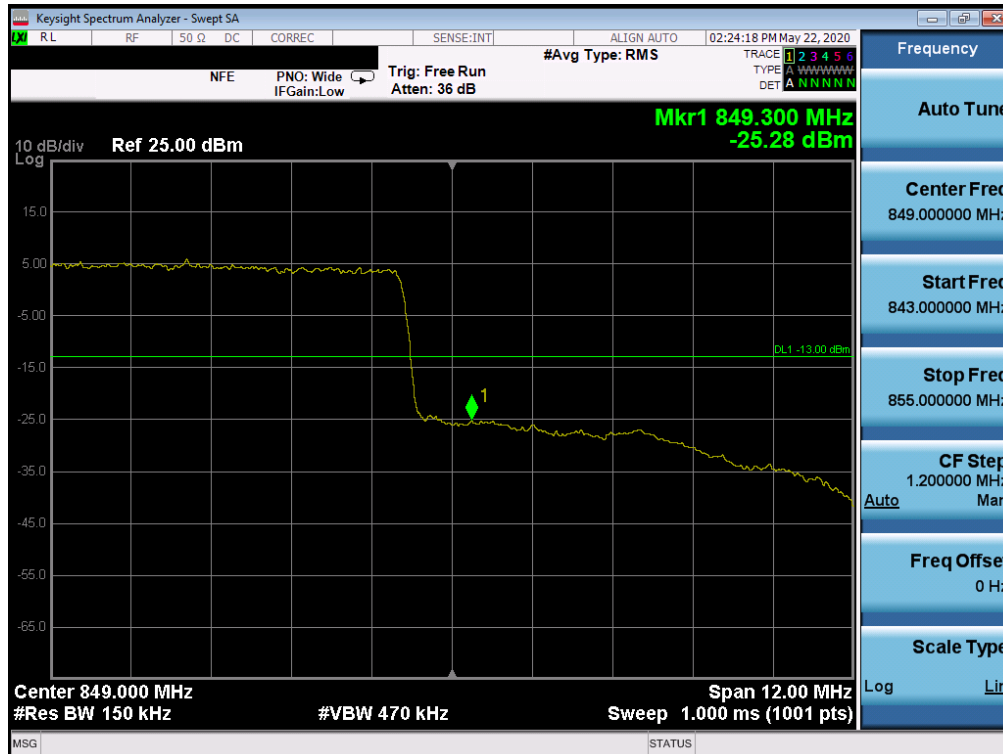


Plot 7-30. Upper Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB Configuration)


FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 47 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

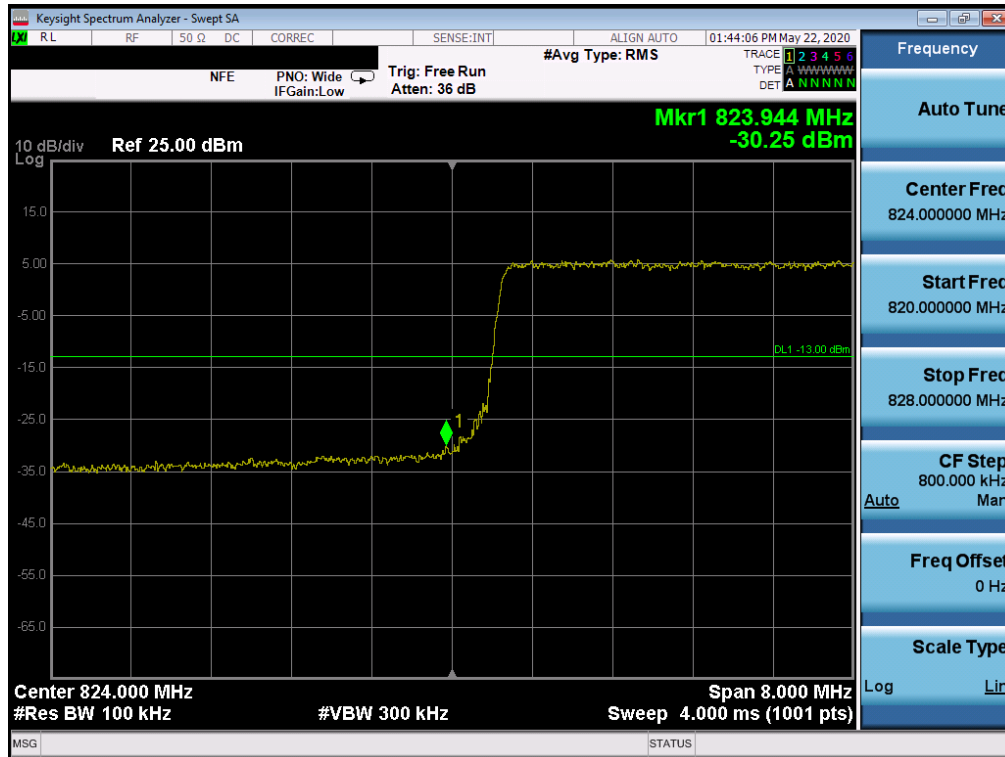

Plot 7-31. Lower Band Edge Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)

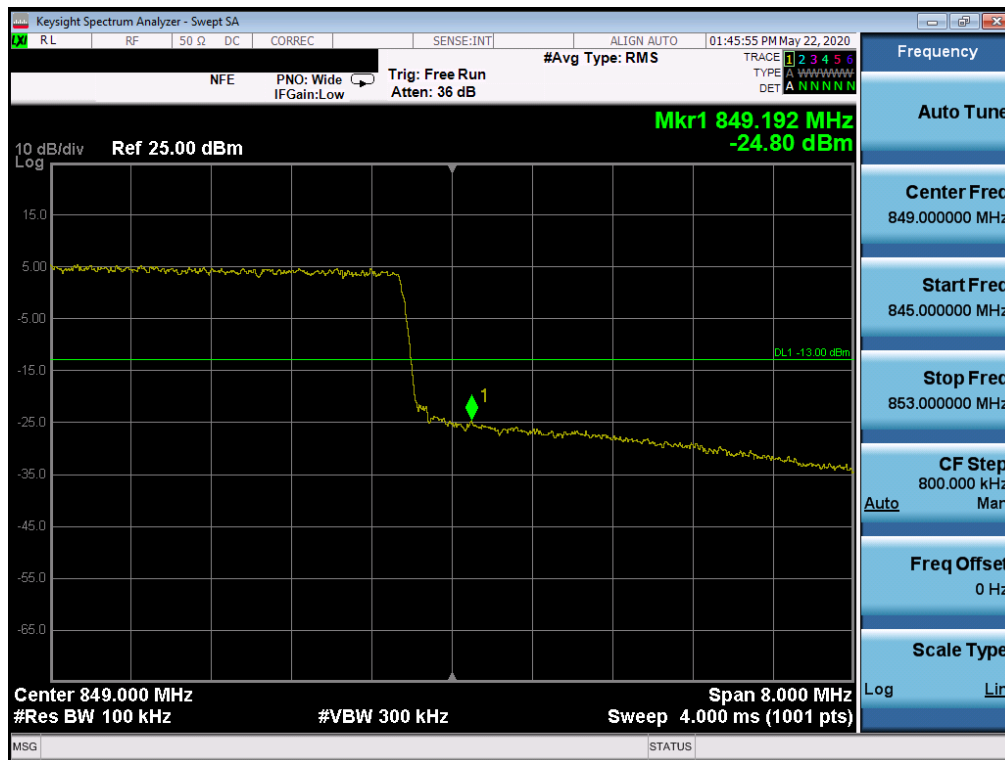


Plot 7-32. Upper Band Edge Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 48 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

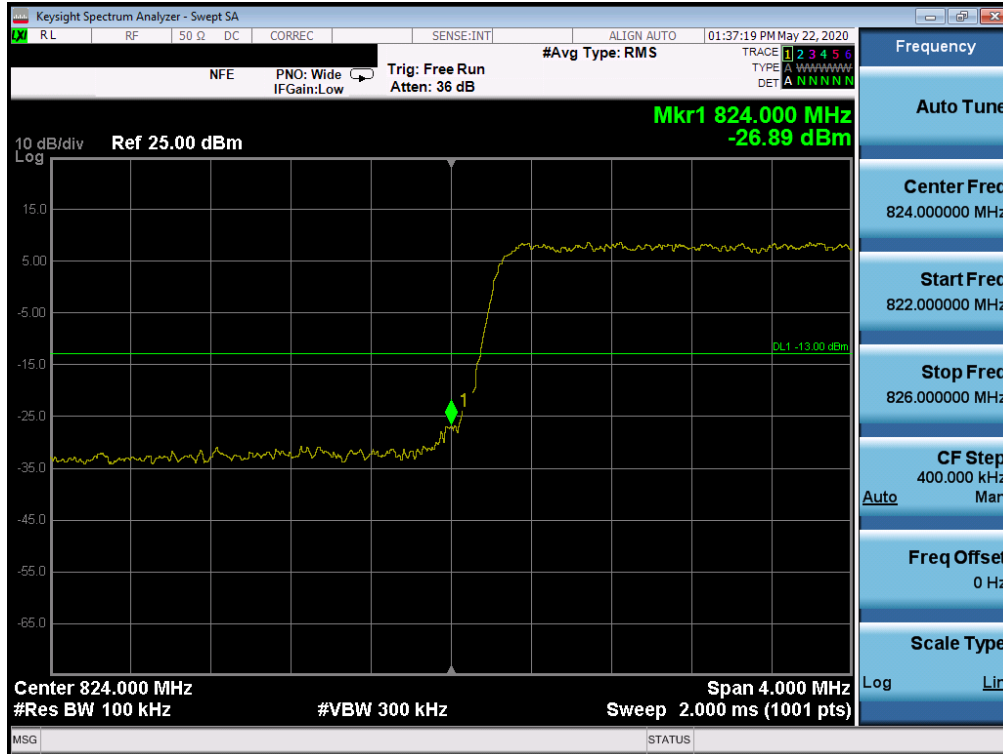

Plot 7-33. Lower Band Edge Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)




Plot 7-34. Upper Band Edge Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 49 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

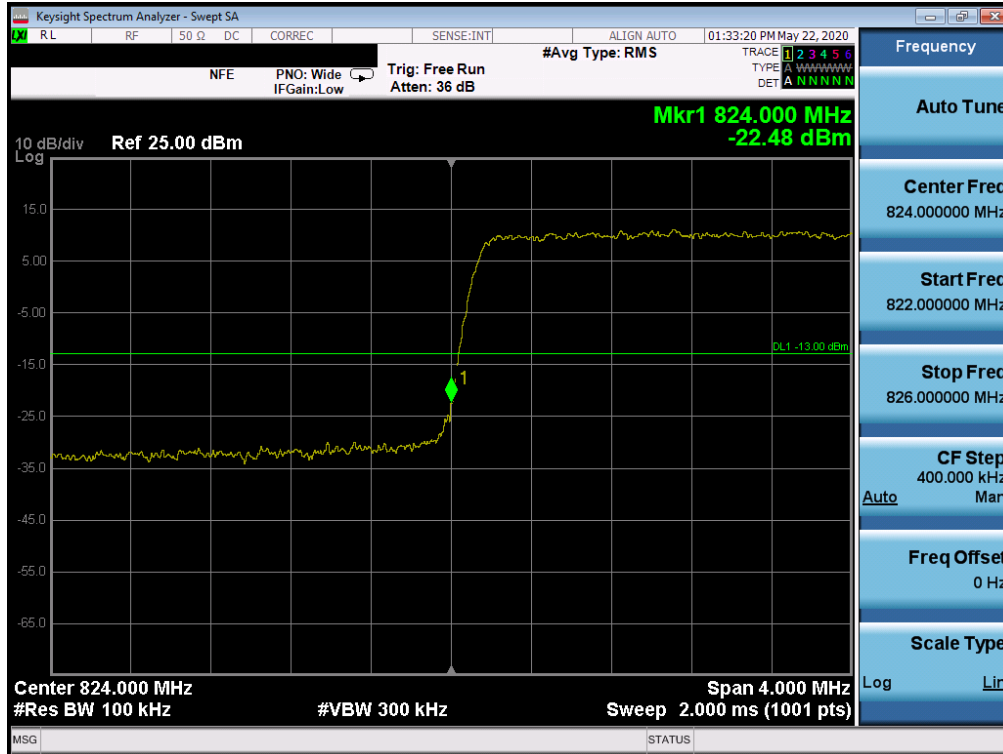

Plot 7-35. Lower Band Edge Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)




Plot 7-36. Upper Band Edge Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 50 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

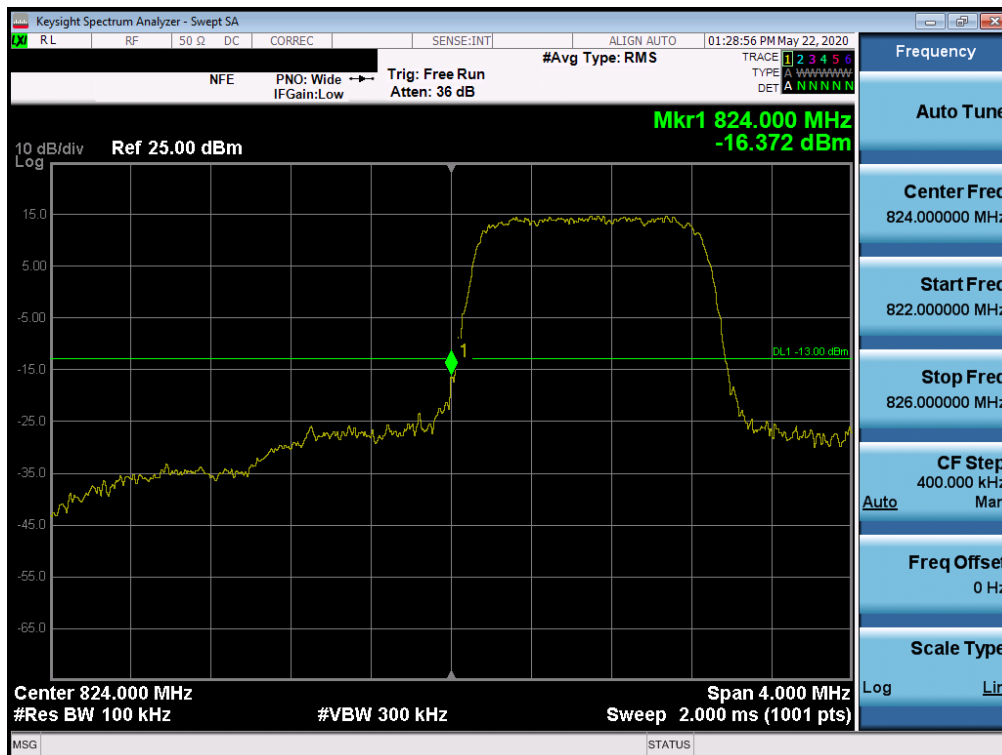

Plot 7-37. Lower Band Edge Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)



Plot 7-38. Upper Band Edge Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 51 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell



Plot 7-41. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)




Plot 7-42. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 53 of 70


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

CDMA Cell

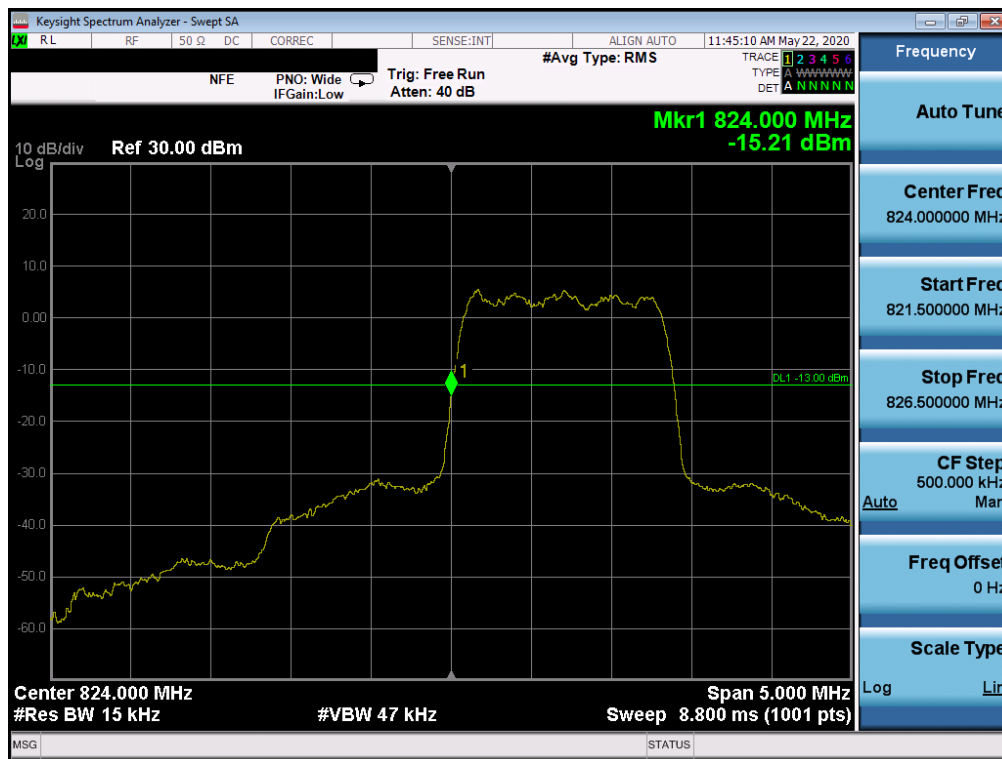

Plot 7-43. Lower Band Edge Plot (CDMA Cell – Ch. 1013)

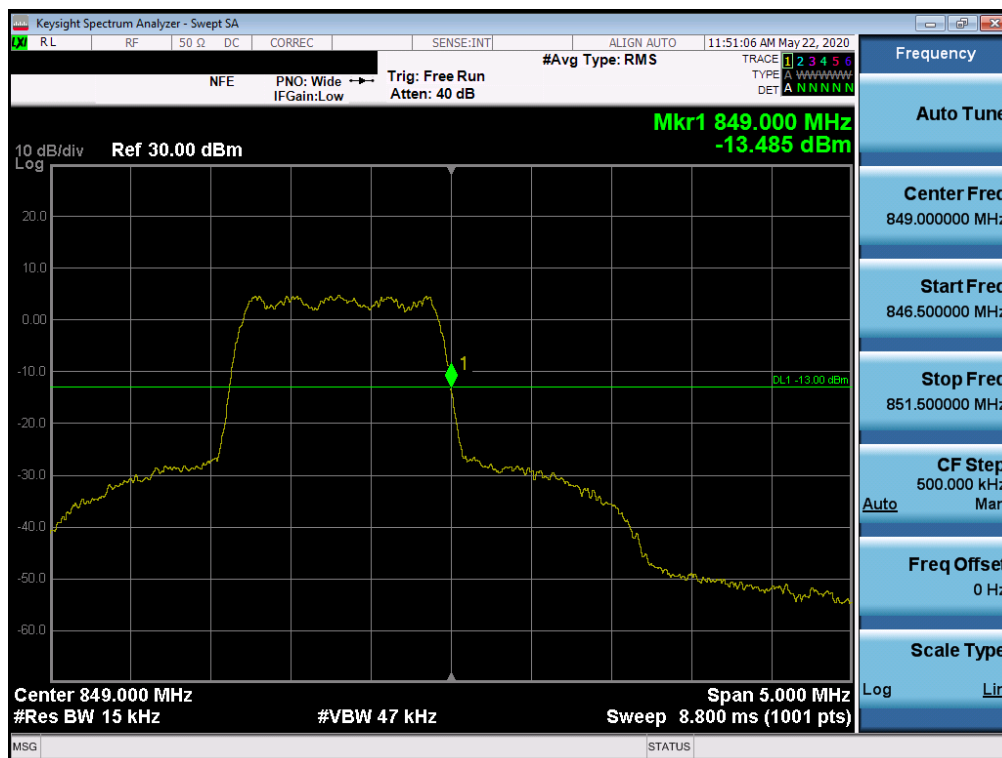

Plot 7-44. Upper Band Edge Plot (CDMA Cell – Ch. 777)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 54 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.5 Radiated Power (ERP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 55 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

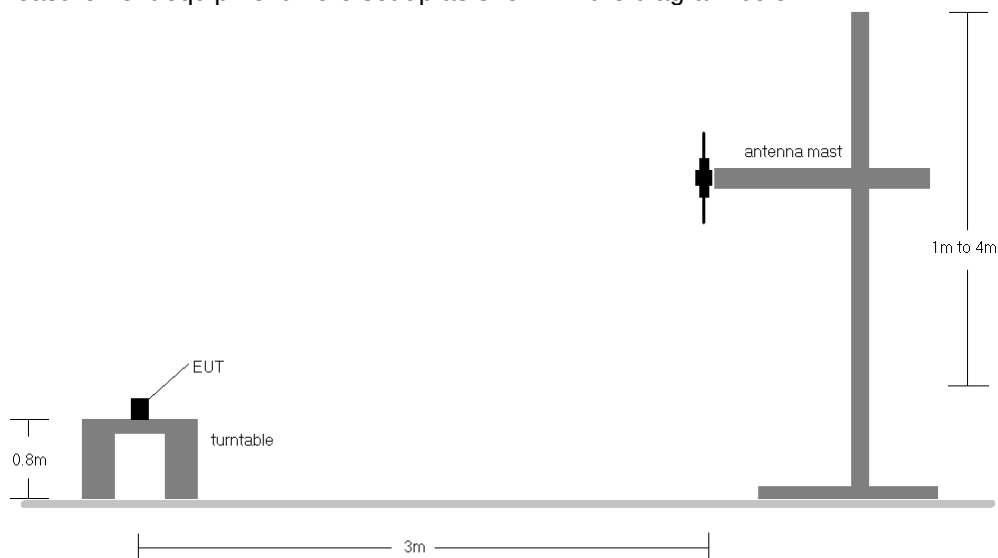


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 56 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15MHz (Band 26 only)	QPSK	831.5	H	209.0	104.0	6.73	1 / 37	12.28	16.86	0.048	38.45	-21.59
		836.5	H	209.0	107.0	6.68	1 / 0	11.80	16.33	0.043	38.45	-22.12
		841.5	H	338.0	103.0	6.63	1 / 37	11.56	16.04	0.040	38.45	-22.41
	16-QAM	831.5	H	209.0	104.0	6.73	1 / 37	11.47	16.05	0.040	38.45	-22.40
	64-QAM	831.5	H	209.0	104.0	6.73	1 / 37	10.46	15.04	0.032	38.45	-23.41
10 MHz	QPSK	829.0	H	209.0	104.0	6.80	1 / 25	12.15	16.80	0.048	38.45	-21.65
		836.5	H	209.0	107.0	6.68	1 / 25	11.85	16.38	0.043	38.45	-22.07
		844.0	H	338.0	103.0	6.66	1 / 25	11.63	16.14	0.041	38.45	-22.31
	16-QAM	829.0	H	209.0	104.0	6.80	1 / 25	11.33	15.98	0.040	38.45	-22.47
	64-QAM	829.0	H	209.0	104.0	6.80	1 / 25	10.24	14.89	0.031	38.45	-23.56
5 MHz	QPSK	826.5	H	209.0	104.0	6.77	1 / 12	12.20	16.83	0.048	38.45	-21.62
		836.5	H	209.0	107.0	6.68	1 / 12	11.78	16.31	0.043	38.45	-22.14
		846.5	H	338.0	103.0	6.68	1 / 12	11.59	16.12	0.041	38.45	-22.33
	16-QAM	826.5	H	209.0	104.0	6.77	1 / 12	11.41	16.04	0.040	38.45	-22.41
	64-QAM	826.5	H	209.0	104.0	6.77	1 / 12	10.32	14.95	0.031	38.45	-23.50
3 MHz	QPSK	825.5	H	209.0	104.0	6.76	1 / 7	12.10	16.72	0.047	38.45	-21.73
		836.5	H	209.0	107.0	6.68	1 / 7	11.83	16.36	0.043	38.45	-22.09
		847.5	H	338.0	103.0	6.69	1 / 7	11.49	16.03	0.040	38.45	-22.42
	16-QAM	825.5	H	209.0	104.0	6.76	1 / 7	11.33	15.95	0.039	38.45	-22.50
	64-QAM	825.5	H	209.0	104.0	6.76	1 / 7	10.23	14.85	0.031	38.45	-23.60
1.4 MHz	QPSK	824.7	H	209.0	104.0	6.76	1 / 0	12.15	16.76	0.047	38.45	-21.69
		836.5	H	209.0	107.0	6.68	1 / 3	11.75	16.28	0.042	38.45	-22.17
		848.3	H	338.0	103.0	6.70	1 / 3	11.44	15.99	0.040	38.45	-22.46
	16-QAM	824.7	H	209.0	104.0	6.76	1 / 0	11.43	16.04	0.040	38.45	-22.41
	64-QAM	824.7	H	209.0	104.0	6.76	1 / 0	10.15	14.76	0.030	38.45	-23.69
	QPSK (Opp. Pol.)	831.5	V	325.0	321.0	6.73	1 / 37	8.34	12.92	0.020	38.45	-25.53

Table 7-45. ERP Data (LTE Band 26/5)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	H	348	51	22.10	6.75	26.70	0.468	38.45	-11.75
836.60	GSM850	H	362	31	22.05	6.68	26.58	0.455	38.45	-11.87
848.80	GSM850	H	304	64	20.83	6.71	25.39	0.346	38.45	-13.07
824.20	GSM850	V	369	269	18.81	6.75	23.41	0.219	38.45	-15.04
824.20	EDGE850	H	348	51	16.72	6.75	21.32	0.136	38.45	-17.13

Table 7-46. ERP Data (GPRS Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	174	205	13.01	6.37	17.23	0.053	38.45	-21.22
836.60	WCDMA850	V	142	177	12.44	6.38	16.67	0.046	38.45	-21.78
846.60	WCDMA850	V	254	225	12.58	6.48	16.91	0.049	38.45	-21.54
826.40	WCDMA850	H	139	190	12.55	6.38	16.78	0.048	38.45	-21.67

Table 7-47. ERP Data (WCDMA Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	V	216	219	16.64	6.76	21.25	0.133	38.45	-17.21
836.52	CDMA850	V	141	211	17.19	6.68	21.72	0.149	38.45	-16.73
848.31	CDMA850	V	205	205	16.79	6.70	21.34	0.136	38.45	-17.11
836.52	CDMA850	H	229	322	15.41	6.68	19.94	0.099	38.45	-18.51

Table 7-48. ERP Data (CDMA Cell)

FCC ID: ZNFL355DL	 PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 57 of 70

7.6 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFL355DL	 PART 22 MEASUREMENT REPORT 	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset
Page 58 of 70		

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

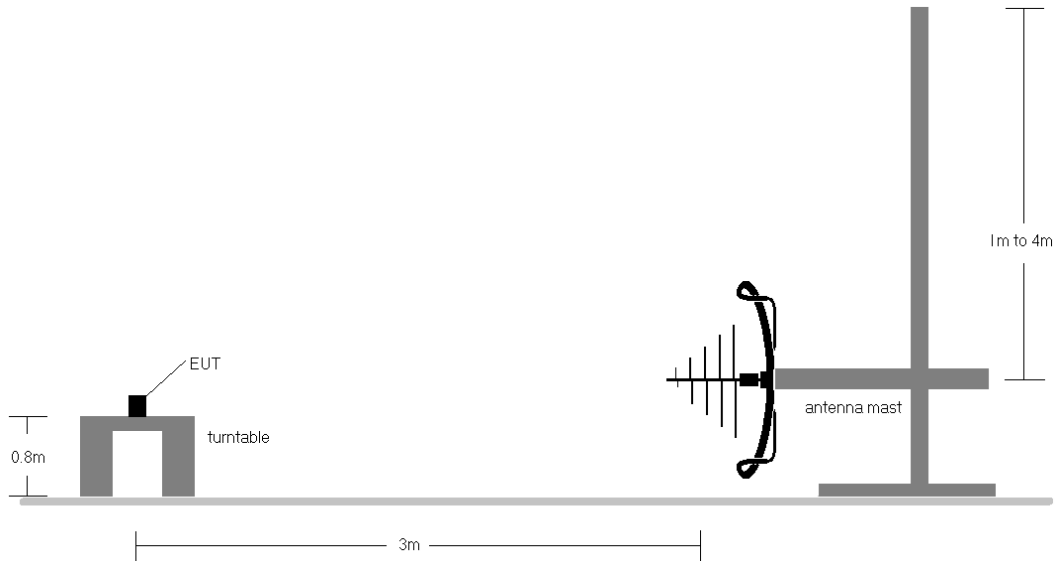


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

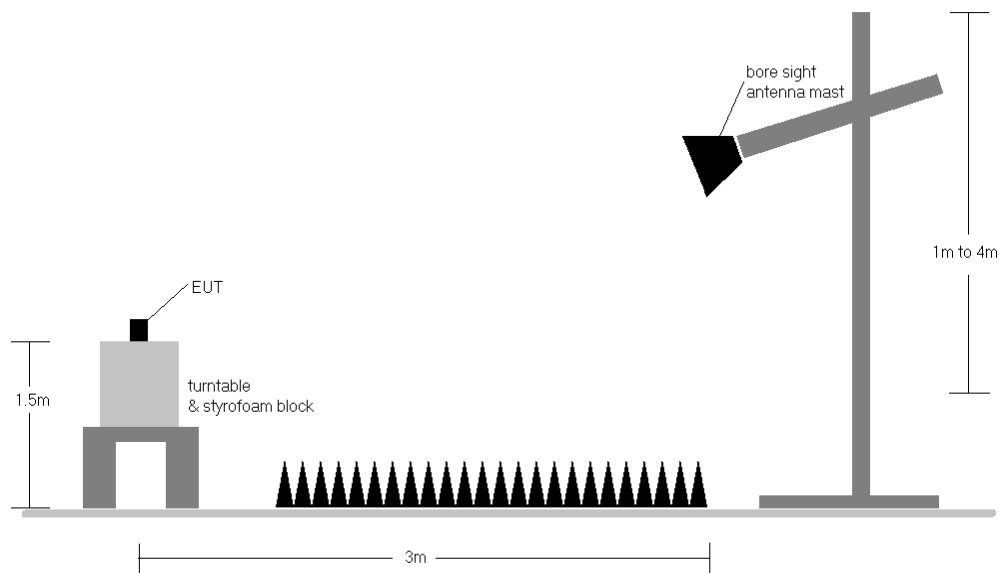


Figure 7-6. Test Instrument & Measurement Setup >1 GHz

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 59 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) For CDMA, this device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 6) This unit was tested with its standard battery.
- 7) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 8) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 9) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 10) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFL355DL	 PART 22 MEASUREMENT REPORT 		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 60 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

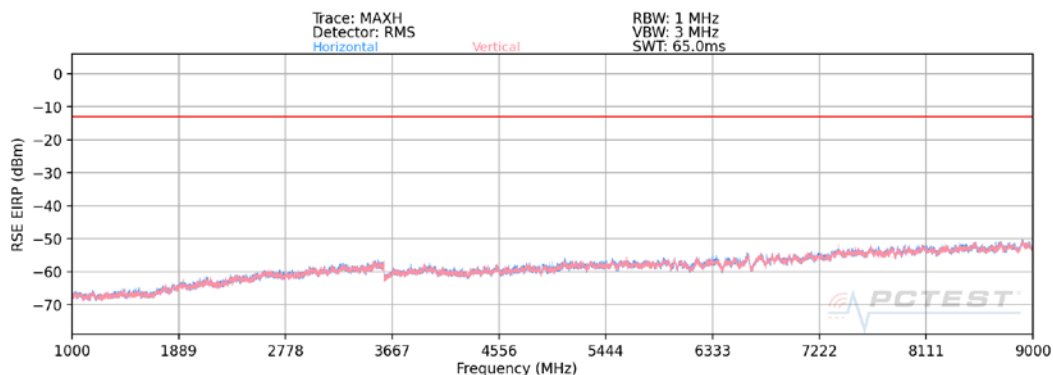

Plot 7-49. Radiated Spurious Plot (LTE Band 26/5)

Bandwidth (MHz):	15
Frequency (MHz):	831.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1663.0	H	112	120	-67.15	-6.25	33.60	-61.65	-13.00	-48.65
2494.5	H	139	205	-60.58	-3.07	43.35	-51.91	-13.00	-38.91
3326.0	H	-	-	-73.72	0.55	33.83	-61.43	-13.00	-48.43
4157.5	H	-	-	-76.87	2.37	32.50	-62.76	-13.00	-49.76

Table 7-2. Radiated Spurious Data (LTE Band 26/5 – Low Channel)

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	H	113	26	-71.81	-6.21	28.98	-66.27	-13.00	-53.27
2509.5	H	112	216	-72.32	-2.57	32.11	-63.14	-13.00	-50.14
3346.0	H	-	-	-73.89	0.79	33.90	-61.36	-13.00	-48.36
4182.5	H	-	-	-76.84	2.47	32.63	-62.63	-13.00	-49.63

Table 7-3. Radiated Spurious Data (LTE Band 26/5 – Mid Channel)

Bandwidth (MHz):	15
Frequency (MHz):	841.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1683.00	H	159	110	-69.12	-6.20	31.68	-63.58	-13.00	-50.58
2524.50	H	136	209	-59.02	-2.05	45.93	-49.33	-13.00	-36.33
3366.00	H	-	-	-73.69	0.74	34.05	-61.21	-13.00	-48.21
4207.50	H	-	-	-77.29	2.35	32.06	-63.20	-13.00	-50.20


Table 7-4. Radiated Spurious Data (LTE Band 26/5 – High Channel)

FCC ID: ZNLF355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 61 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GSM/GPRS Cell

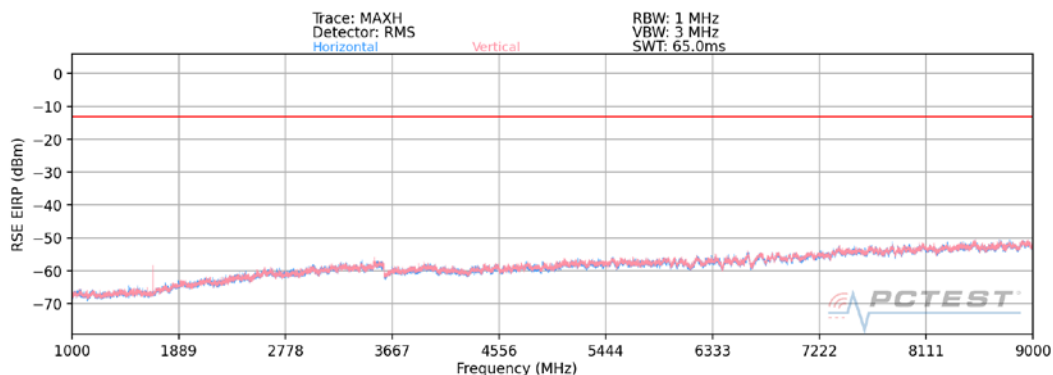

Plot 7-50. Radiated Spurious Plot (GPRS Cell)

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	H	121	36	-53.73	-6.38	46.89	-48.36	-13.00	-35.36
2472.6	H	-	-	-62.79	-2.95	41.26	-54.00	-13.00	-41.00
3296.8	H	-	-	-65.11	1.00	42.89	-52.37	-13.00	-39.37

Table 7-5. Radiated Spurious Data (GPRS Cell – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	156	131	-54.51	-6.21	46.28	-48.97	-13.00	-35.97
2509.8	H	-	-	-59.42	-2.55	45.03	-50.23	-13.00	-37.23
3346.4	H	-	-	-65.33	0.79	42.46	-52.79	-13.00	-39.79
4183.0	H	-	-	-68.98	2.47	40.49	-54.77	-13.00	-41.77

Table 7-6. Radiated Spurious Data (GPRS Cell – Mid Channel)


Mode:	GPRS 1 Tx Slot
Channel:	251
Frequency (MHz):	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	H	113	130	-56.30	-5.65	45.05	-50.21	-13.00	-37.21
2546.4	H	395	192	-62.73	-1.83	42.44	-52.82	-13.00	-39.82
3395.2	H	-	-	-65.20	0.34	42.14	-53.11	-13.00	-40.11

Table 7-7. Radiated Spurious Data (GPRS Cell – High Channel)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 62 of 70

WCDMA Cell

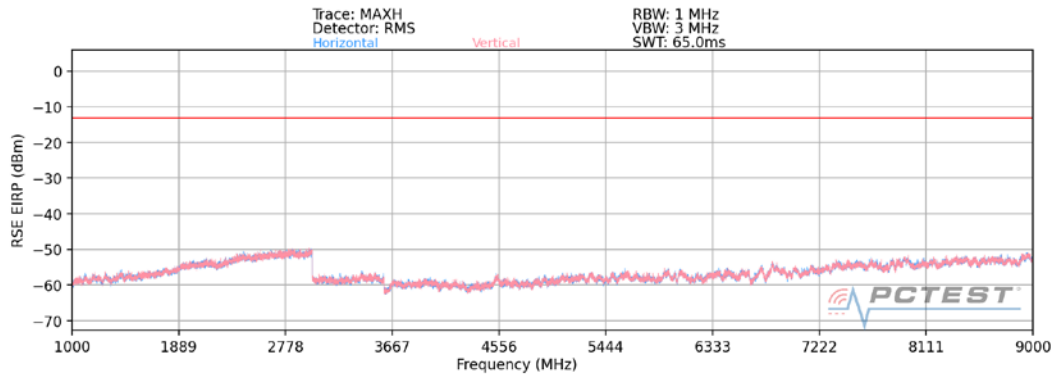

Plot 7-51. Radiated Spurious Plot (WCDMA Cell)

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.8	H	-	-	-69.41	-6.34	31.25	-64.01	-13.00	-51.01
2479.2	H	116	222	-63.94	-3.12	39.94	-55.32	-13.00	-42.32
3305.6	H	-	-	-69.13	0.71	38.58	-56.68	-13.00	-43.68
4132.0	H	-	-	-70.56	2.30	38.74	-56.52	-13.00	-43.52

Table 7-8. Radiated Spurious Data (WCDMA Cell – Low Channel)

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	-	-	-69.49	-6.21	31.30	-63.95	-13.00	-50.95
2509.8	H	-	-	-68.76	-2.55	35.69	-59.57	-13.00	-46.57

Table 7-9. Radiated Spurious Data (WCDMA Cell – Mid Channel)


Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.2	H	-	-	-69.66	-5.84	31.50	-63.76	-13.00	-50.76
2539.8	H	-	-	-69.42	-1.84	35.74	-59.52	-13.00	-46.52
3386.4	H	-	-	-69.55	0.37	37.82	-57.43	-13.00	-44.43
4233.0	H	-	-	-70.84	2.28	38.44	-56.81	-13.00	-43.81

Table 7-10. Radiated Spurious Data (WCDMA Cell – High Channel)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 63 of 70

CDMA Cell

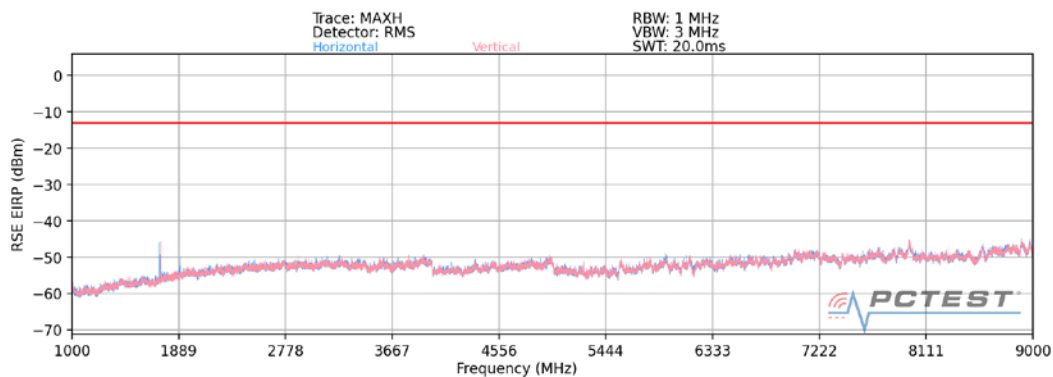

Plot 7-52. Radiated Spurious Plot (CDMA Cell)

Mode:	CDMA
Channel:	1013
Frequency (MHz):	824.7

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1649.40	H	365	9	-70.29	0.49	37.20	-58.05	-13.00	-45.05
2474.10	H	-	-	-70.86	5.01	41.15	-54.10	-13.00	-41.10
3298.80	H	-	-	-71.60	5.74	41.14	-54.12	-13.00	-41.12
4123.50	H	-	-	-71.86	7.64	42.78	-52.48	-13.00	-39.48
4948.20	H	-	-	-72.31	8.99	43.68	-51.58	-13.00	-38.58

Table 7-11. Radiated Spurious Data (CDMA Cell – Low Channel)

Mode:	CDMA
Channel:	384
Frequency (MHz):	836.52

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.04	H	269	124	-63.28	0.81	44.53	-50.72	-13.00	-37.72
2509.56	H	-	-	-70.19	5.03	41.84	-53.41	-13.00	-40.41
3346.08	H	-	-	-71.47	6.09	41.62	-53.64	-13.00	-40.64
4182.60	H	-	-	-72.48	7.74	42.26	-53.00	-13.00	-40.00
5019.12	H	-	-	-72.43	9.11	43.68	-51.58	-13.00	-38.58

Table 7-12. Radiated Spurious Data (CDMA Cell – Mid Channel)

Mode:	CDMA
Channel:	777
Frequency (MHz):	848.31

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1696.62	H	204	7	-70.43	1.01	37.58	-57.68	-13.00	-44.68
2544.93	H	-	-	-72.46	4.99	39.53	-55.72	-13.00	-42.72
3393.24	H	-	-	-73.43	6.83	40.40	-54.86	-13.00	-41.86
4241.55	H	-	-	-73.11	6.46	40.35	-54.91	-13.00	-41.91
5089.86	H	-	-	-72.36	8.99	43.63	-51.63	-13.00	-38.63
5938.17	H	-	-	-74.56	12.59	45.03	-50.22	-13.00	-37.22

Table 7-13. Radiated Spurious Data (CDMA Cell – High Channel)

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1-ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 64 of 70

7.7 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFL355DL	 PART 22 MEASUREMENT REPORT 	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset
Page 65 of 70		

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

LTE Band 26/5

Operating Frequency (Hz):	836,500,000
Ref. Voltage (VDC):	3.85
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	- 30	836,499,902	256	0.0000306
		- 20	836,499,804	158	0.0000189
		- 10	836,499,649	3	0.0000004
		0	836,499,950	304	0.0000363
		+ 10	836,500,387	741	0.0000886
		+ 20 (Ref)	836,499,646	0	0.0000000
		+ 30	836,499,512	-134	-0.0000160
		+ 40	836,500,178	532	0.0000636
		+ 50	836,500,013	367	0.0000439
Battery Endpoint	2.80	+ 20	836,499,690	44	0.0000053

Table 7-9. LTE Band 26/5 Frequency Stability Data

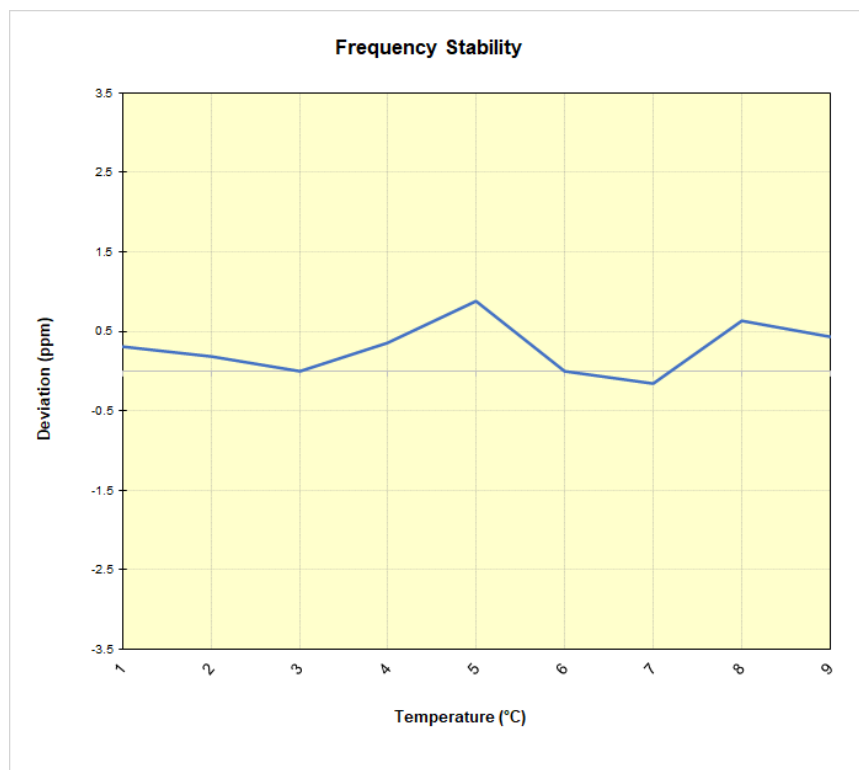


Table 7-9. LTE Band 26/5 Frequency Stability Chart

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 66 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GSM/GPRS Cell

GSM/GPRS Cellular

Operating Frequency (Hz):	836,600,000
Ref. Voltage (VDC):	3.85
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	- 30	836,599,863	223	0.0000267
		- 20	836,599,745	105	0.0000126
		- 10	836,599,509	-131	-0.0000157
		0	836,600,184	544	0.0000650
		+ 10	836,599,773	133	0.0000159
		+ 20 (Ref)	836,599,640	0	0.0000000
		+ 30	836,599,906	266	0.0000318
		+ 40	836,600,459	819	0.0000979
		+ 50	836,600,441	801	0.0000957
Battery Endpoint	2.80	+ 20	836,600,046	406	0.0000485

Table 7-9. GSM/GPRS Cell Frequency Stability Data

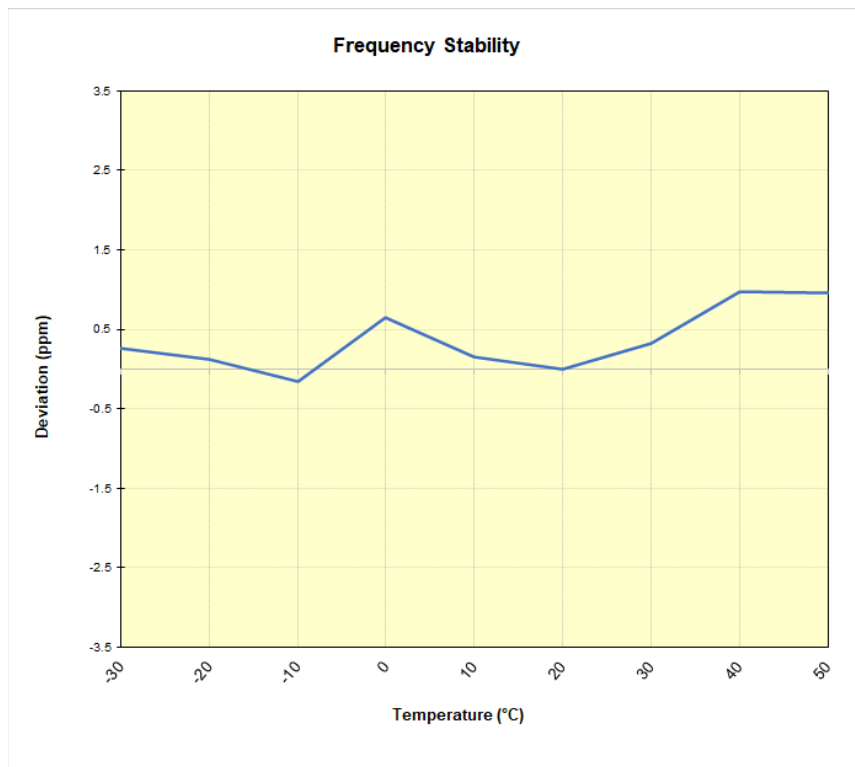


Table 7-9. GSM/GPRS Cell Frequency Stability Chart

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 67 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

WCDMA Cellular					
		Operating Frequency (Hz):		836,600,000	
		Ref. Voltage (VDC):		3.85	
		Deviation Limit:		± 0.00025% or 2.5 ppm	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	- 30	836,600,170	625	0.0000747
		- 20	836,600,178	633	0.0000757
		- 10	836,599,940	395	0.0000472
		0	836,600,015	470	0.0000562
		+ 10	836,599,787	242	0.0000289
		+ 20 (Ref)	836,599,545	0	0.0000000
		+ 30	836,599,665	120	0.0000143
		+ 40	836,600,267	722	0.0000863
		+ 50	836,599,529	-16	-0.0000019
Battery Endpoint	2.80	+ 20	836,600,244	699	0.0000836

Table 7-9. WCDMA Cell Frequency Stability Data

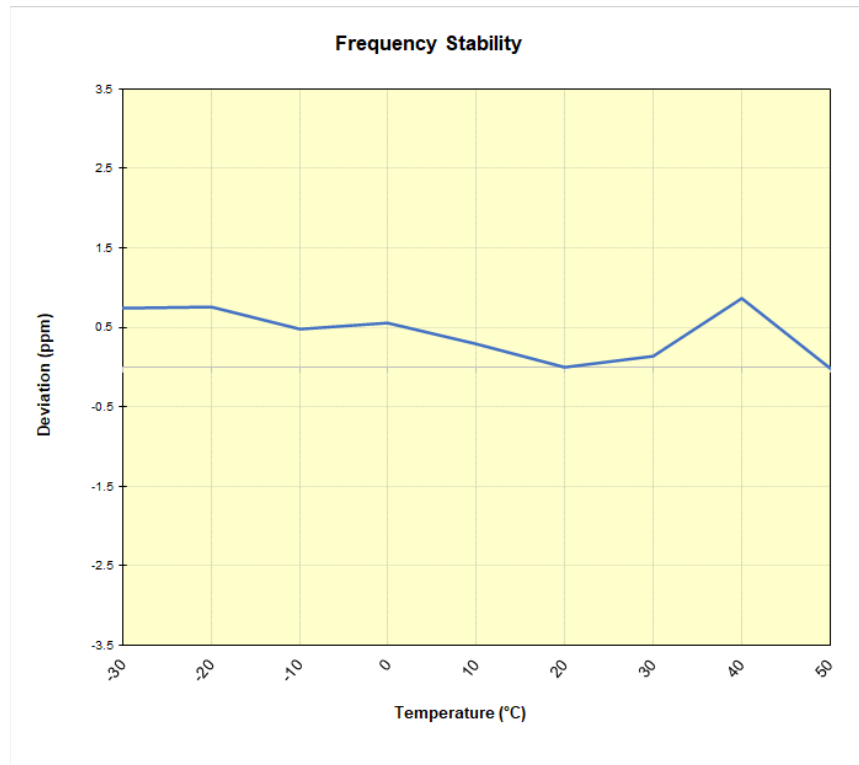


Table 7-9. WCDMA Cell Frequency Stability Chart

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 68 of 70	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

CDMA Cell

CDMA Cellular					
Operating Frequency (Hz):		836,520,000			
Ref. Voltage (VDC):		3.85			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	- 30	836,519,595	-191	-0.0000228
		- 20	836,520,354	568	0.0000679
		- 10	836,519,783	-3	-0.0000004
		0	836,519,920	134	0.0000160
		+ 10	836,520,219	433	0.0000518
		+ 20 (Ref)	836,519,786	0	0.0000000
		+ 30	836,520,260	474	0.0000567
		+ 40	836,520,085	299	0.0000357
		+ 50	836,520,255	469	0.0000561
Battery Endpoint	2.80	+ 20	836,519,635	-151	-0.0000181

Table 7-9. CDMA Cell Frequency Stability Data

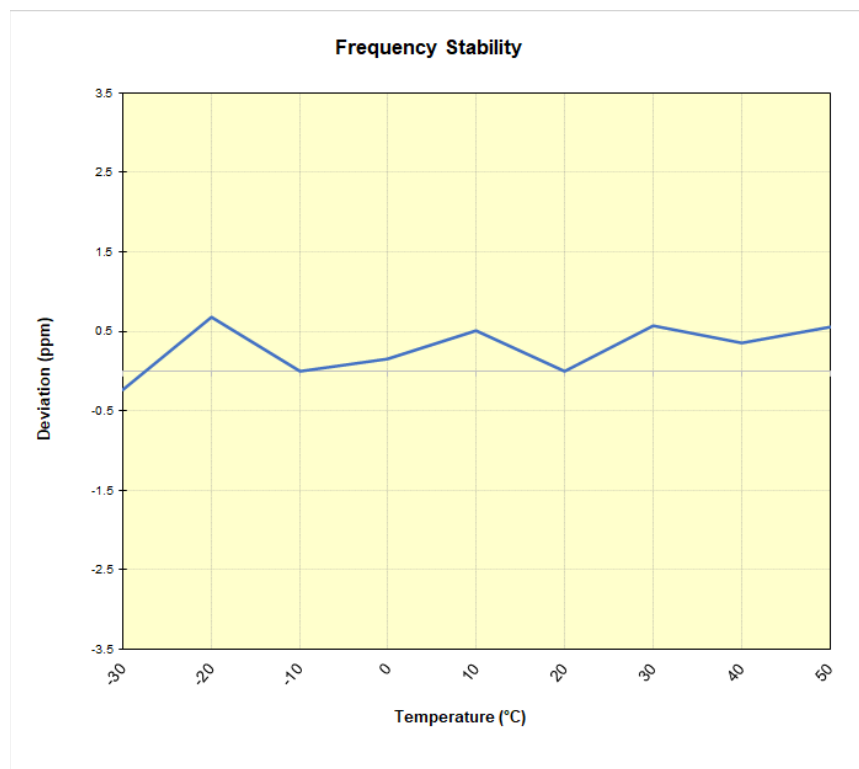


Table 7-9. CDMA Cell Frequency Stability Chart

FCC ID: ZNFL355DL	PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT	LG	Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset	Page 69 of 70	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the LG **Portable Handset** **FCC ID: ZNFL355DL** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: ZNFL355DL	 PCTEST Proud to be part of element	PART 22 MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2004220073-02-R1.ZNF	Test Dates: 4/26 - 5/19/2020	EUT Type: Portable Handset		Page 70 of 70

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.