



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 22, 24, & 27 LTE

Applicant Name:

LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

12/26/2016-1/1/2017

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1612272012.ZNF

FCC ID : ZNFL63BL**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A**Application Type:** Class II Permissive Change**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)**FCC Rule Part(s):** §2; §22; §24; §27**Test Procedure(s):** ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02**EUT Type:** Portable Handset**Model:** LGL63BL**Additional Model(s):** L63BL, LG-L63BL, LG-M327, LGM327, M327**Test Device Serial No.:** *identical prototype* [S/N: 11199]**Class II Permissive Change:** Please see FCC change document**Original Grant Date:** 1/11/2017

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: LG Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset	Page 1 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1

© 2015 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

T A B L E O F C O N T E N T S

FCC PART 22, 24, & 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	5
1.1 Scope	5
1.2 Testing Facility	5
2.0 PRODUCT INFORMATION	6
2.1 Equipment Description	6
2.2 Device Capabilities	6
2.3 Test Configuration	6
2.4 EMI Suppression Device(s)/Modifications	6
3.0 DESCRIPTION OF TESTS	7
3.1 Measurement Procedure	7
3.2 Block A Frequency Range	7
3.3 Cellular - Base Frequency Blocks	7
3.4 Cellular - Mobile Frequency Blocks	7
3.5 PCS - Base Frequency Blocks	8
3.6 PCS - Mobile Frequency Blocks	8
3.7 AWS - Base Frequency Blocks	8
3.8 AWS - Mobile Frequency Blocks	8
3.9 Radiated Power and Radiated Spurious Emissions	9
4.0 MEASUREMENT UNCERTAINTY	10
5.0 TEST EQUIPMENT CALIBRATION DATA	11
6.0 SAMPLE CALCULATIONS	12
7.0 TEST RESULTS	13
7.1 Summary	13
7.2 Radiated Power (ERP/EIRP)	14
7.3 Radiated Spurious Emissions Measurements	20
8.0 CONCLUSION	28

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset





MEASUREMENT REPORT



FCC Part 22, 24, & 27

§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
TEST SITE: Englewood Cliffs, NJ 07632, United States
TEST SITE ADDRESS: PCTEST ENGINEERING LABORATORY, INC.
FCC RULE PART(S): 7185 Oakland Mills Road, Columbia, MD 21045 USA
BASE MODEL: §2; §22; §24; §27
FCC ID: LGL63BL
FCC CLASSIFICATION: ZNFL63BL
FREQUENCY TOLERANCE: PCS Licensed Transmitter Held to Ear (PCE)
Test Device Serial No.: ±0.00025 % (2.5 ppm)
DATE(S) OF TEST: 11199 Production Pre-Production Engineering
TEST REPORT S/N: 12/26/2016-1/1/2017
TEST REPORT S/N: 0Y1612272012.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.





- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFL63BL	PCTEST® ENGINEERING LABORATORY, INC.		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 3 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1



MEASUREMENT REPORT

FCC Part 22, 24, & 27

Mode	FCC Rule Part	Tx Frequency (MHz)	ERP/EIRP		Modulation
			Max. Power (W)	Max. Power (dBm)	
LTE Band 12	27	699.7 - 715.3	0.102	20.07	QPSK
LTE Band 12	27	699.7 - 715.3	0.091	19.57	16QAM
LTE Band 12	27	700.5 - 714.5	0.097	19.85	QPSK
LTE Band 12	27	700.5 - 714.5	0.084	19.23	16QAM
LTE Band 12	27	701.5 - 713.5	0.095	19.78	QPSK
LTE Band 12	27	701.5 - 713.5	0.069	18.37	16QAM
LTE Band 12	27	704 - 711	0.092	19.65	QPSK
LTE Band 12	27	704 - 711	0.078	18.90	16QAM
LTE Band 5	22H	824.7 - 848.3	0.146	21.63	QPSK
LTE Band 5	22H	824.7 - 848.3	0.108	20.35	16QAM
LTE Band 5	22H	825.5 - 847.5	0.143	21.54	QPSK
LTE Band 5	22H	825.5 - 847.5	0.123	20.88	16QAM
LTE Band 5	22H	826.5 - 846.5	0.150	21.76	QPSK
LTE Band 5	22H	826.5 - 846.5	0.105	20.20	16QAM
LTE Band 5	22H	829 - 844	0.139	21.44	QPSK
LTE Band 5	22H	829 - 844	0.102	20.10	16QAM
LTE Band 4	27	1710.7 - 1754.3	0.282	24.50	QPSK
LTE Band 4	27	1710.7 - 1754.3	0.239	23.78	16QAM
LTE Band 4	27	1711.5 - 1753.5	0.285	24.55	QPSK
LTE Band 4	27	1711.5 - 1753.5	0.225	23.52	16QAM
LTE Band 4	27	1712.5 - 1752.5	0.283	24.51	QPSK
LTE Band 4	27	1712.5 - 1752.5	0.227	23.56	16QAM
LTE Band 4	27	1715 - 1750	0.263	24.21	QPSK
LTE Band 4	27	1715 - 1750	0.222	23.46	16QAM
LTE Band 4	27	1717.5 - 1747.5	0.262	24.18	QPSK
LTE Band 4	27	1717.5 - 1747.5	0.232	23.65	16QAM
LTE Band 4	27	1720 - 1745	0.267	24.26	QPSK
LTE Band 4	27	1720 - 1745	0.230	23.61	16QAM
LTE Band 2	24E	1850.7 - 1909.3	0.354	25.49	QPSK
LTE Band 2	24E	1850.7 - 1909.3	0.285	24.55	16QAM
LTE Band 2	24E	1851.5 - 1908.5	0.392	25.93	QPSK
LTE Band 2	24E	1851.5 - 1908.5	0.324	25.11	16QAM
LTE Band 2	24E	1852.5 - 1907.5	0.383	25.84	QPSK
LTE Band 2	24E	1852.5 - 1907.5	0.314	24.97	16QAM
LTE Band 2	24E	1855 - 1905	0.366	25.64	QPSK
LTE Band 2	24E	1855 - 1905	0.300	24.78	16QAM
LTE Band 2	24E	1857.5 - 1902.5	0.329	25.17	QPSK
LTE Band 2	24E	1857.5 - 1902.5	0.288	24.59	16QAM
LTE Band 2	24E	1860 - 1900	0.307	24.87	QPSK
LTE Band 2	24E	1860 - 1900	0.262	24.18	16QAM

EUT Overview

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 4 of 28

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intert'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

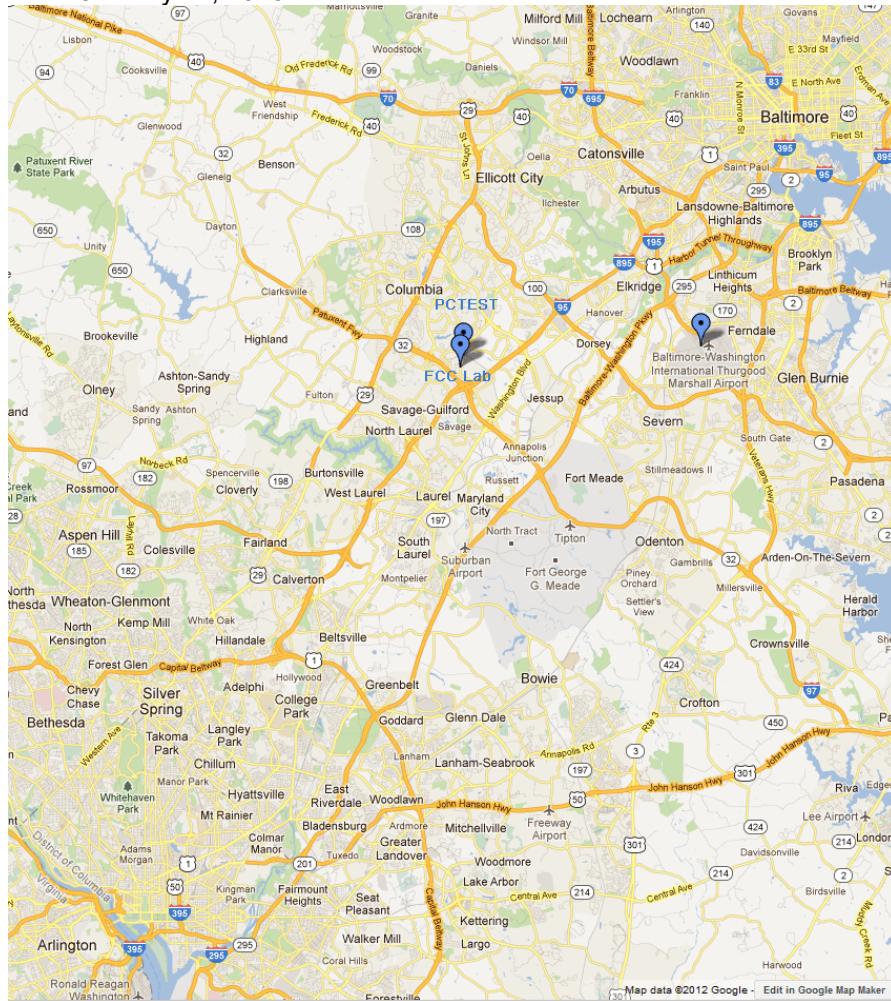


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFL63BL	PCTEST Engineering Laboratory, Inc.		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	Approved by: LG Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset	Page 5 of 28	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFL63BL**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 6 of 28

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

3.2 Block A Frequency Range


§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.


3.3 Cellular - Base Frequency Blocks

§22.905

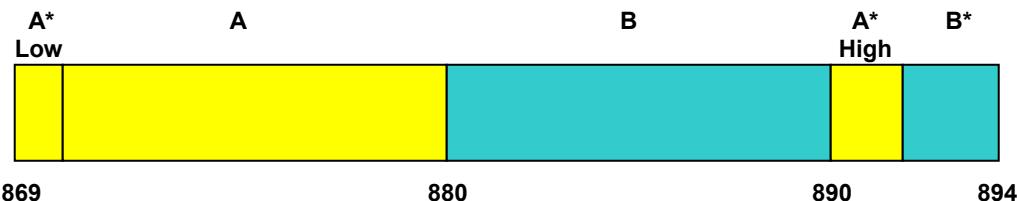

3.4 Cellular - Mobile Frequency Blocks


§22.905

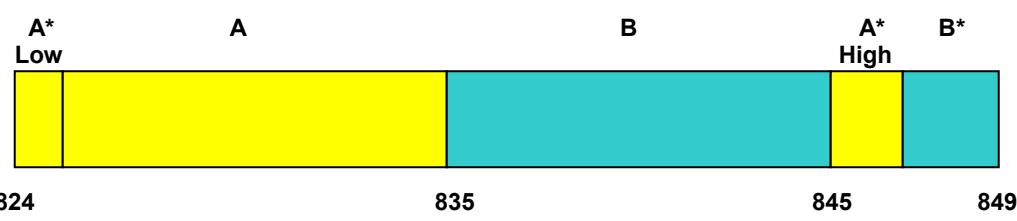

FCC ID: ZNFL63BL	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 7 of 28


3.5 PCS - Base Frequency Blocks

§24.229

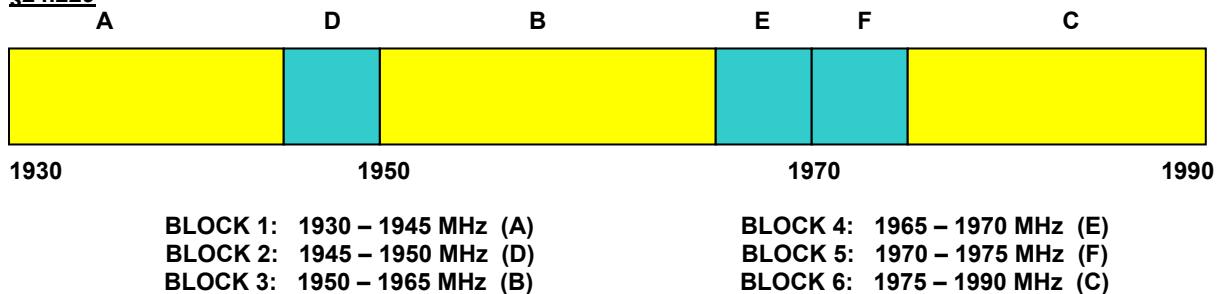


3.6 PCS - Mobile Frequency Blocks

§24.229

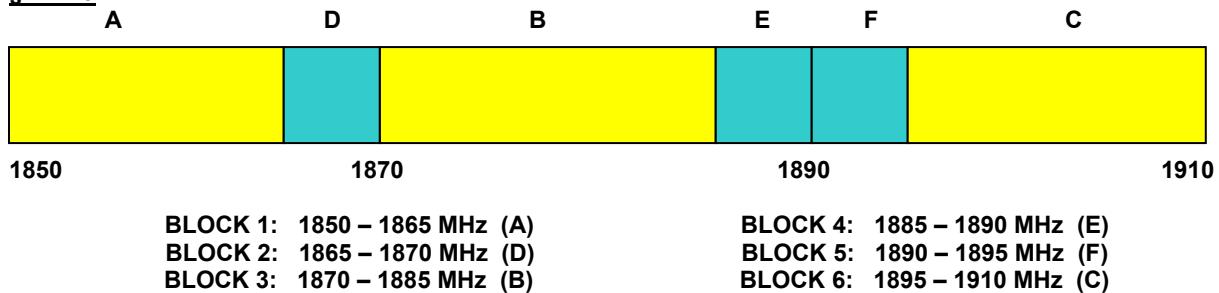


3.7 AWS - Base Frequency Blocks

§27.5(h)

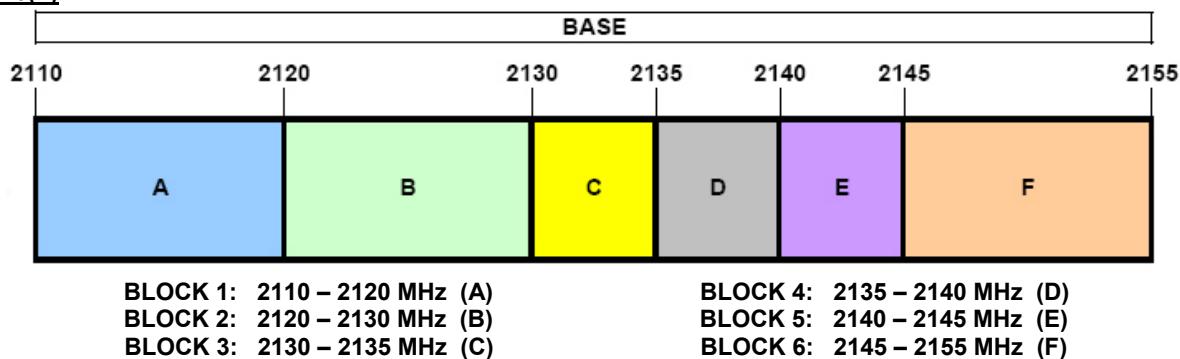

3.8 AWS - Mobile Frequency Blocks

§27.5(h)

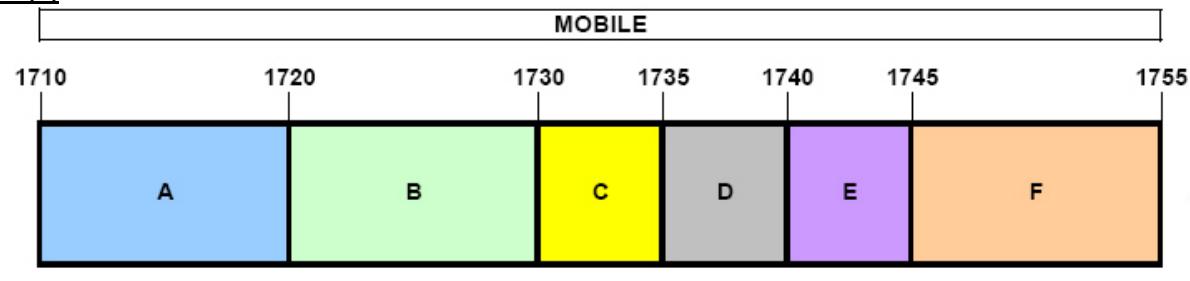

BLOCK 1: 1710 – 1720 MHz (A)
 BLOCK 2: 1720 – 1730 MHz (B)
 BLOCK 3: 1730 – 1735 MHz (C)
 BLOCK 4: 1735 – 1740 MHz (D)
 BLOCK 5: 1740 – 1745 MHz (E)
 BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFL63BL	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>			 LG	Approved by: <small>Quality Manager</small>
Test Report S/N: <small>0Y1612272012.ZNF</small>	Test Dates: <small>12/26/2016-1/1/2017</small>	EUT Type: <small>Portable Handset</small>				Page 8 of 28

3.9 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset	LG	Page 9 of 28
© 2017 PCTEST Engineering Laboratory, Inc.				V 6.1 12/26/2016

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 10 of 28

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	8/23/2016	Biennial	8/23/2018	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/4/2016	Annual	3/4/2017	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11208010032
Mini-Circuits	TVA-11-422	RF Power Amp		N/A		QA1303002
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rohde & Schwarz	CMW500	Radio Communication Tester		N/A		100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/16/2016	Annual	5/16/2017	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107
VWR	62344-734	Thermometer with Clock		N/A		140140420

Table 5-1. Test Equipment

Note:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)				Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 11 of 28

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 12 of 28

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A

FCC ID: ZNFL63BL

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.2
27.50(c.10)	Effective Radiated Power (Band 12)	< 3 Watts max. ERP		PASS	Section 7.2
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 7.2
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 7.2
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	> $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.3

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 13 of 28

7.2 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 14 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

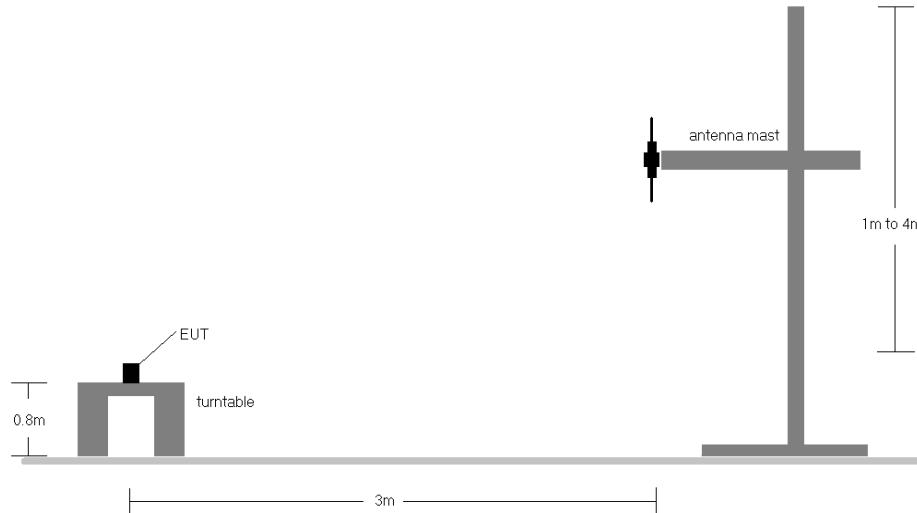


Figure 7-1. Radiated Test Setup <1GHz

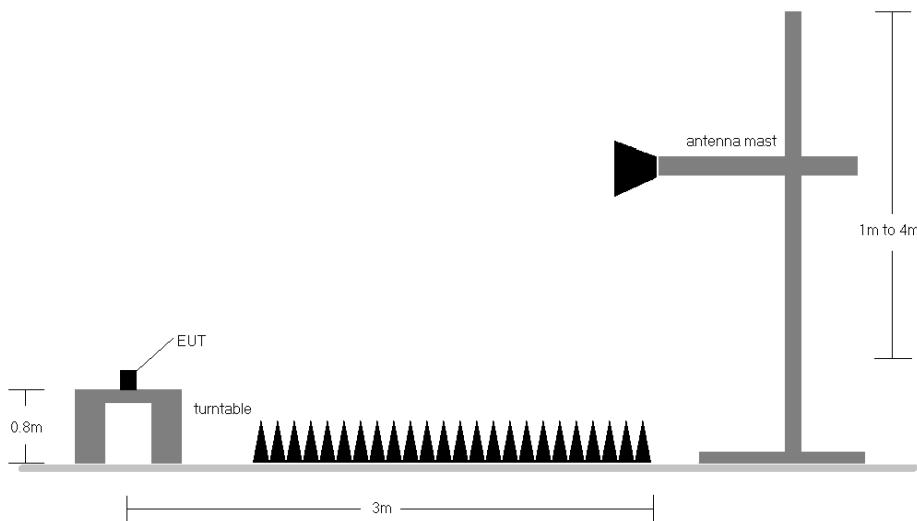


Figure 7-2. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) Class 2 Permissive Change samples were used for testing. It has been determined that powers did not change between Original Certification samples and Class 2 Permissive Change samples. Test results fall within expected measurement tolerances.

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 15 of 28	

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1
12/26/2016

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	H	299	264	1 / 5	17.04	2.48	19.52	34.77	-15.25
707.50	1.4	QPSK	H	125	274	1 / 0	17.39	2.56	19.95	34.77	-14.82
715.30	1.4	QPSK	H	147	260	1 / 5	17.47	2.60	20.07	34.77	-14.71
715.30	1.4	16-QAM	H	147	260	1 / 5	16.76	2.60	19.36	34.77	-15.42
700.50	3	QPSK	H	295	259	1 / 14	16.32	2.48	18.80	34.77	-15.97
707.50	3	QPSK	H	102	269	1 / 0	17.25	2.56	19.81	34.77	-14.96
714.50	3	QPSK	H	139	255	1 / 14	17.25	2.60	19.85	34.77	-14.92
714.50	3	16-QAM	H	139	255	1 / 14	16.52	2.60	19.12	34.77	-15.65
701.50	5	QPSK	H	290	270	1 / 24	16.91	2.49	19.40	34.77	-15.37
707.50	5	QPSK	H	117	267	1 / 0	17.12	2.56	19.68	34.77	-15.09
713.50	5	QPSK	H	143	259	1 / 24	17.18	2.60	19.78	34.77	-14.99
713.50	5	16-QAM	H	143	259	1 / 24	15.77	2.60	18.37	34.77	-16.40
704.00	10	QPSK	H	285	270	1 / 49	17.14	2.51	19.65	34.77	-15.12
707.50	10	QPSK	H	117	264	1 / 49	16.99	2.56	19.55	34.77	-15.22
711.00	10	QPSK	H	140	267	1 / 0	16.91	2.60	19.51	34.77	-15.27
704.00	10	16-QAM	H	285	270	1 / 49	15.94	2.51	18.45	34.77	-16.32
715.30	1.4	QPSK	V	124	158	1 / 0	16.64	3.06	19.70	34.77	-15.07

Table 7-2. ERP Data (Band 12)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 16 of 28

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	H	204	113	1 / 5	16.12	5.51	21.63	38.45	-16.82
836.50	1.4	QPSK	H	203	109	1 / 0	15.97	5.14	21.11	38.45	-17.34
848.30	1.4	QPSK	H	203	122	1 / 5	16.53	4.68	21.21	38.45	-17.24
824.70	1.4	16-QAM	H	204	113	1 / 5	14.31	5.51	19.82	38.45	-18.63
825.50	3	QPSK	H	206	111	1 / 14	16.02	5.52	21.54	38.45	-16.91
836.50	3	QPSK	H	209	110	1 / 0	16.23	5.14	21.37	38.45	-17.08
847.50	3	QPSK	H	204	125	1 / 14	16.50	4.67	21.17	38.45	-17.28
825.50	3	16-QAM	H	206	111	1 / 14	14.73	5.52	20.25	38.45	-18.20
826.50	5	QPSK	H	209	111	1 / 24	16.25	5.51	21.76	38.45	-16.69
836.50	5	QPSK	H	202	112	1 / 0	16.14	5.14	21.28	38.45	-17.17
846.50	5	QPSK	H	203	105	1 / 24	16.62	4.66	21.28	38.45	-17.17
826.50	5	16-QAM	H	209	111	1 / 24	14.01	5.51	19.52	38.45	-18.93
829.00	10	QPSK	H	201	123	1 / 49	15.95	5.49	21.44	38.45	-17.01
836.50	10	QPSK	H	202	120	1 / 0	15.98	5.14	21.12	38.45	-17.33
844.00	10	QPSK	H	205	112	1 / 49	16.39	4.70	21.09	38.45	-17.36
829.00	10	16-QAM	H	201	123	1 / 49	14.03	5.49	19.52	38.45	-18.93
826.50	5	QPSK	V	151	171	1 / 0	15.96	5.34	21.30	38.45	-17.15

Table 7-3. ERP Data (Band 5)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 17 of 28

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	H	108	187	1 / 0	14.88	9.62	24.50	30.00	-5.50
1732.50	1.4	QPSK	H	107	194	1 / 0	14.59	9.50	24.09	30.00	-5.91
1754.30	1.4	QPSK	H	108	198	1 / 0	14.48	9.38	23.86	30.00	-6.14
1710.70	1.4	16-QAM	H	108	187	1 / 0	14.16	9.62	23.78	30.00	-6.22
1711.50	3	QPSK	H	115	191	1 / 0	14.63	9.62	24.25	30.00	-5.75
1732.50	3	QPSK	H	106	194	1 / 0	15.05	9.50	24.55	30.00	-5.45
1753.50	3	QPSK	H	109	198	1 / 0	14.57	9.39	23.96	30.00	-6.04
1732.50	3	16-QAM	H	106	194	1 / 0	12.55	9.50	22.05	30.00	-7.95
1712.50	5	QPSK	H	105	191	1 / 0	14.54	9.61	24.15	30.00	-5.85
1732.50	5	QPSK	H	111	203	1 / 0	15.01	9.50	24.51	30.00	-5.49
1752.50	5	QPSK	H	113	200	1 / 0	14.29	9.39	23.68	30.00	-6.32
1732.50	5	16-QAM	H	111	203	1 / 0	12.85	9.50	22.35	30.00	-7.65
1715.00	10	QPSK	H	109	200	1 / 0	14.61	9.60	24.21	30.00	-5.79
1732.50	10	QPSK	H	109	196	1 / 0	14.57	9.50	24.07	30.00	-5.93
1750.00	10	QPSK	H	108	188	1 / 0	14.46	9.41	23.87	30.00	-6.13
1715.00	10	16-QAM	H	109	200	1 / 0	13.86	9.60	23.46	30.00	-6.54
1717.50	15	QPSK	H	113	200	1 / 0	14.55	9.58	24.13	30.00	-5.87
1732.50	15	QPSK	H	109	202	1 / 0	14.68	9.50	24.18	30.00	-5.82
1747.50	15	QPSK	H	111	197	1 / 0	14.61	9.42	24.03	30.00	-5.97
1732.50	15	16-QAM	H	109	202	1 / 0	12.68	9.50	22.18	30.00	-7.82
1720.00	20	QPSK	H	108	201	1 / 0	14.69	9.57	24.26	30.00	-5.74
1732.50	20	QPSK	H	110	195	1 / 0	14.18	9.50	23.68	30.00	-6.32
1745.00	20	QPSK	H	114	202	1 / 0	14.43	9.43	23.86	30.00	-6.14
1720.00	20	16-QAM	H	108	201	1 / 0	14.04	9.57	23.61	30.00	-6.39
1732.50	3	QPSK	V	100	273	1 / 99	14.14	9.32	23.46	30.00	-6.54

Table 7-4. EIRP Data (Band 4)

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)					 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset						Page 18 of 28

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	111	197	1 / 5	16.37	9.12	25.49	33.01	-7.52
1880.00	1.4	QPSK	H	108	185	1 / 5	15.46	9.10	24.56	33.01	-8.45
1909.30	1.4	QPSK	H	100	187	1 / 0	15.18	9.16	24.34	33.01	-8.67
1850.70	1.4	16-QAM	H	111	197	1 / 5	15.43	9.12	24.55	33.01	-8.46
1851.50	3	QPSK	H	110	188	1 / 14	16.81	9.12	25.93	33.01	-7.08
1880.00	3	QPSK	H	110	186	1 / 0	15.88	9.10	24.98	33.01	-8.03
1908.50	3	QPSK	H	108	196	1 / 0	15.59	9.15	24.74	33.01	-8.27
1851.50	3	16-QAM	H	110	188	1 / 14	15.99	9.12	25.11	33.01	-7.90
1852.50	5	QPSK	H	107	198	1 / 24	16.72	9.12	25.84	33.01	-7.17
1880.00	5	QPSK	H	104	188	1 / 24	15.83	9.10	24.93	33.01	-8.08
1907.50	5	QPSK	H	111	199	1 / 0	15.53	9.15	24.68	33.01	-8.33
1852.50	5	16-QAM	H	107	198	1 / 24	15.85	9.12	24.97	33.01	-8.04
1855.00	10	QPSK	H	106	186	1 / 49	16.52	9.12	25.64	33.01	-7.37
1880.00	10	QPSK	H	101	194	1 / 49	15.63	9.10	24.73	33.01	-8.28
1905.00	10	QPSK	H	103	187	1 / 0	15.36	9.13	24.49	33.01	-8.52
1855.00	10	16-QAM	H	106	186	1 / 49	15.66	9.12	24.78	33.01	-8.23
1857.50	15	QPSK	H	111	187	1 / 74	16.06	9.11	25.17	33.01	-7.84
1880.00	15	QPSK	H	111	194	1 / 0	15.93	9.10	25.03	33.01	-7.98
1902.50	15	QPSK	H	110	200	1 / 0	15.68	9.11	24.79	33.01	-8.22
1857.50	15	16-QAM	H	111	187	1 / 74	15.18	9.11	24.29	33.01	-8.72
1860.00	20	QPSK	H	109	192	1 / 99	15.76	9.11	24.87	33.01	-8.14
1880.00	20	QPSK	H	107	198	1 / 0	15.59	9.10	24.69	33.01	-8.32
1900.00	20	QPSK	H	103	191	1 / 0	15.74	9.09	24.83	33.01	-8.18
1860.00	20	16-QAM	H	109	192	1 / 99	15.07	9.11	24.18	33.01	-8.83
1851.50	3	QPSK	V	101	273	1 / 0	14.22	8.97	23.19	33.01	-9.82

Table 7-5. EIRP Data (Band 2)

FCC ID: ZNFL63BL	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)					 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset						Page 19 of 28

7.3 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 20 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1

© 2015 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

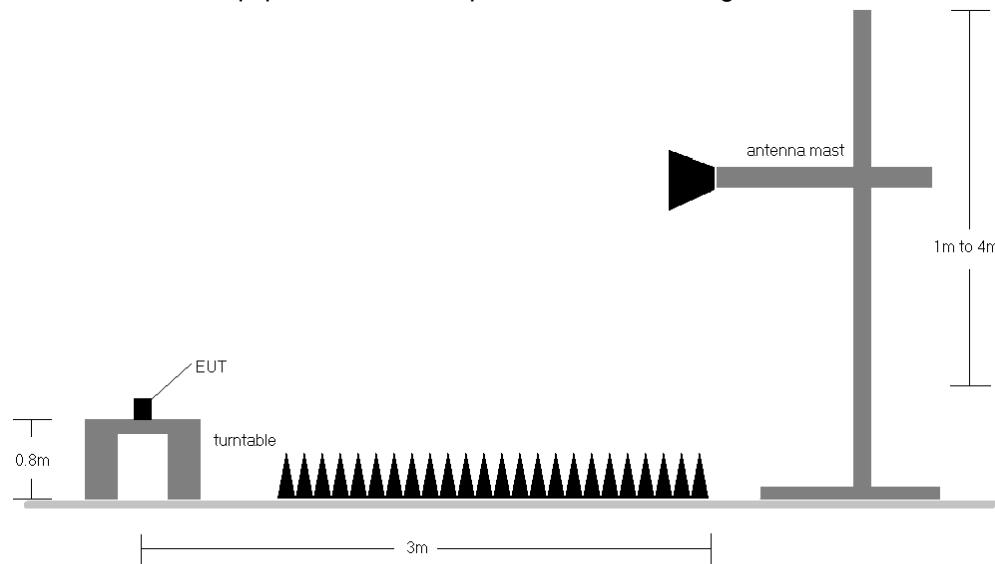


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFL63BL	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT <small>(CLASS II PERMISSIVE CHANGE)</small>		 LG	Approved by: <small>Quality Manager</small>
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset			Page 21 of 28

OPERATING FREQUENCY: 699.70 MHz
 CHANNEL: 23017
 MEASURED OUTPUT POWER: 19.52 dBm = 0.090 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.52 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1399.40	H	141	151	-63.88	5.62	-58.26	77.8
2099.10	H	112	126	-68.97	6.63	-62.33	81.9
2798.80	H	-	-	-70.61	7.15	-63.46	83.0

Table 7-6. Radiated Spurious Data (Band 12 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MEASURED OUTPUT POWER: 19.95 dBm = 0.099 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.95 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1415.00	H	139	145	-63.15	5.72	-57.44	77.4
2122.50	H	115	132	-68.85	6.74	-62.12	82.1
2830.00	H	-	-	-69.95	7.13	-62.81	82.8

Table 7-7. Radiated Spurious Data (Band 12 – Mid Channel)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)				Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 22 of 28

OPERATING FREQUENCY: 715.30 MHz
 CHANNEL: 23173
 MEASURED OUTPUT POWER: 20.07 dBm = 0.102 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.07 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1430.60	H	122	154	-60.70	5.81	-54.88	75.0
2145.90	H	108	161	-69.40	6.84	-62.56	82.6
2861.20	H	-	-	-69.08	7.11	-61.97	82.0

Table 7-8. Radiated Spurious Data (Band 12 – High Channel)

OPERATING FREQUENCY: 826.50 MHz
 CHANNEL: 20425
 MEASURED OUTPUT POWER: 21.76 dBm = 0.150 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.76 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1653.00	H	108	315	-71.63	6.43	-65.19	87.0
2479.50	H	-	-	-69.21	6.64	-62.57	84.3
3306.00	H	-	-	-67.23	6.38	-60.85	82.6

Table 7-9. Radiated Spurious Data (Band 5 – Low Channel)

FCC ID: ZNFL63BL	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 23 of 28

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MEASURED OUTPUT POWER: 21.28 dBm = 0.134 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.28 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.00	H	118	335	-70.99	6.31	-64.67	86.0
2509.50	H	-	-	-70.65	6.66	-63.99	85.3
3346.00	H	-	-	-67.56	6.50	-61.06	82.3

Table 7-10. Radiated Spurious Data (Band 5 – Mid Channel)

OPERATING FREQUENCY: 846.50 MHz
 CHANNEL: 20625
 MEASURED OUTPUT POWER: 21.28 dBm = 0.134 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.28 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.00	H	102	326	-68.39	6.20	-62.19	83.5
2539.50	H	-	-	-69.17	6.66	-62.52	83.8
3386.00	H	-	-	-67.04	6.61	-60.42	81.7

Table 7-11. Radiated Spurious Data (Band 5 – High Channel)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)				Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 24 of 28



OPERATING FREQUENCY: 1711.50 MHz
 CHANNEL: 19965
 MEASURED OUTPUT POWER: 24.25 dBm = 0.266 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.25 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3423.00	H	-	-	-63.38	8.83	-54.55	78.8
5134.50	H	-	-	-62.75	10.64	-52.11	76.4
6846.00	H	-	-	-60.78	10.22	-50.56	74.8

Table 7-12. Radiated Spurious Data (Band 4 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MEASURED OUTPUT POWER: 24.55 dBm = 0.285 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.55 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.00	H	-	-	-64.00	8.88	-55.12	79.7
5197.50	H	-	-	-61.81	10.33	-51.48	76.0
6930.00	H	-	-	-61.34	10.53	-50.81	75.4

Table 7-13. Radiated Spurious Data (Band 4 – Mid Channel)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)				Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 25 of 28



OPERATING FREQUENCY: 1753.50 MHz
 CHANNEL: 20385
 MEASURED OUTPUT POWER: 23.96 dBm = 0.249 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.96 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3507.00	H	-	-	-62.72	8.92	-53.80	77.8
5260.50	H	-	-	-59.50	10.38	-49.12	73.1
7014.00	H	-	-	-60.58	10.52	-50.06	74.0

Table 7-14. Radiated Spurious Data (Band 4 – High Channel)

OPERATING FREQUENCY: 1851.50 MHz
 CHANNEL: 18615
 MEASURED OUTPUT POWER: 25.93 dBm = 0.392 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.93 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3703.00	H	136	376	-61.33	8.81	-52.52	78.4
5554.50	H	-	-	-63.35	10.47	-52.88	78.8
7406.00	H	-	-	-59.23	10.38	-48.85	74.8

Table 7-15. Radiated Spurious Data (Band 2 – Low Channel)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 26 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MEASURED OUTPUT POWER: 24.98 dBm = 0.315 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.98 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	142	357	-59.95	8.44	-51.51	76.5
5640.00	H	-	-	-63.49	10.64	-52.85	77.8
7520.00	H	-	-	-60.78	11.10	-49.68	74.7

Table 7-16. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY: 1908.50 MHz
 CHANNEL: 19185
 MEASURED OUTPUT POWER: 24.74 dBm = 0.298 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.74 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3817.00	H	123	338	-56.25	8.21	-48.03	72.8
5725.50	H	-	-	-62.79	10.40	-52.39	77.1
7634.00	H	-	-	-60.88	11.21	-49.67	74.4

Table 7-17. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFL63BL		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)				Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset				Page 27 of 28

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFL63BL** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: ZNFL63BL	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		 LG	Approved by: Quality Manager
Test Report S/N: 0Y1612272012.ZNF	Test Dates: 12/26/2016-1/1/2017	EUT Type: Portable Handset		Page 28 of 28

© 2017 PCTEST Engineering Laboratory, Inc.

V 6.1
12/26/2016

© 2015 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.