



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22, 24, & 27

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States


**Date of Testing:**  
12/29/2016 - 1/12/2017  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1612272019.ZNF

<b>FCC ID:</b>	<b>ZNFL83BL</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A</b>



**Application Type:** Class II Permissive Change  
**Model:** LGL83BL  
**Additional Model(s):** LG-L83BL, L83BL, LG-M430, LGM430, M430  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2 §22(H) §24(E) §27(L)  
**Test Procedure(s):** ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02  
**Test Device Serial No.:** [S/N: 04553]  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 12/21/2016

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
 Randy Ortanez  
 President




<b>FCC ID:</b> ZNFL83BL			<b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset		Page 1 of 29	

# T A B L E O F C O N T E N T S


FCC PART 22, 24, & 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		5
1.1 Scope.....		5
1.2 Testing Facility .....		5
2.0 PRODUCT INFORMATION.....		6
2.1 Equipment Description .....		6
2.2 Device Capabilities .....		6
2.3 Test Configuration.....		6
2.4 EMI Suppression Device(s)/Modifications.....		6
3.0 DESCRIPTION OF TESTS .....		7
3.1 Evaluation Procedure.....		7
3.2 Cellular - Base Frequency Blocks .....		7
3.3 Cellular - Mobile Frequency Blocks.....		7
3.4 PCS - Base Frequency Blocks.....		7
3.5 PCS - Mobile Frequency Blocks .....		8
3.6 AWS - Base Frequency Blocks .....		8
3.7 AWS - Mobile Frequency Blocks.....		8
3.8 Radiated Measurements .....		9
4.0 MEASUREMENT UNCERTAINTY .....		10
5.0 TEST EQUIPMENT CALIBRATION DATA .....		11
6.0 SAMPLE CALCULATIONS .....		12
7.0 TEST RESULTS .....		13
7.1 Summary.....		13
7.2 Radiated Power (ERP/EIRP) .....		14
7.3 Radiated Spurious Emissions Measurements.....		19
8.0 CONCLUSION.....		29

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> <b>(CLASS II PERMISSIVE CHANGE)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 2 of 29



# MEASUREMENT REPORT

## FCC Part 22, 24, & 27



### §2.1033 General Information



**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2 §22(H) §24(E) §27(L)  
**BASE MODEL:** LGL83BL  
**FCC ID:** ZNFL83BL  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM / EDGE / WCDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 04553       Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** 12/29/2016 - 1/12/2017  
**TEST REPORT S/N:** 0Y1612272019.ZNF


### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.




<b>FCC ID:</b> ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 3 of 29	





## MEASUREMENT REPORT

### FCC Part 22, 24, & 27



	FCC Rule Part	Tx Frequency (MHz)	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GPRS850	22H	824.2 - 848.8	1.489	31.73
EDGE850	22H	824.2 - 848.8	0.302	24.80
WCDMA850	22H	826.4 - 846.6	0.173	22.39
WCDMA1700	27	1712.4 - 1752.6	0.451	26.54
GPRS1900	24E	1850.2 - 1909.8	1.335	31.25
EDGE1900	24E	1850.2 - 1909.8	0.254	24.05
WCDMA1900	24E	1852.4 - 1907.6	0.346	25.38

**EUT Overview**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 4 of 29



## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFL83BL**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

### 2.2 Device Capabilities

This device contains the following capabilities:



850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 6 of 29

## 3.0 DESCRIPTION OF TESTS


### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 Cellular - Base Frequency Blocks

§22.905

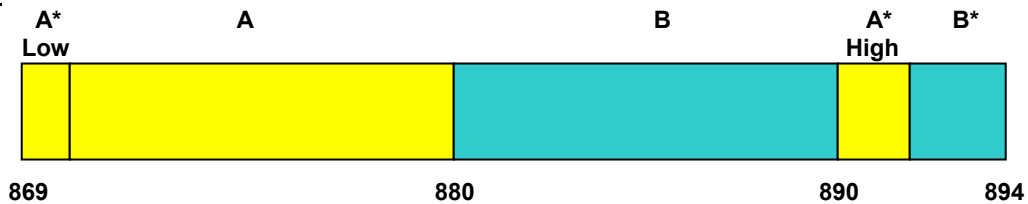

BLOCK 1: 869 – 880 MHz (A\* Low + A)


BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

§22.905

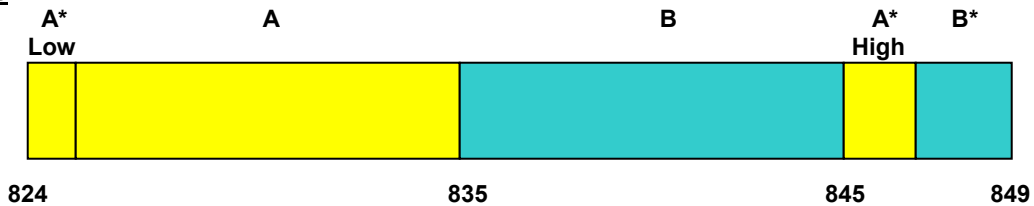

BLOCK 1: 824 – 835 MHz (A\* Low + A)


BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

### 3.4 PCS - Base Frequency Blocks

§24.229

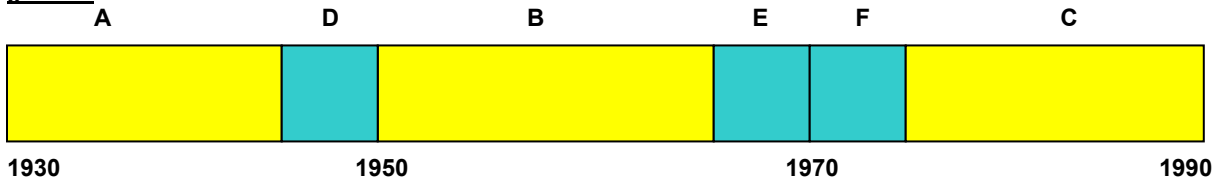

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFL83BL	<b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 0Y1612272019.ZNF	Test Dates: 12/29/2016 - 1/12/2017	EUT Type: Portable Handset	
			Page 7 of 29

### 3.5 PCS - Mobile Frequency Blocks

§24.229

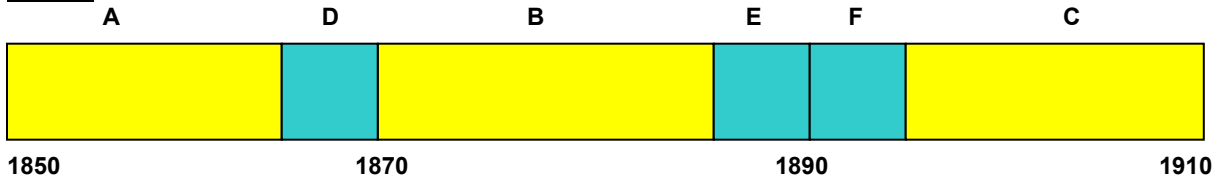

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)


BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks

§27.5(h)

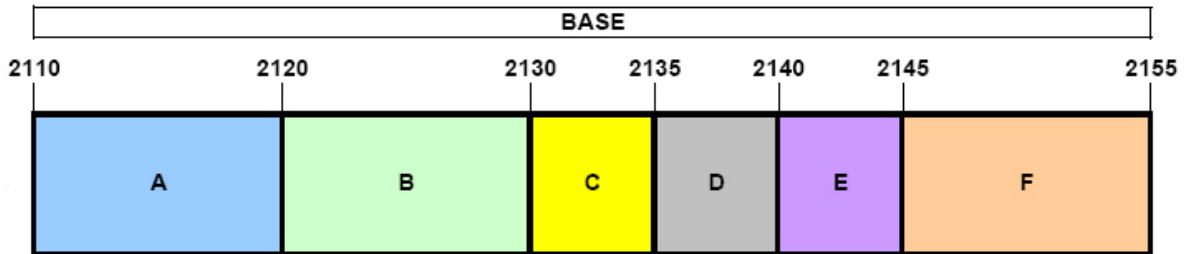

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

### 3.7 AWS - Mobile Frequency Blocks

§27.5(h)

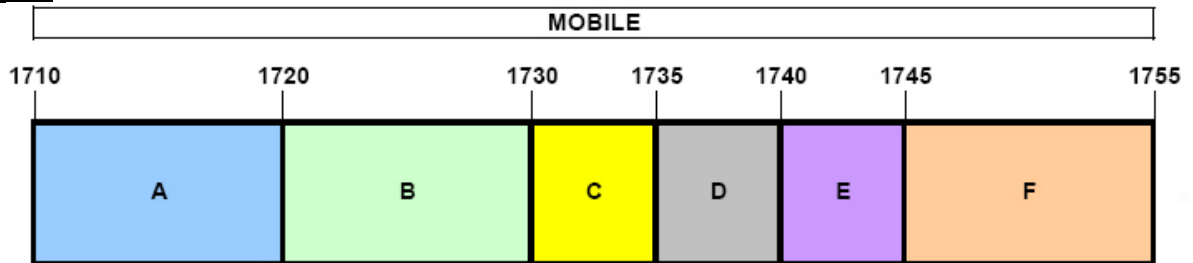

BLOCK 1: 1710 – 1720 MHz (A)



BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 8 of 29	



### 3.8 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d)(10) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/ITA-603-D-2010.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE) 		Approved by: Quality Manager
Test Report S/N: 0Y1612272019.ZNF	Test Dates: 12/29/2016 - 1/12/2017	EUT Type: Portable Handset	Page 9 of 29

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 10 of 29

## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	7/11/2016	Annual	7/11/2017	441128
Emco	6502	Active Loop Antenna (10k - 30 MHz)	8/9/2016	Biennial	8/9/2018	2936
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	8/23/2016	Biennial	8/23/2018	135427
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/4/2016	Annual	3/4/2017	11401010036
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Rohde & Schwarz	CMU200	Base Station Simulator	6/2/2016	Annual	6/2/2017	109892
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100040
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/18/2015	Biennial	11/18/2017	91052523RX
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107
Sunol Sciences	DRH-118	Horn Antenna (1-18GHz)	7/1/2015	Biennial	7/1/2017	A060215

**Table 5-1. Test Equipment**

**Notes:**

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.



<b>FCC ID:</b> ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 11 of 29

## 6.0 SAMPLE CALCULATIONS

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 12 of 29	

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFL83BL  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / EDGE / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.2
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.2
27.50(d.4)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.2
2.1053 22.917(a) 24.238(a) 27.53(h)	Radiated Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 7.3

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

<b>FCC ID:</b> ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	
			Page 13 of 29

## 7.2 Radiated Power (ERP/EIRP)

§22.913(a)(2) 24.232(c) 27.50(d.4)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".  
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 14 of 29

### Test Setup

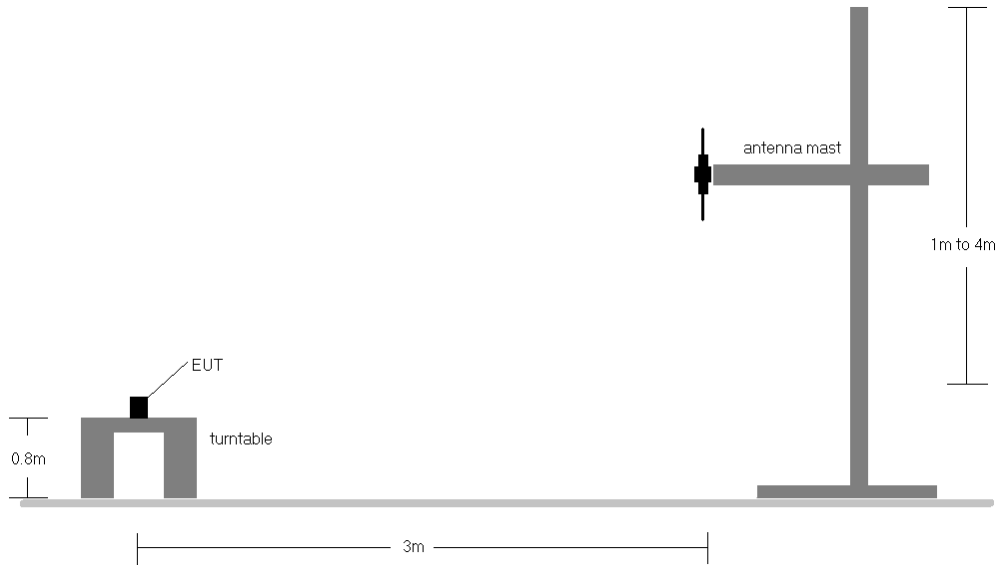

The EUT and measurement equipment were set up as shown in the diagram below.

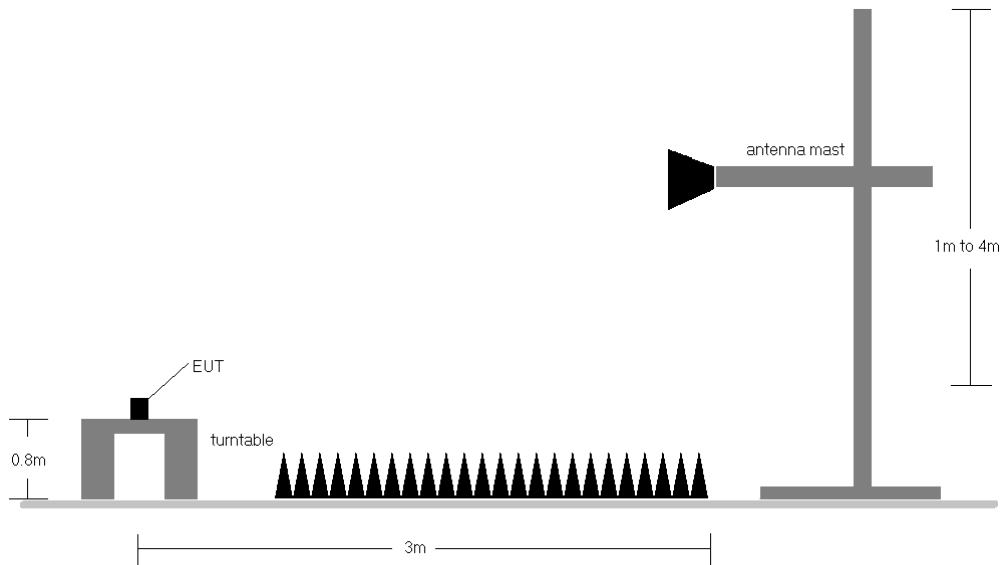

**Figure 7-1. Radiated Test Setup <1GHz**





**Figure 7-2. Radiated Test Setup >1GHz**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 15 of 29

**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) Class 2 Permissive Change samples were used for testing. It has been determined that output powers did not change from the original certification samples and are within the expected measurement tolerances.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 16 of 29



Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GPRS850	H	150	60	31.91	-0.65	31.26	1.337	38.45	-7.19
836.60	GPRS850	H	150	60	32.02	-0.65	31.37	1.371	38.45	-7.08
848.80	GPRS850	H	150	60	32.38	-0.65	31.73	1.489	38.45	-6.72
848.80	GPRS850	V	150	330	31.29	-0.65	30.64	1.159	38.45	-7.81
848.80	EDGE850	H	150	60	25.45	-0.65	24.80	0.302	38.45	-13.65

**Table 7-2. ERP (Cellular GPRS)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	150	60	22.37	-0.65	21.72	0.149	38.45	-16.73
836.60	WCDMA850	H	150	70	23.04	-0.65	22.39	0.173	38.45	-16.06
846.60	WCDMA850	H	150	70	23.00	-0.65	22.35	0.172	38.45	-16.10
836.60	WCDMA850	V	150	220	22.37	-0.65	21.72	0.149	38.45	-16.73



**Table 7-3. ERP (Cellular WCDMA)**

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	150	20	16.93	5.41	22.34	0.171	30.00	-7.66
1732.60	WCDMA1700	H	150	30	21.13	5.41	26.54	0.451	30.00	-3.46
1752.60	WCDMA1700	H	150	20	17.77	5.41	23.18	0.208	30.00	-6.82
1732.60	WCDMA1700	V	150	280	17.39	5.41	22.80	0.190	30.00	-7.20

**Table 7-4. EIRP (AWS WCDMA)**



Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	V	150	50	25.23	4.84	30.07	1.017	33.01	-2.94
1880.00	GPRS1900	V	150	60	26.41	4.84	31.25	1.335	33.01	-1.76
1909.80	GPRS1900	V	150	60	25.52	4.84	30.36	1.088	33.01	-2.65
1880.00	GPRS1900	H	150	20	26.46	4.74	31.20	1.318	33.01	-1.81
1880.00	EDGE1900	V	150	60	19.21	4.84	24.05	0.254	33.01	-8.96

**Table 7-5. EIRP (PCS GPRS)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 0Y1612272019.ZNF	Test Dates: 12/29/2016 - 1/12/2017	EUT Type: Portable Handset		Page 17 of 29

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	V	150	30	19.46	4.84	24.30	0.269	33.01	-8.71
1880.00	WCDMA1900	V	150	0	20.54	4.84	25.38	0.346	33.01	-7.63
1907.60	WCDMA1900	V	150	20	19.34	4.84	24.18	0.262	33.01	-8.83
1880.00	WCDMA1900	H	150	170	19.51	4.74	24.25	0.266	33.01	-8.76

**Table 7-6. EIRP (PCS WCDMA)**

<b>FCC ID:</b> ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> <b>(CLASS II PERMISSIVE CHANGE)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset		Page 18 of 29

### 7.3 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) 24.238(a) 27.53(h)

#### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



#### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12


#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 19 of 29

## Test Setup

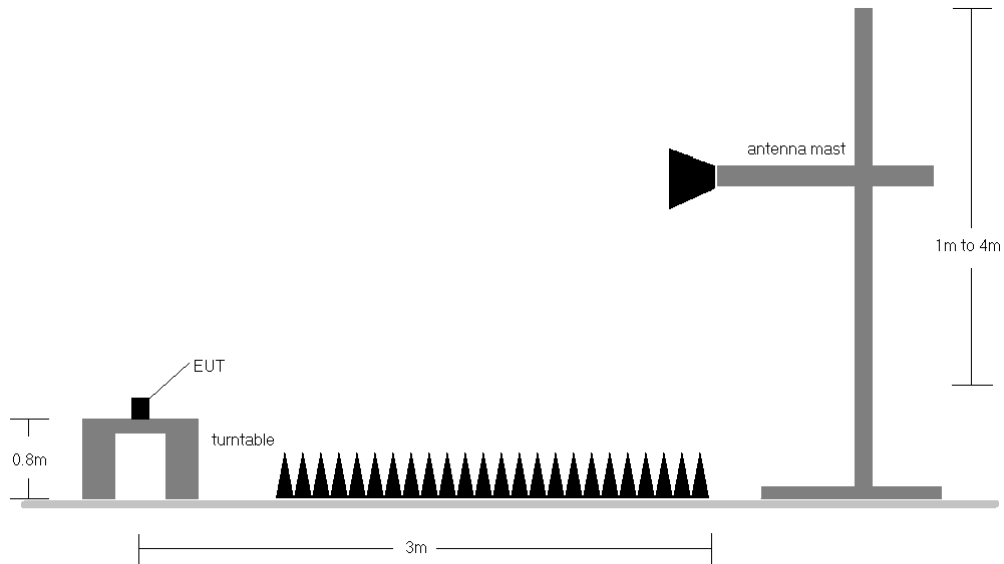

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 20 of 29	

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 31.26 dBm = 1.337 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  44.26 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1648.40	H	-	-	-67.80	6.26	-61.54	92.8
2472.60	H	112	118	-58.42	6.61	-51.81	83.1
3296.80	H	-	-	-62.83	6.98	-55.84	87.1
4121.00	H	-	-	-61.36	7.69	-53.67	84.9

**Table 7-7. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)**

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 31.37 dBm = 1.371 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  44.37 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	H	-	-	-67.12	6.13	-60.99	92.4
2509.80	H	100	131	-61.01	6.64	-54.37	85.7
3346.40	H	-	-	-62.90	7.14	-55.76	87.1
4183.00	H	-	-	-62.98	8.06	-54.92	86.3

**Table 7-8. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 21 of 29	

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 31.73 dBm = 1.489 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  44.73 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1697.60	H	-	-	-66.93	6.00	-60.93	92.7
2546.40	H	100	121	-64.46	6.74	-57.72	89.4
3395.20	H	-	-	-64.79	7.30	-57.49	89.2
4244.00	H	-	-	-63.85	8.35	-55.49	87.2

**Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)**

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 21.72 dBm = 0.149 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.72 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1652.80	H	-	-	-72.80	6.23	-66.57	88.3
2479.20	H	-	-	-70.11	6.61	-63.50	85.2

**Table 7-10. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset		Page 22 of 29

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 22.39 dBm = 0.173 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.39 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1673.20	H	-	-	-72.62	6.13	-66.49	88.9
2509.80	H	-	-	-70.44	6.64	-63.80	86.2

**Table 7-11. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 22.35 dBm = 0.172 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.35 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	[dBc]
1693.20	H	-	-	-72.56	6.03	-66.54	88.9
2539.80	H	-	-	-70.92	6.72	-64.20	86.5

**Table 7-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 23 of 29	

OPERATING FREQUENCY: 1712.40 MHz  
 CHANNEL: 1312  
 MEASURED OUTPUT POWER: 22.34 dBm = 0.171 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.34 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3424.80	H	100	33	-62.41	9.53	-52.88	75.2
5137.20	H	100	349	-58.05	11.03	-47.02	69.4
6849.60	H	-	-	-62.85	10.75	-52.10	74.4
8562.00	H	-	-	-61.13	11.29	-49.85	72.2

Table 7-13. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY: 1732.60 MHz  
 CHANNEL: 1413  
 MEASURED OUTPUT POWER: 26.54 dBm = 0.451 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.54 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3465.20	H	100	36	-65.39	9.64	-55.74	82.3
5197.80	H	102	214	-60.36	10.98	-49.38	75.9
6930.40	H	-	-	-62.88	10.85	-52.03	78.6
8663.00	H	-	-	-61.39	11.53	-49.86	76.4

Table 7-14. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1412)

FCC ID: ZNFL83BL	 FCC Pt. 22, 24, & 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 0Y1612272019.ZNF	Test Dates: 12/29/2016 - 1/12/2017	EUT Type: Portable Handset		Page 24 of 29



OPERATING FREQUENCY: 1752.60 MHz  
 CHANNEL: 1513  
 MEASURED OUTPUT POWER: 23.18 dBm = 0.208 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.18 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3505.20	H	100	36	-65.25	9.75	-55.50	78.7
5257.80	H	100	214	-59.65	11.06	-48.59	71.8
7010.40	H	-	-	-63.10	11.01	-52.10	75.3
8763.00	H	-	-	-62.05	11.73	-50.32	73.5

**Table 7-15. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 30.07 dBm = 1.017 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  43.07 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3700.40	H	100	178	-59.47	9.92	-49.55	79.6
5550.60	H	100	76	-52.11	11.15	-40.96	71.0
7400.80	H	-	-	-56.90	10.79	-46.11	76.2
9251.00	H	-	-	-56.02	12.30	-43.72	73.8

**Table 7-16. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 25 of 29	

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 31.25 dBm = 1.335 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  44.25 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	100	309	-60.01	9.63	-50.38	81.6
5640.00	H	100	75	-52.15	11.29	-40.86	72.1
7520.00	H	-	-	-57.94	11.12	-46.82	78.1
9400.00	H	-	-	-55.21	12.28	-42.93	74.2

**Table 7-17. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)**

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 30.36 dBm = 1.088 W  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  43.36 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3819.60	H	100	304	-57.12	9.39	-47.73	78.1
5729.40	H	121	77	-53.54	11.37	-42.17	72.5
7639.20	H	-	-	-60.15	11.34	-48.80	79.2
9549.00	H	-	-	-55.61	12.48	-43.13	73.5

**Table 7-18. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 26 of 29	

OPERATING FREQUENCY: 1852.40 MHz  
 CHANNEL: 9262  
 MEASURED OUTPUT POWER: 24.30 dBm = 0.269 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.30 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3704.80	H	-	-	-67.89	9.89	-58.00	82.3
5557.20	H	-	-	-65.54	11.16	-54.37	78.7
7409.60	H	-	-	-63.11	10.82	-52.29	76.6

Table 7-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 9400  
 MEASURED OUTPUT POWER: 25.38 dBm = 0.346 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.38 dBc

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3760.00	H	-	-	-67.54	9.63	-57.91	83.3
5640.00	H	-	-	-65.68	11.29	-54.39	79.8



Table 7-20. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFL83BL	 FCC Pt. 22, 24, & 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 0Y1612272019.ZNF	Test Dates: 12/29/2016 - 1/12/2017	EUT Type: Portable Handset		Page 27 of 29

OPERATING FREQUENCY: 1907.60 MHz  
 CHANNEL: 9538  
 MEASURED OUTPUT POWER: 24.18 dBm = 0.262 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.18 dBc



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	[dBc]
3815.20	H	-	-	-66.86	9.40	-57.45	81.6
5722.80	H	-	-	-65.84	11.37	-54.47	78.7

**Table 7-21. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset	Page 28 of 29	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFL83BL** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules.

FCC ID: ZNFL83BL	 <b>FCC Pt. 22, 24, &amp; 27 GSM / EDGE / WCDMA MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1612272019.ZNF	<b>Test Dates:</b> 12/29/2016 - 1/12/2017	<b>EUT Type:</b> Portable Handset		Page 29 of 29