



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 22, 24

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
7/5/2013 - 8/5/2013
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1307031175.ZNF

FCC ID:	ZNFLS980
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A

Application Type: Class II Permissive Change
Model(s): LS-980, LGLS980
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2 §22(H) §24(E)
Test Procedure(s): ANSI/TIA-603-C-2004, KDB 971168
Test Device Serial No.: *identical prototype* [S/N: LTE/CDMA, GSM]
Class II Permissive Change: Please see FCC change documents.
Original Grant Date: 7/23/2013

Mode	Tx Frequency (MHz)	ERP/EIRP	
		Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	0.427	26.30
EDGE850	824.2 - 848.8	0.174	22.41
GSM1900	1850.2 - 1909.8	1.032	30.14
EDGE1900	1850.2 - 1909.8	0.362	25.58
CDMA850	824.70 - 848.31	0.123	20.89
CDMA1900	1851.25 - 1908.75	0.196	22.92
WCDMA850	826.4 - 846.6	0.136	21.33
WCDMA1900	1852.4 - 1907.6	0.220	23.42

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 1 of 32

T A B L E O F C O N T E N T S

FCC PART 22, 24 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES		5
2.3 TEST CONFIGURATION		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
3.0 DESCRIPTION OF TESTS		6
3.1 EVALUATION PROCEDURE		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS		6
3.4 PCS - BASE FREQUENCY BLOCKS		6
3.5 PCS - MOBILE FREQUENCY BLOCKS		7
3.6 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		8
4.0 TEST EQUIPMENT CALIBRATION DATA		9
5.0 SAMPLE CALCULATIONS		10
6.0 TEST RESULTS		11
6.1 SUMMARY		11
6.2 CELLULAR EFFECTIVE RADIATED POWER (ERP)		12
6.3 PCS EQUIVALENT ISOTROPIC POWER (EIRP)		13
6.4 CELLULAR GSM RADIATED MEASUREMENTS		14
6.5 CELLULAR CDMA RADIATED MEASUREMENTS		17
6.6 CELLULAR WCDMA RADIATED MEASUREMENTS		20
6.7 PCS GSM RADIATED MEASUREMENTS		23
6.8 PCS CDMA RADIATED MEASUREMENTS		26
6.9 PCS WCDMA RADIATED MEASUREMENTS		29
7.0 CONCLUSION		32

FCC ID: ZNFLS980	 FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	
			Page 2 of 32



MEASUREMENT REPORT

FCC Part 22, 24




§2.1033 General Information



APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2 §22(H) §24(E)
BASE MODEL: LS-980
FCC ID: ZNFLS980
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: GSM / EDGE / CDMA / WCDMA
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: LTE/CDMA, GSM Production Pre-Production Engineering
DATE(S) OF TEST: 7/5/2013 - 8/5/2013
TEST REPORT S/N: 0Y1307031175.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 3 of 32	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

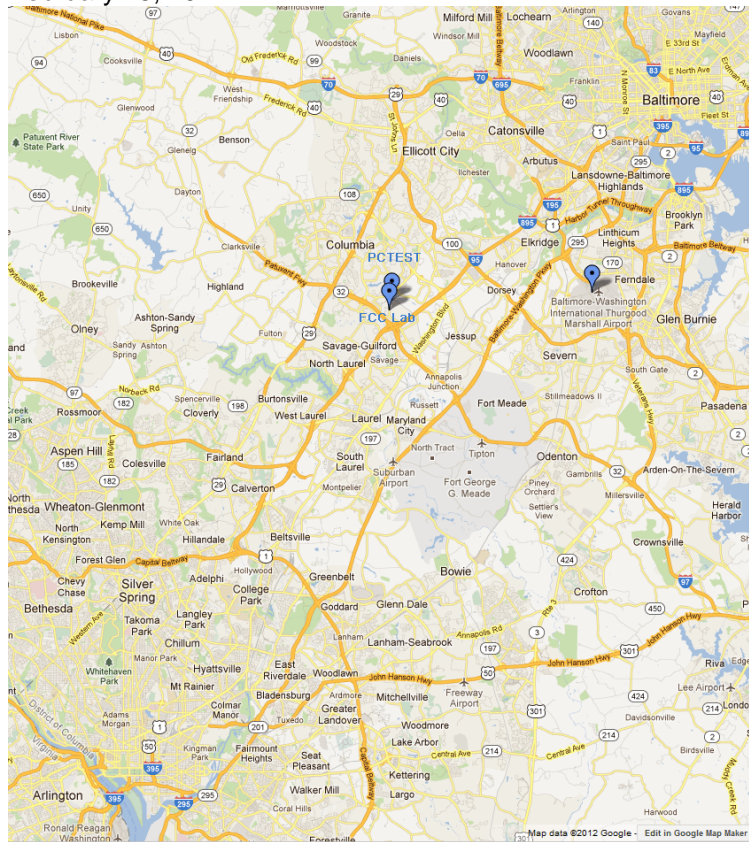




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 4 of 32	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Handset FCC ID: ZNFLS980**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

2.2 Device Capabilities

This device contains the following capabilities:



850/1900 CDMA/EvDO Rev0/A (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 25 (3,5,10MHz), 26 (1.4,3,5,10 MHz), 41 (10,15,20 MHz) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC

2.3 Test Configuration

The LGE Portable Handset FCC ID: ZNFLS980 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 5 of 32	

3.0 DESCRIPTION OF TESTS


3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **LGE Portable Handset FCC ID: ZNFLS980**.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

§22.905

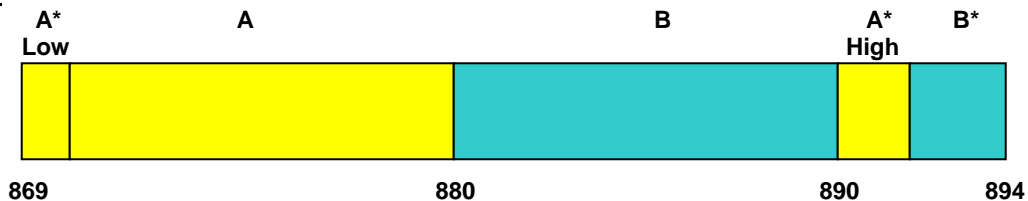

BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

§22.905

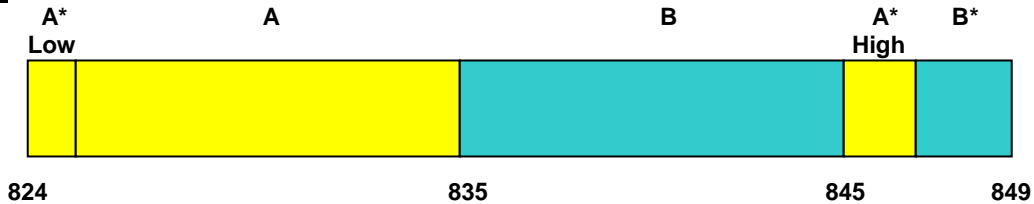

BLOCK 1: 824 – 835 MHz (A* Low + A)


BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

§24.229

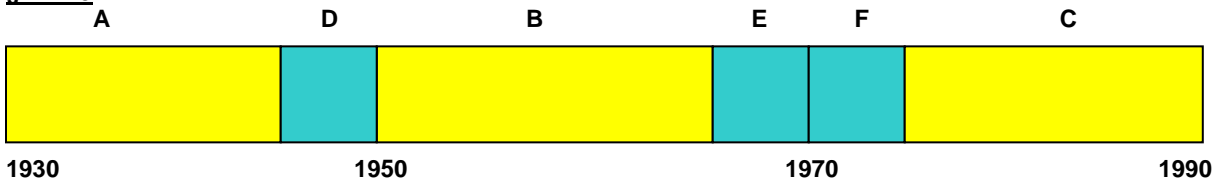

BLOCK 1: 1930 – 1945 MHz (A)



BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 6 of 32

3.5 PCS - Mobile Frequency Blocks

§24.229

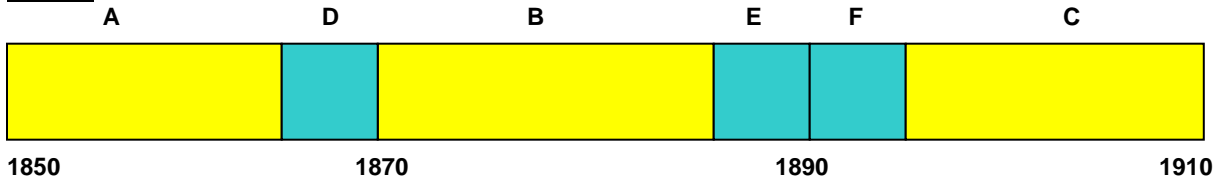

BLOCK 1: 1850 – 1865 MHz (A)



BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 7 of 32	

3.6 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1)

Radiated power measurements are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ specified in 22.917(a) and 24.238(a).

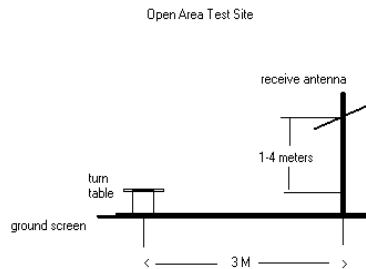




Figure 3-1. Diagram of 3-meter outdoor test range

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 8 of 32

4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	4/17/2013	Annual	4/17/2014	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2012	Annual	10/10/2013	3613A00315
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9038A	MXE EMI Receiver	12/8/2012	Annual	12/8/2013	MY51210133
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Mini-Circuits	VHF-1300+	High Pass Filter	1/21/2013	Annual	1/21/2014	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/21/2013	Annual	1/21/2014	31144
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		N/A	836536/0005
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	6/19/2013	Biennial	6/19/2015	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/19/2013	Biennial	6/19/2015	A042511

Table 4-1. Test Equipment

Notes:

1. Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.



FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 9 of 32

5.0 SAMPLE CALCULATIONS

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 10 of 32	

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFLS980
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / EDGE / CDMA / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a)	Undesirable Emissions	> 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5, 6.6, 6.7, 6.8, 6.9

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 11 of 32	

6.2 Cellular Effective Radiated Power (ERP)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	27.45	-1.15	V	26.30	0.427	38.45	-12.15
836.60	GSM850	Standard	27.18	-1.15	V	26.03	0.401	38.45	-12.42
848.80	GSM850	Standard	25.34	-1.15	V	24.19	0.262	38.45	-14.26
824.20	EDGE850	Standard	23.56	-1.15	V	22.41	0.174	38.45	-16.04

Table 6-2. ERP (Cellular GSM)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	Standard	24.19	-3.30	V	20.89	0.123	38.45	-17.56
836.52	CDMA850	Standard	22.65	-3.30	V	19.35	0.086	38.45	-19.10
848.31	CDMA850	Standard	20.97	-3.30	V	17.67	0.058	38.45	-20.78



Table 6-3. ERP (Cellular CDMA)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	22.48	-1.15	V	21.33	0.136	38.45	-17.12
836.60	WCDMA850	Standard	22.09	-1.15	V	20.94	0.124	38.45	-17.51
846.60	WCDMA850	Standard	20.67	-1.15	V	19.52	0.090	38.45	-18.93

Table 6-4. ERP (Cellular WCDMA)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 12 of 32

6.3 PCS Equivalent Isotropic Power (EIRP)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	18.21	7.97	H	26.18	0.415	33.01	-6.83
1880.00	GSM1900	Standard	19.98	8.02	H	28.00	0.631	33.01	-5.01
1909.80	GSM1900	Standard	22.03	8.11	H	30.14	1.032	33.01	-2.87
1909.80	EDGE1900	Standard	17.47	8.11	H	25.58	0.362	33.01	-7.43

Table 6-4. EIRP (PCS GSM)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	Standard	12.98	8.16	H	21.14	0.130	33.01	-11.87
1880.00	CDMA1900	Standard	14.90	8.02	H	22.92	0.196	33.01	-10.09
1908.75	CDMA1900	Standard	13.60	8.31	H	21.91	0.155	33.01	-11.10



Table 6-5. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	Standard	13.91	7.98	H	21.89	0.154	33.01	-11.12
1880.00	WCDMA1900	Standard	15.40	8.02	H	23.42	0.220	33.01	-9.59
1907.60	WCDMA1900	Standard	15.03	8.10	H	23.13	0.205	33.01	-9.88

Table 6-4. EIRP (PCS WCDMA)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active. This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 13 of 32

6.4 Cellular GSM Radiated Measurements

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 26.30 dBm = 0.427 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-51.60	6.35	-45.25	V	71.6
2472.60	-53.65	6.60	-47.05	V	73.3
3296.80	-83.06	6.96	-76.10	V	102.4
4121.00	-81.21	7.59	-73.61	V	99.9
4945.20	-81.23	9.08	-72.15	V	98.4

Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 14 of 32

Cellular GSM Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 26.03 dBm = 0.401 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.03 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-50.48	6.19	-44.29	V	70.3
2509.80	-52.73	6.58	-46.15	V	72.2
3346.40	-83.26	7.16	-76.10	V	102.1
4183.00	-81.81	8.00	-73.82	V	99.8
5019.60	-80.76	8.97	-71.79	V	97.8

Table 6-7. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 15 of 32

Cellular GSM Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 24.19 dBm = 0.262 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.19 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-49.46	6.03	-43.43	V	67.6
2546.40	-49.49	6.71	-42.78	V	67.0
3395.20	-83.47	7.36	-76.11	V	100.3
4244.00	-82.17	8.27	-73.90	V	98.1
5092.80	-80.13	8.83	-71.30	V	95.5

Table 6-8. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 16 of 32	

6.5 Cellular CDMA Radiated Measurements

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 20.89 dBm = 0.123 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.89 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-46.37	6.34	-40.03	V	60.9
2474.10	-55.43	6.59	-48.84	V	69.7
3298.80	-83.06	6.97	-76.10	V	97.0
4123.50	-81.23	7.61	-73.62	V	94.5
4948.20	-81.22	9.08	-72.14	V	93.0

Table 6-9. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 17 of 32

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 19.35 dBm = 0.086 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.35 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-53.20	6.19	-47.01	V	66.4
2509.56	-54.08	6.58	-47.50	V	66.8
3346.08	-83.26	7.16	-76.10	V	95.5
4182.60	-81.81	7.99	-73.82	V	93.2
5019.12	-80.77	8.98	-71.79	V	91.1

Table 6-10. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 18 of 32

Cellular CDMA Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 17.67 dBm = 0.058 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 30.67 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-43.96	6.04	-37.93	V	55.6
2544.93	-55.36	6.71	-48.65	V	66.3
3393.24	-83.46	7.35	-76.11	V	93.8
4241.55	-82.16	8.26	-73.90	V	91.6
5089.86	-80.15	8.84	-71.32	V	89.0

Table 6-11. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 19 of 32

6.6 Cellular WCDMA Radiated Measurements

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 21.33 dBm = 0.136 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.33 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-53.90	6.32	-47.59	V	68.9
2479.20	-56.64	6.58	-50.06	V	71.4
3305.60	-83.08	6.99	-76.09	V	97.4
4132.00	-81.32	7.67	-73.65	V	95.0
4958.40	-81.16	9.07	-72.09	V	93.4

Table 6-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 20 of 32

Cellular WCDMA Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MEASURED OUTPUT POWER: 20.94 dBm = 0.124 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.94 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-56.94	6.21	-50.74	V	71.7
2509.80	-56.73	6.56	-50.16	V	71.1
3346.40	-83.23	7.13	-76.09	V	97.0
4183.00	-81.59	7.94	-73.65	V	94.6
5019.60	-81.09	8.99	-72.09	V	93.0

Table 6-13. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 21 of 32

Cellular WCDMA Radiated Measurements (Cont'd)
§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MEASURED OUTPUT POWER: 19.52 dBm = 0.090 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-56.42	6.06	-50.37	V	69.9
2539.80	-57.02	6.69	-50.33	V	69.8
3386.40	-83.42	7.32	-76.09	V	95.6
4233.00	-81.88	8.23	-73.65	V	93.2
5079.60	-80.95	8.86	-72.09	V	91.6

Table 6-14. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 22 of 32

6.7 PCS GSM Radiated Measurements

§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 26.18 dBm = 0.415 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.18 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-46.23	9.93	-36.30	H	62.5
5550.60	-19.65	26.06	6.41	H	19.8
7400.80	-22.13	29.32	7.20	H	19.0
9251.00	-23.62	31.45	7.83	H	18.3
11101.20	-23.73	32.74	9.01	H	17.2

Table 6-15. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 23 of 32

PCS GSM Radiated Measurements (Cont'd)
§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 28.00 dBm = 0.631 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.00 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-46.46	9.70	-36.76	H	64.8
5640.00	-39.59	11.25	-28.34	H	56.3
7520.00	-48.46	10.99	-37.48	H	65.5
9400.00	-75.98	12.26	-63.72	H	91.7
11280.00	-72.85	12.95	-59.90	H	87.9

Table 6-16. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 24 of 32	

PCS GSM Radiated Measurements (Cont'd)
§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 30.14 dBm = 1.032 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 43.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-45.92	9.48	-36.44	H	66.6
5729.40	-38.78	11.30	-27.48	H	57.6
7639.20	-46.84	11.22	-35.61	H	65.8
9549.00	-75.96	12.35	-63.61	H	93.7
11458.80	-72.04	13.12	-58.92	H	89.1

Table 6-17. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 25 of 32	

6.8 PCS CDMA Radiated Measurements

§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 21.14 dBm = 0.130 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-50.01	9.92	-40.09	H	61.2
5553.75	-49.02	11.11	-37.91	H	59.1
7405.00	-74.94	10.75	-64.19	H	85.3
9256.25	-74.07	12.31	-61.76	H	82.9
11107.50	-71.10	12.90	-58.20	H	79.3

Table 6-18. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 26 of 32

PCS CDMA Radiated Measurements (Cont'd)
§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 22.92 dBm = 0.196 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.92 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-48.31	9.70	-38.61	H	61.5
5640.00	-47.99	11.25	-36.74	H	59.7
7520.00	-75.18	10.99	-64.19	H	87.1
9400.00	-74.02	12.26	-61.76	H	84.7
11280.00	-71.15	12.95	-58.20	H	81.1

Table 6-19. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 27 of 32

PCS CDMA Radiated Measurements (Cont'd)
§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 21.91 dBm = 0.155 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 34.91 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-44.10	9.49	-34.62	H	56.5
5726.25	-47.17	11.30	-35.88	H	57.8
7635.00	-75.41	11.22	-64.19	H	86.1
9543.75	-74.10	12.34	-61.76	H	83.7
11452.50	-71.31	13.11	-58.20	H	80.1

Table 6-20. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

- 1) This device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 28 of 32

6.9 PCS WCDMA Radiated Measurements

§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MEASURED OUTPUT POWER: 21.89 dBm = 0.154 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.89 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-48.01	9.91	-38.10	H	60.0
5557.20	-51.66	11.12	-40.54	H	62.4
7409.60	-74.95	10.76	-64.19	H	86.1
9262.00	-74.06	12.31	-61.76	H	83.6
11114.40	17.74	12.90	30.64	H	-8.8

Table 6-21. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 29 of 32

PCS WCDMA Radiated Measurements (Cont'd)
§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MEASURED OUTPUT POWER: 23.42 dBm = 0.220 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.42 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-53.16	9.70	-43.46	H	66.9
5640.00	-52.45	11.25	-41.20	H	64.6
7520.00	-75.18	10.99	-64.19	H	87.6
9400.00	-74.01	12.26	-61.76	H	85.2
11280.00	-71.14	12.95	-58.18	H	81.6

Table 6-22. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 30 of 32

PCS WCDMA Radiated Measurements (Cont'd)

§2.1053 §24.238(a) RSS-133(6.5.2)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MEASURED OUTPUT POWER: 23.13 dBm = 0.205 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.13 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-50.45	9.49	-40.95	H	64.1
5722.80	-53.26	11.29	-41.97	H	65.1
7630.40	-75.40	11.21	-64.19	H	87.3
9538.00	-74.08	12.32	-61.76	H	84.9
11445.60	-71.28	13.10	-58.18	H	81.3

Table 6-23. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)



NOTES:

- 1) This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the [H] position. The data reported in the table above was measured in this test setup.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset		Page 31 of 32

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LGE Portable Handset FCC ID: ZNFLS980** complies with all the requirements of Parts 2, 22 and 24 of the FCC rules.

FCC ID: ZNFLS980		FCC Pt. 22, 24 GSM / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307031175.ZNF	Test Dates: 7/5/2013 - 8/5/2013	EUT Type: Portable Handset	Page 32 of 32	