



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. +1.410.290.6652 / Fax +1.410.290.6654  
http://www.pctestlab.com



## SAR EVALUATION REPORT

**Applicant Name:**  
LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
01/22/17 - 02/01/17  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
1M1701180034-01-R4.ZNF

**FCC ID:** ZNFLS993

**APPLICANT:** LG ELECTRONICS MOBILECOMM U.S.A., INC.

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** LG-LS993  
**Additional Model(s):** LGLS993, LS993, LG-AS993, LGAS993, AS993

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.21	1.07	1.07
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.12	0.44	0.51
PCE	UMTS 850	826.40 - 846.60 MHz	0.18	0.57	0.57
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.19	0.85	0.85
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.16	0.69	0.77
PCE	CDMA/EVDO BC0 (\$22H)	824.70 - 848.31 MHz	0.26	0.73	0.71
PCE	CDMA/EVDO BC10 (\$90S)	817.90 - 823.10 MHz	0.22	0.66	0.67
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.19	0.89	0.79
PCE	LTE Band 12	699.7 - 715.3 MHz	0.10	0.42	0.42
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.22	0.72	0.72
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.24	0.83	0.83
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.18	0.78	0.99
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	0.12	0.53	0.65
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.70	0.16	0.16
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	0.46
NII	U-NII-2A	5260 - 5320 MHz	0.56	0.48	N/A
NII	U-NII-2C	5500 - 5720 MHz	0.56	0.65	N/A
NII	U-NII-3	5745 - 5825 MHz	0.10	0.51	0.51
DSS/DTS	Bluetooth	2402 - 2480 MHz		N/A	
<b>Simultaneous SAR per KDB 690783 D01v01r03:</b>			1.59	1.59	1.58

Note: This revised Test Report (S/N: 1M1701180034-01-R4.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez  
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

<b>FCC ID:</b> ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 1 of 94	

# TABLE OF CONTENTS

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	13
3	INTRODUCTION .....	14
4	DOSIMETRIC ASSESSMENT .....	15
5	DEFINITION OF REFERENCE POINTS .....	16
6	TEST CONFIGURATION POSITIONS .....	17
7	RF EXPOSURE LIMITS .....	20
8	FCC MEASUREMENT PROCEDURES.....	21
9	RF CONDUCTED POWERS .....	28
10	SYSTEM VERIFICATION.....	56
11	SAR DATA SUMMARY .....	59
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	73
13	SAR MEASUREMENT VARIABILITY .....	88
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	89
15	EQUIPMENT LIST.....	90
16	MEASUREMENT UNCERTAINTIES.....	91
17	CONCLUSION.....	92
18	REFERENCES .....	93
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: WIFI POWER REDUCTION VERIFICATION		

FCC ID: ZNFLS993	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 2 of 94



# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1852.5 - 1912.5 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

## 1.2 Power Reduction for SAR

This device uses a fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description. Additional test procedure information and data verifying the WLAN power reduction mechanism is included in Appendix G.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 3 of 94	

### 1.3 Nominal and Maximum Output Power Specifications



This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.3.1 Maximum Power



Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slot	1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GSM/GPRS/EDGE 850	Maximum	<b>33.2</b>	<b>33.2</b>	<b>32.2</b>	<b>27.2</b>	<b>27.2</b>
	Nominal	<b>32.7</b>	<b>32.7</b>	<b>31.7</b>	<b>26.7</b>	<b>26.7</b>
GSM/GPRS/EDGE 1900	Maximum	<b>30.2</b>	<b>30.2</b>	<b>29.2</b>	<b>26.2</b>	<b>26.2</b>
	Nominal	<b>29.7</b>	<b>29.7</b>	<b>28.7</b>	<b>25.7</b>	<b>25.7</b>

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>
	Nominal	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>
	Nominal	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>
	Nominal	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	<b>25.2</b>
	Nominal	<b>24.7</b>
CDMA/EVDO BC0 (§22H)	Maximum	<b>25.5</b>
	Nominal	<b>25.0</b>
PCS CDMA/EVDO	Maximum	<b>25.2</b>
	Nominal	<b>24.7</b>

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 4 of 94



Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	25.5
	Nominal	25.0
LTE Band 26 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 4 (AWS)	Maximum	25.0
	Nominal	24.5
LTE Band 25 (PCS)	Maximum	25.5
	Nominal	25.0
LTE Band 2 (PCS)	Maximum	25.5
	Nominal	25.0
LTE Band 41 (PC3)	Maximum	25.5
	Nominal	25.0
LTE Band 41 HPUE (PC2)	Maximum	26.7
	Nominal	26.2

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 5 of 94

Mode / Band		Modulated Average - Single Tx Chain (Antenna 1 & 2) (dBm)	
		Ch.1-2	Ch.3-11
IEEE 802.11b (2.4 GHz)	Maximum	<b>16.5</b>	<b>17.0</b>
	Nominal	<b>15.5</b>	<b>16.0</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>15.0</b>	<b>15.5</b>
	Nominal	<b>14.0</b>	<b>14.5</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>15.0</b>	<b>15.5</b>
	Nominal	<b>14.0</b>	<b>14.5</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>15.0</b>	<b>15.5</b>
	Nominal	<b>14.0</b>	<b>14.5</b>

Mode / Band		Modulated Average - Single Tx Chain (dBm)
Bluetooth (1 Mbps)	Maximum	<b>12.5</b>
	Nominal	<b>11.5</b>
Bluetooth (2 Mbps)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth (3 Mbps)	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth LE	Maximum	<b>8.0</b>
	Nominal	<b>7.0</b>

Mode / Band		Modulated Average - Single Tx Chain (Antenna 1 & 2) (dBm)					
		20 MHz Bandwidth		40 MHz Bandwidth		80 MHz Bandwidth	
		Ch. 36, 64, 100, 165	Ch. 40-48, 52-60, 104-144, 149-161	Ch. 38, 62, 102	Ch. 46, 54, 110-159	Ch. 42, 58, 106	Ch. 138, 155
IEEE 802.11a (5 GHz)	Maximum	<b>12.5</b>	<b>16.5</b>				
	Nominal	<b>11.5</b>	<b>15.5</b>				
IEEE 802.11n (5 GHz)	Maximum	<b>12.5</b>	<b>16.5</b>	<b>9.5</b>	<b>13.5</b>		
	Nominal	<b>11.5</b>	<b>15.5</b>	<b>8.5</b>	<b>12.5</b>		
IEEE 802.11ac (5 GHz)	Maximum	<b>12.5</b>	<b>16.5</b>	<b>9.5</b>	<b>13.5</b>	<b>8.5</b>	<b>11.5</b>
	Nominal	<b>11.5</b>	<b>15.5</b>	<b>8.5</b>	<b>12.5</b>	<b>7.5</b>	<b>10.5</b>

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 6 of 94



Mode / Band		Modulated Average - MIMO (dBm)					
		20 MHz Bandwidth		40 MHz Bandwidth		80 MHz Bandwidth	
		Ch.1-2	Ch.3-11	Ch. 38, 62, 102	Ch. 46, 54, 110-159	Ch. 42, 58, 106	Ch. 138, 155
IEEE 802.11 g/n/ac (2.4 GHz)	Maximum	<b>18.0</b>	<b>18.5</b>				
	Nominal	<b>17.0</b>	<b>17.5</b>				
IEEE 802.11 a (5 GHz)	Maximum	<b>15.5</b>	<b>19.5</b>				
	Nominal	<b>14.5</b>	<b>18.5</b>				
IEEE 802.11 n/ac (5 GHz)	Maximum	<b>15.5</b>	<b>19.5</b>	<b>12.5</b>	<b>16.5</b>	<b>11.5</b>	<b>14.5</b>
	Nominal	<b>14.5</b>	<b>18.5</b>	<b>11.5</b>	<b>15.5</b>	<b>10.5</b>	<b>13.5</b>

### 1.3.2 Reduced Power

Mode / Band		Modulated Average - Single Tx Chain (Antenna 1 & 2) (dBm)	
		Ch.1-2	Ch.3-11
IEEE 802.11b (2.4 GHz)	Maximum	<b>15.0</b>	<b>15.5</b>
	Nominal	<b>14.0</b>	<b>14.5</b>

Mode / Band		Modulated Average - Single Tx Chain (Antenna 1 & 2) (dBm)							
		20 MHz Bandwidth		40 MHz Bandwidth		80 MHz Bandwidth			
		Ch. 36, 64, 100, 165	Ch. 40-48, 52-60, 104-144, 149-161	Ch. 38, 62, 102	Ch. 46, 54, 142, 110-159	Ch. 42, 58, 106	Ch. 138, 155		
IEEE 802.11a (5 GHz)	Maximum	<b>12.5</b>	<b>14.5</b>						
	Nominal	<b>11.5</b>	<b>13.5</b>						
IEEE 802.11n (5 GHz)	Maximum	<b>12.5</b>	<b>14.5</b>					<b>9.5</b>	<b>13.5</b>
	Nominal	<b>11.5</b>	<b>13.5</b>					<b>8.5</b>	<b>12.5</b>
IEEE 802.11ac (5 GHz)	Maximum	<b>12.5</b>	<b>14.5</b>	<b>9.5</b>	<b>13.5</b>	<b>8.5</b>	<b>11.5</b>		
	Nominal	<b>11.5</b>	<b>13.5</b>	<b>8.5</b>	<b>12.5</b>	<b>7.5</b>	<b>10.5</b>		

Mode / Band		Modulated Average - MIMO (dBm)									
		20 MHz Bandwidth		40 MHz Bandwidth		80 MHz Bandwidth					
		Ch. 36, 64, 100, 165	Ch. 40-48, 52-60, 104-144, 149-161	Ch. 38, 62, 102	Ch. 46, 54, 110-159	Ch. 42, 58, 106	Ch. 138, 155				
IEEE 802.11 a (5 GHz)	Maximum	<b>15.5</b>	<b>17.5</b>								
	Nominal	<b>14.5</b>	<b>16.5</b>								
IEEE 802.11 n/ac (5 GHz)	Maximum	<b>15.5</b>	<b>17.5</b>					<b>12.5</b>	<b>16.5</b>	<b>11.5</b>	<b>14.5</b>
	Nominal	<b>14.5</b>	<b>16.5</b>					<b>11.5</b>	<b>15.5</b>	<b>10.5</b>	<b>13.5</b>

FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS TESTING	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 7 of 94

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. The overall diagonal dimension of the device is ≤160 mm and the diagonal display is ≤150 mm. A diagram showing the location of the device antennas can be found in Appendix F.

**Table 1-1  
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes



Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-2A, U-NII-2C operations are disabled. Therefore, U-NII-2A, U-NII-2C operations are not considered in this section.

## 1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

## 1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 8 of 94	



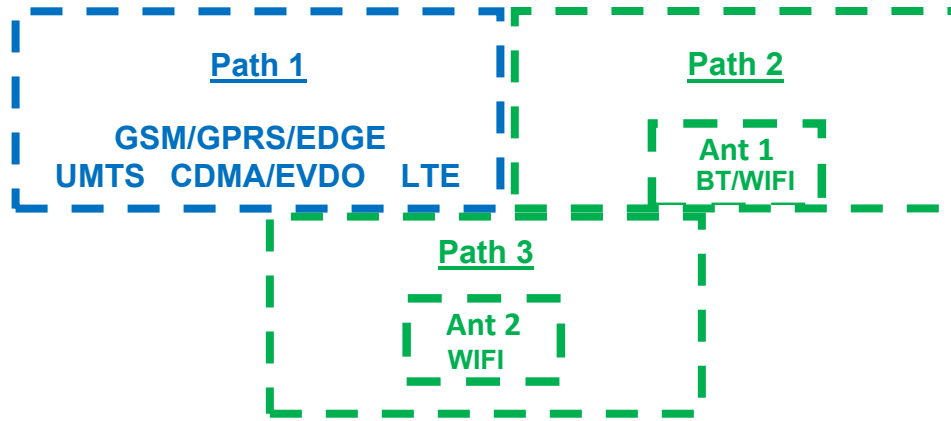


Figure 1-1

**Simultaneous Transmission Paths**

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2  
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	1x CDMA voice + 2.4 GHz WI-FI	Yes	Yes	N/A	
2	1x CDMA voice + 5 GHz WI-FI	Yes	Yes	N/A	
3	1x CDMA voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	
4	1x CDMA voice + 2.4 GHz WI-FI MIMO	Yes	Yes	N/A	
5	1x CDMA voice + 5 GHz WI-FI MIMO	Yes	Yes	N/A	
6	1x CDMA voice + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes	Yes	N/A	
7	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	
8	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	
9	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	
10	GSM voice + 2.4 GHz WI-FI MIMO	Yes	Yes	N/A	
11	GSM voice + 5 GHz WI-FI MIMO	Yes	Yes	N/A	
12	GSM voice + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes	Yes	N/A	
13	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	
14	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	
15	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	
16	UMTS + 2.4 GHz WI-FI MIMO	Yes	Yes	Yes	
17	UMTS + 5 GHz WI-FI MIMO	Yes	Yes	Yes	
18	UMTS + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes	Yes	Yes	
19	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes	
20	LTE + 5 GHz WI-FI	Yes	Yes	Yes	
21	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A	
22	LTE + 2.4 GHz WI-FI MIMO	Yes	Yes	Yes	
23	LTE + 5 GHz WI-FI MIMO	Yes	Yes	Yes	
24	LTE + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes	Yes	Yes	
25	CDMA/EVDO data + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
26	CDMA/EVDO data + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
27	CDMA/EVDO data + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.
28	CDMA/EVDO data + 2.4 GHz WI-FI MIMO	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
29	CDMA/EVDO data + 5 GHz WI-FI MIMO	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
30	CDMA/EVDO data + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
31	GPRS/EDGE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
32	GPRS/EDGE + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
33	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.
34	GPRS/EDGE + 2.4 GHz WI-FI MIMO	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
35	GPRS/EDGE + 5 GHz WI-FI MIMO	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
36	GPRS/EDGE + 2.4 GHz WI-FI + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.

FCC ID: ZNFLS993		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 9 of 94	

1. All licensed modes share the same antenna path and cannot transmit simultaneously.
2. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
3. Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
4. 5 GHz Wireless Router is only supported for U-NII-1, U-NII-3 by S/W, therefore U-NII2A and U-NII2C were not evaluated for wireless router conditions.
5. This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.
6. This device supports VOLTE and VoWIFI

## 1.7 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, Head and body-worn SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1 and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required;  $[(18/10) * \sqrt{2.480}] = 2.8 < 3.0$ . Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:



- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) Band gap channels are supported

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 10 of 94	



CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports both LTE B26 (Cell) and LTE B5 (Cell). Since the supported frequency span for LTE B5 (Cell) falls completely within the supported frequency span for LTE B26 (Cell), both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B26 (Cell).

This device supports both LTE B25 (PCS) and LTE B2 (PCS). Since the supported frequency span for LTE B2 (PCS) falls completely within the supported frequency span for LTE B25 (PCS), both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B25 (PCS).

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.



This device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 11 of 94

## 1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.



	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
GSM/GPRS/EDGE 850	01412	01417	01417
GSM/GPRS/EDGE 1900	01417	01412	01412
UMTS 850	01417	01417	01417
UMTS 1750	01412	01417	01417
UMTS 1900	01417	01417	01417
CDMA/EVDO BC0 (§22H)	01417	01417	01417
CDMA/EVDO BC10 (§90S)	01417	01417	01417
PCS CDMA/EVDO	01417	01412	01412
LTE Band 12	01410	01414	01414
LTE Band 26 (Cell)	01411	01414	01414
LTE Band 4 (AWS)	01413	01414	01414
LTE Band 25 (PCS)	01413	01413	01413
LTE Band 41	01410	01414	01414
2.4 GHz WLAN	01430	01430	01430
5 GHz WLAN	01430	01430	01430

FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL TESTING LABORATORY	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 12 of 94

# 2

# LTE INFORMATION

LTE Information					
FCC ID	ZNFLS993				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
	LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)		
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)		
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)		
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)		
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)		
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)		
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)		
LTE Band 26 (Cell): 15 MHz	821.5 (26765)	831.5 (26865)	841.5 (26965)		
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)		
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)		
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)		
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)		
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)		
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)		
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)		
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)		
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)		
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)		
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)		
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)		
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)		
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)		
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)		
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)		
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)		
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)		
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)		
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)		
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)		
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)		
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	9				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 13 of 94	

### 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS TESTING	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 14 of 94	

# 4 DOSIMETRIC ASSESSMENT

## 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22


\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFLS993	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 15 of 94

## 5 DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

### 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

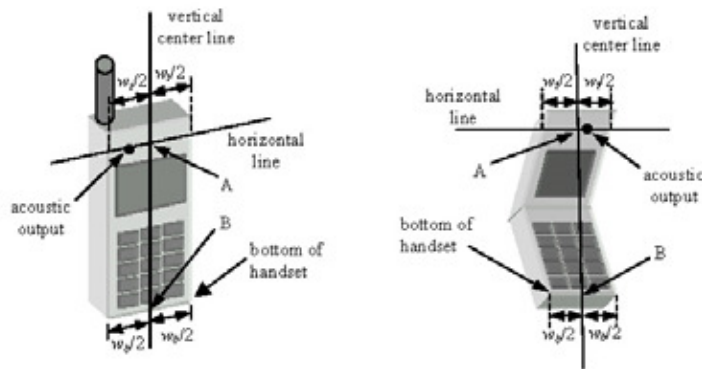

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFLS993	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 16 of 94



## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFLS993	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 17 of 94



**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**


### 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.



### 6.5 Body-Worn Accessory Configurations

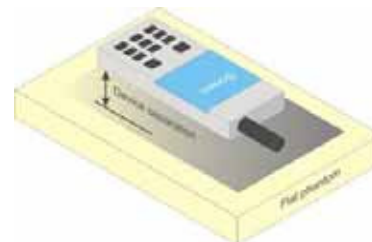Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



**Figure 6-4 Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: ZNFLS993	 PCTEST PROFESSIONAL COMMUNICATIONS TESTING	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 18 of 94

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

### 6.6 Extremity Exposure Configurations



Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

### 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 19 of 94	

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 20 of 94

# 8

# FCC MEASUREMENT PROCEDURES



Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

## 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

## 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is

FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 21 of 94	

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$\frac{I_{or}}{Pilot E_c}$	dBm/1.23 MHz	-104
$\frac{I_{or}}{Traffic E_c}$	dB	-7
$\frac{I_{or}}{Traffic E_c}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$\frac{I_{or}}{Pilot E_c}$	dBm/1.23 MHz	-86
$\frac{I_{or}}{Traffic E_c}$	dB	-7
$\frac{I_{or}}{Traffic E_c}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

### 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

### 8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

### 8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with Ev-Do capabilities, the 3G SAR test reduction procedure is applied to Ev-Do Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: ZNFLS993	 <b>PCTEST</b> PCTEST ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 22 of 94	

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

### 8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For Ev-Do data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with Ev-Do Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

### 8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



## 8.5 SAR Measurement Conditions for UMTS

### 8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

### 8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 23 of 94	

### 8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

### 8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

### 8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.6.1 Spectrum Plots for RB Configurations



A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 24 of 94	



## 8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

## 8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

## 8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 25 of 94

## 8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

### 8.7.3 U-NII-2C and U-NII-3



The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.

### 8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS TESTING	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 26 of 94	

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.



When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6).

### 8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required.

### 8.7.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$  W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.


FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 27 of 94	

# 9 RF CONDUCTED POWERS



## 9.1 CDMA Conducted Powers

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	25.20	25.18	25.16	25.20	25.17	25.18	25.20
Cellular	1013	22H	824.7	25.50	25.48	25.50	25.50	25.49	25.45	25.46
	384	22H	836.52	25.45	25.44	25.46	25.48	25.49	25.47	25.45
	777	22H	848.31	25.47	25.45	25.41	25.50	25.44	25.49	25.45
PCS	25	24E	1851.25	25.20	25.20	25.11	25.11	25.14	25.20	25.13
	600	24E	1880	25.17	25.18	25.13	25.18	25.19	25.18	25.19
	1175	24E	1908.75	25.20	25.14	25.09	25.16	25.18	25.20	25.16

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



**Figure 9-1**  
**Power Measurement Setup**



FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 28 of 94

## 9.2 GSM Conducted Powers

Maximum Burst-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
<b>GSM 850</b>	128	33.15	33.12	<b>32.07</b>	27.10	27.20
	190	33.20	33.20	<b>32.16</b>	27.16	27.16
	251	33.13	33.12	<b>32.19</b>	27.12	27.13
<b>GSM 1900</b>	512	30.19	30.20	<b>29.15</b>	25.85	25.80
	661	30.18	30.18	<b>29.17</b>	25.91	25.96
	810	30.20	30.18	<b>29.17</b>	25.85	25.88

Calculated Maximum Frame-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
<b>GSM 850</b>	128	24.12	24.09	<b>26.05</b>	18.07	21.18
	190	24.17	24.17	<b>26.14</b>	18.13	21.14
	251	24.10	24.09	<b>26.17</b>	18.09	21.11
<b>GSM 1900</b>	512	21.16	21.17	<b>23.13</b>	16.82	19.78
	661	21.15	21.15	<b>23.15</b>	16.88	19.94
	810	21.17	21.15	<b>23.15</b>	16.82	19.86

<b>GSM 850</b>	<b>Frame Avg.Targets:</b>	23.67	23.67	<b>25.68</b>	17.67	20.68
<b>GSM 1900</b>		20.67	20.67	<b>22.68</b>	16.67	19.68

FCC ID: ZNFLS993			SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset			Page 29 of 94	



Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 10 (Max 2 Tx uplink slots)**  
**EDGE Multislot class: 10 (Max 2 Tx uplink slots)**  
**DTM Multislot Class: N/A**



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 30 of 94



### 9.3 UMTS Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.60	24.68	24.68	24.67	24.67	24.70	24.67	24.70	24.69	-
99		12.2 kbps AMR	24.65	24.66	24.70	24.61	24.70	24.70	24.70	24.70	24.66	24.64
6	HSDPA	Subtest 1	24.63	24.68	24.70	24.65	24.65	24.65	24.55	24.58	24.55	0
6		Subtest 2	24.63	24.67	24.70	24.68	24.65	24.67	24.57	24.55	24.58	0
6		Subtest 3	24.16	24.18	24.19	24.15	24.18	24.15	24.10	24.06	24.20	0.5
6		Subtest 4	24.15	24.17	24.17	24.15	24.20	24.15	24.08	24.10	24.17	0.5
6	HSUPA	Subtest 1	24.63	24.68	24.70	24.60	24.62	24.60	24.50	24.50	24.60	0
6		Subtest 2	22.60	22.65	22.64	22.60	22.63	22.61	22.52	22.53	22.60	2
6		Subtest 3	23.55	23.64	23.60	23.53	23.50	23.55	23.44	23.40	23.43	1
6		Subtest 4	22.57	22.65	22.63	22.62	22.63	22.60	22.53	22.50	22.58	2
6		Subtest 5	24.61	24.63	24.60	24.60	24.62	24.60	24.51	24.60	24.60	0

This device does not support DC-HSDPA.



**Figure 9-3**  
**Power Measurement Setup**

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 31 of 94

## 9.4 LTE Conducted Powers



### 9.4.1

### LTE Band 12

Table 9-1  
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.50	0	0
	1	25	25.48		0
	1	49	25.47		0
	25	0	24.47	0-1	1
	25	12	24.45		1
	25	25	24.46		1
	50	0	24.40		1
16QAM	1	0	24.45	0-1	1
	1	25	24.48		1
	1	49	24.48		1
	25	0	23.44	0-2	2
	25	12	23.47		2
	25	25	23.47		2
	50	0	23.49		2
64QAM	1	0	23.44	0-2	2
	1	25	23.06		2
	1	49	23.11		2
	25	0	22.09	0-3	3
	25	12	22.03		3
	25	25	22.23		3
	50	0	22.15		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFLS993	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT		 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 32 of 94	





**Table 9-2  
LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.43	25.45	25.43	0	0
	1	12	25.42	25.43	25.42		0
	1	24	25.44	25.42	25.43		0
	12	0	24.43	24.44	24.45	0-1	1
	12	6	24.42	24.43	24.43		1
	12	13	24.40	24.46	24.40		1
16QAM	25	0	24.44	24.33	24.43	0-1	1
	1	0	24.42	24.43	24.40		1
	1	12	24.41	24.45	24.40		1
	1	24	24.43	24.40	24.45	0-2	1
	12	0	23.42	23.41	23.43		2
	12	6	23.44	23.40	23.44		2
64QAM	12	13	23.43	23.43	23.43	0-2	2
	25	0	23.35	23.43	23.42		2
	1	0	23.43	23.28	23.08		2
	1	12	23.29	23.39	23.20	0-2	2
	1	24	23.40	23.24	23.22		2
	12	0	22.16	22.30	22.42		0-3
12	6	22.14	22.29	22.29	3		
12	13	22.15	22.36	22.49	3		
	25	0	22.26	22.39	22.29		3



**Table 9-3  
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.42	25.43	25.43	0	0
	1	7	25.42	25.42	25.40		0
	1	14	25.43	25.43	25.40		0
	8	0	24.43	24.46	24.42	0-1	1
	8	4	24.40	24.40	24.43		1
	8	7	24.40	24.46	24.41		1
16QAM	15	0	24.41	24.30	24.40	0-1	1
	1	0	24.40	24.43	24.40		1
	1	7	24.41	24.45	24.41		1
	1	14	24.40	24.43	24.43	0-2	1
	8	0	23.42	23.41	23.41		2
	8	4	23.42	23.44	23.43		2
64QAM	8	7	23.40	23.43	23.42	0-2	2
	15	0	23.34	23.43	23.42		2
	1	0	23.14	23.36	23.32		0-2
	1	7	23.37	23.20	23.20	2	
	1	14	23.44	23.41	23.22	0-3	
	8	0	22.29	22.30	22.16		3
8	4	22.21	22.28	22.37	3		
	8	7	22.17	22.41	22.15		3
	15	0	22.10	22.24	22.34		3

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 33 of 94

**Table 9-4  
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.43	25.41	25.41	0	0
	1	2	25.42	25.42	25.43		0
	1	5	25.41	25.41	25.40		0
	3	0	25.43	25.43	25.43		0
	3	2	25.44	25.43	25.40		0
	3	3	25.42	25.42	25.40		0
	6	0	24.40	24.30	24.40		0-1
16QAM	1	0	24.42	24.43	24.30	0-1	1
	1	2	24.41	24.48	24.40		1
	1	5	24.43	24.44	24.44		1
	3	0	24.42	24.40	24.42		1
	3	2	24.41	24.42	24.42		1
	3	3	24.42	24.30	24.40		1
	6	0	23.33	23.40	23.30		0-2
64QAM	1	0	23.37	23.24	23.22	0-2	2
	1	2	23.24	23.45	23.33		2
	1	5	23.43	23.45	23.31		2
	3	0	23.32	23.15	23.44		2
	3	2	23.24	23.10	23.48		2
	3	3	23.22	23.36	23.46		2
	6	0	22.31	22.34	22.18		0-3

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 34 of 94	



9.4.2

LTE Band 26 (Cell)

Table 9-5  
 LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.50	0	0
	1	36	25.49		0
	1	74	25.48		0
	36	0	24.45	0-1	1
	36	18	24.44		1
	36	37	24.46		1
	75	0	24.43		1
16QAM	1	0	24.35	0-1	1
	1	36	24.45		1
	1	74	24.46		1
	36	0	23.45	0-2	2
	36	18	23.46		2
	36	37	23.47		2
	75	0	23.48		2
64QAM	1	0	23.20	0-2	2
	1	36	23.18		2
	1	74	23.10		2
	36	0	22.06	0-3	3
	36	18	22.23		3
	36	37	22.16		3
	75	0	22.10		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: ZNFLS993			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 35 of 94	

**Table 9-6  
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth**

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
QPSK	1	0	25.44	25.45	25.43	0	0
	1	25	25.45	25.43	25.44		0
	1	49	25.44	25.44	25.43		0
	25	0	24.43	24.43	24.40	0-1	1
	25	12	24.44	24.40	24.40		1
	25	25	24.45	24.40	24.43		1
16QAM	50	0	24.43	24.40	24.43	0-1	1
	1	0	24.45	24.41	24.44		1
	1	25	24.40	24.43	24.40		1
	1	49	24.45	24.45	24.43	0-2	1
	25	0	23.44	23.43	23.43		2
	25	12	23.43	23.45	23.44		2
64QAM	25	25	23.44	23.43	23.43	0-2	2
	50	0	23.45	23.44	23.46		2
	1	0	23.45	23.31	23.47		0-2
	1	25	23.21	23.30	23.18	2	
	1	49	23.37	23.30	23.35	2	
	64QAM	25	0	22.29	22.46	22.38	0-3
25		12	22.42	22.48	22.26	3	
25		25	22.32	22.34	22.34	3	
50		0	22.34	22.30	22.30	3	

**Table 9-7  
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)			
Conducted Power [dBm]								
QPSK	1	0	25.44	25.44	25.46	0	0	
	1	12	25.43	25.45	25.44		0	
	1	24	25.45	25.43	25.43		0	
	16QAM	12	0	24.45	24.45	24.45	0-1	1
		12	6	24.43	24.46	24.44		1
		12	13	24.44	24.44	24.43		1
25		0	24.46	24.40	24.44	1		
16QAM	1	0	24.45	24.45	24.43	0-1	1	
	1	12	24.43	24.43	24.45		1	
	1	24	24.46	24.46	24.44		1	
	64QAM	12	0	23.43	23.44	23.44	0-2	2
		12	6	23.45	23.43	23.43		2
		12	13	23.46	23.46	23.44		2
64QAM	25	0	23.43	23.45	23.45	0-2	2	
	1	0	23.42	23.46	23.46		2	
	1	12	23.23	23.38	23.40		2	
	64QAM	1	24	23.36	23.45	23.24	0-3	2
		12	0	22.40	22.36	22.33		3
		12	6	22.35	22.32	22.38		3
		12	13	22.41	22.48	22.36		3
		25	0	22.21	22.30	22.37		3



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 36 of 94

**Table 9-8**  
**LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.44	25.44	25.43	0	0
	1	7	25.43	25.45	25.44		0
	1	14	25.44	25.43	25.45		0
	8	0	24.43	24.44	24.44	0-1	1
	8	4	24.44	24.45	24.46		1
	8	7	24.43	24.43	24.43		1
	15	0	24.40	24.34	24.35		1
16QAM	1	0	24.40	24.44	24.43	0-1	1
	1	7	24.44	24.43	24.43		1
	1	14	24.43	24.45	24.42		1
	8	0	23.45	23.43	23.44	0-2	2
	8	4	23.42	23.43	23.47		2
	8	7	23.45	23.45	23.43		2
	15	0	23.33	23.45	23.45		2
64QAM	1	0	23.23	23.35	23.38	0-2	2
	1	7	23.21	23.28	23.50		2
	1	14	23.29	23.41	23.39		2
	8	0	22.47	22.30	22.31	0-3	3
	8	4	22.39	22.35	22.41		3
	8	7	22.36	22.43	22.42		3
	15	0	22.40	22.24	22.32		3

**Table 9-9**  
**LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.44	25.42	25.44	0	0
	1	2	25.43	25.40	25.43		0
	1	5	25.43	25.43	25.45		0
	3	0	25.45	25.45	25.43		0
	3	2	25.44	25.43	25.43		0
	3	3	25.40	25.43	25.42		0
	6	0	24.44	24.35	24.43	0-1	1
16QAM	1	0	24.43	24.47	24.45	0-1	1
	1	2	24.41	24.43	24.40		1
	1	5	24.40	24.44	24.43		1
	3	0	24.43	24.47	24.44		1
	3	2	24.43	24.40	24.43		1
	3	3	24.40	24.40	24.45		1
	6	0	23.30	23.42	23.42	0-2	2
64QAM	1	0	23.38	23.50	23.46	0-2	2
	1	2	23.44	23.35	23.23		2
	1	5	23.33	23.29	23.32		2
	3	0	23.29	23.30	23.39		2
	3	2	23.33	23.38	23.46		2
	3	3	23.24	23.29	23.48		2
	6	0	22.10	22.27	22.32	0-3	3

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 37 of 94



9.4.3

LTE Band 4 (AWS)

Table 9-10  
 LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.00	0	0
	1	50	24.97		0
	1	99	24.95		0
	50	0	23.96	0-1	1
	50	25	23.95		1
	50	50	23.97		1
	100	0	23.86		1
16QAM	1	0	24.00	0-1	1
	1	50	24.00		1
	1	99	24.00		1
	50	0	22.97	0-2	2
	50	25	22.97		2
	50	50	22.98		2
	100	0	23.00		2
64QAM	1	0	22.78	0-2	2
	1	50	22.74		2
	1	99	22.60		2
	50	0	21.69	0-3	3
	50	25	21.70		3
	50	50	21.59		3
	100	0	21.65		3

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 38 of 94

**Table 9-11  
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth**

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.96	24.92	24.92	0	0
	1	36	24.95	24.94	24.92		0
	1	74	24.93	24.95	24.93		0
	36	0	23.95	23.90	23.94	0-1	1
	36	18	23.90	23.93	23.95		1
	36	37	23.92	23.92	23.93		1
	75	0	23.93	23.92	23.92		1
16QAM	1	0	24.00	24.00	23.94	0-1	1
	1	36	23.94	23.98	23.93		1
	1	74	24.00	23.99	24.00		1
	36	0	23.00	22.90	22.93	0-2	2
	36	18	22.98	22.96	22.94		2
	36	37	22.97	22.97	22.94		2
	75	0	23.00	23.00	22.96		2
64QAM	1	0	22.95	22.88	22.88	0-2	2
	1	36	22.95	22.98	22.79		2
	1	74	22.90	22.99	22.96		2
	36	0	21.87	21.94	21.77	0-3	3
	36	18	21.90	21.88	21.92		3
	36	37	21.86	21.85	21.89		3
	75	0	21.91	21.87	22.00		3

**Table 9-12  
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth**

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.95	24.94	24.95	0	0
	1	25	24.96	24.96	24.93		0
	1	49	24.95	24.96	24.96		0
	25	0	23.94	23.90	23.96	0-1	1
	25	12	23.92	23.92	23.95		1
	25	25	23.95	23.91	23.95		1
16QAM	50	0	23.96	23.92	23.94	0-1	1
	1	0	23.98	23.95	24.00		1
	1	25	23.94	23.94	23.94		1
	1	49	23.99	23.92	23.95	0-2	1
	25	0	22.94	22.96	23.00		2
	25	12	22.95	22.94	22.98		2
64QAM	25	25	22.94	22.95	22.96	0-2	2
	50	0	23.00	22.96	23.00		2
	1	0	22.97	22.87	22.91		0-3
	1	25	22.89	22.78	22.86	2	
	1	49	22.87	22.89	22.80	2	
	25	0	21.91	21.94	21.84	0-3	3
25	12	21.84	21.95	21.94	3		
25	25	21.98	21.78	21.92	3		
50	0	21.98	21.98	21.87	3		



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 39 of 94

**Table 9-13**  
**LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth**

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	24.95	25.00	0	0
	1	12	24.94	24.92	24.99		0
	1	24	24.93	24.94	24.98		0
	12	0	23.93	23.93	23.95	0-1	1
	12	6	23.95	23.95	23.96		1
	12	13	23.94	23.94	23.95		1
	25	0	23.90	23.92	23.92		1
16QAM	1	0	24.00	24.00	24.00	0-1	1
	1	12	23.97	23.95	23.97		1
	1	24	23.98	23.97	23.98		1
	12	0	23.00	23.00	23.00	0-2	2
	12	6	22.98	22.98	22.98		2
	12	13	22.97	22.97	22.97		2
	25	0	22.96	22.98	23.00		2
64QAM	1	0	22.82	22.84	23.00	0-2	2
	1	12	22.97	22.96	22.87		2
	1	24	22.81	22.95	22.68		2
	12	0	21.95	21.95	21.91	0-3	3
	12	6	21.88	21.97	21.84		3
	12	13	21.90	21.99	21.98		3
	25	0	21.89	21.87	21.95		3

**Table 9-14**  
**LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth**



LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.98	24.94	24.95	0	0
	1	7	24.95	25.00	25.00		0
	1	14	24.90	24.96	24.95		0
	8	0	23.95	23.92	23.95	0-1	1
	8	4	23.94	23.94	23.94		1
	8	7	23.97	23.95	23.95		1
	15	0	23.94	23.94	23.92		1
16QAM	1	0	23.90	24.00	23.95	0-1	1
	1	7	23.94	23.98	23.95		1
	1	14	23.94	24.00	23.97		1
	8	0	23.00	23.00	23.00	0-2	2
	8	4	22.97	22.98	22.94		2
	8	7	23.00	23.00	22.97		2
	15	0	22.98	22.97	23.00		2
64QAM	1	0	22.72	22.95	22.87	0-2	2
	1	7	22.89	22.85	22.97		2
	1	14	22.87	22.87	22.84		2
	8	0	21.85	21.89	21.92	0-3	3
	8	4	21.98	21.59	21.85		3
	8	7	21.97	21.66	21.93		3
	15	0	21.90	21.88	21.93		3

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 40 of 94



**Table 9-15**  
**LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.95	24.94	24.90	0	0
	1	2	24.97	24.93	24.97		0
	1	5	24.90	24.91	24.92		0
	3	0	24.96	24.92	24.85		0
	3	2	24.94	24.93	24.97		0
	3	3	24.93	24.93	24.95		0
	6	0	23.90	23.85	23.94		0-1
16QAM	1	0	23.94	23.94	23.90	0-1	1
	1	2	23.94	23.96	24.00		1
	1	5	23.93	23.95	23.96		1
	3	0	24.00	23.98	24.00		1
	3	2	23.99	23.97	24.00		1
	3	3	23.96	23.97	23.98		1
	6	0	23.00	23.00	23.00		0-2
64QAM	1	0	22.88	22.85	22.84	0-2	2
	1	2	22.97	22.95	22.90		2
	1	5	22.88	22.76	22.95		2
	3	0	22.80	22.84	22.95		2
	3	2	22.93	22.89	22.95		2
	3	3	23.00	22.94	22.89		2
	6	0	21.95	21.89	21.97		0-3



FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 41 of 94	

9.4.4

LTE Band 25 (PCS)

**Table 9-16**  
**LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.41	25.46	25.30	0	0	
	1	50	25.49	25.48	25.49		0	
	1	99	<b>25.50</b>	25.44	25.49		0	
	50	0	24.48	24.44	24.48	0-1	1	
	50	25	24.49	<b>24.50</b>	24.47		1	
	50	50	24.44	24.45	24.47		1	
16QAM	100	0	24.48	24.48	24.48	0-1	1	
	1	0	24.50	24.50	24.50		0-1	1
	1	50	24.50	24.48	24.50			1
	50	0	23.50	23.50	23.50	0-2		2
	50	25	23.49	23.50	23.48		2	
	50	50	23.49	23.48	23.46		2	
64QAM	100	0	23.50	23.50	23.49	0-2	2	
	1	0	23.30	23.45	23.40		0-2	2
	1	50	23.46	23.46	23.41			2
	1	99	23.38	23.29	23.49	0-3		2
	50	0	22.32	22.32	22.50		3	
	50	25	22.40	22.44	22.49		3	
64QAM	50	50	22.41	22.39	22.41	0-3	3	
	100	0	22.40	22.42	22.33		3	



FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL TESTING LABORATORY	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 42 of 94

**Table 9-17**  
**LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.49	25.50	25.50	0	0
	1	36	25.48	25.48	25.49		0
	1	74	25.46	25.47	25.47		0
	36	0	24.45	24.48	24.44	0-1	1
	36	18	24.43	24.50	24.48		1
	36	37	24.41	24.49	24.44		1
	75	0	24.44	24.48	24.44		1
16QAM	1	0	24.50	24.50	24.50	0-1	1
	1	36	24.44	24.50	24.48		1
	1	74	24.50	24.50	24.50		1
	36	0	23.48	23.48	23.48	0-2	2
	36	18	23.45	23.50	23.46		2
	36	37	23.48	23.49	23.48		2
	75	0	23.48	23.50	23.50		2
64QAM	1	0	23.36	23.34	23.45	0-2	2
	1	36	23.46	23.38	23.40		2
	1	74	23.37	23.31	23.32		2
	36	0	22.40	22.47	22.44	0-3	3
	36	18	22.48	22.50	22.48		3
	36	37	22.48	22.36	22.37		3
	75	0	22.33	22.40	22.13		3



**Table 9-18**  
**LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.48	25.48	25.48	0	0
	1	25	25.44	25.44	25.44		0
	1	49	25.48	25.45	25.45		0
	25	0	24.48	24.44	24.42	0-1	1
	25	12	24.45	24.44	24.46		1
	25	25	24.44	24.45	24.44		1
	50	0	24.47	24.40	24.48		1
16QAM	1	0	24.50	24.50	24.45	0-1	1
	1	25	24.42	24.44	24.48		1
	1	49	24.50	24.48	24.43		1
	25	0	23.45	23.44	23.44	0-2	2
	25	12	23.43	23.45	23.43		2
	25	25	23.46	23.42	23.45		2
	50	0	23.50	23.48	23.48		2
64QAM	1	0	23.40	23.38	23.40	0-2	2
	1	25	23.33	23.42	23.34		2
	1	49	23.31	23.46	23.22		2
	25	0	22.46	22.29	22.28	0-3	3
	25	12	22.36	22.44	22.44		3
	25	25	22.39	22.45	22.40		3
	50	0	22.32	22.39	22.39		3

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 43 of 94

**Table 9-19**  
**LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.45	25.46	25.45	0	0
	1	12	25.45	25.43	25.46		0
	1	24	25.48	25.46	25.44		0
	12	0	24.43	24.44	24.42	0-1	1
	12	6	24.44	24.41	24.45		1
	12	13	24.42	24.44	24.42		1
16QAM	25	0	24.45	24.36	24.40	0-1	1
	1	0	24.50	24.47	24.40		1
	1	12	24.40	24.44	24.44		1
	1	24	24.50	24.46	24.43	0-2	1
	12	0	23.44	23.42	23.44		2
	12	6	23.43	23.44	23.43		2
64QAM	12	13	23.45	23.45	23.45	0-2	2
	25	0	23.40	23.50	23.50		2
	1	0	23.31	23.23	23.43		0-2
	1	12	23.40	23.34	23.39	2	
	1	24	23.34	23.32	23.43	2	
	12	0	22.34	22.28	22.35	0-3	
	12	6	22.25	22.35	22.40		3
12	13	22.32	22.36	22.32	3		
	25	0	22.40	22.36	22.44		3



FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 44 of 94	

**Table 9-20**  
**LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.47	25.45	25.46	0	0
	1	7	25.45	25.46	25.44		0
	1	14	25.47	25.43	25.46		0
	8	0	24.45	24.46	24.44	0-1	1
	8	4	24.46	24.43	24.46		1
	8	7	24.44	24.46	24.40		1
	15	0	24.41	24.32	24.36		1
16QAM	1	0	24.42	24.48	24.42	0-1	1
	1	7	24.41	24.45	24.40		1
	1	14	24.45	24.48	24.43		1
	8	0	23.42	23.40	23.40	0-2	2
	8	4	23.42	23.47	23.45		2
	8	7	23.45	23.50	23.45		2
	15	0	23.36	23.50	23.50		2
64QAM	1	0	23.34	23.46	23.33	0-2	2
	1	7	23.43	23.33	23.20		2
	1	14	23.46	23.49	23.25		2
	8	0	22.29	22.43	22.42	0-3	3
	8	4	22.38	22.47	22.41		3
	8	7	22.25	22.47	22.39		3
	15	0	22.32	22.33	22.49		3

**Table 9-21**  
**LTE Band 25 (PCS) Conducted Powers – 1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.46	25.43	25.43	0	0
	1	2	25.45	25.45	25.45		0
	1	5	25.45	25.42	25.46		0
	3	0	25.47	25.46	25.43		0
	3	2	25.48	25.43	25.45		0
	3	3	25.43	25.45	25.40		0
	6	0	24.40	24.35	24.40	0-1	1
16QAM	1	0	24.42	24.50	24.50	0-1	1
	1	2	24.41	24.48	24.42		1
	1	5	24.45	24.46	24.44		1
	3	0	24.40	24.50	24.45		1
	3	2	24.41	24.43	24.42		1
	3	3	24.42	24.35	24.44		1
	6	0	23.36	23.45	23.32	0-2	2
64QAM	1	0	23.30	23.30	23.41	0-2	2
	1	2	23.48	23.27	23.34		2
	1	5	23.44	23.34	23.32		2
	3	0	23.27	23.48	23.40		2
	3	2	23.26	23.25	23.32		2
	3	3	23.40	23.23	23.25		2
	6	0	22.29	22.32	22.30	0-3	3

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 45 of 94

9.4.5



LTE Band 41 (PC 3)

Table 9-22  
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.48	25.30	25.50	25.40	25.30	0	0
	1	50	25.49	25.16	25.49	25.45	25.48		0
	1	99	25.44	25.20	25.49	25.40	25.44		0
	50	0	24.48	24.43	24.49	24.49	24.45	-1	1
	50	25	24.49	24.50	24.47	24.44	24.43		1
	50	50	24.45	24.45	24.47	24.45	24.44		1
16QAM	100	0	24.49	24.48	24.48	24.49	24.48	-1	1
	1	0	24.50	24.43	24.48	24.50	24.47		1
	1	50	24.48	24.48	24.50	24.48	24.47		1
	1	99	24.50	24.50	24.48	24.48	24.48	-2	2
	50	0	23.48	23.47	23.50	23.50	23.50		2
	50	25	23.49	23.50	23.44	23.48	23.48		2
64QAM	50	50	23.49	23.48	23.45	23.48	23.44	-2	2
	100	0	23.49	23.50	23.43	23.50	23.50		2
	1	0	23.47	23.45	23.40	23.44	23.48		-3
	1	50	23.47	23.47	23.40	23.46	23.37	2	
	1	99	23.32	23.33	23.29	23.44	23.47	2	
	50	0	22.45	22.27	22.41	22.36	22.35	-3	3
50	25	22.39	22.38	22.47	22.47	22.35	3		
50	50	22.50	22.36	22.46	22.30	22.45	3		
100	0	22.30	22.36	22.22	22.39	22.37	3		

Table 9-23  
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	25.43	25.45	25.43	25.40	25.50	0	0	
	1	36	25.43	25.43	25.43	25.43	25.49		0	
	1	74	25.40	25.44	25.44	25.44	25.47		0	
	36	0	24.43	24.45	24.44	24.45	24.44	-1	1	
	36	18	24.44	24.45	24.48	24.43	24.48		1	
	36	37	24.45	24.43	24.40	24.43	24.40		1	
16QAM	75	0	24.43	24.44	24.44	24.46	24.44	-1	1	
	1	0	24.34	24.40	24.50	24.43	24.45		-1	1
	1	36	24.44	24.40	24.43	24.42	24.43			1
	1	74	24.45	24.40	24.50	24.40	24.43	-2		2
	36	0	23.43	23.43	23.44	23.48	23.42		2	
	36	18	23.44	23.43	23.43	23.50	23.44		2	
64QAM	36	37	23.45	23.43	23.48	23.49	23.43	-2	2	
	75	0	23.43	23.45	23.45	23.50	23.47		2	
	1	0	23.22	23.40	23.36	23.35	23.40		-2	2
	1	36	23.42	23.27	23.36	23.25	23.37	2		
	1	74	23.46	23.23	23.50	23.34	23.35	2		
	36	0	22.50	22.26	22.26	22.46	22.31	-3	3	
36	18	22.40	22.34	22.24	22.50	22.50	3			
36	37	22.34	22.41	22.35	22.42	22.24	3			
75	0	22.50	22.32	22.39	22.42	22.46	3			



FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 46 of 94	

**Table 9-24**  
**LTE Band 41 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	25.44	25.45	25.44	25.45	25.33	0	0	
	1	25	25.43	25.43	25.43	25.43	25.40		0	
	1	49	25.44	25.45	25.44	25.44	25.47		0	
	25	0	24.45	24.43	24.43	24.43	24.30	-1	1	
	25	12	24.43	24.43	24.40	24.44	24.43		1	
	25	25	24.44	24.43	24.43	24.43	24.43		1	
16QAM	50	0	24.43	24.42	24.43	24.46	24.42	-1	1	
	1	0	24.43	24.41	24.44	24.43	24.44		-1	1
	1	25	24.44	24.43	24.43	24.44	24.43			1
	1	49	24.45	24.44	24.45	24.46	24.43	-2		1
	25	0	23.43	23.45	23.44	23.43	23.20		2	
	25	12	23.43	23.43	23.46	23.44	23.45		2	
64QAM	25	25	23.45	23.45	23.40	23.43	23.43	-2	2	
	50	0	23.43	23.45	23.43	23.43	23.45		2	
	1	0	23.45	23.34	23.24	23.22	23.36		-2	2
	1	25	23.28	23.20	23.40	23.31	23.45	2		
	1	49	23.48	23.34	23.25	23.28	23.43	-3		2
	25	0	22.48	22.34	22.46	22.46	22.06		3	
25	12	22.26	22.46	22.32	22.37	22.47	3			
64QAM	25	25	22.40	22.45	22.27	22.37	22.24	-3	3	
	50	0	22.46	22.42	22.32	22.46	22.32		3	

**Table 9-25**  
**LTE Band 41 Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	25.43	25.47	25.46	25.50	25.44	0	0	
	1	12	25.45	25.43	25.47	25.43	25.44		0	
	1	24	25.44	25.46	25.44	25.45	25.43		0	
	12	0	24.43	24.44	24.43	24.43	24.40	-1	1	
	12	6	24.44	24.43	24.43	24.45	24.43		1	
	12	13	24.40	24.45	24.43	24.43	24.44		1	
16QAM	25	0	24.45	24.40	24.45	24.43	24.40	-1	1	
	1	0	24.50	24.47	24.43	24.48	24.42		-1	1
	1	12	24.43	24.44	24.43	24.44	24.40			1
	1	24	24.50	24.46	24.44	24.45	24.40	-2		1
	12	0	23.44	23.45	23.45	23.44	23.43		2	
	12	6	23.45	23.43	23.44	23.46	23.44		2	
64QAM	12	13	23.45	23.46	23.43	23.44	23.45	-2	2	
	25	0	23.43	23.48	23.47	23.43	23.44		2	
	1	0	23.29	23.48	23.40	23.39	23.21		-2	2
	1	12	23.47	23.36	23.46	23.44	23.32	2		
	1	24	23.38	23.30	23.42	23.30	23.43	-3		2
	12	0	22.44	22.50	22.38	22.38	22.33		3	
12	6	22.40	22.41	22.45	22.50	22.42	-3		3	
12	13	22.40	22.16	22.38	22.41	22.40		3		
25	0	22.32	22.49	22.32	22.26	22.35	3			

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 47 of 94	

9.4.6



LTE Band 41 (HPUE PC 2)

Table 9-26  
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	26.54	26.57	26.58	26.50	26.56	0	0	
	1	50	26.54	26.53	26.53	26.53	26.54		0	
	1	99	26.50	26.52	26.51	26.54	26.54		0	
	QPSK	50	0	25.48	25.54	25.52	25.56	25.54	0-1	1
		50	25	25.43	25.58	25.56	25.57	25.55		1
		50	50	25.47	25.53	25.44	25.62	25.55		1
		100	0	25.45	25.54	25.50	25.54	25.53		1
16QAM	1	0	25.58	25.53	25.49	25.56	25.55	0-1	1	
	1	50	25.58	25.51	25.54	25.55	25.59		1	
	1	99	25.48	25.54	25.52	25.57	25.53		1	
	16QAM	50	0	24.55	24.55	24.54	24.55	24.55	0-2	2
		50	25	24.51	24.58	24.50	24.55	24.53		2
		50	50	24.58	24.54	24.52	24.54	24.54		2
		100	0	24.58	24.53	24.52	24.58	24.55		2
64QAM	1	0	24.52	24.60	24.33	24.56	24.41	0-2	2	
	1	50	24.56	24.31	24.56	24.37	24.43		2	
	1	99	24.46	24.38	24.43	24.44	24.38		2	
	64QAM	50	0	23.35	23.42	23.61	23.49	23.52	0-3	3
		50	25	23.43	23.63	23.35	23.60	23.47		3
		50	50	23.49	23.55	23.43	23.43	23.52		3
		100	0	23.56	23.61	23.42	23.57	23.49		3

Table 9-27  
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	26.55	26.53	26.58	26.57	26.56	0	0	
	1	36	26.58	26.58	26.54	26.53	26.58		0	
	1	74	26.50	26.53	26.52	26.55	26.54		0	
	QPSK	36	0	25.48	25.52	25.49	25.54	25.52	0-1	1
		36	18	25.50	25.54	25.45	25.59	25.54		1
		36	37	25.47	25.57	25.48	25.64	25.57		1
		75	0	25.54	25.53	25.44	25.53	25.50		1
16QAM	1	0	25.48	25.54	25.49	25.59	25.52	0-1	1	
	1	36	25.51	25.51	25.55	25.55	25.53		1	
	1	74	25.48	25.52	25.52	25.53	25.50		1	
	16QAM	36	0	24.53	24.55	24.53	24.58	24.53	0-2	2
		36	18	24.51	24.53	24.53	24.54	24.53		2
		36	37	24.51	24.58	24.58	24.55	24.50		2
		75	0	24.47	24.59	24.53	24.59	24.56		2
64QAM	1	0	24.42	24.60	24.45	24.42	24.50	0-2	2	
	1	36	24.58	24.47	24.55	24.60	24.55		2	
	1	74	24.50	24.54	24.51	24.37	24.31		2	
	64QAM	36	0	23.43	23.35	23.38	23.40	23.41	0-3	3
		36	18	23.53	23.42	23.38	23.55	23.31		3
		36	37	23.45	23.52	23.52	23.60	23.33		3
		75	0	23.44	23.38	23.34	23.42	23.49		3

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 48 of 94	





**Table 9-28**  
**LTE Band 41 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.54	26.58	26.54	26.57	26.58	0	0
	1	25	26.58	26.53	26.54	26.54	26.53		0
	1	49	26.52	26.52	26.52	26.50	26.55		0
	25	0	25.52	25.54	25.49	25.58	25.52	-1	1
	25	12	25.51	25.58	25.43	25.59	25.54		1
	25	25	25.47	25.58	25.51	25.60	25.59		1
50	0	25.45	25.53	25.45	25.55	25.59	1		
16QAM	1	0	25.50	25.53	25.49	25.53	25.54	-1	1
	1	25	25.49	25.51	25.54	25.57	25.58		1
	1	49	25.50	25.54	25.52	25.54	25.55		1
	25	0	24.50	24.55	24.53	24.54	24.53	-2	2
	25	12	24.52	24.56	24.55	24.53	24.54		2
	25	25	24.48	24.53	24.53	24.55	24.54		2
50	0	24.50	24.58	24.58	24.59	24.55	2		
64QAM	1	0	24.53	24.54	24.49	24.39	24.55	-2	2
	1	25	24.51	24.40	24.38	24.46	24.51		2
	1	49	24.46	24.40	24.61	24.36	24.51		2
	25	0	23.46	23.51	23.61	23.56	23.56	-3	3
	25	12	23.53	23.57	23.56	23.39	23.39		3
	25	25	23.38	23.43	23.42	23.41	23.40		3
50	0	23.43	23.45	23.50	23.49	23.56	3		

**Table 9-29**  
**LTE Band 41 Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.50	26.53	26.54	26.57	26.53	0	0
	1	12	26.54	26.51	26.53	26.53	26.53		0
	1	24	26.45	26.52	26.43	26.55	26.50		0
	12	0	25.48	25.52	25.49	25.54	25.52	-1	1
	12	6	25.47	25.58	25.43	25.59	25.52		1
	12	13	25.47	25.57	25.44	25.60	25.57		1
25	0	25.45	25.54	25.45	25.53	25.59	1		
16QAM	1	0	25.48	25.50	25.49	25.53	25.52	-1	1
	1	12	25.49	25.51	25.51	25.55	25.58		1
	1	24	25.48	25.52	25.52	25.54	25.53		1
	12	0	24.50	24.51	24.50	24.55	24.53	-2	2
	12	6	24.51	24.52	24.53	24.53	24.56		2
	12	13	24.48	24.53	24.52	24.55	24.52		2
25	0	24.47	24.55	24.52	24.58	24.52	2		
64QAM	1	0	24.42	24.45	24.48	24.33	24.41	-2	2
	1	12	24.36	24.52	24.37	24.48	24.44		2
	1	24	24.34	24.41	24.35	24.50	24.55		2
	12	0	23.56	23.52	23.53	23.52	23.52	-3	3
	12	6	23.41	23.29	23.50	23.44	23.39		3
	12	13	23.54	23.59	23.42	23.40	23.49		3
25	0	23.45	23.53	23.44	23.53	23.49	3		

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4-ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 49 of 94

## 9.4.7 LTE Carrier Aggregation Conducted Powers

**Table 9-30**  
**LTE Carrier Aggregation Conducted Powers (2 CC)**

LTE B41 Power Class	PCC Band	PCC Bandwidth [MHz]	PCC				SCC				Power				
			PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
PC 3	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40422	2573.2	25.48	25.50
N/A	LTE B25	10	26090	1855	QPSK	1	0	8040	1930	LTE B25	5	8665	1992.5	25.44	25.48
PC 2	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40422	2573.2	26.60	26.58

**Table 9-31**  
**LTE Carrier Aggregation Conducted Powers (3 CC)**



LTE B41 Power Class	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC				SCC 1				SCC 2				Power			
				PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
PC 3	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40422	2573.2	LTE B41	20	40224	2553.4	25.46	25.50
PC 2	LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40422	2573.2	LTE B41	20	40224	2553.4	26.52	26.58

**Notes:**

1. The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. For every supported combination of downlink carrier aggregation, power measurements were performed with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.
2. All control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.



**Figure 9-4**  
**Power Measurement Setup**

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 50 of 94	

## 9.5 WLAN Conducted Powers

**Table 9-32**  
2.4 GHz WLAN Reduced Average RF Power (Held-to-Ear) –Antenna 1



Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]			
		IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	14.98	14.61	14.19	14.44
2422	3	15.41	14.96	14.88	14.79
2437	6	15.46	15.26	15.32	15.18
2462	11	15.42	15.16	14.87	15.04

**Table 9-33**  
2.4 GHz WLAN Reduced Average RF Power (Held-to-Ear) - Antenna 2

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]			
		IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	14.97	14.46	14.30	14.30
2422	3	15.23	15.01	14.99	14.79
2437	6	15.27	15.01	15.30	14.94
2462	11	15.03	15.02	15.05	14.95

**Table 9-34**  
2.4 GHz WLAN Maximum Average RF Power- Antenna 1

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]			
		IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	16.15	14.61	14.19	14.44
2422	3	16.30	14.96	14.88	14.79
2437	6	16.82	15.26	15.32	15.18
2462	11	16.61	15.16	14.87	15.04



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 51 of 94

**Table 9-35**  
**2.4 GHz WLAN Maximum Average RF Power- Antenna 2**

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]			
		IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	15.73	14.46	14.30	14.30
2422	3	16.24	15.01	14.99	14.79
2437	6	16.73	15.01	15.30	14.94
2462	11	16.39	15.02	15.05	14.95

**Table 9-36**  
**5 GHz WLAN Reduced Average RF Power (Held-to-Ear)- Antenna 1**

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	11.91	12.01	11.89
5200	40	14.21	14.08	14.01
5220	44	14.06	14.22	14.01
5240	48	14.09	14.16	14.12
5260	52	14.16	14.18	14.13
5280	56	14.00	14.05	14.21
5300	60	14.18	14.13	14.23
5320	64	12.13	11.89	11.97
5500	100	12.23	12.04	12.11
5580	116	14.03	14.18	14.02
5660	132	13.74	13.88	13.74
5720	144	13.73	13.74	13.75
5745	149	14.17	14.13	14.04
5785	157	14.14	14.12	14.20
5825	165	12.08	12.16	12.09



FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 52 of 94	

**Table 9-37**  
**5 GHz WLAN Reduced Average RF Power (Held-to-Ear)- Antenna 2**

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	12.08	12.12	12.12
5200	40	14.03	14.06	14.13
5220	44	14.16	14.01	14.14
5240	48	14.19	14.21	14.22
5260	52	14.14	14.06	14.10
5280	56	14.02	14.23	14.18
5300	60	14.14	14.04	14.18
5320	64	12.19	12.49	11.89
5500	100	12.17	12.10	12.26
5580	116	14.10	14.20	14.21
5660	132	13.89	13.84	13.83
5720	144	13.82	13.82	13.85
5745	149	14.07	14.14	14.08
5785	157	14.22	14.07	14.04
5825	165	12.27	11.94	12.00



**Table 9-38**  
**5 GHz WLAN Maximum Average RF Power- Antenna 1**

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	11.91	12.01	11.89
5200	40	15.94	15.95	15.87
5220	44	16.03	15.86	15.75
5240	48	15.98	15.83	15.73
5260	52	16.01	16.06	15.91
5280	56	15.98	15.95	15.90
5300	60	15.85	15.85	15.93
5320	64	12.13	11.89	11.97
5500	100	12.23	12.04	12.11
5580	116	16.14	15.89	15.79
5660	132	15.89	15.59	15.74
5720	144	15.87	15.58	15.63
5745	149	16.26	16.02	16.14
5785	157	16.04	15.82	15.95
5825	165	12.08	12.16	12.09

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 53 of 94


**Table 9-39  
5 GHz WLAN Maximum Average RF Power- Antenna 2**

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	12.08	12.12	12.12
5200	40	16.20	15.94	16.06
5220	44	16.22	16.09	16.28
5240	48	16.49	16.14	15.99
5260	52	16.25	15.93	15.85
5280	56	16.03	15.86	15.92
5300	60	16.00	15.89	16.01
5320	64	12.19	12.49	11.89
5500	100	12.17	12.10	12.26
5580	116	15.91	15.94	15.78
5660	132	15.18	15.58	15.18
5720	144	14.87	14.91	14.86
5745	149	15.84	16.16	16.01
5785	157	15.74	16.02	15.91
5825	165	12.27	11.94	12.00


FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 54 of 94

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

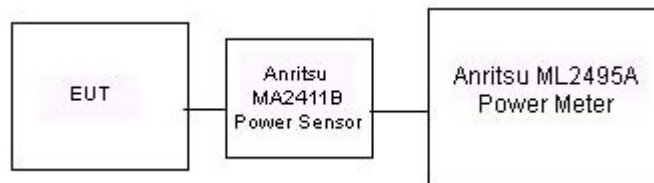

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-5**  
**Power Measurement Setup for Bandwidths < 50 MHz**



**Figure 9-6**  
**Power Measurement Setup for Bandwidths > 50 MHz**



FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL TESTING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 55 of 94

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Tissue Properties (Head)**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
1/25/2017	750H	22.2	700	0.859	42.900	0.889	42.201	-3.37%	1.66%
			710	0.869	42.739	0.890	42.149	-2.36%	1.40%
			740	0.897	42.315	0.893	41.994	0.45%	0.76%
			755	0.910	42.124	0.894	41.916	1.79%	0.50%
1/31/2017	835H	22.1	820	0.897	43.193	0.899	41.578	-0.22%	3.88%
			835	0.912	43.015	0.900	41.500	1.33%	3.65%
			850	0.927	42.828	0.916	41.500	1.20%	3.20%
2/1/2017	835H	21.4	820	0.889	40.464	0.899	41.578	-1.11%	-2.68%
			835	0.903	40.281	0.900	41.500	0.33%	-2.94%
			850	0.918	40.084	0.916	41.500	0.22%	-3.41%
1/27/2017	1750H	22.0	1710	1.325	39.024	1.348	40.142	-1.71%	-2.79%
			1750	1.360	38.821	1.371	40.079	-0.80%	-3.14%
			1790	1.398	38.651	1.394	40.016	0.29%	-3.41%
1/30/2017	1900H	21.3	1850	1.395	38.408	1.400	40.000	-0.36%	-3.98%
			1880	1.430	38.258	1.400	40.000	2.14%	-4.35%
			1910	1.464	38.120	1.400	40.000	4.57%	-4.70%
1/22/2017	2450H	24.0	2400	1.814	38.386	1.756	39.289	3.30%	-2.30%
			2450	1.869	38.155	1.800	39.200	3.83%	-2.67%
			2500	1.931	37.926	1.855	39.136	4.10%	-3.09%
			2550	1.984	37.744	1.909	39.073	3.93%	-3.40%
			2600	2.042	37.518	1.964	39.009	3.97%	-3.82%
01/23/2017	5200H-5800H	20.3	5240	4.554	34.993	4.696	35.940	-3.02%	-2.63%
			5260	4.590	34.983	4.717	35.917	-2.69%	-2.60%
			5300	4.613	34.928	4.758	35.871	-3.05%	-2.63%
			5580	4.883	34.540	5.045	35.551	-3.21%	-2.84%
			5600	4.914	34.502	5.065	35.529	-2.98%	-2.89%
			5745	5.070	34.326	5.214	35.363	-2.76%	-2.93%
			5765	5.085	34.297	5.234	35.340	-2.85%	-2.95%
			5785	5.101	34.275	5.255	35.317	-2.93%	-2.95%



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 56 of 94



**Table 10-2  
Measured Tissue Properties (Body)**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
1/30/2017	750B	20.8	700	0.913	55.104	0.959	55.726	-4.80%	-1.12%
			710	0.923	54.953	0.960	55.687	-3.85%	-1.32%
			740	0.952	54.559	0.963	55.570	-1.14%	-1.82%
			755	0.966	54.398	0.964	55.512	0.21%	-2.01%
1/26/2017	835B	21.4	820	0.989	56.595	0.969	55.258	2.06%	2.42%
			835	1.004	56.440	0.970	55.200	3.51%	2.25%
			850	1.019	56.294	0.988	55.154	3.14%	2.07%
2/1/2017	835B	20.7	820	0.992	53.982	0.969	55.258	2.37%	-2.31%
			835	1.004	53.787	0.970	55.200	3.51%	-2.56%
			850	1.020	53.608	0.988	55.154	3.24%	-2.80%
1/23/2017	1750B	22.0	1710	1.464	51.733	1.463	53.537	0.07%	-3.37%
			1750	1.506	51.573	1.488	53.432	1.21%	-3.48%
			1790	1.550	51.401	1.514	53.326	2.38%	-3.61%
1/27/2017	1750B	21.4	1710	1.444	52.390	1.463	53.537	-1.30%	-2.14%
			1750	1.488	52.205	1.488	53.432	0.00%	-2.30%
			1790	1.533	52.023	1.514	53.326	1.25%	-2.44%
1/25/2017	1900B	22.9	1850	1.504	52.304	1.520	53.300	-1.05%	-1.87%
			1880	1.536	52.210	1.520	53.300	1.05%	-2.05%
			1910	1.570	52.121	1.520	53.300	3.29%	-2.21%
1/23/2017	1900B	23.0	1850	1.480	52.091	1.520	53.300	-2.63%	-2.27%
			1880	1.512	51.983	1.520	53.300	-0.53%	-2.47%
			1910	1.544	51.897	1.520	53.300	1.58%	-2.63%
1/30/2017	1900B	23.0	1850	1.517	53.391	1.520	53.300	-0.20%	0.17%
			1880	1.547	53.261	1.520	53.300	1.78%	-0.07%
			1910	1.588	53.189	1.520	53.300	4.47%	-0.21%
1/24/2017	2450B	23.7	2400	1.951	52.052	1.902	52.767	2.58%	-1.36%
			2450	2.014	51.856	1.950	52.700	3.28%	-1.60%
			2500	2.086	51.676	2.021	52.636	3.22%	-1.82%
			2550	2.151	51.482	2.092	52.573	2.82%	-2.08%
			2600	2.220	51.304	2.163	52.509	2.64%	-2.29%
01/30/2017	5200B-5800B	22.4	5220	5.452	48.208	5.323	48.987	2.42%	-1.59%
			5240	5.478	48.177	5.346	48.960	2.47%	-1.60%
			5260	5.506	48.169	5.369	48.933	2.55%	-1.56%
			5580	5.935	47.666	5.743	48.499	3.34%	-1.72%
			5600	5.973	47.621	5.766	48.471	3.59%	-1.75%
			5745	6.156	47.400	5.936	48.275	3.71%	-1.81%
			5765	6.193	47.398	5.959	48.248	3.93%	-1.76%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.


FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 57 of 94	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-3**  
**System Verification Results**

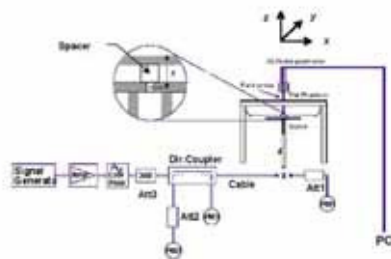

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
I	750	HEAD	01/25/2017	22.3	22.2	0.200	1161	3209	1.570	8.170	7.850	-3.92%
K	835	HEAD	01/31/2017	23.1	22.1	0.200	4d047	7409	1.730	9.130	8.650	-5.26%
G	835	HEAD	02/01/2017	23.1	21.9	0.200	4d047	3287	1.870	9.130	9.350	2.41%
I	1750	HEAD	01/27/2017	24.0	23.0	0.100	1148	3209	3.370	36.200	33.700	-6.91%
F	1900	HEAD	01/30/2017	22.5	21.5	0.100	5d149	3332	3.890	40.100	38.900	-2.99%
G	2450	HEAD	01/22/2017	23.2	22.5	0.100	981	3287	5.640	52.800	56.400	6.82%
G	2600	HEAD	01/22/2017	23.2	22.5	0.100	1071	3287	5.610	56.300	56.100	-0.36%
J	5250	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	3.880	78.900	77.600	-1.65%
J	5600	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	4.120	83.600	82.400	-1.44%
J	5750	HEAD	01/23/2017	20.9	20.3	0.050	1191	7357	3.910	79.100	78.200	-1.14%
I	750	BODY	01/30/2017	22.7	20.8	0.200	1161	3209	1.760	8.430	8.800	4.39%
H	835	BODY	01/26/2017	22.8	21.4	0.200	4d047	3319	2.020	9.570	10.100	5.54%
H	835	BODY	02/01/2017	22.6	20.7	0.200	4d047	3319	2.040	9.570	10.200	6.58%
I	1750	BODY	01/23/2017	23.6	23.0	0.100	1148	3209	3.930	37.100	39.300	5.93%
D	1750	BODY	01/27/2017	23.2	21.6	0.100	1148	3213	3.570	37.100	35.700	-3.77%
K	1900	BODY	01/23/2017	23.9	23.4	0.100	5d149	7409	3.930	39.900	39.300	-1.50%
K	1900	BODY	01/25/2017	24.0	21.5	0.100	5d080	7409	3.980	39.100	39.800	1.79%
K	1900	BODY	01/30/2017	22.3	22.8	0.100	5d149	7409	4.090	39.900	40.900	2.51%
H	2450	BODY	01/24/2017	22.4	22.7	0.100	797	3319	5.210	50.700	52.100	2.76%
H	2600	BODY	01/24/2017	22.4	22.7	0.100	1126	3319	5.760	54.500	57.600	5.69%
D	5250	BODY	01/30/2017	21.9	21.3	0.050	1057	3914	3.490	74.600	69.800	-6.43%
D	5600	BODY	01/30/2017	21.6	21.1	0.050	1057	3914	3.880	78.900	77.600	-1.65%
D	5750	BODY	01/30/2017	21.6	21.1	0.050	1057	3914	3.460	75.500	69.200	-8.34%



**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID: ZNFLS993	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 58 of 94

# 11 SAR DATA SUMMARY



## 11.1 Standalone Head SAR Data

**Table 11-1  
GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	33.20	0.19	Right	Cheek	01412	1	1:8.3	0.075	1.000	0.075	
836.60	190	GSM 850	GSM	33.2	33.20	0.17	Right	Tilt	01412	1	1:8.3	0.044	1.000	0.044	
836.60	190	GSM 850	GSM	33.2	33.20	-0.03	Left	Cheek	01412	1	1:8.3	0.105	1.000	0.105	
836.60	190	GSM 850	GSM	33.2	33.20	0.03	Left	Tilt	01412	1	1:8.3	0.044	1.000	0.044	
836.60	190	GSM 850	GPRS	32.2	32.16	0.07	Right	Cheek	01412	2	1:4.15	0.142	1.009	0.143	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.01	Right	Tilt	01412	2	1:4.15	0.087	1.009	0.088	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.12	Left	Cheek	01412	2	1:4.15	0.207	1.009	0.209	A1
836.60	190	GSM 850	GPRS	32.2	32.16	-0.17	Left	Tilt	01412	2	1:4.15	0.088	1.009	0.089	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
GSM 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.2	30.18	0.12	Right	Cheek	01417	1	1:8.3	0.055	1.005	0.055	
1880.00	661	GSM 1900	GSM	30.2	30.18	0.03	Right	Tilt	01417	1	1:8.3	0.021	1.005	0.021	
1880.00	661	GSM 1900	GSM	30.2	30.18	0.05	Left	Cheek	01417	1	1:8.3	0.083	1.005	0.083	
1880.00	661	GSM 1900	GSM	30.2	30.18	0.04	Left	Tilt	01417	1	1:8.3	0.026	1.005	0.026	
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.01	Right	Cheek	01417	2	1:4.15	0.089	1.007	0.090	
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.05	Right	Tilt	01417	2	1:4.15	0.033	1.007	0.033	
1880.00	661	GSM 1900	GPRS	29.2	29.17	-0.04	Left	Cheek	01417	2	1:4.15	0.117	1.007	0.118	A2
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.14	Left	Tilt	01417	2	1:4.15	0.036	1.007	0.036	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 59 of 94

**Table 11-3  
UMTS 850 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.05	Right	Cheek	01417	1:1	0.145	1.005	0.146	
836.60	4183	UMTS 850	RMC	24.7	24.68	0.12	Right	Tilt	01417	1:1	0.100	1.005	0.101	
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.18	Left	Cheek	01417	1:1	0.182	1.005	0.183	A3
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.07	Left	Tilt	01417	1:1	0.083	1.005	0.083	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.02	Right	Cheek	01412	1:1	0.164	1.007	0.165	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.03	Right	Tilt	01412	1:1	0.112	1.007	0.113	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.18	Left	Cheek	01412	1:1	0.191	1.007	0.192	A4
1732.40	1412	UMTS 1750	RMC	24.7	24.67	-0.01	Left	Tilt	01412	1:1	0.130	1.007	0.131	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5  
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.7	24.70	-0.03	Right	Cheek	01417	1:1	0.138	1.000	0.138	
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.03	Right	Tilt	01417	1:1	0.055	1.000	0.055	
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.04	Left	Cheek	01417	1:1	0.160	1.000	0.160	A5
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.19	Left	Tilt	01417	1:1	0.057	1.000	0.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 60 of 94

**Table 11-6  
CDMA BC0 (§22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	25.44	0.13	Right	Cheek	01417	1:1	0.193	1.014	0.196	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	25.44	0.00	Right	Tilt	01417	1:1	0.124	1.014	0.126	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	25.44	-0.10	Left	Cheek	01417	1:1	0.254	1.014	0.258	A6
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.5	25.44	-0.16	Left	Tilt	01417	1:1	0.113	1.014	0.115	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	25.45	0.06	Right	Cheek	01417	1:1	0.156	1.012	0.158	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	25.45	-0.20	Right	Tilt	01417	1:1	0.104	1.012	0.105	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	25.45	-0.04	Left	Cheek	01417	1:1	0.223	1.012	0.226	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.5	25.45	0.21	Left	Tilt	01417	1:1	0.099	1.012	0.100	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7  
CDMA BC10 (§90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	25.18	0.02	Right	Cheek	01417	1:1	0.134	1.005	0.135	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	25.18	0.05	Right	Tilt	01417	1:1	0.106	1.005	0.107	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	25.18	0.03	Left	Cheek	01417	1:1	0.221	1.005	0.222	A7
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	25.18	0.09	Left	Tilt	01417	1:1	0.106	1.005	0.107	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.20	0.07	Right	Cheek	01417	1:1	0.149	1.000	0.149	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.20	0.11	Right	Tilt	01417	1:1	0.104	1.000	0.104	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.20	0.07	Left	Cheek	01417	1:1	0.215	1.000	0.215	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	25.20	-0.08	Left	Tilt	01417	1:1	0.107	1.000	0.107	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 61 of 94	

**Table 11-8  
PCS CDMA Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	25.18	0.01	Right	Cheek	01417	1:1	0.131	1.005	0.132	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	25.18	0.04	Right	Tilt	01417	1:1	0.049	1.005	0.049	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	25.18	0.01	Left	Cheek	01417	1:1	0.187	1.005	0.188	A8
1880.00	600	PCS CDMA	RC3 / SO55	25.2	25.18	0.02	Left	Tilt	01417	1:1	0.058	1.005	0.058	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	25.19	0.06	Right	Cheek	01417	1:1	0.142	1.002	0.142	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	25.19	0.07	Right	Tilt	01417	1:1	0.049	1.002	0.049	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	25.19	-0.06	Left	Cheek	01417	1:1	0.178	1.002	0.178	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	25.19	-0.07	Left	Tilt	01417	1:1	0.061	1.002	0.061	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-9  
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.03	0	Right	Cheek	QPSK	1	0	01410	1:1	0.083	1.000	0.083	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.14	1	Right	Cheek	QPSK	25	0	01410	1:1	0.071	1.007	0.071	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.07	0	Right	Tilt	QPSK	1	0	01410	1:1	0.051	1.000	0.051	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.18	1	Right	Tilt	QPSK	25	0	01410	1:1	0.048	1.007	0.048	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.07	0	Left	Cheek	QPSK	1	0	01410	1:1	0.104	1.000	0.104	A9
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.08	1	Left	Cheek	QPSK	25	0	01410	1:1	0.088	1.007	0.089	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.15	0	Left	Tilt	QPSK	1	0	01410	1:1	0.054	1.000	0.054	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.11	1	Left	Tilt	QPSK	25	0	01410	1:1	0.048	1.007	0.048	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-10  
LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	-0.11	0	Right	Cheek	QPSK	1	0	01411	1:1	0.140	1.000	0.140	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	0.08	1	Right	Cheek	QPSK	36	37	01411	1:1	0.113	1.009	0.114	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	-0.13	0	Right	Tilt	QPSK	1	0	01411	1:1	0.103	1.000	0.103	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	0.12	1	Right	Tilt	QPSK	36	37	01411	1:1	0.075	1.009	0.076	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.02	0	Left	Cheek	QPSK	1	0	01411	1:1	0.221	1.000	0.221	A10
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	0.00	1	Left	Cheek	QPSK	36	37	01411	1:1	0.160	1.009	0.161	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.10	0	Left	Tilt	QPSK	1	0	01411	1:1	0.105	1.000	0.105	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	0.04	1	Left	Tilt	QPSK	36	37	01411	1:1	0.071	1.009	0.072	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 62 of 94	

**Table 11-11  
LTE Band 4 (AWS) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.10	0	Right	Cheek	QPSK	1	0	01413	1:1	0.176	1.000	0.176	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.07	1	Right	Cheek	QPSK	50	50	01413	1:1	0.142	1.007	0.143	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	0.02	0	Right	Tilt	QPSK	1	0	01413	1:1	0.104	1.000	0.104	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.07	1	Right	Tilt	QPSK	50	50	01413	1:1	0.081	1.007	0.082	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	0.12	0	Left	Cheek	QPSK	1	0	01413	1:1	0.236	1.000	0.236	A11
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.06	1	Left	Cheek	QPSK	50	50	01413	1:1	0.175	1.007	0.176	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	0.01	0	Left	Tilt	QPSK	1	0	01413	1:1	0.124	1.000	0.124	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.09	1	Left	Tilt	QPSK	50	50	01413	1:1	0.100	1.007	0.101	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12  
LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.16	0	Right	Cheek	QPSK	1	99	01413	1:1	0.141	1.000	0.141	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	-0.16	1	Right	Cheek	QPSK	50	25	01413	1:1	0.104	1.000	0.104	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	0.02	0	Right	Tilt	QPSK	1	99	01413	1:1	0.054	1.000	0.054	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.14	1	Right	Tilt	QPSK	50	25	01413	1:1	0.042	1.000	0.042	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.02	0	Left	Cheek	QPSK	1	99	01413	1:1	0.184	1.000	0.184	A12
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.07	1	Left	Cheek	QPSK	50	25	01413	1:1	0.135	1.000	0.135	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	0.00	0	Left	Tilt	QPSK	1	99	01413	1:1	0.072	1.000	0.072	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.07	1	Left	Tilt	QPSK	50	25	01413	1:1	0.051	1.000	0.051	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-13  
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	-0.03	0	Right	Cheek	QPSK	1	0	01410	1:1.58	0.090	1.000	0.090	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	-0.04	1	Right	Cheek	QPSK	50	25	01410	1:1.58	0.057	1.000	0.057	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.16	0	Right	Tilt	QPSK	1	0	01410	1:1.58	0.069	1.000	0.069	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.13	1	Right	Tilt	QPSK	50	25	01410	1:1.58	0.039	1.000	0.039	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.05	0	Left	Cheek	QPSK	1	0	01410	1:1.58	0.124	1.000	0.124	A13
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.06	1	Left	Cheek	QPSK	50	25	01410	1:1.58	0.082	1.000	0.082	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.04	0	Left	Tilt	QPSK	1	0	01410	1:1.58	0.038	1.000	0.038	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.05	1	Left	Tilt	QPSK	50	25	01410	1:1.58	0.024	1.000	0.024	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: ZNFLS993	 PCTEST Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 63 of 94	

**Table 11-14  
DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)	(W/kg)		
2437	6	802.11b	DSSS	22	15.5	15.46	0.06	Right	Cheek	1	01430	1	99.9	0.796	0.623	1.009	1.001	0.629	
2437	6	802.11b	DSSS	22	15.5	15.46	0.20	Right	Tilt	1	01430	1	99.9	0.173	0.132	1.009	1.001	0.133	
2437	6	802.11b	DSSS	22	15.5	15.46	0.04	Left	Cheek	1	01430	1	99.9	0.164	-	1.009	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.46	0.03	Left	Tilt	1	01430	1	99.9	0.054	-	1.009	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.27	0.05	Right	Cheek	2	01430	1	99.9	0.754	0.662	1.054	1.001	0.698	A14
2437	6	802.11b	DSSS	22	15.5	15.27	0.11	Right	Tilt	2	01430	1	99.9	0.606	0.509	1.054	1.001	0.537	
2437	6	802.11b	DSSS	22	15.5	15.27	-0.04	Left	Cheek	2	01430	1	99.9	0.469	-	1.054	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.27	-0.01	Left	Tilt	2	01430	1	99.9	0.403	-	1.054	1.001	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-15  
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)	(W/kg)		
5300	60	802.11a	OFDM	20	14.5	14.18	0.01	Right	Cheek	1	01430	6	99.3	0.073	0.025	1.076	1.007	0.027	
5300	60	802.11a	OFDM	20	14.5	14.18	0.12	Right	Tilt	1	01430	6	99.3	0.037	-	1.076	1.007	-	
5300	60	802.11a	OFDM	20	14.5	14.18	0.10	Left	Cheek	1	01430	6	99.3	0.024	-	1.076	1.007	-	
5300	60	802.11a	OFDM	20	14.5	14.18	0.17	Left	Tilt	1	01430	6	99.3	0.025	-	1.076	1.007	-	
5300	60	802.11a	OFDM	20	14.5	14.14	0.10	Right	Cheek	2	01430	6	99.3	0.957	0.516	1.086	1.007	0.564	A15
5300	60	802.11a	OFDM	20	14.5	14.14	0.09	Right	Tilt	2	01430	6	99.3	0.860	0.485	1.086	1.007	0.530	
5300	60	802.11a	OFDM	20	14.5	14.14	0.20	Left	Cheek	2	01430	6	99.3	0.386	-	1.086	1.007	-	
5300	60	802.11a	OFDM	20	14.5	14.14	0.11	Left	Tilt	2	01430	6	99.3	0.356	-	1.086	1.007	-	
5580	116	802.11a	OFDM	20	14.5	14.03	-0.02	Right	Cheek	1	01430	6	99.3	0.167	0.058	1.114	1.007	0.065	
5580	116	802.11a	OFDM	20	14.5	14.03	0.09	Right	Tilt	1	01430	6	99.3	0.039	-	1.114	1.007	-	
5580	116	802.11a	OFDM	20	14.5	14.03	0.11	Left	Cheek	1	01430	6	99.3	0.029	-	1.114	1.007	-	
5580	116	802.11a	OFDM	20	14.5	14.03	0.10	Left	Tilt	1	01430	6	99.3	0.029	-	1.114	1.007	-	
5580	116	802.11a	OFDM	20	14.5	14.10	0.10	Right	Cheek	2	01430	6	99.3	0.658	0.504	1.096	1.007	0.556	
5580	116	802.11a	OFDM	20	14.5	14.10	0.07	Right	Tilt	2	01430	6	99.3	0.765	0.404	1.096	1.007	0.446	
5580	116	802.11a	OFDM	20	14.5	14.10	0.04	Left	Cheek	2	01430	6	99.3	0.355	-	1.096	1.007	-	
5580	116	802.11a	OFDM	20	14.5	14.10	0.10	Left	Tilt	2	01430	6	99.3	0.310	-	1.096	1.007	-	
5745	149	802.11a	OFDM	20	14.5	14.17	0.10	Right	Cheek	1	01430	6	99.3	0.340	0.094	1.079	1.007	0.102	
5745	149	802.11a	OFDM	20	14.5	14.17	0.03	Right	Tilt	1	01430	6	99.3	0.065	-	1.079	1.007	-	
5745	149	802.11a	OFDM	20	14.5	14.17	0.13	Left	Cheek	1	01430	6	99.3	0.046	-	1.079	1.007	-	
5745	149	802.11a	OFDM	20	14.5	14.17	0.11	Left	Tilt	1	01430	6	99.3	0.057	-	1.079	1.007	-	
5785	157	802.11a	OFDM	20	14.5	14.22	0.03	Right	Cheek	2	01430	6	99.3	0.127	0.045	1.067	1.007	0.048	
5785	157	802.11a	OFDM	20	14.5	14.22	0.03	Right	Tilt	2	01430	6	99.3	0.101	-	1.067	1.007	-	
5785	157	802.11a	OFDM	20	14.5	14.22	0.10	Left	Cheek	2	01430	6	99.3	0.043	-	1.067	1.007	-	
5785	157	802.11a	OFDM	20	14.5	14.22	0.03	Left	Tilt	2	01430	6	99.3	0.059	-	1.067	1.007	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 64 of 94	



## 11.2 Standalone Body-Worn SAR Data



**Table 11-16  
GSM/UMTS/CDMA Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	33.20	0.00	10 mm	01417	1	1:8.3	back	0.569	1.000	0.569	
824.20	128	GSM 850	GPRS	32.2	32.07	-0.05	10 mm	01417	2	1:4.15	back	0.933	1.030	0.961	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.02	10 mm	01417	2	1:4.15	back	1.020	1.009	1.029	
848.80	251	GSM 850	GPRS	32.2	32.19	-0.02	10 mm	01417	2	1:4.15	back	0.940	1.002	0.942	
836.60	190	GSM 850	GPRS	32.2	32.16	0.15	10 mm	01417	2	1:4.15	back	1.060	1.009	1.070	A16
1880.00	661	GSM 1900	GSM	30.2	30.18	0.00	10 mm	01412	1	1:8.3	back	0.299	1.005	0.300	
1880.00	661	GSM 1900	GPRS	29.2	29.17	-0.04	10 mm	01412	2	1:4.15	back	0.438	1.007	0.441	A17
836.60	4183	UMTS 850	RMC	24.7	24.68	0.03	10 mm	01417	N/A	1:1	back	0.568	1.005	0.571	A19
1712.40	1312	UMTS 1750	RMC	24.7	24.67	-0.04	10 mm	01417	N/A	1:1	back	0.730	1.007	0.735	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.03	10 mm	01417	N/A	1:1	back	0.816	1.007	0.822	
1752.60	1513	UMTS 1750	RMC	24.7	24.70	-0.05	10 mm	01417	N/A	1:1	back	0.844	1.000	0.844	
1752.60	1513	UMTS 1750	RMC	24.7	24.70	0.00	10 mm	01417	N/A	1:1	back	0.854	1.000	0.854	A20
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.05	10 mm	01417	N/A	1:1	back	0.692	1.000	0.692	A21
836.52	384	CDMA BC0 (§22H)	TDSO / SO32	25.5	25.49	0.05	10 mm	01417	N/A	1:1	back	0.724	1.002	0.725	A23
820.10	564	CDMA BC10 (§90S)	TDSO / SO32	25.2	25.17	0.02	10 mm	01417	N/A	1:1	back	0.655	1.007	0.660	A25
1851.25	25	PCS CDMA	TDSO / SO32	25.2	25.14	0.07	10 mm	01412	N/A	1:1	back	0.880	1.014	0.892	A27
1880.00	600	PCS CDMA	TDSO / SO32	25.2	25.19	0.11	10 mm	01412	N/A	1:1	back	0.803	1.002	0.805	
1908.75	1175	PCS CDMA	TDSO / SO32	25.2	25.18	0.06	10 mm	01412	N/A	1:1	back	0.772	1.005	0.776	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note: Blue Entries Represent Variability Measurements

**Table 11-17  
LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
	707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.01	0	01414	QPSK	1	0	10 mm	back	1:1	0.424	1.000	0.424	A29
	707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.02	1	01414	QPSK	25	0	10 mm	back	1:1	0.343	1.007	0.345	
	831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.02	0	01414	QPSK	1	0	10 mm	back	1:1	0.717	1.000	0.717	A30
	831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.04	1	01414	QPSK	36	37	10 mm	back	1:1	0.540	1.009	0.545	
	1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.01	0	01414	QPSK	1	0	10 mm	back	1:1	0.826	1.000	0.826	A31
	1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.03	1	01414	QPSK	50	50	10 mm	back	1:1	0.676	1.007	0.681	
	1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.86	0.00	1	01414	QPSK	100	0	10 mm	back	1:1	0.668	1.033	0.690	
	1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.03	0	01413	QPSK	1	99	10 mm	back	1:1	0.778	1.000	0.778	A32
	1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.07	1	01413	QPSK	50	25	10 mm	back	1:1	0.570	1.000	0.570	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.00	0	01414	QPSK	1	0	10 mm	back	1:1.58	0.532	1.000	0.532	A34
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.01	1	01414	QPSK	50	25	10 mm	back	1:1.58	0.348	1.000	0.348	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 65 of 94	

**Table 11-18  
DTS Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	17.0	16.82	0.02	10 mm	1	01430	1	back	99.9	0.127	0.108	1.042	1.001	0.113	
2437	6	802.11b	DSSS	22	17.0	16.73	0.01	10 mm	2	01430	1	back	99.9	0.177	0.151	1.064	1.001	0.161	A36
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-19  
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	16.5	16.01	-0.03	10 mm	1	01430	6	back	99.3	0.802	0.426	1.119	1.007	0.480	
5260	52	802.11a	OFDM	20	16.5	16.25	0.08	10 mm	2	01430	6	back	99.3	0.411	0.197	1.059	1.007	0.210	
5580	116	802.11a	OFDM	20	16.5	16.14	0.03	10 mm	1	01430	6	back	99.3	1.048	0.598	1.086	1.007	0.654	A37
5580	116	802.11a	OFDM	20	16.5	15.91	-0.01	10 mm	2	01430	6	back	99.3	0.566	0.273	1.146	1.007	0.315	
5745	149	802.11a	OFDM	20	16.5	16.26	-0.06	10 mm	1	01430	6	back	99.3	0.948	0.483	1.057	1.007	0.514	
5745	149	802.11a	OFDM	20	16.5	15.84	0.02	10 mm	2	01430	6	back	99.3	0.193	0.105	1.164	1.007	0.123	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 66 of 94

# 11.3 Standalone Hotspot SAR Data

**Table 11-20  
GPRS/UMTS/CDMA Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	32.2	32.07	-0.05	10 mm	01417	2	1:4.15	back	0.933	1.030	0.961	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.02	10 mm	01417	2	1:4.15	back	1.020	1.009	1.029	
848.80	251	GSM 850	GPRS	32.2	32.19	-0.02	10 mm	01417	2	1:4.15	back	0.940	1.002	0.942	
824.20	128	GSM 850	GPRS	32.2	32.07	-0.04	10 mm	01417	2	1:4.15	front	0.925	1.030	0.953	
836.60	190	GSM 850	GPRS	32.2	32.16	0.03	10 mm	01417	2	1:4.15	front	0.899	1.009	0.907	
848.80	251	GSM 850	GPRS	32.2	32.19	-0.01	10 mm	01417	2	1:4.15	front	0.925	1.002	0.927	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.03	10 mm	01417	2	1:4.15	bottom	0.488	1.009	0.492	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.02	10 mm	01417	2	1:4.15	right	0.185	1.009	0.187	
836.60	190	GSM 850	GPRS	32.2	32.16	-0.09	10 mm	01417	2	1:4.15	left	0.536	1.009	0.541	
836.60	190	GSM 850	GPRS	32.2	32.16	0.15	10 mm	01417	2	1:4.15	back	1.060	1.009	1.070	A16
1880.00	661	GSM 1900	GPRS	29.2	29.17	-0.04	10 mm	01412	2	1:4.15	back	0.438	1.007	0.441	
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.00	10 mm	01412	2	1:4.15	front	0.390	1.007	0.393	
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.16	10 mm	01412	2	1:4.15	bottom	0.503	1.007	0.507	A18
1880.00	661	GSM 1900	GPRS	29.2	29.17	0.15	10 mm	01412	2	1:4.15	left	0.189	1.007	0.190	
836.60	4183	UMTS 850	RMC	24.7	24.68	0.03	10 mm	01417	N/A	1:1	back	0.568	1.005	0.571	A19
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.08	10 mm	01417	N/A	1:1	front	0.540	1.005	0.543	
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.02	10 mm	01417	N/A	1:1	bottom	0.305	1.005	0.307	
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.03	10 mm	01417	N/A	1:1	right	0.127	1.005	0.128	
836.60	4183	UMTS 850	RMC	24.7	24.68	-0.03	10 mm	01417	N/A	1:1	left	0.315	1.005	0.317	
1712.40	1312	UMTS 1750	RMC	24.7	24.67	-0.11	10 mm	01417	N/A	1:1	back	0.730	1.007	0.735	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.03	10 mm	01417	N/A	1:1	back	0.816	1.007	0.822	
1752.60	1513	UMTS 1750	RMC	24.7	24.70	0.01	10 mm	01417	N/A	1:1	back	0.844	1.000	0.844	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	-0.02	10 mm	01417	N/A	1:1	front	0.668	1.007	0.673	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	-0.03	10 mm	01417	N/A	1:1	bottom	0.630	1.007	0.634	
1732.40	1412	UMTS 1750	RMC	24.7	24.67	0.01	10 mm	01417	N/A	1:1	left	0.315	1.007	0.317	
1752.60	1513	UMTS 1750	RMC	24.7	24.70	0.00	10 mm	01417	N/A	1:1	back	0.854	1.000	0.854	A20
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.05	10 mm	01417	N/A	1:1	back	0.692	1.000	0.692	
1880.00	9400	UMTS 1900	RMC	24.7	24.70	0.01	10 mm	01417	N/A	1:1	front	0.600	1.000	0.600	
1880.00	9400	UMTS 1900	RMC	24.7	24.70	-0.02	10 mm	01417	N/A	1:1	bottom	0.767	1.000	0.767	A22
1880.00	9400	UMTS 1900	RMC	24.7	24.70	-0.02	10 mm	01417	N/A	1:1	left	0.275	1.000	0.275	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.47	-0.05	10 mm	01417	N/A	1:1	back	0.707	1.007	0.712	A24
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.47	-0.01	10 mm	01417	N/A	1:1	front	0.684	1.007	0.689	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.47	-0.08	10 mm	01417	N/A	1:1	bottom	0.390	1.007	0.393	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.47	-0.02	10 mm	01417	N/A	1:1	right	0.157	1.007	0.158	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.47	-0.02	10 mm	01417	N/A	1:1	left	0.341	1.007	0.343	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.2	25.18	0.04	10 mm	01417	N/A	1:1	back	0.662	1.005	0.665	A26
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.2	25.18	0.02	10 mm	01417	N/A	1:1	front	0.643	1.005	0.646	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.2	25.18	-0.06	10 mm	01417	N/A	1:1	bottom	0.395	1.005	0.397	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.2	25.18	-0.15	10 mm	01417	N/A	1:1	right	0.157	1.005	0.158	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.2	25.18	0.02	10 mm	01417	N/A	1:1	left	0.327	1.005	0.329	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.18	0.05	10 mm	01412	N/A	1:1	back	0.787	1.005	0.791	A28
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.18	-0.10	10 mm	01412	N/A	1:1	front	0.595	1.005	0.598	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.18	0.02	10 mm	01412	N/A	1:1	bottom	0.764	1.005	0.768	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.18	0.08	10 mm	01412	N/A	1:1	left	0.328	1.005	0.330	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Note: Blue Entries Represent Variability Measurements**

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 67 of 94	

**Table 11-21  
LTE Band 12 Hotspot SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.01	0	01414	QPSK	1	0	10 mm	back	1:1	0.424	1.000	0.424	A29
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.02	1	01414	QPSK	25	0	10 mm	back	1:1	0.343	1.007	0.345	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.13	0	01414	QPSK	1	0	10 mm	front	1:1	0.397	1.000	0.397	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	-0.01	1	01414	QPSK	25	0	10 mm	front	1:1	0.331	1.007	0.333	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.02	0	01414	QPSK	1	0	10 mm	bottom	1:1	0.282	1.000	0.282	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	-0.02	1	01414	QPSK	25	0	10 mm	bottom	1:1	0.222	1.007	0.224	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	-0.15	0	01414	QPSK	1	0	10 mm	right	1:1	0.151	1.000	0.151	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.00	1	01414	QPSK	25	0	10 mm	right	1:1	0.122	1.007	0.123	
707.50	23095	Mid	LTE Band 12	10	25.5	25.50	0.11	0	01414	QPSK	1	0	10 mm	left	1:1	0.139	1.000	0.139	
707.50	23095	Mid	LTE Band 12	10	24.5	24.47	0.03	1	01414	QPSK	25	0	10 mm	left	1:1	0.116	1.007	0.117	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-22  
LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.02	0	01414	QPSK	1	0	10 mm	back	1:1	0.717	1.000	0.717	A30
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.04	1	01414	QPSK	36	37	10 mm	back	1:1	0.540	1.009	0.545	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.08	0	01414	QPSK	1	0	10 mm	front	1:1	0.684	1.000	0.684	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.02	1	01414	QPSK	36	37	10 mm	front	1:1	0.528	1.009	0.533	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.00	0	01414	QPSK	1	0	10 mm	bottom	1:1	0.409	1.000	0.409	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.02	1	01414	QPSK	36	37	10 mm	bottom	1:1	0.298	1.009	0.301	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	-0.18	0	01414	QPSK	1	0	10 mm	right	1:1	0.152	1.000	0.152	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.04	1	01414	QPSK	36	37	10 mm	right	1:1	0.111	1.009	0.112	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.50	0.06	0	01414	QPSK	1	0	10 mm	left	1:1	0.342	1.000	0.342	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.46	-0.06	1	01414	QPSK	36	37	10 mm	left	1:1	0.246	1.009	0.248	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-23  
LTE Band 4 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.01	0	01414	QPSK	1	0	10 mm	back	1:1	0.826	1.000	0.826	A31
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	0.03	1	01414	QPSK	50	50	10 mm	back	1:1	0.676	1.007	0.681	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.86	0.00	1	01414	QPSK	100	0	10 mm	back	1:1	0.668	1.033	0.690	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.10	0	01414	QPSK	1	0	10 mm	front	1:1	0.768	1.000	0.768	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	-0.03	1	01414	QPSK	50	50	10 mm	front	1:1	0.628	1.007	0.632	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.01	0	01414	QPSK	1	0	10 mm	bottom	1:1	0.633	1.000	0.633	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	-0.08	1	01414	QPSK	50	50	10 mm	bottom	1:1	0.592	1.007	0.596	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	25.00	-0.01	0	01414	QPSK	1	0	10 mm	left	1:1	0.407	1.000	0.407	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	23.97	-0.04	1	01414	QPSK	50	50	10 mm	left	1:1	0.316	1.007	0.318	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 68 of 94	



**Table 11-24  
LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.03	0	01413	QPSK	1	99	10 mm	back	1:1	0.778	1.000	0.778	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.07	1	01413	QPSK	50	25	10 mm	back	1:1	0.570	1.000	0.570	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	0.07	0	01413	QPSK	1	99	10 mm	front	1:1	0.692	1.000	0.692	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	-0.05	1	01413	QPSK	50	25	10 mm	front	1:1	0.524	1.000	0.524	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.17	0	01413	QPSK	1	99	10 mm	bottom	1:1	0.984	1.000	0.984	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.5	25.48	0.11	0	01413	QPSK	1	50	10 mm	bottom	1:1	0.818	1.005	0.822	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.49	-0.02	0	01413	QPSK	1	50	10 mm	bottom	1:1	0.784	1.002	0.786	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	-0.02	1	01413	QPSK	50	25	10 mm	bottom	1:1	0.684	1.000	0.684	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.48	-0.05	1	01413	QPSK	100	0	10 mm	bottom	1:1	0.760	1.005	0.764	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	0.15	0	01413	QPSK	1	99	10 mm	left	1:1	0.286	1.000	0.286	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.50	0.16	1	01413	QPSK	50	25	10 mm	left	1:1	0.250	1.000	0.250	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.50	-0.05	0	01413	QPSK	1	99	10 mm	bottom	1:1	0.987	1.000	0.987	A33
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Note: Blue Entry Represents Variability Measurement**

**Table 11-25  
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																			
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
	MHz	Ch.																	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.00	0	01414	QPSK	1	0	10 mm	back	1:1.58	1.000	0.532	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.01	1	01414	QPSK	50	25	10 mm	back	1:1.58	1.000	0.348	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.07	0	01414	QPSK	1	0	10 mm	front	1:1.58	1.000	0.382	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.03	1	01414	QPSK	50	25	10 mm	front	1:1.58	1.000	0.216	
PC 3	2506.00	39750	Low	LTE Band 41	20	25.5	25.49	0.02	0	01414	QPSK	1	50	10 mm	bottom	1:1.58	1.002	0.466	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	25.5	25.30	-0.02	0	01414	QPSK	1	0	10 mm	bottom	1:1.58	1.047	0.638	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	-0.07	0	01414	QPSK	1	0	10 mm	bottom	1:1.58	1.000	0.650	A35
PC 3	2636.50	41055	Mid-High	LTE Band 41	20	25.5	25.45	-0.02	0	01414	QPSK	1	50	10 mm	bottom	1:1.58	1.012	0.564	
PC 3	2680.00	41490	High	LTE Band 41	20	25.5	25.48	-0.01	0	01414	QPSK	1	50	10 mm	bottom	1:1.58	1.005	0.649	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.00	1	01414	QPSK	50	25	10 mm	bottom	1:1.58	1.000	0.485	
PC 3	2636.50	41055	Mid-High	LTE Band 41	20	24.5	24.49	-0.04	1	01414	QPSK	100	0	10 mm	bottom	1:1.58	1.002	0.423	
PC 3	2593.00	40620	Mid	LTE Band 41	20	25.5	25.50	0.02	0	01414	QPSK	1	0	10 mm	left	1:1.58	1.000	0.115	
PC 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	24.50	0.00	1	01414	QPSK	50	25	10 mm	left	1:1.58	1.000	0.072	
PC 2	2593.00	40620	Mid	LTE Band 41	20	26.7	26.58	-0.01	0	01414	QPSK	1	0	10 mm	bottom	1:2.309	1.028	0.545	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFLS993	 PCTEST Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 69 of 94	



**Table 11-26  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	17.0	16.82	0.02	10 mm	1	01430	1	back	99.9	0.127	-	1.042	1.001	-	
2437	6	802.11b	DSSS	22	17.0	16.82	0.04	10 mm	1	01430	1	front	99.9	0.137	-	1.042	1.001	-	
2437	6	802.11b	DSSS	22	17.0	16.82	0.05	10 mm	1	01430	1	top	99.9	0.030	-	1.042	1.001	-	
2437	6	802.11b	DSSS	22	17.0	16.82	0.02	10 mm	1	01430	1	left	99.9	0.174	0.130	1.042	1.001	0.136	
2437	6	802.11b	DSSS	22	17.0	16.73	0.01	10 mm	2	01430	1	back	99.9	0.177	0.151	1.064	1.001	0.161	A36
2437	6	802.11b	DSSS	22	17.0	16.73	0.05	10 mm	2	01430	1	front	99.9	0.145	-	1.064	1.001	-	
2437	6	802.11b	DSSS	22	17.0	16.73	-0.02	10 mm	2	01430	1	top	99.9	0.026	-	1.064	1.001	-	
2437	6	802.11b	DSSS	22	17.0	16.73	0.13	10 mm	2	01430	1	left	99.9	0.171	-	1.064	1.001	-	
5220	44	802.11a	OFDM	20	16.5	16.03	0.08	10 mm	1	01430	6	back	99.3	0.758	0.412	1.114	1.007	0.462	
5220	44	802.11a	OFDM	20	16.5	16.03	0.04	10 mm	1	01430	6	front	99.3	0.034	0.022	1.114	1.007	0.025	
5220	44	802.11a	OFDM	20	16.5	16.03	0.02	10 mm	1	01430	6	top	99.3	0.085	-	1.114	1.007	-	
5220	44	802.11a	OFDM	20	16.5	16.03	0.18	10 mm	1	01430	6	left	99.3	0.242	0.127	1.114	1.007	0.142	
5240	48	802.11a	OFDM	20	16.5	16.49	0.03	10 mm	2	01430	6	back	99.3	0.487	0.232	1.002	1.007	0.234	
5240	48	802.11a	OFDM	20	16.5	16.49	0.05	10 mm	2	01430	6	front	99.3	0.193	0.093	1.002	1.007	0.094	
5240	48	802.11a	OFDM	20	16.5	16.49	0.11	10 mm	2	01430	6	top	99.3	0.291	-	1.002	1.007	-	
5240	48	802.11a	OFDM	20	16.5	16.49	0.06	10 mm	2	01430	6	left	99.3	0.088	-	1.002	1.007	-	
5745	149	802.11a	OFDM	20	16.5	16.26	-0.06	10 mm	1	01430	6	back	99.3	0.948	0.483	1.057	1.007	0.514	A38
5745	149	802.11a	OFDM	20	16.5	16.26	0.17	10 mm	1	01430	6	front	99.3	0.064	0.022	1.057	1.007	0.023	
5745	149	802.11a	OFDM	20	16.5	16.26	0.02	10 mm	1	01430	6	top	99.3	0.111	-	1.057	1.007	-	
5745	149	802.11a	OFDM	20	16.5	16.26	0.18	10 mm	1	01430	6	left	99.3	0.351	0.172	1.057	1.007	0.183	
5745	149	802.11a	OFDM	20	16.5	15.84	0.02	10 mm	2	01430	6	back	99.3	0.193	0.105	1.164	1.007	0.123	
5745	149	802.11a	OFDM	20	16.5	15.84	-0.18	10 mm	2	01430	6	front	99.3	0.035	0.024	1.164	1.007	0.028	
5745	149	802.11a	OFDM	20	16.5	15.84	0.11	10 mm	2	01430	6	top	99.3	0.162	-	1.164	1.007	-	
5745	149	802.11a	OFDM	20	16.5	15.84	0.04	10 mm	2	01430	6	left	99.3	0.030	-	1.164	1.007	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

## 11.4 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 70 of 94

8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).

**GSM Test Notes:**



1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**CDMA Notes:**

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

**UMTS Notes:**

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.



<b>FCC ID:</b> ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 71 of 94

**LTE Notes:**

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition. Please see Section 14 for linearity results.
7. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

**WLAN Notes:**

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.7.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is ≤0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

<b>FCC ID:</b> ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 72 of 94	



# 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

## 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

## 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.



When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1  
Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	12.50	10	0.378

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 73 of 94



## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-2**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM/GPRS 850	0.209	0.629	0.698	0.838	0.907	1.536
	GSM/GPRS 1900	0.118	0.629	0.698	0.747	0.816	1.445
	UMTS 850	0.183	0.629	0.698	0.812	0.881	1.510
	UMTS 1750	0.192	0.629	0.698	0.821	0.890	1.519
	UMTS 1900	0.160	0.629	0.698	0.789	0.858	1.487
	CDMA/EVDO BC0 (§22H)	0.258	0.629	0.698	0.887	0.956	<b>1.585</b>
	CDMA/EVDO BC10 (§90S)	0.222	0.629	0.698	0.851	0.920	1.549
	PCS CDMA/EVDO	0.188	0.629	0.698	0.817	0.886	1.515
	LTE Band 12	0.104	0.629	0.698	0.733	0.802	1.431
	LTE Band 26 (Cell)	0.221	0.629	0.698	0.850	0.919	1.548
	LTE Band 4 (AWS)	0.236	0.629	0.698	0.865	0.934	1.563
	LTE Band 25 (PCS)	0.184	0.629	0.698	0.813	0.882	1.511
LTE Band 41	0.124	0.629	0.698	0.753	0.822	1.451	

**Table 12-3**  
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM/GPRS 850	0.209	0.102	0.564	0.311	0.773	0.875
	GSM/GPRS 1900	0.118	0.102	0.564	0.220	0.682	0.784
	UMTS 850	0.183	0.102	0.564	0.285	0.747	0.849
	UMTS 1750	0.192	0.102	0.564	0.294	0.756	0.858
	UMTS 1900	0.160	0.102	0.564	0.262	0.724	0.826
	CDMA/EVDO BC0 (§22H)	0.258	0.102	0.564	0.360	0.822	<b>0.924</b>
	CDMA/EVDO BC10 (§90S)	0.222	0.102	0.564	0.324	0.786	0.888
	PCS CDMA/EVDO	0.188	0.102	0.564	0.290	0.752	0.854
	LTE Band 12	0.104	0.102	0.564	0.206	0.668	0.770
	LTE Band 26 (Cell)	0.221	0.102	0.564	0.323	0.785	0.887
	LTE Band 4 (AWS)	0.236	0.102	0.564	0.338	0.800	0.902
	LTE Band 25 (PCS)	0.184	0.102	0.564	0.286	0.748	0.850
LTE Band 41	0.124	0.102	0.564	0.226	0.688	0.790	



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 74 of 94

**Table 12-4**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM/GPRS 850	0.209	0.629	0.564	0.838	0.773	1.402
	GSM/GPRS 1900	0.118	0.629	0.564	0.747	0.682	1.311
	UMTS 850	0.183	0.629	0.564	0.812	0.747	1.376
	UMTS 1750	0.192	0.629	0.564	0.821	0.756	1.385
	UMTS 1900	0.160	0.629	0.564	0.789	0.724	1.353
	CDMA/EVDO BC0 (§22H)	0.258	0.629	0.564	0.887	0.822	<b>1.451</b>
	CDMA/EVDO BC10 (§90S)	0.222	0.629	0.564	0.851	0.786	1.415
	PCS CDMA/EVDO	0.188	0.629	0.564	0.817	0.752	1.381
	LTE Band 12	0.104	0.629	0.564	0.733	0.668	1.297
	LTE Band 26 (Cell)	0.221	0.629	0.564	0.850	0.785	1.414
	LTE Band 4 (AWS)	0.236	0.629	0.564	0.865	0.800	1.429
	LTE Band 25 (PCS)	0.184	0.629	0.564	0.813	0.748	1.377
LTE Band 41	0.124	0.629	0.564	0.753	0.688	1.317	

**Table 12-5**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM/GPRS 850	0.209	0.698	0.102	0.907	0.311	1.009
	GSM/GPRS 1900	0.118	0.698	0.102	0.816	0.220	0.918
	UMTS 850	0.183	0.698	0.102	0.881	0.285	0.983
	UMTS 1750	0.192	0.698	0.102	0.890	0.294	0.992
	UMTS 1900	0.160	0.698	0.102	0.858	0.262	0.960
	CDMA/EVDO BC0 (§22H)	0.258	0.698	0.102	0.956	0.360	<b>1.058</b>
	CDMA/EVDO BC10 (§90S)	0.222	0.698	0.102	0.920	0.324	1.022
	PCS CDMA/EVDO	0.188	0.698	0.102	0.886	0.290	0.988
	LTE Band 12	0.104	0.698	0.102	0.802	0.206	0.904
	LTE Band 26 (Cell)	0.221	0.698	0.102	0.919	0.323	1.021
	LTE Band 4 (AWS)	0.236	0.698	0.102	0.934	0.338	1.036
	LTE Band 25 (PCS)	0.184	0.698	0.102	0.882	0.286	0.984
LTE Band 41	0.124	0.698	0.102	0.822	0.226	0.924	

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 75 of 94	



## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-6**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM/GPRS 850	1.070	0.113	0.161	1.183	1.231	<b>1.344</b>
	GSM/GPRS 1900	0.441	0.113	0.161	0.554	0.602	0.715
	UMTS 850	0.571	0.113	0.161	0.684	0.732	0.845
	UMTS 1750	0.854	0.113	0.161	0.967	1.015	1.128
	UMTS 1900	0.692	0.113	0.161	0.805	0.853	0.966
	CDMA BC0 (§22H)	0.725	0.113	0.161	0.838	0.886	0.999
	CDMA BC10 (§90S)	0.660	0.113	0.161	0.773	0.821	0.934
	PCS CDMA	0.892	0.113	0.161	1.005	1.053	1.166
	LTE Band 12	0.424	0.113	0.161	0.537	0.585	0.698
	LTE Band 26 (Cell)	0.717	0.113	0.161	0.830	0.878	0.991
	LTE Band 4 (AWS)	0.826	0.113	0.161	0.939	0.987	1.100
	LTE Band 25 (PCS)	0.778	0.113	0.161	0.891	0.939	1.052
LTE Band 41	0.532	0.113	0.161	0.645	0.693	0.806	

**Table 12-7**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body-Worn	GSM/GPRS 850	1.070	0.654	0.315	See Note 1	1.385	See Note 1	0.02	0.01	0.03
	GSM/GPRS 1900	0.441	0.654	0.315	1.095	0.756	1.410	N/A	N/A	N/A
	UMTS 850	0.571	0.654	0.315	1.225	0.886	1.540	N/A	N/A	N/A
	UMTS 1750	0.854	0.654	0.315	1.508	1.169	See Note 1	0.02	0.01	0.03
	UMTS 1900	0.692	0.654	0.315	1.346	1.007	See Note 1	0.02	0.01	0.03
	CDMA BC0 (§22H)	0.725	0.654	0.315	1.379	1.040	See Note 1	0.02	0.01	0.03
	CDMA BC10 (§90S)	0.660	0.654	0.315	1.314	0.975	See Note 1	0.02	0.01	0.03
	PCS CDMA	0.892	0.654	0.315	<b>1.546</b>	1.207	See Note 1	0.02	0.01	0.03
	LTE Band 12	0.424	0.654	0.315	1.078	0.739	1.393	N/A	N/A	N/A
	LTE Band 26 (Cell)	0.717	0.654	0.315	1.371	1.032	See Note 1	0.02	0.01	0.03
	LTE Band 4 (AWS)	0.826	0.654	0.315	1.480	1.141	See Note 1	0.02	0.01	0.03
	LTE Band 25 (PCS)	0.778	0.654	0.315	1.432	1.093	See Note 1	0.02	0.01	0.03
LTE Band 41	0.532	0.654	0.315	1.186	0.847	1.501	N/A	N/A	N/A	



FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS TESTING ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 76 of 94

**Table 12-8**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM/GPRS 850	1.070	0.113	0.315	1.183	1.385	<b>1.498</b>
	GSM/GPRS 1900	0.441	0.113	0.315	0.554	0.756	0.869
	UMTS 850	0.571	0.113	0.315	0.684	0.886	0.999
	UMTS 1750	0.854	0.113	0.315	0.967	1.169	1.282
	UMTS 1900	0.692	0.113	0.315	0.805	1.007	1.120
	CDMA BC0 (§22H)	0.725	0.113	0.315	0.838	1.040	1.153
	CDMA BC10 (§90S)	0.660	0.113	0.315	0.773	0.975	1.088
	PCS CDMA	0.892	0.113	0.315	1.005	1.207	1.320
	LTE Band 12	0.424	0.113	0.315	0.537	0.739	0.852
	LTE Band 26 (Cell)	0.717	0.113	0.315	0.830	1.032	1.145
	LTE Band 4 (AWS)	0.826	0.113	0.315	0.939	1.141	1.254
	LTE Band 25 (PCS)	0.778	0.113	0.315	0.891	1.093	1.206
LTE Band 41	0.532	0.113	0.315	0.645	0.847	0.960	

**Table 12-9**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN (Body-Worn at 1.0 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body-Worn	GSM/GPRS 850	1.070	0.161	0.654	<b>1.231</b>	See Note 1	See Note 1	0.01	0.02	0.02
	GSM/GPRS 1900	0.441	0.161	0.654	0.602	1.095	1.256	N/A	N/A	N/A
	UMTS 850	0.571	0.161	0.654	0.732	1.225	1.386	N/A	N/A	N/A
	UMTS 1750	0.854	0.161	0.654	1.015	1.508	See Note 1	0.01	0.02	0.02
	UMTS 1900	0.692	0.161	0.654	0.853	1.346	1.507	N/A	N/A	N/A
	CDMA BC0 (§22H)	0.725	0.161	0.654	0.886	1.379	1.540	N/A	N/A	N/A
	CDMA BC10 (§90S)	0.660	0.161	0.654	0.821	1.314	1.475	N/A	N/A	N/A
	PCS CDMA	0.892	0.161	0.654	1.053	1.546	See Note 1	0.01	0.02	0.02
	LTE Band 12	0.424	0.161	0.654	0.585	1.078	1.239	N/A	N/A	N/A
	LTE Band 26 (Cell)	0.717	0.161	0.654	0.878	1.371	1.532	N/A	N/A	N/A
	LTE Band 4 (AWS)	0.826	0.161	0.654	0.987	1.480	See Note 1	0.01	0.02	0.02
	LTE Band 25 (PCS)	0.778	0.161	0.654	0.939	1.432	<b>1.593</b>	N/A	N/A	N/A
LTE Band 41	0.532	0.161	0.654	0.693	1.186	1.347	N/A	N/A	N/A	

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 77 of 94	

**Table 12-10**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	1.070	0.378	<b>1.448</b>
	GSM/GPRS 1900	0.441	0.378	0.819
	UMTS 850	0.571	0.378	0.949
	UMTS 1750	0.854	0.378	1.232
	UMTS 1900	0.692	0.378	1.070
	CDMA BC0 (§22H)	0.725	0.378	1.103
	CDMA BC10 (§90S)	0.660	0.378	1.038
	PCS CDMA	0.892	0.378	1.270
	LTE Band 12	0.424	0.378	0.802
	LTE Band 26 (Cell)	0.717	0.378	1.095
	LTE Band 4 (AWS)	0.826	0.378	1.204
	LTE Band 25 (PCS)	0.778	0.378	1.156
	LTE Band 41	0.532	0.378	0.910

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset
		Page 78 of 94



## 12.5 Hotspot SAR Simultaneous Transmission Analysis

**Table 12-11**  
**Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	1.070	0.136	0.161	1.206	1.231	<b>1.367</b>
	GPRS 1900	0.507	0.136	0.161	0.643	0.668	0.804
	UMTS 850	0.571	0.136	0.161	0.707	0.732	0.868
	UMTS 1750	0.854	0.136	0.161	0.990	1.015	1.151
	UMTS 1900	0.767	0.136	0.161	0.903	0.928	1.064
	EVDO BC0 (§22H)	0.712	0.136	0.161	0.848	0.873	1.009
	EVDO BC10 (§90S)	0.665	0.136	0.161	0.801	0.826	0.962
	PCS EVDO	0.791	0.136	0.161	0.927	0.952	1.088
	LTE Band 12	0.424	0.136	0.161	0.560	0.585	0.721
	LTE Band 26 (Cell)	0.717	0.136	0.161	0.853	0.878	1.014
	LTE Band 4 (AWS)	0.826	0.136	0.161	0.962	0.987	1.123
	LTE Band 25 (PCS)	0.987	0.136	0.161	1.123	1.148	1.284
	LTE Band 41	0.650	0.136	0.161	0.786	0.811	0.947

**Table 12-12**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	1.070	0.514	0.234	<b>1.584</b>	1.304	See Table Below
	GPRS 1900	0.507	0.514	0.234	1.021	0.741	1.255
	UMTS 850	0.571	0.514	0.234	1.085	0.805	1.319
	UMTS 1750	0.854	0.514	0.234	1.368	1.088	See Table Below
	UMTS 1900	0.767	0.514	0.234	1.281	1.001	1.515
	EVDO BC0 (§22H)	0.712	0.514	0.234	1.226	0.946	1.460
	EVDO BC10 (§90S)	0.665	0.514	0.234	1.179	0.899	1.413
	PCS EVDO	0.791	0.514	0.234	1.305	1.025	1.539
	LTE Band 12	0.424	0.514	0.234	0.938	0.658	1.172
	LTE Band 26 (Cell)	0.717	0.514	0.234	1.231	0.951	1.465
	LTE Band 4 (AWS)	0.826	0.514	0.234	1.340	1.060	1.574
	LTE Band 25 (PCS)	0.987	0.514	0.234	1.501	1.221	See Table Below
	LTE Band 41	0.650	0.514	0.234	1.164	0.884	1.398

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 79 of 94

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	1.070	0.514	0.234	<b>1.584</b>	1.304	See Note 1	0.02	0.01	0.03
	Front	0.953	0.025	0.094	0.978	1.047	1.072	N/A	N/A	N/A
	Top	-	0.514*	0.234*	0.514	0.234	0.748	N/A	N/A	N/A
	Bottom	0.492	-	-	0.492	0.492	0.492	N/A	N/A	N/A
	Right	0.187	-	-	0.187	0.187	0.187	N/A	N/A	N/A
	Left	0.541	0.183	0.234*	0.724	0.775	0.958	N/A	N/A	N/A
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	0.854	0.514	0.234	<b>1.368</b>	1.088	See Note 1	0.01	0.01	0.03
	Front	0.673	0.025	0.094	0.698	0.767	0.792	N/A	N/A	N/A
	Top	-	0.514*	0.234*	0.514	0.234	0.748	N/A	N/A	N/A
	Bottom	0.634	-	-	0.634	0.634	0.634	N/A	N/A	N/A
	Right	-	-	-	0.000	0.000	0.000	N/A	N/A	N/A
	Left	0.317	0.183	0.234*	0.500	0.551	0.734	N/A	N/A	N/A
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)					
		1	2	3	1+2	1+3	1+2+3			
Hotspot SAR	Back	0.778	0.514	0.234	1.292	1.012	<b>1.526</b>			
	Front	0.692	0.025	0.094	0.717	0.786	0.811			
	Top	-	0.514*	0.234*	0.514	0.234	0.748			
	Bottom	0.987	-	-	0.987	0.987	0.987			
	Right	-	-	-	0.000	0.000	0.000			
	Left	0.286	0.183	0.234*	0.469	0.520	0.703			

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 80 of 94	



**Table 12-13**



**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	1.070	0.136	0.234	1.206	1.304	<b>1.440</b>
	GPRS 1900	0.507	0.136	0.234	0.643	0.741	0.877
	UMTS 850	0.571	0.136	0.234	0.707	0.805	0.941
	UMTS 1750	0.854	0.136	0.234	0.990	1.088	1.224
	UMTS 1900	0.767	0.136	0.234	0.903	1.001	1.137
	EVDO BC0 (§22H)	0.712	0.136	0.234	0.848	0.946	1.082
	EVDO BC10 (§90S)	0.665	0.136	0.234	0.801	0.899	1.035
	PCS EVDO	0.791	0.136	0.234	0.927	1.025	1.161
	LTE Band 12	0.424	0.136	0.234	0.560	0.658	0.794
	LTE Band 26 (Cell)	0.717	0.136	0.234	0.853	0.951	1.087
	LTE Band 4 (AWS)	0.826	0.136	0.234	0.962	1.060	1.196
	LTE Band 25 (PCS)	0.987	0.136	0.234	1.123	1.221	1.357
LTE Band 41	0.650	0.136	0.234	0.786	0.884	1.020	

**Table 12-14**

**Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	1.070	0.161	0.514	1.231	<b>1.584</b>	See Table Below
	GPRS 1900	0.507	0.161	0.514	0.668	1.021	1.182
	UMTS 850	0.571	0.161	0.514	0.732	1.085	1.246
	UMTS 1750	0.854	0.161	0.514	1.015	1.368	1.529
	UMTS 1900	0.767	0.161	0.514	0.928	1.281	1.442
	EVDO BC0 (§22H)	0.712	0.161	0.514	0.873	1.226	1.387
	EVDO BC10 (§90S)	0.665	0.161	0.514	0.826	1.179	1.340
	PCS EVDO	0.791	0.161	0.514	0.952	1.305	1.466
	LTE Band 12	0.424	0.161	0.514	0.585	0.938	1.099
	LTE Band 26 (Cell)	0.717	0.161	0.514	0.878	1.231	1.392
	LTE Band 4 (AWS)	0.826	0.161	0.514	0.987	1.340	1.501
	LTE Band 25 (PCS)	0.987	0.161	0.514	1.148	1.501	See Table Below
LTE Band 41	0.650	0.161	0.514	0.811	1.164	1.325	



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 81 of 94

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	1.070	0.161	0.514	1.231	<b>1.584</b>	See Note 1	0.01	0.02	0.02
	Front	0.953	0.161*	0.025	1.114	0.978	1.139	N/A	N/A	N/A
	Top	-	0.161*	0.514*	0.161	0.514	0.675	N/A	N/A	N/A
	Bottom	0.492	-	-	0.492	0.492	0.492	N/A	N/A	N/A
	Right	0.187	-	-	0.187	0.187	0.187	N/A	N/A	N/A
	Left	0.541	0.161*	0.183	0.702	0.724	0.885	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Back	0.778	0.161	0.514	0.939	1.292	<b>1.453</b>
	Front	0.692	0.161*	0.025	0.853	0.717	0.878
	Top	-	0.161*	0.514*	0.161	0.514	0.675
	Bottom	0.987	-	-	0.987	0.987	0.987
	Right	-	-	-	0.000	0.000	0.000
	Left	0.286	0.161*	0.183	0.447	0.469	0.630



Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.
2. (\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.
3. Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-“).

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 82 of 94	

## 12.6 SPLSR Evaluation and Analysis


Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is



FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 83 of 94


**Table 12-16**  
**Back Side SAR to Peak Location Separation Ratio Calculations (Body-Worn at 1.0 cm)**

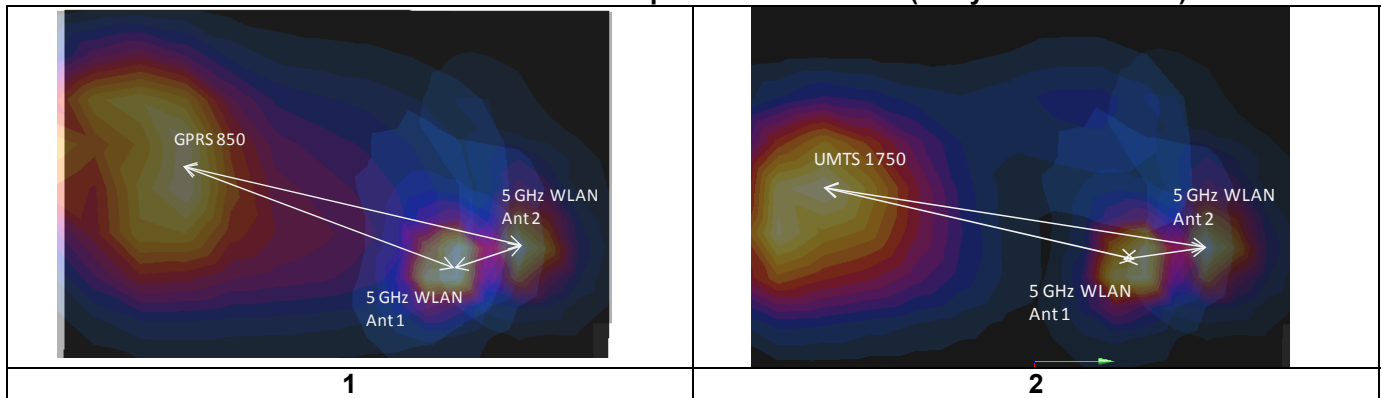

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
2.4 GHz WLAN Ant 2	5 GHz WLAN Ant 1	0.161	0.654	0.815	34.38	0.02	10 to 13
5 GHz WLAN Ant 1	5 GHz WLAN Ant 2	0.654	0.315	0.969	27.89	0.03	1 to 9
GPRS 850	5 GHz WLAN Ant 1	1.07	0.654	1.724	95.82	0.02	1, 10
UMTS 1750	5 GHz WLAN Ant 1	0.854	0.654	1.508	112.38	0.02	2, 11
UMTS 1900	5 GHz WLAN Ant 1	0.692	0.654	1.346	101.79	0.02	3
CDMA BC0	5 GHz WLAN Ant 1	0.725	0.654	1.379	90.90	0.02	4
CDMA BC10	5 GHz WLAN Ant 1	0.66	0.654	1.314	94.14	0.02	5
PCS CDMA	5 GHz WLAN Ant 1	0.892	0.654	1.546	101.39	0.02	6, 12
LTE Band 26 (Cell)	5 GHz WLAN Ant 1	0.717	0.654	1.371	92.29	0.02	7
LTE Band 4 (AWS)	5 GHz WLAN Ant 1	0.826	0.654	1.480	100.66	0.02	8, 13
LTE Band 25 (PCS)	5 GHz WLAN Ant 1	0.778	0.654	1.432	106.96	0.02	9
GPRS 850	5 GHz WLAN Ant 2	1.07	0.315	1.385	119.45	0.01	1
UMTS 1750	5 GHz WLAN Ant 2	0.854	0.315	1.169	137.93	0.01	2
UMTS 1900	5 GHz WLAN Ant 2	0.692	0.315	1.007	126.67	0.01	3
CDMA BC0	5 GHz WLAN Ant 2	0.725	0.315	1.040	114.61	0.01	4
CDMA BC10	5 GHz WLAN Ant 2	0.66	0.315	0.975	116.72	0.01	5
PCS CDMA	5 GHz WLAN Ant 2	0.892	0.315	1.207	126.44	0.01	6
LTE Band 26 (Cell)	5 GHz WLAN Ant 2	0.717	0.315	1.032	116.07	0.01	7
LTE Band 4 (AWS)	5 GHz WLAN Ant 2	0.826	0.315	1.141	126.02	0.01	8
LTE Band 25 (PCS)	5 GHz WLAN Ant 2	0.778	0.315	1.093	132.02	0.01	9
GPRS 850	2.4 GHz WLAN Ant 2	1.07	0.161	1.231	114.62	0.01	10
UMTS 1750	2.4 GHz WLAN Ant 2	0.854	0.161	1.015	135.00	0.01	11
PCS CDMA	2.4 GHz WLAN Ant 2	0.892	0.161	1.053	123.02	0.01	12
LTE Band 4 (AWS)	2.4 GHz WLAN Ant 2	0.826	0.161	0.987	123.00	0.01	13


**Table 12-17**  
**Back Side SAR to Peak Location Separation Ratio Plots (Body-worn at 1.0 cm)**

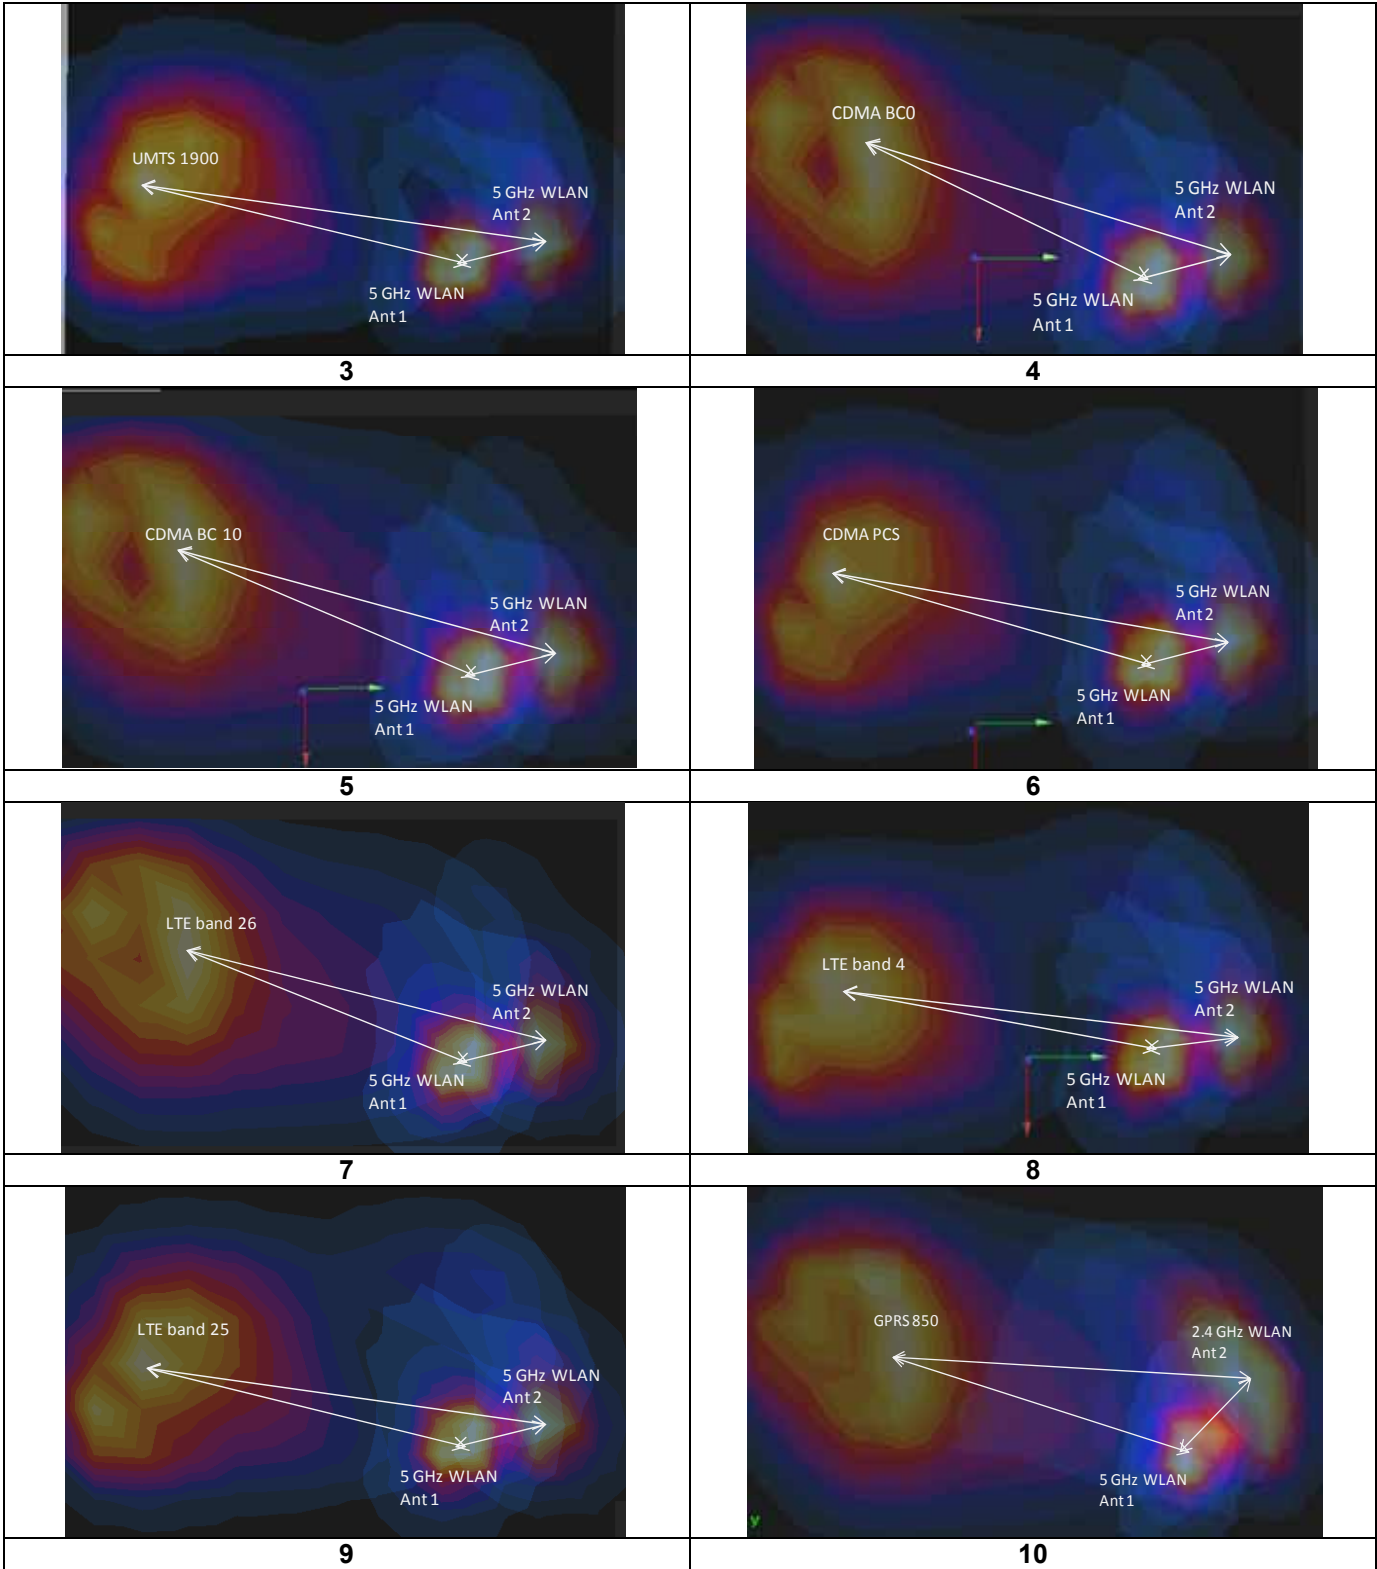

FCC ID: ZNFLS993		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset		Page 84 of 94



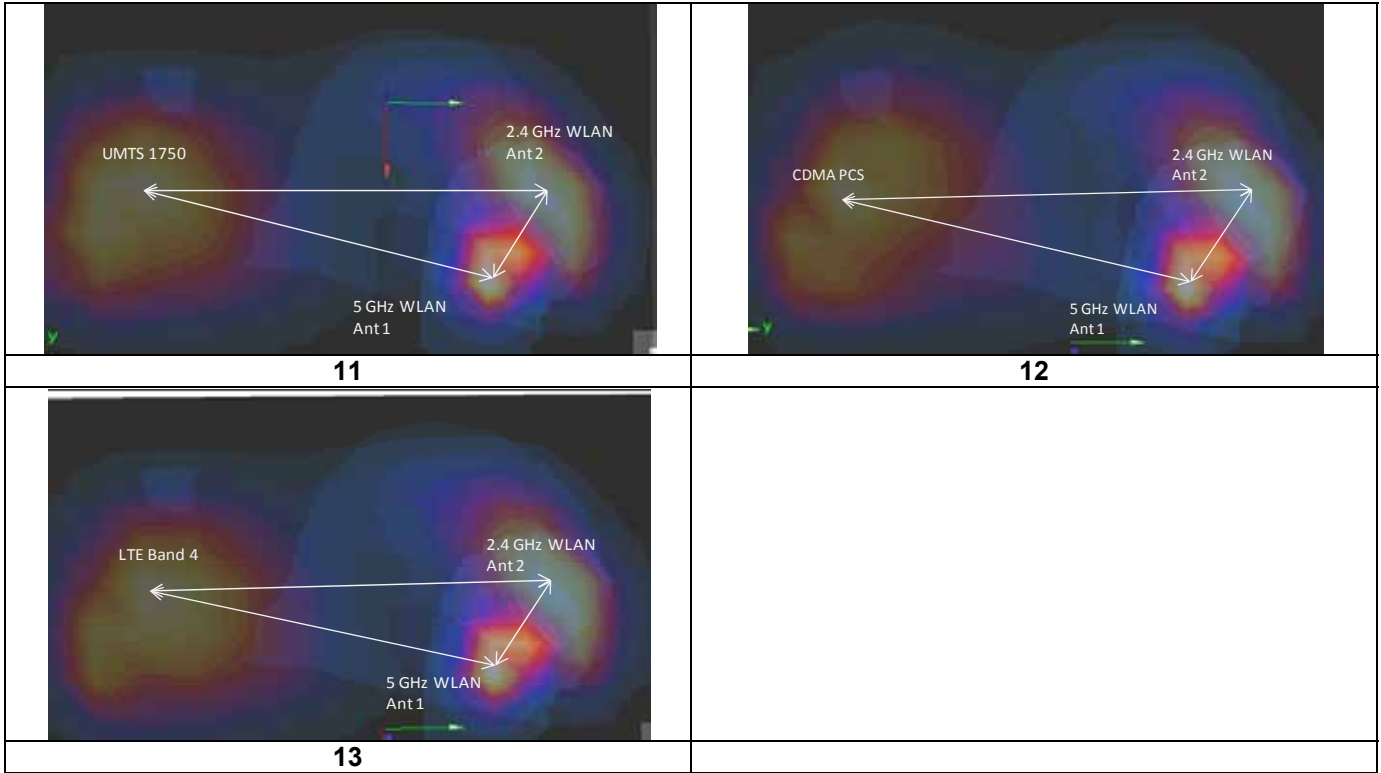

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 85 of 94	



**Table 12-18**  
**Peak SAR Locations for Body Back Side (Hotspot at 1.0 cm)**


Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
2.4 GHz WLAN Ant 2	-14.60	66.00	0.161
5 GHz WLAN Ant 1	10.00	42.00	0.514
5 GHz WLAN Ant 2	8.00	65.00	0.234
GPRS 850	-26.50	-48.00	1.07
UMTS 1750	-14.00	-69.00	0.854

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 86 of 94

**Table 12-19**  
**Back Side SAR to Peak Location Separation Ratio Calculations (Hotspot at 1.0 cm)**



Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
2.4 GHz WLAN Ant 2	5 GHz WLAN Ant 1	0.161	0.514	0.675	34.37	0.02	16
5 GHz WLAN Ant 1	5 GHz WLAN Ant 2	0.514	0.234	0.748	23.09	0.03	14 to 15
GPRS 850	5 GHz WLAN Ant 1	1.07	0.514	1.584	97.12	0.02	14, 16
UMTS 1750	5 GHz WLAN Ant 1	0.854	0.514	1.368	113.56	0.01	15
GPRS 850	5 GHz WLAN Ant 2	1.07	0.234	1.304	118.15	0.01	14
UMTS 1750	5 GHz WLAN Ant 2	0.854	0.234	1.088	135.79	0.01	15
GPRS 850	2.4 GHz WLAN Ant 2	1.07	0.161	1.231	114.62	0.01	16

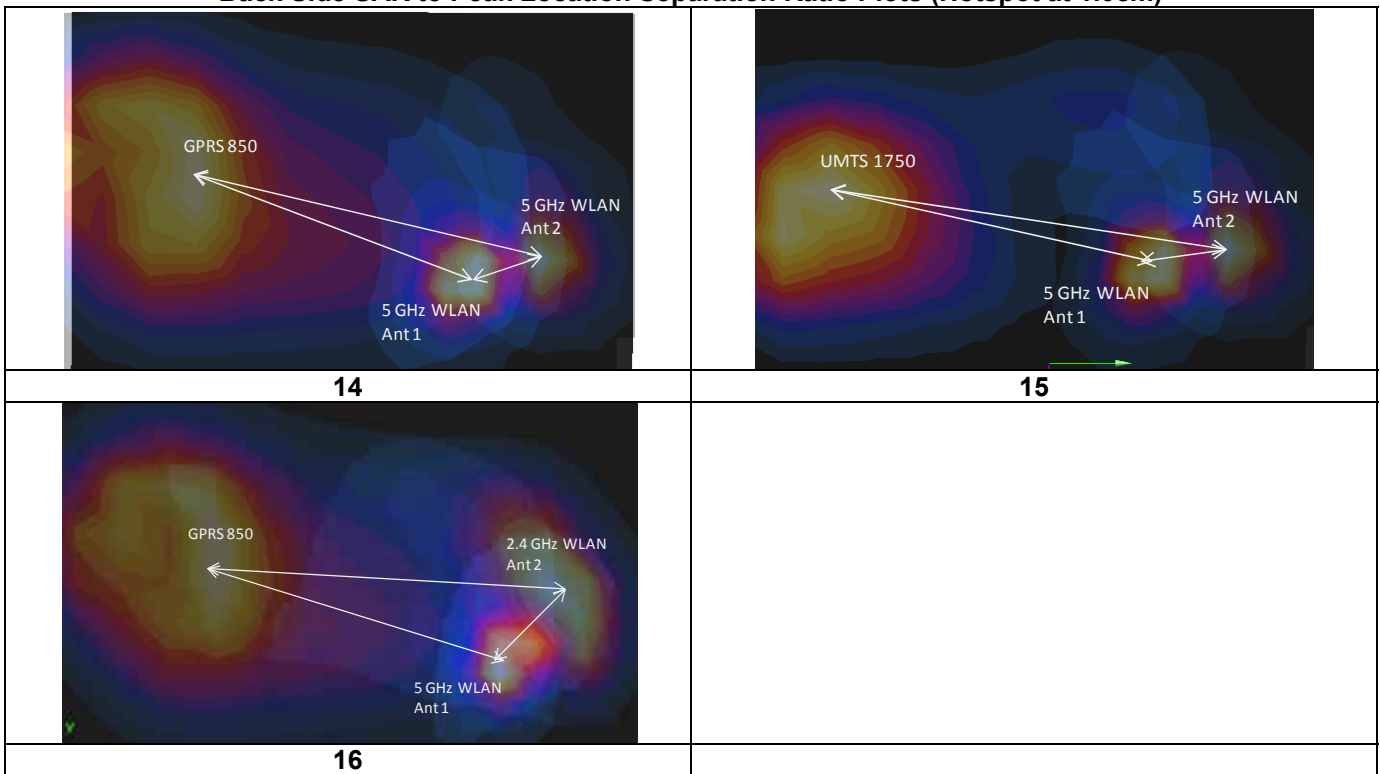**Table 12-20**  
**Back Side SAR to Peak Location Separation Ratio Plots (Hotspot at 1.0cm)**



## 12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1

FCC ID: ZNFLS993		<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 87 of 94	

# 13 SAR MEASUREMENT VARIABILITY

## 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 13-1  
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
835	836.60	190	GSM 850	GPRS	back	10 mm	1.020	1.060	1.04	N/A	N/A	N/A	N/A
1750	1752.60	1513	UMTS 1750	RMC	back	10 mm	0.844	0.854	1.01	N/A	N/A	N/A	N/A
1900	1860.00	26140	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	bottom	10 mm	0.984	0.987	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							

## 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 88 of 94




# 14 ADDITIONAL TESTING PER FCC GUIDANCE

## 14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity



This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure conditions. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per FCC Guidance, no additional SAR measurements were required.

**Table 14-1  
LTE Band 41 Linearity Data**

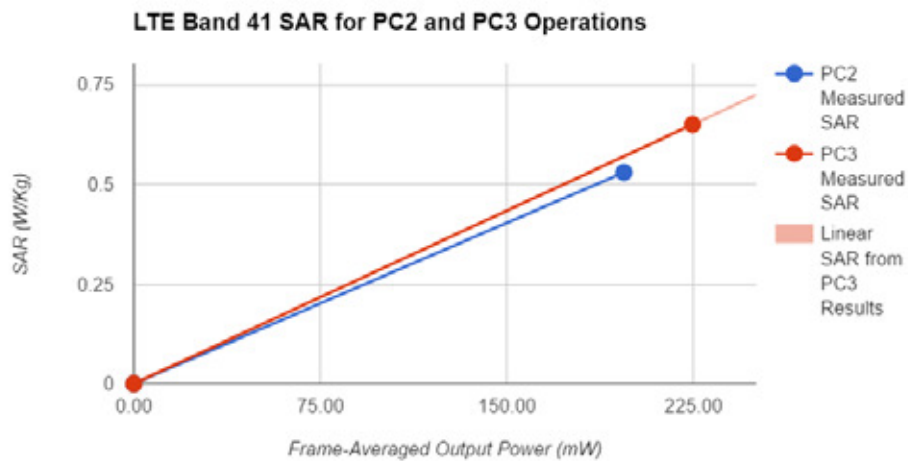	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.5	26.7
Measured Output Power (dBm)	25.50	26.58
Measured SAR (W/kg)	0.65	0.53
Measured Power (mW)	354.81	454.99
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	224.60	197.01
% deviation from expected linearity		<b>-7.04%</b>





**Figure 14-1  
LTE Band 41 Linearity**

FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL COMMUNICATIONS TESTING	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 89 of 94

# 15 EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/2/2016	Annual	3/2/2017	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	3/2/2016	Annual	3/2/2017	JP38020182
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	10/5/2016	Annual	10/5/2017	GB42230325
Agilent	E4438C	ESG Vector Signal Generator	2/27/2016	Annual	2/27/2017	MY45091346
Agilent	E4438C	ESG Vector Signal Generator	3/2/2016	Annual	3/2/2017	MY47270002
Agilent	E4432B	ESG-D Series Signal Generator	3/5/2016	Annual	3/5/2017	US40053896
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Agilent	N5182A	MXG Vector Signal Generator	2/27/2016	Annual	2/27/2017	MY47420651
Agilent	N5182A	MXG Vector Signal Generator	3/5/2016	Annual	3/5/2017	MY47420800
Agilent	8753ES	S-Parameter Network Analyzer	3/3/2016	Annual	3/3/2017	US39170122
Agilent	8753ES	S-Parameter Network Analyzer	6/28/2016	Annual	6/28/2017	MY40000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/19/2016	Annual	8/19/2017	MY40003841
Agilent	E5515C	Wireless Communications Test Set	5/16/2015	Biennial	5/16/2017	GB43304447
Agilent	E5515C	Wireless Communications Test Set	5/22/2015	Biennial	5/22/2017	GB43304278
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Anritsu	ML2496A	Power Meter	3/5/2016	Annual	3/5/2017	1351001
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	1039008
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1207470
Anritsu	MT8820C	Radio Communication Analyzer	4/14/2016	Annual	4/14/2017	6201240328
Anritsu	MT8820C	Radio Communication Analyzer	9/13/2016	Annual	9/13/2017	6201144419
Anritsu	MA24106A	USB Power Sensor	3/4/2016	Annual	3/4/2017	1344555
Anritsu	MA24106A	USB Power Sensor	3/4/2016	Annual	3/4/2017	1344556
COMTECH	AR85729-5/57598	Solid State Amplifier	CBT	N/A	CBT	MBW31A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Control Company	4040	Digital Thermometer	3/15/2015	Biennial	3/15/2017	150194929
Control Company	4040	Digital Thermometer	3/15/2015	Biennial	3/15/2017	150195005
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261701
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261729
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mitutoyo	CD-6°CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264162
Mitutoyo	CD-6°CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264165
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	5/21/2015	Biennial	5/21/2017	N/A
Pasternack	NC-100	Torque Wrench	5/21/2015	Biennial	5/21/2017	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	3/29/2016	Annual	3/29/2017	836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	3/25/2016	Annual	3/25/2017	128633
Rohde & Schwarz	CMW500	Radio Communication Tester	4/13/2016	Annual	4/13/2017	140148
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2016	Annual	7/20/2017	132885
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	8/30/2016	Biennial	8/30/2018	N/A
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/2/2016	Biennial	3/2/2018	N/A
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2016	Annual	5/9/2017	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Annual	7/8/2017	5d080
SPEAG	D1900V2	1900 MHz SAR Dipole	7/15/2016	Annual	7/15/2017	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	981
SPEAG	D2600V2	2600 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	1071
SPEAG	D2450V2	2450 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	797
SPEAG	D5GHV2	5 GHz SAR Dipole	9/21/2016	Annual	9/21/2017	1191
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	1161
SPEAG	D835V2	835 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	4d047
SPEAG	D5GHV2	5 GHz SAR Dipole	1/20/2017	Annual	1/20/2018	1057
SPEAG	D2600V2	2600 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	1126
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2016	Annual	2/18/2017	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/19/2016	Annual	2/19/2017	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/14/2016	Annual	3/14/2017	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/11/2016	Annual	5/11/2017	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/22/2016	Annual	8/22/2017	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/14/2016	Annual	9/14/2017	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/15/2016	Annual	9/15/2017	1333
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2016	Annual	5/10/2017	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/13/2016	Annual	9/13/2017	1091
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	3/1/2016	Annual	3/1/2017	1102
SPEAG	ES3DV3	SAR Probe	2/19/2016	Annual	2/19/2017	3213
SPEAG	ES3DV4	SAR Probe	2/22/2016	Annual	2/22/2017	3914
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3209
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3319
SPEAG	ES3DV4	SAR Probe	4/19/2016	Annual	4/19/2017	7357
SPEAG	ES3DV4	SAR Probe	5/17/2016	Annual	5/17/2017	7409
SPEAG	ES3DV3	SAR Probe	9/19/2016	Annual	9/19/2017	3287
SPEAG	ES3DV3	SAR Probe	8/25/2016	Annual	8/25/2017	3332

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFLS993	 PCTEST PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1701180034-01-R4.ZNF	Test Dates: 01/22/17 - 02/01/17	DUT Type: Portable Handset	Page 90 of 94	

# 16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>	RSS					11.5	11.3	60
<b>Expanded Uncertainty</b> (95% CONFIDENCELEVEL)	k=2					23.0	22.6	



FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 91 of 94

# 17 CONCLUSION

## 17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: ZNFLS993	 <b>PCTEST</b> PROFESSIONAL TESTING LABORATORY	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset		Page 92 of 94

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFLS993	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 93 of 94	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

<b>FCC ID:</b> ZNFLS993	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1701180034-01-R4.ZNF	<b>Test Dates:</b> 01/22/17 - 02/01/17	<b>DUT Type:</b> Portable Handset	Page 94 of 94

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.914 \text{ S/m}$ ;  $\epsilon_r = 42.995$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-31-2017; Ambient Temp: 23.1°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7409; ConvF(10.04, 10.04, 10.04); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Left Head, Cheek, Mid.ch, 2 Tx slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.05 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.265 W/kg

**SAR(1 g) = 0.207 W/kg**

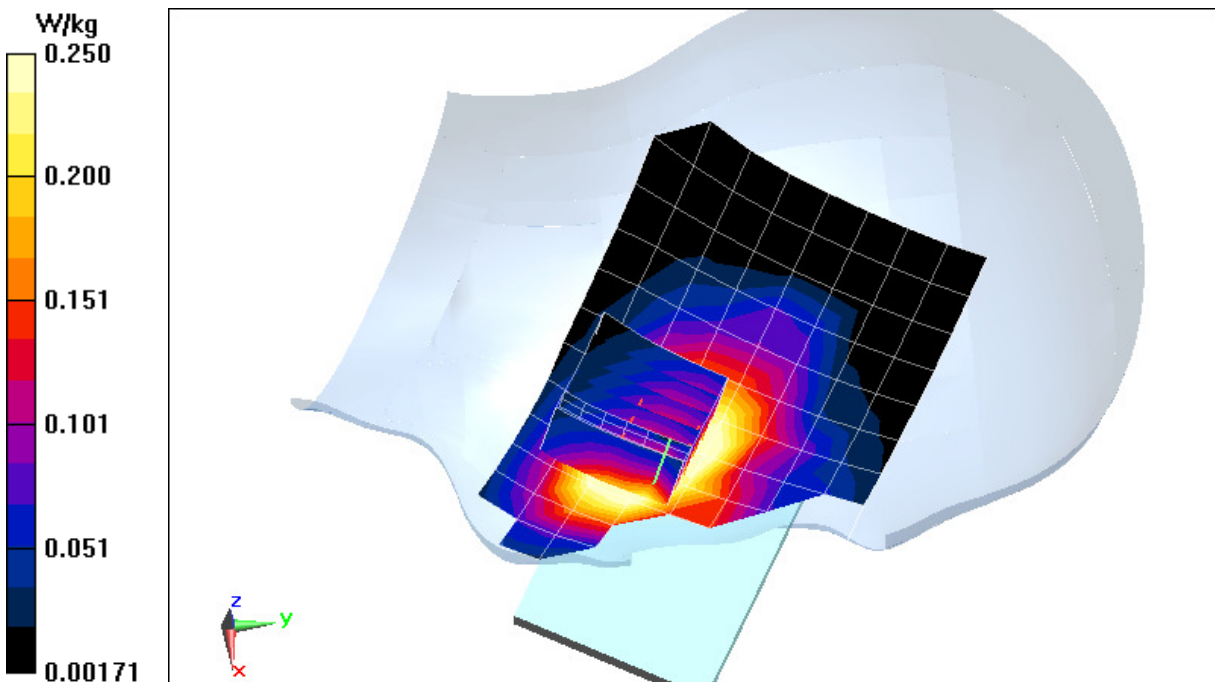



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, GSM GPRS; 2 Tx slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15  
Medium: 1900 Head Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.43 \text{ S/m}$ ;  $\epsilon_r = 38.258$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-30-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(5.45, 5.45, 5.45); Calibrated: 8/25/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 9/15/2016  
Phantom: SAM Left; Type: SAM; Serial: 1688

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 2 Tx slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.463 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.188 W/kg

**SAR(1 g) = 0.117 W/kg**

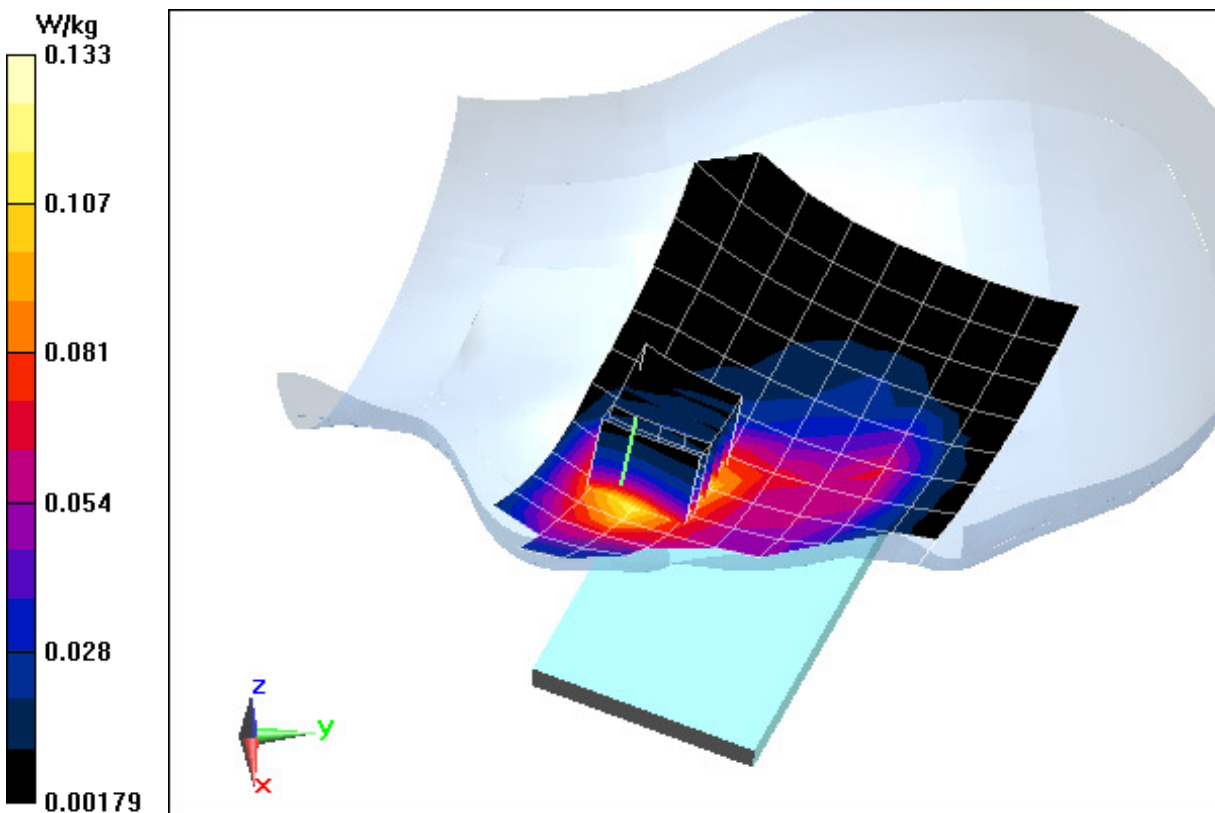

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 40.26$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 02-01-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Left Head, Cheek, Mid.ch**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.82 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.182 W/kg**

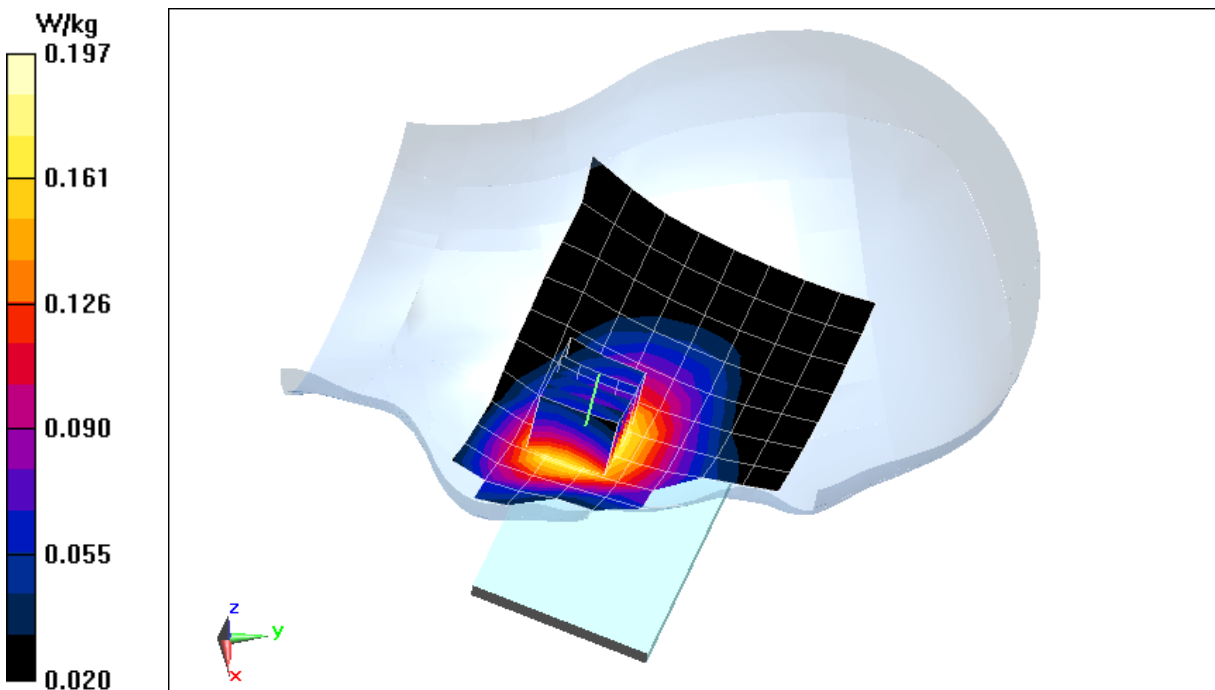

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.345 \text{ S/m}$ ;  $\epsilon_r = 38.91$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-27-2017; Ambient Temp: 24.0°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(5.28, 5.28, 5.28); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1750, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.97 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.313 W/kg

**SAR(1 g) = 0.191 W/kg**

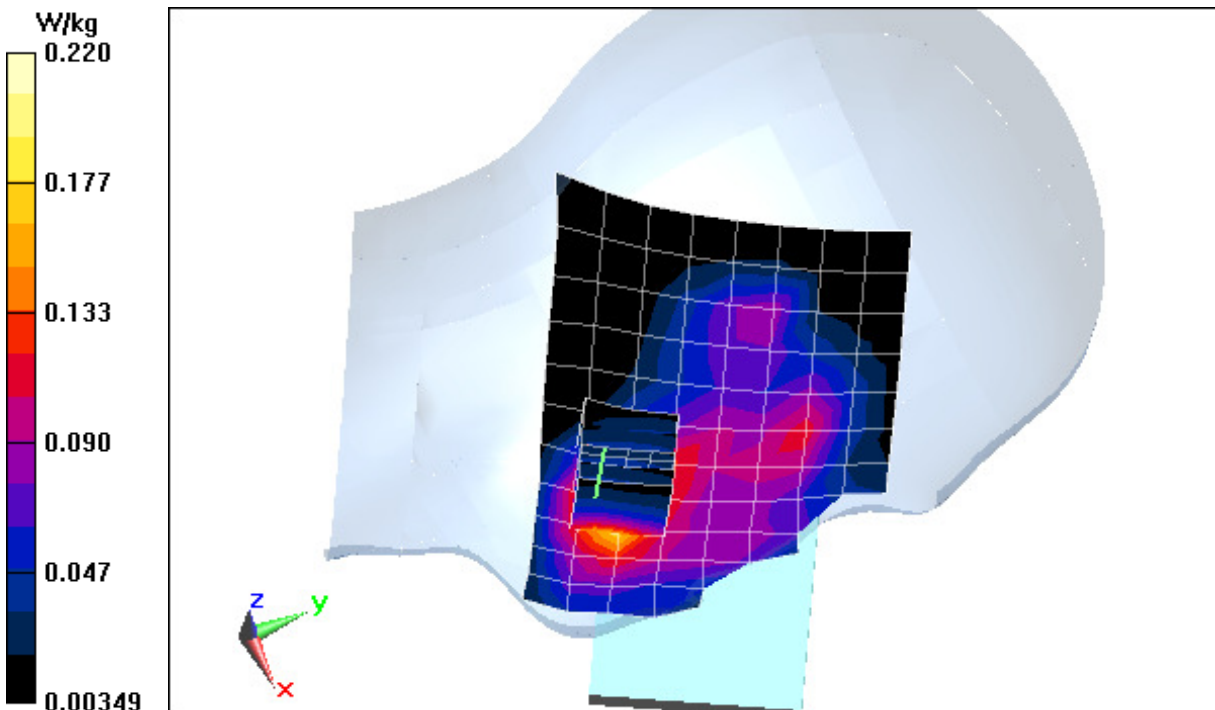

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.43 \text{ S/m}$ ;  $\epsilon_r = 38.258$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-30-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(5.45, 5.45, 5.45); Calibrated: 8/25/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 9/15/2016  
Phantom: SAM Left; Type: SAM; Serial: 1688  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.03 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.160 W/kg**

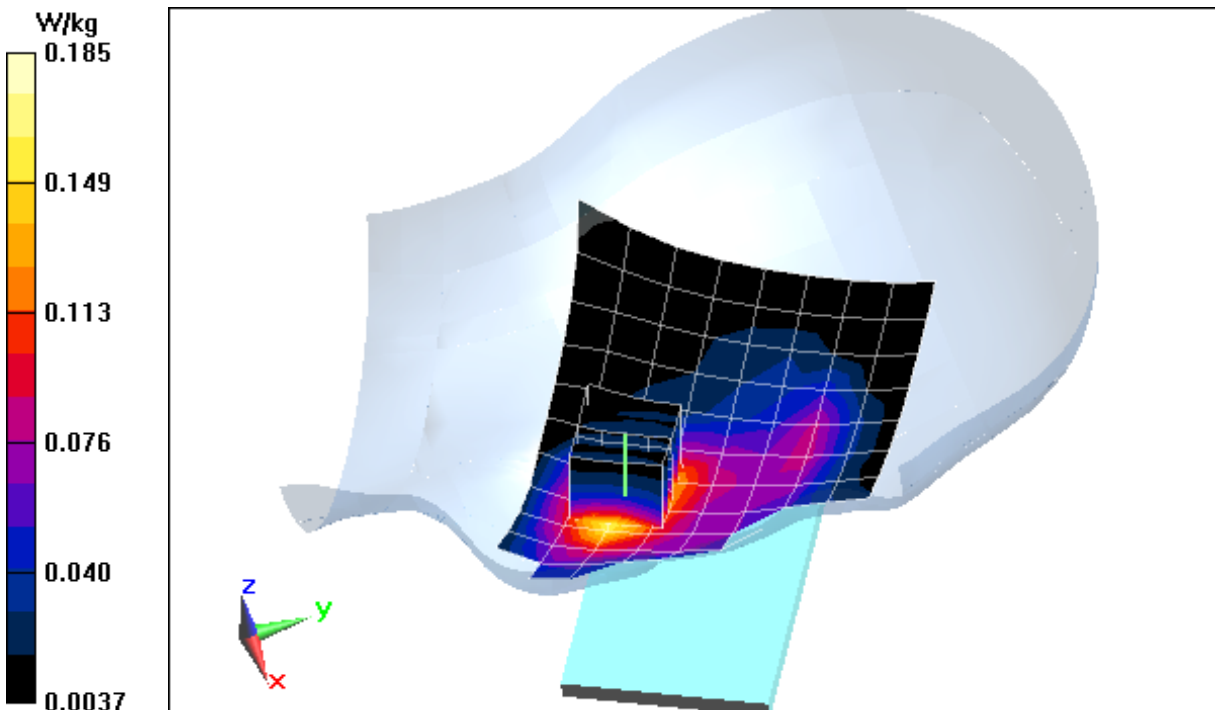

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 40.261$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 02-01-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. CDMA, Rule Part 22H, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.33 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.314 W/kg

**SAR(1 g) = 0.254 W/kg**

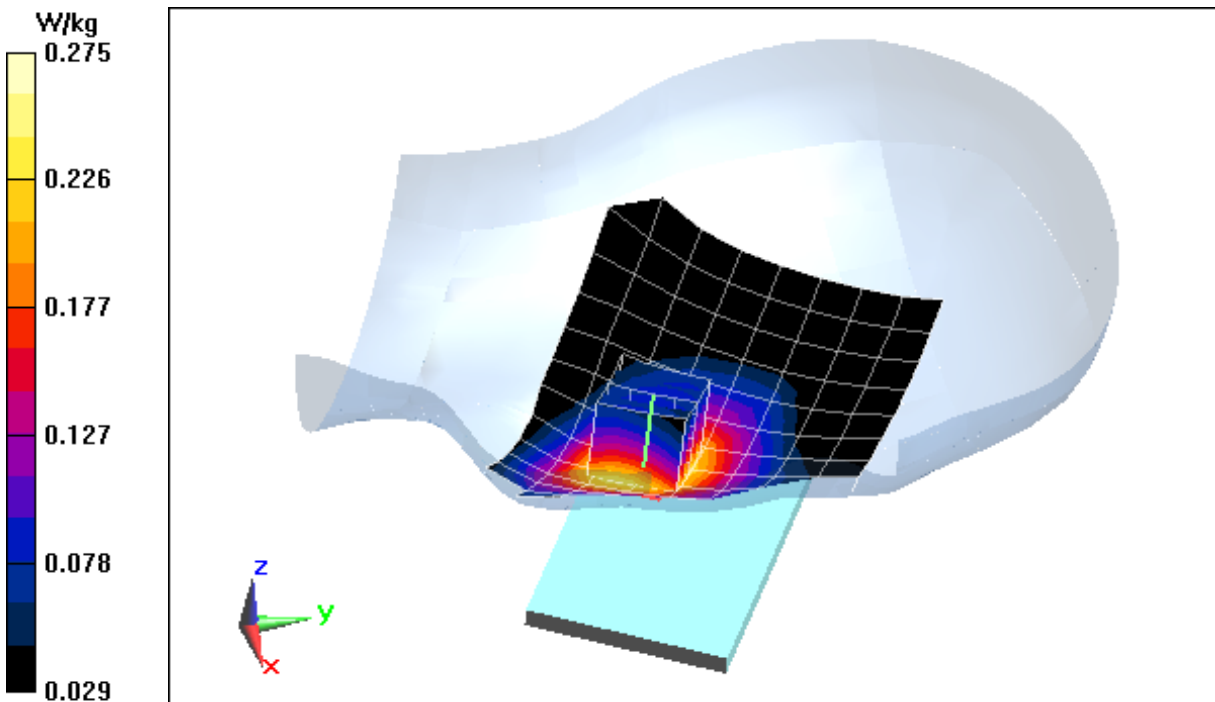

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**


Communication System: UID 0, Cellular CDMA (0); Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 40.463$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 02-01-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. CDMA, Rule Part 90S, Left Head, Cheek, Mid.ch**

**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 15.99 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.271 W/kg  
**SAR(1 g) = 0.221 W/kg**

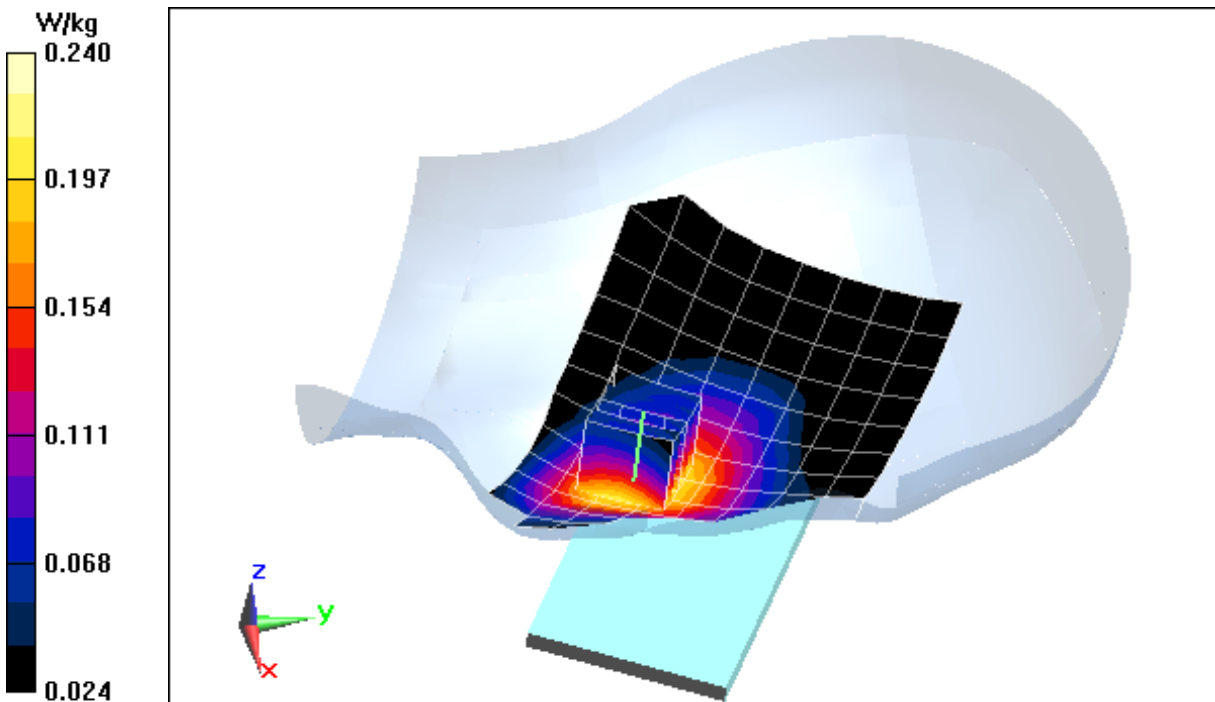

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.43 \text{ S/m}$ ;  $\epsilon_r = 38.258$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-30-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(5.45, 5.45, 5.45); Calibrated: 8/25/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 9/15/2016  
Phantom: SAM Left; Type: SAM; Serial: 1688  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: PCS CDMA, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.86 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.297 W/kg

**SAR(1 g) = 0.187 W/kg**

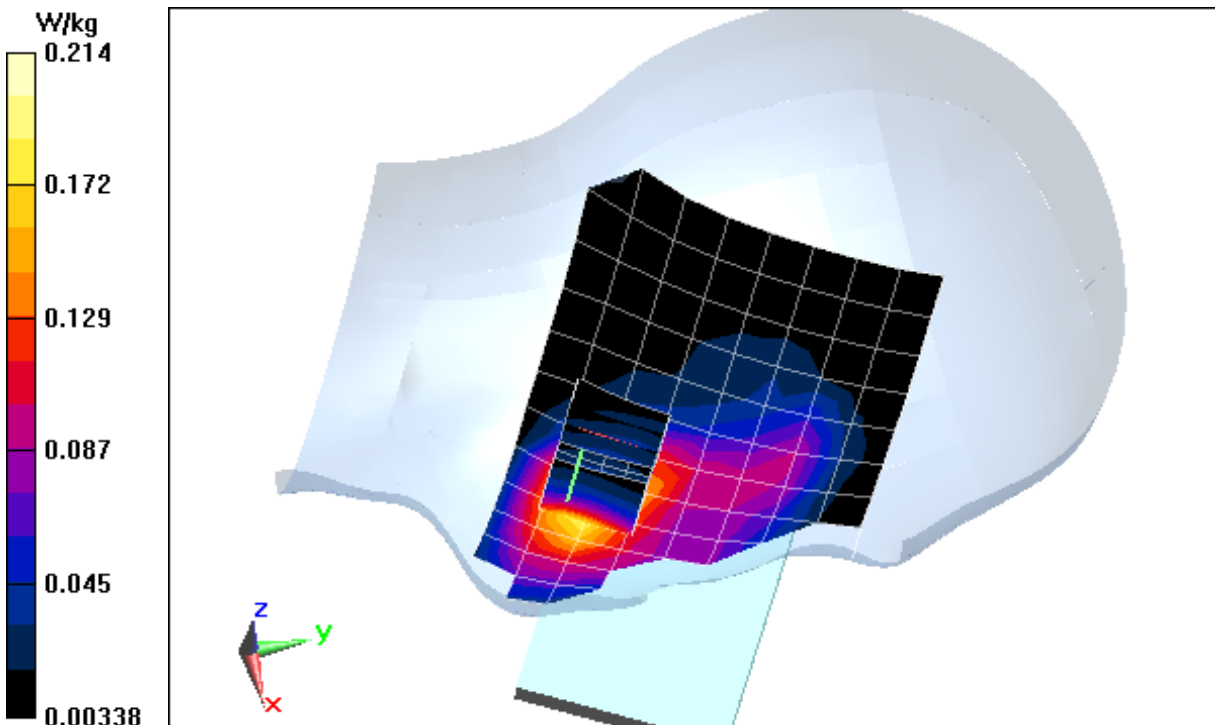

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01410**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.866 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-25-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3209; ConvF(6.6, 6.6, 6.6); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Right; Type: SAM; Serial: 1757

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch,  
QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.88 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.104 W/kg**

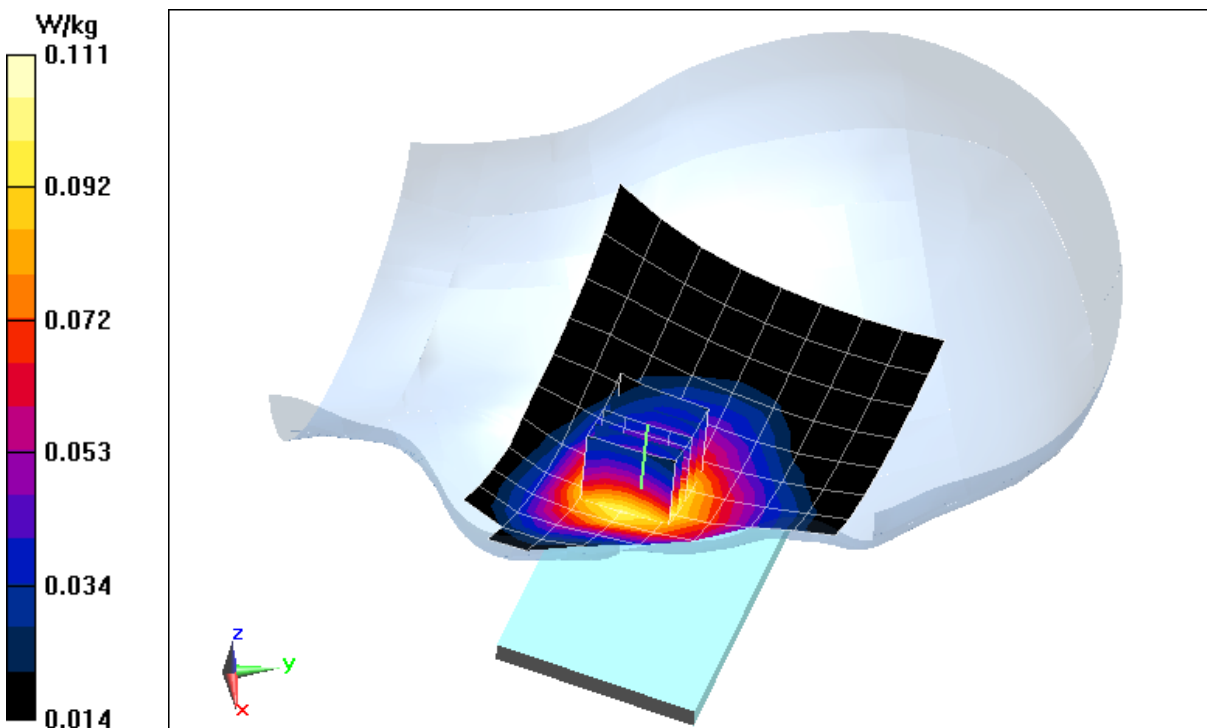



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01411**


Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: 835 Head Medium parameters used (interpolated):  
 $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 40.324$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 02-01-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.87 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.277 W/kg  
**SAR(1 g) = 0.221 W/kg**

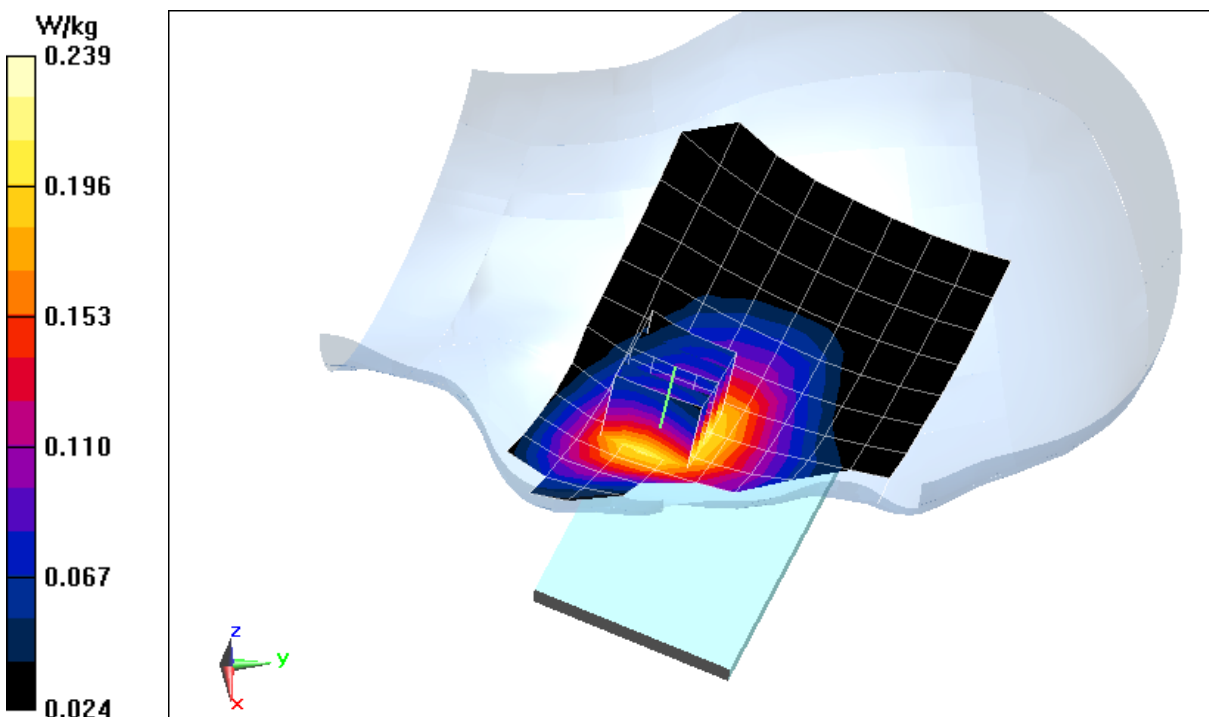

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01413**


Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used (interpolated):  
 $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.345 \text{ S/m}$ ;  $\epsilon_r = 38.91$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-27-2017; Ambient Temp: 24.0°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(5.28, 5.28, 5.28); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.95 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.371 W/kg  
**SAR(1 g) = 0.236 W/kg**

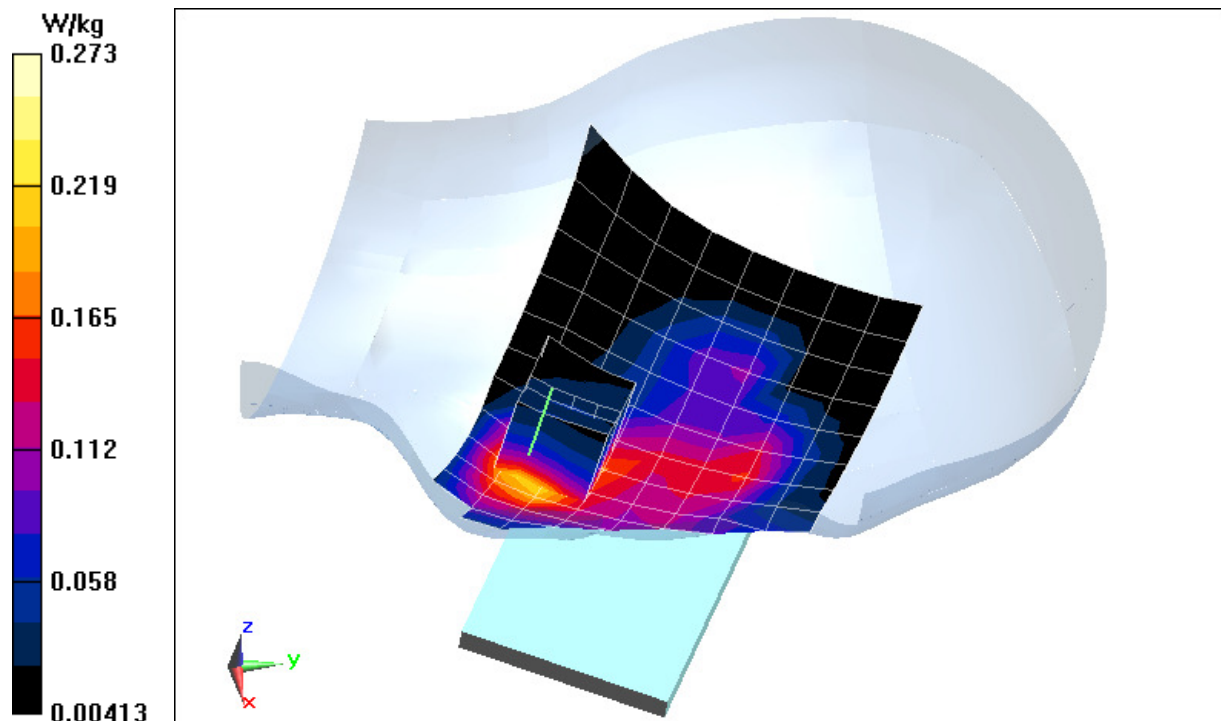

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01413**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1860 \text{ MHz}$ ;  $\sigma = 1.407 \text{ S/m}$ ;  $\epsilon_r = 38.358$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-30-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(5.45, 5.45, 5.45); Calibrated: 8/25/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 9/15/2016  
Phantom: SAM Left; Type: SAM; Serial: 1688  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.04 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.297 W/kg  
**SAR(1 g) = 0.184 W/kg**

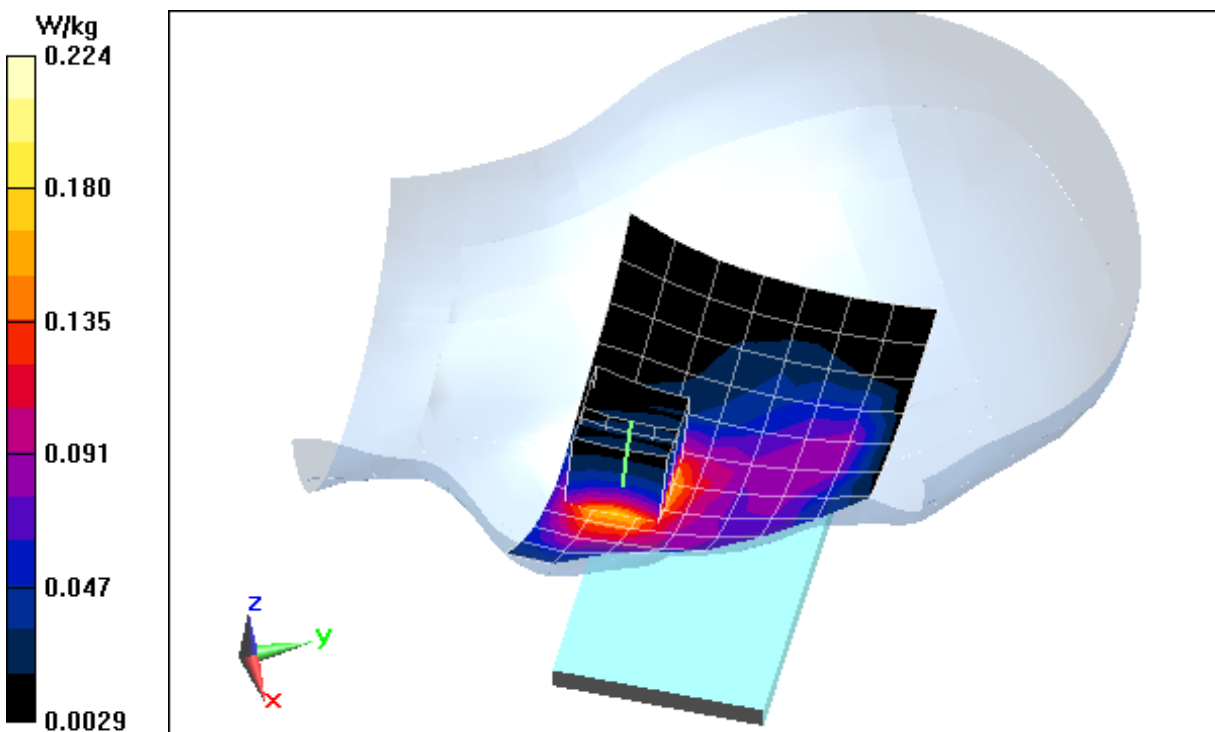

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01410**


Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium: 2450 Head Medium parameters used (interpolated):  
 $f = 2593 \text{ MHz}$ ;  $\sigma = 2.034 \text{ S/m}$ ;  $\epsilon_r = 37.55$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.41, 4.41, 4.41); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Left Head, Cheek, Mid.ch,  
QPSK, 20 MHz Bandwidth, 1 RB, 0 RB Offset**

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 8.849 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.244 W/kg  
**SAR(1 g) = 0.124 W/kg**

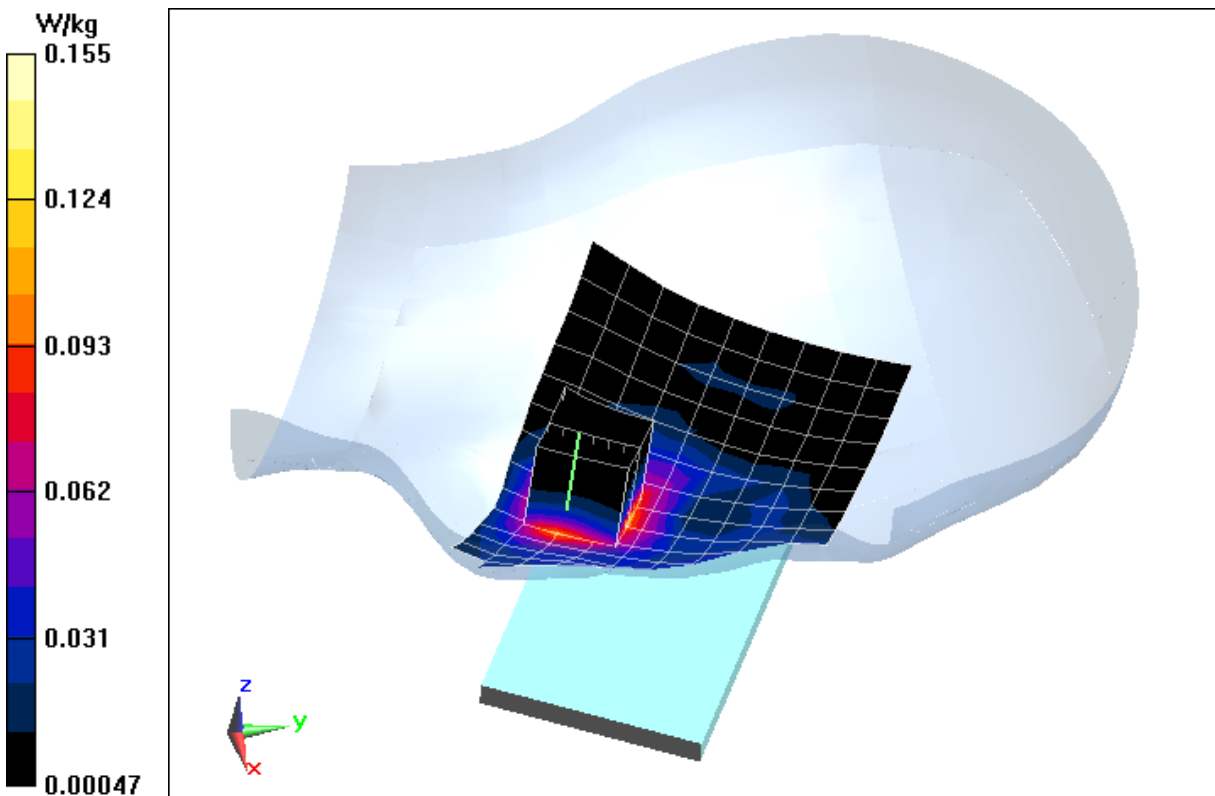

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01430**


Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Head Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 1.855 \text{ S/m}$ ;  $\epsilon_r = 38.215$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Antenna 2**  
**Right Head, Cheek, Ch 6, 1 Mbps**

**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
**Zoom Scan (8x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 18.52 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 1.66 W/kg  
**SAR(1 g) = 0.662 W/kg**

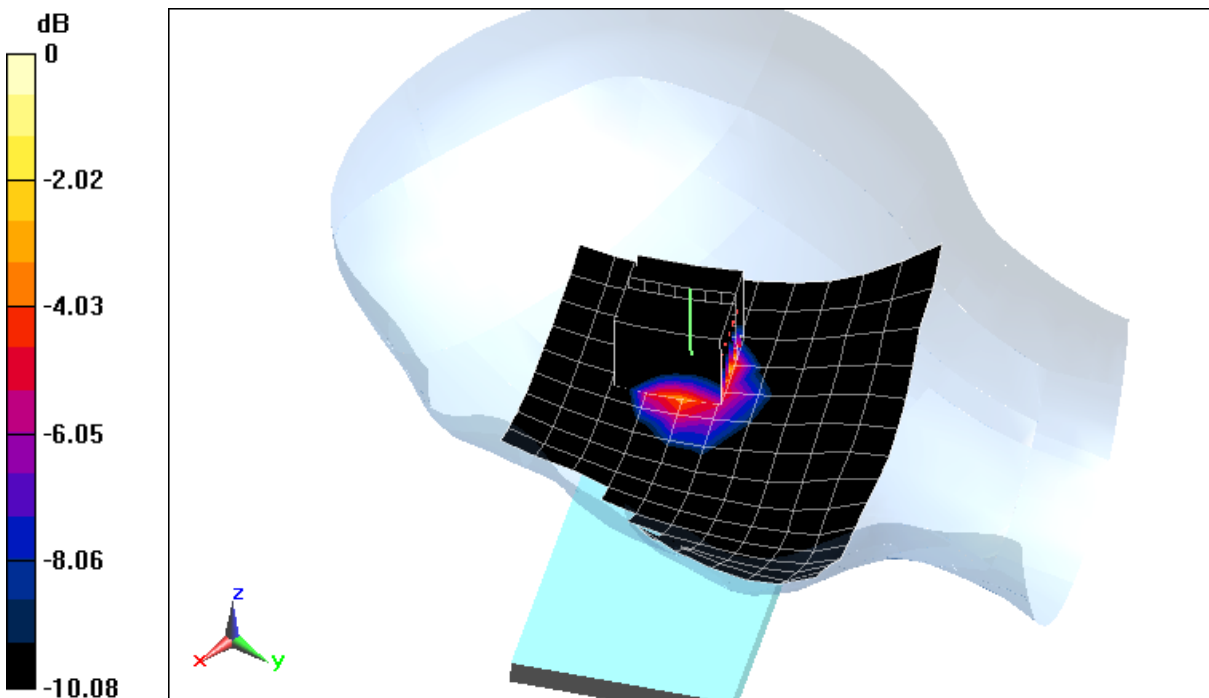

0 dB = 0.946 W/kg = -0.24 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01430**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5300 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head Medium parameters used:  
 $f = 5300 \text{ MHz}$ ;  $\sigma = 4.613 \text{ S/m}$ ;  $\epsilon_r = 34.928$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(5.1, 5.1, 5.1); Calibrated: 4/19/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2A, Antenna 2, 20 MHz Bandwidth,  
Right Head, Cheek, Ch 60, 6 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.7550 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 0.516 W/kg**

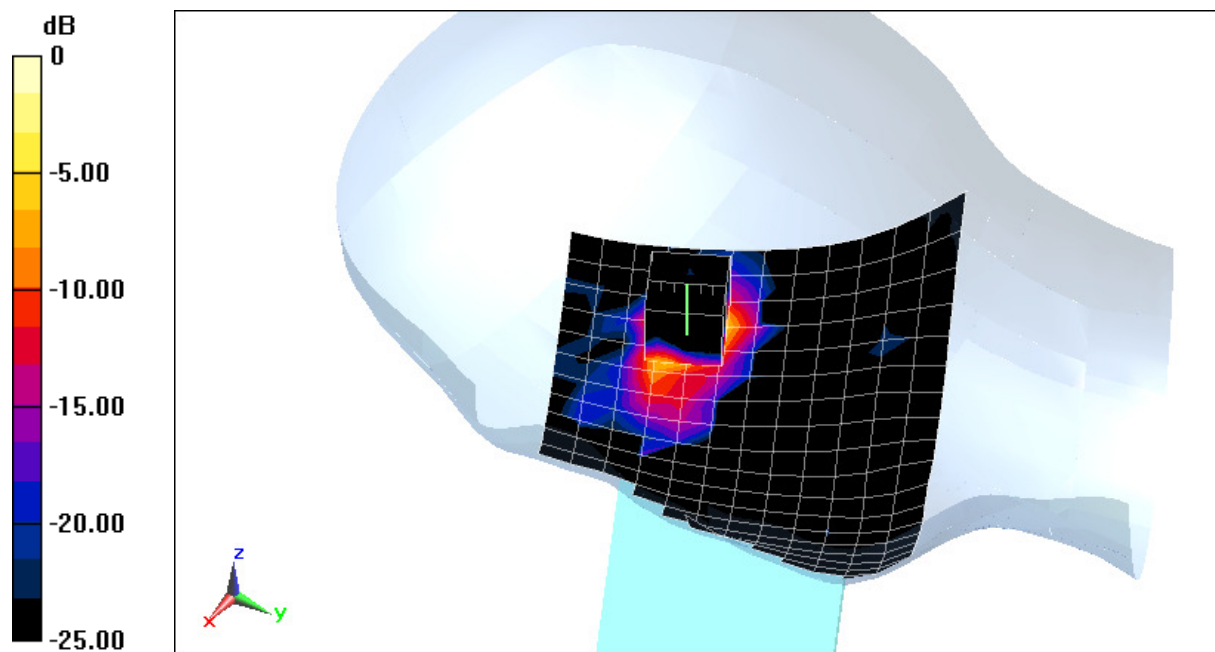

0 dB = 1.45 W/kg = 1.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 1.006 \text{ S/m}$ ;  $\epsilon_r = 53.768$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-01-2017; Ambient Temp: 22.6°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 33.76 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 1.06 W/kg**

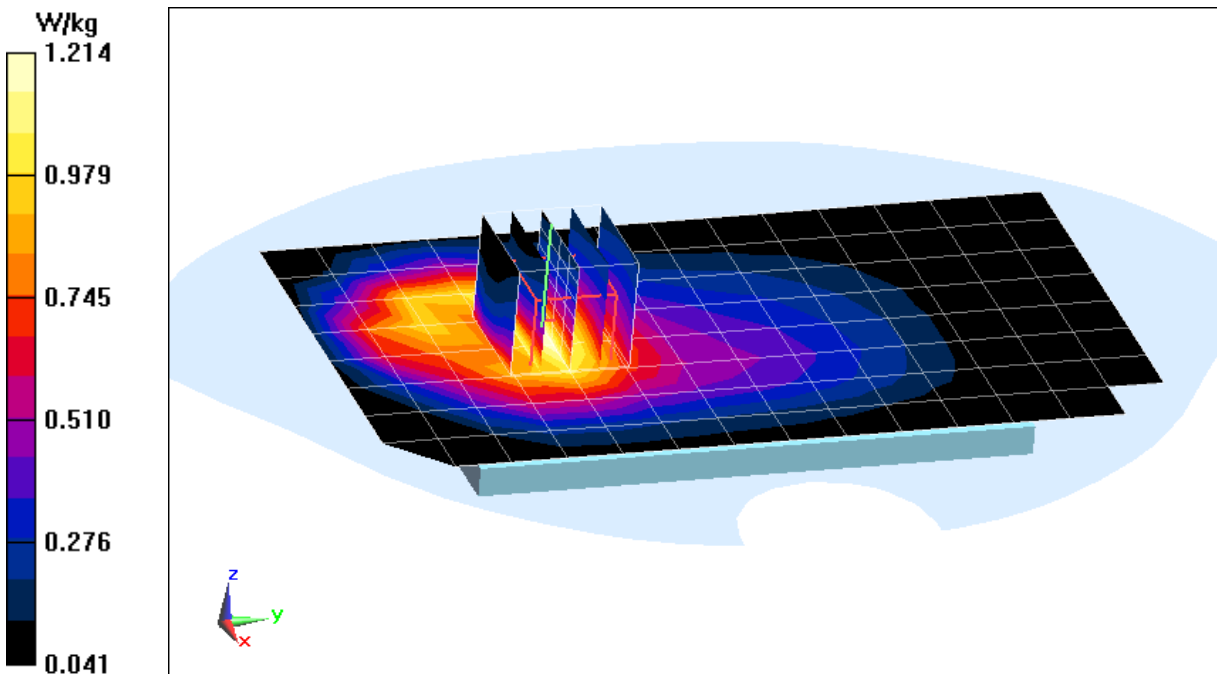

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.21$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.438 W/kg**

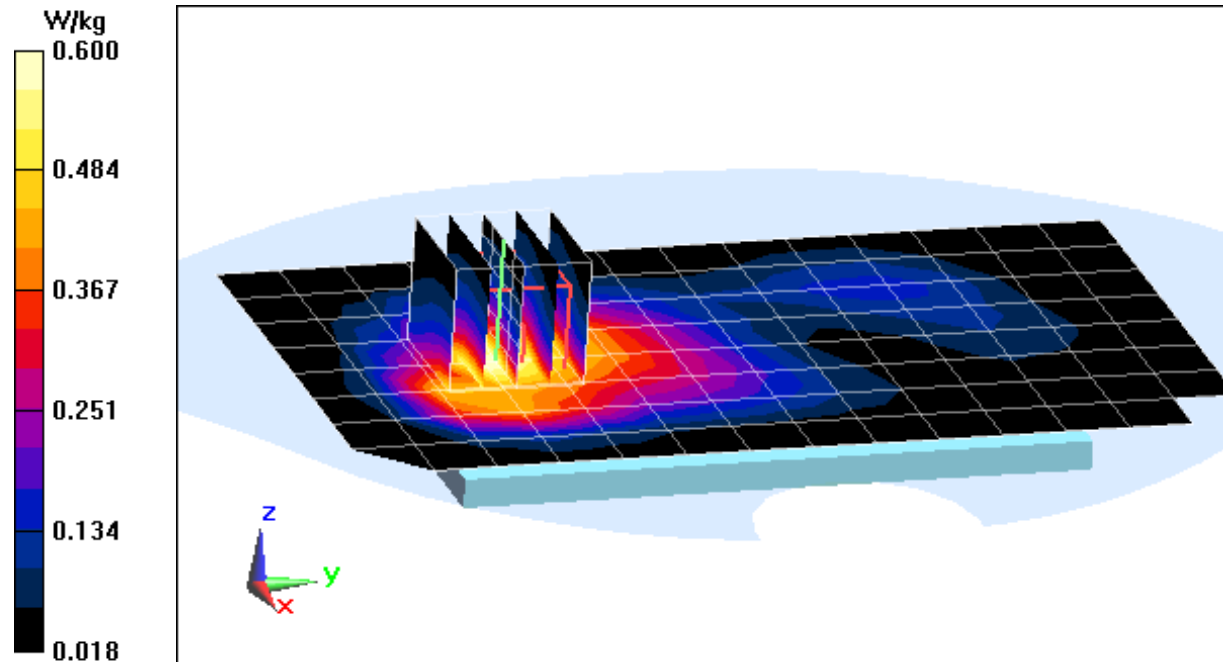



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.21$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 2 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.51 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.892 W/kg

**SAR(1 g) = 0.503 W/kg**

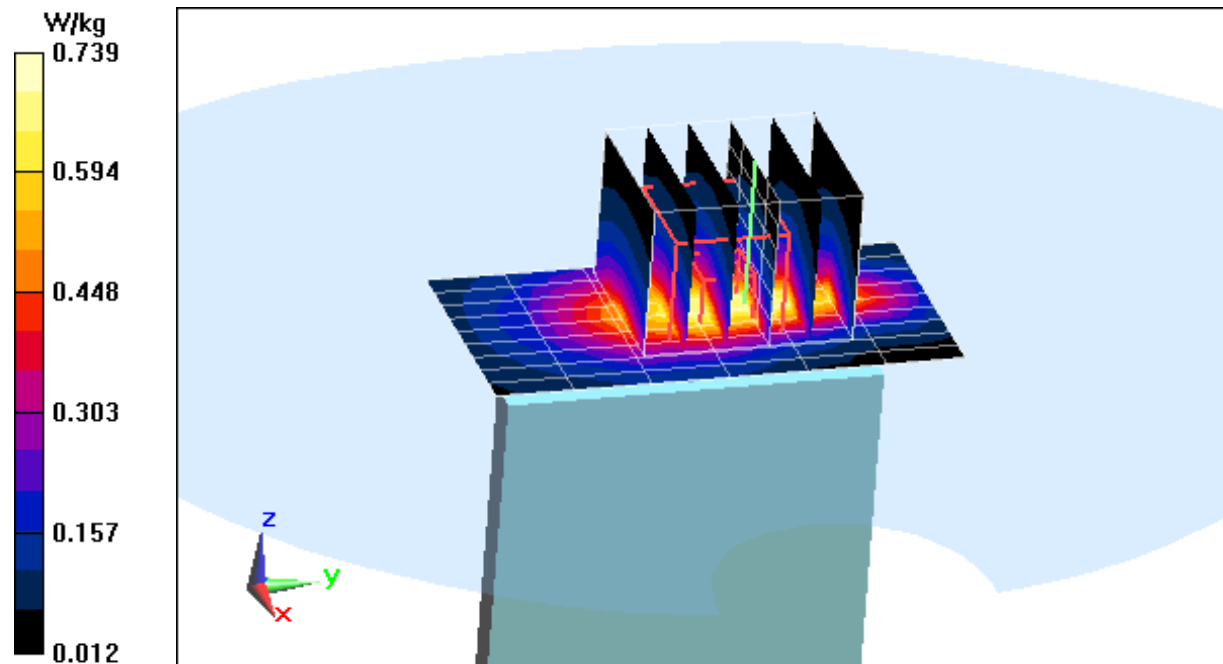

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.6 \text{ MHz}$ ;  $\sigma = 1.006 \text{ S/m}$ ;  $\epsilon_r = 56.424$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.71 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.843 W/kg

**SAR(1 g) = 0.568 W/kg**

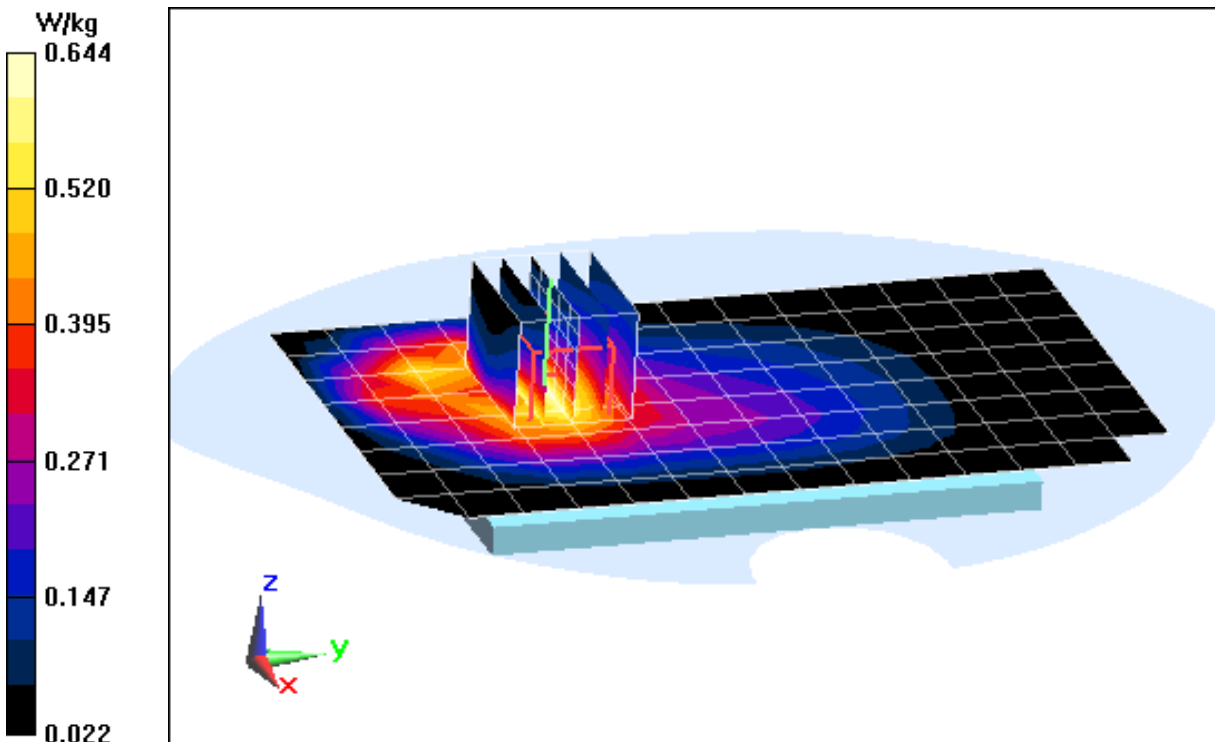

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 52.193$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2017; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(4.94, 4.94, 4.94); Calibrated: 2/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1750, Body SAR, Back side, High.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.33 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.854 W/kg**

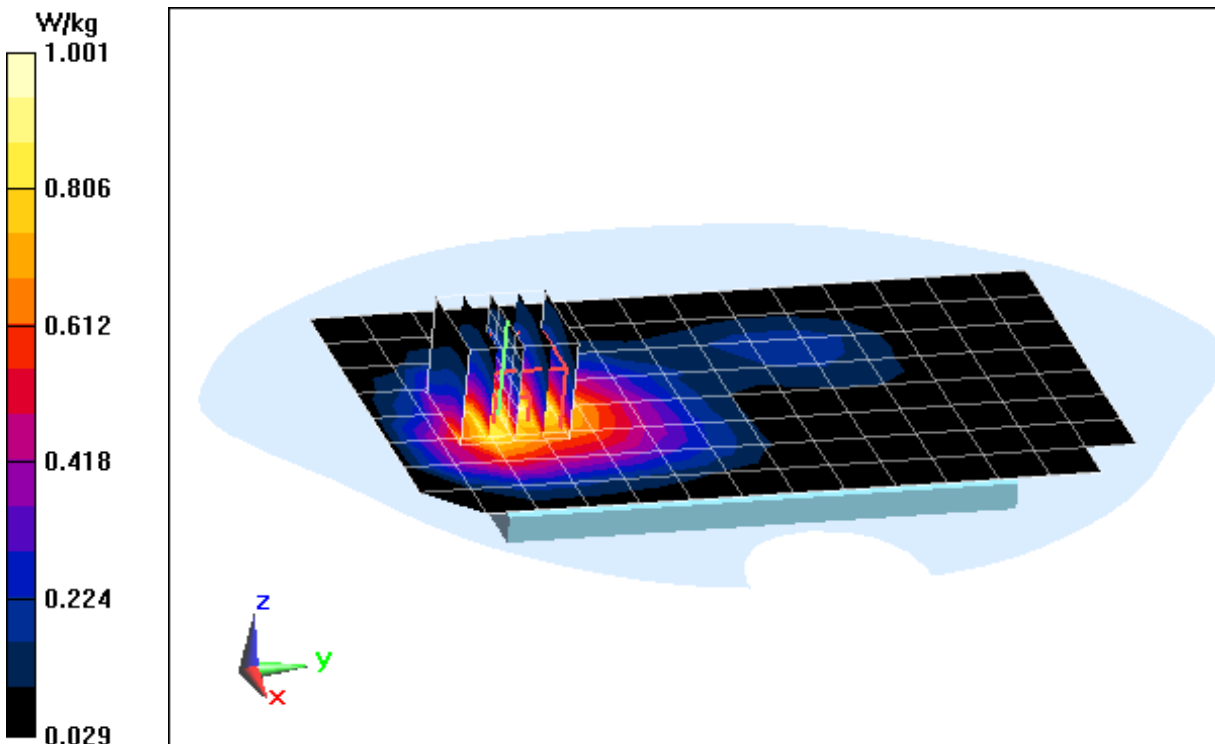

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.21$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.04 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.692 W/kg**

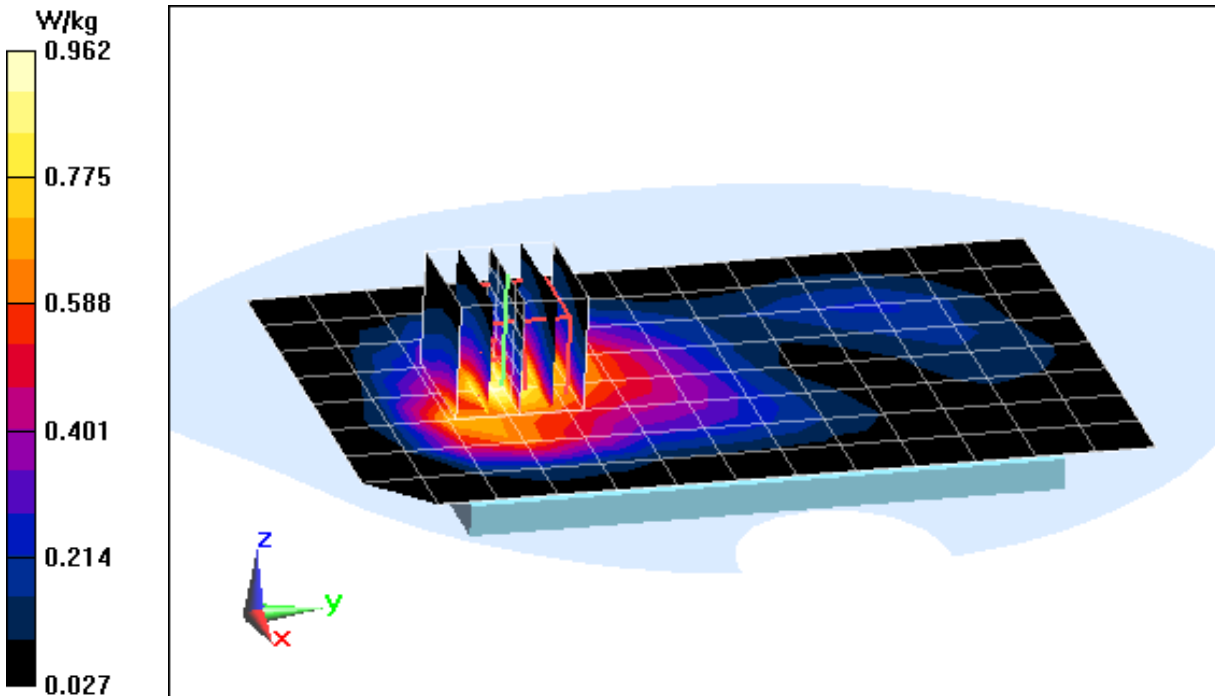

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.21$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Mid.ch**

**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.64 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 1.34 W/kg  
**SAR(1 g) = 0.767 W/kg**

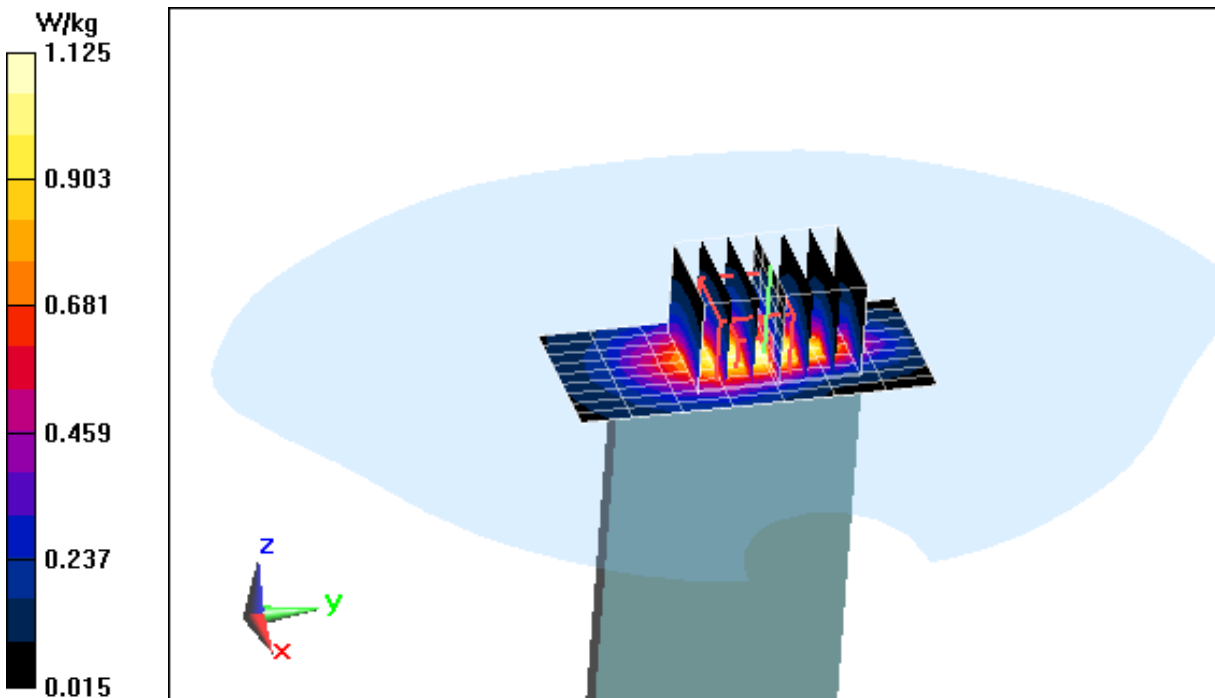

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.52 \text{ MHz}$ ;  $\sigma = 1.006 \text{ S/m}$ ;  $\epsilon_r = 56.425$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. CDMA, Rule Part 22H, Body SAR, Back side, Mid.ch**


**Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.97 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.724 W/kg**

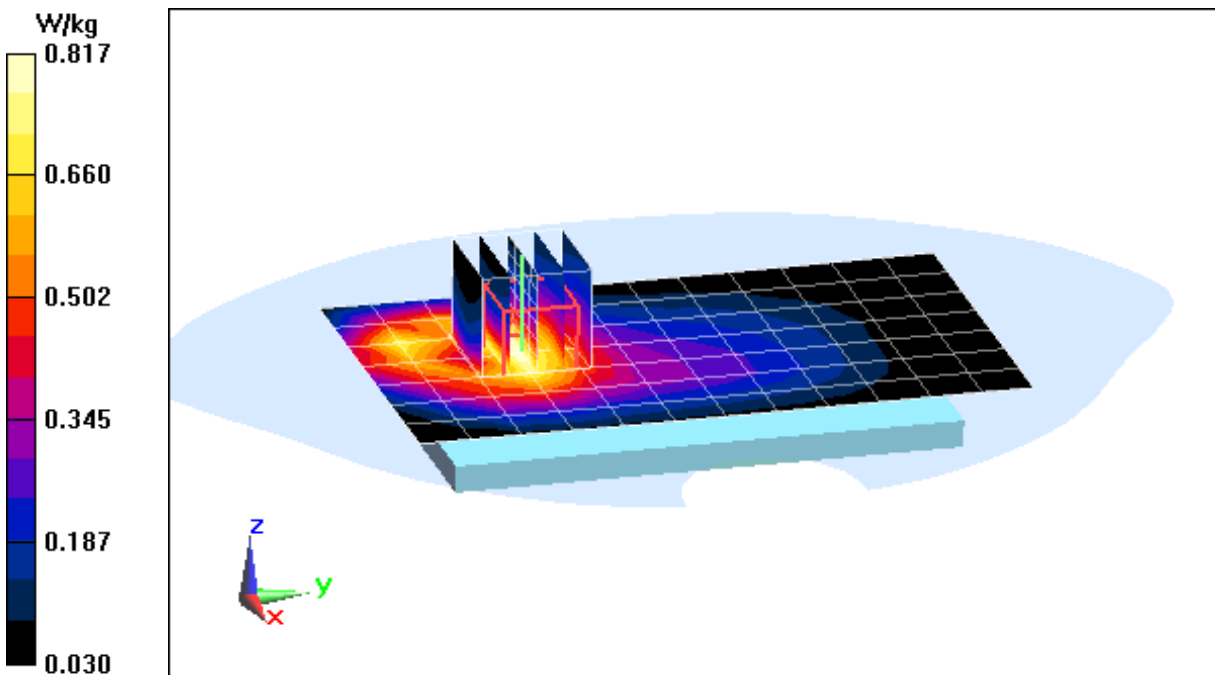

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 836.52 \text{ MHz}$ ;  $\sigma = 1.006 \text{ S/m}$ ;  $\epsilon_r = 56.425$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. EVDO, Rule Part 22H, Body SAR, Back side, Mid.ch**


**Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 27.78 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.707 W/kg**

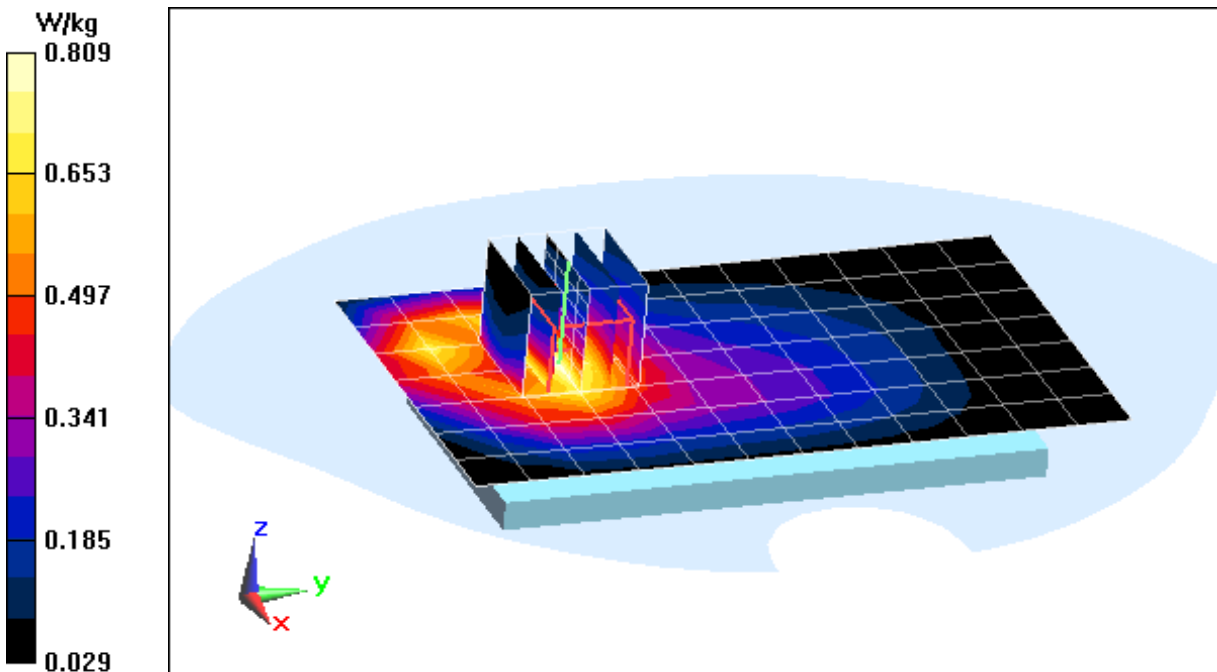

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.989 \text{ S/m}$ ;  $\epsilon_r = 56.594$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. CDMA BC10, Rule Part 90S, Body SAR, Back side, Mid.ch**


**Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.974 W/kg

**SAR(1 g) = 0.655 W/kg**

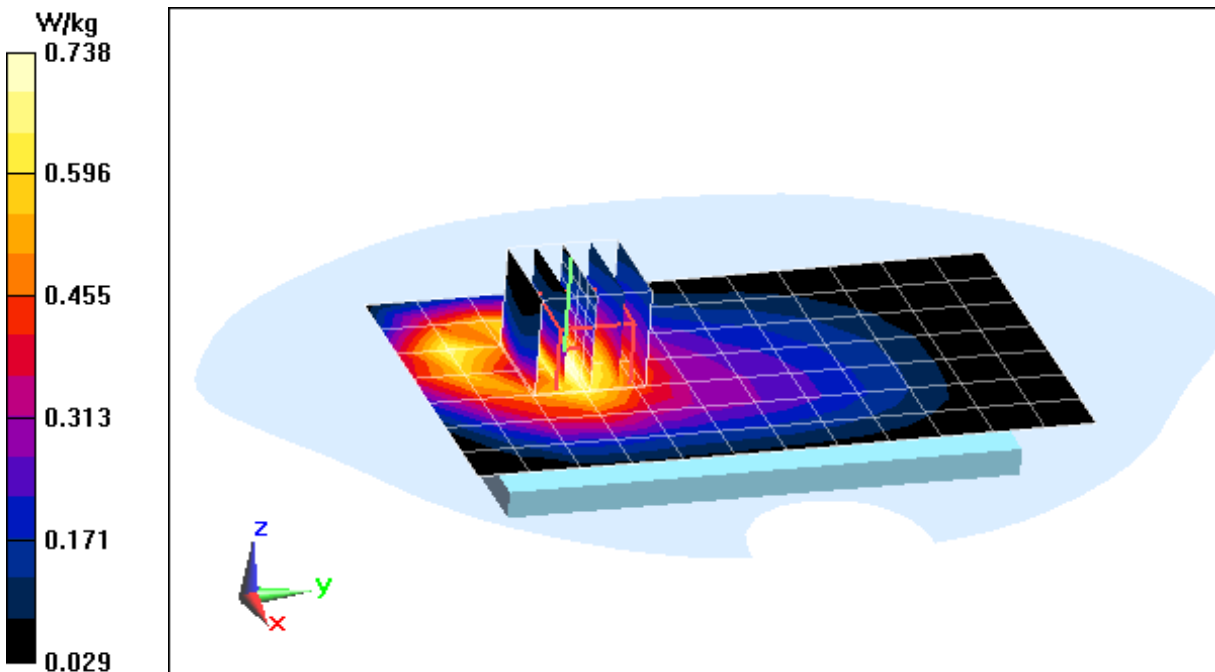



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01417**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 820.1 \text{ MHz}$ ;  $\sigma = 0.989 \text{ S/m}$ ;  $\epsilon_r = 56.594$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: Cell. EVDO BC10, Rule Part 90S, Body SAR, Back side, Mid.ch**


**Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.94 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.974 W/kg

**SAR(1 g) = 0.662 W/kg**

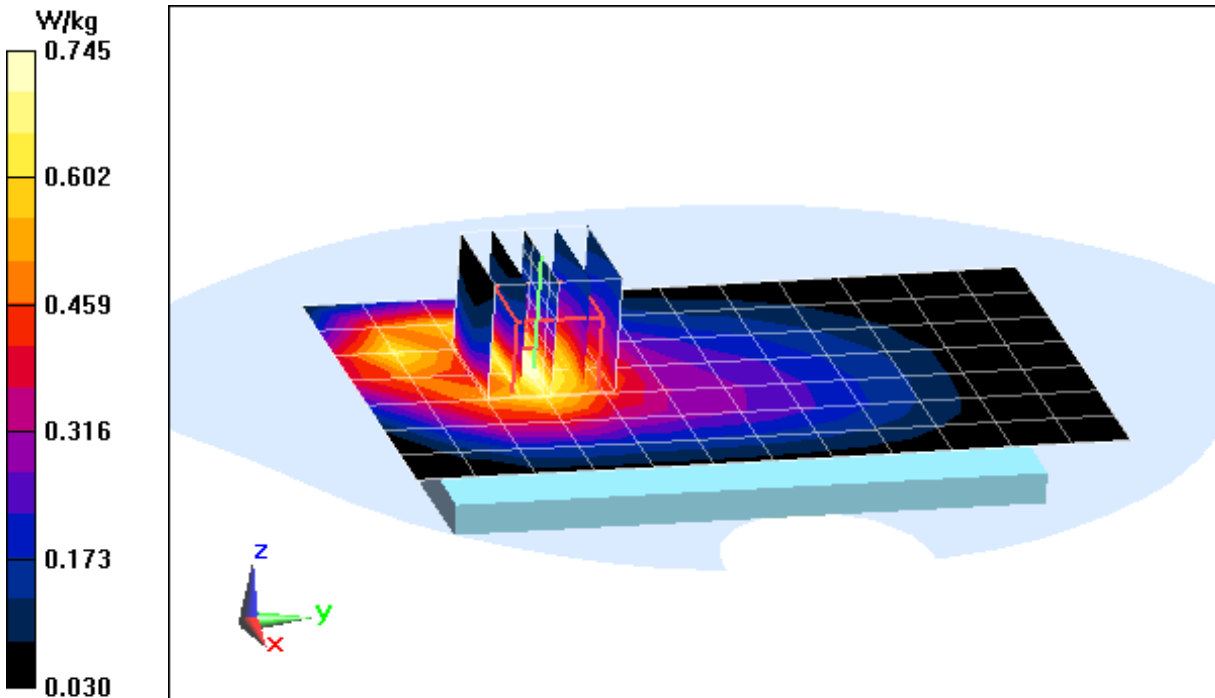

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.505 \text{ S/m}$ ;  $\epsilon_r = 52.3$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: PCS CDMA, Body SAR, Back side, Low ch**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.71 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.880 W/kg**

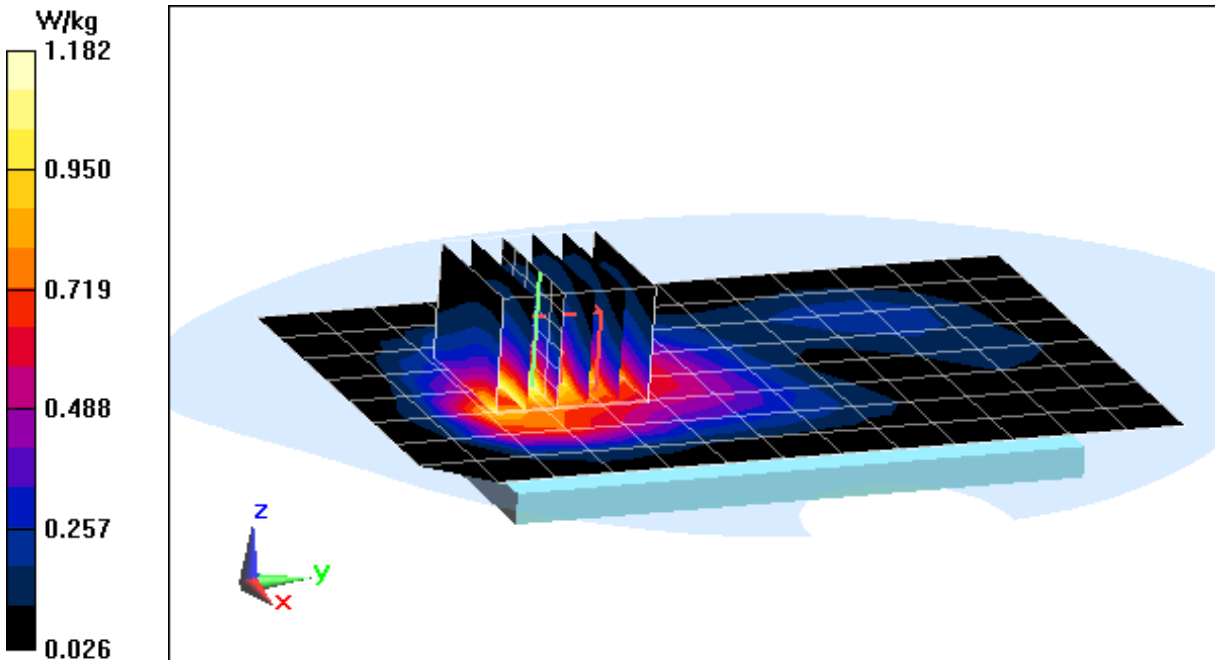

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01412**

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used:  
 $f = 1880 \text{ MHz}$ ;  $\sigma = 1.536 \text{ S/m}$ ;  $\epsilon_r = 52.21$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: PCS EVDO, Body SAR, Back side, Mid.ch**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.27 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.787 W/kg**

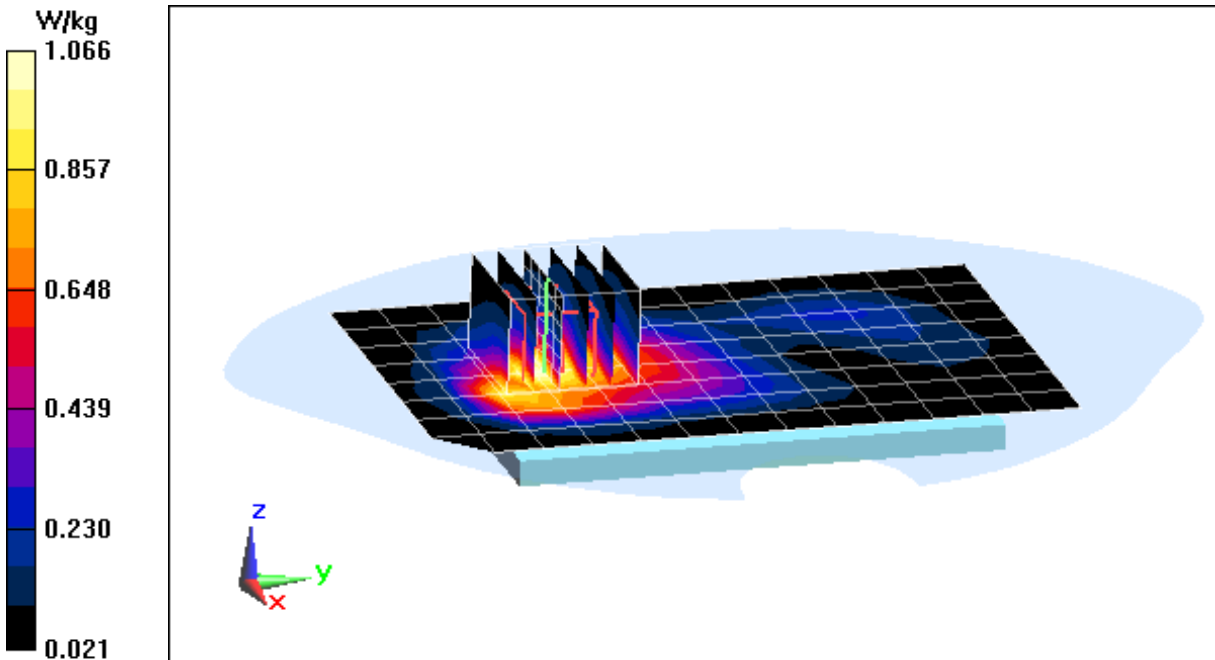

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01414**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 54.991$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 22.7°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3209; ConvF(6.19, 6.19, 6.19); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.42 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.639 W/kg

**SAR(1 g) = 0.424 W/kg**

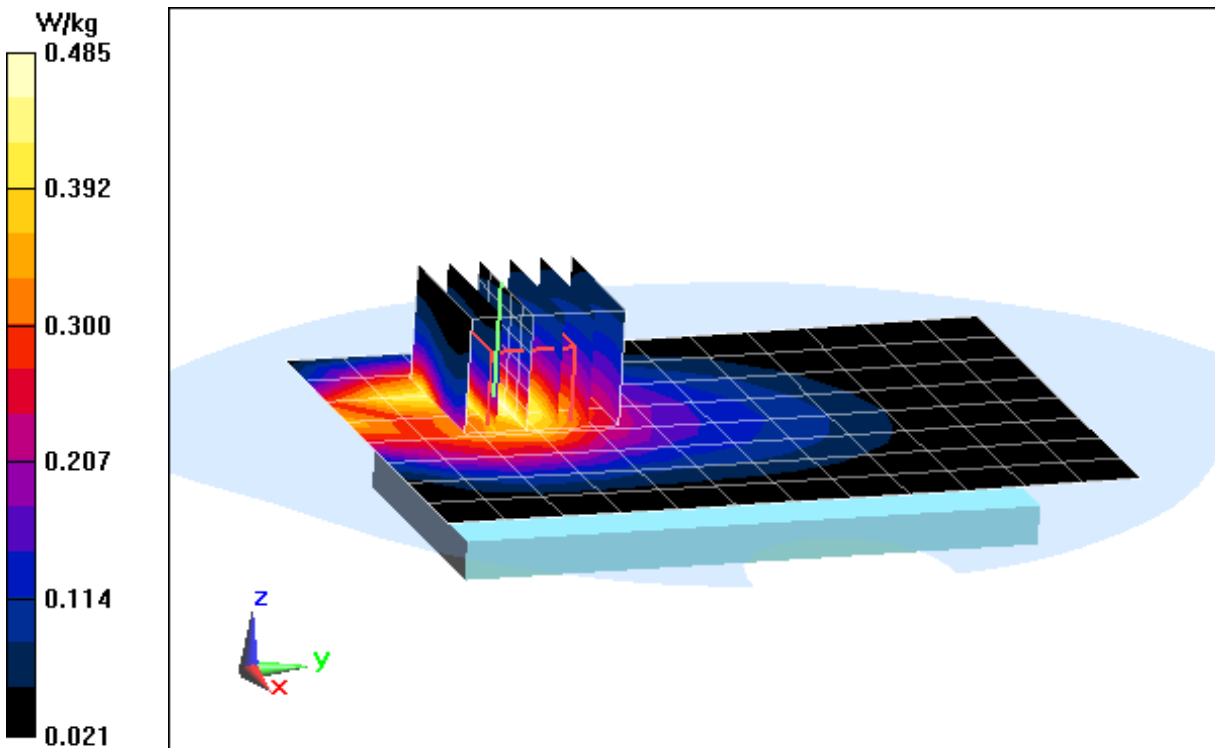

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01414**


Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: 835 Body Medium parameters used (interpolated):  
 $f = 831.5 \text{ MHz}$ ;  $\sigma = 1 \text{ S/m}$ ;  $\epsilon_r = 56.476$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-26-2017; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.86 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.717 W/kg**

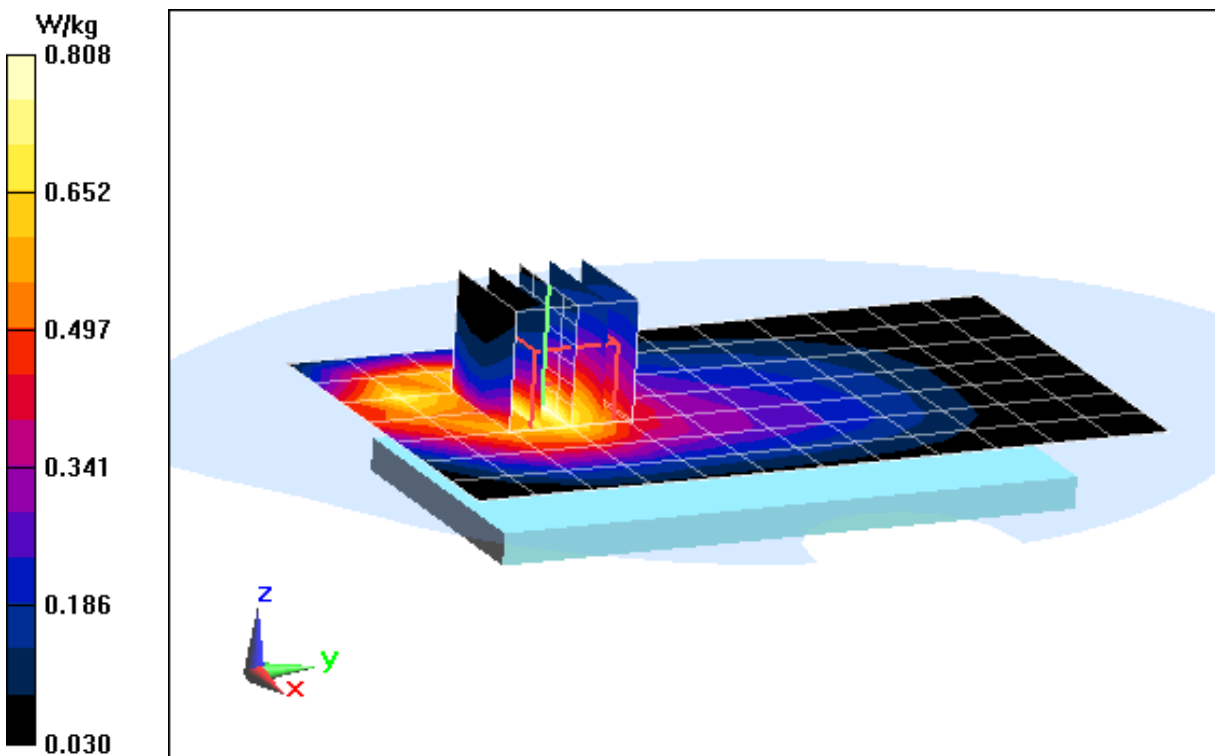

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01414**


Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: 1750 Body Medium parameters used (interpolated):  
 $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.488 \text{ S/m}$ ;  $\epsilon_r = 51.643$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 23.6°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(4.99, 4.99, 4.99); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.87 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 1.21 W/kg  
**SAR(1 g) = 0.826 W/kg**

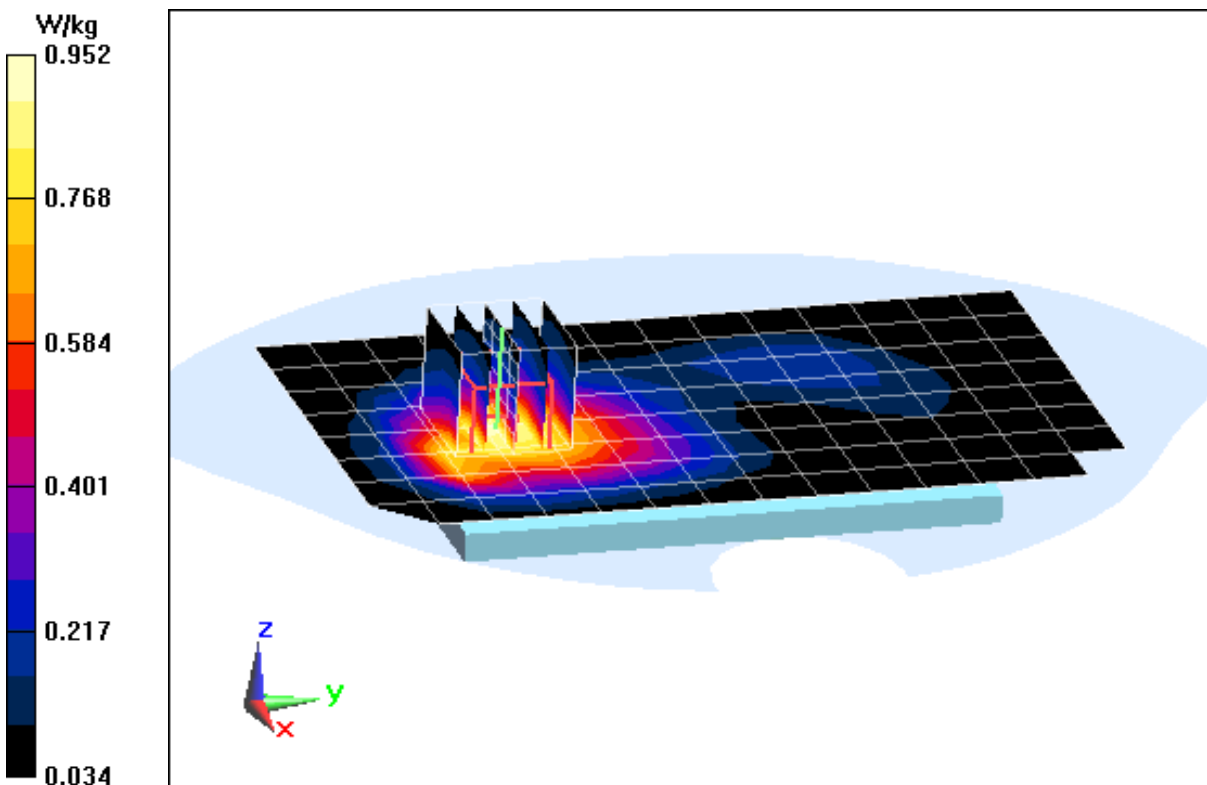

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01413**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1860 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 52.055$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 23.9°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.42 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.27 W/kg  
**SAR(1 g) = 0.778 W/kg**

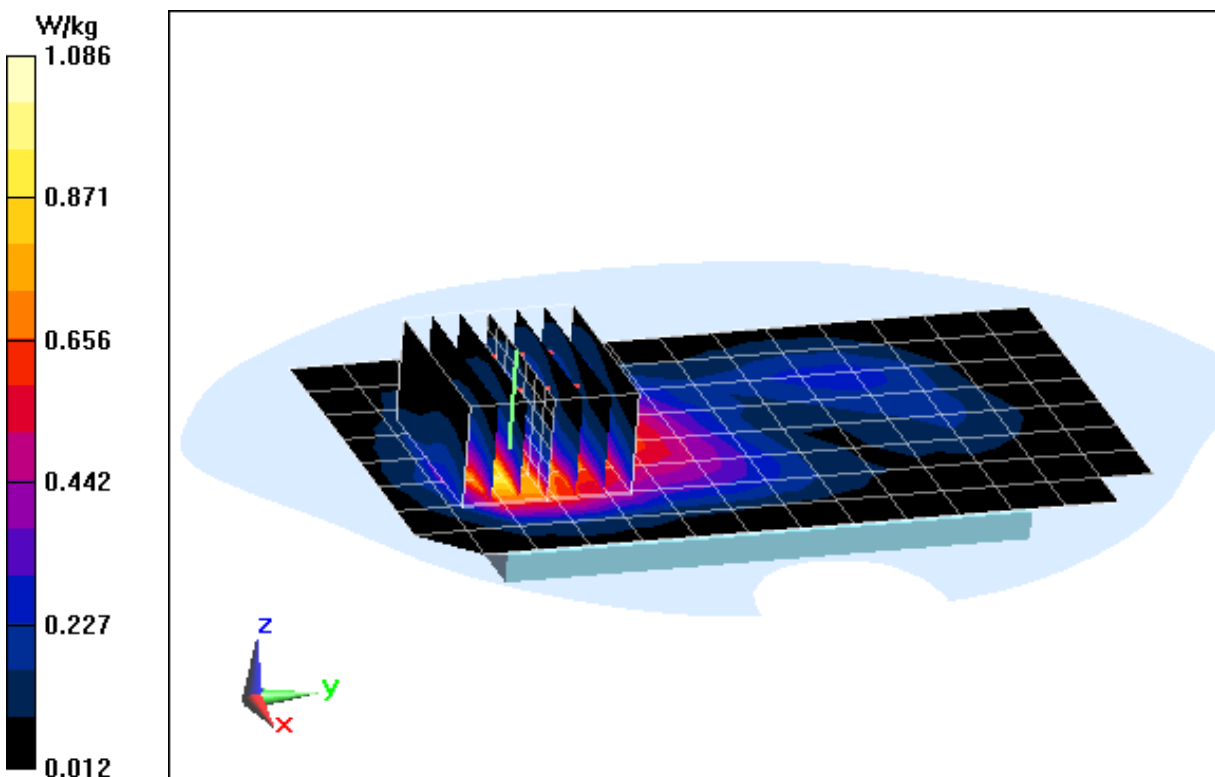

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01413**


Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1860 \text{ MHz}$ ;  $\sigma = 1.527 \text{ S/m}$ ;  $\epsilon_r = 53.348$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge,  
Low.ch, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

**Area Scan (9x9x1):** Measurement grid: dx=5mm, dy=15mm  
**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.44 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.69 W/kg  
**SAR(1 g) = 0.987 W/kg**

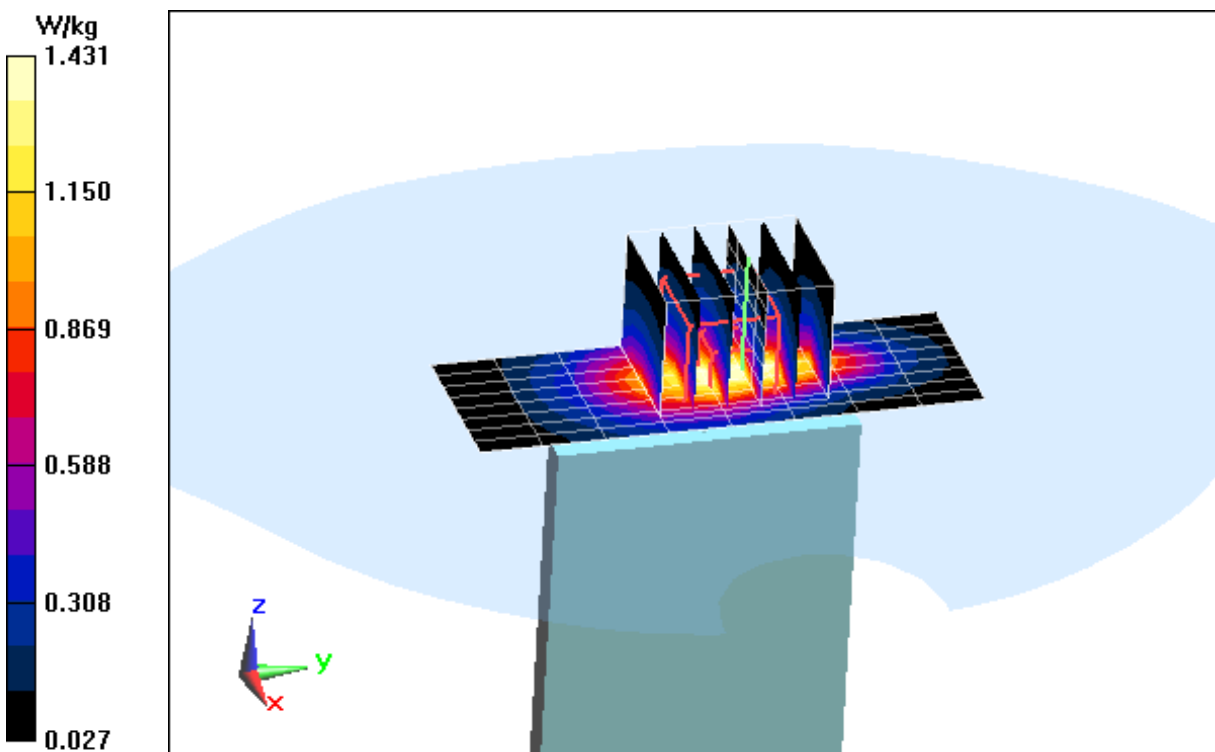



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01414**


Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2593 \text{ MHz}$ ;  $\sigma = 2.21 \text{ S/m}$ ;  $\epsilon_r = 51.329$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(3.99, 3.99, 3.99); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Back side, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 16.82 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 1.32 W/kg  
**SAR(1 g) = 0.532 W/kg**

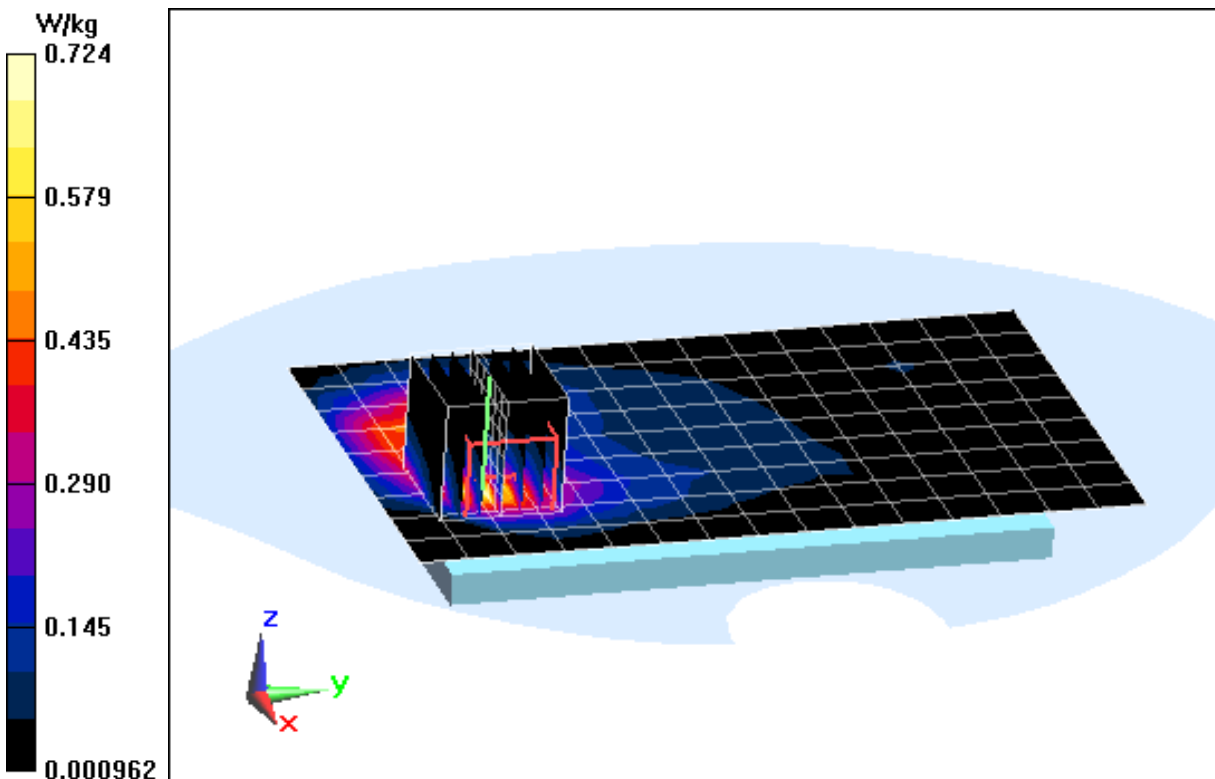

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01414**


Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2593 \text{ MHz}$ ;  $\sigma = 2.21 \text{ S/m}$ ;  $\epsilon_r = 51.329$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(3.99, 3.99, 3.99); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Bottom Edge, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 18.44 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.34 W/kg  
**SAR(1 g) = 0.650 W/kg**

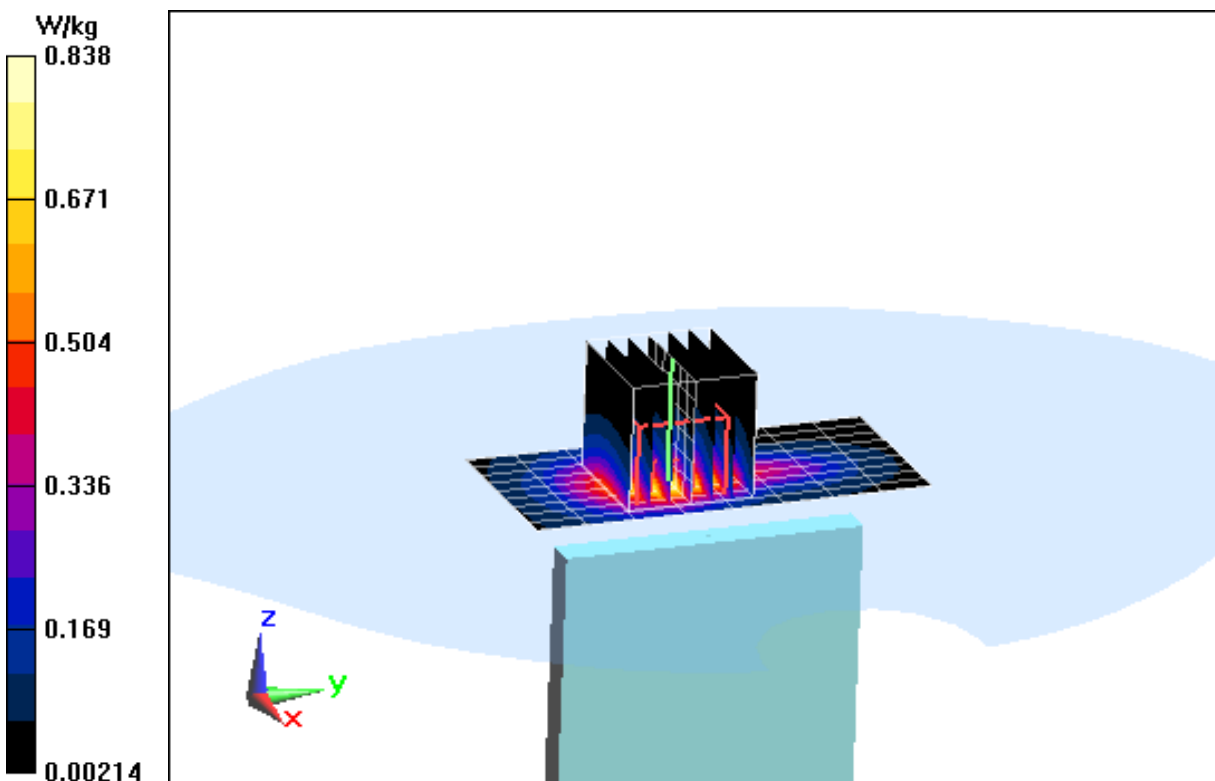

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01430**

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used (interpolated):  
 $f = 2437 \text{ MHz}$ ;  $\sigma = 1.998 \text{ S/m}$ ;  $\epsilon_r = 51.907$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Antenna 2,  
Body SAR, Ch 06, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.386 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.291 W/kg

**SAR(1 g) = 0.151 W/kg**

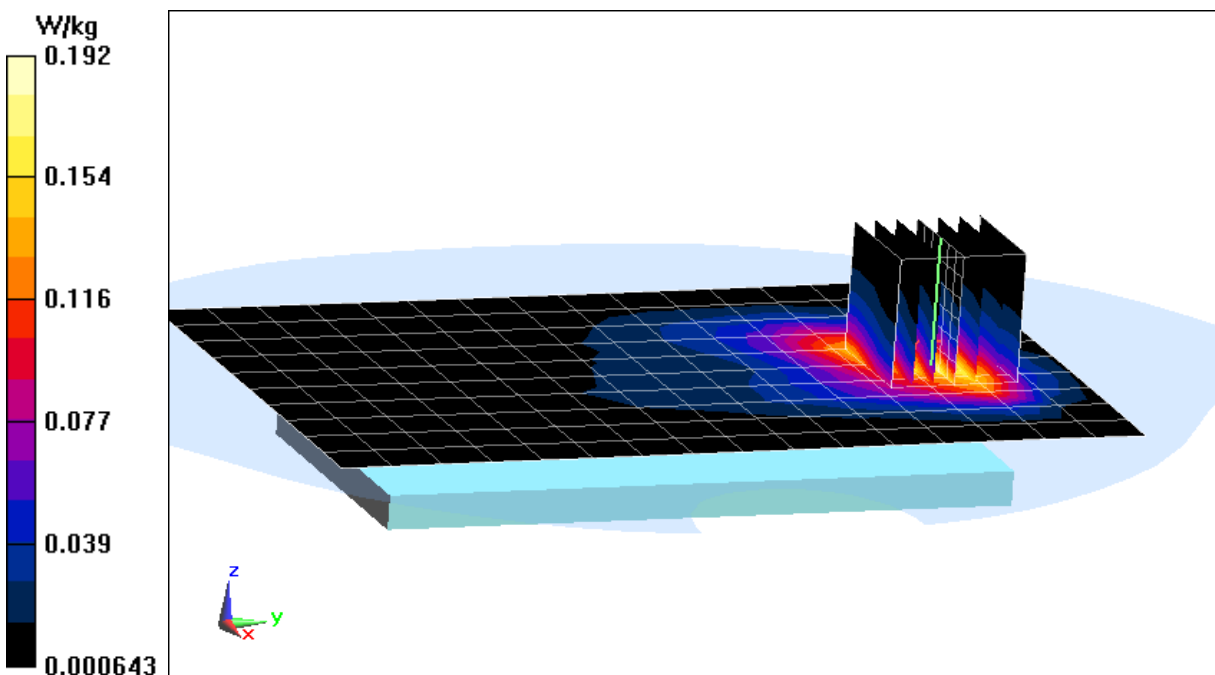

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01430**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5580 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used:  
 $f = 5580 \text{ MHz}$ ;  $\sigma = 5.935 \text{ S/m}$ ;  $\epsilon_r = 47.666$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth,  
Antenna 1, Body SAR, Ch 116, 6 Mbps, Back Side**


**Area Scan (13x19x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 10.90 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 0.598 W/kg**

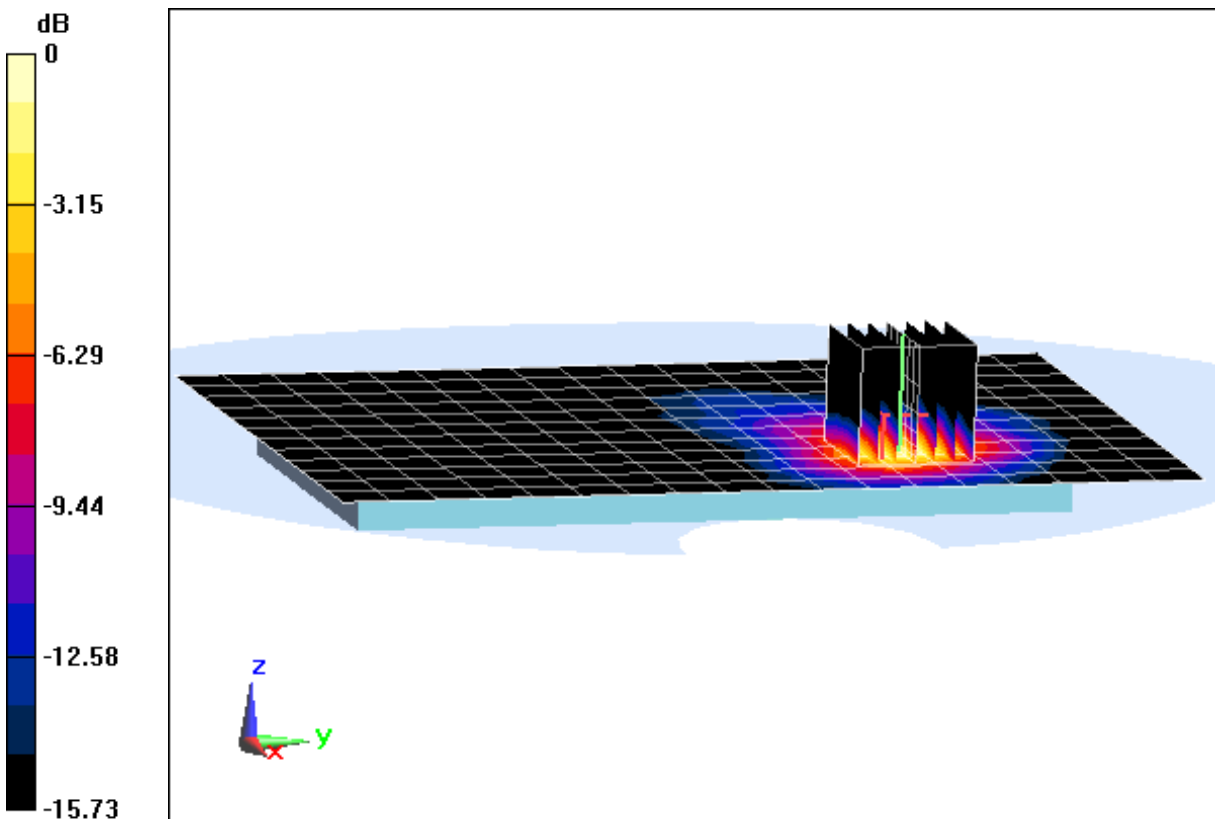

0 dB = 1.43 W/kg = 1.55 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFLS993; Type: Portable Handset; Serial: 01430**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used:  
 $f = 5745 \text{ MHz}$ ;  $\sigma = 6.156 \text{ S/m}$ ;  $\epsilon_r = 47.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth,  
Antenna 1, Body SAR, Ch 149, 6 Mbps, Back Side**


**Area Scan (13x19x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 9.527 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.483 W/kg**

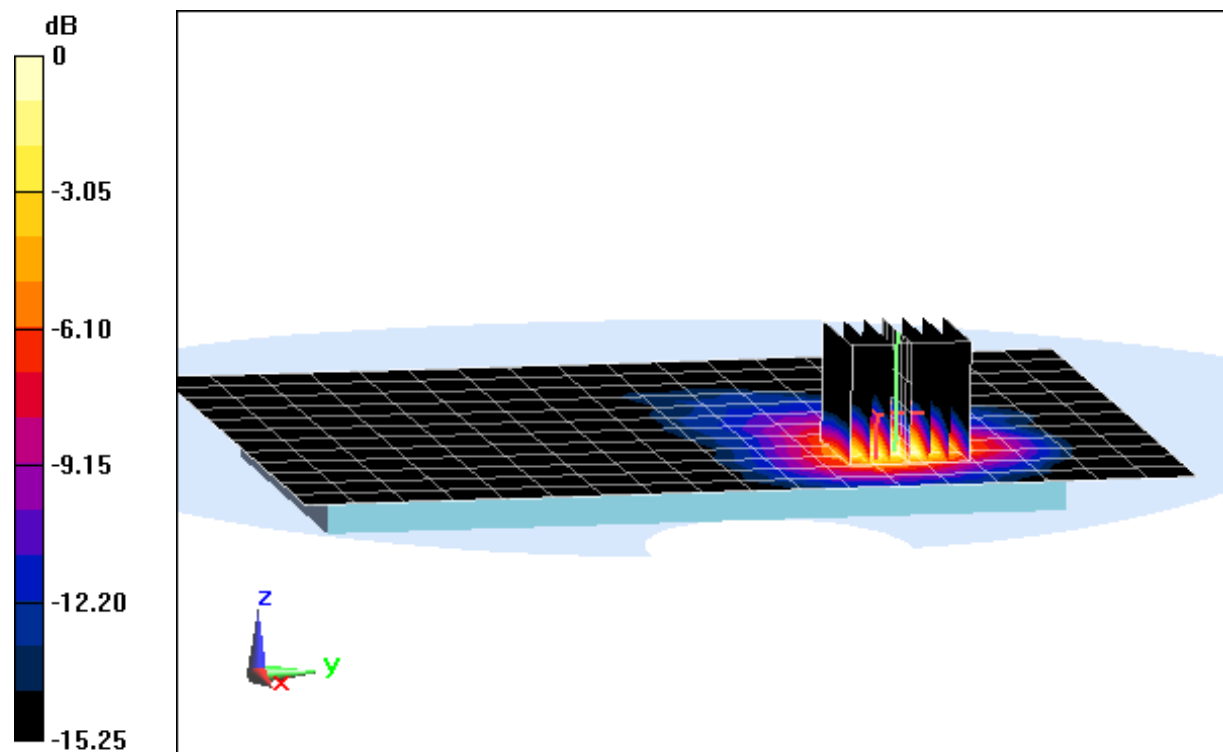

0 dB = 1.17 W/kg = 0.68 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: 750 Head Medium parameters used (interpolated):  
 $f = 750 \text{ MHz}$ ;  $\sigma = 0.906 \text{ S/m}$ ;  $\epsilon_r = 42.188$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-25-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3209; ConvF(6.6, 6.6, 6.6); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Right; Type: SAM; Serial: 1757

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 1.57 W/kg**

Deviation(1 g) = -3.92%

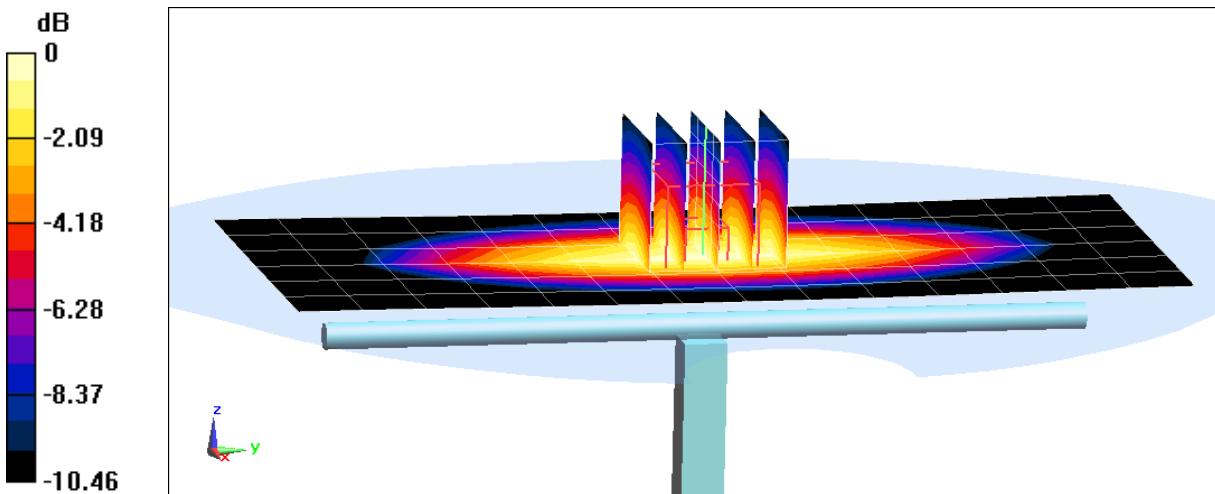

0 dB = 1.84 W/kg = 2.65 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.912 \text{ S/m}$ ;  $\epsilon_r = 43.015$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-31-2017; Ambient Temp: 23.1°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7409; ConvF(10.04, 10.04, 10.04); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.59 W/kg

**SAR(1 g) = 1.73 W/kg**

Deviation(1 g) = -5.26 %

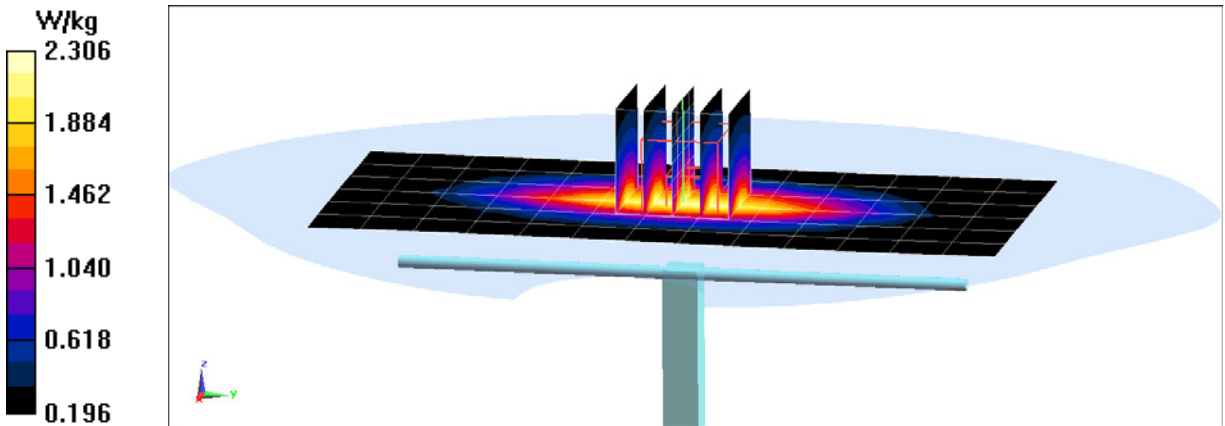



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 40.281$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-01-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3287; ConvF(6.67, 6.67, 6.67); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 1.87 W/kg**

Deviation(1 g) = 2.41%

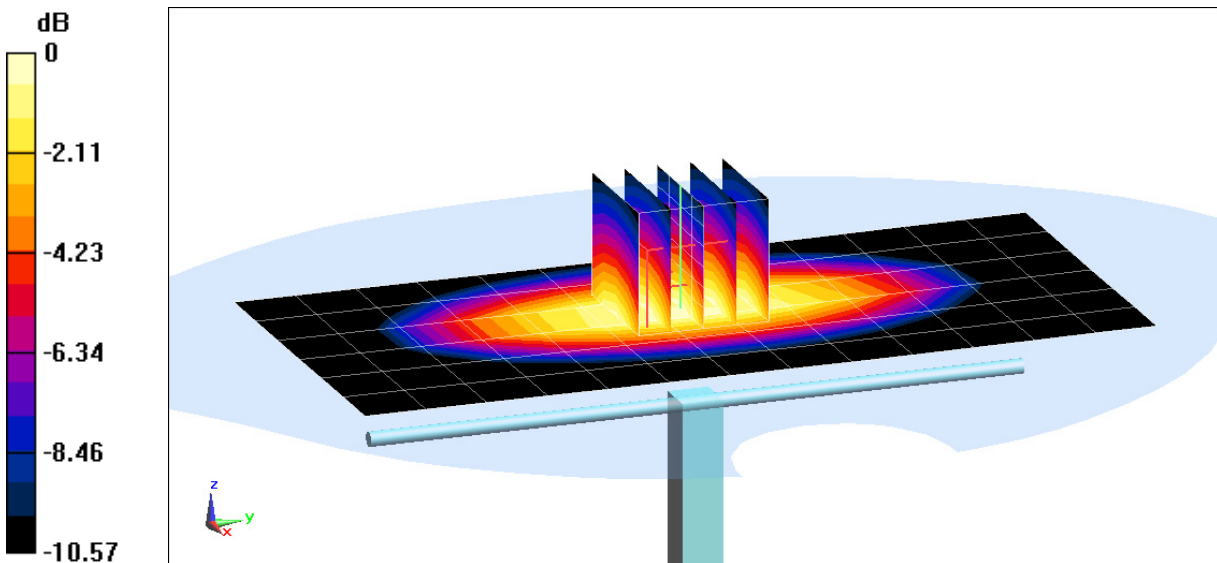

0 dB = 2.18 W/kg = 3.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**


Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: 1750 Head Medium parameters used:  
 $f = 1750 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 38.821$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2017; Ambient Temp: 24.0°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(5.28, 5.28, 5.28); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 1750 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 6.02 W/kg  
**SAR(1 g) = 3.37 W/kg**  
Deviation(1 g) = -6.91%

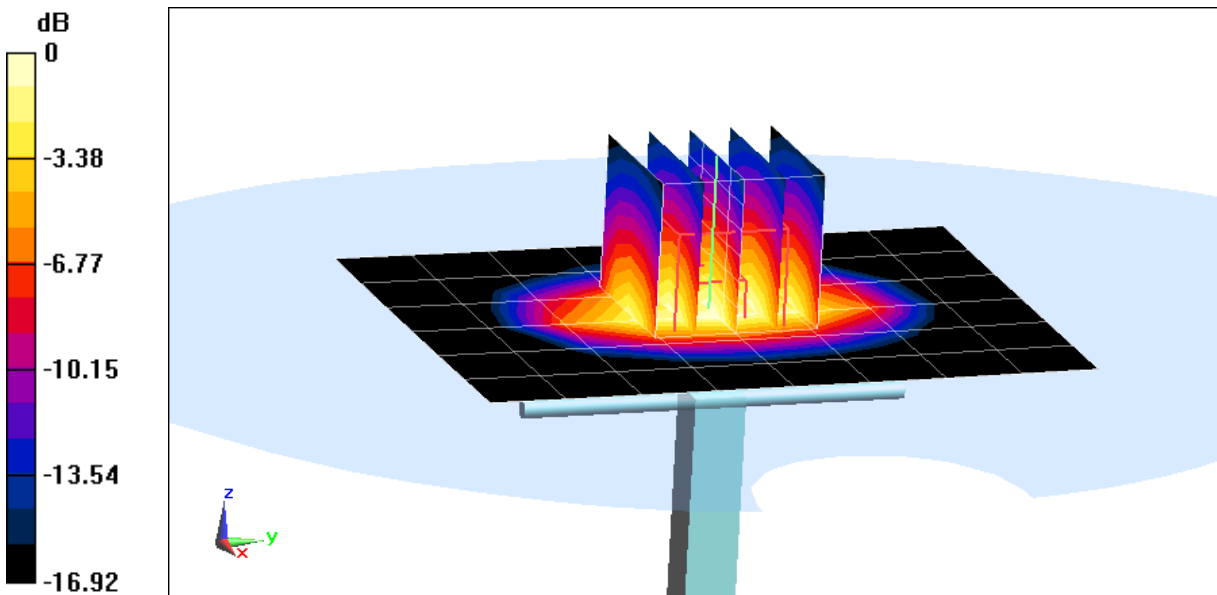

0 dB = 4.22 W/kg = 6.25 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Head Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.453 \text{ S/m}$ ;  $\epsilon_r = 38.166$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(5.45, 5.45, 5.45); Calibrated: 8/25/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1333; Calibrated: 9/15/2016  
Phantom: SAM Left; Type: SAM; Serial: 1688  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Peak SAR (extrapolated) = 7.11 W/kg  
**SAR(1 g) = 3.89 W/kg**  
Deviation(1 g) = -2.99%

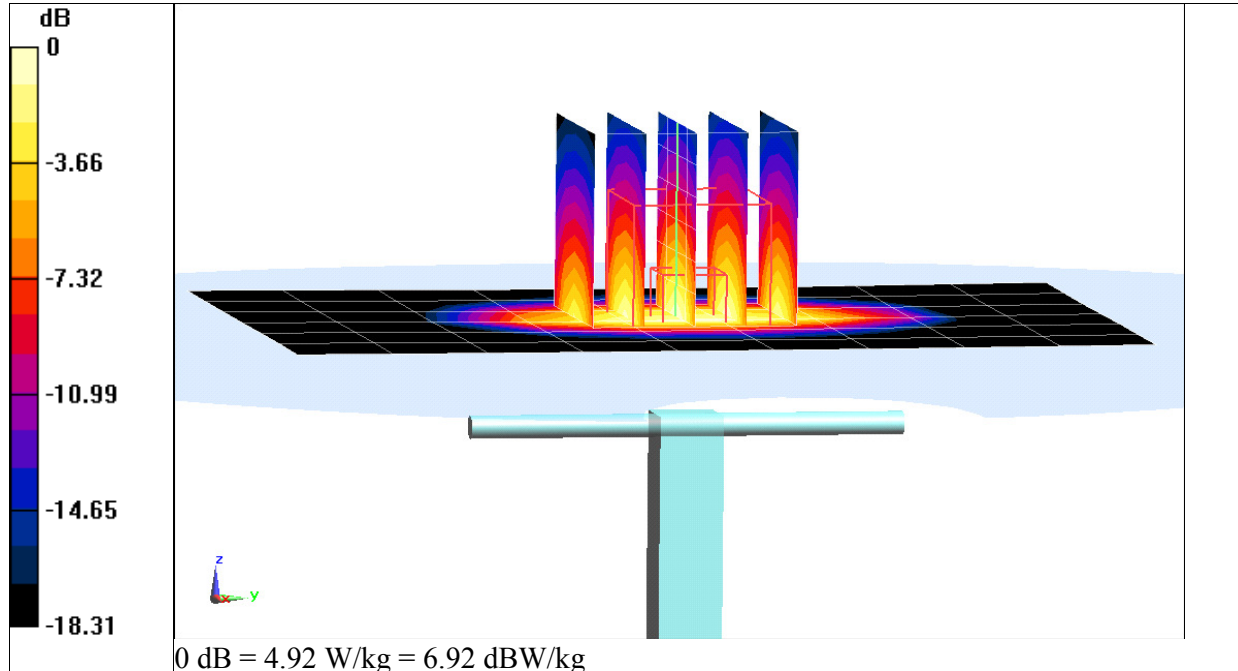

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.869 \text{ S/m}$ ;  $\epsilon_r = 38.155$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.54, 4.54, 4.54); Calibrated: 9/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 9/14/2016

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.9 W/kg

**SAR(1 g) = 5.64 W/kg**

Deviation(1 g) = 6.82%

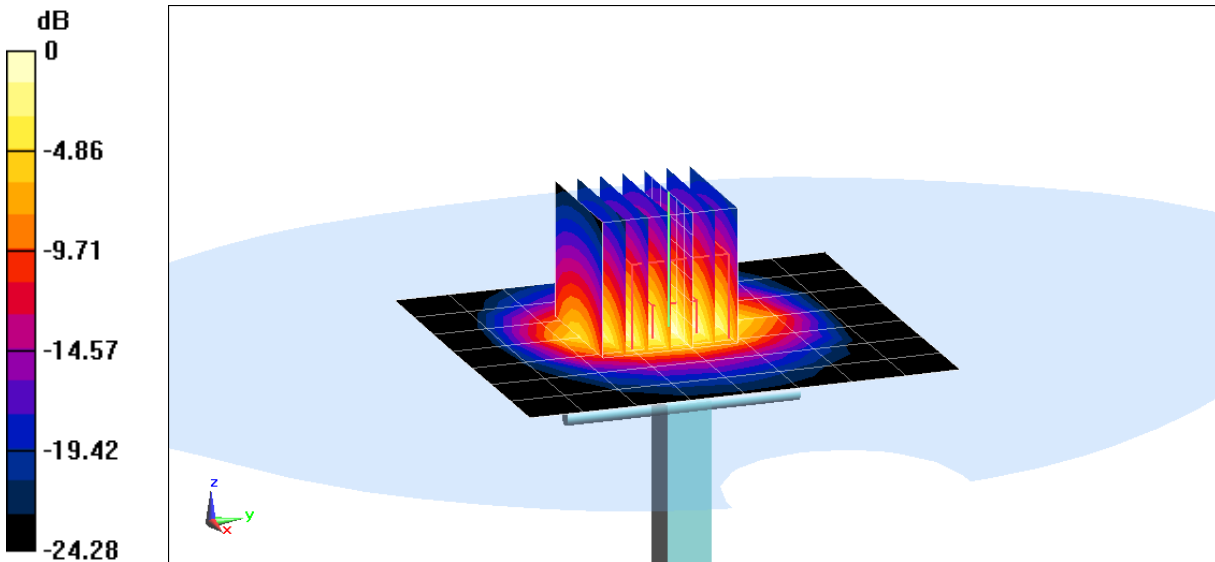

0 dB = 7.52 W/kg = 8.76 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**


Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: 2450 Head Medium parameters used:  
 $f = 2600 \text{ MHz}$ ;  $\sigma = 2.042 \text{ S/m}$ ;  $\epsilon_r = 37.518$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2017; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3287; ConvF(4.41, 4.41, 4.41); Calibrated: 9/19/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1408; Calibrated: 9/14/2016  
Phantom: SAM Front; Type: SAM; Serial: 1686  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Peak SAR (extrapolated) = 12.8 W/kg  
**SAR(1 g) = 5.61 W/kg**  
Deviation(1 g) = -0.36%

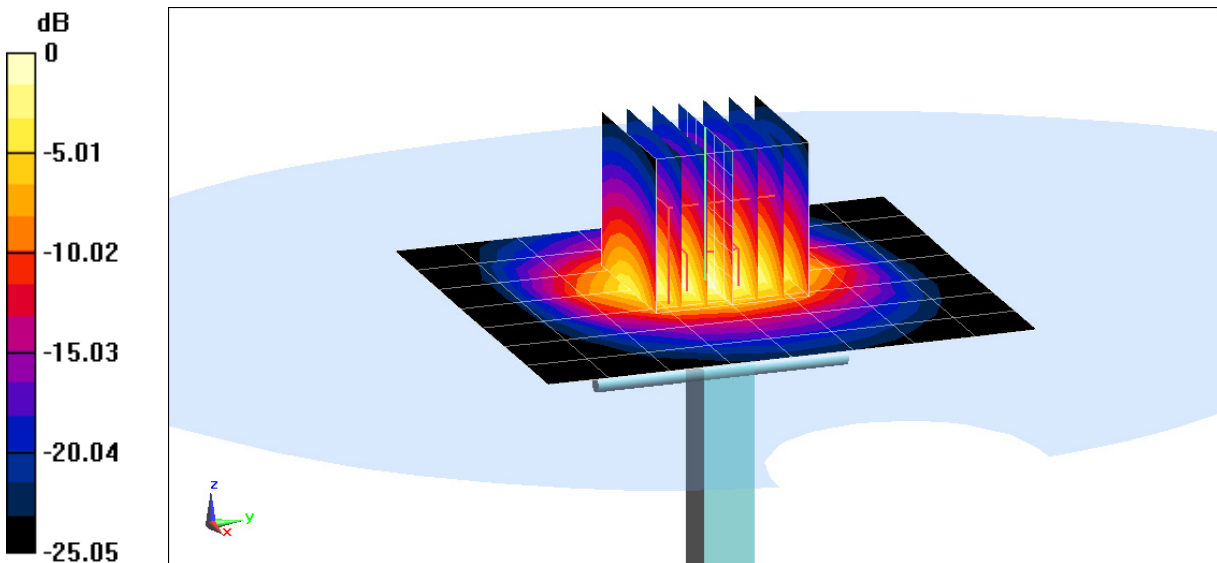

0 dB = 7.56 W/kg = 8.79 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head Medium parameters used (interpolated):  
 $f = 5250 \text{ MHz}$ ;  $\sigma = 4.572 \text{ S/m}$ ;  $\epsilon_r = 34.988$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(5.1, 5.1, 5.1); Calibrated: 4/19/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.0 W/kg

**SAR(1 g) = 3.88 W/kg**

Deviation(1 g) = -1.65%

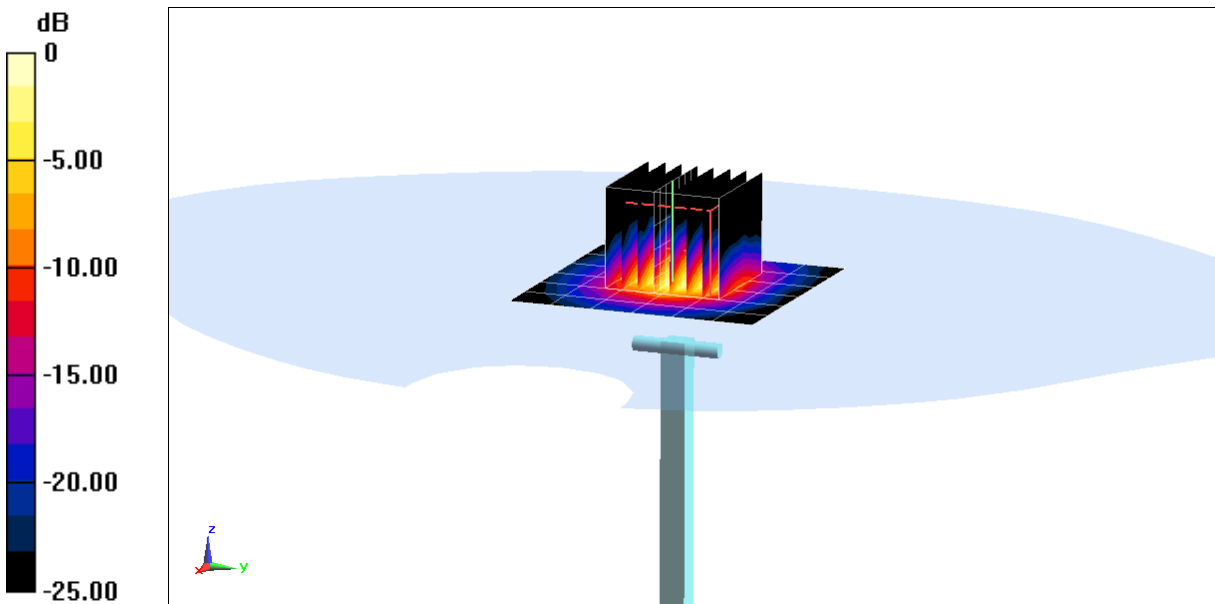

0 dB = 9.08 W/kg = 9.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 4.914 \text{ S/m}$ ;  $\epsilon_r = 34.502$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 4.12 W/kg**

Deviation(1 g) = -1.44%

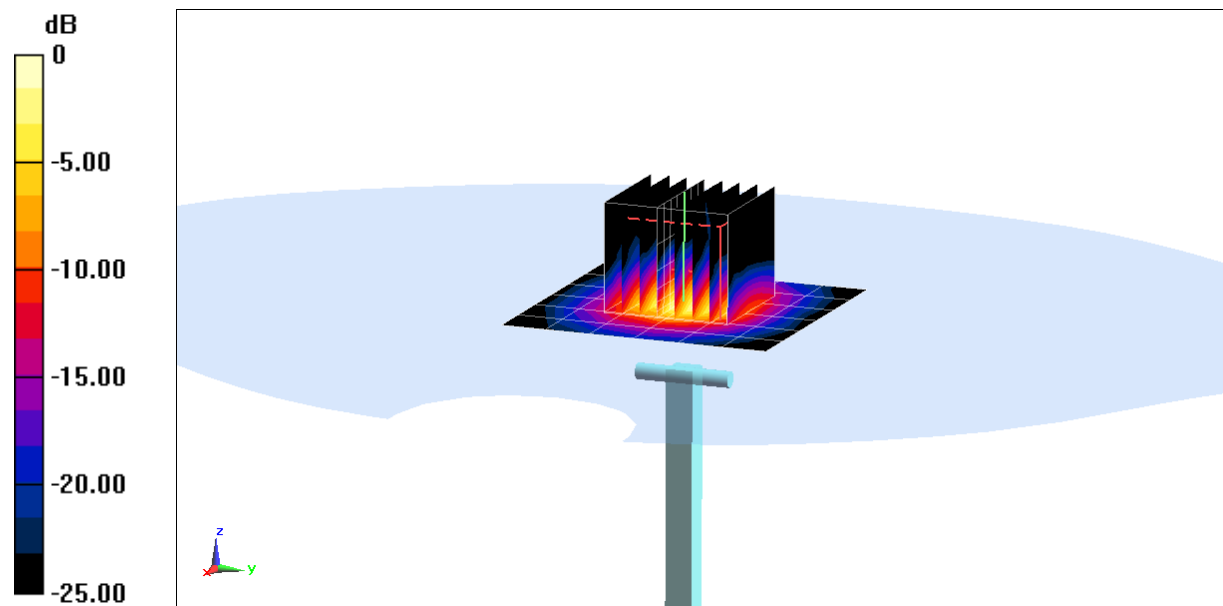

0 dB = 10.1 W/kg = 10.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: 5GHz Head Medium parameters used (interpolated):  
 $f = 5750 \text{ MHz}$ ;  $\sigma = 5.074 \text{ S/m}$ ;  $\epsilon_r = 34.319$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 20.9°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7357; ConvF(4.65, 4.65, 4.65); Calibrated: 4/19/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

**SAR(1 g) = 3.91 W/kg**

Deviation(1 g) = -1.14%

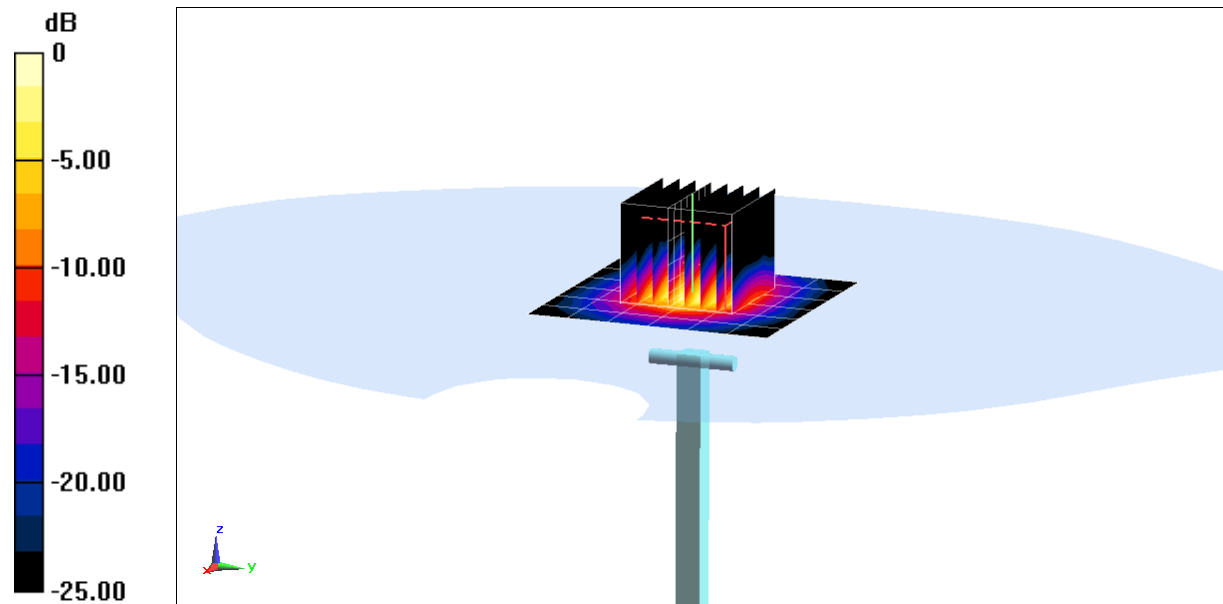

0 dB = 9.67 W/kg = 9.85 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**


Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: 750 Body Medium parameters used (interpolated):  
 $f = 750 \text{ MHz}$ ;  $\sigma = 0.961 \text{ S/m}$ ;  $\epsilon_r = 54.452$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-30-2017; Ambient Temp: 22.7°C; Tissue Temp: 20.8°C

Probe: ES3DV3 - SN3209; ConvF(6.19, 6.19, 6.19); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1364; Calibrated: 8/22/2016  
Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 750 MHz System Verification at 23.0 dBm (200 mW)

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 2.57 W/kg  
**SAR(1 g) = 1.76 W/kg**  
Deviation(1 g) = 4.39%

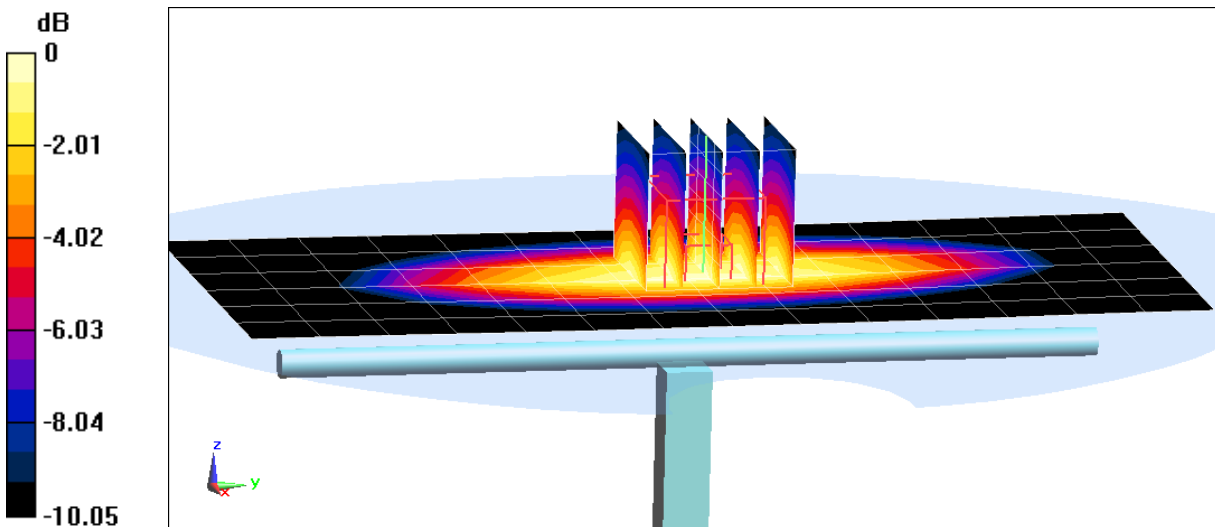

0 dB = 2.05 W/kg = 3.12 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 1.004 \text{ S/m}$ ;  $\epsilon_r = 53.787$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02-01-2017; Ambient Temp: 22.6°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.03 W/kg

**SAR(1 g) = 2.04 W/kg**

Deviation(1 g) = 6.58%

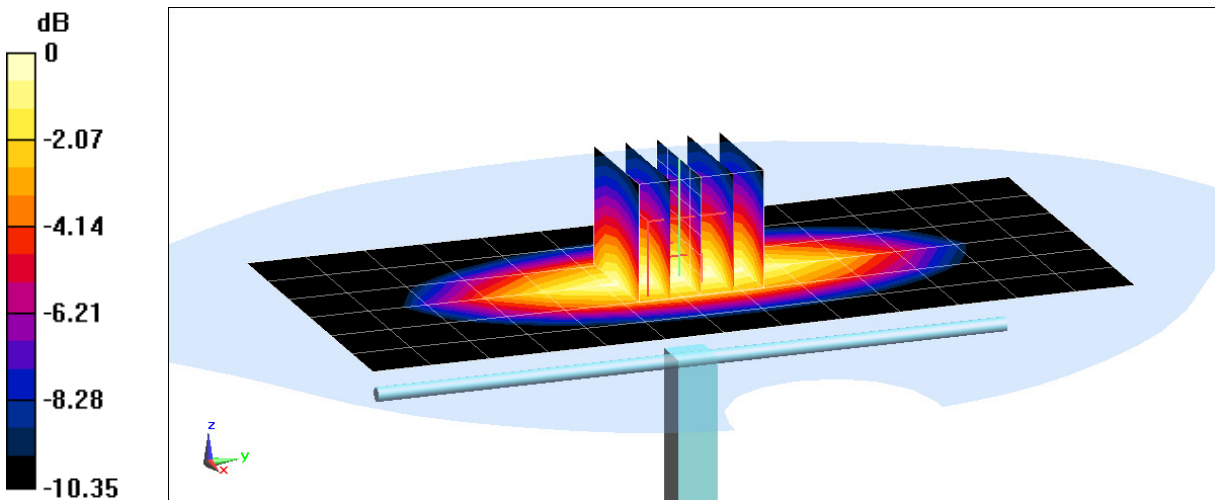

0 dB = 2.39 W/kg = 3.78 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.506 \text{ S/m}$ ;  $\epsilon_r = 51.573$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-23-2017; Ambient Temp: 23.6°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3209; ConvF(4.99, 4.99, 4.99); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 8/22/2016

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.96 W/kg

**SAR(1 g) = 3.93 W/kg**

Deviation(1 g) = 5.93%

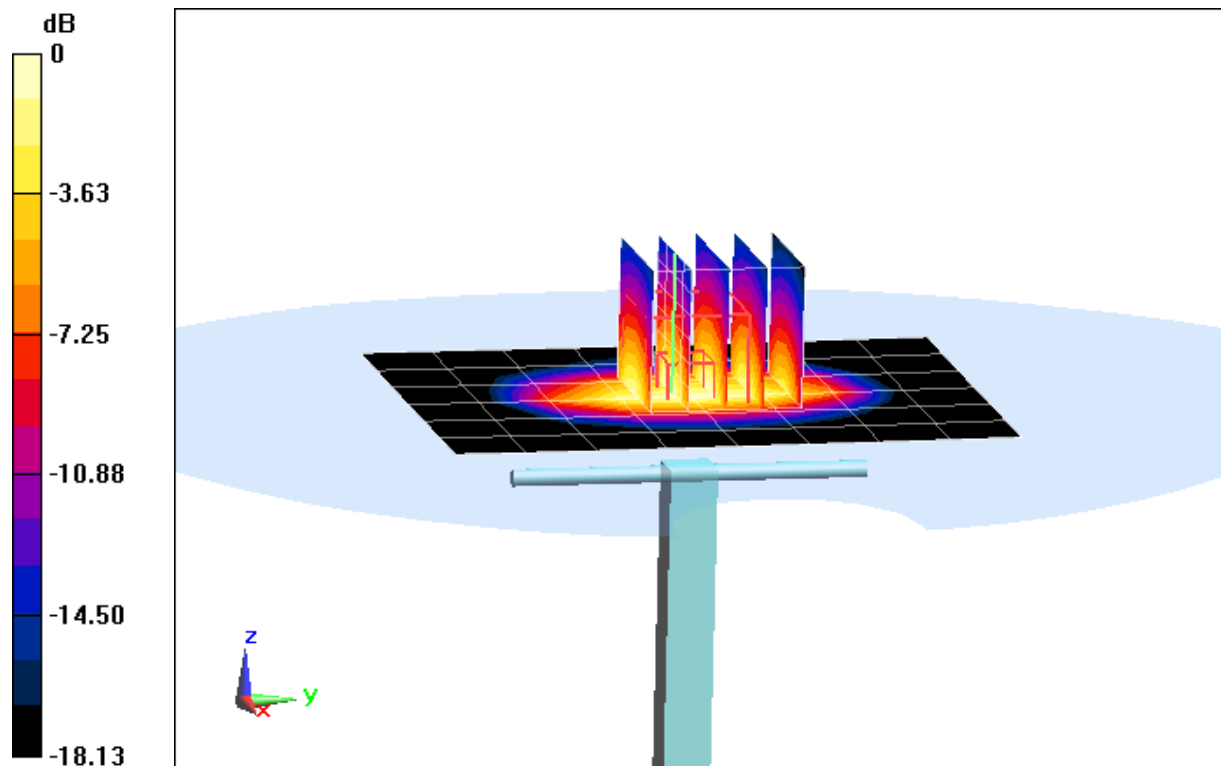

0 dB = 4.81 W/kg = 6.82 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.488 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2017; Ambient Temp: 23.2°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(4.94, 4.94, 4.94); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.23 W/kg

**SAR(1 g) = 3.57 W/kg**

Deviation(1 g) = -3.77%

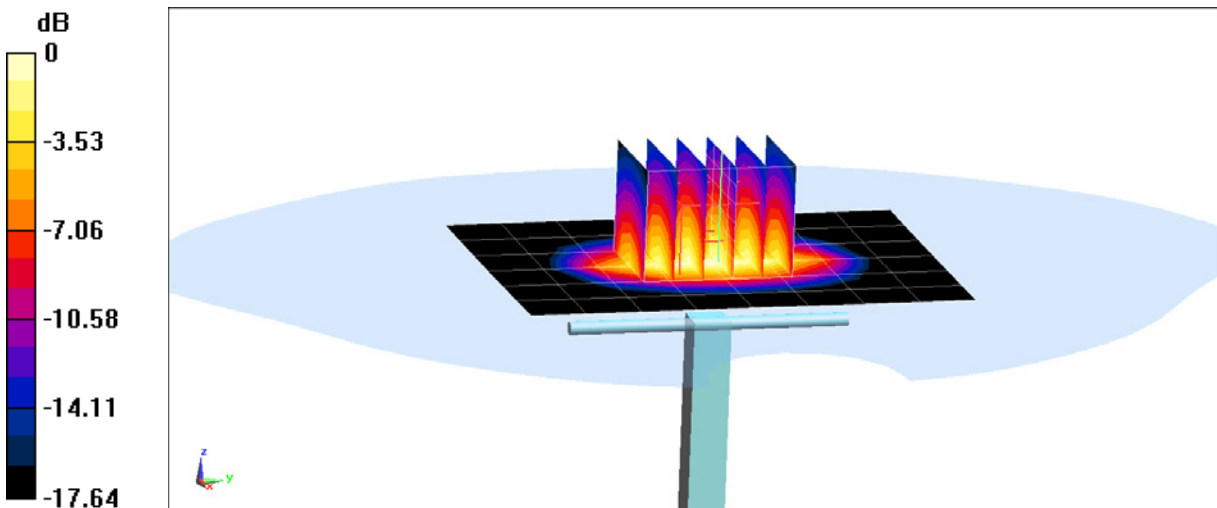

0 dB = 4.46 W/kg = 6.49 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.559 \text{ S/m}$ ;  $\epsilon_r = 52.151$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-25-2017; Ambient Temp: 24.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 7.37 W/kg  
**SAR(1 g) = 3.98 W/kg**  
Deviation(1 g) = 1.79%

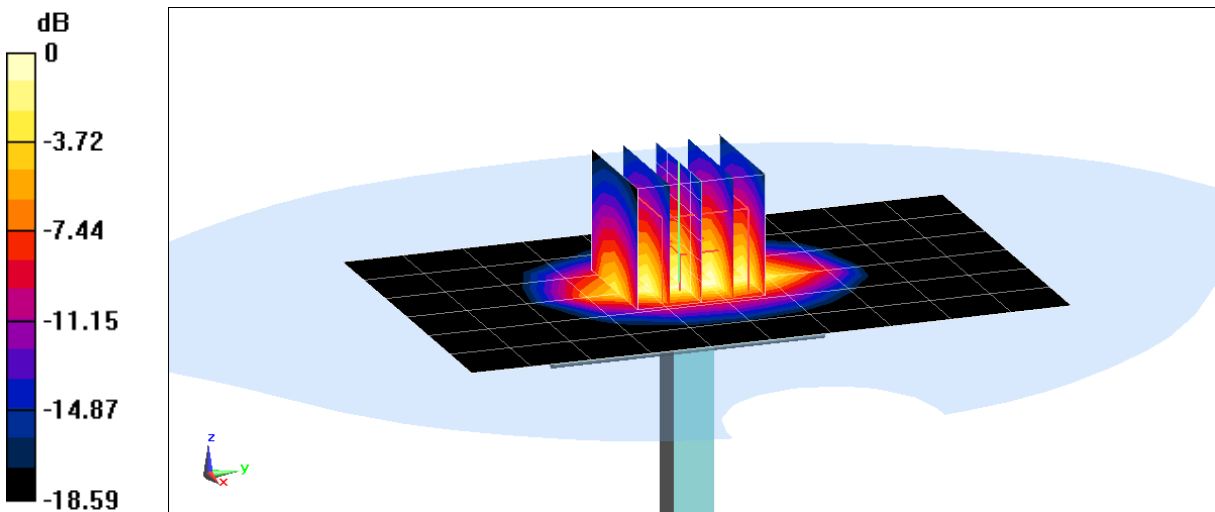

0 dB = 6.13 W/kg = 7.87 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: 1900 Body Medium parameters used (interpolated):  
 $f = 1900 \text{ MHz}$ ;  $\sigma = 1.574 \text{ S/m}$ ;  $\epsilon_r = 53.213$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 22.3°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn859; Calibrated: 5/11/2016  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Peak SAR (extrapolated) = 7.50 W/kg  
**SAR(1 g) = 4.09 W/kg**  
Deviation(1 g) = 2.51%

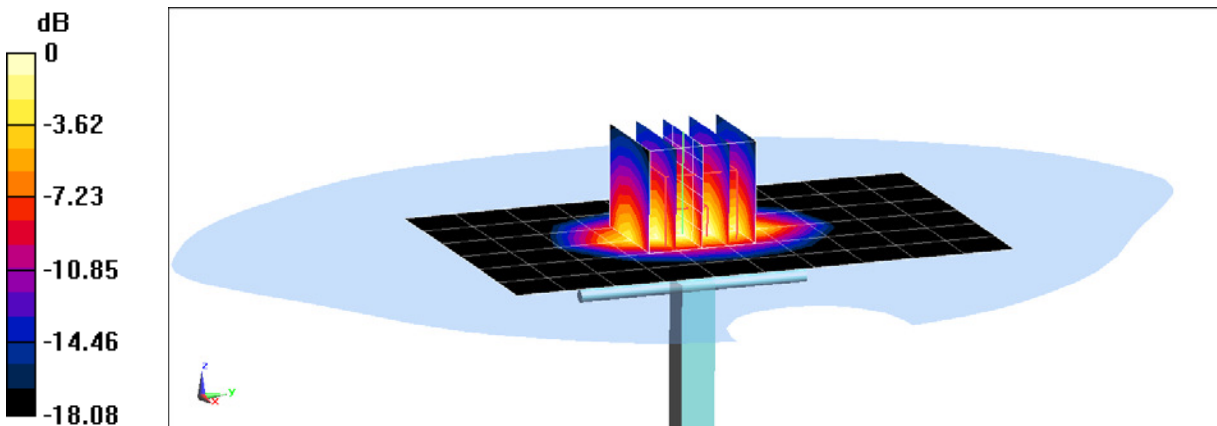

0 dB = 6.32 W/kg = 8.01 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.014$  S/m;  $\epsilon_r = 51.856$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.21 W/kg**

Deviation(1 g) = 2.76%

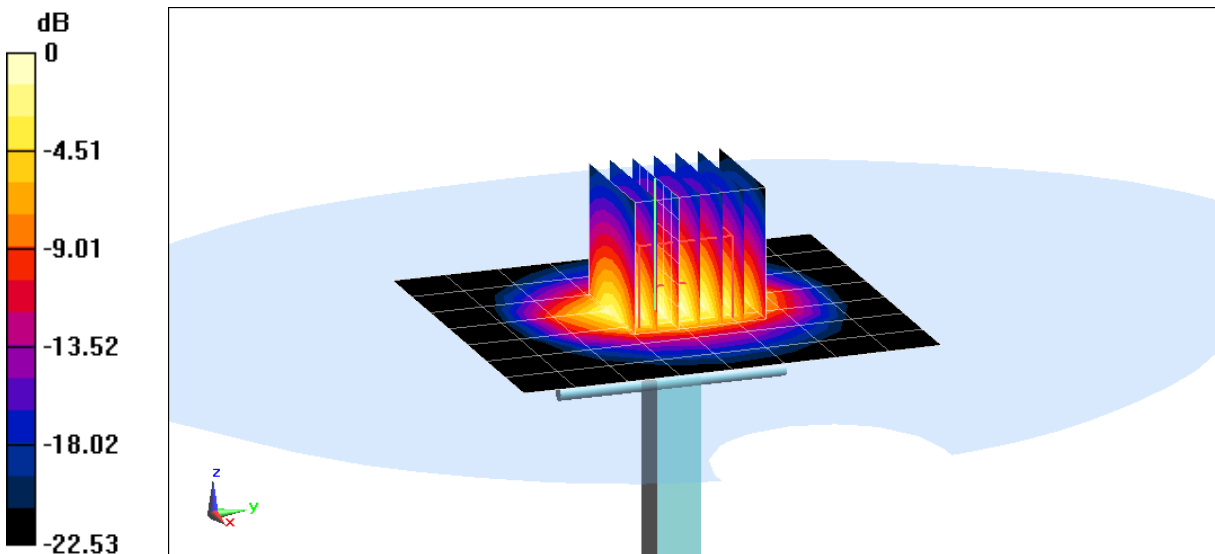

0 dB = 6.85 W/kg = 8.36 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**


Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: 2450 Body Medium parameters used:  
 $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 51.304$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(3.99, 3.99, 3.99); Calibrated: 3/18/2016;  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016  
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification at 20.0 dBm (100 mW)

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm  
**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Peak SAR (extrapolated) = 12.8 W/kg  
**SAR(1 g) = 5.76 W/kg**  
Deviation(1 g) = 5.69%

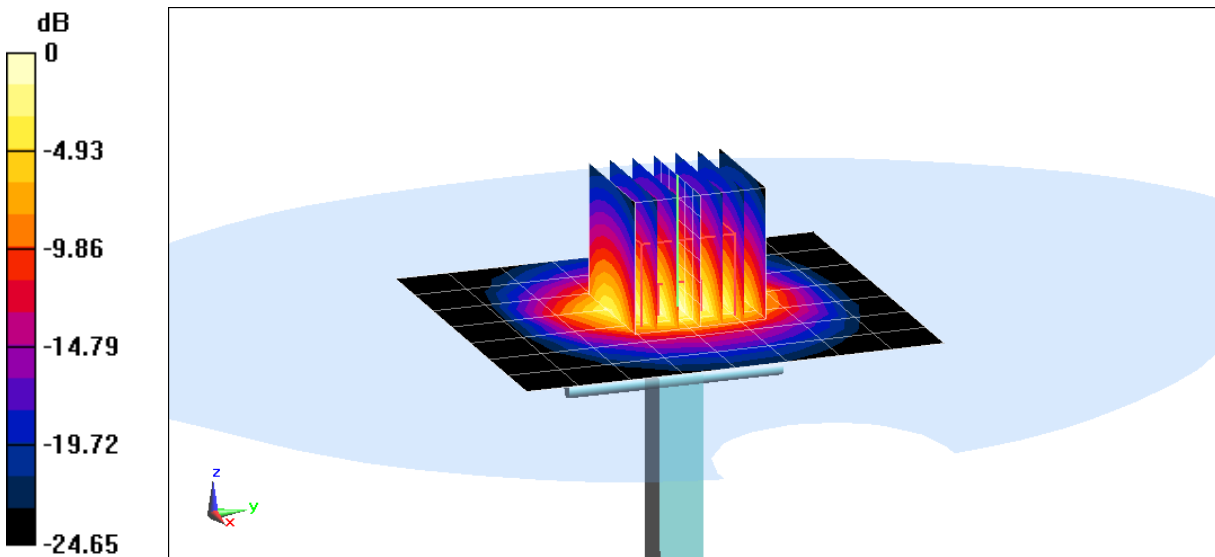

0 dB = 7.64 W/kg = 8.83 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used (interpolated):  
 $f = 5250 \text{ MHz}$ ;  $\sigma = 5.492 \text{ S/m}$ ;  $\epsilon_r = 48.173$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 21.9°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF(4.32, 4.32, 4.32); Calibrated: 2/22/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.4 W/kg

**SAR(1 g) = 3.49 W/kg**

Deviation(1 g) = -6.43%

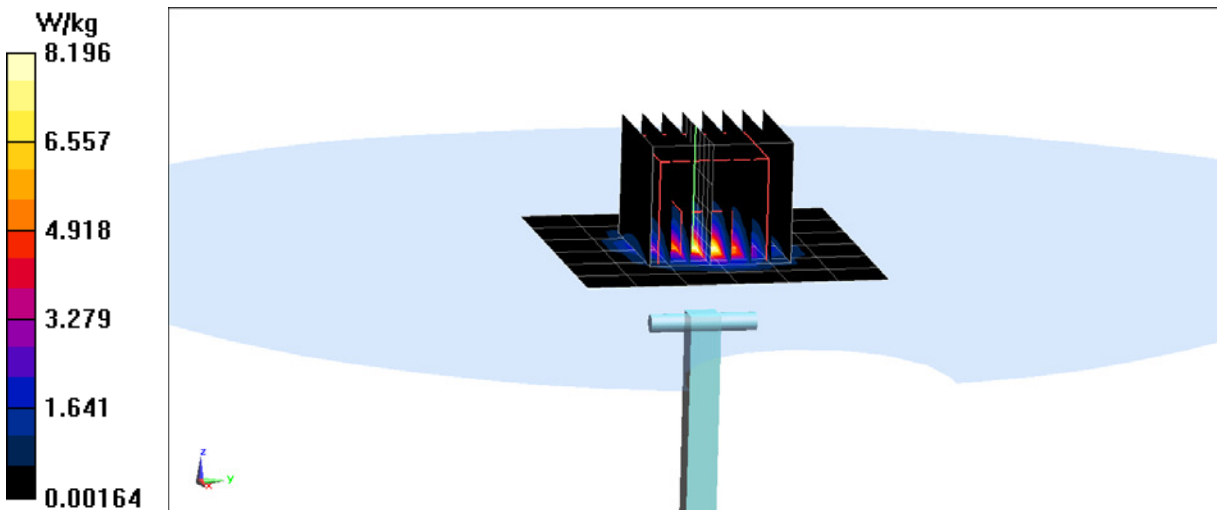

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used:  
 $f = 5600 \text{ MHz}$ ;  $\sigma = 5.973 \text{ S/m}$ ;  $\epsilon_r = 47.621$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

**SAR(1 g) = 3.88 W/kg**

Deviation(1 g) = -1.65%

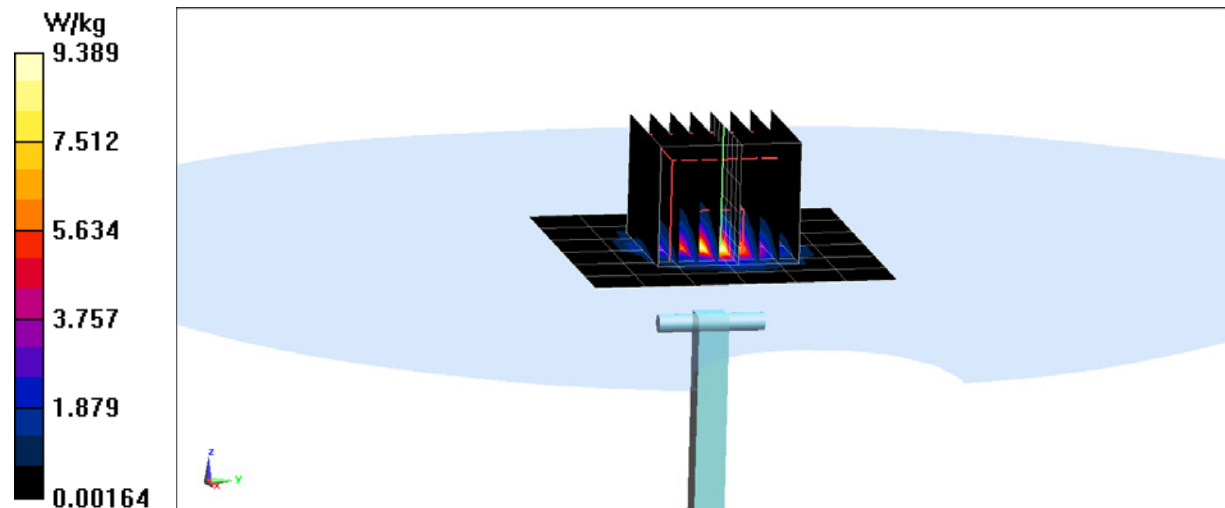

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: 5 GHz Body Medium parameters used (interpolated):  
 $f = 5750 \text{ MHz}$ ;  $\sigma = 6.165 \text{ S/m}$ ;  $\epsilon_r = 47.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-30-2017; Ambient Temp: 21.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646  
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5750 MHz System Verification at 17.0 dBm (50 mW)

**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.0 W/kg

**SAR(1 g) = 3.46 W/kg**

Deviation(1 g) = -8.34%

