



SAR EVALUATION REPORT

Applicant Name:
 LG Electronics MobileComm U.S.A., Inc.
 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632
 United States

Date of Testing:
 03/08/18 - 03/26/18
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 1M1803050033-01-R3.ZNF

FCC ID: ZNFQ710TS

APPLICANT: LG ELECTRONICS MOBILECOMM U.S.A., INC.

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: LM-Q710TS
Additional Model(s): LMQ710TS, Q710TS, LM-Q710MS, LMQ710MS, Q710MS

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.24	0.48	0.54	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.10	0.39	0.59	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.27	0.61	0.82	N/A
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.10	0.46	0.69	2.24
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.15	0.64	1.22	3.18
PCE	LTE Band 71	665.5 - 695.5 MHz	0.11	0.56	0.58	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.17	0.68	0.71	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.21	0.75	0.82	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.22	0.66	0.75	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.11	0.44	0.87	3.20
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.14	0.55	1.15	3.20
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.16	0.28	N/A
DTS	2.4 GHz WLAN	2412 - 2462 MHz	1.12	0.22	0.23	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	0.80	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.80	0.76	N/A	2.38
NII	U-NII-2C	5500 - 5700 MHz	0.90	0.76	N/A	1.70
NII	U-NII-3	5745 - 5825 MHz	0.49	0.89	0.89	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.15	N/A	N/A	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.38	1.57	1.58	3.80

Note: This revised Test Report (S/N: 1M1803050033-01-R3.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez
 President





The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 1 of 97	

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	12
3	INTRODUCTION	13
4	DOSIMETRIC ASSESSMENT	14
5	DEFINITION OF REFERENCE POINTS.....	15
6	TEST CONFIGURATION POSITIONS.....	16
7	RF EXPOSURE LIMITS	20
8	FCC MEASUREMENT PROCEDURES.....	21
9	RF CONDUCTED POWERS	27
10	SYSTEM VERIFICATION.....	57
11	SAR DATA SUMMARY	61
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	79
13	SAR MEASUREMENT VARIABILITY	91
14	EQUIPMENT LIST.....	93
15	MEASUREMENT UNCERTAINTIES.....	94
16	CONCLUSION.....	95
17	REFERENCES	96
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	
APPENDIX D:	SAR TISSUE SPECIFICATIONS	
APPENDIX E:	SAR SYSTEM VALIDATION	
APPENDIX F:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX G:	POWER REDUCTION VERIFICATION	

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 2 of 97	

1 DEVICE UNDER TEST



1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5700 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's hand. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device being used in phablet conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 3 of 97	



1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power



Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.7	33.7	32.2	30.7	29.2	27.7	27.7	27.2	27.2
	Nominal	33.2	33.2	31.7	30.2	28.7	27.2	27.2	26.7	26.7
GSM/GPRS/EDGE 1900	Maximum	30.7	30.7	29.2	27.2	25.7	26.2	26.2	25.7	25.7
	Nominal	30.2	30.2	28.7	26.7	25.2	25.7	25.7	25.2	25.2

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	25.2	25.2	25.2
	Nominal	24.7	24.7	24.7
UMTS Band 4 (1750 MHz)	Maximum	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0
UMTS Band 2 (1900 MHz)	Maximum	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 4 of 97	

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	25.0
	Nominal	24.5
LTE Band 12	Maximum	25.5
	Nominal	25.0
LTE Band 13	Maximum	25.5
	Nominal	25.0
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 66 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	24.5
	Nominal	24.0
LTE Band 41	Maximum	24.0
	Nominal	23.5

Mode / Band		Modulated Average (dBm)			
		Ch. 1	Ch. 2,10	Ch. 3-9	Ch. 11
IEEE 802.11b (2.4 GHz)	Maximum	23.0			
	Nominal	22.0			
IEEE 802.11g (2.4 GHz)	Maximum	19.0	20.0	22.0	18.5
	Nominal	18.0	19.0	21.0	17.5
IEEE 802.11n (2.4 GHz)	Maximum	17.0	18.0	20.0	16.5
	Nominal	16.0	17.0	19.0	15.5

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 5 of 97	



Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	11.5
	Nominal	10.5
Bluetooth LE	Maximum	2.0
	Nominal	1.0

Mode / Band		Modulated Average (dBm)							
		20 MHz Bandwidth			40 MHz Bandwidth		80 MHz Bandwidth		
		Ch. 36, 64-100	Ch. 40-60, 104-136, 153-161	Ch. 140-149, 165	Ch. 38, 62 - 102	Ch. 46-54, 110, 118-126, 134, 151-159	Ch. 42, 106	Ch. 58	Ch. 122-155
IEEE 802.11a (5 GHz)	Maximum	16.0	20.0	18.0					
	Nominal	15.0	19.0	17.0					
IEEE 802.11n (5 GHz)	Maximum	13.0	17.0	15.0	13.0	15.0			
	Nominal	12.0	16.0	14.0	12.0	14.0			
IEEE 802.11ac (5 GHz)	Maximum	12.0	16.0	14.0	11.0	13.0	11.0	12.0	13.0
	Nominal	11.0	15.0	13.0	10.0	12.0	10.0	11.0	12.0



1.3.2 Reduced Output Power

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 4 (1750 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	23.5
	Nominal	23.0

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 6 of 97

Mode / Band		Modulated Average (dBm)			
		Ch. 1	Ch. 2,10	Ch. 3-9	Ch. 11
IEEE 802.11b (2.4 GHz)	Maximum	19.0			
	Nominal	18.0			
IEEE 802.11g (2.4 GHz)	Maximum	16.0	17.0	19.0	15.5
	Nominal	15.0	16.0	18.0	14.5
IEEE 802.11n (2.4 GHz)	Maximum	16.0	17.0	19.0	15.5
	Nominal	15.0	16.0	18.0	14.5
Mode / Band		Modulated Average (dBm)			
		20 MHz Bandwidth			
		Ch. 36, 64-100	Ch. 40-60, 104-136, 153-161	Ch. 140-149, 165	
IEEE 802.11a (5 GHz)	Maximum	14.0	18.0	16.0	
	Nominal	13.0	17.0	15.0	

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 7 of 97	

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	No	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	No	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
LTE Band 71	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Yes	Yes	No	Yes	No	Yes
LTE Band 13	Yes	Yes	No	Yes	No	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	No	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-2A, U-NII-2C operations are disabled. Therefore, U-NII-2A, U-NII-2C operations are not considered in this section.



1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 8 of 97

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	Yes	
2	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz Bluetooth	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
4	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes	
5	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	Yes	
6	UMTS + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
7	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes	
8	LTE + 5 GHz WI-FI	Yes	Yes	Yes	Yes	
9	LTE + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
10	GPRS/EDGE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
11	GPRS/EDGE + 5 GHz WI-FI	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
12	GPRS/EDGE + 2.4 GHz Bluetooth	Yes [^]	Yes*	Yes [^]	Yes	[^] Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, therefore, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VoWIFI.
- This device supports Bluetooth tethering.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT



Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1, and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot Bluetooth SAR was not required; $[(14/10)^* \sqrt{2.480}] = 2.2 < 3.0$.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 9 of 97

Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet Bluetooth SAR was not required; $[(14/5) * \sqrt{2.480}] = 4.7 < 7.5$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz, U-NII-1 and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.



This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 10 of 97	



This device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- Fall 2017 TCB Workshop Notes (LTE Carrier Aggregation)

1.9 Device Serial Numbers



Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 11 of 97

2

LTE INFORMATION

LTE Information					
FCC ID	ZNFQ710TS				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz) LTE Band 12 (699.7 - 715.3 MHz) LTE Band 13 (779.5 - 784.5 MHz) LTE Band 5 (Cell) (824.7 - 848.3 MHz) LTE Band 66 (AWS) (1710.7 - 1779.3 MHz) LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) LTE Band 2 (PCS) (1850.7 - 1909.3 MHz) LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)		695.5 (133447)
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)		693 (133422)
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)		690.5 (133397)
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)		688 (133372)
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 6 (QPSK, 16QAM, 64QAM), UL UE Cat 5 (QPSK, 16QAM, 64QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 12 of 97	

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 13 of 97

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 14 of 97

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

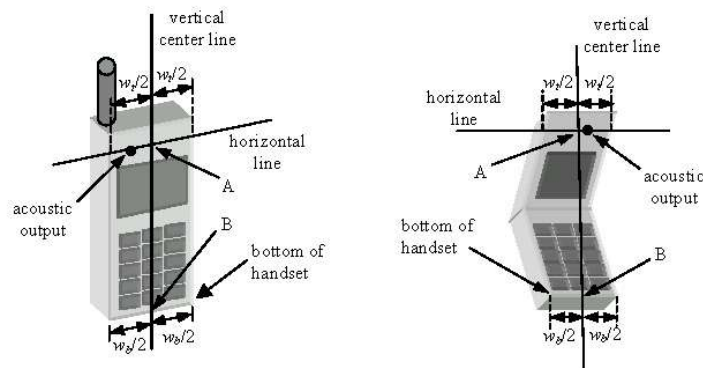




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 15 of 97

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 16 of 97

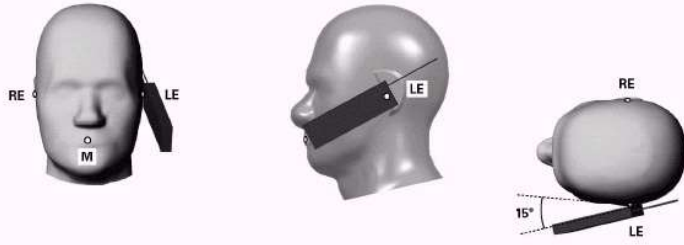


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

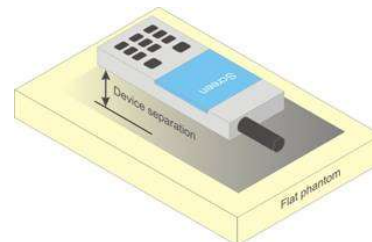




Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 17 of 97

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 18 of 97	



support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Additional Test Positions due to Proximity Conditions

This device uses a sensor to reduce voice and data powers in extremity (hand-held) use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

The proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 19 of 97

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 20 of 97

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR



The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: ZNFQ710TS	 PCTEST PROFESSIONAL LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 21 of 97

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.5 SAR Measurement Conditions for LTE



LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 22 of 97

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: ZNFQ710TS	 PCTEST PROFESSIONAL LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 23 of 97

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A



For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFQ710TS	 PCTEST PROFESSIONAL LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 24 of 97

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



8.6.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.



When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 25 of 97

subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 26 of 97

9 RF CONDUCTED POWERS



9.1 GSM Conducted Powers

**Table 9-1
Maximum Conducted Power**

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.66	33.59	32.09	30.60	29.17	27.68	27.31	26.68	26.53
	190	33.56	33.62	32.20	30.69	29.08	27.64	27.35	26.69	26.40
	251	33.63	33.66	32.16	30.54	29.08	27.67	27.33	26.78	26.50
GSM 1900	512	30.51	30.63	28.92	27.15	25.65	25.81	25.70	24.79	24.79
	661	30.62	30.62	28.93	27.20	25.60	25.88	25.71	24.83	24.69
	810	30.53	30.63	28.91	27.19	25.55	25.78	25.64	24.82	24.80

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.63	24.56	26.07	26.34	26.16	18.65	21.29	22.42	23.52
	190	24.53	24.59	26.18	26.43	26.07	18.61	21.33	22.43	23.39
	251	24.60	24.63	26.14	26.28	26.07	18.64	21.31	22.52	23.49
GSM 1900	512	21.48	21.60	22.90	22.89	22.64	16.78	19.68	20.53	21.78
	661	21.59	21.59	22.91	22.94	22.59	16.85	19.69	20.57	21.68
	810	21.50	21.60	22.89	22.93	22.54	16.75	19.62	20.56	21.79

GSM 850	Frame	24.17	24.17	25.68	25.94	25.69	18.17	21.18	22.44	23.69
GSM 1900	Avg.Targets:	21.17	21.17	22.68	22.44	22.19	16.67	19.68	20.94	22.19

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 27 of 97	



Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-1
Power Measurement Setup

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 28 of 97

9.2 UMTS Conducted Powers

Table 9-2
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.93	25.14	25.19	24.38	24.38	24.43	24.38	24.39	24.37	-
99		12.2 kbps AMR	24.99	25.19	25.04	24.38	24.43	24.41	24.34	24.41	24.24	-
6	HSDPA	Subtest 1	24.94	24.98	25.07	24.24	24.48	24.50	24.37	24.05	24.14	0
6		Subtest 2	24.94	25.05	24.91	24.19	24.26	24.45	24.37	23.95	24.25	0
6		Subtest 3	24.64	24.65	24.61	23.67	23.78	23.96	23.83	23.82	23.68	0.5
6		Subtest 4	24.68	24.26	24.44	23.72	23.79	23.90	23.82	23.53	23.64	0.5
6	HSUPA	Subtest 1	25.19	24.95	25.16	24.33	24.32	24.35	24.18	24.33	24.39	0
6		Subtest 2	22.75	22.94	22.86	22.19	22.50	22.43	22.26	22.26	22.24	2
6		Subtest 3	23.98	23.79	24.13	23.16	23.30	23.40	23.09	23.00	23.13	1
6		Subtest 4	23.13	22.91	22.89	22.10	22.28	22.50	22.28	21.94	22.30	2
6		Subtest 5	25.06	25.09	24.94	24.34	24.46	24.34	24.24	24.17	24.27	0



Table 9-3
Reduced Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.42	23.40	23.45	23.43	23.44	23.34	-
99		12.2 kbps AMR	23.31	23.30	23.32	23.47	23.42	23.40	-
6	HSDPA	Subtest 1	23.25	23.25	23.46	23.26	23.49	23.48	0
6		Subtest 2	23.28	23.17	23.49	23.29	23.50	23.46	0
6		Subtest 3	23.09	22.82	22.91	22.71	23.08	22.97	0.5
6		Subtest 4	23.11	22.83	22.85	22.65	23.07	22.96	0.5
6	HSUPA	Subtest 1	22.84	22.73	22.95	22.75	23.03	22.95	0
6		Subtest 2	21.33	21.42	21.51	21.31	21.39	21.41	2
6		Subtest 3	22.29	22.24	22.40	22.20	22.43	22.40	1
6		Subtest 4	21.42	21.36	21.53	21.33	21.46	21.42	2
6		Subtest 5	23.49	23.19	23.42	23.50	23.48	23.48	0

This device does not support DC-HSDPA.



Figure 9-2
Power Measurement Setup

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 29 of 97

9.3 LTE Conducted Powers

9.3.1 LTE Band 71

**Table 9-4
LTE Band 71 Conducted Powers - 20 MHz Bandwidth**



LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.73	0	0
	1	50	24.80		0
	1	99	24.73		0
	50	0	23.95	0-1	1
	50	25	23.63		1
	50	50	23.90		1
16QAM	100	0	23.80	0-1	1
	1	0	23.68		1
	1	50	23.84		1
	1	99	23.81	0-2	1
	50	0	22.86		2
	50	25	22.74		2
64QAM	50	50	22.81	0-2	2
	100	0	23.00		2
	1	0	22.60		0-3
	1	50	22.83	2	
	1	99	22.56	2	
	50	0	21.57	0-3	3
50	25	21.63	3		
50	50	21.56	3		
	100	0	21.67		3

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 9-5
LTE Band 71 Conducted Powers - 15 MHz Bandwidth**

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.95	0	0
	1	36	24.79		0
	1	74	24.91		0
	36	0	23.93	0-1	1
	36	18	23.68		1
	36	37	23.81		1
16QAM	75	0	23.87	0-1	1
	1	0	23.83		1
	1	36	23.73		1
	1	74	23.77	0-2	1
	36	0	22.86		2
	36	18	22.69		2
64QAM	36	37	22.80	0-2	2
	75	0	22.94		2
	1	0	22.48		0-2
	1	36	22.73	2	
	1	74	22.62	2	
	36	0	21.68	0-3	3
36	18	21.87	3		
36	37	21.65	3		
	75	0	21.62		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 30 of 97

**Table 9-6
LTE Band 71 Conducted Powers - 10 MHz Bandwidth**

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.94	24.81	24.88	0	0
	1	25	24.77	24.70	24.91		0
	1	49	24.99	24.73	24.55		0
	25	0	23.70	23.67	23.45	0-1	1
	25	12	23.72	23.66	23.54		1
	25	25	23.56	23.61	23.58		1
16QAM	50	0	23.71	23.73	23.70	0-1	1
	1	0	23.64	23.80	23.71		1
	1	25	23.85	23.92	23.90		1
	1	49	23.58	23.65	23.70	0-2	1
	25	0	22.63	22.76	22.70		2
	25	12	22.82	22.64	22.63		2
64QAM	25	25	22.68	22.68	22.61	0-2	2
	50	0	22.69	22.65	22.57		2
	1	0	22.58	22.91	22.67		0-2
	1	25	22.89	23.00	22.80	2	
	1	49	22.57	22.56	22.69	2	
	64QAM	25	0	21.67	21.61	21.68	0-3
25		12	21.73	21.60	21.62	3	
25		25	21.64	21.65	21.67	3	
50		0	21.65	21.64	21.52	3	

**Table 9-7
LTE Band 71 Conducted Powers - 5 MHz Bandwidth**

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.92	24.73	24.74	0	0
	1	12	24.67	24.64	24.67		0
	1	24	25.00	24.59	24.61		0
	12	0	23.75	23.74	23.65	0-1	1
	12	6	23.85	23.55	23.79		1
	12	13	23.84	23.62	23.95		1
16QAM	25	0	23.65	23.57	23.63	0-1	1
	1	0	23.75	23.55	23.63		1
	1	12	24.00	23.60	23.85		1
	1	24	23.87	23.65	23.54	0-2	1
	12	0	22.75	22.75	22.54		2
	12	6	22.84	22.62	22.59		2
64QAM	12	13	22.65	22.56	22.51	0-2	2
	25	0	22.93	22.52	22.59		2
	1	0	22.93	22.52	22.62		2
	1	12	23.00	22.68	22.80	0-3	2
	1	24	23.00	22.64	22.60		2
	12	0	21.91	21.70	21.44		3
64QAM	12	6	21.63	21.75	21.51	0-3	3
	12	13	21.57	21.62	21.55		3
	25	0	22.00	21.54	21.54		3

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 31 of 97

9.3.2

LTE Band 12



Table 9-8
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz) Conducted Power [dBm]		
QPSK	1	0	25.25	0	0
	1	25	25.20		0
	1	49	25.33		0
	25	0	24.21	0-1	1
	25	12	24.17		1
	25	25	24.19		1
16QAM	50	0	24.17	0-1	1
	1	0	24.33		1
	1	25	24.23		1
	1	49	24.14	0-2	1
	25	0	23.41		2
	25	12	23.31		2
64QAM	25	25	23.31	0-2	2
	50	0	23.49		2
	1	0	23.26		2
	1	25	23.25	0-3	2
	1	49	23.39		2
	25	0	22.35		3
64QAM	25	12	22.29	0-3	3
	25	25	22.19		3
	50	0	22.36		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-9
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.28	25.36	25.35	0	0
	1	12	25.23	25.36	25.27		0
	1	24	25.40	25.40	25.31		0
	12	0	24.05	24.23	24.23	0-1	1
	12	6	24.23	24.40	24.32		1
	12	13	24.32	24.32	24.33		1
16QAM	25	0	24.27	24.22	24.05	0-1	1
	1	0	24.33	24.44	24.33		1
	1	12	24.41	24.29	24.34		1
	1	24	24.38	24.11	23.84	0-2	1
	12	0	23.42	23.06	23.18		2
	12	6	23.27	23.04	23.17		2
64QAM	12	13	23.49	23.46	23.19	0-2	2
	25	0	23.13	23.18	23.14		2
	1	0	23.35	23.44	23.16		2
	1	12	23.42	23.25	23.33	0-3	2
	1	24	23.39	23.29	22.84		2
	12	0	22.31	22.12	22.08		3
64QAM	12	6	22.22	22.11	22.29	0-3	3
	12	13	22.33	22.50	22.06		3
	12	0	22.06	22.14	22.13		3
	25	0	22.06	22.14	22.13		3



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 32 of 97

**Table 9-10
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)			
Conducted Power [dBm]								
QPSK	1	0	25.28	25.35	25.27	0	0	
	1	7	25.00	25.44	25.29		0	
	1	14	25.24	25.32	25.05		0	
	QPSK	8	0	24.01	24.12	24.19	0-1	1
		8	4	23.98	24.17	24.11		1
		8	7	24.10	24.17	24.29		1
		15	0	24.09	24.23	24.01		1
15		0	24.28	24.39	24.43	1		
16QAM	1	7	24.47	24.37	24.28	0-1	1	
	1	14	24.48	24.35	24.31		1	
	8	0	23.09	23.21	23.32		0-2	2
	8	4	23.11	23.31	23.16	2		
	8	7	23.27	23.35	23.24	2		
	15	0	23.12	23.18	23.15	2		
	64QAM	1	0	23.24	23.46	23.45	0-2	2
1		7	23.36	23.49	23.37	2		
1		14	23.48	23.27	23.22	0-3		2
8		0	22.10	22.16	22.33		3	
8		4	22.20	22.22	22.27		3	
8		7	22.32	22.21	22.18		3	
15		0	22.06	22.21	22.08	3		

**Table 9-11
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	25.09	25.30	25.34	0	0
	1	2	25.37	25.25	25.45		0
	1	5	25.26	25.15	25.40		0
	3	0	25.33	25.46	25.50		0
	3	2	25.20	25.26	25.17		0
	3	3	25.50	25.32	25.37		0
	6	0	24.13	24.28	24.27	0-1	1
16QAM	1	0	24.34	24.21	24.12	0-1	1
	1	2	24.36	24.29	24.30		1
	1	5	24.44	24.09	24.48		1
	3	0	24.36	24.20	24.14		1
	3	2	24.24	24.42	24.49		1
	3	3	24.27	24.12	24.06	1	
	6	0	23.45	23.37	23.21	0-2	2
64QAM	1	0	23.49	23.23	23.24	0-2	2
	1	2	23.41	23.24	23.29		2
	1	5	23.46	23.14	23.40		2
	3	0	23.46	22.98	23.24		2
	3	2	22.94	23.41	23.46		2
	3	3	23.42	23.04	23.07		2
	6	0	22.42	22.37	22.32	0-3	3

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 33 of 97	

9.3.3

LTE Band 13



Table 9-12
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	25.31	0	0
	1	25	25.30		0
	1	49	25.23		0
	25	0	24.40	0-1	1
	25	12	24.37		1
	25	25	24.36		1
16QAM	50	0	24.22	0-1	1
	1	0	24.22		1
	1	25	24.20		1
	1	49	24.06	0-2	1
	25	0	23.35		2
	25	12	23.38		2
64QAM	25	25	23.34	0-2	2
	50	0	23.27		2
	1	0	23.01		2
	1	25	23.04	0-3	2
	1	49	23.17		2
	25	0	22.17		3
64QAM	25	12	22.36	0-3	3
	25	25	22.36		3
	50	0	22.31		3

Table 9-13
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	25.41	0	0
	1	12	25.33		0
	1	24	25.27		0
	12	0	24.22	0-1	1
	12	6	24.23		1
	12	13	24.24		1
16QAM	25	0	24.11	0-1	1
	1	0	24.04		1
	1	12	24.48		1
	1	24	24.11	0-2	1
	12	0	23.34		2
	12	6	23.38		2
64QAM	12	13	23.33	0-2	2
	25	0	23.20		2
	1	0	23.34		2
	1	12	23.42	0-3	2
	1	24	23.02		2
	12	0	22.20		3
64QAM	12	6	22.04	0-3	3
	12	13	22.23		3
	25	0	22.27		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 34 of 97

9.3.4

LTE Band 5 (Cell)

Table 9-14
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz) Conducted Power [dBm]		
QPSK	1	0	25.36	0	0
	1	25	25.39		0
	1	49	25.46		0
	25	0	24.25	0-1	1
	25	12	24.23		1
	25	25	24.48		1
16QAM	50	0	24.36	0-1	1
	1	0	24.25		1
	1	25	24.40		1
	1	49	24.48	0-2	1
	25	0	23.31		2
	25	12	23.31		2
64QAM	25	25	23.45	0-2	2
	50	0	23.26		2
	1	0	23.36		2
	1	25	23.39	0-3	2
	1	49	23.39		2
	25	0	22.42		3
64QAM	25	12	22.23	0-3	3
	25	25	22.43		3
	50	0	22.15		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-15
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	25.24	25.39	25.33	0	0
	1	12	25.37	25.43	25.34		0
	1	24	25.21	25.27	25.28		0
	12	0	24.06	24.32	24.20	0-1	1
	12	6	24.02	24.28	24.13		1
	12	13	24.17	24.21	24.34		1
16QAM	25	0	24.17	24.16	24.21	0-1	1
	1	0	24.46	24.32	24.37		1
	1	12	24.38	24.29	24.23		1
	1	24	24.37	24.32	24.22	0-2	1
	12	0	23.41	23.36	23.27		2
	12	6	23.29	23.22	23.23		2
64QAM	12	13	23.41	23.08	23.36	0-2	2
	25	0	23.23	23.10	23.27		2
	1	0	23.31	23.25	23.32		0-3
	1	12	23.32	23.30	23.22	2	
	1	24	23.28	23.40	23.35	2	
	64QAM	12	0	22.30	22.30	22.33	0-3
12		6	22.28	22.21	22.23	3	
12		13	22.41	22.16	22.18	3	
25		0	22.29	22.11	22.21	3	





FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 35 of 97

Table 9-16
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	25.34	25.30	25.42	0	0
	1	7	25.34	25.30	25.24		0
	1	14	25.31	25.37	25.33		0
	8	0	24.42	24.30	24.38	0-1	1
	8	4	24.34	24.19	24.26		1
	8	7	24.26	24.36	24.21		1
16QAM	15	0	24.32	24.23	24.19	0-1	1
	1	0	24.50	24.20	24.11		1
	1	7	24.45	24.44	24.26		1
	1	14	24.36	24.29	24.16	0-2	1
	8	0	23.23	23.38	23.13		2
	8	4	23.28	23.29	23.27		2
64QAM	8	7	23.25	23.24	23.28	0-2	2
	15	0	23.38	23.15	23.10		2
	1	0	23.40	23.23	23.30		0-2
	1	7	23.42	23.21	23.24	2	
	1	14	23.34	23.36	23.20	0-3	
	8	0	22.23	22.37	22.11		3
8	4	22.22	22.38	22.34	3		
64QAM	8	7	22.24	22.20	22.42	0-3	3
	15	0	22.40	22.06	22.25		3

Table 9-17
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	25.38	25.34	25.36	0	0
	1	2	25.40	25.48	25.24		0
	1	5	25.35	25.48	25.27		0
	3	0	25.46	25.37	25.23	0-1	0
	3	2	25.36	25.47	25.27		0
	3	3	25.32	25.27	25.37		0
16QAM	6	0	24.45	24.06	24.17	0-1	1
	1	0	24.43	24.29	24.44		1
	1	2	24.49	24.32	24.16		0-1
	1	5	24.42	24.42	24.29	1	
	3	0	24.39	24.26	24.19	1	
	64QAM	3	2	24.26	24.45	24.18	0-2
3		3	24.21	24.28	24.18	1	
6		0	23.44	23.40	23.31	2	
1		0	23.40	23.38	23.28	0-2	2
1		2	23.42	23.30	23.21		2
1		5	23.38	23.42	23.35		2
64QAM	3	0	23.48	23.12	23.24	0-2	2
	3	2	23.26	23.38	23.18		2
	3	3	23.23	23.27	23.15		2
64QAM	6	0	22.43	22.20	22.23	0-3	3

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 36 of 97

9.3.5

LTE Band 66 (AWS)

Table 9-18
LTE Band 66 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.36	24.46	24.35	0	0
	1	50	24.16	24.17	24.16		0
	1	99	24.41	24.38	24.45		0
	50	0	23.49	23.50	23.49	0-1	1
	50	25	23.42	23.43	23.29		1
	50	50	23.27	23.32	23.35		1
16QAM	100	0	23.45	23.38	23.32	0-1	1
	1	0	23.26	23.23	23.20		1
	1	50	23.37	23.35	23.41		1
	1	99	23.19	23.19	23.11	0-2	1
	50	0	22.37	22.45	22.38		2
	50	25	22.33	22.37	22.27		2
64QAM	50	50	22.34	22.36	22.38	0-2	2
	100	0	22.27	22.32	22.24		2
	1	0	22.28	22.36	22.24		2
	1	50	22.27	22.26	22.44	0-3	2
	1	99	22.31	22.15	22.08		2
	50	0	21.41	21.38	21.30		3
64QAM	50	25	21.33	21.33	21.15	0-3	3
	50	50	21.21	21.22	21.45		3
	100	0	21.29	21.26	21.20	3	

Table 9-19
LTE Band 66 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.43	24.42	24.40	0	0
	1	36	24.26	24.19	24.39		0
	1	74	24.30	24.29	24.31		0
	36	0	23.39	23.49	23.23	0-1	1
	36	18	23.43	23.35	23.14		1
	36	37	23.23	23.37	23.17		1
16QAM	75	0	23.45	23.34	23.34	0-1	1
	1	0	23.35	23.45	23.36		1
	1	36	23.33	23.39	23.09		1
	1	74	23.17	23.41	23.40	0-2	1
	36	0	22.47	22.39	22.42		2
	36	18	22.35	22.39	22.17		2
64QAM	36	37	22.42	22.36	22.33	0-2	2
	75	0	22.31	22.42	22.49		2
	1	0	22.24	22.43	22.23		2
	1	36	22.28	22.40	22.12	0-3	2
	1	74	22.19	22.28	22.45		2
	36	0	21.40	21.46	21.36		3
64QAM	36	18	21.39	21.33	21.14	0-3	3
	36	37	21.43	21.29	21.29		3
	75	0	21.34	21.47	21.38	3	



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 37 of 97

Table 9-20
LTE Band 66 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.27	24.46	24.25	0	0
	1	25	24.37	24.25	24.43		0
	1	49	24.40	24.22	24.14		0
	25	0	23.38	23.31	23.28	0-1	1
	25	12	23.45	23.25	23.46		1
	25	25	23.29	23.33	23.46		1
	50	0	23.47	23.23	23.49		1
16QAM	1	0	23.37	23.14	23.21	0-1	1
	1	25	23.20	23.33	23.30		1
	1	49	23.17	23.38	23.37		1
	25	0	22.46	22.46	22.23	0-2	2
	25	12	22.38	22.40	22.40		2
	25	25	22.21	22.21	22.16		2
	50	0	22.38	22.42	22.50		2
64QAM	1	0	22.27	22.05	22.23	0-2	2
	1	25	22.24	22.39	22.18		2
	1	49	22.20	22.36	22.40		2
	25	0	21.36	21.29	21.23	0-3	3
	25	12	21.33	21.33	21.42		3
	25	25	21.18	21.35	21.23		3
	50	0	21.44	21.42	21.38		3

Table 9-21
LTE Band 66 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.24	24.49	24.50	0	0
	1	12	24.16	24.47	24.26		0
	1	24	24.29	24.26	24.08		0
	12	0	23.48	23.31	23.41	0-1	1
	12	6	23.47	23.22	23.42		1
	12	13	23.41	23.43	23.46		1
	25	0	23.36	23.24	23.32		1
16QAM	1	0	23.30	23.38	23.28	0-1	1
	1	12	23.46	23.23	23.32		1
	1	24	23.25	23.43	23.40		1
	12	0	22.34	22.49	22.23	0-2	2
	12	6	22.45	22.42	22.50		2
	12	13	22.32	22.28	22.37		2
	25	0	22.50	22.40	22.32		2
64QAM	1	0	22.27	22.37	22.29	0-2	2
	1	12	22.40	22.25	22.27		2
	1	24	22.11	22.43	22.41		2
	12	0	21.36	21.49	21.22	0-3	3
	12	6	21.47	21.43	21.41		3
	12	13	21.36	21.27	21.46		3
	25	0	21.40	21.41	21.22		3



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 38 of 97

Table 9-22
LTE Band 66 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.19	24.36	24.15	0	0
	1	7	24.21	24.08	24.22		0
	1	14	24.34	24.46	24.41		0
	8	0	23.38	23.22	23.41	0-1	1
	8	4	23.31	23.20	23.43		1
	8	7	23.41	23.15	23.30		1
	15	0	23.34	23.23	23.50		1
16QAM	1	0	23.50	23.33	23.40	0-1	1
	1	7	23.35	23.34	23.29		1
	1	14	23.24	23.40	23.43		1
	8	0	22.39	22.45	22.34	0-2	2
	8	4	22.46	22.40	22.35		2
	8	7	22.43	22.32	22.50		2
	15	0	22.34	22.33	22.40		2
64QAM	1	0	22.45	22.43	22.45	0-2	2
	1	7	22.38	22.24	22.30		2
	1	14	22.39	22.47	22.44		2
	8	0	21.34	21.45	21.40	0-3	3
	8	4	21.50	21.25	21.28		3
	8	7	21.35	21.27	21.47		3
	15	0	21.41	21.17	21.50		3

Table 9-23
LTE Band 66 (AWS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.48	24.25	24.27	0	0
	1	2	24.09	24.31	24.40		0
	1	5	24.26	24.21	24.49		0
	3	0	24.31	24.18	24.20		0
	3	2	24.39	24.31	24.25		0
	3	3	24.43	24.29	24.15		0
	6	0	23.32	23.15	23.33	0-1	1
16QAM	1	0	23.36	23.20	23.22	0-1	1
	1	2	23.39	23.27	23.45		1
	1	5	23.41	23.39	23.33		1
	3	0	23.21	23.24	23.30		1
	3	2	23.29	23.43	23.32		1
	3	3	23.36	23.29	23.08		1
	6	0	22.33	22.40	22.34	0-2	2
64QAM	1	0	22.47	22.27	22.14	0-2	2
	1	2	22.36	22.44	22.34		2
	1	5	22.37	22.25	22.38		2
	3	0	22.29	22.32	22.14		2
	3	2	22.19	22.40	22.33		2
	3	3	22.41	22.34	22.03		2
	6	0	21.32	21.47	21.41	0-3	3



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 39 of 97	

Table 9-24
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.42	23.34	23.31	0	0
	1	50	23.47	23.50	23.48		0
	1	99	23.31	23.45	23.41		0
	50	0	23.31	23.50	23.45	0-1	0
	50	25	23.33	23.33	23.44		0
	50	50	23.28	23.31	23.41		0
	100	0	23.38	23.46	23.32		0
16QAM	1	0	23.50	23.29	23.46	0-1	0
	1	50	23.40	23.39	23.39		0
	1	99	23.35	23.39	23.29		0
	50	0	22.34	22.41	22.35	0-2	1
	50	25	22.25	22.37	22.38		1
	50	50	22.42	22.36	22.28		1
	100	0	22.42	22.39	22.49		1
64QAM	1	0	22.32	22.45	22.46	0-2	1
	1	50	22.42	22.20	22.29		1
	1	99	22.42	22.36	22.24		1
	50	0	21.36	21.33	21.41	0-3	2
	50	25	21.30	21.34	21.24		2
	50	50	21.38	21.30	21.22		2
	100	0	21.28	21.36	21.43		2

Table 9-25
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.23	23.36	23.34	0	0
	1	36	23.44	23.45	23.36		0
	1	74	23.44	23.40	23.37		0
	36	0	23.42	23.31	23.35	0-1	0
	36	18	23.36	23.41	23.26		0
	36	37	23.46	23.43	23.38		0
	75	0	23.39	23.45	23.43		0
16QAM	1	0	23.39	23.43	23.41	0-1	0
	1	36	23.33	23.42	23.38		0
	1	74	23.38	23.44	23.45		0
	36	0	22.45	22.35	22.38	0-2	1
	36	18	22.35	22.42	22.38		1
	36	37	22.10	22.29	22.41		1
	75	0	22.34	22.40	22.42		1
64QAM	1	0	22.50	22.46	22.29	0-2	1
	1	36	22.24	22.40	22.30		1
	1	74	22.34	22.33	22.41		1
	36	0	21.45	21.36	21.35	0-3	2
	36	18	21.40	21.30	21.28		2
	36	37	21.07	21.34	21.29		2
	75	0	21.33	21.30	21.29		2



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 40 of 97

Table 9-26
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.26	23.46	23.29	0	0
	1	25	23.21	23.39	23.39		0
	1	49	23.40	23.42	23.06		0
	25	0	23.41	23.35	23.18	0-1	0
	25	12	23.27	23.41	23.47		0
	25	25	23.42	23.28	23.35		0
	50	0	23.49	23.47	23.29		0
16QAM	1	0	23.34	23.36	23.39	0-1	0
	1	25	23.34	23.33	23.40		0
	1	49	23.43	23.32	23.40		0
	25	0	22.41	22.41	22.29	0-2	1
	25	12	22.33	22.30	22.43		1
	25	25	22.41	22.38	22.40		1
	50	0	22.40	22.41	22.36		1
64QAM	1	0	22.41	22.33	22.33	0-2	1
	1	25	22.22	22.42	22.44		1
	1	49	22.40	22.28	22.36		1
	25	0	21.33	21.34	21.36	0-3	2
	25	12	21.17	21.23	21.41		2
	25	25	21.32	21.27	21.27		2
	50	0	21.42	21.38	21.43		2

Table 9-27
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.41	23.39	23.47	0	0
	1	12	23.50	23.37	23.34		0
	1	24	23.32	23.39	23.43		0
	12	0	23.45	23.50	23.39	0-1	0
	12	6	23.50	23.48	23.33		0
	12	13	23.33	23.44	23.36		0
	25	0	23.44	23.42	23.37		0
16QAM	1	0	23.47	23.49	23.49	0-1	0
	1	12	23.47	23.32	23.35		0
	1	24	23.47	23.40	23.38		0
	12	0	22.41	22.32	22.48	0-2	1
	12	6	22.37	22.24	22.43		1
	12	13	22.22	22.41	22.23		1
	25	0	22.30	22.27	22.29		1
64QAM	1	0	22.34	22.46	22.36	0-2	1
	1	12	22.42	22.12	22.22		1
	1	24	22.37	22.28	22.43		1
	12	0	21.21	21.28	21.23	0-3	2
	12	6	21.22	21.16	21.45		2
	12	13	21.07	21.45	21.15		2
	25	0	21.21	21.14	21.14		2





FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 41 of 97

Table 9-28
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.40	23.42	23.34	0	0
	1	7	23.48	23.27	23.40		0
	1	14	23.43	23.47	23.32		0
	8	0	23.41	23.33	23.48	0-1	0
	8	4	23.47	23.29	23.38		0
	8	7	23.44	23.30	23.50		0
	15	0	23.31	23.48	23.43		0
16QAM	1	0	23.33	23.41	23.30	0-1	0
	1	7	23.45	23.26	23.11		0
	1	14	23.36	23.15	23.20		0
	8	0	22.42	22.48	22.39	0-2	1
	8	4	22.44	22.50	22.45		1
	8	7	22.28	22.43	22.45		1
	15	0	22.43	22.49	22.42		1
64QAM	1	0	22.34	22.33	22.35	0-2	1
	1	7	22.48	22.18	21.98		1
	1	14	22.27	22.09	22.16		1
	8	0	21.31	21.41	21.46	0-3	2
	8	4	21.29	21.47	21.49		2
	8	7	21.28	21.36	21.37		2
	15	0	21.33	21.33	21.49		2

Table 9-29
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.34	23.19	23.49	0	0
	1	2	23.45	23.29	23.48		0
	1	5	23.28	23.39	23.46		0
	3	0	23.37	23.31	23.40		0
	3	2	23.38	23.22	23.38		0
	3	3	23.40	23.44	23.48		0
	6	0	23.48	23.41	23.40	0-1	0
16QAM	1	0	23.19	23.38	23.30	0-1	0
	1	2	23.26	23.29	23.42		0
	1	5	23.31	23.42	23.39		0
	3	0	23.39	23.43	23.37		0
	3	2	23.36	23.42	23.47		0
	3	3	23.36	23.42	23.30		0
	6	0	22.49	22.28	22.27	0-2	1
64QAM	1	0	22.17	22.39	22.27	0-2	1
	1	2	22.10	22.15	22.39		1
	1	5	22.32	22.39	22.31		1
	3	0	22.37	22.37	22.29		1
	3	2	22.26	22.26	22.45		1
	3	3	22.30	22.29	22.26		1
	6	0	21.32	21.22	21.31	0-3	2

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 42 of 97

9.3.6

LTE Band 2 (PCS)

Table 9-30
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.50	24.50	24.43	0	0
	1	50	24.17	24.14	24.16		0
	1	99	24.29	24.39	24.22		0
	50	0	23.29	23.10	23.18	0-1	1
	50	25	23.21	23.21	23.24		1
	50	50	23.40	23.25	23.34		1
16QAM	100	0	23.24	23.22	23.19	0-1	1
	1	0	23.11	23.35	23.48		1
	1	50	23.40	23.34	23.40		1
	1	99	23.43	23.45	23.31	0-2	1
	50	0	22.37	22.11	22.32		2
	50	25	22.34	22.35	22.37		2
64QAM	50	50	22.40	22.35	22.30	0-2	2
	100	0	22.41	22.39	22.39		2
	1	0	22.17	22.23	22.50		2
	1	50	22.43	22.23	22.42	0-2	2
	1	99	22.33	22.47	22.40		2
	50	0	21.30	21.13	21.34		0-3
50	25	21.49	21.31	21.32	3		
50	50	21.38	21.31	21.29	3		
	100	0	21.15	21.44	21.43		3

Table 9-31
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.41	24.42	24.38	0	0
	1	36	24.35	24.23	24.23		0
	1	74	24.24	24.19	24.32		0
	36	0	23.25	23.12	23.20	0-1	1
	36	18	23.22	23.15	23.02		1
	36	37	23.21	23.18	23.16		1
16QAM	75	0	23.27	23.28	23.32	0-1	1
	1	0	23.43	23.41	23.24		1
	1	36	23.44	23.38	23.30		1
	1	74	23.35	23.35	23.45	0-2	1
	36	0	22.33	22.15	22.25		2
	36	18	22.39	22.06	22.26		2
64QAM	36	37	22.32	22.23	22.28	0-2	2
	75	0	22.35	22.29	22.04		2
	1	0	22.42	22.48	22.21		0-2
	1	36	22.36	22.22	22.35	2	
	1	74	22.29	22.46	22.32	0-3	
	36	0	21.38	21.24	21.20		3
36	18	21.29	21.02	21.20	3		
	36	37	21.37	21.23	21.17		3
	75	0	21.40	21.37	21.22		3



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 43 of 97

Table 9-32
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.43	24.46	24.46	0	0
	1	25	24.28	24.34	24.38		0
	1	49	24.40	24.43	24.50		0
	25	0	23.20	23.14	23.26	0-1	1
	25	12	23.20	23.26	23.19		1
	25	25	23.49	23.34	23.48		1
	50	0	23.25	23.27	23.33		1
16QAM	1	0	23.42	23.17	23.25	0-1	1
	1	25	23.47	23.44	23.33		1
	1	49	23.47	23.21	23.44		1
	25	0	22.32	22.35	22.30	0-2	2
	25	12	22.35	22.43	22.31		2
	25	25	22.45	22.37	22.46		2
	50	0	22.30	22.32	22.25		2
64QAM	1	0	22.49	22.16	22.07	0-2	2
	1	25	22.40	22.38	22.26		2
	1	49	22.37	22.15	22.41		2
	25	0	21.35	21.25	21.21	0-3	3
	25	12	21.32	21.45	21.23		3
	25	25	21.31	21.45	21.45		3
	50	0	21.44	21.22	21.27		3

Table 9-33
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.47	24.01	24.35	0	0
	1	12	24.35	24.44	24.18		0
	1	24	24.22	24.01	24.06		0
	12	0	23.24	23.28	23.19	0-1	1
	12	6	23.15	23.25	23.24		1
	12	13	23.15	23.14	23.21		1
	25	0	23.34	23.16	23.41		1
16QAM	1	0	23.45	23.26	23.45	0-1	1
	1	12	23.37	23.17	23.25		1
	1	24	23.15	23.10	23.45		1
	12	0	22.45	22.23	22.26	0-2	2
	12	6	22.46	22.33	22.43		2
	12	13	22.48	22.27	22.28		2
	25	0	22.34	22.25	22.23		2
64QAM	1	0	22.41	22.22	22.46	0-2	2
	1	12	22.43	22.07	22.21		2
	1	24	22.17	22.03	22.44		2
	12	0	21.36	21.37	21.33	0-3	3
	12	6	21.41	21.32	21.26		3
	12	13	21.47	21.29	21.12		3
	25	0	21.31	21.35	21.28		3



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 44 of 97

Table 9-34
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.29	24.23	24.27	0	0
	1	7	24.17	24.45	24.08		0
	1	14	24.03	24.21	24.15		0
	8	0	23.16	23.11	23.14	0-1	1
	8	4	23.19	23.16	23.29		1
	8	7	23.15	23.09	23.27		1
	15	0	23.22	23.11	23.17		1
16QAM	1	0	23.40	23.27	23.20	0-1	1
	1	7	23.35	23.36	23.19		1
	1	14	23.26	23.08	23.20		1
	8	0	22.17	22.24	22.29	0-2	2
	8	4	22.25	22.36	22.23		2
	8	7	22.17	22.08	22.27		2
	15	0	22.24	22.09	22.17		2
64QAM	1	0	22.35	22.15	22.31	0-2	2
	1	7	22.18	22.44	22.27		2
	1	14	22.30	22.10	22.21		2
	8	0	21.18	21.32	21.32	0-3	3
	8	4	21.40	21.25	21.36		3
	8	7	21.17	21.16	21.26		3
	15	0	21.27	21.26	21.30		3

Table 9-35
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.12	24.39	24.45	0	0
	1	2	24.20	24.44	24.23		0
	1	5	24.08	24.28	24.24		0
	3	0	24.16	24.34	24.30		0
	3	2	24.17	24.32	24.04		0
	3	3	24.12	24.16	24.04		0
	6	0	23.41	23.09	23.07	0-1	1
16QAM	1	0	23.30	23.29	23.37	0-1	1
	1	2	23.47	23.33	23.25		1
	1	5	23.15	23.10	23.18		1
	3	0	23.27	23.25	23.14		1
	3	2	23.37	23.22	23.21		1
	3	3	23.40	23.19	23.20		1
	6	0	22.38	22.21	22.32	0-2	2
64QAM	1	0	22.25	22.35	22.39	0-2	2
	1	2	22.45	22.25	22.31		2
	1	5	22.34	22.06	22.29		2
	3	0	22.36	22.27	22.11		2
	3	2	22.28	22.18	22.21		2
	3	3	22.47	22.23	22.27		2
	6	0	21.42	21.29	21.35	0-3	3



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 45 of 97	

Table 9-36
LTE Band 2 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.46	23.25	23.29	0	0
	1	50	23.44	23.50	23.47		0
	1	99	23.29	23.43	23.34		0
	50	0	23.30	23.46	23.41	0-1	0
	50	25	23.28	23.33	23.40		0
	50	50	23.20	23.37	23.39		0
	100	0	23.41	23.35	23.30		0
16QAM	1	0	23.50	23.24	23.50	0-1	0
	1	50	23.38	23.30	23.28		0
	1	99	23.38	23.33	23.21		0
	50	0	22.38	22.37	22.36	0-2	1
	50	25	22.27	22.31	22.30		1
	50	50	22.36	22.29	22.23		1
	100	0	22.43	22.32	22.40		1
64QAM	1	0	22.31	22.40	22.49	0-2	1
	1	50	22.43	22.10	22.22		1
	1	99	22.30	22.26	22.30		1
	50	0	21.39	21.38	21.45	0-3	2
	50	25	21.28	21.32	21.26		2
	50	50	21.32	21.24	21.23		2
	100	0	21.20	21.42	21.44		2

Table 9-37
LTE Band 2 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.16	23.27	23.30	0	0
	1	36	23.41	23.45	23.30		0
	1	74	23.40	23.36	23.31		0
	36	0	23.41	23.31	23.34	0-1	0
	36	18	23.35	23.32	23.26		0
	36	37	23.45	23.44	23.32		0
	75	0	23.36	23.41	23.39		0
16QAM	1	0	23.44	23.43	23.38	0-1	0
	1	36	23.34	23.49	23.46		0
	1	74	23.43	23.43	23.49		0
	36	0	22.48	22.33	22.36	0-2	1
	36	18	22.35	22.40	22.38		1
	36	37	22.03	22.38	22.43		1
	75	0	22.36	22.43	22.43		1
64QAM	1	0	22.45	22.47	22.26	0-2	1
	1	36	22.18	22.44	22.25		1
	1	74	22.39	22.23	22.46		1
	36	0	21.43	21.26	21.32	0-3	2
	36	18	21.34	21.29	21.20		2
	36	37	21.10	21.44	21.27		2
	75	0	21.30	21.31	21.31		2



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 46 of 97

Table 9-38
LTE Band 2 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.35	23.48	23.34	0	0
	1	25	23.17	23.40	23.41		0
	1	49	23.32	23.39	23.03		0
	25	0	23.42	23.28	23.18	0-1	0
	25	12	23.30	23.40	23.46		0
	25	25	23.48	23.32	23.35		0
	50	0	23.46	23.40	23.24		0
16QAM	1	0	23.30	23.43	23.40	0-1	0
	1	25	23.39	23.35	23.40		0
	1	49	23.35	23.36	23.35		0
	25	0	22.34	22.31	22.36	0-2	1
	25	12	22.35	22.27	22.31		1
	25	25	22.33	22.35	22.46		1
	50	0	22.38	22.41	22.35		1
64QAM	1	0	22.37	22.37	22.37	0-2	1
	1	25	22.25	22.41	22.40		1
	1	49	22.45	22.38	22.36		1
	25	0	21.24	21.29	21.39	0-3	2
	25	12	21.12	21.29	21.39		2
	25	25	21.32	21.29	21.28		2
	50	0	21.46	21.35	21.39		2

Table 9-39
LTE Band 2 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.39	23.39	23.45	0	0
	1	12	23.13	23.41	23.29		0
	1	24	23.28	23.36	23.41		0
	12	0	23.50	23.45	23.35	0-1	0
	12	6	23.40	23.39	23.24		0
	12	13	23.36	23.43	23.45		0
	25	0	23.42	23.40	23.44		0
16QAM	1	0	23.41	23.38	23.46	0-1	0
	1	12	23.49	23.29	23.31		0
	1	24	23.44	23.28	23.42		0
	12	0	22.45	22.28	22.46	0-2	1
	12	6	22.40	22.25	22.37		1
	12	13	22.17	22.41	22.23		1
	25	0	22.25	22.27	22.25		1
64QAM	1	0	22.37	22.50	22.26	0-2	1
	1	12	22.33	22.14	22.27		1
	1	24	22.36	22.23	22.49		1
	12	0	21.21	21.23	21.16	0-3	2
	12	6	21.28	21.19	21.40		2
	12	13	21.00	21.38	21.17		2
	25	0	21.18	21.13	21.13		2





FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 47 of 97	

Table 9-40
LTE Band 2 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.30	23.47	23.34	0	0
	1	7	23.30	23.22	23.40		0
	1	14	23.36	23.47	23.30		0
	8	0	23.49	23.26	23.48	0-1	0
	8	4	23.38	23.32	23.41		0
	8	7	23.46	23.25	23.44		0
	15	0	23.27	23.50	23.46		0
16QAM	1	0	23.31	23.39	23.25	0-1	0
	1	7	23.46	23.15	23.14		0
	1	14	23.41	23.12	23.18		0
	8	0	22.44	22.40	22.41	0-2	1
	8	4	22.43	22.45	22.49		1
	8	7	22.27	22.46	22.48		1
	15	0	22.38	22.49	22.48		1
64QAM	1	0	22.31	22.34	22.36	0-2	1
	1	7	22.44	22.10	21.94		1
	1	14	22.22	21.99	22.18		1
	8	0	21.28	21.36	21.46	0-3	2
	8	4	21.28	21.41	21.50		2
	8	7	21.24	21.34	21.29		2
	15	0	21.33	21.23	21.31		2

Table 9-41
LTE Band 2 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.36	23.21	23.42	0	0
	1	2	23.50	23.33	23.10		0
	1	5	23.29	23.39	23.46		0
	3	0	23.34	23.31	23.40		0
	3	2	23.39	23.14	23.37		0
	3	3	23.34	23.40	23.38		0
	6	0	23.42	23.34	23.36	0-1	0
16QAM	1	0	23.28	23.38	23.21	0-1	0
	1	2	23.19	23.29	23.41		0
	1	5	23.30	23.39	23.34		0
	3	0	23.42	23.42	23.35		0
	3	2	23.39	23.48	23.49		0
	3	3	23.39	23.46	23.27		0
	6	0	22.42	22.31	22.29	0-2	1
64QAM	1	0	22.16	22.32	22.37	0-2	1
	1	2	22.13	22.07	22.37		1
	1	5	22.29	22.46	22.34		1
	3	0	22.40	22.41	22.23		1
	3	2	22.26	22.31	22.40		1
	3	3	22.32	22.31	22.19		1
	6	0	21.33	21.32	21.32	0-3	2

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 48 of 97

9.3.7

LTE Band 41

Table 9-42
LTE Band 41 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.77	23.73	24.00	23.86	23.56	0	0
	1	50	23.72	23.90	23.85	23.79	23.80		0
	1	99	23.84	23.66	23.90	23.94	23.76		0
	50	0	22.64	22.94	22.93	22.73	22.80	0-1	1
	50	25	22.84	22.84	23.00	22.85	22.73		1
	50	50	22.88	22.95	22.68	22.58	22.78		1
100	0	22.74	22.83	22.96	22.70	22.76	1		
16QAM	1	0	22.80	22.80	22.99	22.91	22.92	0-1	1
	1	50	22.86	22.84	22.76	22.78	22.96		1
	1	99	22.87	22.80	22.91	22.85	22.69		1
	50	0	21.65	21.85	21.98	21.74	21.69	0-2	2
	50	25	21.77	22.00	21.96	21.83	21.81		2
	50	50	21.75	21.88	21.78	21.80	21.78		2
100	0	22.00	21.74	21.81	21.72	21.86	2		
64QAM	1	0	21.68	21.73	21.84	21.86	21.77	0-2	2
	1	50	21.74	21.65	21.71	21.64	21.78		2
	1	99	21.73	21.69	21.72	21.72	21.53		2
	50	0	20.84	20.84	20.88	20.61	20.68	0-3	3
	50	25	20.76	20.96	20.86	20.69	20.71		3
	50	50	20.63	20.82	20.63	20.69	20.59		3
100	0	20.92	20.57	20.81	20.64	20.86	3		

Table 9-43
LTE Band 41 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.63	23.66	23.82	23.80	23.75	0	0
	1	36	23.65	23.50	23.84	23.64	23.83		0
	1	74	23.71	23.88	23.90	23.76	23.88		0
	36	0	22.67	22.75	22.87	22.64	22.80	0-1	1
	36	18	22.69	22.72	22.96	22.63	22.89		1
	36	37	22.82	22.69	22.91	22.75	22.75		1
75	0	22.60	22.82	22.76	22.50	22.76	1		
16QAM	1	0	22.85	22.78	22.81	23.00	22.58	0-1	1
	1	36	23.00	22.96	22.90	22.94	22.72		1
	1	74	22.65	22.87	22.59	22.89	22.83		1
	36	0	21.74	21.74	22.00	21.82	21.83	0-2	2
	36	18	21.73	21.66	21.95	21.78	21.57		2
	36	37	21.77	21.85	22.00	21.68	21.88		2
75	0	21.89	21.75	21.90	21.70	21.63	2		
64QAM	1	0	21.77	21.64	21.76	21.99	21.42	0-2	2
	1	36	21.92	21.86	21.87	21.78	21.71		2
	1	74	21.62	21.72	21.48	21.75	21.65		2
	36	0	20.55	20.63	20.97	20.77	20.82	0-3	3
	36	18	20.71	20.53	20.92	20.72	20.38		3
	36	37	20.61	20.70	20.91	20.65	20.72		3
75	0	20.84	20.62	20.76	20.59	20.44	3		





FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 49 of 97

Table 9-44
LTE Band 41 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.79	23.82	23.87	23.67	23.71	0	0
	1	25	23.84	23.77	23.92	23.62	23.56		0
	1	49	23.73	23.97	23.92	23.75	23.96		0
	25	0	22.50	22.78	22.74	22.72	22.71	0-1	1
	25	12	22.62	22.86	22.94	22.78	22.70		1
	25	25	22.74	22.73	22.93	22.91	22.77		1
16QAM	50	0	22.69	22.76	22.90	22.61	22.71	0-1	1
	1	0	22.91	22.59	22.85	22.72	22.78		1
	1	25	22.97	22.71	22.95	22.98	22.89		1
	1	49	22.90	22.92	22.88	22.72	22.89	0-2	2
	25	0	21.68	21.72	21.99	21.69	21.73		2
	25	12	21.82	21.51	21.88	21.71	21.72		2
64QAM	25	25	21.67	22.00	21.90	21.86	21.87	0-2	2
	50	0	21.75	21.71	21.95	21.88	21.78		2
	1	0	21.82	21.49	21.69	21.70	21.61		0-2
	1	25	21.78	21.70	21.91	21.81	21.74	2	
	1	49	21.72	21.86	21.80	21.58	21.84	2	
	64QAM	25	0	20.58	20.53	20.93	20.56	20.71	0-3
25		12	20.72	20.47	20.76	20.69	20.65	3	
25		25	20.52	20.94	20.79	20.84	20.69	3	
50		0	20.64	20.67	20.90	20.75	20.61	3	

Table 9-45
LTE Band 41 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.86	23.95	23.69	23.70	23.81	0	0
	1	12	23.71	23.77	23.88	23.83	23.70		0
	1	24	23.98	23.89	23.65	23.77	23.67		0
	12	0	22.74	22.87	22.92	22.60	22.76	0-1	1
	12	6	22.75	23.00	22.77	22.75	22.83		1
	12	13	22.49	22.66	22.92	22.82	22.49		1
16QAM	25	0	22.71	22.90	22.89	22.74	22.71	0-1	1
	1	0	22.95	22.95	22.71	22.81	22.74		1
	1	12	22.81	22.91	22.91	22.86	22.83		1
	1	24	22.77	22.78	22.81	22.80	22.65	0-2	1
	12	0	21.83	21.98	21.90	21.71	21.96		2
	12	6	21.91	21.89	21.90	21.71	21.94		2
64QAM	12	13	21.80	21.82	21.84	21.68	21.57	0-2	2
	25	0	21.71	21.89	21.76	22.00	21.99		2
	1	0	21.77	21.88	21.68	21.68	21.57		2
	1	12	21.66	21.88	21.85	21.73	21.81	0-2	2
	1	24	21.58	21.75	21.70	21.66	21.61		2
	12	0	20.75	20.88	20.84	20.58	20.90		0-3
12	6	20.80	20.77	20.85	20.57	20.82	3		
12	13	20.74	20.69	20.82	20.49	20.45	3		
25	0	20.70	20.71	20.75	20.83	20.89	3		

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 50 of 97	



9.3.8 LTE Carrier Aggregation Conducted Powers

Table 9-46
LTE Carrier Aggregation Conducted Powers

Combination	PCC								SCC				Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	1100	1980	24.43	24.50
CA_2A-4A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	24.46	24.50
CA_2A-5A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	24.41	24.50
CA_2A-12A(1)	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	24.42	24.50
CA_2A-66A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	20	66786	2145	24.38	24.50
CA_2A-71A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B71	20	68761	634.5	24.45	24.50
CA_4A-4A	LTE B4	5	20375	1752.5	QPSK	1	0	2375	2152.5	LTE B4	20	2050	1960	24.46	24.50
CA_2A-4A	LTE B4	5	20375	1752.5	QPSK	1	0	2375	2152.5	LTE B2	20	900	1960	24.42	24.50
CA_4A-5A(1)	LTE B4	5	20375	1752.5	QPSK	1	0	2375	2152.5	LTE B5	10	2525	881.5	24.50	24.50
CA_4A-12A	LTE B4	5	20375	1752.5	QPSK	1	0	2375	2152.5	LTE B12	10	5095	737.5	24.49	24.50
CA_4A-71A	LTE B4	5	20375	1752.5	QPSK	1	0	2375	2152.5	LTE B71	20	68761	634.5	24.47	24.50
CA_66A-66A	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B66	20	66536	2120	24.48	24.50
CA_66B	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B66	15	67018	2168.2	24.50	24.50
CA_66C	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B66	20	66994	2165.8	24.48	24.50
CA_2A-66A	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B2	20	900	1960	24.49	24.50
CA_12A-66A	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B12	10	5095	737.5	24.49	24.50
CA_66A-71A	LTE B66	5	132647	1777.5	QPSK	1	0	67111	2177.5	LTE B71	20	68761	634.5	24.50	24.50
CA_2A-5A	LTE B5	10	20525	836.5	QPSK	1	49	2525	881.5	LTE B2	20	900	1960	25.39	25.46
CA_4A-5A(1)	LTE B5	10	20525	836.5	QPSK	1	49	2525	881.5	LTE B4	20	2175	2132.5	25.36	25.46
CA_2A-12A(1)	LTE B12	3	23095	707.5	QPSK	1	7	5095	737.5	LTE B2	20	900	1960	25.10	25.44
CA_4A-71A	LTE B12	3	23095	707.5	QPSK	1	7	5095	737.5	LTE B66	20	66786	2145	25.26	25.44
CA_4A-12A	LTE B12	3	23095	707.5	QPSK	1	7	5095	737.5	LTE B4	20	2175	2132.5	25.24	25.44
CA_2A-71A	LTE B71	5	133147	665.5	QPSK	1	24	68611	619.5	LTE B2	20	900	1960	24.92	25.00
CA_4A-71A	LTE B71	5	133147	665.5	QPSK	1	24	68611	619.5	LTE B4	20	2175	2132.5	24.90	25.00
CA_66A-71A	LTE B71	5	133147	665.5	QPSK	1	24	68611	619.5	LTE B66	20	66786	2145	24.93	25.00

Table 9-47
LTE Carrier Aggregation Reduced Conducted Powers

Combination	PCC								SCC				Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	1100	1980	23.50	23.50
CA_2A-4A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	23.49	23.50
CA_2A-5A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	23.49	23.50
CA_2A-12A(1)	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	23.50	23.50
CA_2A-66A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	20	66786	2145	23.48	23.50
CA_2A-71A	LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B71	20	68761	634.5	23.40	23.50
CA_4A-4A	LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B4	20	2300	2145	23.03	23.50
CA_2A-4A	LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B2	20	900	1960	23.04	23.50
CA_4A-5A(1)	LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B5	10	2525	881.5	23.06	23.50
CA_4A-12A	LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B12	10	5095	737.5	23.07	23.50
CA_4A-71A	LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B71	20	68761	634.5	23.06	23.50
CA_66A-66A	LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	20	67236	2190	23.45	23.50
CA_66B	LTE B66	5	131997	1712.5	QPSK	1	12	66461	2112.5	LTE B66	15	66554	2121.8	23.43	23.50
CA_66C	LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	20	66734	2139.8	23.40	23.50
CA_2A-66A	LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B2	20	900	1960	23.46	23.50
CA_12A-66A	LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B12	10	5095	737.5	23.49	23.50
CA_66A-71A	LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B71	20	68761	634.5	23.48	23.50

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 51 of 97	

Notes:

1. For every supported combination of downlink carrier aggregation, power measurements were performed with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.
2. All control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
3. For downlink carrier aggregation combinations, PCC uplink channel was selected based on section C)3)b)ii) of KBD 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers. All selected downlink channels remained fully within the downlink transmission band of the respective component carrier.
4. This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.






Figure 9-3
Power Measurement Setup

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 52 of 97

9.4 WLAN Conducted Powers

Table 9-48
2.4 GHz WLAN Maximum Average RF Power



2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	22.92	18.78	16.94
2417	2	N/A	19.68	17.90
2437	6	22.97	21.46	19.64
2457	10	N/A	19.64	17.72
2462	11	22.92	18.07	16.23

Table 9-49
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11a
		Average
5180	36	15.05
5200	40	19.14
5220	44	19.18
5240	48	19.20
5260	52	19.21
5280	56	19.08
5300	60	19.19
5320	64	15.11
5500	100	15.13
5520	104	19.28
5600	120	19.67
5680	136	19.63
5700	140	17.14
5745	149	17.18
5765	153	19.55
5785	157	19.61
5805	161	19.59
5825	165	17.20

Table 9-50
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	18.78	15.88	15.66
2417	2	N/A	16.63	16.61
2437	6	18.67	18.37	18.43
2457	10	N/A	16.65	16.60
2462	11	18.57	15.16	15.04


FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 53 of 97

**Table 9-51
5 GHz WLAN Reduced Average RF Power**



5GHz (20MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11a Average
5180	36	13.43
5200	40	17.84
5220	44	17.86
5240	48	17.90
5260	52	17.90
5280	56	17.92
5300	60	17.90
5320	64	13.31
5500	100	13.47
5520	104	17.86
5600	120	17.93
5680	136	17.81
5700	140	15.43
5745	149	15.43
5765	153	17.25
5785	157	17.71
5805	161	17.44
5825	165	15.55

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

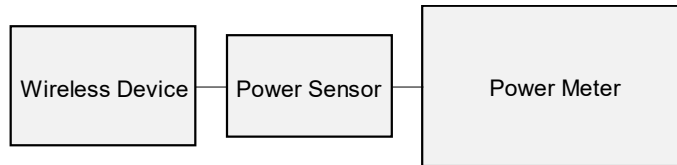- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-4
Power Measurement Setup**

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 54 of 97

9.5 Bluetooth Conducted Powers

Table 9-52
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	10.28	10.666
2441	1.0	39	10.98	12.531
2480	1.0	78	10.13	10.299
2402	2.0	0	9.61	9.147
2441	2.0	39	10.67	11.661
2480	2.0	78	9.49	8.889
2402	3.0	0	9.60	9.113
2441	3.0	39	10.66	11.635
2480	3.0	78	9.49	8.900

Note: The bolded data rates and channel above were tested for SAR.



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 55 of 97



Figure 9-5
Bluetooth Transmission Plot

Equation 9-1
Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.887ms}{3.712ms} * 100\% = 77.8\%$$

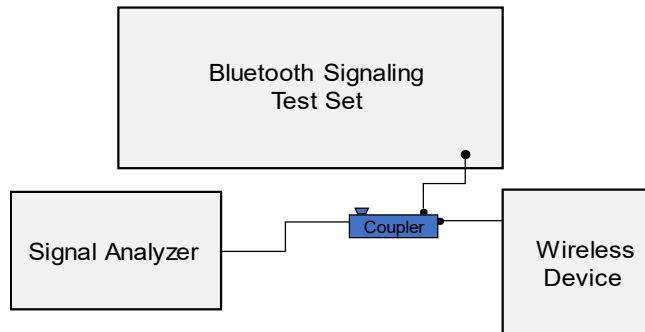


Figure 9-6
Power Measurement Setup



FCC ID: ZNFQ710TS	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 56 of 97

10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Head Measured Tissue Properties**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
3/14/2018	750H	20.3	680	0.855	40.954	0.888	42.305	-3.72%	-3.19%
			695	0.859	40.888	0.889	42.227	-3.37%	-3.17%
			700	0.860	40.818	0.889	42.201	-3.26%	-3.28%
			710	0.864	40.817	0.890	42.149	-2.92%	-3.16%
			740	0.874	40.715	0.893	41.994	-2.13%	-3.05%
			755	0.879	40.699	0.894	41.916	-1.68%	-2.90%
			770	0.884	40.674	0.895	41.838	-1.23%	-2.78%
			785	0.890	40.651	0.896	41.760	-0.67%	-2.66%
3/13/2018	835H	20.8	820	0.935	39.820	0.899	41.578	4.00%	-4.23%
			835	0.940	39.773	0.900	41.500	4.44%	-4.16%
			850	0.945	39.722	0.916	41.500	3.17%	-4.28%
3/13/2018	1750H	21.1	1710	1.362	39.383	1.348	40.142	1.04%	-1.89%
			1750	1.404	39.175	1.371	40.079	2.41%	-2.26%
			1790	1.445	38.977	1.394	40.016	3.66%	-2.60%
3/8/2018	1900H	22.0	1850	1.401	39.108	1.400	40.000	0.07%	-2.23%
			1880	1.434	39.000	1.400	40.000	2.43%	-2.50%
			1910	1.464	38.895	1.400	40.000	4.57%	-2.76%
3/18/2018	2450H - 2600H	23.5	2400	1.795	40.195	1.756	39.289	2.22%	2.31%
			2450	1.856	39.999	1.800	39.200	3.11%	2.04%
			2500	1.913	39.830	1.855	39.136	3.13%	1.77%
			2550	1.970	39.599	1.909	39.073	3.20%	1.35%
			2600	2.024	39.431	1.964	39.009	3.05%	1.08%
3/25/2018	2450H	23.5	2400	1.710	40.716	1.756	39.289	-2.62%	3.63%
			2450	1.764	40.568	1.800	39.200	-2.00%	3.49%
			2500	1.818	40.397	1.855	39.136	-1.99%	3.22%
03/12/2018	5200H- 5800H	21.0	5240	4.558	37.199	4.696	35.940	-2.94%	3.50%
			5260	4.579	37.137	4.717	35.917	-2.93%	3.40%
			5280	4.607	37.110	4.737	35.894	-2.74%	3.39%
			5520	4.838	36.806	4.983	35.620	-2.91%	3.33%
			5600	4.933	36.664	5.065	35.529	-2.61%	3.19%
			5680	5.015	36.570	5.147	35.437	-2.56%	3.20%
			5745	5.092	36.478	5.214	35.363	-2.34%	3.15%
			5765	5.109	36.439	5.234	35.340	-2.39%	3.11%
			5785	5.140	36.404	5.255	35.317	-2.19%	3.08%
			5800	5.150	36.401	5.270	35.300	-2.28%	3.12%
			5805	5.151	36.395	5.275	35.294	-2.35%	3.12%
			5825	5.173	36.365	5.296	35.271	-2.32%	3.10%
03/26/2018	5600H	22.3	5520	4.942	37.088	4.983	35.620	-0.82%	4.12%
			5580	5.031	37.068	5.045	35.551	-0.28%	4.27%
			5600	5.020	36.954	5.065	35.529	-0.89%	4.01%

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 57 of 97

**Table 10-2
Body Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
3/19/2018	750B	21.5	700	0.957	53.820	0.959	55.726	-0.21%	-3.42%
			710	0.961	53.800	0.960	55.687	0.10%	-3.39%
			740	0.971	53.749	0.963	55.570	0.83%	-3.28%
			755	0.976	53.711	0.964	55.512	1.24%	-3.24%
3/22/2018	750B	21.5	680	0.943	54.053	0.958	55.804	-1.57%	-3.14%
			695	0.949	54.024	0.959	55.745	-1.04%	-3.09%
			740	0.965	53.954	0.963	55.570	0.21%	-2.91%
			755	0.970	53.903	0.964	55.512	0.62%	-2.90%
			770	0.976	53.848	0.965	55.453	1.14%	-2.89%
3/19/2018	835B	20.9	820	0.958	52.797	0.969	55.258	-1.14%	-4.45%
			835	0.973	52.660	0.970	55.200	0.31%	-4.60%
			850	0.988	52.533	0.988	55.154	0.00%	-4.75%
3/20/2018	1750B	21.4	1710	1.463	51.439	1.463	53.537	0.00%	-3.92%
			1750	1.510	51.282	1.488	53.432	1.48%	-4.02%
			1790	1.556	51.120	1.514	53.326	2.77%	-4.14%
3/23/2018	1750B	21.4	1710	1.470	51.077	1.463	53.537	0.48%	-4.59%
			1750	1.514	50.923	1.488	53.432	1.75%	-4.70%
			1790	1.559	50.737	1.514	53.326	2.97%	-4.86%
3/26/2018	1750B	21.3	1710	1.479	51.319	1.463	53.537	1.09%	-4.14%
			1750	1.527	51.137	1.488	53.432	2.62%	-4.30%
			1790	1.571	50.987	1.514	53.326	3.76%	-4.39%
3/19/2018	1900B	22.3	1850	1.520	52.874	1.520	53.300	0.00%	-0.80%
			1880	1.558	52.748	1.520	53.300	2.50%	-1.04%
			1910	1.592	52.674	1.520	53.300	4.74%	-1.17%
3/21/2018	1900B	21.5	1850	1.520	52.331	1.520	53.300	0.00%	-1.82%
			1880	1.556	52.249	1.520	53.300	2.37%	-1.97%
			1910	1.591	52.168	1.520	53.300	4.67%	-2.12%
3/18/2018	2450B - 2600B	21.1	2400	1.986	51.186	1.902	52.767	4.42%	-3.00%
			2450	2.047	51.063	1.950	52.700	4.97%	-3.11%
			2500	2.105	50.909	2.021	52.636	4.16%	-3.28%
			2550	2.167	50.733	2.092	52.573	3.59%	-3.50%
			2600	2.227	50.553	2.163	52.509	2.96%	-3.73%
03/18/2018	5200B-5800B	20.6	5240	5.500	47.462	5.346	48.960	2.88%	-3.06%
			5260	5.516	47.381	5.369	48.933	2.74%	-3.17%
			5280	5.551	47.322	5.393	48.906	2.93%	-3.24%
			5600	5.970	46.771	5.766	48.471	3.54%	-3.51%
			5745	6.167	46.545	5.936	48.275	3.89%	-3.58%
			5765	6.217	46.475	5.959	48.248	4.33%	-3.67%
			5785	6.251	46.461	5.982	48.220	4.50%	-3.65%
			5805	6.282	46.374	6.006	48.193	4.60%	-3.77%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 58 of 97

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


**Table 10-3
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
E	750	HEAD	03/14/2018	23.9	20.7	0.200	1003	3213	1.550	8.280	7.750	-6.40%
E	835	HEAD	03/13/2018	23.4	21.2	0.200	4d132	3213	2.010	9.360	10.050	7.37%
J	1750	HEAD	03/13/2018	22.3	21.5	0.100	1150	3914	3.690	36.100	36.900	2.22%
G	1900	HEAD	03/08/2018	21.1	20.5	0.100	5d148	3332	4.030	40.100	40.300	0.50%
K	1900	HEAD	03/08/2018	21.9	20.5	0.100	5d080	7406	4.160	39.300	41.600	5.85%
G	2450	HEAD	03/18/2018	21.7	21.5	0.100	797	3332	5.220	52.700	52.200	-0.95%
G	2600	HEAD	03/18/2018	21.7	21.5	0.100	1126	3332	5.550	56.400	55.500	-1.60%
G	2450	HEAD	03/25/2018	23.2	23.1	0.100	797	3332	4.920	52.700	49.200	-6.64%
H	5250	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.920	78.900	78.400	-0.63%
H	5600	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.930	83.600	78.600	-5.98%
H	5750	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.760	79.100	75.200	-4.93%
H	5600	HEAD	03/26/2018	21.5	20.4	0.050	1120	3589	4.270	84.700	85.400	0.83%
I	750	BODY	03/19/2018	22.2	21.0	0.200	1046	3287	1.820	8.590	9.100	5.94%
H	750	BODY	03/22/2018	23.0	21.8	0.200	1046	7410	1.750	8.590	8.750	1.86%
E	835	BODY	03/19/2018	23.7	20.9	0.200	4d132	3213	1.980	9.710	9.900	1.96%
K	1750	BODY	03/20/2018	23.0	21.4	0.100	1148	7406	3.790	37.000	37.900	2.43%
K	1750	BODY	03/26/2018	22.0	21.3	0.100	1150	7406	3.920	36.500	39.200	7.40%
J	1900	BODY	03/19/2018	20.7	22.3	0.100	5d080	3914	4.180	39.100	41.800	6.91%
J	1900	BODY	03/21/2018	21.5	21.5	0.100	5d148	3914	4.110	39.600	41.100	3.79%
K	2450	BODY	03/18/2018	22.5	21.1	0.100	797	7406	5.050	51.100	50.500	-1.17%
K	2600	BODY	03/18/2018	22.5	21.1	0.100	1126	7406	5.390	54.300	53.900	-0.74%
D	5250	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.610	76.900	72.200	-6.11%
D	5600	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.840	78.500	76.800	-2.17%
D	5750	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.610	77.100	72.200	-6.36%

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 59 of 97	

**Table 10-4
System Verification Results – 10g**

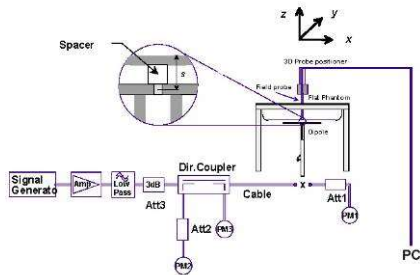

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
K	1750	BODY	03/23/2018	23.2	21.4	0.100	1148	7406	2.100	19.800	21.000	6.06%
K	1750	BODY	03/26/2018	22.0	21.3	0.100	1150	7406	2.070	19.500	20.700	6.15%
J	1900	BODY	03/21/2018	21.5	21.5	0.100	5d148	3914	2.110	20.900	21.100	0.96%
D	5250	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	1.010	21.500	20.200	-6.05%
D	5600	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	1.060	22.100	21.200	-4.07%



**Figure 10-1
System Verification Setup Diagram**



**Figure 10-2
System Verification Setup Photo**

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 60 of 97	

11 SAR DATA SUMMARY



11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.56	0.09	Right	Cheek	05734	1	1:8.3	0.109	1.033	0.113	
836.60	190	GSM 850	GSM	33.7	33.56	-0.02	Right	Tilt	05734	1	1:8.3	0.072	1.033	0.074	
836.60	190	GSM 850	GSM	33.7	33.56	0.03	Left	Cheek	05734	1	1:8.3	0.185	1.033	0.191	
836.60	190	GSM 850	GSM	33.7	33.56	-0.04	Left	Tilt	05734	1	1:8.3	0.084	1.033	0.087	
836.60	190	GSM 850	GPRS	30.7	30.69	-0.17	Right	Cheek	05734	3	1:2.76	0.104	1.002	0.104	
836.60	190	GSM 850	GPRS	30.7	30.69	0.00	Right	Tilt	05734	3	1:2.76	0.066	1.002	0.066	
836.60	190	GSM 850	GPRS	30.7	30.69	-0.09	Left	Cheek	05734	3	1:2.76	0.237	1.002	0.237	A1
836.60	190	GSM 850	GPRS	30.7	30.69	-0.12	Left	Tilt	05734	3	1:2.76	0.107	1.002	0.107	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2
GSM 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.62	0.15	Right	Cheek	05718	1	1:8.3	0.069	1.019	0.070	
1880.00	661	GSM 1900	GSM	30.7	30.62	-0.06	Right	Tilt	05718	1	1:8.3	0.031	1.019	0.032	
1880.00	661	GSM 1900	GSM	30.7	30.62	-0.11	Left	Cheek	05718	1	1:8.3	0.085	1.019	0.087	
1880.00	661	GSM 1900	GSM	30.7	30.62	0.18	Left	Tilt	05718	1	1:8.3	0.050	1.019	0.051	
1880.00	661	GSM 1900	GPRS	27.2	27.20	0.02	Right	Cheek	05718	3	1:2.76	0.074	1.000	0.074	
1880.00	661	GSM 1900	GPRS	27.2	27.20	-0.13	Right	Tilt	05718	3	1:2.76	0.035	1.000	0.035	
1880.00	661	GSM 1900	GPRS	27.2	27.20	0.12	Left	Cheek	05718	3	1:2.76	0.099	1.000	0.099	A2
1880.00	661	GSM 1900	GPRS	27.2	27.20	0.12	Left	Tilt	05718	3	1:2.76	0.045	1.000	0.045	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 61 of 97

**Table 11-3
UMTS 850 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.2	25.14	0.10	Right	Cheek	05734	1:1	0.124	1.014	0.126	
836.60	4183	UMTS 850	RMC	25.2	25.14	0.02	Right	Tilt	05734	1:1	0.077	1.014	0.078	
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.04	Left	Cheek	05734	1:1	0.264	1.014	0.268	A3
836.60	4183	UMTS 850	RMC	25.2	25.14	0.04	Left	Tilt	05734	1:1	0.116	1.014	0.118	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (W/kg) averaged over 1 gram							

**Table 11-4
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.13	Right	Cheek	05718	1:1	0.094	1.028	0.097	A4
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.03	Right	Tilt	05718	1:1	0.050	1.028	0.051	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.00	Left	Cheek	05718	1:1	0.085	1.028	0.087	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.04	Left	Tilt	05718	1:1	0.056	1.028	0.058	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.13	Right	Cheek	05718	1:1	0.130	1.026	0.133	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.16	Right	Tilt	05718	1:1	0.055	1.026	0.056	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.09	Left	Cheek	05718	1:1	0.148	1.026	0.152	A5
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.12	Left	Tilt	05718	1:1	0.085	1.026	0.087	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 62 of 97

**Table 11-6
LTE Band 71 Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	-0.13	0	Right	Cheek	QPSK	1	50	05726	1:1	0.077	1.047	0.081	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	-0.05	1	Right	Cheek	QPSK	50	0	05726	1:1	0.051	1.012	0.052	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	0.14	0	Right	Tilt	QPSK	1	50	05726	1:1	0.050	1.047	0.052	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	-0.01	1	Right	Tilt	QPSK	50	0	05726	1:1	0.034	1.012	0.034	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	-0.01	0	Left	Cheek	QPSK	1	50	05726	1:1	0.103	1.047	0.108	A6
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	-0.01	1	Left	Cheek	QPSK	50	0	05726	1:1	0.072	1.012	0.073	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	0.15	0	Left	Tilt	QPSK	1	50	05726	1:1	0.051	1.047	0.053	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	0.11	1	Left	Tilt	QPSK	50	0	05726	1:1	0.033	1.012	0.033	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-7
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.02	0	Right	Cheek	QPSK	1	49	05726	1:1	0.102	1.040	0.106	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.12	1	Right	Cheek	QPSK	25	0	05726	1:1	0.101	1.069	0.108	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	0.11	0	Right	Tilt	QPSK	1	49	05726	1:1	0.061	1.040	0.063	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.04	1	Right	Tilt	QPSK	25	0	05726	1:1	0.065	1.069	0.069	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.17	0	Left	Cheek	QPSK	1	49	05726	1:1	0.166	1.040	0.173	A7
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.06	1	Left	Cheek	QPSK	25	0	05726	1:1	0.148	1.069	0.158	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	0.07	0	Left	Tilt	QPSK	1	49	05726	1:1	0.069	1.040	0.072	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.11	1	Left	Tilt	QPSK	25	0	05726	1:1	0.062	1.069	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-8
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	0.08	0	Right	Cheek	QPSK	1	0	05726	1:1	0.126	1.045	0.132	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	-0.04	1	Right	Cheek	QPSK	25	0	05726	1:1	0.100	1.023	0.102	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.01	0	Right	Tilt	QPSK	1	0	05726	1:1	0.078	1.045	0.082	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.10	1	Right	Tilt	QPSK	25	0	05726	1:1	0.070	1.023	0.072	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.13	0	Left	Cheek	QPSK	1	0	05726	1:1	0.198	1.045	0.207	A8
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.11	1	Left	Cheek	QPSK	25	0	05726	1:1	0.169	1.023	0.173	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.01	0	Left	Tilt	QPSK	1	0	05726	1:1	0.086	1.045	0.090	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	-0.03	1	Left	Tilt	QPSK	25	0	05726	1:1	0.076	1.023	0.078	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 63 of 97	

**Table 11-9
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	0.15	0	Right	Cheek	QPSK	1	49	05726	1:1	0.132	1.009	0.133	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.00	1	Right	Cheek	QPSK	25	25	05726	1:1	0.104	1.005	0.105	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	-0.12	0	Right	Tilt	QPSK	1	49	05726	1:1	0.102	1.009	0.103	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	-0.02	1	Right	Tilt	QPSK	25	25	05726	1:1	0.083	1.005	0.083	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	-0.18	0	Left	Cheek	QPSK	1	49	05726	1:1	0.217	1.009	0.219	A9
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	-0.01	1	Left	Cheek	QPSK	25	25	05726	1:1	0.189	1.005	0.190	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	0.03	0	Left	Tilt	QPSK	1	49	05726	1:1	0.113	1.009	0.114	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.04	1	Left	Tilt	QPSK	25	25	05726	1:1	0.091	1.005	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-10
LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.16	0	Right	Cheek	QPSK	1	0	05726	1:1	0.112	1.009	0.113	A10
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.05	1	Right	Cheek	QPSK	50	0	05726	1:1	0.091	1.000	0.091	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.13	0	Right	Tilt	QPSK	1	0	05726	1:1	0.051	1.009	0.051	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.13	1	Right	Tilt	QPSK	50	0	05726	1:1	0.042	1.000	0.042	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.16	0	Left	Cheek	QPSK	1	0	05726	1:1	0.102	1.009	0.103	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.02	1	Left	Cheek	QPSK	50	0	05726	1:1	0.070	1.000	0.070	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.06	0	Left	Tilt	QPSK	1	0	05726	1:1	0.070	1.009	0.071	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.02	1	Left	Tilt	QPSK	50	0	05726	1:1	0.054	1.000	0.054	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 64 of 97

**Table 11-11
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.17	0	Right	Cheek	QPSK	1	0	05734	1:1	0.125	1.000	0.125	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.19	1	Right	Cheek	QPSK	50	50	05734	1:1	0.096	1.023	0.098	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.12	0	Right	Tilt	QPSK	1	0	05734	1:1	0.060	1.000	0.060	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.12	1	Right	Tilt	QPSK	50	50	05734	1:1	0.030	1.023	0.031	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.15	0	Left	Cheek	QPSK	1	0	05734	1:1	0.137	1.000	0.137	A11
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.11	1	Left	Cheek	QPSK	50	50	05734	1:1	0.115	1.023	0.118	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.13	0	Left	Tilt	QPSK	1	0	05734	1:1	0.076	1.000	0.076	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.12	1	Left	Tilt	QPSK	50	50	05734	1:1	0.062	1.023	0.063	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-12
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.14	0	Right	Cheek	QPSK	1	0	05734	1:1.58	0.033	1.000	0.033	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.14	1	Right	Cheek	QPSK	50	25	05734	1:1.58	0.029	1.000	0.029	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.16	0	Right	Tilt	QPSK	1	0	05734	1:1.58	0.027	1.000	0.027	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.12	1	Right	Tilt	QPSK	50	25	05734	1:1.58	0.023	1.000	0.023	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.12	0	Left	Cheek	QPSK	1	0	05734	1:1.58	0.040	1.000	0.040	A12
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.13	1	Left	Cheek	QPSK	50	25	05734	1:1.58	0.031	1.000	0.031	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.12	0	Left	Tilt	QPSK	1	0	05734	1:1.58	0.017	1.000	0.017	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.12	1	Left	Tilt	QPSK	50	25	05734	1:1.58	0.014	1.000	0.014	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 65 of 97

**Table 11-13
DTS Head SAR**



MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	19.0	18.78	0.11	Right	Cheek	05809	1	100.0	1.161	0.979	1.052	1.000	1.030	
2437	6	802.11b	DSSS	22	19.0	18.67	0.20	Right	Cheek	05809	1	100.0	1.257	1.030	1.079	1.000	1.111	A13
2462	11	802.11b	DSSS	22	19.0	18.57	-0.07	Right	Cheek	05809	1	100.0	1.276	1.010	1.104	1.000	1.115	
2412	1	802.11b	DSSS	22	19.0	18.78	-0.04	Right	Tilt	05809	1	100.0	0.795	0.822	1.052	1.000	0.865	
2437	6	802.11b	DSSS	22	19.0	18.67	-0.14	Right	Tilt	05809	1	100.0	0.721	0.769	1.079	1.000	0.830	
2412	1	802.11b	DSSS	22	19.0	18.78	-0.16	Left	Cheek	05809	1	100.0	0.412	-	1.052	1.000	-	
2412	1	802.11b	DSSS	22	19.0	18.78	0.07	Left	Tilt	05809	1	100.0	0.417	0.344	1.052	1.000	0.362	
2437	6	802.11b	DSSS	22	19.0	18.67	0.06	Right	Cheek	05809	1	100.0	1.407	0.966	1.079	1.000	1.042	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability data.

**Table 11-14
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	18.0	17.92	-0.06	Right	Cheek	05809	6	98.8	1.686	0.775	1.019	1.012	0.799	
5280	56	802.11a	OFDM	20	18.0	17.92	0.18	Right	Tilt	05809	6	98.8	0.822	0.372	1.019	1.012	0.384	
5280	56	802.11a	OFDM	20	18.0	17.92	-0.04	Left	Cheek	05809	6	98.8	0.571	-	1.019	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.92	0.10	Left	Tilt	05809	6	98.8	0.288	-	1.019	1.012	-	
5520	104	802.11a	OFDM	20	18.0	17.86	0.19	Right	Cheek	05809	6	98.8	2.156	0.858	1.033	1.012	0.897	A14
5600	120	802.11a	OFDM	20	18.0	17.93	0.13	Right	Cheek	05809	6	98.8	2.031	0.823	1.016	1.012	0.846	
5680	136	802.11a	OFDM	20	18.0	17.81	0.13	Right	Cheek	05809	6	98.8	1.478	0.585	1.045	1.012	0.619	
5600	120	802.11a	OFDM	20	18.0	17.93	0.17	Right	Tilt	05809	6	98.8	0.866	0.395	1.016	1.012	0.406	
5600	120	802.11a	OFDM	20	18.0	17.93	0.10	Left	Cheek	05809	6	98.8	0.609	-	1.016	1.012	-	
5600	120	802.11a	OFDM	20	18.0	17.93	0.06	Left	Tilt	05809	6	98.8	0.524	-	1.016	1.012	-	
5520	104	802.11a	OFDM	20	18.0	17.86	0.18	Right	Cheek	05809	6	98.8	1.597	0.787	1.033	1.012	0.823	
5785	157	802.11a	OFDM	20	18.0	17.71	0.18	Right	Cheek	05809	6	98.8	1.151	0.457	1.069	1.012	0.494	
5785	157	802.11a	OFDM	20	18.0	17.71	0.12	Right	Tilt	05809	6	98.8	0.510	0.197	1.069	1.012	0.213	
5785	157	802.11a	OFDM	20	18.0	17.71	0.13	Left	Cheek	05809	6	98.8	0.223	-	1.069	1.012	-	
5785	157	802.11a	OFDM	20	18.0	17.71	0.11	Left	Tilt	05809	6	98.8	0.198	-	1.069	1.012	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability data.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 66 of 97



**Table 11-15
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle %	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441.00	39	Bluetooth	FHSS	11.5	10.98	-0.17	Right	Cheek	05809	1	77.8	0.106	1.127	1.285	0.154	A15
2441.00	39	Bluetooth	FHSS	11.5	10.98	0.01	Right	Tilt	05809	1	77.8	0.089	1.127	1.285	0.129	
2441.00	39	Bluetooth	FHSS	11.5	10.98	0.12	Left	Cheek	05809	1	77.8	0.044	1.127	1.285	0.064	
2441.00	39	Bluetooth	FHSS	11.5	10.98	0.21	Left	Tilt	05809	1	77.8	0.043	1.127	1.285	0.062	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

11.2 Standalone Body-Worn SAR Data

**Table 11-16
GSM/UMTS Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.56	-0.01	10 mm	05718	1	1:8.3	back	0.406	1.033	0.419	
836.60	190	GSM 850	GPRS	30.7	30.69	0.00	10 mm	05718	3	1:2.76	back	0.478	1.002	0.479	A16
1880.00	661	GSM 1900	GSM	30.7	30.62	-0.04	10 mm	05718	1	1:8.3	back	0.378	1.019	0.385	
1880.00	661	GSM 1900	GPRS	27.2	27.20	-0.01	10 mm	05718	3	1:2.76	back	0.388	1.000	0.388	A18
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.01	10 mm	05718	N/A	1:1	back	0.605	1.014	0.613	A20
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.04	10 mm	05718	N/A	1:1	back	0.444	1.028	0.456	A22
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.02	10 mm	05718	N/A	1:1	back	0.622	1.026	0.638	A24
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 67 of 97

**Table 11-17
LTE Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	0.18	0	05726	QPSK	1	50	10 mm	back	1:1	0.531	1.047	0.556	A26
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	0.07	1	05726	QPSK	50	0	10 mm	back	1:1	0.365	1.012	0.369	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.01	0	05734	QPSK	1	49	10 mm	back	1:1	0.649	1.040	0.675	A28
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.00	1	05734	QPSK	25	0	10 mm	back	1:1	0.559	1.069	0.598	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.06	0	05726	QPSK	1	0	10 mm	back	1:1	0.714	1.045	0.746	A30
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.06	1	05726	QPSK	25	0	10 mm	back	1:1	0.566	1.023	0.579	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	-0.15	0	05726	QPSK	1	49	10 mm	back	1:1	0.655	1.009	0.661	A32
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.06	1	05726	QPSK	25	25	10 mm	back	1:1	0.546	1.005	0.549	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.14	0	05726	QPSK	1	0	10 mm	back	1:1	0.435	1.009	0.439	A34
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.09	1	05726	QPSK	50	0	10 mm	back	1:1	0.359	1.000	0.359	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.06	0	05734	QPSK	1	0	10 mm	back	1:1	0.548	1.000	0.548	A36
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	-0.02	1	05734	QPSK	50	50	10 mm	back	1:1	0.469	1.023	0.480	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.12	0	05726	QPSK	1	0	10 mm	back	1:1.58	0.157	1.000	0.157	A38
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.15	1	05726	QPSK	50	25	10 mm	back	1:1.58	0.145	1.000	0.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										



**Table 11-18
DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	23.0	22.97	0.03	10 mm	05809	1	back	100.0	0.348	0.217	1.007	1.000	0.219	A40
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-19
NII Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	20.0	19.21	0.07	10 mm	05809	6	back	98.8	1.480	0.622	1.199	1.012	0.755	
5600	120	802.11a	OFDM	20	20.0	19.67	-0.06	10 mm	05809	6	back	98.8	1.604	0.691	1.079	1.012	0.755	
5765	153	802.11a	OFDM	20	20.0	19.55	0.11	10 mm	05809	6	back	98.8	1.829	0.767	1.109	1.012	0.861	
5785	157	802.11a	OFDM	20	20.0	19.61	0.13	10 mm	05809	6	back	98.8	1.638	0.805	1.094	1.012	0.891	A42
5805	161	802.11a	OFDM	20	20.0	19.59	0.04	10 mm	05809	6	back	98.8	1.880	0.783	1.099	1.012	0.871	
5785	157	802.11a	OFDM	20	20.0	19.61	-0.01	10 mm	05809	6	back	98.8	1.836	0.786	1.094	1.012	0.848	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry represents variability data.



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 68 of 97	

11.3 Standalone Hotspot SAR Data

**Table 11-20
GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	30.7	30.69	0.00	10 mm	05718	3	1:2.76	back	0.478	1.002	0.479	
836.60	190	GSM 850	GPRS	30.7	30.69	-0.05	10 mm	05718	3	1:2.76	front	0.538	1.002	0.539	A17
836.60	190	GSM 850	GPRS	30.7	30.69	-0.07	10 mm	05718	3	1:2.76	bottom	0.269	1.002	0.270	
836.60	190	GSM 850	GPRS	30.7	30.69	-0.12	10 mm	05718	3	1:2.76	left	0.227	1.002	0.227	
1880.00	661	GSM 1900	GPRS	27.2	27.20	-0.01	10 mm	05718	3	1:2.76	back	0.388	1.000	0.388	
1880.00	661	GSM 1900	GPRS	27.2	27.20	0.13	10 mm	05718	3	1:2.76	front	0.340	1.000	0.340	
1880.00	661	GSM 1900	GPRS	27.2	27.20	-0.03	10 mm	05718	3	1:2.76	bottom	0.591	1.000	0.591	A19
1880.00	661	GSM 1900	GPRS	27.2	27.20	-0.02	10 mm	05718	3	1:2.76	left	0.169	1.000	0.169	
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.01	10 mm	05718	N/A	1:1	back	0.605	1.014	0.613	
826.40	4132	UMTS 850	RMC	25.2	24.93	0.02	10 mm	05718	N/A	1:1	front	0.766	1.064	0.815	A21
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.01	10 mm	05718	N/A	1:1	front	0.694	1.014	0.704	
846.60	4233	UMTS 850	RMC	25.2	25.19	-0.04	10 mm	05718	N/A	1:1	front	0.680	1.002	0.681	
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.07	10 mm	05718	N/A	1:1	bottom	0.428	1.014	0.434	
836.60	4183	UMTS 850	RMC	25.2	25.14	-0.01	10 mm	05718	N/A	1:1	left	0.298	1.014	0.302	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.04	10 mm	05718	N/A	1:1	back	0.444	1.028	0.456	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.01	10 mm	05718	N/A	1:1	front	0.443	1.028	0.455	
1712.40	1312	UMTS 1750	RMC	24.5	24.38	0.11	10 mm	05718	N/A	1:1	bottom	0.566	1.028	0.582	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.00	10 mm	05718	N/A	1:1	bottom	0.629	1.028	0.647	
1752.60	1513	UMTS 1750	RMC	24.5	24.43	0.00	10 mm	05718	N/A	1:1	bottom	0.678	1.016	0.689	A23
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.09	10 mm	05718	N/A	1:1	left	0.227	1.028	0.233	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.02	10 mm	05718	N/A	1:1	back	0.622	1.026	0.638	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.08	10 mm	05718	N/A	1:1	front	0.548	1.026	0.562	
1852.40	9262	UMTS 1900	RMC	24.5	24.38	-0.02	10 mm	05718	N/A	1:1	bottom	0.860	1.028	0.884	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.14	10 mm	05718	N/A	1:1	bottom	0.992	1.026	1.018	
1907.60	9538	UMTS 1900	RMC	24.5	24.37	0.14	10 mm	05718	N/A	1:1	bottom	1.170	1.030	1.205	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	0.05	10 mm	05718	N/A	1:1	left	0.295	1.026	0.303	
1907.60	9538	UMTS 1900	RMC	24.5	24.37	0.11	10 mm	05718	N/A	1:1	bottom	1.180	1.030	1.215	A25
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability data.



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 69 of 97	

**Table 11-21
LTE Band 71 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	0.18	0	05726	QPSK	1	50	10 mm	back	1:1	0.531	1.047	0.556	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	0.07	1	05726	QPSK	50	0	10 mm	back	1:1	0.365	1.012	0.369	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	0.04	0	05726	QPSK	1	50	10 mm	front	1:1	0.549	1.047	0.575	A27
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	-0.09	1	05726	QPSK	50	0	10 mm	front	1:1	0.353	1.012	0.357	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	-0.13	0	05726	QPSK	1	50	10 mm	bottom	1:1	0.298	1.047	0.312	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	-0.07	1	05726	QPSK	50	0	10 mm	bottom	1:1	0.205	1.012	0.207	
680.50	133297	Mid	LTE Band 71	20	25.0	24.80	-0.11	0	05726	QPSK	1	50	10 mm	left	1:1	0.266	1.047	0.279	
680.50	133297	Mid	LTE Band 71	20	24.0	23.95	0.07	1	05726	QPSK	50	0	10 mm	left	1:1	0.187	1.012	0.189	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-22
LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.01	0	05734	QPSK	1	49	10 mm	back	1:1	0.649	1.040	0.675	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.00	1	05734	QPSK	25	0	10 mm	back	1:1	0.559	1.069	0.598	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	0.00	0	05734	QPSK	1	49	10 mm	front	1:1	0.684	1.040	0.711	A29
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.05	1	05734	QPSK	25	0	10 mm	front	1:1	0.596	1.069	0.637	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.09	0	05734	QPSK	1	49	10 mm	bottom	1:1	0.380	1.040	0.395	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	-0.16	1	05734	QPSK	25	0	10 mm	bottom	1:1	0.374	1.069	0.400	
707.50	23095	Mid	LTE Band 12	10	25.5	25.33	-0.16	0	05734	QPSK	1	49	10 mm	left	1:1	0.326	1.040	0.339	
707.50	23095	Mid	LTE Band 12	10	24.5	24.21	0.16	1	05374	QPSK	25	0	10 mm	left	1:1	0.307	1.069	0.328	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												



FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 70 of 97

**Table 11-23
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.06	0	05726	QPSK	1	0	10 mm	back	1:1	0.714	1.045	0.746	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.06	1	05726	QPSK	25	0	10 mm	back	1:1	0.566	1.023	0.579	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	0.02	0	05726	QPSK	1	0	10 mm	front	1:1	0.781	1.045	0.816	A31
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.01	1	05726	QPSK	25	0	10 mm	front	1:1	0.617	1.023	0.631	
782.00	23230	Mid	LTE Band 13	10	24.5	24.22	0.03	1	05726	QPSK	50	0	10 mm	front	1:1	0.618	1.067	0.659	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	0.12	0	05726	QPSK	1	0	10 mm	bottom	1:1	0.478	1.045	0.500	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	-0.01	1	05726	QPSK	25	0	10 mm	bottom	1:1	0.370	1.023	0.379	
782.00	23230	Mid	LTE Band 13	10	25.5	25.31	-0.09	0	05726	QPSK	1	0	10 mm	left	1:1	0.372	1.045	0.389	
782.00	23230	Mid	LTE Band 13	10	24.5	24.40	0.02	1	05726	QPSK	25	0	10 mm	left	1:1	0.289	1.023	0.296	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-24
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	-0.15	0	05726	QPSK	1	49	10 mm	back	1:1	0.655	1.009	0.661	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.06	1	05726	QPSK	25	25	10 mm	back	1:1	0.546	1.005	0.549	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	0.04	0	05726	QPSK	1	49	10 mm	front	1:1	0.744	1.009	0.751	A33
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.09	1	05726	QPSK	25	25	10 mm	front	1:1	0.617	1.005	0.620	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	0.12	0	05726	QPSK	1	49	10 mm	bottom	1:1	0.415	1.009	0.419	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	0.06	1	05726	QPSK	25	25	10 mm	bottom	1:1	0.349	1.005	0.351	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.46	-0.12	0	05726	QPSK	1	49	10 mm	left	1:1	0.300	1.009	0.303	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.48	-0.03	1	05726	QPSK	25	25	10 mm	left	1:1	0.243	1.005	0.244	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 71 of 97



**Table 11-25
LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.14	0	05726	QPSK	1	0	10 mm	back	1:1	0.435	1.009	0.439	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.09	1	05726	QPSK	50	0	10 mm	back	1:1	0.359	1.000	0.359	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.06	0	05726	QPSK	1	0	10 mm	front	1:1	0.437	1.009	0.441	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.05	1	05726	QPSK	50	0	10 mm	front	1:1	0.353	1.000	0.353	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	24.41	0.09	0	05726	QPSK	1	99	10 mm	bottom	1:1	0.699	1.021	0.714	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	-0.07	0	05726	QPSK	1	0	10 mm	bottom	1:1	0.617	1.009	0.623	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.45	-0.04	0	05726	QPSK	1	99	10 mm	bottom	1:1	0.859	1.012	0.869	A35
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.09	1	05726	QPSK	50	0	10 mm	bottom	1:1	0.481	1.000	0.481	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.45	0.10	1	05726	QPSK	100	0	10 mm	bottom	1:1	0.499	1.012	0.505	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	-0.03	0	05726	QPSK	1	0	10 mm	left	1:1	0.204	1.009	0.206	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.01	1	05726	QPSK	50	0	10 mm	left	1:1	0.175	1.000	0.175	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.45	0.12	0	05726	QPSK	1	99	10 mm	bottom	1:1	0.857	1.012	0.867	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability data.

**Table 11-26
LTE Band 2 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.06	0	05734	QPSK	1	0	10 mm	back	1:1	0.548	1.000	0.548	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	-0.02	1	05734	QPSK	50	50	10 mm	back	1:1	0.469	1.023	0.480	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	-0.01	0	05734	QPSK	1	0	10 mm	front	1:1	0.480	1.000	0.480	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	-0.06	1	05734	QPSK	50	50	10 mm	front	1:1	0.387	1.023	0.396	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.04	0	05734	QPSK	1	0	10 mm	bottom	1:1	0.912	1.000	0.912	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	24.50	-0.04	0	05734	QPSK	1	0	10 mm	bottom	1:1	1.080	1.000	1.080	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	24.43	-0.12	0	05734	QPSK	1	0	10 mm	bottom	1:1	1.130	1.016	1.148	A37
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.14	1	05734	QPSK	50	50	10 mm	bottom	1:1	0.766	1.023	0.784	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.24	-0.10	1	05734	QPSK	100	0	10 mm	bottom	1:1	0.747	1.062	0.793	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	-0.09	0	05734	QPSK	1	0	10 mm	left	1:1	0.257	1.000	0.257	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.00	1	05734	QPSK	50	50	10 mm	left	1:1	0.190	1.023	0.194	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 72 of 97



**Table 11-27
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.12	0	05726	QPSK	1	0	10 mm	back	1:1.58	0.157	1.000	0.157	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.15	1	05726	QPSK	50	25	10 mm	back	1:1.58	0.145	1.000	0.145	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	-0.18	0	05726	QPSK	1	0	10 mm	front	1:1.58	0.278	1.000	0.278	A39
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.04	1	05726	QPSK	50	25	10 mm	front	1:1.58	0.239	1.000	0.239	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	0.09	0	05726	QPSK	1	0	10 mm	bottom	1:1.58	0.153	1.000	0.153	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	0.06	1	05726	QPSK	50	25	10 mm	bottom	1:1.58	0.138	1.000	0.138	
2593.00	40620	Mid	LTE Band 41	20	24.0	24.00	-0.12	0	05726	QPSK	1	0	10 mm	left	1:1.58	0.091	1.000	0.091	
2593.00	40620	Mid	LTE Band 41	20	23.0	23.00	-0.16	1	05726	QPSK	50	25	10 mm	left	1:1.58	0.078	1.000	0.078	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-28
WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	23.0	22.97	0.03	10 mm	05809	1	back	100.0	0.348	-	1.007	1.000	-	
2437	6	802.11b	DSSS	22	23.0	22.97	0.13	10 mm	05809	1	front	100.0	0.287	-	1.007	1.000	-	
2437	6	802.11b	DSSS	22	23.0	22.97	0.12	10 mm	05809	1	top	100.0	0.351	-	1.007	1.000	-	
2437	6	802.11b	DSSS	22	23.0	22.97	0.12	10 mm	05809	1	left	100.0	0.360	0.228	1.007	1.000	0.230	A41
5240	48	802.11a	OFDM	20	20.0	19.20	0.08	10 mm	05809	6	back	98.8	1.440	0.655	1.202	1.012	0.797	
5240	48	802.11a	OFDM	20	20.0	19.20	-0.13	10 mm	05809	6	front	98.8	0.330	0.142	1.202	1.012	0.173	
5240	48	802.11a	OFDM	20	20.0	19.20	0.13	10 mm	05809	6	top	98.8	0.180	-	1.202	1.012	-	
5240	48	802.11a	OFDM	20	20.0	19.20	0.13	10 mm	05809	6	left	98.8	1.045	0.499	1.202	1.012	0.607	
5785	153	802.11a	OFDM	20	20.0	19.55	0.11	10 mm	05809	6	back	98.8	1.829	0.767	1.109	1.012	0.861	
5785	157	802.11a	OFDM	20	20.0	19.61	0.13	10 mm	05809	6	back	98.8	1.638	0.805	1.094	1.012	0.891	A42
5805	161	802.11a	OFDM	20	20.0	19.59	0.04	10 mm	05809	6	back	98.8	1.880	0.783	1.099	1.012	0.871	
5785	157	802.11a	OFDM	20	20.0	19.61	0.02	10 mm	05809	6	front	98.8	0.244	0.090	1.094	1.012	0.100	
5785	157	802.11a	OFDM	20	20.0	19.61	0.14	10 mm	05809	6	top	98.8	0.148	-	1.094	1.012	-	
5785	157	802.11a	OFDM	20	20.0	19.61	0.17	10 mm	05809	6	left	98.8	1.017	0.445	1.094	1.012	0.493	
5785	157	802.11a	OFDM	20	20.0	19.61	-0.01	10 mm	05809	6	back	98.8	1.836	0.766	1.094	1.012	0.848	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										



Note: Blue entry represents variability data.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 73 of 97	

11.4 Standalone Phablet SAR Data

Table 11-29
UMTS Phablet SAR Data



MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.13	3 mm	05718	1:1	back	0.762	1.028	0.783	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	0.02	2 mm	05718	1:1	front	1.250	1.028	1.285	
1712.40	1312	UMTS 1750	RMC	24.5	24.38	-0.04	0 mm	05718	1:1	bottom	2.130	1.028	2.190	
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.01	0 mm	05718	1:1	bottom	2.170	1.028	2.231	
1752.60	1513	UMTS 1750	RMC	24.5	24.43	-0.01	0 mm	05718	1:1	bottom	2.200	1.016	2.235	A43
1732.40	1412	UMTS 1750	RMC	24.5	24.38	-0.05	0 mm	05718	1:1	left	0.516	1.028	0.530	
1732.40	1412	UMTS 1750	RMC	23.5	23.40	0.19	0 mm	05718	1:1	back	1.390	1.023	1.422	
1732.40	1412	UMTS 1750	RMC	23.5	23.40	-0.13	0 mm	05718	1:1	front	1.920	1.023	1.964	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.03	3 mm	05718	1:1	back	1.110	1.026	1.139	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.04	2 mm	05718	1:1	front	1.430	1.026	1.467	
1852.40	9262	UMTS 1900	RMC	24.5	24.38	0.07	0 mm	05718	1:1	bottom	2.940	1.028	3.022	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.02	0 mm	05718	1:1	bottom	3.100	1.026	3.181	A44
1907.60	9538	UMTS 1900	RMC	24.5	24.37	0.10	0 mm	05718	1:1	bottom	3.090	1.030	3.183	
1880.00	9400	UMTS 1900	RMC	24.5	24.39	-0.02	0 mm	05718	1:1	left	0.682	1.026	0.700	
1880.00	9400	UMTS 1900	RMC	23.5	23.44	-0.03	0 mm	05718	1:1	back	1.700	1.014	1.724	
1852.40	9262	UMTS 1900	RMC	23.5	23.43	-0.22	0 mm	05718	1:1	front	1.930	1.016	1.961	
1880.00	9400	UMTS 1900	RMC	23.5	23.44	-0.13	0 mm	05718	1:1	front	2.140	1.014	2.170	
1907.60	9538	UMTS 1900	RMC	23.5	23.34	-0.04	0 mm	05718	1:1	front	2.300	1.038	2.387	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 74 of 97

**Table 11-30
LTE Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	-0.05	0	05726	QPSK	1	0	3 mm	back	1:1	0.765	1.009	0.772	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.06	1	05726	QPSK	50	0	3 mm	back	1:1	0.614	1.000	0.614	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.18	0	05726	QPSK	1	0	2 mm	front	1:1	1.040	1.009	1.049	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.06	1	05726	QPSK	50	0	2 mm	front	1:1	0.847	1.000	0.847	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.5	24.41	-0.14	0	05726	QPSK	1	99	0 mm	bottom	1:1	3.080	1.021	3.145	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	-0.18	0	05726	QPSK	1	0	0 mm	bottom	1:1	2.780	1.009	2.805	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.45	-0.07	0	05726	QPSK	1	99	0 mm	bottom	1:1	3.160	1.012	3.198	A45
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.49	-0.16	1	05726	QPSK	50	0	0 mm	bottom	1:1	2.190	1.002	2.194	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.07	1	05726	QPSK	50	0	0 mm	bottom	1:1	2.240	1.000	2.240	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	-0.17	1	05726	QPSK	50	0	0 mm	bottom	1:1	2.250	1.002	2.255	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.45	-0.17	1	05726	QPSK	100	0	0 mm	bottom	1:1	2.190	1.012	2.216	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.5	24.46	0.09	0	05726	QPSK	1	0	0 mm	left	1:1	0.601	1.009	0.606	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.01	1	05726	QPSK	50	0	0 mm	left	1:1	0.483	1.000	0.483	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.12	0	05726	QPSK	1	50	0 mm	back	1:1	1.340	1.000	1.340	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	0.12	0	05726	QPSK	50	0	0 mm	back	1:1	1.320	1.000	1.320	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.12	0	05726	QPSK	1	50	0 mm	front	1:1	1.860	1.000	1.860	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.5	23.50	-0.14	0	05726	QPSK	50	0	0 mm	front	1:1	1.610	1.000	1.610	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.5	24.45	-0.01	0	05726	QPSK	1	99	0 mm	bottom	1:1	3.160	1.012	3.198	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.03	0	05734	QPSK	1	0	3 mm	back	1:1	1.050	1.000	1.050	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.11	1	05734	QPSK	50	50	3 mm	back	1:1	0.849	1.023	0.869	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	-0.12	0	05734	QPSK	1	0	2 mm	front	1:1	1.370	1.000	1.370	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	-0.12	1	05734	QPSK	50	50	2 mm	front	1:1	1.110	1.023	1.136	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.00	0	05734	QPSK	1	0	0 mm	bottom	1:1	3.010	1.000	3.010	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	24.50	0.02	0	05734	QPSK	1	0	0 mm	bottom	1:1	3.200	1.000	3.200	A46
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	24.43	-0.08	0	05734	QPSK	1	0	0 mm	bottom	1:1	3.130	1.016	3.180	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.11	1	05734	QPSK	50	50	0 mm	bottom	1:1	2.420	1.023	2.476	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.25	0.01	1	05734	QPSK	50	50	0 mm	bottom	1:1	2.500	1.059	2.648	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.34	0.01	1	05734	QPSK	50	50	0 mm	bottom	1:1	2.480	1.038	2.574	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.24	-0.09	1	05734	QPSK	100	0	0 mm	bottom	1:1	2.410	1.062	2.559	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	24.50	0.01	0	05734	QPSK	1	0	0 mm	left	1:1	0.666	1.000	0.666	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.02	1	05734	QPSK	50	50	0 mm	left	1:1	0.549	1.023	0.562	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.50	-0.02	0	05734	QPSK	1	50	0 mm	back	1:1	1.660	1.000	1.660	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.46	-0.03	0	05734	QPSK	50	0	0 mm	back	1:1	1.740	1.009	1.756	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.50	-0.13	0	05734	QPSK	1	50	0 mm	front	1:1	1.830	1.000	1.830	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.46	-0.13	0	05734	QPSK	50	0	0 mm	front	1:1	1.880	1.009	1.897	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	24.50	-0.11	0	05734	QPSK	1	0	0 mm	bottom	1:1	3.100	1.000	3.100	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

Note: Blue entry represents variability data.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 75 of 97	



**Table 11-31
WLAN Phablet SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	20.0	19.21	-0.14	0 mm	05809	6	back	98.8	16.794	1.840	1.199	1.012	2.233	
5280	56	802.11a	OFDM	20	20.0	19.08	0.02	0 mm	05809	6	back	98.8	17.204	1.900	1.236	1.012	2.377	A47
5300	60	802.11a	OFDM	20	20.0	19.19	-0.12	0 mm	05809	6	back	98.8	13.670	1.490	1.205	1.012	1.817	
5260	52	802.11a	OFDM	20	20.0	19.21	-0.14	0 mm	05809	6	front	98.8	5.394	0.674	1.199	1.012	0.818	
5260	52	802.11a	OFDM	20	20.0	19.21	0.14	0 mm	05809	6	top	98.8	4.097	-	1.199	1.012	-	
5260	52	802.11a	OFDM	20	20.0	19.21	0.05	0 mm	05809	6	left	98.8	9.678	1.030	1.199	1.012	1.250	
5600	120	802.11a	OFDM	20	20.0	19.67	0.11	0 mm	05809	6	back	98.8	15.122	1.560	1.079	1.012	1.703	
5600	120	802.11a	OFDM	20	20.0	19.67	-0.16	0 mm	05809	6	front	98.8	4.882	0.795	1.079	1.012	0.868	
5600	120	802.11a	OFDM	20	20.0	19.67	-0.21	0 mm	05809	6	top	98.8	3.441	-	1.079	1.012	-	
5600	120	802.11a	OFDM	20	20.0	19.67	0.12	0 mm	05809	6	left	98.8	9.989	1.070	1.079	1.012	1.168	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams									

11.5 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
- Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 76 of 97

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
4. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

UMTS Notes:



1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 77 of 97	

the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.6.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.5 for the time domain plot and calculation for the duty factor of the device.

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 78 of 97

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$



When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 10g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{18.75} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1
Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)	Separation Distance (Phablet)	Estimated SAR (Phablet)
	[MHz]	[dBm]	[mm]	[W/kg]	[mm]	[W/kg]
Bluetooth	2480	11.50	10	0.294	5	0.235

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 79 of 97

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.237	1.115	1.352
	GSM/GPRS 1900	0.099	1.115	1.214
	UMTS 850	0.268	1.115	1.383
	UMTS 1750	0.097	1.115	1.212
	UMTS 1900	0.152	1.115	1.267
	LTE Band 71	0.108	1.115	1.223
	LTE Band 12	0.173	1.115	1.288
	LTE Band 13	0.207	1.115	1.322
	LTE Band 5 (Cell)	0.219	1.115	1.334
	LTE Band 66 (AWS)	0.113	1.115	1.228
	LTE Band 2 (PCS)	0.137	1.115	1.252
	LTE Band 41	0.040	1.115	1.155





FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 80 of 97	

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.237	0.897	1.134
	GSM/GPRS 1900	0.099	0.897	0.996
	UMTS 850	0.268	0.897	1.165
	UMTS 1750	0.097	0.897	0.994
	UMTS 1900	0.152	0.897	1.049
	LTE Band 71	0.108	0.897	1.005
	LTE Band 12	0.173	0.897	1.070
	LTE Band 13	0.207	0.897	1.104
	LTE Band 5 (Cell)	0.219	0.897	1.116
	LTE Band 66 (AWS)	0.113	0.897	1.010
	LTE Band 2 (PCS)	0.137	0.897	1.034
	LTE Band 41	0.040	0.897	0.937

Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.237	0.154	0.391
	GSM/GPRS 1900	0.099	0.154	0.253
	UMTS 850	0.268	0.154	0.422
	UMTS 1750	0.097	0.154	0.251
	UMTS 1900	0.152	0.154	0.306
	LTE Band 71	0.108	0.154	0.262
	LTE Band 12	0.173	0.154	0.327
	LTE Band 13	0.207	0.154	0.361
	LTE Band 5 (Cell)	0.219	0.154	0.373
	LTE Band 66 (AWS)	0.113	0.154	0.267
	LTE Band 2 (PCS)	0.137	0.154	0.291
	LTE Band 41	0.040	0.154	0.194

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 81 of 97



12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.479	0.219	0.698
	GSM/GPRS 1900	0.388	0.219	0.607
	UMTS 850	0.613	0.219	0.832
	UMTS 1750	0.456	0.219	0.675
	UMTS 1900	0.638	0.219	0.857
	LTE Band 71	0.556	0.219	0.775
	LTE Band 12	0.675	0.219	0.894
	LTE Band 13	0.746	0.219	0.965
	LTE Band 5 (Cell)	0.661	0.219	0.880
	LTE Band 66 (AWS)	0.439	0.219	0.658
	LTE Band 2 (PCS)	0.548	0.219	0.767
	LTE Band 41	0.157	0.219	0.376

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	GSM/GPRS 850	0.479	0.891	1.370	N/A
	GSM/GPRS 1900	0.388	0.891	1.279	N/A
	UMTS 850	0.613	0.891	1.504	N/A
	UMTS 1750	0.456	0.891	1.347	N/A
	UMTS 1900	0.638	0.891	1.529	N/A
	LTE Band 71	0.556	0.891	1.447	N/A
	LTE Band 12	0.675	0.891	1.566	N/A
	LTE Band 13	0.746	0.891	See Note 1	0.02
	LTE Band 5 (Cell)	0.661	0.891	1.552	N/A
	LTE Band 66 (AWS)	0.439	0.891	1.330	N/A
	LTE Band 2 (PCS)	0.548	0.891	1.439	N/A
	LTE Band 41	0.157	0.891	1.048	N/A

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 82 of 97	

**Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.479	0.294	0.773
	GSM/GPRS 1900	0.388	0.294	0.682
	UMTS 850	0.613	0.294	0.907
	UMTS 1750	0.456	0.294	0.750
	UMTS 1900	0.638	0.294	0.932
	LTE Band 71	0.556	0.294	0.850
	LTE Band 12	0.675	0.294	0.969
	LTE Band 13	0.746	0.294	1.040
	LTE Band 5 (Cell)	0.661	0.294	0.955
	LTE Band 66 (AWS)	0.439	0.294	0.733
	LTE Band 2 (PCS)	0.548	0.294	0.842
	LTE Band 41	0.157	0.294	0.451

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 for 1g SAR per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-“).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.





FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 83 of 97	

Table 12-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	GPRS 850	0.539	0.230	0.769
	GPRS 1900	0.591	0.230	0.821
	UMTS 850	0.815	0.230	1.045
	UMTS 1750	0.689	0.230	0.919
	UMTS 1900	1.215	0.230	1.445
	LTE Band 71	0.575	0.230	0.805
	LTE Band 12	0.711	0.230	0.941
	LTE Band 13	0.816	0.230	1.046
	LTE Band 5 (Cell)	0.751	0.230	0.981
	LTE Band 66 (AWS)	0.869	0.230	1.099
	LTE Band 2 (PCS)	1.148	0.230	1.378
	LTE Band 41	0.278	0.230	0.508

Table 12-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	GPRS 850	0.539	0.891	1.430
	GPRS 1900	0.591	0.891	1.482
	UMTS 850	0.815	0.891	See Table Below
	UMTS 1750	0.689	0.891	1.580
	UMTS 1900	1.215	0.891	See Table Below
	LTE Band 71	0.575	0.891	1.466
	LTE Band 12	0.711	0.891	See Table Below
	LTE Band 13	0.816	0.891	See Table Below
	LTE Band 5 (Cell)	0.751	0.891	See Table Below
	LTE Band 66 (AWS)	0.869	0.891	See Table Below
	LTE Band 2 (PCS)	1.148	0.891	See Table Below
	LTE Band 41	0.278	0.891	1.169

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 84 of 97



Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.613	0.891	1.504	Hotspot SAR	Back	0.638	0.891	1.529
	Front	0.815	0.173	0.988		Front	0.562	0.173	0.735
	Top	-	0.891*	0.891		Top	-	0.891*	0.891
	Bottom	0.434	-	0.434		Bottom	1.215	-	1.215
	Left	0.302	0.607	0.909		Left	0.303	0.607	0.910

Simult Tx	Configuration	LTE Band 12 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Hotspot SAR	Back	0.675	0.891	1.566	
	Front	0.711	0.173	0.884	
	Top	-	0.891*	0.891	
	Bottom	0.400	-	0.400	
	Left	0.339	0.607	0.946	

Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	0.746	0.891	See Note 1	0.02
	Front	0.816	0.173	0.989	N/A
	Top	-	0.891*	0.891	N/A
	Bottom	0.500	-	0.500	N/A
	Left	0.389	0.607	0.996	N/A

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.661	0.891	1.552	Hotspot SAR	Back	0.439	0.891	1.330
	Front	0.751	0.173	0.924		Front	0.441	0.173	0.614
	Top	-	0.891*	0.891		Top	-	0.891*	0.891
	Bottom	0.419	-	0.419		Bottom	0.869	-	0.869
	Left	0.303	0.607	0.910		Left	0.206	0.607	0.813

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Hotspot SAR	Back	0.548	0.891	1.439	
	Front	0.480	0.173	0.653	
	Top	-	0.891*	0.891	
	Bottom	1.148	-	1.148	
	Left	0.257	0.607	0.864	

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 85 of 97



**Table 12-10
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Hotspot SAR	GPRS 850	0.539	0.294	0.833
	GPRS 1900	0.591	0.294	0.885
	UMTS 850	0.815	0.294	1.109
	UMTS 1750	0.689	0.294	0.983
	UMTS 1900	1.215	0.294	1.509
	LTE Band 71	0.575	0.294	0.869
	LTE Band 12	0.711	0.294	1.005
	LTE Band 13	0.816	0.294	1.110
	LTE Band 5 (Cell)	0.751	0.294	1.045
	LTE Band 66 (AWS)	0.869	0.294	1.163
	LTE Band 2 (PCS)	1.148	0.294	1.442
	LTE Band 41	0.278	0.294	0.572

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 for 1g SAR per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 86 of 97

12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).



(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)

Mode	3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
	1	2	1+2
UMTS 1750	2.235	2.377	See Table Below
UMTS 1900	3.183	2.377	See Table Below
LTE Band 66 (AWS)	3.198	2.377	See Table Below
LTE Band 2 (PCS)	3.200	2.377	See Table Below

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	1.422	2.377	3.799
	Front	1.964	0.868	2.832
	Top	-	2.377*	2.377
	Bottom	2.235	-	2.235
	Left	0.530	1.250	1.780

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	1.724	2.377	See Note 1	0.07
	Front	2.387	0.868	3.255	N/A
	Top	-	2.377*	2.377	N/A
	Bottom	3.183	-	3.183	N/A
	Left	0.700	1.250	1.950	N/A

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 87 of 97

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Phablet SAR	Back	1.340	2.377	3.717	
	Front	1.860	0.868	2.728	
	Top	-	2.377*	2.377	
	Bottom	3.198	-	3.198	
	Left	0.606	1.250	1.856	

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	1.756	2.377	See Note 1	0.07
	Front	1.897	0.868	2.765	N/A
	Top	-	2.377*	2.377	N/A
	Bottom	3.200	-	3.200	N/A
	Left	0.666	1.250	1.916	N/A

**Table 12-12
Simultaneous Transmission Scenario with Bluetooth (Phablet)**

Exposure Condition	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	UMTS 1750	2.235	0.235	2.470
	UMTS 1900	3.183	0.235	3.418
	LTE Band 66 (AWS)	3.198	0.235	3.433
	LTE Band 2 (PCS)	3.200	0.235	3.435



Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Notes:

1. No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.10 for 10g SAR per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.
2. For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g and ≤ 0.10 for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 88 of 97	

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

12.7.1 Body-Worn and Hotspot Back Side SPLSR Evaluation and Analysis


Table 12-13
Peak SAR Locations for Body-Worn and Hotspot Back Side



Mode/Band	x (mm)	y (mm)
5 GHz WLAN	15.00	55.00
LTE Band 13	-9.00	-42.00

Table 12-14
Body-Worn and Hotspot Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) ^{1.5} /D _{a-b}	
5 GHz WLAN	LTE Band 13	0.891	0.746	1.637	99.92	0.02	1

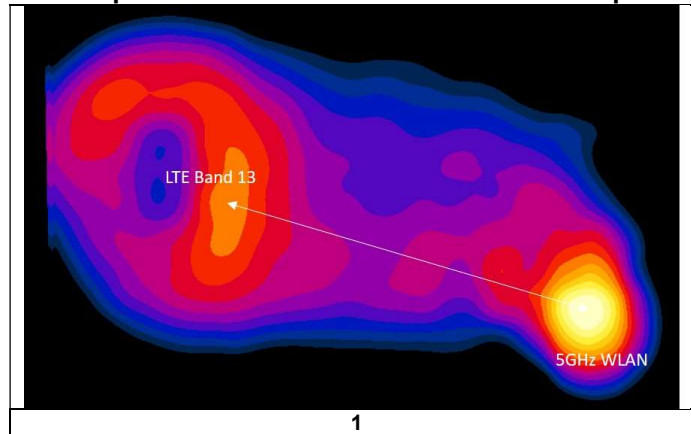Table 12-15
Body-Worn and Hotspot Back Side SAR to Peak Location Separation Ratio Plots



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 89 of 97

12.7.2 Phablet Back Side SPLSR Evaluation and Analysis


Table 12-16
Peak SAR Locations for Phablet Back Side

Mode/Band	x (mm)	y (mm)
5 GHz WLAN	15.00	50.00
UMTS 1900	-8.50	-70.50
LTE Band 2 (PCS)	-8.50	-70.50

Table 12-17
Phablet Back Side SAR to Peak Location Separation Ratio Calculations



Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	UMTS 1900	2.377	1.724	4.101	122.77	0.07	1
5 GHz WLAN	LTE Band 2 (PCS)	2.377	1.756	4.133	122.77	0.07	2

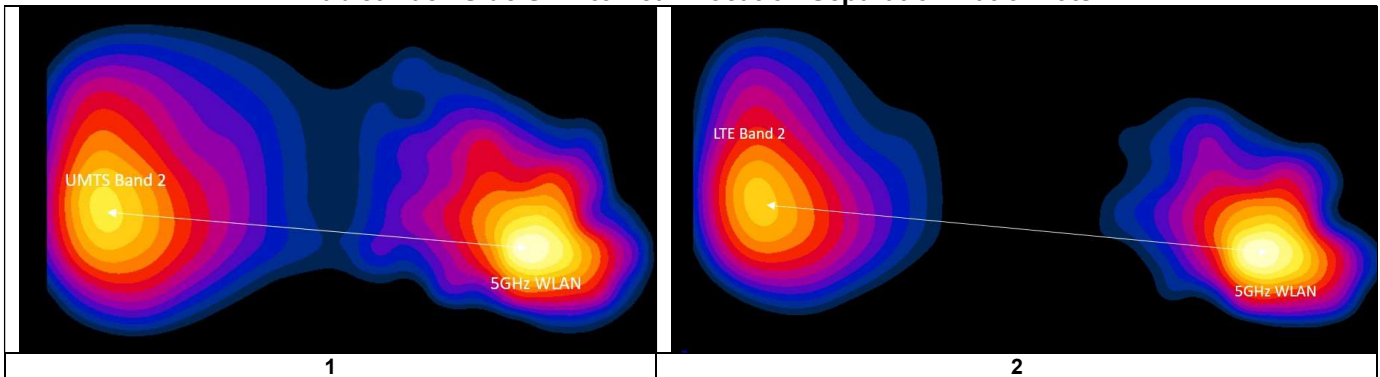Table 12-18
Phablet Back Side SAR to Peak Location Separation Ratio Plots



12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 90 of 97

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability



Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1
Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2437.00	6	802.11b, 22 MHz Bandwidth	DSSS	Right	Cheek	1	1.030	0.966	1.07	N/A	N/A	N/A	N/A
5600	5520.00	104	802.11a, 20 MHz Bandwidth	OFDM	Right	Cheek	6	0.858	0.787	1.09	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 91 of 97	

**Table 13-2
Body SAR Measurement Variability Results**



BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Side	Data Rate (Mbps)	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1907.60	9538	UMTS 1900	RMC	bottom	N/A	10 mm	1.170	1.180	1.01	N/A	N/A	N/A	N/A
1750	1770.00	132572	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	bottom	N/A	10 mm	0.859	0.857	1.00	N/A	N/A	N/A	N/A
5750	5785.00	157	802.11a, 20 MHz Bandwidth	OFDM	back	6	10 mm	0.805	0.766	1.05	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 13-3
Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1770.00	132572	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	bottom	0 mm	3.160	3.160	1.00	N/A	N/A	N/A	N/A
1900	1880.00	18900	LTE Band 2 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	bottom	0 mm	3.200	3.100	1.03	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams						

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 92 of 97	

14

EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	E5515C	Wireless Communications Test Set	1/24/2018	Annual	1/24/2019	GB44400860
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Agilent	N9202A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231535
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231538
Anritsu	MA2411B	Pulse Power Sensor	10/22/2017	Annual	10/22/2018	846215
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	941001
Anritsu	MT8820C	Radio Communication Analyzer	5/23/2017	Annual	5/23/2018	6201240328
Anritsu	MT8821C	Radio Communication Analyzer	8/15/2017	Annual	8/15/2018	6200901190
Anritsu	MT8821C	Radio Communication Analyzer	7/25/2017	Annual	7/25/2018	6201664756
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./ Clock/ Humidity Monitor	3/1/2017	Biennial	3/1/2019	170152009
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330144
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/11/2017	Annual	4/11/2018	836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	3/29/2017	Annual	3/29/2018	128633
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2017	Annual	7/20/2018	132885
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	1003
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	D1750V2	1750 MHz SAR Dipole	7/14/2016	Biennial	7/14/2018	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Biennial	7/8/2018	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Annual	9/11/2018	797
SPEAG	D2600V2	2600 MHz SAR Dipole	7/10/2017	Annual	7/10/2018	1126
SPEAG	D5GHzV2	5 GHz SAR Dipole	9/21/2016	Biennial	9/21/2018	1191
SPEAG	D5GHzV2	5 GHz SAR Dipole	2/12/2018	Annual	2/12/2019	1120
SPEAG	D750V3	750 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	1046
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1148
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/15/2017	Annual	8/15/2018	1237
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	EX3DV4	SAR Probe	2/14/2018	Annual	2/14/2019	3914
SPEAG	ES3DV3	SAR Probe	8/14/2017	Annual	8/14/2018	3332
SPEAG	EX3DV4	SAR Probe	4/18/2017	Annual	4/18/2018	7406
SPEAG	EX3DV4	SAR Probe	1/16/2018	Annual	1/16/2019	3589
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410
SPEAG	EX3DV4	SAR Probe	8/16/2017	Annual	8/16/2018	7308
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/9/2017	Annual	8/9/2018	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2017	Annual	4/11/2018	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFQ710TS		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 93 of 97	

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 94 of 97

16 CONCLUSION

16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: ZNFQ710TS	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset		Page 95 of 97

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFQ710TS	 PCTEST PROFESSIONAL LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 96 of 97	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFQ710TS	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803050033-01-R3.ZNF	Test Dates: 03/08/18 - 03/26/18	DUT Type: Portable Handset	Page 97 of 97

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734


Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 39.768$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Left Head, Cheek, Mid.ch, 3 Tx slots

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.43 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.301 W/kg
SAR(1 g) = 0.237 W/kg

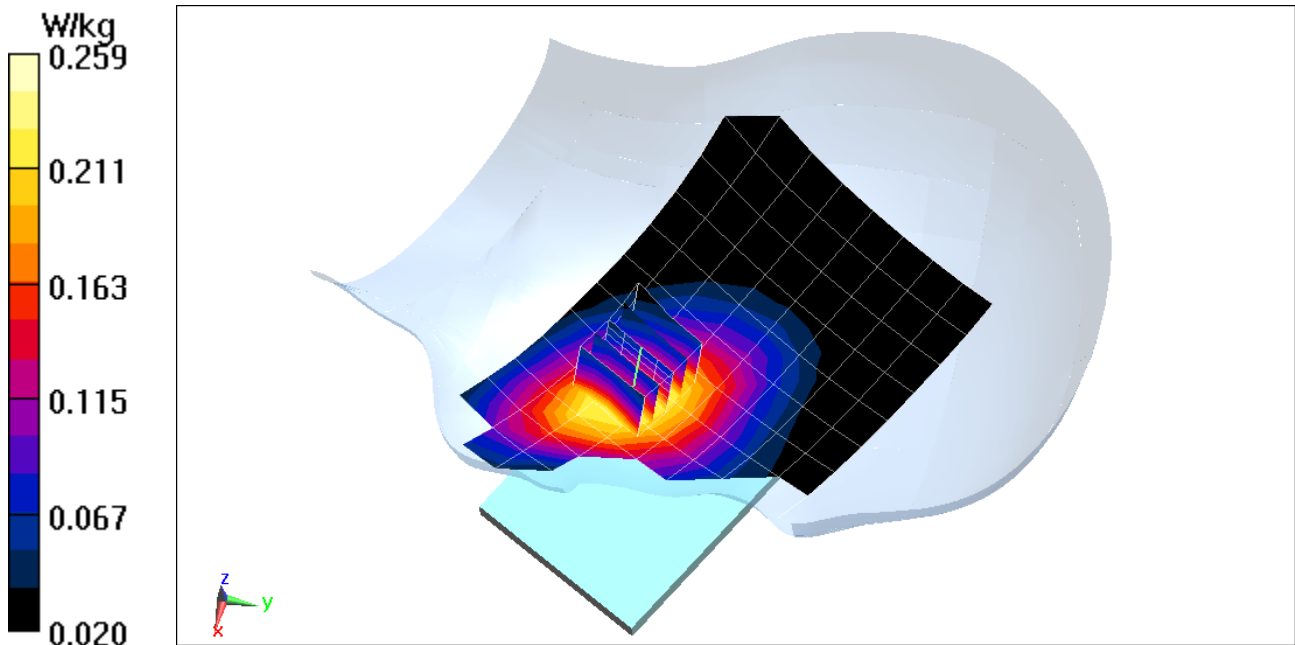

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 3 Tx slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.438 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.099 W/kg

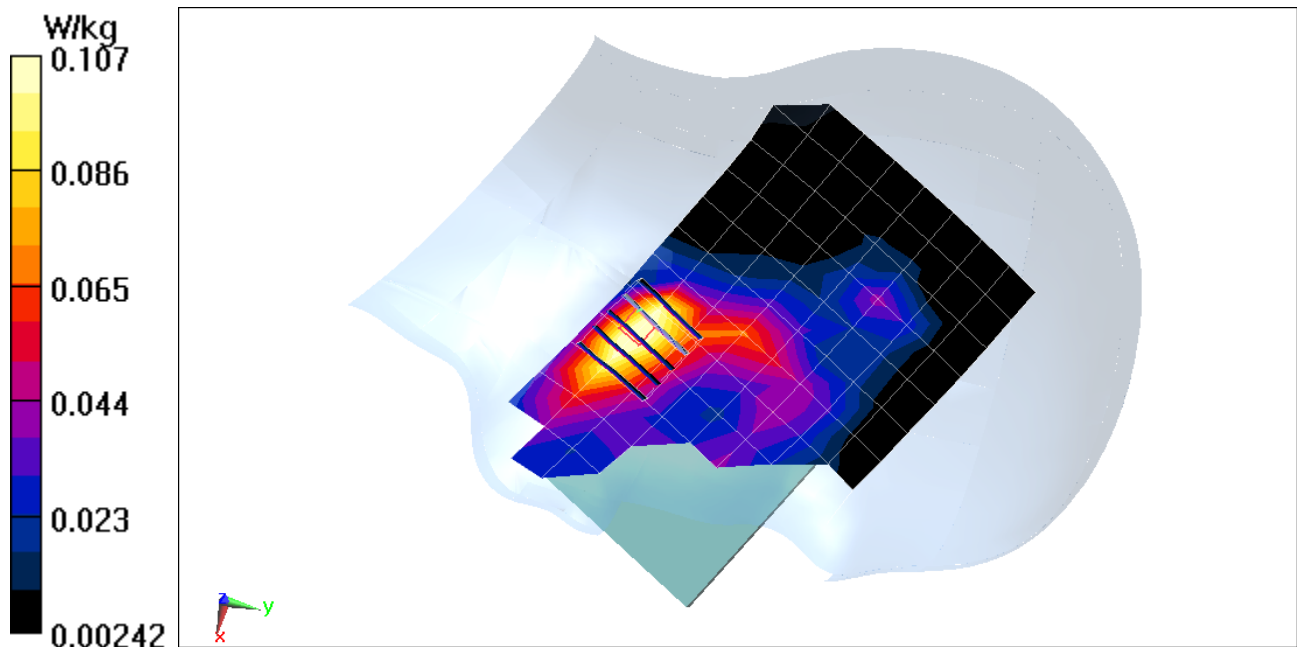

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734


Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.941 \text{ S/m}$; $\epsilon_r = 39.768$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.38 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.335 W/kg
SAR(1 g) = 0.264 W/kg

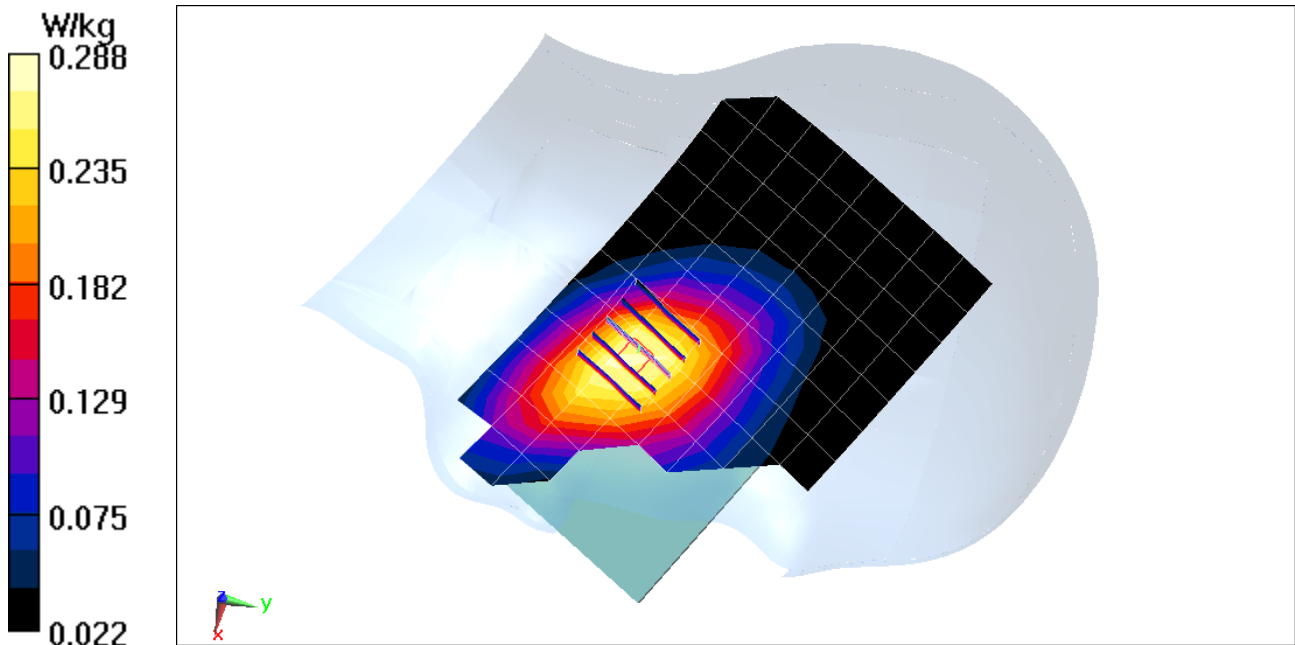

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1732.4 \text{ MHz}$; $\sigma = 1.386 \text{ S/m}$; $\epsilon_r = 39.267$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-13-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(8.34, 8.34, 8.34); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.548 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.094 W/kg

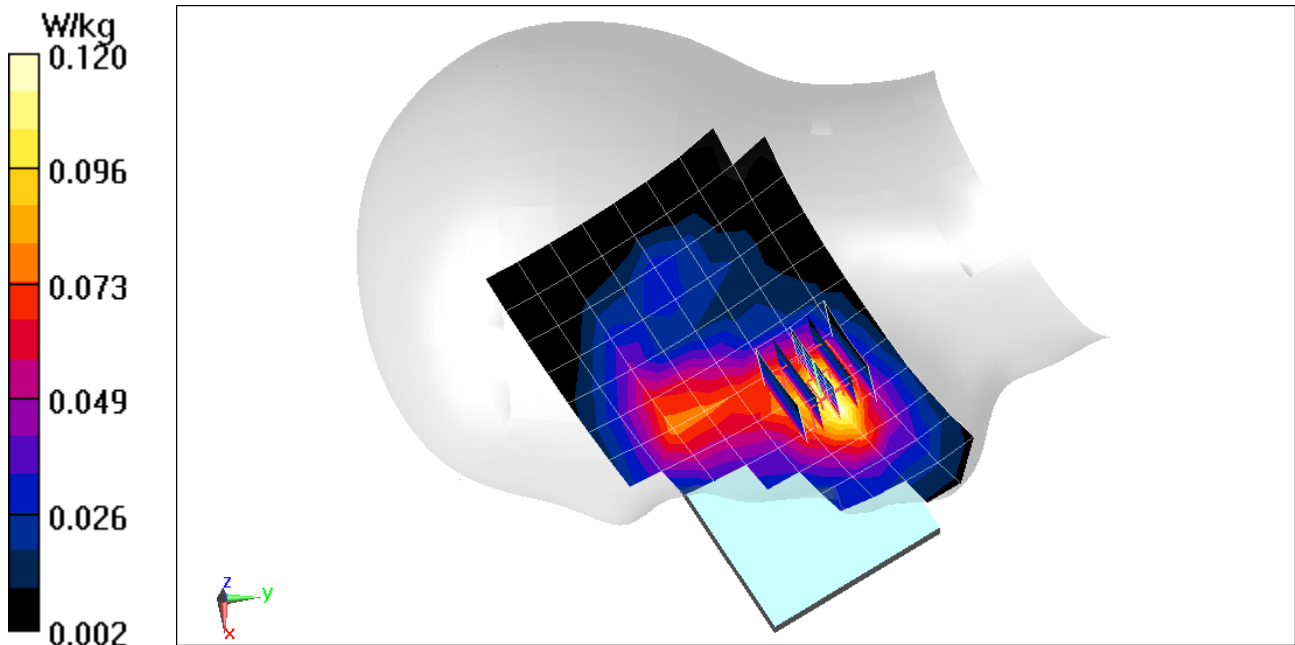

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.57 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.246 W/kg
SAR(1 g) = 0.148 W/kg

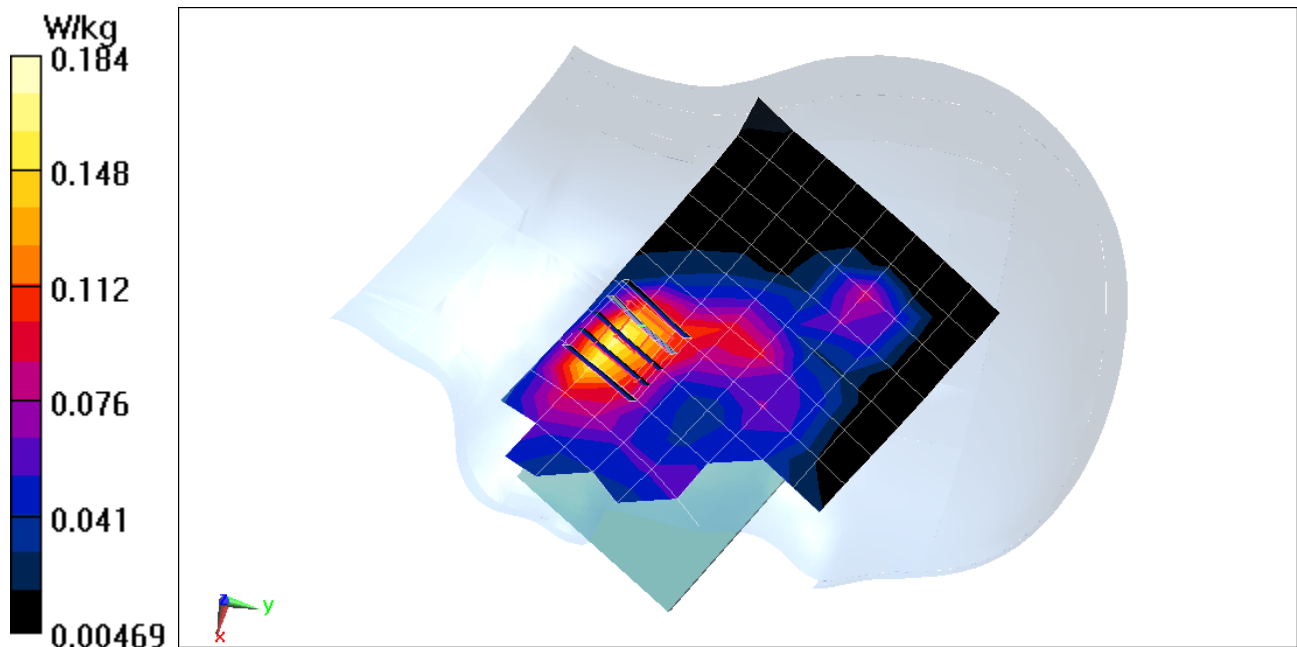

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 680.5 \text{ MHz}$; $\sigma = 0.855 \text{ S/m}$; $\epsilon_r = 40.952$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-14-2018; Ambient Temp: 23.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 71, Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.96 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.126 W/kg
SAR(1 g) = 0.103 W/kg

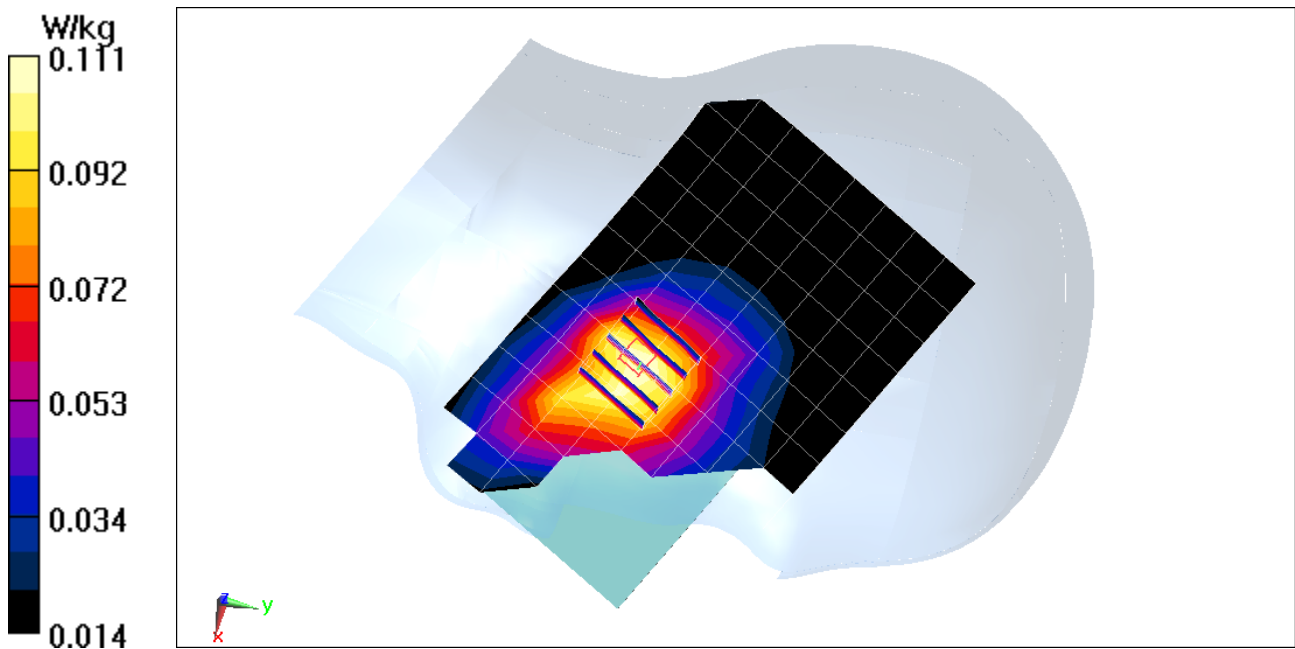

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 707.5 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 40.817$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-14-2018; Ambient Temp: 23.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 49 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.60 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.166 W/kg

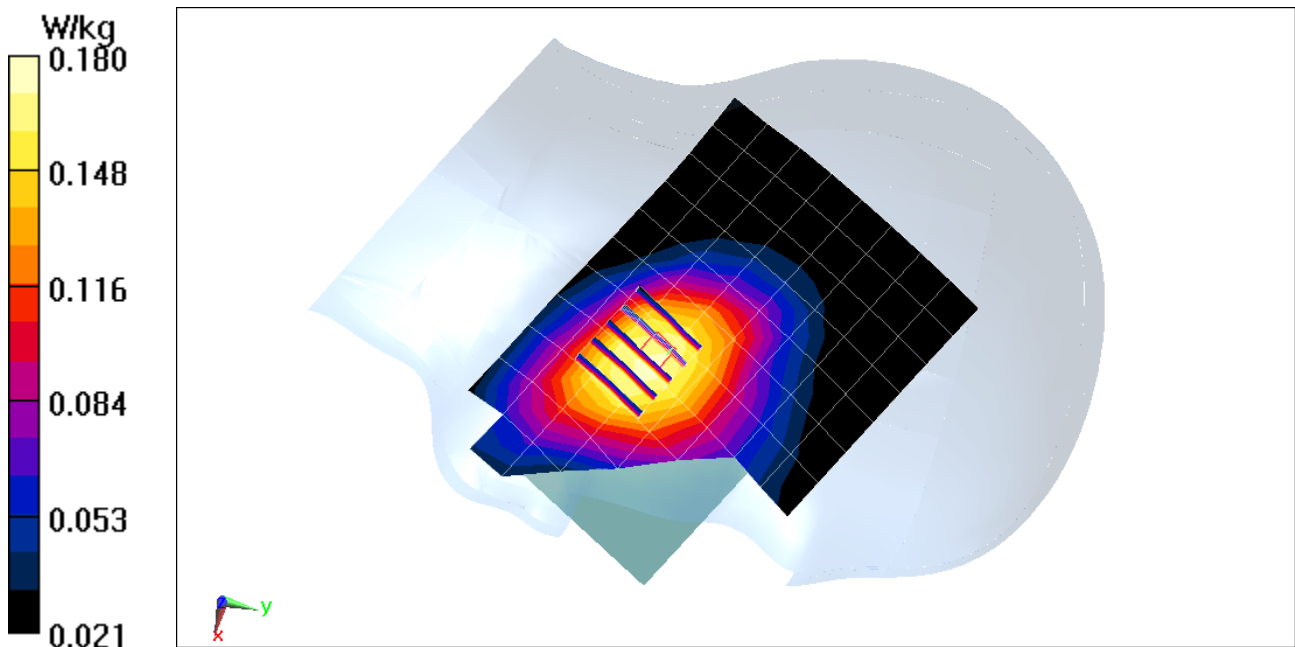

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 782 \text{ MHz}$; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 40.656$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-14-2018; Ambient Temp: 23.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.28 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.245 W/kg
SAR(1 g) = 0.198 W/kg

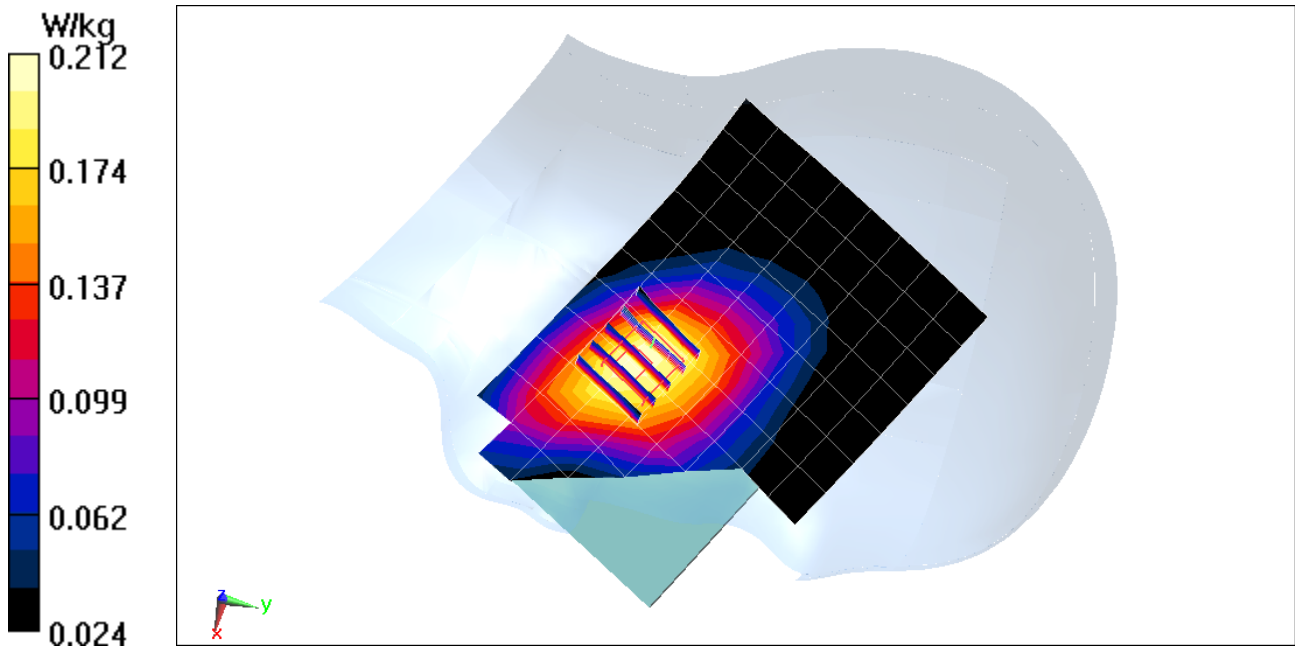

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 39.768$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Left Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.58 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.278 W/kg
SAR(1 g) = 0.217 W/kg

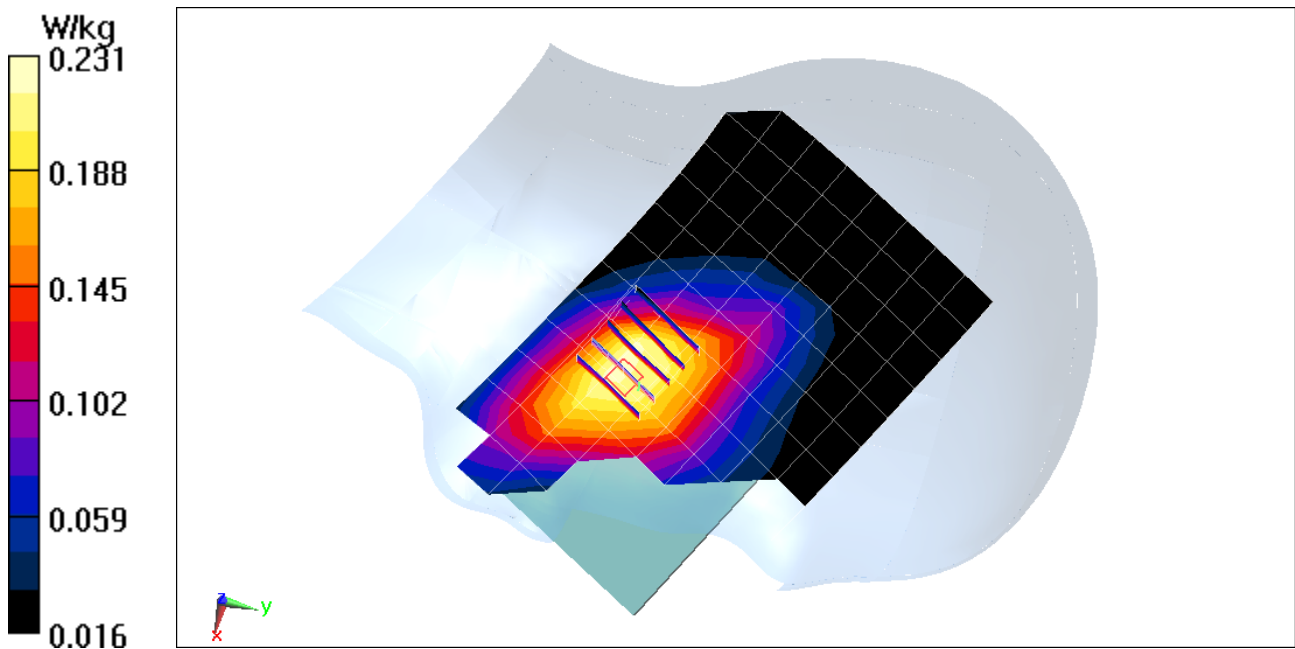

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1745 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 39.201$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-13-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(8.34, 8.34, 8.34); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.418 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.112 W/kg

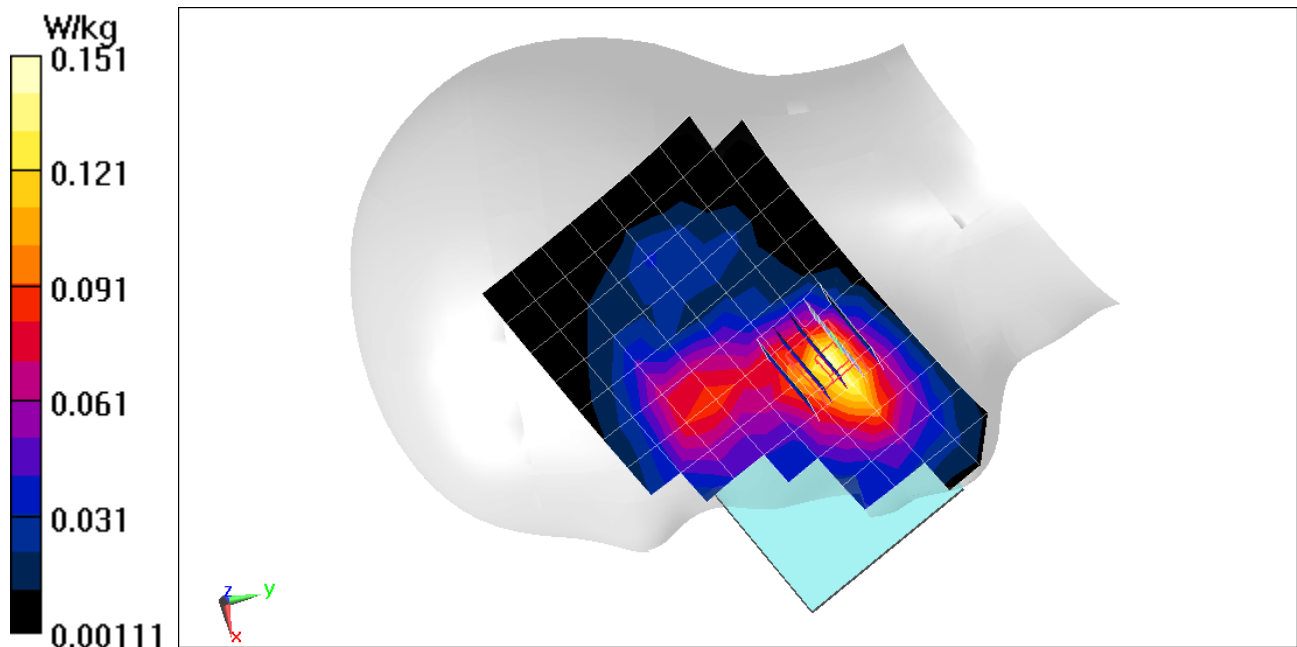

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1860 \text{ MHz}$; $\sigma = 1.412 \text{ S/m}$; $\epsilon_r = 39.072$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7406; ConvF(8.4, 8.4, 8.4); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.53 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.137 W/kg

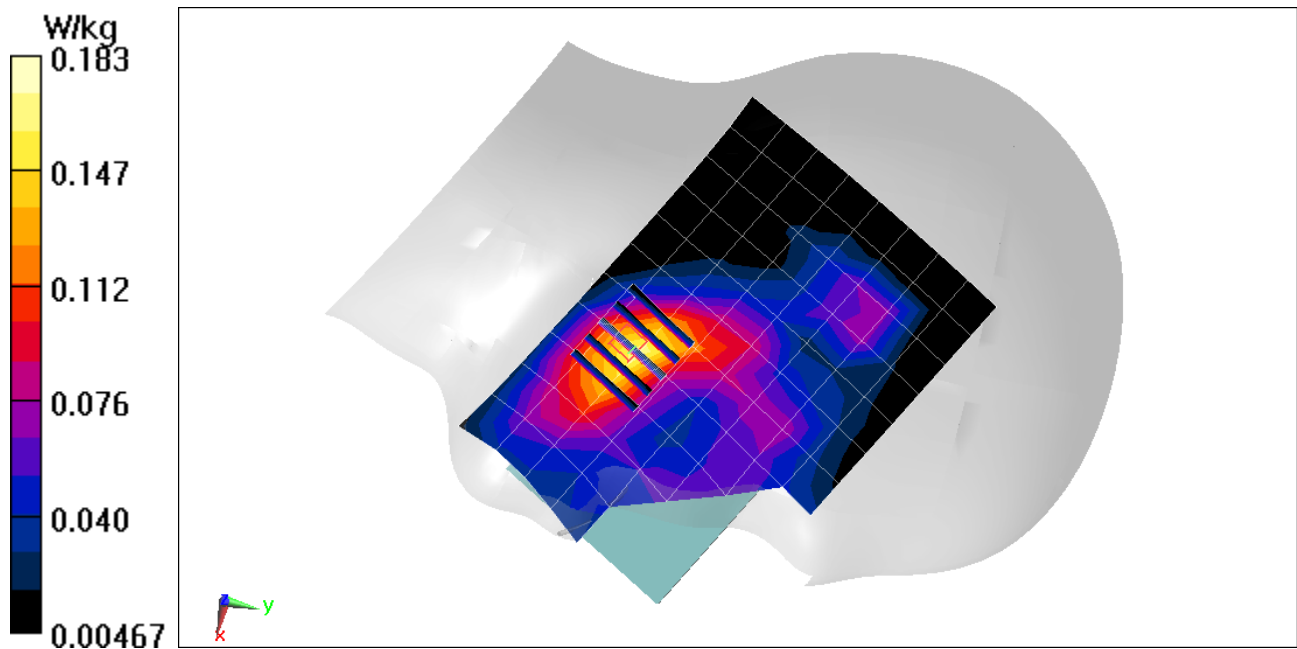

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734


Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium: 2450 Head Medium parameters used (interpolated):
 $f = 2593 \text{ MHz}$; $\sigma = 2.016 \text{ S/m}$; $\epsilon_r = 39.455$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Left Head, Cheek, Mid.ch, QPSK,
20 MHz Bandwidth, 1 RB, 0 RB Offset**

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.199 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.0800 W/kg
SAR(1 g) = 0.040 W/kg

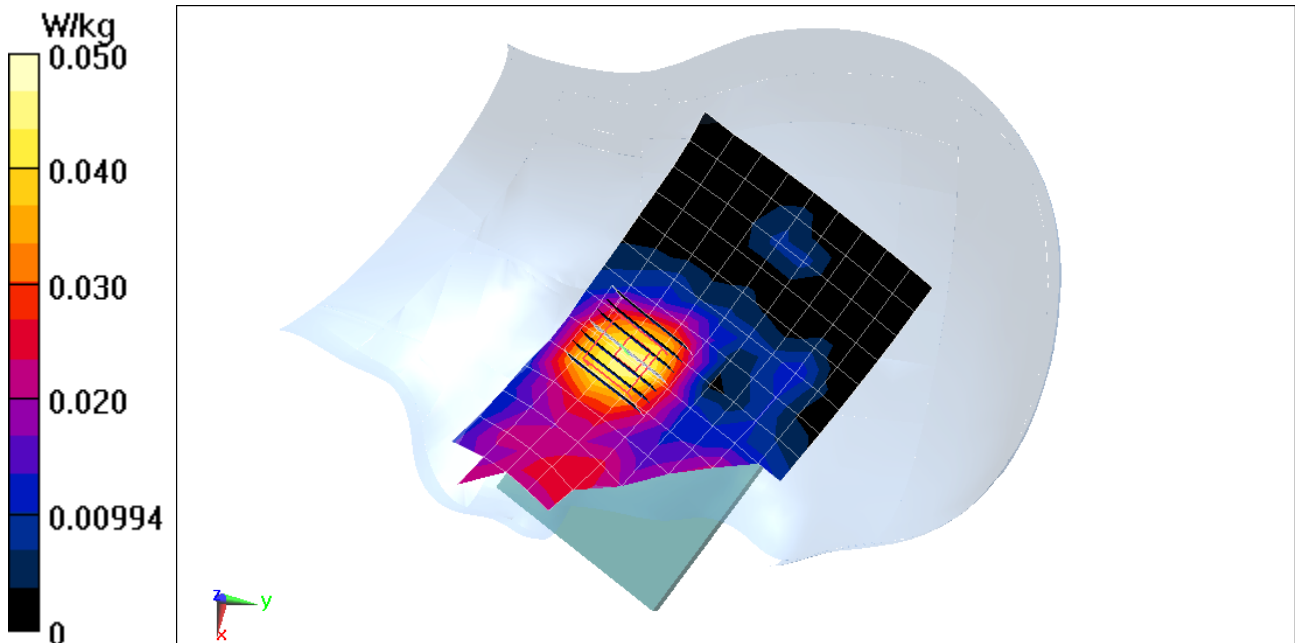

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809


Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used (interpolated):
 $f = 2437 \text{ MHz}$; $\sigma = 1.84 \text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Right Head, Cheek, Ch 6, 1 Mbps**

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.93 V/m; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 2.37 W/kg
SAR(1 g) = 1.03 W/kg

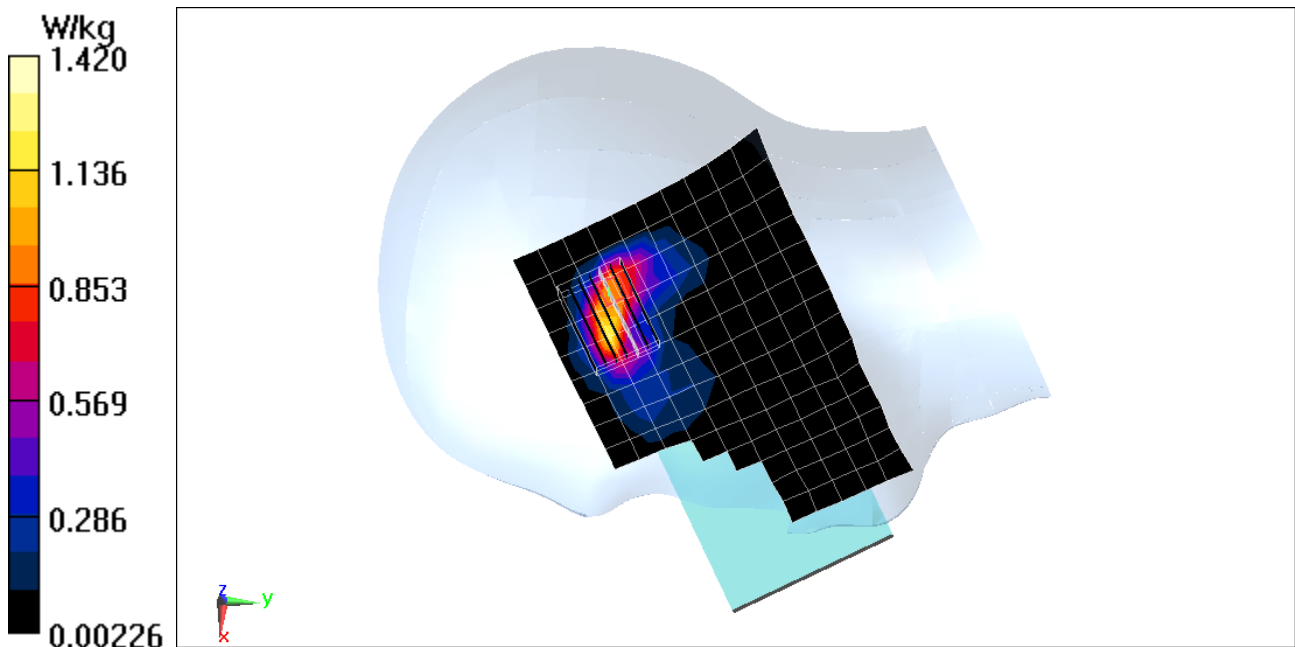

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5520 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5520 \text{ MHz}$; $\sigma = 4.838 \text{ S/m}$; $\epsilon_r = 36.806$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth,
Right Head, Cheek, Ch 104, 6 Mbps**


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 2.654 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 0.858 W/kg

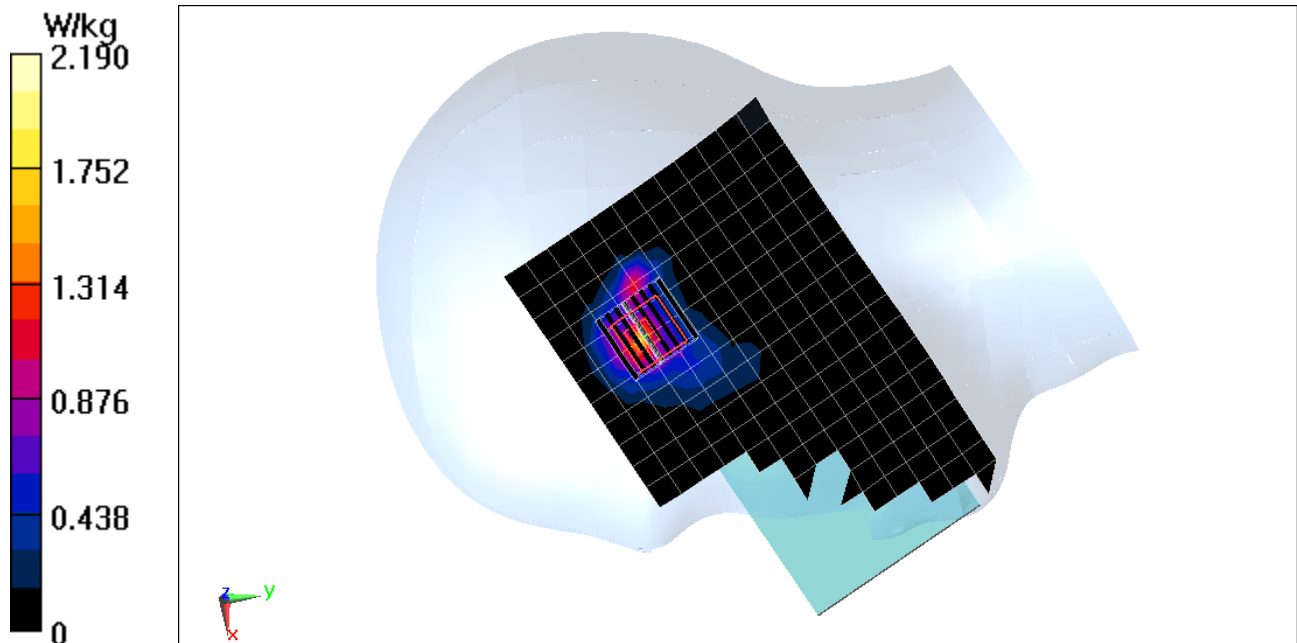

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.285

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 40.595$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 03-25-2018; Ambient Temp: 23.2°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

Mode: Bluetooth, Right Head, Cheek, Ch 39, 1Mbps


Area Scan (11x19x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.230 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.106 W/kg

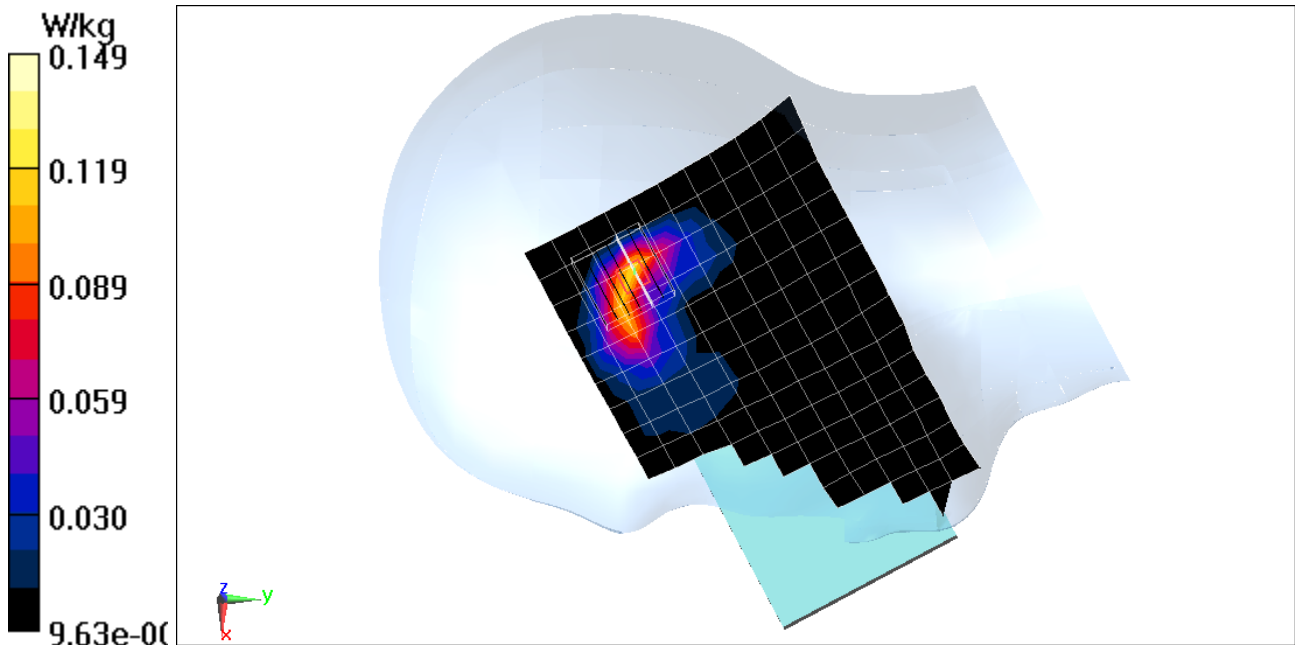

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.975 \text{ S/m}$; $\epsilon_r = 52.646$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.18 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.478 W/kg

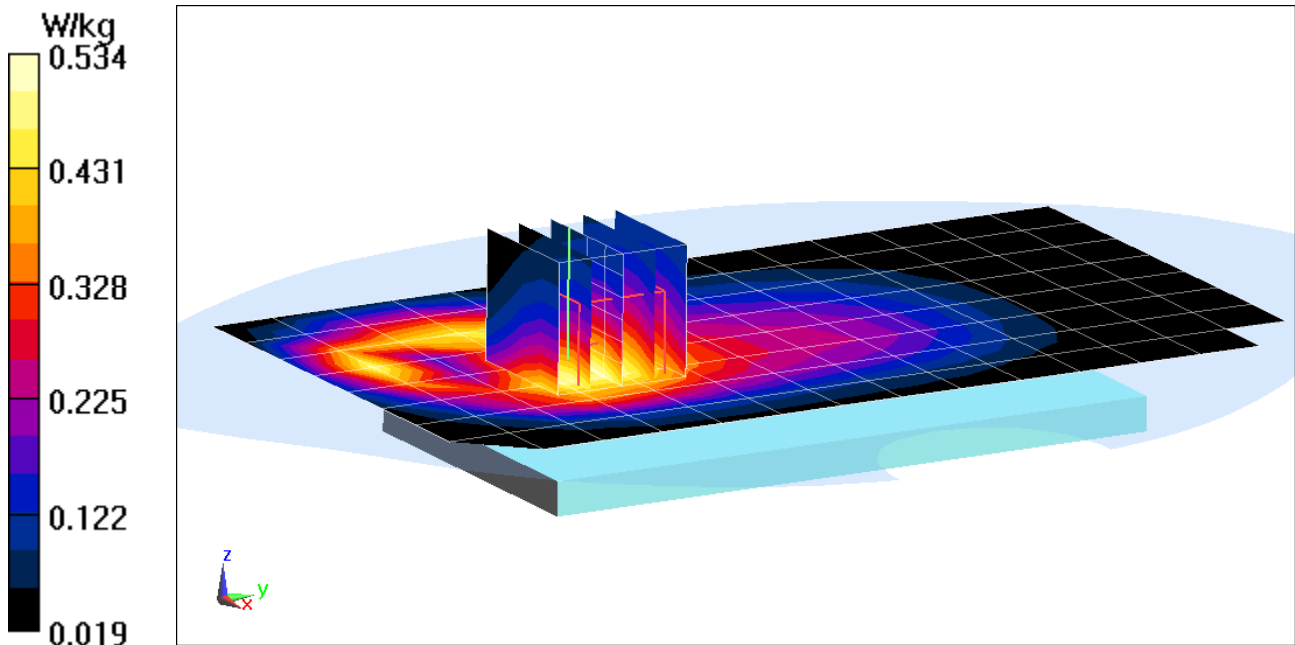

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, _GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.975 \text{ S/m}$; $\epsilon_r = 52.646$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Front side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.56 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.538 W/kg

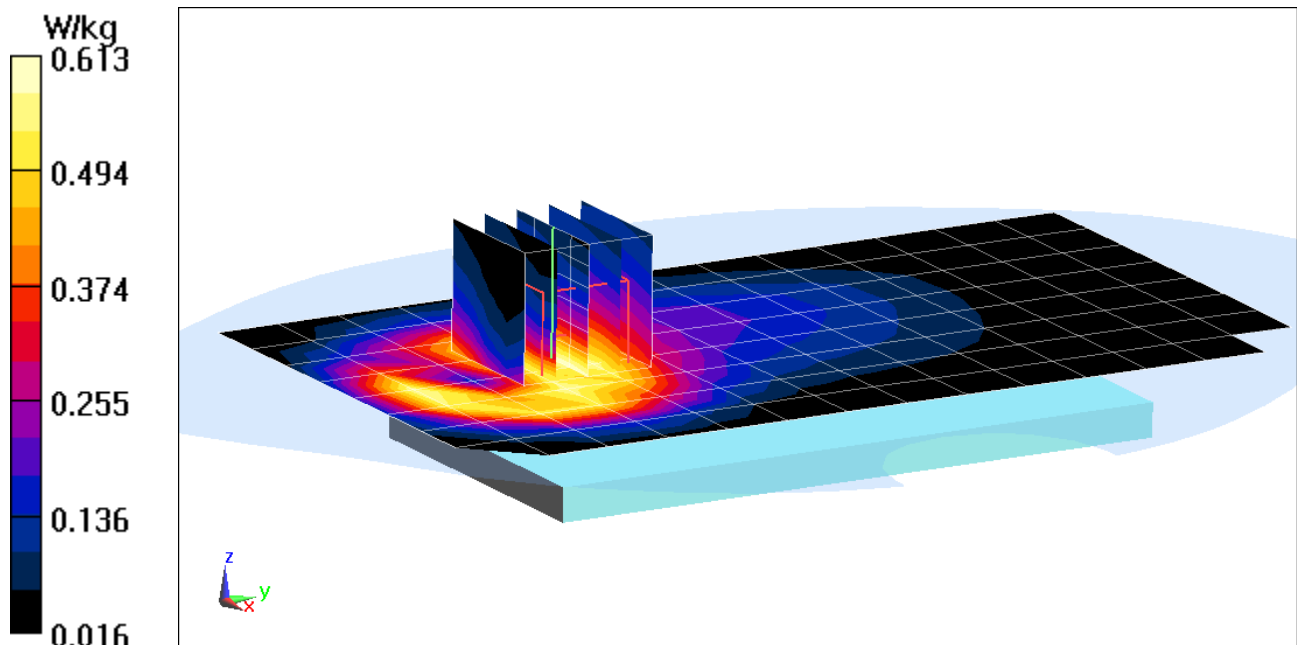

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.558 \text{ S/m}$; $\epsilon_r = 52.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 3-19-2018; Ambient Temp: 20.7°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (8x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.388 W/kg

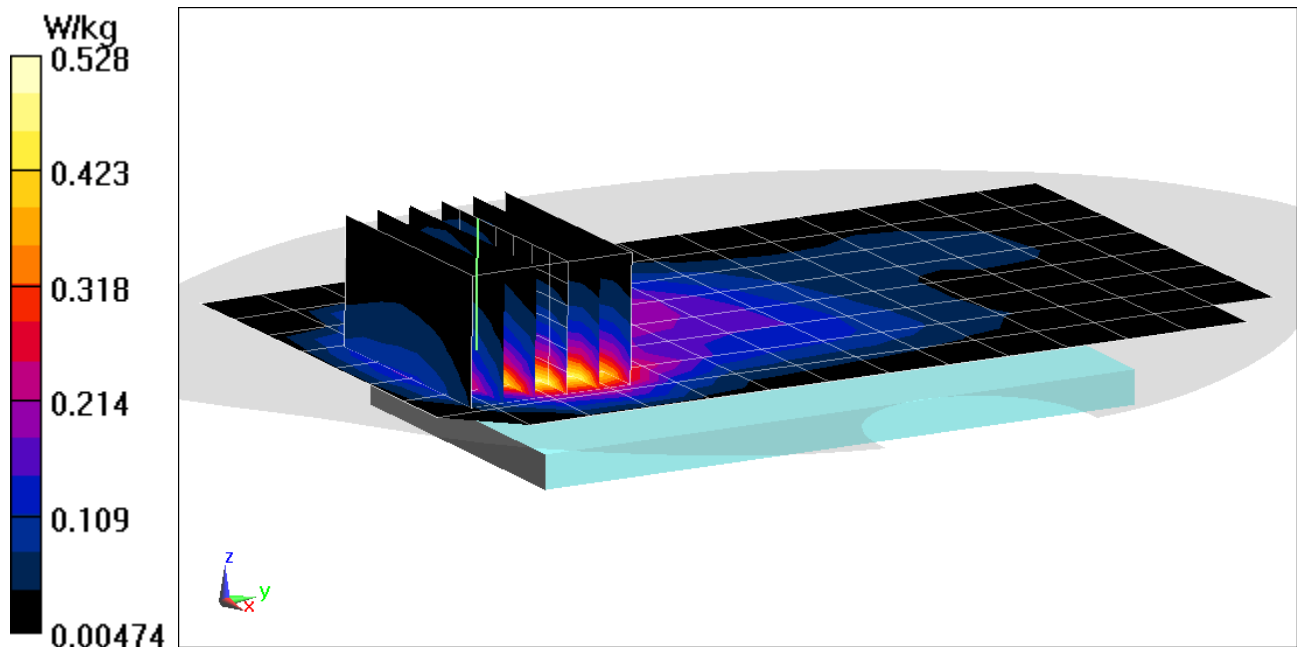

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.558 \text{ S/m}$; $\epsilon_r = 52.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 3-19-2018; Ambient Temp: 20.7°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.47 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.591 W/kg

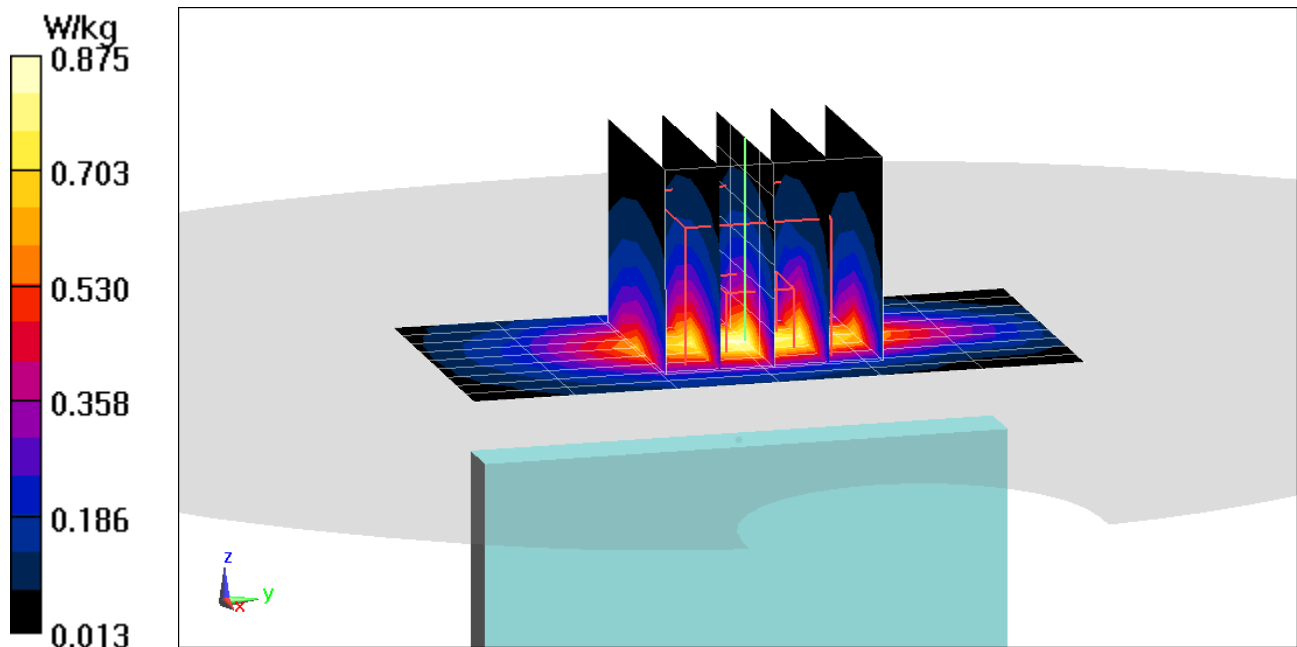

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.975 \text{ S/m}$; $\epsilon_r = 52.646$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.02 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.605 W/kg

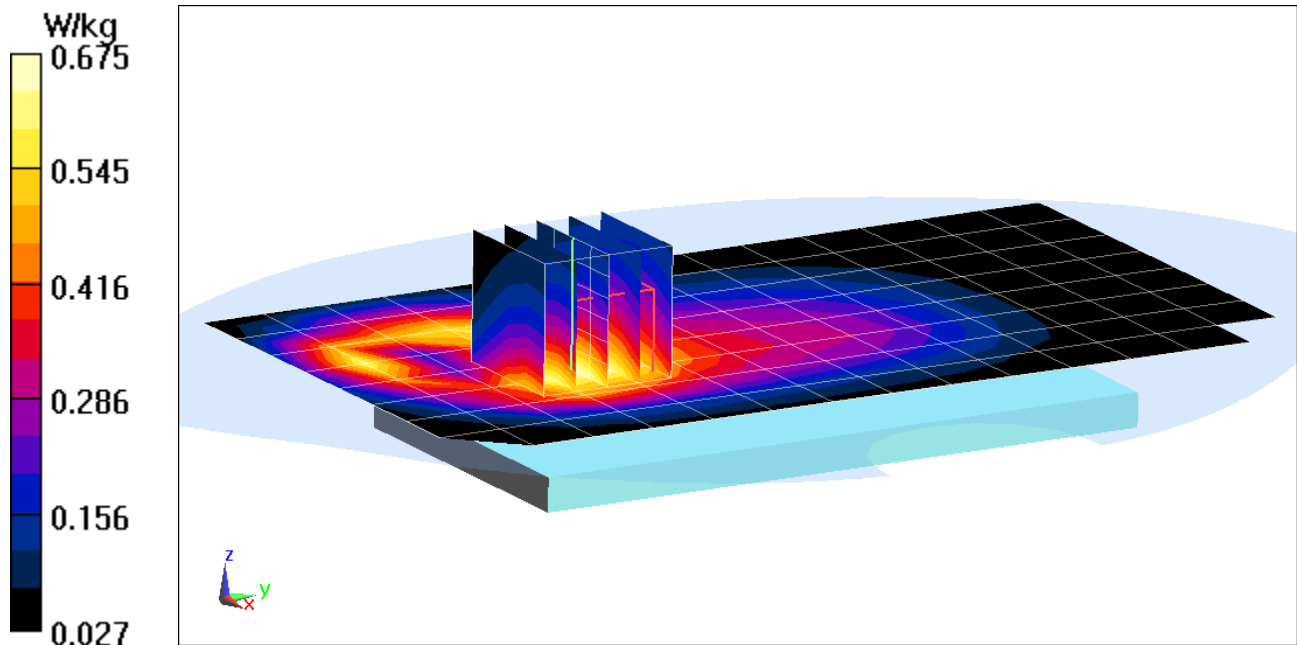

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, _UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 826.4 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 52.739$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Front side, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (9x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.50 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.766 W/kg

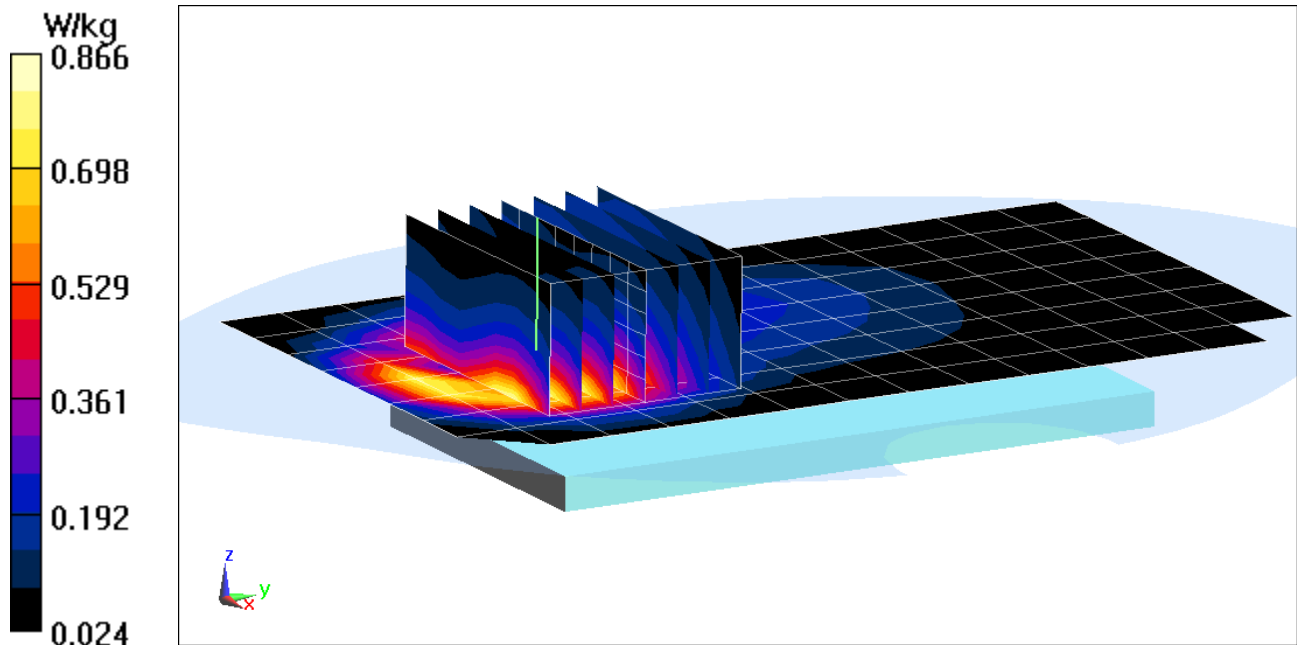

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.4 \text{ MHz}$; $\sigma = 1.489 \text{ S/m}$; $\epsilon_r = 51.351$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.41 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.444 W/kg

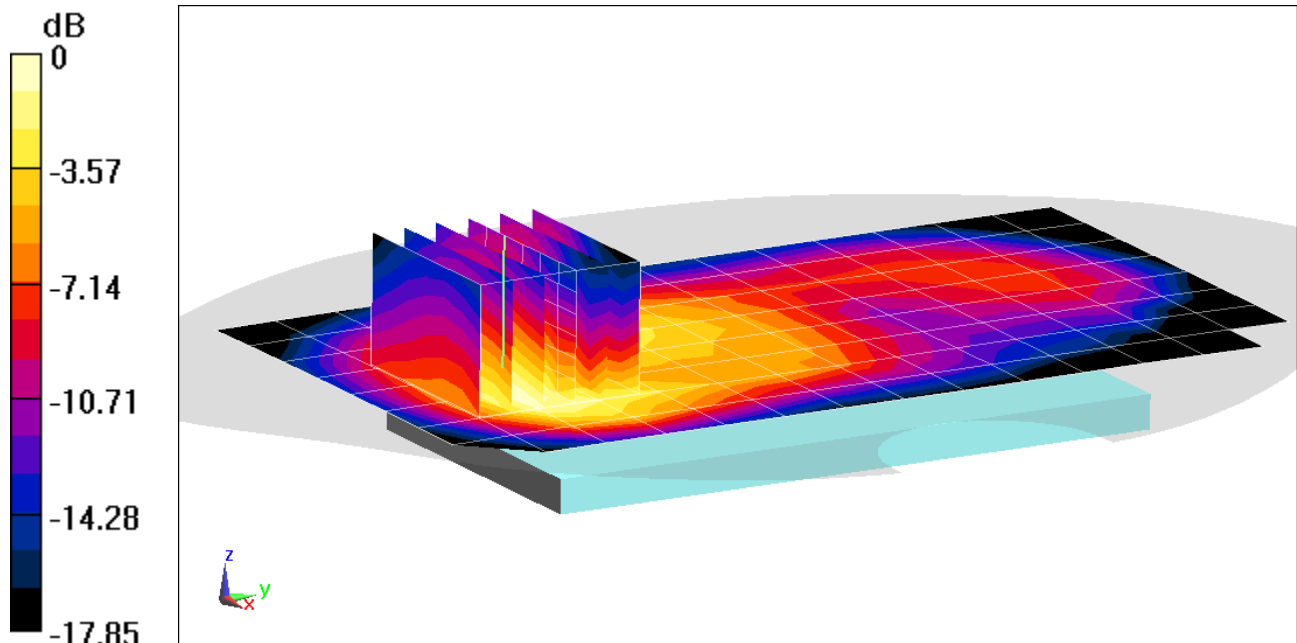

0 dB = 0.593 W/kg = -2.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, _UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1752.6$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 51.271$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.12 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.678 W/kg

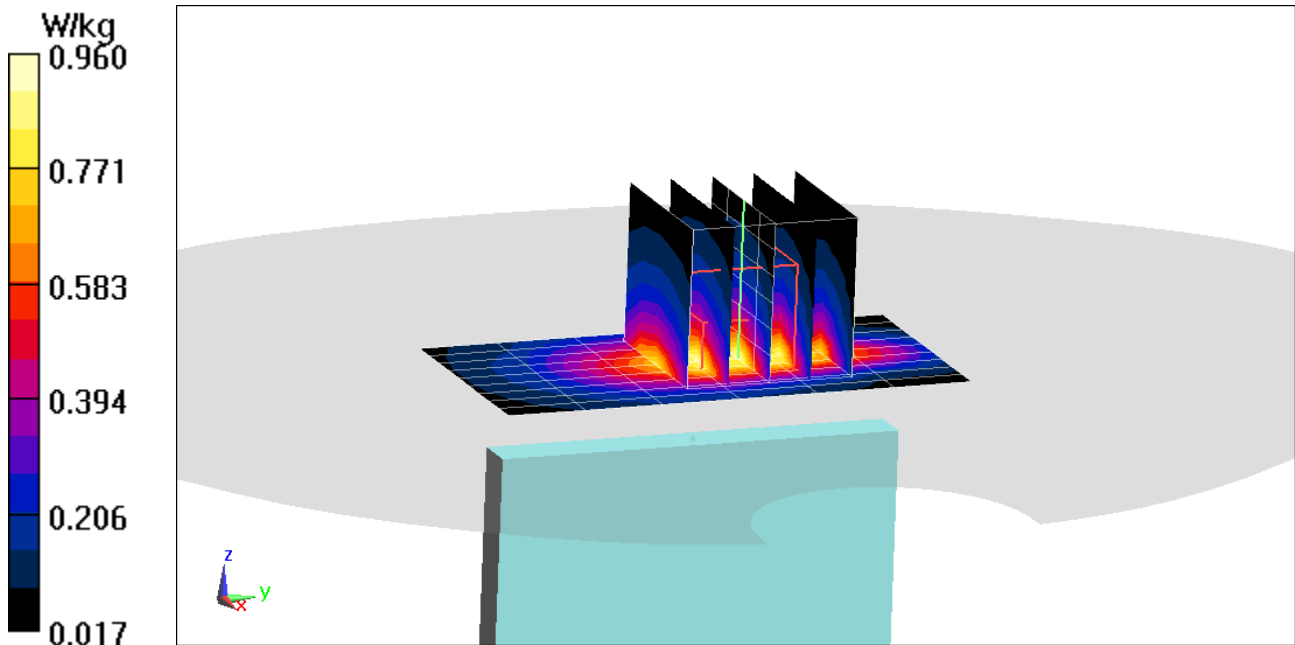

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.556 \text{ S/m}$; $\epsilon_r = 52.249$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (8x6x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.34 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.989 W/kg
SAR(1 g) = 0.622 W/kg

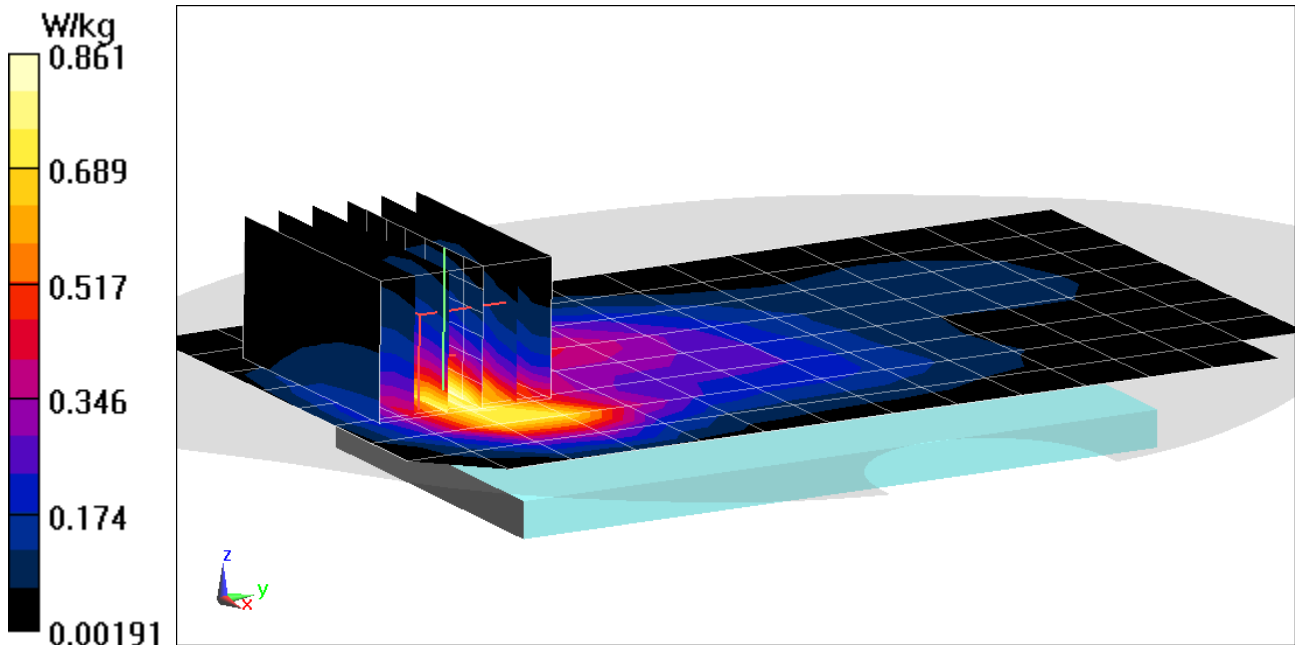

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1907.6$ MHz; $\sigma = 1.588$ S/m; $\epsilon_r = 52.174$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Bottom Edge, High.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.40 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.18 W/kg

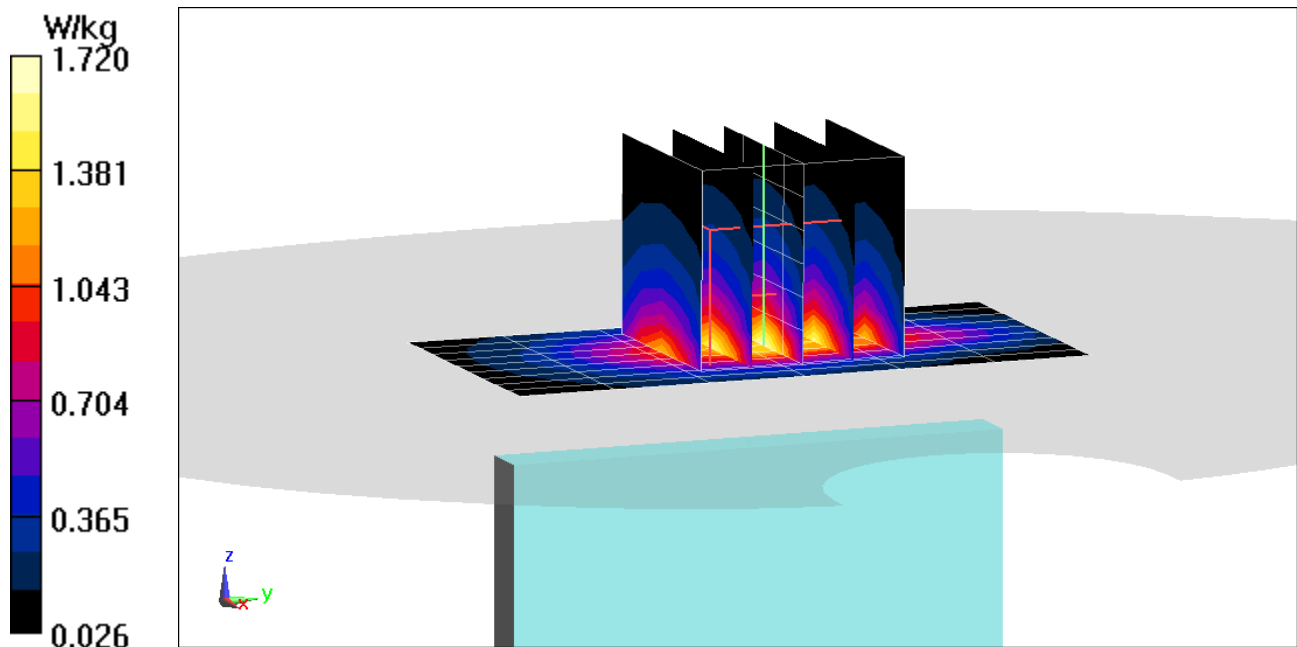

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 54.052$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.19, 10.19, 10.19); Calibrated: 7/17/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.10 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.898 W/kg
SAR(1 g) = 0.531 W/kg

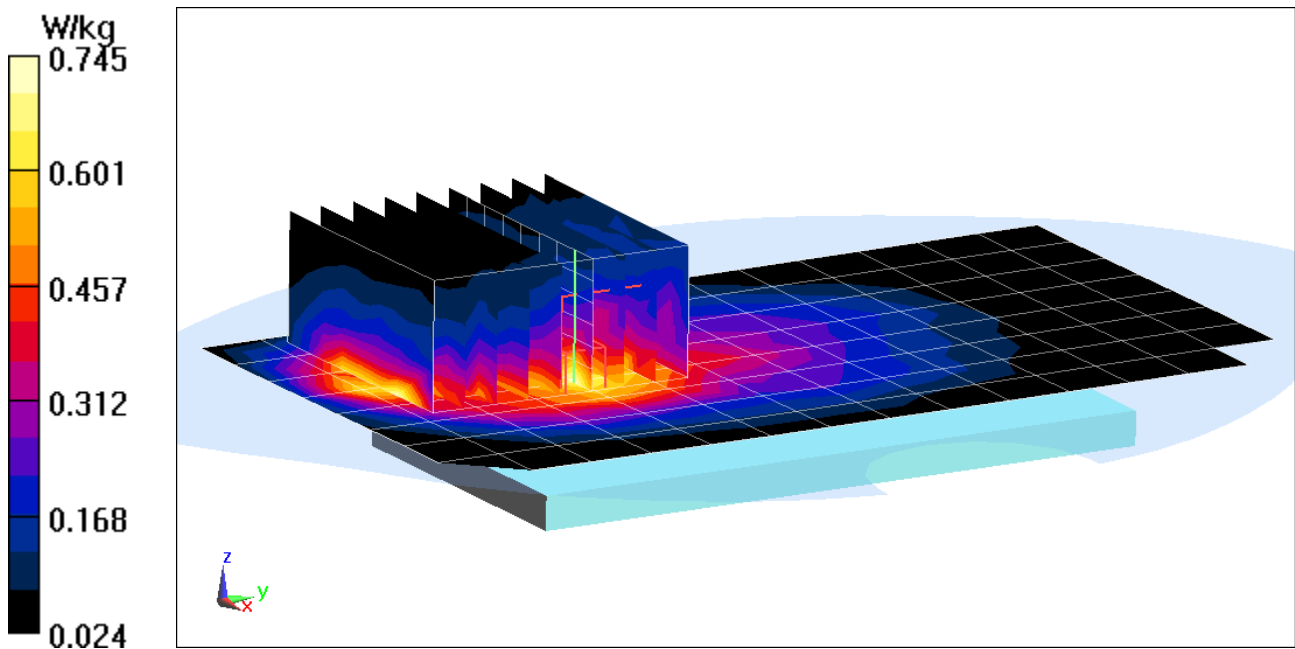

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.943 \text{ S/m}$; $\epsilon_r = 54.052$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.19, 10.19, 10.19); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 71, Body SAR, Front side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.99 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.970 W/kg

SAR(1 g) = 0.549 W/kg

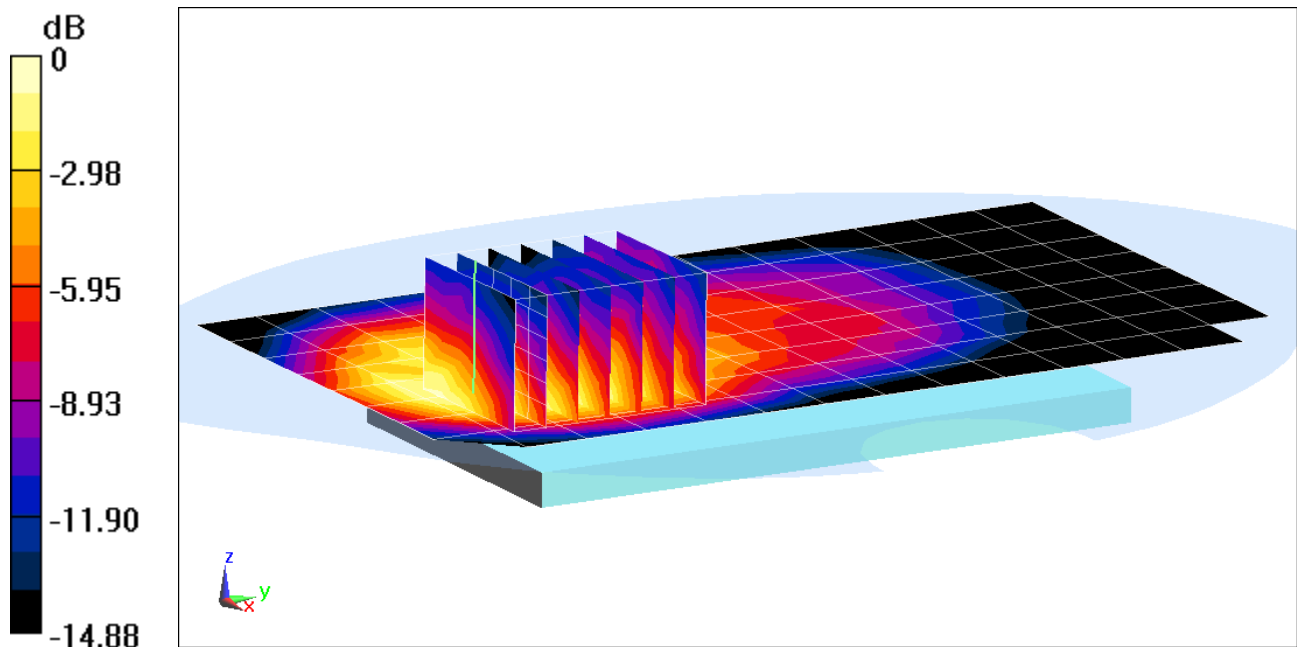

0 dB = 0.744 W/kg = -1.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 53.805$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD;

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.97 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.649 W/kg

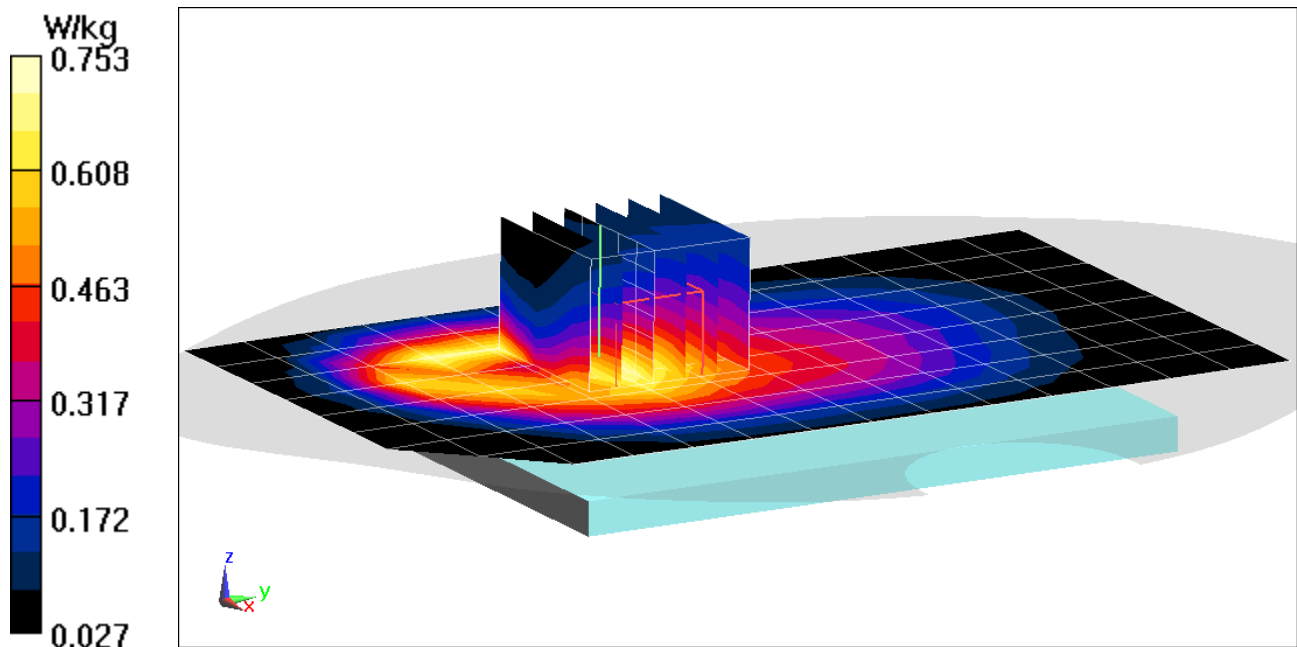

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 53.805$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD;

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.93 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.684 W/kg

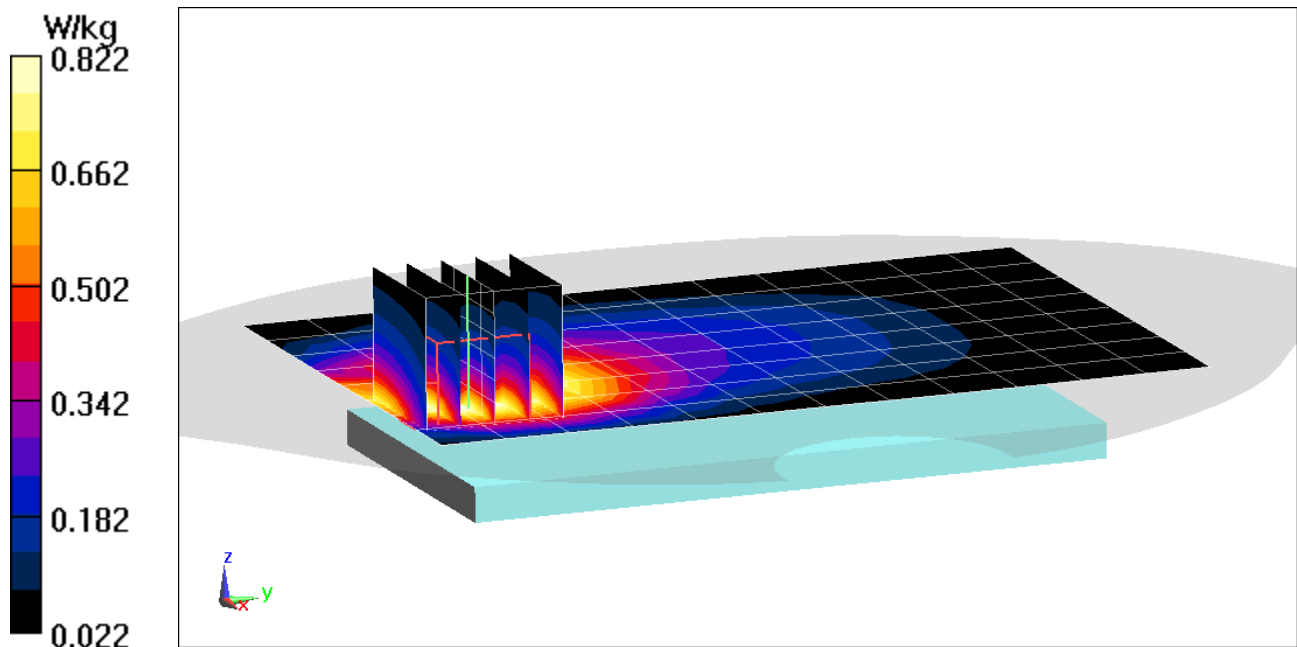

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 53.813$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.19, 10.19, 10.19); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.94 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.714 W/kg

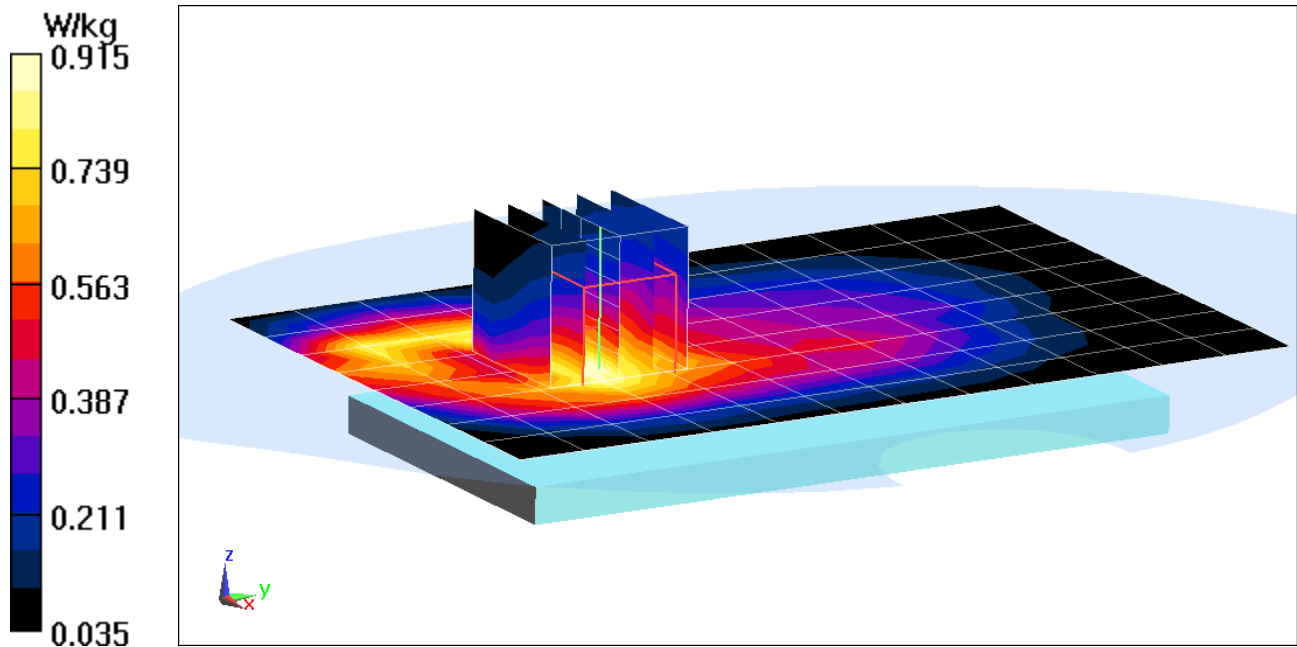

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 782 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 53.813$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.19, 10.19, 10.19); Calibrated: 7/17/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.29 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.781 W/kg

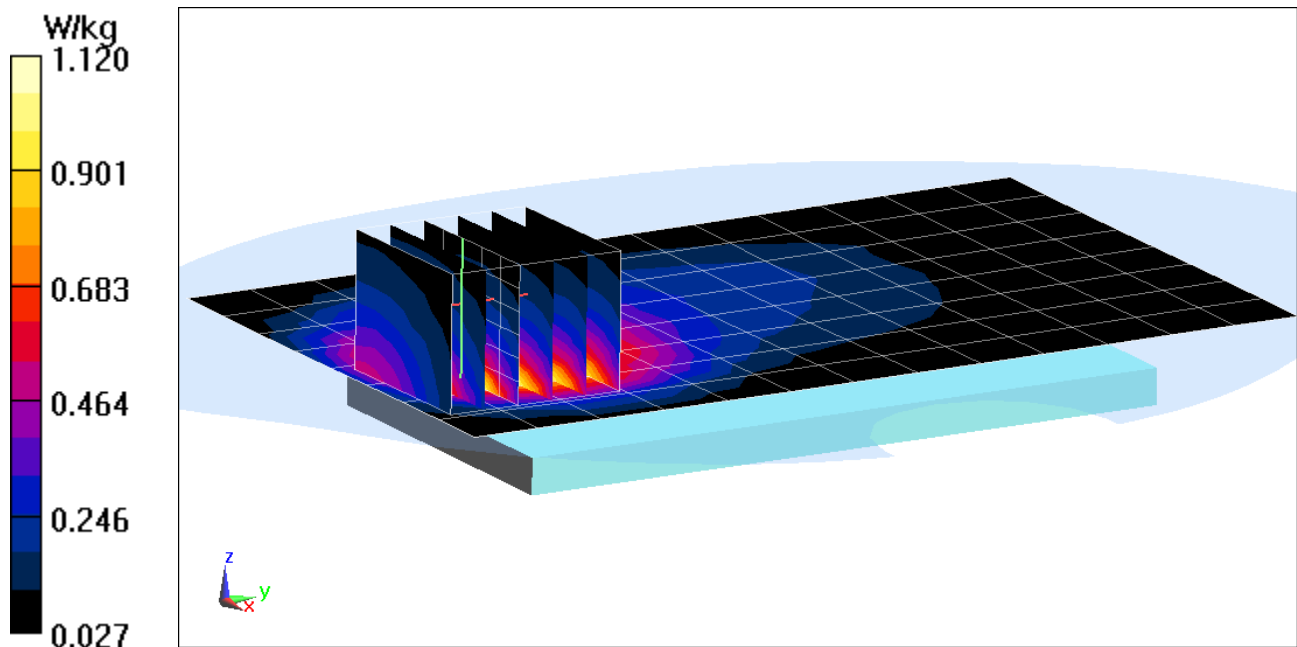

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 52.647$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.80 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.655 W/kg

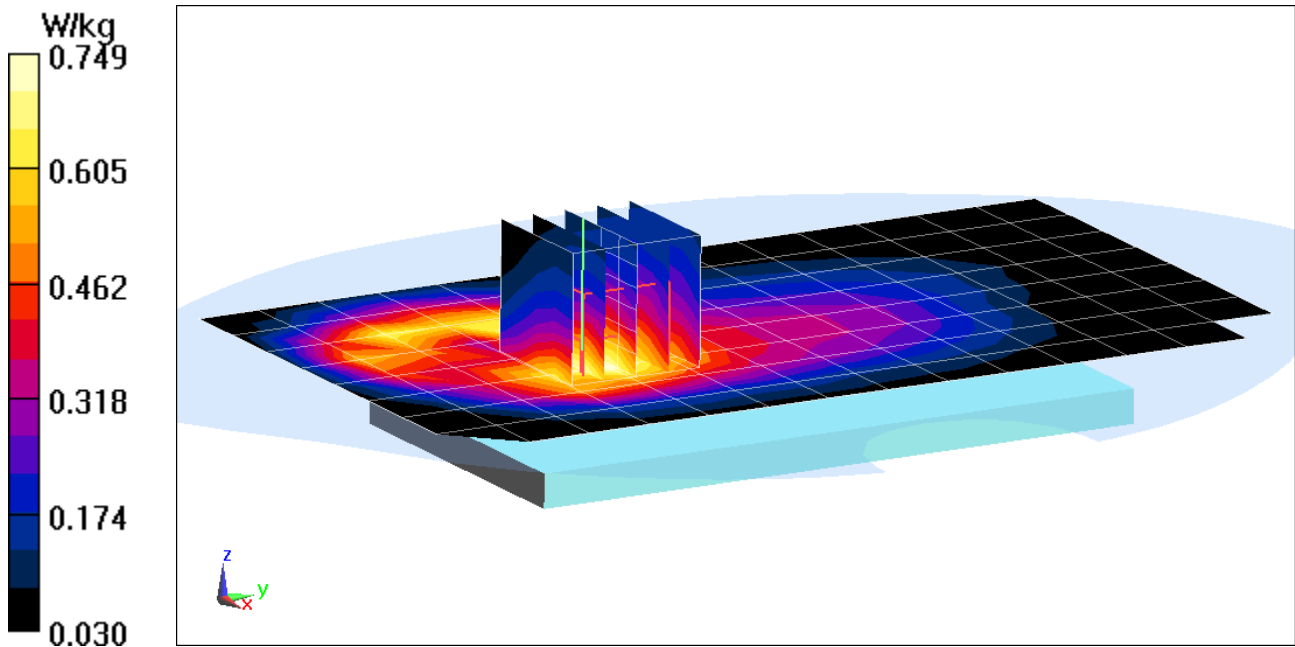

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05276

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 52.647$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (9x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.69 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.744 W/kg

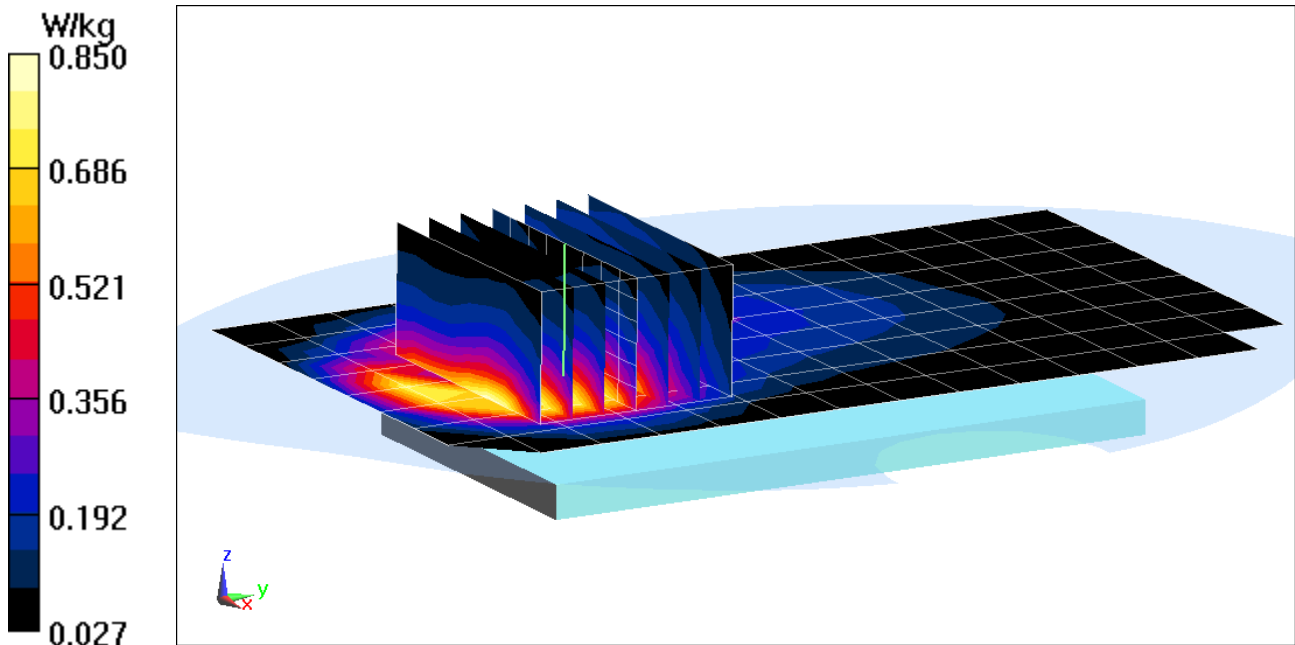

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1745 \text{ MHz}$; $\sigma = 1.521 \text{ S/m}$; $\epsilon_r = 51.16$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.47 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.435 W/kg

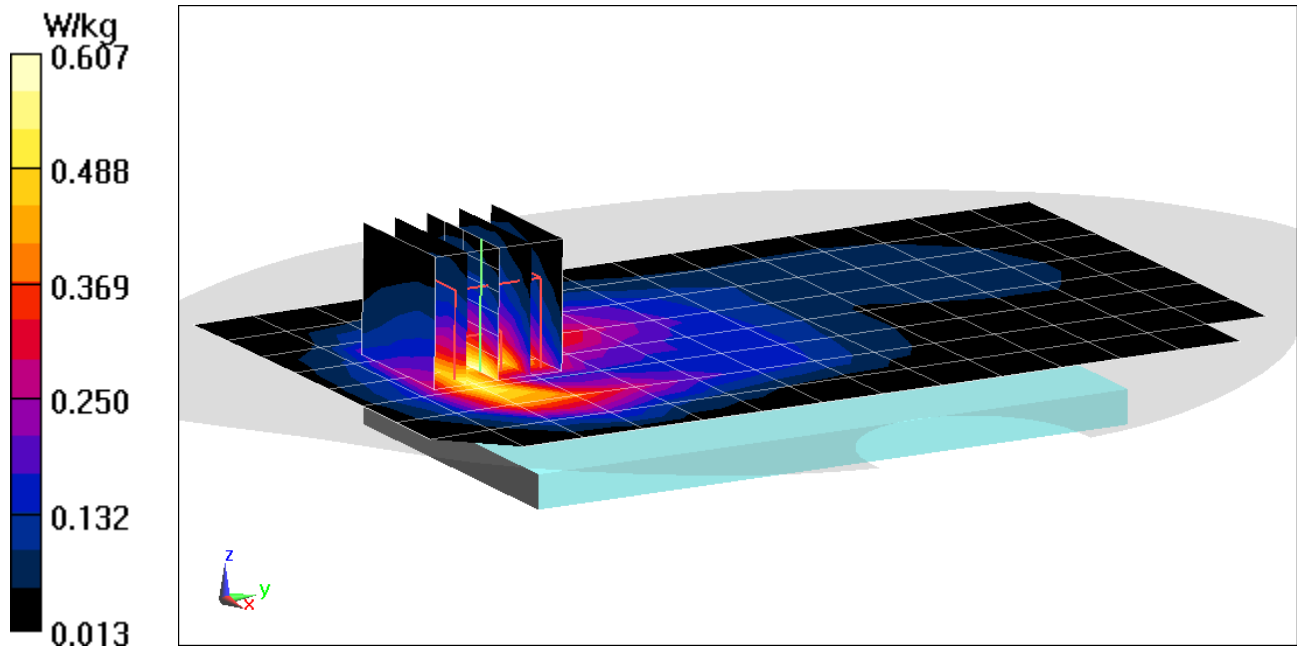

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, _LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1770 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 51.062$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (11x7x1): Measurement grid: dx=5mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.97 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.859 W/kg

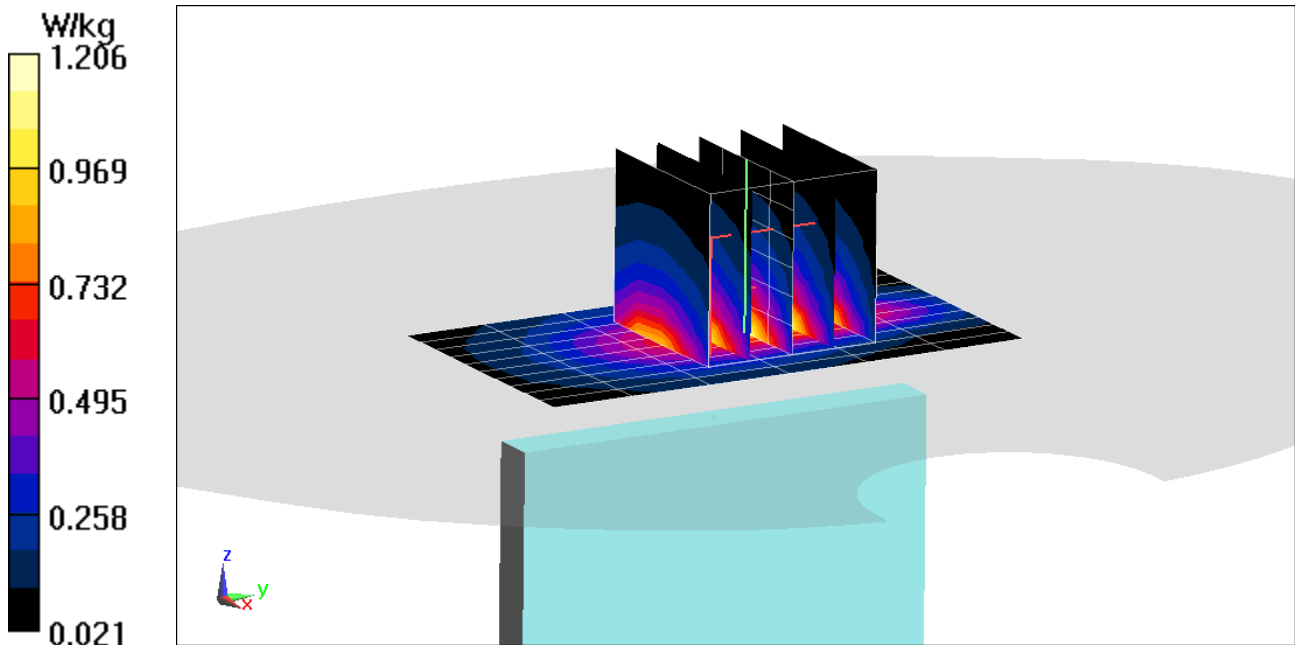

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.304$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.74 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.548 W/kg

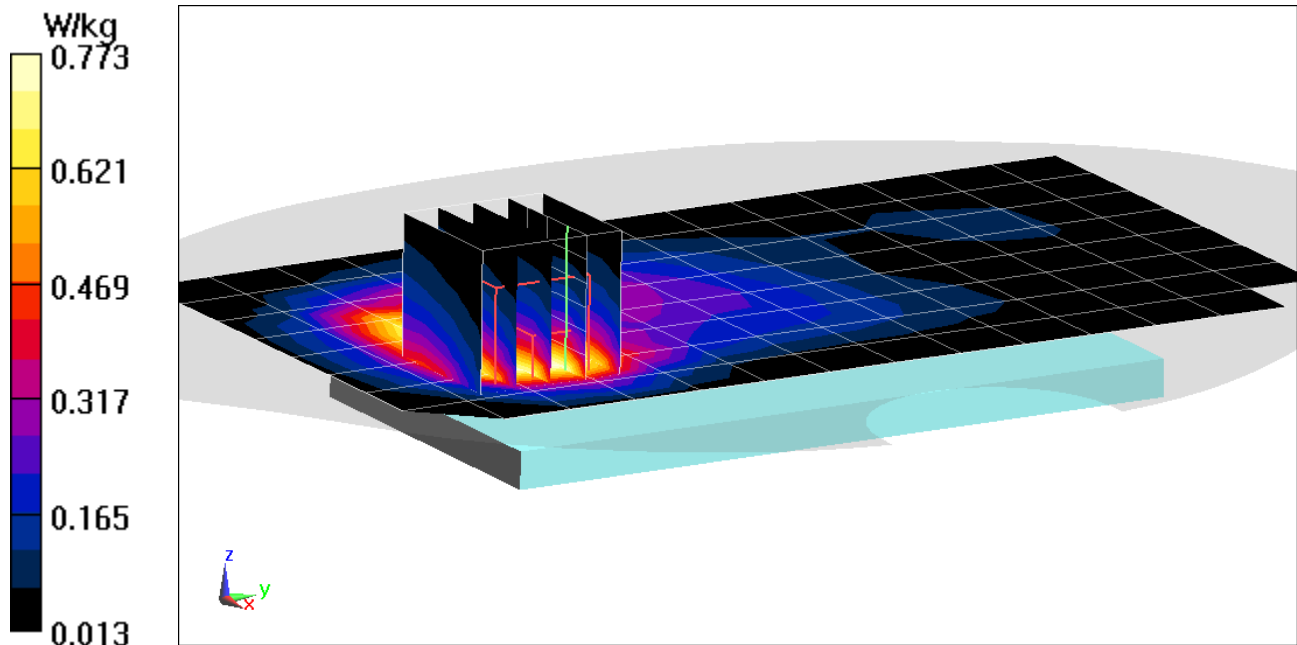

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.579$ S/m; $\epsilon_r = 52.195$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.34 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.13 W/kg

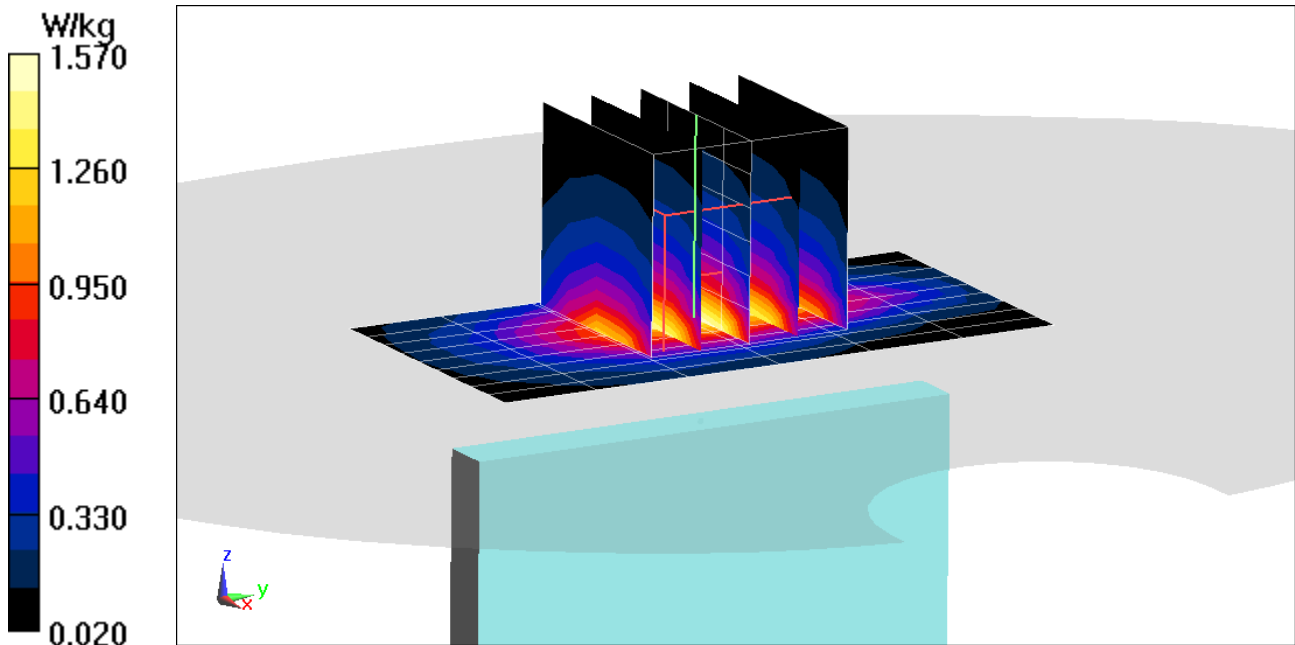

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2593$ MHz; $\sigma = 2.219$ S/m; $\epsilon_r = 50.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.969 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.157 W/kg

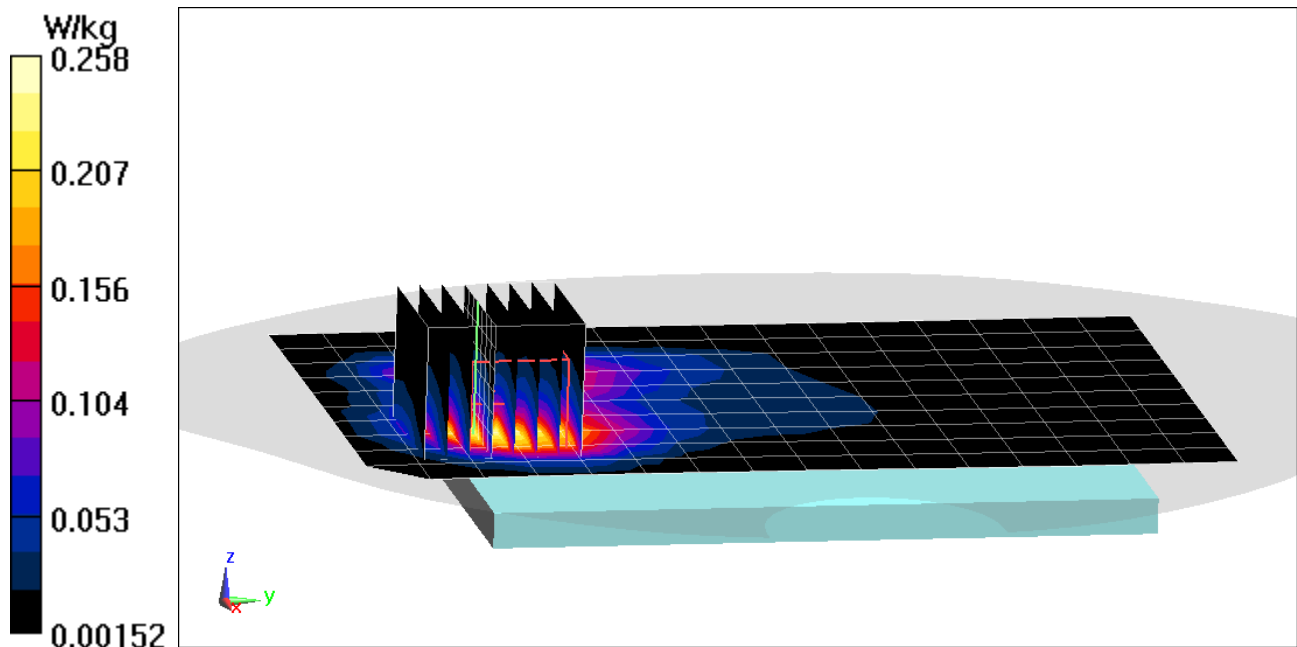

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726

Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$; $\sigma = 2.219 \text{ S/m}$; $\epsilon_r = 50.578$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41, Body SAR, Front side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.23 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.278 W/kg

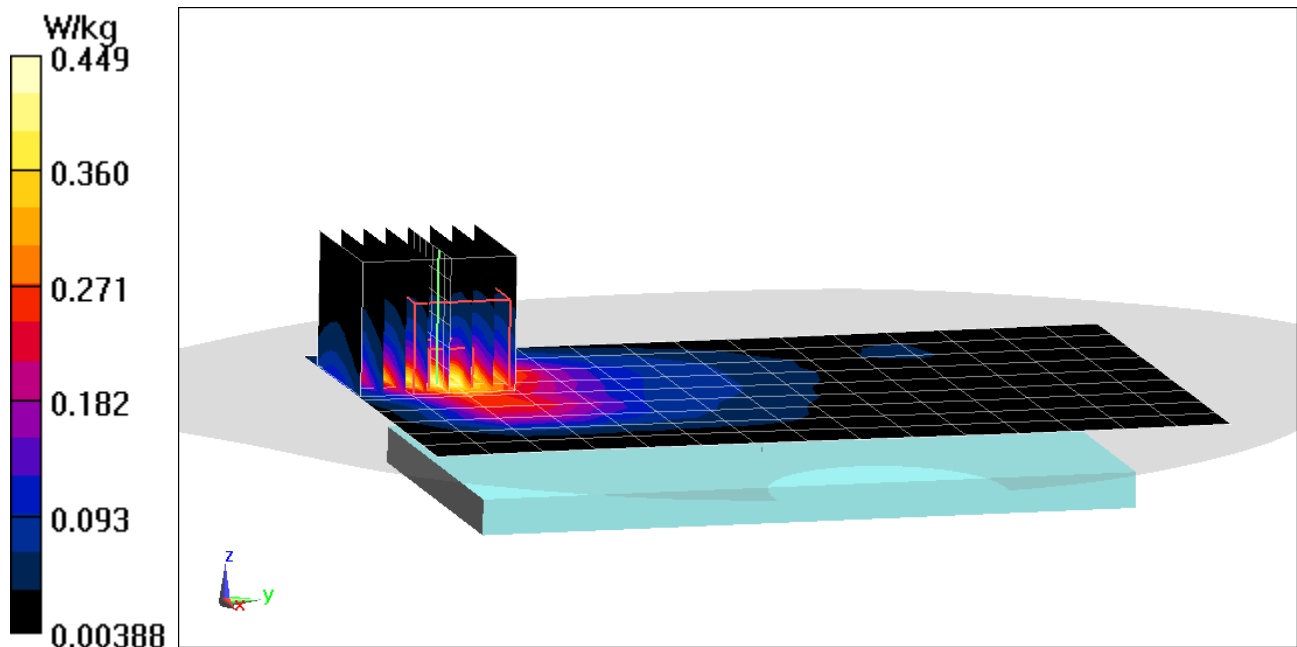

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.031 \text{ S/m}$; $\epsilon_r = 51.095$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 6, 1 Mbps, Back Side**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.18 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.217 W/kg

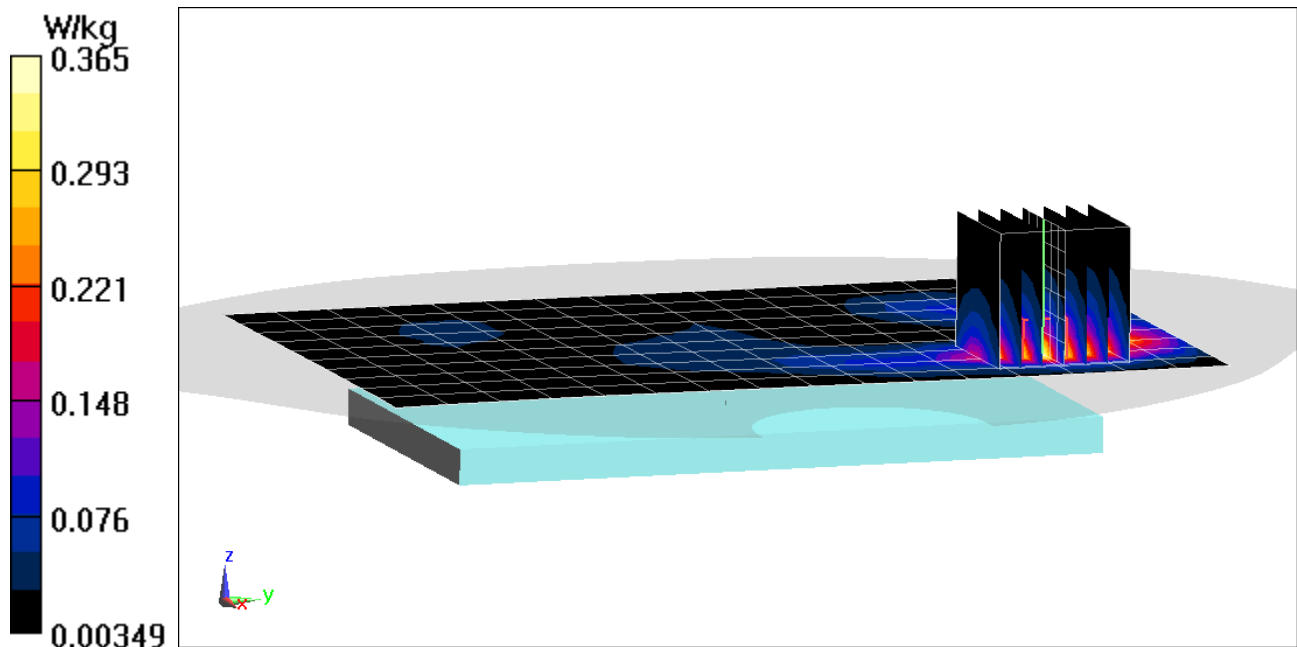

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437$ MHz; $\sigma = 2.031$ S/m; $\epsilon_r = 51.095$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 6, 1 Mbps, Left Side**


Area Scan (10x17x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.629 V/m; Power Drift = 0.12

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.228 W/kg

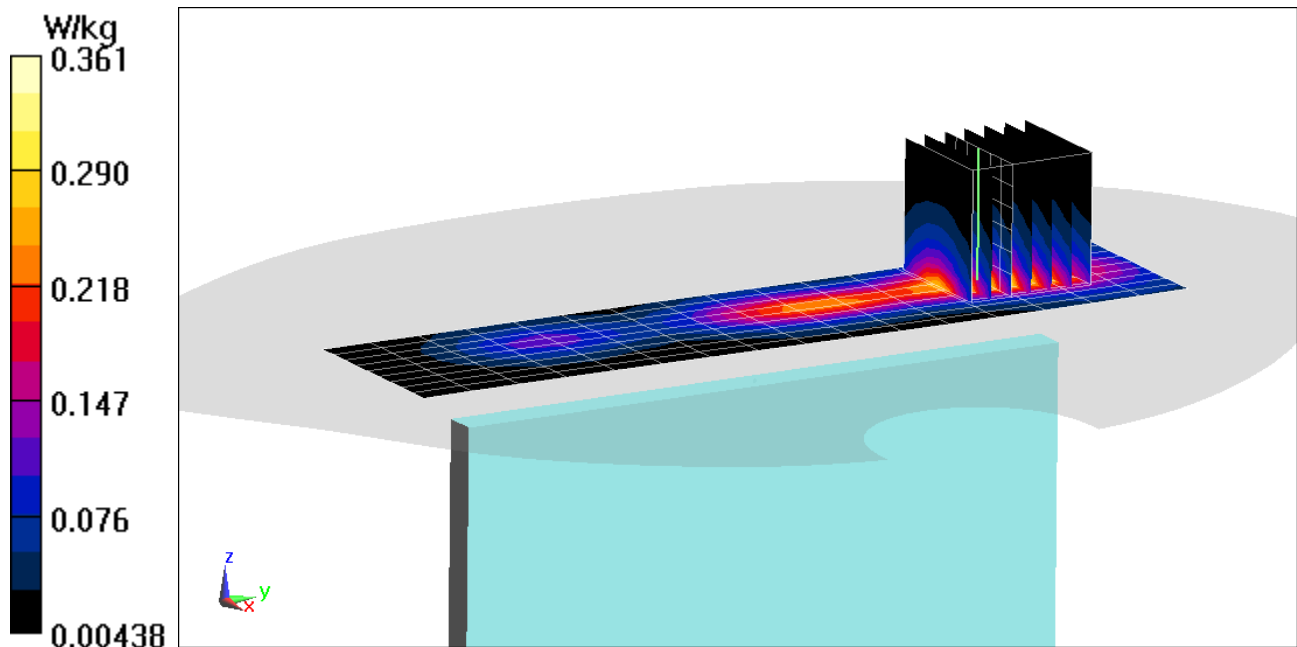

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785 \text{ MHz}$; $\sigma = 6.251 \text{ S/m}$; $\epsilon_r = 46.461$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth,
Body SAR, Ch 157, 6 Mbps, Back Side**


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.36 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 0.805 W/kg

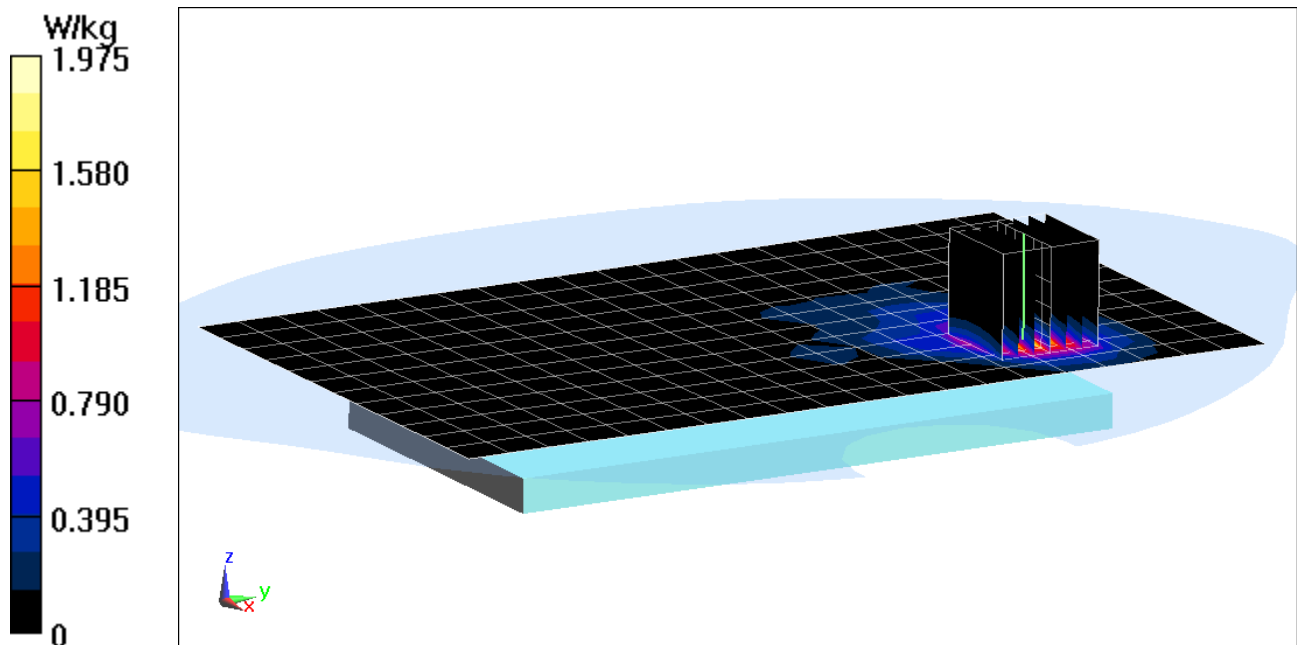

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718


Communication System: UID 0, _UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1752.6 \text{ MHz}$; $\sigma = 1.517 \text{ S/m}$; $\epsilon_r = 50.911$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-23-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750, Phablet SAR, Bottom Edge, High.ch

Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 59.59 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 13.9 W/kg
SAR(10 g) = 2.2 W/kg

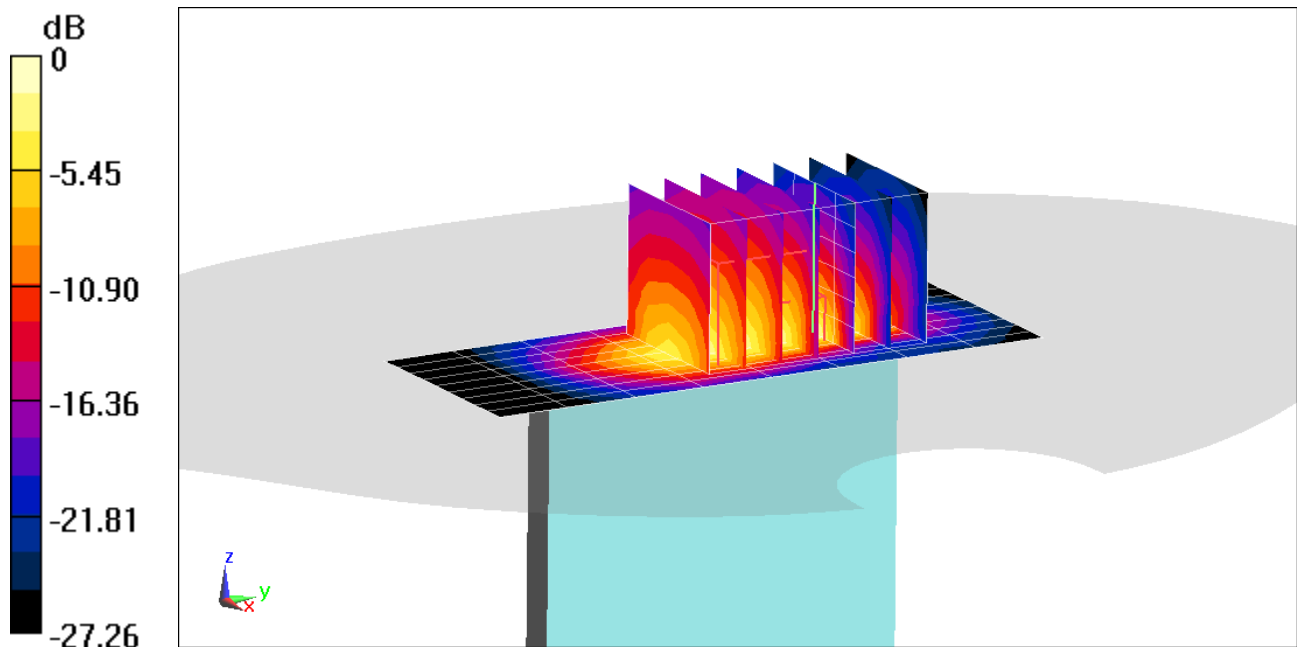

0 dB = 10.6 W/kg = 10.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05718


Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.556 \text{ S/m}$; $\epsilon_r = 52.249$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Phablet SAR, Bottom Edge, Mid.ch

Area Scan (11x9x1): Measurement grid: dx=5mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 68.72 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 15.1 W/kg
SAR(10 g) = 3.1 W/kg

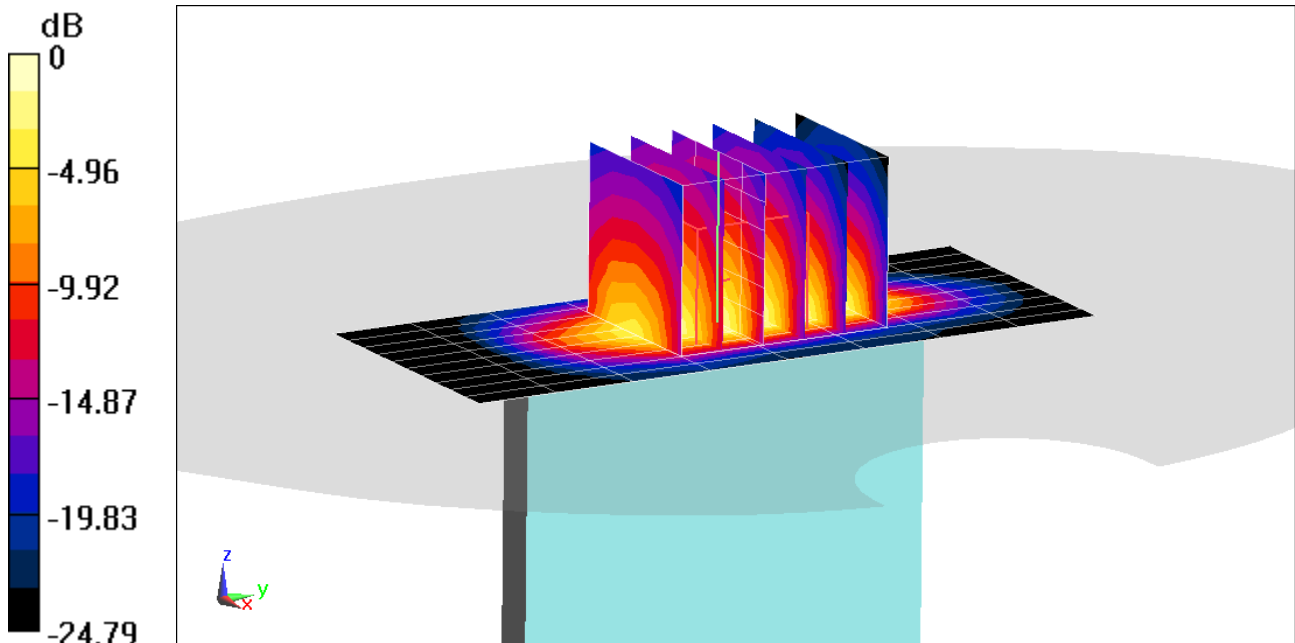

0 dB = 12.2 W/kg = 10.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05726


Communication System: UID 0, _LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1770 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 51.062$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm
Zoom Scan (5x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 73.79 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 21.9 W/kg
SAR(10 g) = 3.16 W/kg

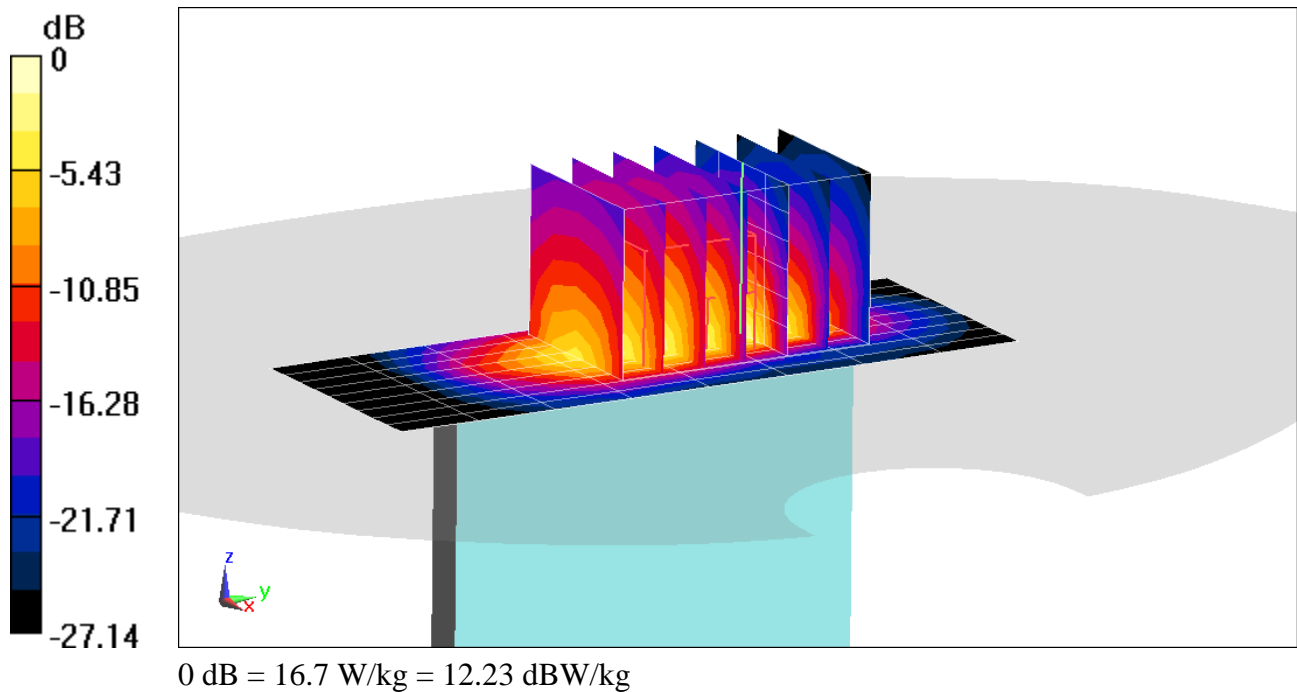

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05734

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.556 \text{ S/m}$; $\epsilon_r = 52.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Phablet SAR, Bottom Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (11x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 69.96 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(10 g) = 3.2 W/kg

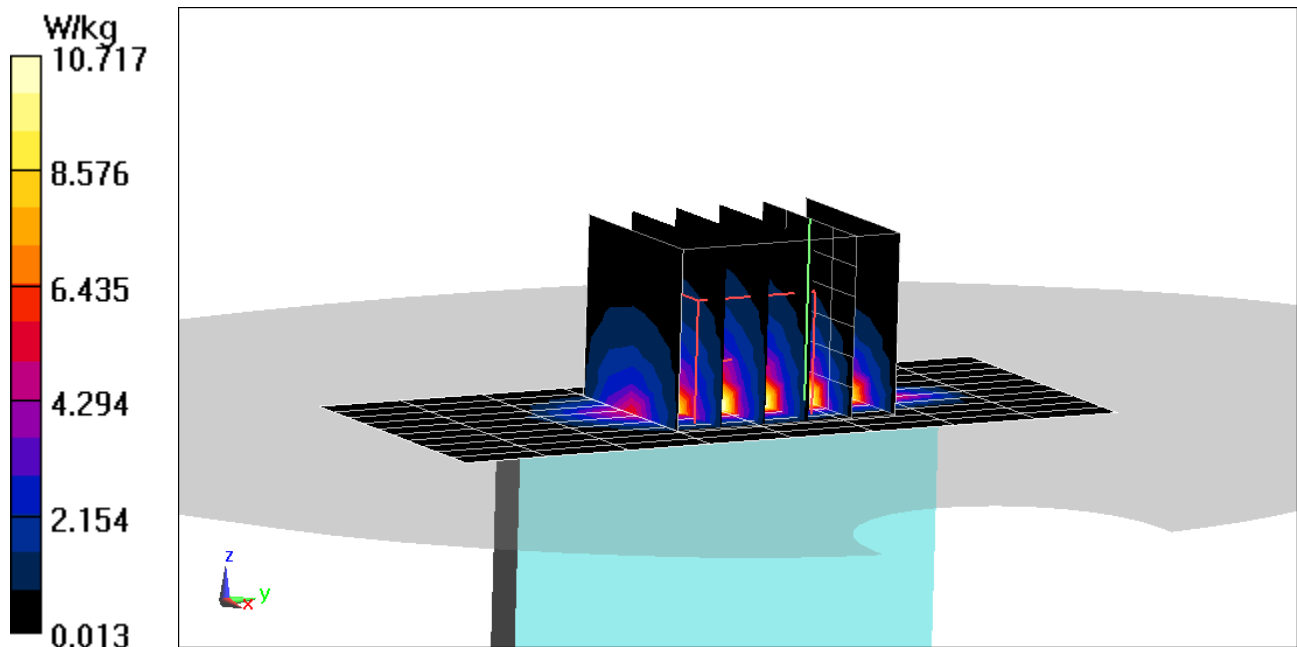

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFQ710TS; Type: Portable Handset; Serial: 05809

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5280 \text{ MHz}$; $\sigma = 5.551 \text{ S/m}$; $\epsilon_r = 47.322$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, U-NII-2A, 20 MHz Bandwidth,
Phablet SAR, Ch 56, 6 Mbps, Back Side**


Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 35.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(10 g) = 1.9 W/kg

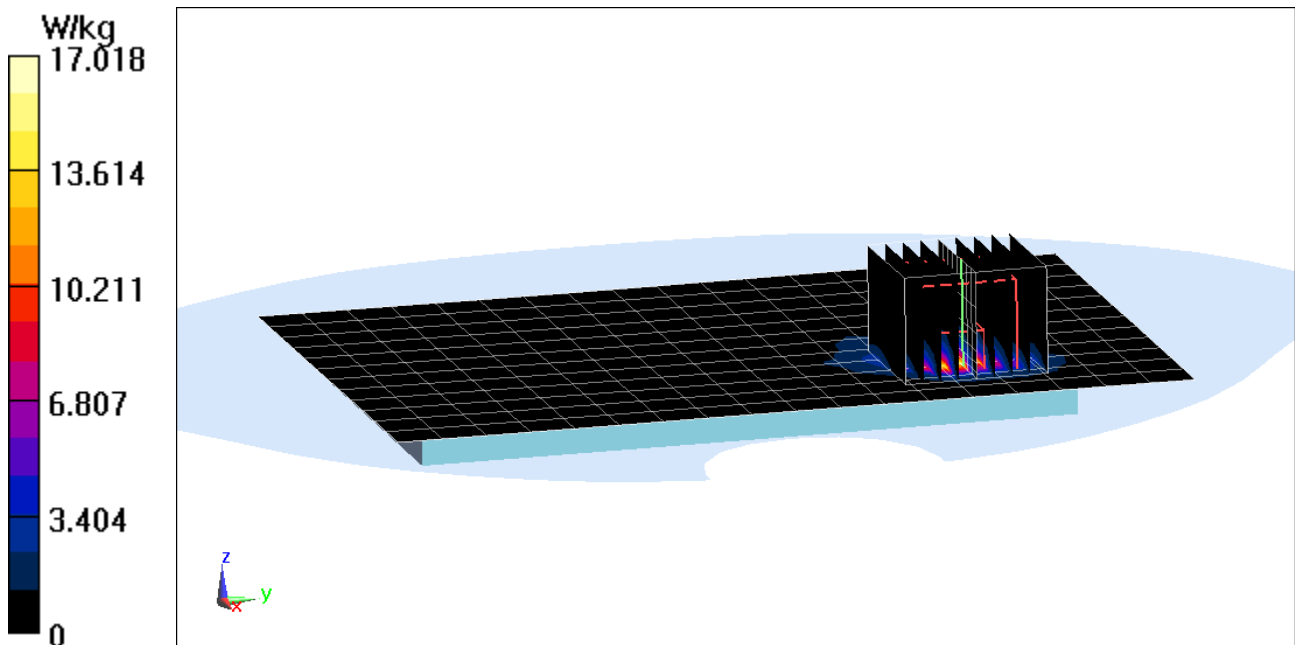

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.877 \text{ S/m}$; $\epsilon_r = 40.704$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-14-2018; Ambient Temp: 23.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 1.55 W/kg

Deviation(1 g) = -6.40%

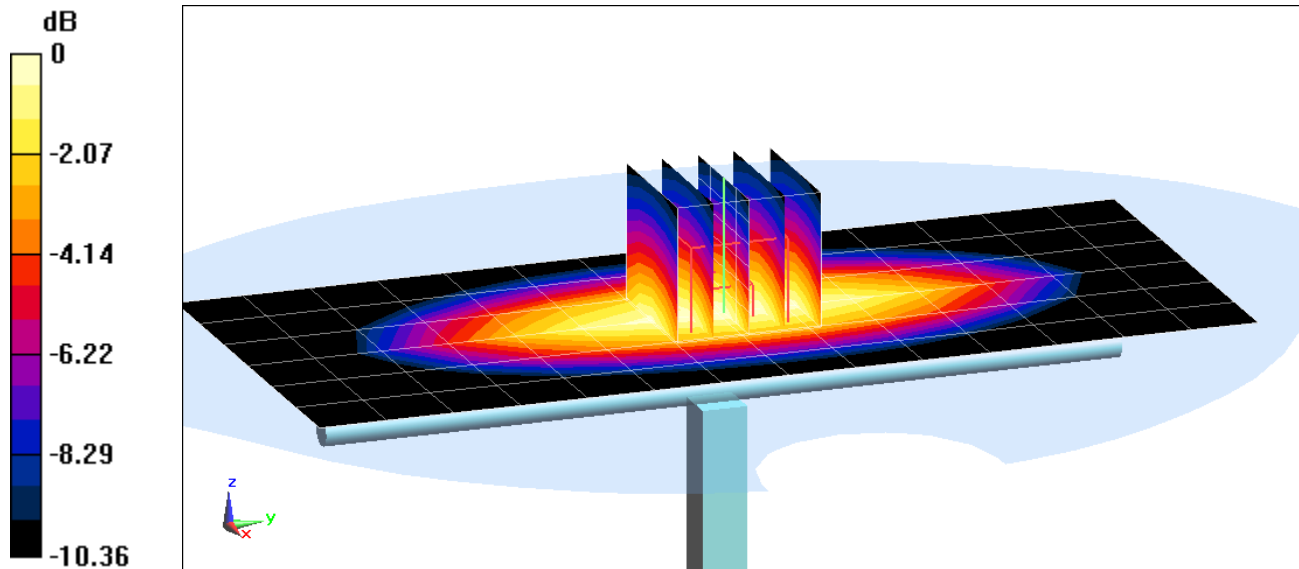

0 dB = 1.81 W/kg = 2.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 39.773$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 2.01 W/kg

Deviation(1 g) = 7.37%

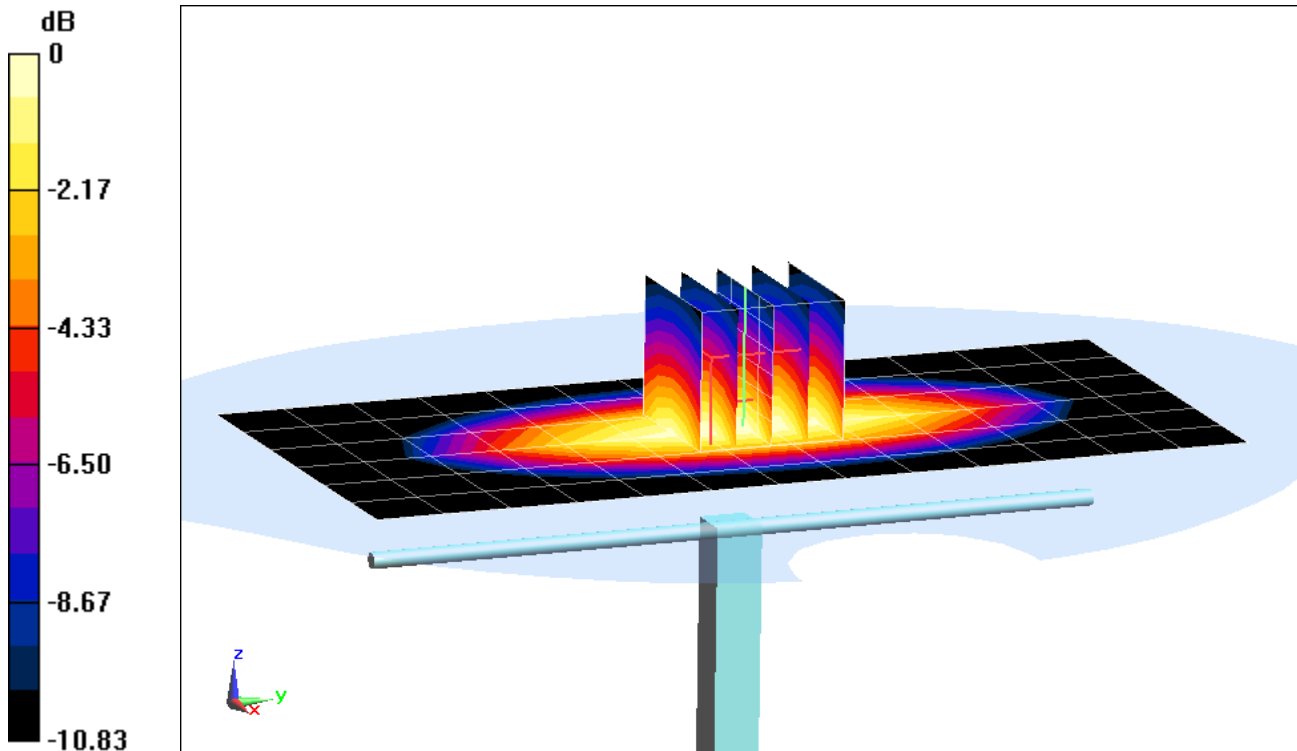

0 dB = 2.36 W/kg = 3.73 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-13-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(8.34, 8.34, 8.34); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 3.69 W/kg

Deviation(1 g) = 2.22%

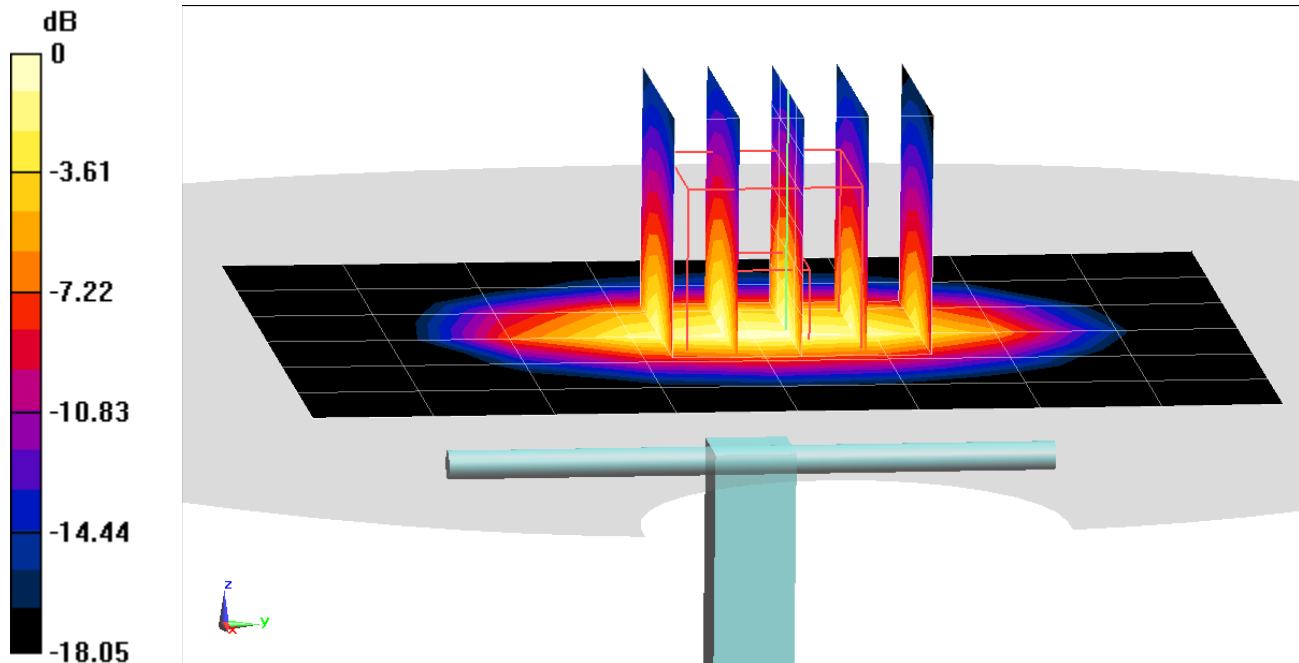

0 dB = 5.70 W/kg = 7.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.454 \text{ S/m}$; $\epsilon_r = 38.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.38 W/kg

SAR(1 g) = 4.03 W/kg

Deviation(1 g) = 0.50%

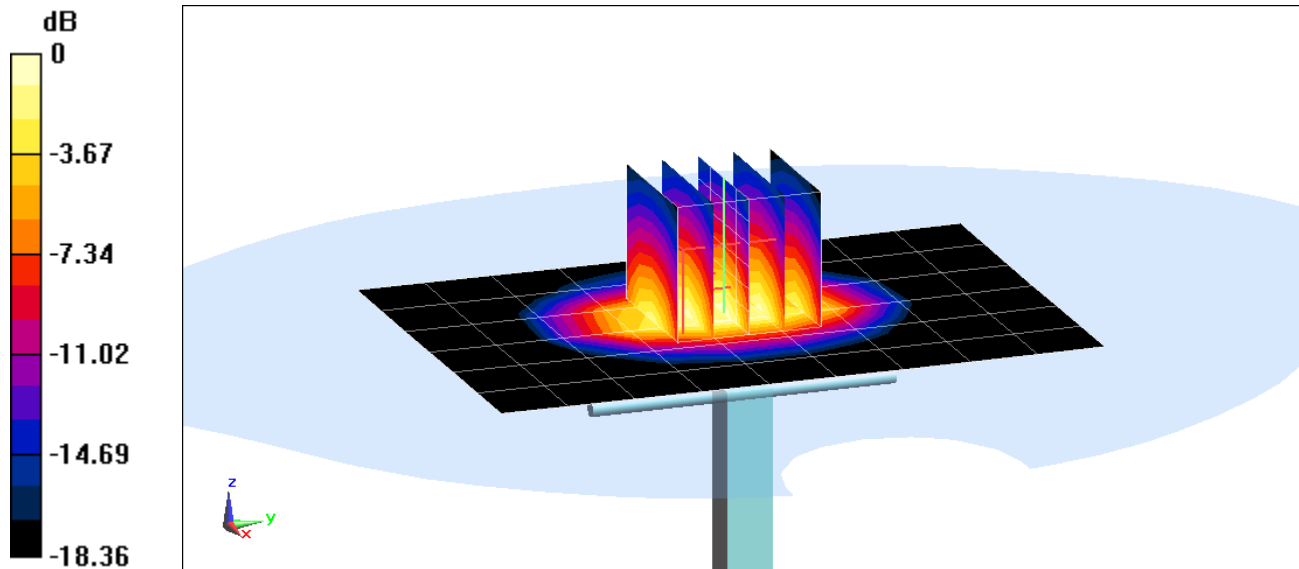

0 dB = 5.12 W/kg = 7.09 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.454 \text{ S/m}$; $\epsilon_r = 38.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-08-2018; Ambient Temp: 21.9°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7406; ConvF(8.4, 8.4, 8.4); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 8.06 W/kg

SAR(1 g) = 4.16 W/kg

Deviation(1 g) = 5.85%

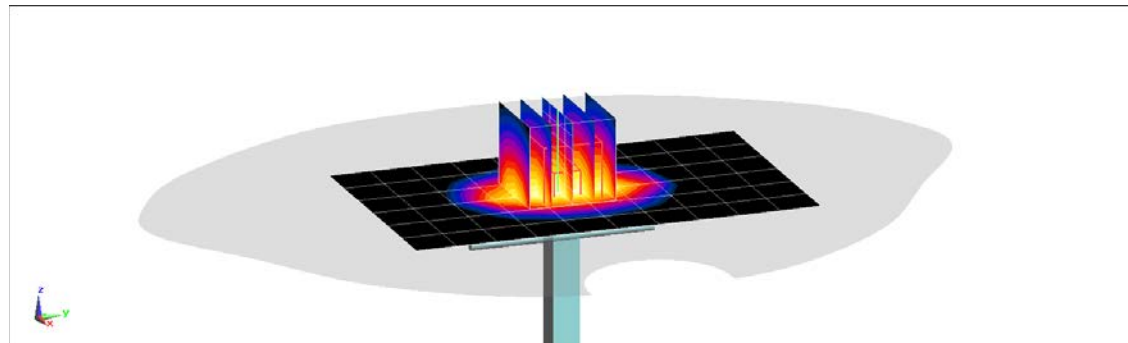

0 dB = 6.64 W/kg = 8.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 39.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.55 W/kg

Deviation(1 g) = -1.60%

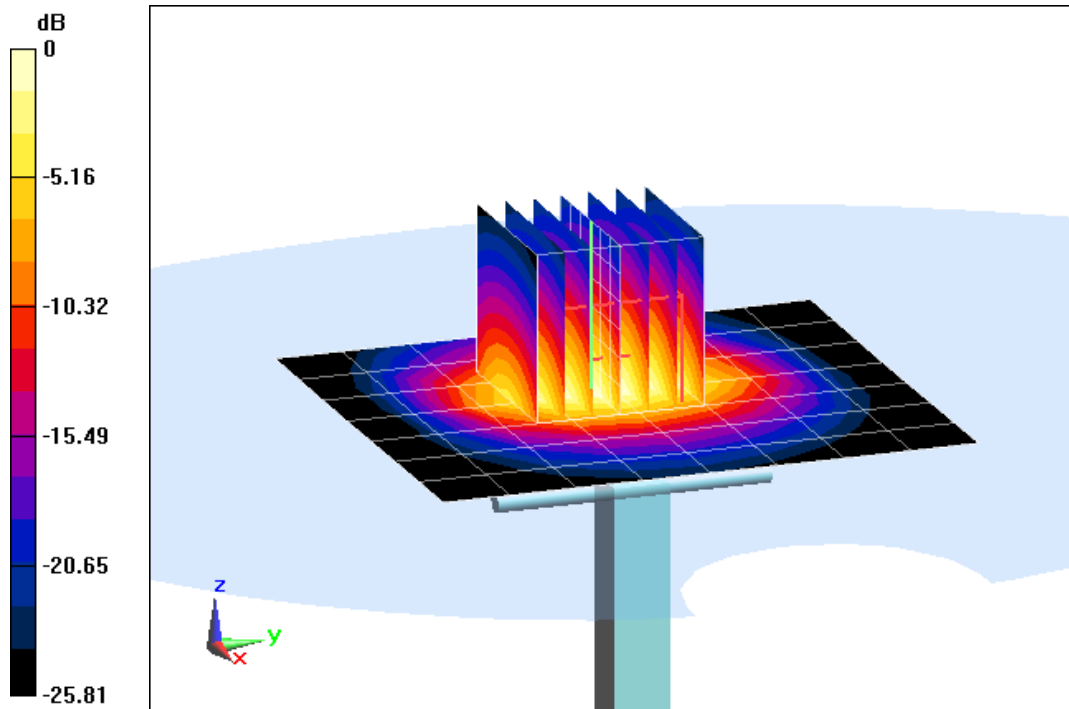

0 dB = 7.39 W/kg = 8.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.764$ S/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-25-2018; Ambient Temp: 23.2°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 9.98 W/kg

SAR(1 g) = 4.92 W/kg

Deviation(1 g) = -6.64%

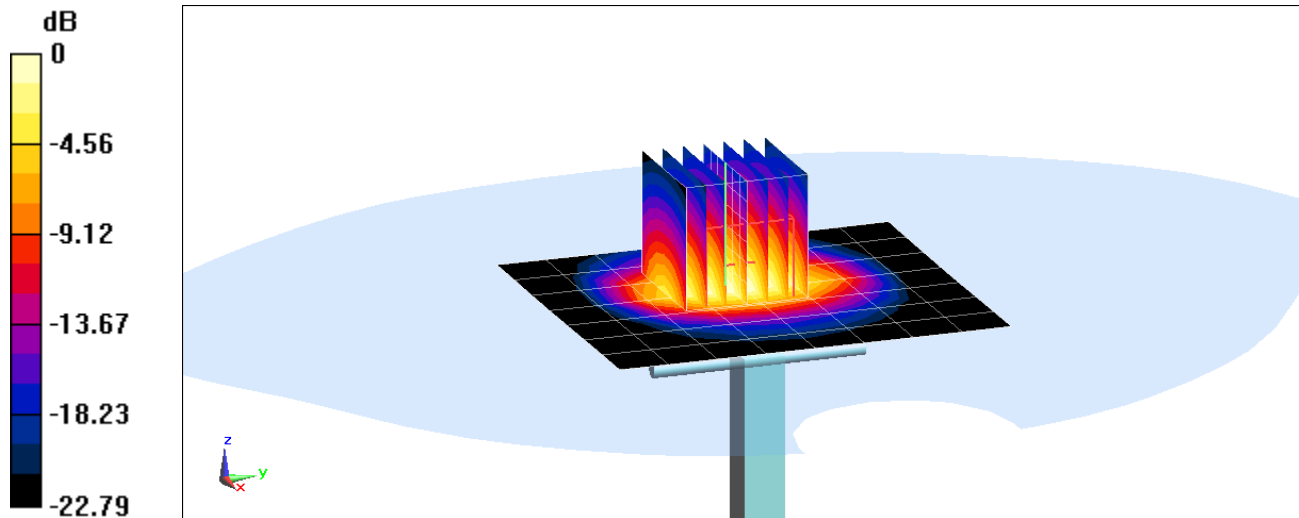

0 dB = 6.43 W/kg = 8.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: 5GHz Head Medium parameters used (interpolated):
 $f = 5250 \text{ MHz}$; $\sigma = 4.569 \text{ S/m}$; $\epsilon_r = 37.168$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 3.92 W/kg

Deviation(1 g) = -0.63%

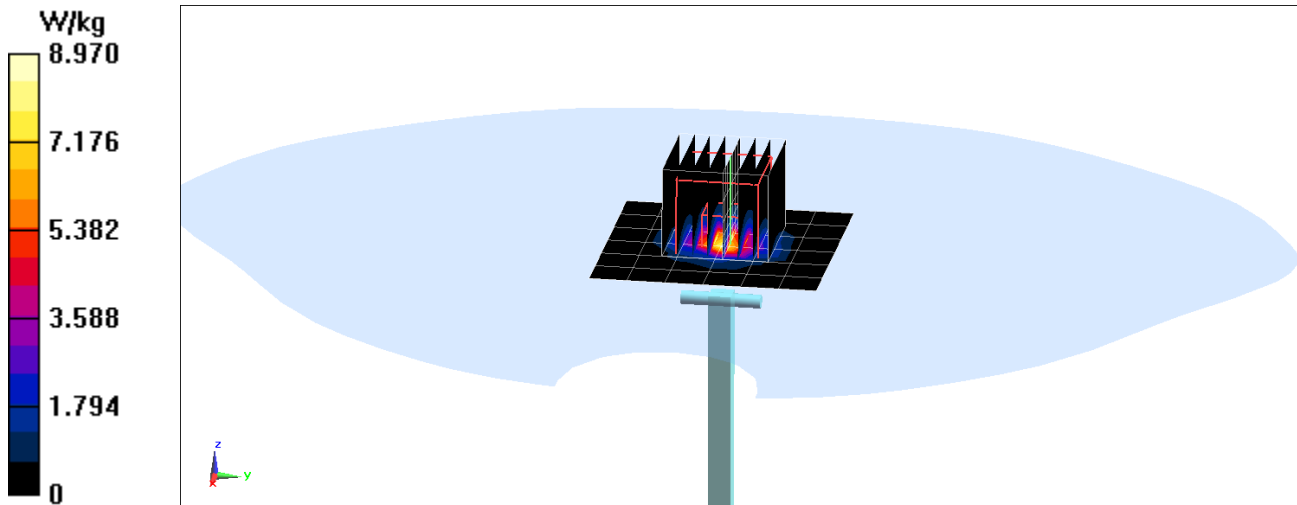

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.933 \text{ S/m}$; $\epsilon_r = 36.664$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.93 W/kg

Deviation(1 g) = -5.98%

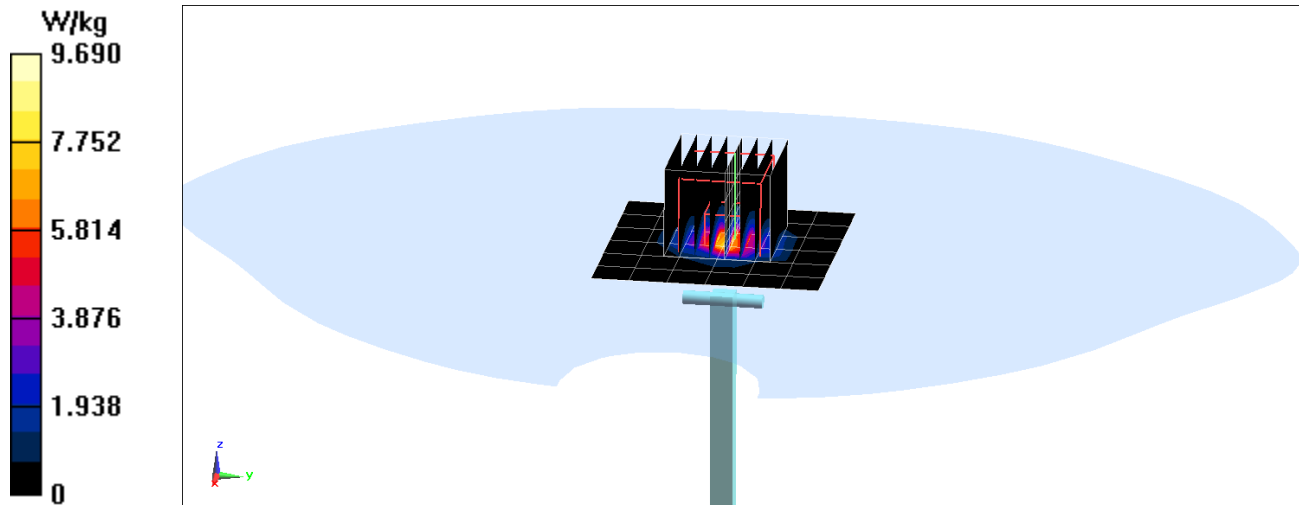

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: 5GHz Head Medium parameters used (interpolated):
 $f = 5750 \text{ MHz}$; $\sigma = 5.096 \text{ S/m}$; $\epsilon_r = 36.468$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 3.76 W/kg

Deviation(1 g) = -4.93%

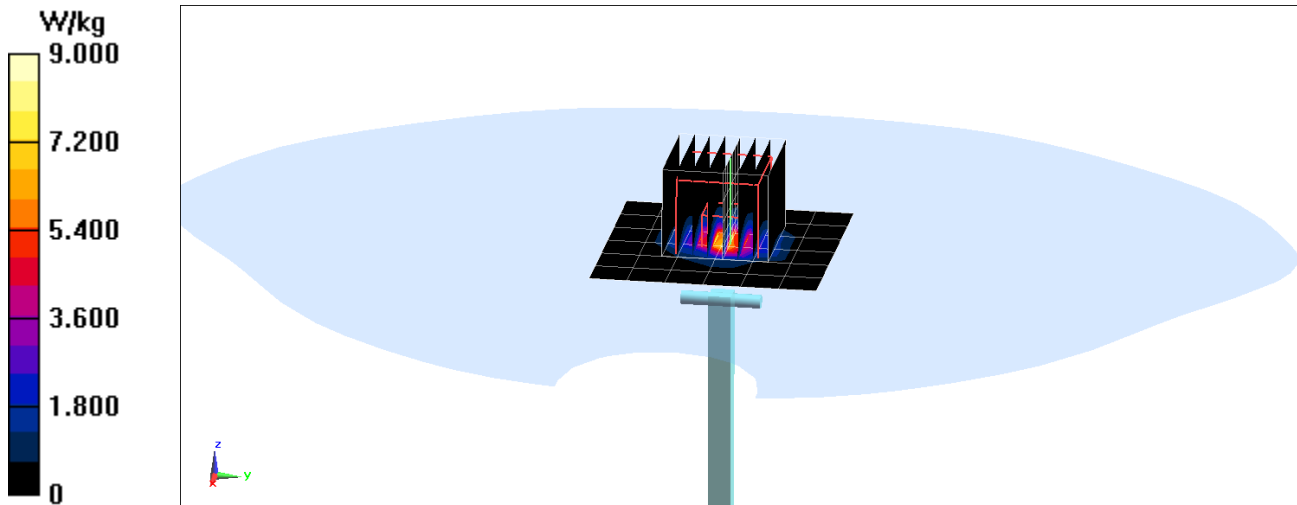

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 36.954$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 4.27 W/kg

Deviation(1 g) = 0.83%

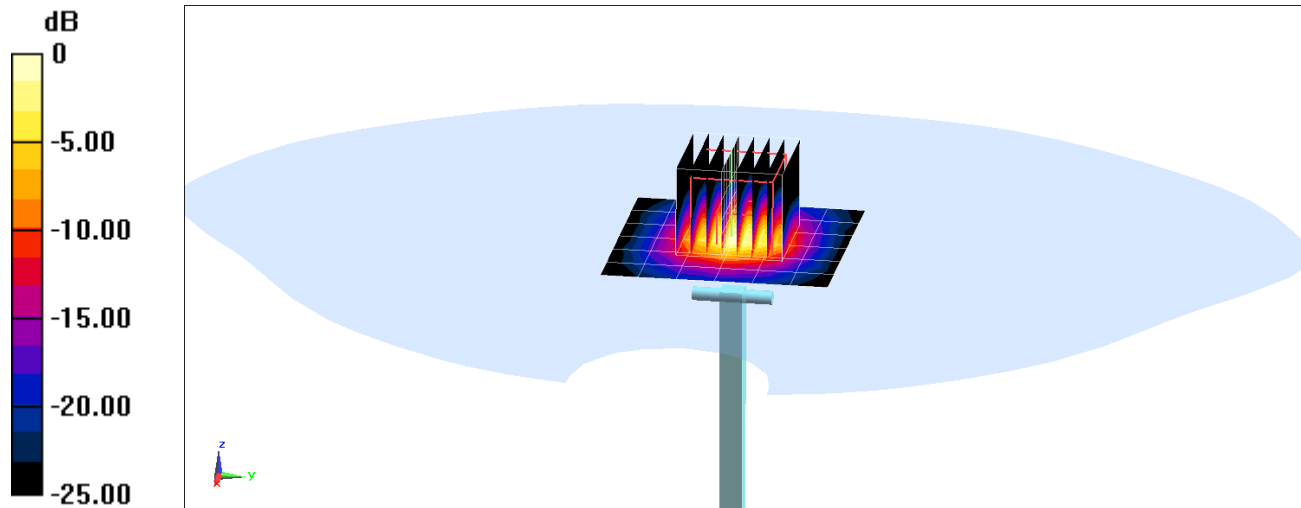

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046


Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 53.724$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-19-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 6/21/2017
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD;
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.69 W/kg
SAR(1 g) = 1.82 W/kg
Deviation(1 g) = 5.94%

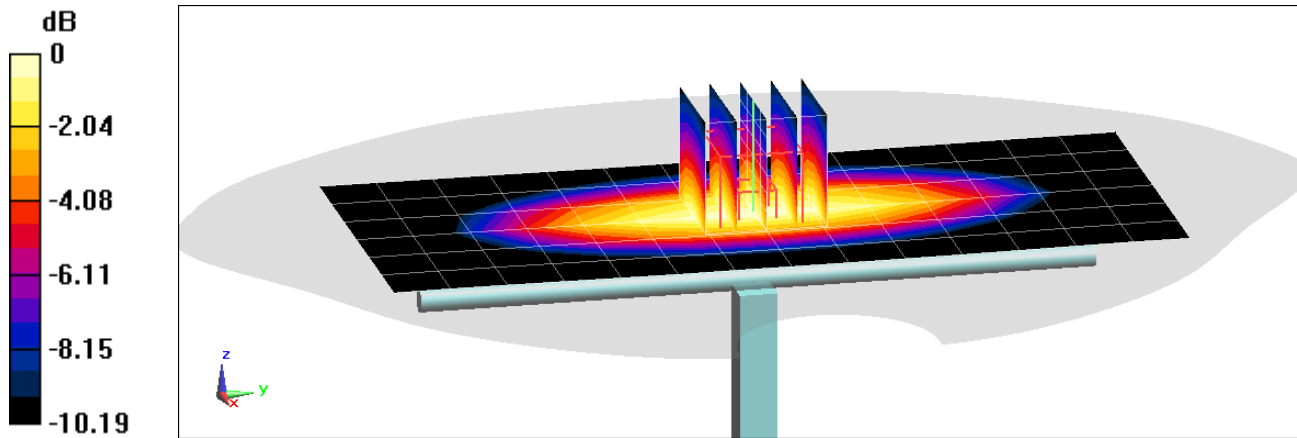

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.968 \text{ S/m}$; $\epsilon_r = 53.92$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(10.19, 10.19, 10.19); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.75 W/kg

Deviation(1 g) = 1.86%

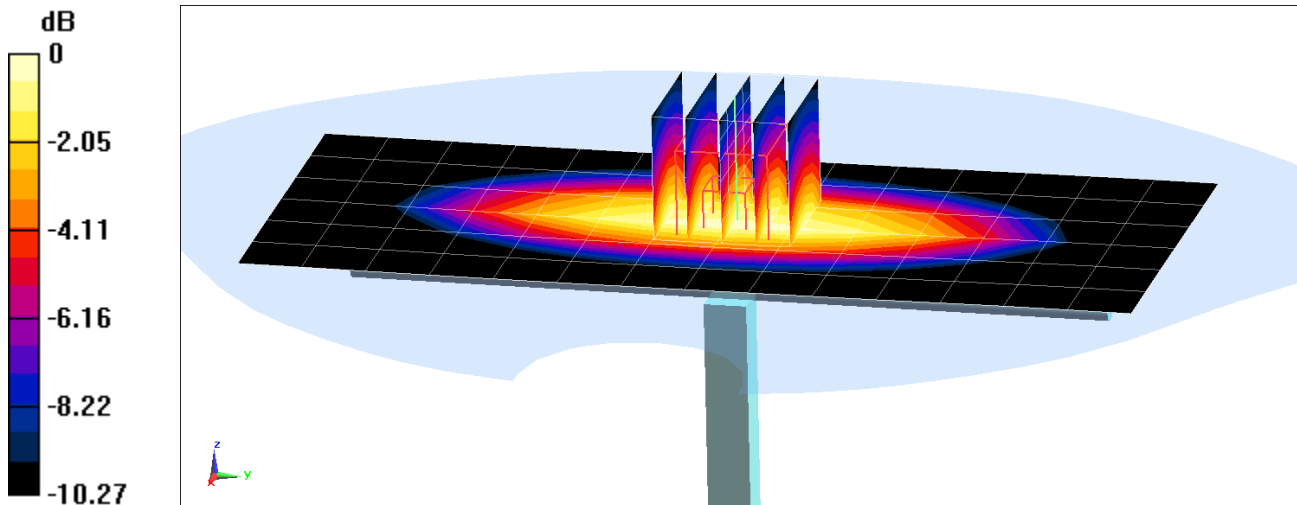

0 dB = 2.33 W/kg = 3.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 52.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.98 W/kg

Deviation(1 g) = 1.96%

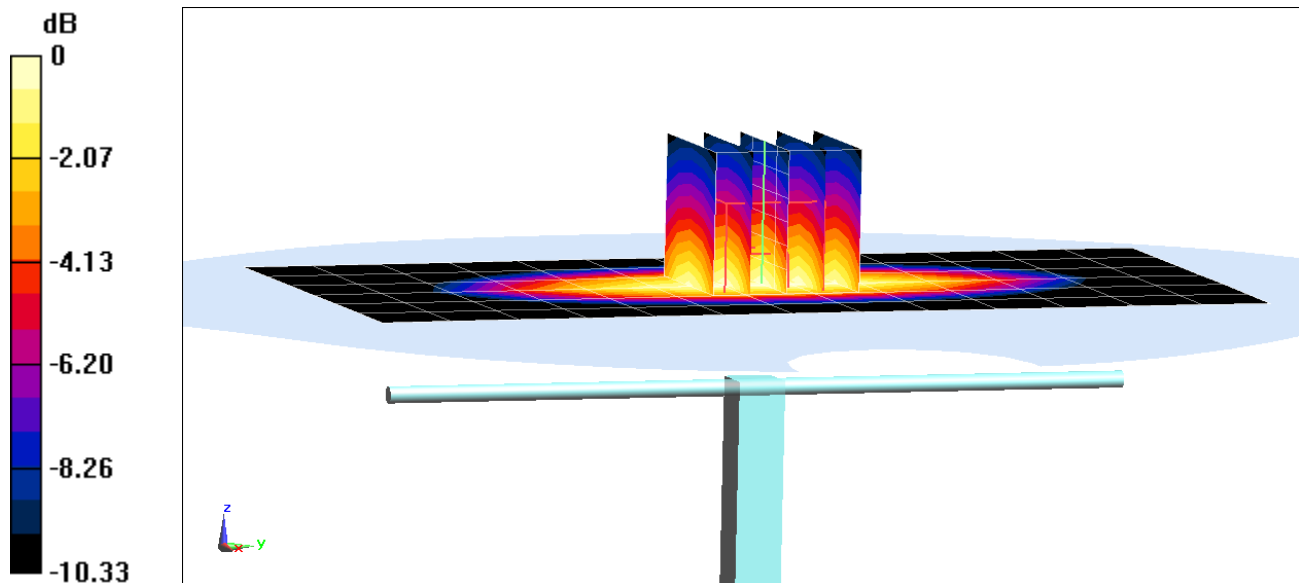

0 dB = 2.32 W/kg = 3.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.51 \text{ S/m}$; $\epsilon_r = 51.282$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-20-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.80 W/kg

SAR(1 g) = 3.79 W/kg

Deviation(1 g) = 2.43%

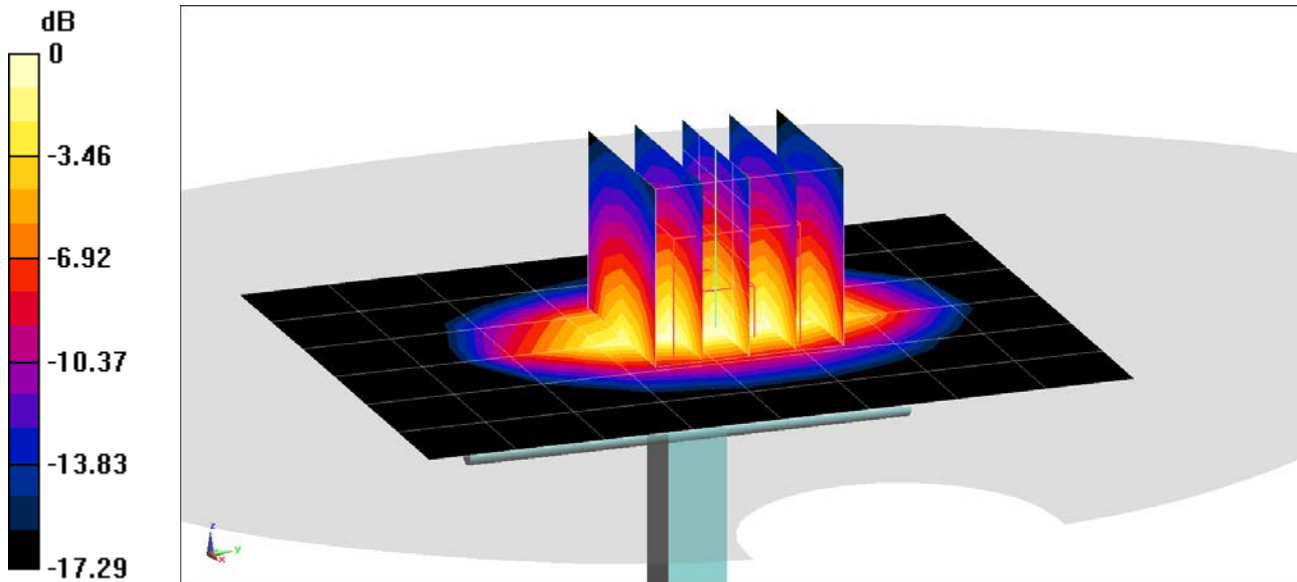

0 dB = 5.60 W/kg = 7.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 50.923$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-23-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.14 W/kg

SAR(10 g) = 2.1 W/kg

Deviation(10 g) = 6.06%

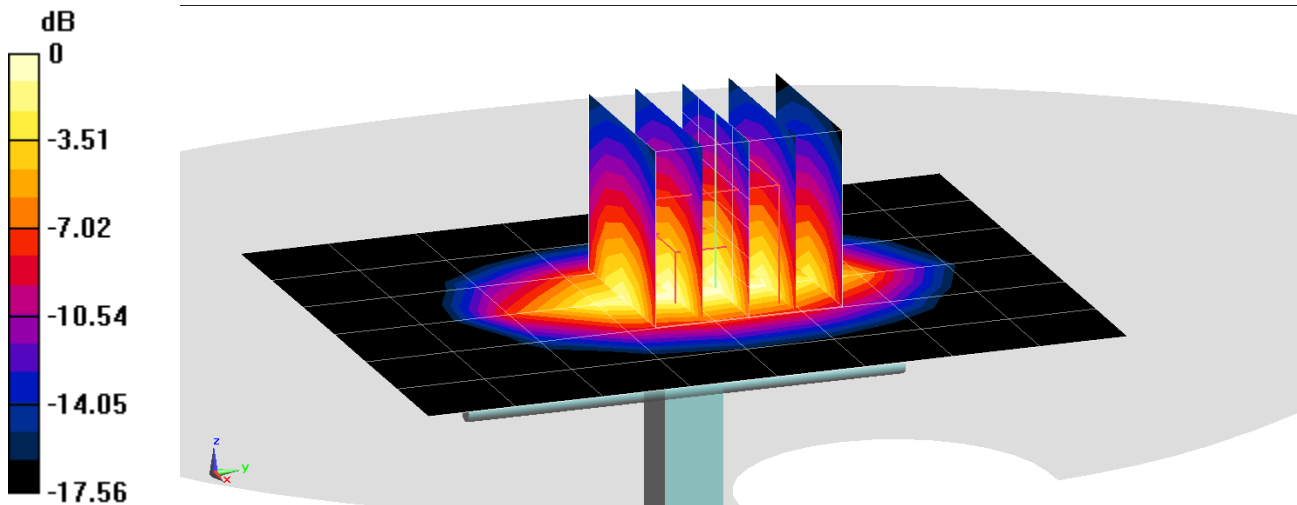

0 dB = 5.96 W/kg = 7.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 51.137$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.06 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 2.07 W/kg

Deviation(1 g) = 7.40%; Deviation(10 g) = 6.15%

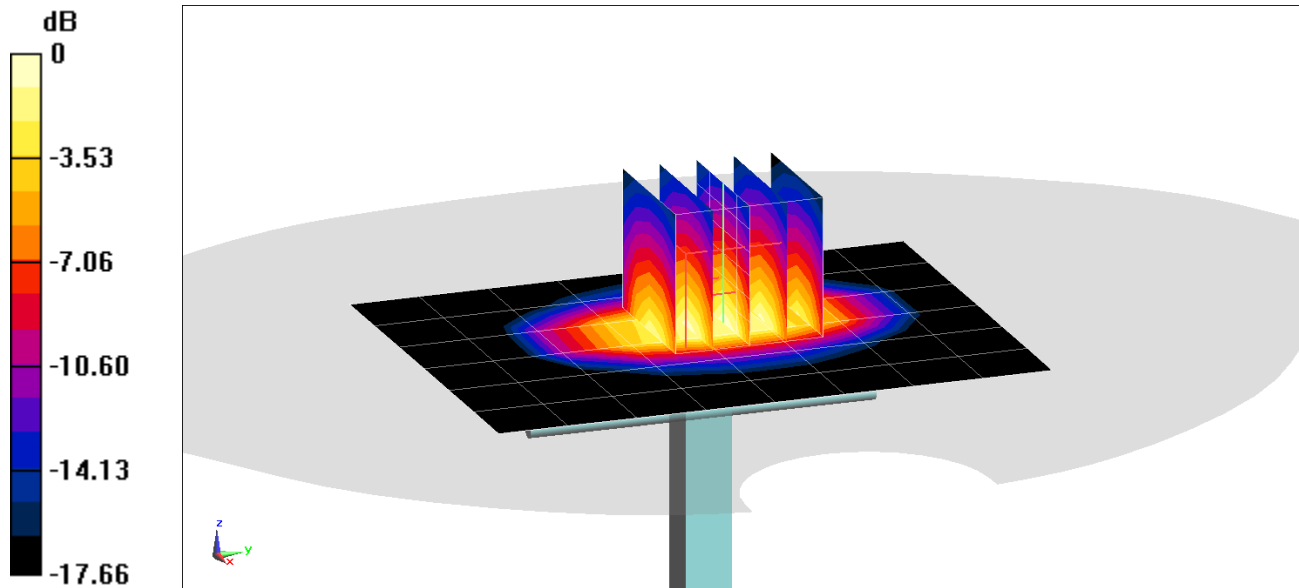

0 dB = 5.82 W/kg = 7.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.581 \text{ S/m}$; $\epsilon_r = 52.699$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 3-19-2018; Ambient Temp: 20.7°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.80 W/kg

SAR(1 g) = 4.18 W/kg

Deviation(1 g) = 6.91%

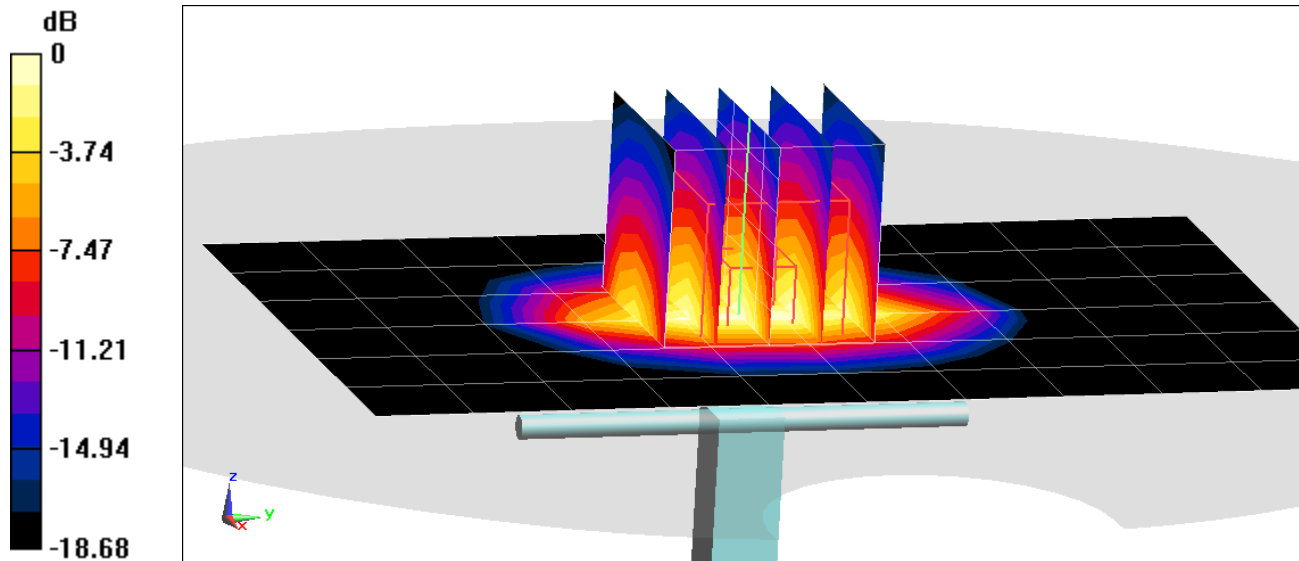

0 dB = 6.53 W/kg = 8.15 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 52.195$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-21-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 7.80 W/kg
SAR(1 g) = 4.11 W/kg; SAR(10 g) = 2.11 W/kg
Deviation(1 g) = 3.79%; Deviation(10 g) = 0.96%

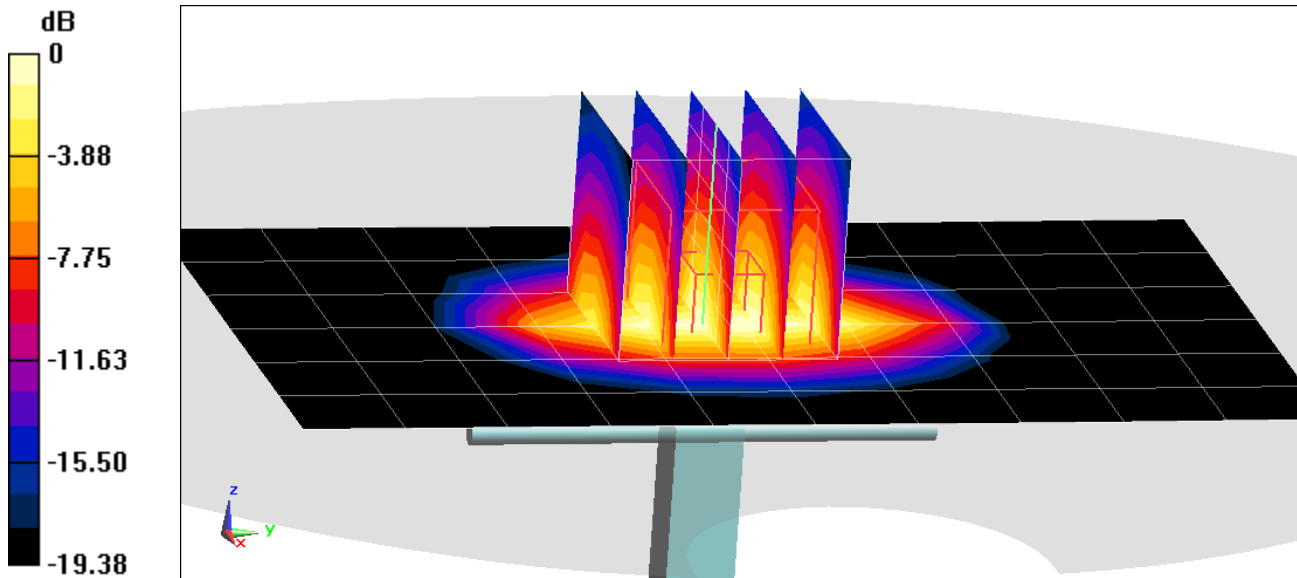

0 dB = 6.19 W/kg = 7.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 51.063$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.05 W/kg

Deviation(1 g) = -1.17%

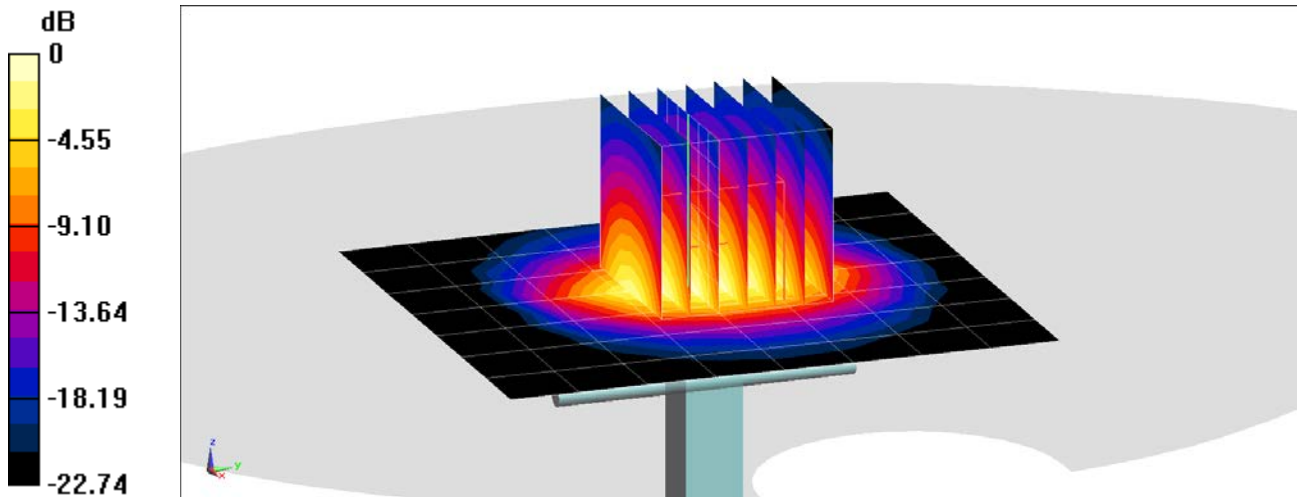

0 dB = 8.46 W/kg = 9.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126


Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used:
 $f = 2600 \text{ MHz}$; $\sigma = 2.227 \text{ S/m}$; $\epsilon_r = 50.553$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 11.8 W/kg
SAR(1 g) = 5.39 W/kg;
Deviation(1 g) = -0.74%

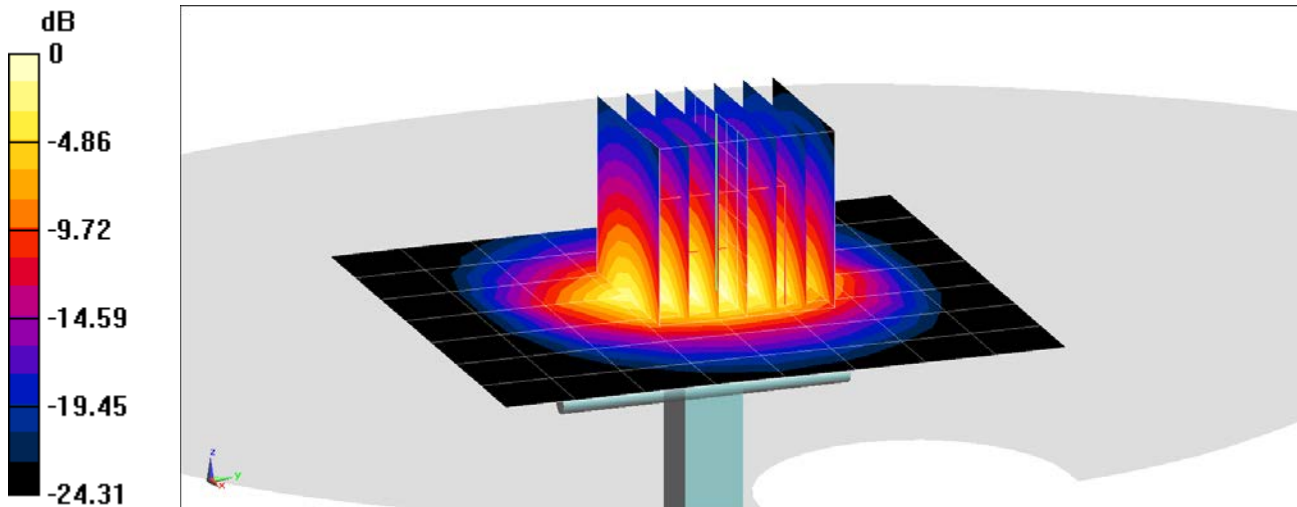

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used (interpolated):
 $f = 5250 \text{ MHz}$; $\sigma = 5.508 \text{ S/m}$; $\epsilon_r = 47.422$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 3.61 W/kg; SAR(10 g) = 1.01 W/kg

Deviation(1 g) = -6.11%; Deviation(10 g) = -6.05%

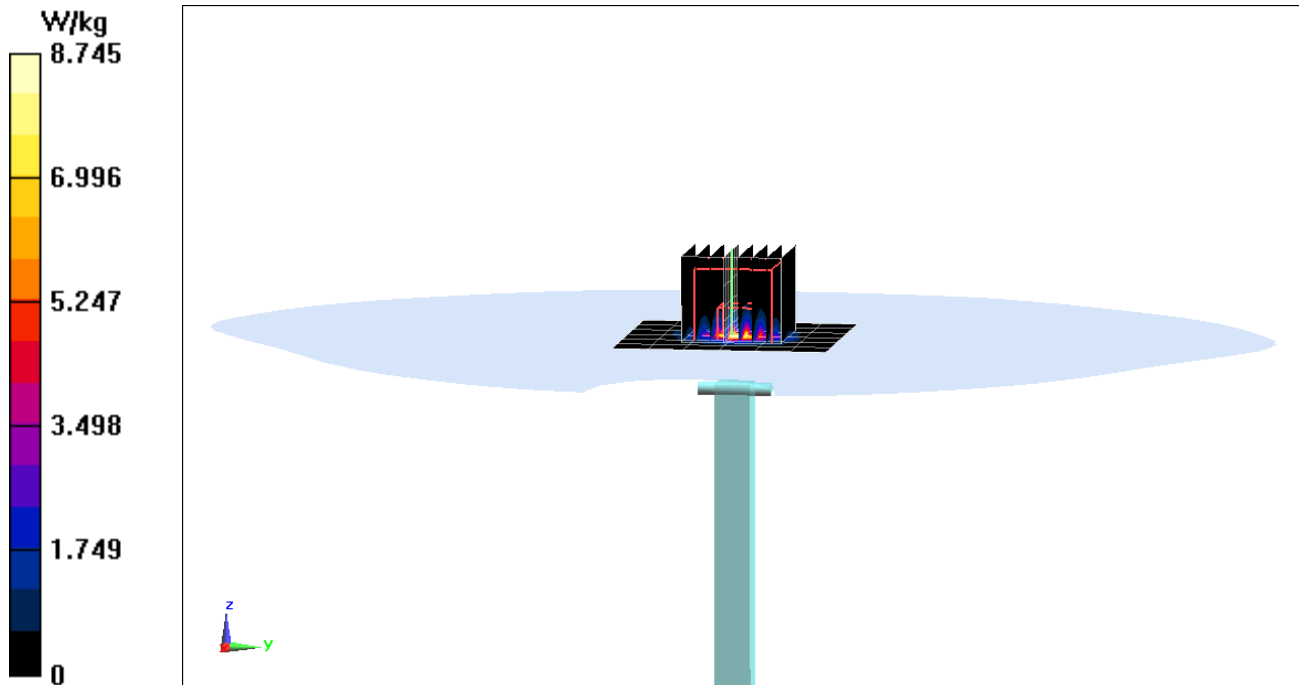

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.97$ S/m; $\epsilon_r = 46.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 3.84 W/kg; SAR(10 g) = 1.06 W/kg

Deviation(1 g) = -2.17%; Deviation(10 g) = -4.07%

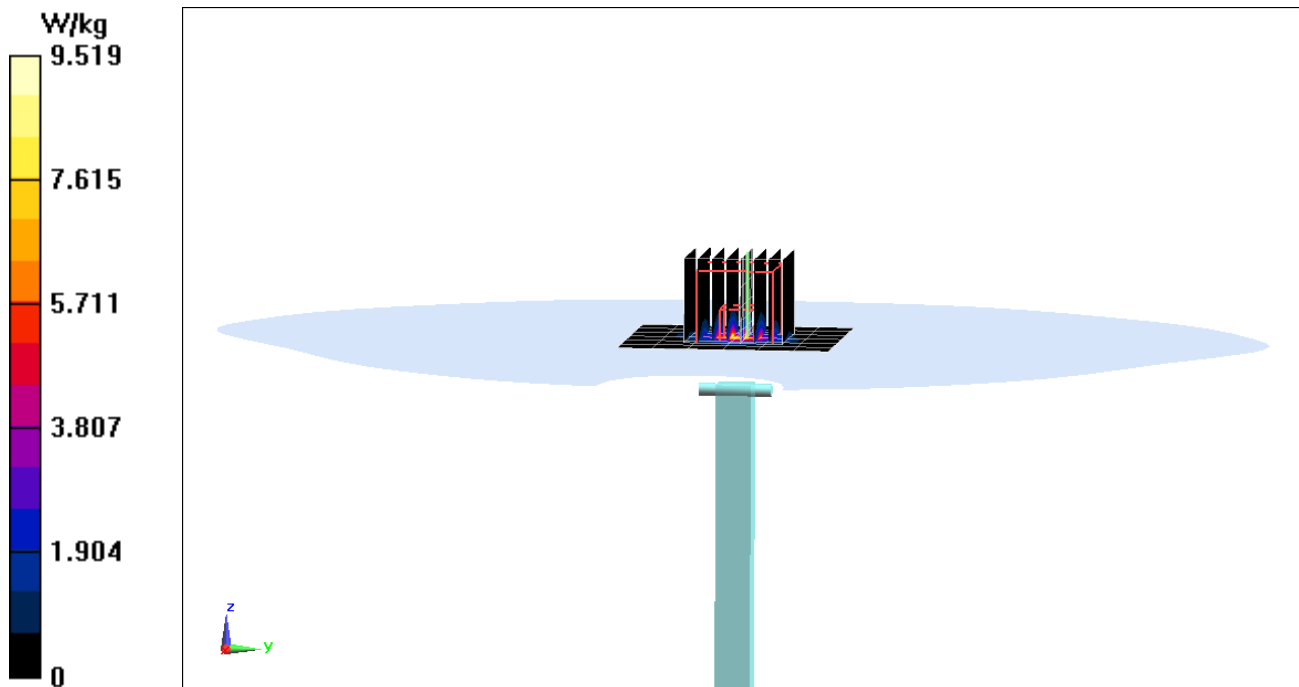

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750$ MHz; $\sigma = 6.179$ S/m; $\epsilon_r = 46.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 3.61 W/kg

Deviation(1 g) = -6.36%

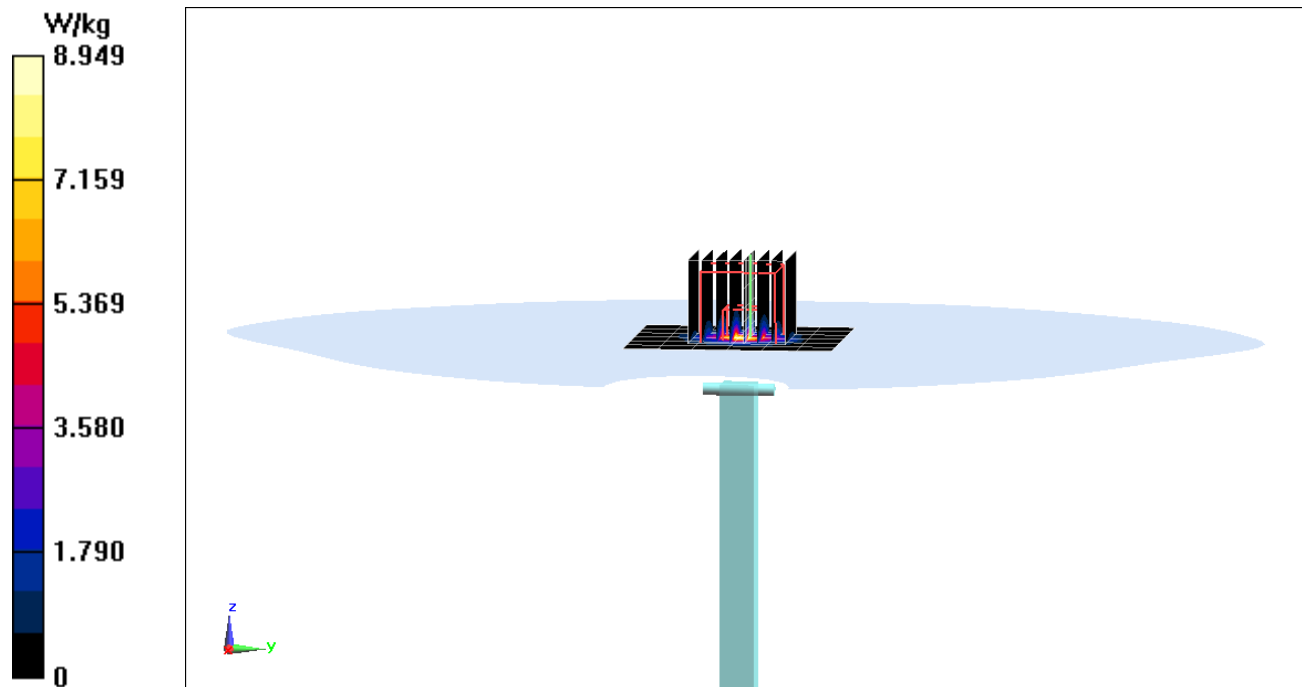

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1120_Feb18**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1120**

Calibration procedure(s) **QA CAL-22.v2
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **February 12, 2018**

BW
03-02-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	30-Dec-17 (No. EX3-3503_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature: *M. Weber*

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature: *Katja Pokovic*

Issued: February 12, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5750 MHz ± 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.3 ± 6 %	4.59 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)