



**MEASUREMENT REPORT
 FCC Part 90**

Applicant Name:
 LG Electronics MobileComm U.S.A
 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632
 United States

Date of Testing:
 April 12 - June 19, 2018
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M1804120069-04-R1.ZNF


FCC ID:	ZNFQ710WA
IC:	2703C-Q710WA
APPLICANT:	LG Electronics MobileComm U.S.A

Application Type: Certification
Model: LM-Q710WA
Additional Model(s): LMQ710WA, Q710WA
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: §2.1049, §90
ISED Specification: RSS-140 Issue 1
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This revised Test Report (S/N:1M1804120069-04-R1.ZNF) supersedes and replaces the previously issued test report (S/N: 1M1804120069-04) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President




FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 1 of 39	

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	15
7.4	Band Edge Emission at the Antenna Terminal	21
7.5	Conducted Power Output Data	26
7.6	Peak-Average Ratio	27
7.7	Radiated Power (ERP)	30
7.8	Radiated Spurious Emissions Measurements	32
7.9	Frequency Stability / Temperature Variation	36
	Frequency Stability / Temperature Variation	37
8.0	CONCLUSION	39

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 2 of 39	



MEASUREMENT REPORT

FCC Part 90



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)		
LTE Band 14	90	790.5 - 795.5	0.064	18.05	0.105	20.20	4M56G7D	QPSK
LTE Band 14	90	790.5 - 795.5	0.052	17.13	0.085	19.28	4M55W7D	16QAM
LTE Band 14	90	793	0.054	17.33	0.089	19.48	9M02G7D	QPSK
LTE Band 14	90	793	0.046	16.64	0.076	18.79	9M00W7D	16QAM

EUT Overview

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 3 of 39

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 4 of 39	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFQ710WA**. The test data contained in this report pertains to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90 and RSS-140.

Test Device Serial No.: 00073, 00057, 00065, 00123

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Approved by: Quality Manager
			Page 5 of 39

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.542, §90.543, RSS-140

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-D-2010.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 6 of 39	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 7 of 39

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Anritsu	MT8820C	Radio Communication Analyzer	5/23/2017	Annual	5/23/2018	6201240328
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	12/1/2016	Biennial	12/1/2018	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	5/19/2017	Annual	5/19/2018	251425001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
Mini Circuits	TVA-11-422	RF Power Amp		N/A		QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	10/13/2017	Annual	10/13/2018	102060
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/3/2017	Annual	7/3/2018	102135
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	10/30/2017	Annual	10/30/2018	101058
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Schwarzbeck	UHA 9105	Dipole Antenna	8/26/2016	Biennial	8/26/2018	2696
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol Sciences	JB6	JB6 Antenna	9/27/2016	Biennial	9/27/2018	A082816

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 8 of 39	

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80)$.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 9 of 39	

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFQ710WA
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE
 Band: B14

FCC Part Section(s)	ISED Radio Standard Specification	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (6.7)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.543	RSS-140 (4.4)	Conducted Band Edge / Spurious Emissions	<p>On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.</p> <p>On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10 \log(P)$ dB</p> <p>Undesirable emissions must meet the limits detailed in RSS-140(4.4)</p>		PASS	Sections 7.3, 7.4
2.1055 90.213	RSS-140 (4.2)	Frequency Stability	< 2.5 ppm		PASS	Section 7.9
2.1046	RSS-140 (4.3)	Conducted Power	N/A		PASS	Section 7.5
24.232(d)	RSS-140 (4.3)	Peak-Average Ratio	<13 dB		PASS	Section 7.6
90.542	RSS-140 (3.1, 4.3)	Effective Radiated Power (ERP)	< 3 Watts max. ERP	RADIATED	PASS	Section 7.7
2.1053 90.543	RSS-140 (3.2, 4.4)	Radiated Spurious Emissions	<p>> $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions</p> <p>all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP</p> <p>Undesirable emissions must meet the limits detailed in RSS-140(4.4)</p>		PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1-ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 10 of 39	

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 11 of 39	

7.2 Occupied Bandwidth

§2.1049, RSS-140

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

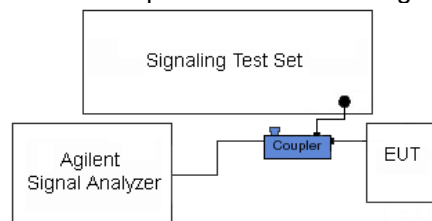


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 12 of 39	




Plot 7-1. Occupied Bandwidth Plot (LTE B14 - 5.0MHz QPSK – RB Size 25)

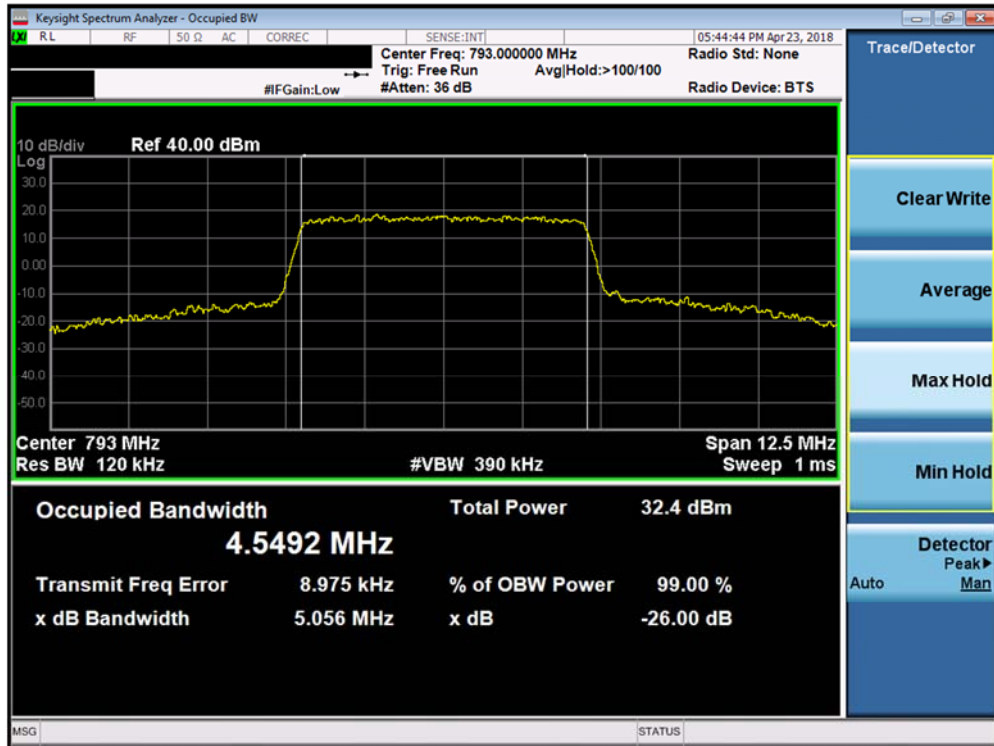


Plot 7-2 Occupied Bandwidth Plot (LTE B14 - 5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 13 of 39

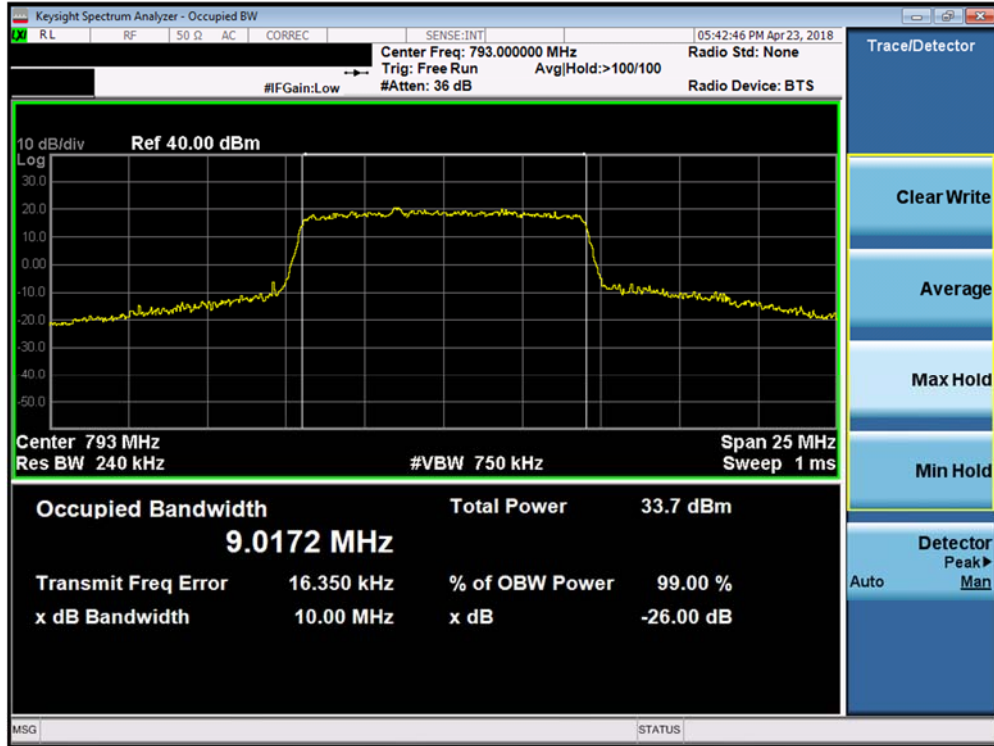

Plot 7-3 Occupied Bandwidth Plot (LTE B14 - 10.0MHz QPSK – RB Size 50)

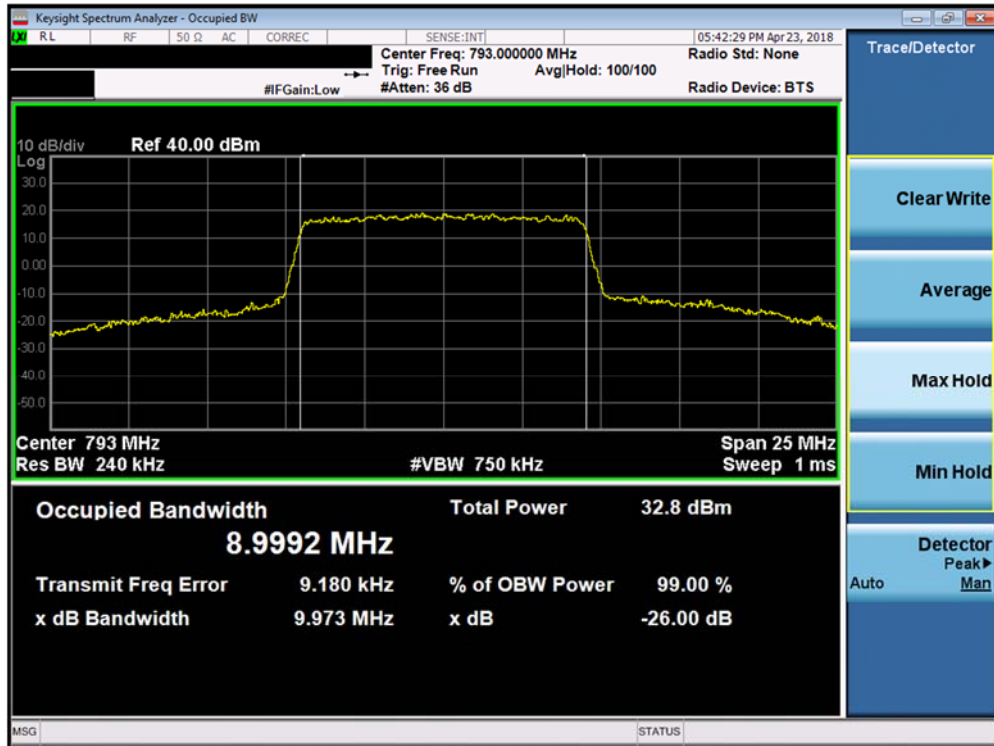

Plot 7-4 Occupied Bandwidth Plot (LTE B14 - 10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 14 of 39

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051 §90.543, RSS-140

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01– Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 1MHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


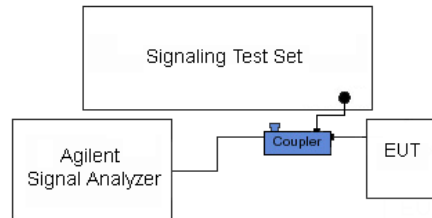


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 15 of 39

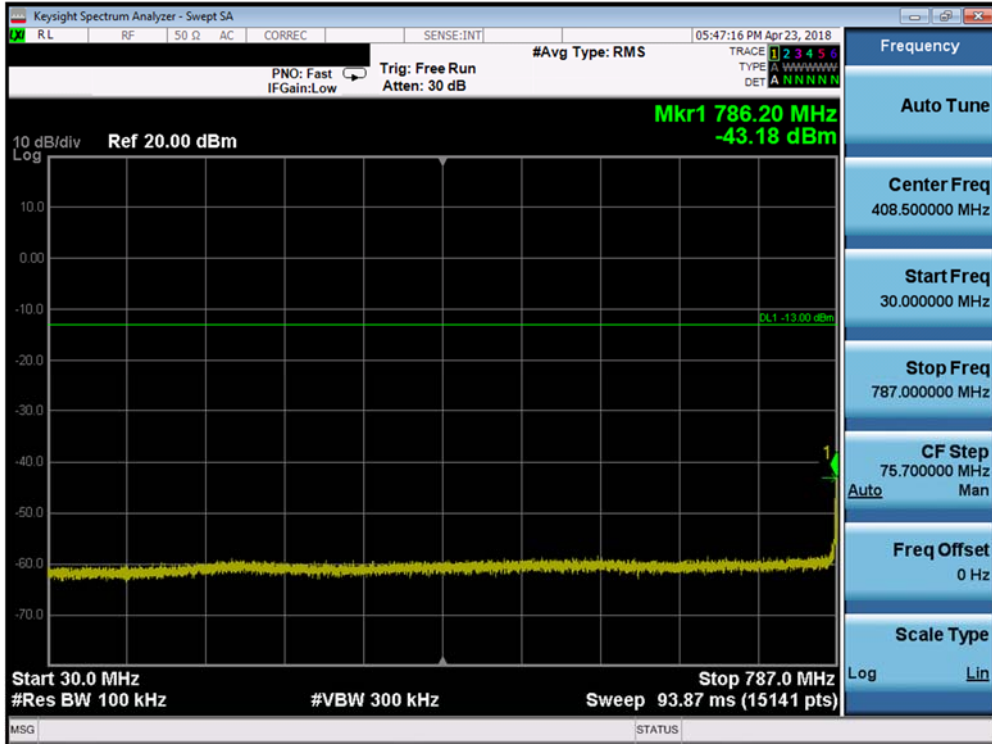


Plot 7-5. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

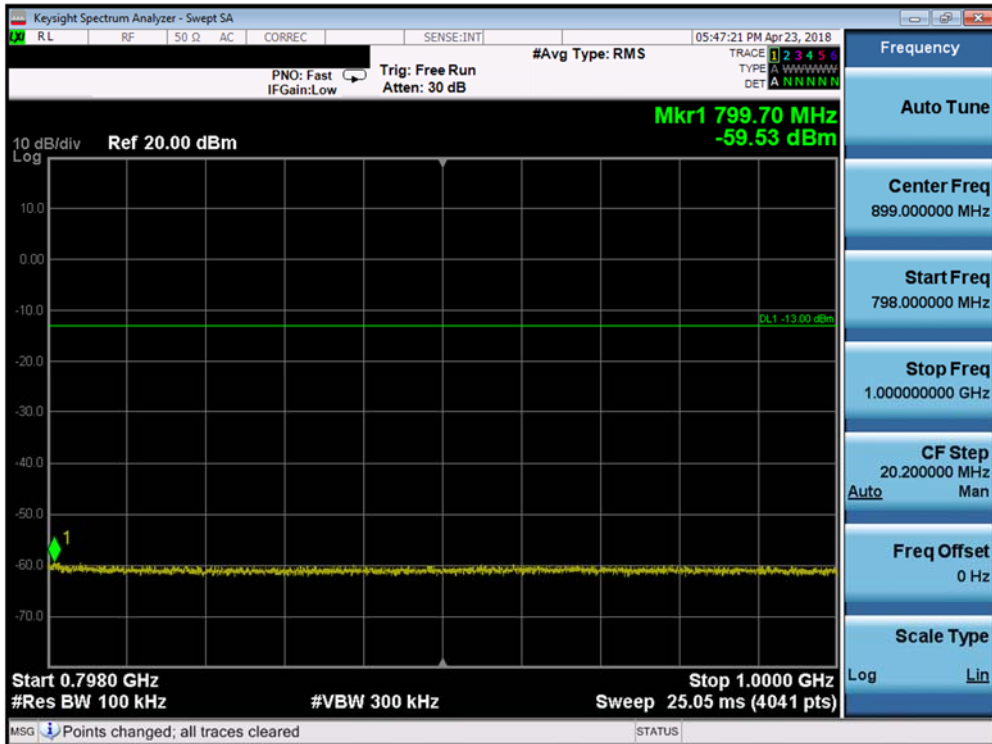


Plot 7-6. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 16 of 39

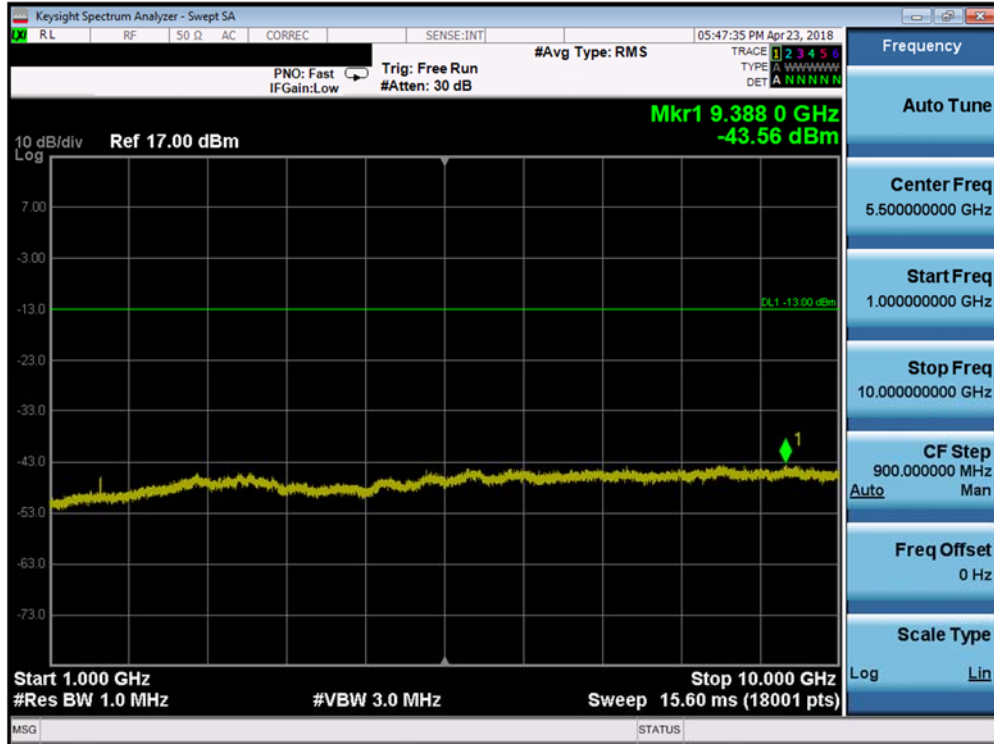


Plot 7-7. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

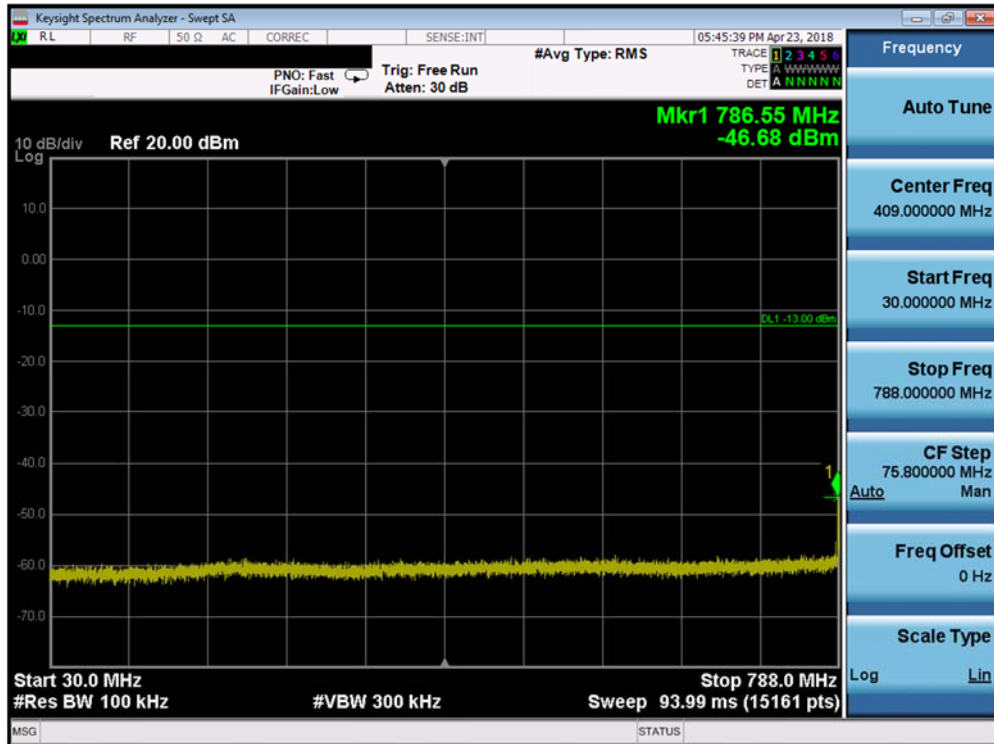


Plot 7-8. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFQ710WA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 17 of 39

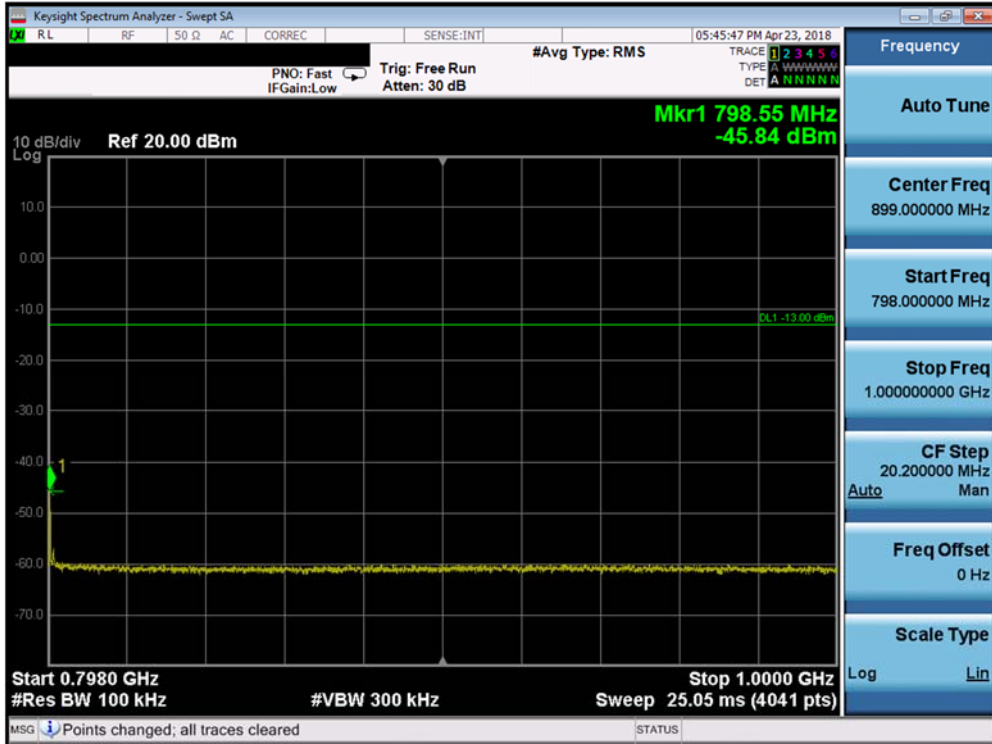


Plot 7-9. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

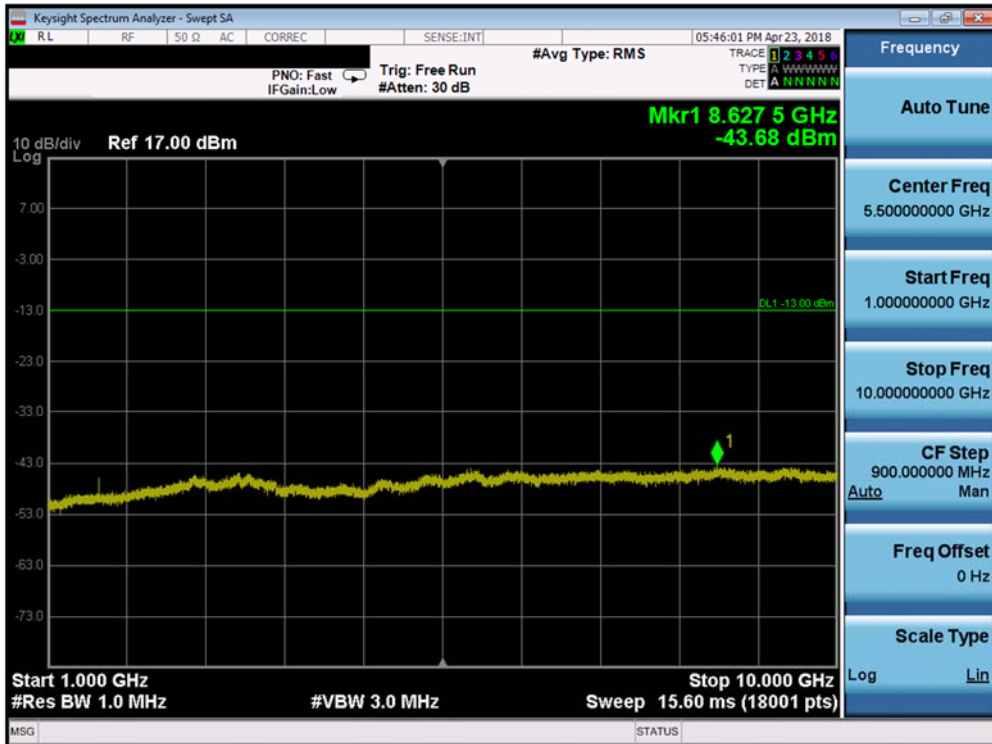


Plot 7-10. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFQ710WA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 18 of 39

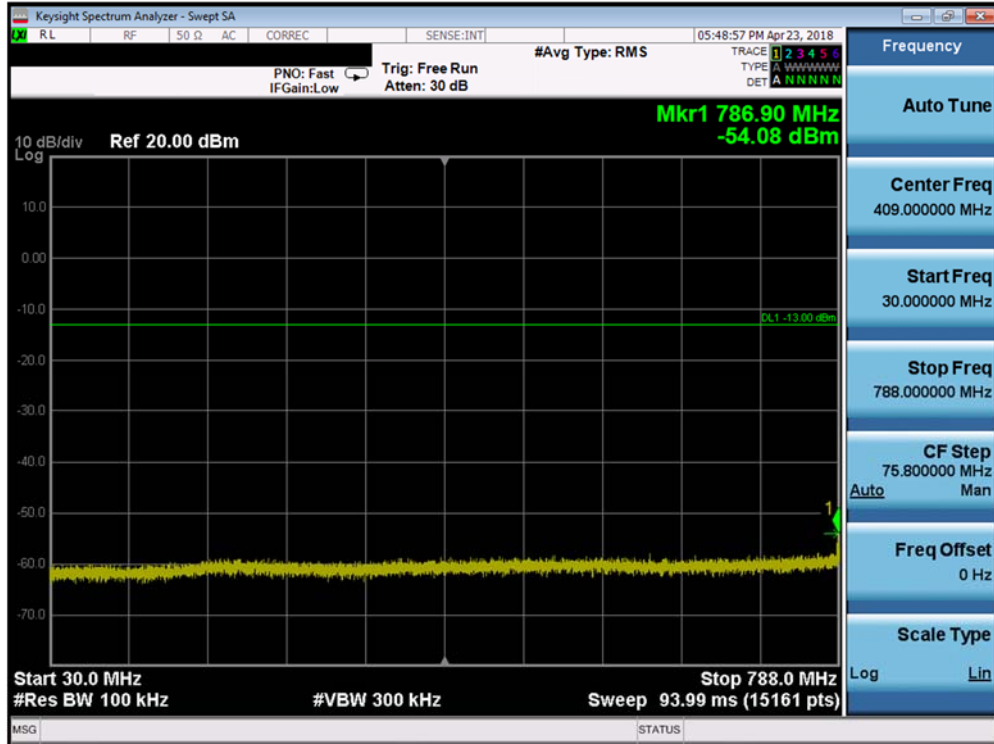

Plot 7-11. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

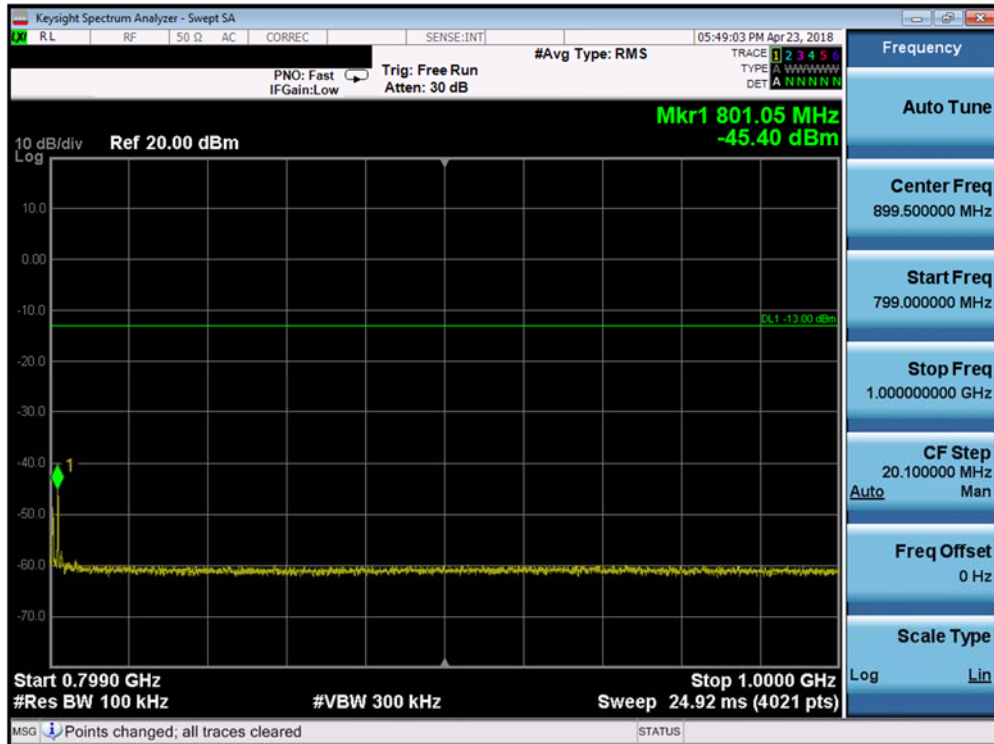

Plot 7-12. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 19 of 39



Plot 7-13. Conducted Spurious Plot (LTE B14 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 20 of 39

7.4 Band Edge Emission at the Antenna Terminal

§2.1051 §90.543, RSS-140

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Test Procedure Used

KDB 971168 D01 v03r01– Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


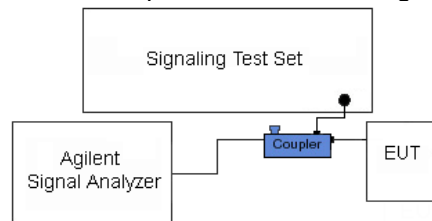


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 21 of 39

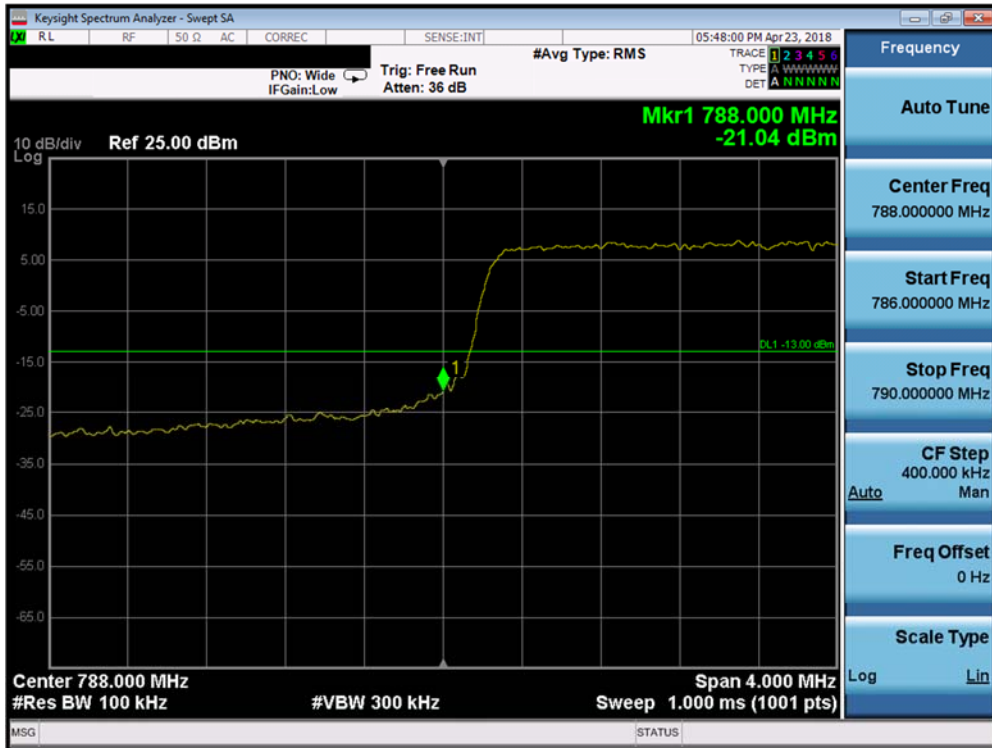


Plot 7-14. Lower Band Edge Plot (LTE B14 5MHz QPSK – RB Size 25)

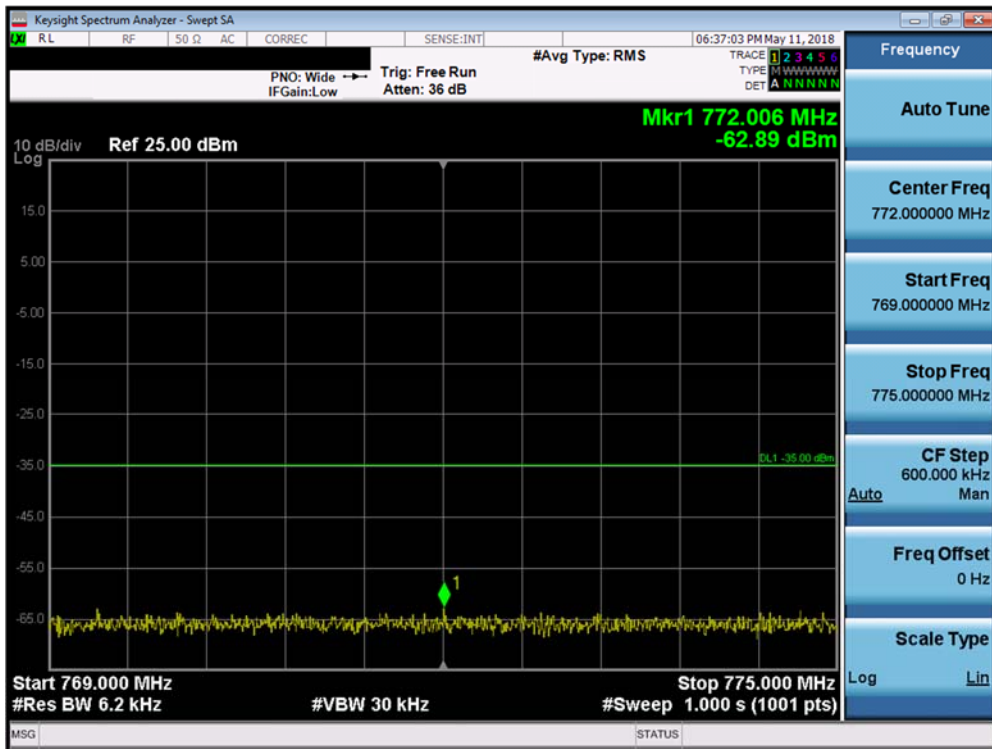


Plot 7-15. Lower Emission Mask Plot (LTE B14 5MHz QPSK – RB Size 25)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 22 of 39

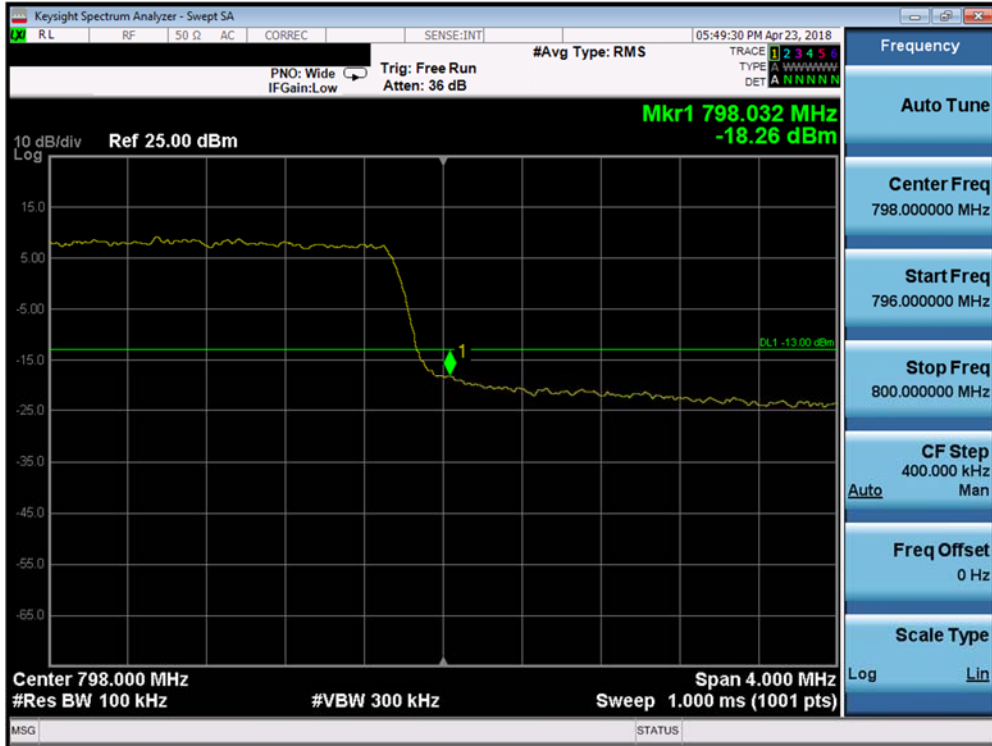


Plot 7-16. Upper Band Edge Plot (LTE B14 5MHz QPSK – RB Size 25)

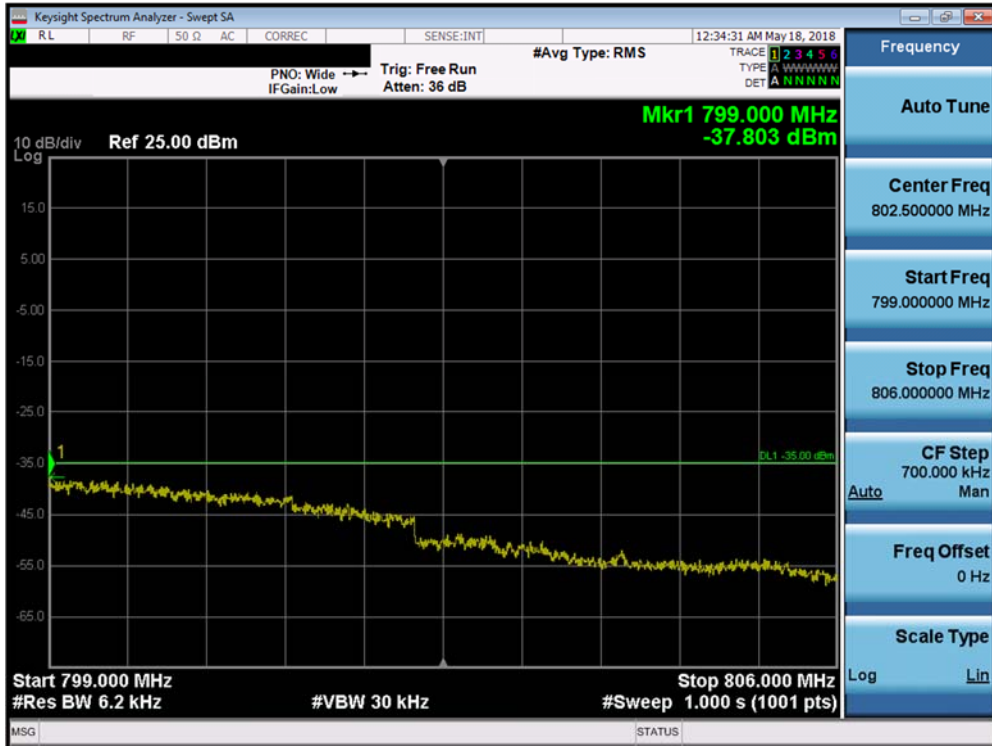


Plot 7-17. Upper Emission Mask Plot (LTE B14 5MHz QPSK – RB Size 25)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 23 of 39

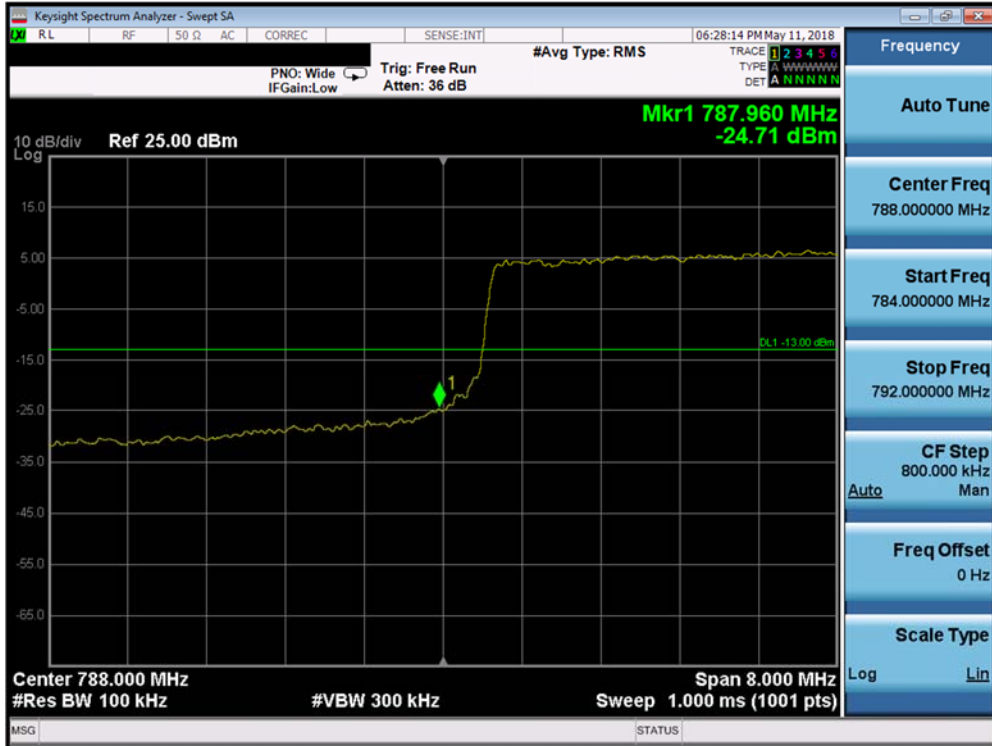


Plot 7-18. Lower Band Edge Plot (LTE B14 10MHz QPSK – RB Size 50)

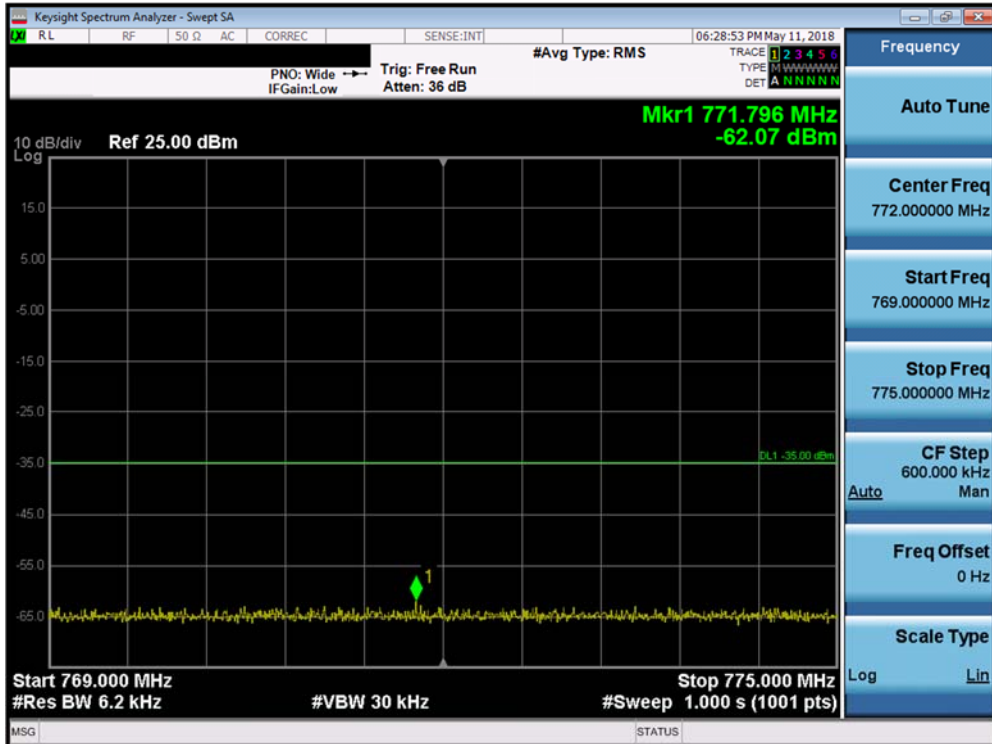


Plot 7-19. Lower Emission Mask Plot (LTE B14 10MHz QPSK – RB Size 50)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 24 of 39

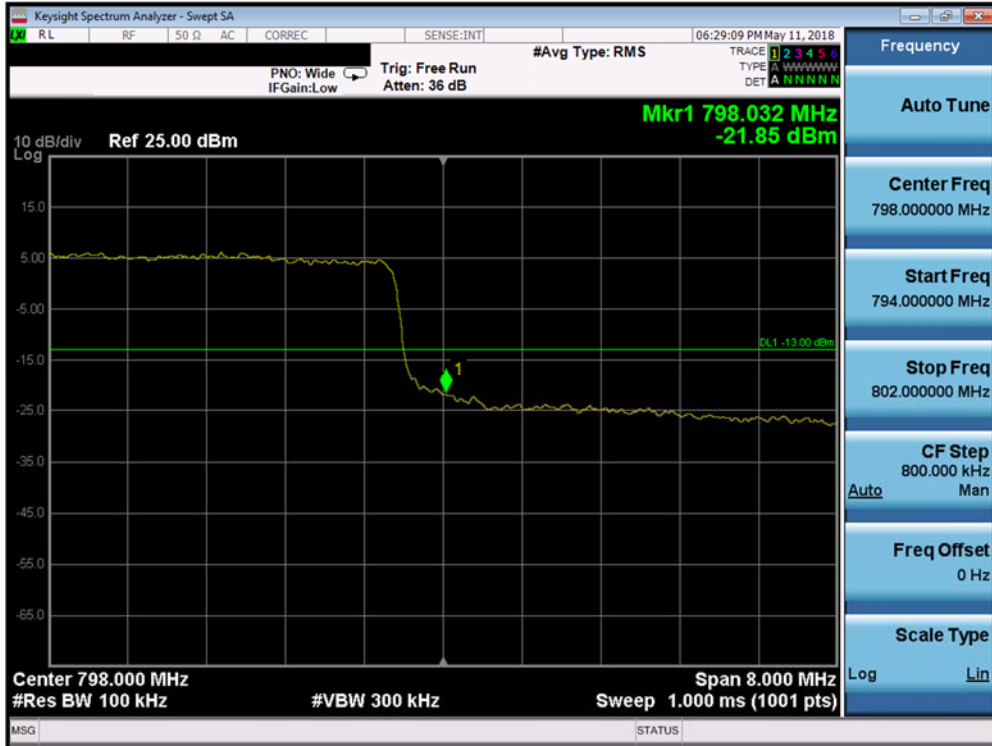

Plot 7-20. Upper Band Edge Plot (LTE B14 10MHz QPSK – RB Size 50)

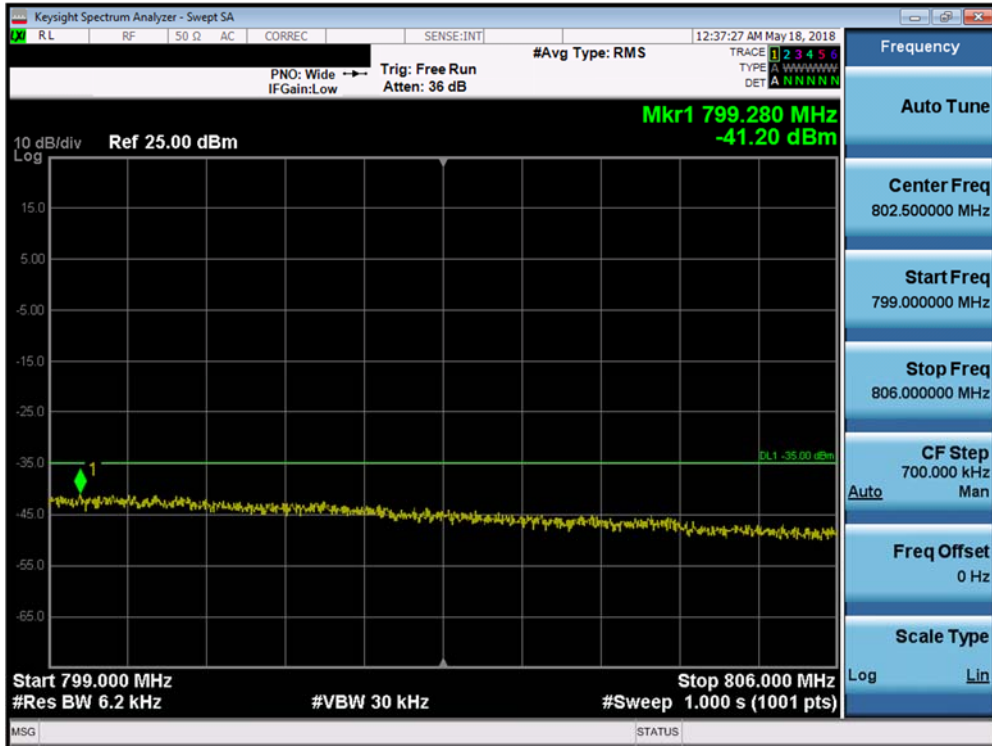

Plot 7-21. Upper Emission Mask Plot (LTE B14 10MHz QPSK – RB Size 50)

FCC ID: ZNFQ710WA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 25 of 39

7.5 Conducted Power Output Data

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
793.00	5	QPSK	25.39	0.346	50.00	-24.61
793.00	5	16-QAM	24.45	0.279	50.00	-25.55
793.00	10	QPSK	25.36	0.344	50.00	-24.64
793.00	10	16-QAM	24.50	0.282	50.00	-25.50

Table 7-2. LTE Band 14 Conducted Power Output Data

NOTES:

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 26 of 39	

7.6 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


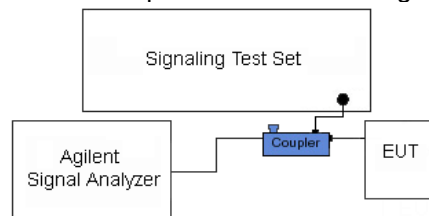


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 27 of 39

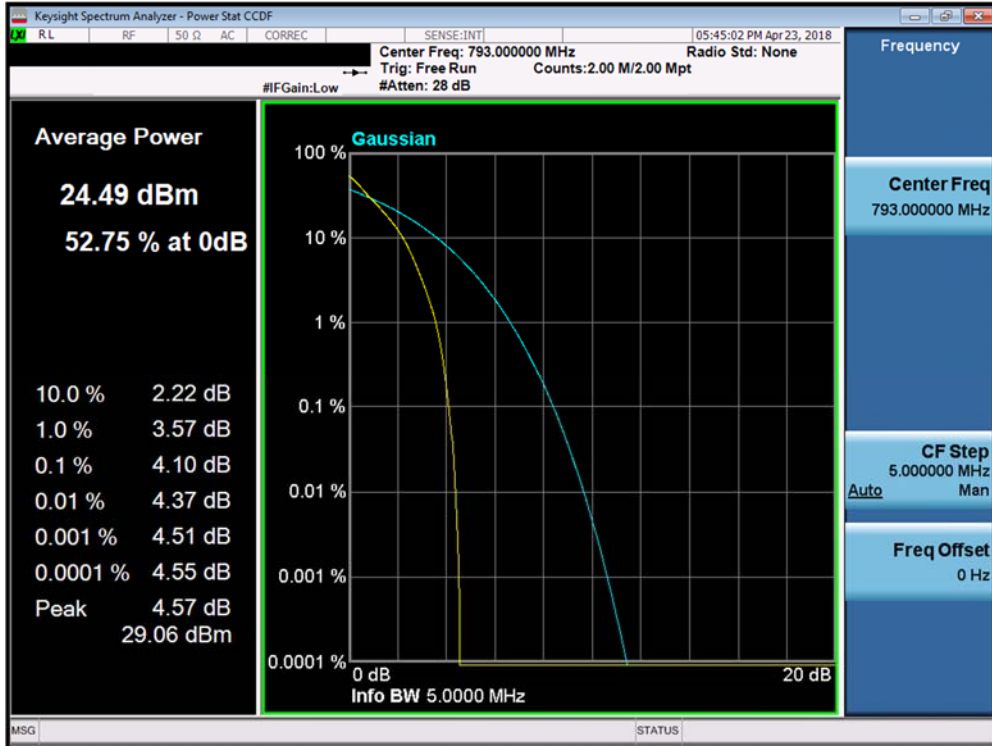


Plot 7-22. Peak-Average Ratio Plot (LTE B14 5MHz QPSK – RB Size 25)

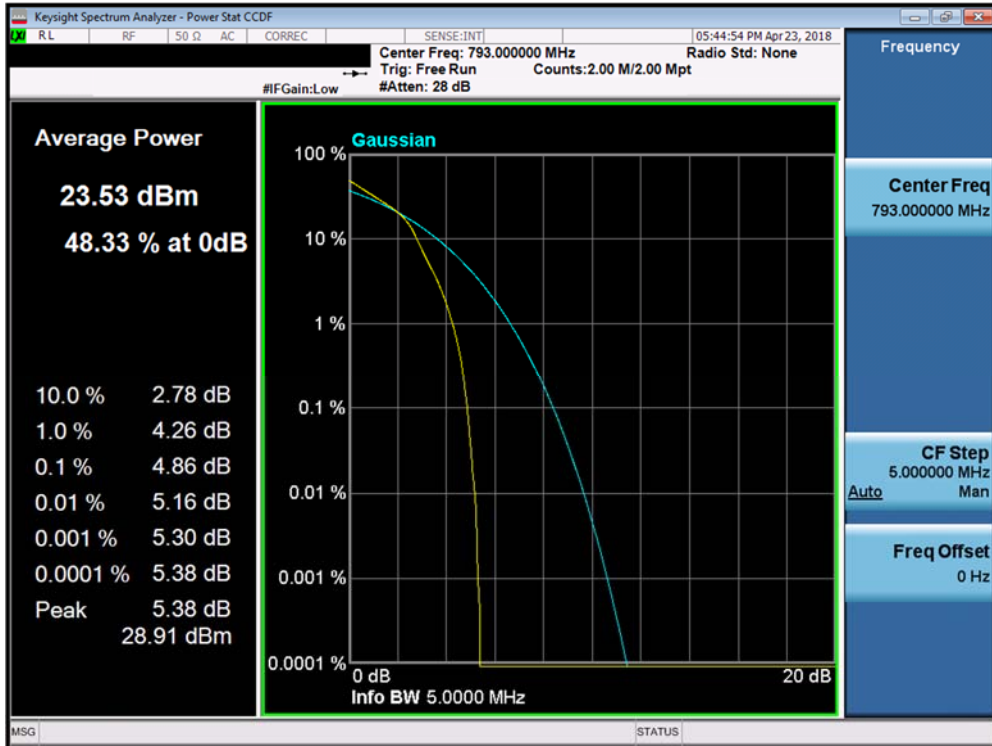


Plot 7-23. Peak-Average Ratio Plot (LTE B14 5MHz 16-QAM – RB Size 25)

FCC ID: ZNFQ710WA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 28 of 39

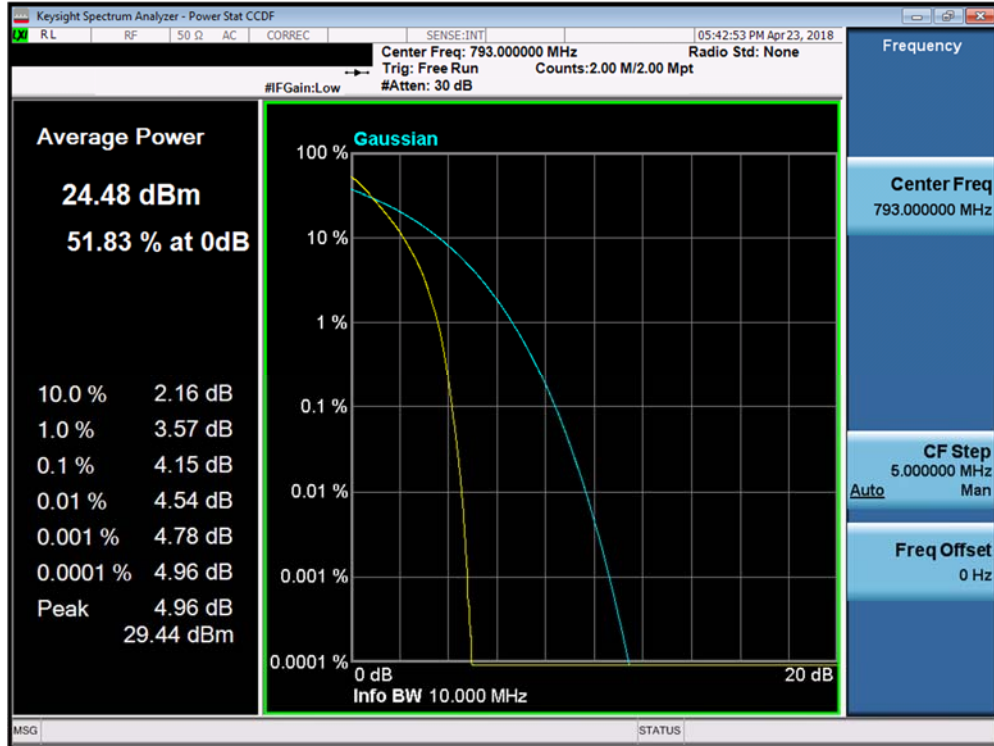

Plot 7-24. Peak-Average Ratio Plot (LTE B14 10MHz QPSK – RB Size 50)

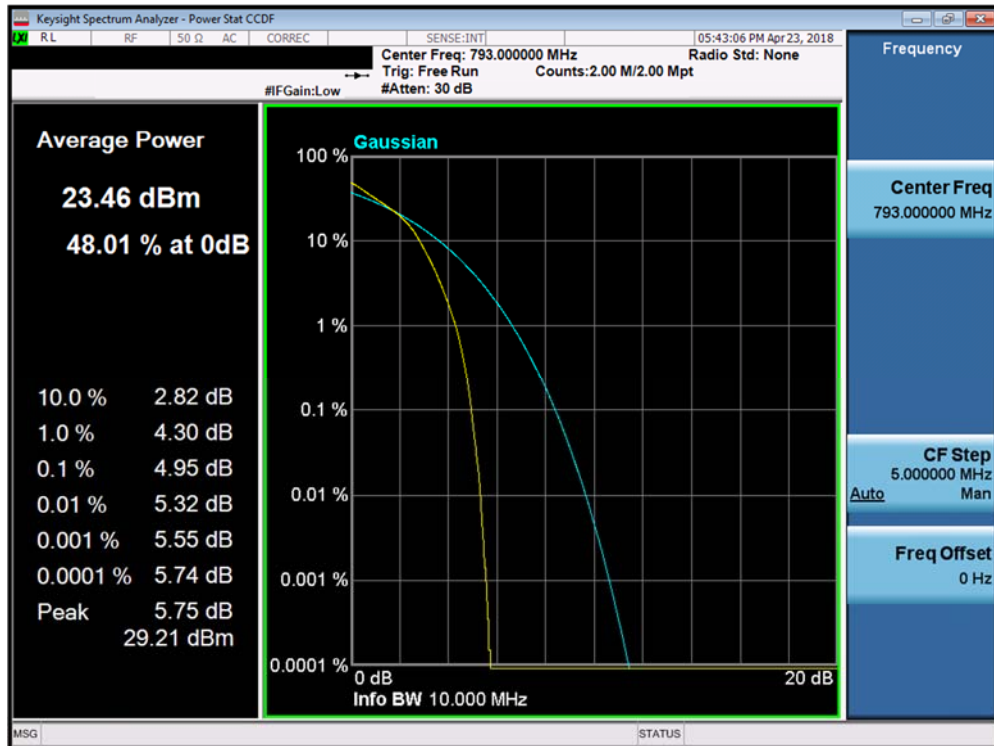

Plot 7-25. Peak-Average Ratio Plot (LTE B14 10MHz 16-QAM – RB Size 50)

FCC ID: ZNFQ710WA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset		Page 29 of 39

7.7 Radiated Power (ERP)

§90.542

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 30 of 39	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

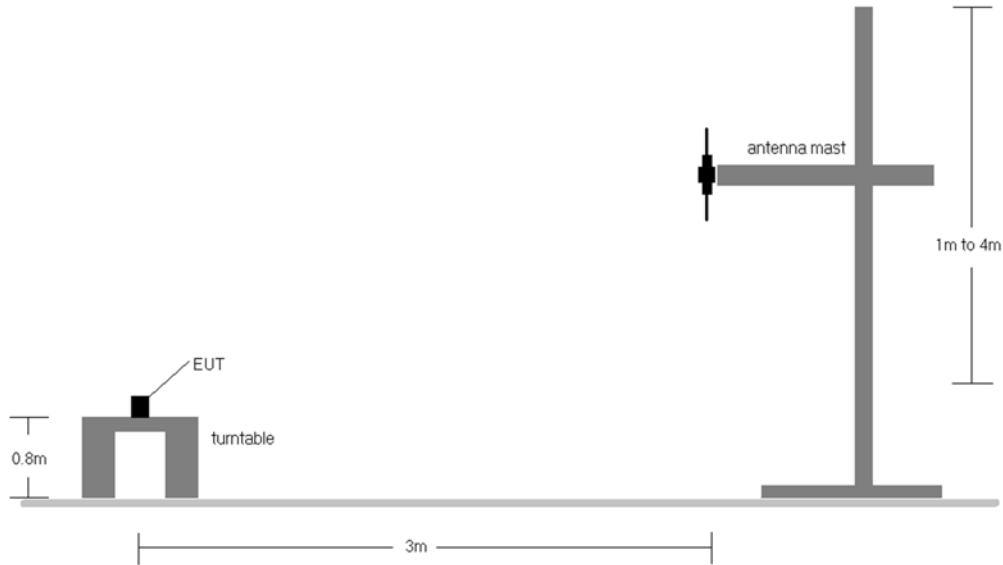


Figure 7-5. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
790.50	5	QPSK	V	150	74	1 / 24	18.84	1.36	18.05	0.064	34.77	-16.72	20.20	0.105	36.99	-16.79
793.00	5	QPSK	V	150	75	1 / 24	18.21	1.37	17.43	0.055	34.77	-17.34	19.58	0.091	36.99	-17.41
795.50	5	QPSK	V	150	71	1 / 24	18.32	1.38	17.55	0.057	34.77	-17.22	19.70	0.093	36.99	-17.29
790.50	5	16-QAM	V	150	74	1 / 24	17.92	1.36	17.13	0.052	34.77	-17.64	19.28	0.085	36.99	-17.71
793.00	10	QPSK	V	150	74	1 / 49	18.11	1.37	17.33	0.054	34.77	-17.44	19.48	0.089	36.99	-17.51
793.00	10	16-QAM	V	150	74	1 / 49	17.42	1.37	16.64	0.046	34.77	-18.13	18.79	0.076	36.99	-18.20
790.50	5	QPSK	H	150	113	1 / 24	17.09	1.36	16.30	0.043	34.77	-18.47	18.45	0.070	36.99	-18.54

Table 7-3. Summary of Test Results

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 31 of 39	

7.8 Radiated Spurious Emissions Measurements

§2.1053 §90.543, RSS-140

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01– Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 32 of 39	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

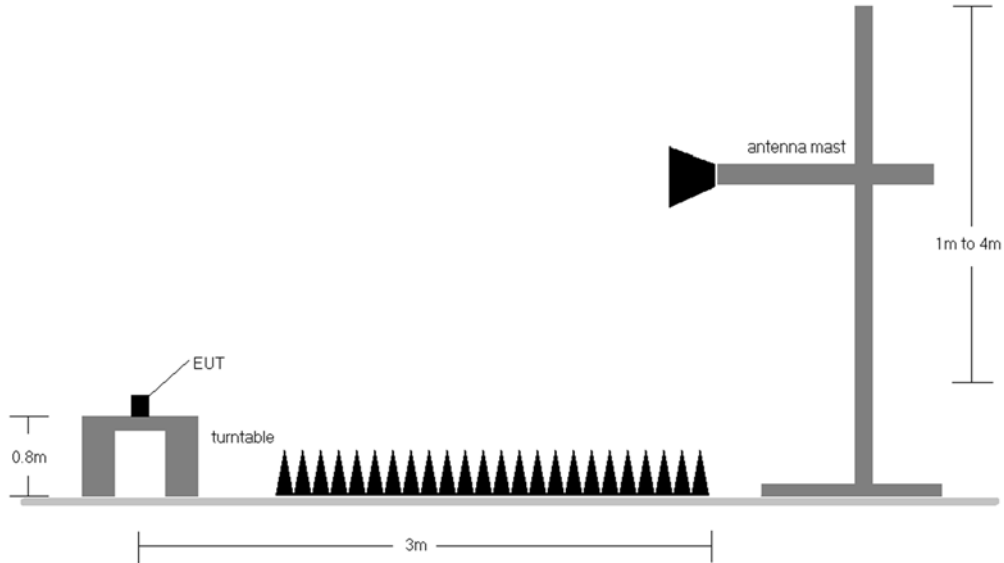


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. This unit was tested with its standard battery.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
3. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 33 of 39

OPERATING FREQUENCY: 790.50 MHz
 CHANNEL: 23305
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2371.50	V	150	300	-66.43	5.72	-60.71	-47.7
3162.00	V	-	-	-73.45	6.67	-66.78	-53.8
3952.50	V	-	-	-71.88	8.83	-63.05	-50.0

Table 7-4. Radiated Spurious Data (LTE Band 14 – Low Channel)

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	V	159	327	-67.92	5.71	-62.20	-49.2
3172.00	V	-	-	-72.92	6.59	-66.33	-53.3
3965.00	V	-	-	-72.06	8.90	-63.16	-50.2

Table 7-5. Radiated Spurious Data (LTE Band 14 – Mid Channel)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset			Page 34 of 39

OPERATING FREQUENCY: 795.50 MHz
 CHANNEL: 23355
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2386.50	V	150	333	-68.78	5.71	-63.07	-50.1
3182.00	V	-	-	-73.16	6.52	-66.64	-53.6
3977.50	V	-	-	-72.71	8.97	-63.74	-50.7

Table 7-6. Radiated Spurious Data (LTE Band 14 – High Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	V	352	61	-79.80	8.59	-71.20	-31.2
1586.00	V	338	75	-78.71	8.61	-70.09	-30.1
1591.00	V	342	77	-79.36	8.63	-70.73	-30.7

Table 7-7. Radiated Spurious Data (LTE Band 14 – Wide Band)

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset			Page 35 of 39

7.9 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-D-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 36 of 39	

Frequency Stability / Temperature Variation

§2.1055, §90.213

OPERATING FREQUENCY: 793,000,000 Hz
 CHANNEL: 23330
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	792,999,843	-157	-0.0000198
100 %		- 30	792,999,960	-40	-0.0000050
100 %		- 20	792,999,931	-69	-0.0000087
100 %		- 10	792,999,914	-86	-0.0000108
100 %		0	792,999,796	-204	-0.0000257
100 %		+ 10	793,000,083	83	0.0000105
100 %		+ 20	793,000,047	47	0.0000059
100 %		+ 30	793,000,086	86	0.0000108
100 %		+ 40	793,000,052	52	0.0000066
100 %		+ 50	792,999,974	-26	-0.0000033
BATT. ENDPOINT		3.45	+ 20	793,000,192	192

Table 7-8. LTE B14 Frequency Stability Data

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 37 of 39	

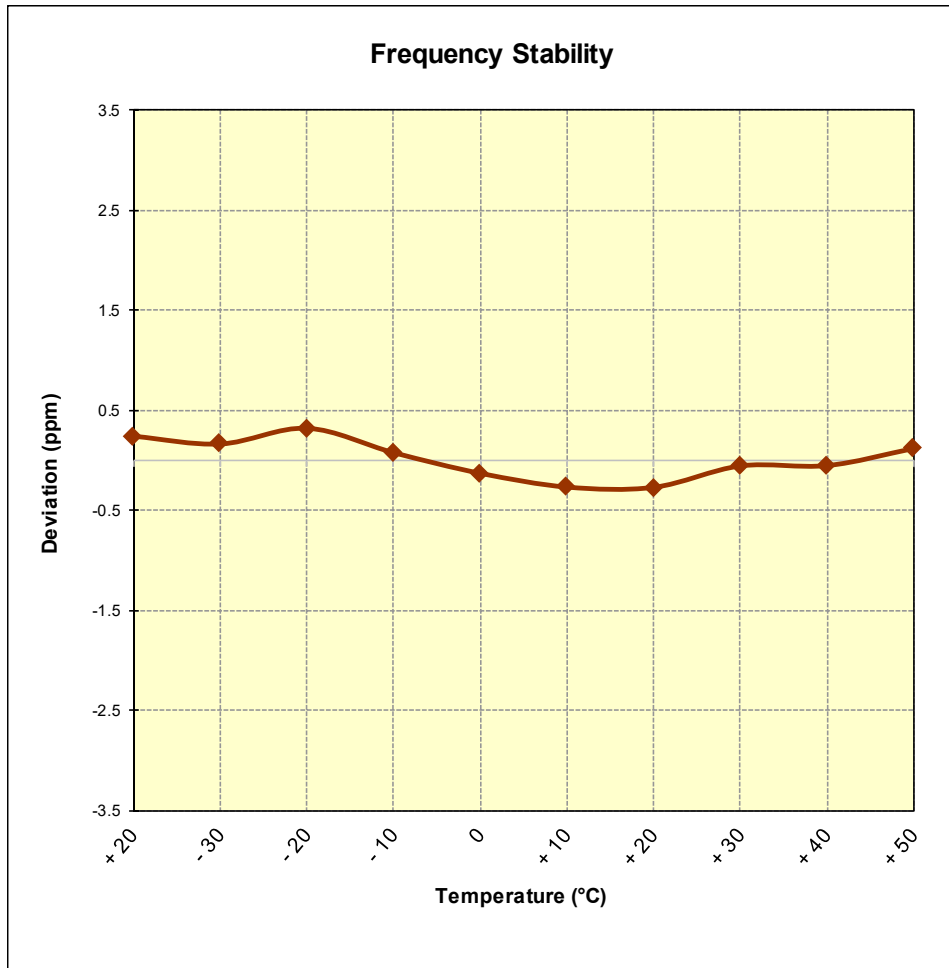


Figure 7-7. Radiated Test Setup <1GHz

FCC ID: ZNFQ710WA	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 38 of 39

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFQ710WA / IC: 2703C-Q710WA** complies with all the requirements of Parts 90 of the FCC rules and RSS-140 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: ZNFQ710WA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1804120069-04-R1.ZNF	Test Dates: April 12 - June 19, 2018	EUT Type: Portable Handset	Page 39 of 39	